



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 15.231 TEST REPORT

### LOW POWER UNLICENSED TRANSMITTER

<b>Applicant</b>	PRO TECH MONITORING, INC
<b>Address</b>	2549 SUCCESS DRIVE ODESSA FL 33556 USA
<b>FCC ID</b>	NC3WMTD3418
<b>Product Description</b>	418 MHZ ANKLE TRACKING MONITOR
<b>Date Sample Received</b>	2/5/2010
<b>Date Tested</b>	2/22/2010
<b>Tested By</b>	Richard Block
<b>Approved By</b>	Mario de Aranzeta
<b>Timco Report No.</b>	322AUT10TestReport.pdf
<b>Test Results</b>	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Certificate # 0955-01



## TABLE OF CONTENTS

GENERAL REMARKS .....	4
REPORT SUMMARY .....	5
TEST ENVIRONMENT.....	5
TEST SETUP .....	5
DUT SPECIFICATION .....	6
MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(E).....	7
TEST EQUIPMENT LIST .....	8
TEST PROCEDURES .....	9
RADIATION INTERFERENCE .....	10
CALCULATION OF DUTY CYCLE .....	12
OCCUPIED BANDWIDTH.....	13
POWER LINE CONDUCTED INTERFERENCE .....	14



## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

### Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669



### Authorized Signatory Name:

Mario de Aranzeta C.E.T.  
Compliance Engineer/ Lab. Supervisor

**Date:** February 23, 2010



## REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	FCC Pt 15.231, Pt 15.209, Pt 15.207, ANSI C63.4: 2003
Related Report(s) or Approval(s)	

### Receiver

The receiver portion of this system has been tested and meets all of the FCC requirements per FCC rules Part 15.109. A report was issued and a copy of this report is available upon request.

## TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C Relative humidity: 50%

## TEST SETUP

Test Exercise (e.g. software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control radio.



## DUT SPECIFICATION

<b>Applicant</b>	PRO TECH MONITORING, INC		
<b>Description</b>	418 MHZ ANKLE TRACKING MONITOR		
<b>FCC ID</b>	NC3WMTD3418		
<b>Model Number</b>	WMTD3418		
<b>Frequency Range</b>	418 MHz		
<b>DUT Power Source</b>	<input type="checkbox"/> 110-120Vac/50- 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
<b>Test Item</b>	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable

APPLICANT: PRO TECH MONITORING, INC

FCC ID: NC3WMTD3418

REPORT: P\PTECH\322AUT10\322AUT10TestReport.doc

Page 6 of 14



## **MANUFACTURE DECLARATION OF COMPLIANCE WITH PART 15.231(E)**

### **15.231(e)**

"In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds."

The DUT transmits 1.784 ms every 15 seconds, and therefore is compliant with the standard listed above.

APPLICANT: PRO TECH MONITORING, INC

FCC ID: NC3WMTD3418

REPORT: P\PTECH\322AUT10\322AUT10TestReport.doc

Page 7 of 14



## TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/09	1/10/12
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
Analyzer Silver Tower Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/30/08	10/30/10
Analyzer Silver Tower RF Preselector	HP	85685A	2620A00294	CAL 3/6/09	3/6/11
Analyzer Silver Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 10/30/08	10/30/10
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 12/8/09	12/8/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 12/8/09	12/8/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 12/7/09	12/7/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 12/7/09	12/7/11
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/09	12/12/11
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/08	10/11/10
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	CAL 12/1/08	12/1/10

APPLICANT: PRO TECH MONITORING, INC

FCC ID: NC3WMTD3418

REPORT: P\PTECH\322AUT10\322AUT10TestReport.doc



## TEST PROCEDURES

**Power line conducted Emissions:** The test procedure used was ANSI C63.4-2003.

**Spurious Emissions:** The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

**Occupied Bandwidth:** A small sample of the transmitter output was fed into the spectrum analyzer and a was generated. The vertical scale is set to 10 dB per division.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq MHz	Meter Reading dBuV	ACF dB/m	Cable Loss dB	Field Strength dBuV/m @ 3 m
33	20	+10.36	+1.2	= 31.56

**ANSI C63.4-2003 Measurement:** The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

## RADIATION INTERFERENCE

**Rules Part No.:** FCC Pt 15.231(a)

**Requirements:** 15.231 (a)

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB $\mu$ V/m)	Field Strength of Harmonics and Spurious Emissions (dB $\mu$ V/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

**15.231 (e)**

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB $\mu$ V/m)	Field Strength of Harmonics and Spurious Emissions (dB $\mu$ V/m @ 3m)
40.66 to 40.70	60	40
70 to 130	54	34
130 to 174	54 to 63.5	34 to 43.5
174 to 260	63.5	43.5
260 to 470	63.5 to 74	43.5 to 54
470 and above	74	54

No fundamental frequency is allowed in the restricted bands.

Spurious emissions in the restricted bands must be less than 54 dB $\mu$ V/m or to the limits of 15.209.

**FOR THIS DUT:**

The limit for average field strength in dB $\mu$ V/m for the fundamental frequency is 72.33 dB $\mu$ V/m.

The limit for average field strength in dB $\mu$ V/m for the harmonics and other spurious frequencies is 52.33 dB $\mu$ V/m unless it is in a restricted band.

**Test Data:**

Tuned Frequency MHz	Emission Frequency MHz	*	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
418	418		72.4	H	1.22	16.2	20	69.82	2.51
418	418		74.6	V	1.22	15.98	20	71.8	0.53
418	836		2.8	V	1.92	21.52	20	6.24	46.09
418	836		9.2	H	1.92	22.34	20	13.46	38.87
418	1,254.00		11.9	V	2.3	27.8	20	22	30.33
418	1,254.00		12.3	H	2.3	27.8	20	22.4	29.93
418	1,672.00	**	14.3	H	2.64	29.1	20	26.04	26.29
418	1,672.00	**	15.6	V	2.64	29.1	20	27.34	24.99
418	2,090.00		10.3	H	2.96	31.43	20	24.69	27.64
418	2,090.00		11.1	V	2.96	31.43	20	25.49	26.84
418	2,508.00		5.2	V	3.26	32.5	20	20.96	31.37
418	2,508.00		6.2	H	3.26	32.5	20	21.96	30.37
418	2,926.00		5.1	V	3.55	32.59	20	21.24	31.09
418	2,926.00		5.4	H	3.55	32.59	20	21.54	30.79
418	3,344.00		2	H	3.91	32.74	20	18.65	33.68
418	3,344.00		2	V	3.91	32.74	20	18.65	33.68
418	3,762.00	**	3.3	H	4.29	33.22	20	20.81	31.52
418	3,762.00	**	4.3	V	4.29	33.22	20	21.81	30.52
418	4,180.00	**	4.3	V	4.59	33.78	20	22.67	29.66
418	4,180.00	**	4.7	H	4.59	33.78	20	23.07	29.26

\*\* -Denotes restricted bands

Note: Emissions that are 20 dB below the limit are not required to be reported.

APPLICANT: PRO TECH MONITORING, INC

FCC ID: NC3WMTD3418

REPORT: P\PTECH\322AUT10\322AUT10TestReport.doc

Page 11 of 14

## CALCULATION OF DUTY CYCLE

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero (0) frequency span. A plot is then made of the pulse train with a sweep time of 100 milliseconds. This sweep determines the duration of the pulse train. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100-millisecond plot, the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the DUT is on within 100 ms.

Long Pulse	
Short Pulse	
On Time	
Length of Pulse Train	
Total	


$$dB = 20 * \log(ON\ TIME) / PERIOD$$

$$dB = 20 * \log(1.784 / 100)$$

$$dB = 20 * \log(0.01784)$$

$$dB = -34.97$$

See the following plot.

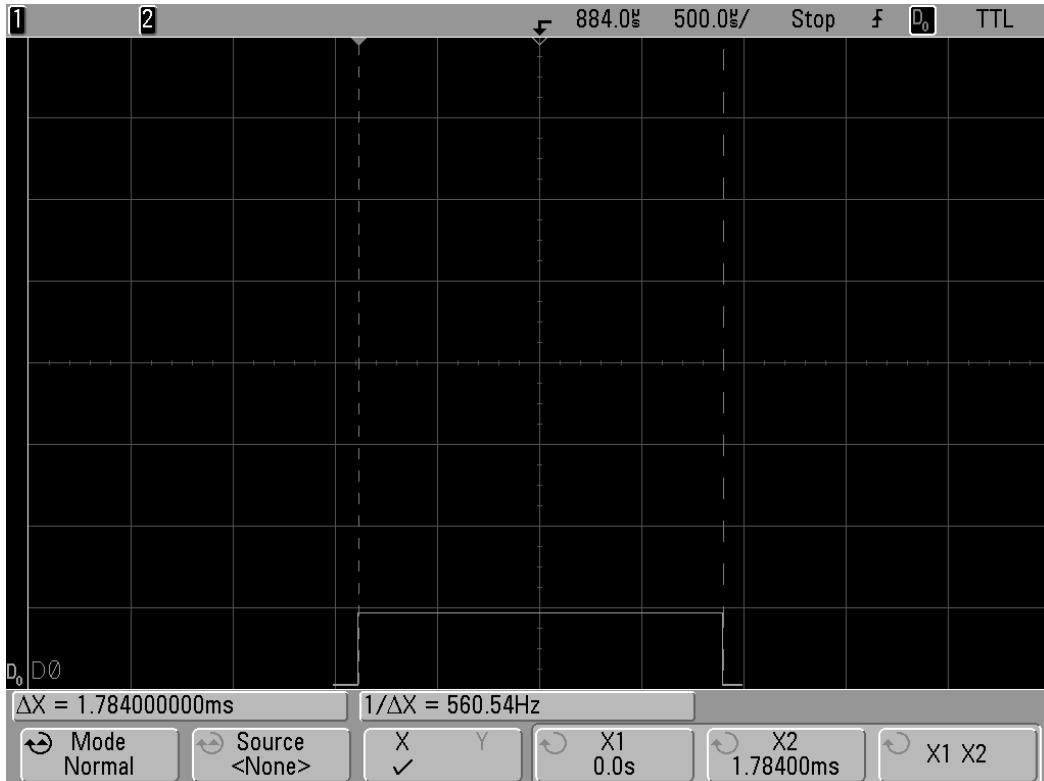


## OCCUPIED BANDWIDTH

Rules Part No.: 15.231(C)

**Requirements:** The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

**Test Data:** Please refer to the following plots.

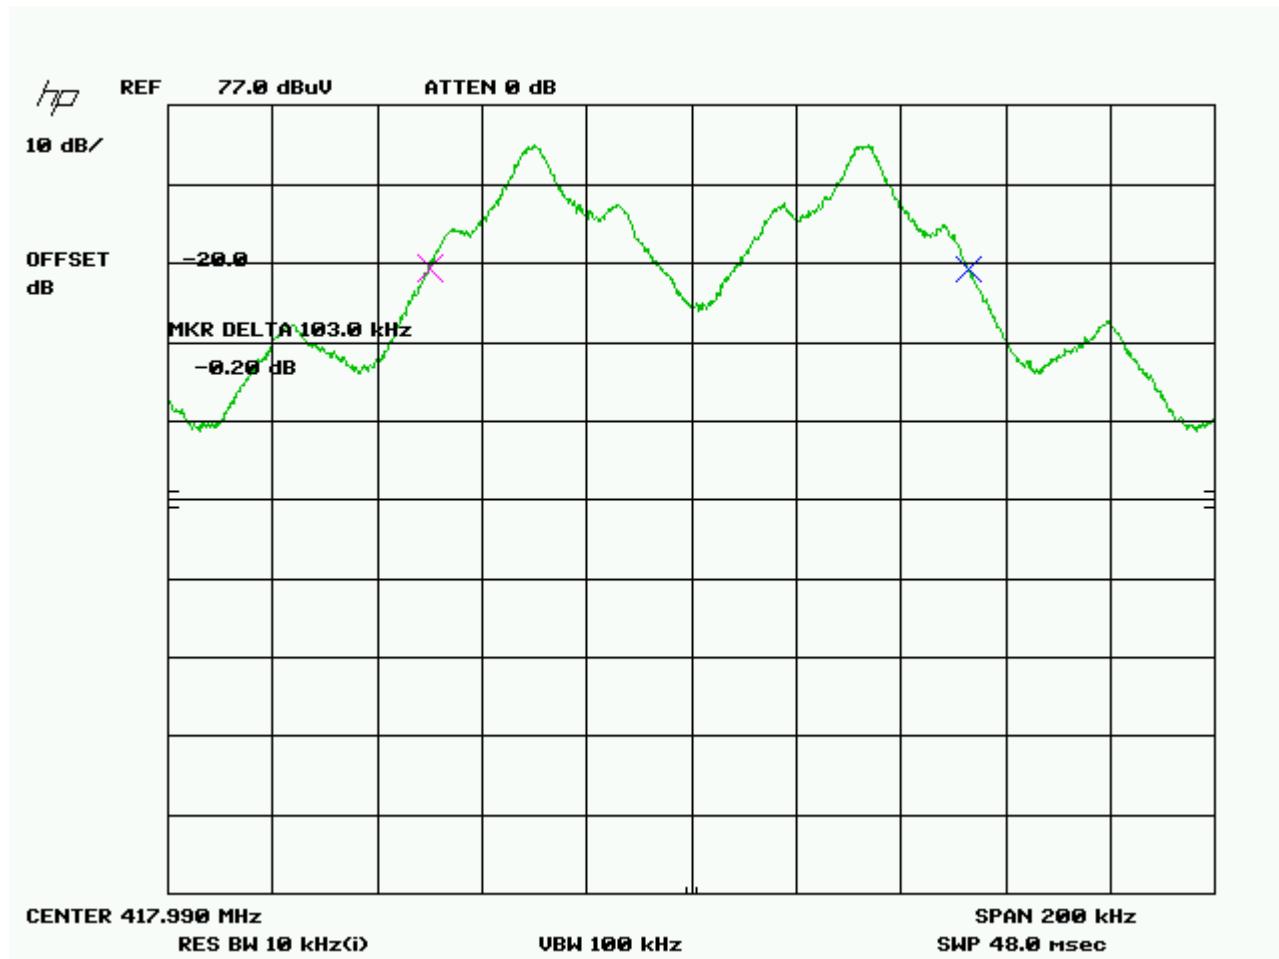



## POWER LINE CONDUCTED INTERFERENCE

**Rules Part No.:** Pt 15.207

**Requirements:**

Frequency (MHz)	Quasi Peak Limits (dBuV)	Average Limits (dBuV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

**Test Data:** Not applicable because the DUT is battery operated exclusively.