

TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: One Track 0.6318

FCC ID: NC3XT06318

To: FCC Part 15.109: 2010 Subpart B

Test Report Serial No:
RFI-RPT-RP80091JD01B

Version 2.0 Supersedes All Previous Versions

**This Test Report Is Issued Under The Authority
Of Chris Guy, Head of Global Approvals:**



Checked By:	Ian Watch
Signature:	
Date of Issue:	02 March 2011

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	6
3.3. Modifications Incorporated in the EUT	6
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	7
4. Operation and Monitoring of the EUT during Testing	8
4.1. Operating Modes	8
4.2. Configuration and Peripherals	8
5. Measurements, Examinations and Derived Results	9
5.1. General Comments	9
5.2. Test Results	10
5.2.1. Receiver/Idle Mode Radiated Spurious Emissions	10
6. Measurement Uncertainty	13
Appendix 1. Test Equipment Used	14

1. Customer Information

Company Name:	Pro Tech Monitoring Inc.
Address:	2549 Success Dr Odessa, FL 33556 United States

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.109
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2010: Part 15 Subpart B (Radio Frequency Devices) – Section 15.109
Site Registration:	FCC: 209735
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	07 December 2010 to 08 December 2010

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Key to Results		
 = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2009)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	One Track
Model Name or Number:	0.6318
Serial Number:	35002674
Hardware Version Number:	0.6
Software Version Number:	5.0.2.4
FCC ID::	NC3XT06318

3.2. Description of EUT

The equipment under test was a GPS Tracking Equipment for Department of Corrections.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Type of Equipment	Transceiver		
Mode:	GSM/GPRS		
Power Supply Requirement:	Nominal	3.6 V	
Technology Tested:	GSM850		
Receive Frequency Range:	824 to 849 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	128	869.2
	Middle	190	881.6
	Top	251	848.8
Technology Tested:	PCS1900		
Receive Frequency Range:	1930 to 1990 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	512	1930.2
	Middle	660	1959.8
	Top	810	1989.8

3.5. Support Equipment

No support equipment was used to exercise the EUT during testing:

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Standalone in idle mode receiving in both the GSM850 and PCS1900 bands.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results

5.2.1. Receiver/Idle Mode Radiated Spurious Emissions

Test Summary:

Test Engineer:	Andrew Edwards	Test Date:	07 December 2010
Test Sample Serial No:	35002674		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

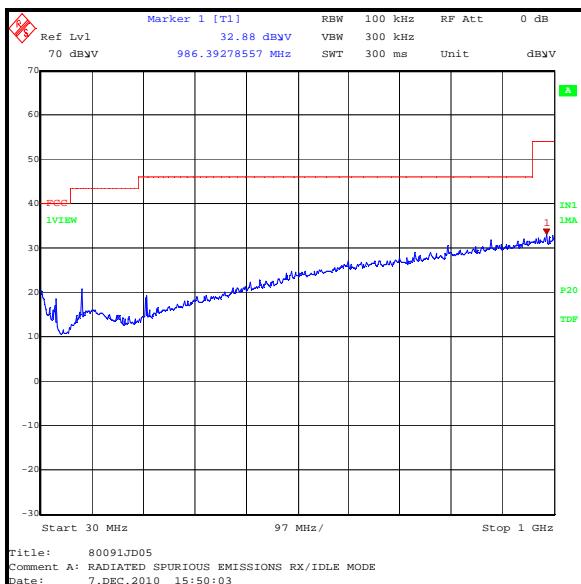
Temperature (°C):	24
Relative Humidity (%):	20

Results:

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
986.393	Vertical	32.9	54.0	21.1	Complied

Note(s):

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected within 20 dB of the limit therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above.
3. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.



Receiver/Idle Mode Radiated Spurious Emissions (continued)**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	08 December 2010
Test Sample Serial No:	35002674		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8
Frequency Range:	1 GHz to 10 GHz

Environmental Conditions:

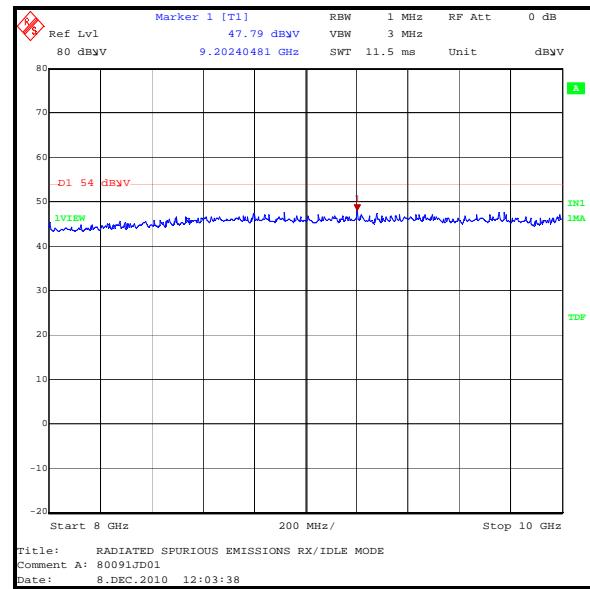
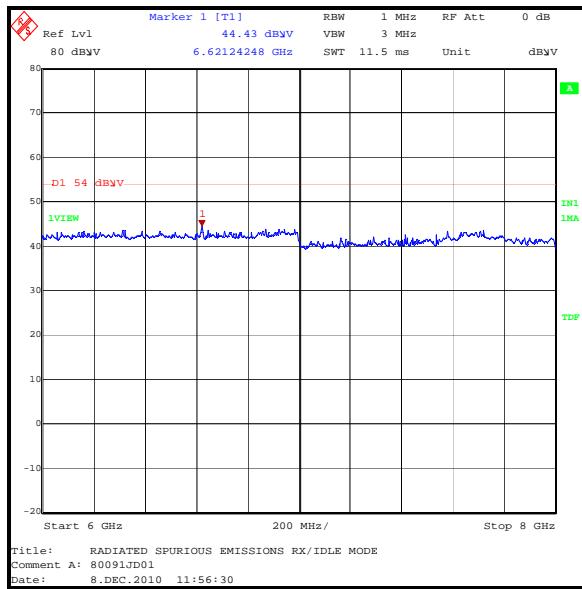
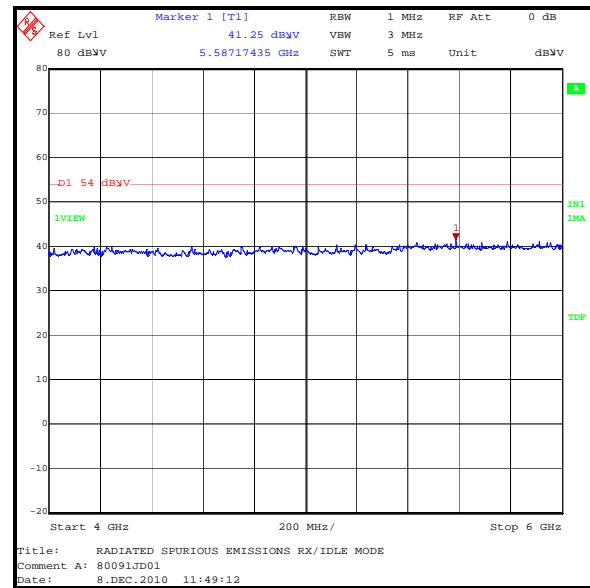
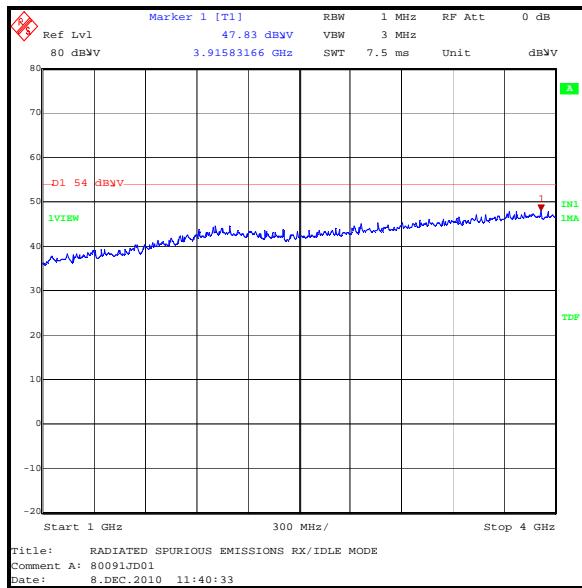
Temperature (°C):	23
Relative Humidity (%):	21

Results:

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
3915.532	Vertical	47.8	54.0	6.2	Complied

Note(s):

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Radiated Spurious Emissions	30 MHz to 10 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	06 Jun 2011	12
A1818	Antenna	EMCO	3115	00075692	05 Sep 2011	12
A253	Antenna	Flann Microwave	12240-20	128	05 Sep 2011	12
A254	Antenna	Flann Microwave	14240-20	139	05 Sep 2011	12
A255	Antenna	Flann Microwave	16240-20	519	05 Sep 2011	12
A288	Antenna	Chase	CBL6111A	1589	05 Sep 2011	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	05 Sep 2011	12
M1124	Test Receiver	Rohde & Schwarz	ESI26	100046K	22 Apr 2011	12

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.