

Plot 1: 836.6MHz Right Touch

Date/Time: 4/8/2011 10:57:01 AM, Date/Time: 4/8/2011 11:04:44 AM

DUT: ProTech; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 836.6 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (9x9x1): Measurement grid: dx=14mm, dy=14mm

Maximum value of SAR (measured) = 0.706 mW/g


Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.670 mW/g; SAR(10 g) = 0.500 mW/g

Maximum value of SAR (measured) = 0.711 mW/g

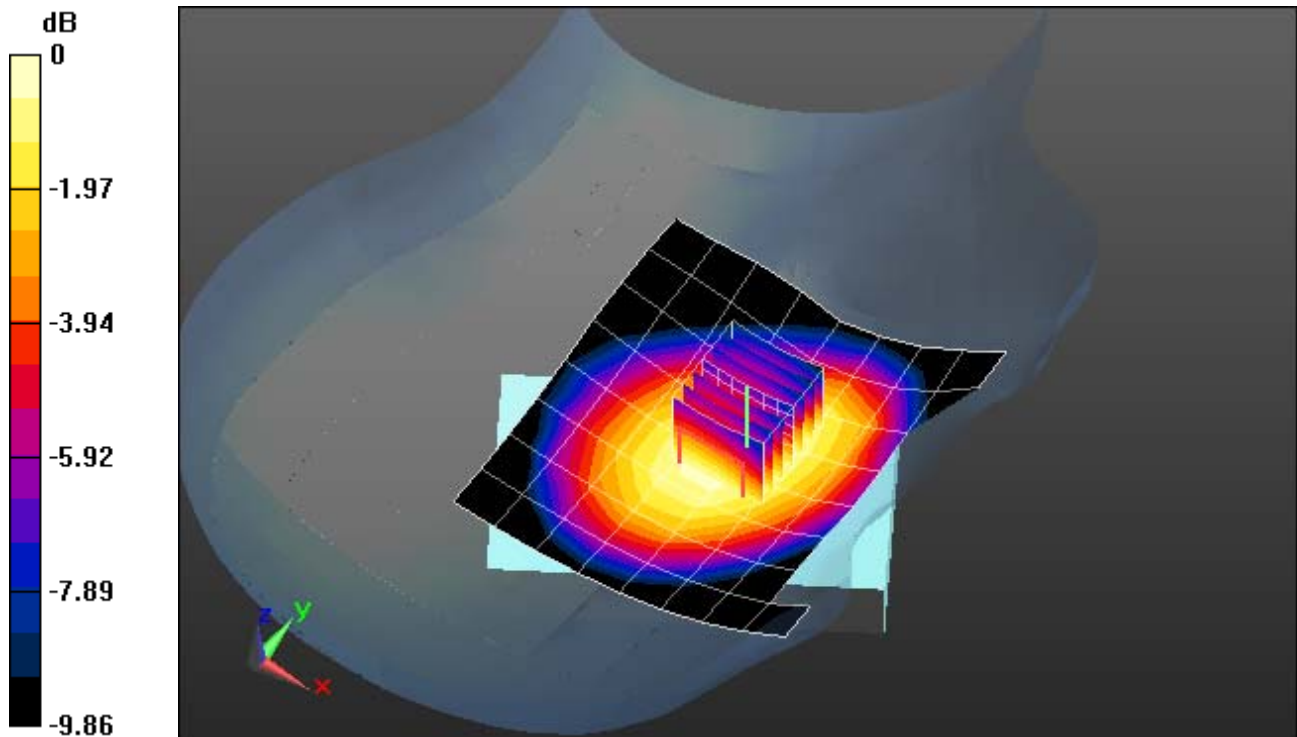

0 dB = 0.711mW/g

Plot 2: 836.6MHz Right Tilt

Date/Time: 4/8/2011 11:39:21 AM, Date/Time: 4/8/2011 11:47:03 AM

DUT: ProTech; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 836.6 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;


Right-Hand-Side HSL/Tilt Position - Mid/Area Scan (9x9x1): Measurement grid: dx=14mm, dy=14mm
Maximum value of SAR (measured) = 0.331 mW/g**Right-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 0.336 mW/g

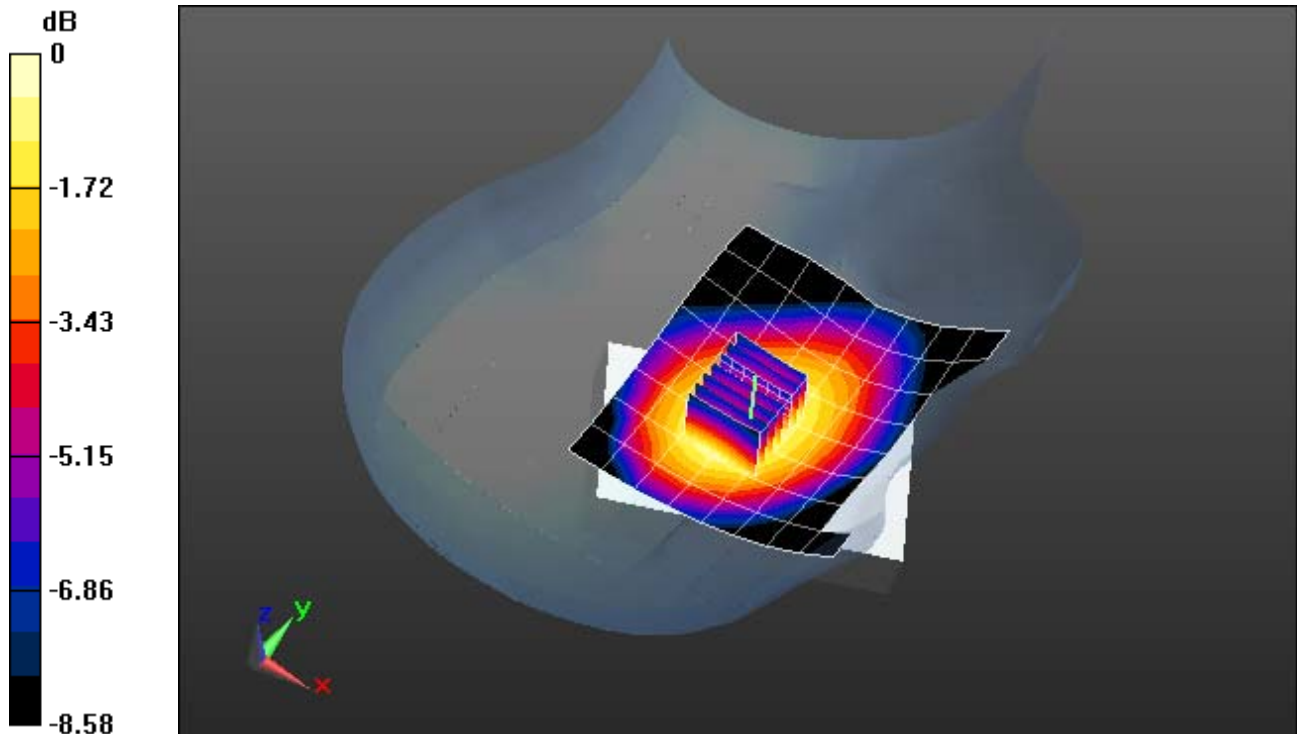

0 dB = 0.336mW/g

Plot 3: 836.6MHz Left Touch

Date/Time: 4/8/2011 12:55:39 PM, Date/Time: 4/8/2011 1:03:41 PM

DUT: ProTech; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 836.6 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Left-Hand-Side HSL/Touch Position - Mid/Area Scan (9x9x1): Measurement grid: dx=14mm, dy=14mm

Maximum value of SAR (measured) = 0.459 mW/g


Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.575 W/kg

SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.469 mW/g

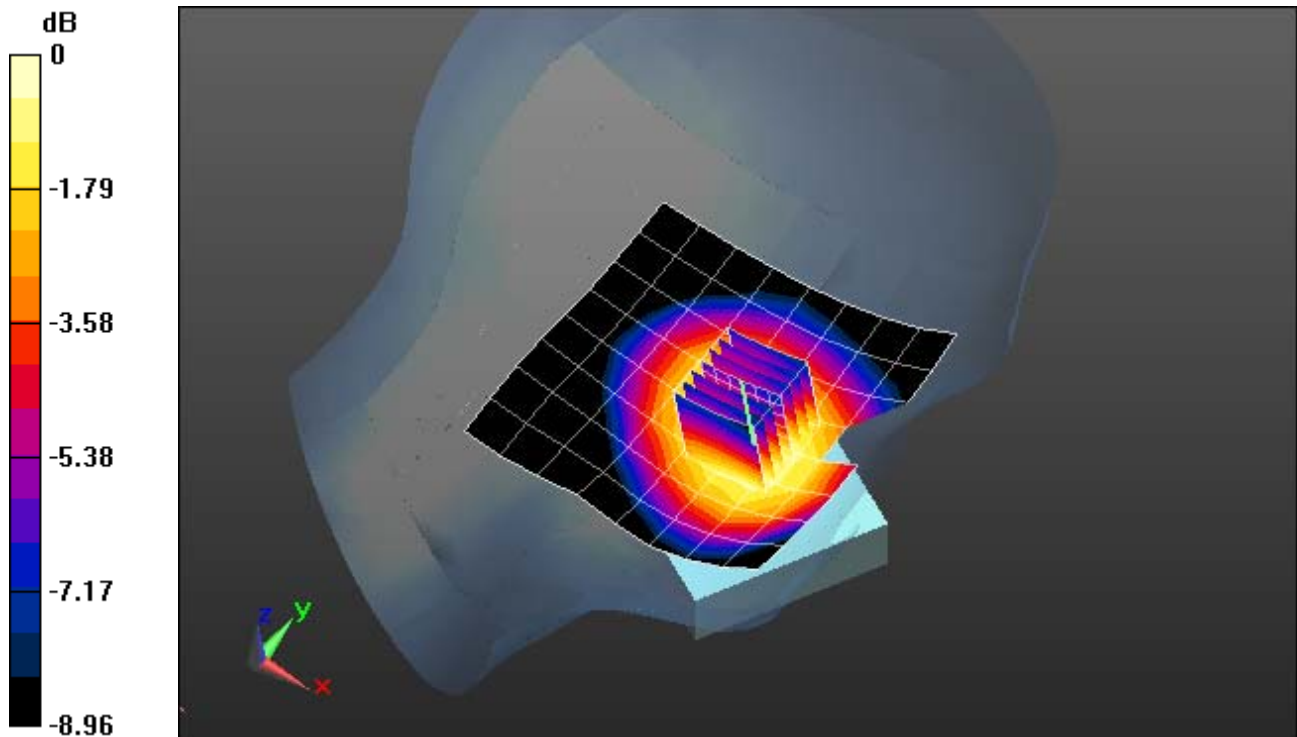

0 dB = 0.469mW/g

Plot 4: 836.6MHz Left Tilt

Date/Time: 4/8/2011 1:17:24 PM, Date/Time: 4/8/2011 1:25:27 PM

DUT: ProTech; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 836.6 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Left-Hand-Side HSL/Tilt Position - Mid/Area Scan (9x9x1): Measurement grid:

dx=14mm, dy=14mm

Maximum value of SAR (measured) = 0.303 mW/g

Left-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.311 mW/g

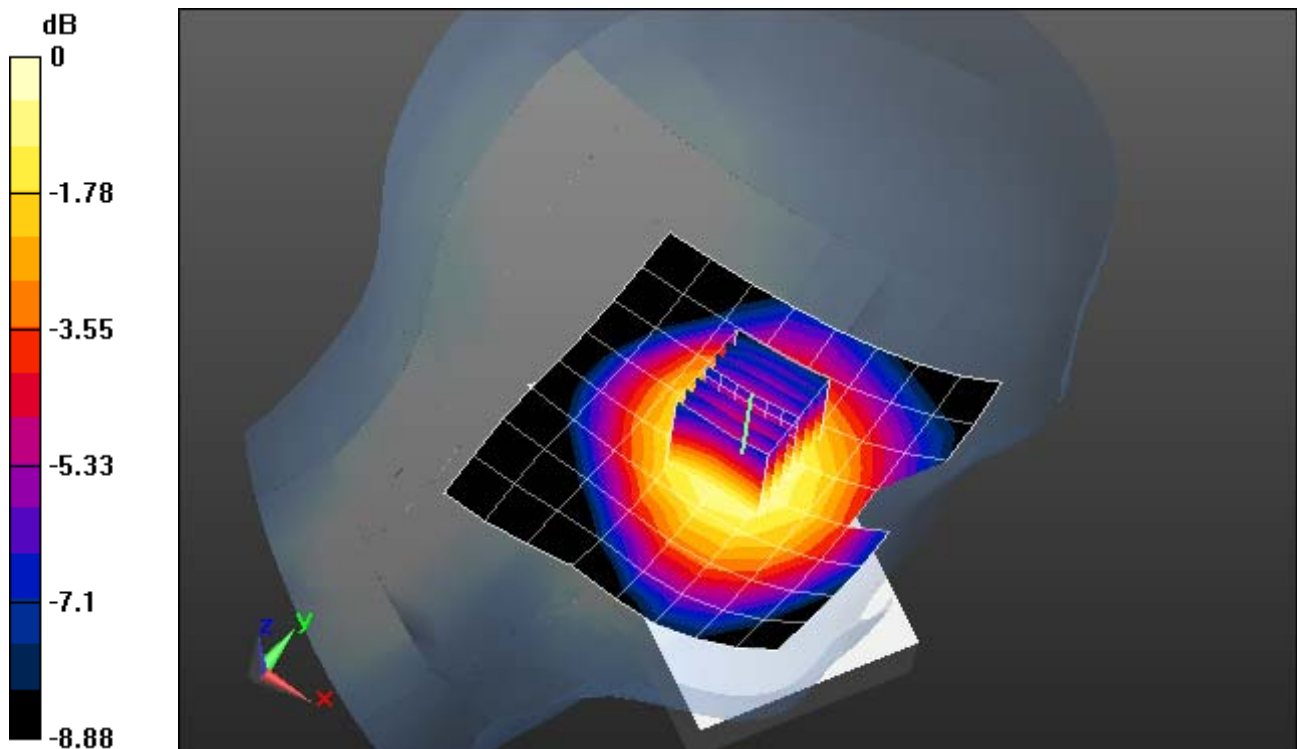

0 dB = 0.311mW/g

Plot 5: 836.6MHz Back with Holster

Date/Time: 4/27/2011 2:07:12 PM, Date/Time: 4/27/2011 2:13:27 PM

DUT: Protech with Holster; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 836.6 MHz

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.949$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, V52.2 Build 0;

Flat-Section MSL 4-27-11/836 Back/Area Scan (8x8x1): Measurement grid: dx=14mm, dy=14mm

Maximum value of SAR (measured) = 0.469 mW/g


Flat-Section MSL 4-27-11/836 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.477 mW/g

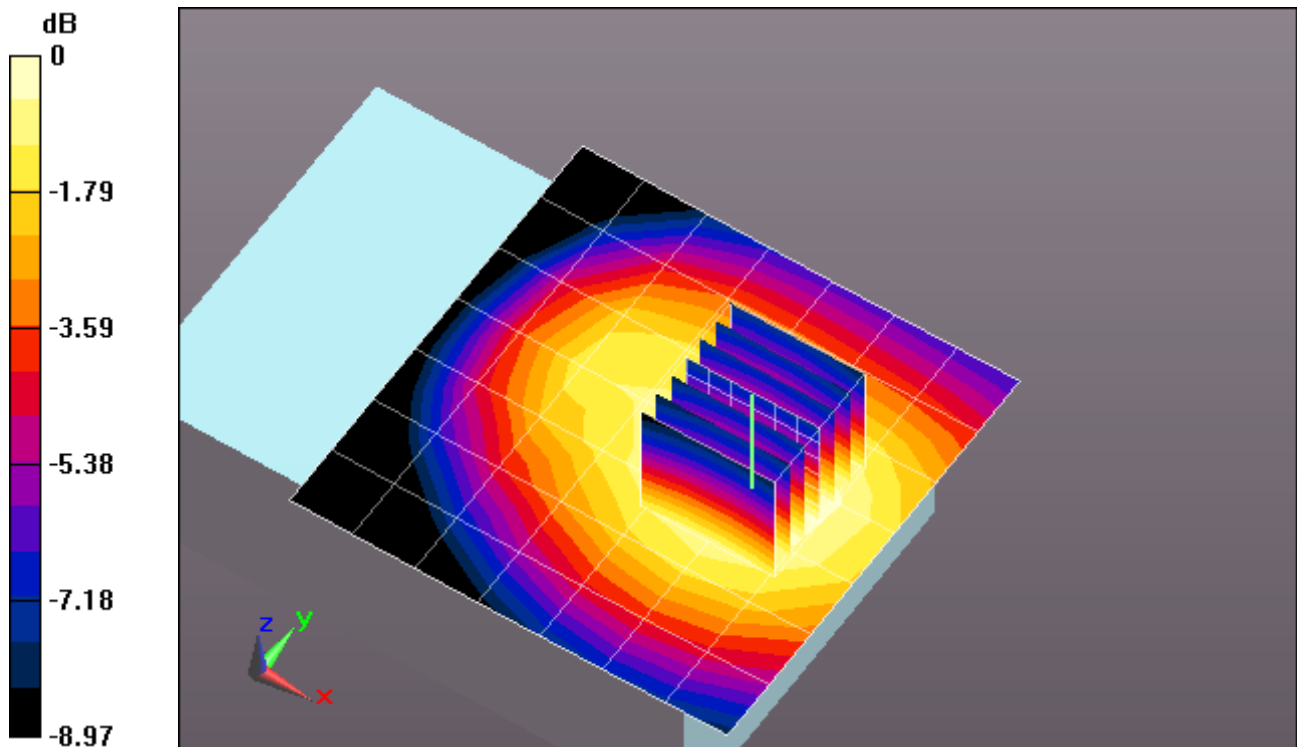

0 dB = 0.477mW/g

Plot 6: 1880MHz Right Touch

Date/Time: 4/5/2011 3:44:18 PM, Date/Time: 4/5/2011 3:54:13 PM, Date/Time: 4/5/2011 4:06:46 PM

DUT: ProTech; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(5.02, 5.02, 5.02);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Right-Hand-Side HSL/Touch Position - Mid/Area Scan (8x11x1): Measurement grid: dx=14mm, dy=14mm

Maximum value of SAR (measured) = 0.290 mW/g

Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.285 mW/g


Right-Hand-Side HSL/Touch Position - Mid/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

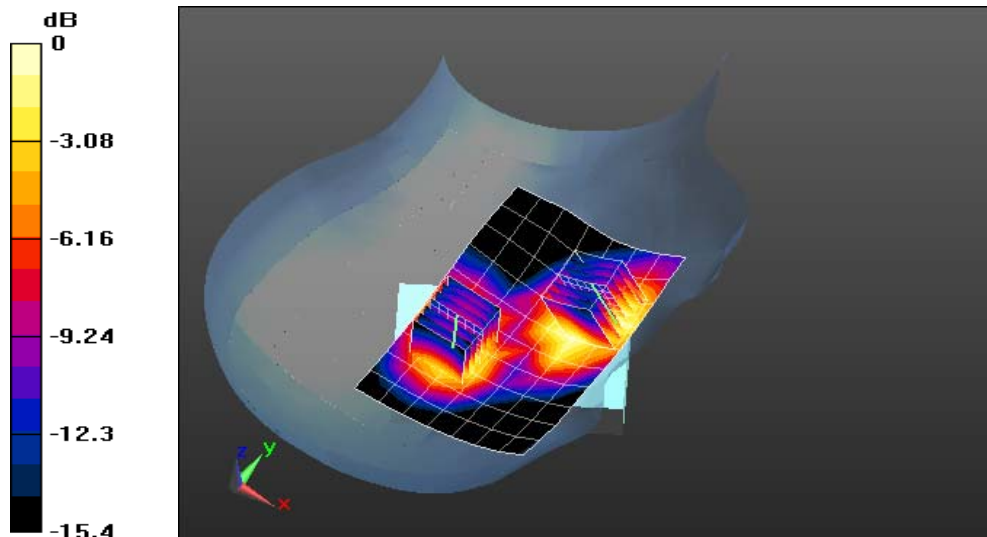

0 dB = 0.308mW/g

Plot 7: 1880MHz Right Tilt

Date/Time: 4/5/2011 4:56:32 PM, Date/Time: 4/5/2011 5:05:38 PM

DUT: ProTech; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(5.02, 5.02, 5.02);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Right-Hand-Side HSL 4-5-11/Tilt Position - Mid/Area Scan (8x11x1): Measurement grid: dx=14mm, dy=14mm

Maximum value of SAR (measured) = 0.159 mW/g

Right-Hand-Side HSL 4-5-11/Tilt Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.79 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.169 mW/g

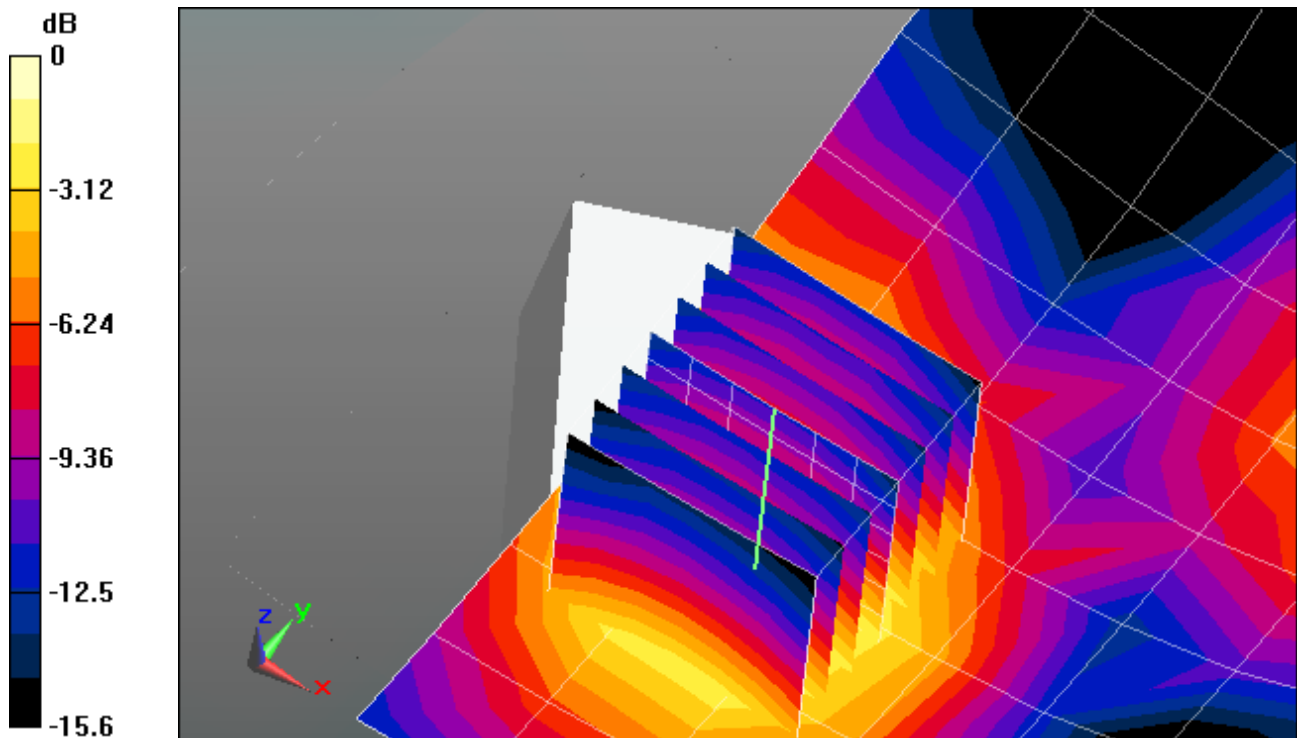

0 dB = 0.169mW/g

Plot 8: 1880MHz Left Touch

Date/Time: 4/5/2011 3:06:31 PM, Date/Time: 4/5/2011 3:16:13 PM, Date/Time: 4/5/2011 3:28:45 PM

DUT: ProTech; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(5.02, 5.02, 5.02);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Left-Hand-Side HSL/Touch Position - Mid/Area Scan (9x9x1): Measurement grid: dx=14mm, dy=14mm

Maximum value of SAR (measured) = 0.392 mW/g

Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.392 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.444 mW/g


Left-Hand-Side HSL/Touch Position - Mid/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.167 mW/g

Maximum value of SAR (measured) = 0.299 mW/g

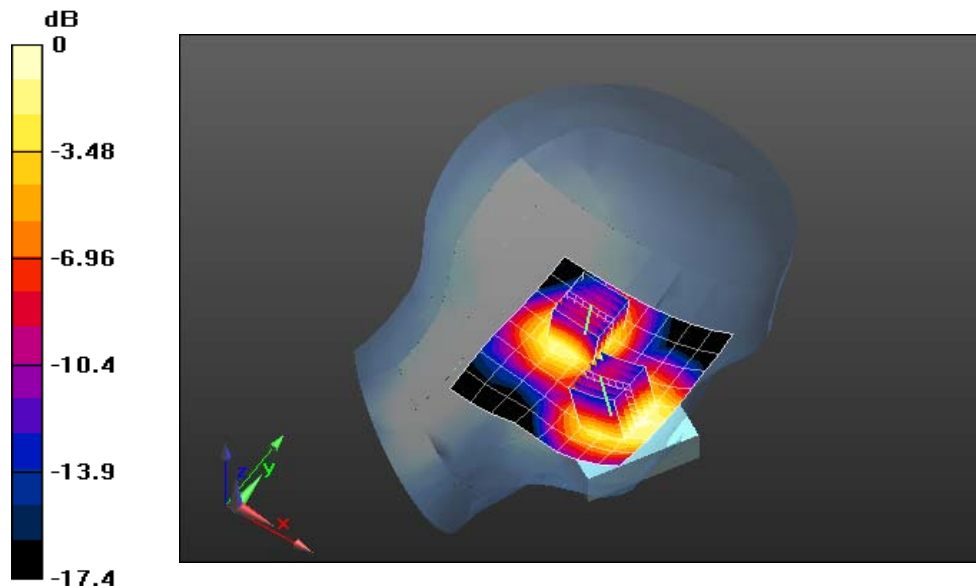

0 dB = 0.299mW/g

Plot 9: 1880MHz Left Tilt

Date/Time: 4/5/2011 2:40:27 PM, Date/Time: 4/5/2011 2:52:17 PM

DUT: ProTech; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(5.02, 5.02, 5.02);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Left-Hand-Side HSL/Tilt Position - Mid/Area Scan (11x11x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.123 mW/g

Left-Hand-Side HSL/Tilt Position - Mid/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.05 V/m; Power Drift = 0.204 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.125 mW/g

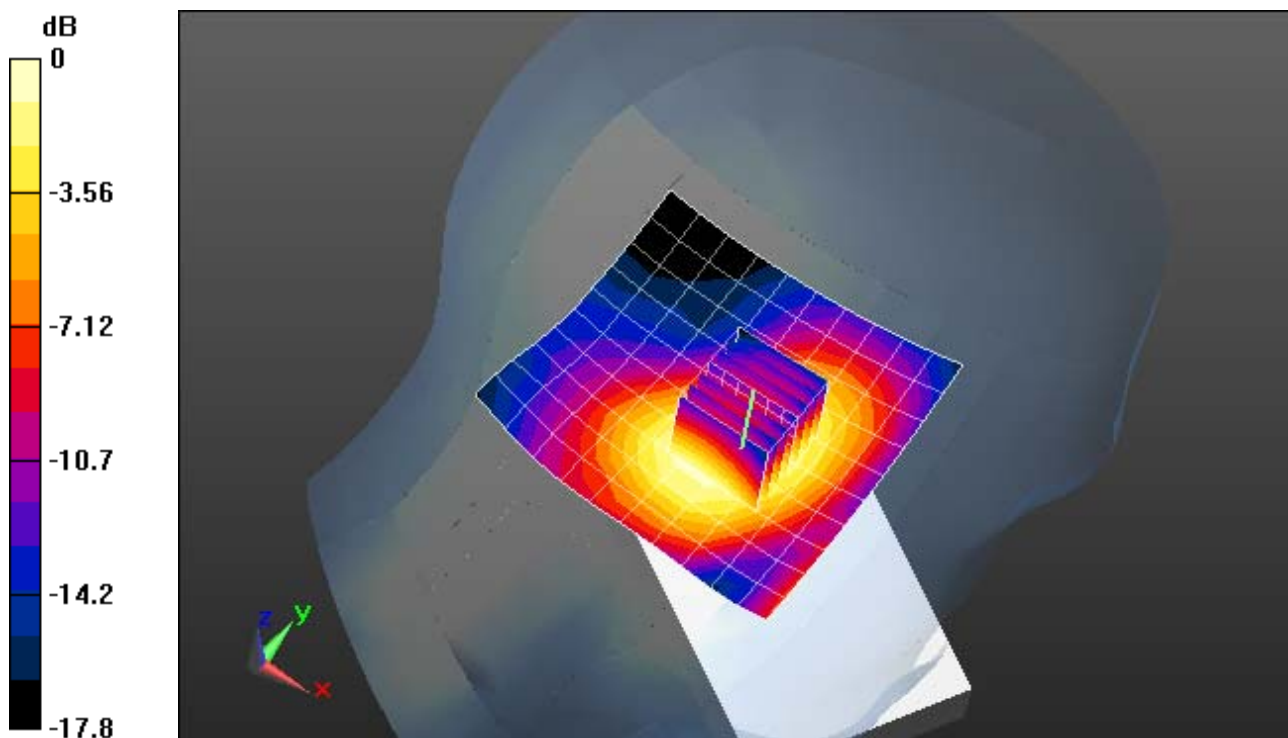

0 dB = 0.125mW/g

Plot 10: 1880MHz Back with Holster

Date/Time: 4/26/2011 4:16:40 PM, Date/Time: 4/26/2011 4:24:39 PM

DUT: Protech with Holster; Serial: IMEI 7002

Communication System: Generic GSM; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

Flat-Section MSL 4-26-11/1880 Back/Area Scan (8x8x1): Measurement grid:

dx=14mm, dy=14mm

Maximum value of SAR (measured) = 0.230 mW/g

Flat-Section MSL 4-26-11/1880 Back/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.129 mW/g

Maximum value of SAR (measured) = 0.243 mW/g

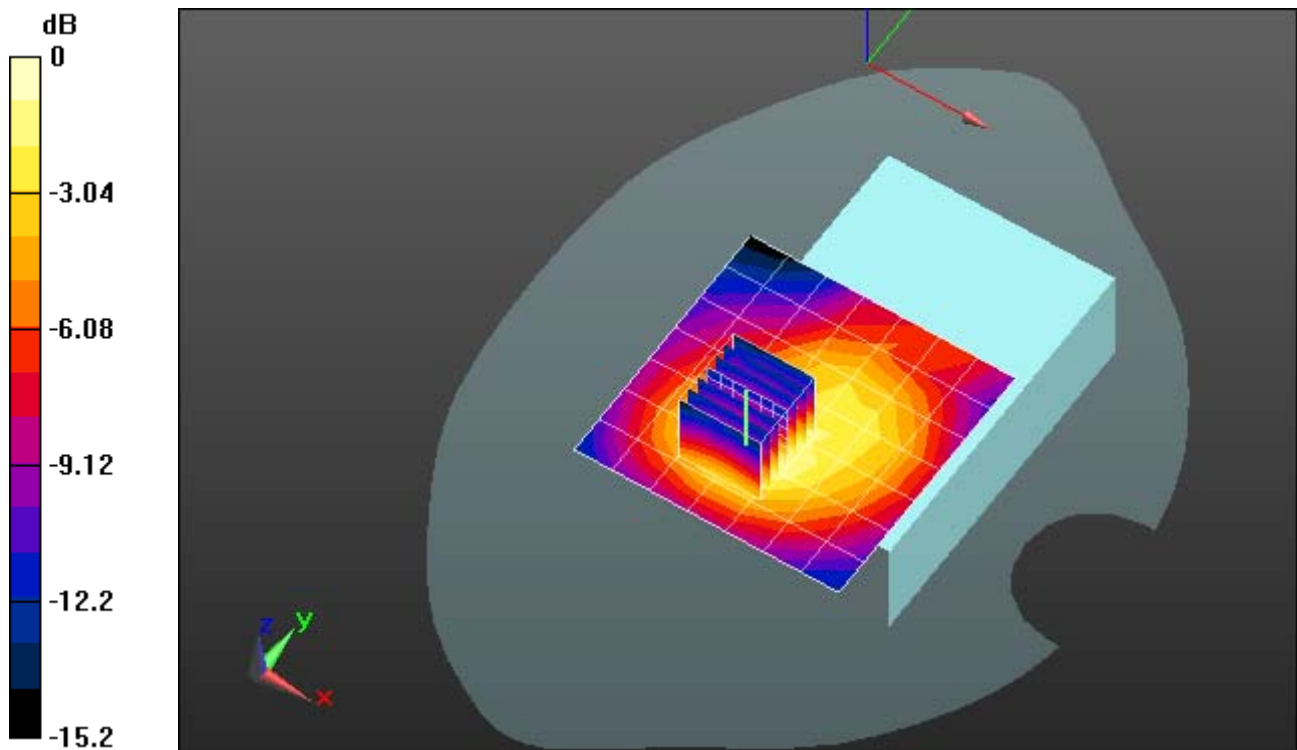

0 dB = 0.243mW/g

Plot 11: 835MHz Dipole Verification, Head Liquid, 2011/04/07

Date/Time: 4/7/2011 2:31:18 PM, Date/Time: 4/7/2011 2:37:45 PM

DUT: Dipole 835 MHz D835V2; Serial: D835V2 - SN:4d113

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.3 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 114.5 V/m; Power Drift = 0.115 dB

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 9.81 mW/g; SAR(10 g) = 6.37 mW/g

Maximum value of SAR (measured) = 11.5 mW/g

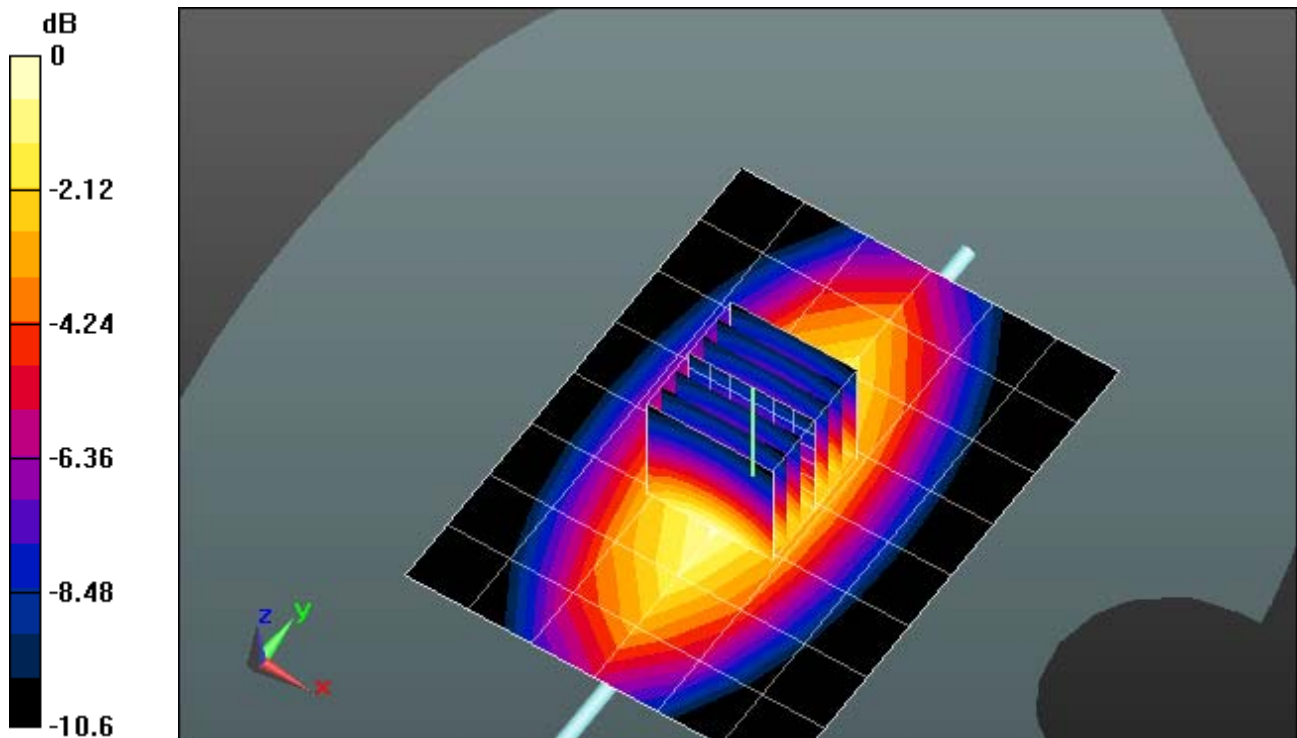

0 dB = 11.5mW/g

Plot 12: 835MHz Dipole Verification, Body Liquid, 2011/04/27

Date/Time: 4/27/2011 12:12:57 PM, Date/Time: 4/27/2011 12:19:29 PM

DUT: Dipole 835 MHz D835V2; Serial: D835V2 - SN:4d113

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, V52.2 Build 0;

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 10.7 mW/g

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 107.0 V/m; Power Drift = 0.155 dB
Peak SAR (extrapolated) = 15 W/kg
SAR(1 g) = 10 mW/g; SAR(10 g) = 6.57 mW/g
Maximum value of SAR (measured) = 11.8 mW/g

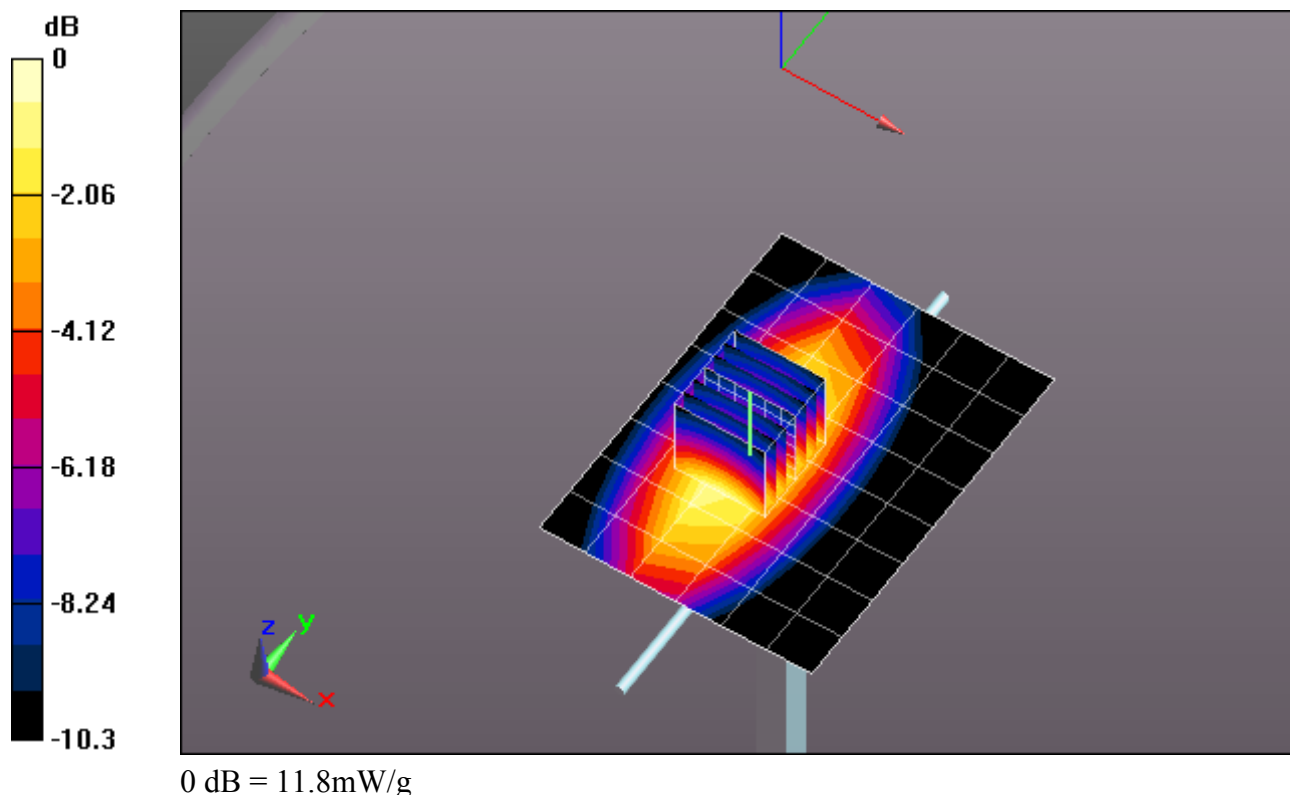

Plot 13: 1900MHz Dipole Verification, Head Liquid, 2011/04/04

Date/Time: 4/4/2011 4:16:48 PM, Date/Time: 4/4/2011 4:21:48 PM

DUT: Dipole 1900 MHz D1900V2; Serial: D1900V2 - SN:5d135

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(5.02, 5.02, 5.02);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 41.5 mW/g


System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 197.2 V/m; Power Drift = 0.144 dB

Peak SAR (extrapolated) = 76.1 W/kg

SAR(1 g) = 40.8 mW/g; SAR(10 g) = 20.9 mW/g

Maximum value of SAR (measured) = 51.9 mW/g

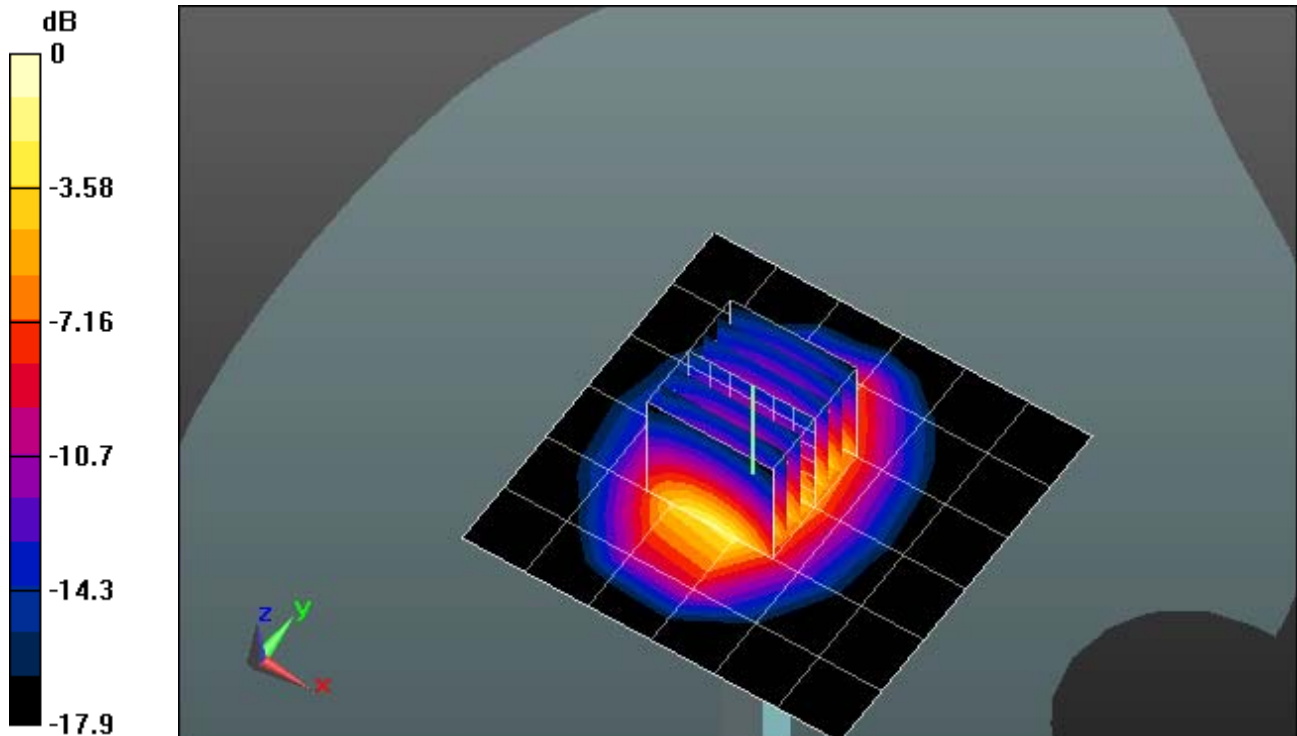

0 dB = 51.9mW/g

Plot 14: 1900MHz Dipole Verification, Head Liquid, 2011/04/05

Date/Time: 4/5/2011 4:25:10 PM, Date/Time: 4/5/2011 4:30:11 PM

DUT: Dipole 1900 MHz D1900V2; Serial: D1900V2 - SN:5d135

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(5.02, 5.02, 5.02);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 53.1 mW/g

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 191.0 V/m; Power Drift = 0.196 dB
Peak SAR (extrapolated) = 80.9 W/kg
SAR(1 g) = 43.4 mW/g; SAR(10 g) = 22.2 mW/g
Maximum value of SAR (measured) = 55.7 mW/g

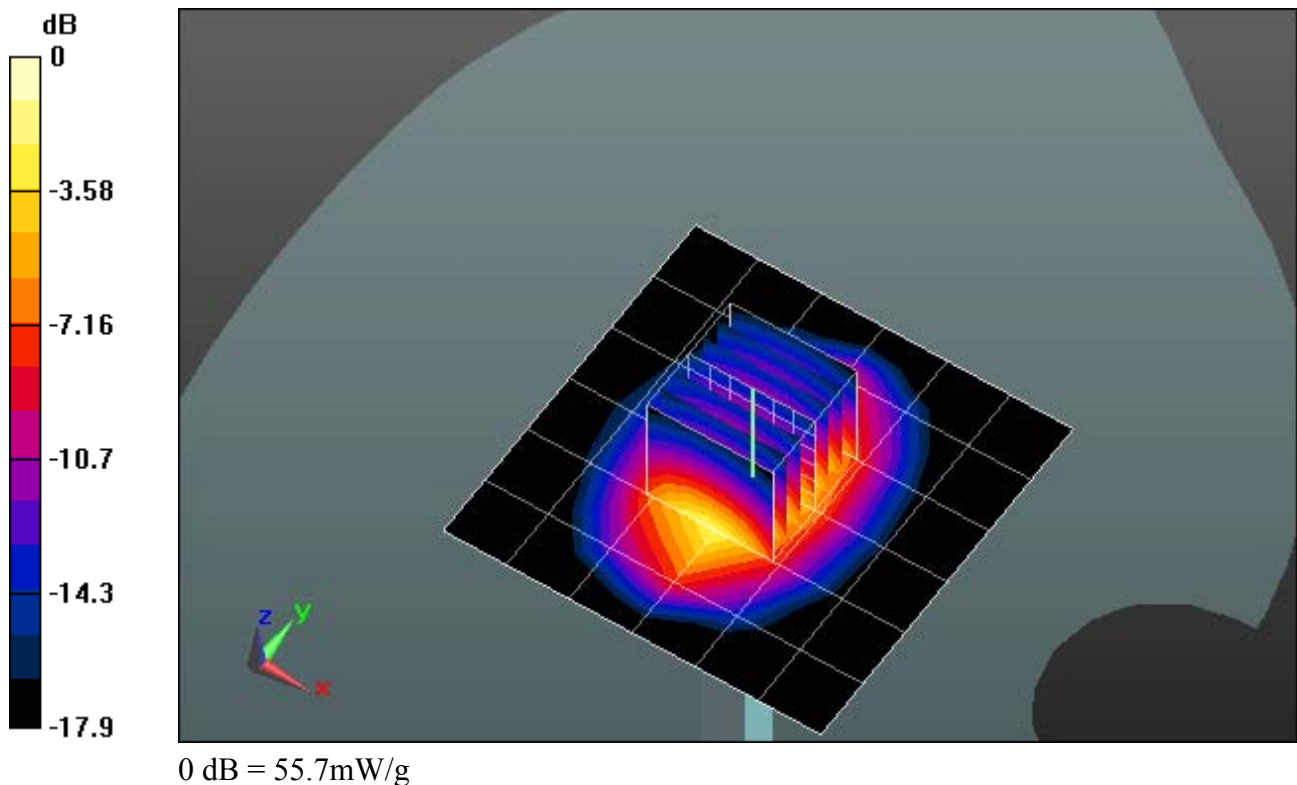

Plot 15: 1900MHz Dipole Verification, Body Liquid, 2011/04/26

Date/Time: 4/26/2011 1:17:06 PM, Date/Time: 4/26/2011 1:24:53 PM

DUT: Dipole 1900 MHz D1900V2; Serial: D1900V2 - SN: 5d135

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(4.62, 4.62, 4.62);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, V52.2 Build 0;

System Check 1900 MSL/System Performance Check/Area Scan (9x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 49 mW/g


System Check 1900 MSL/System Performance Check/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 185.7 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 79.1 W/kg

SAR(1 g) = 44.8 mW/g; SAR(10 g) = 23.3 mW/g

Maximum value of SAR (measured) = 51.2 mW/g

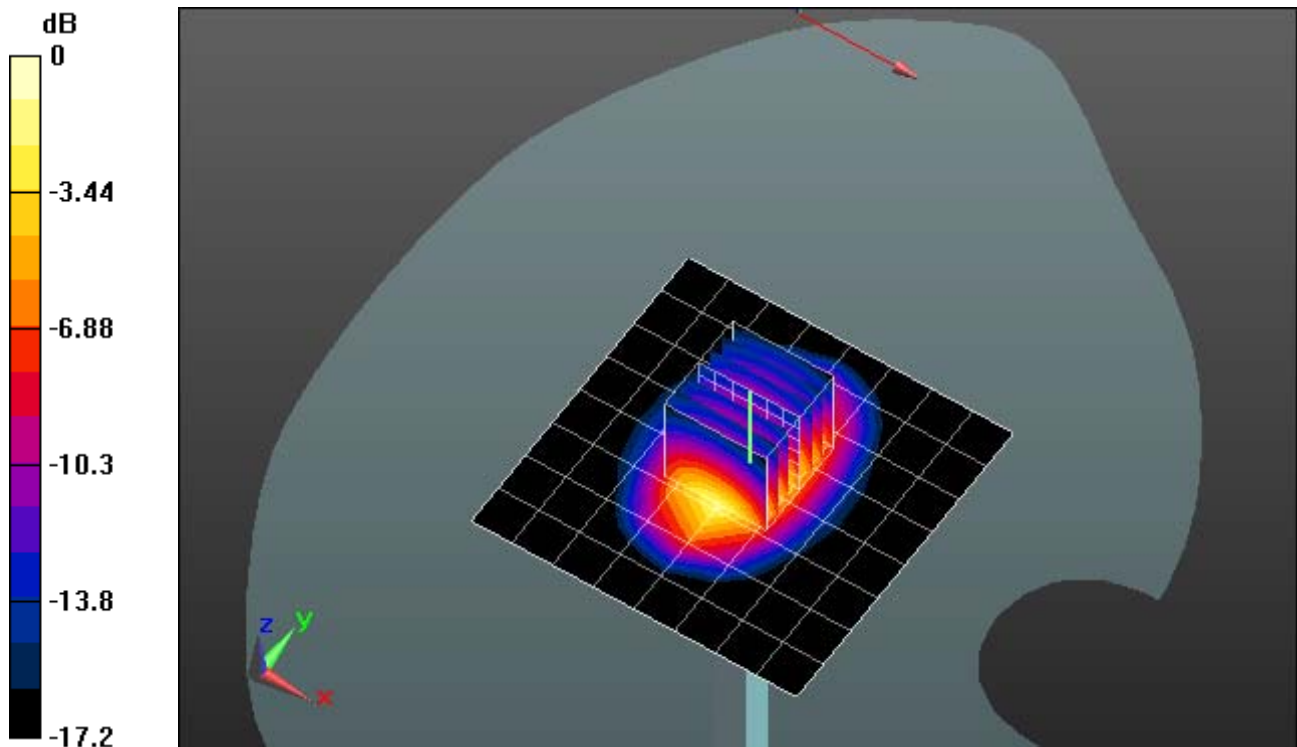

0 dB = 51.2mW/g