

Installation Guide

XS4 Eco.Lock


SALTO
inspiredaccess

(Eng) Installation guide

(F) Guide d'installation


(E) Guía de instalación

Li100.. series

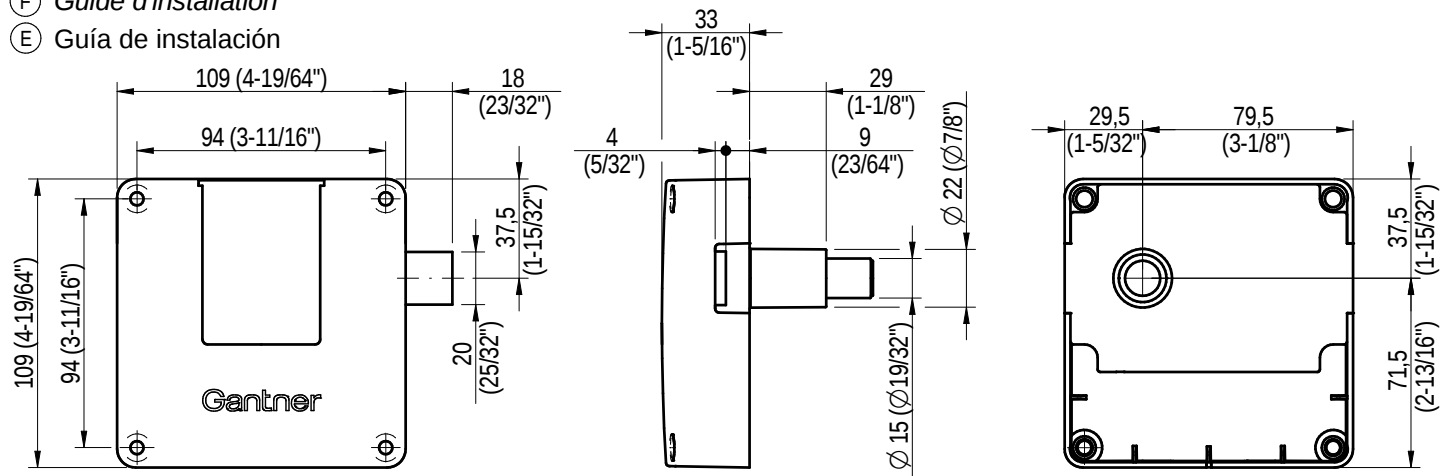


DOOR PREPARATION

NON METALLIC DOORS

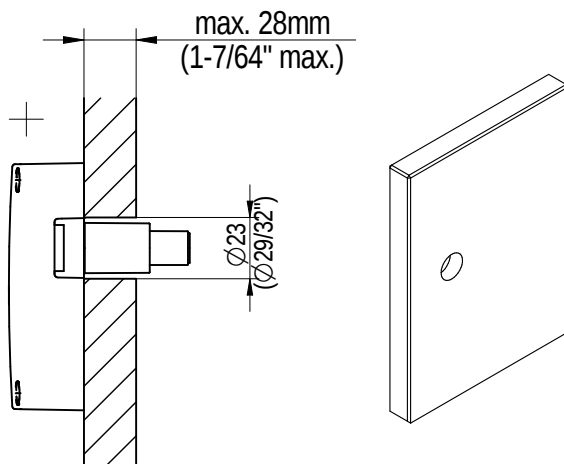


METALLIC DOORS

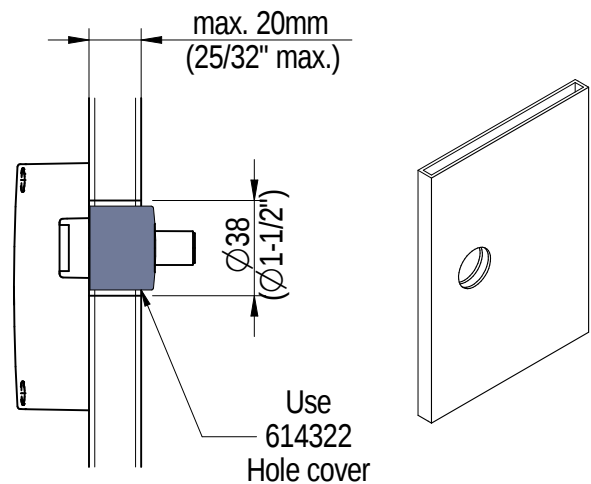


DOOR HANDING

Righth
Hand Door

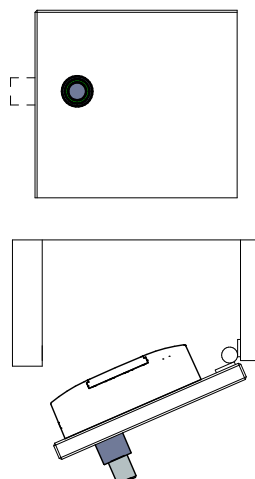

Left
Hand Door

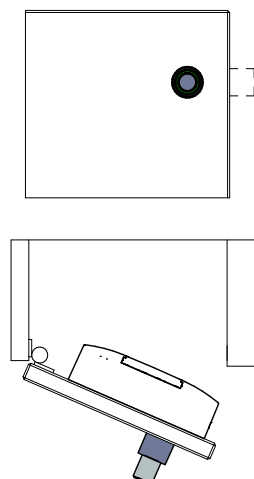

MODEL: ELECTRONIC INFO. LM100

Installation Guide

XS4 Eco.Lock

SALTO
inspiredaccess

Eng

ELECTRICAL FEATURES

F

CARACTÉRISTIQUES ÉLECTRIQUES

E

CARACTERÍSTICAS ELÉCTRICAS

Eng

OPERATING CONDITIONS

	Min.	Max.
Temperature	-25°C	55°C
Humidity	0	95% (Non-condensing)

RF CHARACTERISTICS

	Min.	Cen.	Max.	Unit
RFID Frequency	-	13,56	-	MHz
Bluetooth Smart Frequency*	2400	2445	2483,5	MHz

SALTO BLUEnet FEATURES

Frequency Range	2400-2483.5 MHz
Standard	Bluetooth 5.2 Compliant
Output TX power	+6 dBm
Indoor Range	5-10m *

(*) Depending upon installed environment. To ensure correct operation, do not install the device near a metallic surface.

POWER SUPPLY

BATTERIES 3XLR6	4,5V
-----------------	------