

FCC PART 15.247


EMI MEASUREMENT AND TEST REPORT

For

CCT R & D Limited

18F., CCT Telecom Building, 11 Wo Shing Street,  
Fo Tan, Shatin, N.T.

**FCC ID: NC8MD751**

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> Digital 2.4/5.8GHz Cordless Telephone System w/ Caller ID – Base
<b>Test Engineer:</b> Ling Zhang / 	
<b>Report No.:</b> R0407072(B)	
<b>Report Date:</b> 2004-08-02	
<b>Reviewed By:</b> Ming Jing / 	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation (BACL) 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** This test report is specially limited to the above client company and product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
JUSTIFICATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
SCHEMATICS / BLOCK DIAGRAM .....	6
EQUIPMENT MODIFICATIONS .....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLING LIST AND DETAILS .....	6
CONFIGURATION OF TEST SYSTEM .....	7
TEST SETUP BLOCK DIAGRAM .....	7
<b>SUMMARY OF TEST RESULTS FOR FCC PART 15.....</b>	<b>8</b>
<b>ANTENNA REQUIREMENT .....</b>	<b>9</b>
<b>§15.207(A) - CONDUCTED EMISSION.....</b>	<b>10</b>
MEASUREMENT UNCERTAINTY .....	10
TEST SETUP .....	10
SPECTRUM ANALYZER SETUP .....	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST PROCEDURE .....	10
ENVIRONMENTAL CONDITIONS .....	11
SUMMARY OF TEST RESULTS .....	11
CONDUCTED EMISSIONS TEST DATA .....	11
PLOT OF CONDUCTED EMISSIONS TEST DATA .....	12
<b>§15.205 &amp; §15.209 - RADIATED EMISSION.....</b>	<b>17</b>
MEASUREMENT UNCERTAINTY .....	17
TEST SETUP .....	17
SPECTRUM ANALYZER SETUP .....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
ENVIRONMENTAL CONDITIONS .....	18
TEST PROCEDURE .....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
SUMMARY OF TEST RESULTS .....	19
RADIATED EMISSION TEST DATA, MODEL: MD751 .....	20
RADIATED EMISSION TEST DATA, MODEL: MD761 .....	22
<b>§15.247 (A) - HOPPING CHANNEL SEPARATION .....</b>	<b>24</b>
STANDARD APPLICABLE .....	24
MEASUREMENT PROCEDURE.....	24
TEST EQUIPMENT .....	24
ENVIRONMENTAL CONDITIONS .....	24
MEASUREMENT RESULTS.....	24
PLOTS OF HOPPING CHANNEL SEPARATION .....	25
<b>§15.247 (A) (1) - CHANNEL BANDWIDTH .....</b>	<b>26</b>
STANDARD APPLICABLE .....	26
MEASUREMENT PROCEDURE.....	26
TEST EQUIPMENT .....	26
ENVIRONMENTAL CONDITIONS .....	26
MEASUREMENT RESULT .....	26

PLOT OF CHANNEL BANDWIDTH.....	26
<b>§15.247 (A) (1) (III) - NUMBER OF HOPPING FREQUENCY USED .....</b>	<b>28</b>
STANDARD APPLICABLE .....	28
MEASUREMENT PROCEDURE.....	28
TEST EQUIPMENT .....	28
ENVIRONMENTAL CONDITIONS.....	28
MEASUREMENT RESULTS.....	28
PLOTS OF NUMBER OF HOPPING FREQUENCY .....	28
<b>§15.247 9 (A) (1) (III) - DWELL TIME .....</b>	<b>30</b>
STANDARD APPLICABLE .....	30
MEASUREMENT PROCEDURE.....	30
TEST EQUIPMENT .....	30
ENVIRONMENTAL CONDITIONS.....	30
MEASUREMENT RESULTS.....	30
PLOTS OF DWELL TIME .....	30
<b>§15.247 (B) (1) - MAXIMUM PEAK OUTPUT POWER.....</b>	<b>34</b>
STANDARD APPLICABLE .....	34
MEASUREMENT PROCEDURE.....	34
TEST EQUIPMENT .....	34
ENVIRONMENTAL CONDITIONS.....	34
MEASUREMENT RESULT .....	34
PLOTS OF MAXIMUM PEAK OUTPUT POWER.....	34
<b>§15.247 (C) - 100 KHZ BANDWIDTH OF BAND EDGES.....</b>	<b>37</b>
STANDARD APPLICABLE .....	37
MEASUREMENT PROCEDURE.....	37
TEST EQUIPMENT .....	37
ENVIRONMENTAL CONDITIONS.....	37
PLOTS OF 100KHz BANDWIDTH OF BAND EDGE.....	37
<b>SPURIOUS EMISSION AT ANTENNA PORT .....</b>	<b>40</b>
STANDARD APPLICABLE .....	40
MEASUREMENT PROCEDURE.....	40
TEST EQUIPMENT .....	40
ENVIRONMENTAL CONDITIONS.....	40
MEASUREMENT RESULTS.....	40

## GENERAL INFORMATION

### Product Description for Equipment Under Test (EUT)

The *CCT R & D Limited's*, model: *MD751 / MD761*, or the “EUT” as referred to in this report is the base part of a Digital 2.4/5.8GHz Cordless Telephone System w/ Caller ID, which measures approximately 113mmL x 76mm W x 107mm H (for Model: MD751) and 153mmL x 157mm W x 63mm H (for Model: MD761). The EUT is a DSS device, which operates at the frequency range of 5760.7190 – 5838.3117MHz, with the maximum conducted output power of 19.33dBm (85.70mW).

The EUT utilized the Motorola, model 5864200W11 adapter (for Model: MD751) and CCT power adapter (for Model: MD761).

*\* The test data gathered are from a production sample, S/N: MD751-02 (for Model: MD751) & M761A-USA-SSR1 (for Model: MD761), provided by the manufacturer.*

### Objective

This type approval report is prepared on behalf of *CCT R & D Limited* in accordance with Part 2, Subpart J, Part 15, Subparts A, B, C, and Part 24 Subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC 15.247 rules for the bluetooth:

- Maximum Peak Output Power
- Hopping Channel Separation
- Number of Hopping Frequency Used
- 20 dB Bandwidth
- Dwell Time on Each Channel
- 100 kHz Bandwidth of Band Edge
- Conducted Emission
- Spurious Emission
- Radiated Emission
- Antenna Requirement

### Related Submittal(s)/Grant(s)

No Related Submittals

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2001& TIA/EIA-603.

### Test Facility

The Open Area Test site used by BACL Corp. to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports

has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the test methods and procedures set forth in ANSI C63.4-2001& TIA/EIA-603.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22:2002, Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing according to ANSI C63.4-2001.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

### EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the system components.

Once loaded, set the Tx channel to low, mid and high for testing.

### Special Accessories

As shown in following test block diagram, all interface cables used for compliance testing are shielded.

### Schematics / Block Diagram

Please refer to Appendix A.

### Equipment Modifications

No modifications were made to the EUT.


### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
TELTON E CORP.	SIMULATOR	TLS-3B-01	80071	DOC
Southern Telecom	Telephone	None	None	None


### External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
None-Shielded Telephone Cable	1.5	RJ11 Port/EUT	Telephone Simulator RJ11 Port
None-Shielded Telephone Cable	1.5	RJ11 Port/Simulator	Telephone RJ11 Port/telephone

## Configuration of Test System

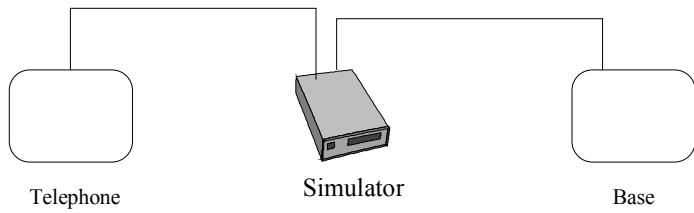

## Test Setup Block Diagram

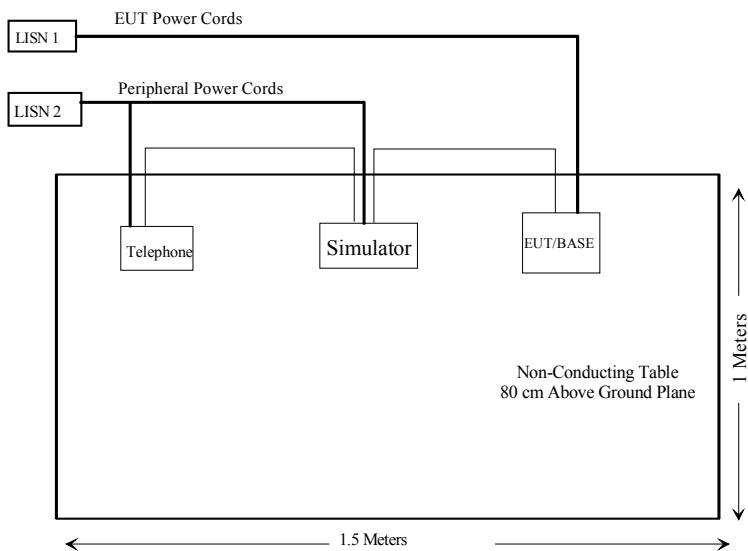

**SUMMARY OF TEST RESULTS FOR FCC PART 15**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§ 15.205	Restricted Bands	N/A
§15.207 (a)	Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247 (a) (1)	Hopping Channel Separation	Compliant
§15.247 (a) (1)	Channel Bandwidth	Compliant
§15.247 (a) (1) (iii)	Number of Hopping Frequencies Used	Compliant
§15.247 (a) (1) (iii)	Dwell Time of Each Frequency within a 10 Second Period of time (0.4 x Number of Channel)	Compliant
§15.247 (b) (1)	Maximum Peak Output Power	Compliant
§ 15.247 (b)(4) § 2.1093	RF Safety Requirements	Compliant
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edge	Compliant
	Spurious Emission at Antenna Port	Compliant

## **ANTENNA REQUIREMENT**

---

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The gain of antenna used for transmitting is 0 dBi by default, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

## §15.207(a) - CONDUCTED EMISSION

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is  $\pm 2.4$  dB.

### Test Setup

The measurement was performed at shield room, using the same setup per ANSI C63.4 – 2001 measurement procedure. The specification used was FCC Class B limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The EUT was connected with LISN-1.

### Spectrum Analyzer Setup

The spectrum analyzer was set to investigate the spectrum from 150 kHz to 30MHz.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	LISN	ESH2-Z5	871884/039	2004-03-28
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2004-05-06
Fluke	Calibrated Voltmeter	189	18485-38	2003-07-18

\* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

During the conducted emission test, the power cord of the host system was connected to the mains outlet of the LISN-1.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with an “QP”. Average readings are distinguished with an “Ave”.

## Environmental Conditions

Temperature:	26° C
Relative Humidity:	47%
ATM Pressure:	1013 mbar

The testing was performed by Ling Zhang on 2004-07-29 for Model: MD751

Temperature:	23° C
Relative Humidity:	35%
ATM Pressure:	1019 mbar

The testing was performed by Ling Zhang on 2004-07-16 for Model: MD761.

## Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Conducted limit for a Class B device, with the *worst* margin reading of:

**-28.3 dB at 17.900 MHz** in the **Line** conductor, MD751

**-24.3 dB at 17.900 MHz** in the **Line** conductor, MD761

## Conducted Emissions Test Data

MD751:

Frequency MHz	Amplitude dB $\mu$ V	LINE CONDUCTED EMISSIONS		FCC CLASS B	
		Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB $\mu$ V	Margin dB
17.900	21.7	Ave	Line	50	-28.3
17.900	21	Ave	Neutral	50	-29.0
9.900	20	Ave	Line	50	-30.0
9.800	17.2	Ave	Neutral	50	-32.8
9.900	26.8	QP	Line	60	-33.2
0.625	20.8	QP	Line	56	-35.2
9.800	24.6	QP	Neutral	60	-35.4
1.370	9.9	Ave	Neutral	46	-36.1
17.900	23.7	QP	Line	60	-36.3
17.900	22.7	QP	Neutral	60	-37.3
1.010	17.8	QP	Neutral	56	-38.2
0.625	3.9	Ave	Line	46	-42.1

MD761:

Frequency MHz	Amplitude dB $\mu$ V	LINE CONDUCTED EMISSIONS		FCC CLASS B	
		Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB $\mu$ V	Margin dB
17.900	25.7	Ave	Line	50	-24.3
17.900	24.1	Ave	Neutral	50	-25.9
9.600	15.8	Ave	Neutral	50	-34.2
9.500	15.0	Ave	Line	50	-35.0
17.900	24.9	QP	Line	60	-35.1
0.575	20.4	QP	Line	56	-35.6
17.900	23.6	QP	Neutral	60	-36.4
9.500	22.4	QP	Line	60	-37.6
9.600	20.8	QP	Neutral	60	-39.2
0.595	16.5	QP	Neutral	56	-39.5
0.235	8.9	Ave	Line	52	-43.4
0.235	8.1	Ave	Neutral	52	-44.2

**Plot of Conducted Emissions Test Data**

Plot(s) of Conducted Emissions Test Data is presented in the following page as reference.


Bay Area Compliance Laboratory Corp  
Class B

29. Jul 04 18:33

EUT: MD751  
Manuf: GGT TELECOM  
Op Cond: Normal  
Operator: LING  
Comment: N

## Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	W-Time	Atten	Preamp	
150K	1M	5K	9K	QP+AV	20ms	15dBLLN	OFF	
1M	6M	10K	9K	QP+AV	1ms	15dBLLN	OFF	
6M	30M	100K	9K	QP+AV	1ms	15dBLLN	OFF	

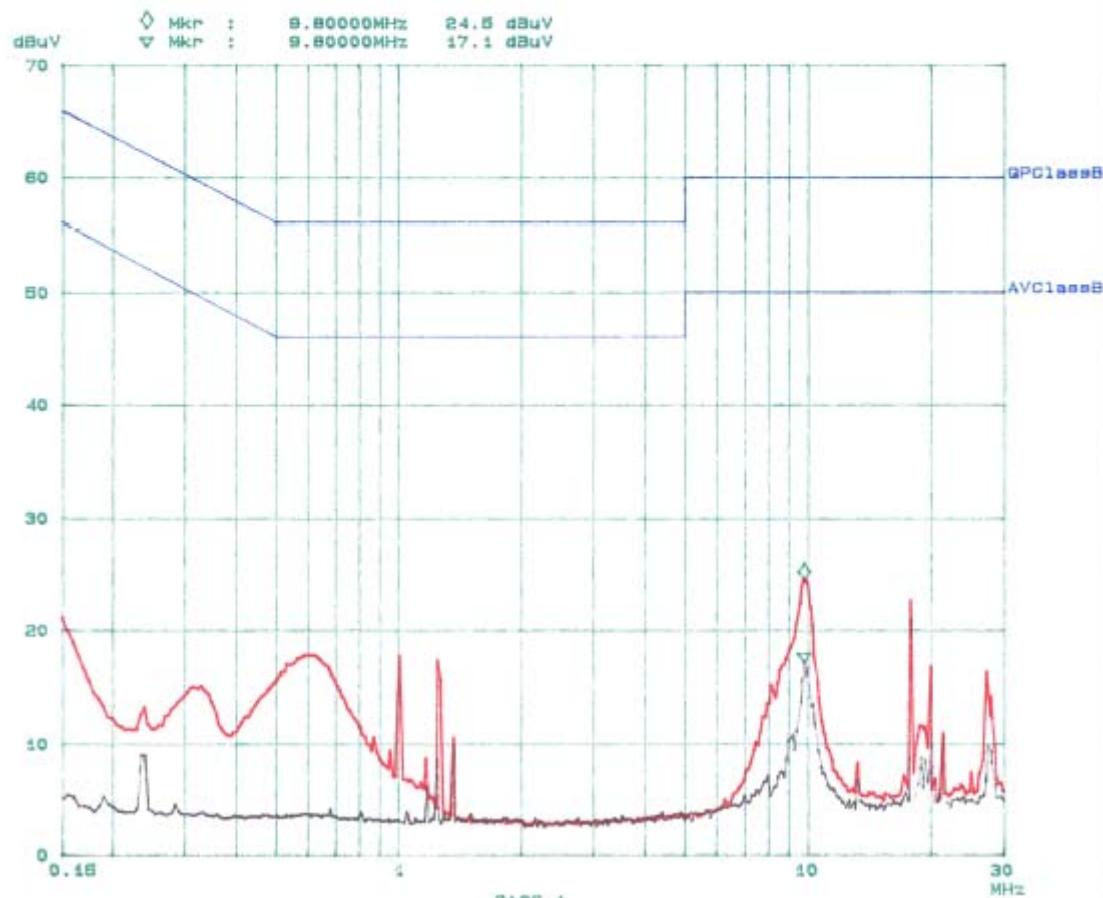


Bay Area Compliance Laboratory Corp  
Class B

29. Jul 04 16:18

EUT: MD751  
Manuf: CCT TELECOM  
Op Cond: Normal  
Operator: LING  
Comment: L

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150K	4M	5K	8K	QP+AV	20ms	15dBBLN	OFF
1M	8M	10K	8K	QP+AV	1ms	15dBBLN	OFF
8M	30M	100K	8K	QP+AV	1ms	15dBBLN	OFF

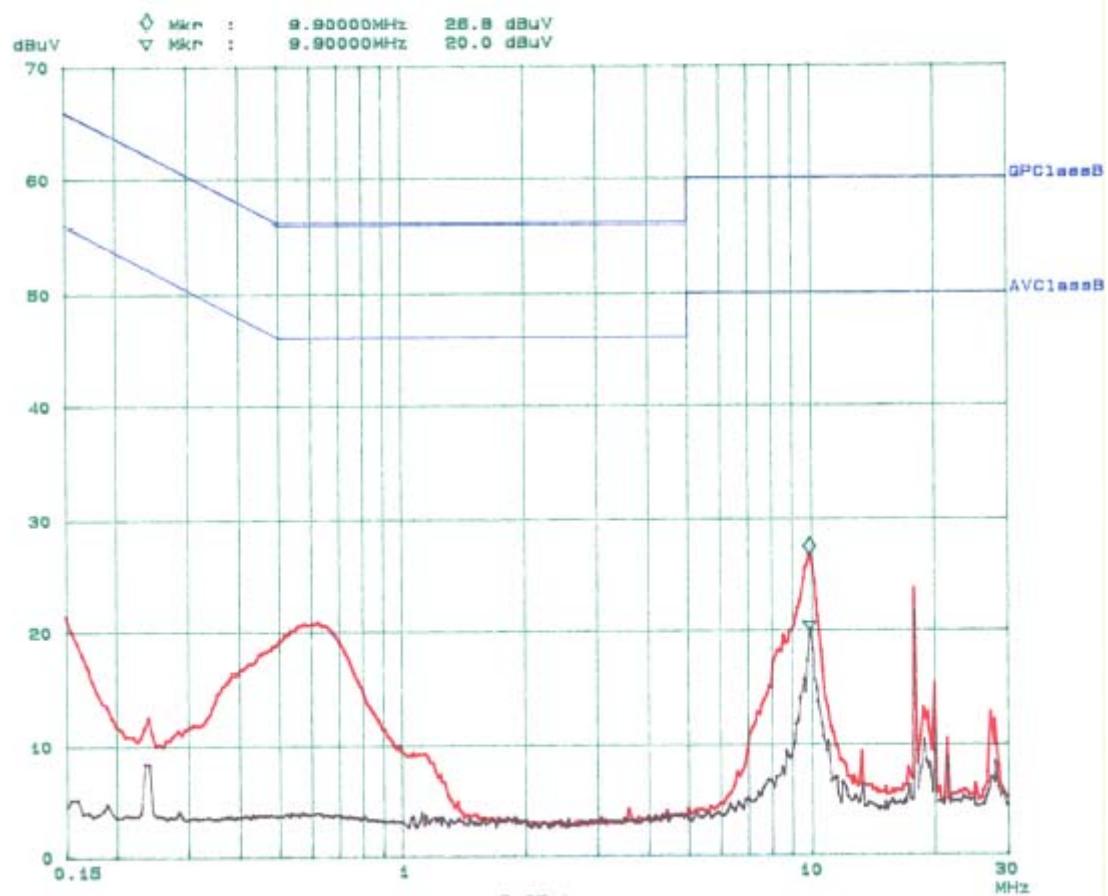


Bay Area Compliance Laboratory Corp  
Class B

18. Jul 04 13:02

EUT: MD751  
Manuf: CCT TELECOM  
Op Cond: Normal  
Operator: LINA  
Comment: L

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BN	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	15dBBLN	OFF
1M	5M	20k	9k	QP+AV	1ms	15dBBLN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dBBLN	OFF

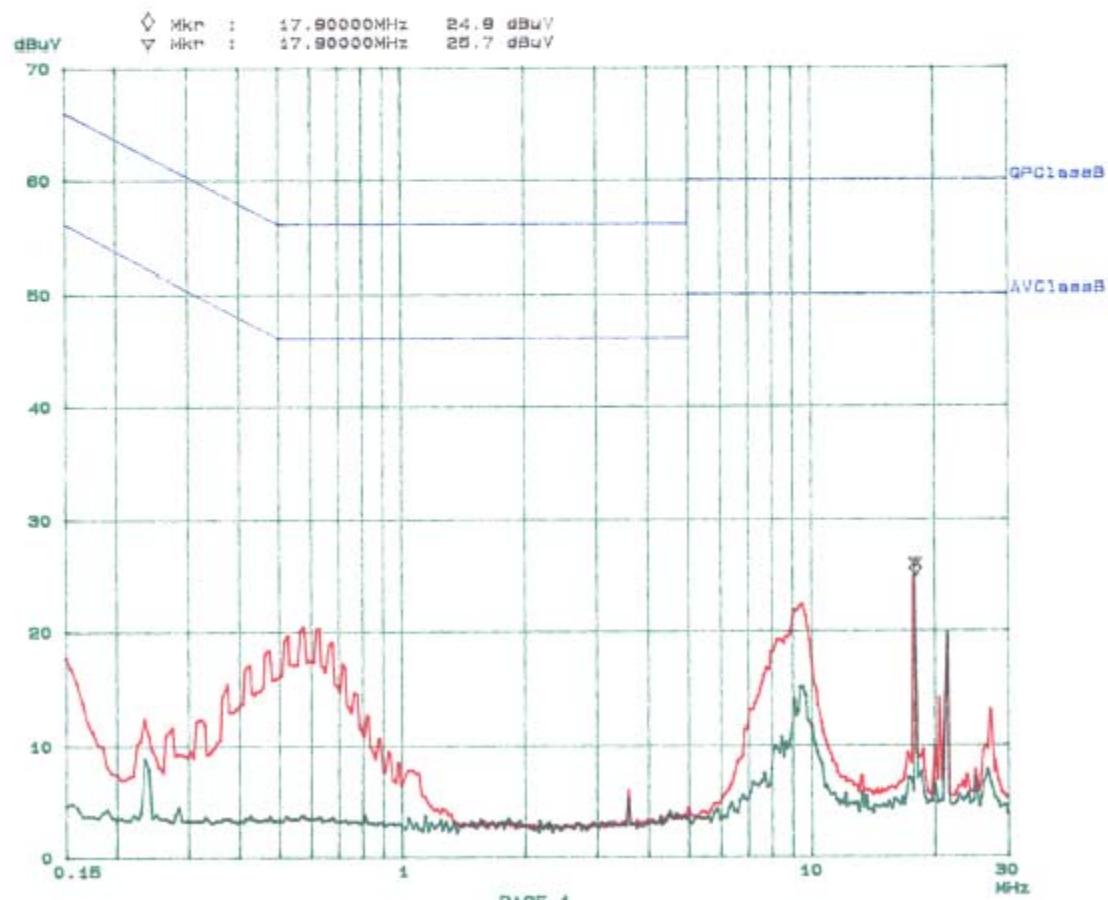


Bay Area Compliance Laboratory Corp  
Class B

18. Jul 04 12:46

EUT: MD751  
Manuf: CCT TELECOM  
Op Cond: Normal  
Operator: L.TNA  
Comment: N

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	15dBLN	OFF
1M	5M	20k	9k	QP+AV	1ms	15dBLN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dBLN	OFF

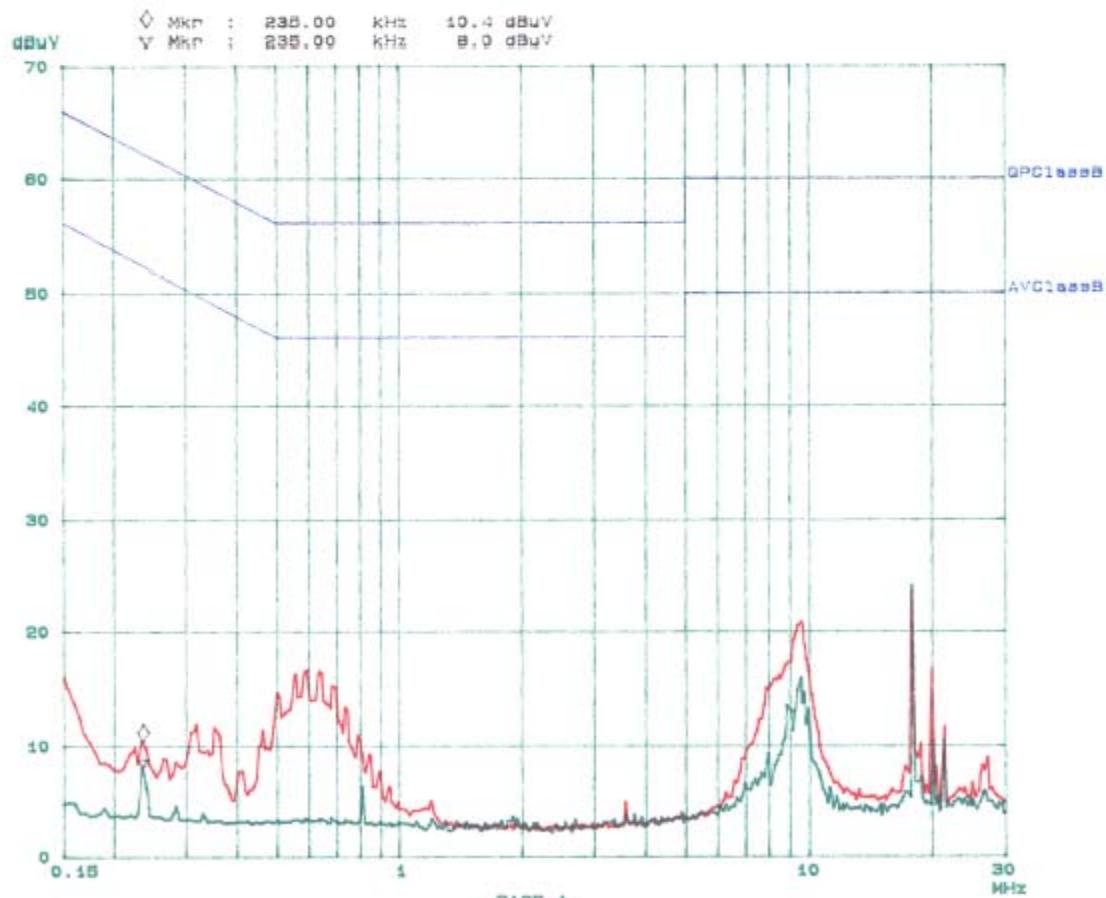

## §15.205 & §15.209 - RADIATED EMISSION

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

### Test Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with ANSI C63.4-2001. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The EUT was connected with 120Vac/60Hz power source.

### Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<b><u>Frequency Range</u></b>	<b><u>RBW</u></b>	<b><u>Video B/W</u></b>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

### Test Equipment List and Details

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal. Due Date</b>
HP	Amplifier, Pre, microwave	8449B	3147A00400	2004-03-14
HP	Amplifier, Pre	8447E	1937A01057	2003-08-04
HP	Analyzer, Spectrum	8565EC	3946A00131	2004-06-30
ETS	Antenna, Biconical	3110B	9603-2315	2004-01-11
A.R.A.	Antenna, Horn, DRG	DRG-118/A	1132	2003-09-30
A. H. Systems	Antenna, Horn, DRG	SAS-200/571	2455-261	2003-08-01
ETS	Antenna, logperiodic	3148	0004-1155	2003-10-11

\* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Environmental Conditions

Temperature:	26° C
Relative Humidity:	47%
ATM Pressure:	1013 mbar

*The testing was performed by Ling Zhang on 2004-07-29 for Model: MD751*

Temperature:	23° C
Relative Humidity:	35%
ATM Pressure:	1019 mbar

*The testing was performed by Ling Zhang on 2004-07-16 for Model: MD761.*

## Test Procedure

For the radiated emissions test, both the laptop and all peripheral power cords were connected to the AC floor outlet since the power supply used in the laptop did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limits), and are distinguished with a "Qp" in the data table.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

**Summary of Test Results**

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.247, and had the worst margin of:

Model: MD751

- 0.70 dB at 17282.157 MHz** in the **Horizontal** polarization, Low Channel.
- 1.27 dB at 17397.208 MHz** in the **Vertical** polarization, Middle Channel.
- 1.37 dB at 17514.935 MHz** in the **Horizontal** polarization, High Channel.
- 5.40 dB at 157.800 MHz** in the **Vertical** polarization, Unintentional Emission.

Model: MD761

- 2.30 dB at 17282.157 MHz** in the **Vertical** polarization, Low Channel.
- 2.50 dB at 17397.208 MHz** in the **Vertical** polarization, Middle Channel.
- 2.37 dB at 17514.935 MHz** in the **Vertical** polarization, High Channel.
- 4.73 dB at 157.800 MHz** in the **Vertical** polarization, Unintentional Emission.

**Radiated Emission Test Data, Model: MD751**

Indicated			Antenna	Antenna		Correction Factor			FCC 15 Subpart C		
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin	Comments
MHz	dB $\mu$ V/m	Degree	Meter	H/V	dB $\mu$ V/m	dB $\mu$ V/m	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	
Low Channel											
5760.719	114.00	330	1.6	v	34.1	3.4	34.50	117.00			Fund/Peak
5760.719	115.67	270	1.5	h	34.1	3.4	34.50	118.67			Fund/Peak
5760.719	60.83	330	1.6	v	34.1	3.4	34.50	63.83			Fund/Ave
5760.719	60.83	270	1.5	h	34.1	3.4	34.50	63.83			Fund/Ave
17282.157	52.90	150	1.8	h	44.3	7.1	31.00	73.30	74	-0.70	Peak
17282.157	32.57	150	1.8	h	44.3	7.1	31.00	52.97	54	-1.03	Ave
17282.157	51.37	250	1.6	v	44.3	7.1	31.00	71.77	74	-2.23	Peak
17282.157	31.37	250	1.6	v	44.3	7.1	31.00	51.77	54	-2.23	Ave
11521.438	58.70	150	1.2	h	39.1	5.4	32.17	71.03	74	-2.97	Peak
11521.438	37.20	150	1.2	h	39.1	5.4	32.17	49.53	54	-4.47	Ave
11521.438	36.20	100	1.2	v	39.1	5.4	32.17	48.53	54	-5.47	Ave
11521.438	54.70	100	1.2	v	39.1	5.4	32.17	67.03	74	-6.97	Peak
Middle Channel											
5799.069	113.83	120	1.5	v	34.1	3.4	34.50	116.83			Fund/Peak
5799.069	114.33	270	1.5	h	34.1	3.4	34.50	117.33			Fund/Peak
5799.069	60.17	120	1.5	v	34.1	3.4	34.50	63.17			Fund/Ave
5799.069	60.33	270	1.5	h	34.1	3.4	34.50	63.33			Fund/Ave
17397.208	52.33	120	1.8	v	44.3	7.1	31.00	72.73	74	-1.27	Peak
17397.208	51.90	180	1.6	h	44.3	7.1	31.00	72.30	74	-1.70	Peak
17397.208	31.90	180	1.6	h	44.3	7.1	31.00	52.30	54	-1.70	Ave
17397.208	31.50	120	1.8	v	44.3	7.1	31.00	51.90	54	-2.10	Ave
11598.139	57.83	150	1.6	h	39.1	5.4	32.17	70.16	74	-3.84	Peak
11598.139	37.33	150	1.6	h	39.1	5.4	32.17	49.66	54	-4.34	Ave
11598.139	36.67	150	1.6	v	39.1	5.4	32.17	49.00	54	-5.00	Ave
11598.139	54.83	150	1.6	v	39.1	5.4	32.17	67.16	74	-6.84	Peak
High Channel											
5838.312	113.70	100	1.6	v	34.1	3.4	34.50	116.70			Fund/Peak
5838.312	114.00	180	1.5	h	34.1	3.4	34.50	117.00			Fund/Peak
5838.312	60.30	100	1.6	v	34.1	3.4	34.50	63.30			Fund/Ave
5838.312	59.80	180	1.5	h	34.1	3.4	34.50	62.80			Fund/Ave
17514.935	52.10	180	1.5	h	44.1	7.1	30.67	72.63	74	-1.37	Peak
17514.935	31.80	180	1.5	h	44.1	7.1	30.67	52.33	54	-1.67	Ave
17514.935	31.60	90	1.5	v	44.1	7.1	30.67	52.13	54	-1.87	Ave
17514.935	51.50	90	1.5	v	44.1	7.1	30.67	72.03	74	-1.97	Peak
11676.623	57.20	150	1.6	h	39.1	5.4	32.17	69.53	74	-4.47	Peak
11676.623	37.20	150	1.6	h	39.1	5.4	32.17	49.53	54	-4.47	Ave
11676.623	36.50	120	1.6	v	39.1	5.4	32.17	48.83	54	-5.17	Ave
11676.623	54.50	120	1.6	v	39.1	5.4	32.17	66.83	74	-7.17	Peak

Note:

FUND: Fundamental

AVG: Average

## Unintentional Emission

Frequency MHz	Indicated		Antenna Height Meter	Antenna		Cable Loss dB $\mu$ V/ m	Correction Factor		FCC 15 Subpart C	
	Ampl. dB $\mu$ V/m	Direction Degree		Polar H/V	Antenna dB $\mu$ V/m		Amp.	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
157.800	53.50	0	1.2	v	12.8	0.2	28.40	38.10	43.5	-5.40
878.300	45.17	270	1.4	v	22.4	0.9	28.49	39.98	46	-6.02
157.800	52.30	15	1.8	h	12.8	0.2	28.40	36.90	43.5	-6.60
879.170	43.83	330	1	h	22.4	0.9	28.49	38.64	46	-7.36
80.000	49.20	60	2	v	9.5	0.2	28.70	30.20	40	-9.80
79.670	48.20	30	1.5	h	9.35	0.2	28.80	28.95	40	-11.05
175.500	45.50	90	1.4	v	13.1	0.2	28.31	30.49	43.5	-13.01

**Radiated Emission Test Data, Model: MD761**

Indicated			Antenna	Antenna		Correction Factor			FCC 15 Subpart C		
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin	Comments
MHz	dB $\mu$ V/m	Degree	Meter	H/V	dB $\mu$ V/m	dB $\mu$ V/m	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	
Low Channel											
5760.719	114.67	200	1.6	v	34.1	3.4	34.50	117.67			Fund/Peak
5760.719	114.83	0	1.8	h	34.1	3.4	34.50	117.83			Fund/Peak
5760.719	61.50	200	1.6	v	34.1	3.4	34.50	64.50			Fund/Ave
5760.719	62.17	0	1.8	h	34.1	3.4	34.50	65.17			Fund/Ave
17282.157	31.30	180	1.4	v	44.3	7.1	31.00	51.70	54	-2.30	Ave
17282.157	31.17	200	1.6	h	44.3	7.1	31.00	51.57	54	-2.43	Ave
11521.438	59.03	200	1.5	v	39.1	5.4	32.17	71.36	74	-2.64	Peak
11521.438	58.80	150	1.6	h	39.1	5.4	32.17	71.13	74	-2.87	Peak
17282.157	50.20	180	1.4	v	44.3	7.1	31.00	70.60	74	-3.40	Peak
17282.157	49.83	200	1.6	h	44.3	7.1	31.00	70.23	74	-3.77	Peak
11521.438	37.80	150	1.6	h	39.1	5.4	32.17	50.13	54	-3.87	Ave
11521.438	37.70	200	1.5	v	39.1	5.4	32.17	50.03	54	-3.97	Ave
Middle Channel											
5799.069	112.80	0	1.4	v	34.1	3.4	34.50	115.80			Fund/Peak
5799.069	111.67	0	1.8	h	34.1	3.4	34.50	114.67			Fund/Peak
5799.069	60.00	0	1.4	v	34.1	3.4	34.50	63.00			Fund/Ave
5799.069	59.70	0	1.8	h	34.1	3.4	34.50	62.70			Fund/Ave
17397.208	31.10	0	1.4	v	44.3	7.1	31.00	51.50	54	-2.50	Ave
17397.208	31.00	30	1.8	h	44.3	7.1	31.00	51.40	54	-2.60	Ave
17397.208	50.50	0	1.4	v	44.3	7.1	31.00	70.90	74	-3.10	Peak
11598.139	57.80	180	1.6	h	39.1	5.4	32.17	70.13	74	-3.87	Peak
17397.208	49.67	30	1.8	h	44.3	7.1	31.00	70.07	74	-3.93	Peak
11598.139	57.70	30	1.5	v	39.1	5.4	32.17	70.03	74	-3.97	Peak
11598.139	37.60	30	1.5	v	39.1	5.4	32.17	49.93	54	-4.07	Ave
11598.139	37.50	180	1.6	h	39.1	5.4	32.17	49.83	54	-4.17	Ave
High Channel											
5838.312	112.70	45	1.6	v	34.1	3.4	34.50	115.70			Fund/Peak
5838.312	112.00	30	1.6	h	34.1	3.4	34.50	115.00			Fund/Peak
5838.312	59.50	45	1.6	v	34.1	3.4	34.50	62.50			Fund/Ave
5838.312	58.83	30	1.6	h	34.1	3.4	34.50	61.83			Fund/Ave
17514.935	31.10	90	1.5	v	44.1	7.1	30.67	51.63	54	-2.37	Ave
17514.935	31.10	180	1.2	h	44.1	7.1	30.67	51.63	54	-2.37	Ave
17514.935	50.20	90	1.5	v	44.1	7.1	30.67	70.73	74	-3.27	Peak
11676.623	58.20	60	1.6	h	39.1	5.4	32.17	70.53	74	-3.47	Peak
17514.935	50.00	180	1.2	h	44.1	7.1	30.67	70.53	74	-3.47	Peak
11676.623	37.80	60	1.6	h	39.1	5.4	32.17	50.13	54	-3.87	Ave
11676.623	57.70	30	1.4	v	39.1	5.4	32.17	70.03	74	-3.97	Peak
11676.623	37.60	30	1.4	v	39.1	5.4	32.17	49.93	54	-4.07	Ave

Note:

FUND: Fundamental

AVG: Average

## Unintentional Emission

Frequency MHz	Indicated		Antenna Height Meter	Antenna		Cable Loss dB $\mu$ V/ m	Correction Factor		FCC 15 Subpart C	
	Ampl. dB $\mu$ V/m	Direction Degree		Polar H/V	Antenna dB $\mu$ V/m		Amp.	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
157.800	54.17	0	1	v	12.8	0.2	28.40	38.77	43.5	-4.73
157.800	52.30	15	1.8	h	12.8	0.2	28.40	36.90	43.5	-6.60
878.300	44.50	90	1.2	h	22.4	0.9	28.49	39.31	46	-6.69
878.300	43.67	90	1.2	v	22.4	0.9	28.49	38.48	46	-7.52
79.230	48.50	30	1.8	v	9.35	0.2	28.80	29.25	40	-10.75
79.230	46.67	270	1.6	h	9.35	0.2	28.80	27.42	40	-12.58
180.267	44.83	0	1.5	v	13.2	0.2	28.29	29.94	43.5	-13.56
175.275	42.33	45	1.2	v	13.1	0.2	28.31	27.32	43.5	-16.18

## §15.247 (a) (1) - HOPPING CHANNEL SEPARATION

### Standard Applicable

According to §15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies.

### Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max-Hold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function, and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### Test Equipment

Manufacturer	Model No.	Description	Calibration Date
Agilent	8564E	Spectrum Analyzer	2003-08-01

\* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Environmental Conditions

Temperature:	24° C
Relative Humidity:	55%
ATM Pressure:	1012 mbar


*The testing was performed by Ling Zhang on 2004-07-23.*

### Measurement Results

Channel	Measurement (KHz)	Result
Low	900	Compliant
Middle	897	Compliant
High	887	Compliant

**Plots of Hopping Channel Separation**

Please refer to the following plots.

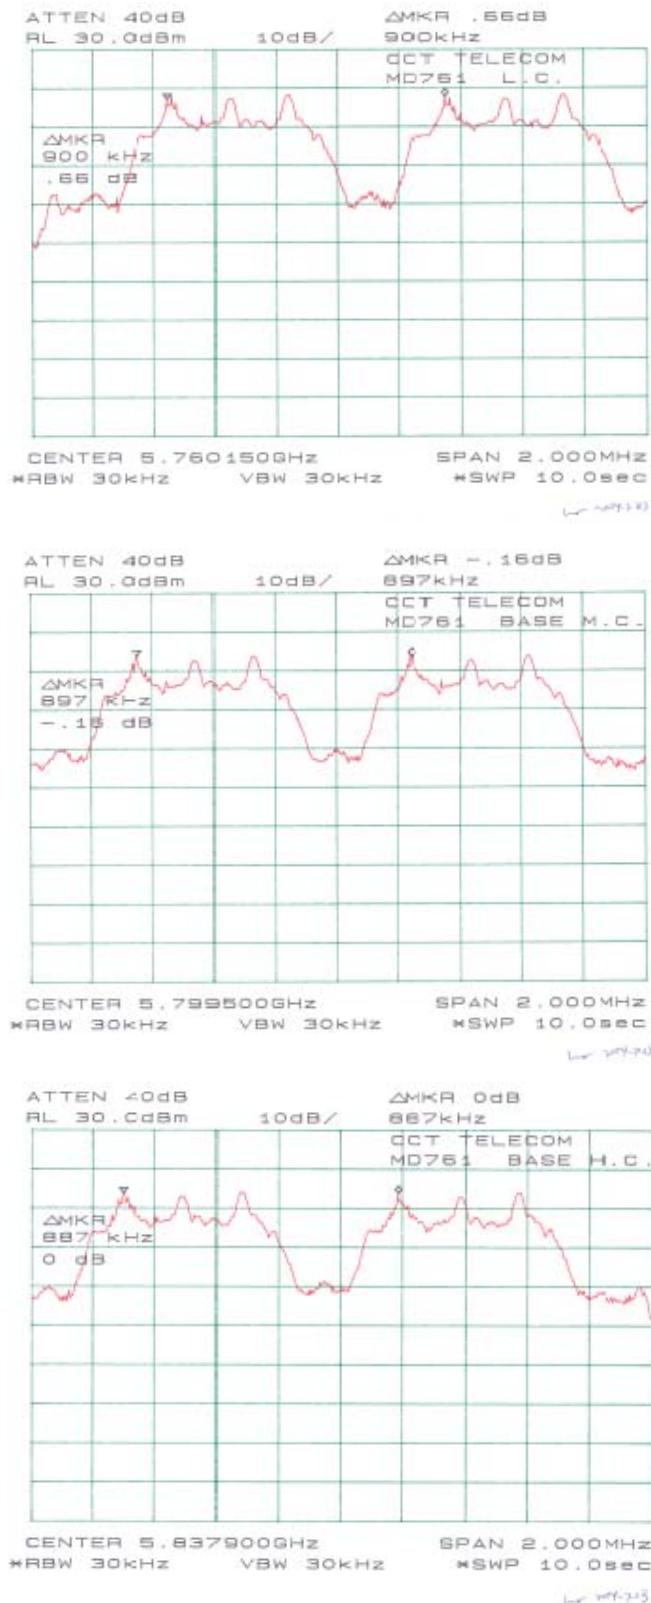

## §15.247 (a) (1) - CHANNEL BANDWIDTH

### Standard Applicable

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2003-08-01

\* **Statement of Traceability:** **BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Environmental Conditions

Temperature:	24° C
Relative Humidity:	55%
ATM Pressure:	1012 mbar




*The testing was performed by Ling Zhang on 2004-07-23.*

### Measurement Result

Frequency	Measurement (kHz)	Standard	Result
Low	677	≤ 1MHz	Compliant
Middle	680	≤ 1MHz	Compliant
High	687	≤ 1MHz	Compliant

### Plot of Channel Bandwidth

Please see the following plots

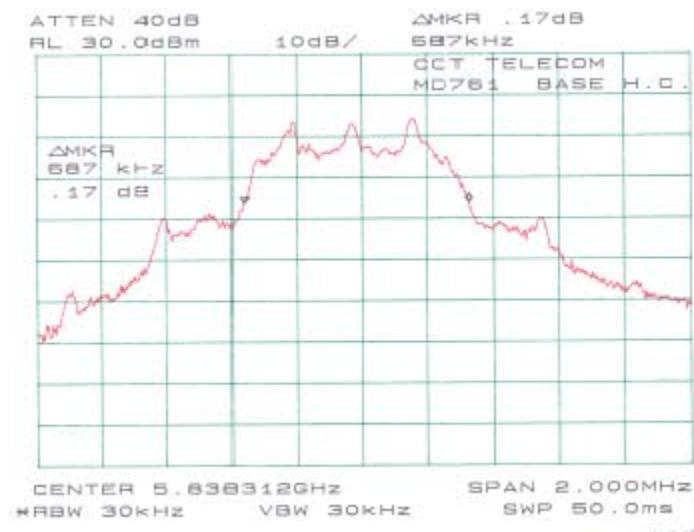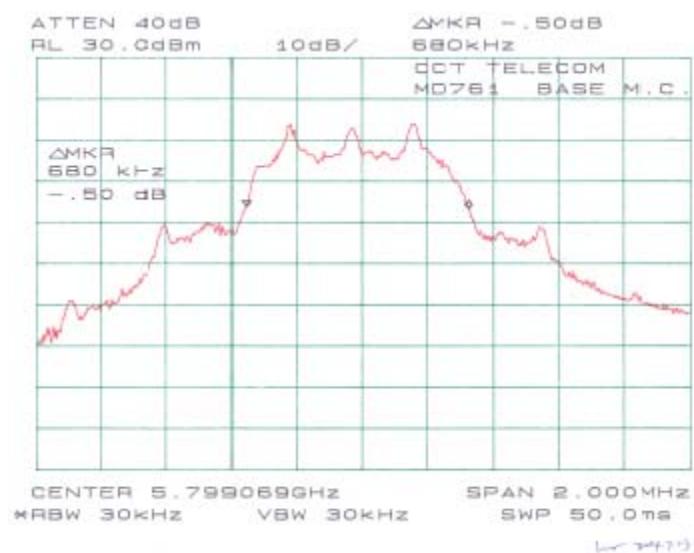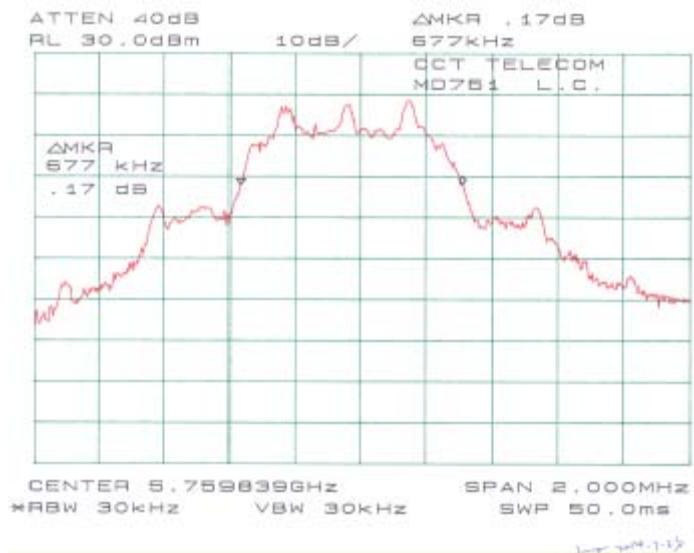

## **§15.247 (a) (1) (iii) - NUMBER OF HOPPING FREQUENCY USED**

### **Standard Applicable**

According to §15.247(a)(1)(iii), frequency hopping systems operating in the 2400-2483.5Mhz band shall use at least 75 hopping frequencies.

### **Measurement Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### **Test Equipment**

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2003-08-01

\* **Statement of Traceability:** **BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### **Environmental Conditions**

Temperature:	24° C
Relative Humidity:	55%
ATM Pressure:	1012 mbar




*The testing was performed by Ling Zhang on 2004-07-23.*

### **Measurement Results**

Measurement	Standard	Result
88	75	Compliant

### **Plots of Number of Hopping Frequency**

Please refer to the attached plots.

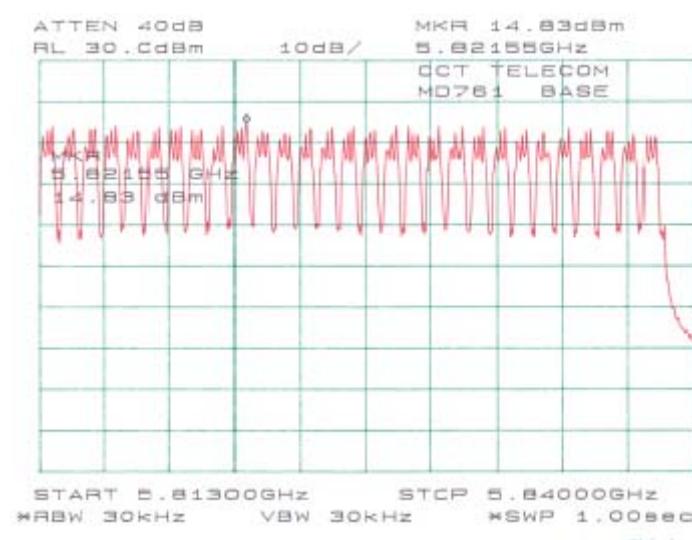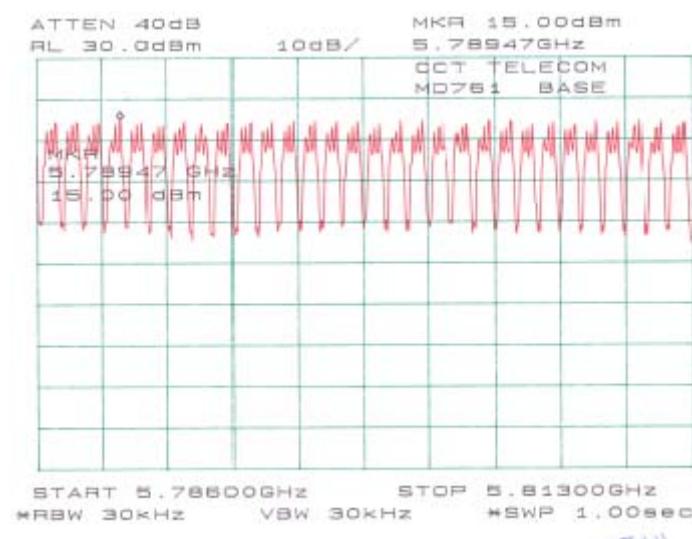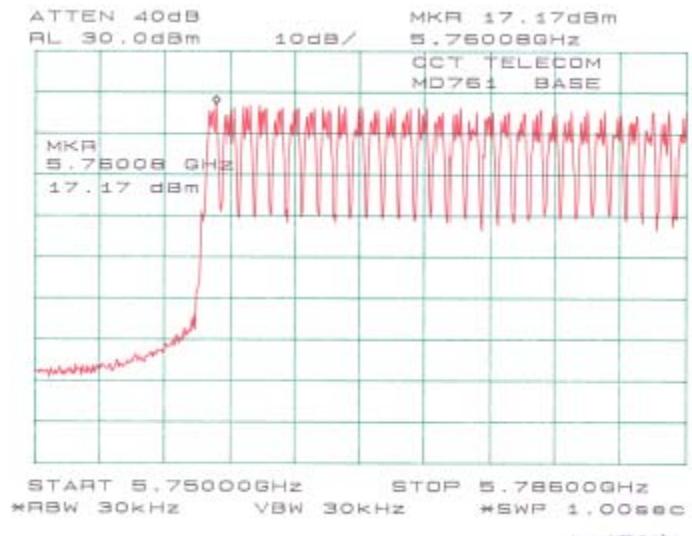

## §15.247 9 (a) (1) (iii) - DWELL TIME

### Standard Applicable

According to §15.247 (a)(1)(iii), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

### Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2003-08-01

\* **Statement of Traceability:** **BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Environmental Conditions

Temperature:	24° C
Relative Humidity:	55%
ATM Pressure:	1012 mbar



*The testing was performed by Ling Zhang on 2004-07-23.*



### Measurement Results



Low, Mid, High Channels:  $7 \times 1.333(\text{ms}) \times [30 / 5 (\text{s})] = 0.056 \text{ s} < 0.4 \text{ s}$

### Plots of Dwell Time

Please refer the following plots.

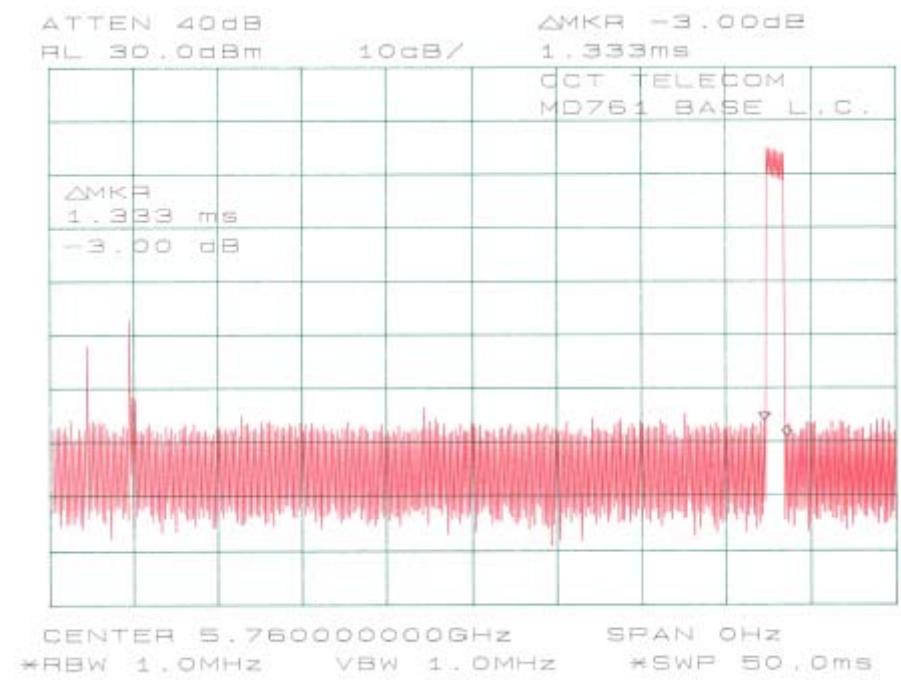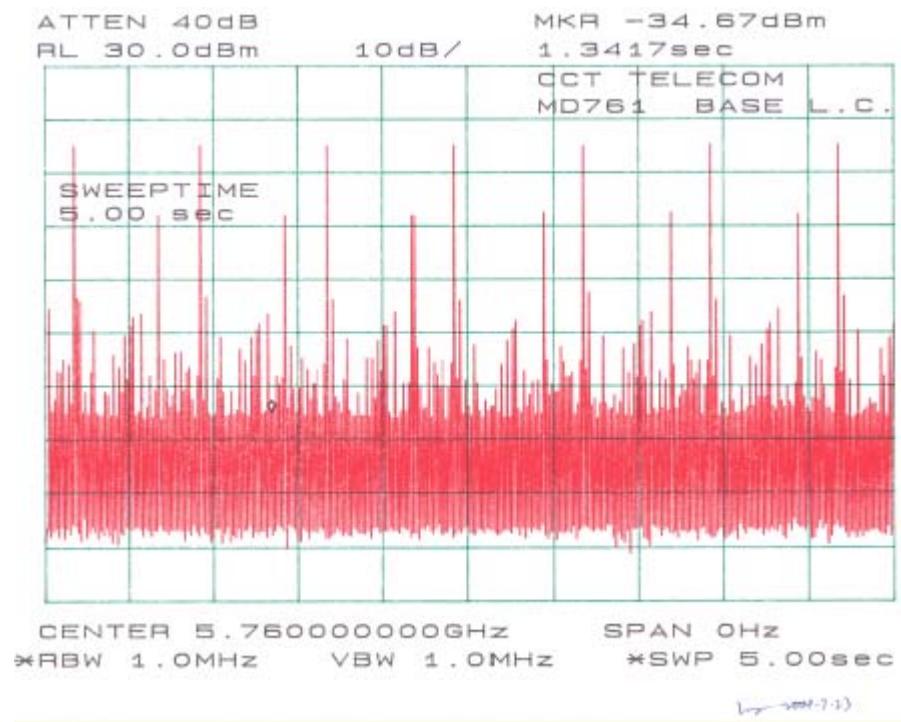

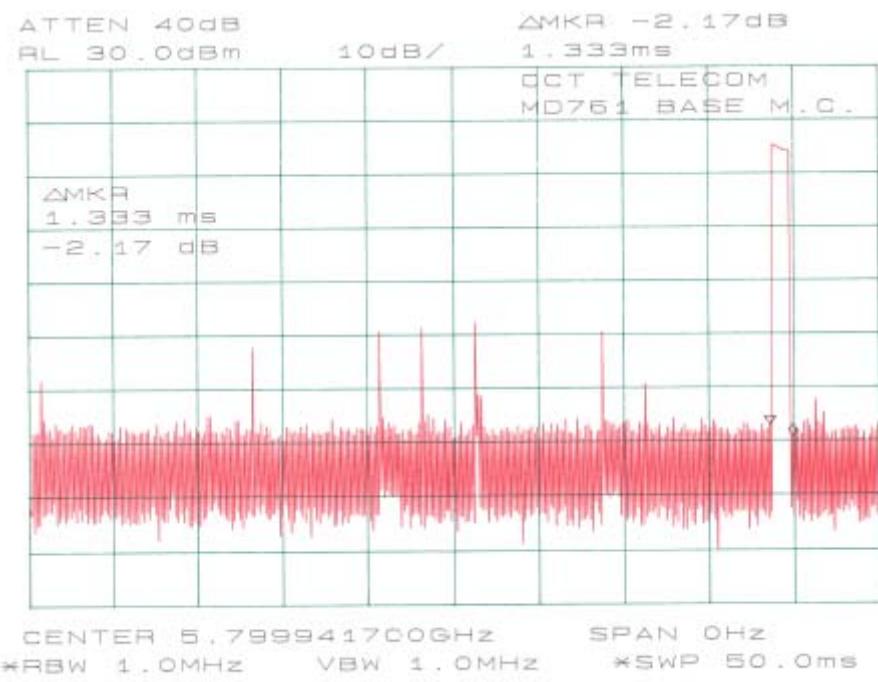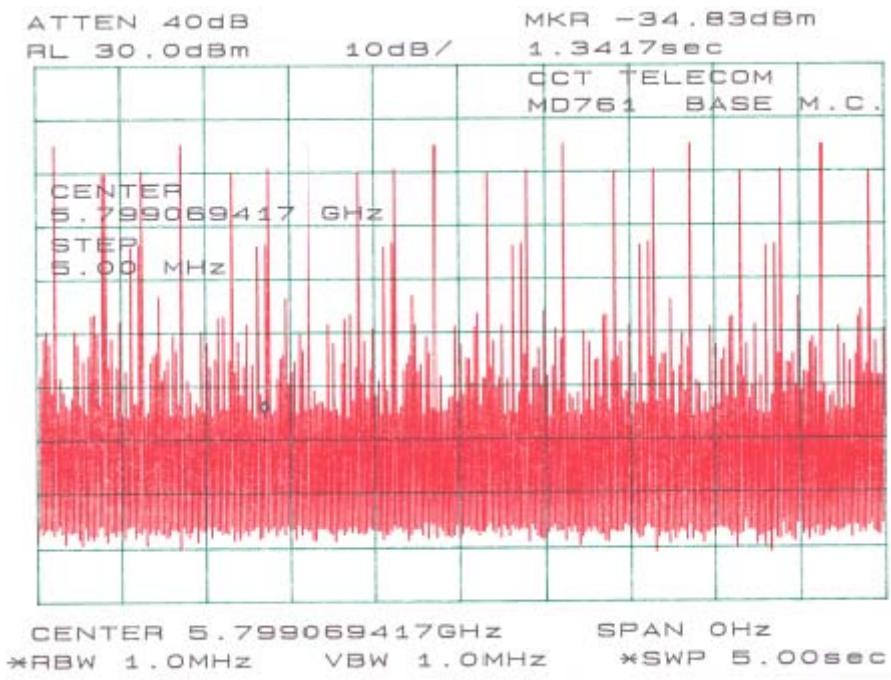

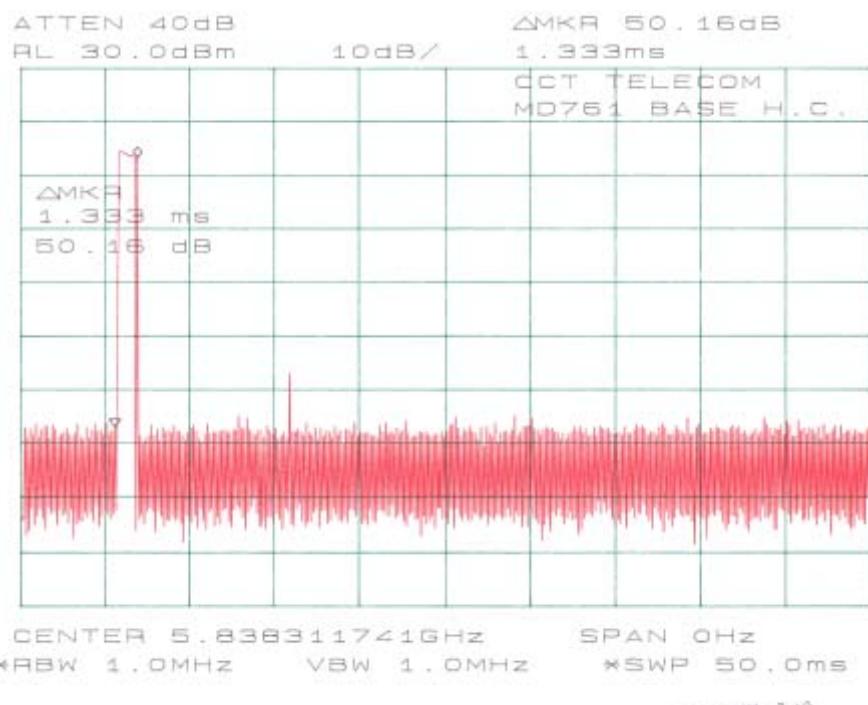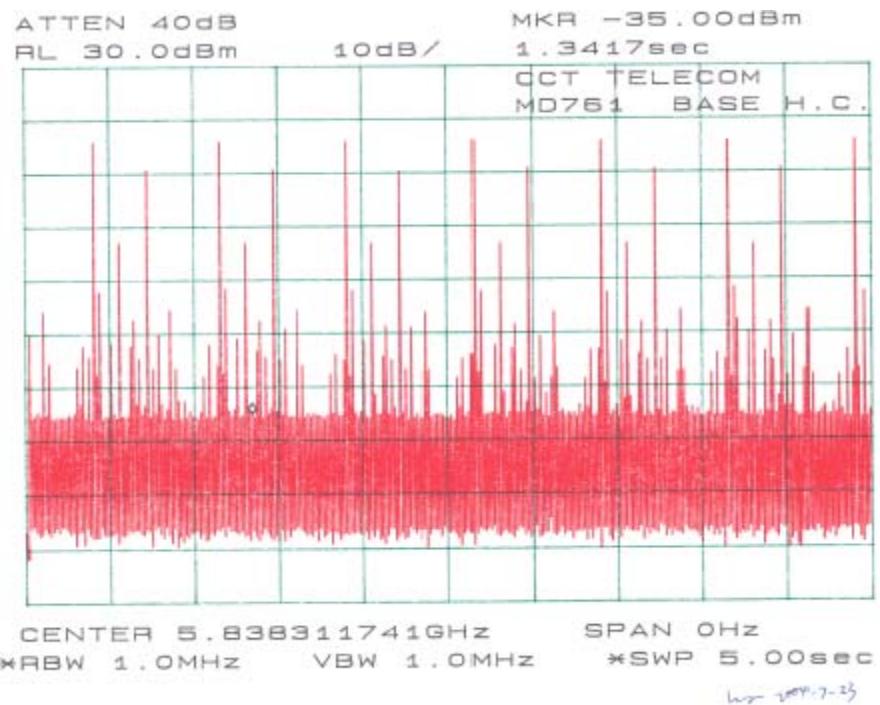

## §15.247 (b) (1) - MAXIMUM PEAK OUTPUT POWER

### Standard Applicable

According to §15.247(b) (1), for all frequency hopping systems in the 5725-5850 MHz band, the maximum peak output power of the transmitter shall not exceed 1 Watt.

### Measurement Procedure

1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

### Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2003-08-01

\* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Environmental Conditions

Temperature:	24° C
Relative Humidity:	55%
ATM Pressure:	1012 mbar



*The testing was performed by Ling Zhang on 2004-07-23.*




### Measurement Result

Model	Channel	Frequency (MHz)	Output Power (dBm)	Cable Loss (dB)	Corrected Output Power (dBm)	Corrected Output Power (W)	Standard	Result
MD751	Low	5759.809	16.50	1.5	18.00	0.063	≤ 1W	Compliant
	Middle	5799.069	15.00	1.5	16.50	0.045	≤ 1W	Compliant
	High	5838.312	15.83	1.5	17.33	0.054	≤ 1W	Compliant
MD761	Low	5759.860	17.83	1.5	19.33	0.086	≤ 1W	Compliant
	Middle	5799.069	15.33	1.5	16.83	0.048	≤ 1W	Compliant
	High	5838.312	15.67	1.5	17.17	0.052	≤ 1W	Compliant

### Plots of Maximum Peak Output Power

Please refer to following plots.

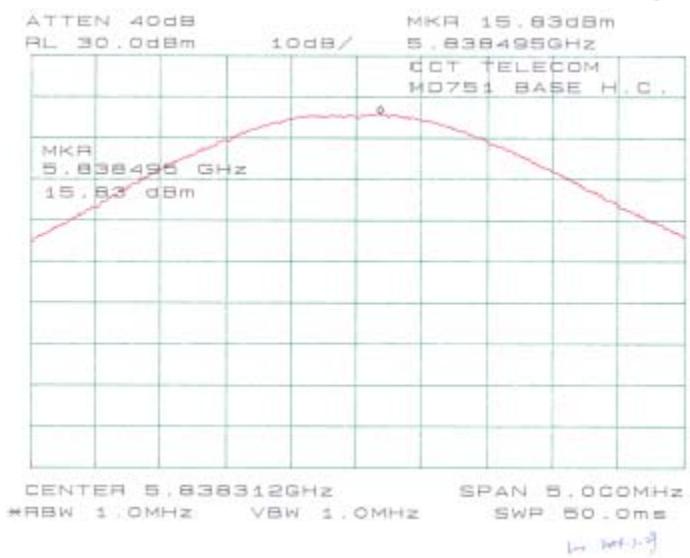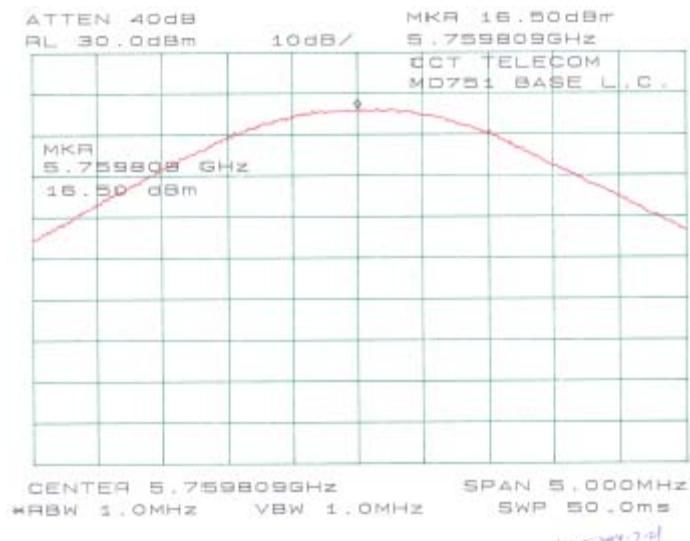

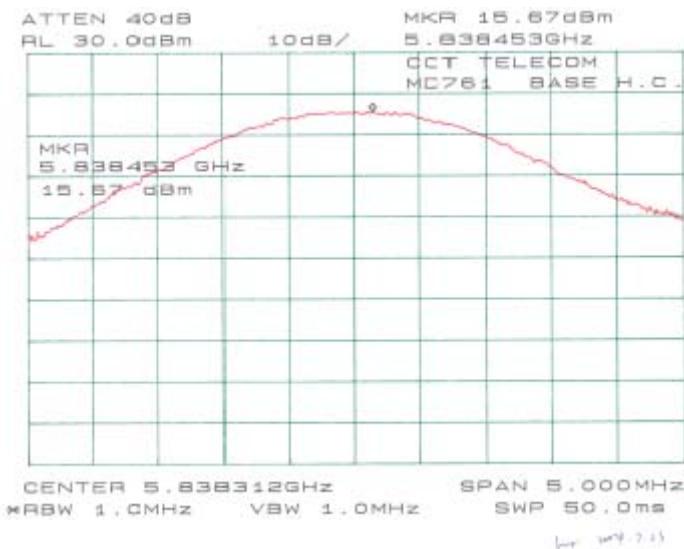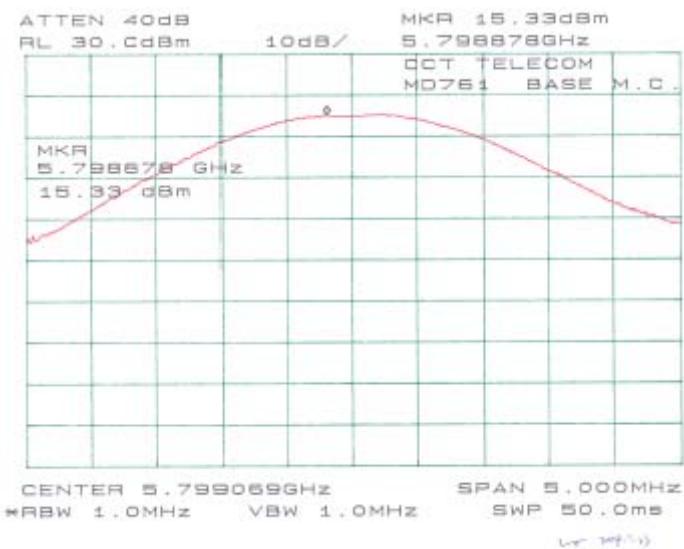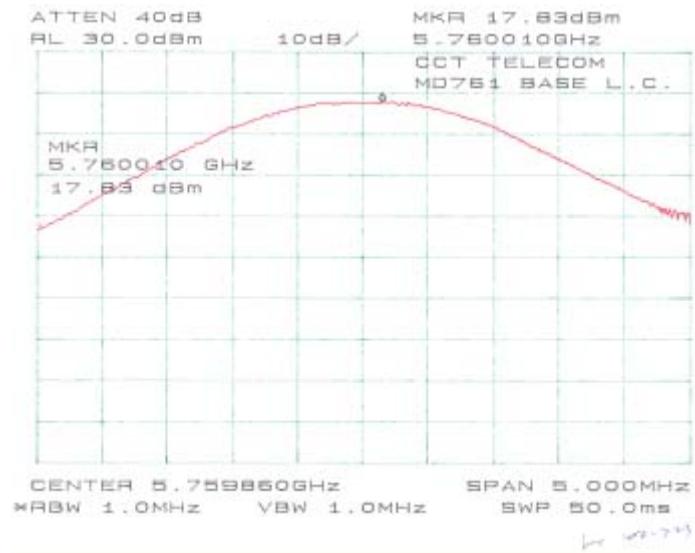

## §15.247 (c) - 100 KHZ BANDWIDTH OF BAND EDGES

### Standard Applicable

According to §15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.

### Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2003-08-01

\* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.



### Environmental Conditions



Temperature:	24° C
Relative Humidity:	55%
ATM Pressure:	1012 mbar

*The testing was performed by Ling Zhang on 2004-07-23.*

### Plots of 100kHz Bandwidth of Band Edge

Please refer the following plots.

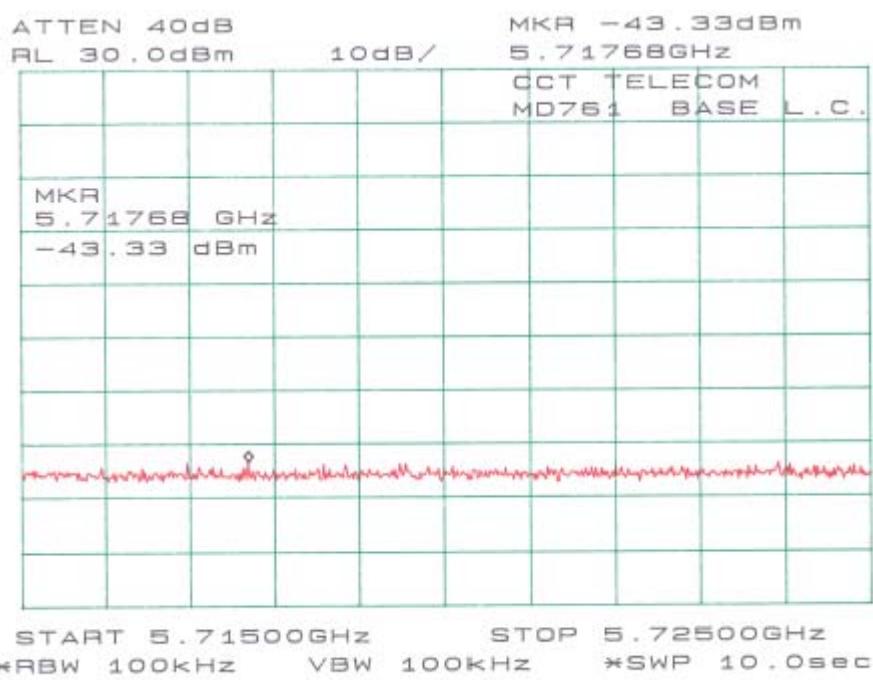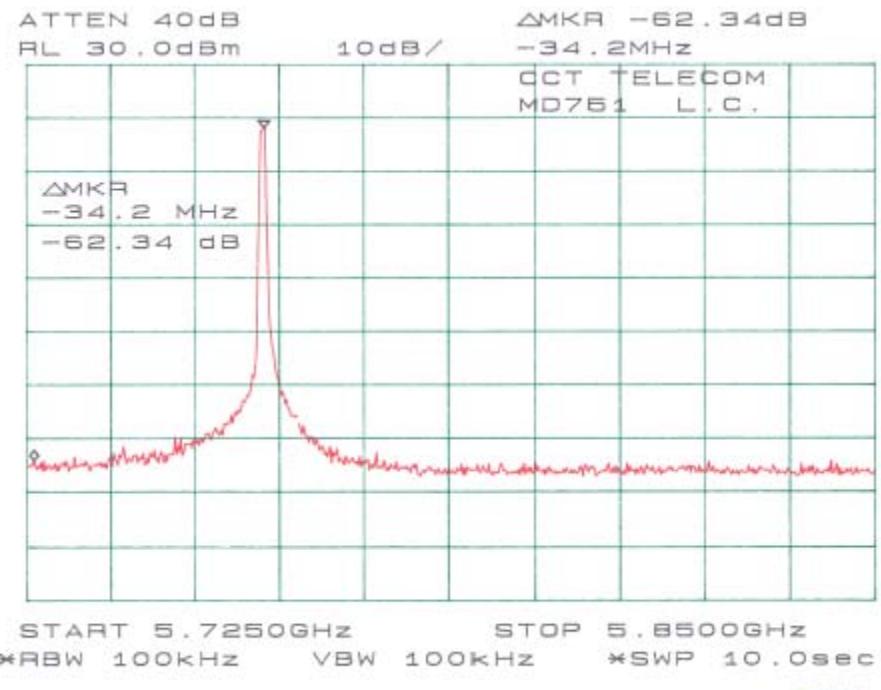

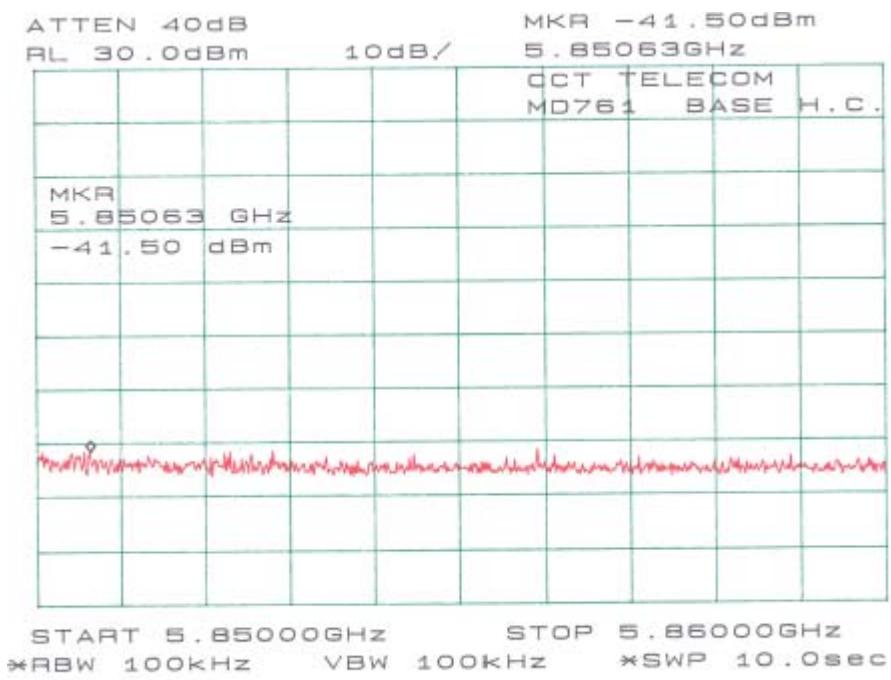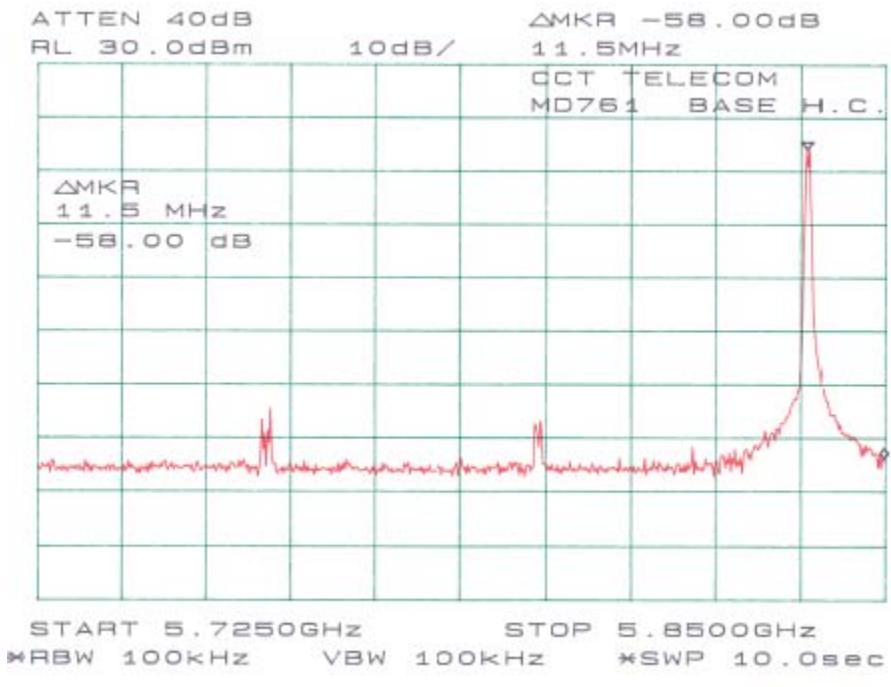

## SPURIOUS EMISSION AT ANTENNA PORT

### Standard Applicable

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.

### Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Date
Agilent	8564E	Spectrum Analyzer	2003-08-01

\* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.


### Environmental Conditions

Temperature:	24° C
Relative Humidity:	55%
ATM Pressure:	1012 mbar


*The testing was performed by Ling Zhang on 2004-07-23.*

### Measurement Results

Please refer to the following plots.

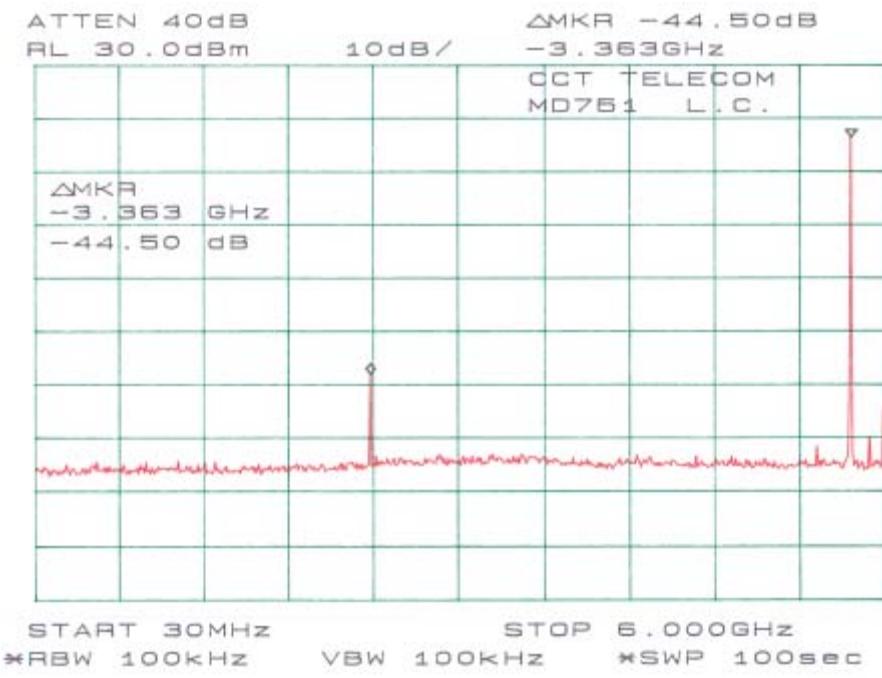

12-24-7-13

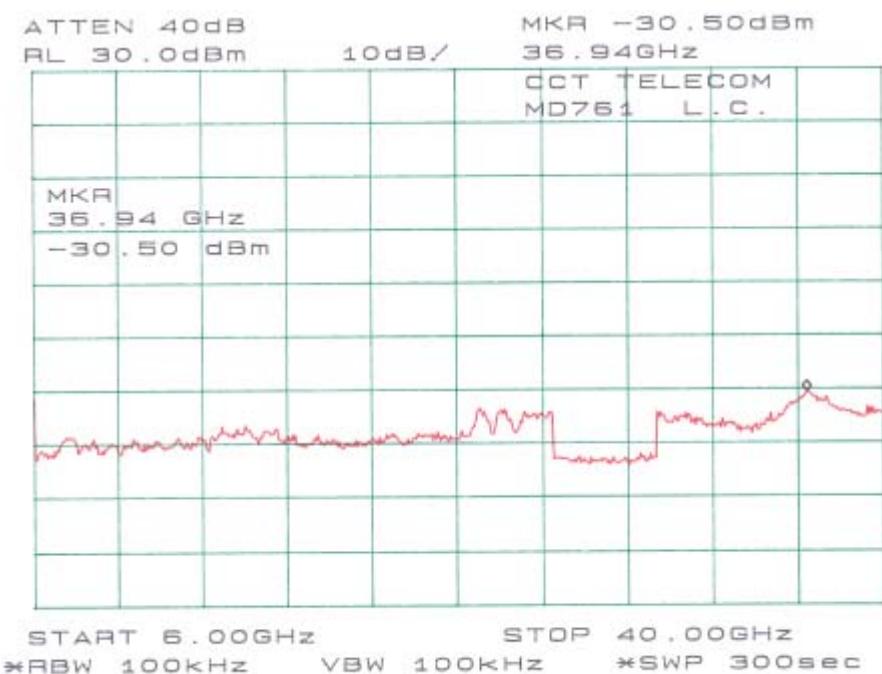

12-24-7-13

