

FCC PART 15 SUBPART C TEST REPORT
for
Low Power With Push Button and Pull Cord
Transmitters
Model No.: JD-180
FCC ID: NDAJD-180

of

Applicant: **Gold Apollo Co., Ltd.**
Address: **Rm 1,3rd Fl.,No. 77, Sec. 1, Hsin Tai Wu Rd.,Hsi-Chih Dist,**
New Taipei City, Taiwan, R.O.C. 221

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. TW1477

A2LA Accredited No.: 2732.01



Report No.: W6M21904-18989-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	<i>Location</i>	3
1.2.2	<i>Details of accreditation status</i>	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS	4
1.5	TEST ITEM	4
1.6	TEST STANDARDS.....	4
2	TECHNICAL TEST.....	5
2.1	SUMMARY OF TEST RESULTS	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT UTILIZED	6
2.4	GENERAL TEST PROCEDURE	9
2.5	DEVIATIONS FROM THE TECHNICAL SPECIFICATION	9
3	TEST RESULTS (ENCLOSURE).....	10
3.1	TRANSMISSION REQUIREMENTS.....	11
3.1.1	<i>Limit of Transmission Time</i>	11
3.1.2	<i>Active Time</i>	11
3.2	OUTPUT POWER (FIELD STRENGTH)	12
3.3	OUT OF BAND RADIATED EMISSIONS.....	18
3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	19
3.5	SPURIOUS EMISSION RADIATED, TRANSMITTER	20
3.6	CHANNEL BANDWIDTH	22
3.7	ANTENNA REQUIREMENT	23
3.8	DUTY CYCLE	24
3.9	CONDUCTED MEASUREMENT AT (AC) POWER LINE	25
Appendix: Diagrams		



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

May 20, 2019

Sora Guo

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

May 20, 2019

Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. TW1477

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name : ./.

Accredited number : ./.

Street : ./.

Town : ./.

Country : ./.

Telephone : ./.

Fax : ./.

1.3 Details of approval holder

Name : Gold Apollo Co., Ltd.

Street : Rm 1,3rd Fl.,No. 77, Sec. 1, Hsin Tai Wu Rd.,Hsi-Chih Dist,

Town : New Taipei City,

Country : Taiwan, R.O.C. 221

Telephone : +886 2 2698 8888

Fax : +886 2 2698 1750



Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

1.4 Application details

Date of receipt of test item: April 23, 2019
Date of test: from April 24, 2019 to May 17, 2019

1.5 Test item

Description of test item: Low Power With Push Button and Pull Cord Transmitters
Type identification: JD-180
Brand name: Apollo
Multi-listing model number: ./.
Transmitting frequency: 430-470 MHz
Operation mode: Simplex
Voltage supply: Battery 9Vd.c.
Antenna type: Spring Antenna
Photos: see Annex

Manufacturer (if applicable)

Name: ./.
Street: ./.
Town: ./.
Country: ./.
Additional information: ./.

1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART C § 15.231 (a) (2018-10)



Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.



2.2 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Details of power supply: Battery 9Vd.c.

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty : AMN : 1.30 dB Voltage probe : 1.36 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty : 0.009-30 MHz : 2.02 dB 30-1000 MHz : 3.49 dB 1-18 GHz : 3.01 dB 18-40 GHz : 2.43 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement Frequency stability	Expanded Uncertainty : 6.11 Hz
Estimation Result of Uncertainty of Band Edge Measurement	Expanded Uncertainty : 0.98 dBc

The decision rule is : Measurement uncertainty is not taken into account.



Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

2.3 Test equipment utilized

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2019/5/20	2020/5/19
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2018/11/1	2019/10/31
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2018/8/21	2019/8/20
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2018/7/13	2019/7/12
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2018/9/25	2019/9/24
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2018/7/16	2019/7/15
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2019/5/20	2020/5/19
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2019/5/20	2020/5/19
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2018/7/13	2019/7/12
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2018/7/12	2019/7/11
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2019/4/2	2020/4/1
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2019/1/29	2020/1/28
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2019/4/23	2020/4/22
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2019/5/13	2020/5/12
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2019/2/27	2020/2/26
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2019/2/27	2020/2/26
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2019/2/27	2020/2/26
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2019/3/5	2020/3/4
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2019/2/27	2020/2/26
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2019/3/15	2020/3/14
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2018/9/17	2019/9/16
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2018/9/18	2019/9/17
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2019/5/9	2020/5/8
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2019/2/22	2020/2/21
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2019/1/15	2020/1/14



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2019/5/20	2020/5/19
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2018/8/8	2019/8/7
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2018/8/8	2019/8/7
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2019/2/26	2020/2/25
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2018/8/8	2019/8/7
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2018/8/8	2019/8/7
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2019/3/15	2020/3/14
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2019/4/2	2020/4/1
ETSTW-RE 151	Thermohygrometer	608-h1	45104376	TESTO	2018/8/17	2019/8/16
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2019/5/16	2020/5/15
ETSTW-EMS 008	Exposure Level Tester	ELT-400	G-0009	Narda	2018/7/17	2019/7/16
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2019/3/5	2020/3/4
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2019/3/26	2020/3/25
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2018/10/19	2019/10/18
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40/12+9SS	3	WI	2019/1/14	2020/1/13
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2019/1/14	2020/1/13
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2019/1/14	2020/1/13
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2019/1/14	2020/1/13
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2018/9/12	2019/9/11
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2019/3/5	2020/3/4
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2018/8/9	2019/8/8
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2019/2/21	2020/2/20
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2019/2/21	2020/2/20
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2019/2/21	2020/2/20
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2019/2/21	2020/2/20
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2018/7/2	2019/7/1
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2019/2/25	2020/2/24
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2019/5/10	2020/5/9
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2018/9/18	2019/9/17
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2018/9/18	2019/9/17
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2019/2/25	2020/2/24
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2019/3/15	2020/3/14
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2019/3/15	2020/3/14
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325519	HUBER+SUHNER	2019/3/15	2020/3/14



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2018/6/9	2019/6/8
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2019/3/15	2020/3/14
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2019/3/15	2020/3/14
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2018/6/9	2019/6/8
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	



Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.10-2013 6.3 using a spectrum analyzer. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was the 100 kHz and the video bandwidth was 300 kHz.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dBμV + 10.36 dB/m + 6 dB = 36.36 dBμV/m @3m

ANSI STANDARD C63.10-2013 6.2.2 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANSI STANDARD C63.10-2009 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.

2.5 Deviations from the Technical Specification

No Deviations from the Technical Specification.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

3 Test results (enclosure)

☒ 1st test

☐ test after modification

☐ production test

TEST CASE	Para. Number	Required	Test passed	Test failed
Transmission Requirements	FCC 15.231(a)	☒	☒	☐
Radiated Emission	FCC 15.231(b)	☒	☒	☐
Bandwidth of Emission	FCC 15.231(c)	☒	☒	☐
Frequency Tolerance	FCC 15.231(d)	☐	☐	☐
Period Alternate Field Strength Requirements	FCC 15.231(e)	☒	☒	☐
Antenna Requirement	FCC 15.203	☒	☒	☐
Conducted Measurement at (AC) Power Line	FCC 15.207	☐	☐	☐

The following is intentionally left blank.



Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

3.1 Transmission Requirements

FCC 15.231(a)

3.1.1 Limit of Transmission Time

- ☒ According to 15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- ☐ According to 15.231(a)(2), a transmitter activated automatically shall cease transmission within 5 seconds after activation.
- ☐ According to 15.231(a)(3), periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- ☐ According to 15.231(a)(4), intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- ☐ According to 15.231(a)(5), transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

3.1.2 Active Time

- ☒ This manually operated transmitter employs a switch that automatically deactivate the transmitter within 1.332665 s of being released. (for 430.1MHz, 450MHz, 469.9MHz)
- ☐ This transmitter is operated by automatic activation and active will cease transmission in _____ ms after activation.
- ☐ Others: This product is employed for radio control purpose during emergencies. When emergency switch is pulled down, the EUT will transmit a signal around _____ ms and continue to retransmit the signal every 5 minutes during the pendency of the alarm condition.

Explanation: See attached diagrams in appendix.

Test equipment used: ETSTW-RE 055, ETSTW-RE 004



Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

3.2 Output Power (Field Strength)

Radiated Emission Measurement

Operator: Allen

File :Power

Data :#1


Date: 5/9/2019

Temperature:21.8 °C

120.0 dBuV/m

Time: 2:17:04 AM

Humidity:70.8 %

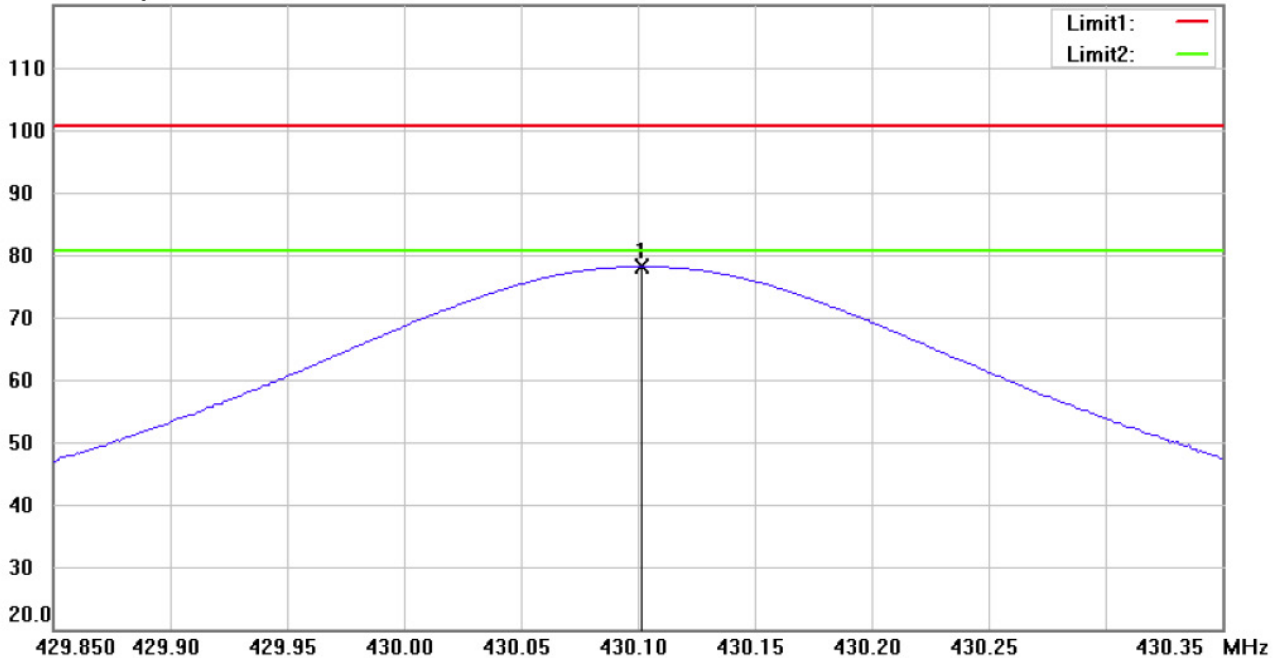

Site : Chamber

Condition : FCC 15.231(430.1MHz)Power(PK)

Polarization: *Horizontal*

EUT : W6M21904-18989

Power : 9 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 430.1MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	430.1015	52.65	peak	25.46	78.11	100.60	100	44	-22.49	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

Radiated Emission Measurement

Operator: Allen

File :Power
120.0 dBuV/m


Data :#2

Date: 5/9/2019

Temperature:21.8 °C

Time: 2:23:06 AM

Humidity:70.8 %

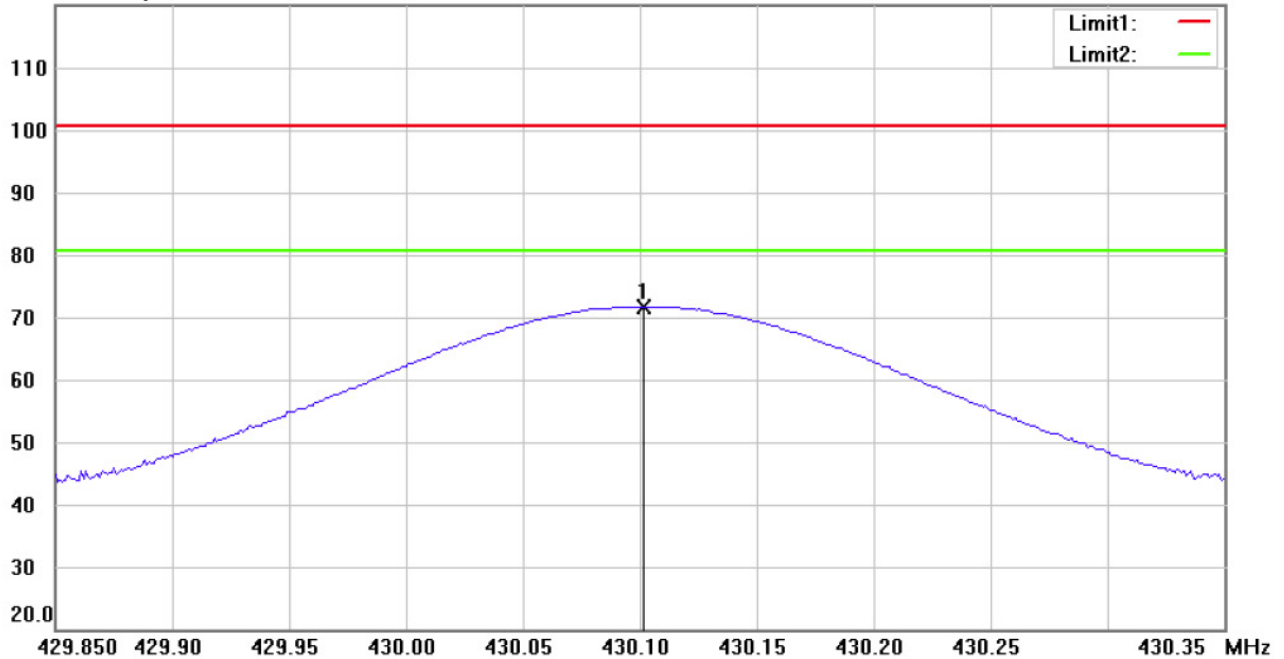

Site : Chamber

Condition : FCC 15.231(430.1MHz)Power(PK)

Polarization: **Vertical**

EUT : W6M21904-18989

Power : 9 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 430.1MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	430.1015	46.29	peak	25.46	71.75	100.60	230	290	-28.85	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

Radiated Emission Measurement


Operator: Allen

File :Power
120.0 dBuV/m

Data :#1

Date: 5/9/2019
Time: 2:40:00 AM

Temperature:21.8 °C
Humidity:70.8 %

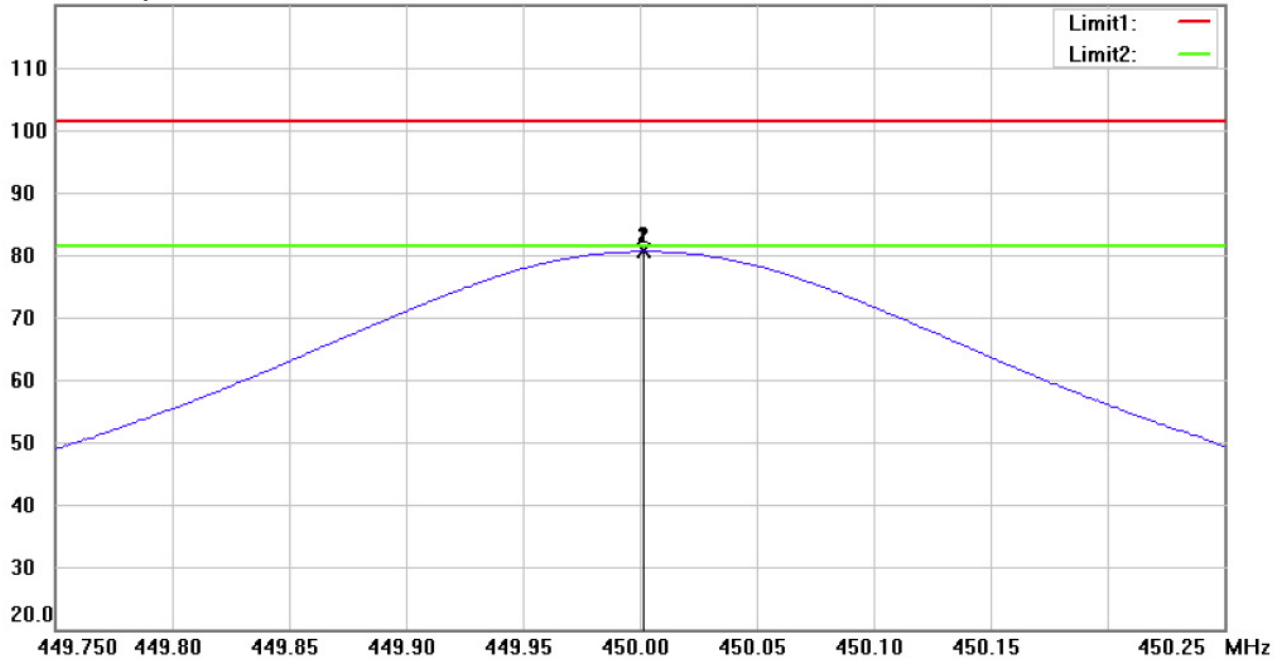

Site : Chamber

Condition : FCC 15.231(450MHz)Power(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz


Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	450.0015	54.93	peak	25.64	80.57	101.30	230	80	-20.73	
*	450.0015	54.91	AVG	25.64	80.55	81.30	230	80	-0.75	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

Radiated Emission Measurement


Operator: Allen

File :Power
120.0 dBuV/m

Data :#2

Date: 5/9/2019
Time: 2:51:04 AM

Temperature:21.8 °C
Humidity:70.8 %

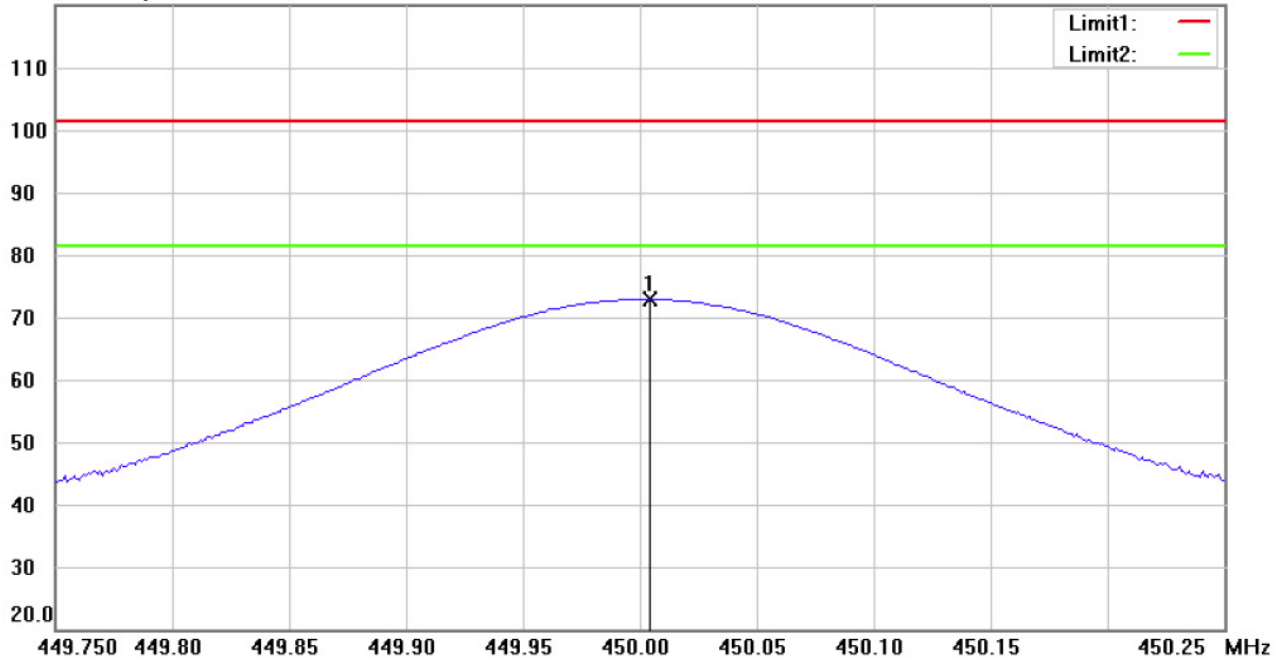

Site : Chamber

Condition : FCC 15.231(450MHz)Power(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz


Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	450.0045	47.24	peak	25.64	72.88	101.30	235	315	-28.42	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

Radiated Emission Measurement


Operator: Allen

File :Power
120.0 dBuV/m

Data :#1

Date: 5/9/2019
Time: 3:43:50 AM

Temperature:21.8 °C
Humidity:70.8 %

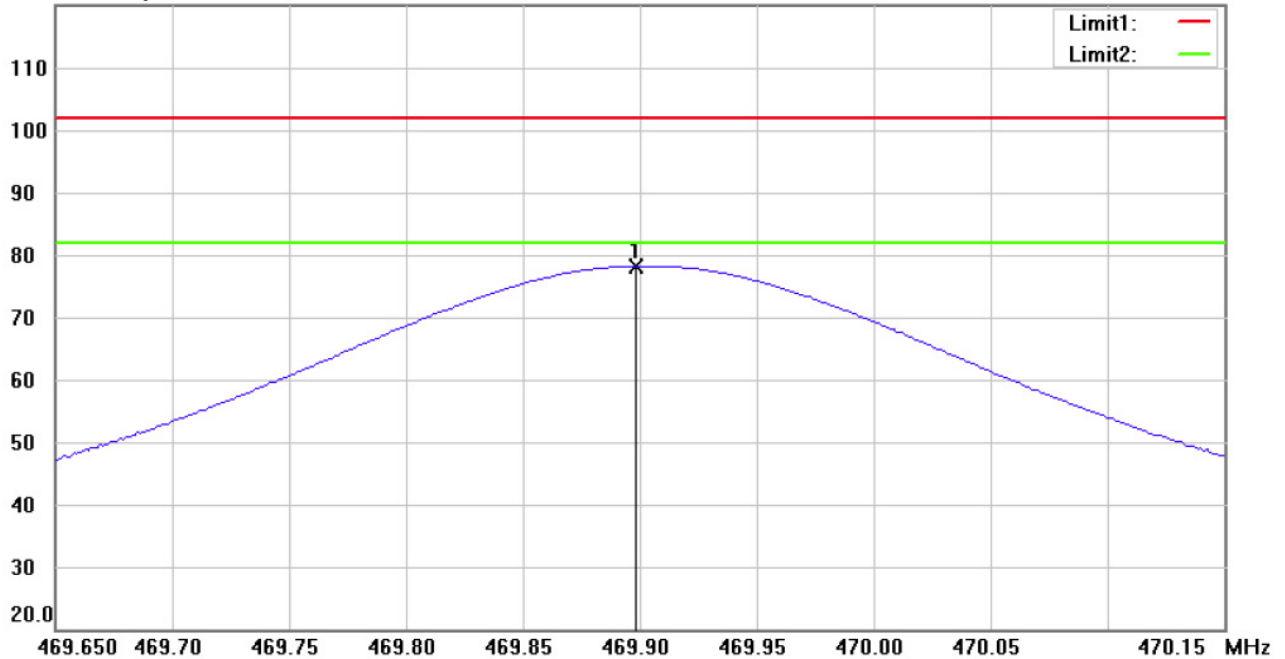

Site : Chamber

Condition : FCC 15.231(469.9MHz)Power(PK)

Polarization: *Horizontal*

EUT : W6M21904-18989

Power : 9 Vd.c.


M/N:

Distance: 3m

Test Mode : TX 469.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	469.8985	52.11	peak	26.11	78.22	101.90	220	115	-23.68	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180

Radiated Emission Measurement

Operator: Allen

File :Power
120.0 dBuV/m


Data :#2

Date: 5/9/2019

Temperature:21.8 °C

Time: 3:52:00 AM

Humidity:70.8 %

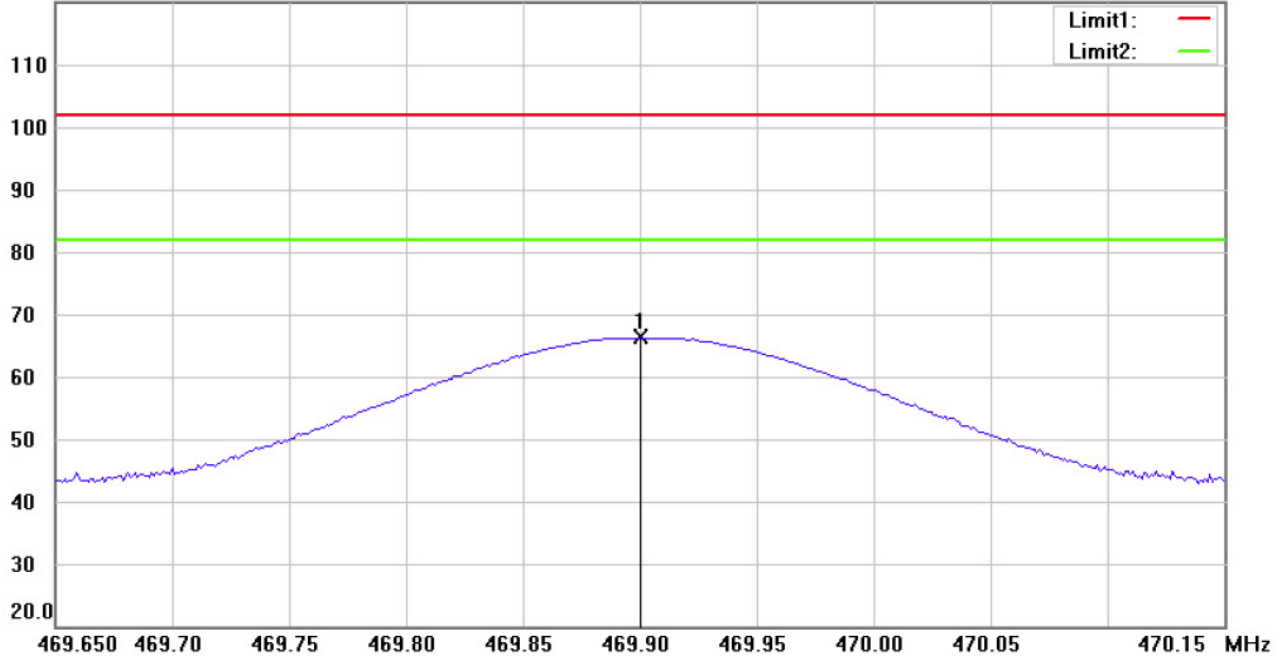

Site : Chamber

Condition : FCC 15.231(469.9MHz)Power(PK)

Polarization: **Vertical**

EUT : W6M21904-18989

Power : 9 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 469.9MHz

Note :


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	469.9005	40.20	peak	26.11	66.31	101.90	215	200	-35.59	

Limit 15.231(b)

Fundamental Frequency (MHz)	Field strength of fundamental, limit $\mu\text{V/m}$
40.66 – 40.70	2,250
70 – 130	1,250
130 – 174	1,250 to 3,750
174 – 260	3,750
260 – 470	3,750 to 12,500** (430.1 MHz: 80.70 dB $\mu\text{V/m}$ = 10837.51 $\mu\text{V/m}$) (450 MHz: 81.34 dB $\mu\text{V/m}$ = 11666.68 $\mu\text{V/m}$) (469.9 MHz: 81.94 dB $\mu\text{V/m}$ = 12495.85 $\mu\text{V/m}$)
Above 470	12,500

** linear interpolation

Test equipment used: ETSTW-RE 004, ETSTW-RE 111



Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

3.3 Out of Band Radiated Emissions

FCC Rule: 15.231(b) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Guidance on Measurement of pulsed emission: 15.35(c)

“the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.”

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms or one period})$

Limits:

For frequencies (Average measurements)

Correction factor conform 15.35 (c) (Average measurements)

Duty cycle correction :

Max. Peak reading – duty cycle correction

Max permitted average Limits = Max permitted Fundamental limit – 20 dB

For example for 430.1 fundamental carrier:

Max permitted average Limit: $80.70 \text{ dB}\mu\text{V/m} - 20 \text{ dB} = 60.70 \text{ dB}\mu\text{V/m}$

For example for 450 fundamental carrier:

Max permitted average Limit: $81.34 \text{ dB}\mu\text{V/m} - 20 \text{ dB} = 61.34 \text{ dB}\mu\text{V/m}$

For example for 469.9 fundamental carrier:

Max permitted average Limit: $81.94 \text{ dB}\mu\text{V/m} - 20 \text{ dB} = 61.94 \text{ dB}\mu\text{V/m}$

For frequencies above 1GHz (Peak measurements).

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)

Explanation: See attached diagrams in appendix.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111



Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

3.4 Transmitter Radiated Emissions in restricted Bands

FCC Rules: 15.231 (b), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 8000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of pulsed emission:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

For frequencies above 1GHz (Average measurements).

The correction factor, based on the channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

No duty cycle correction was added to the reading

Modified Limits for peak conform 15.35 (b) = Max Permitted average Limits + 20dB (because Peak detector is used)

Above 960 MHz

For mode DSSS CW: $54 \text{ dB}\mu\text{V/m} + 20 \text{ dB} = 74 \text{ dB}\mu\text{V/m}$

Explanation: See attached diagrams in appendix.



Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

3.5 Spurious Emission radiated, Transmitter

Spurious emission was measured with modulation (declared by manufacturer).

The limits on the field strength of the spurious emission in the table § 15.231(b) are based on the fundamental frequency of the intentional radiator. Spurious emission shall be attenuated to the average (or alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

In addition, radiated emission which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (See § 15.205(c)).

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.


In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

Summary table with radiated data of the test plots

Model: JD-180 Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV) Peak	Factor (dB)		Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
		Corr.	Duty	Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV) Peak	Factor (dB)		Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
		Corr.	Duty	Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Note

- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
- 2. The formula of measured value as: Test Result = Reading + Correction Factor**
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
- 5. See attached diagrams in appendix.**

All other not noted test plots do not contain significant test results in relation to the limits
Test results: The unit meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142,
ETSTW-RE 147



Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

3.6 Channel Bandwidth

Measurement of Necessary Bandwidth (BN)


Used frequency	Bandwidth	Limit
430.1 MHz	40.08016032 kHz	1.07525 MHz
450 MHz	40.08016032 kHz	1.12500 MHz
469.9 MHz	40.08016032 kHz	1.17475 MHz

Explanation: The bandwidth fulfills the requirements of FCC § 15.231, see attached diagrams in appendix.

Limits:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test equipment used: ETSTW-RE 055, ETSTW-RE 004



3.7 Antenna requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Explanation: This Spring Antenna is integral antenna which passes antenna requirement.

The equipment meets the requirements	yes ☒	no ☐
--------------------------------------	--	--------------------------------



Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

3.8 Duty Cycle

The correction factor, based on the channel dwell time in a 100ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the measured value.

Average Reading = Peak Reading (dBuV/m) + Duty Cycle Correction

Duty Cycle Correction = $20 \log(\text{Cycle})$

In order to determine the Duty Cycle, the EUT is measured as:

430.1MHz, 450MHz, 469.9MHz

Testing Mode	T period (ms)	T on (ms)	Duty Cycle	Duty Cycle Correction $20 \cdot \log(\text{Duty Cycle})$
Transmitting Mode	100	100	1	0.00

Explanation: See attached diagrams in appendix.

Test equipment used: ETSTW-RE 055, ETSTW-RE 004



Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

3.9 Conducted Measurement at (AC) Power Line

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level	
	quasi-peak (dB μ V/m)	average (dB μ V/m)
-- kHz	--	--


Note

- 1. The formula of measured value as: Test Result = Reading + Correction Factor**
- 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
- 5. This test is not required because the EUT is battery-used.**

Limits:

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045



Appendix

A Measurement diagrams

1. Active Time
2. Bandwidth
3. Duty Cycle
4. Spurious Emissions radiated





Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

Active Time

430.1MHz

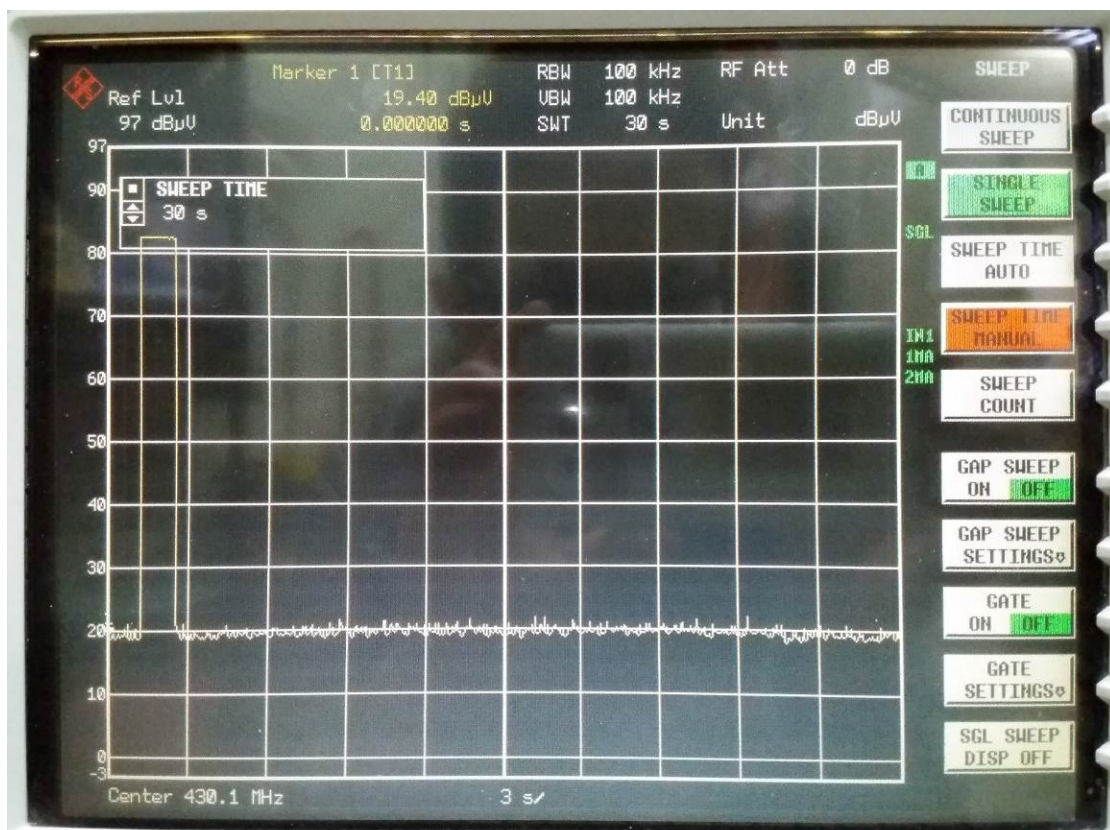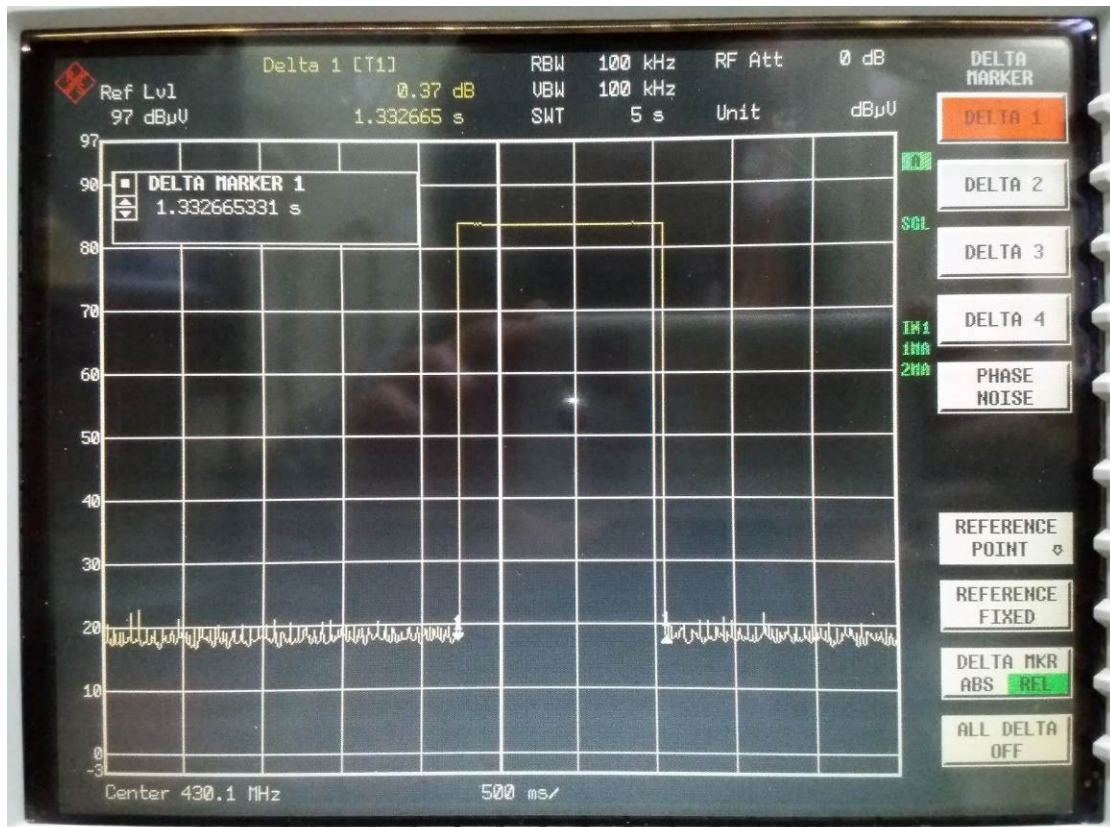





Worldwide Testing Services(Taiwan) Co., Ltd.



Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

450MHz

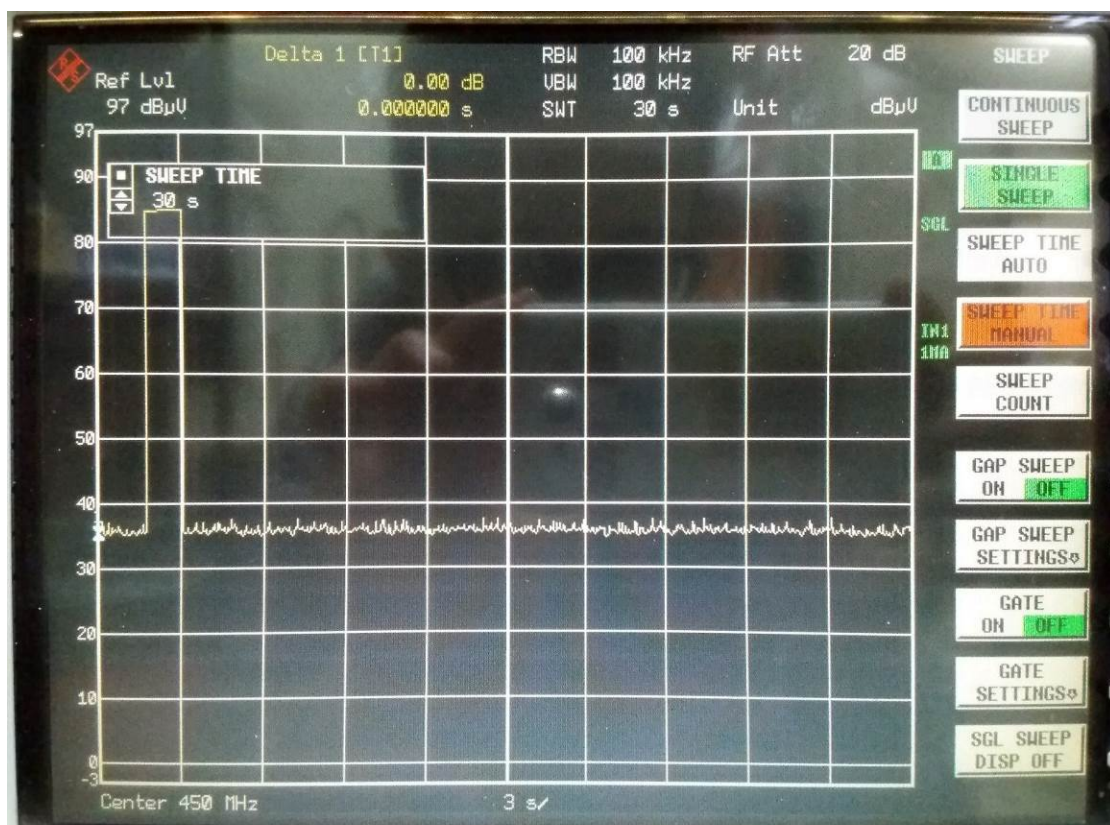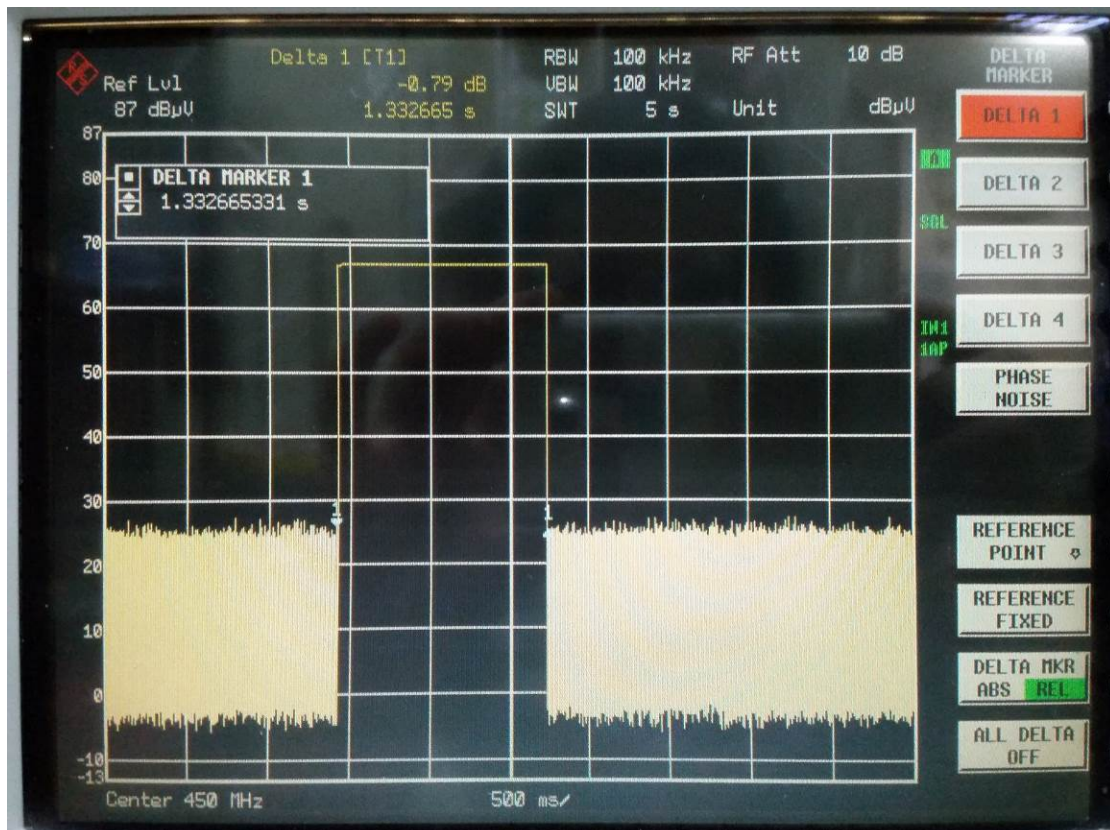

Registration number: W6M21904-18989-C-1
FCC ID: NDAJD-180
469.9MHz

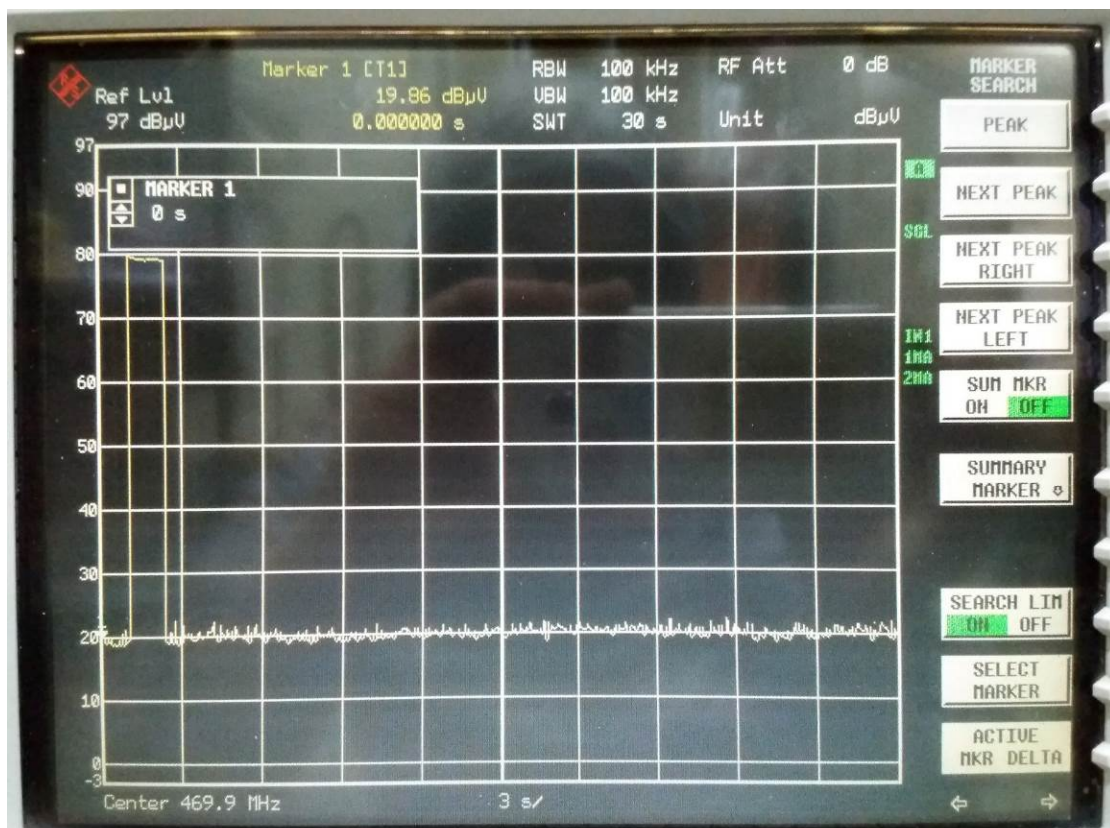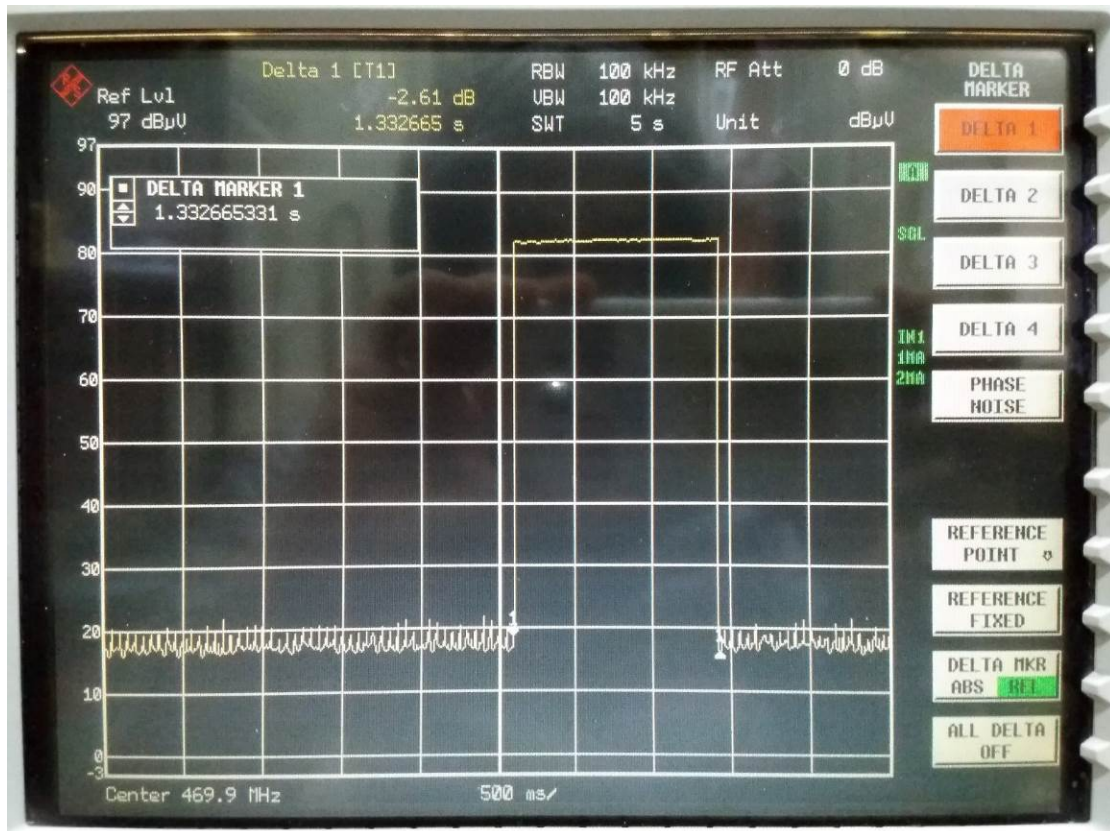


Registration number: W6M21904-18989-C-1


FCC ID: NDAJD-180

Bandwidth


430.1MHz

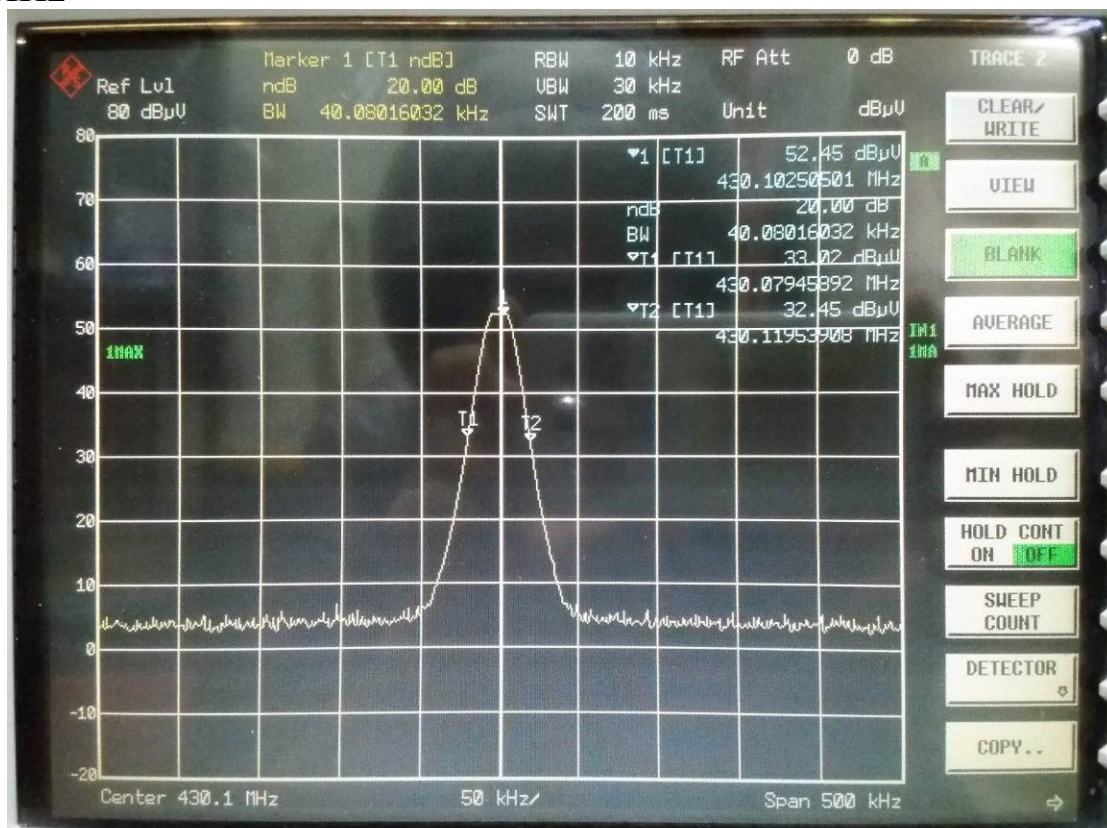


450MHz

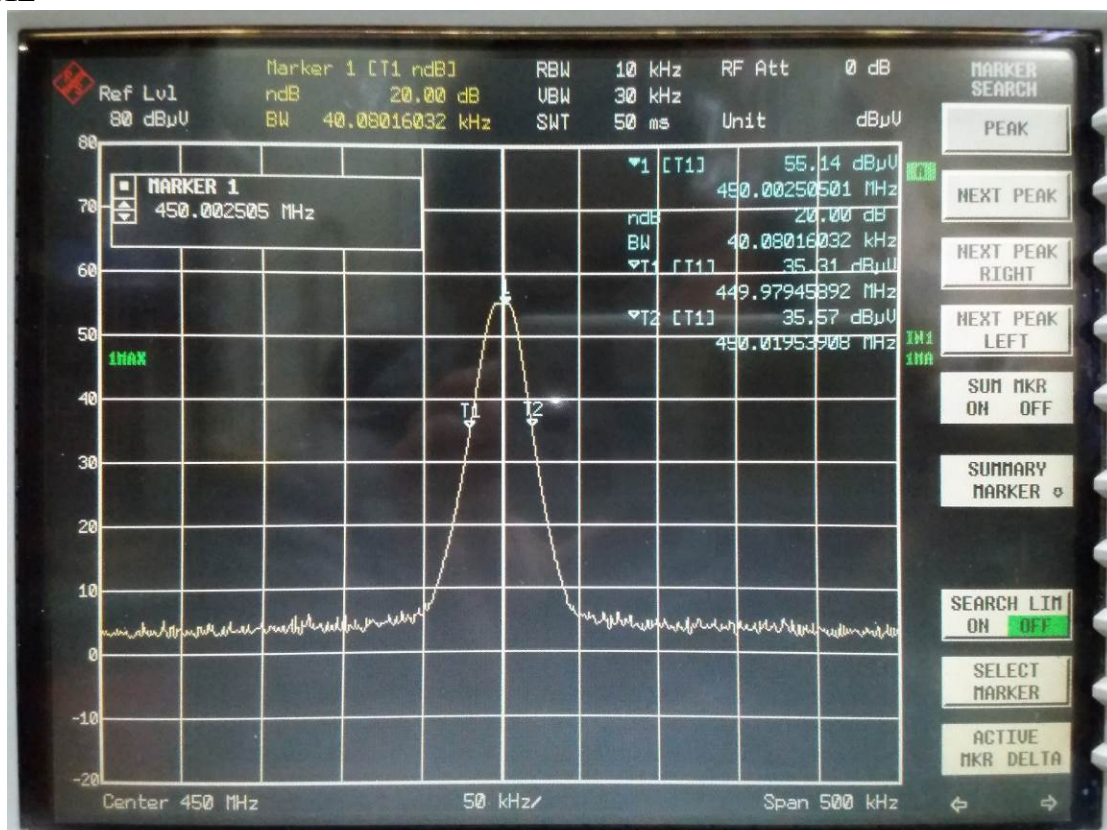

469.9MHz





Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1


FCC ID: NDAJD-180

Duty Cycle

430.1MHz



450MHz

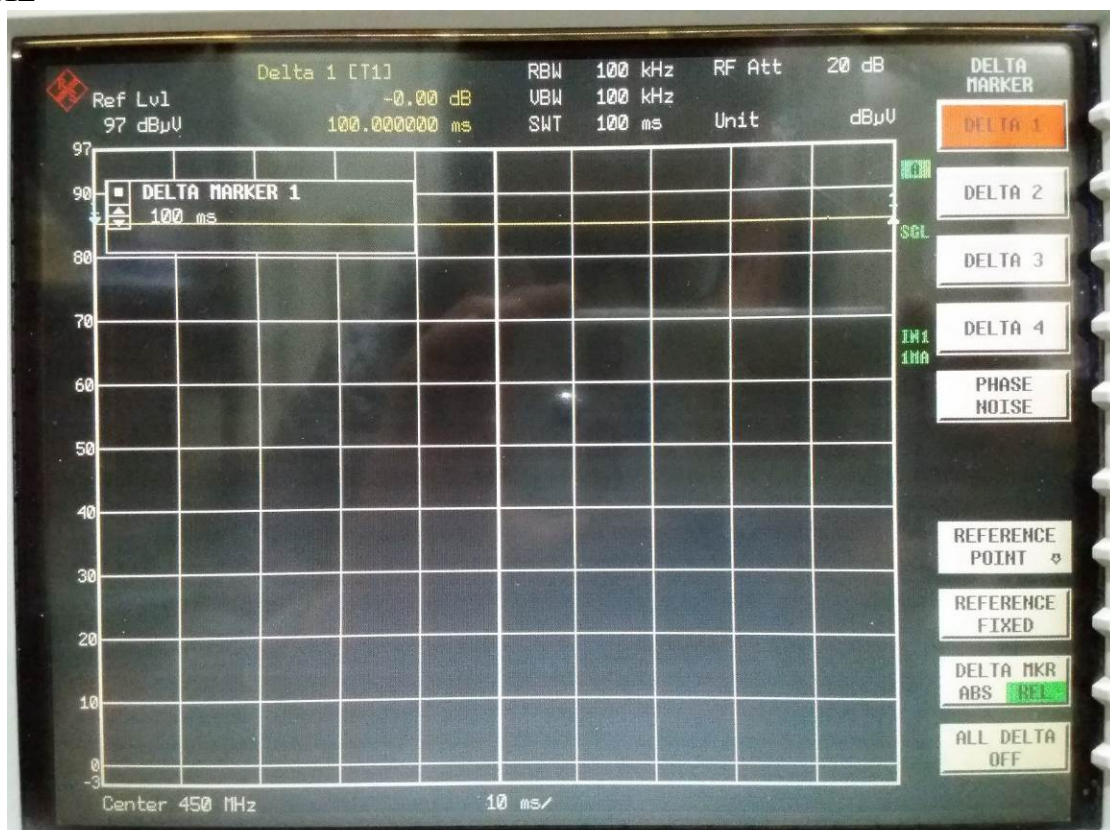




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21904-18989-C-1

FCC ID: NDAJD-180

469.9MHz

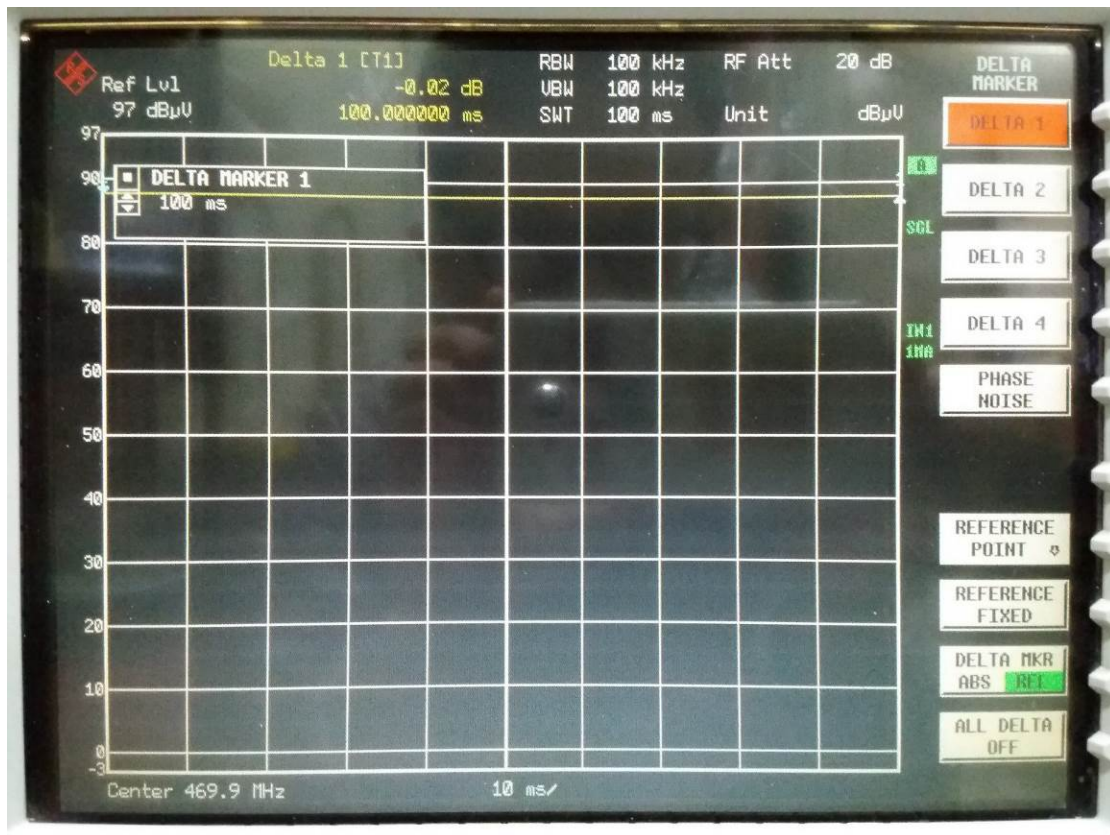



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 5/9/2019

Temperature: 21.8 °C

Time: 4:08:48 AM

Humidity: 70.8 %

90.0 dBuV/m

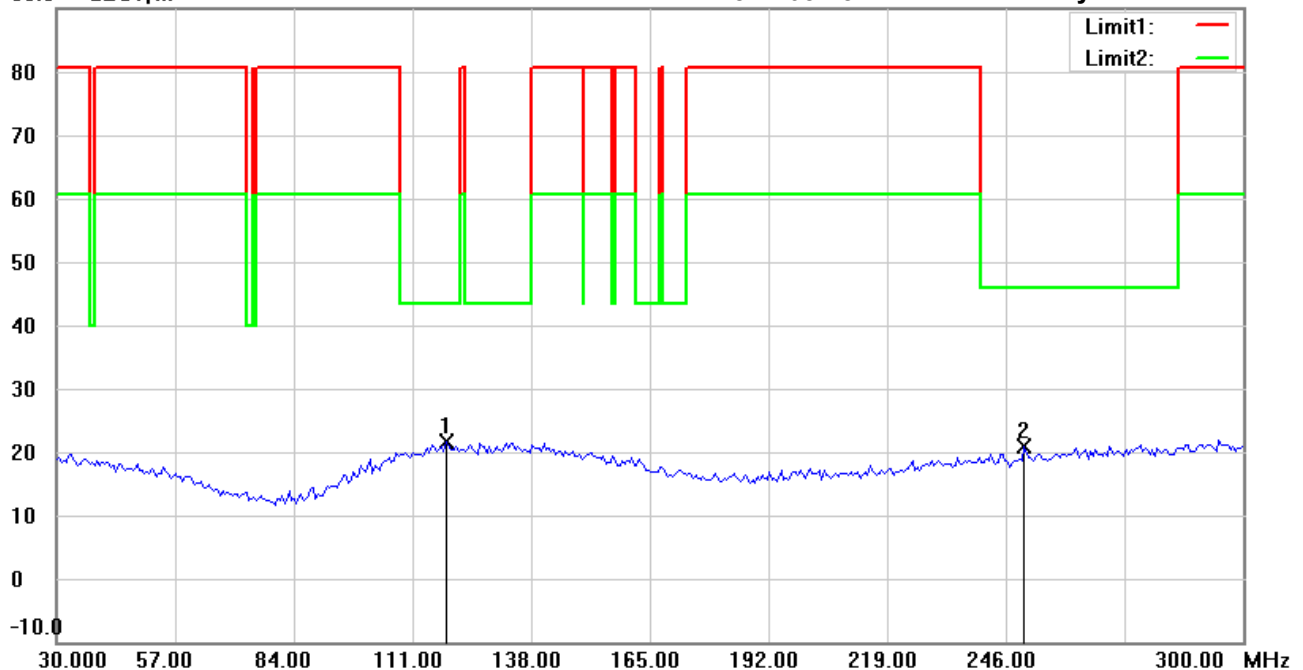

Site : Chamber

Condition : FCC 15.231(430.1MHz) 30-300(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	118.7375	28.41	peak	-6.69	21.72	43.50	100	180	-21.78	
	250.2204	28.21	peak	-7.36	20.85	46.00	100	30	-25.15	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 4:11:08 AM

Humidity: 70.8 %

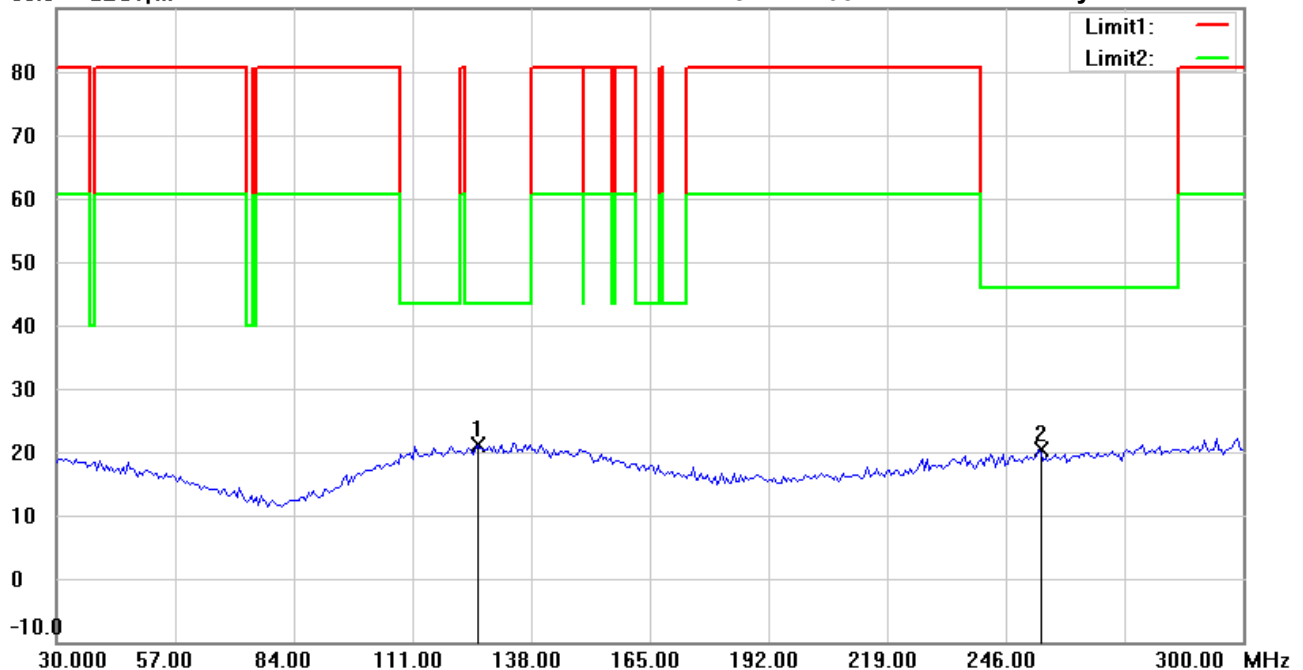

Site : Chamber

Condition : FCC 15.231(430.1MHz) 30-300(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	125.7715	27.47	peak	-6.43	21.04	43.50	100	270	-22.46	
	253.4670	27.55	peak	-7.21	20.34	46.00	100	85	-25.66	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #1


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 4:48:47 AM

Humidity: 70.8 %

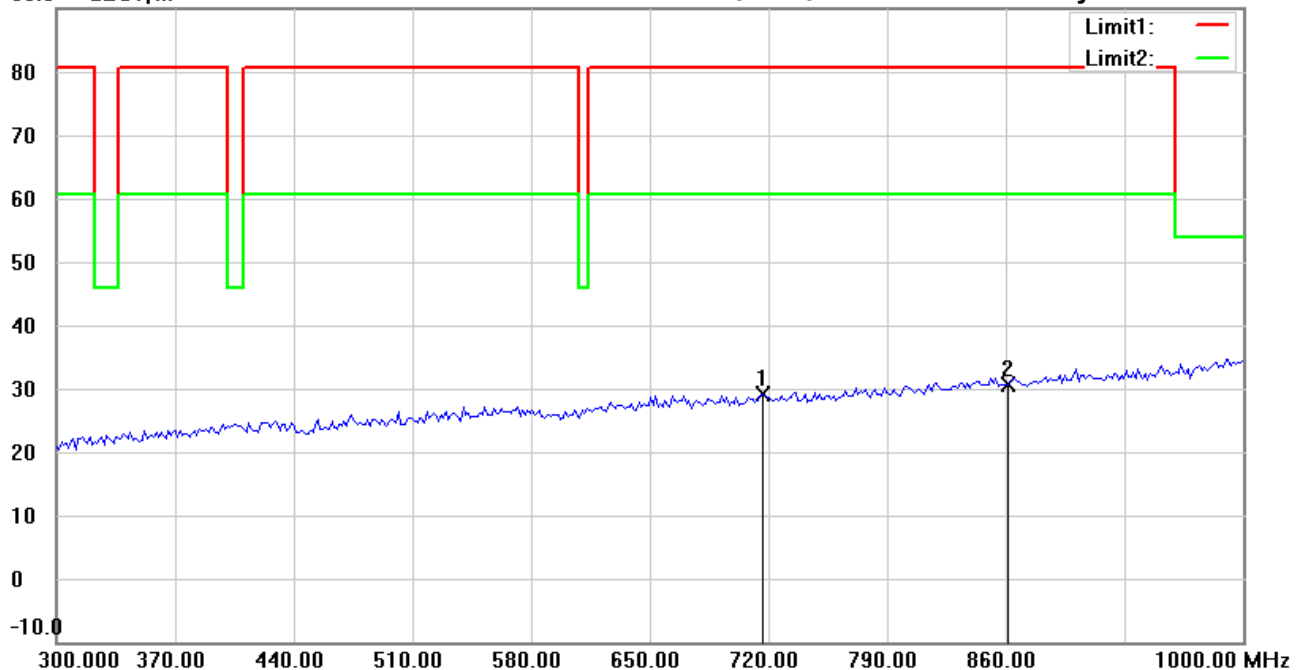

Site : Chamber

Condition : FCC 15.231(430.1MHz) 300-1000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	716.6332	28.10	peak	1.11	29.21	80.60	100	275	-51.39	
*	860.2000	26.63	peak	4.09	30.72	80.60	100	340	-49.88	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :2

Data :#2


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 4:50:15 AM

Humidity: 70.8 %

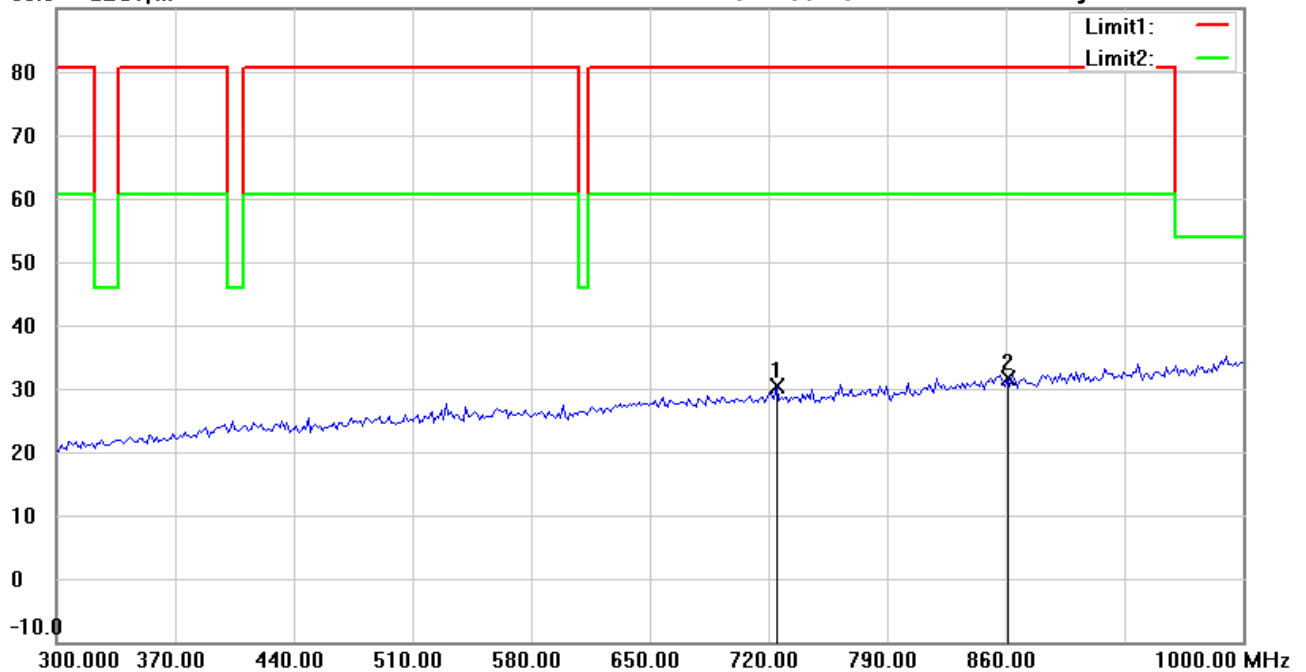

Site : Chamber

Condition : FCC 15.231(430.1MHz) 300-1000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	725.0501	29.04	peak	1.24	30.28	80.60	100	195	-50.32	
*	860.2000	27.53	peak	4.09	31.62	80.60	100	70	-48.98	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #1


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 4:55:47 AM

Humidity: 70.8 %

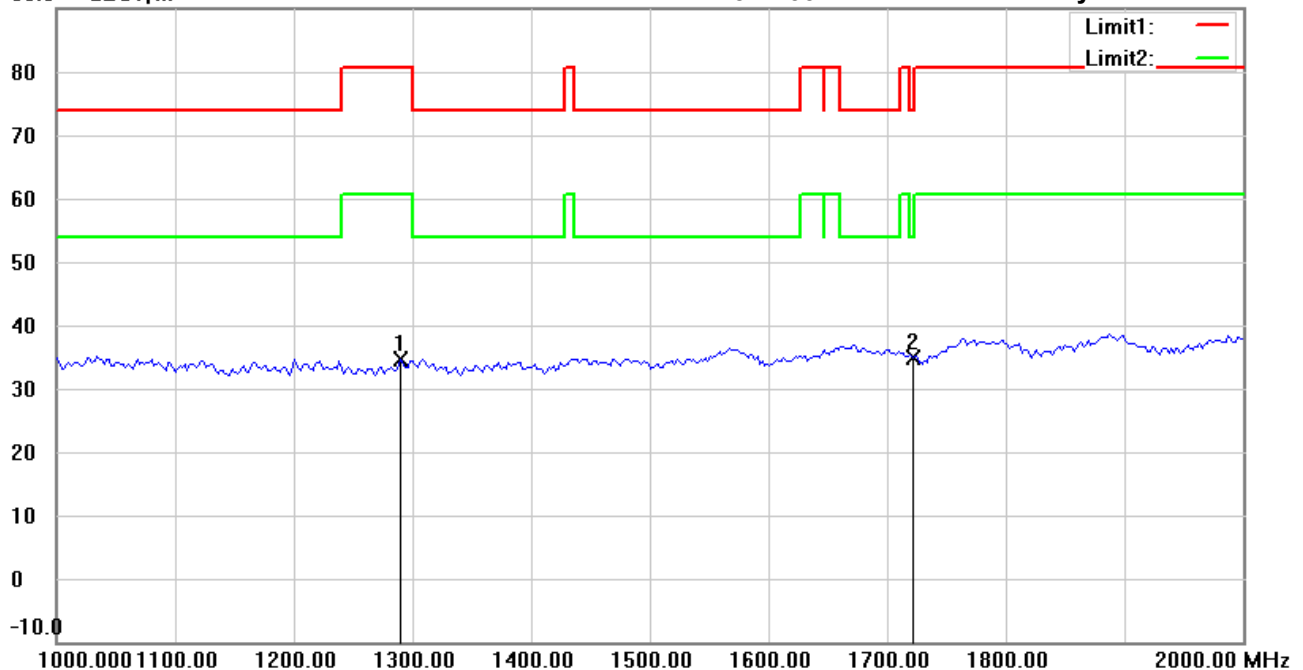

Site : Chamber

Condition : FCC 15.231(430.1MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1290.300	43.58	peak	-9.04	34.54	80.60	150	130	-46.06	
*	1720.400	41.99	peak	-7.22	34.77	74.00	150	295	-39.23	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 5/9/2019

Temperature:21.8 °C

90.0 dBuV/m

Time: 5:05:35 AM

Humidity:70.8 %

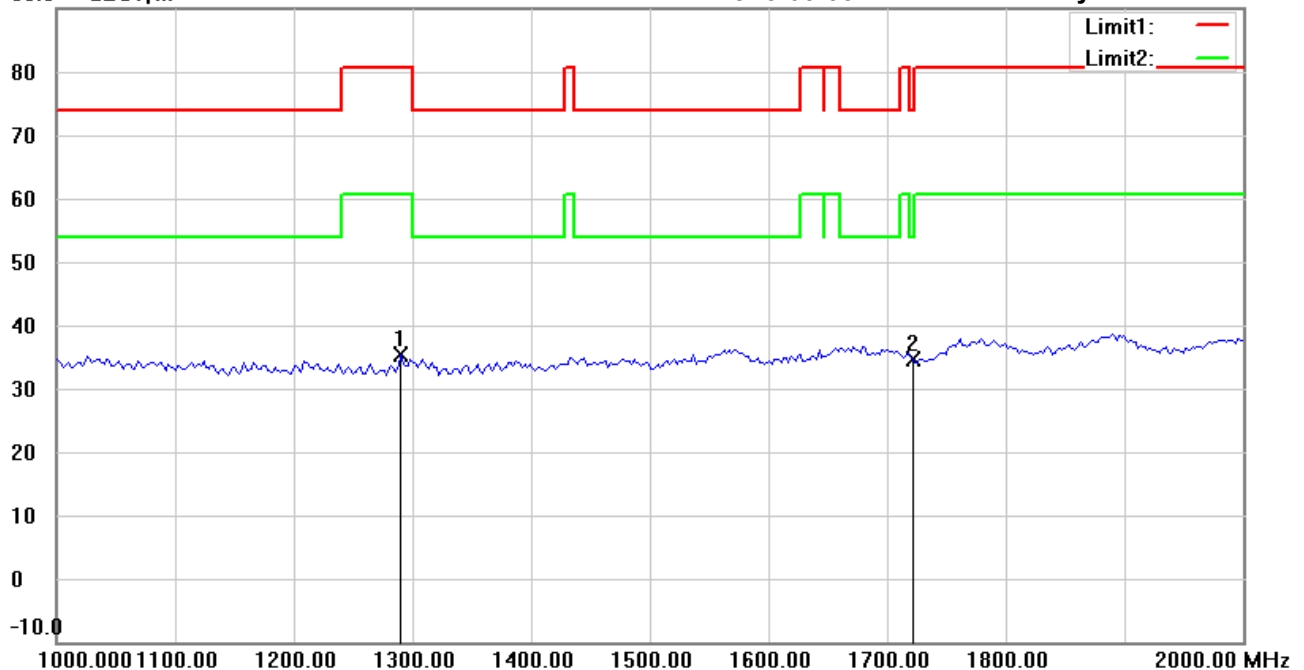

Site : Chamber

Condition : FCC 15.231(430.1MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1290.300	44.38	peak	-9.04	35.34	80.60	150	255	-45.26	
*	1720.400	41.75	peak	-7.22	34.53	74.00	150	30	-39.47	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 4:58:40 AM

Humidity: 70.8 %

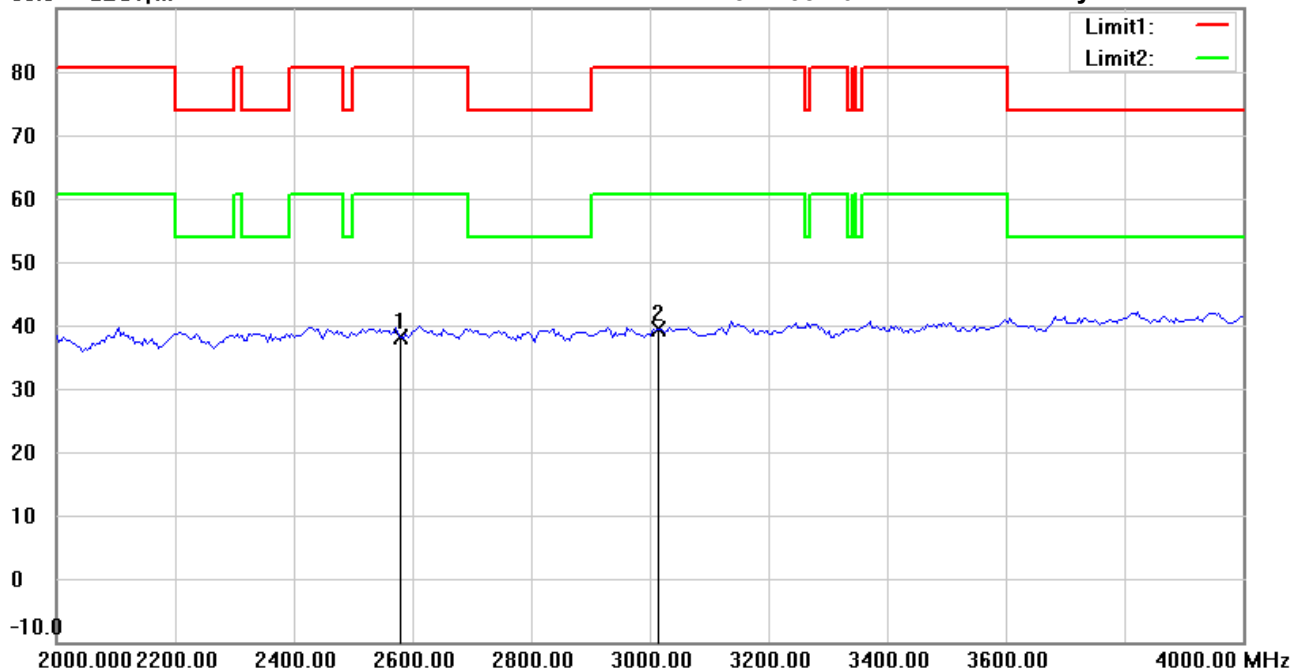

Site : Chamber

Condition : FCC 15.231(430.1MHz) 2000-4000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: **Horizontal**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2580.600	41.55	peak	-3.37	38.18	80.60	150	315	-42.42	
*	3010.700	42.70	peak	-3.28	39.42	80.60	150	60	-41.18	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#5


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 5:09:42 AM

Humidity: 70.8 %

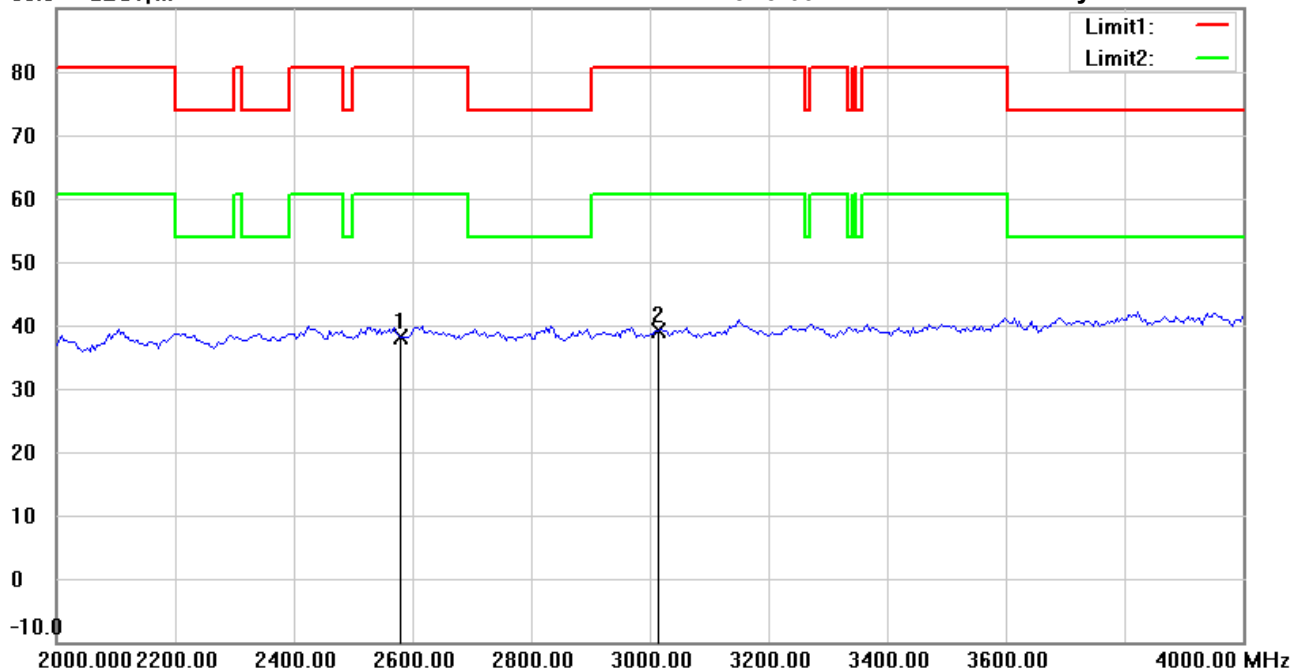

Site : Chamber

Condition : FCC 15.231(430.1MHz) 2000-4000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2580.600	41.42	peak	-3.37	38.05	80.60	150	70	-42.55	
*	3010.700	42.53	peak	-3.28	39.25	80.60	150	100	-41.35	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #3


Date: 5/9/2019

Temperature: 21.8 °C

Time: 5:03:16 AM

Humidity: 70.8 %

90.0 dBuV/m

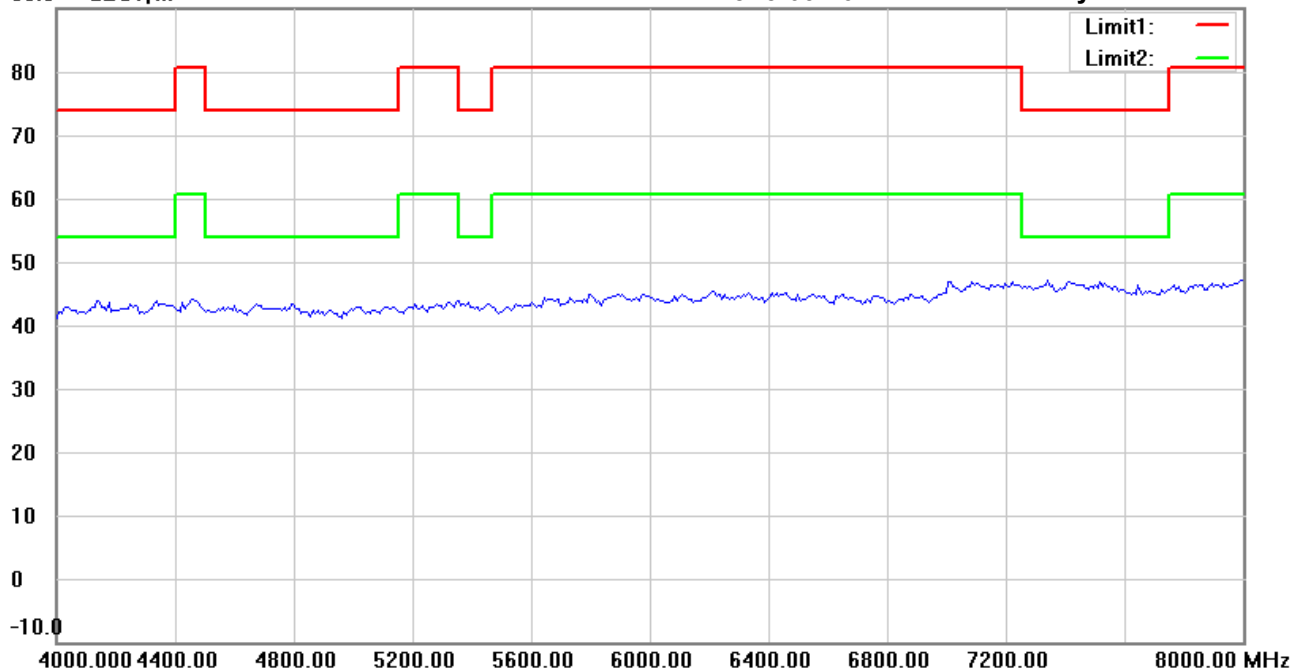

Site : Chamber

Condition : FCC 15.231(430.1MHz) 4000-8000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: Horizontal

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #6


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 5:14:43 AM

Humidity: 70.8 %

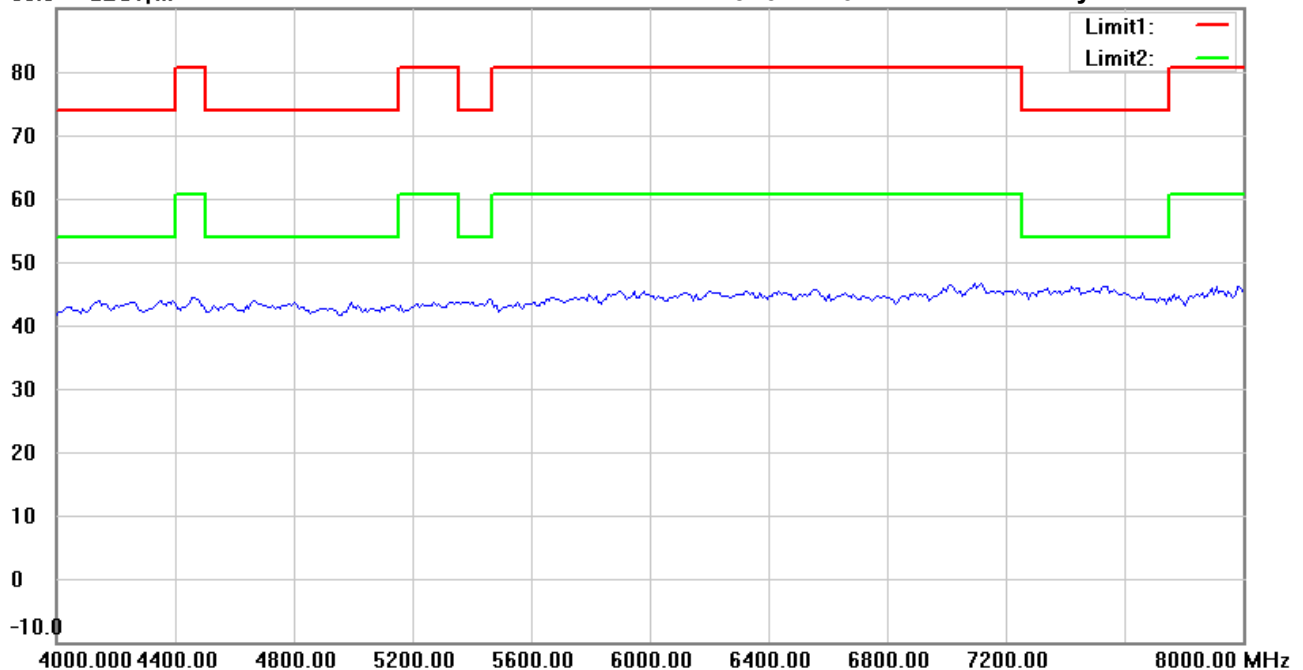

Site : Chamber

Condition : FCC 15.231(430.1MHz) 4000-8000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 430.1MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 5/9/2019

Temperature: 21.8 °C

Time: 4:03:23 AM

Humidity: 70.8 %

90.0 dBuV/m

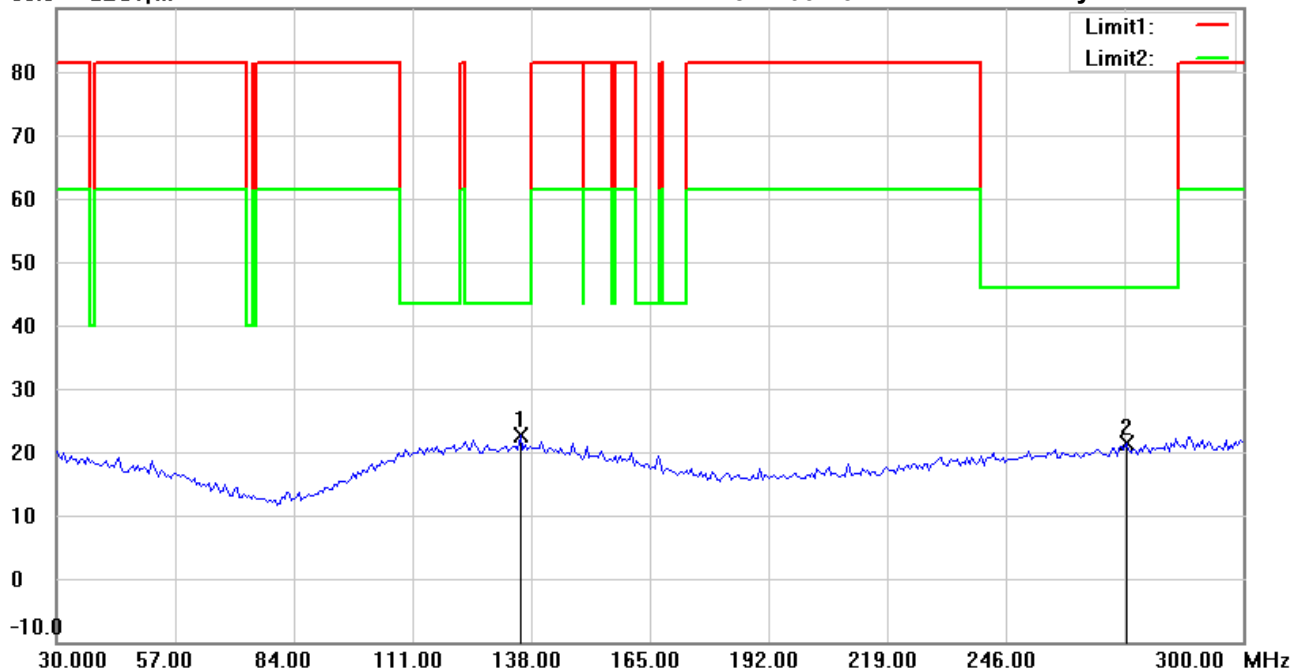

Site : Chamber

Condition : FCC 15.231(450MHz) 30-300(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	135.5110	28.96	peak	-6.39	22.57	43.50	100	0	-20.93	
	273.4870	27.71	peak	-6.33	21.38	46.00	100	175	-24.62	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 4:06:11 AM

Humidity: 70.8 %

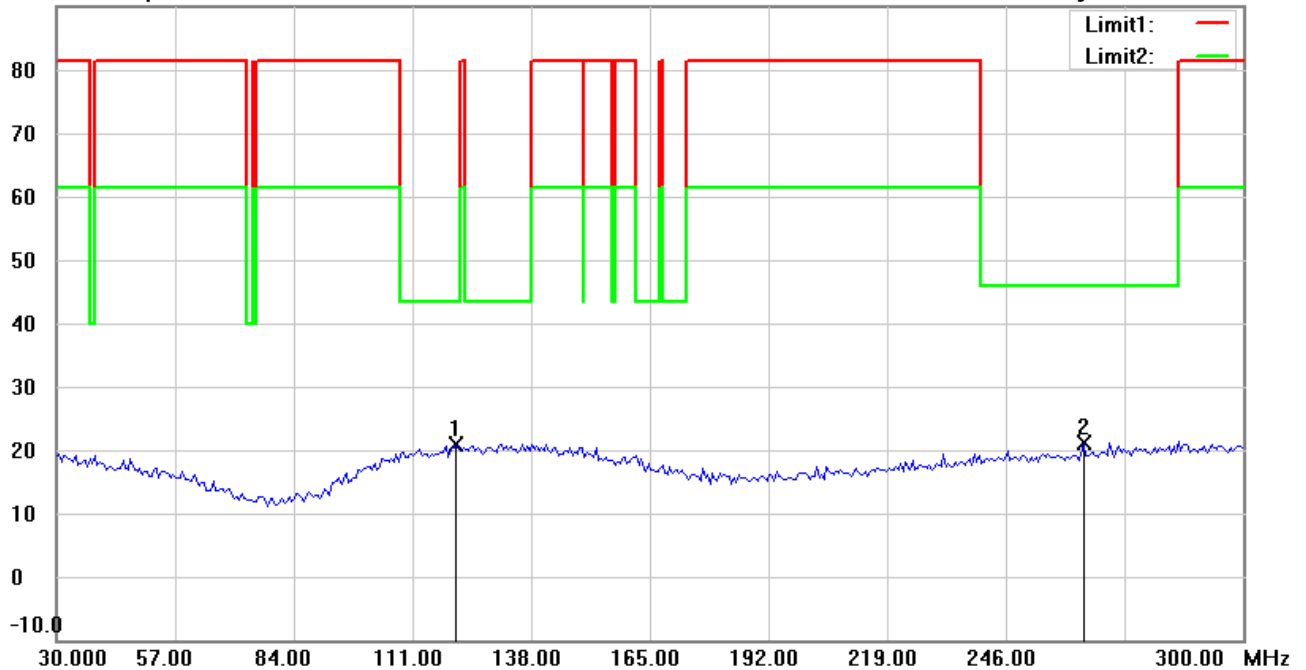

Site : Chamber

Condition : FCC 15.231(450MHz) 30-300(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	120.9018	27.45	peak	-6.56	20.89	43.50	100	40	-22.61	
	263.7475	27.85	peak	-6.76	21.09	46.00	100	310	-24.91	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :2

Data :#1


Date: 5/9/2019

Temperature:21.8 °C

Time: 4:43:36 AM

Humidity:70.8 %

90.0 dBuV/m

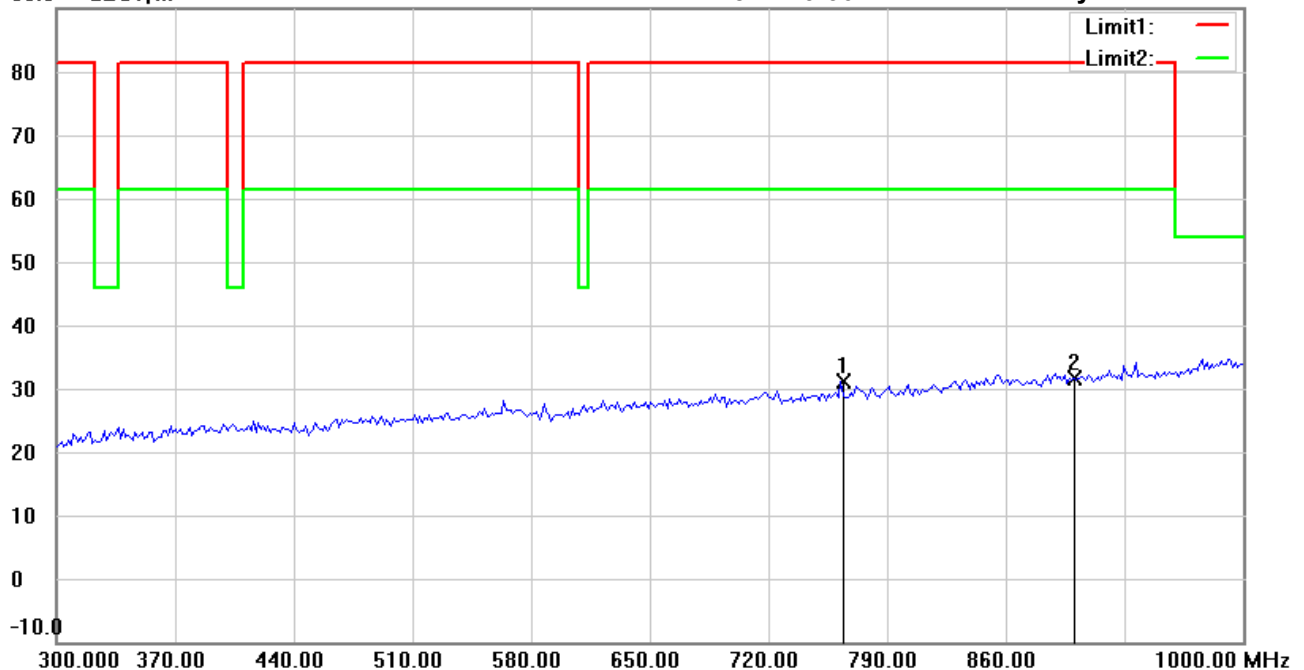

Site : Chamber

Condition : FCC 15.231(450MHz) 300-1000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: **Horizontal**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	762.9260	29.24	peak	1.87	31.11	81.30	100	30	-50.19	
*	900.0000	26.86	peak	4.88	31.74	81.30	100	155	-49.56	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #2


Date: 5/9/2019

Temperature: 21.8 °C

Time: 4:45:28 AM

Humidity: 70.8 %

90.0 dBuV/m

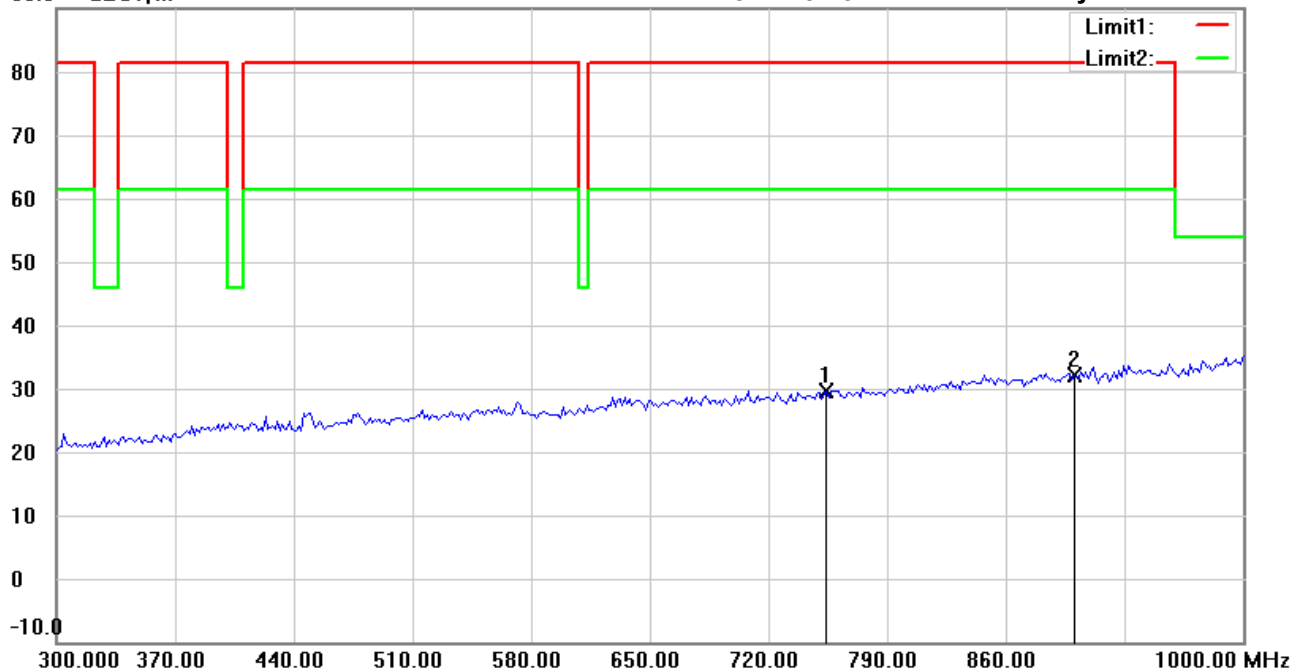

Site : Chamber

Condition : FCC 15.231(450MHz) 300-1000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	754.5090	27.82	peak	1.71	29.53	81.30	100	45	-51.77	
*	900.0000	27.22	peak	4.88	32.10	81.30	100	360	-49.20	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #1


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 5:19:41 AM

Humidity: 70.8 %

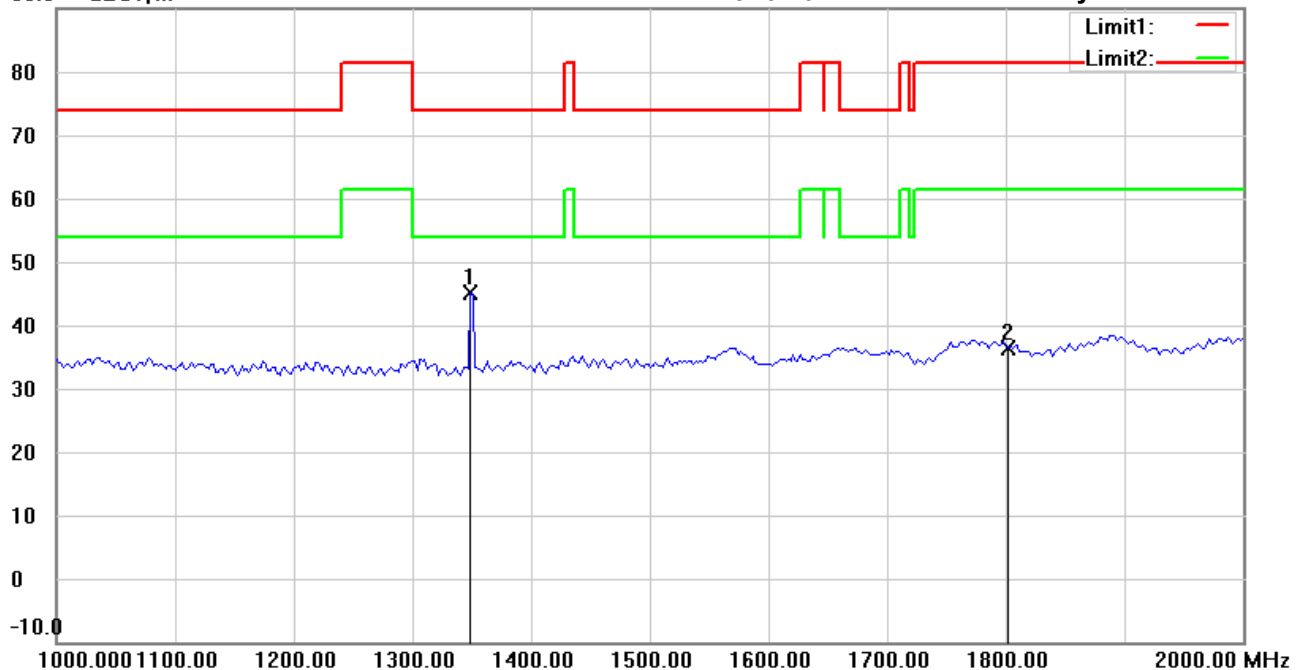

Site : Chamber

Condition : FCC 15.231(450MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1348.697	54.09	peak	-9.01	45.08	74.00	150	340	-28.92	
	1800.000	42.97	peak	-6.52	36.45	81.30	150	15	-44.85	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#4


Date: 5/9/2019

Temperature: 21.8 °C

Time: 5:31:15 AM

Humidity: 70.8 %

90.0 dBuV/m

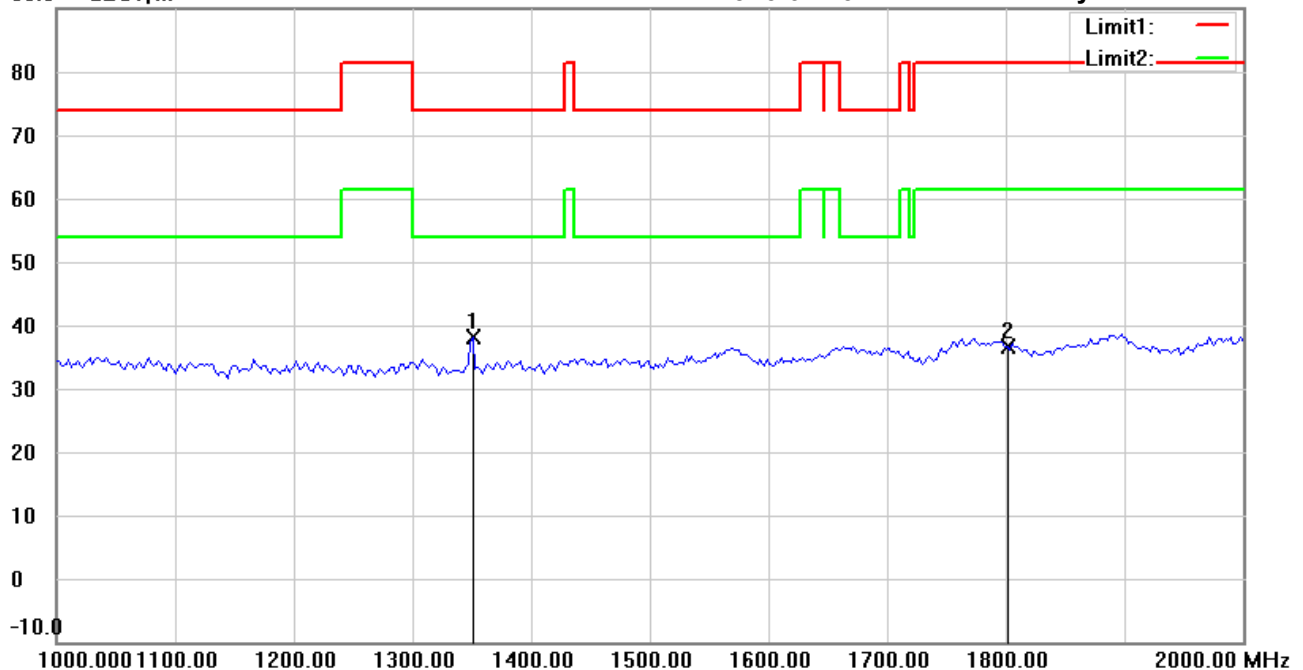

Site : Chamber

Condition : FCC 15.231(450MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1350.701	47.04	peak	-9.02	38.02	74.00	150	125	-35.98	
	1800.000	43.06	peak	-6.52	36.54	81.30	150	80	-44.76	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 5/9/2019

Temperature:21.8 °C

90.0 dBuV/m

Time: 5:23:18 AM

Humidity:70.8 %

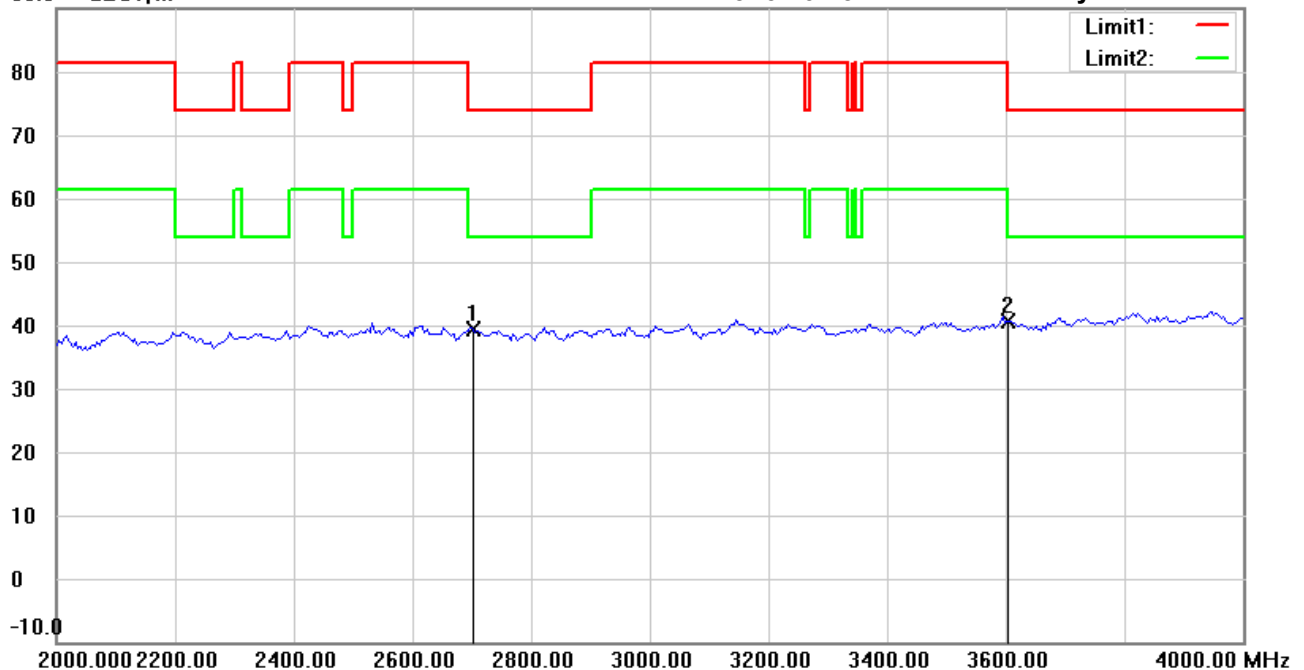

Site : Chamber

Condition : FCC 15.231(450MHz) 2000-4000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2700.000	43.27	peak	-3.83	39.44	74.00	150	205	-34.56	
*	3600.000	41.85	peak	-1.27	40.58	74.00	150	35	-33.42	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#5


Date: 5/9/2019

Temperature:21.8 °C

90.0 dBuV/m

Time: 5:36:10 AM

Humidity:70.8 %

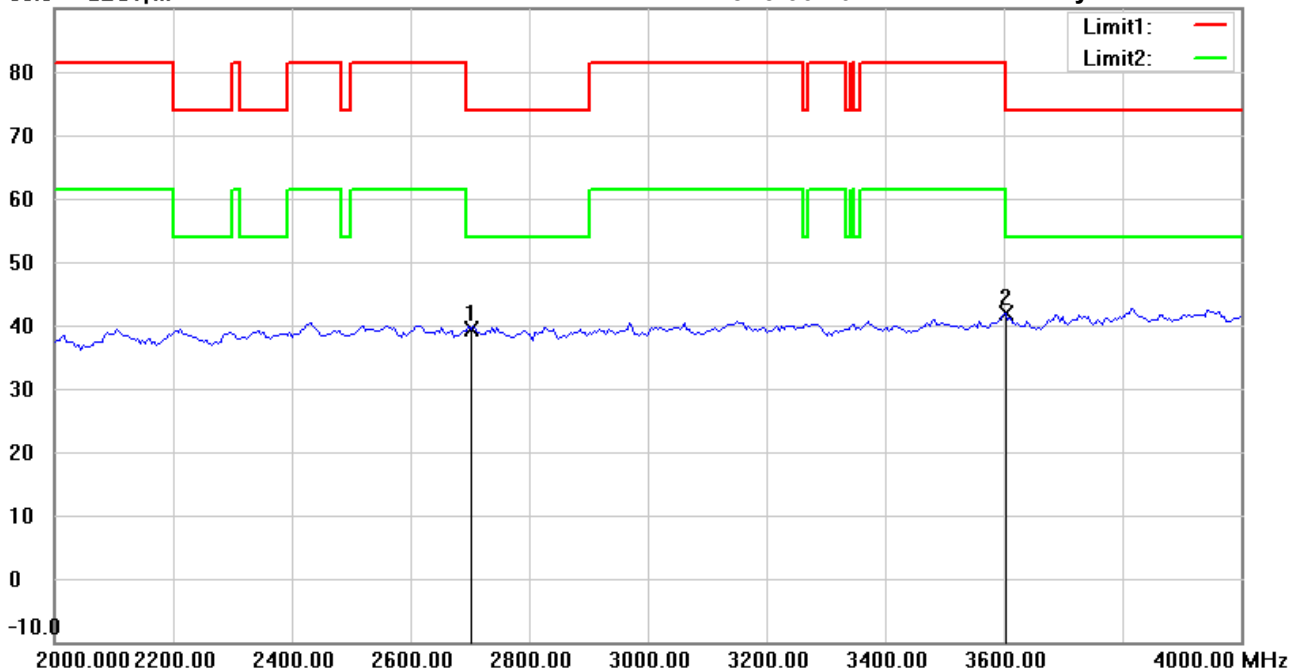

Site : Chamber

Condition : FCC 15.231(450MHz) 2000-4000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2700.000	43.28	peak	-3.83	39.45	74.00	150	75	-34.55	
*	3600.000	43.11	peak	-1.27	41.84	74.00	150	135	-32.16	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#3


Date: 5/9/2019

Temperature:21.8 °C

Time: 5:27:50 AM

Humidity:70.8 %

90.0 dBuV/m

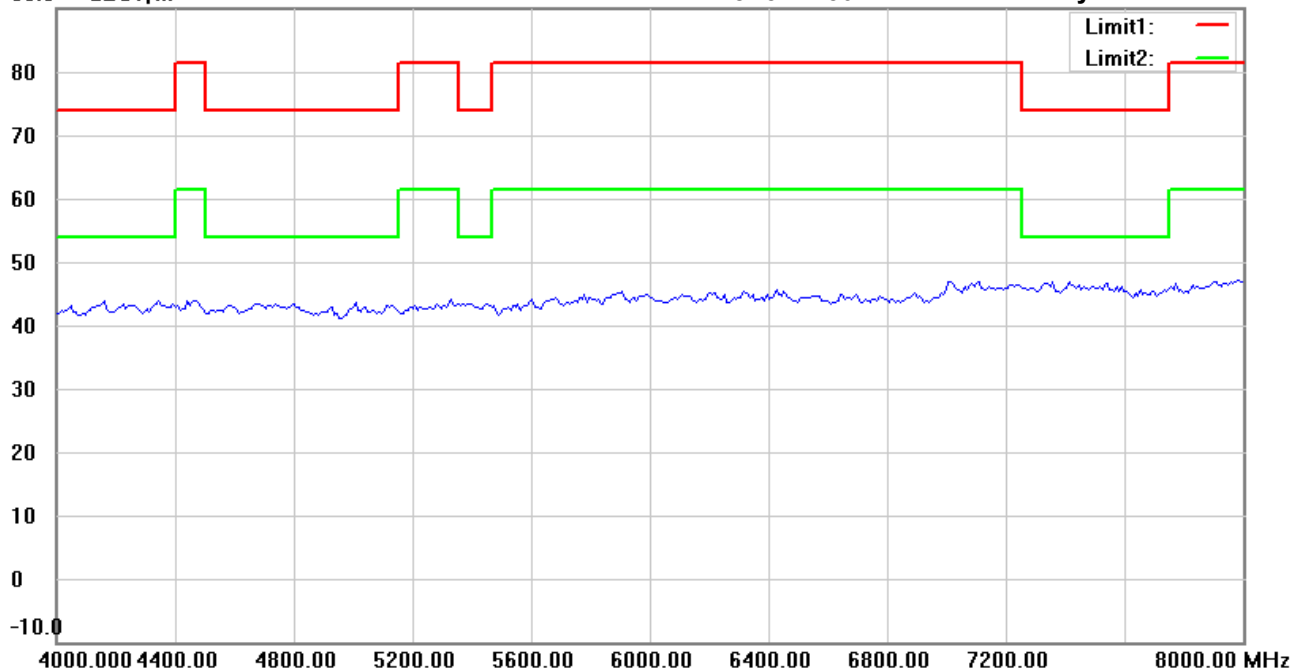

Site : Chamber

Condition : FCC 15.231(450MHz) 4000-8000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#6


Date: 5/9/2019

Temperature:21.8 °C

Time: 5:40:57 AM

Humidity:70.8 %

90.0 dBuV/m

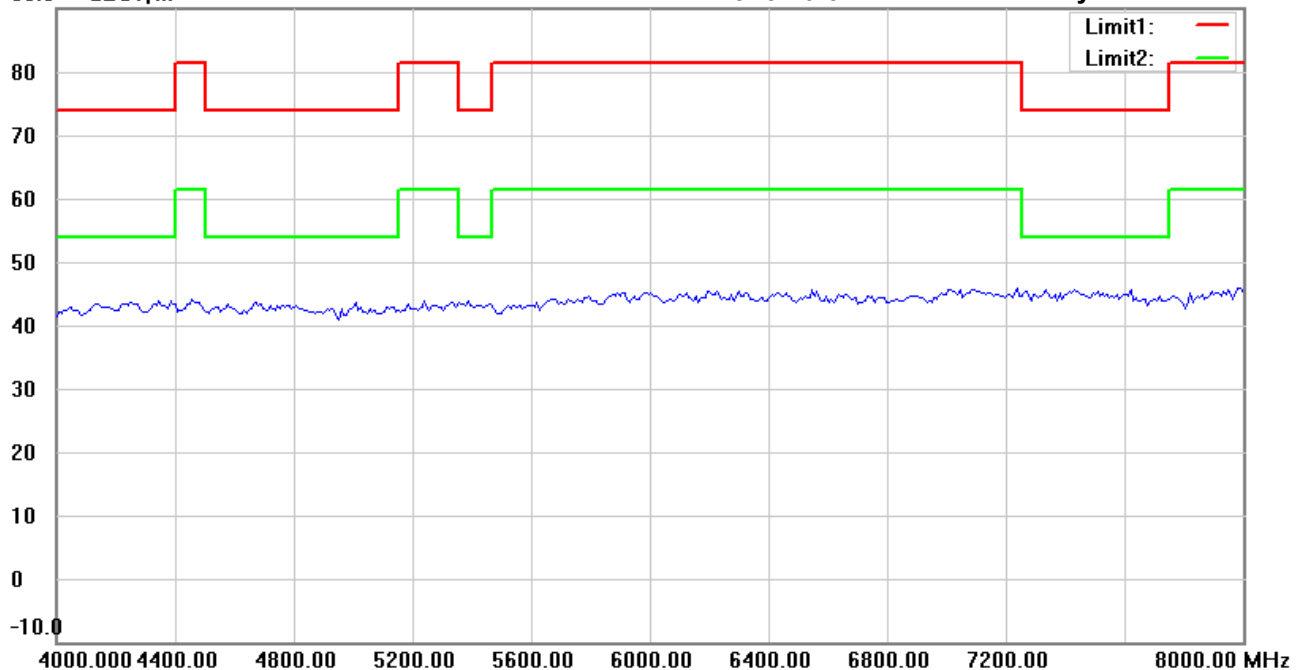

Site : Chamber

Condition : FCC 15.231(450MHz) 4000-8000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 450MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :1

Data :#1


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 3:55:15 AM

Humidity: 70.8 %

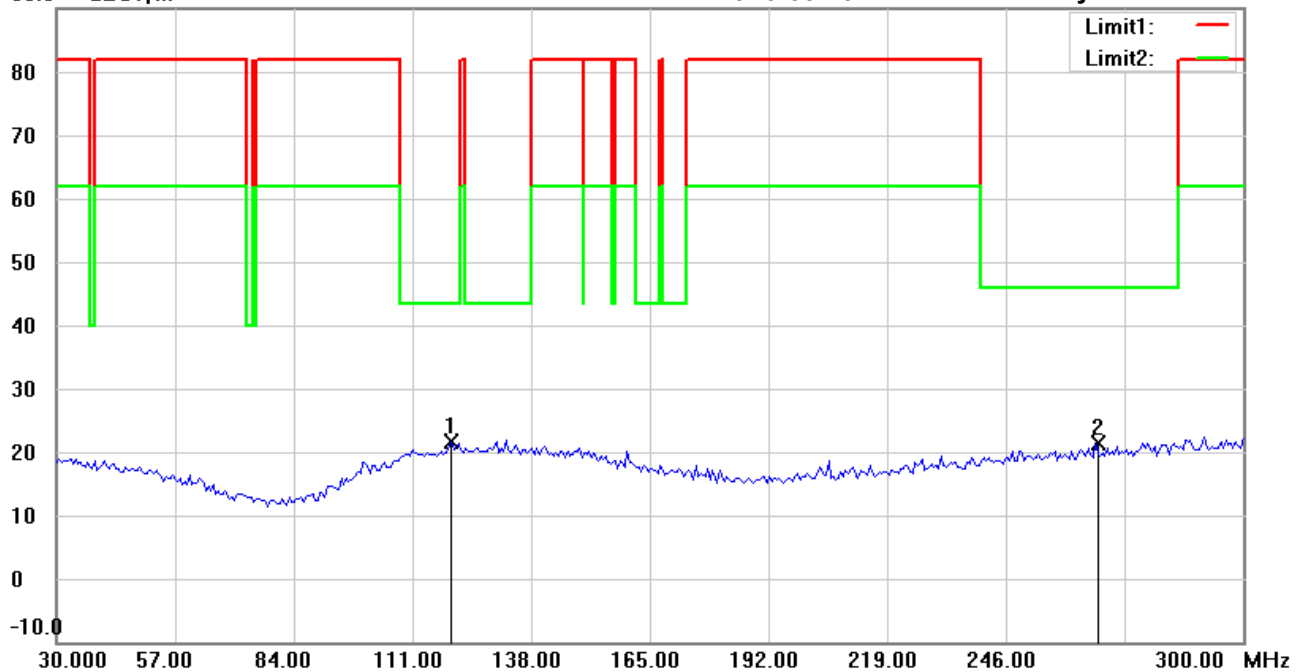

Site : Chamber

Condition : FCC 15.231(469.9MHz) 30-300(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	119.8196	28.21	peak	-6.60	21.61	43.50	100	35	-21.89	
	266.4530	27.91	peak	-6.64	21.27	46.00	100	240	-24.73	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :1

Data :#2


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 3:56:33 AM

Humidity: 70.8 %

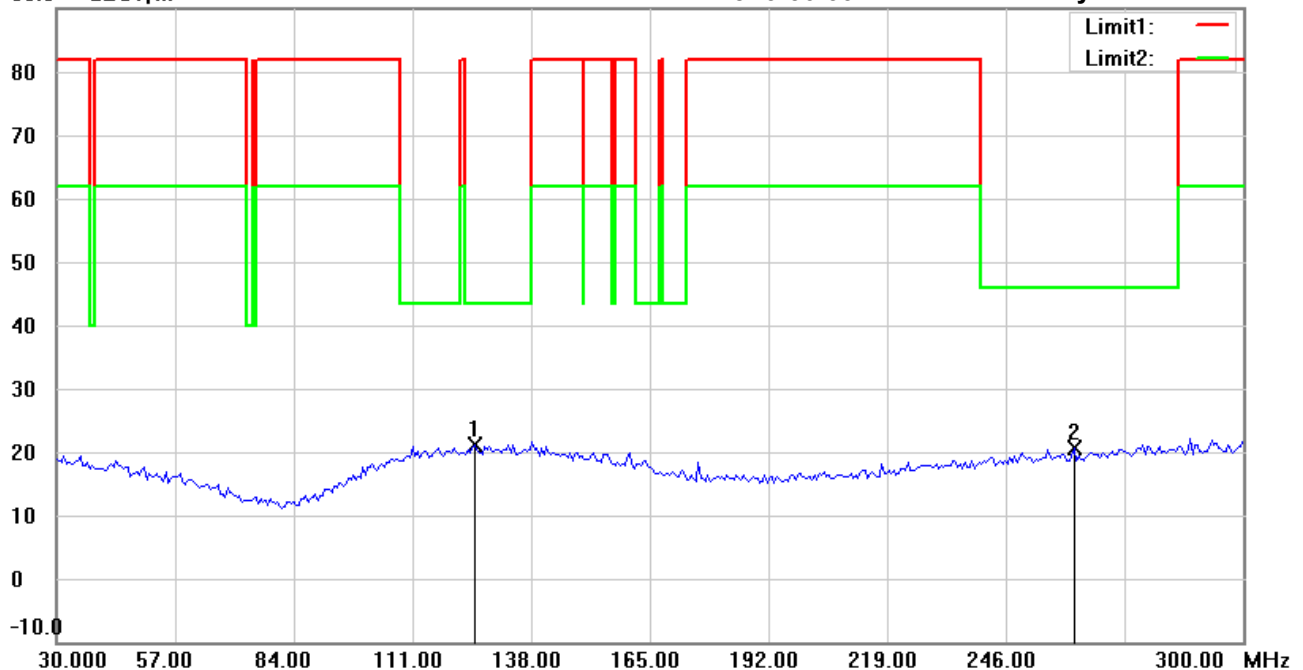

Site : Chamber

Condition : FCC 15.231(469.9MHz) 30-300(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	125.2305	27.53	peak	-6.44	21.09	43.50	100	185	-22.41	
	261.5832	27.39	peak	-6.85	20.54	46.00	100	60	-25.46	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #1


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 3:58:27 AM

Humidity: 70.8 %

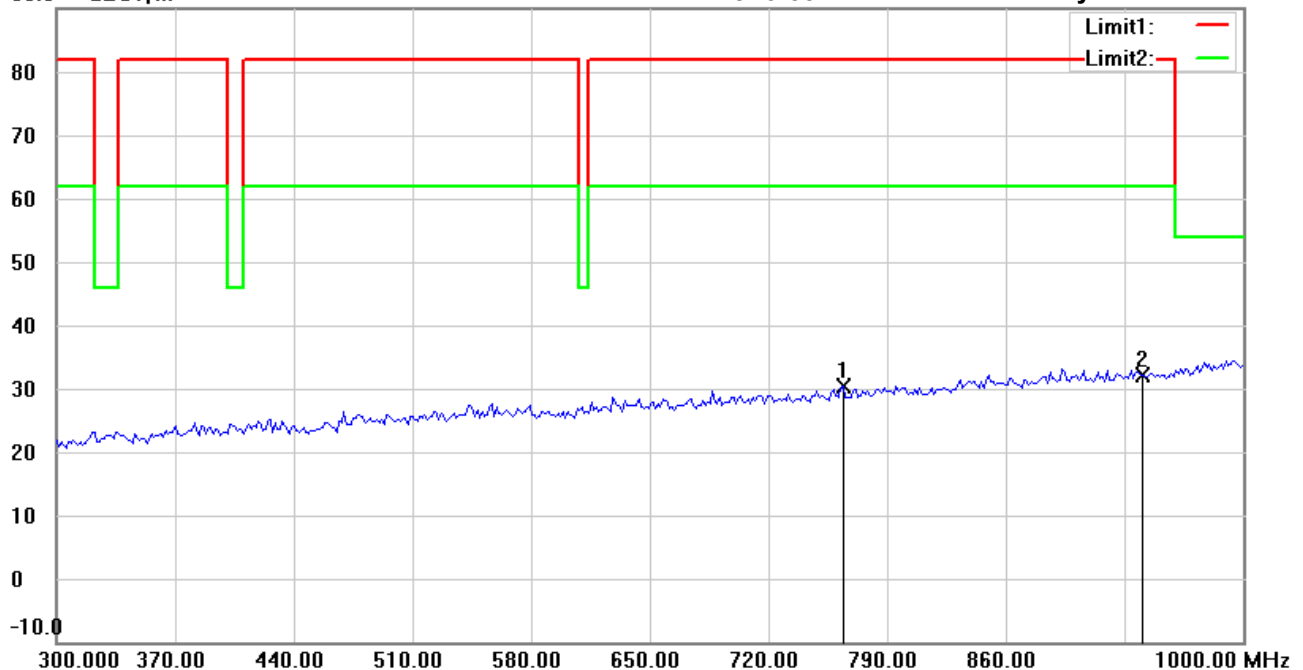

Site : Chamber

Condition : FCC 15.231(469.9MHz) 300-1000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	764.3287	28.56	peak	1.90	30.46	81.90	100	300	-51.44	
*	939.8000	26.59	peak	5.52	32.11	81.90	100	75	-49.79	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 2

Data : #2


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 4:00:00 AM

Humidity: 70.8 %

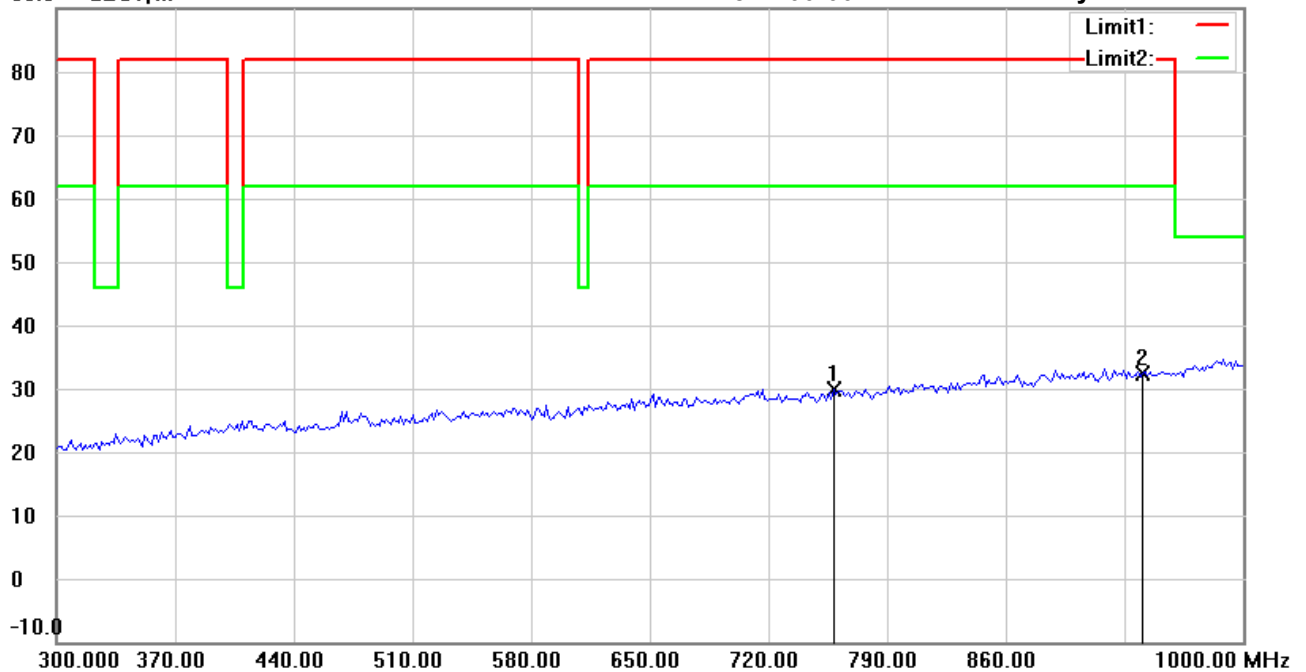

Site : Chamber

Condition : FCC 15.231(469.9MHz) 300-1000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	758.7174	28.17	peak	1.79	29.96	81.90	100	115	-51.94	
*	939.8000	26.92	peak	5.52	32.44	81.90	100	230	-49.46	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#1


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 5:48:59 AM

Humidity: 70.8 %

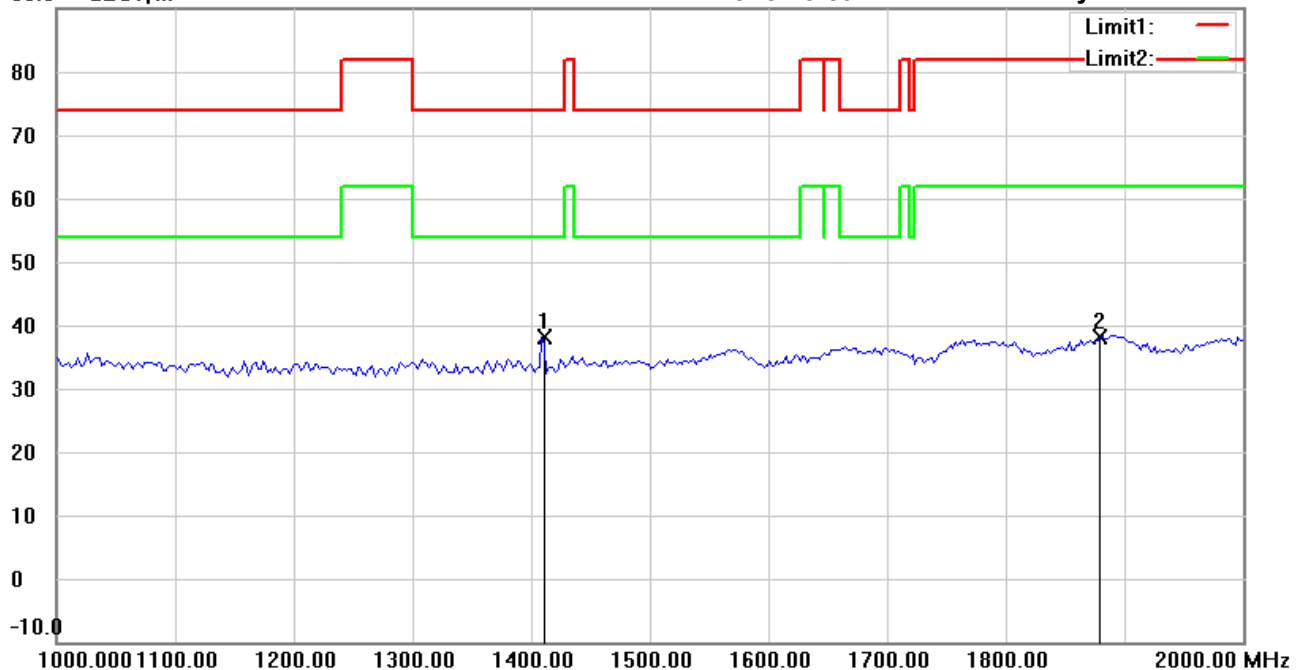

Site : Chamber

Condition : FCC 15.231(469.9MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: **Horizontal**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1408.818	47.21	peak	-8.99	38.22	74.00	150	255	-35.78	
	1879.600	44.38	peak	-6.16	38.22	81.90	150	130	-43.68	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #4


Date: 5/9/2019

Temperature: 21.8 °C

90.0 dBuV/m

Time: 6:01:18 AM

Humidity: 70.8 %

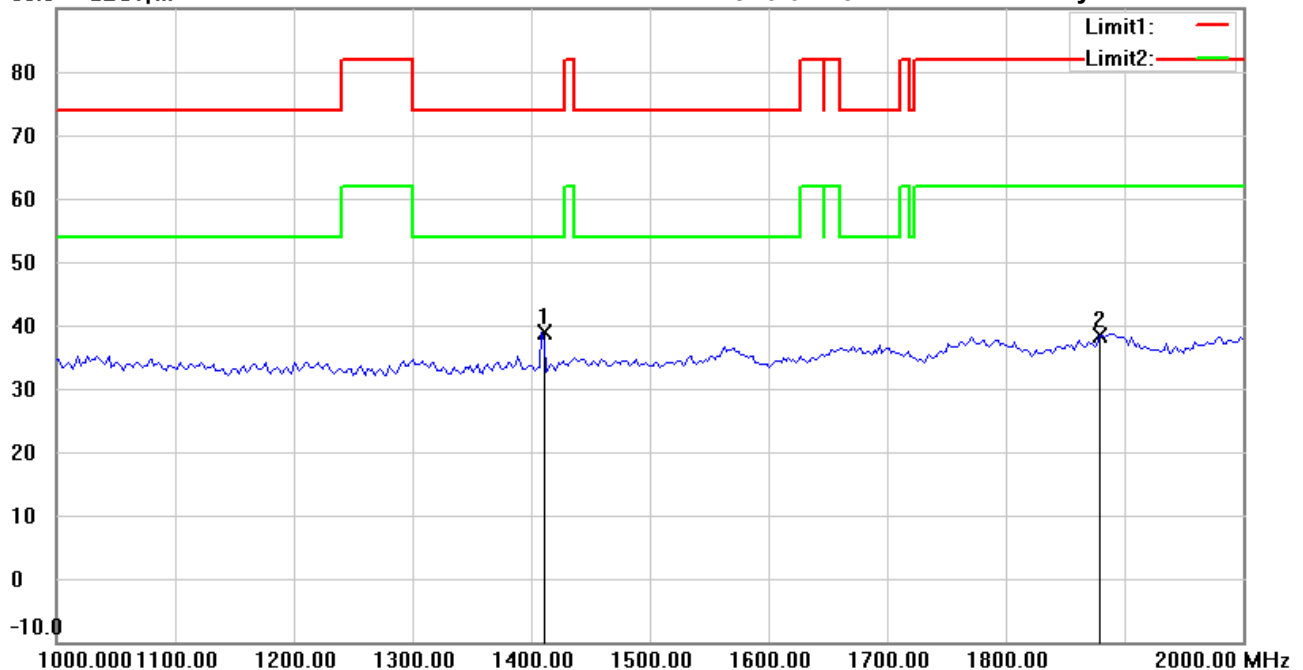

Site : Chamber

Condition : FCC 15.231(469.9MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1408.818	47.94	peak	-8.99	38.95	74.00	150	355	-35.05	
	1879.600	44.60	peak	-6.16	38.44	81.90	150	20	-43.46	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#2


Date: 5/9/2019

Temperature:21.8 °C

90.0 dBuV/m

Time: 5:53:50 AM

Humidity:70.8 %

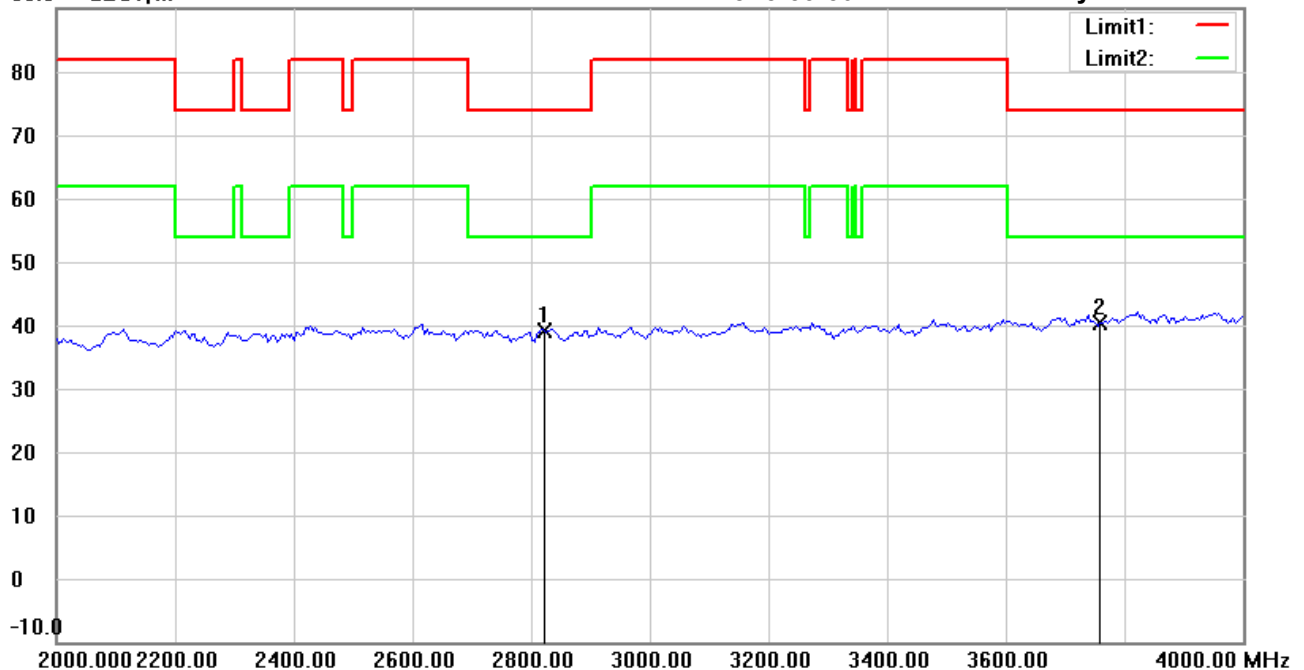

Site : Chamber

Condition : FCC 15.231(469.9MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: **Horizontal**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2819.400	42.97	peak	-3.82	39.15	74.00	150	195	-34.85	
*	3759.200	41.29	peak	-0.81	40.48	74.00	150	0	-33.52	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #5


Date: 5/9/2019

Temperature: 21.8 °C

Time: 6:05:01 AM

Humidity: 70.8 %

90.0 dBuV/m

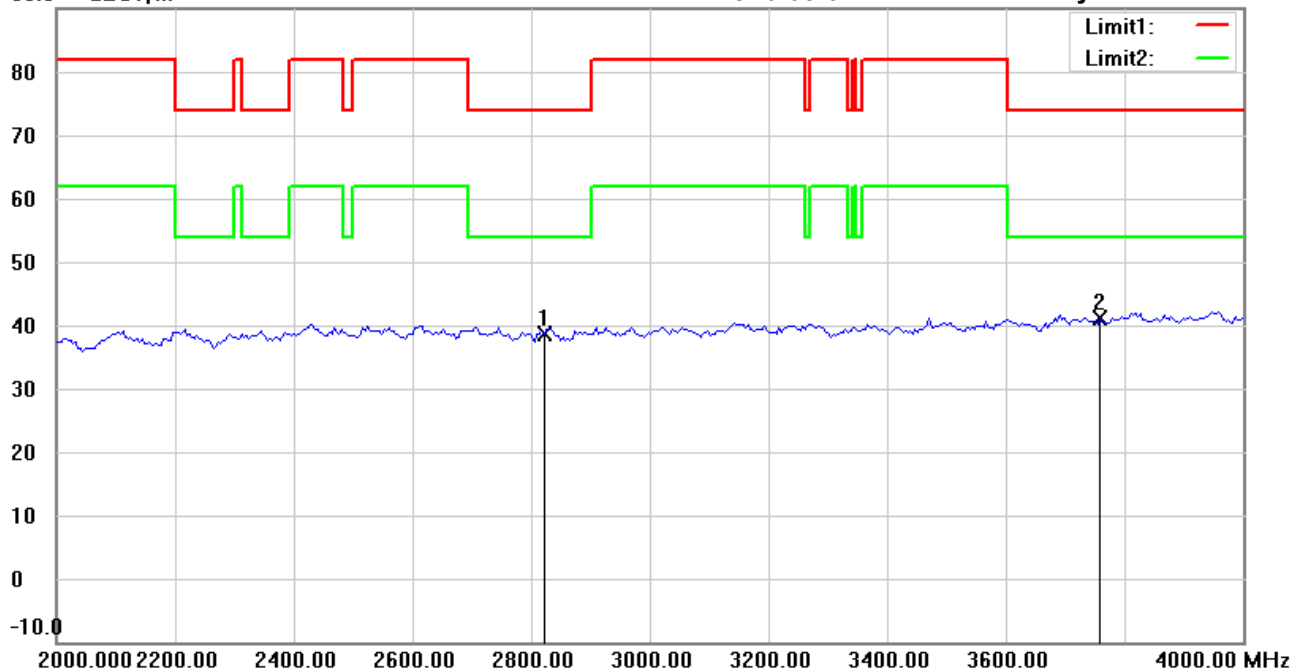

Site : Chamber

Condition : FCC 15.231(469.9MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2819.400	42.53	peak	-3.82	38.71	74.00	150	330	-35.29	
*	3759.200	41.99	peak	-0.81	41.18	74.00	150	180	-32.82	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File : 3

Data : #3


Date: 5/9/2019

Temperature: 21.8 °C

Time: 5:54:35 AM

Humidity: 70.8 %

90.0 dBuV/m

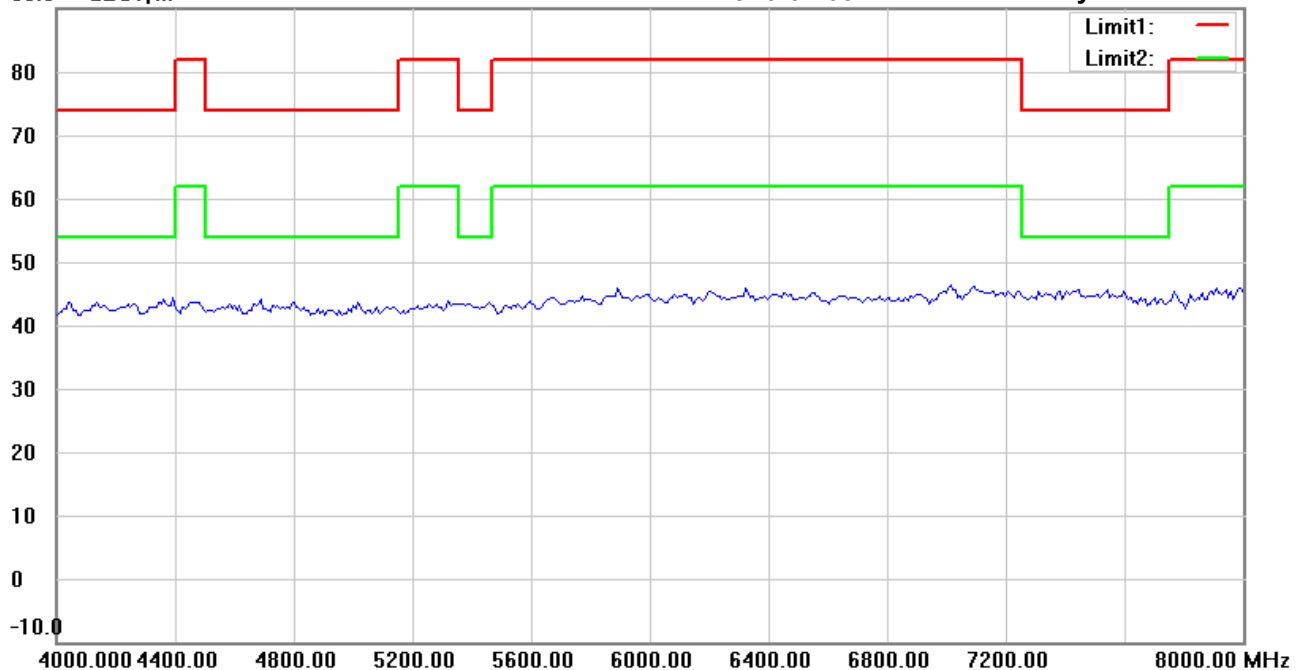

Site : Chamber

Condition : FCC 15.231(469.9MHz) 1000-2000(PK)

Polarization: Horizontal

EUT : W6M21904-18989

Power : 9 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 469.9MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Allen

File :3

Data :#6


Date: 5/9/2019

Temperature:21.8 °C

90.0 dBuV/m

Time: 6:10:47 AM

Humidity:70.8 %

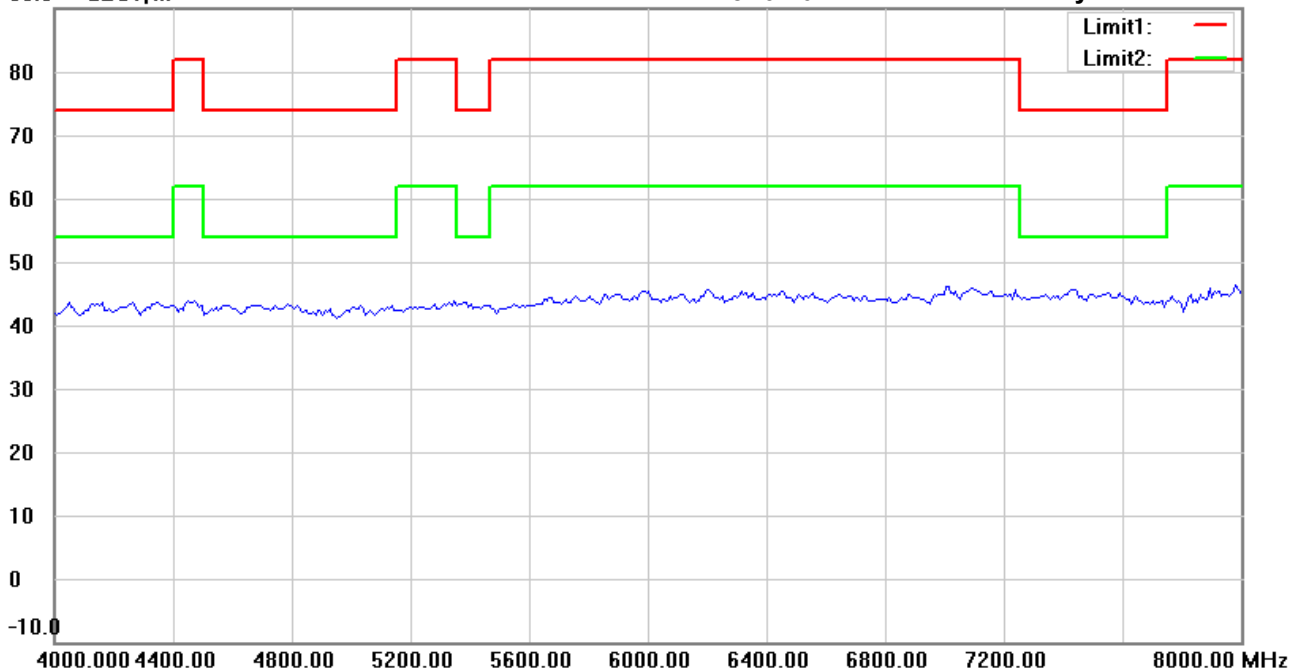

Site : Chamber

Condition : FCC 15.231(469.9MHz) 1000-2000(PK)

EUT : W6M21904-18989

M/N:

Test Mode : TX 469.9MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin