



FCC Part 15C Test Report

FCC ID:NDD6208AC

Product Name:	11ac Dual Band concurrent Wireless Router
Trademark:	Edimax
Model Name :	BR-6208AC V2
Prepared For :	Edimax Technology Co Ltd
Address :	No.3, Wu-Chuan 3rd Road, Wu-Ku Industrial Park, New Taipei City, Taiwan
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101,Yousong Road,Longhua New District, Shenzhen,China
Test Date:	Sep. 20 - Sep. 28, 2016
Date of Report :	Sep. 28, 2016
Report No.:	BCTC-FY160902344-1E



VERIFICATION OF COMPLIANCE

Applicant's name..... Edimax Technology Co Ltd

Address No.3, Wu-Chuan 3rd Road, Wu-Ku Industrial Park, New Taipei City, Taiwan

Manufacture's Name Edimax Technology Co Ltd

Address No.3, Wu-Chuan 3rd Road, Wu-Ku Industrial Park, New Taipei City, Taiwan

Product description

Product name..... 11ac Dual Band concurrent Wireless Router

Model Name: BR-6208AC V2

Standards: FCC Part15.407

ANSI C63.10-2013

KDB789033 D02 General UNII Test Procedures New Rules
v03v05

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result

Pass

Testing Engineer :

Eric Yang

Reviewer
(Supervisor) :

Jade Yang

Approved &
Authorized
Signer(Manager) :





TABLE OF CONTENTS

	Page
Test Report Declaration	
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	5
2.1. Product Function	5
2.2. Description of Device (EUT)	5
2.3. Test Supporting System	6
2.4. Independent Operation Modes	7
2.5. Test Sites	7
2.6. List of Test and Measurement Instruments	8
3. TEST SET-UP AND OPERATION MODES	9
3.1. Principle of Configuration Selection	9
3.2. Block Diagram of Test Set-up	9
3.3. Test Operation Mode and Test Software	9
3.4. Special Accessories and Auxiliary Equipment	9
3.5. Countermeasures to Achieve EMC Compliance	9
4. EMISSION TEST RESULTS	10
4.1. Conducted Emission Measurement	10
4.2. Radiated Emission Measurement	14
5. BAND EDGE COMPLIANCE TEST	32
5.1. Limits	32
5.2. Test setup	32
5.3. Test Data	32
6. 26DB AND 99% BANDWIDTH TEST	34
6.1. Measurement Procedure	34
7. OUTPUT POWER TEST	44
7.1. Limits	44
7.2. Test setup	44
7.3. Test result	45
8. PEAK POWER SPECTRAL DENSITY TEST	46
8.1. Limits	46
8.2. Test setup	46
8.3. Test data	47
9. DUTY CYCLE TEST SIGNAL	56
10. FREQUENCY STABILITY	58
10.1. Limits	58
10.2. Test setup	58
10.3. Test data	59
11. TRANSMISSION IN THE ABSENCE OF DATA	62
11.1. Limits	62
11.2. Test result	62
12. ANTENNA REQUIREMENT	62
12.1. STANDARD REQUIREMENT	62
12.2. EUT ANTENNA	62
13. PHOTOGRAPHS OF TEST SET-UP	63
14. PHOTOGRAPHS OF THE EUT	65



1.TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.407(b), 15.209	PASS
26dB bandwidth and 99%dB Bandwidth	15.403(i) 15.407(e)	PASS
Power density	15.407 (a)	PASS
Maximum Peak Output Power	15.407 (a)	PASS
Emissions from out of band	15.407 (b)	PASS
Transmission in case of Absence of Information	15.407(c)	PASS
Frequency Stability	15.407(g)	PASS
Antenna Requirement	15.203	PASS



2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	11ac Dual Band concurrent Wireless Router
Model No.:	BR-6208AC V2
Trade Name:	Edimax
Operation Frequency:	5180-5240, 5745-5825MHz(802.11a/n(HT20)) 5190-5230, 5755-5795MHz(802.11n(HT40))
Channel numbers:	See channel list
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Data speed (IEEE 802.11a):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Data speed (IEEE 802.11n):	Up to 300Mbps
Antenna Type:	External antenna
Antenna gain:	3.0dBi
Power supply:	Main unit: DC5V---2000mA External adaptor: Model: KA1503-0502000USS Input: AC100-240V~ 50/60Hz 0.35A Max Output: DC5V---2000mA

Note1: For 2.4G,The EUT incorporates a mimo function. Physically, the EUT provide two completed transmitter and two receivers. For 5G, is one antenna was used.



Channel List for 802.11a/n(20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

Channel List for 802.11a/n(20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

Channel List for 802.11n(40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

2.3. Test Supporting System

None.



2.4. Independent Operation Modes

The basic operation modes are:

These is Digital Transmission system (DTS) and have modulation OFDM, DSSS, DBPSK, DQPSK, CCK, 16QAM, 64QAM. According exploratory test, EUT will have maximum output power in those data rate (802.11a/n: MCS0), so those data rate were used for all test. The equipment enables high-speed access without wires to network assets. This adapter uses the IEEE 802.11 protocol to enable wireless communications between the host and Wireless router.

802.11a/n(20)

Frequency	Band 1	Band 4
Low	5180MHz	5745MHz
Middle	5200MHz	5785MHz
High	5240MHz	5825MHz

802.11n(40)

Frequency	Band 1	Band 4
Low	5190MHz	5755MHz
High	5230MHz	5795MHz

Note: for conducted emission test, we pretest all mode, the worst mode was 802.11a channel 36.

for radiated emissions test, we pretest all mode, the worst mode was 802.11a/n20

The worst mode's data was recording and show in the test report.

2.5. Test Sites

2.5.1. Test Facilities

Lab Qualifications : FCC Registration No.:187086



2.6. List of Test and Measurement Instruments

Conduction test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	1166.5950K03-101165-ha	2016.07.06	2017.07.05	1 year
2	LISN	R&S	NSLK8126	8126466	2016.08.24	2017.08.23	1 year
3	LISN	R&S	NSLK8126	8126487	2016.08.24	2017.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.07.06	2017.07.05	1 year
5	RF cables	R&S	R204	R20X	2016.07.06	2017.07.05	1 year

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Kind of equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2016.07.06	2017.07.05	1 year
3	Bilog Antenna	R&S	VULB 9168	VULB9168-438	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.07.06	2017.07.05	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.07.06	2017.07.05	1 year
6	Horn Antenna	R&S	HF906	10027	2016.07.06	2017.07.05	1 year
7	Horn Antenna	R&S	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	R&S	BBV9743	9743-019	2016.07.06	2017.07.05	1 year
9	Loop Antenna	ARA	PLBR-6208A C V230/B	1029	2016.07.06	2017.07.05	1 year
10	RF cables	R&S	R203	R20X	2016.07.06	2017.07.05	1 year
11	Antenna connector	Florida RFLabs	Lab-Fle	RF 01#	2016.07.06	2017.07.05	1 year
12	Power Metter	ANRITSU	ML2487A	6K00001568	2016.07.06	2017.07.05	1 year
13	Power Sensor (AV)	ANRITSU	ML2491A	030989	2016.07.06	2017.07.05	1 year
14	Signal Analyzer	Agilent	N9010A	MY48030494	2016.07.06	2017.07.05	1 year
15	Test Receiver	R&S	ESU 40	100376	2016.07.06	2017.07.05	1 year


3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators

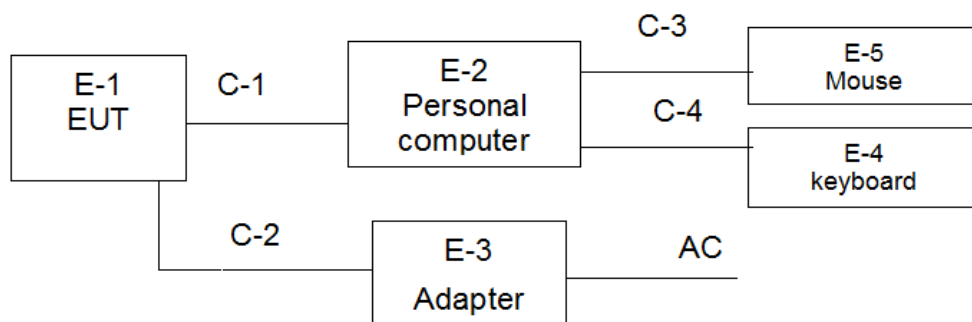

(EUT: 11ac Dual Band concurrent Wireless Router)

3.3. Test Operation Mode and Test Software

None.

3.4. Special Accessories and Auxiliary Equipment

3.5. Countermeasures to Achieve EMC Compliance

None.



4. EMISSION TEST RESULTS

4.1. Conducted Emission Measurement

POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi -peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.1. TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.2. DEVIATION FROM TEST STANDARD

No deviation

4.1.3. TEST SETUP

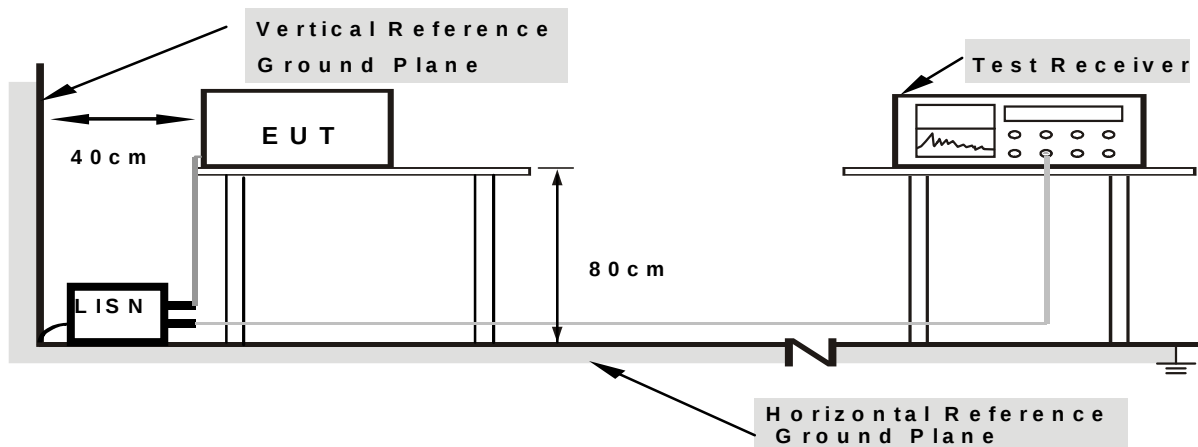

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.4. EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest all adapter's emission, only the adapter 1's data was worst and the data was recording in the report.

The data only show the worst mode.


If peak level comply with Quasi-Peak limit, then the Quasi-Peak level is deemed to comply with Quasi-Peak limit.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

4.1.5. TEST RESULTS



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter	Test Mode:	Link Mode

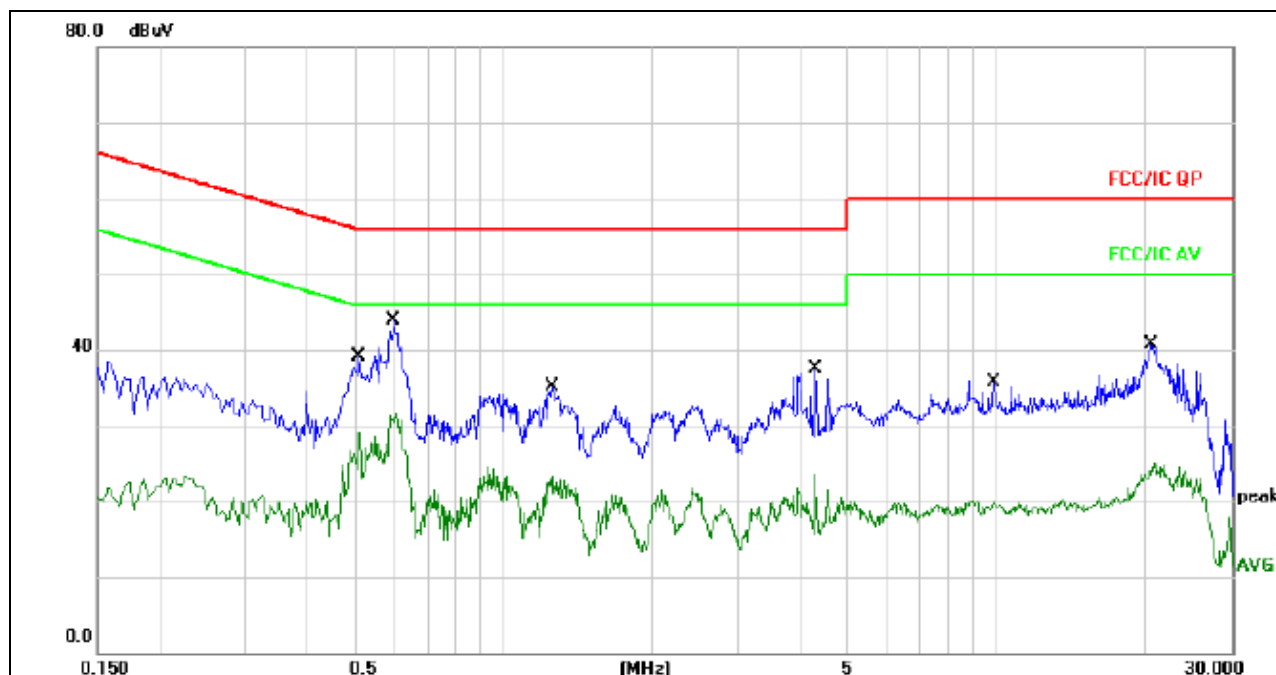


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.5100	29.37	9.68	39.05	56.00	-16.95	QP	
2		0.5100	19.46	9.68	29.14	46.00	-16.86	AVG	
3	*	0.5980	34.17	9.68	43.85	56.00	-12.15	QP	
4		0.5980	22.09	9.68	31.77	46.00	-14.23	AVG	
5		1.2540	25.34	9.70	35.04	56.00	-20.96	QP	
6		1.2540	13.58	9.70	23.28	46.00	-22.72	AVG	
7		4.3060	27.82	9.73	37.55	56.00	-18.45	QP	
8		4.3060	13.69	9.73	23.42	46.00	-22.58	AVG	
9		9.9020	25.88	9.83	35.71	60.00	-24.29	QP	
10		9.9020	9.89	9.83	19.72	50.00	-30.28	AVG	
11		20.6140	30.84	9.85	40.69	60.00	-19.31	QP	
12		20.6140	15.18	9.85	25.03	50.00	-24.97	AVG	



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter	Test Mode:	Link Mode

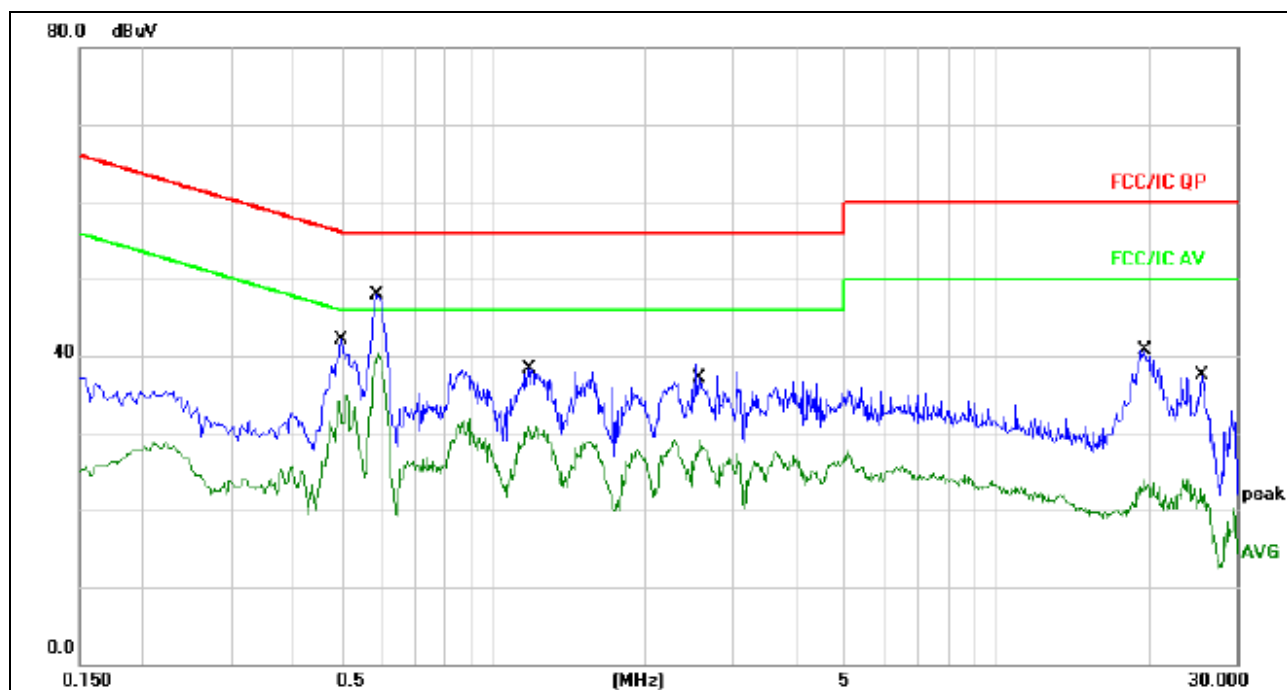

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4980	32.33	9.68	42.01	56.03	-14.02	QP	
2		0.4980	25.16	9.68	34.84	46.03	-11.19	AVG	
3		0.5860	38.21	9.68	47.89	56.00	-8.11	QP	
4	*	0.5860	30.52	9.68	40.20	46.00	-5.80	AVG	
5		1.1780	28.62	9.69	38.31	56.00	-17.69	QP	
6		1.1780	21.28	9.69	30.97	46.00	-15.03	AVG	
7		2.5579	29.19	9.72	38.91	56.00	-17.09	QP	
8		2.5579	18.27	9.72	27.99	46.00	-18.01	AVG	
9		19.7020	30.92	9.85	40.77	60.00	-19.23	QP	
10		19.7020	14.08	9.85	23.93	50.00	-26.07	AVG	
11		25.6740	27.65	9.88	37.53	60.00	-22.47	QP	
12		25.6740	12.87	9.88	22.75	50.00	-27.25	AVG	



4.2. Radiated Emission Measurement

4.2.1. Radiated Emission Limits (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2.2. TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 1.5 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

4.2.3. DEVIATION FROM TEST STANDARD


No deviation

4.2.4. TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

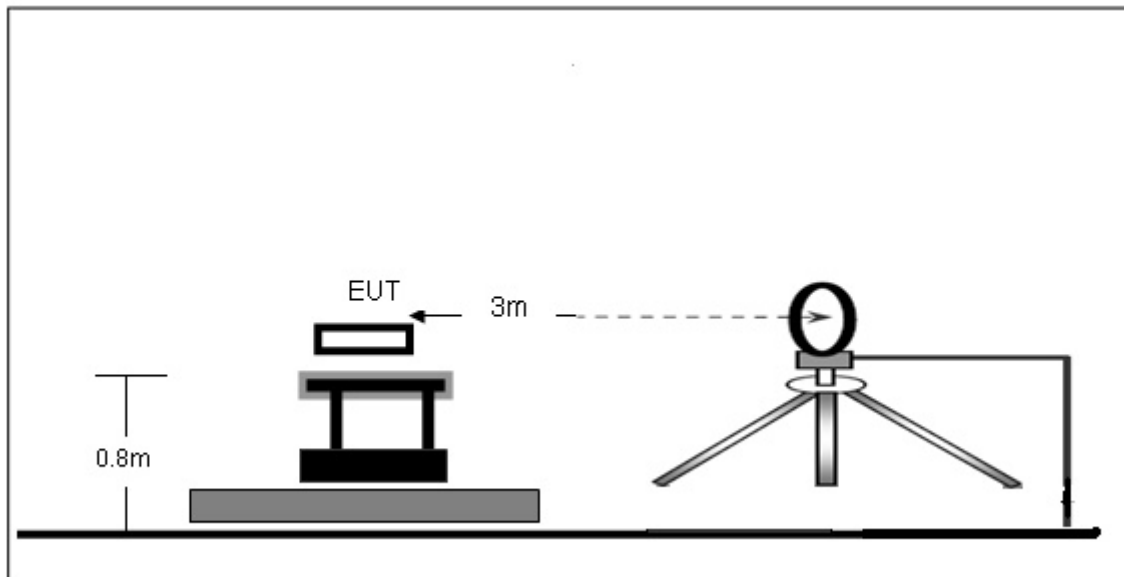

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

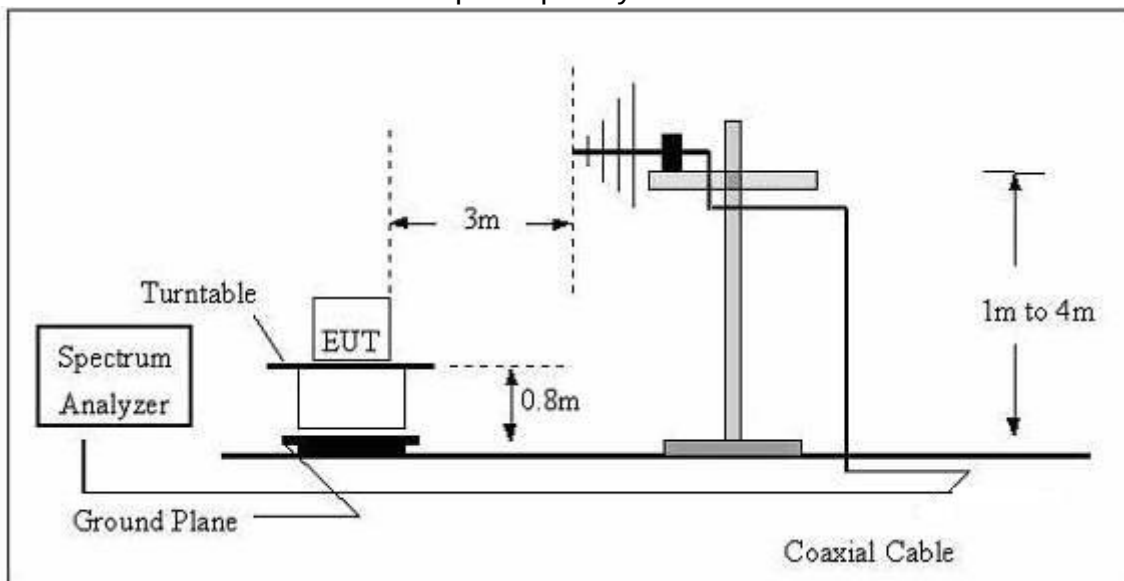

(C) Radiated Emission Test-Up Frequency Above 1GHz

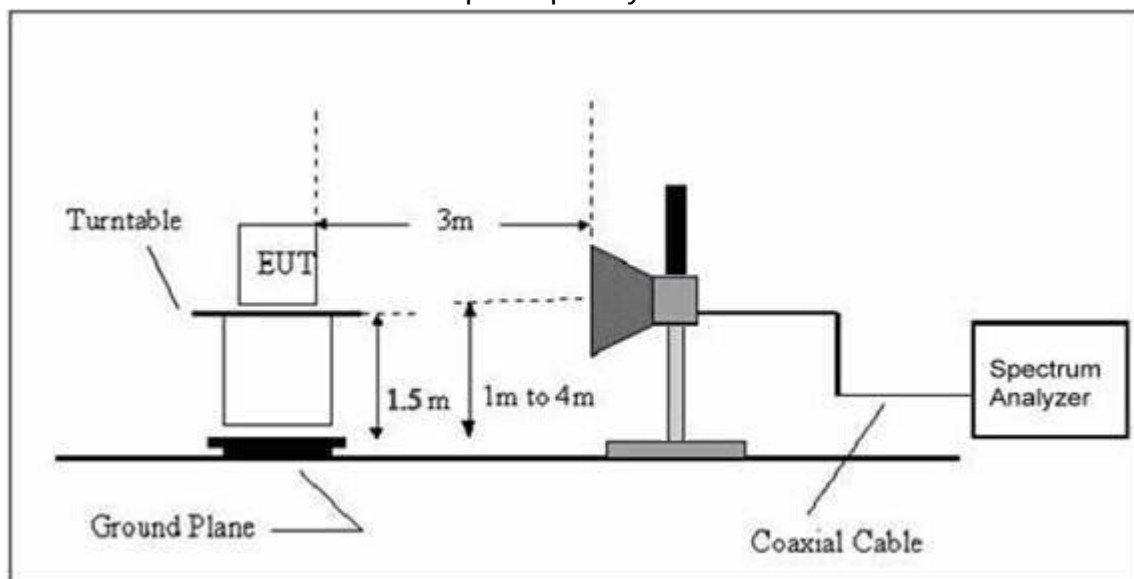

4.2.5. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

We pretest all adapter's emission, only the adapter 1's data was worst and the data was recording in the report.

The data only show the worst mode.



Radiated Spurious Emission (Below 30MHz)

EUT :	11ac Dual Band concurrent Wireless Router	Model Name :	BR-6208AC V2
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 5V from adapter		
Test Mode :	TX		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Radiated Spurious Emission (Between 30MHz – 1GHz)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from adapter		
Test Mode : (Worst)	Link Mode		

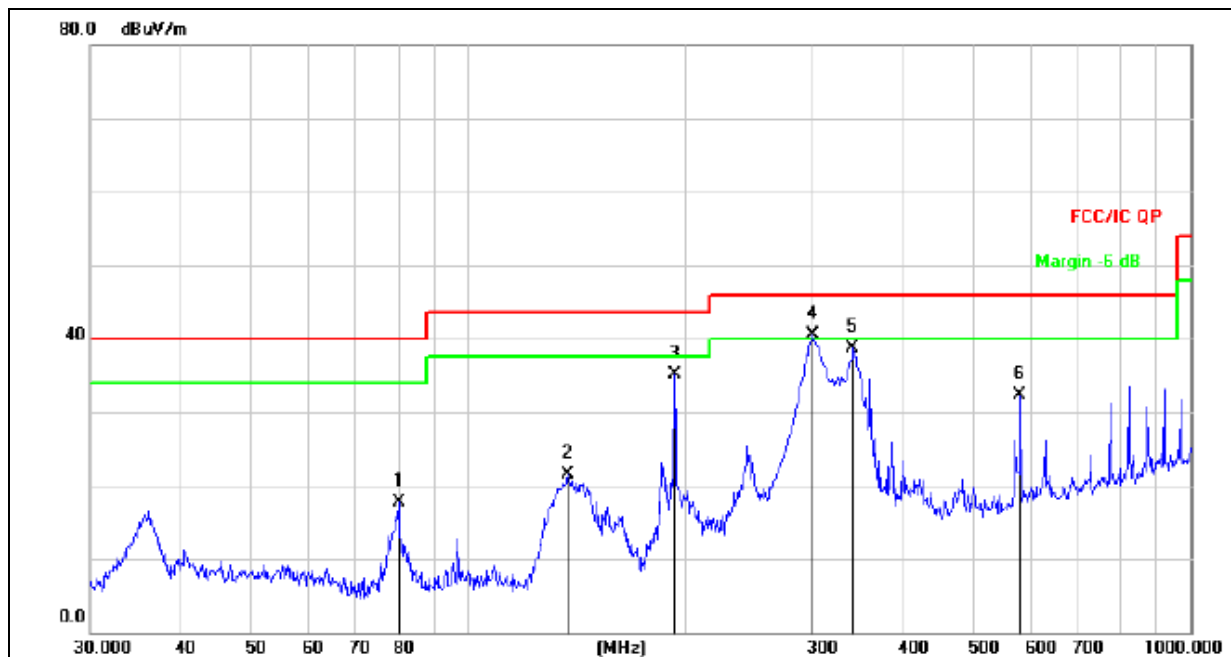


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		80.0806	38.21	-20.60	17.61	40.00	-22.39	QP
2		137.4202	41.33	-19.83	21.50	43.50	-22.00	QP
3		193.0945	51.42	-16.27	35.15	43.50	-8.35	QP
4	*	300.3672	52.61	-12.09	40.52	46.00	-5.48	QP
5		340.7817	49.51	-10.72	38.79	46.00	-7.21	QP
6		580.7026	37.41	-5.18	32.23	46.00	-13.77	QP



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from adapter		
Test Mode : (Worst)	Link Mode		

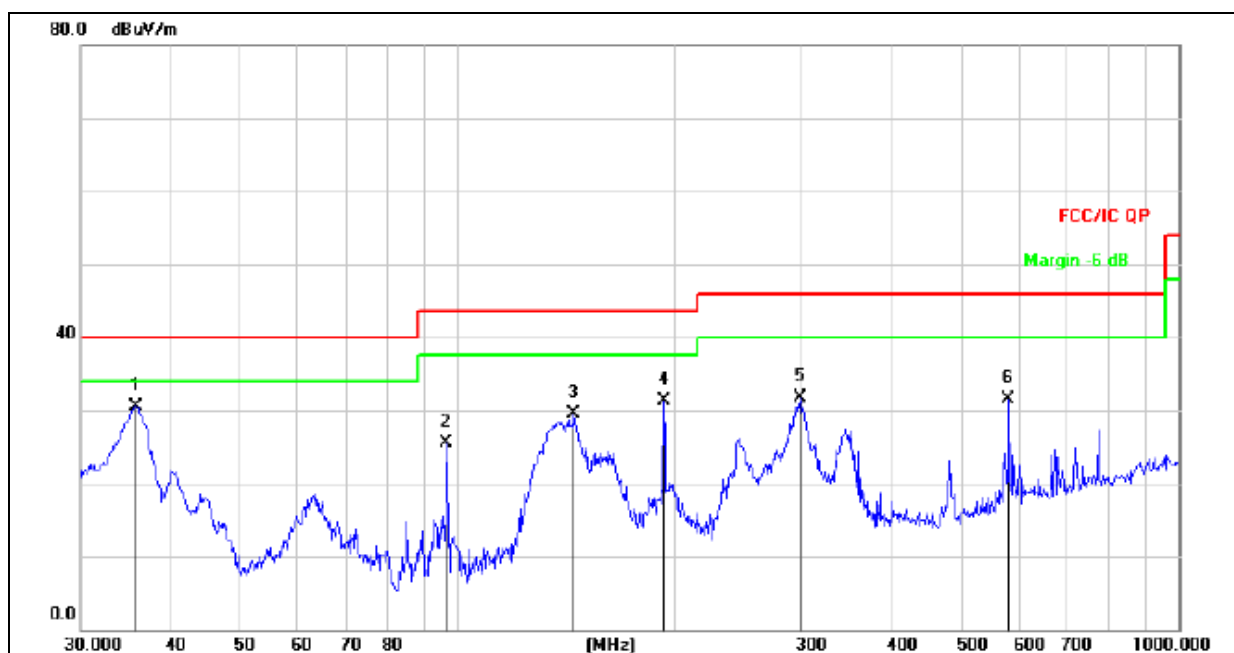

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	35.7490	47.79	-17.19	30.60	40.00	-9.40	QP
2		96.4362	42.60	-17.06	25.54	43.50	-17.96	QP
3		144.8418	49.48	-19.89	29.59	43.50	-13.91	QP
4		193.0945	47.61	-16.27	31.34	43.50	-12.16	QP
5		298.2681	43.91	-12.14	31.77	46.00	-14.23	QP
6		580.7026	36.63	-5.18	31.45	46.00	-14.55	QP



Radiated Spurious Emission (1GHz to 5th harmonics)

802.11a band 1

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 5180MHz	10360.00	57.82	PK	H	33.36	6.20	29.10	59.76	74.00	Pass
	10360.00	47.79	Ave	H	33.36	6.20	29.10	49.73	54.00	Pass
	15540.00	59.47	PK	H	34.40	6.55	26.50	58.12	74.00	Pass
	15540.00	48.76	Ave	H	34.40	6.55	26.50	47.41	54.00	Pass
	10360.00	57.67	PK	V	33.36	6.20	29.10	59.61	74.00	Pass
	10360.00	48.61	Ave	V	33.45	6.20	29.10	50.46	54.00	Pass
	15540.00	58.89	PK	V	34.40	6.55	26.50	57.54	74.00	Pass
	15540.00	48.97	Ave	V	34.40	6.55	26.50	47.62	54.00	Pass
Middle Channel 5200MHz	10400.00	56.52	PK	H	33.65	6.45	29.36	58.68	74.00	Pass
	10400.00	47.53	Ave	H	33.65	6.45	29.36	49.69	54.00	Pass
	15600.00	59.03	PK	H	34.72	6.84	26.68	57.83	74.00	Pass
	15600.00	47.54	Ave	H	34.72	6.84	26.68	46.34	54.00	Pass
	10400.00	57.32	PK	V	33.65	6.45	29.36	59.48	74.00	Pass
	10400.00	48.51	Ave	V	33.65	6.45	29.36	50.67	54.00	Pass
	15600.00	58.78	PK	V	34.72	6.84	26.68	57.58	74.00	Pass
	15600.00	47.83	Ave	V	34.72	6.84	26.38	46.33	54.00	Pass
Upper Channel 5240MHz	10480.00	56.7	PK	H	33.89	6.82	30.55	60.18	74.00	Pass
	10480.00	46.35	Ave	H	33.89	6.82	30.55	49.83	54.00	Pass
	15720.00	58.95	PK	H	35.12	6.95	27.85	58.63	74.00	Pass
	15720.00	47.84	Ave	H	35.12	6.95	27.85	47.52	54.00	Pass
	10480.00	57.71	PK	V	33.89	6.82	30.55	61.19	74.00	Pass
	10480.00	47.16	Ave	V	33.89	6.82	30.55	50.64	54.00	Pass
	15720.00	59.06	PK	V	35.12	6.95	27.85	58.74	74.00	Pass
	15720.00	47.99	Ave	V	35.12	6.95	27.85	47.67	54.00	Pass

Remark:

Emission Level = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



802.11a band 4

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 5745MHz	11490.00	56.84	PK	H	34.25	6.48	29.46	58.53	74.00	Pass
	11490.00	47.81	Ave	H	33.25	6.48	29.46	50.5	54.00	Pass
	17235.00	58.52	PK	H	34.83	6.96	26.88	57.53	74.00	Pass
	17235.00	47.75	Ave	H	34.83	6.96	26.88	46.76	54.00	Pass
	11490.00	56.5	PK	V	34.25	6.48	29.46	58.19	74.00	Pass
	11490.00	47.64	Ave	V	33.25	6.48	29.46	50.33	54.00	Pass
	17235.00	58.76	PK	V	34.83	6.96	26.88	57.77	74.00	Pass
	17235.00	47.95	Ave	V	34.83	6.96	26.88	46.96	54.00	Pass
Middle Channel 5785MHz	11570.00	57.51	PK	H	33.95	6.89	29.36	59.81	74.00	Pass
	11570.00	48.05	Ave	H	33.95	6.89	29.36	50.35	54.00	Pass
	17355.00	58.12	PK	H	35.25	7.10	27.22	57.19	74.00	Pass
	17355.00	48.52	Ave	H	35.25	7.10	27.22	47.59	54.00	Pass
	11570.00	57.44	PK	V	33.95	6.89	29.36	59.74	74.00	Pass
	11570.00	47.83	Ave	V	33.95	6.89	29.36	50.13	54.00	Pass
	17355.00	59.01	PK	V	35.25	7.10	27.22	58.08	74.00	Pass
	17355.00	47.57	Ave	V	35.25	7.10	27.22	46.64	54.00	Pass
Upper Channel 5825MHz	11650.00	57.12	PK	H	34.35	7.15	30.15	60.07	57.12	Pass
	11650.00	46.04	Ave	H	34.35	7.15	30.15	48.99	46.04	Pass
	17475.00	59.77	PK	H	35.75	7.45	28.54	60.01	59.77	Pass
	17475.00	48.12	Ave	H	35.75	7.45	28.54	48.36	48.12	Pass
	11650.00	58.43	PK	V	34.35	7.15	30.15	61.38	58.43	Pass
	11650.00	46.91	Ave	V	34.35	7.15	30.15	49.86	46.91	Pass
	17475.00	59.21	PK	V	35.75	7.45	28.54	59.45	59.21	Pass
	17475.00	48.24	Ave	V	35.75	7.45	28.54	48.48	48.24	Pass

Remark:

Emission Level = Receiver Reading + Antenna Factor + Cable Loss – Pre-amplifier.

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



802.11n20 band 1

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 5180MHz	10360.00	57.81	PK	H	33.36	6.20	29.10	59.75	74.00	Pass
	10360.00	47.78	Ave	H	33.36	6.20	29.10	49.72	54.00	Pass
	15540.00	59.46	PK	H	34.40	6.55	26.50	58.11	74.00	Pass
	15540.00	48.75	Ave	H	34.40	6.55	26.50	47.40	54.00	Pass
	10360.00	57.65	PK	V	33.36	6.20	29.10	59.59	74.00	Pass
	10360.00	48.05	Ave	V	33.45	6.20	29.10	49.90	54.00	Pass
	15540.00	58.87	PK	V	34.40	6.55	26.50	57.52	74.00	Pass
	15540.00	48.96	Ave	V	34.40	6.55	26.50	47.61	54.00	Pass
Middle Channel 5200MHz	10400.00	56.50	PK	H	33.65	6.45	29.36	58.66	74.00	Pass
	10400.00	47.52	Ave	H	33.65	6.45	29.36	49.68	54.00	Pass
	15600.00	59.01	PK	H	34.72	6.84	26.68	57.81	74.00	Pass
	15600.00	47.53	Ave	H	34.72	6.84	26.68	46.33	54.00	Pass
	10400.00	57.31	PK	V	33.65	6.45	29.36	59.47	74.00	Pass
	10400.00	47.76	Ave	V	33.65	6.45	29.36	49.92	54.00	Pass
	15600.00	58.77	PK	V	34.72	6.84	26.68	57.57	74.00	Pass
	15600.00	47.82	Ave	V	34.72	6.84	26.38	46.32	54.00	Pass
Upper Channel 5240MHz	10480.00	56.69	PK	H	33.89	6.82	30.55	60.17	74.00	Pass
	10480.00	46.94	Ave	H	33.89	6.82	30.55	50.42	54.00	Pass
	15720.00	59.00	PK	H	35.12	6.95	27.85	58.68	74.00	Pass
	15720.00	47.83	Ave	H	35.12	6.95	27.85	47.51	54.00	Pass
	10480.00	57.69	PK	V	33.89	6.82	30.55	61.17	74.00	Pass
	10480.00	45.85	Ave	V	33.89	6.82	30.55	49.33	54.00	Pass
	15720.00	59.05	PK	V	35.12	6.95	27.85	58.73	74.00	Pass
	15720.00	47.98	Ave	V	35.12	6.95	27.85	47.66	54.00	Pass

Remark:

Emission Level = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



802.11n20 band 4

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 5745MHz	11490.00	56.97	PK	H	34.26	6.45	29.23	58.39	74.00	Pass
	11490.00	47.47	Ave	H	33.26	6.45	29.23	49.89	54.00	Pass
	17235.00	58.68	PK	H	34.83	6.96	26.88	57.69	74.00	Pass
	17235.00	47.88	Ave	H	34.83	6.96	26.88	46.89	54.00	Pass
	11490.00	56.65	PK	V	34.25	6.48	29.46	58.34	74.00	Pass
	11490.00	46.35	Ave	V	33.25	6.48	29.46	49.04	54.00	Pass
	17235.00	58.92	PK	V	34.83	6.96	26.88	57.93	74.00	Pass
	17235.00	48.07	Ave	V	34.83	6.96	26.88	47.08	54.00	Pass
Middle Channel 5785MHz	11570.00	57.67	PK	H	33.95	6.89	29.36	59.97	74.00	Pass
	11570.00	46.91	Ave	H	33.95	6.89	29.36	49.21	54.00	Pass
	17355.00	58.28	PK	H	35.25	7.10	27.22	57.35	74.00	Pass
	17355.00	48.65	Ave	H	35.25	7.10	27.22	47.72	54.00	Pass
	11570.00	57.6	PK	V	33.95	6.89	29.36	59.9	74.00	Pass
	11570.00	47.46	Ave	V	33.95	6.89	29.36	49.76	54.00	Pass
	17355.00	59.17	PK	V	35.25	7.10	27.22	58.24	74.00	Pass
	17355.00	47.7	Ave	V	35.25	7.10	27.22	46.77	54.00	Pass
Upper Channel 5825MHz	11650.00	58.26	PK	H	34.35	7.15	30.15	61.21	57.12	Pass
	11650.00	46.84	Ave	H	34.35	7.15	30.15	49.79	46.04	Pass
	17475.00	59.93	PK	H	35.75	7.45	28.54	60.17	59.77	Pass
	17475.00	48.12	Ave	H	35.75	7.45	28.54	48.36	48.12	Pass
	11650.00	58.56	PK	V	34.35	7.15	30.15	61.51	58.43	Pass
	11650.00	47.02	Ave	V	34.35	7.15	30.15	49.97	46.91	Pass
	17475.00	59.37	PK	V	35.75	7.45	28.54	59.61	59.21	Pass
	17475.00	48.37	Ave	V	35.75	7.45	28.54	48.61	48.24	Pass

Remark:

Emission Level = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



18G~40GHz

802.11a band 1

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 5180MHz	20590.00	58.81	PK	H	36.36	10.20	27.10	59.75	74.00	Pass
	20590.00	48.78	Ave	H	36.36	10.20	27.10	49.72	54.00	Pass
	25580.00	59.46	PK	H	36.40	10.55	27.50	61.11	74.00	Pass
	25590.00	48.56	Ave	H	36.40	10.55	27.50	50.21	54.00	Pass
	20590.00	57.45	PK	V	36.63	10.20	27.10	58.12	74.00	Pass
	20590.00	48.35	Ave	V	36.63	10.20	27.10	49.02	54.00	Pass
	25580.00	58.43	PK	V	36.40	10.55	27.50	60.08	74.00	Pass
	25580.00	47.96	Ave	V	36.40	10.55	27.50	49.61	54.00	Pass
Middle Channel 5200MHz	20450.00	55.50	PK	H	36.38	10.20	27.10	56.42	74.00	Pass
	20450.00	46.52	Ave	H	36.38	10.20	27.10	47.44	54.00	Pass
	25670.00	58.01	PK	H	36.45	10.55	27.50	59.61	74.00	Pass
	25670.00	46.53	Ave	H	36.45	10.55	27.50	48.13	54.00	Pass
	20450.00	57.31	PK	V	36.68	10.20	27.10	57.93	74.00	Pass
	20450.00	47.35	Ave	V	36.68	10.20	27.10	47.97	54.00	Pass
	25670.00	58.12	PK	V	36.50	10.55	27.50	59.67	74.00	Pass
	25670.00	47.76	Ave	V	36.50	10.55	27.50	49.31	54.00	Pass
Upper Channel 5240MHz	20480.00	56.64	PK	H	36.65	10.35	27.34	57.68	74.00	Pass
	20480.00	46.54	Ave	H	36.65	10.35	27.34	47.58	54.00	Pass
	25720.00	58.56	PK	H	36.74	10.78	27.95	60.55	74.00	Pass
	25720.00	47.75	Ave	H	36.74	10.78	27.95	49.74	54.00	Pass
	20480.00	57.25	PK	V	36.65	10.35	27.34	58.29	74.00	Pass
	20480.00	45.75	Ave	V	36.65	10.35	27.34	46.79	54.00	Pass
	25785.00	59.21	PK	V	36.74	10.78	27.95	61.2	74.00	Pass
	25785.00	47.68	Ave	V	36.74	10.78	27.95	49.67	54.00	Pass

Remark:

Emission Level = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



802.11a band 4

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 5745MHz	21456.00	56.85	PK	H	37.15	10.55	28.12	58.37	74.00	Pass
	21456.00	47.56	Ave	H	37.15	10.55	28.12	49.08	54.00	Pass
	27235.00	58.62	PK	H	37.44	10.84	28.43	60.45	74.00	Pass
	27235.00	47.48	Ave	H	37.44	10.84	28.43	49.31	54.00	Pass
	21456.00	56.45	PK	V	37.15	10.55	28.12	57.97	74.00	Pass
	21456.00	46.25	Ave	V	37.15	10.55	28.12	47.77	54.00	Pass
	27235.00	57.92	PK	V	37.44	10.84	28.43	59.75	74.00	Pass
	27235.00	47.62	Ave	V	37.44	10.84	28.43	49.45	54.00	Pass
Middle Channel 5785MHz	21548.00	57.27	PK	H	37.15	10.89	28.35	59.36	74.00	Pass
	21548.00	46.84	Ave	H	37.15	10.89	28.35	48.93	54.00	Pass
	27395.00	58.19	PK	H	37.44	10.95	28.54	60.24	74.00	Pass
	27395.00	48.52	Ave	H	37.44	10.95	28.54	50.57	54.00	Pass
	21548.00	57.53	PK	V	37.15	10.89	28.35	59.62	74.00	Pass
	21548.00	47.37	Ave	V	37.15	10.89	28.35	49.46	54.00	Pass
	27395.00	59.21	PK	V	37.44	10.95	28.54	61.26	74.00	Pass
	27395.00	47.18	Ave	V	37.44	10.95	28.54	49.23	54.00	Pass
Upper Channel 5825MHz	21750.00	57.86	PK	H	37.29	10.96	28.56	60.09	74.00	Pass
	21750.00	46.65	Ave	H	37.29	10.96	28.56	48.88	54.00	Pass
	27494.00	59.44	PK	H	37.65	11.15	28.75	61.69	74.00	Pass
	27494.00	47.55	Ave	H	37.65	11.15	28.75	49.8	54.00	Pass
	21750.00	58.39	PK	V	37.29	10.96	28.56	60.62	74.00	Pass
	21750.00	47.11	Ave	V	37.29	10.96	28.56	49.34	54.00	Pass
	27494.00	59.74	PK	V	37.65	11.15	28.75	61.99	74.00	Pass
	27494.00	47.56	Ave	V	37.65	11.15	28.75	49.81	54.00	Pass

Remark:

Emission Level = Receiver Reading + Antenna Factor + Cable Loss – Pre-amplifier.

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



802.11n20 band 1

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 5180MHz	20590.00	58.67	PK	H	36.36	10.20	27.10	59.61	74.00	Pass
	20590.00	48.45	Ave	H	36.36	10.20	27.10	49.39	54.00	Pass
	25580.00	59.61	PK	H	36.40	10.55	27.50	61.26	74.00	Pass
	25590.00	48.49	Ave	H	36.40	10.55	27.50	50.14	54.00	Pass
	20590.00	57.57	PK	V	36.63	10.20	27.10	58.24	74.00	Pass
	20590.00	48.85	Ave	V	36.63	10.20	27.10	49.52	54.00	Pass
	25580.00	58.45	PK	V	36.40	10.55	27.50	60.10	74.00	Pass
	25580.00	47.23	Ave	V	36.40	10.55	27.50	48.88	54.00	Pass
Middle Channel 5200MHz	20450.00	56.87	PK	H	36.38	10.20	27.10	57.79	74.00	Pass
	20450.00	45.63	Ave	H	36.38	10.20	27.10	46.55	54.00	Pass
	25670.00	58.22	PK	H	36.45	10.55	27.50	59.82	74.00	Pass
	25670.00	45.95	Ave	H	36.45	10.55	27.50	47.55	54.00	Pass
	20450.00	57.46	PK	V	36.68	10.20	27.10	58.08	74.00	Pass
	20450.00	47.75	Ave	V	36.68	10.20	27.10	48.37	54.00	Pass
	25670.00	58.69	PK	V	36.50	10.55	27.50	60.24	74.00	Pass
	25670.00	47.48	Ave	V	36.50	10.55	27.50	49.03	54.00	Pass
Upper Channel 5240MHz	20480.00	56.25	PK	H	36.65	10.35	27.34	57.29	74.00	Pass
	20480.00	46.37	Ave	H	36.65	10.35	27.34	47.41	54.00	Pass
	25720.00	58.71	PK	H	36.74	10.78	27.95	60.7	74.00	Pass
	25720.00	47.48	Ave	H	36.74	10.78	27.95	49.47	54.00	Pass
	20480.00	57.19	PK	V	36.65	10.35	27.34	58.23	74.00	Pass
	20480.00	45.47	Ave	V	36.65	10.35	27.34	46.51	54.00	Pass
	25785.00	59.38	PK	V	36.74	10.78	27.95	61.37	74.00	Pass
	25785.00	47.44	Ave	V	36.74	10.78	27.95	49.43	54.00	Pass

Remark:

Emission Level = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



802.11n20 band 4

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 5745MHz	21456.00	56.37	PK	H	37.15	10.55	28.12	57.89	74.00	Pass
	21456.00	47.78	Ave	H	37.15	10.55	28.12	49.3	54.00	Pass
	27235.00	57.62	PK	H	37.44	10.84	28.43	59.45	74.00	Pass
	27235.00	46.48	Ave	H	37.44	10.84	28.43	48.31	54.00	Pass
	21456.00	56.22	PK	V	37.15	10.55	28.12	57.74	74.00	Pass
	21456.00	46.47	Ave	V	37.15	10.55	28.12	47.99	54.00	Pass
	27235.00	57.78	PK	V	37.44	10.84	28.43	59.61	74.00	Pass
	27235.00	47.12	Ave	V	37.44	10.84	28.43	48.95	54.00	Pass
Middle Channel 5785MHz	21548.00	57.45	PK	H	37.15	10.89	28.35	59.54	74.00	Pass
	21548.00	46.39	Ave	H	37.15	10.89	28.35	48.48	54.00	Pass
	27395.00	58.48	PK	H	37.44	10.95	28.54	60.53	74.00	Pass
	27395.00	48.29	Ave	H	37.44	10.95	28.54	50.34	54.00	Pass
	21548.00	57.35	PK	V	37.15	10.89	28.35	59.44	74.00	Pass
	21548.00	47.46	Ave	V	37.15	10.89	28.35	49.55	54.00	Pass
	27395.00	59.57	PK	V	37.44	10.95	28.54	61.62	74.00	Pass
	27395.00	47.33	Ave	V	37.44	10.95	28.54	49.38	54.00	Pass
Upper Channel 5825MHz	21750.00	57.78	PK	H	37.29	10.96	28.56	60.01	74.00	Pass
	21750.00	46.21	Ave	H	37.29	10.96	28.56	48.44	54.00	Pass
	27494.00	59.44	PK	H	37.65	11.15	28.75	61.69	74.00	Pass
	27494.00	47.51	Ave	H	37.65	11.15	28.75	49.76	54.00	Pass
	21750.00	58.35	PK	V	37.29	10.96	28.56	60.58	74.00	Pass
	21750.00	47.22	Ave	V	37.29	10.96	28.56	49.45	54.00	Pass
	27494.00	59.38	PK	V	37.65	11.15	28.75	61.63	74.00	Pass
	27494.00	47.14	Ave	V	37.65	11.15	28.75	49.39	54.00	Pass

Remark:


Emission Level = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = Emission Level - Limit


Other harmonics emissions are lower than 20dB below the allowable limit.



802.11a band 1
5180MHz Horizontal

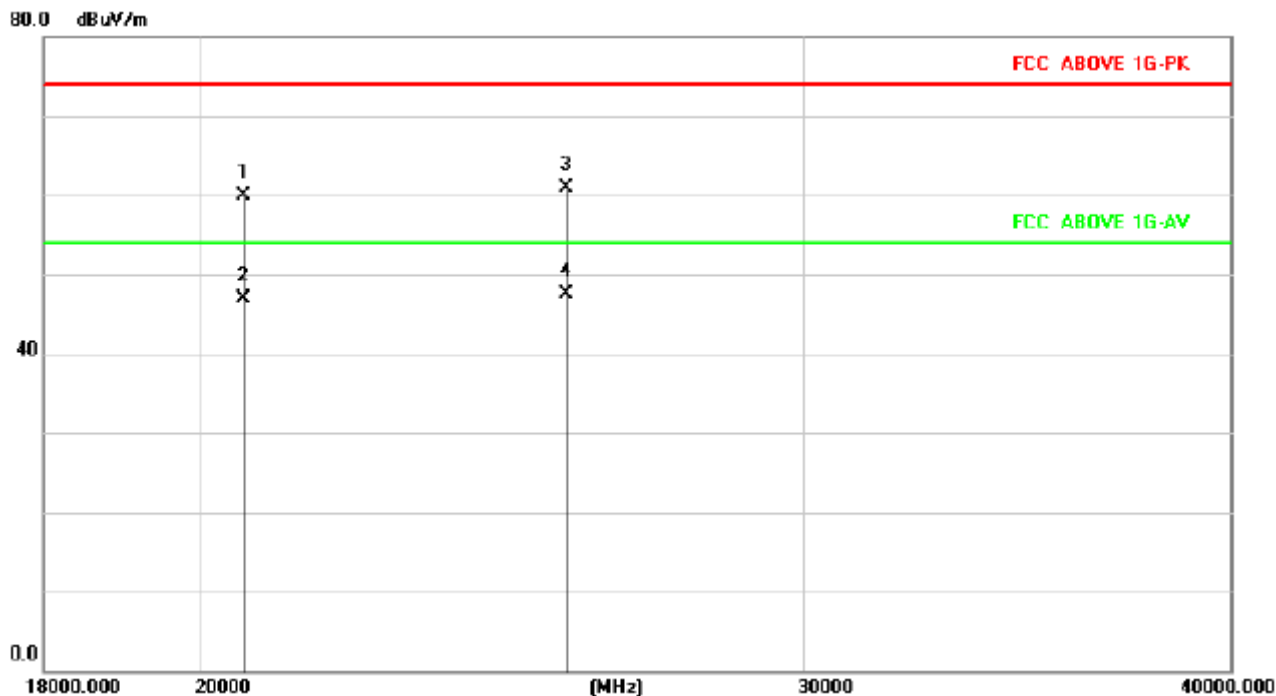

5180MHz Vertical

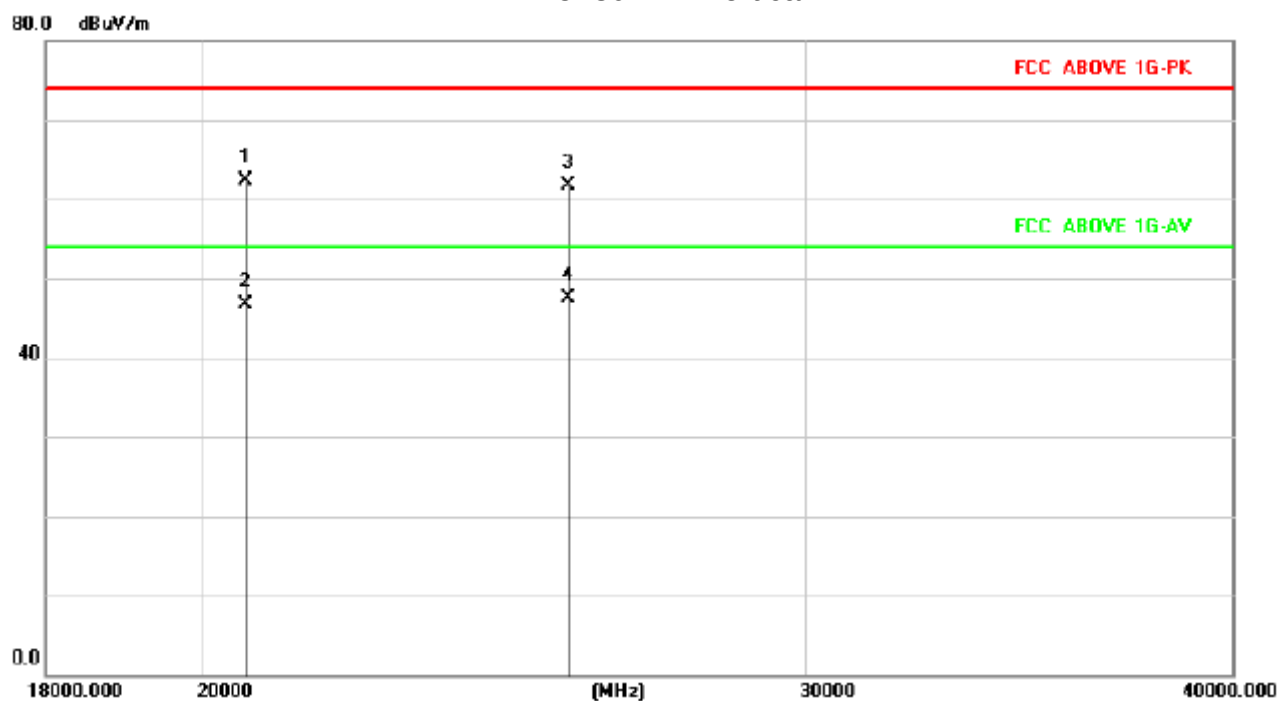




5200MHz Horizontal




5200MHz Vertical

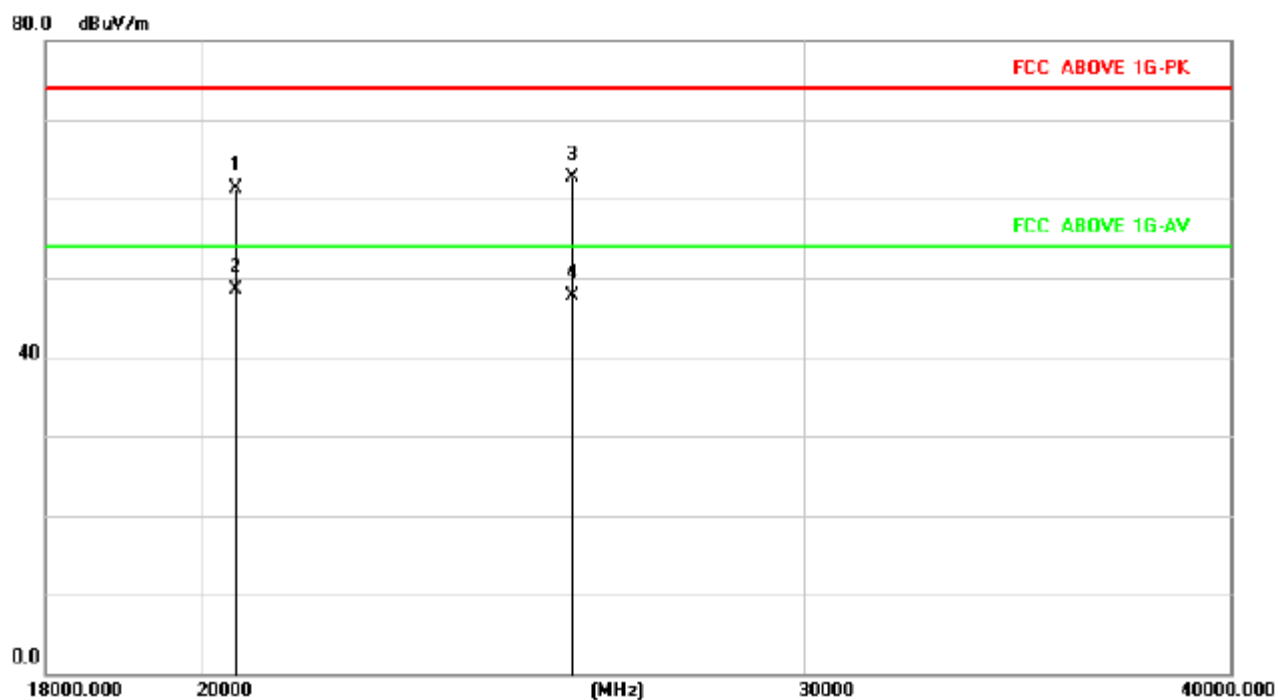




5240MHz Horizontal

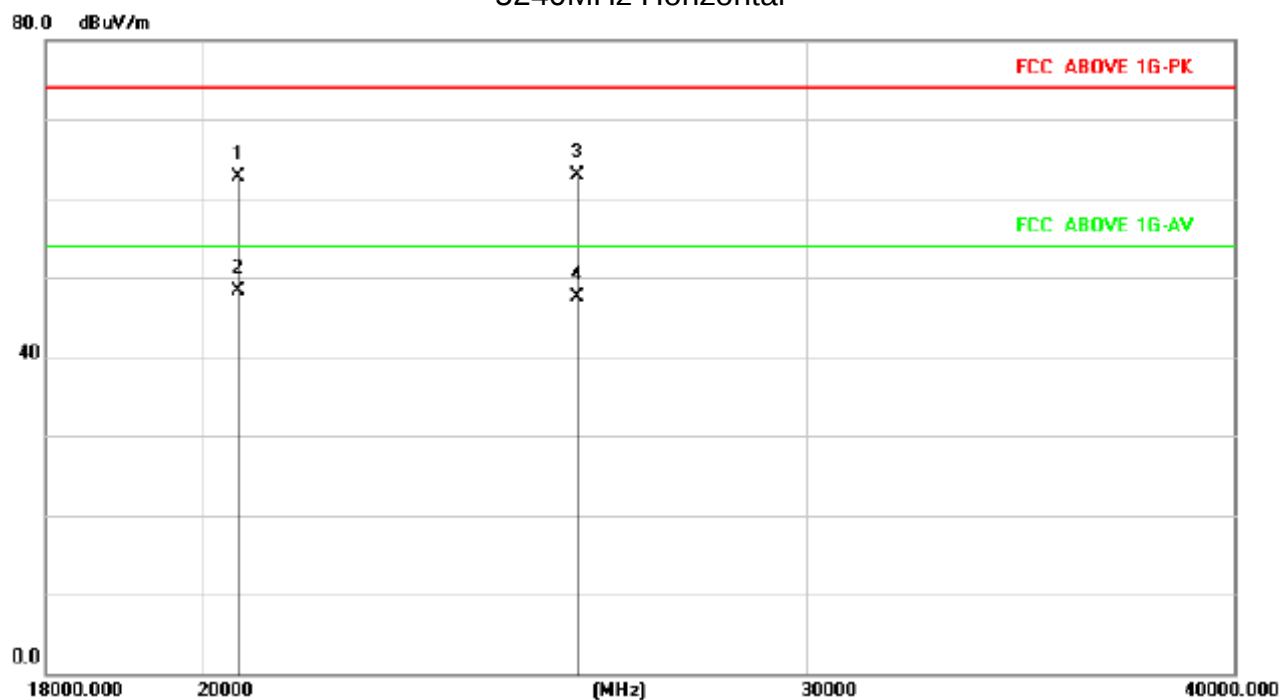

5240MHz Vertical

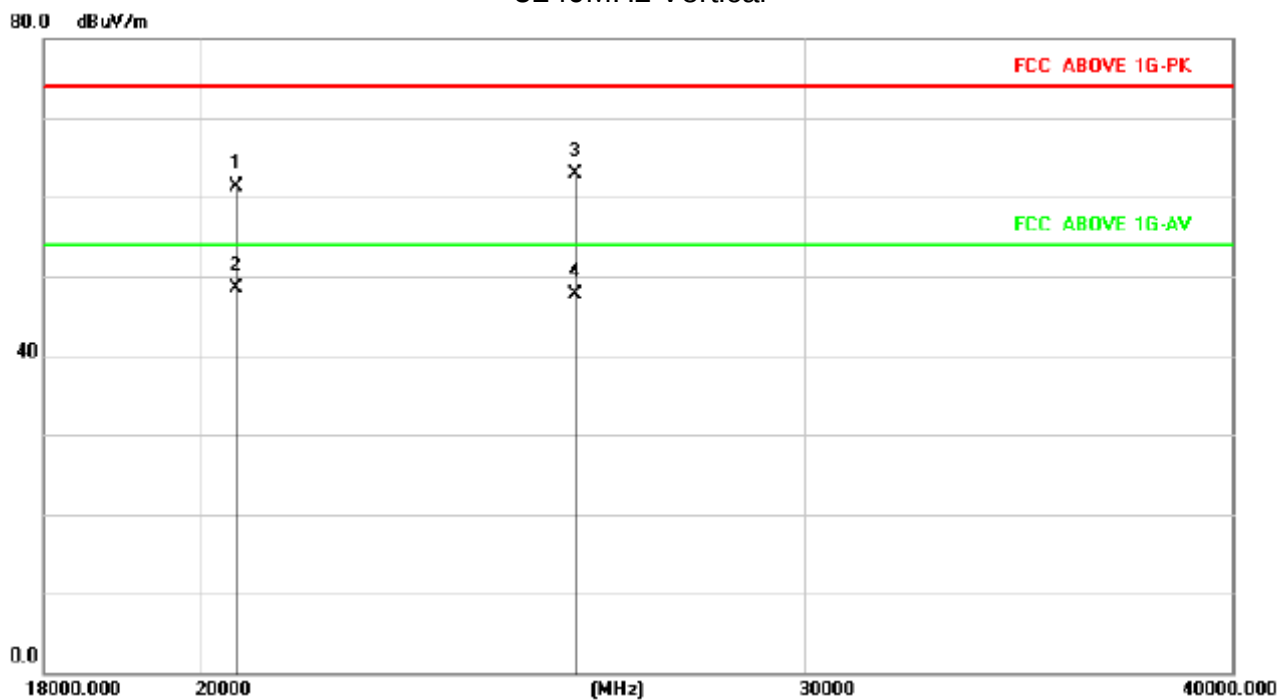

Note: "802.11a band 1" mode is the worst mode and the data recording in the report.



5. BAND EDGE COMPLIANCE TEST

5.1. Limits

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.2. Test setup

Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

Same as Clause 4.2.

5.3. Test Data

Please see data as below:

Note: we pretest horizontal and vertical, the worst was horizontal and show in the report.



Modulation	Test Frequency (MHz)	Max Level Frequency (MHz)	Max Level (dBμV/m)	Max Level (dBμV/m)	Limit[dBm]	Result
802.11a	5180	5148.63	52.46	-42.74	-27.00	Pass
	5240	5255.34	51.88	-43.32	-27.00	Pass
	5745	5723.67	51.64	-43.56	-27.00	Pass
	5825	5853.16	51.61	-43.59	-27.00	Pass
802.11n(HT20)	5180	5146.86	52.28	-42.92	-27.00	Pass
	5240	5253.19	52.16	-43.04	-27.00	Pass
	5745	5723.51	51.76	-43.44	-27.00	Pass
	5825	5853.43	52.09	-43.11	-27.00	Pass
802.11n(HT40)	5190	5147.69	51.87	-43.33	-27.00	Pass
	5230	5253.42	52.00	-43.20	-27.00	Pass
	5755	5723.11	51.54	-43.66	-27.00	Pass
	5795	5853.61	51.62	-43.58	-27.00	Pass

Remark: 1. According to KDB 789033 D02 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows: $EIRP[dBm] = E[dBμV/m] - 95.2$



6. 26DB AND 99% BANDWIDTH TEST

6.1. Measurement Procedure

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.

The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3




26dB bandwidth

	Frequency (MHz)	26dB Bandwidth (MHz) Ant 1	99% Bandwidth (MHz) Ant 1
802.11a	5180	18.796	16.483
	5200	18.965	16.487
	5240	18.662	16.450
802.11n (HT20)	5180	19.705	17.563
	5200	19.007	17.575
	5240	19.108	17.508
802.11n (HT40)	5190	38.779	35.982
	5230	38.468	35.905


	Frequency (MHz)	-6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.31	16.411	>0.5
	5785	16.36	16.426	>0.5
	5825	16.34	16.407	>0.5
802.11n (HT20)	5745	17.03	17.559	>0.5
	5785	17.24	17.561	>0.5
	5825	16.98	17.560	>0.5
802.11n (HT40)	5755	35.20	35.852	>0.5
	5795	35.53	35.901	>0.5



802.11a 5180MHz

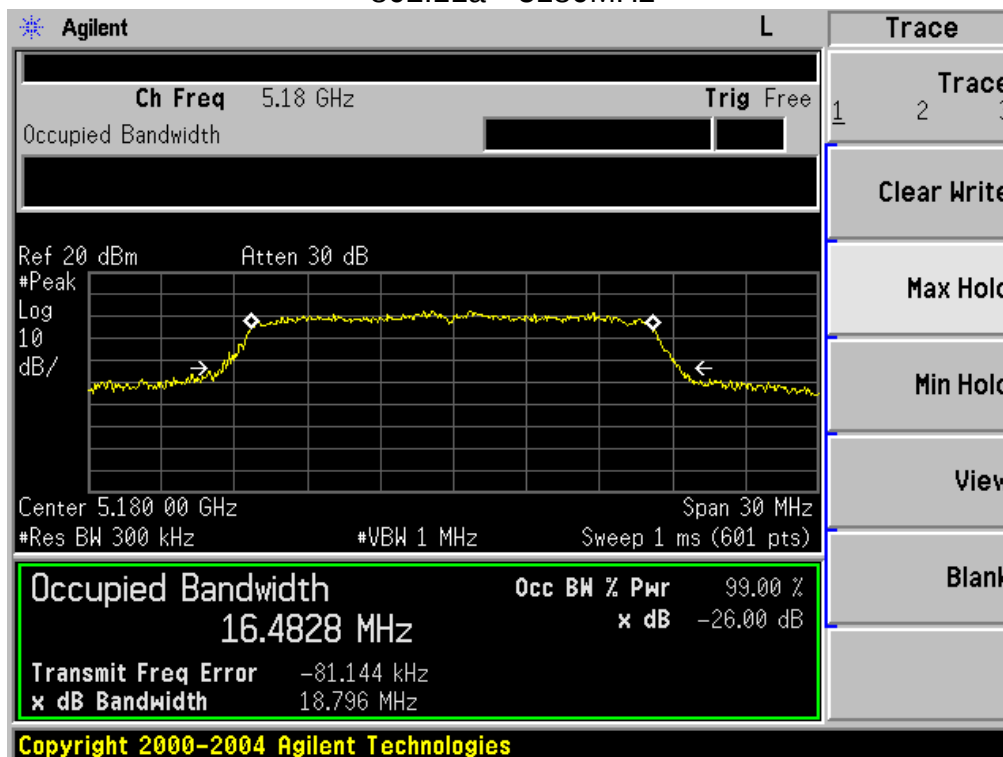


802.11a 5200MHz

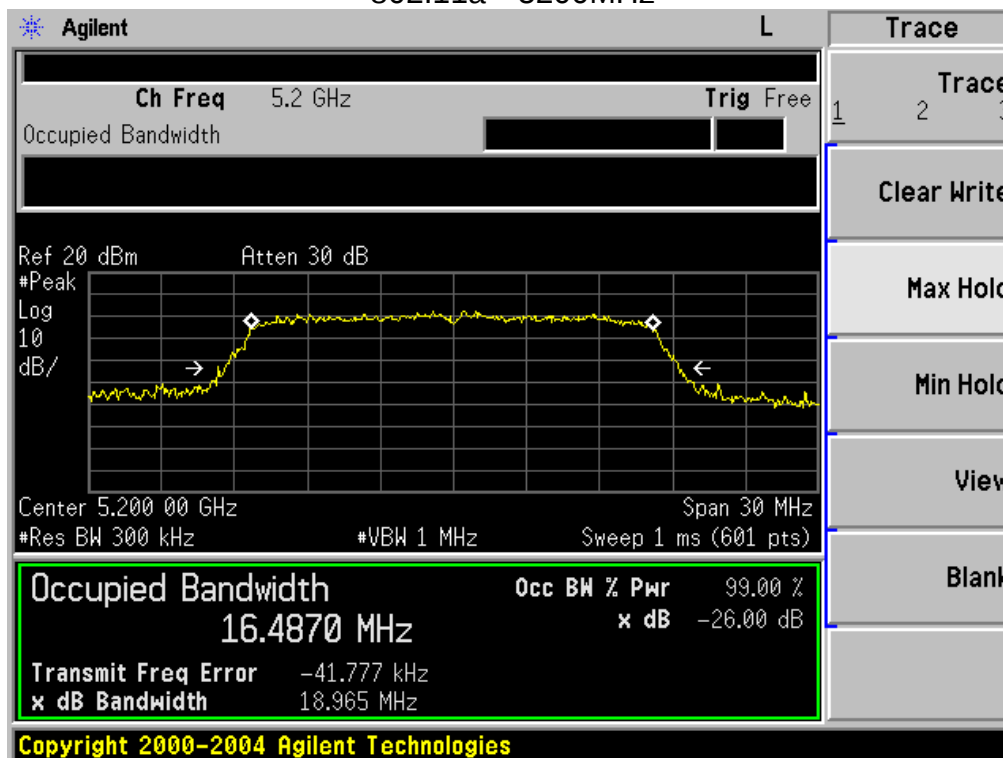




802.11a 5240MHz

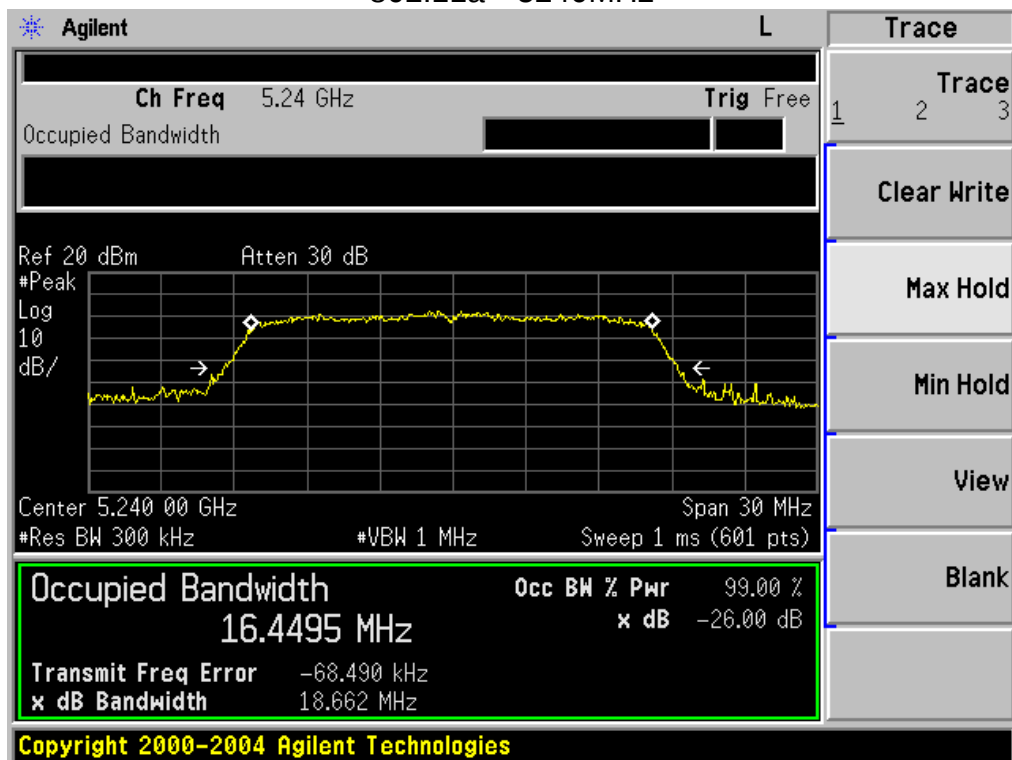


802.11n(HT20) 5180MHz

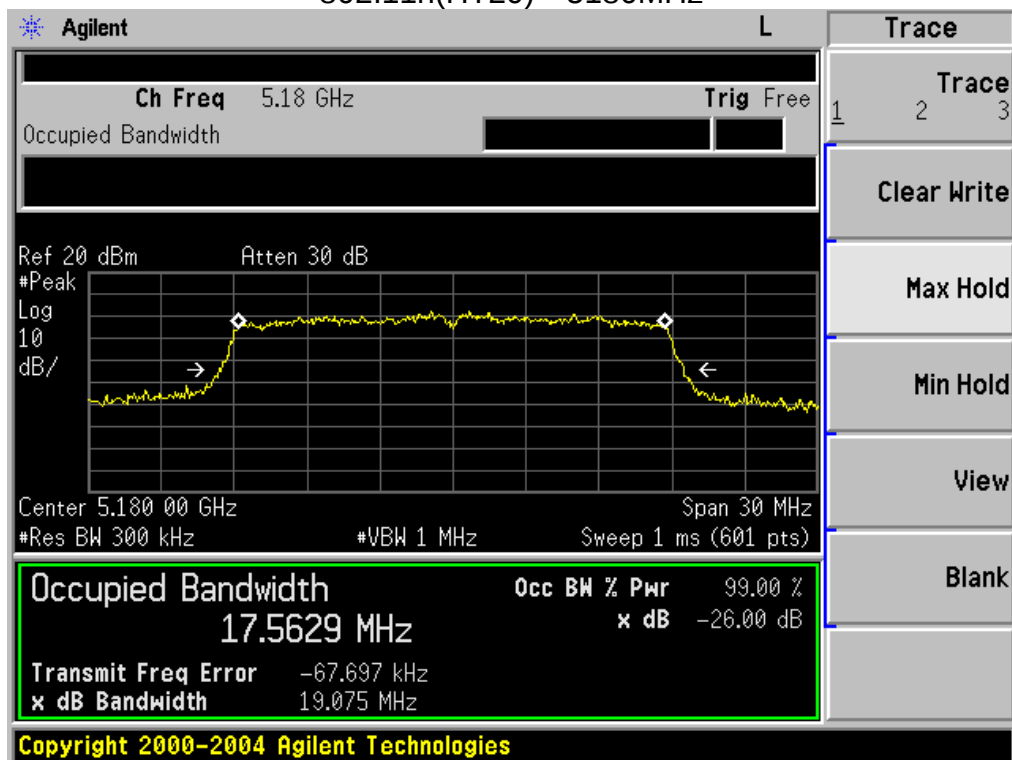




802.11n(HT20) 5200MHz

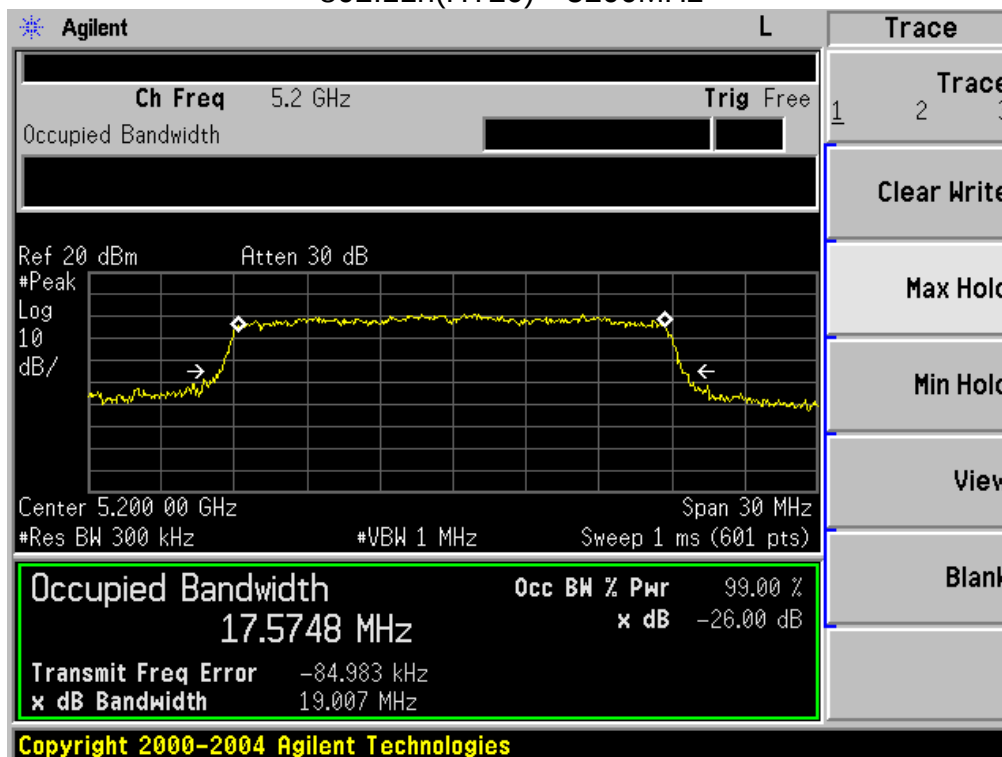


802.11n(HT20) 5240MHz

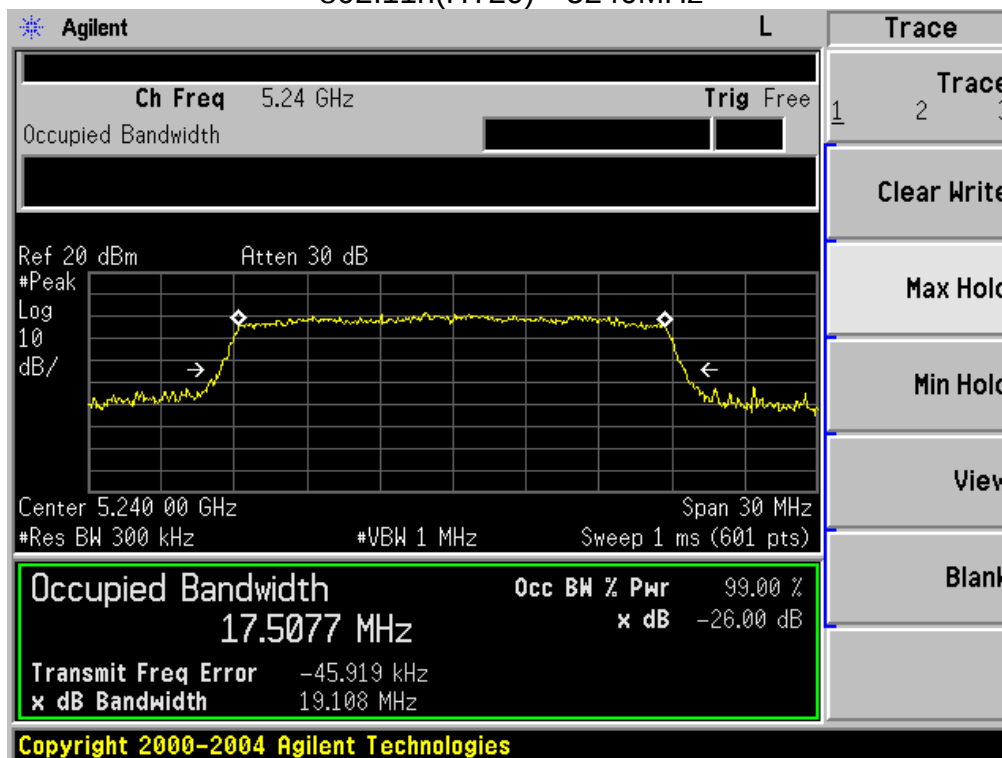




802.11n(HT40) 5190MHz

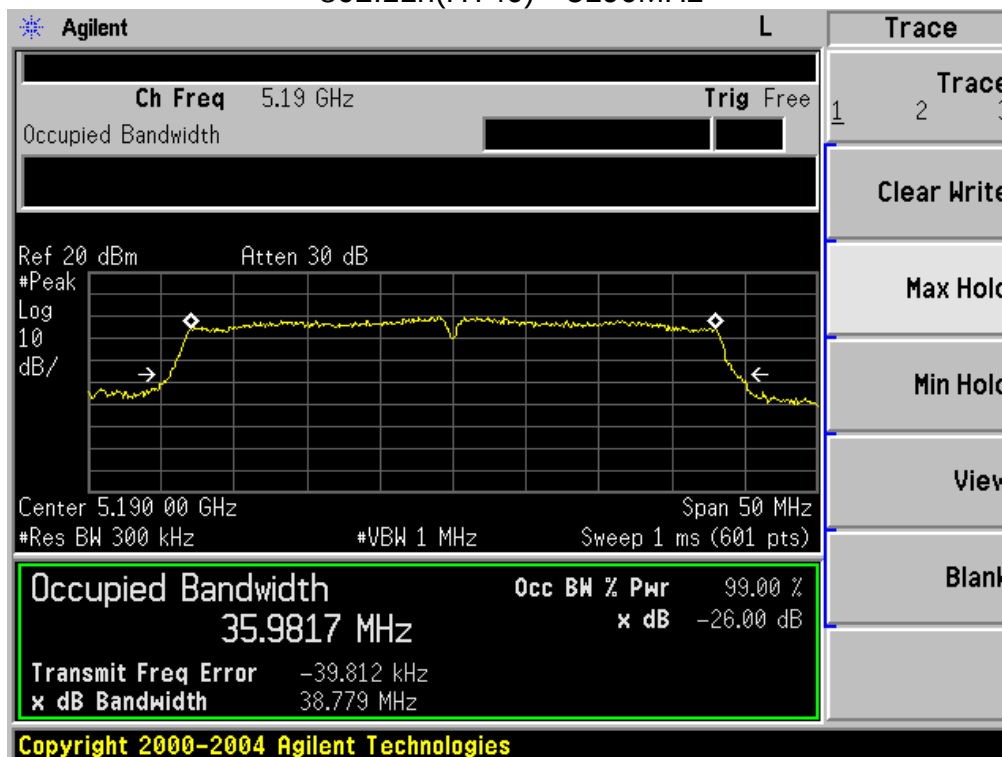


802.11n(HT40) 5230MHz

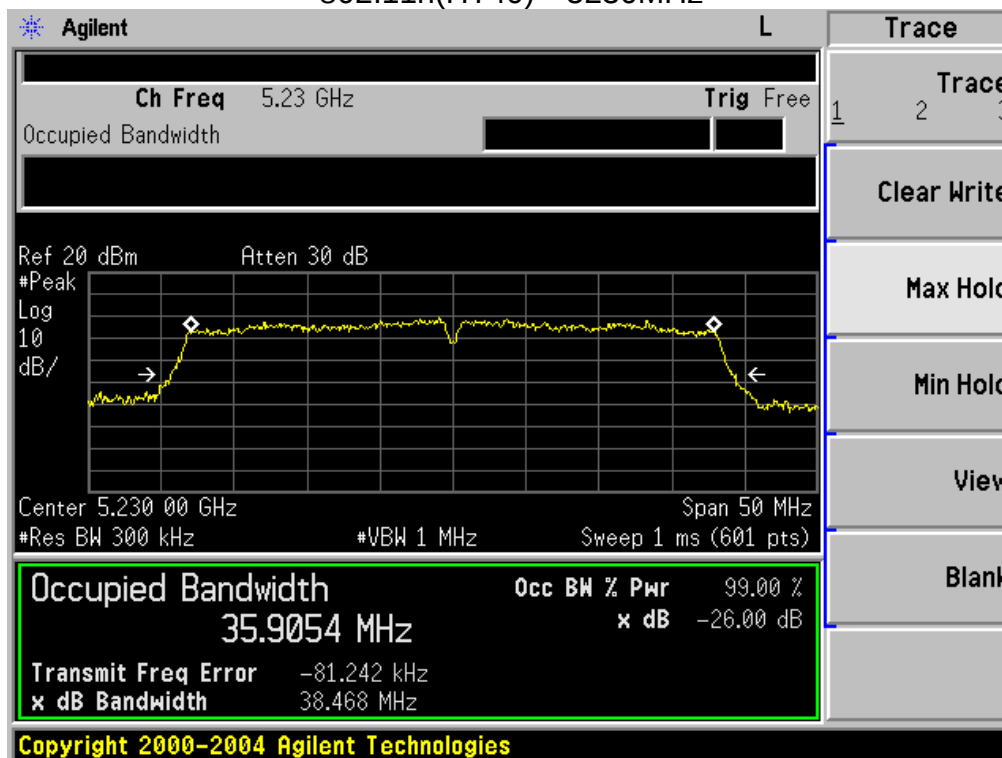




802.11a 5745MHz

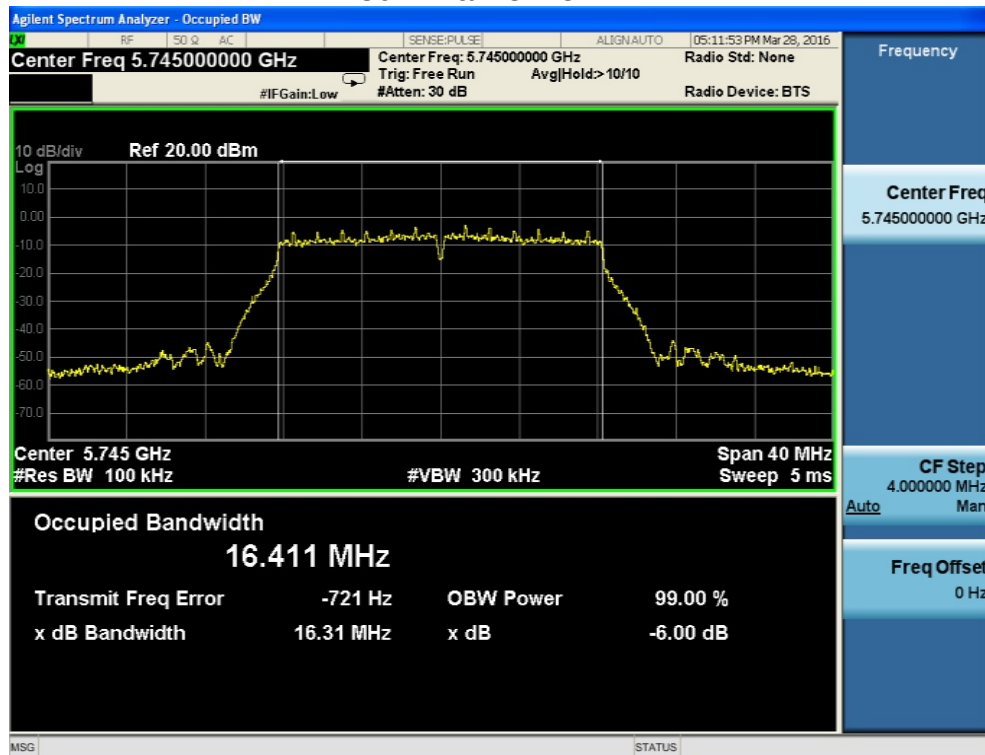


802.11a 5785MHz

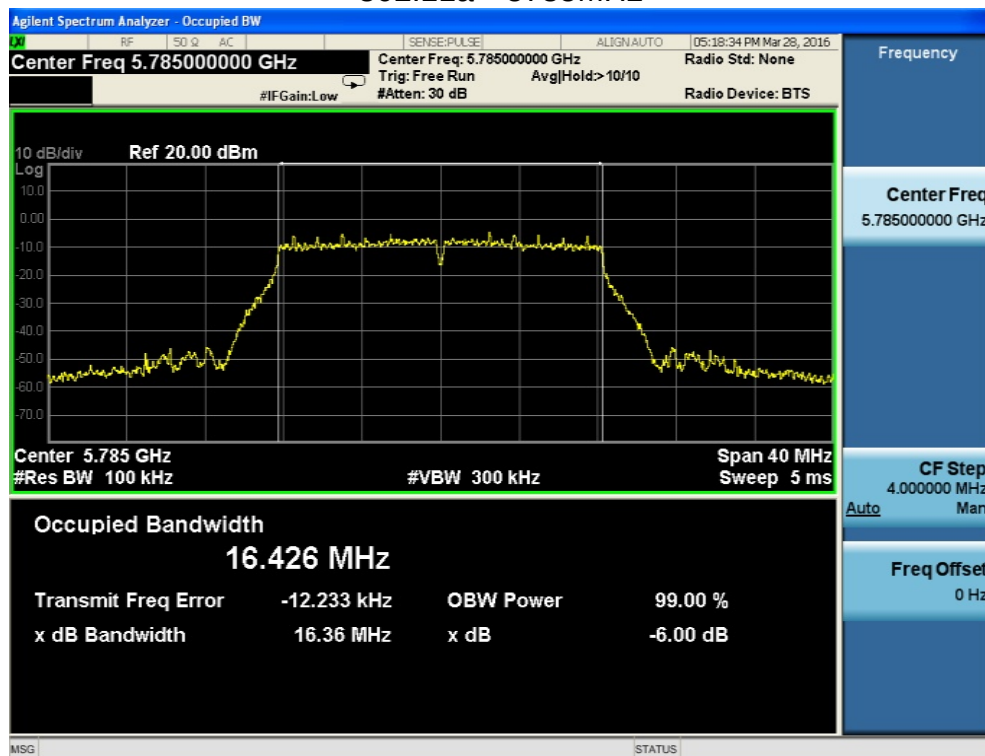




802.11a 5825MHz

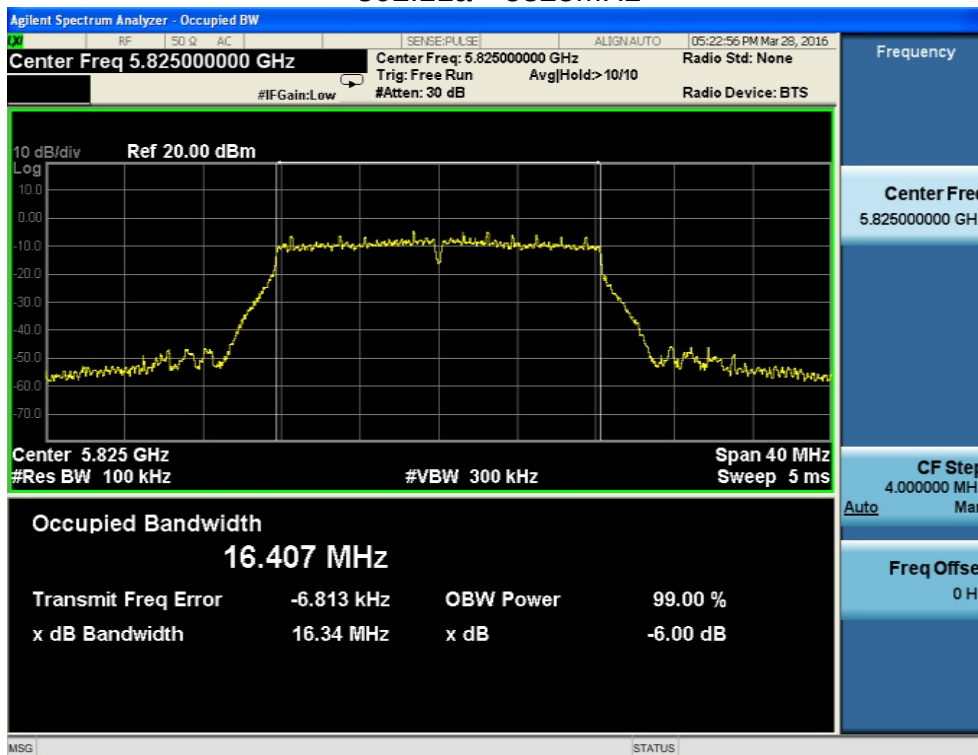


802.11n(HT20) 5745MHz

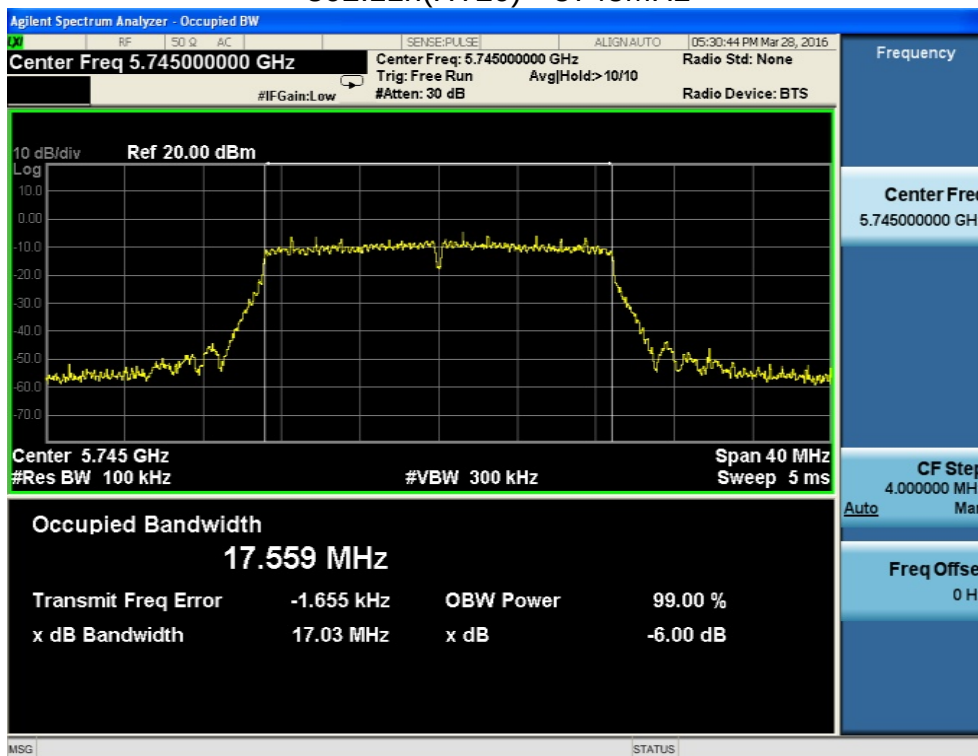




802.11n(HT20) 5785MHz

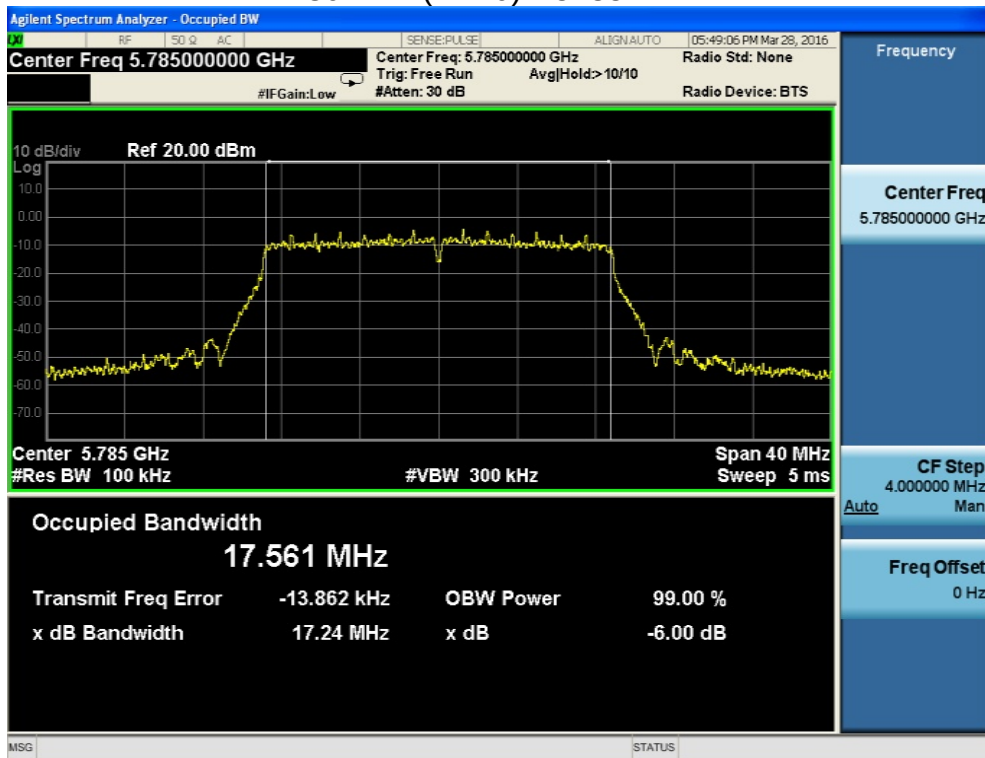


802.11n(HT20) 5825MHz

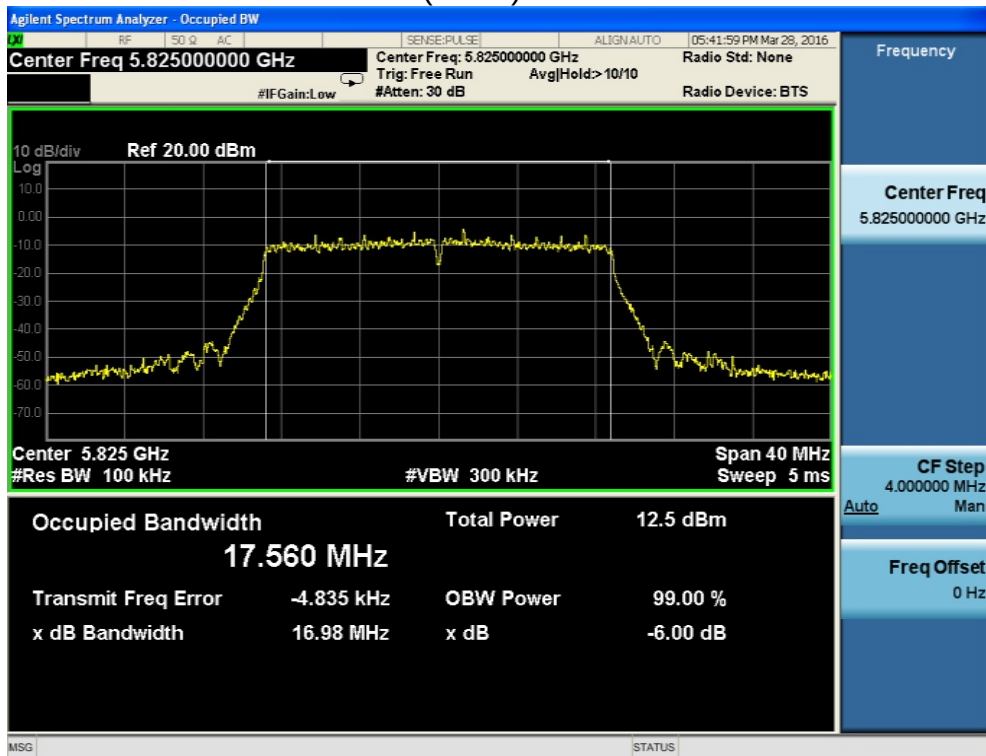




802.11n(HT40) 5755MHz

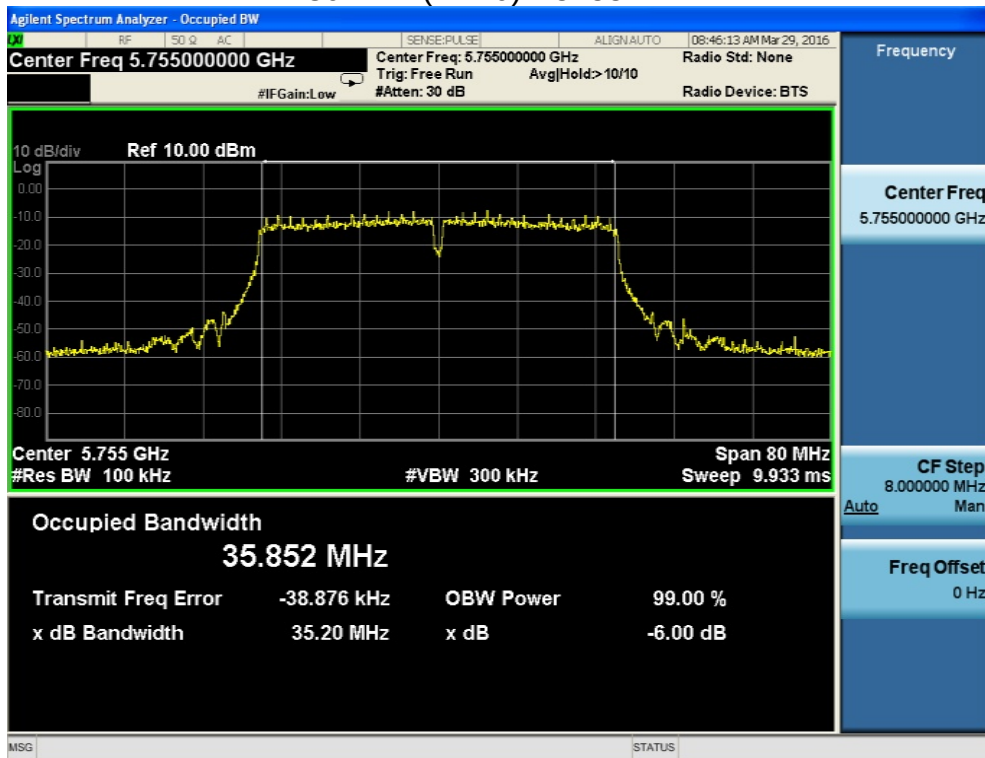

802.11n(HT40) 5795MHz

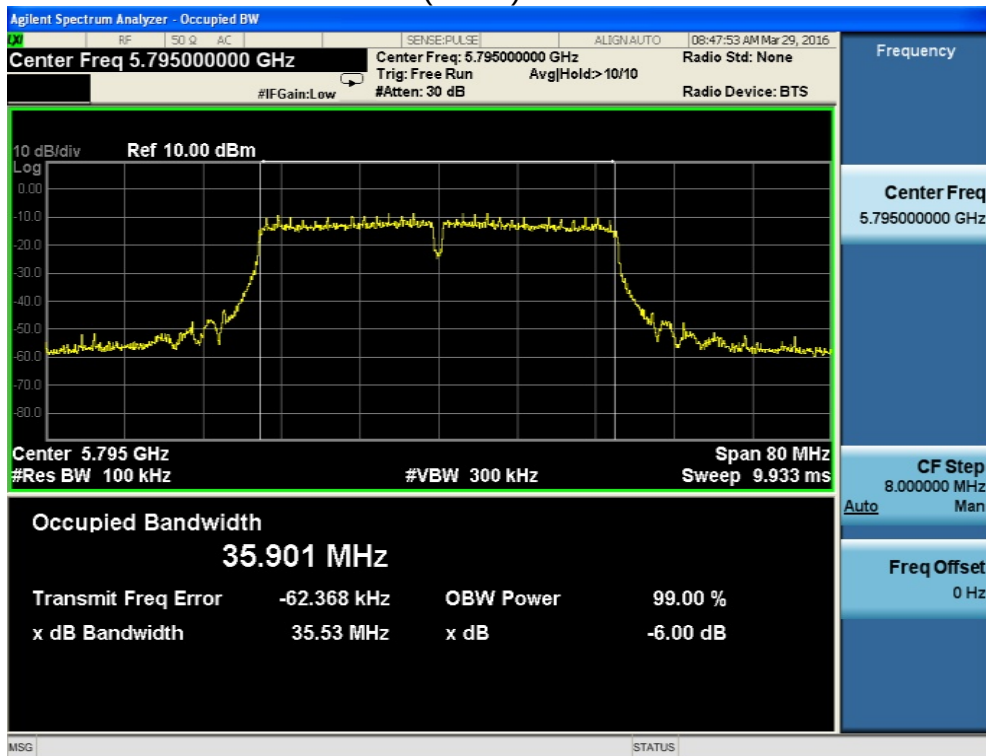



7. OUTPUT POWER TEST

7.1. Limits

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

7.2. Test setup

1. The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):
2. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
 - a. The Transmitter output (antenna port) was connected to the power meter.
 - b. Turn on the EUT and power meter and then record the power value.
 - c. Repeat above procedures on all channels needed to be tested.



7.3. Test result

	Frequency (MHz)	Average Output Power(dBm)	Total Power (mW)	FCC Limit (dBm)	Result
802.11a	5180	15.84	38.37	23.98	Pass
	5220	15.66	36.81	23.98	Pass
	5240	15.67	36.90	23.98	Pass
	5745	14.75	29.85	30.0	Pass
	5785	14.67	29.31	30.0	Pass
	5825	14.62	28.97	30.0	Pass
802.11n (HT20)	5180	13.57	22.75	23.98	Pass
	5220	13.27	21.23	23.98	Pass
	5240	13.42	21.98	23.98	Pass
	5745	13.08	20.32	30.0	Pass
	5785	13.11	20.46	30.0	Pass
	5825	13.06	20.23	30.0	Pass
802.11n (HT40)	5190	12.79	19.01	23.98	Pass
	5230	12.34	17.14	23.98	Pass
	5755	12.18	16.52	30.0	Pass
	5795	12.27	16.87	30.0	Pass



8. PEAK POWER SPECTRAL DENSITY TEST

8.1. Limits

In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

8.2. Test setup

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to
Spectrum.
4. For U-NII1, U-NII-2A, U-NII-2C Band:
Set RBW=1MHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
For U-NII-3 Band:
Set RBW=500 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
5. User the cursor on spectrum to peak search the highest level of trace
6. Record the max. reading and add $10 \log(1/\text{duty cycle})$.




8.3. Test data

Test data as below


	Frequency (MHz)	Reading Level (dBm)	Duty factor (dB)	Duty factor 10 log (1MHz/RBW)	PPSD (dBm)	FCC Limit (dBm)	Result
802.11a	5180	5.97	0.21	0.0	6.18	11.00	Pass
	5220	4.88	0.21	0.0	5.09	11.00	Pass
	5240	5.96	0.21	0.0	6.17	11.00	Pass
	5745	8.84	0.21	0.0	9.05	30.00	Pass
	5785	9.26	0.21	0.0	9.47	30.00	Pass
	5825	10.60	0.21	0.0	10.81	30.00	Pass
802.11n (HT20)	5180	4.47	0.44	0.0	4.91	11.00	Pass
	5220	3.52	0.44	0.0	3.96	11.00	Pass
	5240	3.91	0.44	0.0	4.35	11.00	Pass
	5745	8.54	0.44	0.0	8.98	30.00	Pass
	5785	8.37	0.44	0.0	8.81	30.00	Pass
	5825	8.12	0.44	0.0	8.56	30.00	Pass
802.11n (HT40)	5190	0.36	0.77	0.0	1.13	11.00	Pass
	5230	1.94	0.77	0.0	2.71	11.00	Pass
	5755	4.22	0.77	0.0	4.99	30.00	Pass
	5795	3.60	0.77	0.0	4.37	30.00	Pass



802.11a 5180MHz

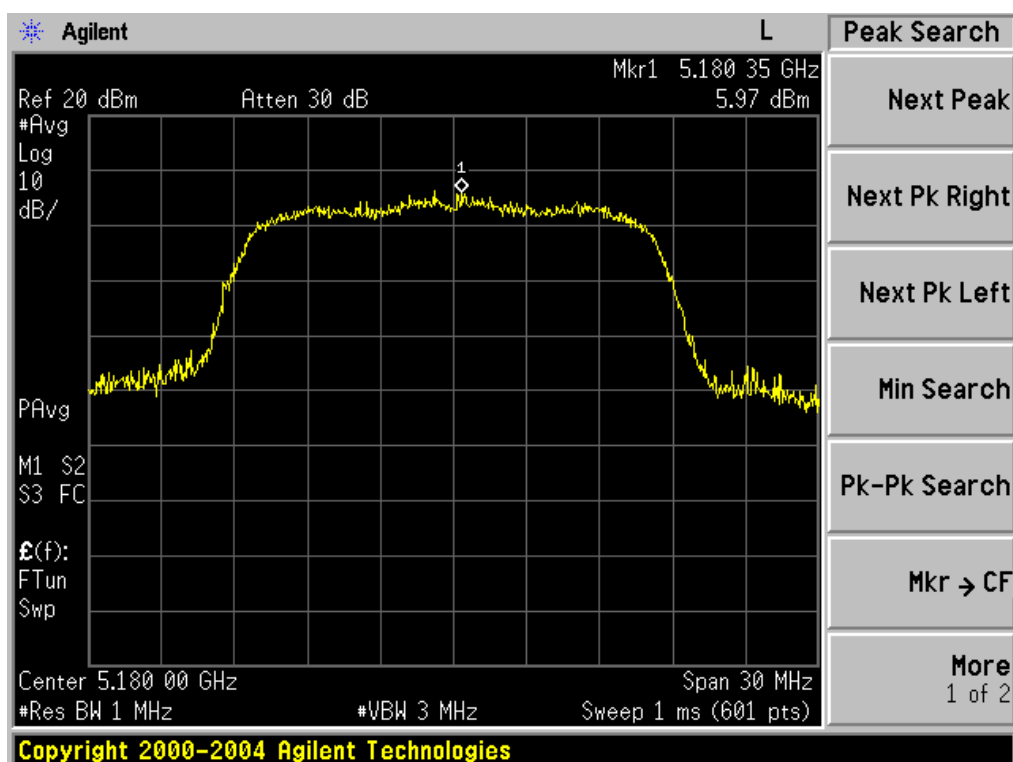


802.11a 5200MHz

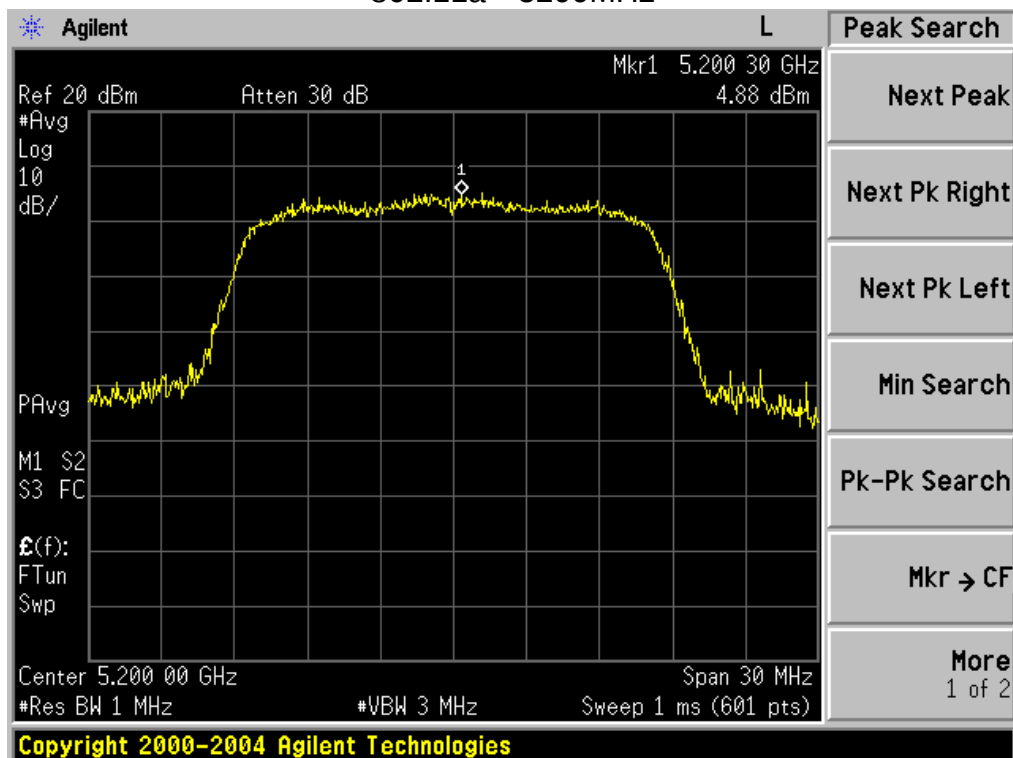




802.11a 5240MHz

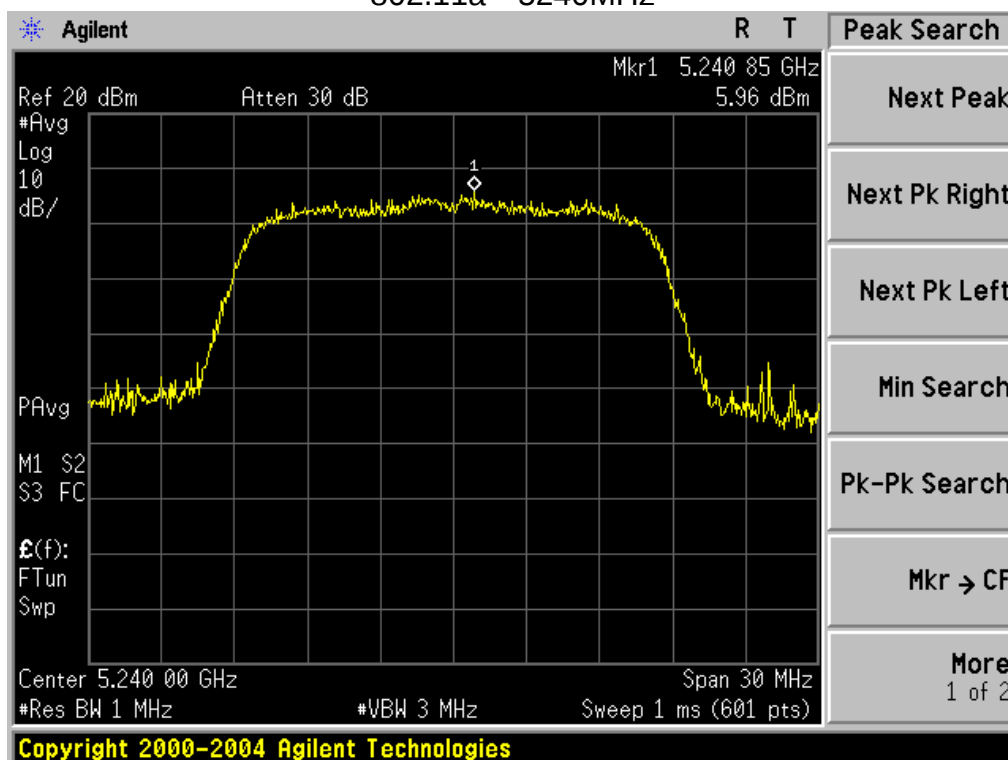


802.11a 5745MHz

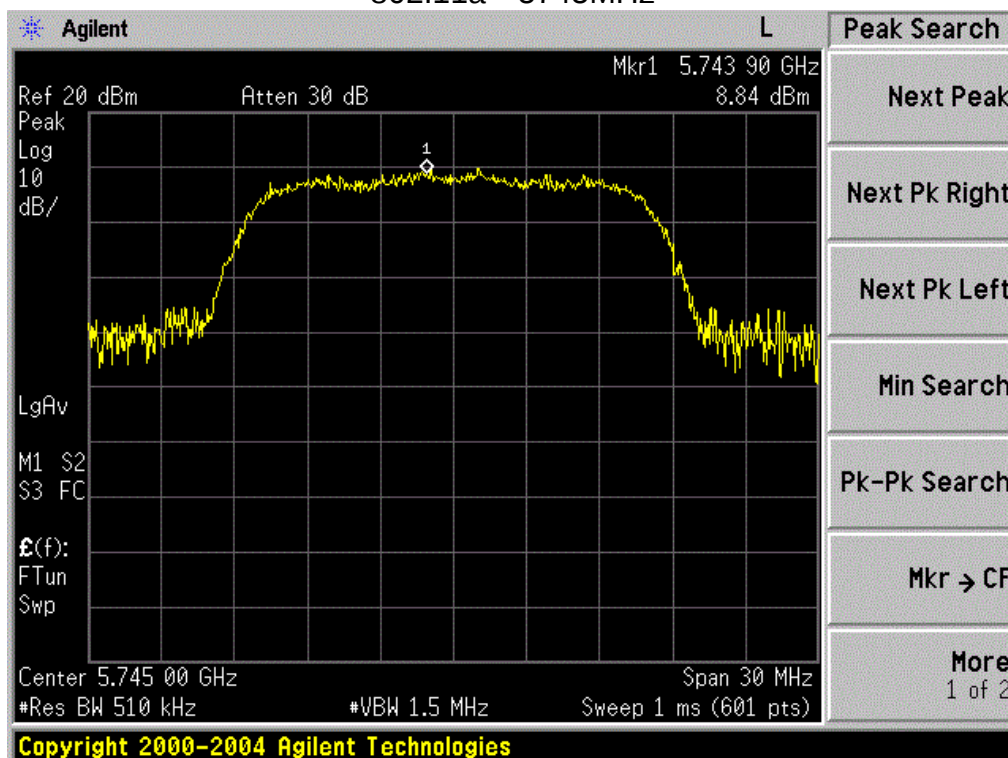




802.11a 5785MHz

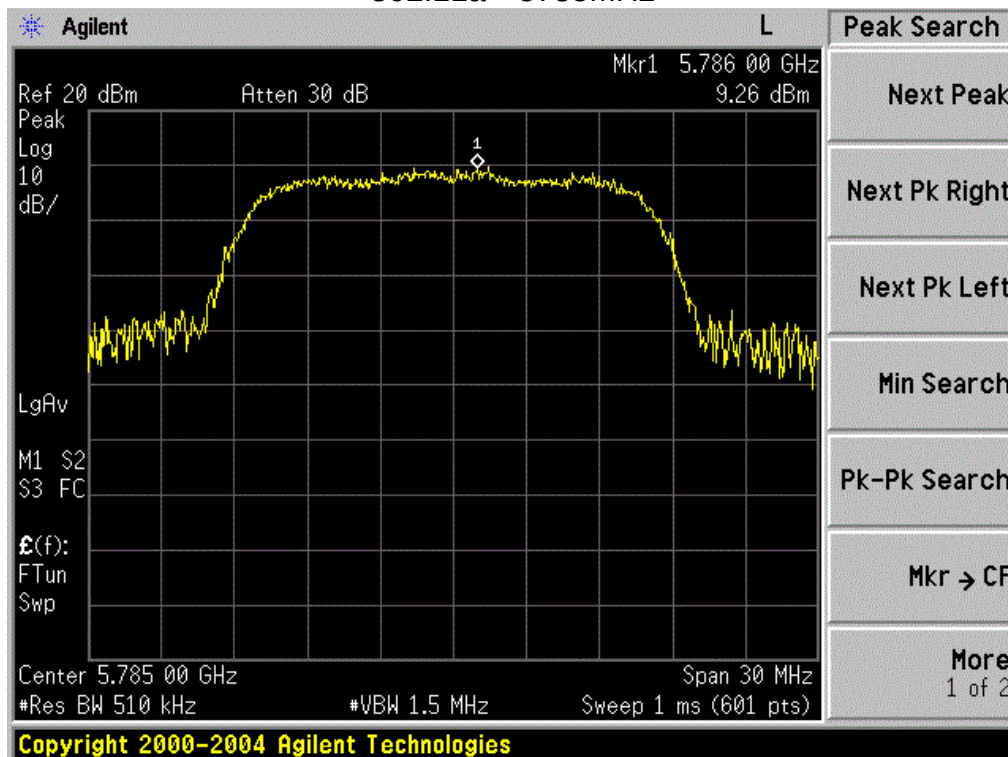


802.11a 5825MHz

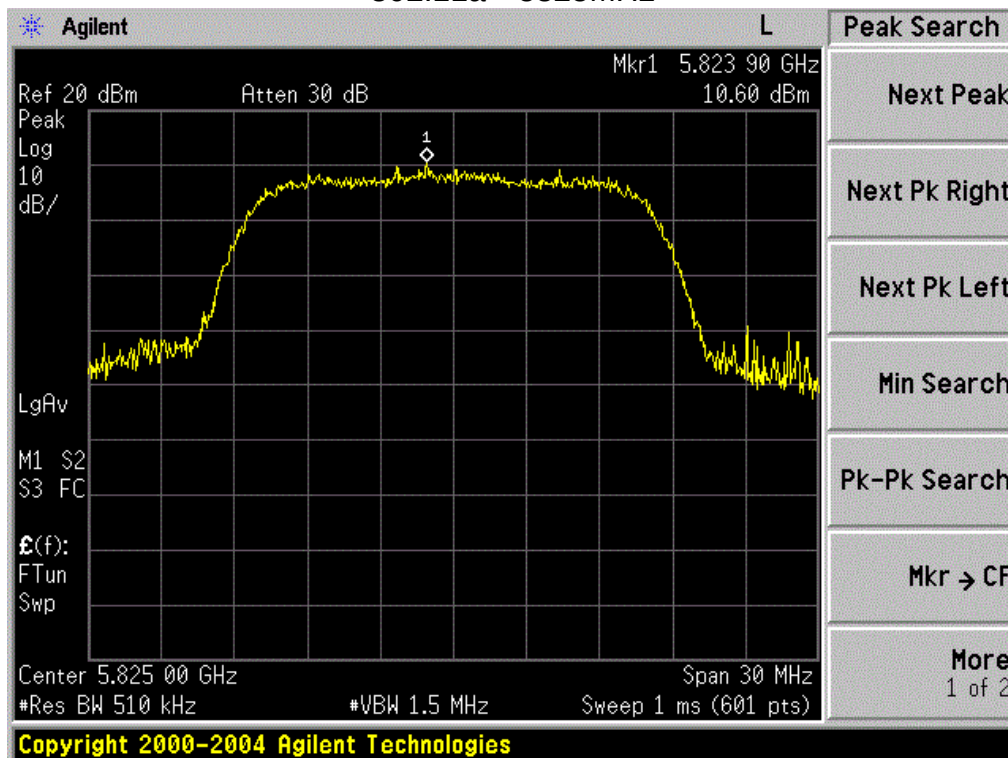




802.11n(HT20) 5180MHz

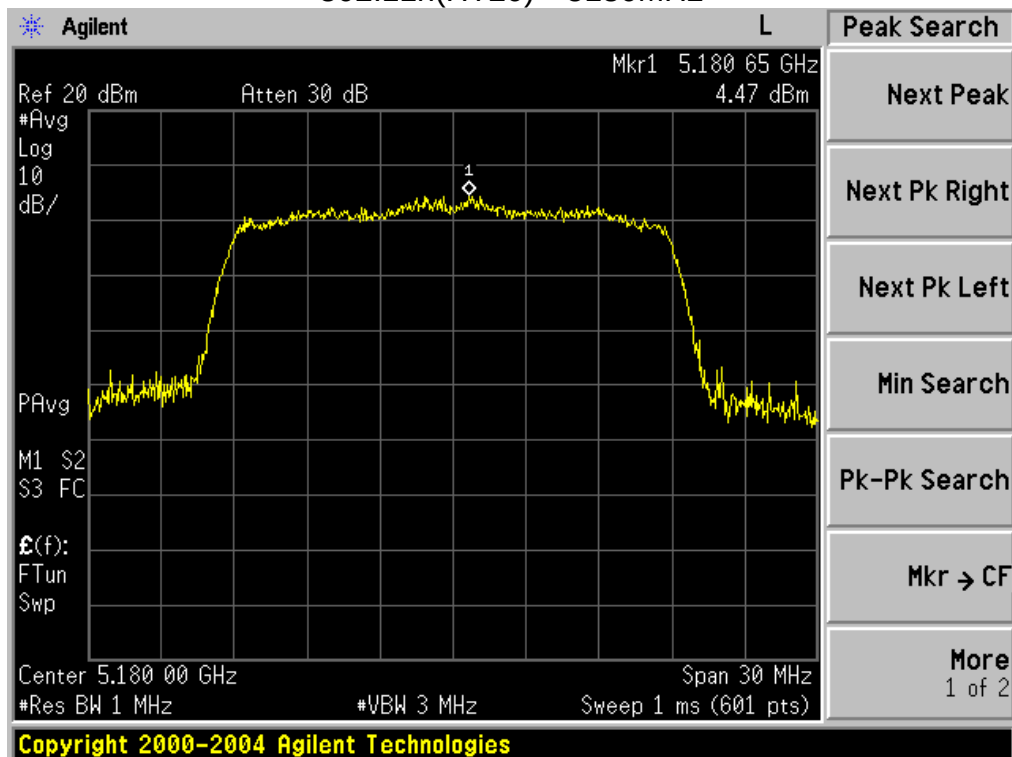


802.11n(HT20) 5200MHz

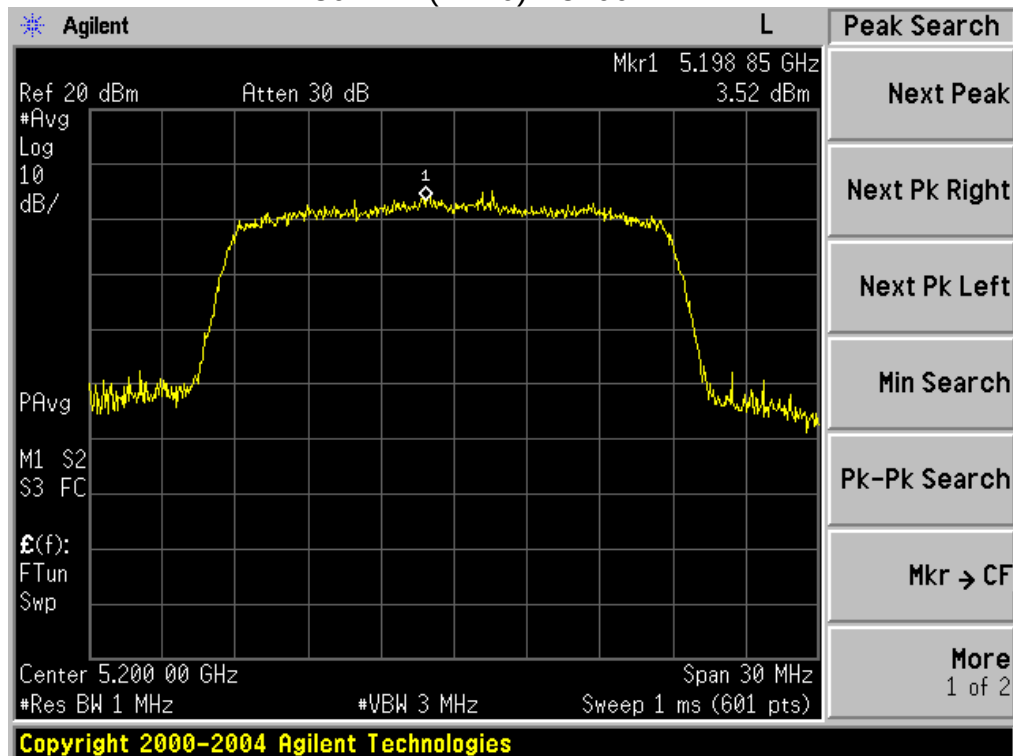




802.11n(HT20) 5240MHz

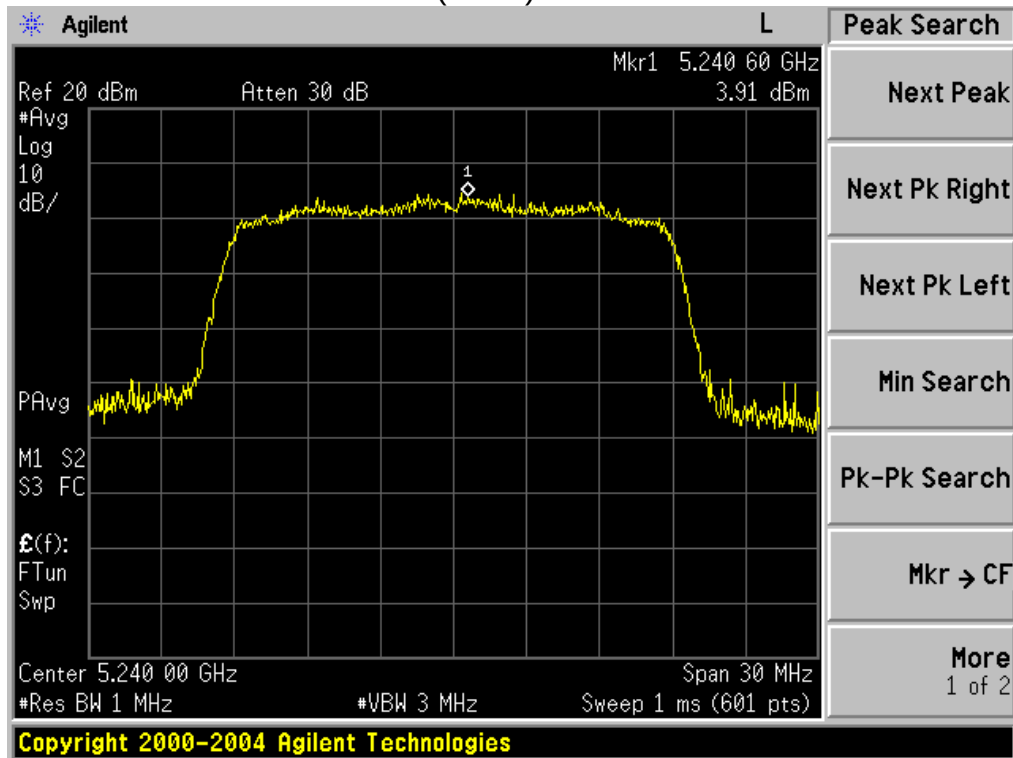


802.11n(HT20) 5745MHz

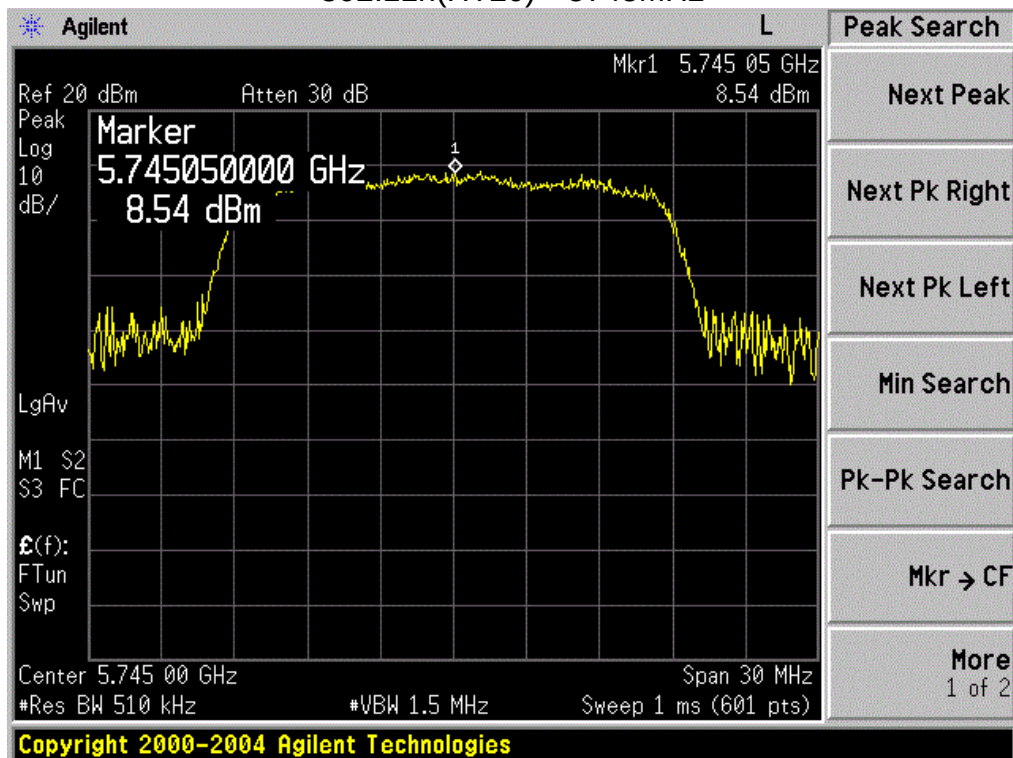




802.11n(HT20) 5785MHz

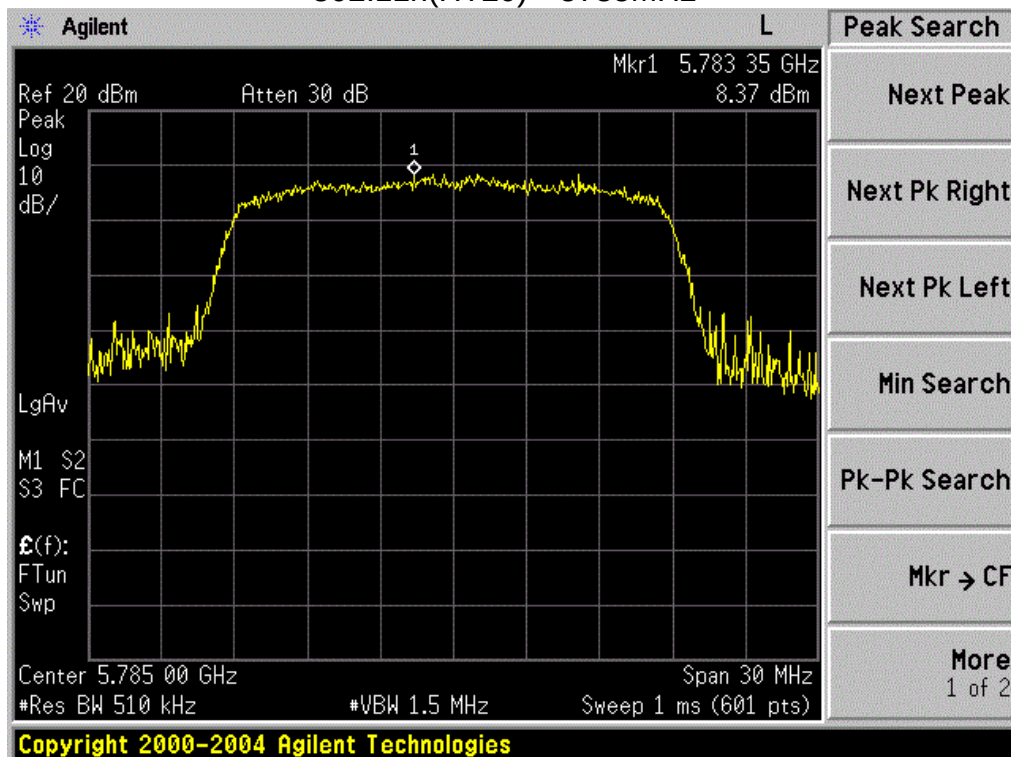


802.11n(HT20) 5825MHz

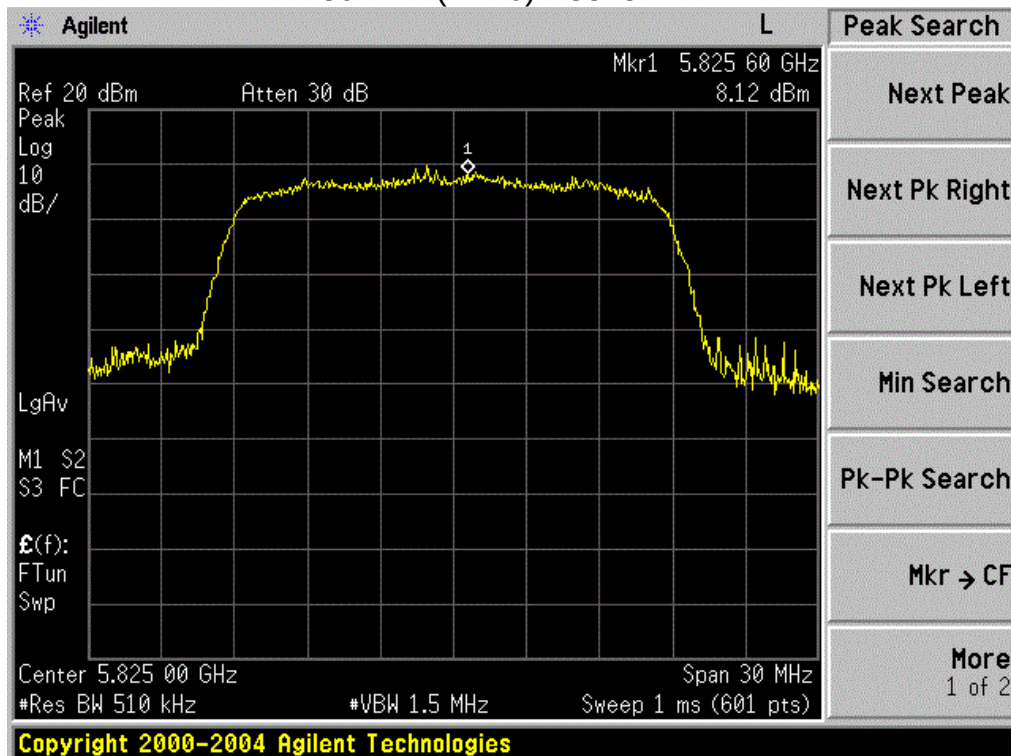




802.11n(HT40) 5190MHz

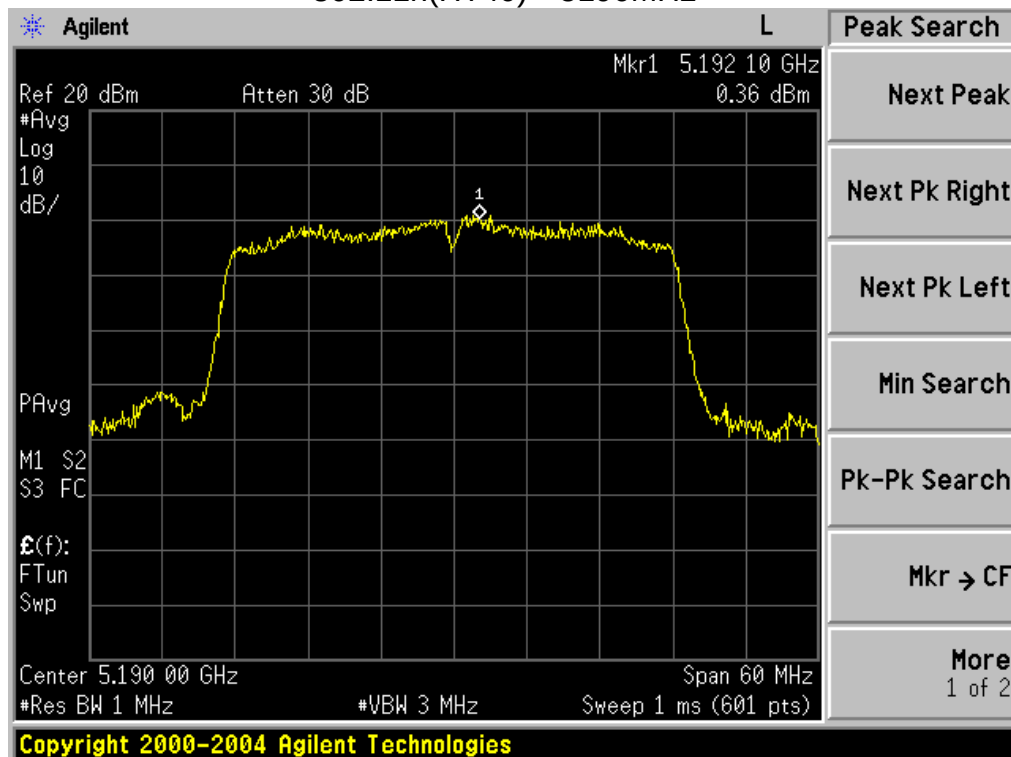


802.11n(HT40) 5230MHz

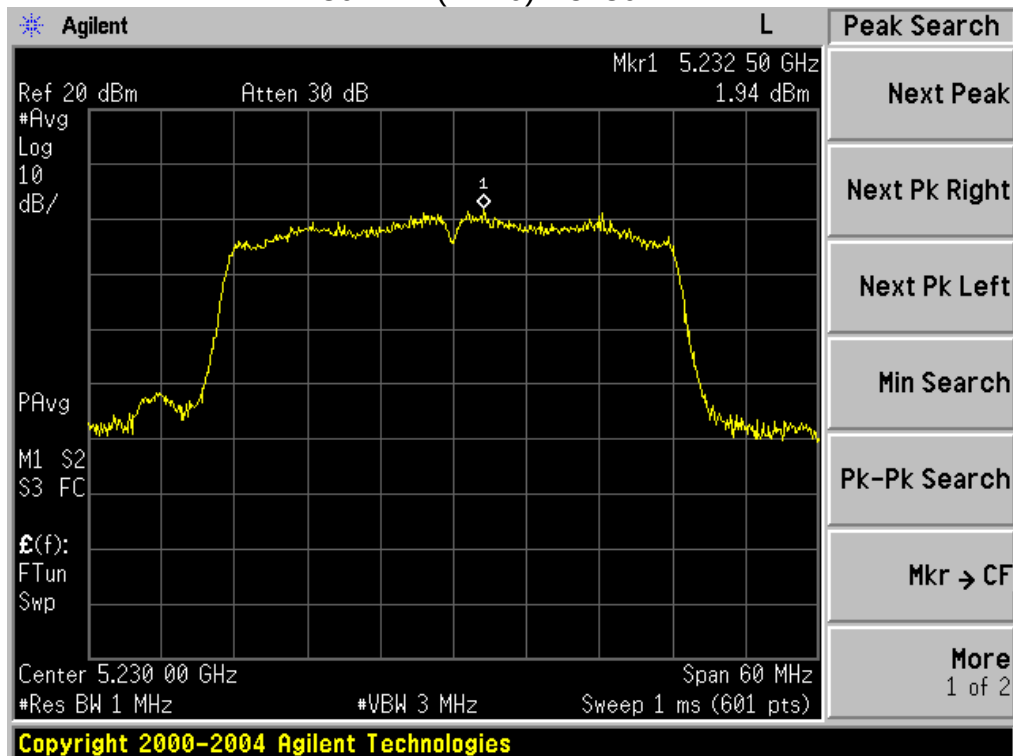




802.11n(HT40) 5755MHz

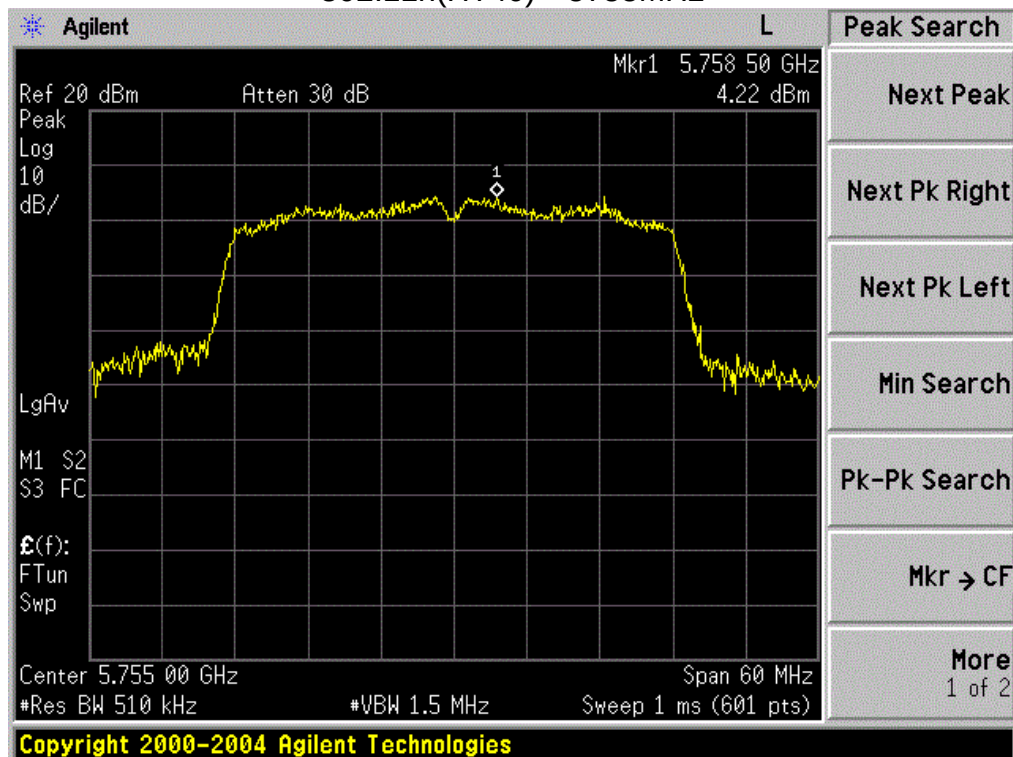

802.11n(HT40) 5795MHz

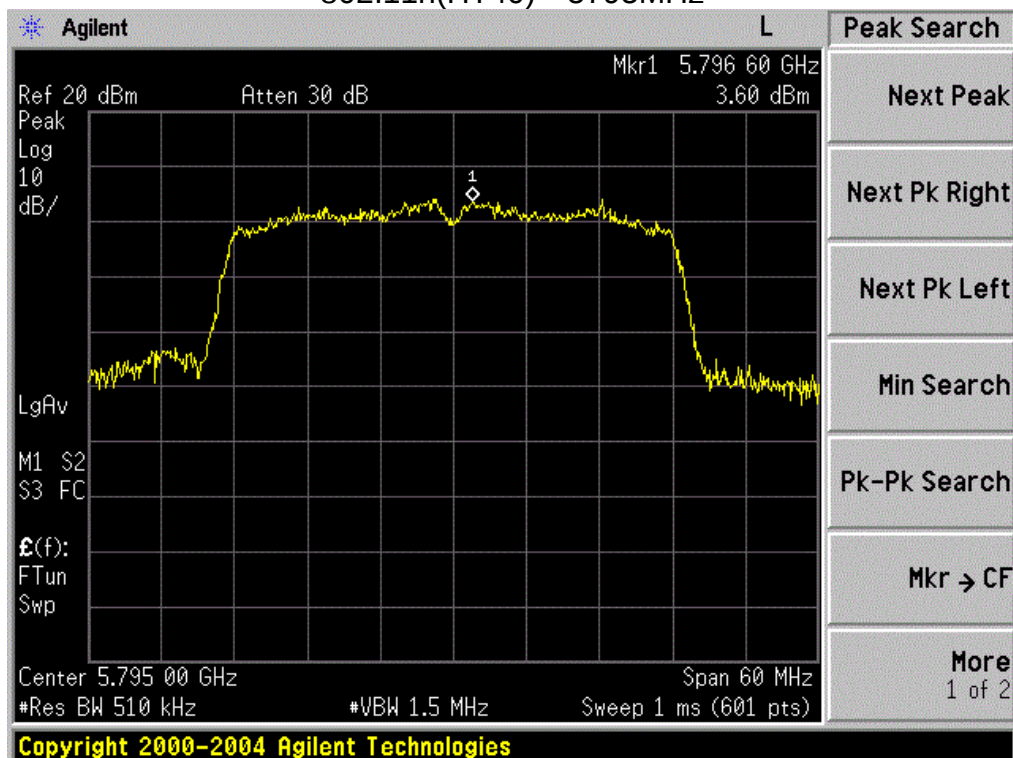



9. DUTY CYCLE TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}})$$

Measurement Procedure:


1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:


Operation Mode	Duty Cycle	Duty Fator (dB) 10 * log (1/ Duty cycle)
802.11a	95.35%	0.21
802.11n(HT20)	90.78%	0.42
802.11n(HT40)	83.76%	0.77




802.11a

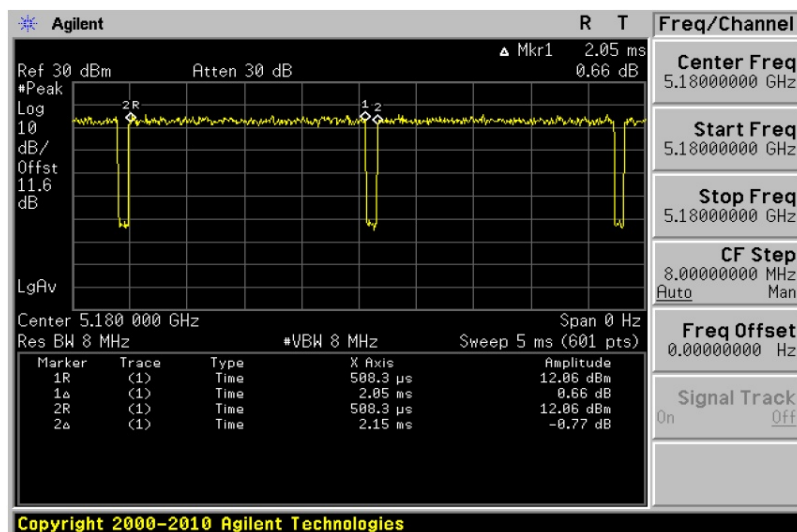

802.11n(HT20)

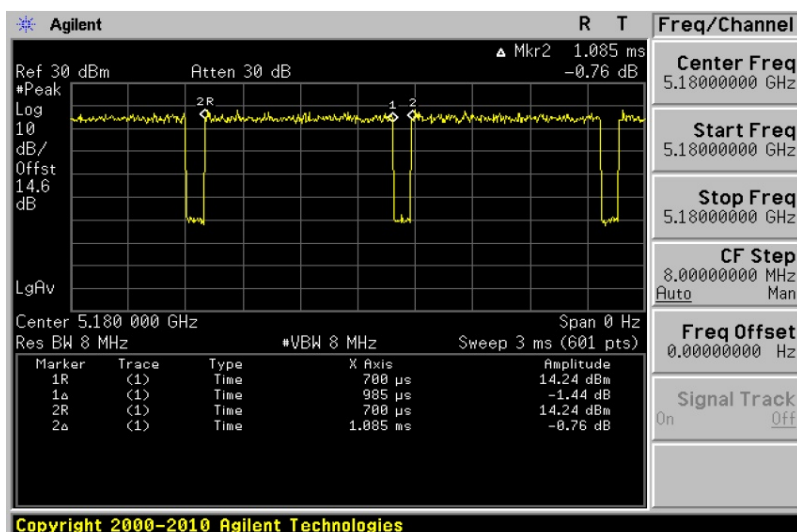

802.11n(HT40)

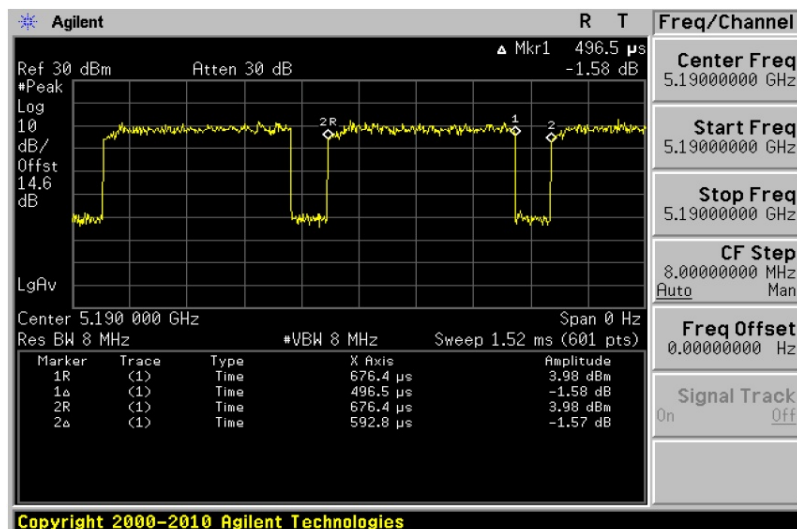



10. FREQUENCY STABILITY

10.1. Limits

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

10.2. Test setup

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.



10.3. Test data

	Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
802.11a	4.255V	-20℃	5180.000	5180.0353	-0.0353
			5220.000	5220.0346	-0.0346
			5240.000	5240.0254	-0.0254
			5745.000	5745.0325	-0.0325
			5785.000	5785.0333	-0.0333
			5825.000	5825.0342	-0.0342
	3.145V	-20℃	5180.000	5180.0274	-0.0274
			5220.000	5220.0325	-0.0325
			5240.000	5240.0254	-0.0254
			5745.000	5745.0261	-0.0261
			5785.000	5785.0343	-0.0343
			5825.000	5825.0428	-0.0428
	3.70V	25℃	5180.000	5180.0553	-0.0553
			5220.000	5220.0242	-0.0242
			5240.000	5240.0351	-0.0351
			5745.000	5745.0327	-0.0327
			5785.000	5785.0443	-0.0443
			5825.000	5825.0259	-0.0259
	4.255V	50℃	5180.000	5180.0357	-0.0357
			5220.000	5220.0261	-0.0261
			5240.000	5240.0326	-0.0326
			5745.000	5745.0642	-0.0642
			5785.000	5785.0461	-0.0461
			5825.000	5825.0642	-0.0642
	3.145V	50℃	5180.000	5180.0326	-0.0326
			5220.000	5220.0246	-0.0246
			5240.000	5240.0374	-0.0374
			5745.000	5745.0451	-0.0451
			5785.000	5785.0263	-0.0263
			5825.000	5825.0741	-0.0741



	Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
802.11n20	4.255V	-20℃	5180.000	5180.0421	-0.0421
			5220.000	5220.0374	-0.0374
			5240.000	5240.0216	-0.0216
			5745.000	5745.0652	-0.0652
			5785.000	5785.0236	-0.0236
			5825.000	5825.0344	-0.0344
	3.145V		5180.000	5180.0274	-0.0274
			5220.000	5220.0526	-0.0526
			5240.000	5240.0341	-0.0341
			5745.000	5745.0434	-0.0434
			5785.000	5785.0426	-0.0426
			5825.000	5825.0227	-0.0227
	3.70V	25℃	5180.000	5180.0241	-0.0241
			5220.000	5220.0361	-0.0361
			5240.000	5240.0474	-0.0474
			5745.000	5745.0667	-0.0667
			5785.000	5785.0324	-0.0324
			5825.000	5825.0526	-0.0526
	4.255V	50℃	5180.000	5180.0243	-0.0243
			5220.000	5220.0361	-0.0361
			5240.000	5240.0558	-0.0558
			5745.000	5745.0352	-0.0352
			5785.000	5785.0674	-0.0674
			5825.000	5825.0225	-0.0225
	3.145V	50℃	5180.000	5180.0351	-0.0351
			5220.000	5220.0274	-0.0274
			5240.000	5240.0662	-0.0662
			5745.000	5745.0358	-0.0358
			5785.000	5785.0252	-0.0252
			5825.000	5825.0361	-0.0361



	Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
802.11n40	4.255V	-20℃	5190.000	5190.0267	-0.0267
			5230.000	5230.0364	-0.0364
			5755.000	5755.0517	-0.0517
			5795.000	5795.0641	-0.0641
	3.145V		5190.000	5190.0297	-0.0297
			5230.000	5230.0384	-0.0384
			5755.000	5755.0275	-0.0275
			5795.000	5795.0466	-0.0466
	3.70V	25℃	5190.000	5190.0258	-0.0258
			5230.000	5230.0618	-0.0618
			5755.000	5755.0268	-0.0268
			5795.000	5795.0517	-0.0517
	4.255V	50℃	5190.000	5190.0617	-0.0617
			5230.000	5230.0546	-0.0546
			5755.000	5755.0417	-0.0417
			5795.000	5795.0349	-0.0349
	3.145V	50℃	5190.000	5190.0521	-0.0521
			5230.000	5230.0328	-0.0328
			5755.000	5755.0337	-0.0337
			5795.000	5795.0419	-0.0419



11. TRANSMISSION IN THE ABSENCE OF DATA

11.1. Limits

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

11.2. Test result

No non-compliance noted:

Refer to the theory of operation.

12. ANTENNA REQUIREMENT

12.1. STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2. EUT ANTENNA



The EUT antenna is Integral (external) antenna, and used permanent connection antenna, It complies with the standard requirement.

13. PHOTOGRAPHS OF TEST SET-UP

Conducted Emission



Radiated Emission Test

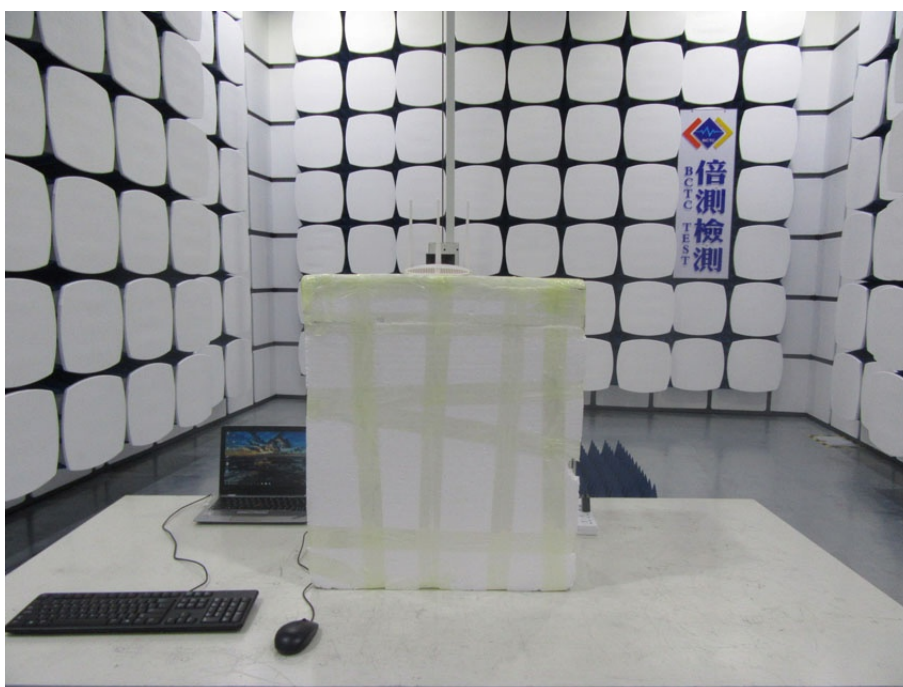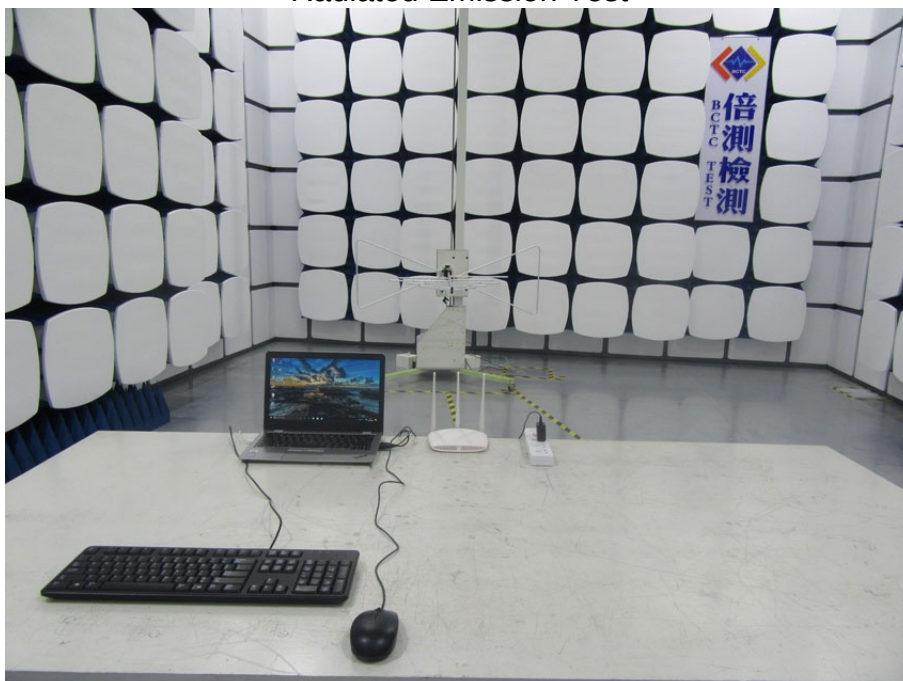

14. PHOTOGRAPHS OF THE EUT



***** END OF REPORT *****