

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 150N Wireless LAN Broadband Router
Model No. : BR-6225N / BR-6226N / GR-225N
Brand Name : EDIMAX
Filing Type : New Application
Applicant : EDIMAX TECHNOLOGY CO., LTD.
No.3, Wu Chuan 3RD Road, Wu-Ku Industrial Park, Taipei
Hsien, Taiwan
FCC ID : NDD9562250907
Manufacturer : EDIMAX TECHNOLOGY CO., LTD.
No.3, Wu Chuan 3RD Road, Wu-Ku Industrial Park, Taipei
Hsien, Taiwan
Received Date : May 08, 2009
Final Test Date : Jul. 06, 2009
Multiple Listing : Please refer to section 2.6

Statement

Test result included is only for the 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT	2
2 GENERAL INFORMATION	3
2.1 Product Details	3
2.2 Table for Filed Antenna	3
2.3 Table for Carrier Frequencies	4
2.4 Table for Test Modes	4
2.5 Table for Multiple Listing	5
2.6 Table for Testing Locations	5
2.7 Table for Supporting Units.....	5
2.8 Table for Parameters of Test Software Setting	5
2.9 EUT Operation during Test	6
2.10 Test Configuration	6
3 TEST RESULT	8
3.1 AC Power Line Conducted Emissions Measurement.....	8
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement.....	16
3.4 6dB Spectrum Bandwidth Measurement.....	22
3.5 Radiated Emissions Measurement.....	28
3.6 Band Edge and Fundamental Emissions Measurement	46
3.7 Antenna Requirements.....	51
4 LIST OF MEASURING EQUIPMENTS	52
5 TEST LOCATION	54
6 TAF CERTIFICATE OF ACCREDITATION	55
APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE.....	A1 ~ A3
APPENDIX B. TEST PHOTOS	B1 ~ B10
APPENDIX C. PHOTOGRAPHS OF EUT	C1 ~ C22

History of This Test Report

Original Issue Date: Jul. 07, 2009

Report No.: FR950511AC

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 150N Wireless LAN Broadband Router


Model No. : BR-6225N / BR-6226N / GR-225N

Brand Name : EDIMAX

Applicant : EDIMAX TECHNOLOGY CO., LTD.

No.3, Wu Chuan 3RD Road, Wu-Ku Industrial
Park, Taipei Hsien, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 08, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

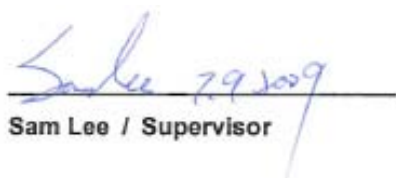

Sam Lee / Supervisor

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	3.80 dB
3.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	6.67 dB
3.3	15.247(e)	Power Spectral Density	Complies	8.12 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	0.24 dB
3.6	15.247(d)	Band Edge Emissions	Complies	0.17 dB
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of IEEE 802.11b/g is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	12V from adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (DBPSK / DQPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11b/g: 11
Channel Band Width (99%)	11b: 14.72 MHz ; 11g: 17.00 MHz
Conducted Output Power	11b: 23.33 dBm ; 11g: 21.21 dBm

2.2 Table for Filed Antenna

Antenna & Bandwidth

Antenna	Single (TX)	
Bandwidth Mode	20 MHz	40 MHz
802.11b	V	X
802.11g	V	X
802.11n (2.4GHz)	V	V

For single dipole antenna with equipment

Ant.	Antenna Type	Connector	Gain (dBi)	Remark
A	Dipole Antenna	Fixed on Board	3.00	TX / RX

Ant.	Antenna Type	Connector	Gain (dBi)	Remark
B	Dipole Antenna	Reversed-SMA	3.00	TX / RX

Note:

There are two connector types of equipment. One is device equipped with dipole antenna without connector and the other is a detachable antenna (Reversed-SMA). There is 1T1R Spatial Multiplexing MIMO configuration. One antenna is for signal transmitting and receiving. The device tested in this report is antenna A.

For two dipole antennas with equipment

Ant.	Antenna Type	Connector	Gain (dBi)	Remark
A	Dipole Antenna	Fixed on Board	3.00	TX / RX
B	Dipole Antenna	Fixed on Board	3.00	RX

Note:

The antennas is 1T2R Spatial Multiplexing MIMO configuration. 1 antenna is for signal transmitting and 2 antennas are for signal receiving.

2.3 Table for Carrier Frequencies

Frequency Allocation for 802.11b/g

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

2.4 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Line Conducted Emissions	See the Note	Auto	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11
Power Spectral Density	11g/BPSK	6 Mbps	1/6/11
6dB Spectrum Bandwidth			
Radiated Emissions Above 1GHz			
Band Edge Emissions	See the Note	Auto	-
Radiated Emissions Below 1GHz			

Note: For AC Power Line Conducted Emissions test, the following modes were tested:

Mode 1. Single antenna with dipole

Mode 2. Two antennas with dipole

In the other tested is used the "Mode 2" performed the worst test result; it was reported as final data.

2.5 Table for Multiple Listing

No.	Brand Name	Model Name
1	Edimax	BR-6225N, GR-225N, 3G-6200N, 3G-200N
2	Jensen	AL29150, AL29150-3G
3	IC ICTRACOM	524445
4	2Direct	WL0052
5	PCI	MZK-WNH
6	Assman	DN-7049-1

2.6 Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH02-HY	SAC	Hwa Ya	643075	IC 4086B-1	-
CO01-HY	Conduction	Hwa Ya	643075	IC 4086B-1	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

2.7 Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	N/A
Modem	ACEEX	DM1414	IFAXDM1414
Mouse (USB)	Microsoft	1004	N/A
Notebook (Remote Workstation)	DELL	D400	DoC

2.8 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11b/g

Test Software Version	RT3052QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	0D	10	10
IEEE 802.11g	12	16	16

2.9 EUT Operation during Test

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating “H” pattern was used as the test software.

The NB sends “H” messages to the panel, and the panel displays “H” patterns on the screen.


Executed "ping.exe" to link with the remote workstation to receive and transmit data by LAN and WLAN.

Executed “RT3052QA” to keep transmitting signals at fixed frequency.


2.10 Test Configuration

2.10.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

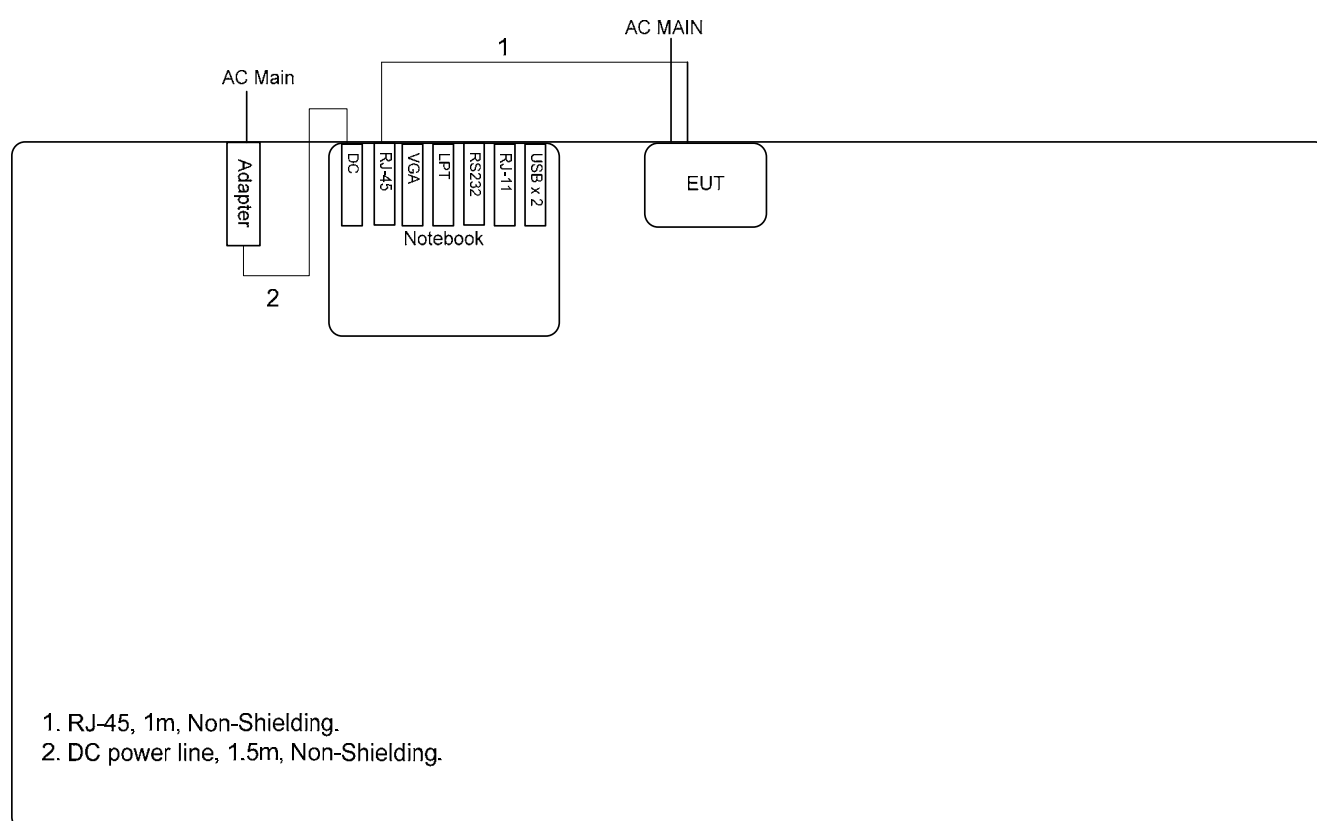

For radiated emissions above 1GHz

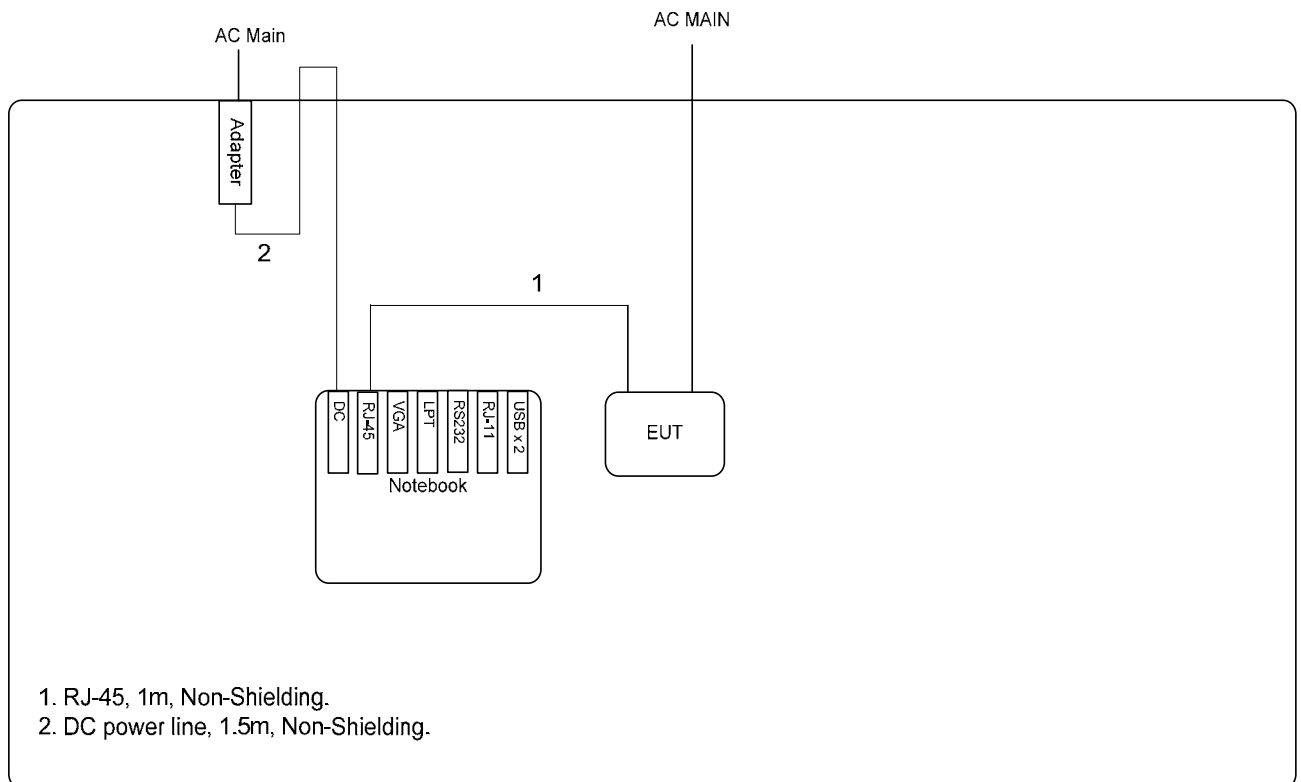

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

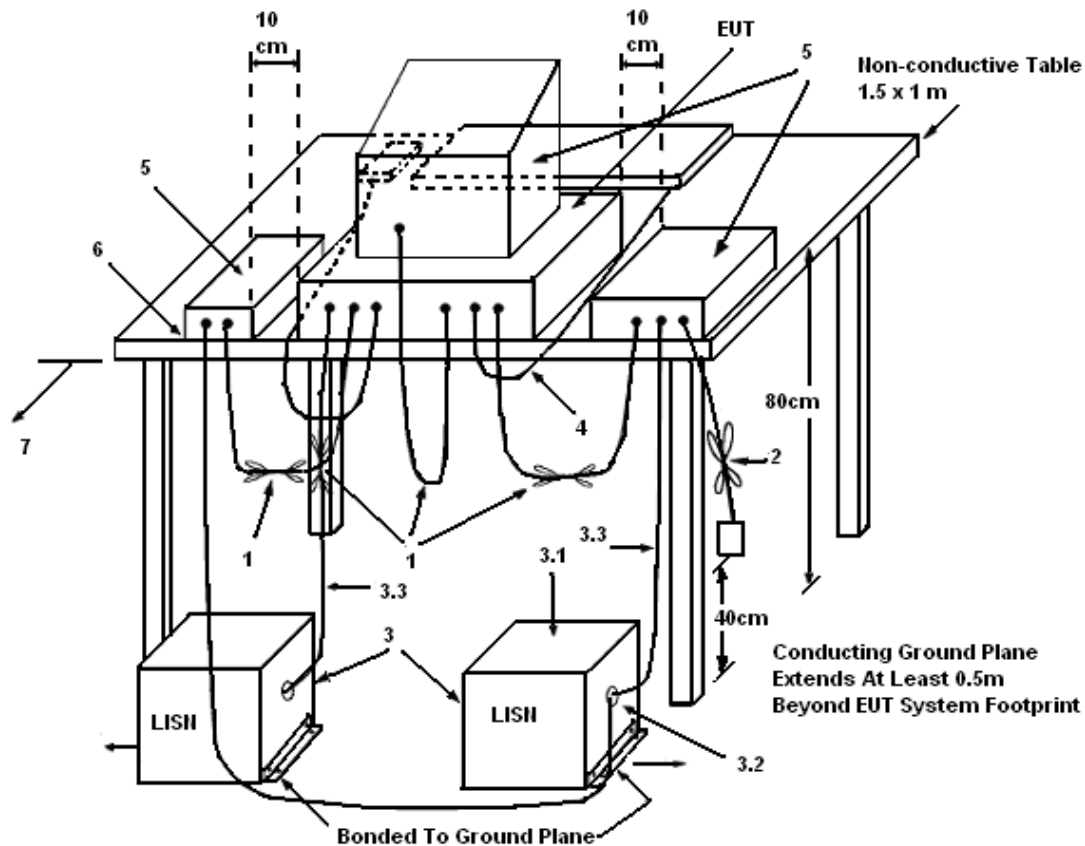

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test date	May 08, 2009	Test Site No.	CO01-HY
Temperature	27.4	Humidity	49%
Test Engineer	Ken	Configuration	Mode 1

Line

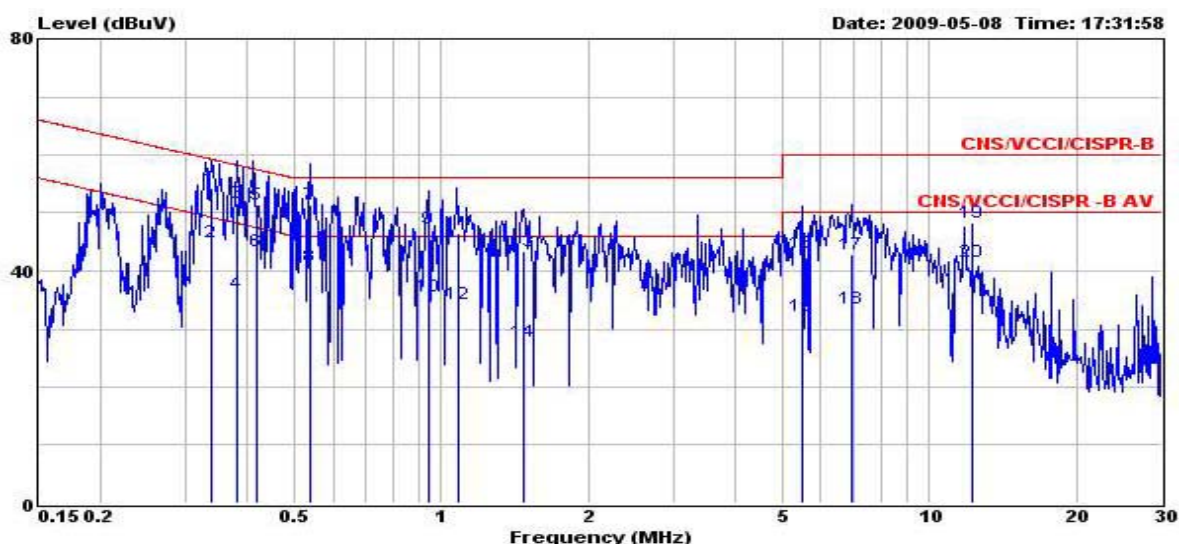

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.337	54.34	-4.94	59.28	54.20	0.09	0.05	QP
2	0.337	45.05	-4.23	49.28	44.91	0.09	0.05	Average
3	0.381	51.72	-6.54	58.26	51.59	0.09	0.04	QP
4	0.381	36.11	-12.15	48.26	35.98	0.09	0.04	Average
5	0.420	51.45	-6.00	57.45	51.32	0.09	0.04	QP
6	0.420	43.46	-3.99	47.45	43.33	0.09	0.04	Average
7	0.541	51.31	-4.69	56.00	51.16	0.10	0.05	QP
8	0.541	40.82	-5.18	46.00	40.67	0.10	0.05	Average
9	0.938	47.30	-8.70	56.00	47.13	0.11	0.06	QP
10	0.938	35.57	-10.43	46.00	35.40	0.11	0.06	Average
11	1.080	46.53	-9.47	56.00	46.35	0.11	0.07	QP
12	1.080	34.29	-11.71	46.00	34.11	0.11	0.07	Average
13	1.470	43.37	-12.63	56.00	43.16	0.12	0.09	QP
14	1.470	27.85	-18.15	46.00	27.64	0.12	0.09	Average
15	5.500	43.13	-16.87	60.00	42.79	0.20	0.14	QP
16	5.500	32.24	-17.76	50.00	31.90	0.20	0.14	Average
17	6.906	42.91	-17.09	60.00	42.52	0.23	0.16	QP
18	6.906	33.60	-16.40	50.00	33.21	0.23	0.16	Average
19	12.200	48.18	-11.82	60.00	47.67	0.30	0.21	QP
20	12.200	41.51	-8.49	50.00	41.00	0.30	0.21	Average

Neutral

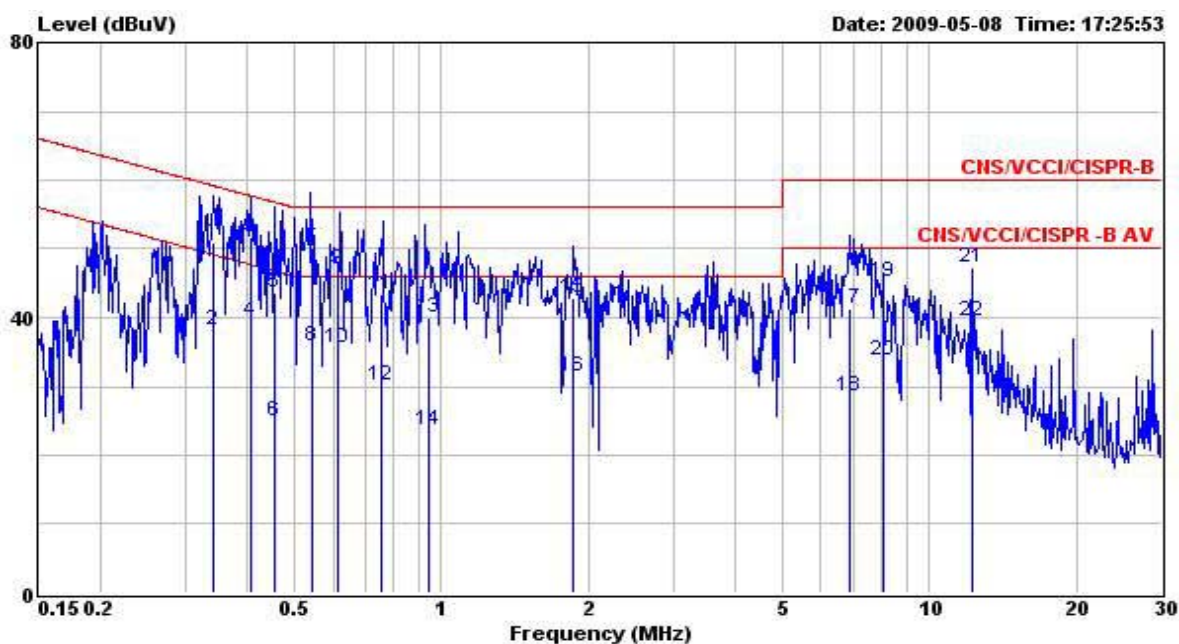


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.341	51.04	-8.14	59.18	50.92	0.07	0.05	QP
2	0.341	38.29	-10.89	49.18	38.17	0.07	0.05	Average
3	0.408	51.63	-6.06	57.69	51.52	0.07	0.04	QP
4	0.408	39.53	-8.16	47.69	39.42	0.07	0.04	Average
5	0.456	43.75	-13.02	56.77	43.64	0.07	0.04	QP
6	0.456	25.05	-21.72	46.77	24.94	0.07	0.04	Average
7	0.541	50.25	-5.75	56.00	50.12	0.08	0.05	QP
8	0.541	35.91	-10.09	46.00	35.78	0.08	0.05	Average
9	0.616	46.92	-9.08	56.00	46.79	0.08	0.05	QP
10	0.616	35.54	-10.46	46.00	35.41	0.08	0.05	Average
11	0.750	43.26	-12.74	56.00	43.13	0.08	0.05	QP
12	0.750	30.25	-15.75	46.00	30.12	0.08	0.05	Average
13	0.938	40.10	-15.90	56.00	39.95	0.09	0.06	QP
14	0.938	23.71	-22.29	46.00	23.56	0.09	0.06	Average
15	1.870	42.86	-13.14	56.00	42.64	0.11	0.11	QP
16	1.870	31.46	-14.54	46.00	31.24	0.11	0.11	Average
17	6.841	41.42	-18.58	60.00	41.06	0.20	0.16	QP
18	6.841	28.55	-21.45	50.00	28.19	0.20	0.16	Average
19	8.069	45.30	-14.70	60.00	44.91	0.22	0.17	QP
20	8.069	33.81	-16.19	50.00	33.42	0.22	0.17	Average
21	12.201	47.37	-12.63	60.00	46.87	0.29	0.21	QP
22	12.201	39.51	-10.49	50.00	39.01	0.29	0.21	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

Final Test date	May 08, 2009	Test Site No.	CO01-HY
Temperature	27.4	Humidity	49%
Test Engineer	Ken	Configuration	Mode 2


Line

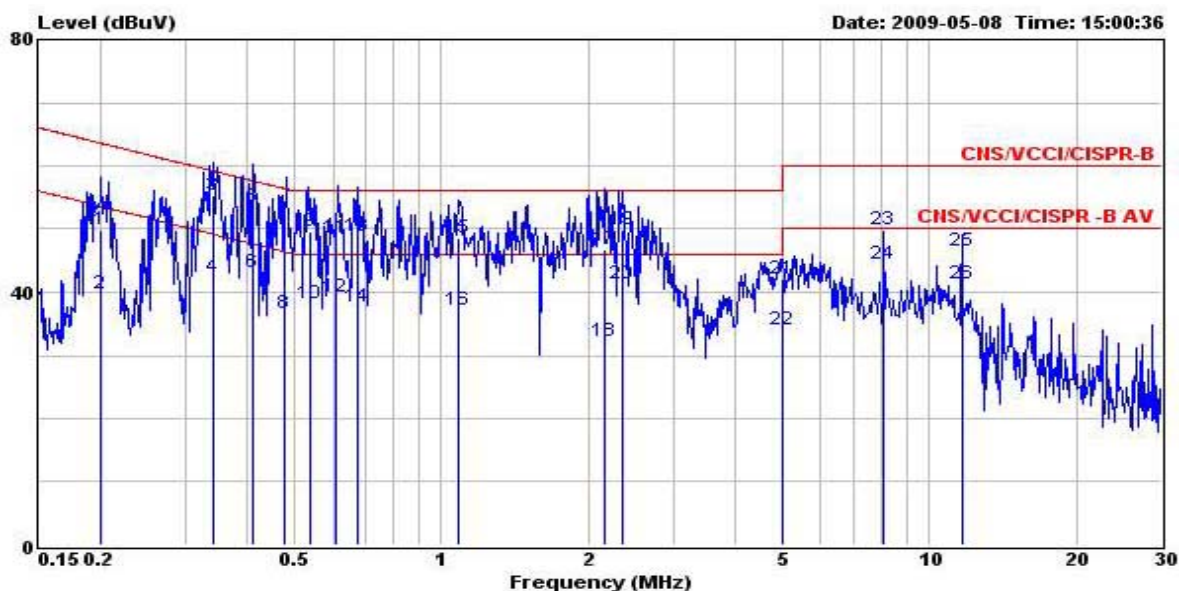

Continued on page 2

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.200	49.89	-13.73	63.62	49.73	0.08	0.08	QP
2	0.200	39.75	-13.87	53.62	39.59	0.08	0.08	Average
3	0.341	55.38	-3.80	59.18	55.24	0.09	0.05	QP
4	0.341	42.30	-6.88	49.18	42.16	0.09	0.05	Average
5	0.410	53.42	-4.22	57.64	53.29	0.09	0.04	QP
6	0.410	43.18	-4.46	47.64	43.05	0.09	0.04	Average
7	0.477	50.91	-5.48	56.39	50.78	0.09	0.04	QP
8	0.477	36.74	-9.65	46.39	36.61	0.09	0.04	Average
9	0.540	49.67	-6.33	56.00	49.52	0.10	0.05	QP
10	0.540	38.27	-7.73	46.00	38.12	0.10	0.05	Average
11	0.610	48.64	-7.36	56.00	48.49	0.10	0.05	QP
12	0.610	39.11	-6.89	46.00	38.96	0.10	0.05	Average
13	0.675	48.78	-7.22	56.00	48.63	0.10	0.05	QP
14	0.675	37.53	-8.47	46.00	37.38	0.10	0.05	Average
15	1.080	48.61	-7.39	56.00	48.43	0.11	0.07	QP
16	1.080	37.18	-8.82	46.00	37.00	0.11	0.07	Average
17	2.170	46.66	-9.34	56.00	46.41	0.13	0.12	QP
18	2.170	32.33	-13.67	46.00	32.08	0.13	0.12	Average
19	2.360	49.94	-6.06	56.00	49.68	0.14	0.12	QP
20	2.360	41.30	-4.70	46.00	41.04	0.14	0.12	Average
21	5.000	41.99	-14.01	56.00	41.67	0.19	0.13	QP
22	5.000	33.98	-12.02	46.00	33.66	0.19	0.13	Average
23	8.060	49.81	-10.19	60.00	49.39	0.25	0.17	QP
24	8.060	44.48	-5.52	50.00	44.06	0.25	0.17	Average
25	11.672	46.55	-13.45	60.00	46.05	0.30	0.20	QP
26	11.672	41.28	-8.72	50.00	40.78	0.30	0.20	Average

Neutral

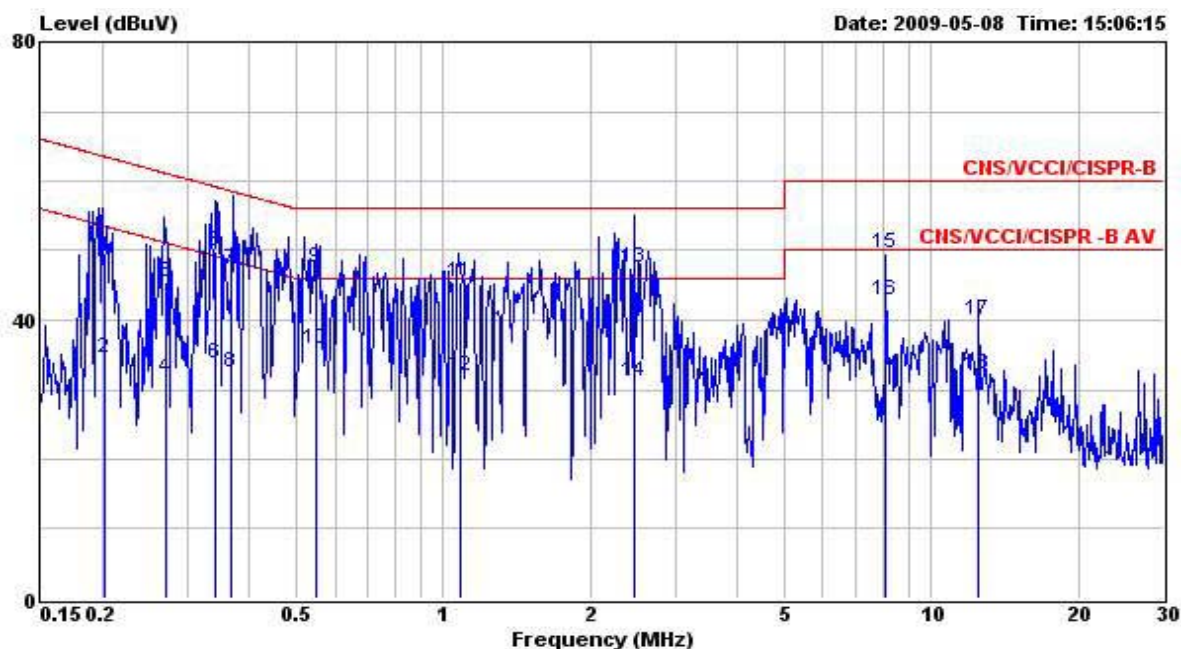

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.202	49.67	-13.85	63.52	49.53	0.06	0.08	QP
2	0.202	34.48	-19.04	53.52	34.34	0.06	0.08	Average
3	0.269	45.55	-15.60	61.15	45.43	0.06	0.06	QP
4	0.269	31.77	-19.38	51.15	31.65	0.06	0.06	Average
5	0.341	49.88	-9.30	59.18	49.76	0.07	0.05	QP
6	0.341	33.78	-15.40	49.18	33.66	0.07	0.05	Average
7	0.368	47.31	-11.25	58.56	47.20	0.07	0.04	QP
8	0.368	32.36	-16.20	48.56	32.25	0.07	0.04	Average
9	0.546	47.46	-8.54	56.00	47.33	0.08	0.05	QP
10	0.546	35.78	-10.22	46.00	35.65	0.08	0.05	Average
11	1.080	45.51	-10.49	56.00	45.35	0.09	0.07	QP
12	1.080	31.99	-14.01	46.00	31.83	0.09	0.07	Average
13	2.460	47.41	-8.59	56.00	47.17	0.12	0.12	QP
14	2.460	31.10	-14.90	46.00	30.86	0.12	0.12	Average
15	8.060	49.61	-10.39	60.00	49.22	0.22	0.17	QP
16	8.060	42.96	-7.04	50.00	42.57	0.22	0.17	Average
17	12.503	39.91	-20.09	60.00	39.40	0.30	0.21	QP
18	12.503	32.08	-17.92	50.00	31.57	0.30	0.21	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	rms
Trace	Max Hold
Sweep Time	Auto

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247.

3.2.4 Test Setup Layout

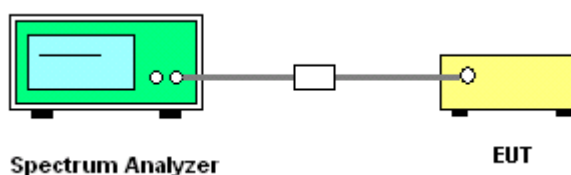

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Maximum Conducted Output Power

Final Test date	Jul. 06, 2009	Test Site No.	TH01-HY
Temperature	26	Humidity	56%
Test Engineer	Duncan	Configuration	802.11b/g

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.34	30.00	Complies
6	2437 MHz	23.33	30.00	Complies
11	2462 MHz	20.38	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.07	30.00	Complies
6	2437 MHz	21.21	30.00	Complies
11	2462 MHz	19.57	30.00	Complies

3.3 Power Spectral Density Measurement

3.3.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3 kHz and VBW to 30 kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

3.3.4 Test Setup Layout

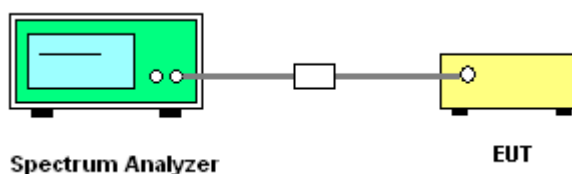

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Power Spectral Density

Final Test date	Jul. 06, 2009	Test Site No.	TH01-HY
Temperature	26	Humidity	56%
Test Engineer	Duncan	Configuration	802.11b/g


Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-1.16	8.00	Complies
6	2437 MHz	-1.50	8.00	Complies
11	2462 MHz	-2.23	8.00	Complies

Configuration IEEE 802.11g


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-0.77	8.00	Complies
6	2437 MHz	-0.12	8.00	Complies
11	2462 MHz	-1.58	8.00	Complies

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

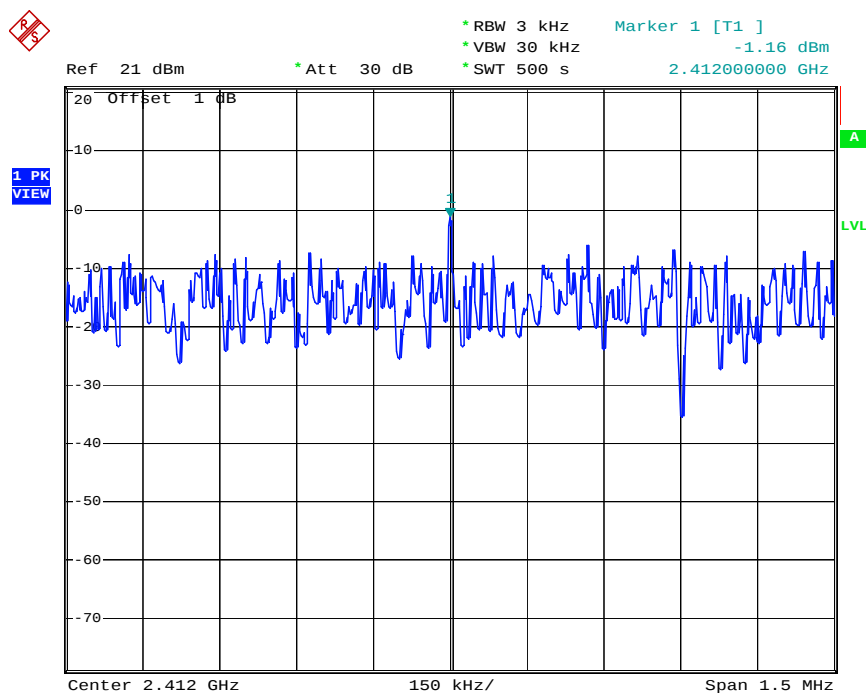


Date: 6.JUL.2009 16:09:25

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

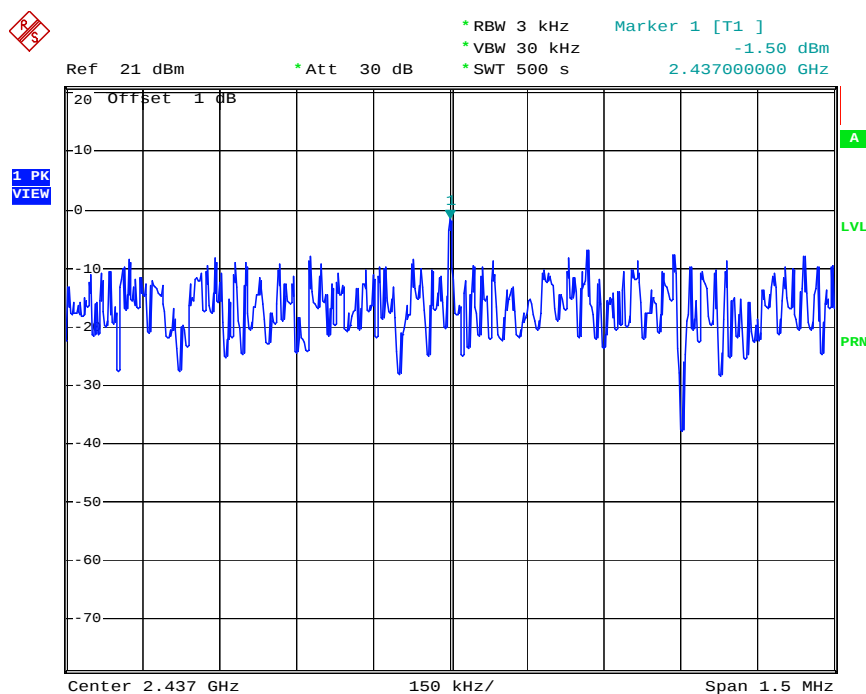


Date: 6.JUL.2009 16:01:03

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

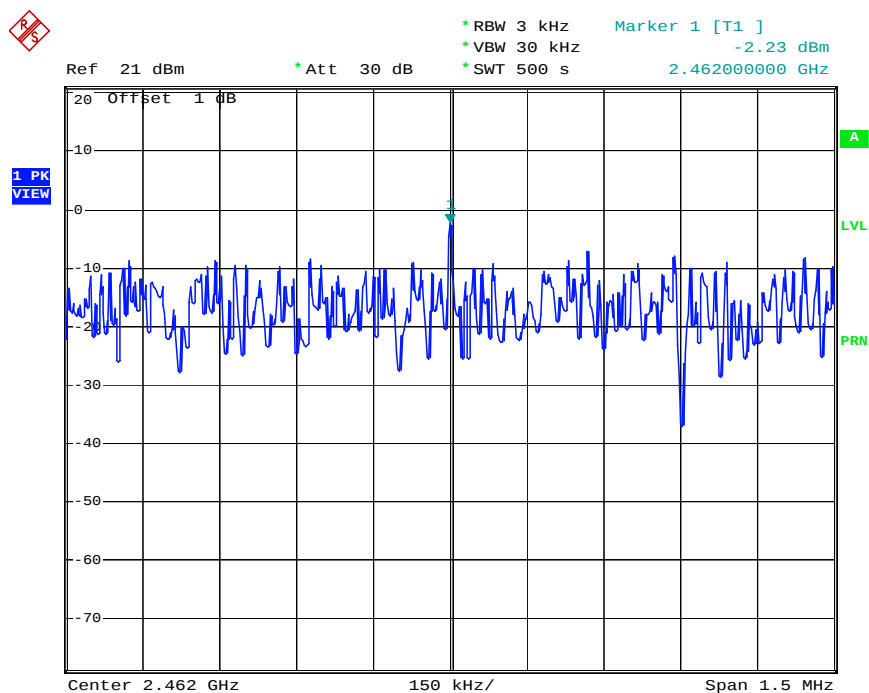


Date: 6.JUL.2009 16:00:22

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

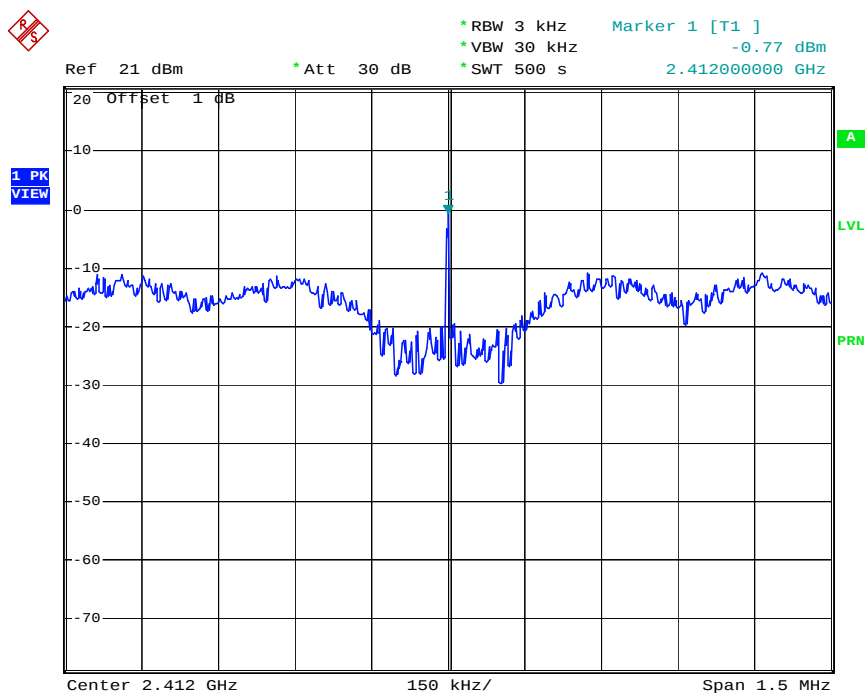


Date: 6.JUL.2009 16:11:24

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

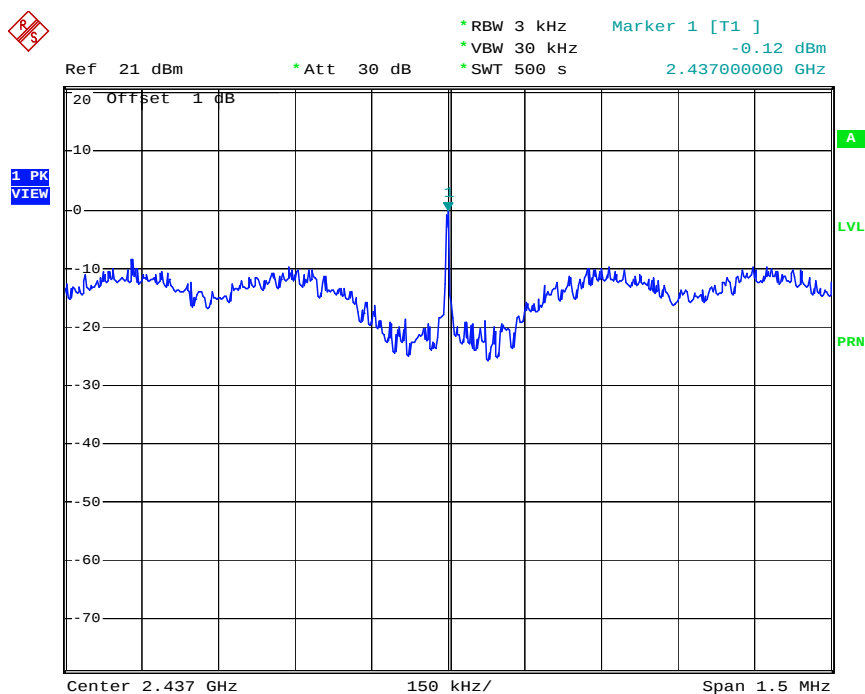

Date: 6.JUL.2009 16:12:39

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

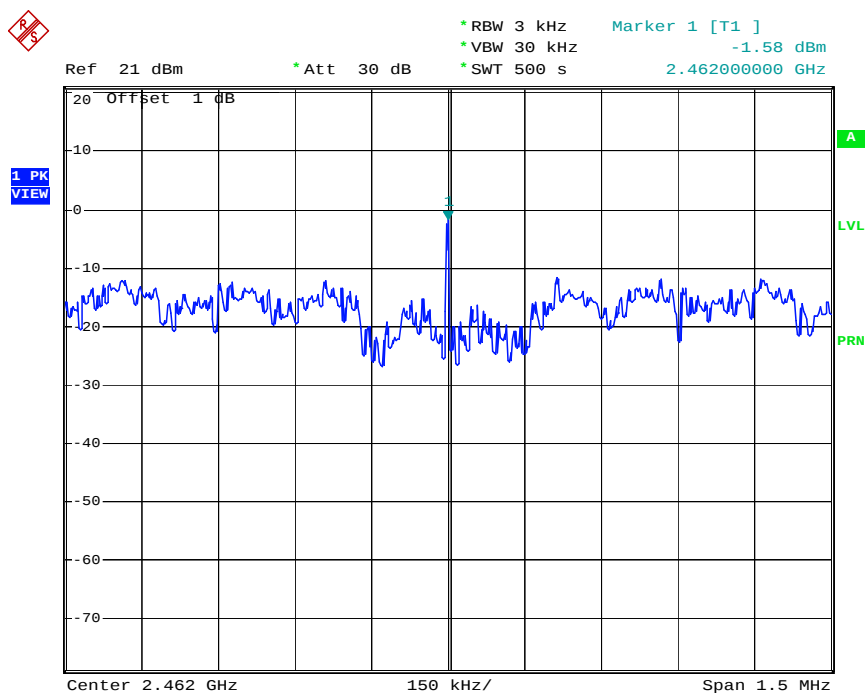

Date: 6.JUL.2009 16:16:35

3.4 6dB Spectrum Bandwidth Measurement

3.4.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

3.4.4 Test Setup Layout

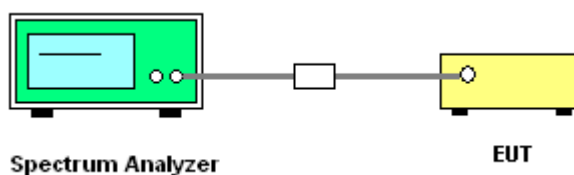

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of 6dB Spectrum Bandwidth

Final Test date	Jul. 06, 2009	Test Site No.	TH01-HY
Temperature	26	Humidity	56%
Test Engineer	Duncan	Configuration	802.11b/g

Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.12	14.72	500	Complies
6	2437 MHz	11.72	14.72	500	Complies
11	2462 MHz	11.56	14.72	500	Complies

Configuration IEEE 802.11g

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.48	16.40	500	Complies
6	2437 MHz	16.44	16.40	500	Complies
11	2462 MHz	16.56	17.00	500	Complies

* RBW 100 kHz Delta 1 [T1]
 * VBW 100 kHz -0.13 dB
 * SWT 500 ms 12.12000000 MHz

Ref 21 dBm * Att 30 dB

20 Offset 1 dB

1 PK VIEW

D1 7.72 dBm
 D2 7.72 dBm

T1 1.50 dBm
 T2 3.45 dBm
 T3 4.59 dBm
 T4 4.19360000 GHz

OBW 14 720000000 MHz
 Marker 1 [T1]
 Temp 1 [T1 OBW]
 Temp 2 [T1 OBW]

F1 F2

Center 2.412 GHz 2 MHz/ Span 20 MHz

Date: 6.JUL.2009 16:04:13

Ref 21 dBm * Att 30 dB

* RBW 100 kHz Delta 1 [T1]
 * VBW 100 kHz -0.17 dB
 * SWT 500 ms 11.720000000 MHz

20 Offset 1 dB


OBW 14.720000000 MHz
 Marker 1 [T1]
 1.08 dBm
 2.431120000 GHz
 Temp 1 [T1 OBW]
 2.437200000 GHz
 Temp 2 [T1 OBW]
 2.443200000 GHz
 -5.77 dBm

D1 7.07 dBm
 D2 1.08 dBm
 T1
 T2
 F1
 F2

Center 2.437 GHz 2 MHz/ Span 20 MHz


Date: 6.JUL.2009 16:02:06

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

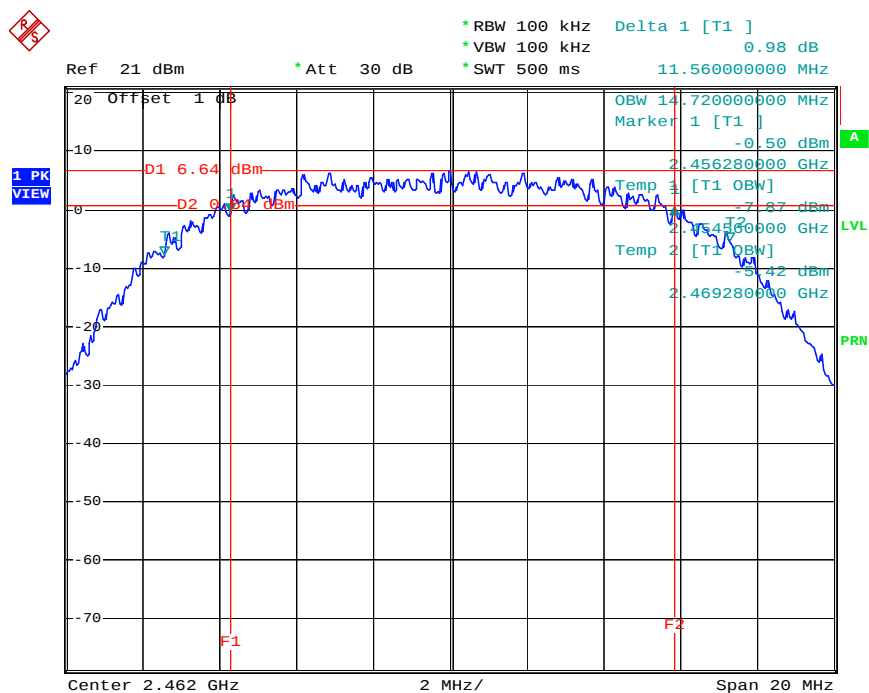


Date: 6.JUL.2009 15:59:17

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

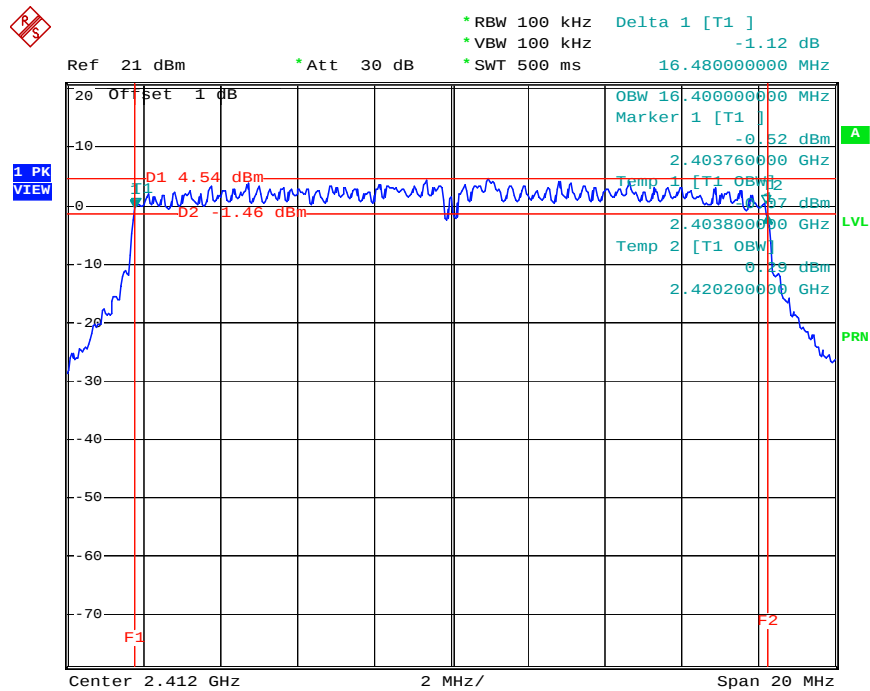


Date: 6.JUL.2009 16:21:45

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

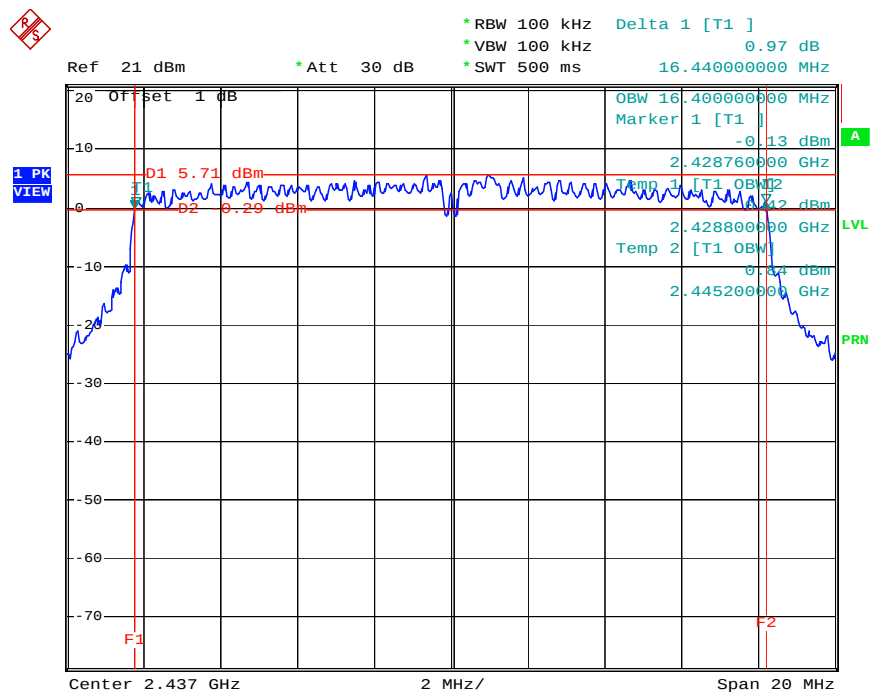

Date: 6.JUL.2009 16:20:21

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

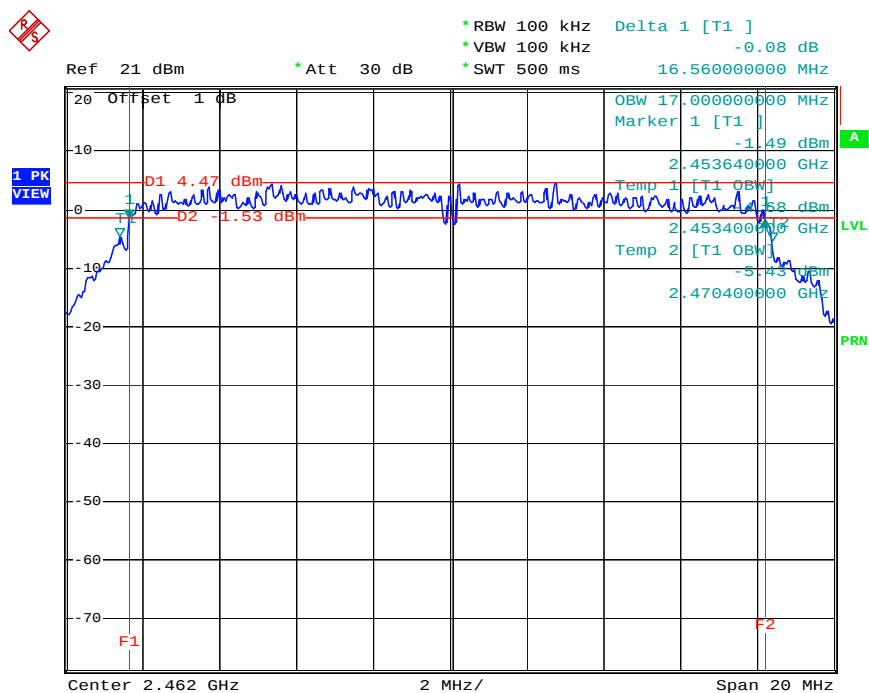

Date: 6.JUL.2009 16:19:05

3.5 Radiated Emissions Measurement

3.5.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4 Test Setup Layout

For radiated emissions below 30MHz

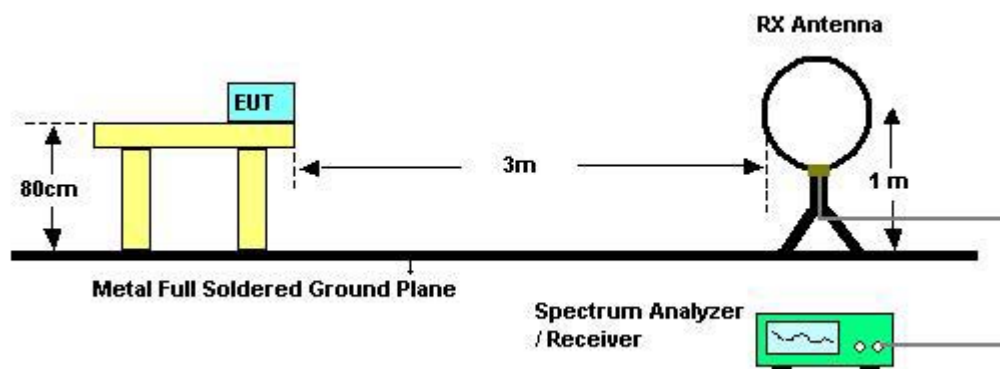

For radiated emissions above 30MHz

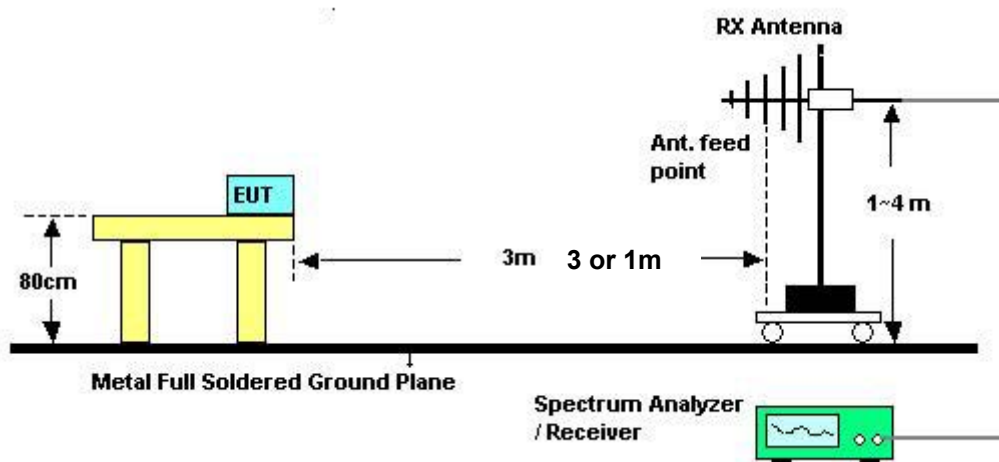

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test date	Jun. 01, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test date	Jun. 01, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11g CH 6

Horizontal

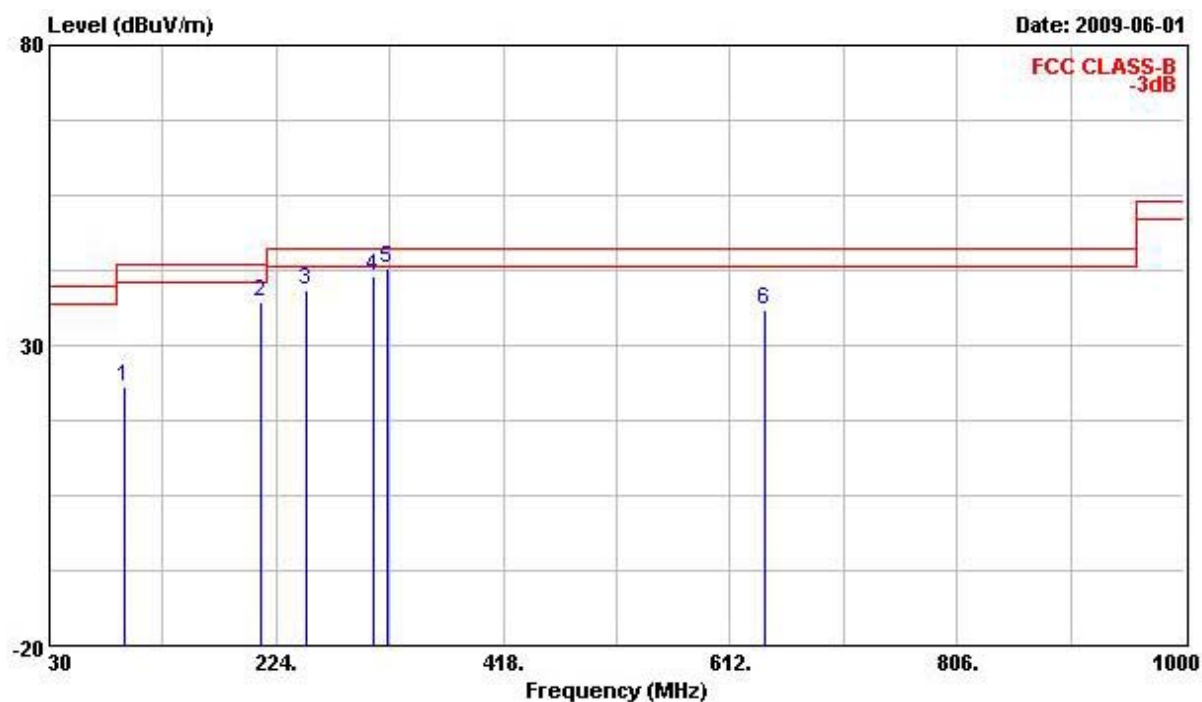

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	94.020	23.01	-20.49	43.50	41.72	10.17	1.91	30.80	---	---	Peak
2	211.390	37.37	-6.13	43.50	53.31	11.73	2.91	30.58	---	---	Peak
3	249.220	39.37	-6.63	46.00	53.81	12.97	3.10	30.50	---	---	Peak
4	307.420	41.51	-4.49	46.00	54.62	13.82	3.45	30.38	---	---	Peak
5	319.060	42.89	-3.11	46.00	55.84	14.00	3.40	30.36	---	---	Peak
6	641.100	36.03	-9.97	46.00	40.74	19.63	5.10	29.44	---	---	Peak

Vertical

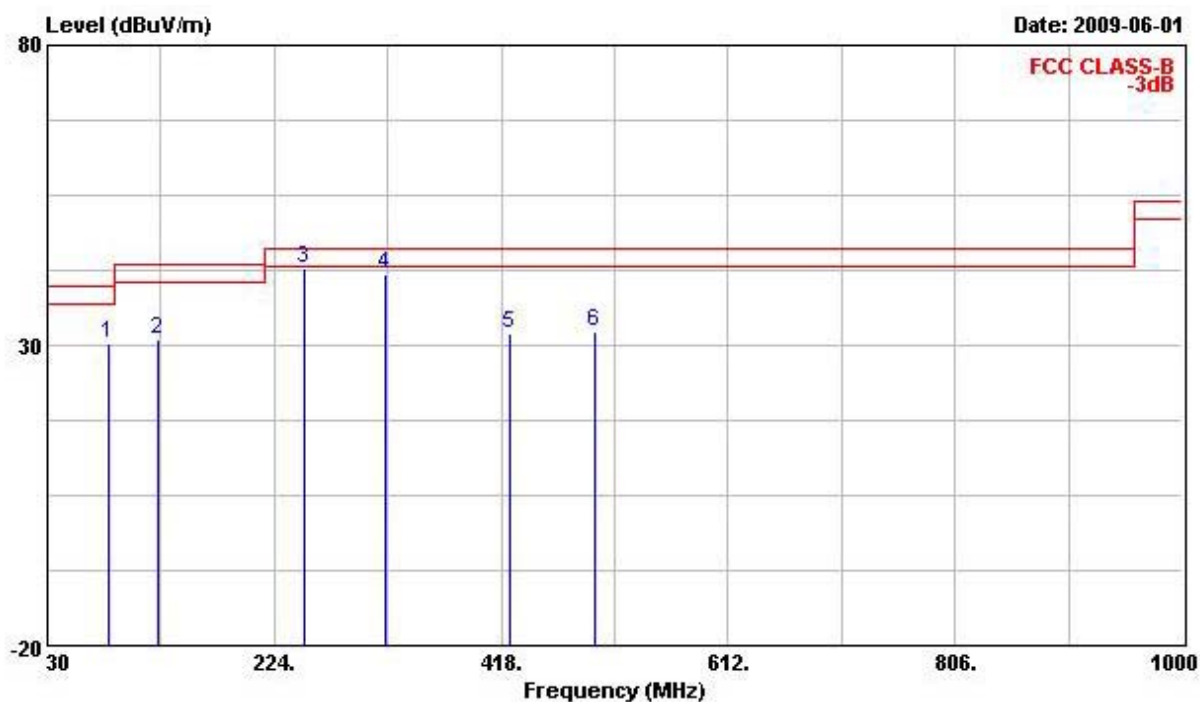

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	82.380	30.30	-9.70	40.00	51.39	7.95	1.76	30.80	---	---	Peak
2	125.060	31.09	-12.41	43.50	46.44	13.18	2.22	30.75	---	---	Peak
3	249.220	42.87	-3.13	46.00	57.31	12.97	3.10	30.50	---	---	Peak
4	319.060	41.73	-4.27	46.00	54.68	14.00	3.40	30.36	---	---	Peak
5	424.790	32.04	-13.96	46.00	42.45	15.76	3.95	30.13	---	---	Peak
6	498.510	32.16	-13.84	46.00	40.54	17.26	4.26	29.90	---	---	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9 Results for Radiated Emissions (1GHz~10th Harmonic)

Final Test date	Jul. 04, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11b CH 1


Horizontal

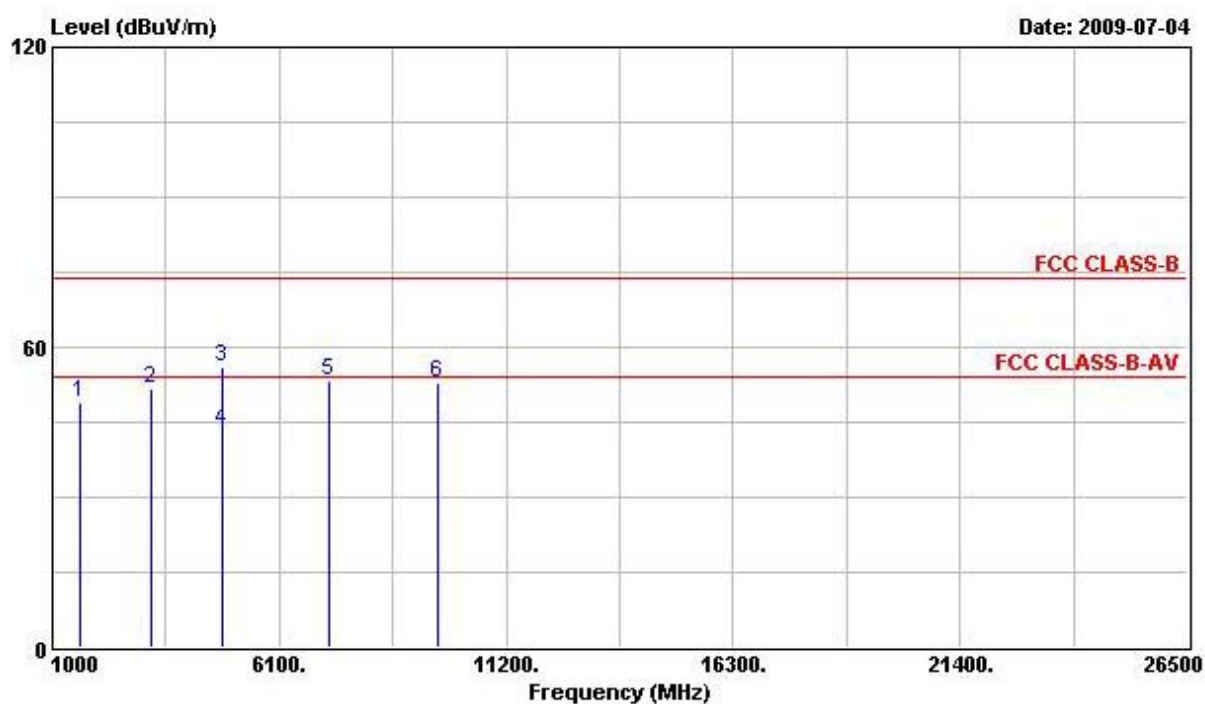

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	1608.000	48.82	-5.18	54.00	53.17	28.13	2.40	34.88	---	---	PK
2	3216.000	51.72			49.76	33.40	3.62	35.06	---	---	PEAK
3	4824.000	56.07	-17.93	74.00	50.66	35.76	4.58	34.94	---	---	PEAK
4	4825.900	43.29	-10.71	54.00	37.89	35.76	4.58	34.94	---	---	Average
5	7232.000	53.09			44.86	37.85	5.63	35.25	---	---	PEAK
6	9648.000	52.86			42.83	39.39	6.34	35.70	---	---	PEAK

Note: An item 2, 5 and 6 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

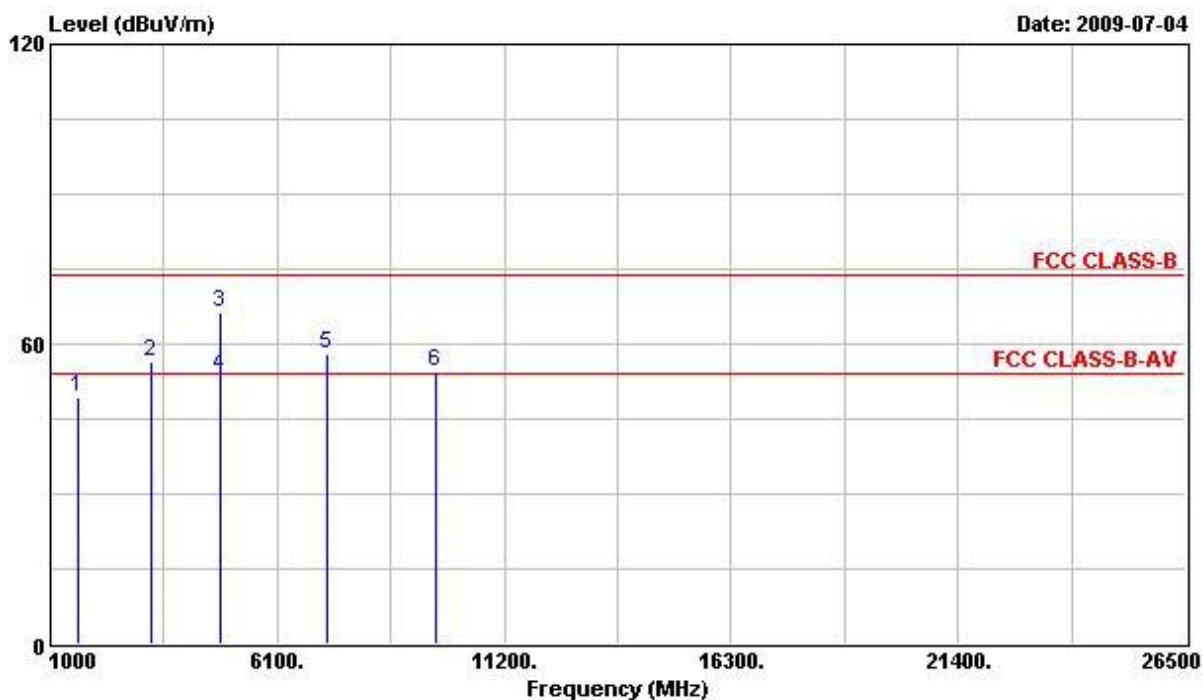

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1608.000	49.46	-4.54	54.00	53.18	28.76	2.40	34.88	---	---	PK
2	3248.000	56.64			54.79	33.25	3.65	35.05	---	---	PEAK
3	4823.880	66.49	-7.51	74.00	61.72	35.13	4.58	34.94	---	---	PEAK
4	4825.880	53.76	-0.24	54.00	48.98	35.13	4.58	34.94	---	---	Average
5	7232.000	58.18			50.90	36.90	5.63	35.25	---	---	PEAK
6	9648.000	54.43			45.20	38.59	6.34	35.70	---	---	PEAK

Note: An item 2, 5 and 6 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test date	Jul. 04, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11b CH 6

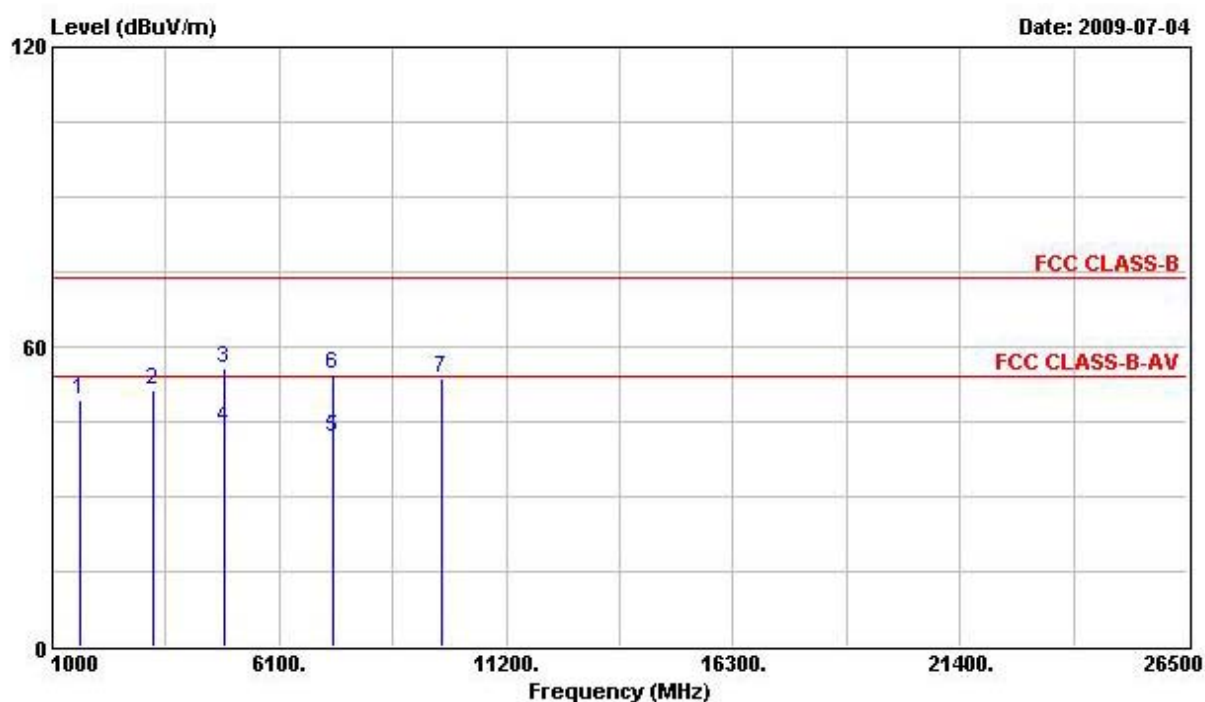Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1624.710	49.42	-4.58	54.00	53.68	28.22	2.40	34.88	---	---	PK
2	3248.000	51.45			49.45	33.40	3.65	35.05	---	---	PEAK
3	4876.000	55.82	-18.18	74.00	50.30	35.83	4.61	34.93	---	---	PEAK
4	4876.000	43.93	-10.07	54.00	38.41	35.83	4.61	34.93	---	---	Average
5	7314.500	41.84	-12.16	54.00	33.61	37.86	5.64	35.27	---	---	Average
6	7314.500	54.53	-19.47	74.00	46.30	37.86	5.64	35.27	---	---	PEAK
7	9748.000	53.79			43.62	39.51	6.36	35.70	---	---	PEAK

Note: An item 2 and 7 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

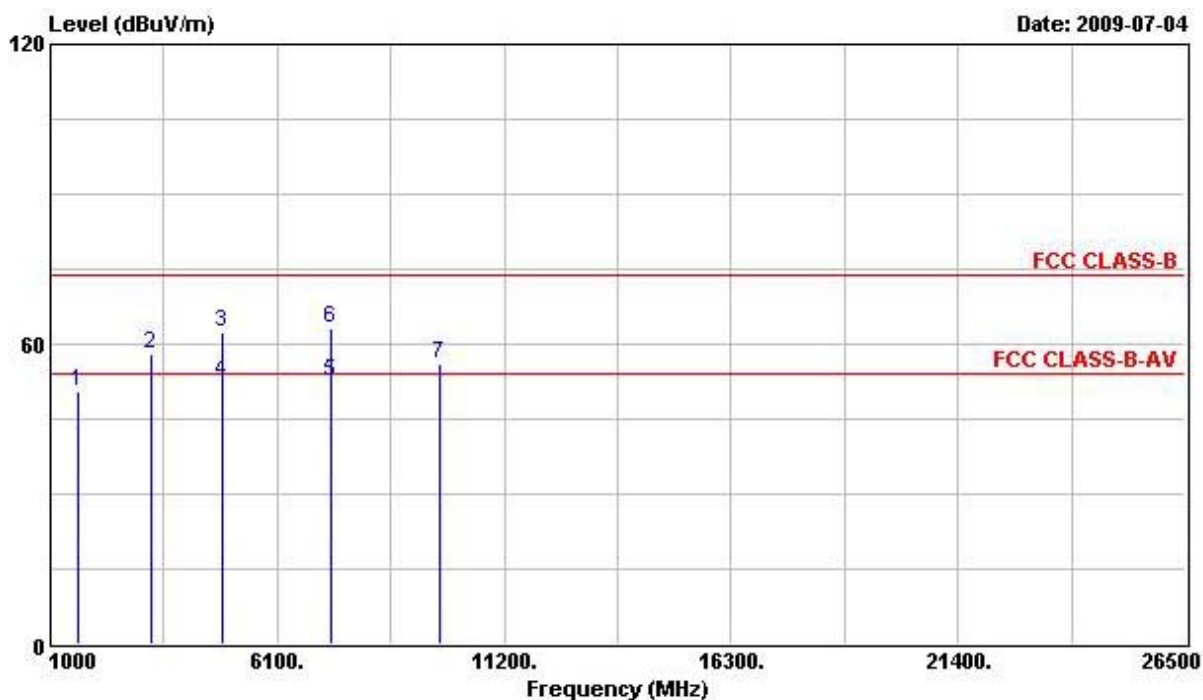

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1624.000	50.39	-3.61	54.00	54.03	28.84	2.40	34.88	---	---	PK
2	3248.000	58.15			56.30	33.25	3.65	35.05	---	---	PEAK
3	4874.000	62.28	-11.72	74.00	57.42	35.18	4.61	34.93	---	---	PEAK
4	4874.000	52.47	-1.53	54.00	47.60	35.18	4.61	34.93	---	---	Average
5	7311.000	52.47	-1.53	54.00	45.17	36.92	5.64	35.26	---	---	Average
6	7311.000	62.96	-11.04	74.00	55.66	36.92	5.64	35.26	---	---	Peak
7	9748.000	56.24			46.87	38.71	6.36	35.70	---	---	PEAK

Note: An item 2 and 7 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test date	Jul. 04, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11b CH 11

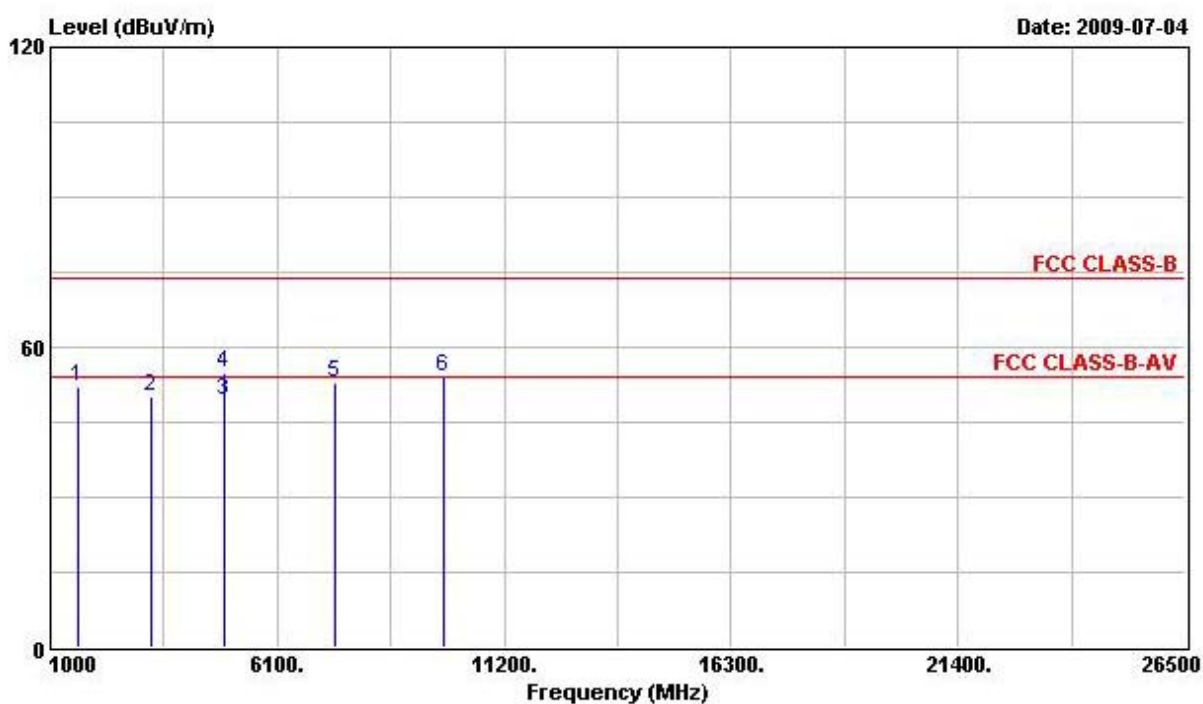Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1640.000	52.09	-21.91	74.00	56.25	28.31	2.40	34.87	---	---	PEAK
2	3280.000	49.95			47.95	33.40	3.65	35.05	---	---	PEAK
3 B	4924.000	49.34	-4.66	54.00	43.68	35.90	4.68	34.92	---	---	Average
4	4924.000	54.95	-19.05	74.00	49.29	35.90	4.68	34.92	---	---	PEAK
5	7382.000	52.82	-21.18	74.00	44.58	37.88	5.65	35.28	---	---	PEAK
6	9848.000	54.05			43.76	39.61	6.38	35.70	---	---	PEAK

Note: An item 2 and 6 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

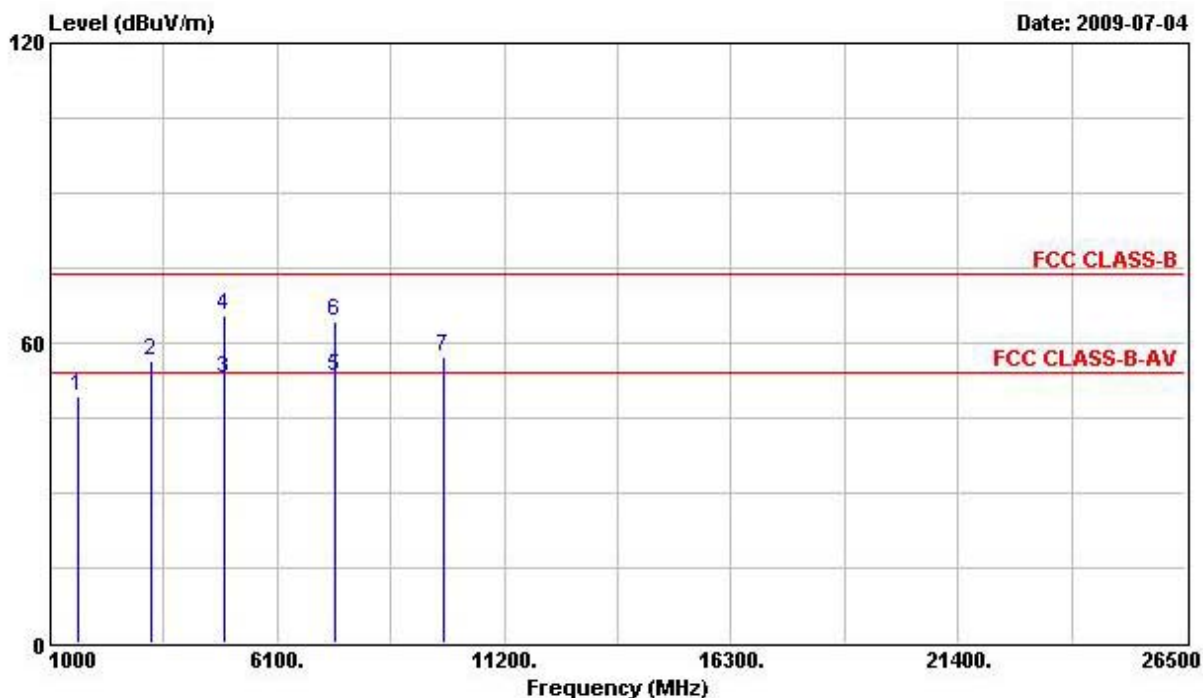


SCHEMATIC OF THE TEST

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1640.000	49.35	-24.65	74.00	52.91	28.92	2.40	34.87	---	---	PEAK
2	3280.000	56.30			54.44	33.26	3.65	35.05	---	---	PEAK
3	4925.900	53.07	-0.93	54.00	48.08	35.23	4.68	34.92	---	---	Average
4	4925.900	65.33	-8.67	74.00	60.34	35.23	4.68	34.92	---	---	Peak
5	7386.600	53.46	-0.54	54.00	46.13	36.96	5.65	35.28	---	---	Average
6	7386.600	64.17	-9.83	74.00	56.84	36.96	5.65	35.28	---	---	Peak
7	9848.000	57.29			47.80	38.81	6.38	35.70	---	---	PEAK

Note: An item 2 and 7 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test date	Jul. 04, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11g CH 1

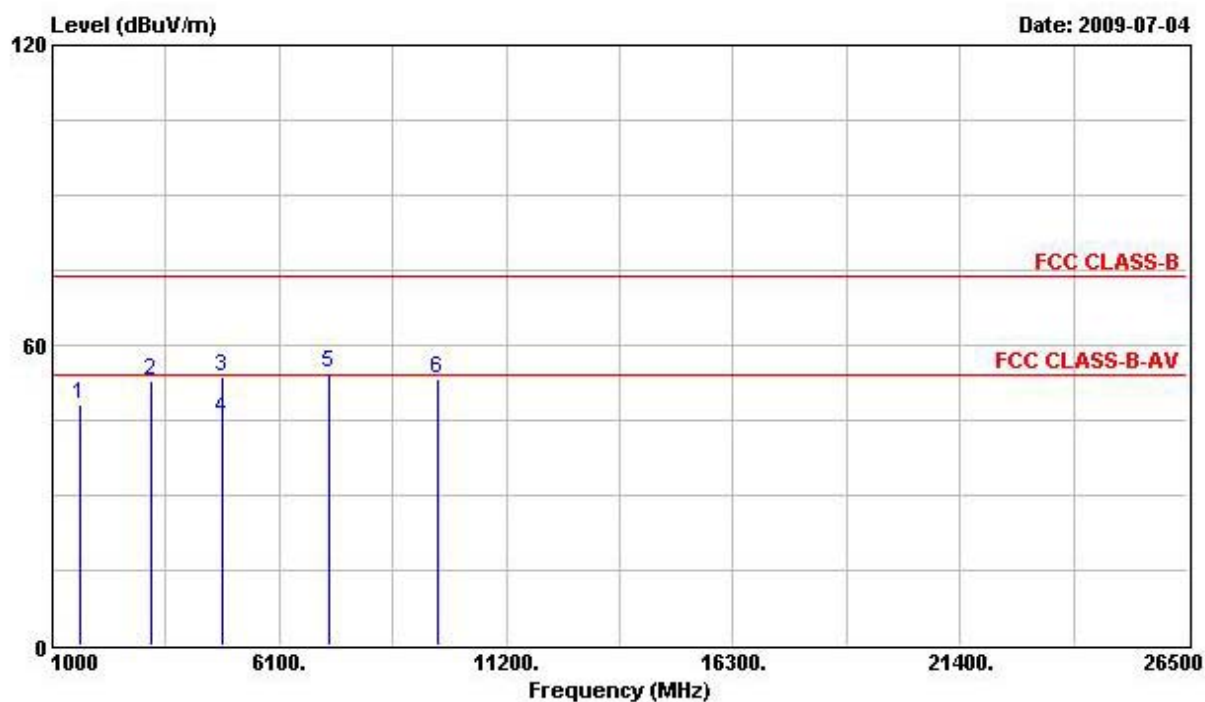Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1608.000	47.99	-6.01	54.00	52.34	28.13	2.40	34.88	---	---	PK
2	3216.000	53.07			51.10	33.40	3.62	35.06	---	---	PEAK
3	4824.000	53.84	-20.16	74.00	48.44	35.76	4.58	34.94	---	---	Peak
4	4824.000	45.38	-8.62	54.00	39.98	35.76	4.58	34.94	---	---	Average
5	7236.000	54.39			46.16	37.85	5.63	35.25	---	---	PEAK
6	9648.000	53.40			43.37	39.39	6.34	35.70	---	---	PEAK

Note: An item 2, 5 and 6 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

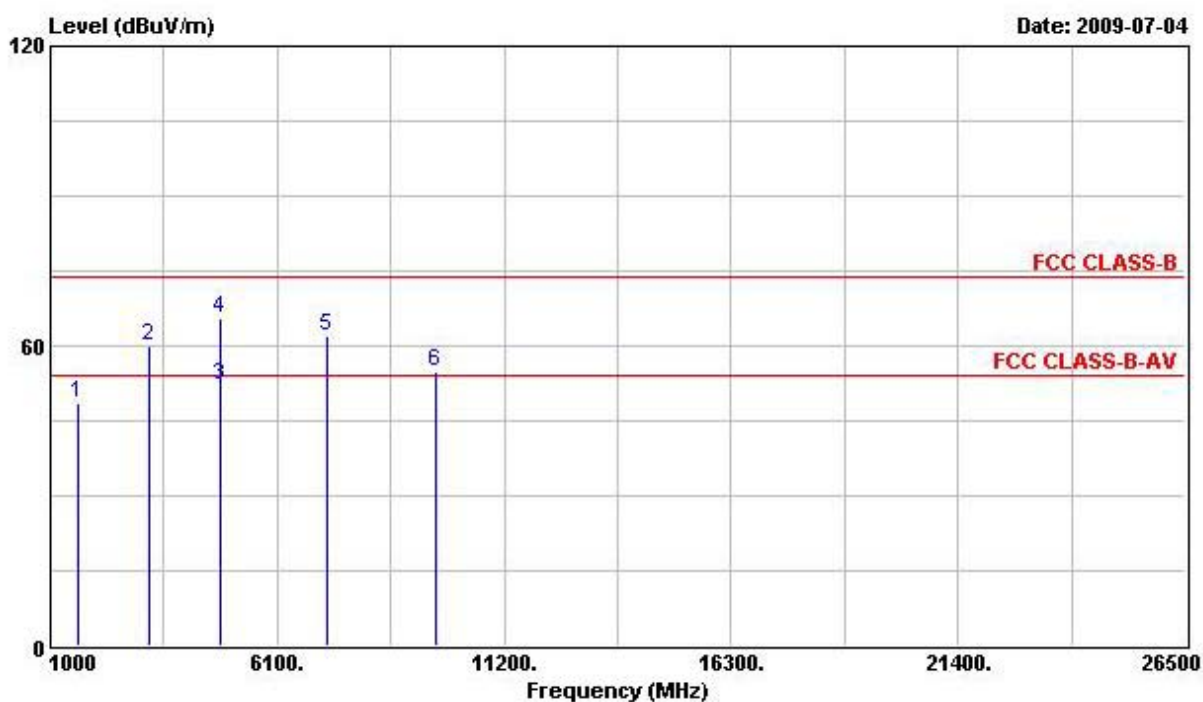

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1608.000	48.36	-5.64	54.00	52.08	28.76	2.40	34.88	---	---	PK
2	3216.000	60.12			58.32	33.24	3.62	35.06	---	---	PEAK
3	4824.100	52.14	-1.86	54.00	47.37	35.13	4.58	34.94	---	---	Average
4	4824.100	65.48	-8.52	74.00	60.71	35.13	4.58	34.94	---	---	Peak
5	7232.000	62.11			54.84	36.90	5.63	35.25	---	---	PEAK
6	9644.000	54.79			45.58	38.57	6.34	35.70	---	---	PEAK

Note: An item 2, 5 and 6 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test date	Jul. 04, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11g CH 6

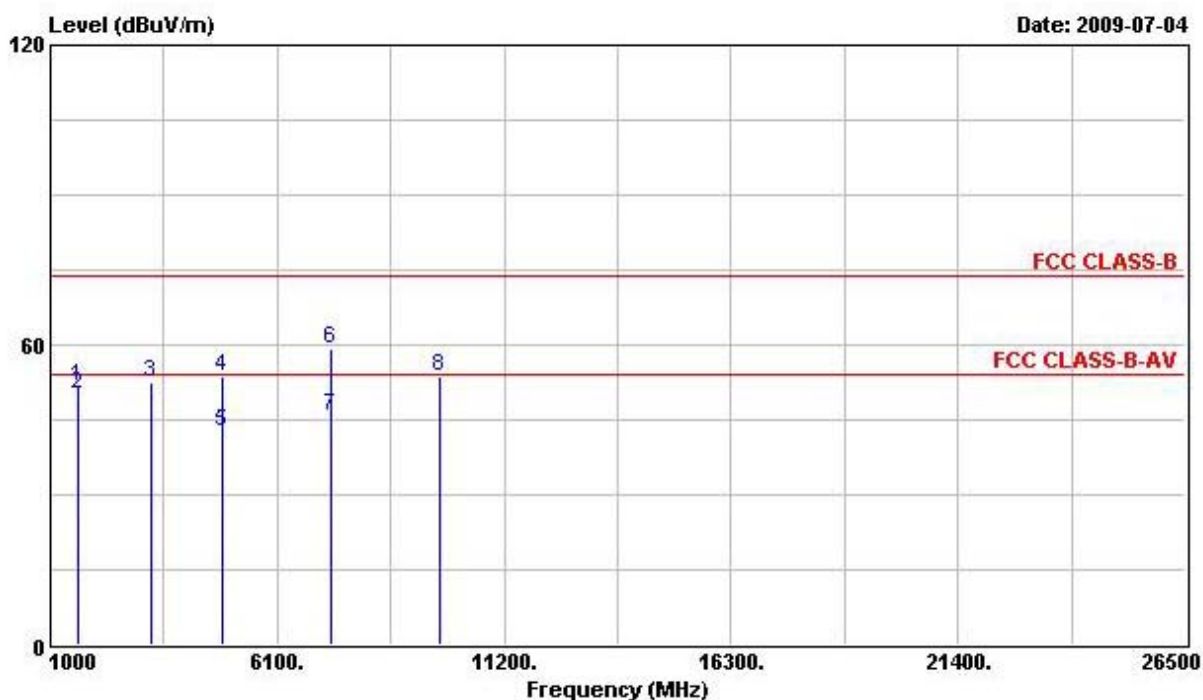Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1624.000	51.75	-22.25	74.00	56.01	28.22	2.40	34.88	---	---	PEAK
2	1624.000	50.22	-3.78	54.00	54.48	28.22	2.40	34.88	---	---	Average
3	3248.000	52.34			50.34	33.40	3.65	35.05	---	---	PEAK
4	4872.000	53.73	-20.27	74.00	48.22	35.83	4.61	34.93	---	---	PEAK
5	4872.000	42.75	-11.25	54.00	37.23	35.83	4.61	34.93	---	---	Average
6	7307.000	59.16	-14.84	74.00	50.92	37.86	5.64	35.26	---	---	PEAK
7	7307.000	45.70	-8.30	54.00	37.46	37.86	5.64	35.26	---	---	Average
8	9744.000	53.61			43.47	39.49	6.36	35.70	---	---	PEAK

Note: An item 3 and 8 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

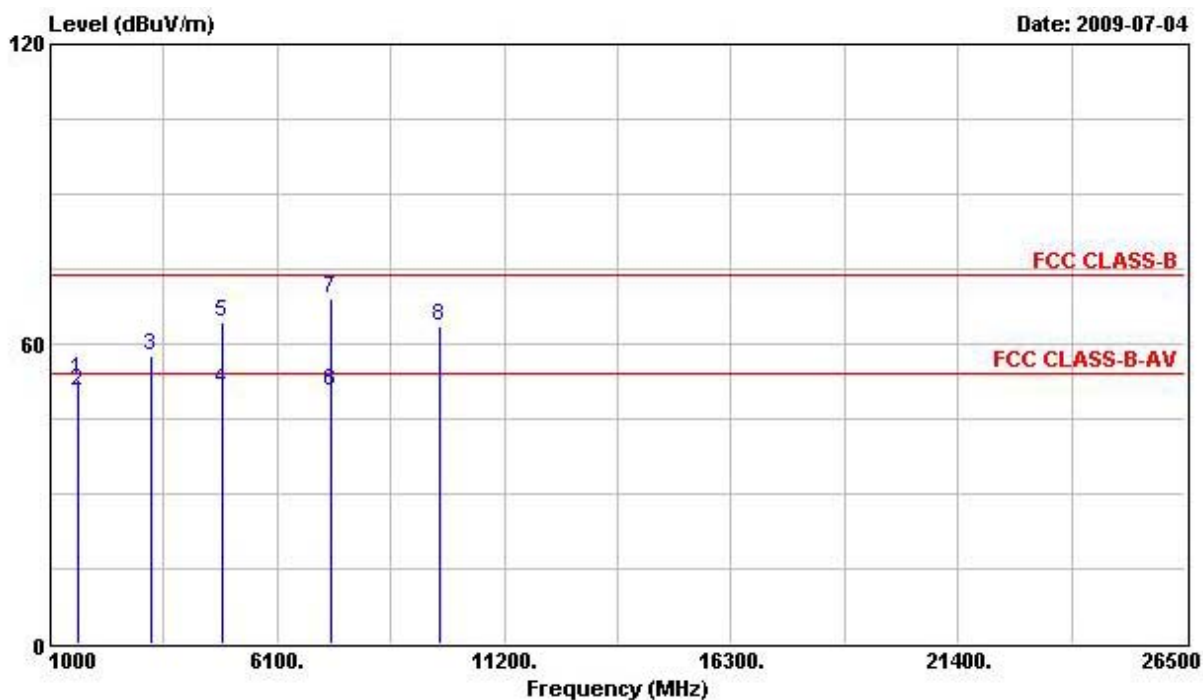

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1624.680	53.00	-21.00	74.00	56.64	28.84	2.40	34.88	---	---	PEAK
2	1624.680	50.56	-3.44	54.00	54.20	28.84	2.40	34.88	---	---	Average
3	3248.000	57.48			55.63	33.25	3.65	35.05	---	---	PEAK
4	4876.000	50.89	-3.11	54.00	46.02	35.18	4.61	34.93	---	---	Average
5	4876.000	64.44	-9.56	74.00	59.57	35.18	4.61	34.93	---	---	PEAK
6	7309.600	50.46	-3.54	54.00	43.15	36.92	5.64	35.26	---	---	Average
7	7309.600	69.03	-4.97	74.00	61.73	36.92	5.64	35.26	---	---	Peak
8	9748.000	63.57			54.20	38.71	6.36	35.70	---	---	PEAK

Note: An item 3 and 8 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test date	Jul. 04, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11g CH 11

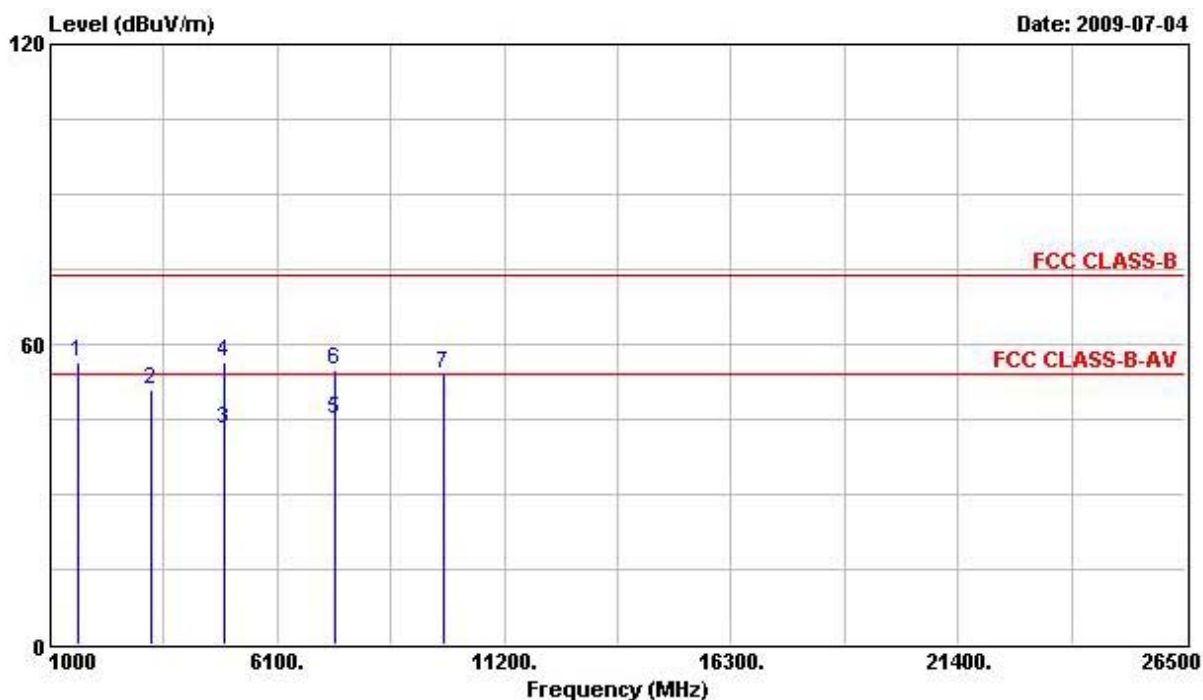Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1640.000	56.25			60.42	28.31	2.40	34.87	---	---	PEAK
2	3280.000	50.82			48.81	33.40	3.65	35.05	---	---	PEAK
3	4924.300	43.03	-10.97	54.00	37.37	35.90	4.68	34.92	---	---	Average
4	4924.300	56.53	-17.47	74.00	50.87	35.90	4.68	34.92	---	---	PEAK
5	7382.000	45.15	-8.85	54.00	36.90	37.88	5.65	35.28	---	---	Average
6	7382.000	54.91	-19.09	74.00	46.67	37.88	5.65	35.28	---	---	PEAK
7	9848.000	53.99			43.70	39.61	6.38	35.70	---	---	PEAK

Note: An item 1, 2 and 7 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

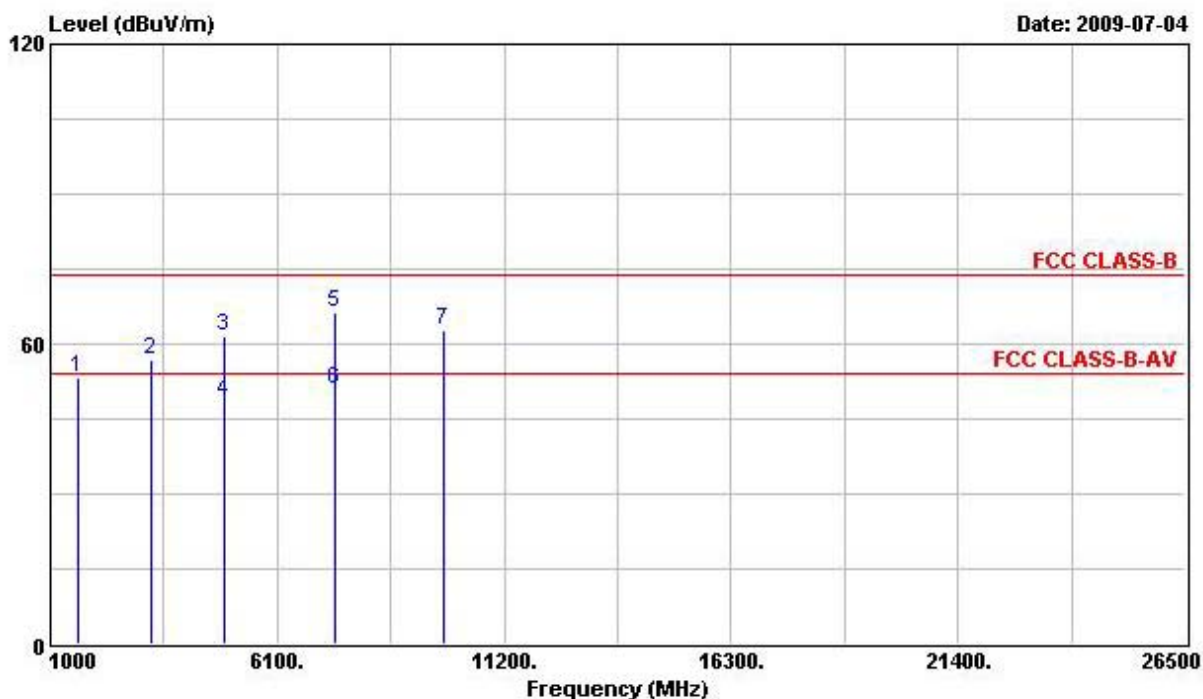

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1640.000	53.30			56.85	28.92	2.40	34.87	---	---	PEAK
2	3280.000	56.75			54.89	33.26	3.65	35.05	---	---	PEAK
3	4920.000	61.40	-12.60	74.00	56.41	35.23	4.68	34.92	---	---	PEAK
4	4920.000	48.59	-5.41	54.00	43.60	35.23	4.68	34.92	---	---	Average
5	7382.500	66.18	-7.82	74.00	58.85	36.95	5.65	35.28	---	---	PEAK
6	7386.600	50.78	-3.22	54.00	43.45	36.96	5.65	35.28	---	---	Average
7	9844.000	62.70			53.21	38.81	6.38	35.70	---	---	PEAK

Note: An item 1, 2 and 7 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6 Band Edge and Fundamental Emissions Measurement

3.6.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

3.6.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.6.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7 Test Result of Band Edge and Fundamental Emissions

Final Test date	Jul. 04, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11b CH 1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2369.850	62.45	-11.55	74.00	27.49	31.97	2.99	0.00	---	---	Peak
2 @	2412.980	113.01			77.90	32.09	3.02	0.00	---	---	Peak
1 @	2369.090	52.13	-1.87	54.00	17.17	31.97	2.99	0.00	---	---	Average
2 @	2411.460	104.41			69.30	32.09	3.02	0.00	---	---	Average

An item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2438.060	115.51			80.25	32.21	3.05	0.00	---	---	Peak
1 @	2439.010	106.63			71.37	32.21	3.05	0.00	---	---	Average

An item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2463.140	113.63			78.27	32.28	3.08	0.00	---	---	Peak
2	2498.100	64.12	-9.88	74.00	28.64	32.40	3.08	0.00	---	---	Peak
1 @	2461.620	105.12			69.79	32.28	3.05	0.00	---	---	Average
2 @	2499.810	53.83	-0.17	54.00	18.35	32.40	3.08	0.00	---	---	Average

An item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test date	Jul. 04, 2009	Test Site No.	03CH02-HY
Temperature	25.8	Humidity	53.4%
Test Engineer	David	Configuration	802.11g CH 1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2384.860	63.02	-10.98	74.00	28.03	31.97	3.02	0.00	---	---	Peak
2 @	2412.220	113.12			78.01	32.09	3.02	0.00	---	---	Peak
1 @	2359.210	49.75	-4.25	54.00	14.86	31.90	2.99	0.00	---	---	Average
2 @	2413.930	100.70			65.59	32.09	3.02	0.00	---	---	Average

An item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2439.010	113.71			78.45	32.21	3.05	0.00	---	---	Peak
1 @	2438.250	103.13			67.87	32.21	3.05	0.00	---	---	Average

An item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2462.380	113.85			78.53	32.28	3.05	0.00	---	---	Peak
2 @	2483.660	71.70	-2.30	74.00	36.28	32.34	3.08	0.00	---	---	Peak
1 @	2465.420	101.25			65.89	32.28	3.08	0.00	---	---	Average
2 @	2483.500	50.37	-3.63	54.00	14.95	32.34	3.08	0.00	---	---	Average

An item 1 is Fundamental Emissions.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

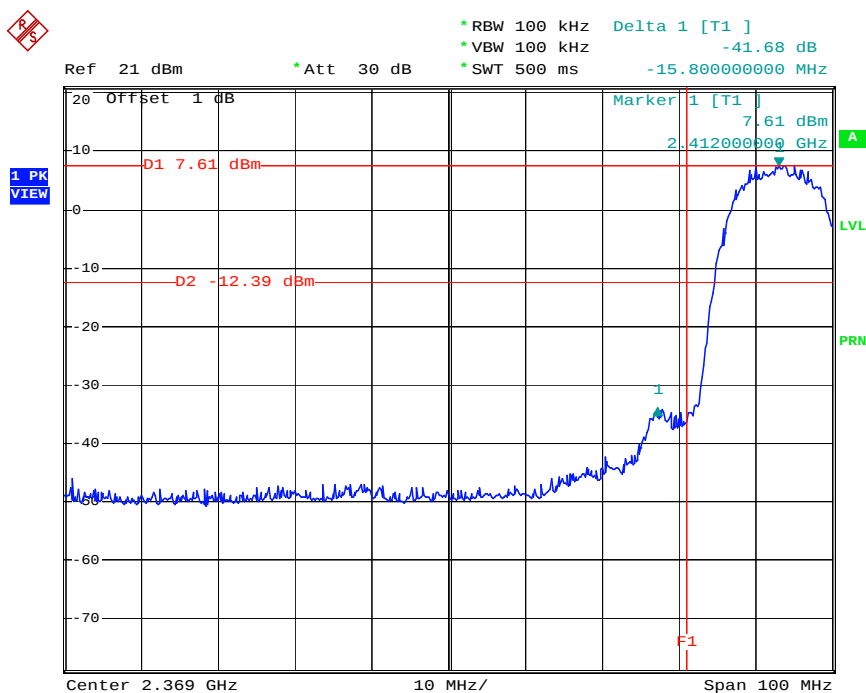


Date: 6.JUL.2009 16:05:02

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

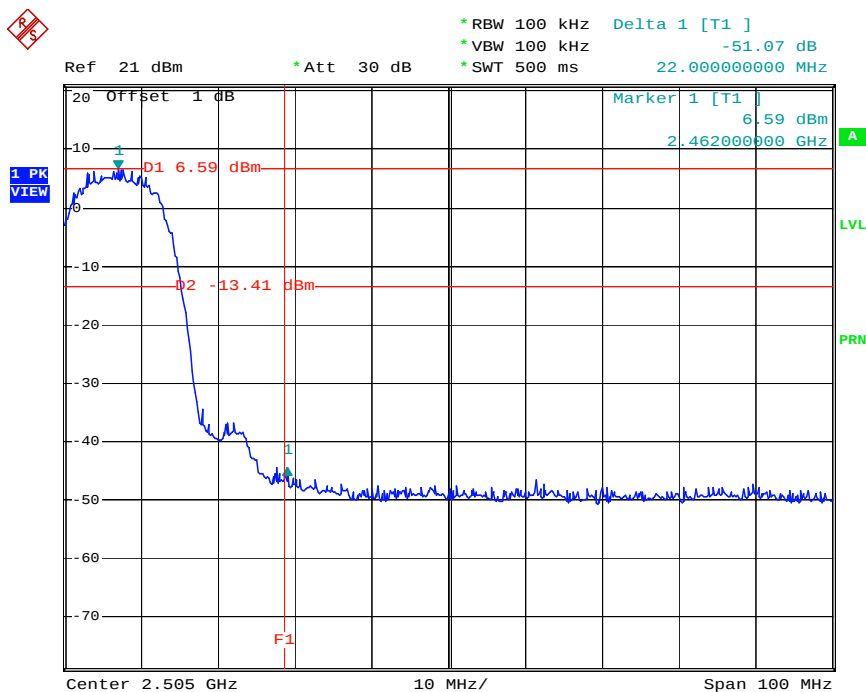


Date: 6.JUL.2009 15:58:02

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

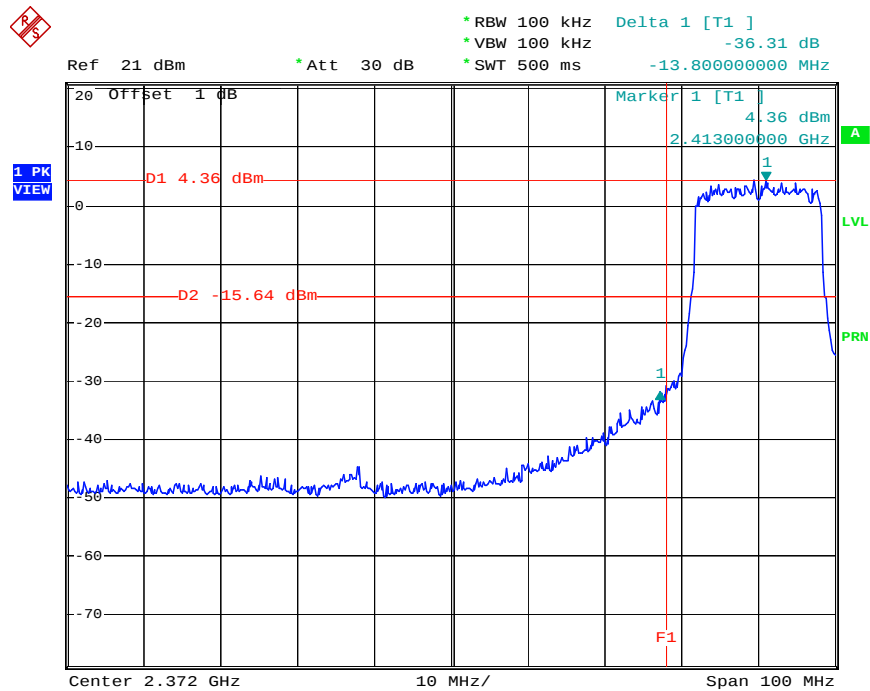

Date: 6.JUL.2009 16:22:34

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

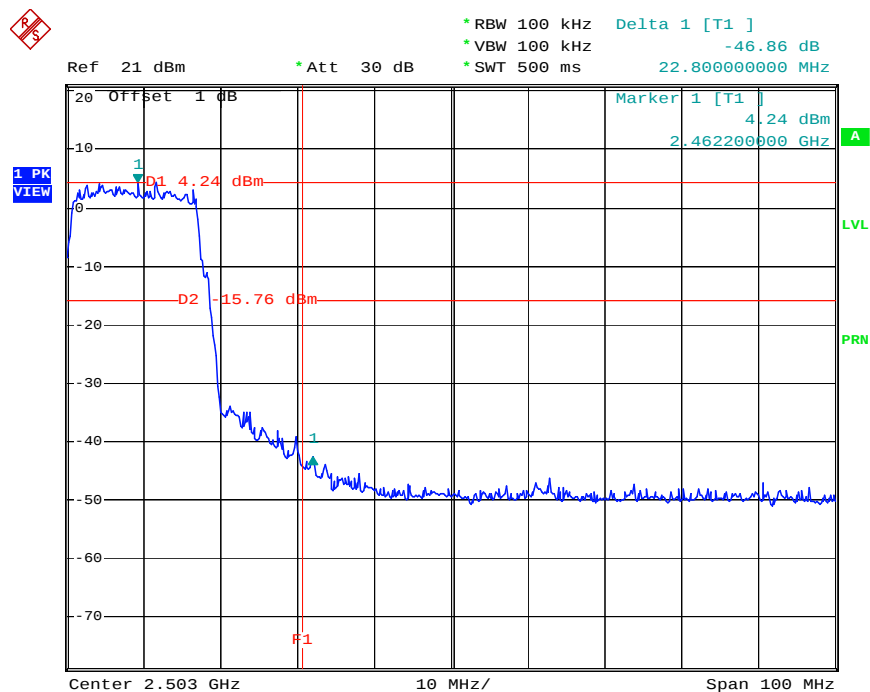

Date: 6.JUL.2009 16:18:01

3.7 Antenna Requirements

3.7.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

3.7.2 Antenna Connector Construction

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Jul. 24, 2008	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Mar. 18, 2009	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Feb. 24, 2009	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010001	9kHz – 30MHz	May 05, 2009	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 11, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz – 1.3 GHz	Jul. 11, 2008	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Feb. 04, 2009	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Nov. 30, 2008	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB020	30 MHz - 1 GHz	Dec. 17, 2008	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul 28, 2008*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 11, 2008	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Jul. 18, 2008	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Dec. 14, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 30, 2009*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION


財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate No. : L1190-090318

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : March 18, 2009

PI, total 19 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix