



# FCC Test Report

**Equipment** : 300N Wireless LAN Concurrent Dual Band Gigabit Router  
**Brand Name** : EDIMAX  
**Model No.** : BR-6476ND / GR-476ND  
**FCC ID** : NDD9564761215  
**Standard** : 47 CFR FCC Part 15.247  
**Operating Band** : 5725 MHz – 5850 MHz  
**Equipment Class** : DTS  
**Applicant** : EDIMAX TECHNOLOGY CO.,LTD  
**Manufacturer** : 6F, No3, Wu-Chuan 3rd Road, Wu-Gu,  
New Taipei City 24891, Taiwan

The product sample received on Nov. 26, 2012 and completely tested on Feb. 26, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
\_\_\_\_\_  
Wayne Hsu / Assistant Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Product Details .....	7
1.3	Accessories .....	7
1.4	Support Equipment.....	7
1.5	Testing Applied Standards .....	7
1.6	Testing Location Information.....	8
1.7	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>9</b>
2.1	The Worst Case Modulation Configuration .....	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter .....	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Test Setup Diagram .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>13</b>
3.1	AC Power-line Conducted Emissions .....	13
3.2	6dB Bandwidth .....	16
3.3	RF Output Power.....	19
3.4	Power Spectral Density .....	25
3.5	Transmitter Radiated Bandedge Emissions.....	28
3.6	Transmitter Radiated Unwanted Emissions .....	33
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>	<b>54</b>
<b>APPENDIX A. TEST PHOTOS .....</b>		<b>A9</b>
<b>APPENDIX B. PHOTOGRAPHS OF EUT .....</b>		<b>B23</b>



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.3055450MHz 51.20 (Margin 8.89dB) - AV 36.94 (Margin 13.15dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth [MHz] 20M:17.41M:35.40	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]:24.38	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/3kHz]:-13.31	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 5722.300MHz: 22.69 dB	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 55.220MHz 39.89 (Margin 0.11dB) - QP	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



## Revision History



## 1 General Description

### 1.1 Information

#### 1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	RF Output Power (dBm)	Co-location
5725-5850	a	5745-5825	149-165 [5]	1	22.66	Yes
5725-5850	n (HT20)	5745-5825	149-165 [5]	2	24.38	Yes
5725-5850	n (HT40)	5755-5795	151-159 [2]	2	23.84	Yes

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.  
Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

#### 1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	<input type="checkbox"/> Temporary RF connector provided
<input type="checkbox"/>	<input type="checkbox"/> No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input checked="" type="checkbox"/>	External antenna (dedicated antennas)
	<input type="checkbox"/> Single power level with corresponding antenna(s).
	<input checked="" type="checkbox"/> Multiple power level and corresponding antenna(s).

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	External	Dipole	2.00

Reminder: The EUT was pre-tested Antenna Port 1 and Antenna Port 2 for single chain, the worst case was Antenna Port 1. Therefore only the test data recorded in this report.



### 1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

### 1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100.00%- IEEE 802.11a	0
<input checked="" type="checkbox"/> 100.00% - IEEE 802.11n (HT20)	0
<input checked="" type="checkbox"/> 100.00%- IEEE 802.11n (HT40)	0

### 1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> PoE



## 1.2 Product Details

The equipment is 300N Wireless LAN Concurrent Dual Band Gigabit Router. There are two types of EUT. One is with USB and without USB. The only difference is the appearance. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

## 1.3 Accessories

Accessories Information				
AC Adaptor	Brand Name	DVE	Model Name	DSA-12PFA-09 FUS
	Power Rating	I/P: 100-240V ~ 50/60Hz 0.5A; O/P: +12V 1A		

Note: Regarding to more detail and other information, please refer to user manual.

## 1.4 Support Equipment

Support Equipment - Conducted Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	VOSTRO 3350	DoC
2	(USB) Mouse	Microsoft	1004	DoC
3	Printer	EPSON	C61	DoC
4	Dummy Load	-	-	-
5	USB 2.0 Flash Disk x2	Transcend	JetFlash 530	DoC
6	PoE	Motorola	AP-PSBIAS-2P2-AFR	DoC
7	Notebook (Remote Workstation)	DELL	INSPIRON 6400	DoC

Support Equipment - Radiated Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5520	DoC
2	(USB) Mouse	Microsoft	1004	DoC
3	Printer	EPSON	C61	DoC
4	USB 2.0 Flash Disk x2	Transcend	JetFlash 530	DoC
5	PoE (Remote Workstation)	Motorola	AP-PSBIAS-2P2-AFR	DoC
6	Notebook (Remote Workstation)	DELL	INSPIRON 6400	DoC

## 1.5 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074
- FCC KDB 662911
- FCC KDB 412172



## 1.6 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer	Test Environment
RF Conducted		TH01-HY	Ian	21.2°C / 30%
AC Conduction		CO04-HY	Bill	22.8°C / 53.4%
Radiated Emission		03CH02-HY	Daniel	21.8°C / 58%
Test Date				Jan. 15, 2013~Jan. 17, 2013

## 1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing				
Modulation Mode	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS	Worst Data Rate / MCS	RF Output Power (dBm)
11a,6-54Mbps	1	6-54 Mbps	6 Mbps	22.66
HT20,M0-15	2	MCS 0-15	MCS 0	24.38
HT40,M0-15	2	MCS 0-15	MCS 0	23.84

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 800ns.

Note 2: Modulation modes consist below configuration:  
11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n

Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

### 2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std. 802.11	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
a, n (HT20)	5745-(F1), 5785-(F2), 5825-(F3)
n (HT40)	5755-(F4), 5795-(F5)

### 2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software Version	RT 5x9x QA_1.0.7.6						
Modulation Mode	N <sub>TX</sub>	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		
		5745	5785	5825	5755	5795	-
11a,6-54Mbps	1	2B	2B	2B	-	-	-
HT20,M0-15	2	2B,2B	2B,2B	2B,2B	-	-	-
HT40,M0-15	2	-	-	-	2B,2B	2B,2B	-

## 2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	Adapter Mode
2	PoE Mode


For operating mode 1 is the worst case and it was record in this test report.

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, Power Spectral Density, 6 dB Bandwidth
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	11a, HT20, HT40

The Worst Case Mode for Following Conformance Tests							
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions						
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.						
<b>User Position</b>	<input checked="" type="checkbox"/> EUT will be placed in fixed position. The worst planes is X. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.						
<b>Operating Mode &lt; 1GHz</b>	<input checked="" type="checkbox"/> 1. Adapter Mode <input checked="" type="checkbox"/> 2. PoE Mode						
<b>Modulation Mode</b>	11a, HT20, HT40						
<b>Orthogonal Planes of EUT</b>	<table border="1"> <thead> <tr> <th>X Plane</th> <th>Y Plane</th> <th>Z Plane</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					
							


For operating mode 2 is the worst case and it was record in this test report.

## 2.5 Test Setup Diagram

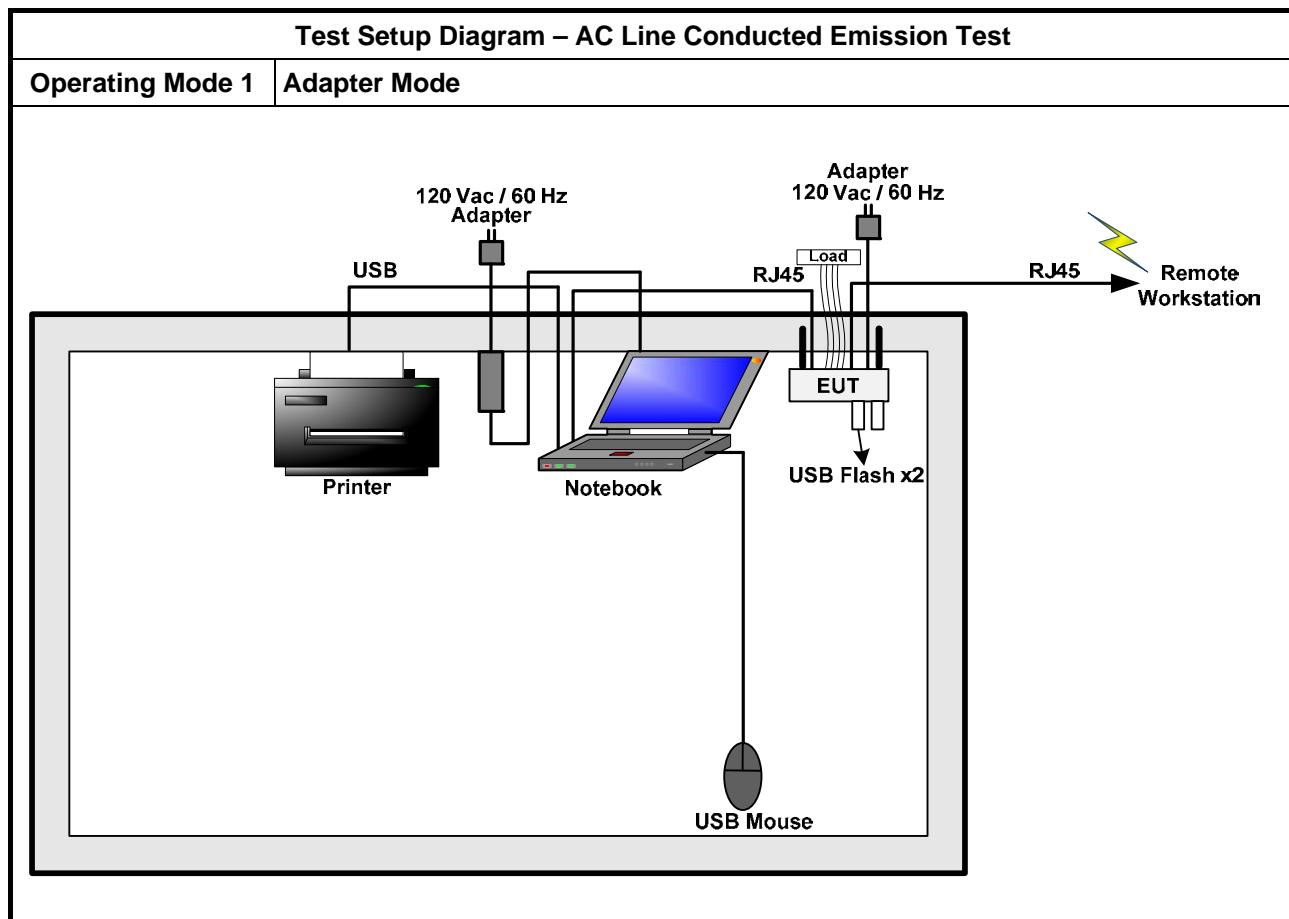


**Test Setup Diagram - Radiated Test (Below 1GHz)**

**Operating Mode** **PoE Mode**

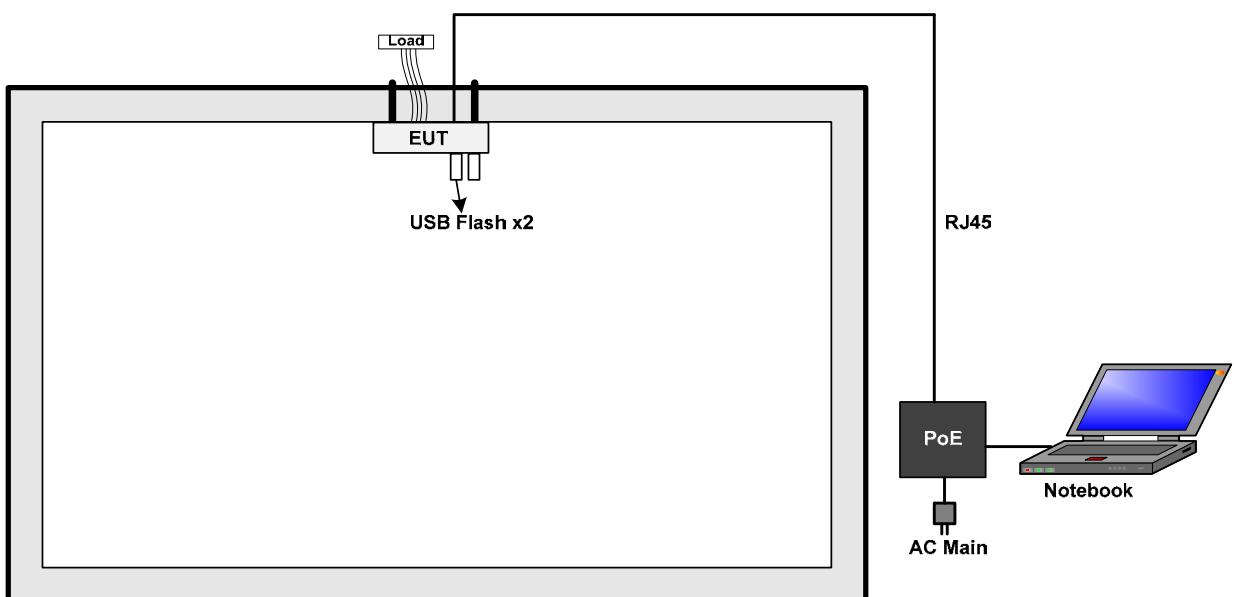

**Test Setup Diagram - Radiated Test (Above 1GHz)**

**Operating Mode** **Transmission Mode**

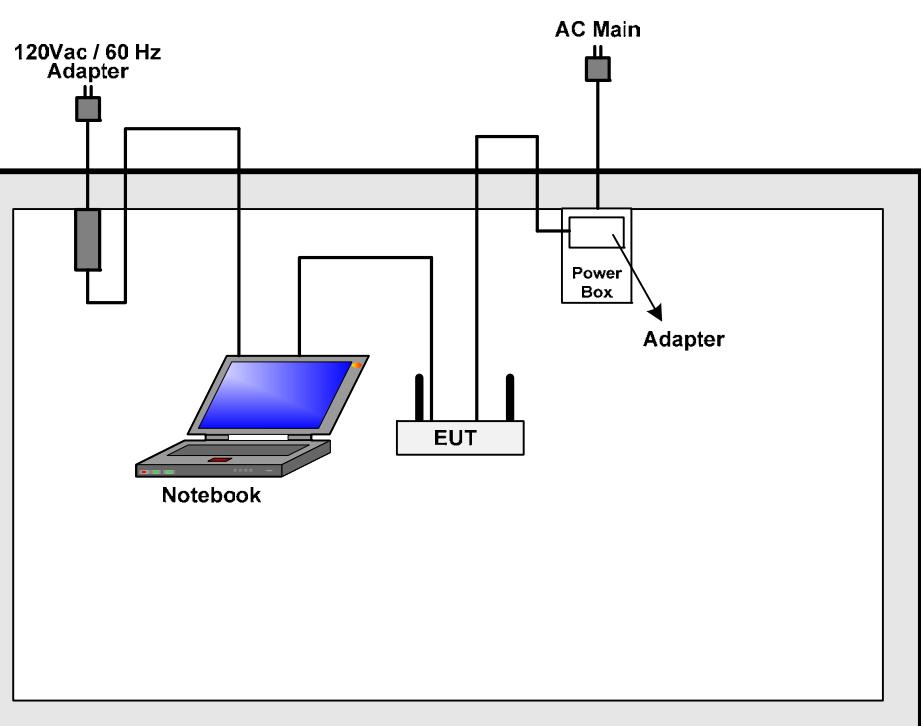

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


##### 3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

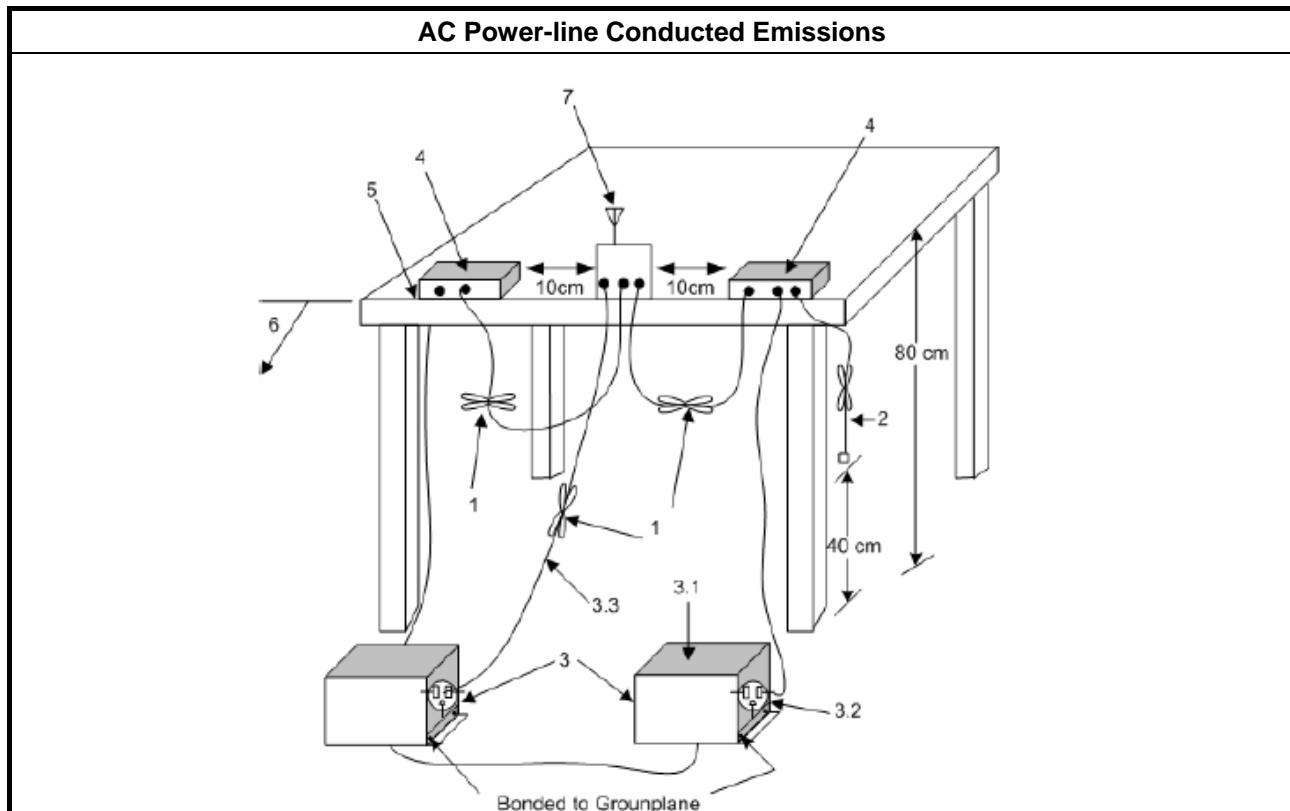

### 3.1.5 Test Result of AC Power-line Conducted Emissions

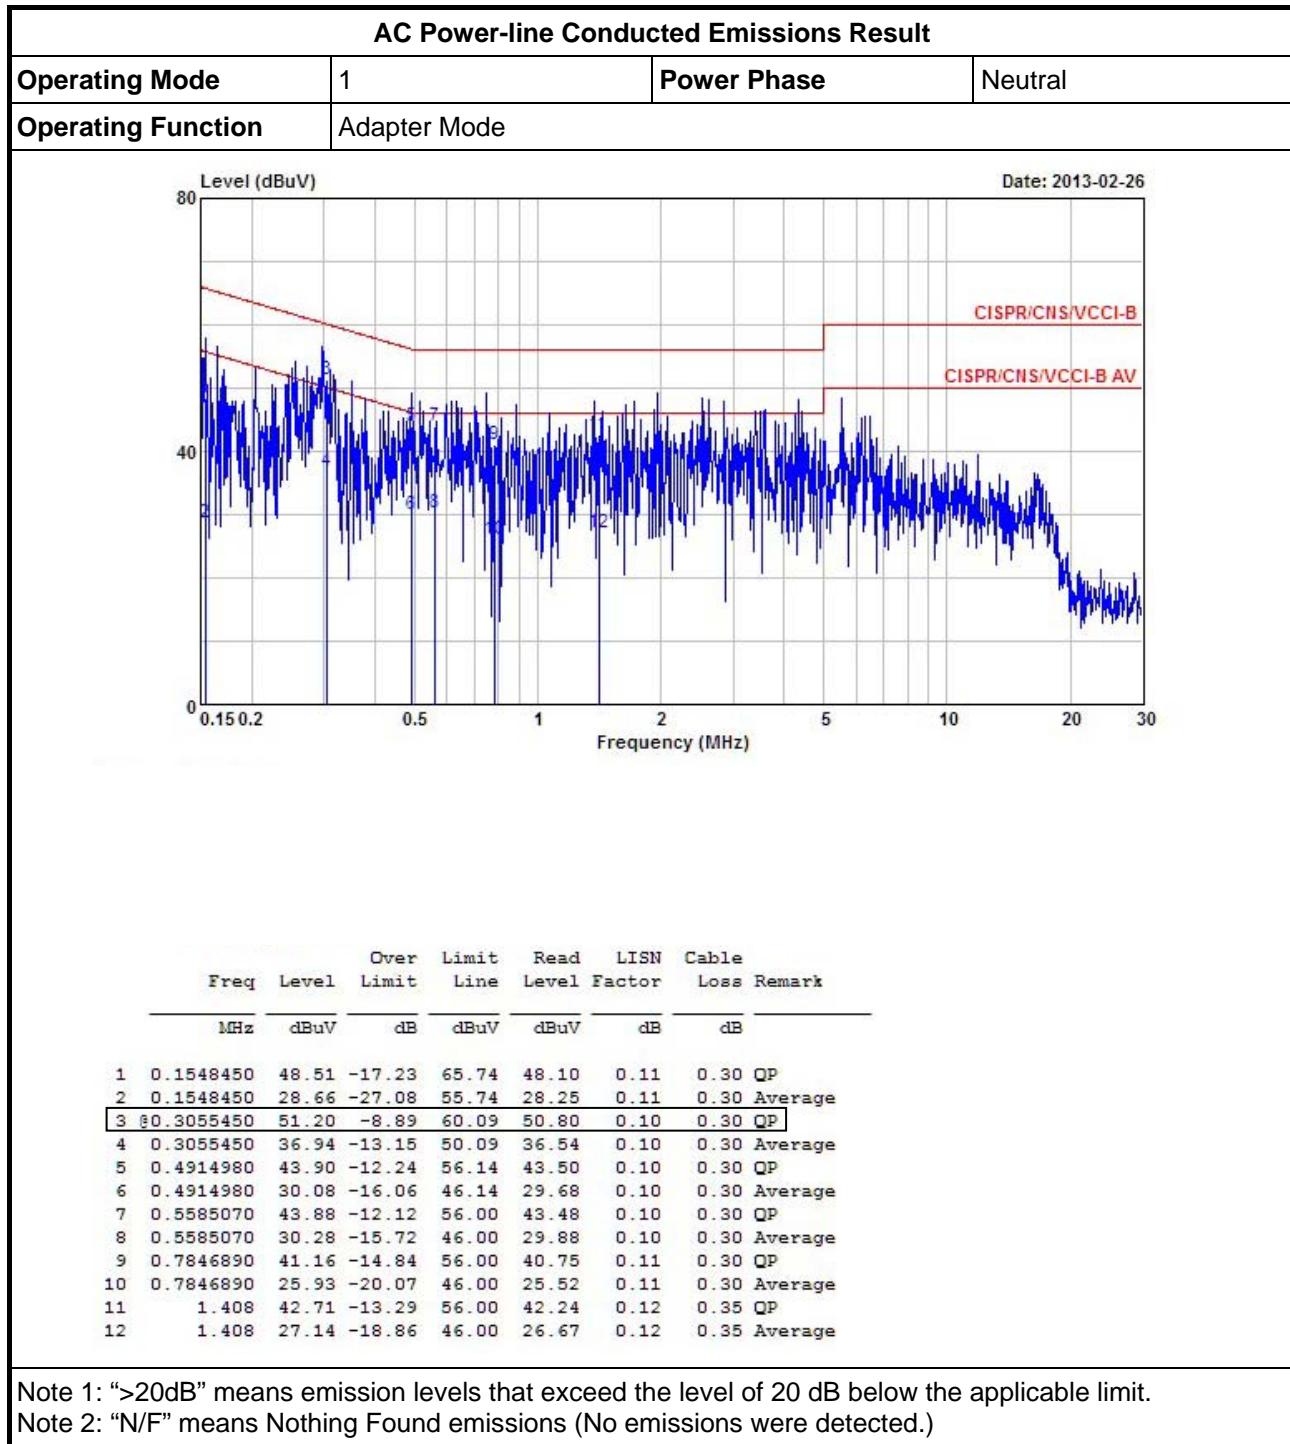

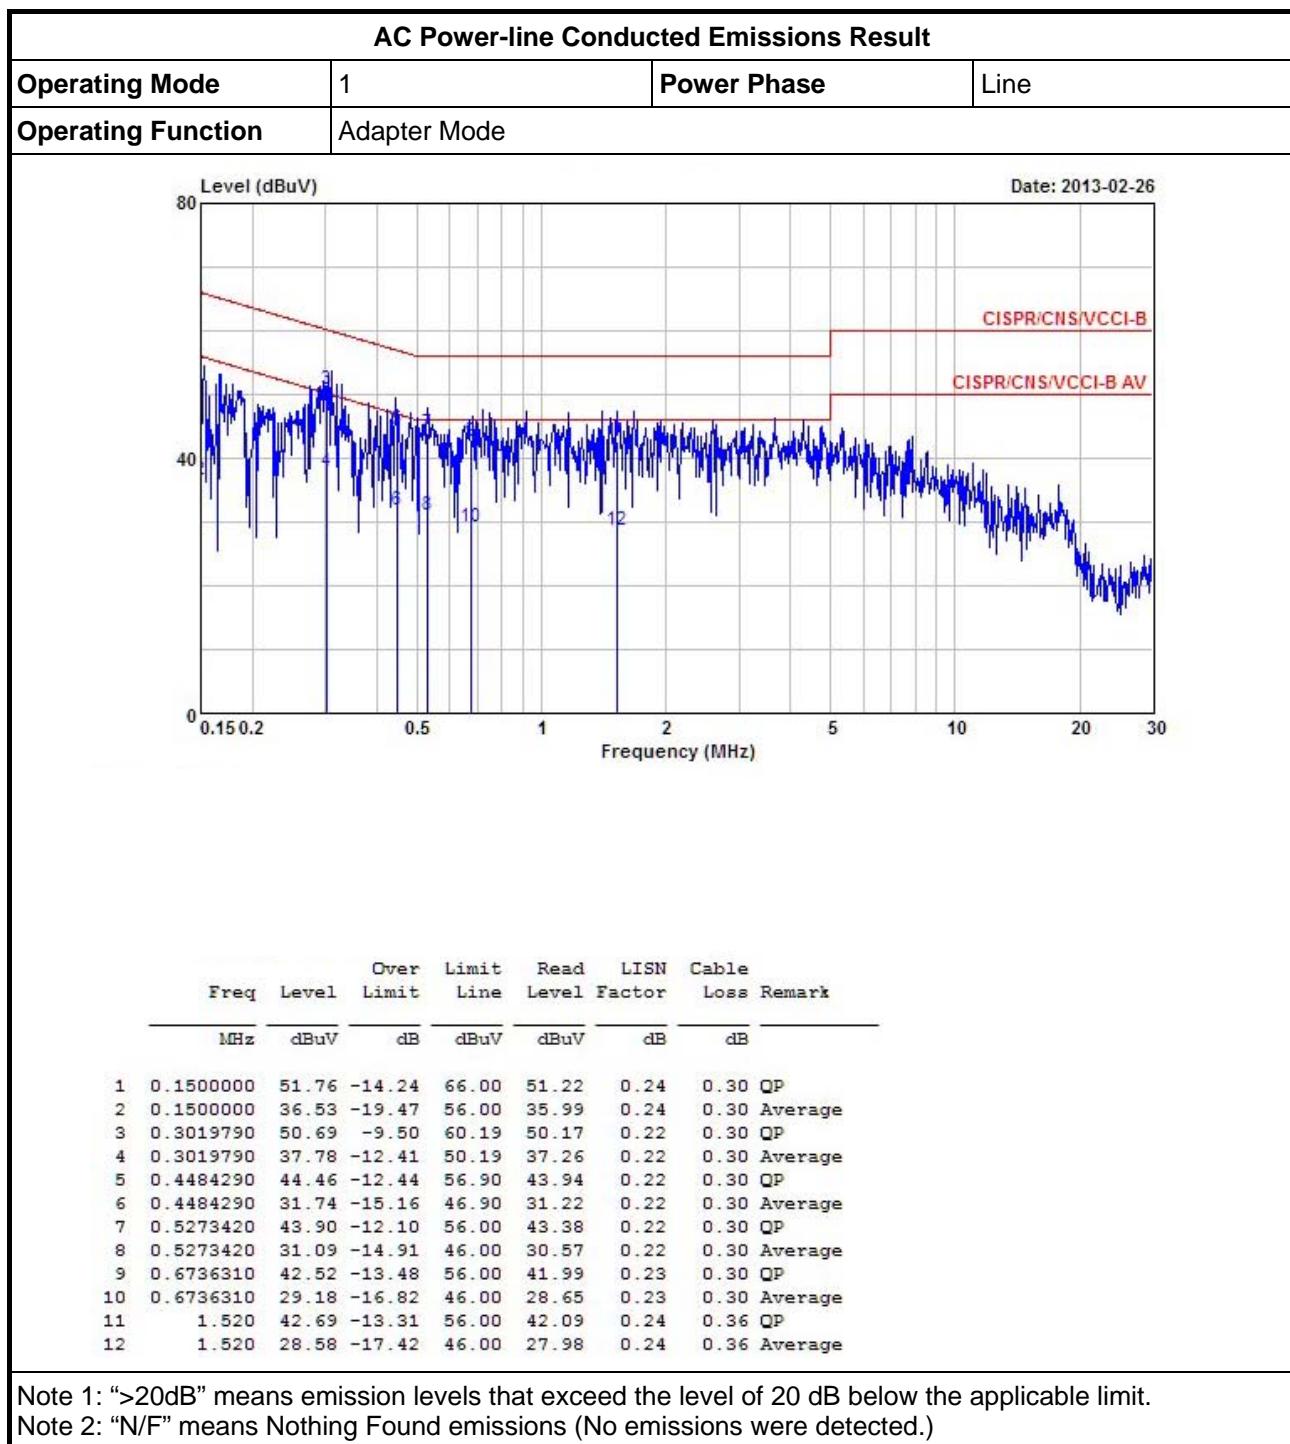

## **3.2 6dB Bandwidth**

### **3.2.1 6dB Bandwidth Limit**

<b>6dB Bandwidth Limit</b>
<b>Systems using digital modulation techniques:</b>
<input checked="" type="checkbox"/> 6 dB bandwidth $\geq$ 500 kHz.


### **3.2.2 Measuring Instruments**

Refer a test equipment and calibration data table in this test report.

### **3.2.3 Test Procedures**

<b>Test Method</b>
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 7.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 7.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

### **3.2.4 Test Setup**



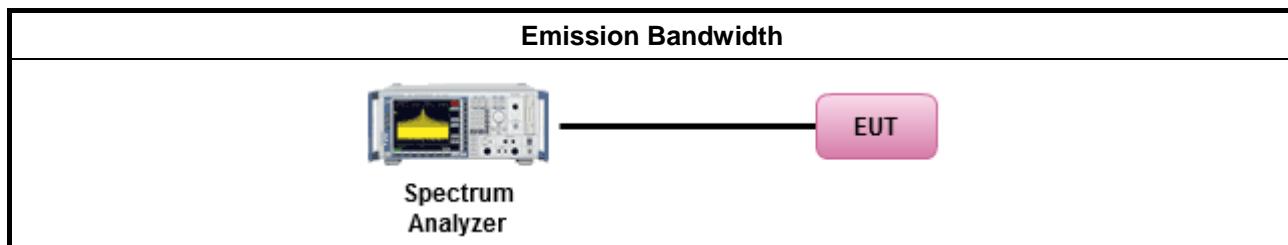




## 3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	-	-	Chain-Port 1	Chain-Port 2	-	-
11a	1	5745	16.43	-	-	-	16.35	-	-	-
11a	1	5785	16.44	-	-	-	16.20	-	-	-
11a	1	5825	16.47	-	-	-	16.35	-	-	-
HT20	2	5745	17.45	17.42	-	-	17.11	17.41	-	-
HT20	2	5785	17.45	17.46	-	-	17.29	17.19	-	-
HT20	2	5825	17.42	17.52	-	-	17.14	17.41	-	-
HT40	2	5755	36.10	35.90	-	-	35.16	35.16	-	-
HT40	2	5795	36.02	36.34	-	-	35.24	35.40	-	-
Limit			N/A				≥500 kHz			
Result			Complied							

Note 1: N<sub>TX</sub> = Number of Transmit Chains

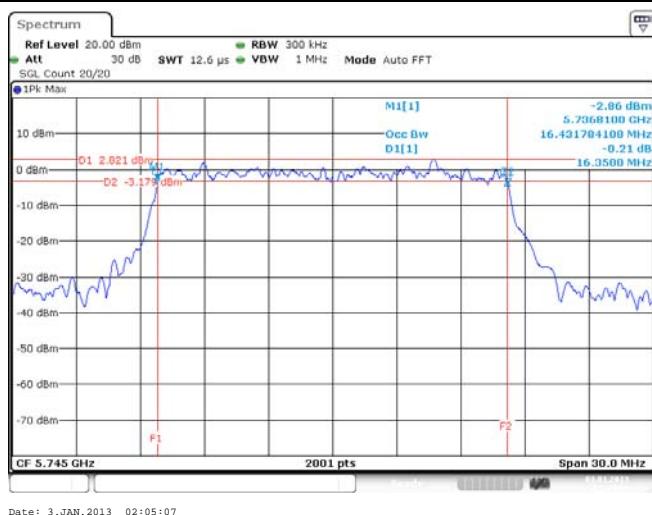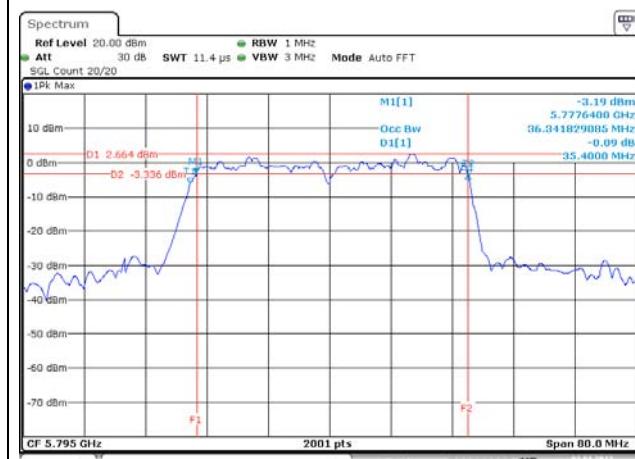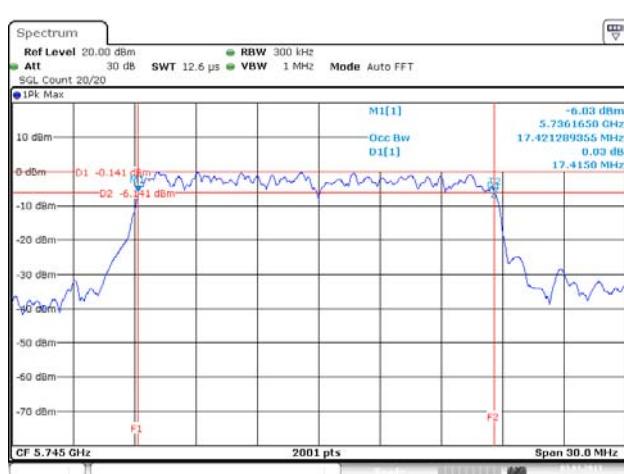**Worst Emission Bandwidth Plots**
**11a**

**HT20**
**HT40**


### **3.3 RF Output Power**

#### **3.3.1 RF Output Power Limit**

<b>RF Output Power Limit</b>	
<b>Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 5725-5850 MHz Band:	
<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm	
<input type="checkbox"/> Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30$ dBm	
<b>e.i.r.p. Power Limit:</b>	
<input checked="" type="checkbox"/> 5725-5850 MHz Band	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)	
<input type="checkbox"/> Point-to-point systems (P2P): N/A	
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi. $P_{eirp}$ = e.i.r.p. Power in dBm.	

#### **3.3.2 Measuring Instruments**

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

<b>Test Method</b>
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.1.1 Option 1 (RBW $\geq$ EBW method).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1.2 Option 2 (integrated band power method).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.1.3 Option 2 (peak power meter for VBW $\geq$ DTS BW)
<input checked="" type="checkbox"/> Maximum Conducted (Average) Output Power
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2.1 Option 1 (spectral trace averaging).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2.2 Option 2 (slow sweep speed).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2.3 Option 3 (average power meter).
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

### 3.3.4 Test Setup

<b>RF Output Power (Spectrum Analyzer)</b>
 <p>Spectrum Analyzer</p> <p>EUT</p>
<b>RF Output Power (Power Meter)</b>
 <p>Power Meter</p> <p>EUT</p>



## 3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum $G_{ANT}$ (dBi)		2.00	2.00	-	-
Modulation Mode	DG (dBi)	$N_{TX}$	$N_{SS}$	STBC	Array Gain (dB)
11a,6-54Mbps	2.00	1	1	-	-
HT20,M0-M7	2.00	2	1	-	-
HT20,M8-15	2.00	2	2	-	-
HT40,M0-M7	2.00	2	1	-	-
HT40,M8-M15	2.00	2	2	-	-

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:  
 Any transmit signals are correlated, Directional Gain =  $G_{ANT} + 10 \log(N_{TX})$   
 All transmit signals are completely uncorrelated, Directional Gain =  $G_{ANT}$

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:  
 Any transmit signals are correlated, Directional Gain =  $10 \log[(10^{G1/20} + \dots + 10^{GN/20})^2 / N_{TX}]$   
 All transmit signals are completely uncorrelated, Directional Gain =  $10 \log[(10^{G1/10} + \dots + 10^{GN/10}) / N_{TX}]$

Note 3: For Spatial Multiplexing, Directional Gain (DG) =  $G_{ANT} + 10 \log(N_{TX}/N_{SS})$ ,  
 where  $N_{SS}$  = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:  
 Directional Gain (DG) =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows:  
 Array Gain = 0 dB (i.e., no array gain) for  $N_{TX} \leq 4$ ;  
 Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{TX}$ ;





## 3.3.6 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result												
Condition			RF Output Power (dBm)									
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11a	1	5745	22.66	-	-	-	22.66	30	2.00	24.66	36	
11a	1	5785	21.93	-	-	-	21.93	30	2.00	23.93	36	
11a	1	5825	21.90	-	-	-	21.90	30	2.00	23.90	36	
HT20	2	5745	20.99	21.72	-	-	24.38	30	2.00	26.38	36	
HT20	2	5785	20.98	21.04	-	-	24.02	30	2.00	26.02	36	
HT20	2	5825	21.55	20.68	-	-	24.15	30	2.00	26.15	36	
HT40	2	5755	20.69	20.96	-	-	23.84	30	2.00	25.84	36	
HT40	2	5795	20.74	20.47	-	-	23.62	30	2.00	25.62	36	
Result			Complied									

## 3.3.7 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power												
Condition			RF Output Power (dBm)									
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11a	1	5745	14.87	-	-	-	14.87	30	2.00	16.87	36	
11a	1	5785	14.22	-	-	-	14.22	30	2.00	16.22	36	
11a	1	5825	14.33	-	-	-	14.33	30	2.00	16.33	36	
HT20	2	5745	13.02	13.82	-	-	16.45	30	2.00	18.45	36	
HT20	2	5785	13.09	13.16	-	-	16.14	30	2.00	18.14	36	
HT20	2	5825	13.63	12.87	-	-	16.28	30	2.00	18.28	36	
HT40	2	5755	12.88	13.14	-	-	16.02	30	2.00	18.02	36	
HT40	2	5795	12.91	12.78	-	-	15.86	30	2.00	17.86	36	
Result			Complied									

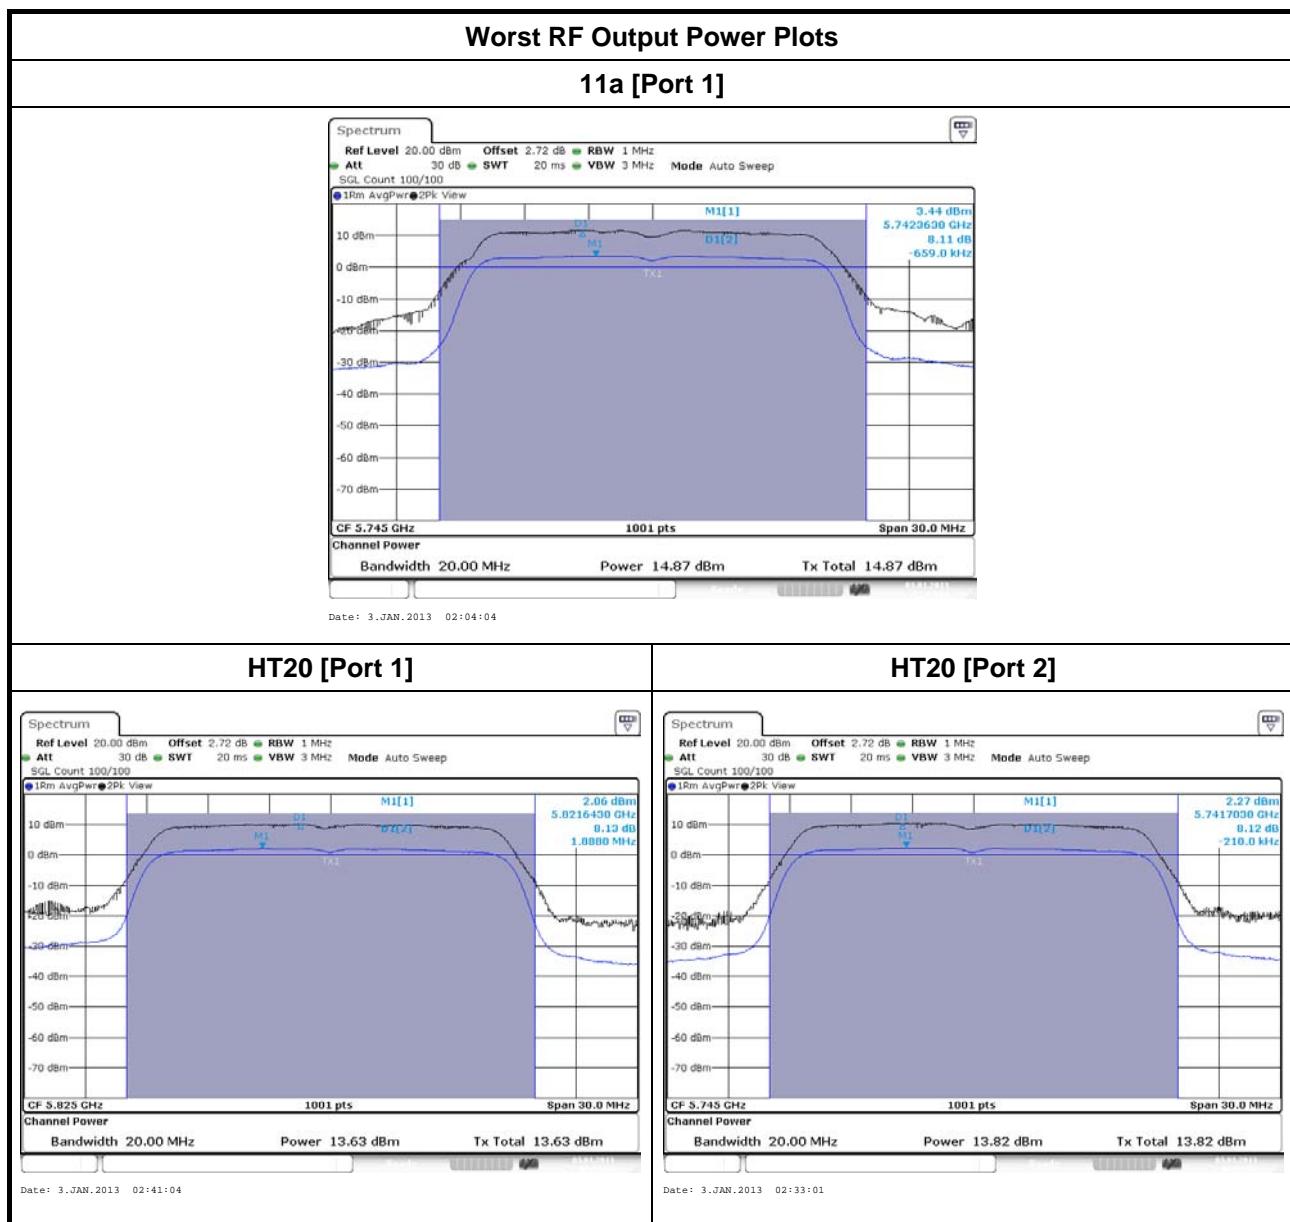

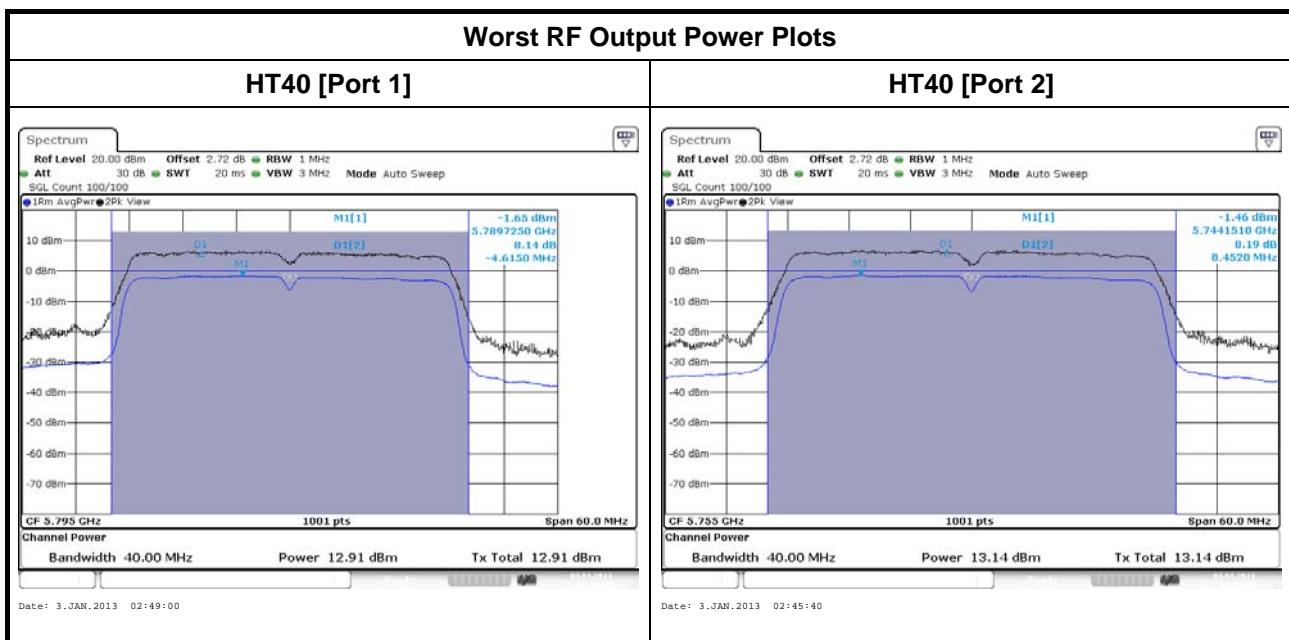

## **3.4 Power Spectral Density**

### **3.4.1 Power Spectral Density Limit**

<b>Power Spectral Density Limit</b>
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq 8 \text{ dBm/3kHz}$


### **3.4.2 Measuring Instruments**

Refer a test equipment and calibration data table in this test report.

### **3.4.3 Test Procedures**

<b>Test Method</b>
<input checked="" type="checkbox"/> Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.1 Option 1 - (RBW $\geq 3\text{kHz}$ ; sweep=auto, detector=peak).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2 Option 2 - (RBW $\geq 3\text{kHz}$ ; sweep=auto, average=100).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.3 Option 3 - (RBW $\geq 3\text{kHz}$ ; slow sweep speed).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.4 Alternative 1 (average PSD; Add 10log (1/duty cycle)).
<input checked="" type="checkbox"/> RBW $>3\text{kHz}$ , add the bandwidth correction factor (BWCF) adjusting in PSD per 3kHz.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the $N_{TX}$ output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

### 3.4.4 Test Setup

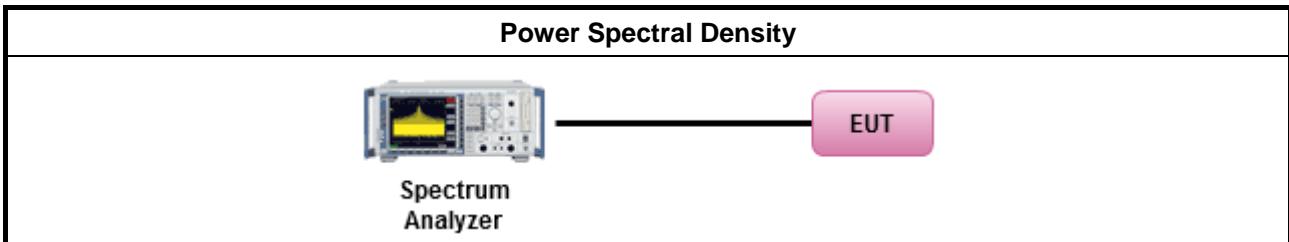


### 3.4.5 Test Result of Power Spectral Density

Condition			Power Spectral Density (dBm/3kHz)						
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	-	-	-	-	-	Sum Chain	Power Limit
11a	1	5745	-	-	-	-	-	-14.62	8
11a	1	5785	-	-	-	-	-	-14.86	8
11a	1	5825	-	-	-	-	-	-15.34	8
HT20	2	5745	-	-	-	-	-	-13.31	8
HT20	2	5785	-	-	-	-	-	-13.68	8
HT20	2	5825	-	-	-	-	-	-13.55	8
HT40	2	5755	-	-	-	-	-	-17.03	8
HT40	2	5795	-	-	-	-	-	-17.27	8
Result			Complied						


Note 1: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]

**Worst Power Spectral Density Plots**


**11a [Sum All Chains]**

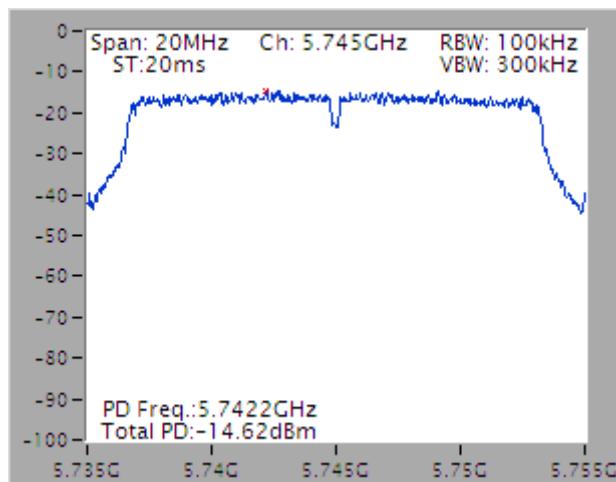

**HT20 [Sum All Chains]**

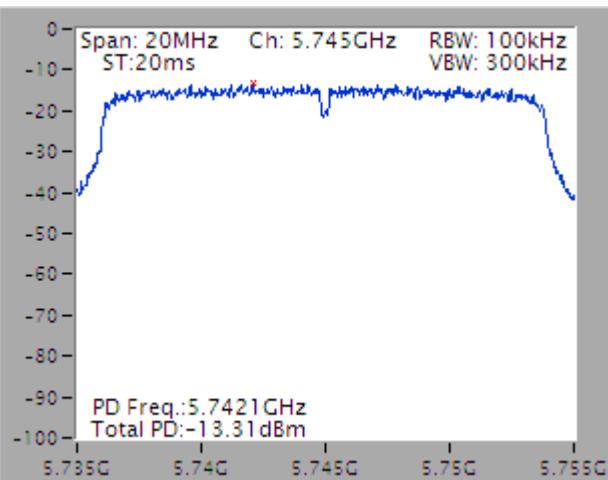


**HT40 [Sum All Chains]**

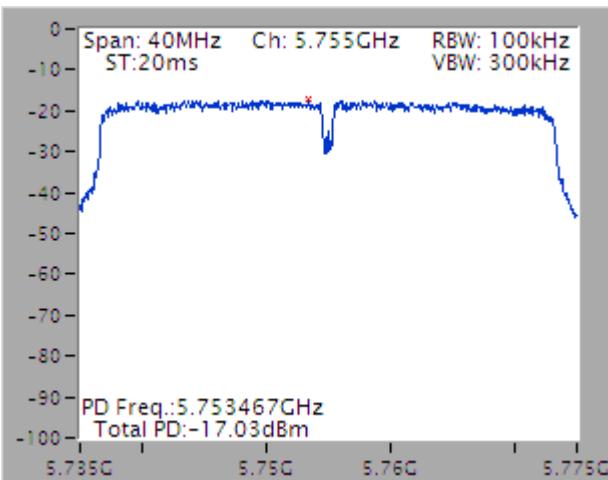

## 3.5 Transmitter Radiated Bandedge Emissions

### 3.5.1 Transmitter Radiated Bandedge Emissions Limit

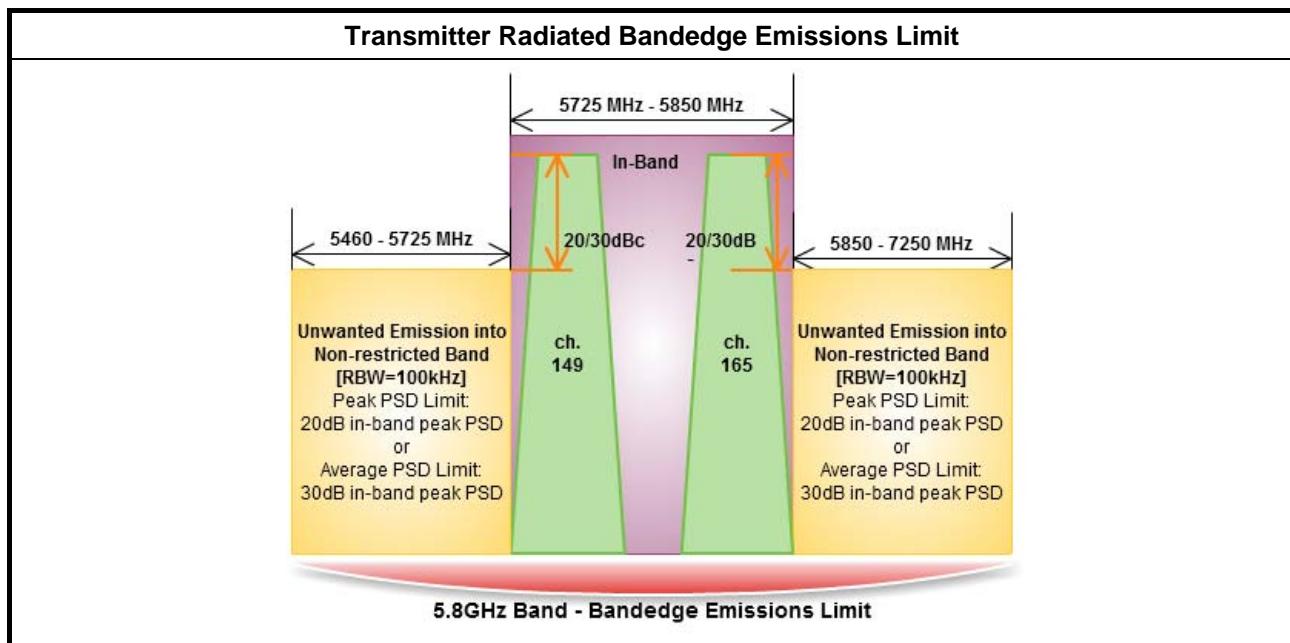

### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures


<b>Test Method</b>
<input checked="" type="checkbox"/> The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/> For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.1 for unwanted emissions into non-restricted bands. <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 for unwanted emissions into restricted bands.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 1 (spectral trace averaging) <input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 2 (slow sweep speed). <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$ , where T is pulse time. <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.2 and 8.1.1 measurement procedure peak limit.
<input checked="" type="checkbox"/> For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.5.2 for narrower resolution bandwidth using the band power and summing the spectral levels (i.e., 100 kHz or 1 MHz). <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing. <input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.

#### **Test Method**

- Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 1.0m, because the instrumentation noise floor is typically close to the radiated emission limit.
- For radiated measurement, refer as FCC KDB 558074, clause 10.2.1.
- For conducted measurement, refer as FCC KDB 558074, clause 10.2.2.



#### **3.5.4 Test Setup**

##### **Transmitter Radiated Bandedge Emissions**


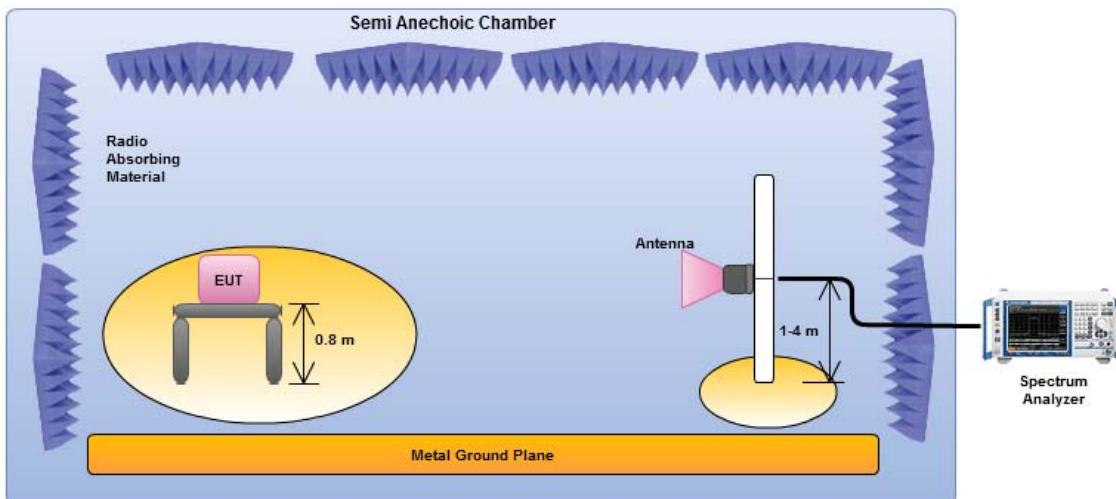


Electric field tests shall be performed in transmitter bandedge emissions using a calibrated horn antenna.



### 3.5.5 Test Result of Transmitter Radiated Bandedge Emissions

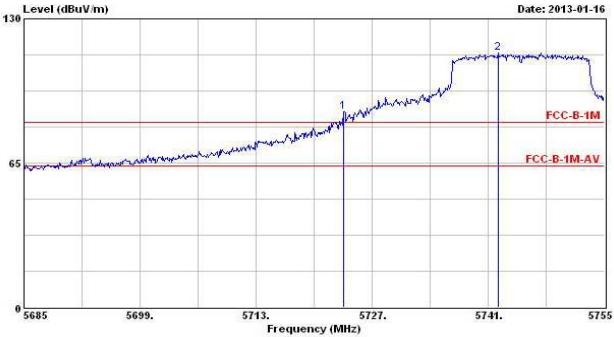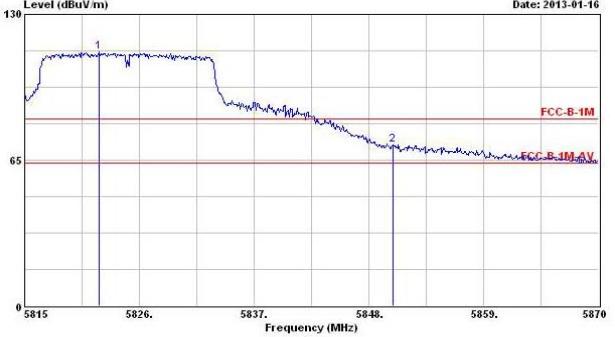Transmitter Radiated Bandedge Emissions Result								
Modulation	11a			N <sub>TX</sub>	1			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
5460-5725	5745	114.62	5723.570	88.26	26.36	20	PK	V
5850-7250	5825	113.35	5850.310	71.79	41.56	20	PK	V
Low Bandedge				Up Bandedge				
								

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

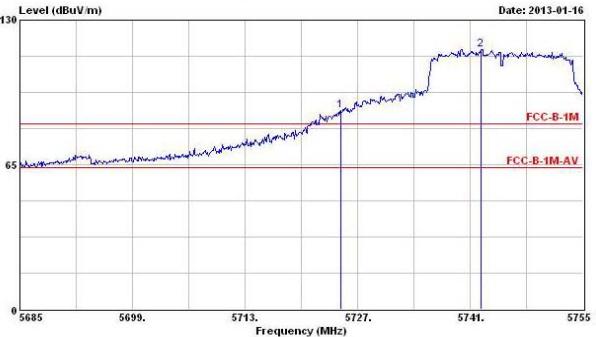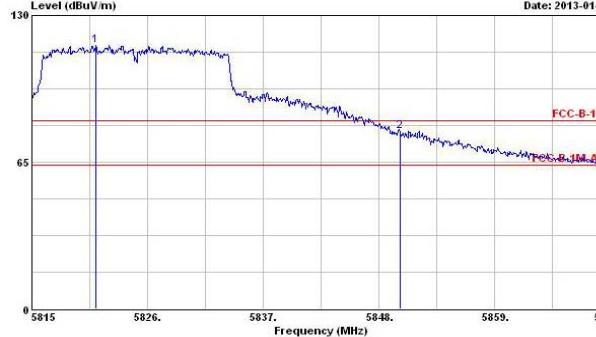Transmitter Radiated Bandedge Emissions Result								
Modulation	HT20			$N_{TX}$	2			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
5460-5725	5745	116.93	5724.900	89.24	27.69	20	PK	V
5850-7250	5825	116.87	5849.980	78.58	38.29	20	PK	V
Low Bandedge				Up Bandedge				
								

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

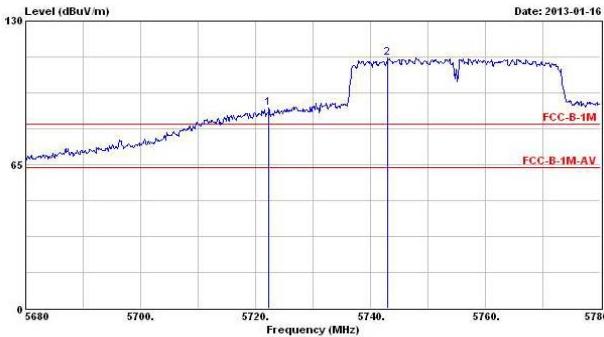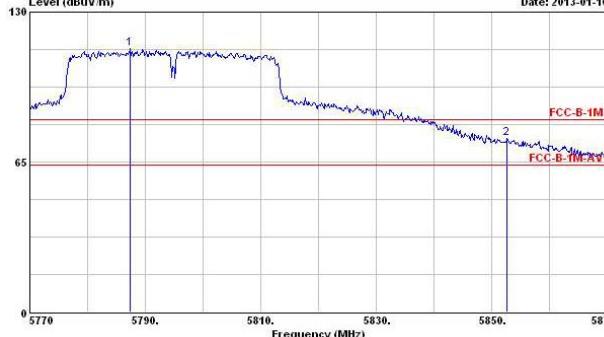Transmitter Radiated Bandedge Emissions Result								
Modulation	HT40			$N_{TX}$	2			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
5460-5725	5755	113.15	5722.300	90.46	22.69	20	PK	V
5850-7250	5795	114.21	5852.700	75.47	38.74	20	PK	V
Low Bandedge				Up Bandedge				
								

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

## **3.6 Transmitter Radiated Unwanted Emissions**

### **3.6.1 Transmitter Radiated Unwanted Emissions Limit**

<b>Restricted Band Emissions Limit</b>			
<b>Frequency Range (MHz)</b>	<b>Field Strength (uV/m)</b>	<b>Field Strength (dBuV/m)</b>	<b>Measure Distance (m)</b>
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

<b>Un-restricted Band Emissions Limit</b>	
<b>RF output power procedure</b>	<b>Limit (dB)</b>
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

### **3.6.2 Measuring Instruments**


Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures

<b>Test Method</b>
<input checked="" type="checkbox"/> Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/> Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1.0m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/> Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/> Measurements in the frequency range above 18 GHz - 40GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/> The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/> For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 for unwanted emissions into restricted bands.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 1 (spectral trace averaging)
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 2 (slow sweep speed).
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$ , where T is pulse time.
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.2 and 8.1.1 measurement procedure peak limit.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.1 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/> For radiated measurement, refer as FCC KDB 558074, clause 10.2.1.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.
<input checked="" type="checkbox"/> For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 10.2.2.
<input checked="" type="checkbox"/> For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(N)$ if the measurements are made relative to the in-band emissions on the individual outputs.
<input checked="" type="checkbox"/> For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB

### 3.6.4 Test Setup

#### Transmitter Radiated Unwanted Emissions

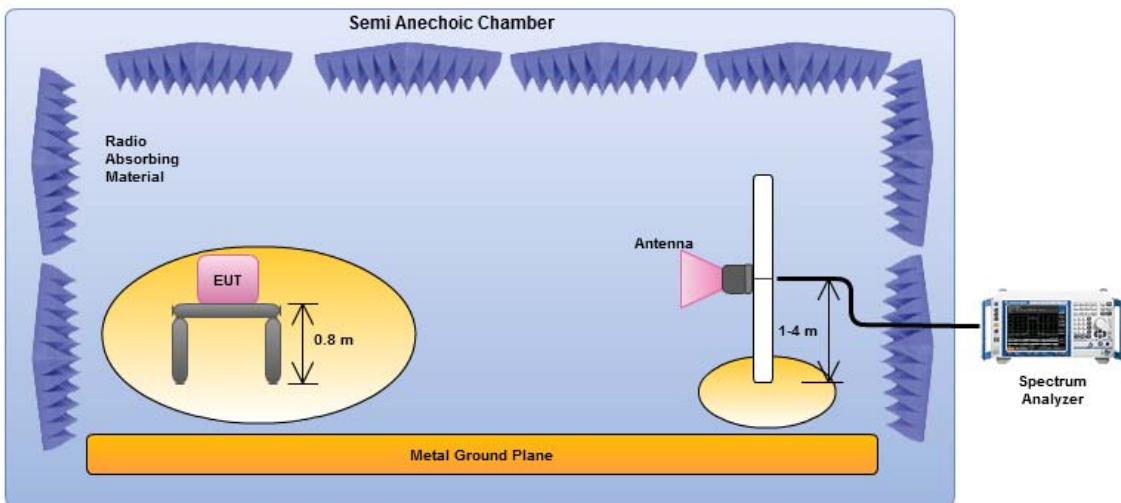


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

### 3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

### 3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

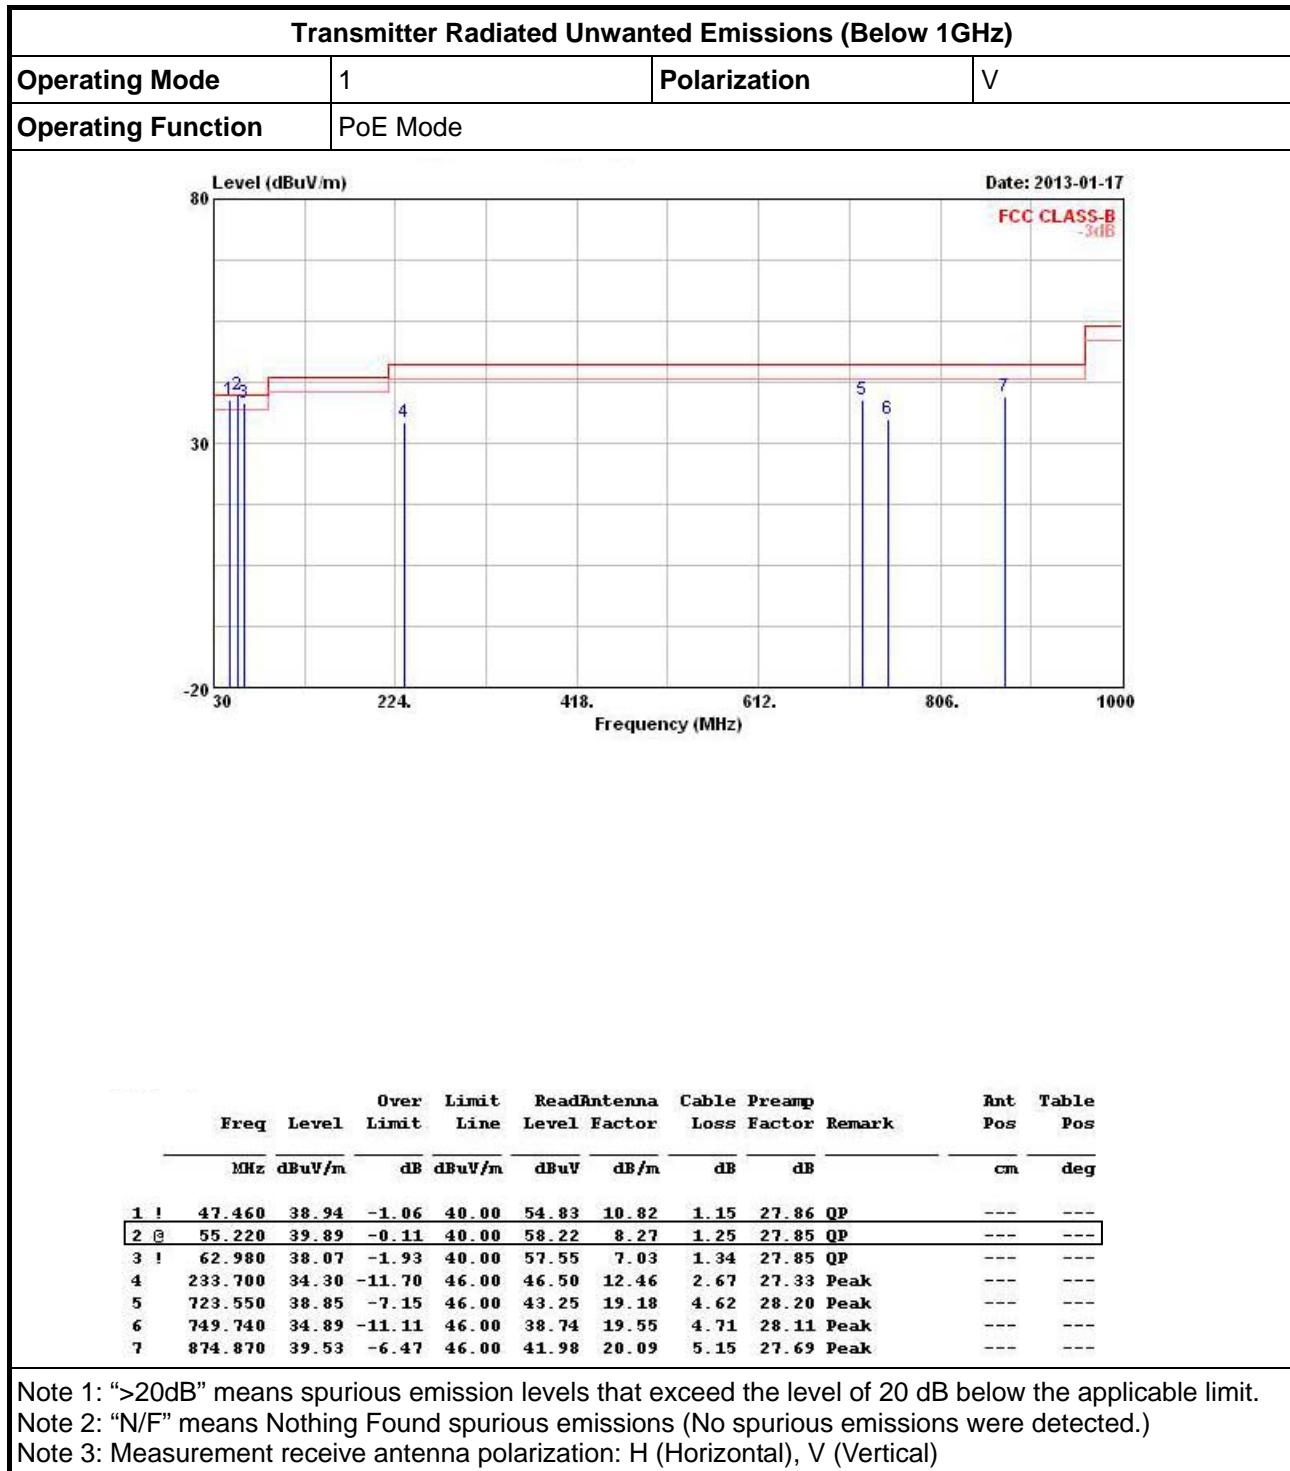





Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

### 3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

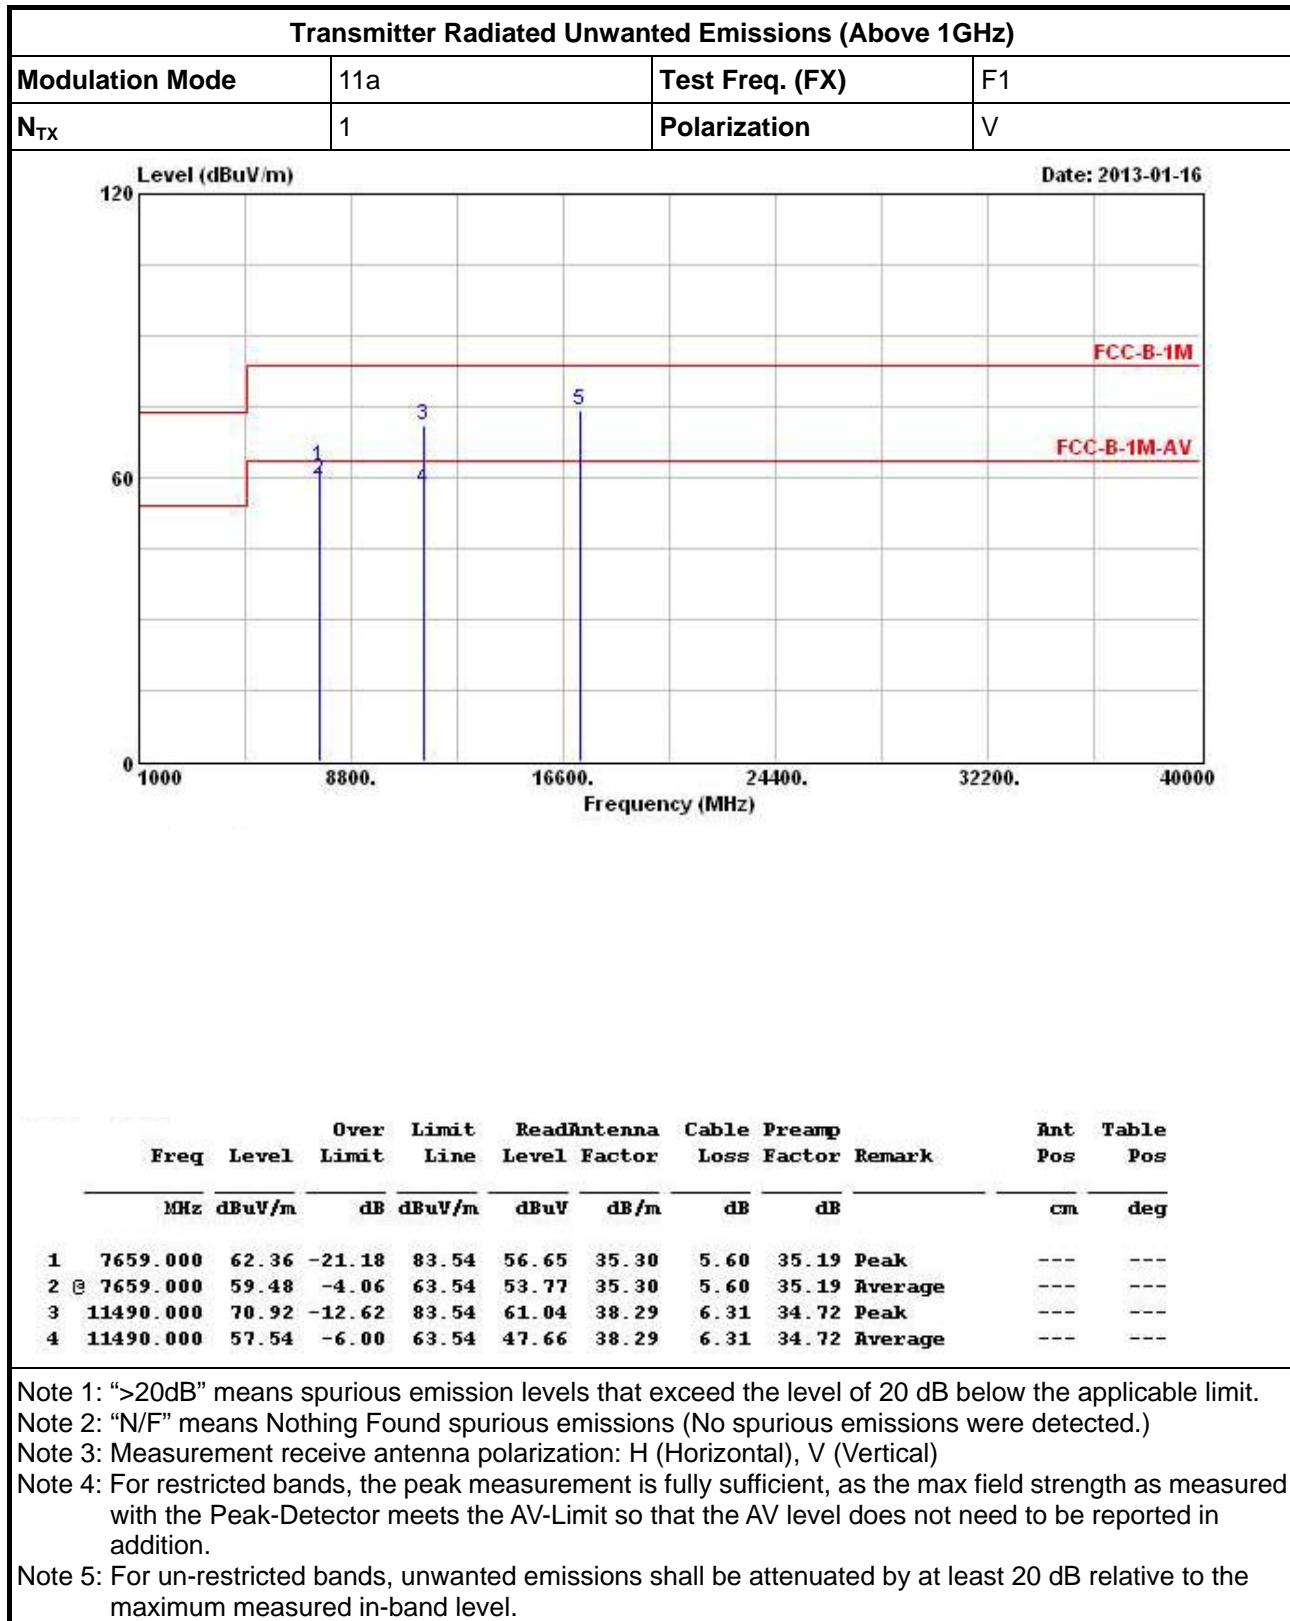

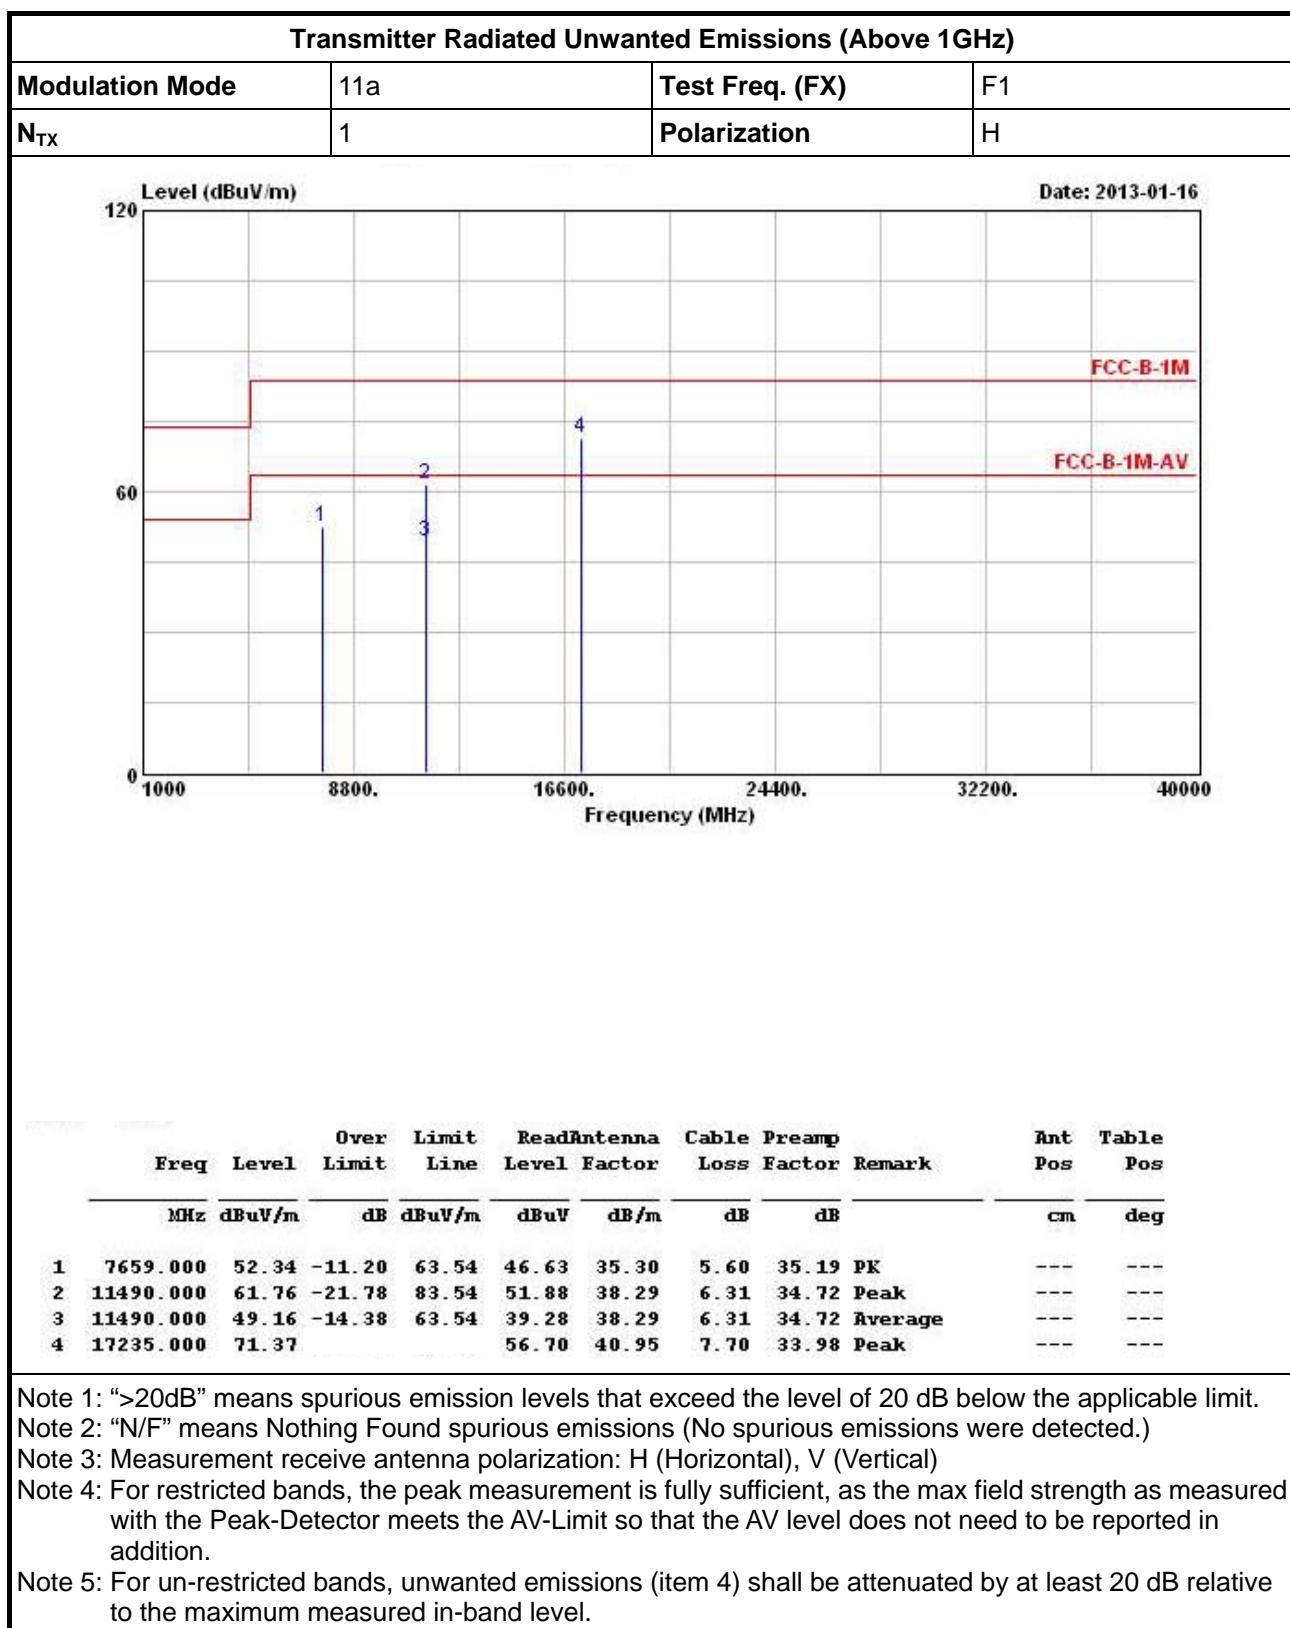



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

Modulation Mode	11a	Test Freq. (FX)	F2
N <sub>TX</sub>	1	Polarization	V

Level (dBuV/m)      Date: 2013-01-16

The graph plots Level (dBuV/m) on the y-axis (0 to 120) against Frequency (MHz) on the x-axis (1000 to 40000). Five data points are marked: 1 (57.66 dBuV/m at 7713.000 MHz), 2 (57.50 dBuV/m at 11570.000 MHz), 3 (68.78 dBuV/m at 11570.000 MHz), 4 (63.54 dBuV/m at 17355.000 MHz), and 5 (71.44 dBuV/m at 17355.000 MHz). Two horizontal lines represent limits: FCC-B-1M at approximately 80 dBuV/m and FCC-B-1M-AV at approximately 60 dBuV/m.

Freq	Level	Over Limit	Limit	Read		Cable	Preamp	Remark	Ant Pos	Table Pos
				Antenna	Level Factor					
MHz	dBuV/m								cm	deg
1 7713.000	61.16	-22.38	83.54	55.48	35.30	5.58	35.20	Peak	---	---
2 7713.000	57.66	-5.88	63.54	51.98	35.30	5.58	35.20	Average	---	---
3 11570.000	68.78	-14.76	83.54	58.77	38.36	6.41	34.76	Peak	---	---
4 11570.000	57.50	-6.04	63.54	47.49	38.36	6.41	34.76	Average	---	---
5 17355.000	71.44			56.72	40.97	7.73	33.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.




**Transmitter Radiated Unwanted Emissions (Above 1GHz)**


Modulation Mode	11a	Test Freq. (FX)	F2
N <sub>TX</sub>	1	Polarization	H

Date: 2013-01-16


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 7713.000	52.37	-11.17	63.54	46.69	35.30	5.58	35.20 PK	---	---
2 11570.000	60.86	-22.68	83.54	50.85	38.36	6.41	34.76 Peak	---	---
3 11570.000	49.35	-14.19	63.54	39.34	38.36	6.41	34.76 Average	---	---
4 17355.000	67.85			53.13	40.97	7.73	33.98 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

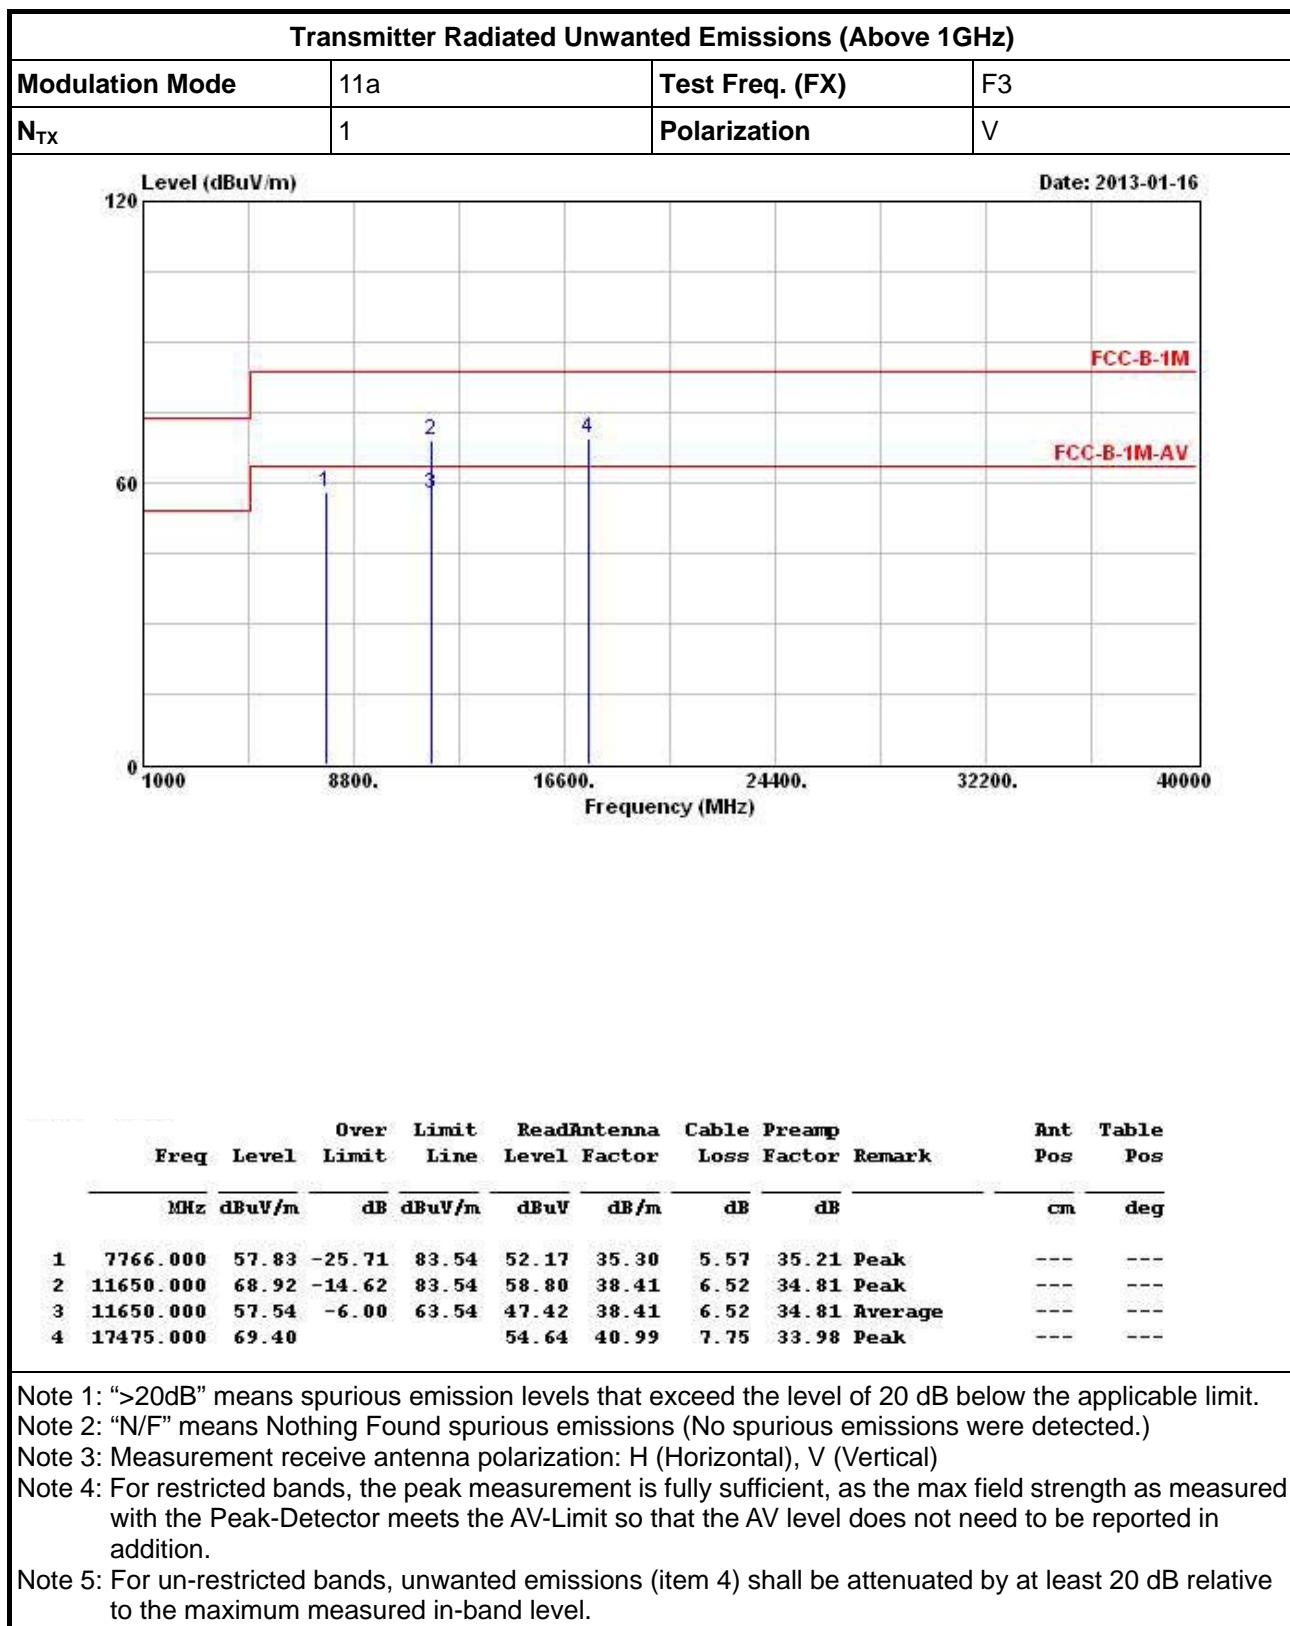

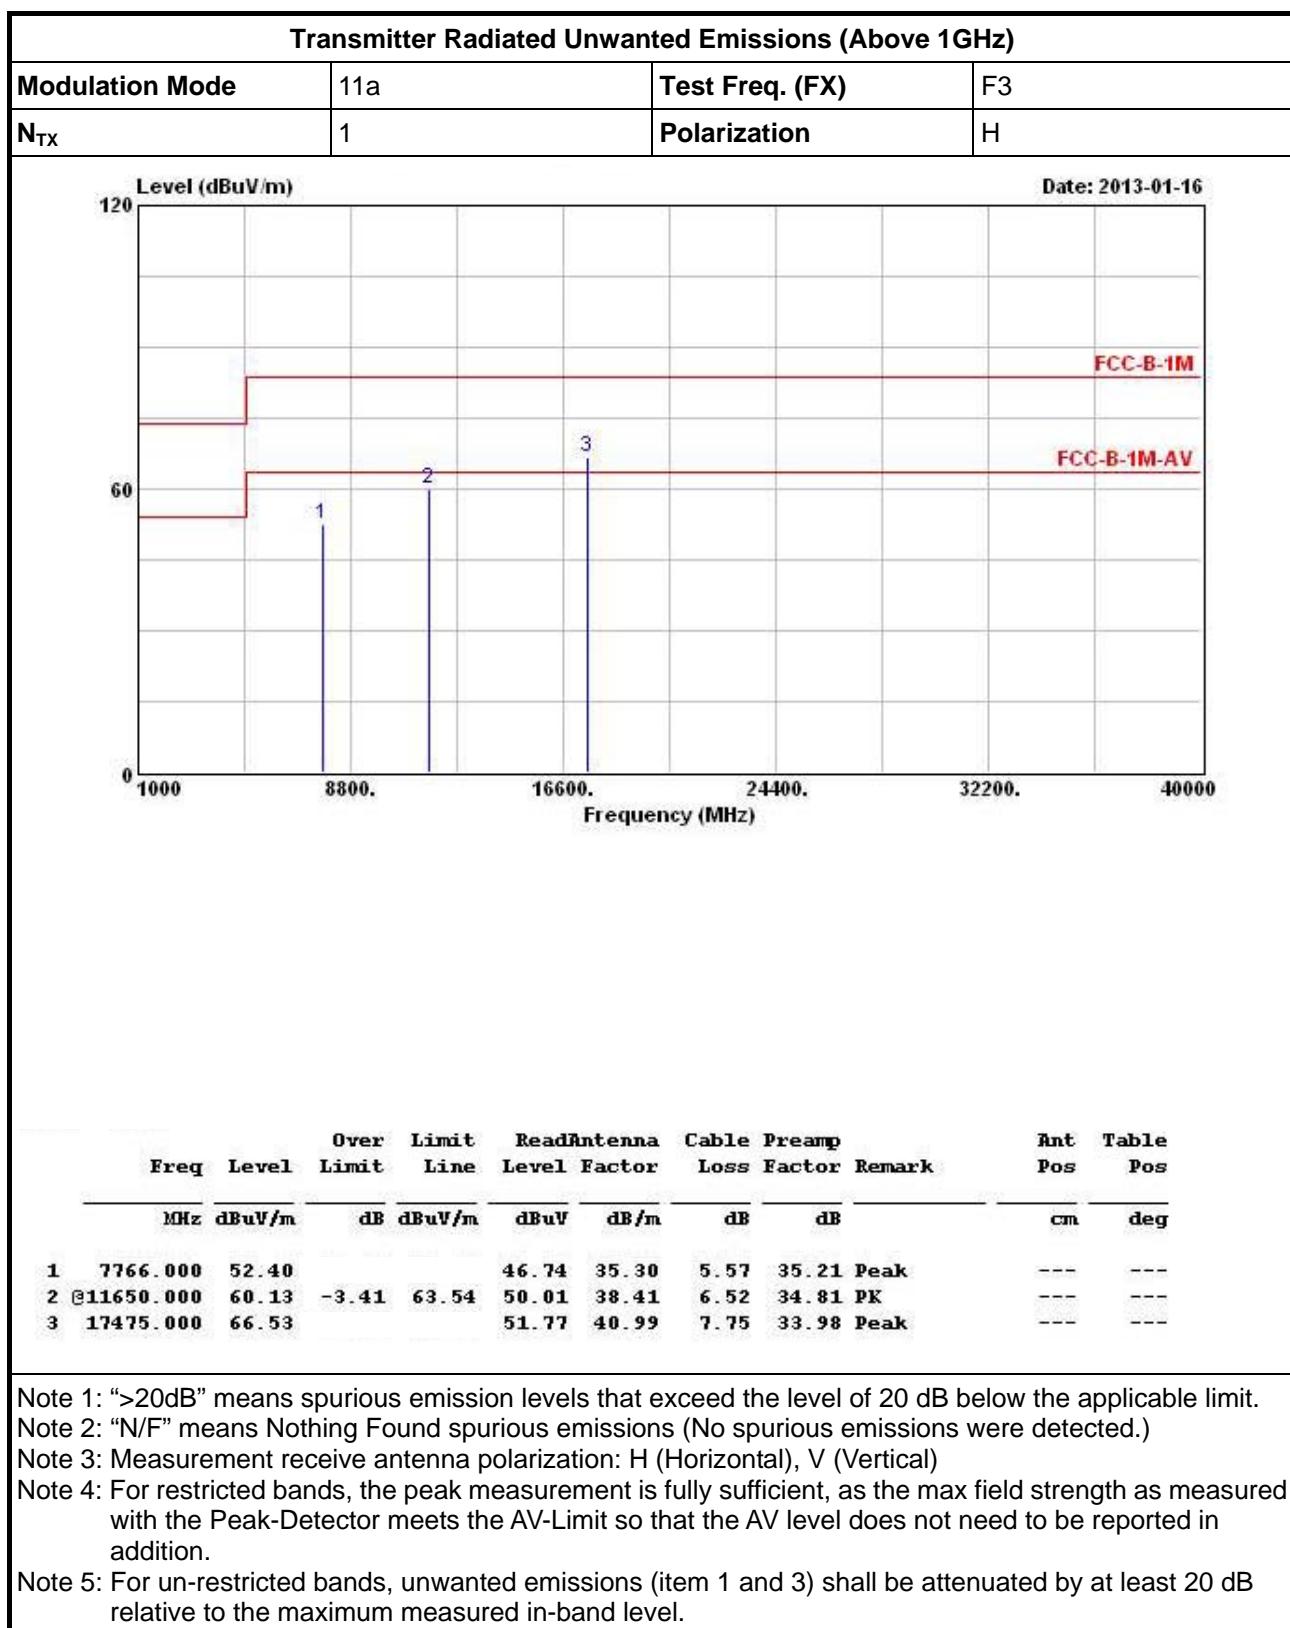


### 3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

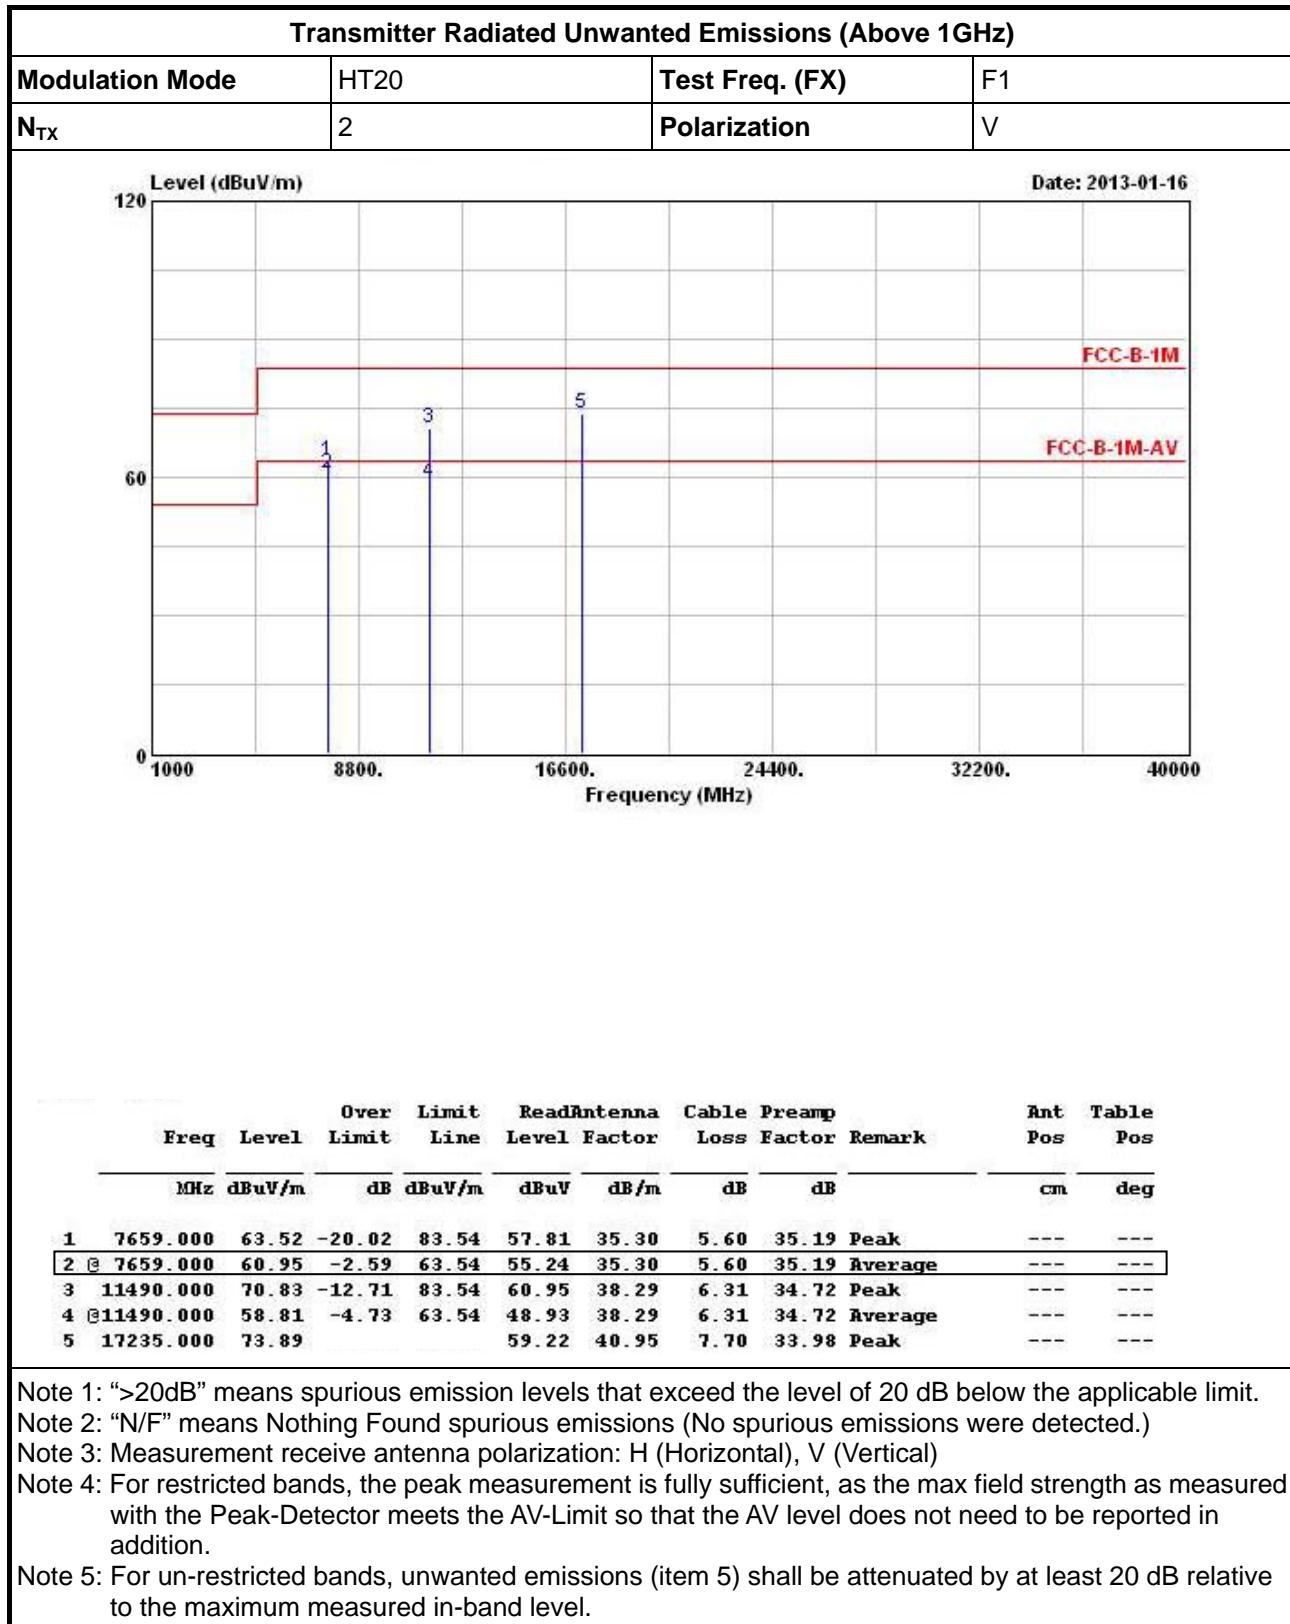



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (FX)	F1
N <sub>TX</sub>	2	Polarization	H

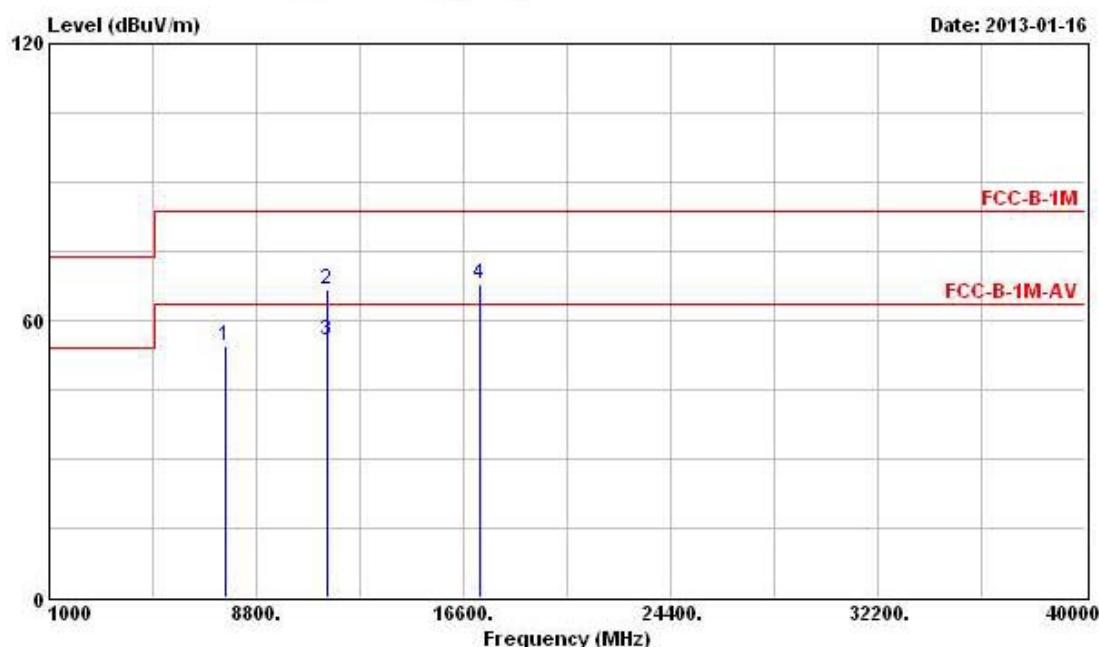

Freq	Level	Over Limit		Read Antenna		Cable Preamp		Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 7659.000	54.64	-8.90	63.54	48.93	35.30	5.60	35.19	PK	---
2 11490.000	66.89	-16.65	83.54	57.01	38.29	6.31	34.72	Peak	---
3 11490.000	55.75	-7.79	63.54	45.87	38.29	6.31	34.72	Average	---
4 17235.000	67.98			53.31	40.95	7.70	33.98	Peak	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "NF" means Nothing Found spurious emissions (No spurious emissions were detected).

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: Measurement receive antenna polarization: H (horizontal), V (vertical)  
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F2
$N_{TX}$	2	Polarization	V

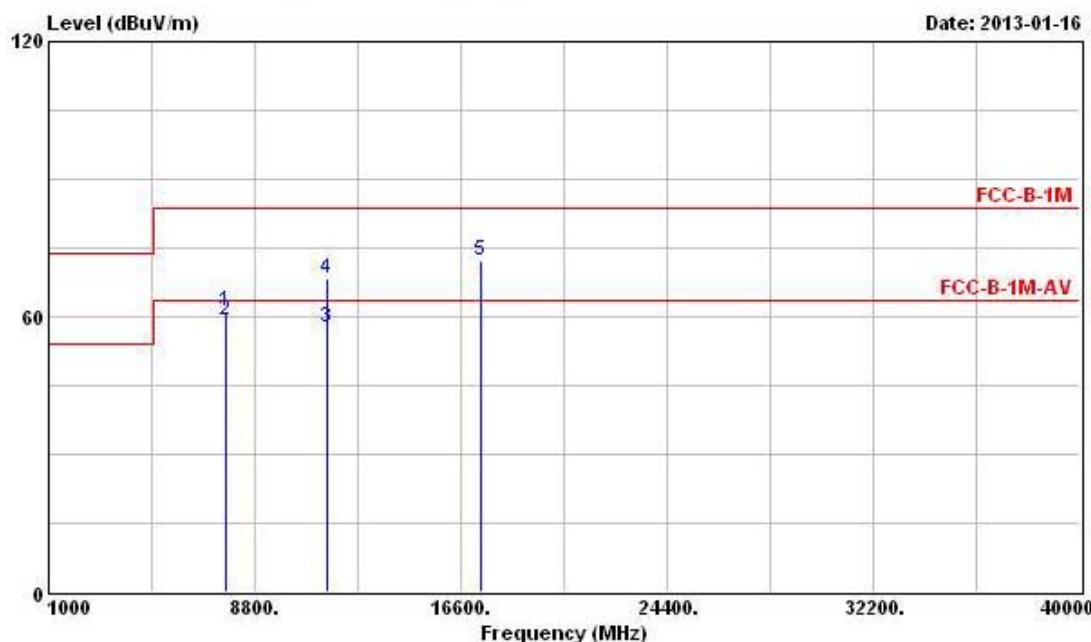

Freq	Level	Over Limit		ReadAntenna		Cable Preamp			Ant Pos	Table Pos
		Line	Limit	Level	Factor	Loss	Factor	Remark		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 7713.000	61.38	-22.16	83.54	55.70	35.30	5.58	35.20	Peak	---	---
2 @ 7713.000	59.40	-4.14	63.54	53.72	35.30	5.58	35.20	Average	---	---
3 11570.000	57.79	-5.75	63.54	47.78	38.36	6.41	34.76	Average	---	---
4 11570.000	68.17	-15.37	83.54	58.16	38.36	6.41	34.76	Peak	---	---
5 17355.000	72.19			57.47	40.97	7.73	33.98	Peak	---	---


Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

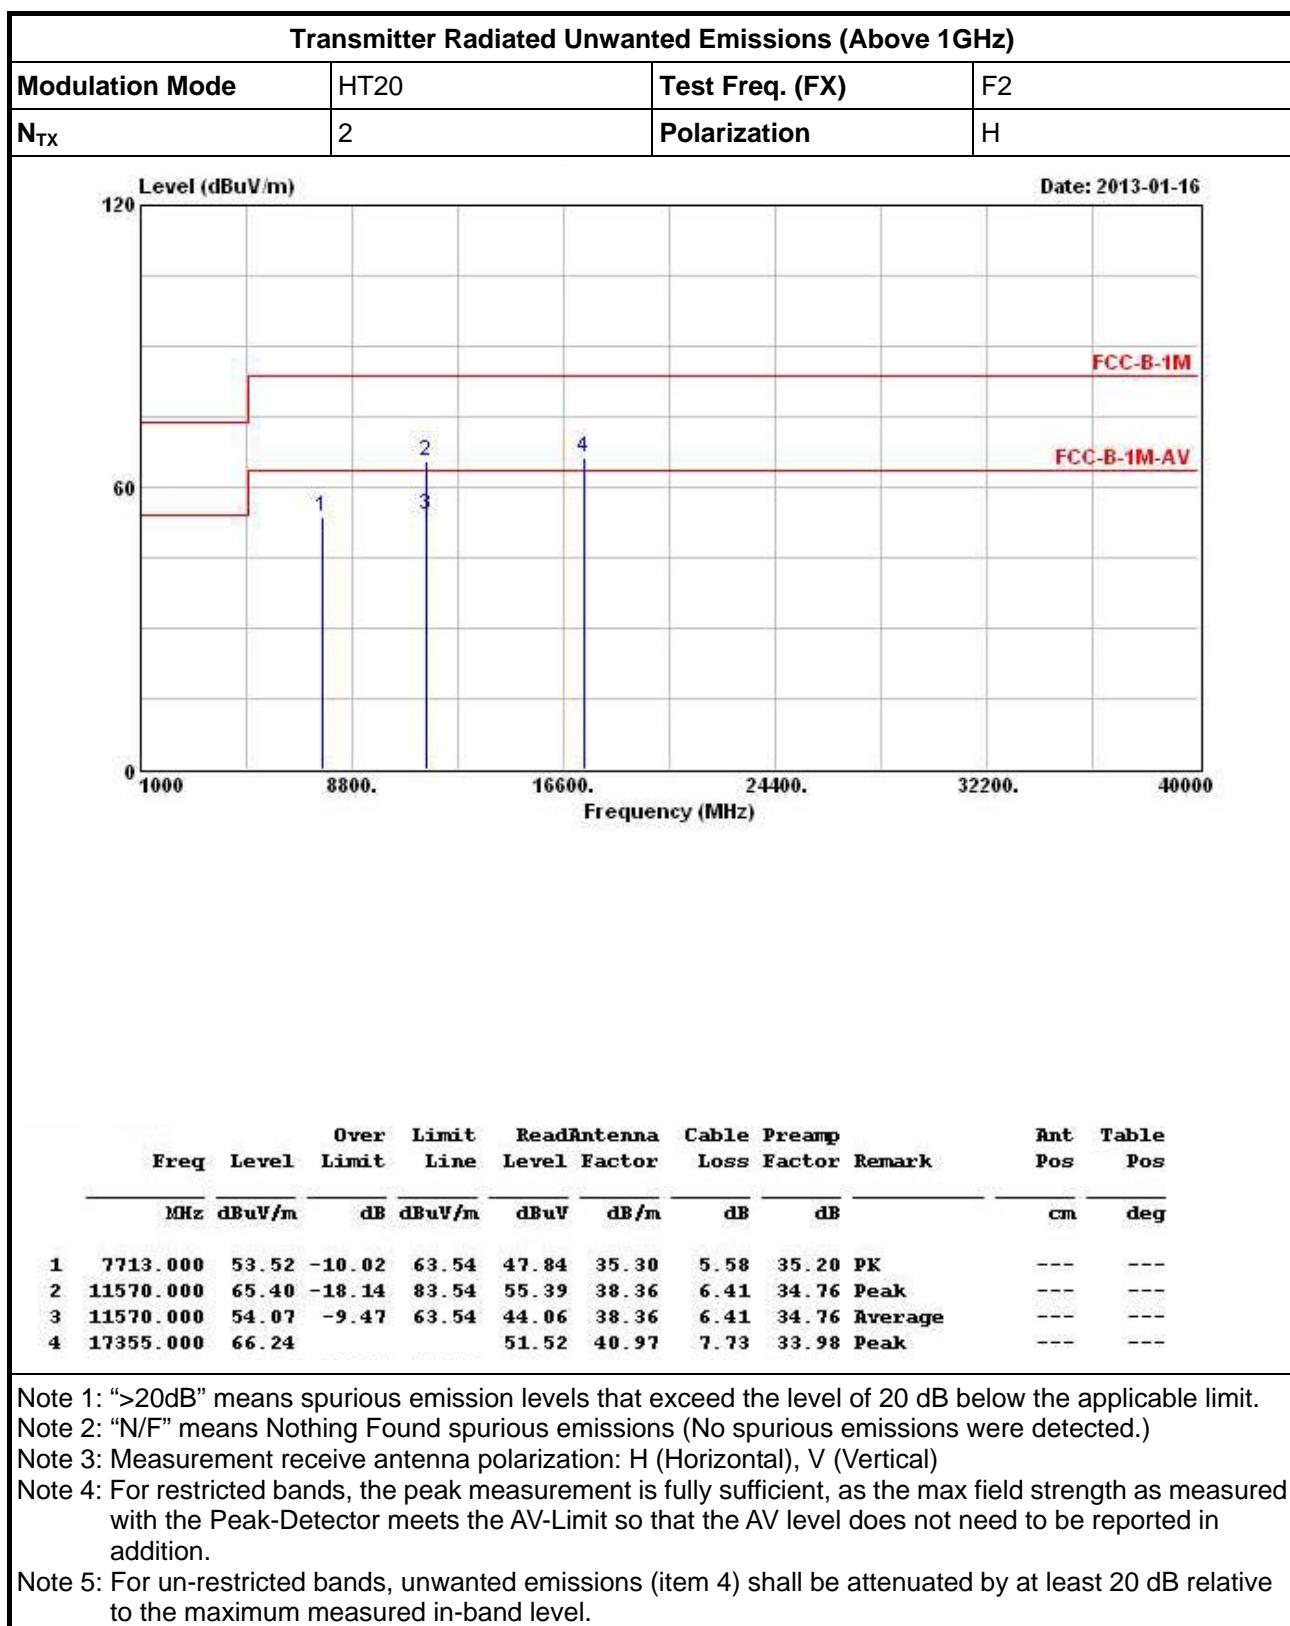



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation Mode</b>	HT20	<b>Test Freq. (FX)</b>	F3
<b>N<sub>TX</sub></b>	2	<b>Polarization</b>	V

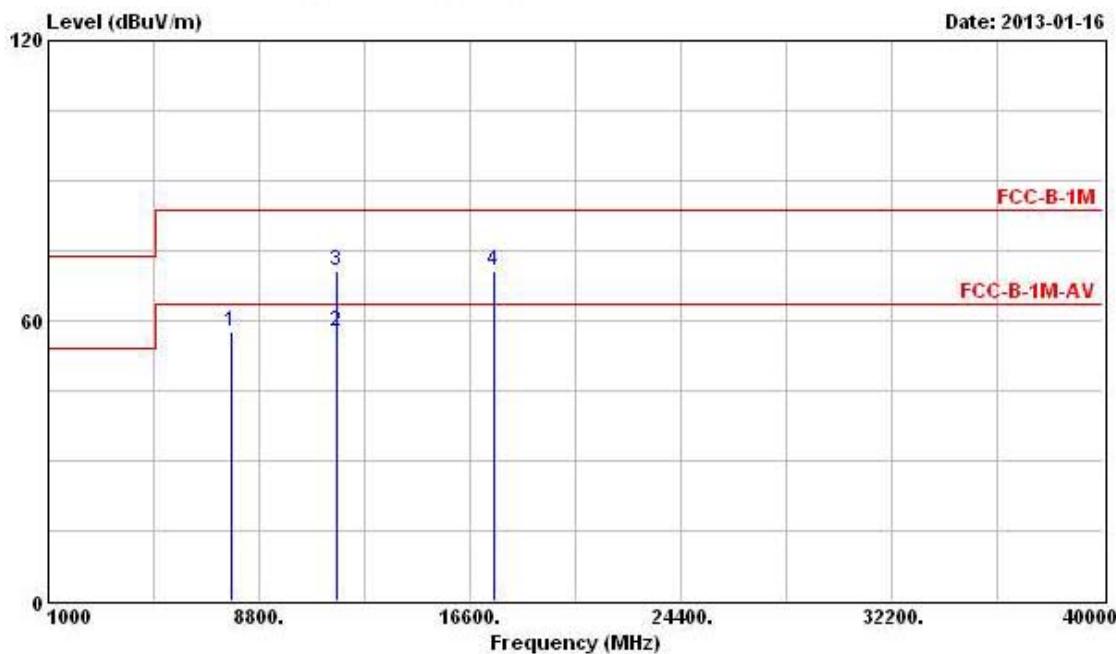

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7766.000	57.70			52.04	35.30	5.57	35.21	Peak	---
2	11650.000	57.50	-6.04	63.54	47.38	38.41	6.52	34.81	Average	---
3	11650.000	70.85	-12.69	83.54	60.73	38.41	6.52	34.81	Peak	---
4	17475.000	70.66			55.90	40.99	7.75	33.98	Peak	---


Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected).


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: Measurement receive antenna polarization: H (horizontal), V (vertical)  
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

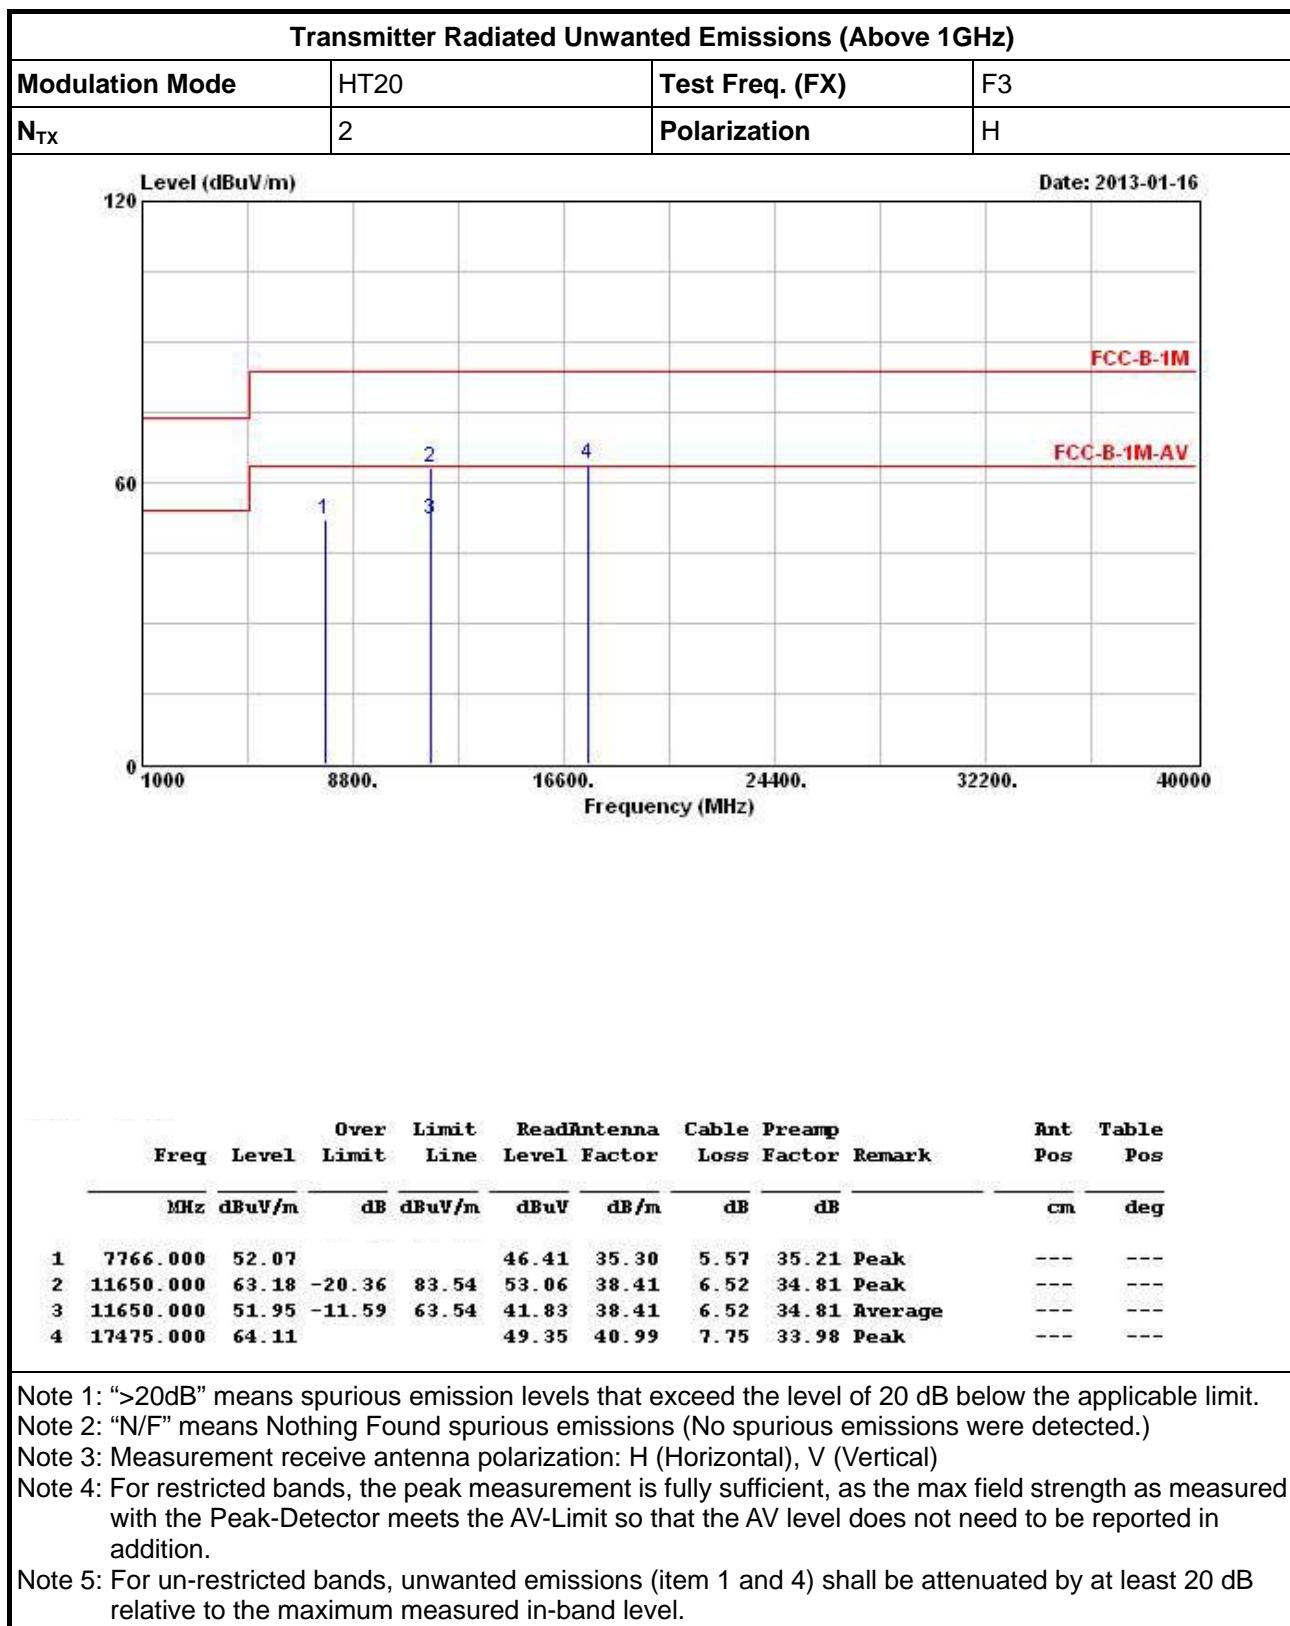


### 3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

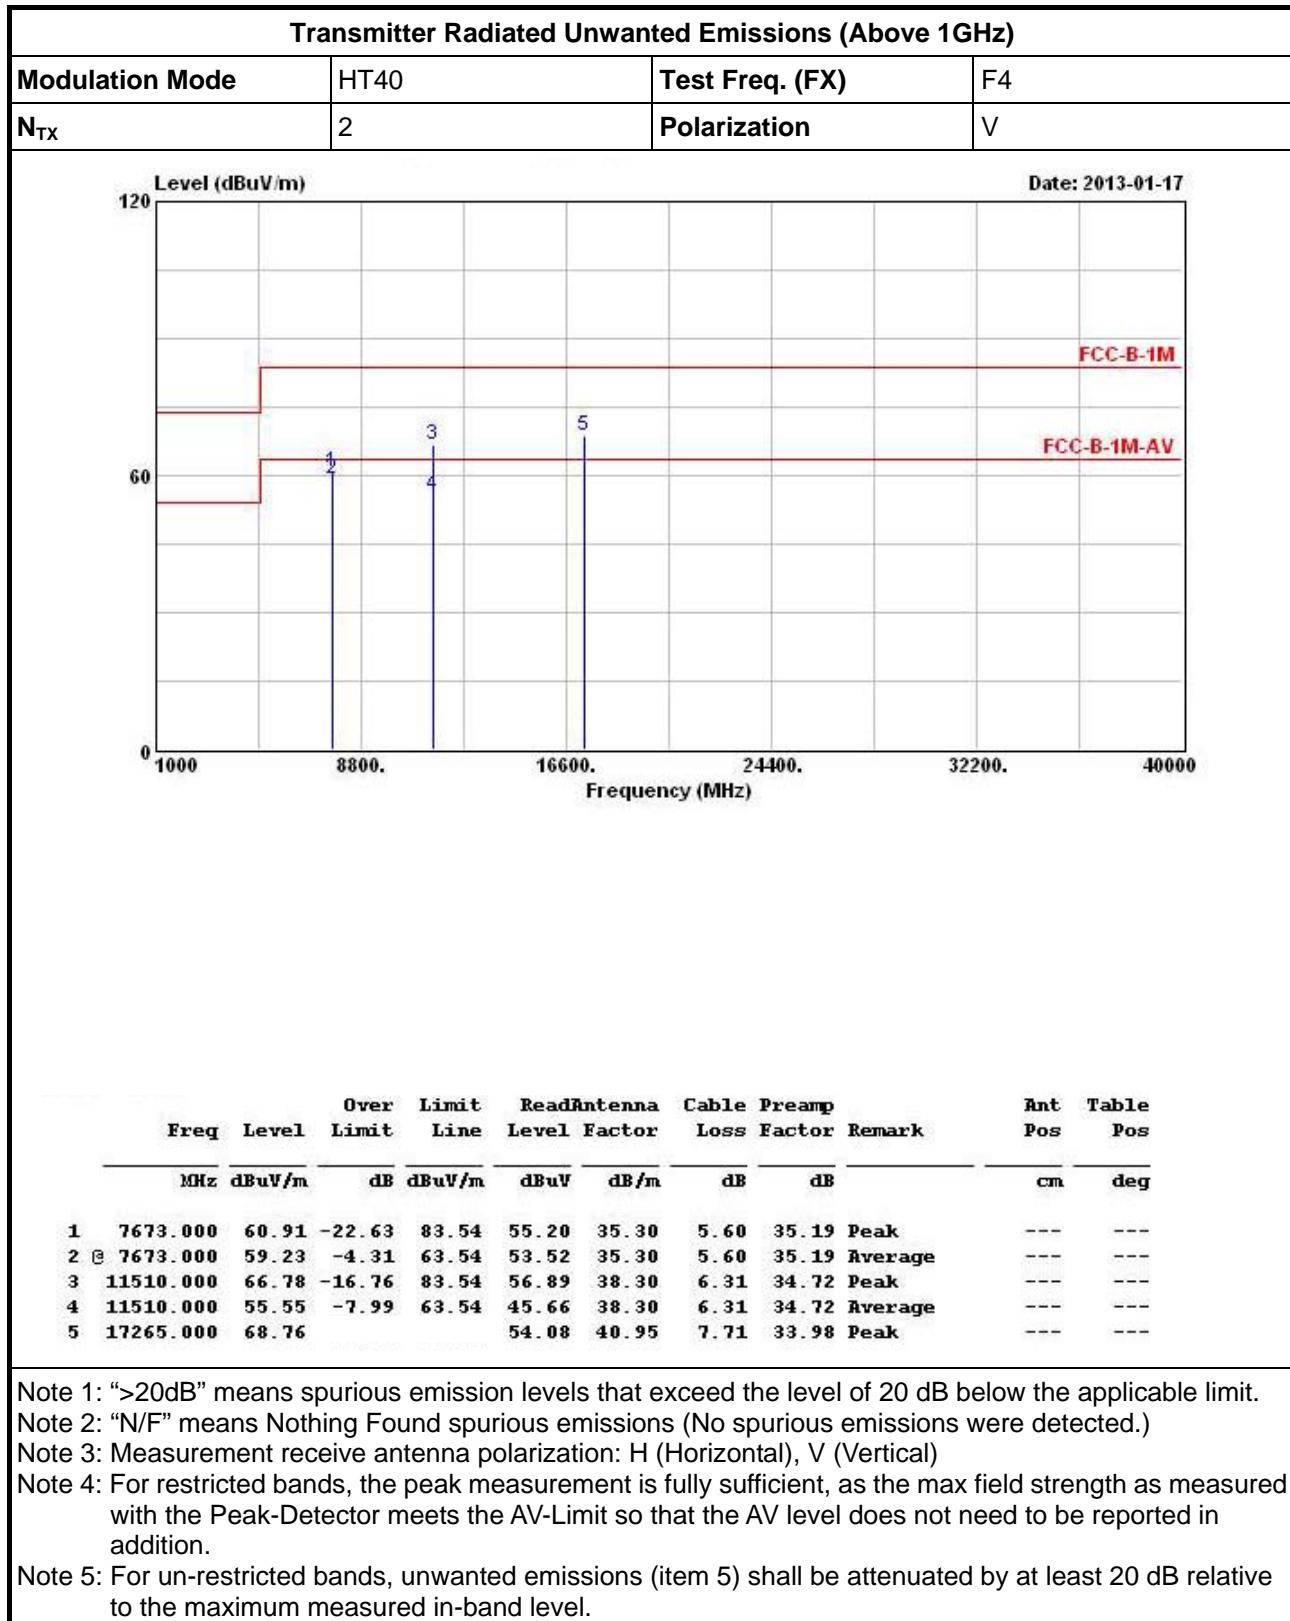

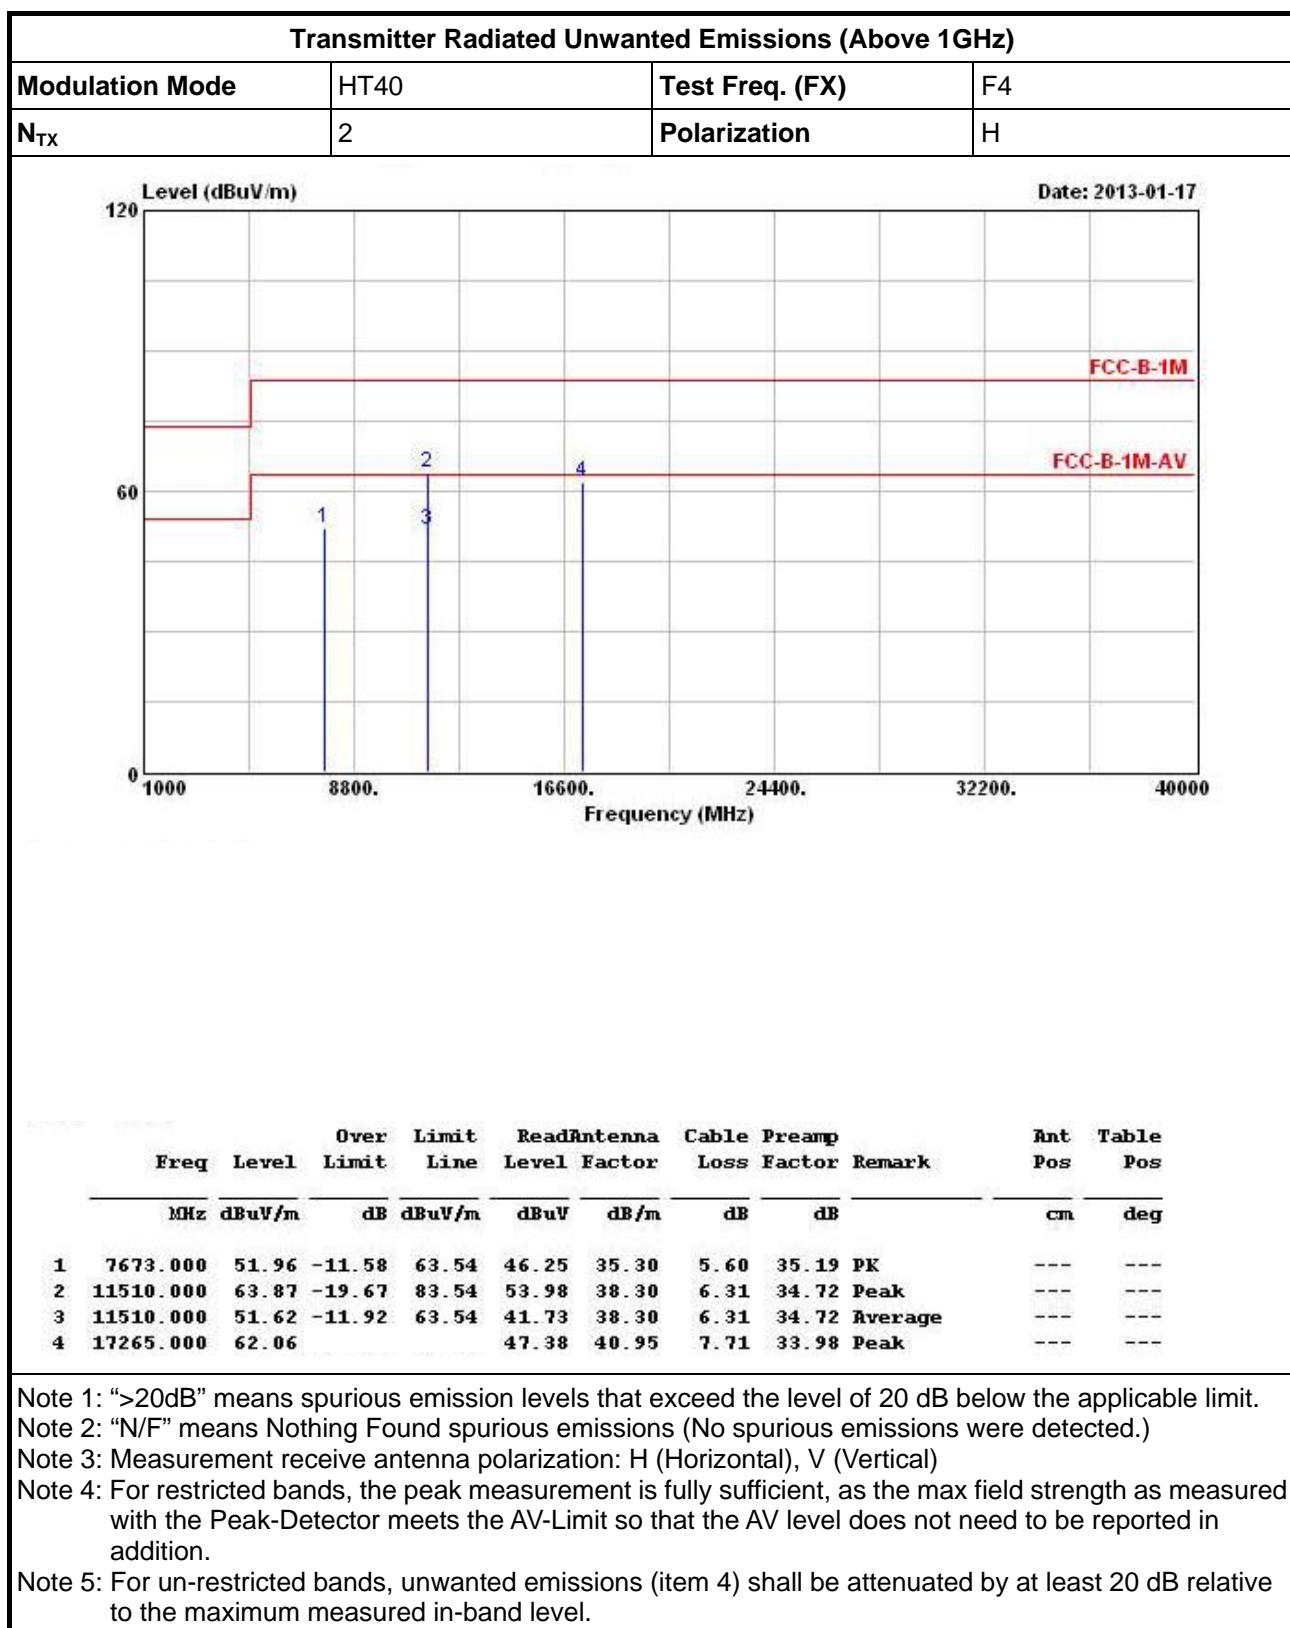



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (FX)	F5
N <sub>TX</sub>	2	Polarization	V

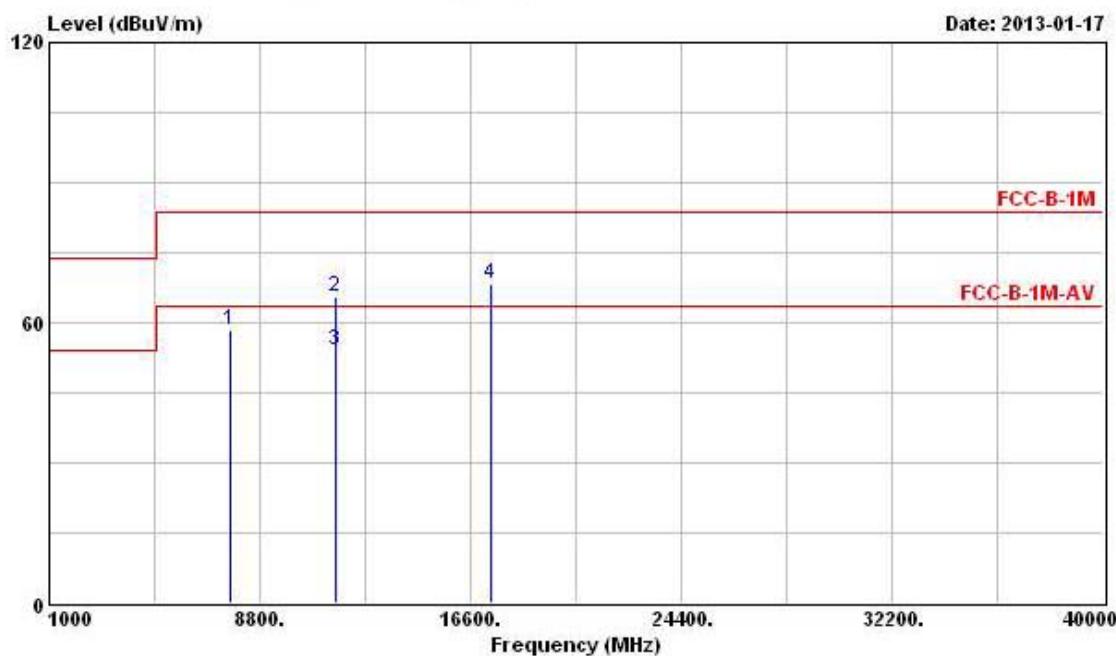

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 0 7726.000	58.60	-4.94	63.54	52.92	35.30	5.58	35.20	PK	---
2 11590.000	65.34	-18.20	83.54	55.26	38.37	6.47	34.76	Peak	---
3 11590.000	54.06	-9.48	63.54	43.98	38.37	6.47	34.76	Average	---
4 17385.000	68.28			53.55	40.98	7.73	33.98	Peak	---


Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "NF" means Nothing Found spurious emissions (No spurious emissions were detected).

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: Measurement receive antenna polarization: H (horizontal), V (vertical)  
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

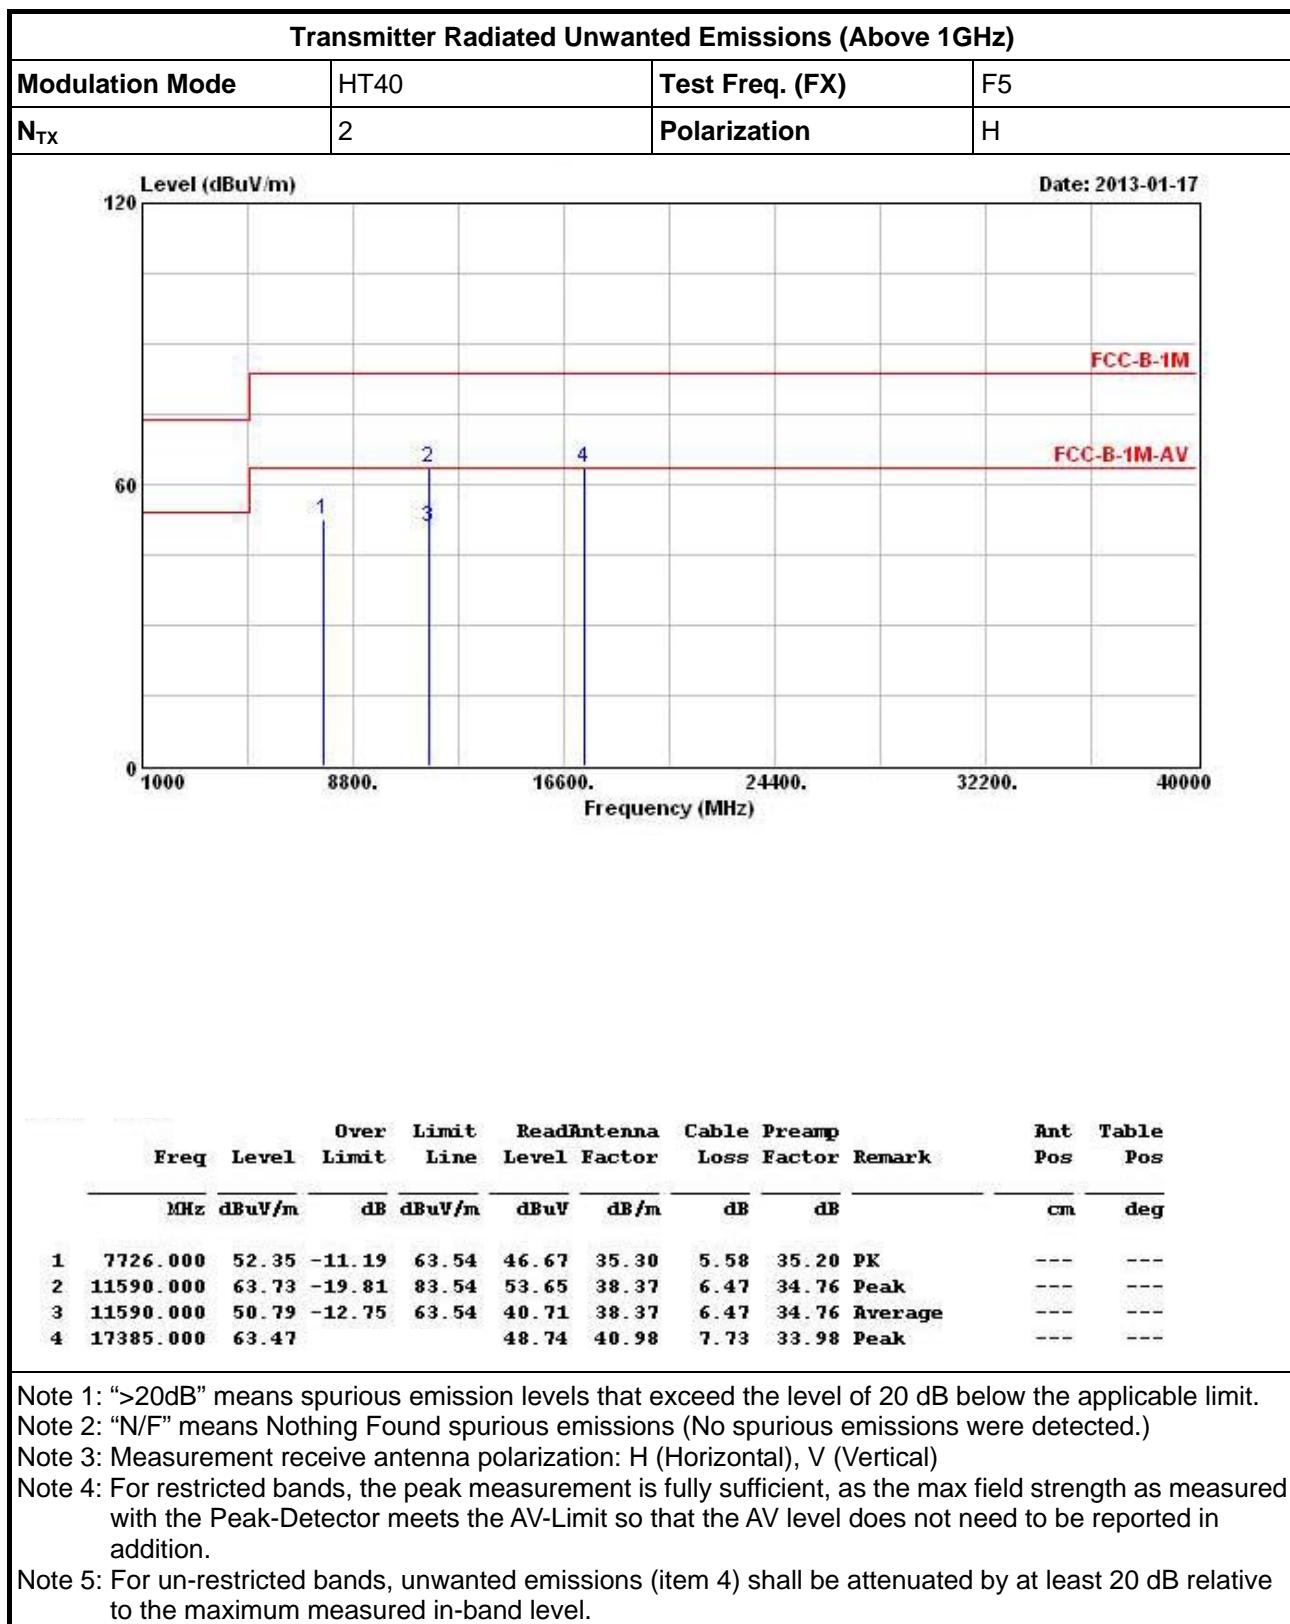



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Nov. 22, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 08, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 08, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 10, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 10, 2012	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 06, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.