

FCC TEST REPORT

CATEGORY : Portable
PRODUCT NAME : 802.11g Turbo Wireless LAN PC Card
FCC ID. : NDD9571080513
FILING TYPE : Certification
MODEL (BRAND) NAME : EW-7108PCg V2.0 (EDIMAX) / GWA-E08G (GLP)
APPLICANT : **EDIMAX TECHNOLOGY CO., LTD.**
No. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park, Taipei
Hsien, Taiwan, R.O.C.
MANUFACTURER : Same as applicant
ISSUED BY : **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

Only the test result of 802.11b/g part is shown in this test report.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by NVLAP and any agency of U.S. government.

The test equipment used to perform the test is calibrated and traceable to NML/ROC or NIST/USA.



Lab Code: 200079-0

Table of Contents

HISTORY OF THIS TEST REPORT	II
CERTIFICATE OF COMPLIANCE.....	III
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Features of Equipment under Test	1
1.5. Antenna Description.....	2
1.6. Table for Carrier Frequencies	2
1.7. Multiple List.....	2
2. TEST CONFIGURATION OF THE EQUIPMENT UNDER TEST	3
2.1. Connection Diagram of Conducted Test System.....	3
2.2. The Test Mode Description	4
2.3. Description of Test Supporting Units	4
3. GENERAL INFORMATION OF TEST	5
3.1. Test Facility	5
3.2. Standards for Methods of Measurement.....	5
3.3. Frequency Range Investigated	5
3.4. Test Distance	5
3.5. Test Software.....	5
4. LIST OF MEASUREMENTS	6
4.1. Summary of the Test Results.....	6
5. TEST RESULT	7
5.1. Test of 6dB Spectrum Bandwidth	7
5.2. Test of Maximum Peak Conducted Output Power	12
5.3. Test of Peak Power Spectral Density	14
5.4. Test of Band Edges Emission.....	19
5.5. Test of AC Power Line Conducted Emission	24
5.6. Test of Spurious Radiated Emission.....	29
5.7. Antenna Requirements	49
5.8. RF Exposure	50
6. LIST OF MEASURING EQUIPMENTS USED	52
7. COMPANY PROFILE.....	54
7.1. Certificate of Accreditation	54
7.2. Test Location	54
8. CERTIFICATE OF NVLAP ACCREDITATION.....	55
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A6



HISTORY OF THIS TEST REPORT

Received Date: Sep. 06, 2005

Test Date: Sep. 14, 2005

Original Report Issue Date: Sep. 21, 2005

Report No.: FR590506

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

with

47 CFR FCC Part 15 Subpart C

PRODUCT NAME : 802.11g Turbo Wireless LAN PC Card

MODEL (BRAND) NAME : EW-7108PCg V2.0 (EDIMAX) / GWA-E08G (GLP)

APPLICANT : **EDIMAX TECHNOLOGY CO., LTD.**

No. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park, Taipei
Hsien, Taiwan, R.O.C.

MANUFACTURER : Same as applicant

I **HEREBY** CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4-2003 and all test are performed according to 47 CFR FCC Part 15 Subpart C. Testing was carried out on Sep. 14, 2005 at SPORTON International Inc. LAB.



Wayne Hsu / Supervisor
Sporton International Inc.

1. General Description of Equipment under Test

1.1. Applicant

EDIMAX TECHNOLOGY CO., LTD.

No. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park, Taipei Hsien, Taiwan, R.O.C.

1.2. Manufacturer

Same as applicant

1.3. Basic Description of Equipment under Test

This product is a WLAN PC Card with 802.11b/g wireless solution. The technical data has been listed on section "Features of Equipment under Test".

1.4. Features of Equipment under Test

EUT

Items	Description
Type of Modulation	DSSS (CCK / DQPSK / DBPSK) OFDM (16QAM / 64QAM / DQPSK / DBPSK)
Number of Channels	11
Frequency Band	2400 MHz ~ 2483.5 MHz
Carrier Frequency	See section 1.6 for details
Data Rate	1, 2, 5.5, 11 Mbps - DSSS 6, 12, 18, 24, 36, 48, 54 Mbps – OFDM
Channel Bandwidth	5 MHz
Max. Conducted Output Power	DSSS : 15.70 dBm OFDM : 15.84 dBm
Antenna Type	See section 1.5 for details
Communication Type	Half-Duplex
Testing Duty Cycle	100.00%
Power Rating (DC/AC, Voltage)	3.30V DC from host
Test Power Source	120.00V AC
Temperature Range (Operating)	0 ~ 55 °C

1.5. Antenna Description

No.	Antenna Type	Gain (dBi)
1	Print Antenna	0.00

1.6. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	05	2432 MHz	09	2452 MHz	-	-
02	2417 MHz	06	2437 MHz	10	2457 MHz	-	-
03	2422 MHz	07	2442 MHz	11	2462 MHz	-	-
04	2427 MHz	08	2447 MHz	-	-	-	-


1.7. Multiple List

No.	Brand Name	Model Name
1	Edimax	EW-7108PCg, GWA-E08G
2	GetNet	GW-9108PCg
3	Black Box	LW6000A
4	Hawking	HWC54GR
5	Sitecom	WL-112
6	REPOTEC	RP-WB7108
7	Sceptre	SC254W
8	LanReady	WLG2500
9	Tonze	PW-6200T
10	XINETRON	BWP0105
11	JAHT	WN-4054P
12	Alink	A801G
13	Sweex	LC500030
14	Digitus	DN-7001G
15	Skyr@acr	154g
16	PhoebeMicro	OCT11G-CB
17	Airlink	AWLC3020
18	Micronet	SP908GKV3
19	SDT	WLB2154PCM
20	Level One	WPC-0301
21	AOpen	AOI-812, 91.18G10.112


2. Test Configuration of the Equipment under Test

2.1. Connection Diagram of Conducted Test System

Conduction

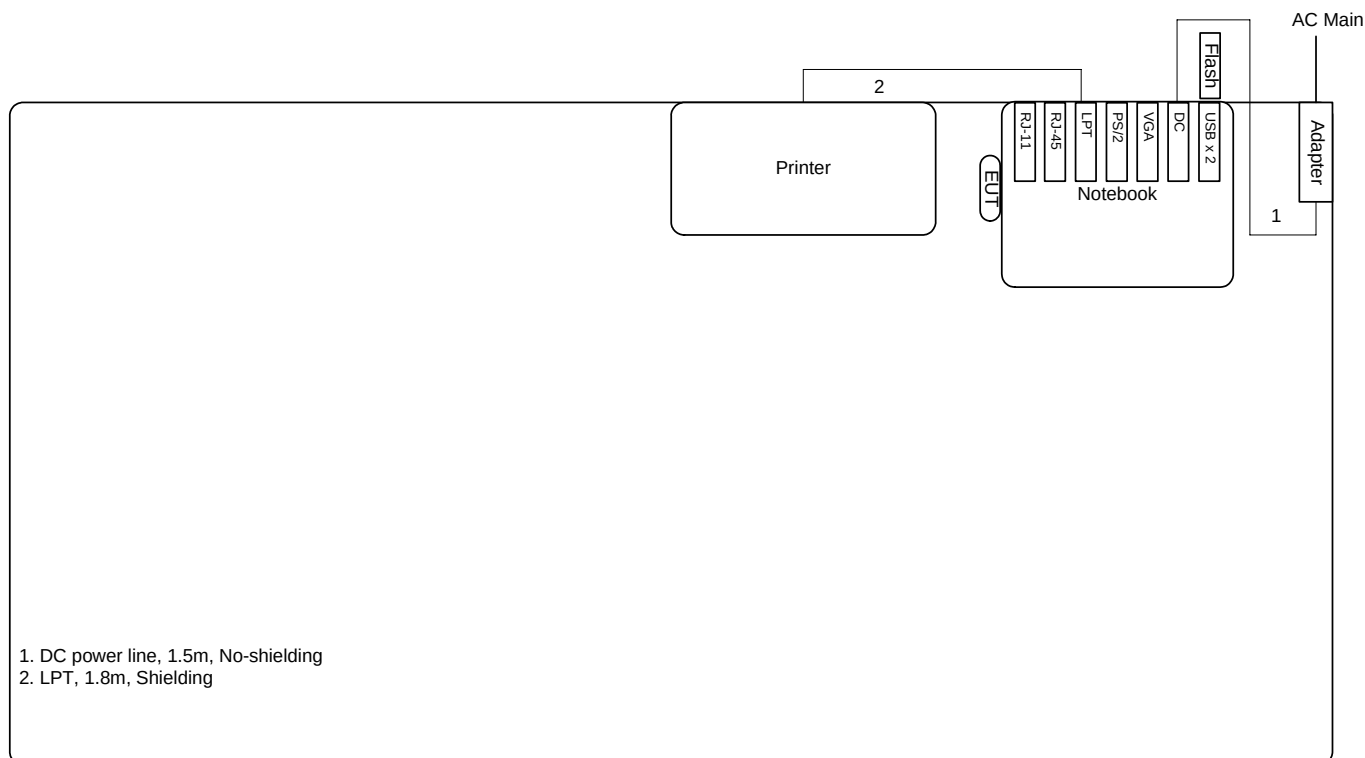

Radiation

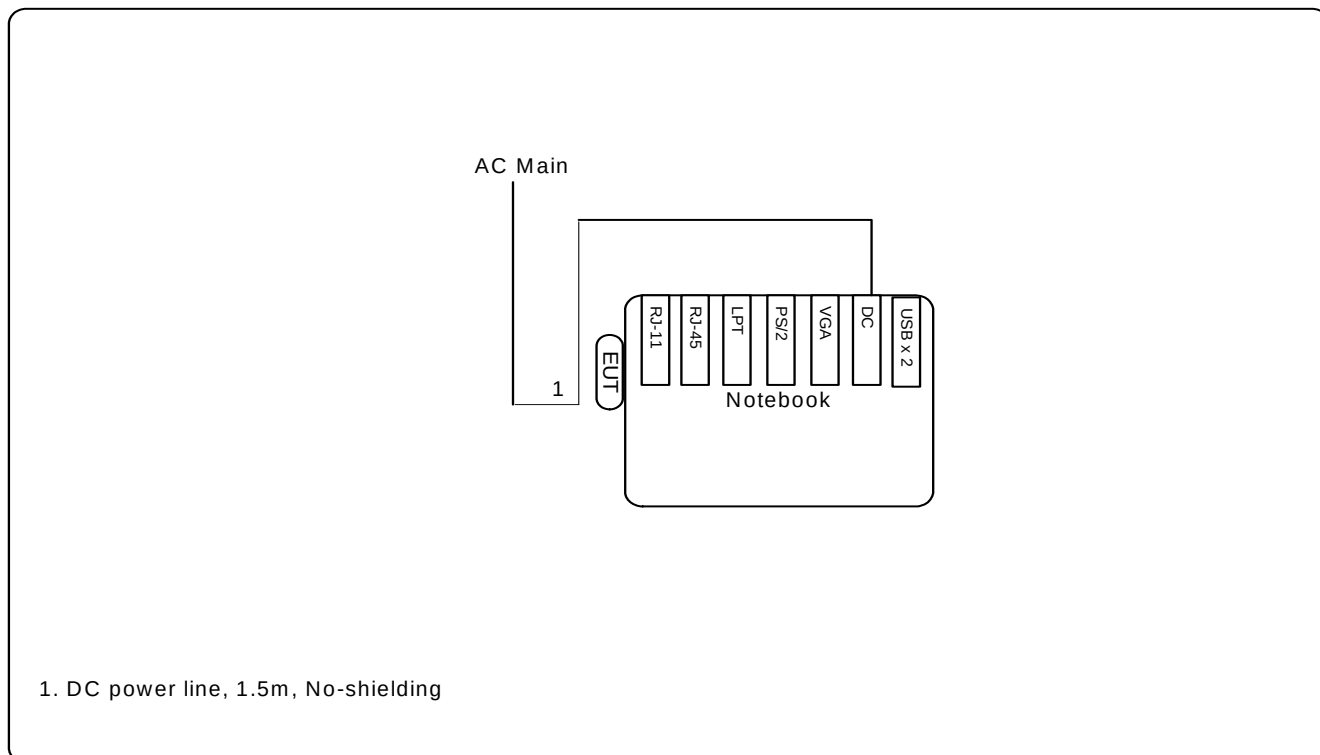

2.2. The Test Mode Description

1. For DSSS modulation, CCK (11 Mbps) is the worst case on all test items.
2. For OFDM modulation, BPSK (6 Mbps) is the worst case on all test items.
3. According to ANSI C63.4-2003: If frequency range of EUT is more than 10 MHz, we have to test the lowest, middle and highest channels of EUT.
4. Spurious emission below 1GHz is independent of channel selection and modulation types. So only channel 06 was tested.
5. For AC conduction emission, the EUT was linked with AP wirelessly.

2.3. Description of Test Supporting Units

Support unit	Brand	Model No.	FCC ID
Notebook	COMPAQ	PP2150	DoC
Printer	EPSON	LQ-680	DoC
FLASH	I-Dask	-	DoC

3. General Information of Test

3.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao
Yuan Hsien, Taiwan, R.O.C.
: TEL 886-3-327-3456
: FAX 886-3-318-0055

Test Site No : 03CH03-HY / TH01-HY / CO04-HY

3.2. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2003

47 CFR FCC Part 15 Subpart C

3.3. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic

3.4. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.

The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 3 M.

3.5. Test Software

During testing, Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Conduction: The EUT linked with executed " Ping.exe " was executed to continue transmitting signal.

Power Parameter Table

Test Software Version	RT2561		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b DSSS	7	8	9
IEEE 802.11g OFDM	9	9	0A

4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Paragraph	FCC Section	Description of Test	Result
5.1	15.247(a)(2)	6dB Spectrum Bandwidth	Pass
5.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Pass
5.3	15.247(e)	Peak Power Spectral Density	Pass
5.4	15.247(d)	Band Edges Emission	Pass
5.5	15.207	AC Power Line Conducted Emission	Pass
5.5	15.247(d)	Spurious Radiated Emission	Pass
5.7	15.203/15.247(b)/(c)	Antenna Requirement	Pass
5.8	2.1091	Maximum Permissible Exposure	Pass

5. Test Result

5.1. Test of 6dB Spectrum Bandwidth

5.1.1. Applicable Standard

Section 15.247(a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.2. Measuring Instruments

Item 20 of the table on section 6.


5.1.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2412 MHz / 2437 MHz / 2462 MHz
- Span Frequency : > 6dB Bandwidth
- RB : 100 kHz
- VB : 100 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : Auto

5.1.4. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz. Trace to Max hold and Detector PK.
3. The 6dB bandwidth is the spectrum width with level below the peak level.
4. Repeat above 1~3 points for the lowest middle and highest channel of the EUT.

5.1.5. Test Setup Layout

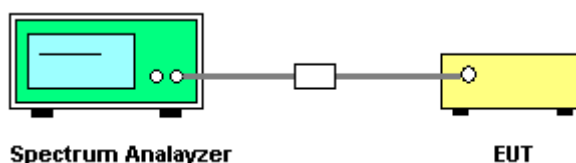

5.1.6. Test Criteria


All test results complied with the requirements of 15.247(a)(2). Measurement Uncertainty is 1×10^{-5} .

5.1.7. Test Result

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Eason Lu


Modulation Type	Channel No.	Frequency (MHz)	6dB Bandwidth	99% Occupied BW	Min. Limit
DSSS	01	2412 MHz	11.96	15.04	0.5
DSSS	06	2437 MHz	12.12	15.04	0.5
DSSS	11	2462 MHz	12.16	15.00	0.5
OFDM	01	2412 MHz	16.52	16.48	0.5
OFDM	06	2437 MHz	16.52	16.48	0.5
OFDM	11	2462 MHz	16.48	16.48	0.5

Modulation Type: DSSS (Channel 01) :

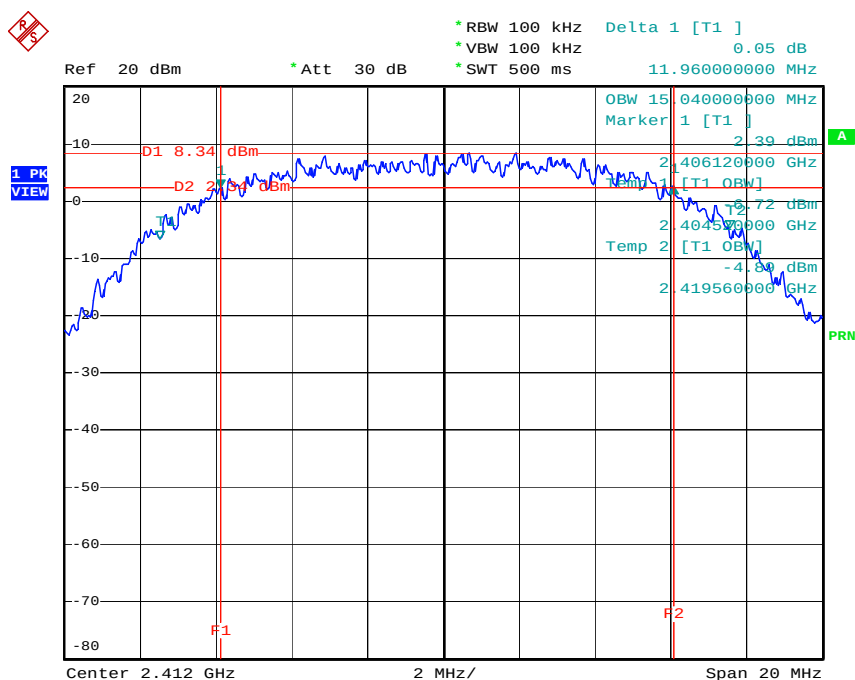


Date: 8. SEP. 2005 17:38:16

Modulation Type: DSSS (Channel 06) :

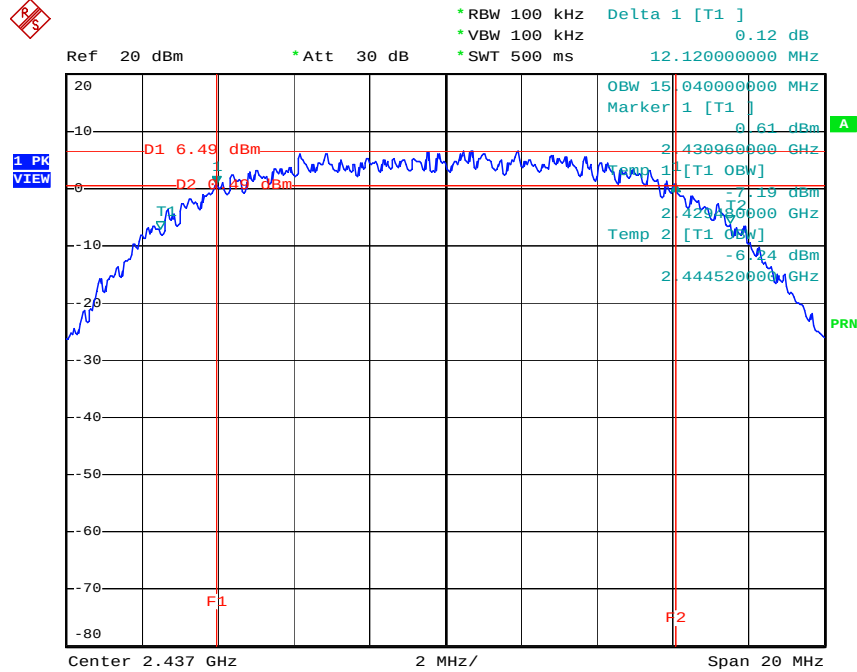


Date: 8.SEP.2005 17:45:22

Modulation Type: DSSS (Channel 11) :

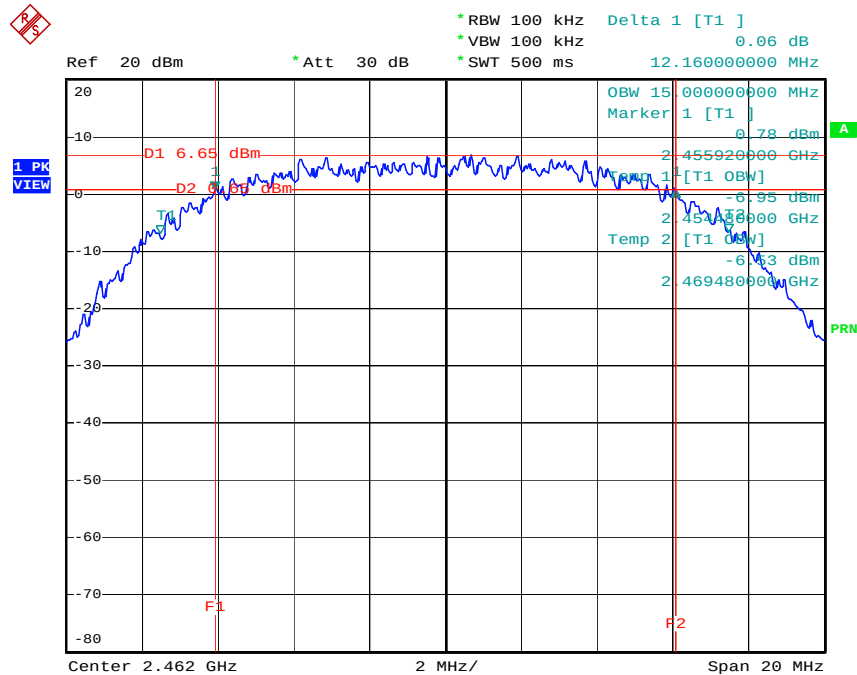


Date: 8.SEP.2005 17:46:58

Modulation Type: OFDM (Channel 01) :

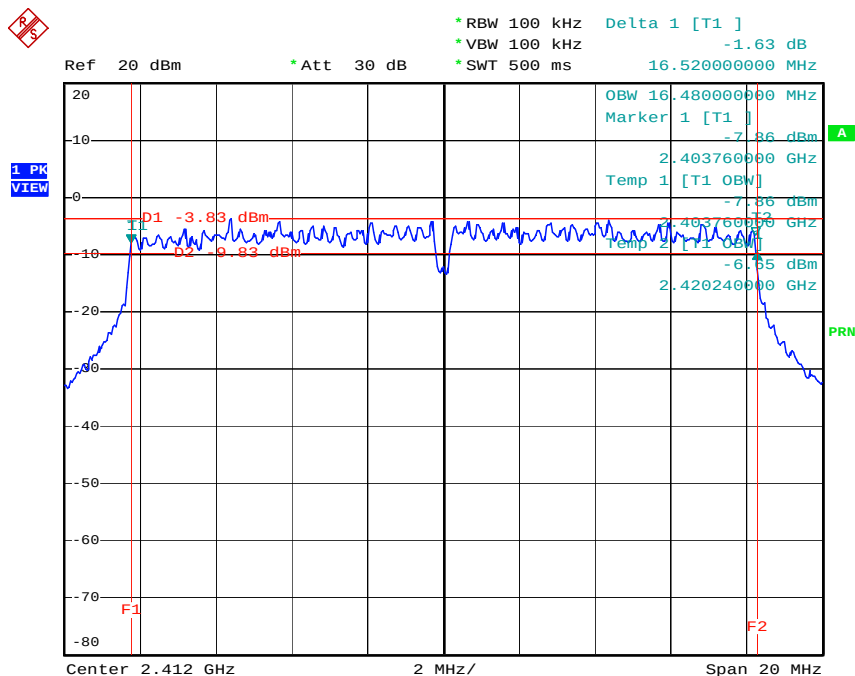


Date: 8.SEP.2005 17:54:17

Modulation Type: OFDM (Channel 06) :

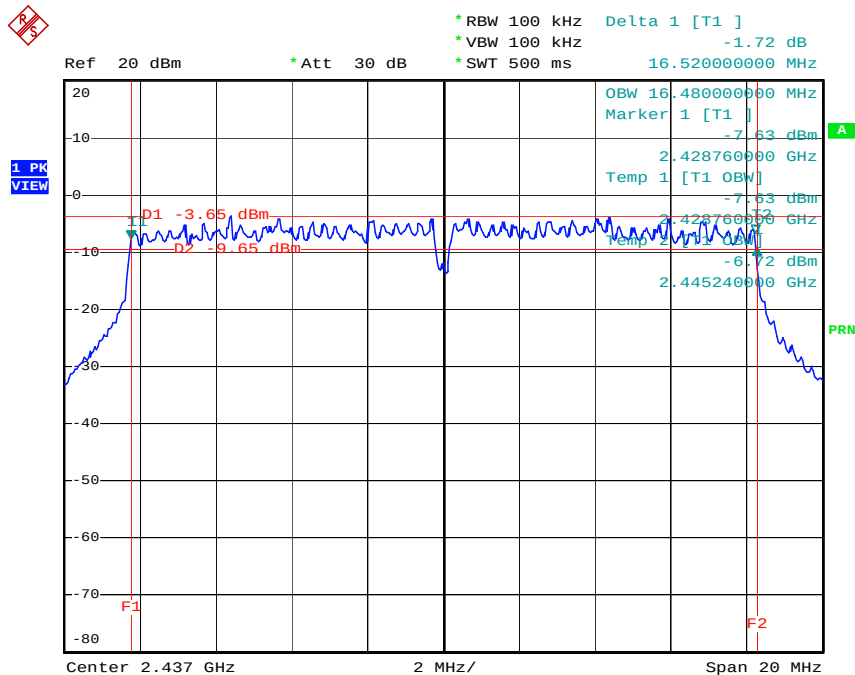

Date: 8.SEP.2005 18:01:02

Modulation Type: OFDM (Channel 11) :

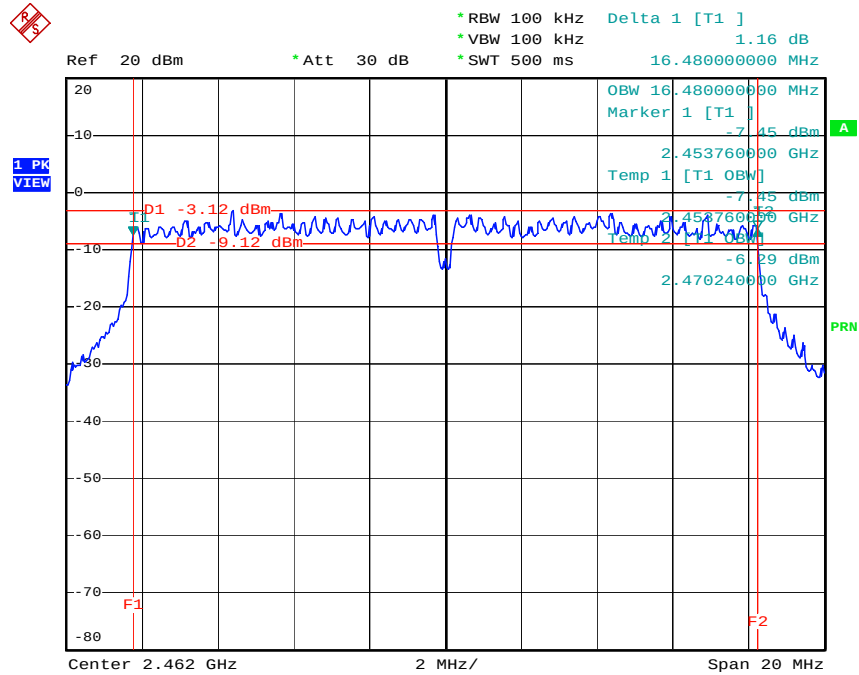

Date: 8.SEP.2005 18:02:33

5.2. Test of Maximum Peak Conducted Output Power

5.2.1. Applicable Standard

Section 15.247(b)(3): The maximum peak output power shall not exceed 1 watt (30dBm). Except as shown below, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the above stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.2.2. Measuring Instruments

Item 21, 23 of the table on section 6.

5.2.3. Test Procedures and Test Instruments Setting

1. The transmitter output was connected to the peak power meter through an attenuator.
2. Repeated point 1 for the lowest middle and highest channel of the EUT.

5.2.4. Test Setup Layout

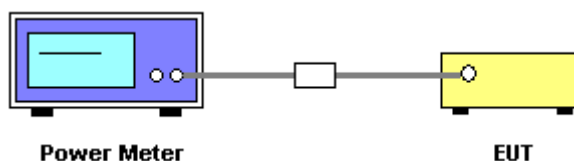

5.2.5. Test Criteria

All test results complied with the requirements of 15.247(b)(3). Measurement Uncertainty is 1.5dB.

5.2.6. Test Result of Conducted Power

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Eason Lu

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
DSSS	01	2412 MHz	15.20	30
DSSS	06	2437 MHz	15.38	30
DSSS	11	2462 MHz	15.70	30
OFDM	01	2412 MHz	15.84	30
OFDM	06	2437 MHz	15.69	30
OFDM	11	2462 MHz	15.60	30

5.3. Test of Peak Power Spectral Density

5.3.1. Applicable Standard

Section 15.247(e): For digital modulation systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.3.2. Measuring Instruments

Item 20 of the table on section 6.


5.3.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2412 MHz / 2437 MHz / 2462 MHz
- Span Frequency : 1.5MHz
- RB : 3 kHz
- VB : 30 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : 500s

5.3.4. Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated points 1~4 for the lowest middle and highest channel of the EUT.

5.3.5. Test Setup Layout

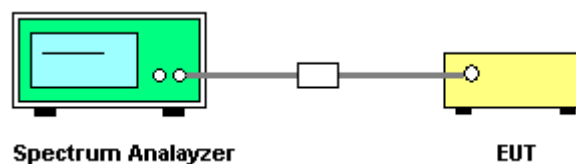

5.3.6. Test Criteria


All test results complied with the requirements of 15.247(e). Measurement Uncertainty is 1.5dB.

5.3.7. Test Result

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Eason Lu


Modulation Type	Channel No.	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
DSSS	01	2412 MHz	-10.63	8
DSSS	06	2437 MHz	-10.14	8
DSSS	11	2462 MHz	-10.37	8
OFDM	01	2412 MHz	-17.11	8
OFDM	06	2437 MHz	-17.21	8
OFDM	11	2462 MHz	-17.00	8

Modulation Type: DSSS (Channel 01) :

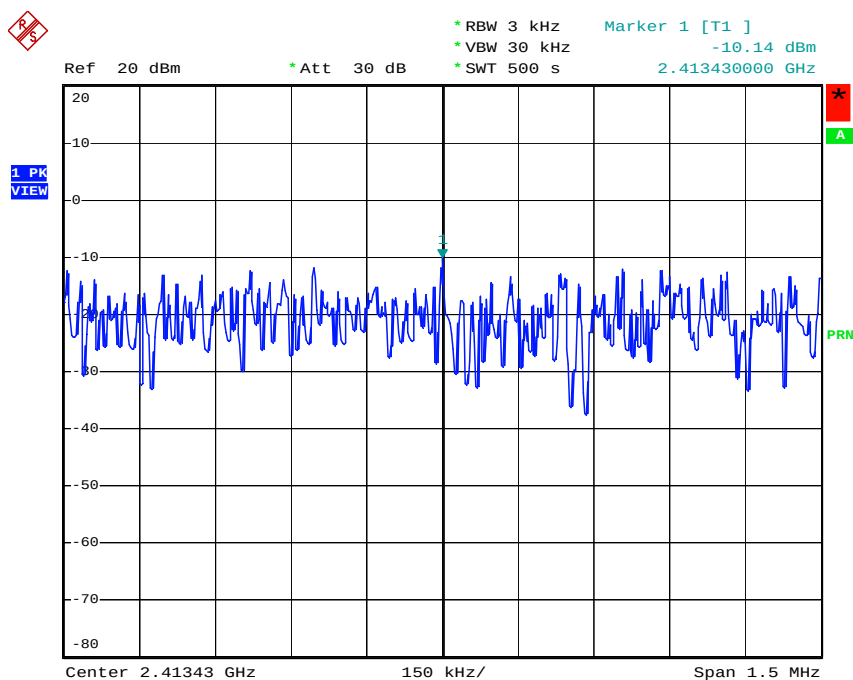


Date: 4.OCT.2005 16:00:37

Modulation Type: DSSS (Channel 06) :

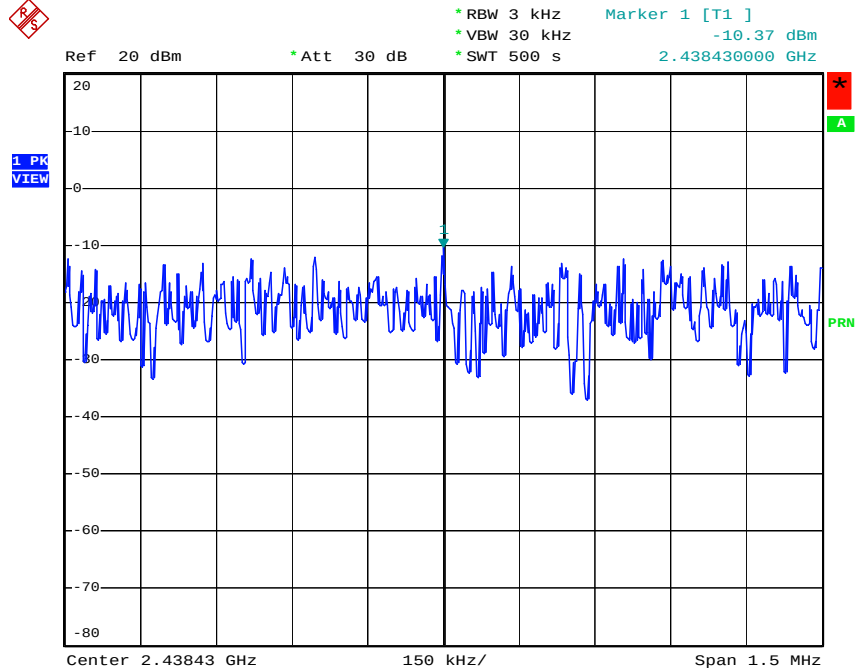


Date: 4.OCT.2005 16:03:15

Modulation Type: DSSS (Channel 11) :

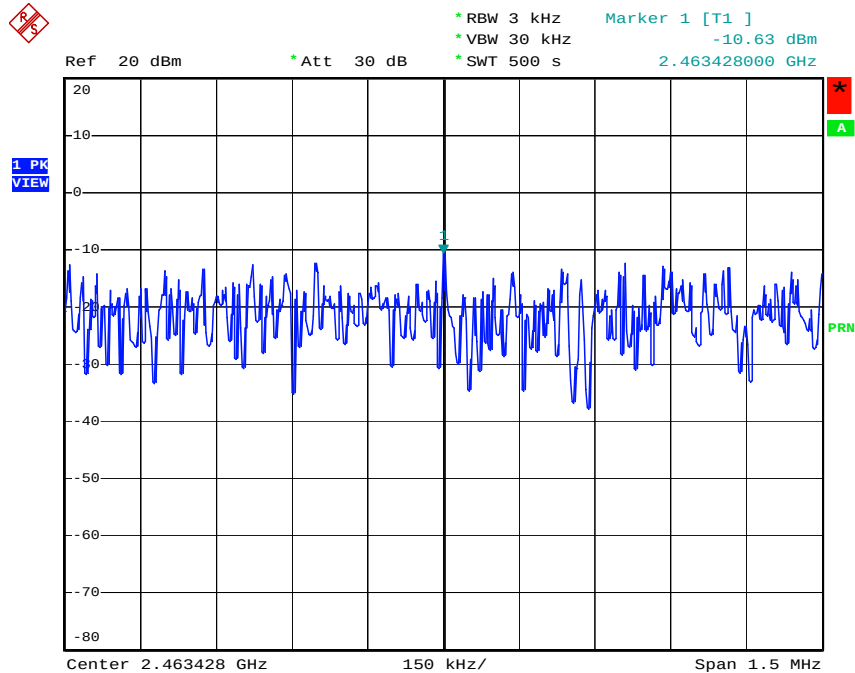


Date: 4.OCT.2005 16:04:14

Modulation Type: OFDM (Channel 01) :

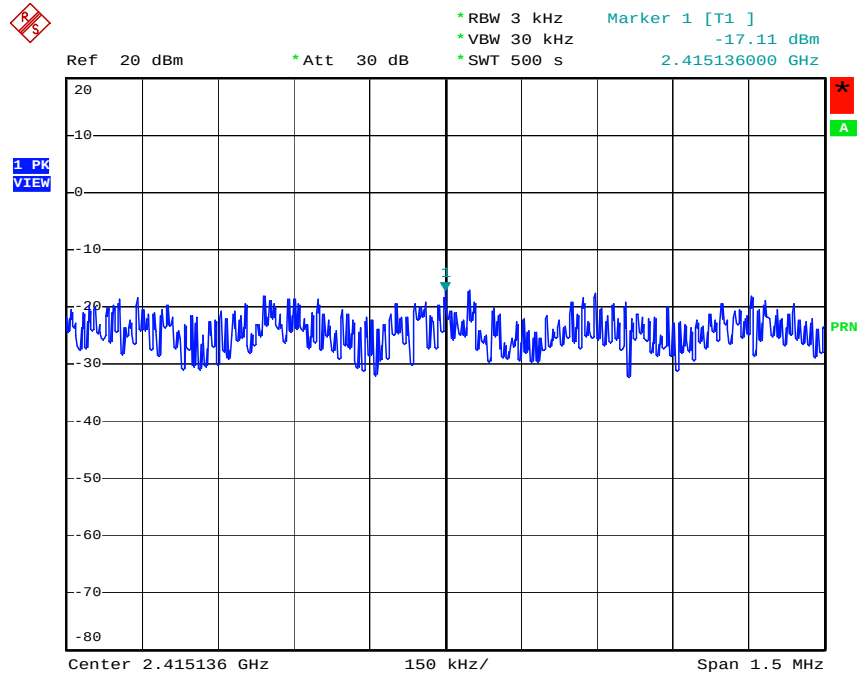


Date: 8.SEP.2005 17:57:19

Modulation Type: OFDM (Channel 06) :

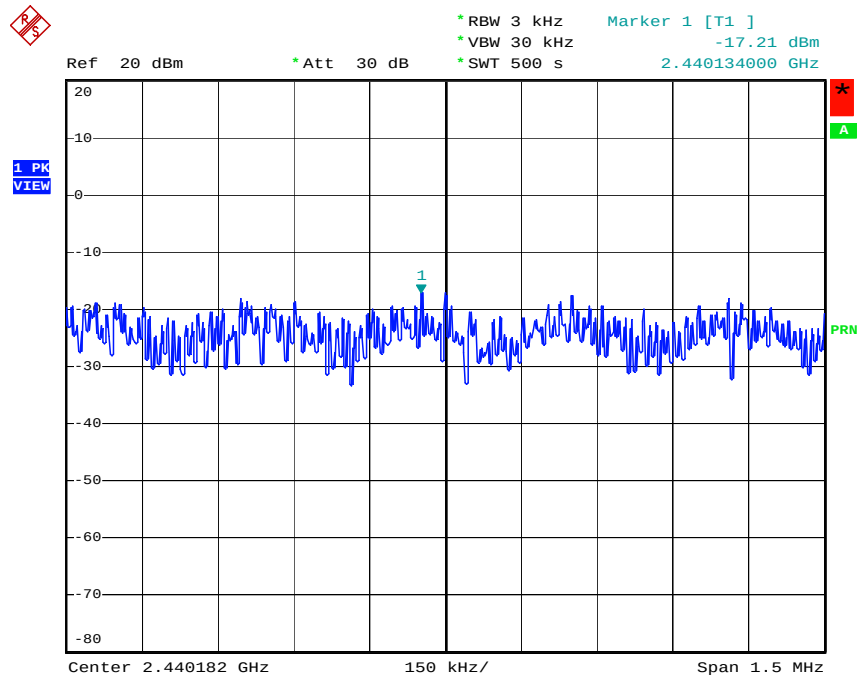

Date: 8.SEP.2005 17:59:17

Modulation Type: OFDM (Channel 11) :

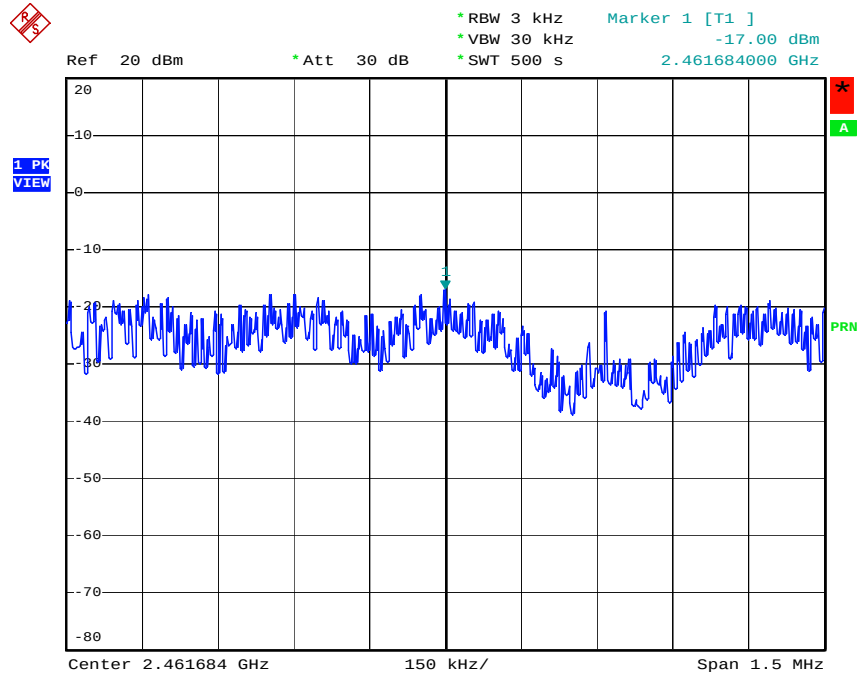

Date: 8.SEP.2005 18:07:57

5.4. Test of Band Edges Emission

5.4.1. Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

5.4.2. Measuring Instruments

Item 6~19 of the table on section 6 for radiated measurement.
Item 20 of the table on section 6 for conducted measurement.

5.4.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40 (Conducted Measurement)
 - Attenuation : Auto
 - Center Frequency : 2412 MHz / 2462 MHz
 - Span Frequency : 100MHz
 - RB : 100 kHz
 - VB : 100 kHz
 - Detector : Peak
 - Trace : Max Hold
 - Sweep Time : Auto
- Spectrum Analyzer : R&S FSP40 (Radiated Measurement)
 - Attenuation : Auto
 - Center Frequency : 2412 MHz / 2462 MHz
 - Span Frequency : 100MHz
 - RB : 1 MHz for PK value / 1 MHz for AV value
 - VB : 1 MHz for PK value / 10 Hz for AV value
 - Detector : Peak
 - Trace : Max Hold
 - Sweep Time : Auto

5.4.4. Test Procedures and Test Instruments Setting

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.


5. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement


1. Configure the EUT according to ANSI C63.4:2003.
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission in restriction bands, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1 MHz RBW for reading under PK.
6. The transmitter set to the highest channel and repeated 2~5.

5.4.5. Test Setup

Radiated Method

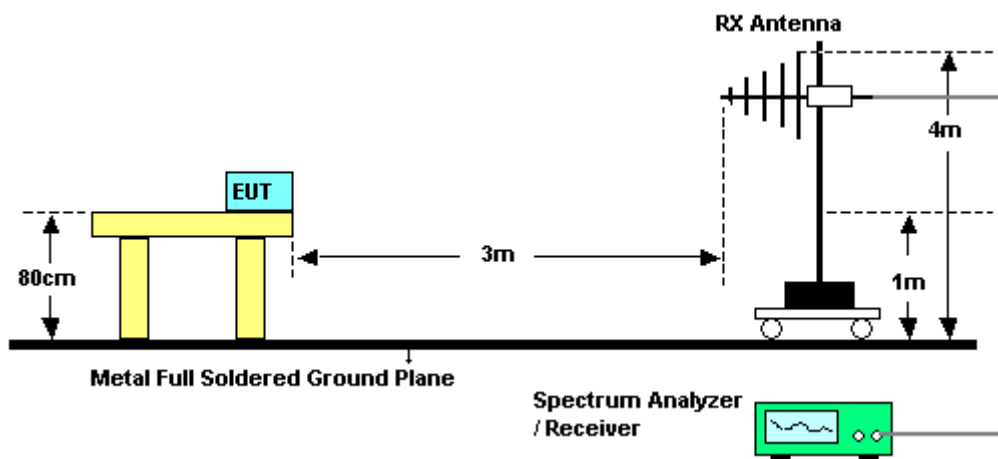

Conducted Method

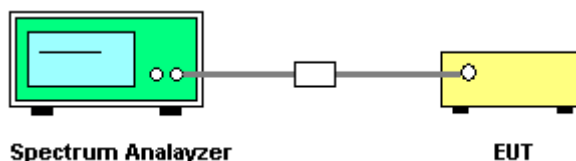

5.4.6. Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is 1×10^{-5} .

5.4.7. Test Result of Radiated Emission

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Eason Lu

2412 MHz

DSSS

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	2386.380	65.23	-8.77	34.74	74.00	2.28	28.21	0.00	Peak	---	---
1	2387.330	52.91	-1.09	22.42	54.00	2.28	28.21	0.00	Average	---	---

OFDM

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
2	2483.500	57.08	-16.92	26.37	74.00	2.34	28.37	0.00	Peak	---	---
2	2483.500	44.50	-9.50	13.79	54.00	2.34	28.37	0.00	Average	---	---

2462 MHz

DSSS

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
2	2483.500	57.52	-16.48	26.81	74.00	2.34	28.37	0.00	Peak	---	---
2	2483.500	45.68	-8.32	14.97	54.00	2.34	28.37	0.00	Average	---	---


OFDM

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	2390.000	58.49	-15.51	28.00	74.00	2.28	28.21	0.00	Peak	---	---
1	2390.000	46.01	-7.99	15.52	54.00	2.28	28.21	0.00	Average	---	---

Level*: The max field strength in the restricted bands.


Test Result of Conducted Emission

Modulation Type: DSSS (Channel 01) :

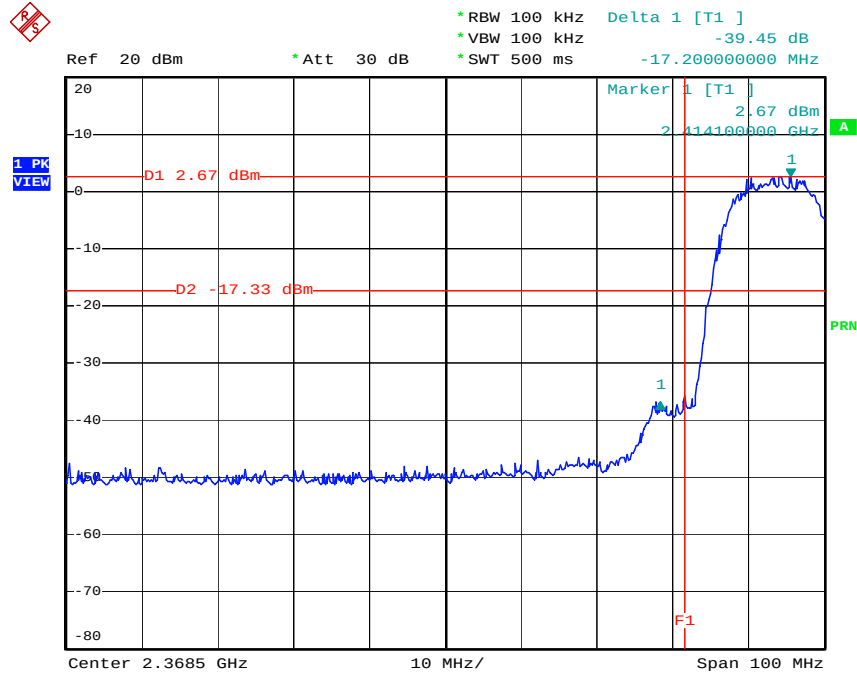


Date: 4.OCT.2005 15:59:22

Modulation Type: DSSS (Channel 11) :

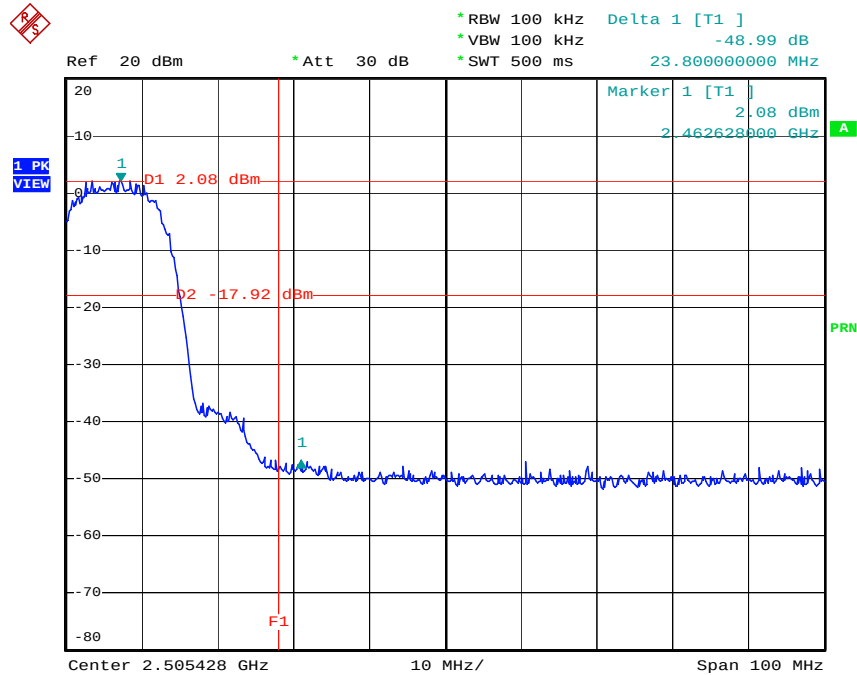


Date: 4.OCT.2005 16:05:26

Modulation Type: OFDM (Channel 01) :

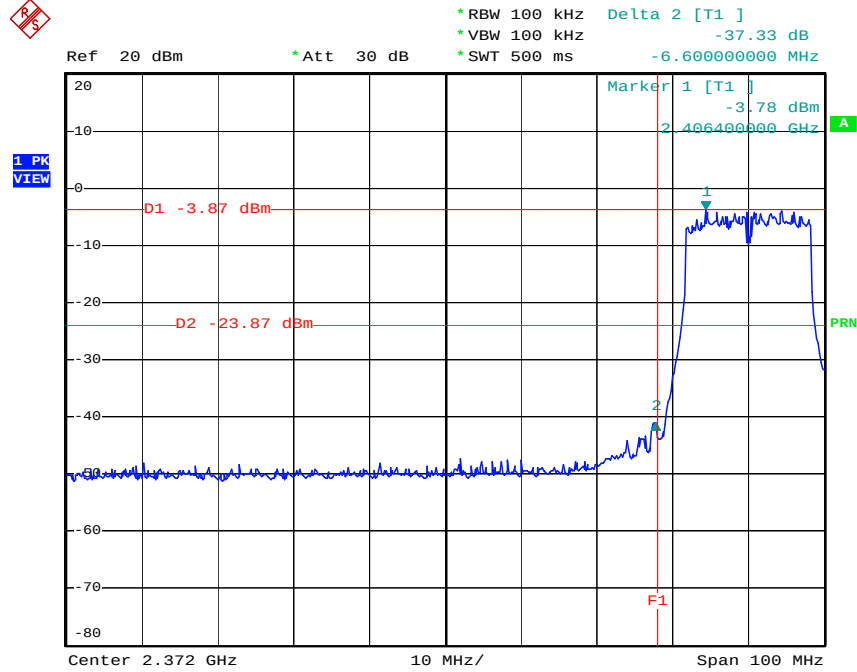

Date: 8.SEP.2005 17:55:48

Modulation Type: OFDM (Channel 11) :

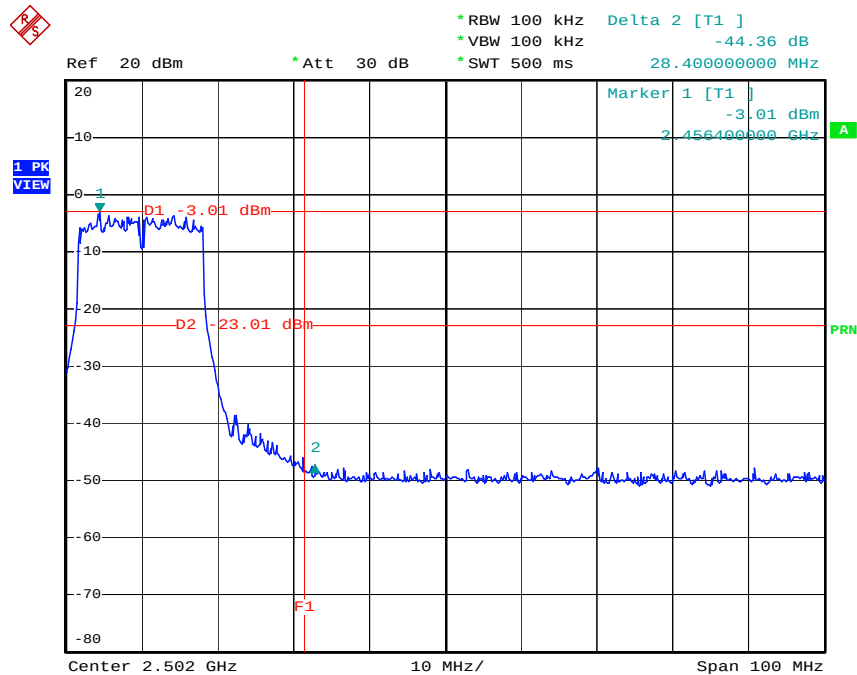

Date: 8.SEP.2005 18:04:38

5.5. Test of AC Power Line Conducted Emission

5.5.1. Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

5.5.2. Measuring Instruments

Please reference item 1~5 in chapter 6 for the instruments used for testing.


5.5.3. Description of Major Test Instruments Setting

- Test Receiver : R&S ESCS 30
- Attenuation : 10 dB
- Start Frequency : 0.15 MHz
- Stop Frequency : 30 MHz
- IF Bandwidth : 9 KHz

5.5.4. Test Procedures

1. Configure the EUT according to ANSI C63.4:2003.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal for each RF channel.

5.5.5. Test Setup Layout

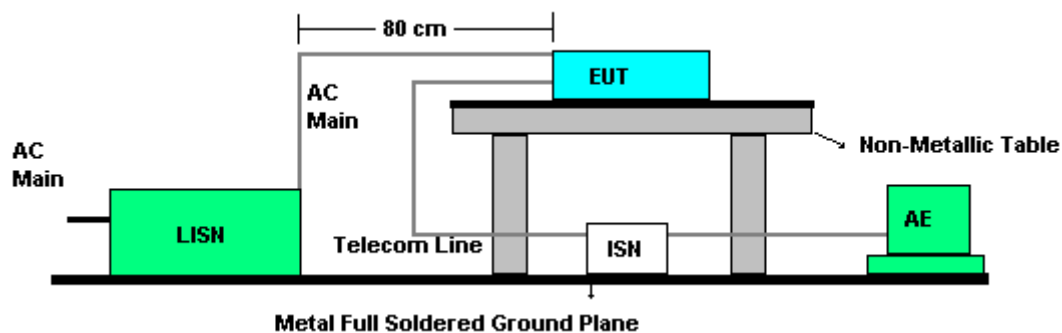


5.5.6. Test Criteria

All test results complied with the requirements of 15.207. Measurement Uncertainty is 2.54dB.

5.5.7. Test Result of Conducted Emission


- Temperature: 27°C
- Relative Humidity: 45%
- Test Engineer: Sky Wu

Line to Ground

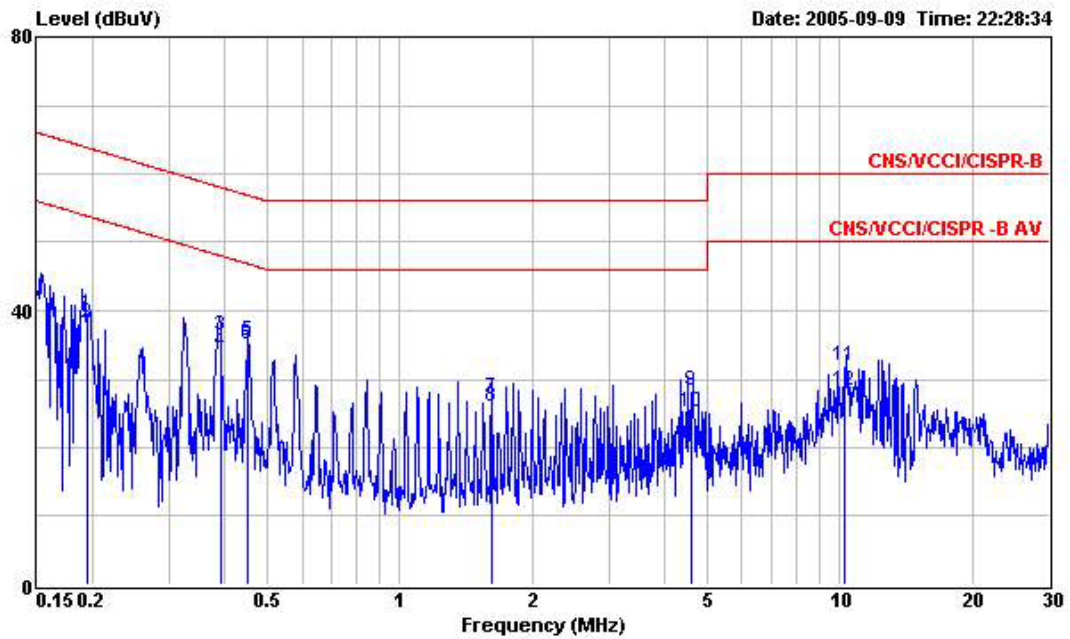

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.194	39.35	-24.50	63.85	39.26	0.06	0.03	QP
2	0.194	38.13	-15.72	53.85	38.04	0.06	0.03	Average
3	0.390	36.30	-21.76	58.06	36.18	0.06	0.06	QP
4	0.390	34.03	-14.03	48.06	33.91	0.06	0.06	Average
5	0.451	35.54	-21.32	56.86	35.41	0.07	0.06	QP
6	0.451	35.10	-11.76	46.86	34.97	0.07	0.06	Average
7	1.615	27.33	-28.67	56.00	27.11	0.11	0.11	QP
8	1.615	25.92	-20.08	46.00	25.70	0.11	0.11	Average
9	4.583	28.18	-27.82	56.00	27.84	0.21	0.13	QP
10	4.583	25.21	-20.79	46.00	24.87	0.21	0.13	Average
11	10.262	31.88	-28.12	60.00	31.46	0.21	0.21	QP
12	10.262	28.37	-21.63	50.00	27.95	0.21	0.21	Average


Neutral to Ground

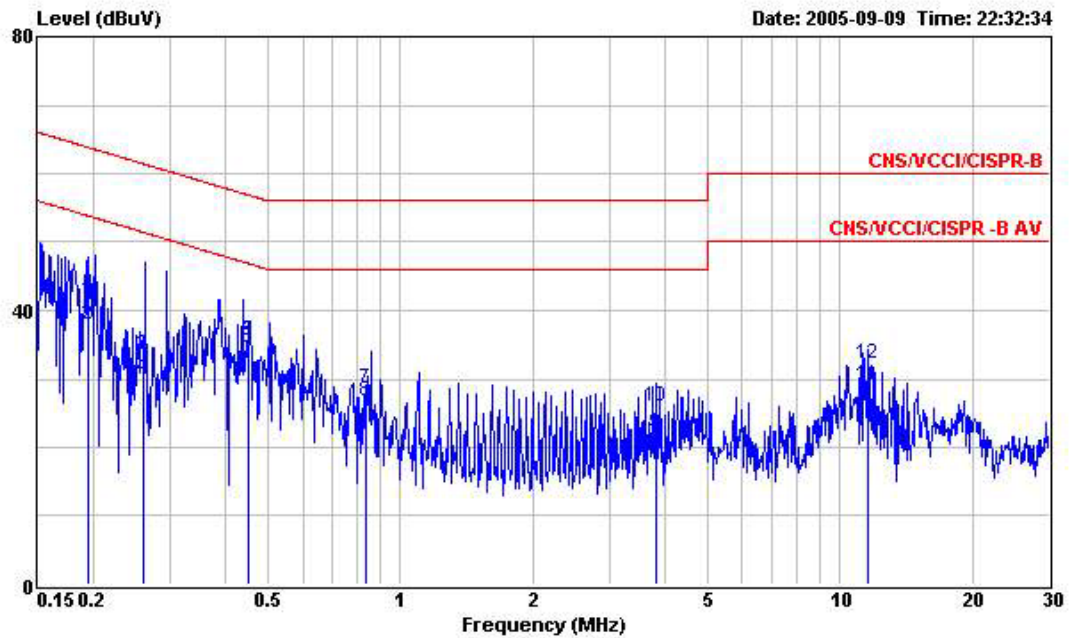

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.195	41.63	-22.19	63.82	41.49	0.11	0.03	QP
2	0.195	37.84	-15.98	53.82	37.70	0.11	0.03	Average
3	0.259	33.45	-28.01	61.46	33.30	0.11	0.04	QP
4	0.259	30.04	-21.42	51.46	29.89	0.11	0.04	Average
5	0.452	35.58	-21.27	56.85	35.39	0.13	0.06	QP
6	0.452	34.50	-12.35	46.85	34.31	0.13	0.06	Average
7	0.838	28.48	-27.52	56.00	28.19	0.21	0.08	QP
8	0.838	26.65	-19.35	46.00	26.36	0.21	0.08	Average
9	3.804	22.00	-24.00	46.00	21.65	0.23	0.12	Average
10	3.804	26.04	-29.96	56.00	25.69	0.23	0.12	QP
11	11.550	29.01	-20.99	50.00	28.46	0.33	0.22	Average
12	11.550	32.09	-27.91	60.00	31.54	0.33	0.22	QP

5.5.8. Photographs of Conducted Emission Test Configuration

FRONT VIEW

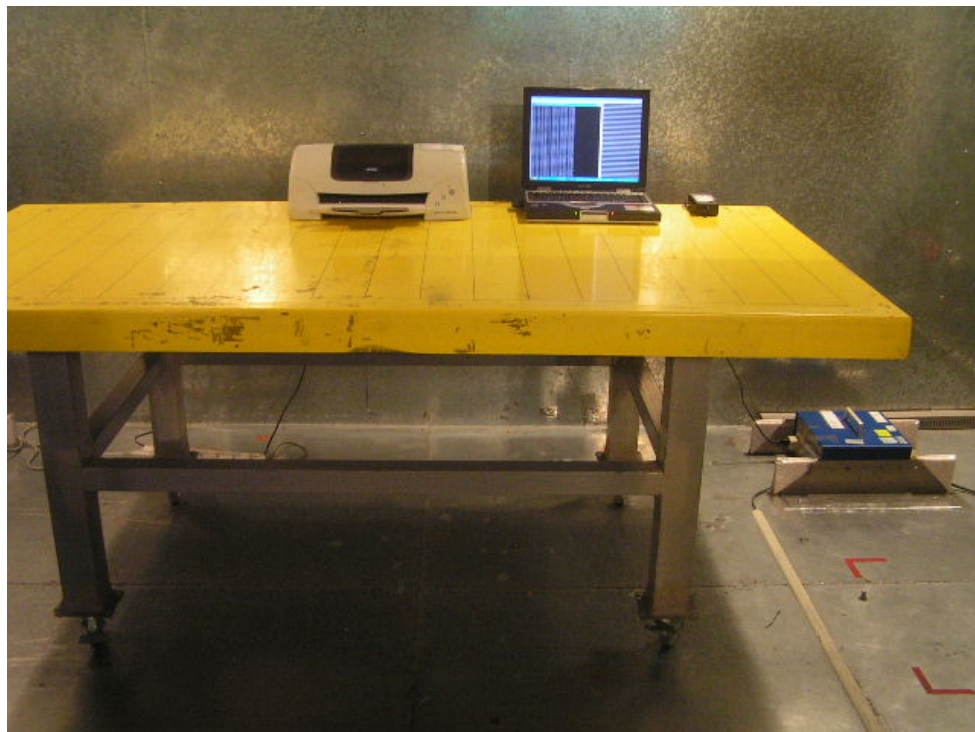

REAR VIEW



5.6. Test of Spurious Radiated Emission

5.6.1. Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

5.6.2. Measuring Instruments

Please reference item 6~19 in chapter 6 for the instruments used for testing.

5.6.3. Description of Major Test Instruments Setting


- Spectrum Analyzer : R&S FSP40
 - Attenuation : Auto
 - Start Frequency : 1000 MHz
 - Stop Frequency : 10th carrier harmonic
 - RB / VB : 1 MHz / 1MHz for Peak
 - RB / VB : 1 MHz / 10Hz for Average
- Test Receiver : R&S ESCS 30
 - Attenuation : Auto
 - Start Frequency : 30 MHz
 - Stop Frequency : 1000 MHz
 - RB : 120 KHz for QP or PK

5.6.4. Test Procedures

1. Configure the EUT according to ANSI C63.4:2003.
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.5. Test Setup Layout

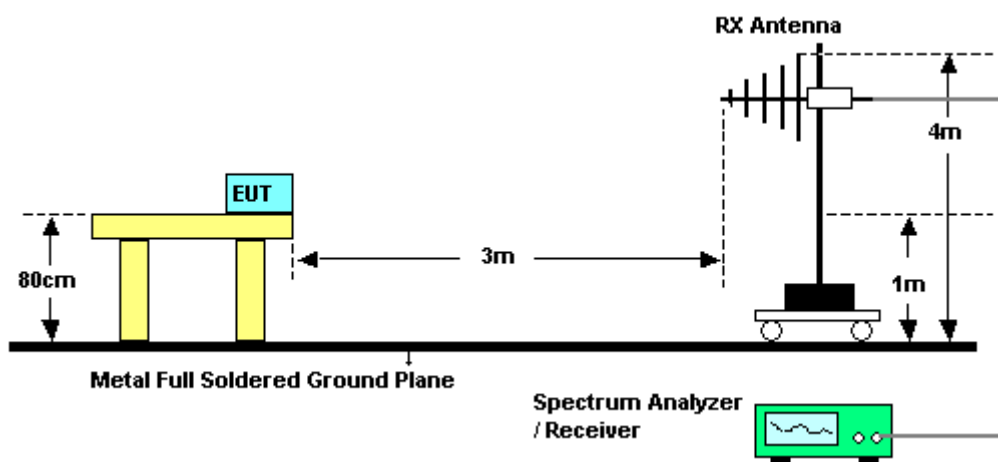


5.6.6. Test Criteria


All test results complied with the requirements of 15.247(d). Measurement Uncertainty is 2.26dB.

5.6.7. Test Results for CH 06 / 2437 MHz (for emission below 1GHz)

- Modulation Type: OFDM
- Temperature: 28°C
- Relative Humidity: 52%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Ted Chiu

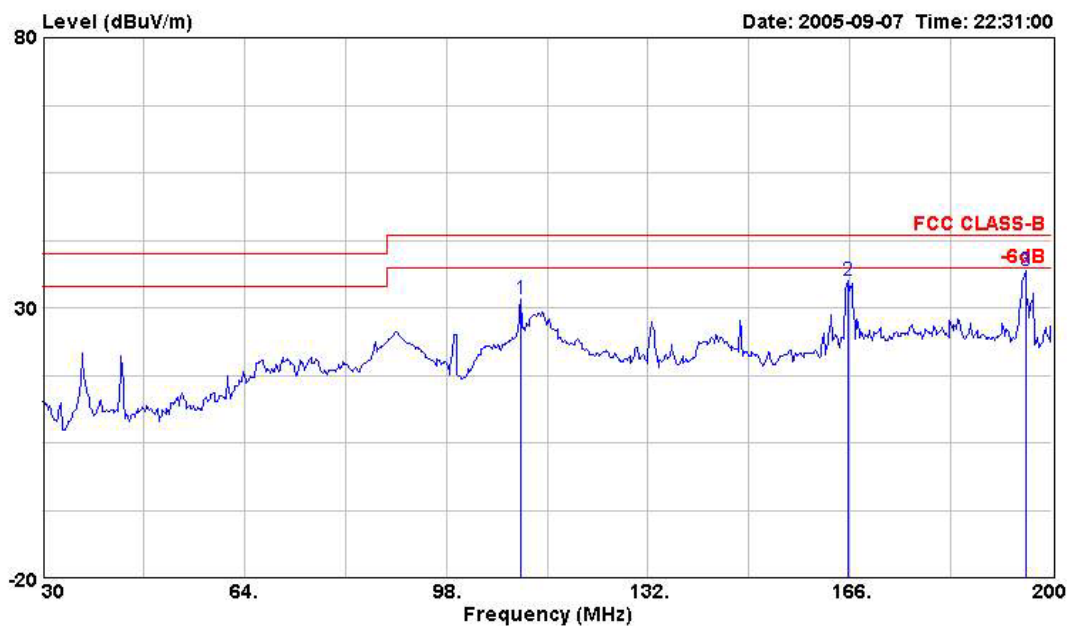
(A) Polarization: Horizontal


	Freq	Level	Over	Read	Limit	CableAntenna	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor	Pos	Pos
			dB	dBuV	dBuV/m	dB	dB/m	dB	cm	deg
1	110.580	31.72	-11.78	50.45	43.50	1.04	10.53	30.29 Peak	---	---
2	165.660	34.91	-8.59	50.58	43.50	1.28	13.21	30.16 Peak	---	---
3	195.580	36.89	-6.61	50.79	43.50	1.30	15.45	30.65 Peak	---	---

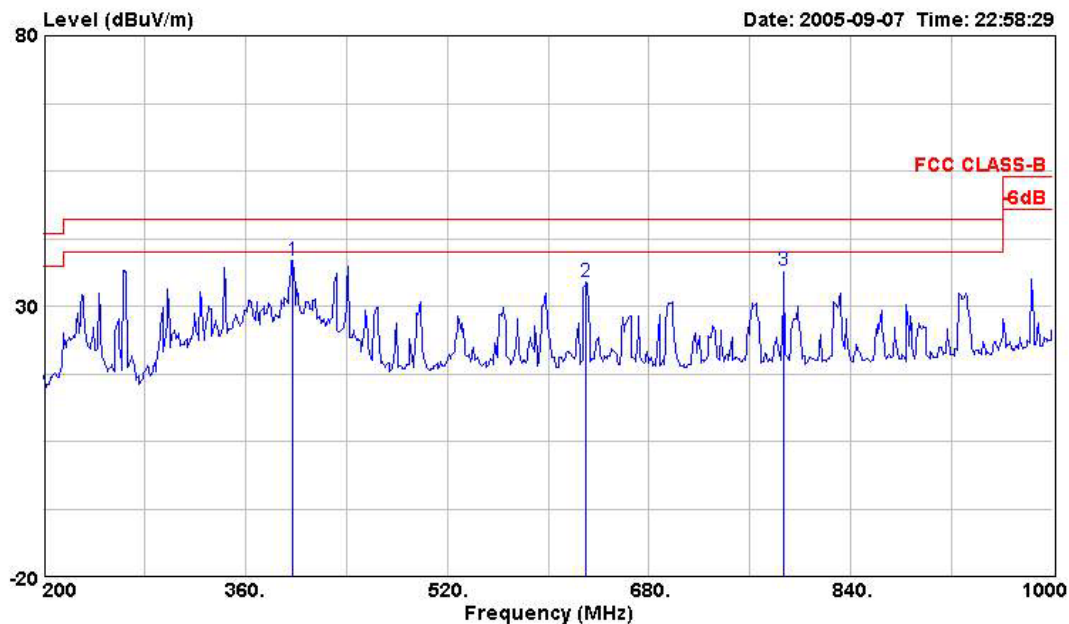


	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	397.600	38.54	-7.46	51.02	46.00	1.97	16.73	31.17	Peak	---	---
2	630.400	34.43	-11.57	42.21	46.00	2.45	20.49	30.73	Peak	---	---
3	787.200	36.46	-9.54	42.56	46.00	2.79	21.74	30.63	Peak	---	---

(B) Polarization: Vertical

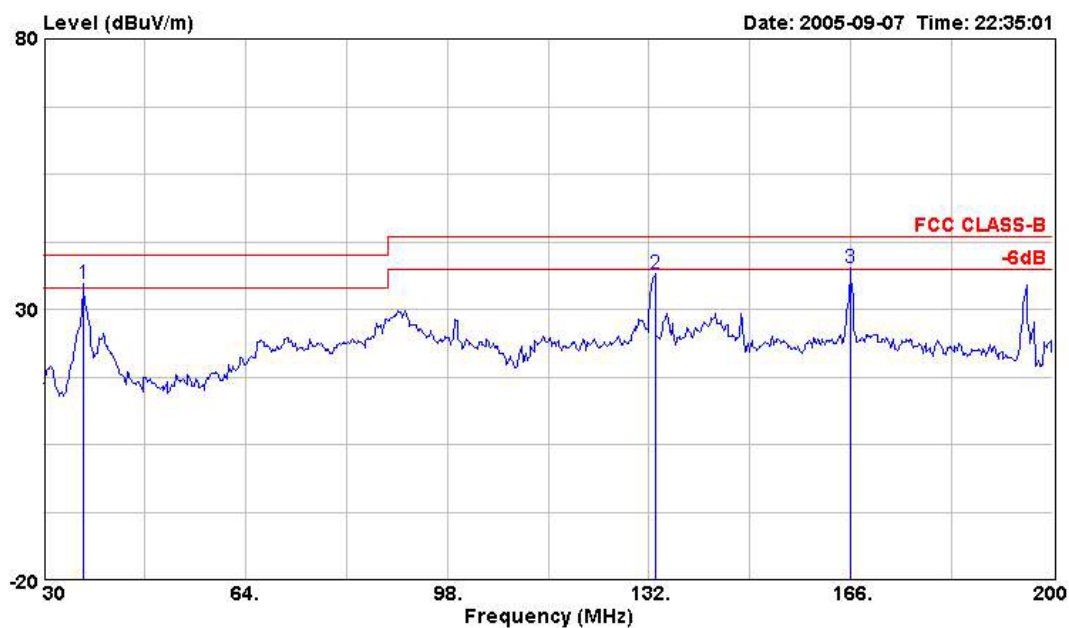

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1 !	36.630	34.78	-5.22	52.57	40.00	0.58	12.12	30.49	Peak	---	---
2	133.020	36.54	-6.96	53.69	43.50	1.15	12.41	30.72	Peak	---	---
3 !	165.830	37.58	-5.92	53.23	43.50	1.28	13.23	30.16	Peak	---	---

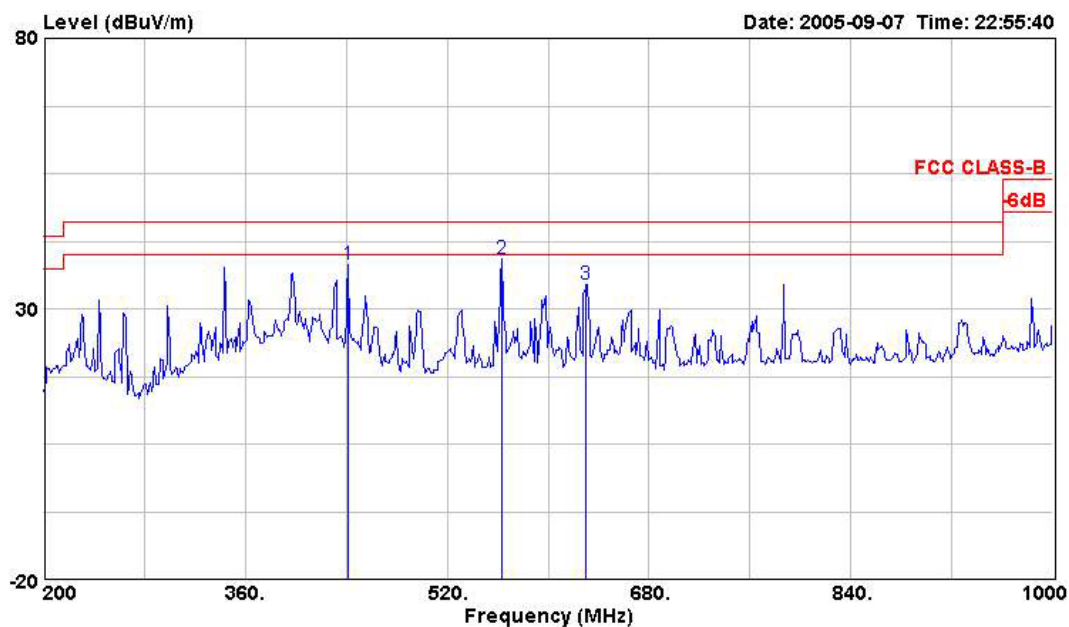

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	441.600	38.10	-7.90	50.29	46.00	2.12	16.47	30.77	Peak	---	---
2	563.200	39.26	-6.74	49.35	46.00	2.28	18.78	31.15	Peak	---	---
3	630.400	34.48	-11.52	42.26	46.00	2.45	20.49	30.73	Peak	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.8. Test Results for CH 01 / 2412 MHz (for emission above 1GHz)


- Modulation Type: DSSS
- Temperature: 28°C
- Relative Humidity: 52%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

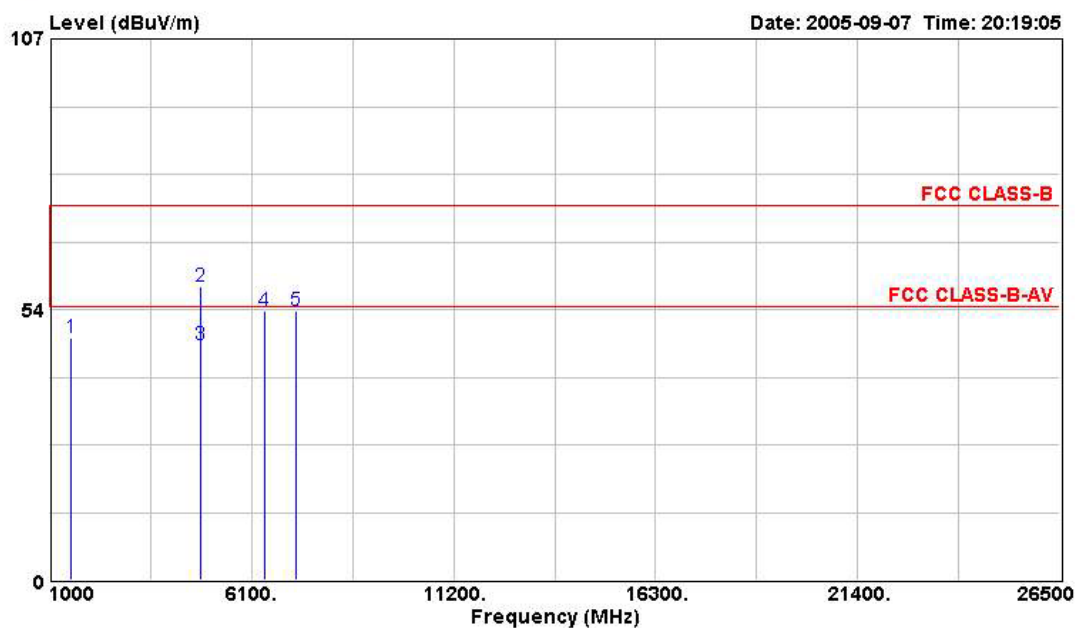

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1524.000	47.85	-26.15	53.84	74.00	1.58	25.45	33.02	Peak	---	---
2	4824.000	58.03	-15.97	54.35	74.00	3.10	33.12	32.54	PEAK	---	---
3	4824.000	46.39	-7.61	42.71	54.00	3.10	33.12	32.54	Average	---	---
4	6432.000	53.20	-20.80	47.54	74.00	3.83	34.30	32.47	PEAK	---	---
5	7232.000	53.15	-20.85	45.49	74.00	4.09	35.98	32.40	PEAK	---	---

(B) Polarization: Vertical

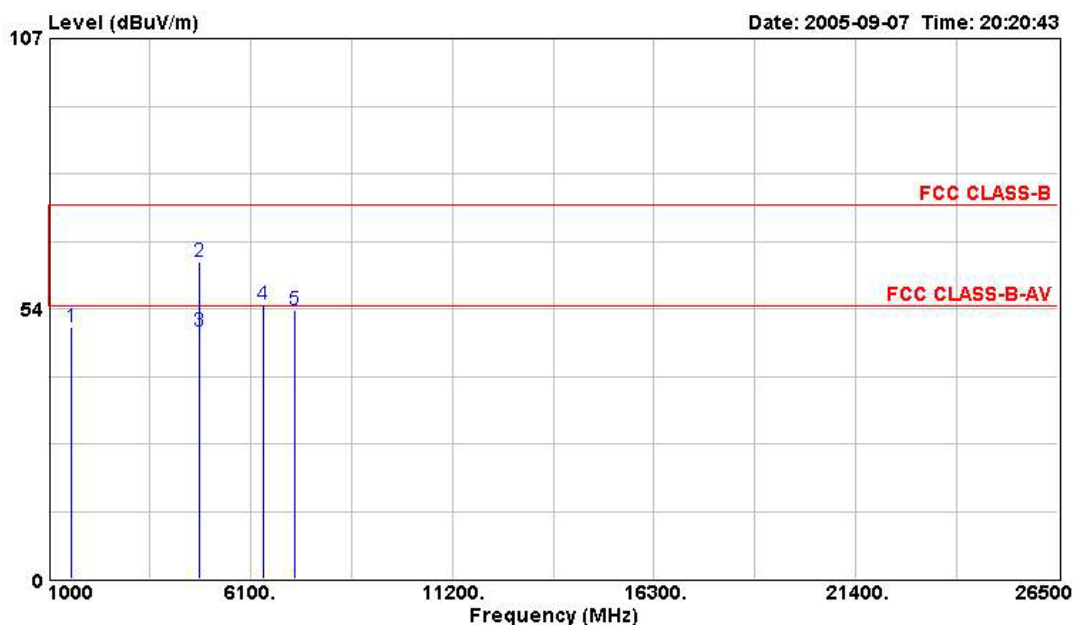

	Freq	Level	Over	Read	Limit	Cable	Antenna	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1588.000	49.82	-24.18	55.44	74.00	1.62	25.74	32.98	Peak	---	---
2	4824.000	62.78	-11.22	59.10	74.00	3.10	33.12	32.54	PEAK	---	---
3	4824.000	48.87	-5.13	45.19	54.00	3.10	33.12	32.54	Average	---	---
4	6432.000	54.44	-19.56	48.78	74.00	3.83	34.30	32.47	PEAK	---	---
5	7236.000	53.24	-20.76	45.63	74.00	4.09	35.98	32.46	PEAK	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Item 4 is on un-restricted band, so the limit is -20dBc for such emission.


- Modulation Type: OFDM
- Temperature: 28°C
- Relative Humidity: 52%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

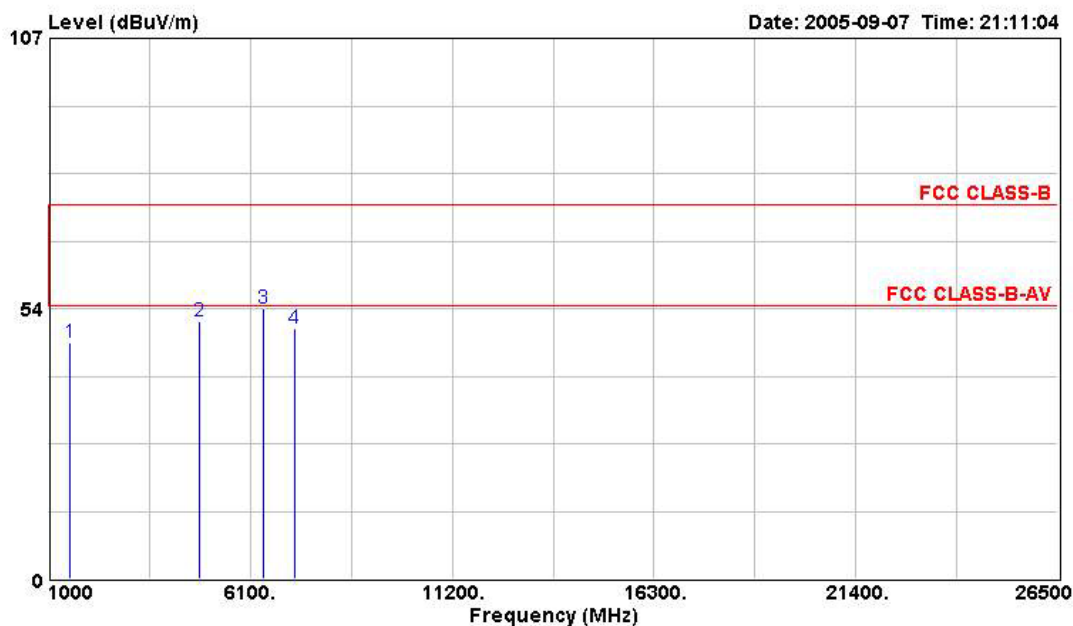

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1524.000	46.74	-27.26	52.73	74.00	1.58	25.45	33.02	Peak	---	---
2	4824.000	50.92	-23.08	47.24	74.00	3.10	33.12	32.54	Peak	---	---
3	6432.000	53.65	-20.35	47.98	74.00	3.83	34.30	32.47	PEAK	---	---
4	7236.000	49.53	-24.47	41.92	74.00	4.09	35.98	32.46	PEAK	---	---

(B) Polarization: Vertical

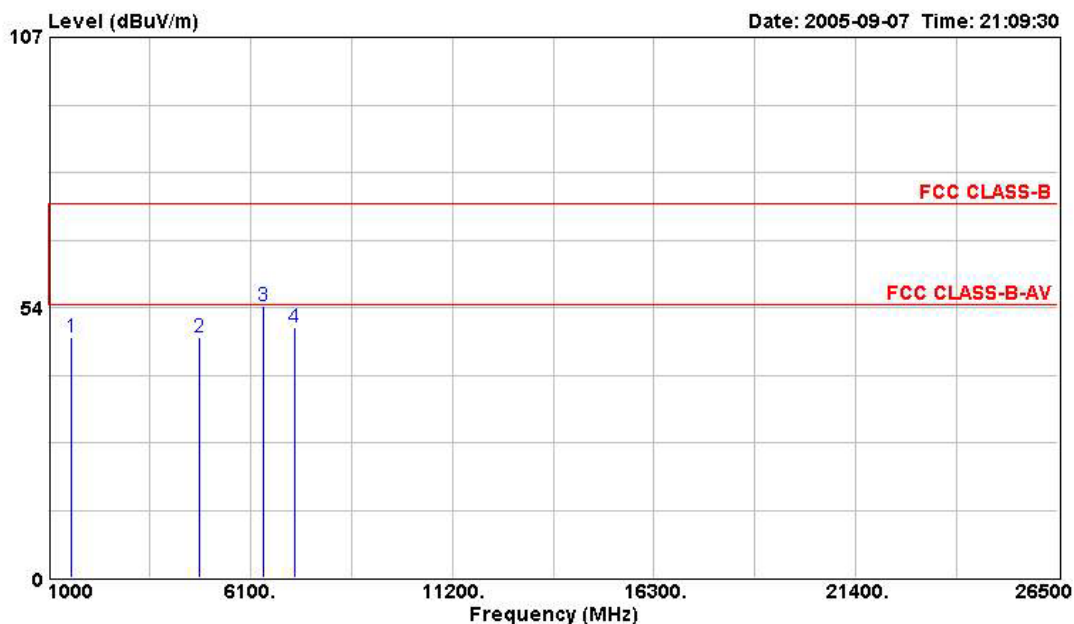

	Freq	Level	Over	Read	Limit	Cable	Antenna	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1588.000	47.67	-26.33	53.29	74.00	1.62	25.74	32.98	Peak	---	---
2	4828.000	47.67	-26.33	43.99	74.00	3.10	33.12	32.54	PEAK	---	---
3	6432.000	53.84	-20.16	48.18	74.00	3.83	34.30	32.47	PEAK	---	---
4	7236.000	49.49	-24.51	41.88	74.00	4.09	35.98	32.46	PEAK	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.9. Test Results for CH 06 / 2437 MHz (for emission above 1GHz)

- Modulation Type: DSSS
- Temperature: 28°C
- Relative Humidity: 52%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

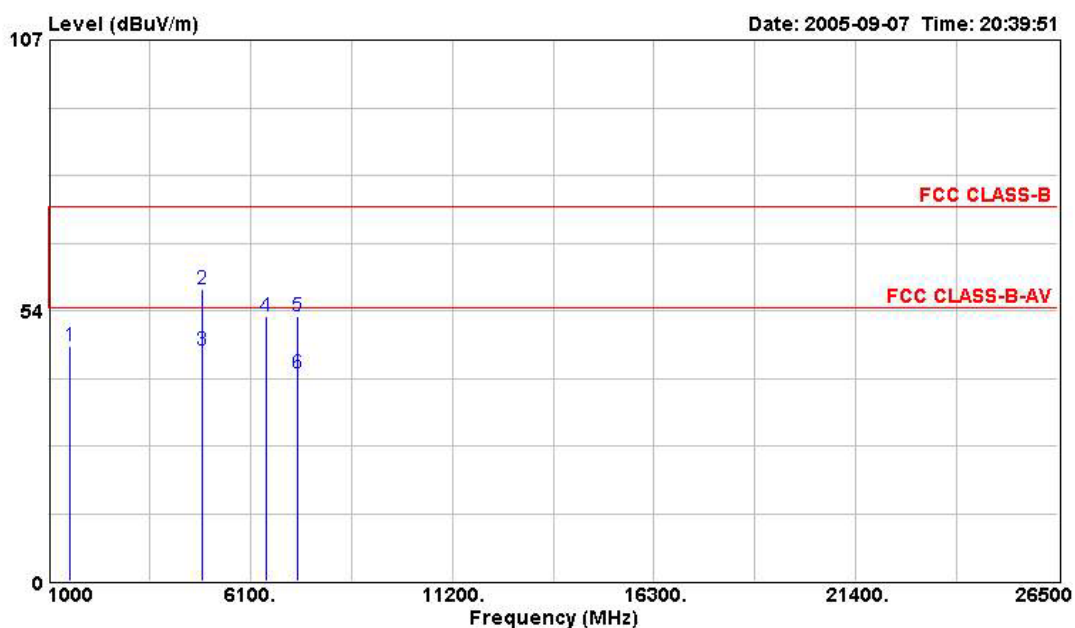

	Freq	Level	Over	Read	Limit	Cable	Antenna	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1524.000	46.51	-27.49	52.51	74.00	1.58	25.45	33.02	PEAK	---	---
2	4876.000	57.73	-16.27	53.95	74.00	3.11	33.21	32.55	PEAK	---	---
3	4876.000	45.58	-8.42	41.81	54.00	3.11	33.21	32.55	Average	---	---
4	6500.000	52.36	-21.64	46.65	74.00	3.87	34.30	32.46	PEAK	---	---
5	7308.000	52.40	-21.60	44.76	74.00	4.06	36.14	32.56	PEAK	---	---
6	7308.000	41.22	-12.78	33.57	54.00	4.06	36.14	32.56	Average	---	---

(B) Polarization: Vertical



	Freq	Level	Over	Read	Limit	CableAntenna	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB	cm	deg
1	1588.000	47.01	-26.99	52.63	74.00	1.62	25.74	32.98	---	---
2	4876.000	61.30	-12.70	57.52	74.00	3.11	33.21	32.55	---	---
3	4876.000	48.79	-5.21	45.02	54.00	3.11	33.21	32.55	---	---
4	6500.000	54.08	-19.92	48.37	74.00	3.87	34.30	32.46	---	---
5	7312.000	53.23	-20.77	45.64	74.00	4.06	36.14	32.61	---	---
6	7312.000	42.32	-11.68	34.73	54.00	4.06	36.14	32.61	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Item 4 is on un-restricted band, so the limit is -20dBc for such emission.


- Modulation Type: OFDM
- Temperature: 28°C
- Relative Humidity: 52%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

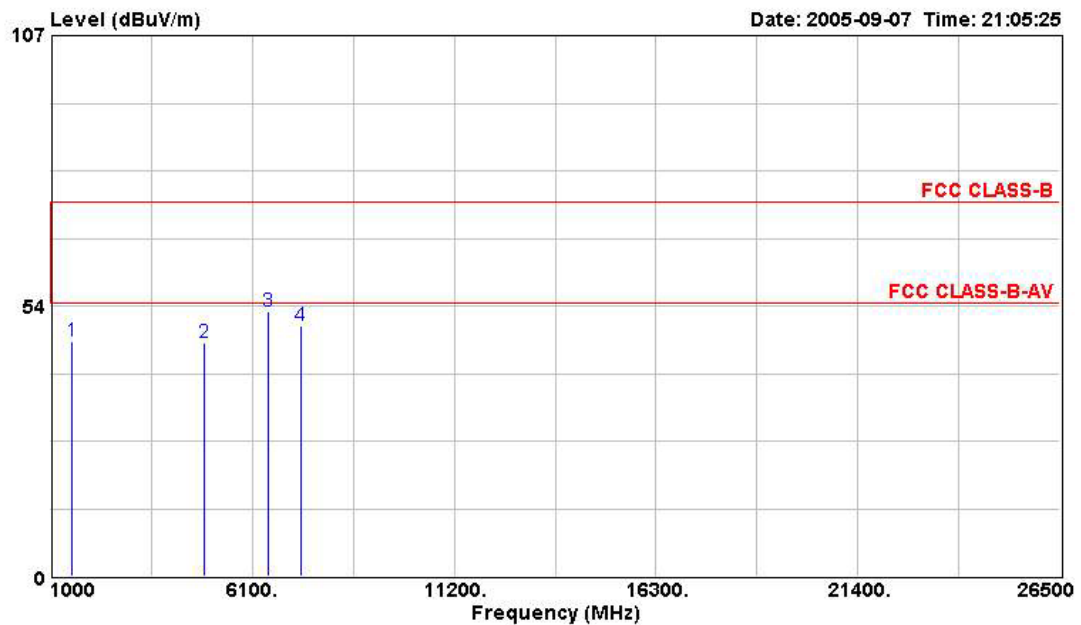

	Freq	Level	Over	Read	Limit	Cable	Antenna	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1524.000	46.59	-27.41	52.58	74.00	1.58	25.45	33.02	Peak	---	---
2	4876.000	46.32	-27.68	42.55	74.00	3.11	33.21	32.55	PEAK	---	---
3	6500.000	52.45	-21.55	46.74	74.00	3.87	34.30	32.46	PEAK	---	---
4	7311.000	49.62	-24.38	41.97	74.00	4.06	36.14	32.56	PEAK	---	---

(B) Polarization: Vertical

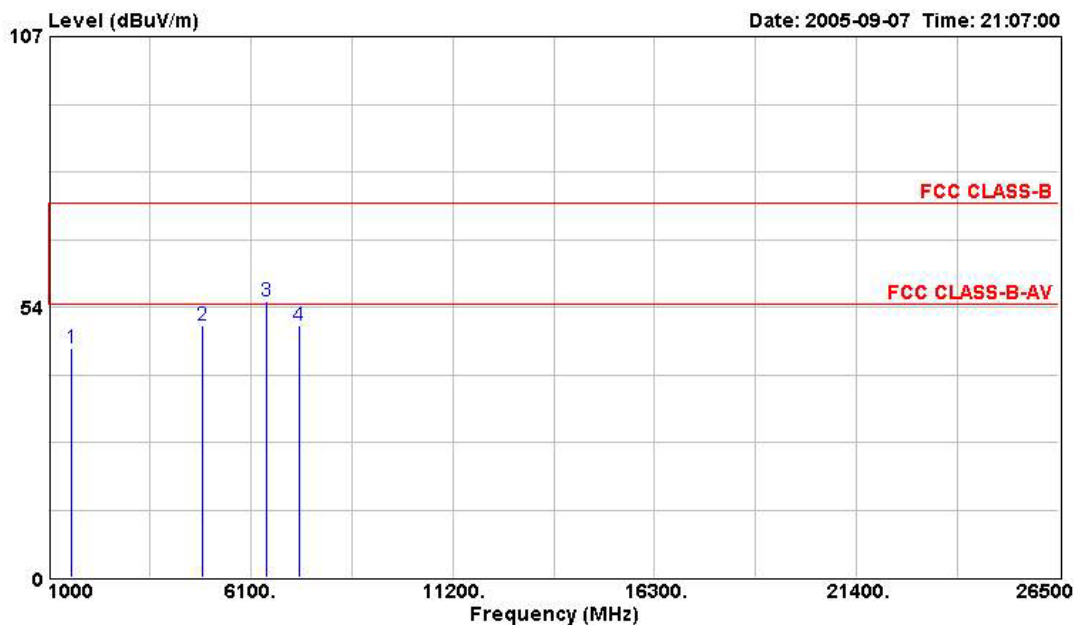

	Freq	Level	Over	Read	Limit	Cable&Antenna	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB	cm	deg
1	1588.000	45.22	-28.78	50.84	74.00	1.62	25.74	32.98	Peak	---
2	4880.000	49.82	-24.18	46.05	74.00	3.11	33.21	32.55	PEAK	---
3	6500.000	54.70	-19.30	48.99	74.00	3.87	34.30	32.46	PEAK	---
4	7311.000	49.76	-24.24	42.11	74.00	4.06	36.14	32.56	PEAK	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Item 3 is on un-restricted band, so the limit is -20dBc for such emission.

5.6.10. Test Results for CH 11 / 2462 MHz (for emission above 1GHz)


- Modulation Type: DSSS
- Temperature: 28°C
- Relative Humidity: 52%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

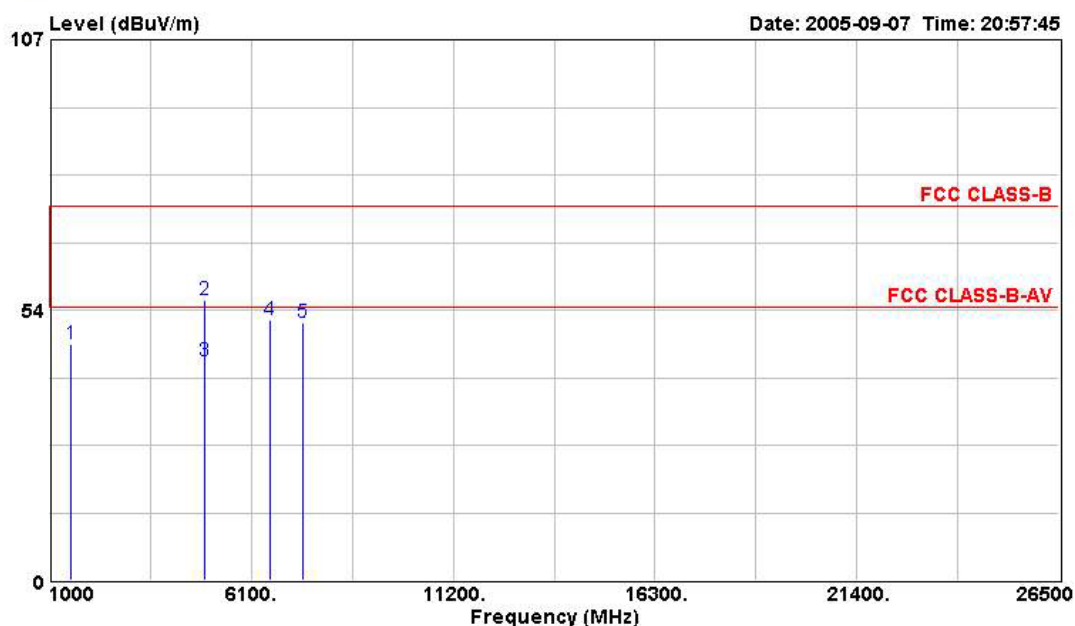

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1524.000	46.64	-27.36	52.63	74.00	1.58	25.45	33.02	Peak	---	---
2	4924.000	55.37	-18.63	51.51	74.00	3.12	33.29	32.55	PEAK	---	---
3	4924.000	43.44	-10.56	39.58	54.00	3.12	33.29	32.55	Average	---	---
4	6568.000	51.67	-22.33	45.71	74.00	3.92	34.45	32.41	PEAK	---	---
5	7386.000	50.90	-23.10	43.23	74.00	4.03	36.35	32.71	PEAK	---	---

(B) Polarization: Vertical

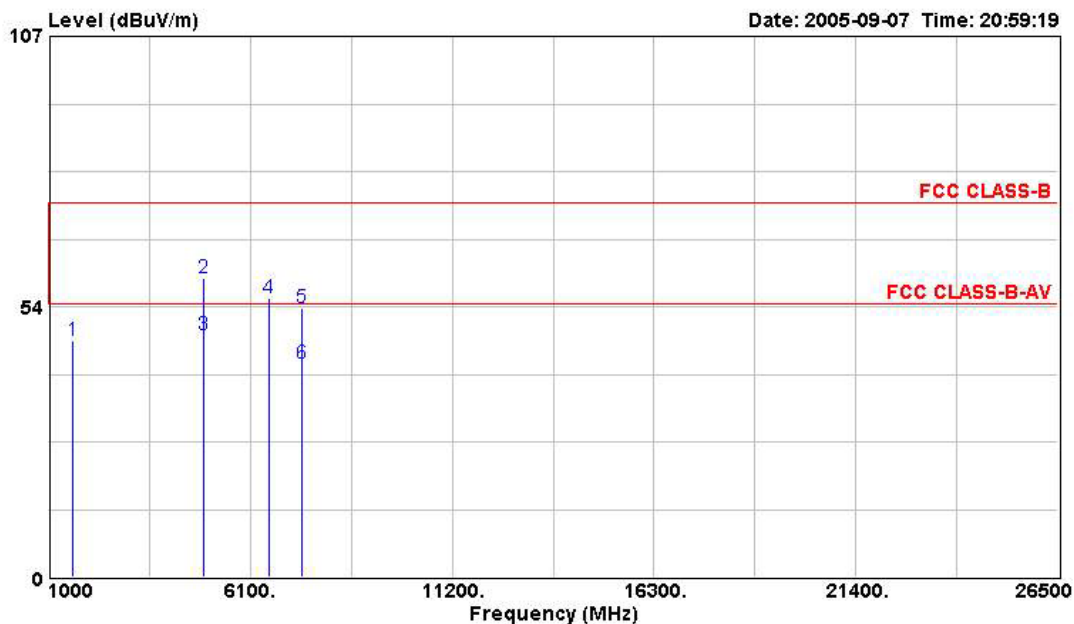

	Freq	Level	Over	Read	Limit	CableAntenna	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB	cm	deg
1	1596.000	46.73	-27.27	52.35	74.00	1.62	25.74	32.98	Peak	---
2	4924.000	59.19	-14.81	55.33	74.00	3.12	33.29	32.55	PEAK	---
3	4924.000	47.94	-6.06	44.08	54.00	3.12	33.29	32.55	Average	---
4	6568.000	55.20	-18.80	49.24	74.00	3.92	34.45	32.41	PEAK	---
5	7384.000	53.24	-20.76	45.56	74.00	4.03	36.35	32.71	PEAK	---
6	7384.000	42.32	-11.68	34.65	54.00	4.03	36.35	32.71	Average	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Item 4 is on un-restricted band, so the limit is -20dBc for such emission.



- Modulation Type: OFDM
- Temperature: 28°C
- Relative Humidity: 52%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

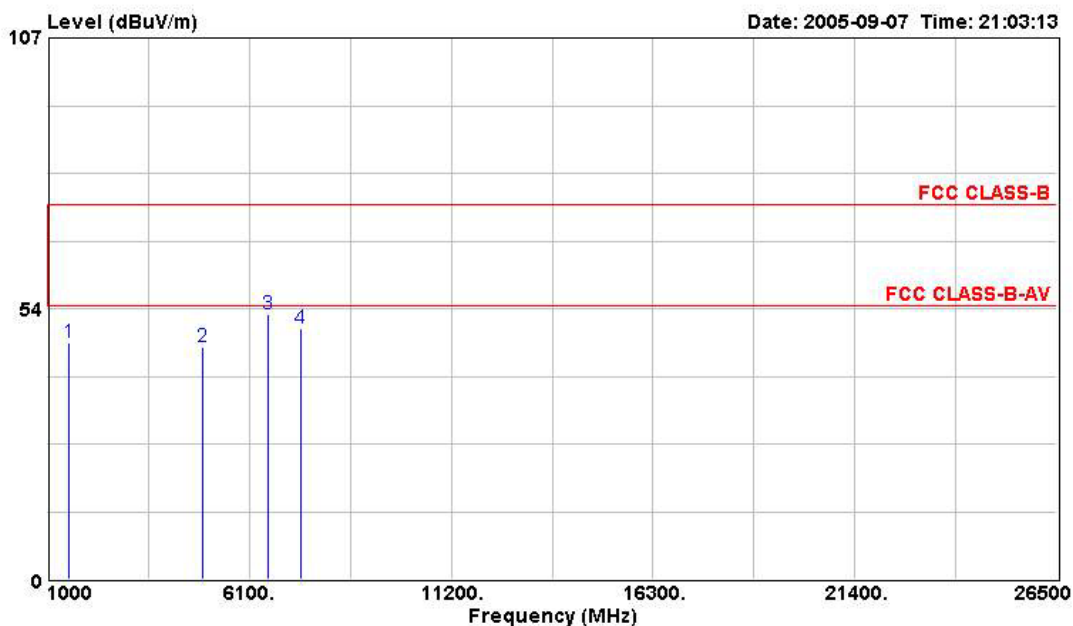

	Freq	Level	Over Limit	Read Level	Limit Line	Cable Loss	Antenna Factor	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1524.000	46.62	-27.38	52.61	74.00	1.58	25.45	33.02	Peak	---	---
2	4924.000	45.97	-28.03	42.11	74.00	3.12	33.29	32.55	Peak	---	---
3	6568.000	52.29	-21.71	46.33	74.00	3.92	34.45	32.41	Peak	---	---
4	7386.000	49.64	-24.36	41.97	74.00	4.03	36.35	32.71	Peak	---	---

(B) Polarization: Vertical



	Freq	Level	Over	Read	Limit	Cable	Antenna	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB/m	dB		cm	deg
1	1588.000	44.66	-29.34	50.28	74.00	1.62	25.74	32.98	Peak	---	---
2	4932.000	48.69	-25.31	44.83	74.00	3.12	33.29	32.55	PEAK	---	---
3	6568.000	54.39	-19.61	48.43	74.00	3.92	34.45	32.41	PEAK	---	---
4	7386.000	49.46	-24.54	41.79	74.00	4.03	36.35	32.71	PEAK	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level


Item 3 is on un-restricted band, so the limit is -20dBc for such emission.


5.6.11. Photographs of Radiated Emission Test Configuration

FRONT VIEW

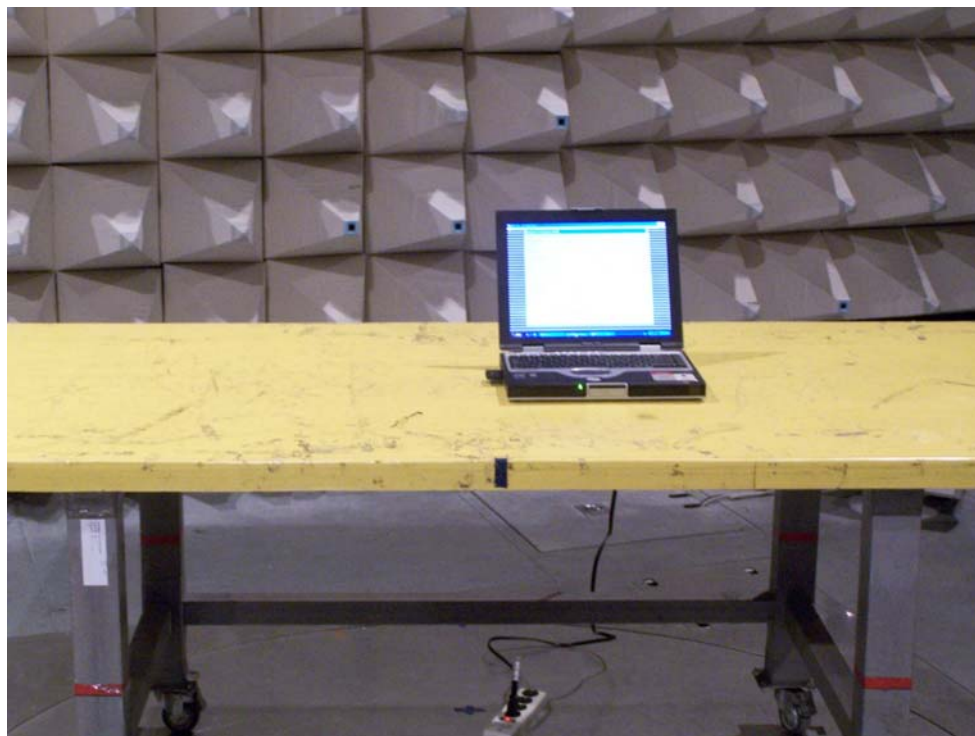

REAR VIEW

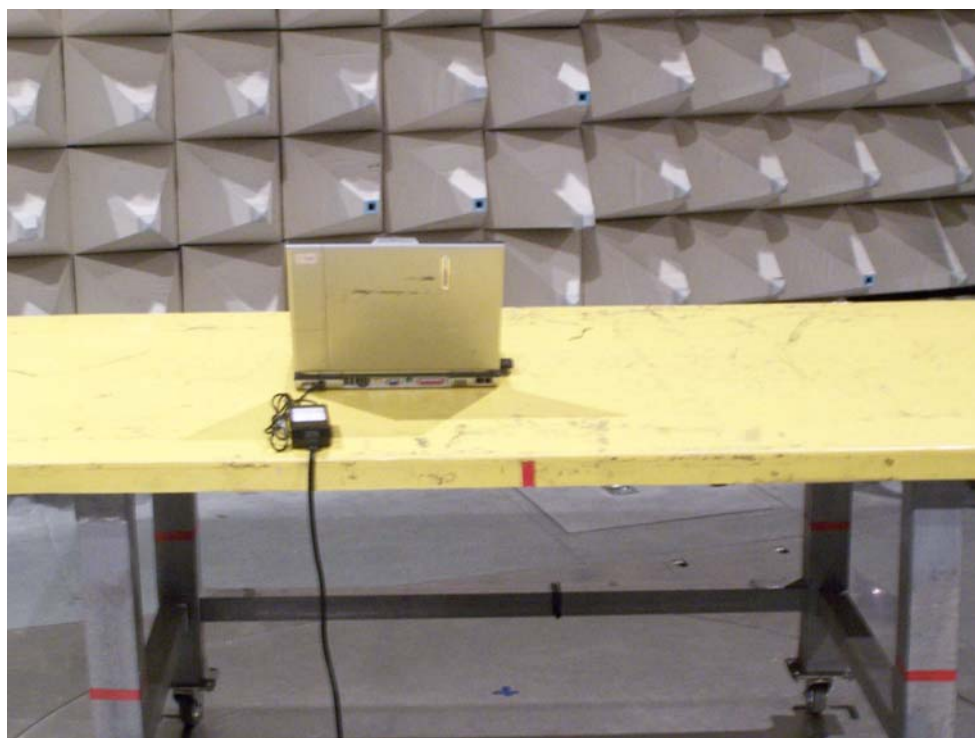

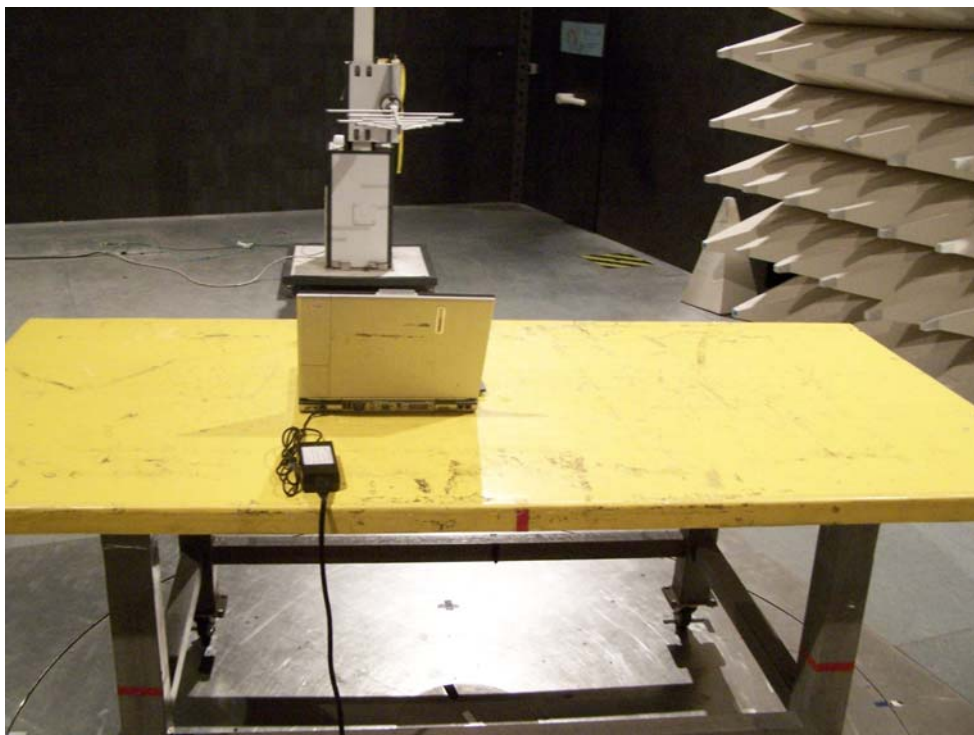

5.7. Antenna Requirements

5.7.1. Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2. Antenna Connected Construction

No connector is used in this EUT.

5.7.3. Antenna Gain

Antenna gain of EUT is less than 6dBi. Therefore peak conducted power limit shall not be degraded any more. Antenna report of manufacturer will have more detail antenna gain or antenna pattern.

5.7.4. Test Criteria

All test results complied with the requirements of 15.203/15.247(b)/(c).

5.8. RF Exposure

5.8.1. Limit For Maximum Permissible Exposure (MPE)

This product can be classified as mobile device, so the 20cm separation distance warning is required. In this section, the power density at 20cm location is calculated to examine if it is lower than the limit.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F = frequency in MHz

*Plane-wave equivalent power density

5.8.2. MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (mW)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=20cm, as well as the gain of the used antenna, the RF power density can be obtained.

5.8.3. Calculated Result and Limit

- Modulation Type: DSSS
- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Eason Lu

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
01	0.00	1.00	15.20	33.11	0.0066	1
06	0.00	1.00	15.38	34.51	0.0069	1
11	0.00	1.00	15.70	37.15	0.0074	1

- Modulation Type: OFDM
- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Eason Lu

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
01	0.00	1.00	15.84	38.37	0.0076	1
06	0.00	1.00	15.69	37.07	0.0074	1
11	0.00	1.00	15.60	36.31	0.0072	1

6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Feb. 16, 2005	Conduction (CO04-HY)
2	LISN	MessTec	NNB-2/16Z	2001/004	9kHz ~ 30MHz	Apr. 20, 2005	Conduction (CO04-HY)
3	LISN (Support Unit)	MessTec	NNB-2/16Z	99041	9kHz ~ 30MHz	May. 05, 2005	Conduction (CO04-HY)
4	RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz ~ 30MHz	Apr. 20, 2005	Conduction (CO04-HY)
5	EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
6	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Jun. 16, 2005	Radiation (03CH03-HY)
7	Spectrum Analyzer	R&S	FSP40	100019	9KHZ~40GHz	Jul. 21, 2005	Radiation (03CH03-HY)
8	Amplifier	SCHAFFNER	CPA9231A	18667	9KHz ~ 2GHz	Jan. 10, 2005	Radiation (03CH03-HY)
9	Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	May 31, 2005	Radiation (03CH03-HY)
10	Amplifier	MITEQ	AMF-6F-260400	923364	26.5GHz ~ 40GHz	Jan. 05, 2004*	Radiation (03CH03-HY)
11	Loop Antenna	R&S	HFH2-Z2	860004/001	9kHz ~ 30MHz	May 24, 2004*	Radiation (03CH03-HY)
12	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz ~ 200MHz	Jul. 22, 2005	Radiation (03CH03-HY)
13	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz ~ 1GHz	Jul. 22, 2005	Radiation (03CH03-HY)
14	Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 22, 2005	Radiation (03CH03-HY)
15	Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jun. 09, 2004*	Radiation (03CH03-HY)
16	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Feb. 22, 2005	Radiation (03CH03-HY)
17	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec.01, 2004	Radiation (03CH03-HY)
18	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
19	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.

※ *Calibration Interval of instruments listed above is two years.

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
20	Spectrum analyzer	R&S	FSP40	100116	9kHz ~ 40GHz	Jan. 28, 2005	Conducted (TH01-HY)
21	Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
22	Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
23	Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Apr. 28, 2005	Conducted (TH01-HY)
24	AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005	Conducted (TH01-HY)
25	DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Nov. 28, 2004	Conducted (TH01-HY)
26	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2004	Conducted (TH01-HY)
27	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 01, 2005	Conducted (TH01-HY)
28	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 01, 2005	Conducted (TH01-HY)
29	Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Apr. 15, 2005	Conducted (TH01-HY)
30	Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 31, 2004	Conducted (TH01-HY)
31	Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 02, 2005	Conducted (TH01-HY)

※ Calibration Interval of instruments listed above is one year.

7. Company Profile

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.


7.1. Certificate of Accreditation

Taiwan	BSMI, CNLA, DGT
USA	FCC, NVLAP, UL
EU	Nemko, TUV
Japan	VCCI
Canada	Industry Canada

7.2. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777

8. Certificate of NVLAP Accreditation

United States Department of Commerce National Institute of Standards and Technology	
	
ISO/IEC 17025:1999 ISO 9002:1994	
Certificate of Accreditation	
SPORTON INTERNATIONAL, INC. TAIPEI HSIEN 221 TAIWAN	
<i>is recognized by the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria set forth in NIST Handbook 150:2001, all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994. Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:</i>	
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS	
December 31, 2005 Effective through	 For the National Institute of Standards and Technology NVLAP Lab Code: 200079-0

NVLAP-01C (06-01)