

# MEASUREMENT REPORT

## of

### *Wireless LAN PCI Card*

**Applicant : EDIMAX TECHNOLOGY CO., LTD.**

**Applicant address : No. 7, Lane 116, Wu-Kung Second Rd.,  
Wu-Ku Industrial Park, Taipei Hsien, Taiwan 248**

**EUT : Wireless LAN PCI Card**

**Model : as Appendix A**

**FCC ID : NDD9571260303**

**Report No. : E3015536**

Tested by :

*Training Research Co., Ltd.*

TEL : 886-2-26935155      FAX : 886-2-26934440  
No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

# CERTIFICATION

**We here by verify that:**

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

**Product Name** : Wireless LAN PCI Card  
**Model Name** : as Appendix A  
**FCC ID** : NDD9571260303  
**Report No.** : E3015536  
**Test Date** : April 1, 2003

Prepared by:

  
\_\_\_\_\_  
Jack Tsai

Approved by:

  
\_\_\_\_\_  
Frank Tsai

**Conditions of issue :**

- (1) This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.
- (2) This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.

★ **NVLAP LAB CODE: 200174-0**

# *Federal Communications Commission*

## Declaration of Conformity (DoC)

*For the Following Equipment:*

**Product name** : Wireless LAN PCI Card

**Model name** : as Appendix A

**Trade name** : as Appendix A

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the **report number : E3015536**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation

<b>Manufacturer</b>	<b>USA local representative</b>
<b>Company name:</b> EDIMAX TECHNOLOGY CO., LTD.	<b>Company name:</b> Edimax Computer Company
<b>Computer address:</b> 7, Lane 116, Wu-Kung Second Rd., Wu-Ku Industrial Park, Taipei Hsien, Taiwan	<b>Computer address:</b> 3350 Scott Blvd., Bldg. 15, Santa Clara, CA 95054
<b>ZIP / Postal code</b> 248	<b>ZIP / Postal code</b> 95054
<b>Contact person:</b> Arthur Shen	<b>Contact person:</b> Arthur Lu
<b>Title:</b> R&D Manager	<b>Title:</b> Vice General Manager
<b>Internet e-mail address:</b> arthur.shen@edimax.com.tw	<b>Internet e-mail address:</b> arthur@edimax.com
<b>Tel / Fax:</b> +886-2-77396602 / +86-2-77396887	<b>Tel / Fax:</b> 1-408-496-1105 / 1-408-980-1530

## Tables of Contents

<b>I. GENERAL .....</b>	6
1.1 Introduction .....	6
1.2 Description of EUT .....	6
1.3 Test method .....	6
1.4 Description of Support Equipment .....	7
1.5 Configuration of System Under Test .....	9
1.6 Verify the Frequency and Channel .....	11
1.7 Test Procedure .....	12
1.8 Location of the Test Site .....	12
1.9 General Test Condition .....	12
<b>II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators .....</b>	13
<b>III. Section 15.203 : Antenna Requirement.....</b>	14
<b>IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units .....</b>	15
4.1 Test Condition & Setup .....	15
4.2 List of Test Instruments .....	15
4.3 Test Result of Conducted Emissions .....	16
Table 1 Conducted emissions of Channel 01 .....	16
Table 2 Conducted emissions of Channel 06 .....	17
Table 3 Conducted emissions of Channel 11 .....	17
Table 4 Conducted emissions of Standby mode .....	18
<b>V. Section 15.247(a) : Technical Description of the EUT .....</b>	19
<b>VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System .....</b>	20
6.1 Test Condition & Setup .....	20
6.2 Test Instruments Configuration .....	20
6.3 List of Test Instruments .....	20
6.4 Test Result of Bandwidth .....	21
Channel 01 .....	22
Channel 06 .....	23
Channel 11 .....	24

<b>VII. Section 15.247(b) : Power Output .....</b>	25
7.1 Test Condition & Setup .....	25
7.2 List of Test Instruments .....	25
7.3 Test Result .....	26
<b>VIII. Section 15.247(c) : Spurious Emissions (Radiated) .....</b>	27
8.1 Test Condition & Setup .....	27
8.2 List of Test Instruments .....	28
8.3 Test Result of Spurious Radiated Emissions .....	29
Table 5 Radiated emissions of Horizontal for 30MHz to 1GHz .....	29
Table 6 Radiated emissions of Vertical for 30MHz to 1GHz .....	29
Table 7 Above 1GHz radiated emissions of Horizontal of CH1 .....	30
Table 8 Above 1GHz radiated emissions of Vertical of CH1 .....	30
Table 9 Above 1GHz radiated emissions of Horizontal of CH6 .....	31
Table 10 Above 1GHz radiated emissions of Vertical of CH6 .....	31
Table 11 Above 1GHz radiated emissions of Horizontal of CH11 .....	32
Table 12 Above 1GHz radiated emissions of Vertical of CH11 .....	32
8.4 Test Result of Bandedge.....	33
Channel 01 .....	34
Channel 11 .....	35
<b>IX. Section 15.247(d) : Power Spectral Density .....</b>	36
9.1 Test Condition & Setup .....	36
9.2 Test Instruments Configuration .....	36
9.3 List of Test Instruments .....	36
9.4 Test Result of Power Spectral Density .....	36
Channel 01 .....	37
Channel 06 .....	38
Channel 11 .....	39
<b>Appendix A : Brand Name and Model Name List .....</b>	40

## I . GENERAL

### 1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

### 1.2 Description of EUT

**Product Name** : Wireless LAN PCI Card  
**Model Name** : as Appendix A  
**Granted FCC ID** : NDD9571260303  
**Frequency Range** : 2.412 GHz ~ 2.462GHz  
**Support Channel** : 11 Channel  
**Modulation Skill** : DBPSK, DQPSK, CCK  
**Power Type** : By the PCI interface of PC

### 1.3 Test method

1. Put the EUT into a personal computer's PCI bus and screw it.
2. Using the PC and software provided by the manufacturer to control EUT. The software is operated under the Windows to control the EUT in the continuous transmission mode.
3. Set different channel being tested and repeat the procedures above.
  - (a) Radiated for intentional test:  
making EUT to the mode of continuous transmission
  - (b) Conducted and Radiated for unintentional test:  
making EUT to the linking (Rx/Tx) mode with far support equipments

## 1.4 Description of Support Equipment


In order to construct the minimum testing, following equipment were used as the support units.

<b>PC</b>	<b>: HP Pavilion 500</b>
Model No.	: P8574A
Serial No.	: TW219204335
FCC ID	: Doc Approved
檢磁	: 3902H097
Power type	: 100 ~ 240VAC / 50 ~ 60Hz, 4A, Switching
Power cord	: Non-shielded, 2.3m long, Plastic, No ferrite core
<b>Monitor</b>	<b>: HP 15' Color Monitor</b>
Model No.	: D2827A
Serial No.	: KR91161716
FCC ID	: C5F7NFCMC1518X
檢磁	: 3872B039
Power type	: 110 ~ 240 VAC / 50 ~ 60 Hz, Switching
Power cord	: Shielded, 1.83m long, No ferrite core
Data cable	: Shielded, 1.46m long, with two ferrite cores
<b>Keyboard</b>	<b>: HP</b>
Model No.	: 5181
Serial No.	: BE21700405
FCC ID	: Doc Approved
檢磁	: 3892C981
Power type	: By PC
Data cable	: Shielded, 1.70m length, with ferrite core
<b>Mouse</b>	<b>: HP</b>
Model No.	: M-UR89
Serial No.	: LZS21750238
FCC ID	: Doc Approved
檢磁	: 3892D767
Power type	: By PC
Power cord	: Shielded, 1.80m length, No ferrite core

<b>Fax/Modem</b>	:	<b>Aceex</b>
Model No.	:	DM-1414
Serial No.	:	9010582
FCC ID	:	IFAXDM1414
Power type	:	110 VAC / 50 ~ 60 Hz, Switching
Power Cord	:	Non-shielded, 1.90m long, Plastic hoods, and no ferrite bead
Data Cable	:	RS-232→Shielded, 1.30m long, Metal hoods , No bead RJ-11Cx2→Non-shielded, 7' long, Plastic hoods, No bead
<b>Printer</b>	:	<b>HP</b>
Model No.	:	C6464A
Serial No.	:	TH16LEB5PK
FCC ID	:	N/A, DoC Approved
檢磁	:	3892H381
Power type	:	Switching adaptor
Power cord	:	Non-shielded, 173cm long, No ferrite core (between adaptor and AC source) Non-shielded, 180cm long, with ferrite core (between printer and adaptor)
Data cable	:	Shielded, 1.70m long, No ferrite core
<b>USB Gamepad</b>	:	<b>Rockfire</b>
Model No.	:	QF-337uv
Serial No.	:	10600545, KR91379759
FCC ID	:	None (CE approval)
檢磁	:	3862A574
Power type	:	By computer
Data Cable	:	Shielded, 1.81m long, Plastic, with ferrite core
<b>Notebook</b>	:	<b>IBM Think Pad X20</b>
Type No.	:	2662-11T
Serial No.	:	FX-11922 00/09
FCC ID	:	Doc Approved
檢磁	:	3892B565
<b>AC Adaptor</b>	:	<b>IBM</b>
Model No.	:	PA2450U
Serial No.	:	02K6654
FCC ID	:	Doc Approved
Power Core	:	Non-shielded, 180cm long, Plastic hoods, with ferrite bead
Power type	:	100 ~ 240VAC, 50 ~ 60Hz, 0.5A ~ 1.2A / 16Vdc, 4.5A

## 1.5 Configuration of System Under Test


*(Conducted and Radiated for unintentional)*

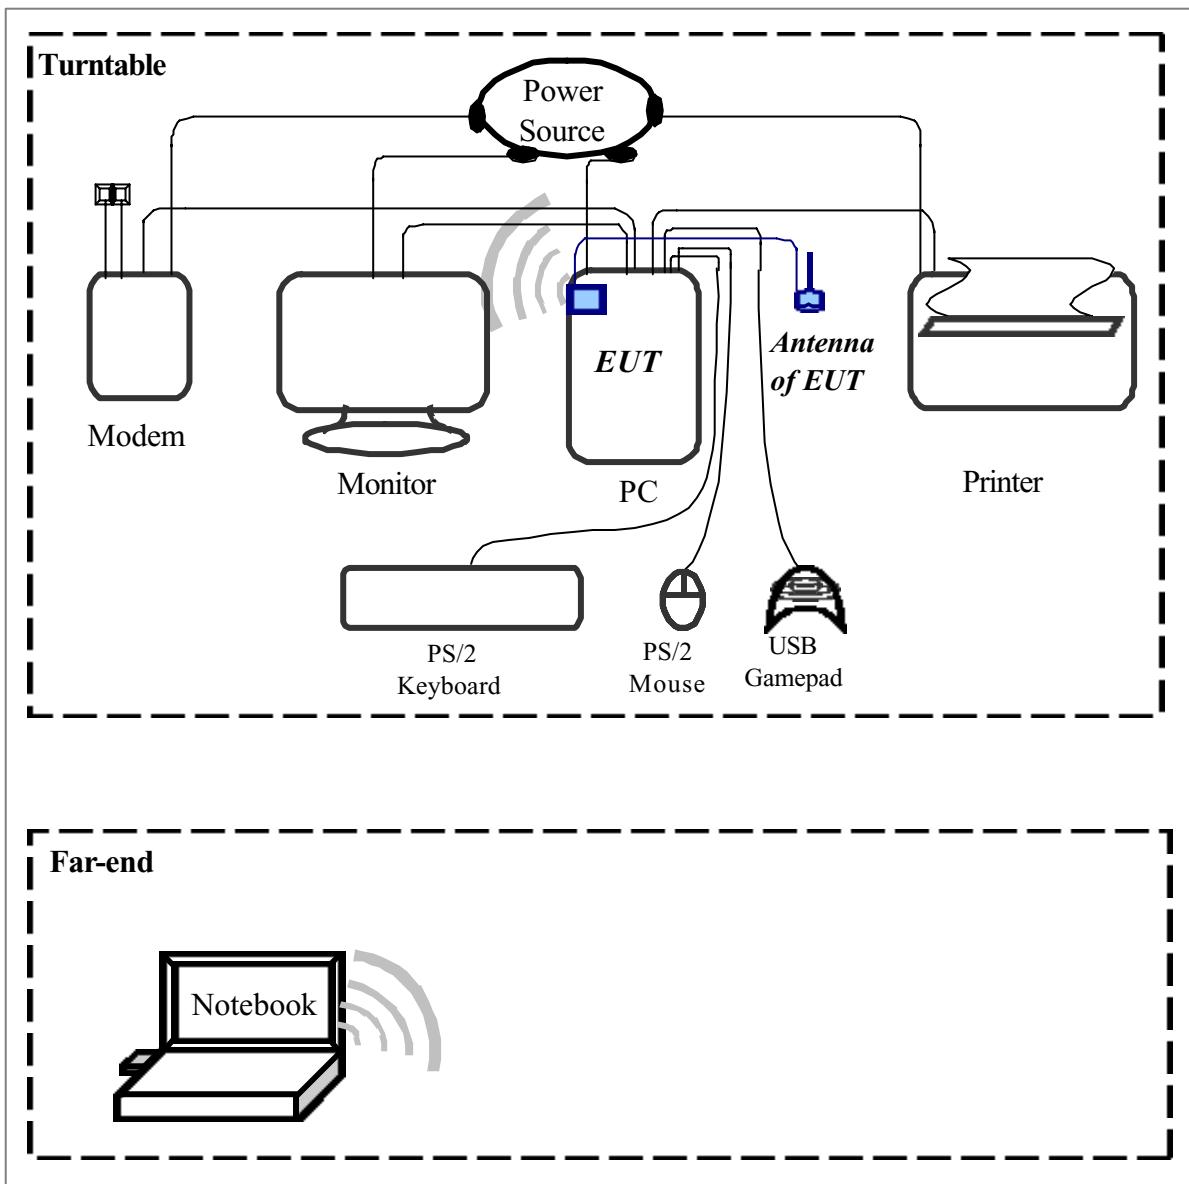

### Connections of Computer:

- \*Parallel Port --- a printer
- \*Serial Port --- an external modem
- \*PS/2 Port --- a PS/2 keyboard
- \*PS/2 Port --- a PS/2 mouse
- \*USB Port --- a USB gamepad
- \*PCI Interface --- EUT

*(Radiated of intentional)*

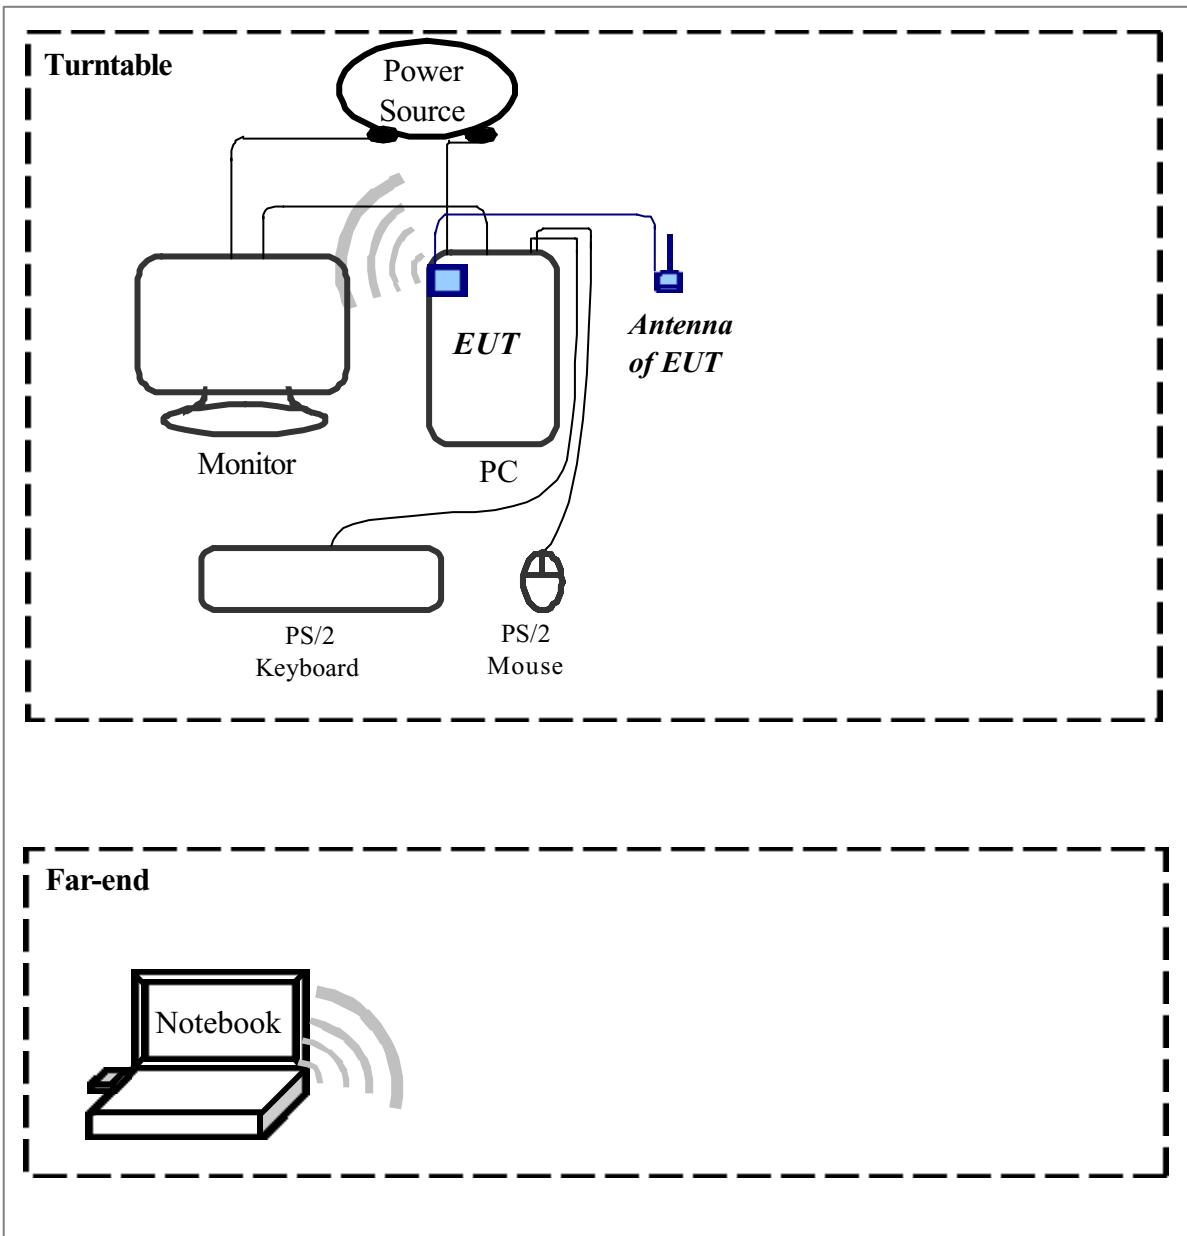

The tests below are carried out the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number.

The setting up procedure was recorded in <1.3> test method.

## 1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.  
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:  
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

### **1.7 Test Procedure**

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

### **1.8 Location of the Test Site**

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

### **1.9 General Test Condition**

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

## **II. Section 15.101(a): Equipment authorization of unintentional radiators**

The EUT equipped with a PCI interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Sect.15.109 (Radiated emission limits) is same as Sect.15.207 and 15.247(C).

### **III. Section 15.203: Antenna requirement**

The EUT can be equipped with one detachable antenna. **The detachable antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector.**

## IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

### 4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There is a test condition applies in this test item, the test procedure description as the following: EUT transmit only:

The setting up procedure is recorded on <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

### 4.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>	
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
LISN (EUT)	LISN-01	TRC	9912-03,04	06/04/02	06/04/03
LISN (Support E.)	LISN-01	TRC	9912-05	07/15/02	07/15/03
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	11/20/02	11/20/03

The level of confidence of 95%, the uncertainty of measurement of conducted emission is  $\pm$  2.02 dB.

### 4.3 Test Result of Conducted Emissions

#### EUT station transmit only

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord.

Test Conditions: Testing room : Temperature : 21.0 °C Humidity : 60.0 % RH

**Table 1 Test mode: Channel 1**

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Average (dB $\mu$ V)	QP-limit (dB $\mu$ V)	AVG-limit (dB $\mu$ V)	Margin (dB)
Line 1	183.00	45.79	---	---	65.06	55.06	-9.27
	208.00	47.75	---	---	64.34	54.34	-6.59
	405.00	40.18	---	---	58.71	48.71	-8.53
	456.00	37.97	---	---	57.26	47.26	-9.29
	832.00	25.73	---	---	56.00	46.00	-20.27
	2308.00	25.82	---	---	56.00	46.00	-20.18
Line 2	185.00	45.70	---	---	65.00	55.00	-9.30
	203.00	47.87	---	---	64.49	54.49	-6.62
	409.00	41.62	---	---	58.60	48.60	-6.98
	461.00	37.80	---	---	57.11	47.11	-9.31
	2222.00	24.46	---	---	56.00	46.00	-21.54
	3126.00	25.80	---	---	56.00	46.00	-20.20

NOTE:

(1)Margin = Amplitude – Limit, **The reading amplitudes are all under limit.**

(2)A "+" sign in the margin column means the emission is OVER the Class B Limit  
and "–" sign of means UNDER the Class B limit

Table 2 Test mode: Channel 6

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Average (dB $\mu$ V)	QP-limit (dB $\mu$ V)	AVG-limit (dB $\mu$ V)	Margin (dB)
Line 1	185.00	46.68	---	---	65.00	55.00	-8.32
	206.00	47.10	---	---	64.40	54.40	-7.30
	401.00	41.01	---	---	58.83	48.83	-7.82
	461.00	39.14	---	---	57.11	47.11	-7.97
	504.00	35.80	---	---	56.00	46.00	-10.20
	3606.00	26.88	---	---	56.00	46.00	-19.12
Line 2	185.00	46.14	---	---	65.00	55.00	-8.86
	208.00	46.66	---	---	64.34	54.34	-7.68
	401.00	40.83	---	---	58.83	48.83	-8.00
	452.00	38.31	---	---	57.37	47.37	-9.06
	504.00	34.91	---	---	56.00	46.00	-11.09
	558.00	31.11	---	---	56.00	46.00	-14.89

Table 3 Test mode: Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Average (dB $\mu$ V)	QP-limit (dB $\mu$ V)	AVG-limit (dB $\mu$ V)	Margin (dB)
Line 1	185.00	46.28	---	---	65.00	55.00	-8.72
	203.00	47.83	---	---	64.49	54.49	-6.66
	405.00	42.27	---	---	58.71	48.71	-6.44
	461.00	37.05	---	---	57.11	47.11	-10.06
	552.00	32.65	---	---	56.00	46.00	-13.35
	3606.00	26.95	---	---	56.00	46.00	-19.05
Line 2	183.00	46.21	---	---	65.06	55.06	-8.85
	205.00	47.83	---	---	64.43	54.43	-6.60
	405.00	41.45	---	---	58.71	48.71	-7.26
	456.00	39.24	---	---	57.26	47.26	-8.02
	558.00	30.61	---	---	56.00	46.00	-15.39
	3975.00	25.35	---	---	56.00	46.00	-20.65

Table 4 Test mode: Standby

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dB $\mu$ V)	QP (dB $\mu$ V)	Average (dB $\mu$ V)	QP-limit (dB $\mu$ V)	AVG-limit (dB $\mu$ V)	Margin (dB)
Line 1	185.00	46.49	---	---	65.00	55.00	-8.51
	210.00	47.52	---	---	64.29	54.29	-6.77
	405.00	41.29	---	---	58.71	48.71	-7.42
	461.00	39.24	---	---	57.11	47.11	-7.87
	832.00	25.85	---	---	56.00	46.00	-20.15
	1113.00	23.73	---	---	56.00	46.00	-22.27
	1385.00	24.60	---	---	56.00	46.00	-21.40
	2115.00	26.53	---	---	56.00	46.00	-19.47
	3221.00	25.51	---	---	56.00	46.00	-20.49
	6110.00	23.71	---	---	60.00	50.00	-26.29
Line 2	185.00	45.95	---	---	65.00	55.00	-9.05
	208.00	46.91	---	---	64.34	54.34	-7.43
	405.00	40.74	---	---	58.71	48.71	-7.97
	456.00	37.41	---	---	57.26	47.26	-9.85
	504.00	34.77	---	---	56.00	46.00	-11.23
	832.00	22.34	---	---	56.00	46.00	-23.66
	1566.00	25.44	---	---	56.00	46.00	-20.56
	2222.00	24.01	---	---	56.00	46.00	-21.99
	3221.00	23.71	---	---	56.00	46.00	-22.29
	5260.00	21.68	---	---	60.00	50.00	-28.32

## **V. Section 15.247 (a): Technical description of the EUT**


Based on the Section 2.1, *Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the Exhibit, operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

## VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

### 6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

### 6.2 Test Instruments Configuration

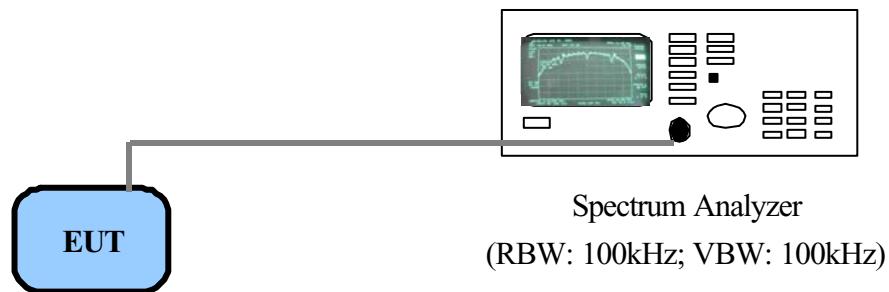

Test Configuration of Bandwidth for Direct Sequence System

*P.S.: Notebook computer to control the EUT at maximal power output and channel number and set antenna kit*

### 6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/11/02	09/11/03

## 6.4 Test Result of Bandwidth

### Bandwidth of Channel 1

Bandwidth : 9.60 MHz  
The min. 6 dB BW at least : 500 KHz

### Bandwidth of Channel 6

Bandwidth : 9.64 MHz  
The min. 6 dB BW at least : 500 KHz


### Bandwidth of Channel 11


Bandwidth : 9.64 MHz  
The min. 6 dB BW at least : 500 KHz

Note:


1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth ( $RBW$ )=100kHz and set the  $span>>RBW$ . The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
2. The attachments show these on the following pages.

**Bandwidth of Channel 1: 9.60 MHz**

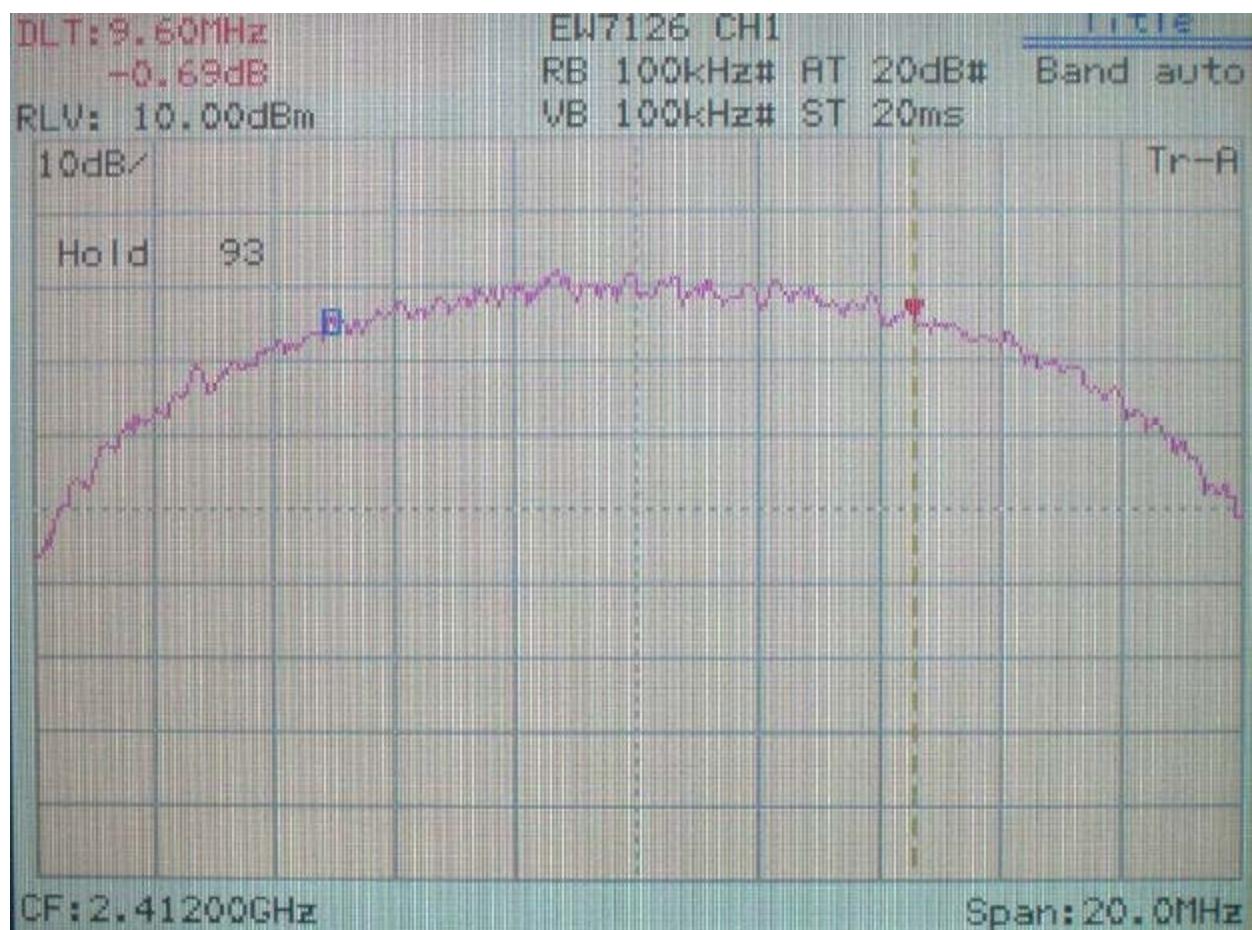

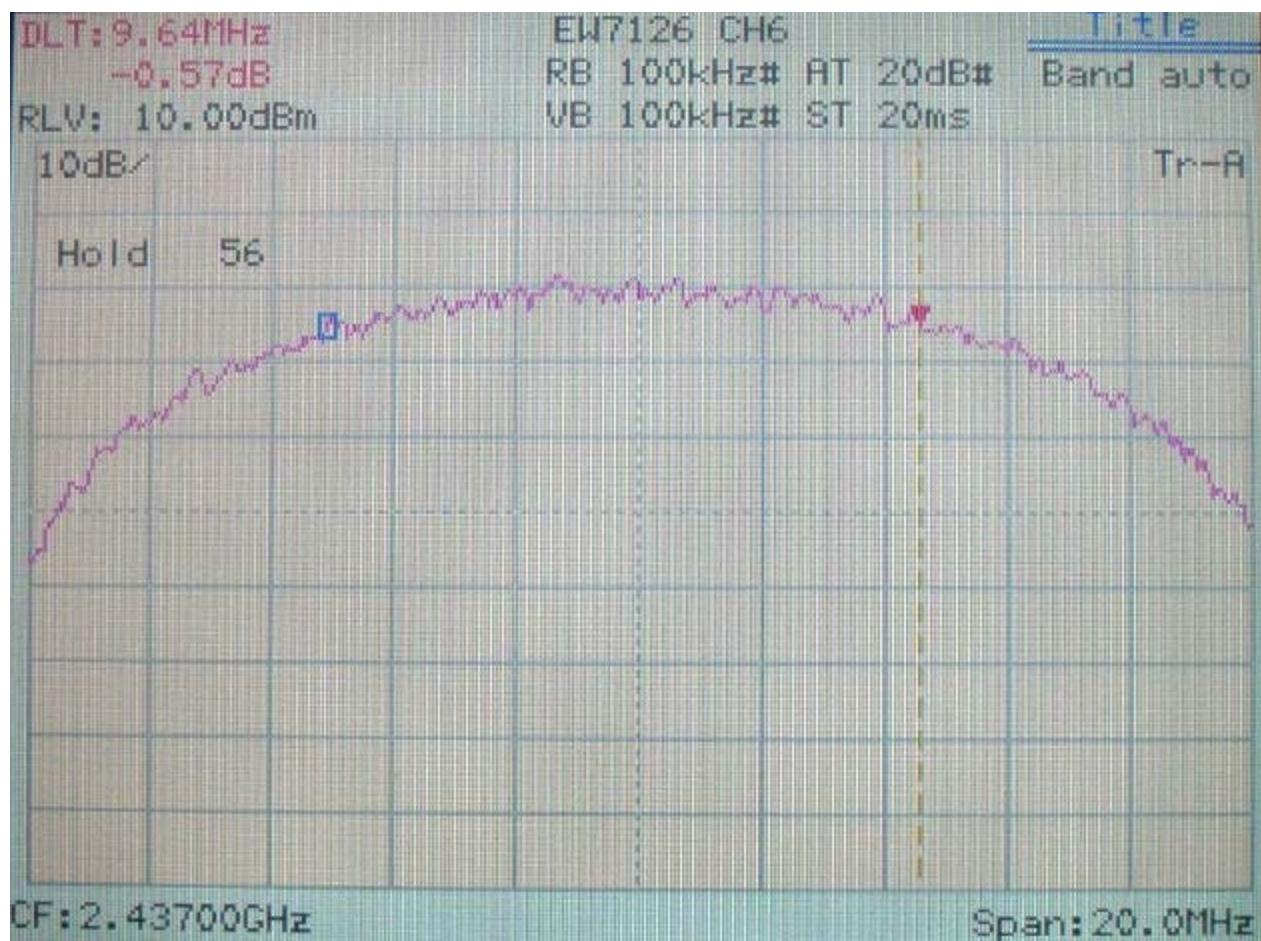
**Bandwidth of Channel 6: 9.64 MHz**

**Bandwidth of Channel 11: 9.64 MHz**

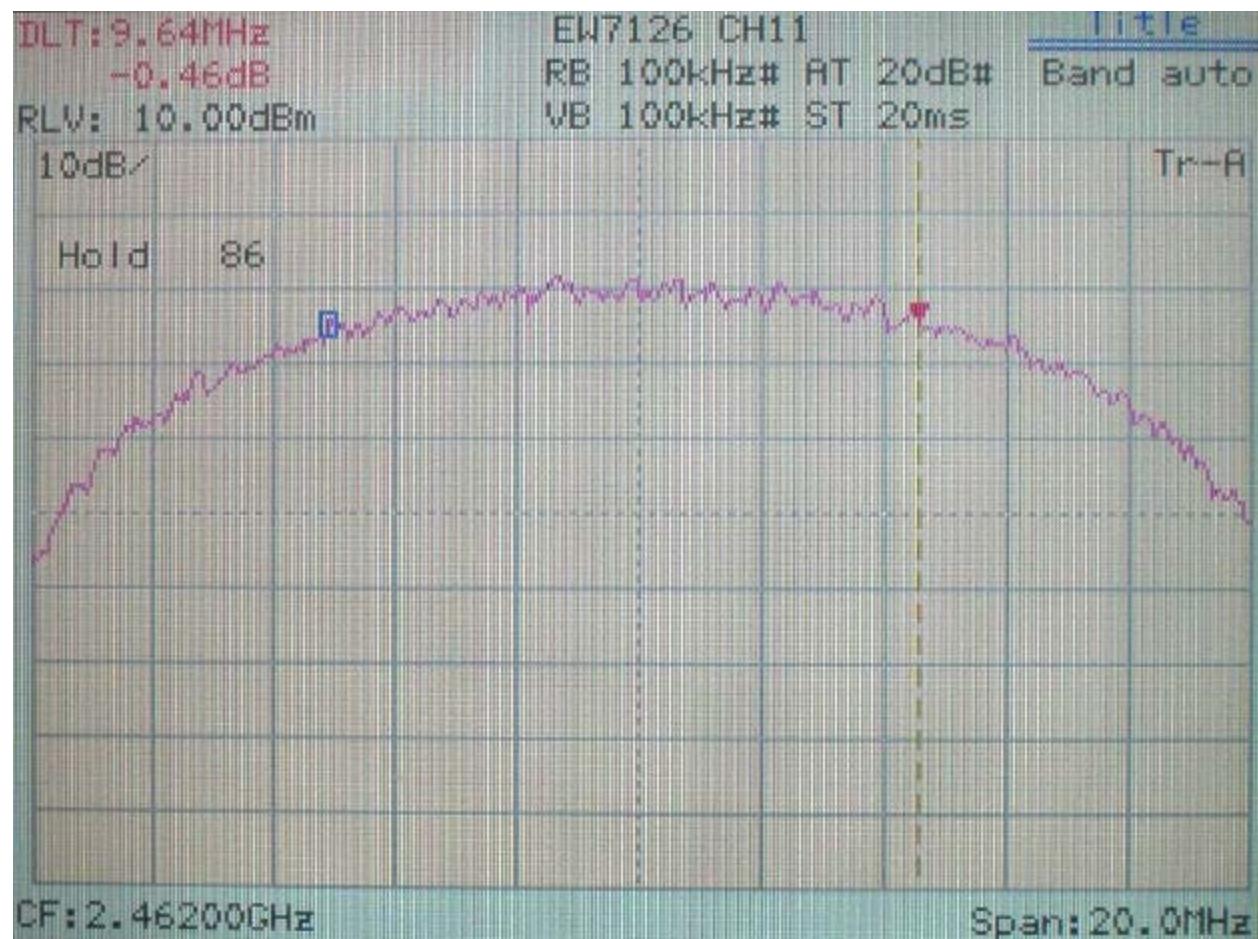

## VII. Section 15.247(b): Power Output

### 7.1 Test Condition & Setup

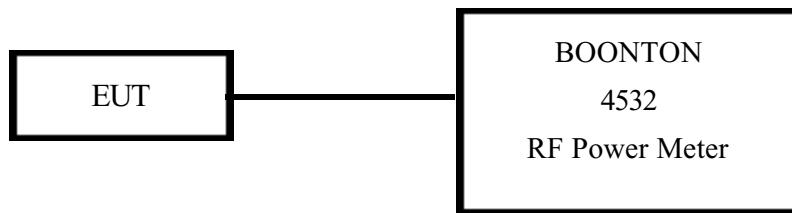

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every tests. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

### 7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.
RF Power Meter	4532	BOONTON	117501

### 7.3 Test Result

**Formula:** Signal generator + | Cable loss | = Output peak power

Channel	Signal Generator	Cable Loss	Limit	Output peak power	
	dBm	dBm	(DTS)	dBm	mW
CH 1	18.05	0.7	100mW	18.75	74.989
CH 6	17.65	0.7	100mW	18.35	68.391
CH 11	17.35	0.7	100mW	18.05	66.069

Note:

The limit is vary according to the equipment class, listed below:

1. Digital Transmission System (DTS): 100mW
2. Spread Spectrum Transmitter (DSS): 1W

## VIII. Section 15.247 (C): Spurious Emissions (Radiated)

### 8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, Schwarzeck whole range Small Biconical antenna (Model No.: BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/CMT Horn Antenna (Model 3115 / RA42-K-F-4B-C) for 1G to 25GHz. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the <1.3> test method:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB $\mu$ V/m) is determined by algebraically adding the measured reading in dB $\mu$ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

**For frequency between 30MHz to 1000MHz**

FIa (dB $\mu$ V/m) = FIr (dB $\mu$ V) + Correction Factors

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

**For frequency between 1 GHz to 25 GHz**

FIa (dB $\mu$ V/m) = FIr (dB $\mu$ V) + Correction Factor

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

**8.2 List of Test Instruments**

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
Small Biconical	BBVU9135	Schwarzeck	127	05/07/02	05/07/03
Antenna and Balun	UBAA9114				
Switch/Control Unit (>30MHz)	3488A	HP	N/A	11/20/02	11/20/03
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	11/20/02	11/20/03
Spectrum Analyzer	8564E	HP	US36433002	08/01/02	08/01/03
Microwave Preamplifier	83051A	HP	3232A00347	08/01/02	08/01/03
Horn Antenna	3115	EMCO	9704 – 5178	08/01/02	08/01/03
Horn Antenna	RA42-K-F-4B-C	CMT	961505-003	02/01/03	02/01/04
Anechoic Chamber (cable calibrated together)				05/20/02	05/20/03

The level of confidence of 95% , the uncertainty of measurement of radiated emission is  $\pm$  3.44dB .

### 8.3 Test Result of Spurious Radiated Emissions

#### EUT's transmit only

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Testing room : Temperature : 20.3 ° C Humidity : 55.4 % RH

**Table 5 Radiated Emissions for 30MHz to 1GHz [Antenna Polarity Horizontal]**

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
71.83	30.21	1.00	121	1.90	29.24	40.00	-10.76
167.01	39.35	1.00	288	-2.55	27.69	43.50	-15.81
235.52	36.53	1.00	244	-2.80	28.61	46.00	-17.39
552.59	24.60	1.00	185	6.97	34.63	46.00	-11.37
576.84	24.22	1.00	190	7.86	36.05	46.00	-9.95
700.51	30.86	1.00	180	11.76	36.60	46.00	-9.40

**Table 6 Radiated Emissions For 30MHz to 1GHz [Antenna Polarity Vertical]**

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dB $\mu$ V)	Ant. H. (m)	Table (°)			Limit (dB $\mu$ V/m)	Margin (dB)
125.18	29.33	1.00	310	-1.48	27.85	43.50	-15.65
151.86	31.55	1.00	41	-2.21	29.34	43.50	-14.16
167.62	33.42	1.00	19	-2.56	30.86	43.50	-12.64
342.22	36.22	1.00	19	-1.52	34.70	46.00	-11.30
442.86	26.25	1.00	5	2.43	28.68	46.00	-17.32
772.66	23.38	1.00	23	13.18	36.56	46.00	-9.44

Note: 1. Margin = Amplitude – limit, if margin is minus means under limit.

2. Corrected Amplitude = Reading Amplitude + Correction Factors

3. Correction factor = Antenna factor + [ Cable Loss – Amplitude Gain ]

**Table 7 Radiated Emissions for 1GHz to 25GHz [Ant. Horizontal] [CH 1]**

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		Margin (dB)	
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dB $\mu$ V/m)		Limit (dB $\mu$ V/m)			
				Peak	Average	Peak	Ave.		
2233.33	1.00	128	2.61	46.61	---	74.00	53.96	-7.35	
4835.21	1.00	46	3.80	38.91	---	74.00	53.96	-15.05	
6623.54	1.00	179	8.14	43.08	---	74.00	53.96	-10.88	
7336.46	1.00	44	10.35	43.96	---	74.00	53.96	-10.00	
12169.79	1.00	259	9.68	44.62	---	74.00	53.96	-9.34	
14507.92	1.00	58	7.79	47.89	---	74.00	53.96	-6.07	

**Table 8 Radiated Emissions for 1GHz to 25GHz [Ant. Vertical] [CH 1]**

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		Margin (Db)	
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (Db)	(Db $\mu$ V/m)		Limit (Db $\mu$ V/m)			
				Peak	Average	Peak	Ave.		
4838.23	1.00	39	3.82	39.76	---	74.00	53.96	-14.20	
7291.15	1.00	178	10.25	44.19	---	74.00	53.96	-9.77	
9988.75	1.00	165	11.28	45.72	---	74.00	53.96	-8.24	
12124.48	1.00	2	9.54	44.82	---	74.00	53.96	-9.14	

Note:

1. Margin = Corrected — Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF Radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

**Table 9 Radiated Emissions for 1GHz to 25GHz [Ant. Horizontal] [CH 6]**

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
3711.46	1.00	56	0.24	38.68	---	74.00	53.96	-15.28
4237.08	1.00	198	2.22	38.16	---	74.00	53.96	-15.80
4853.33	1.00	223	3.88	39.98	---	74.00	53.96	-13.98
7315.31	1.00	69	10.31	44.58	---	74.00	53.96	-9.38
9716.87	1.00	18	11.76	43.70	---	74.00	53.96	-10.26
12118.44	1.00	289	9.57	44.17	---	74.00	53.96	-9.79

**Table 10 Radiated Emissions for 1GHz to 25GHz [Ant. Vertical] [CH 6]**

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4877.50	1.00	8	3.97	39.58	---	74.00	53.96	-14.38
7309.27	1.00	246	10.29	43.57	---	74.00	53.96	-10.39

**Table 11 Radiated Emissions for 1GHz to 25GHz [Ant. Horizontal] [CH 11]**

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4264.27	1.00	256	2.29	38.06	---	74.00	53.96	-15.90
5037.60	1.00	18	4.43	38.87	---	74.00	53.96	-15.09
7427.08	1.00	203	10.35	44.29	---	74.00	53.96	-9.67
8188.33	1.00	309	11.19	43.80	---	74.00	53.96	-10.16
10145.83	1.00	118	11.95	45.39	---	74.00	53.96	-8.57
14474.69	1.00	29	7.83	47.94	---	74.00	53.96	-6.02

**Table 12 Radiated Emissions for 1GHz to 25GHz [Ant. Vertical] [CH 11]**

Radiated Emission				Corrected Amplitude		FCC Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4919.79	1.00	33	4.11	39.22	---	74.00	53.96	-14.74
7357.60	1.00	125	10.40	44.34	---	74.00	53.96	-9.62
9245.62	1.00	36	12.07	45.17	---	74.00	53.96	-8.79
9810.52	1.00	158	11.92	44.86	---	74.00	53.96	-9.10
11731.77	1.00	220	10.60	46.04	---	74.00	53.96	-7.92

## 8.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a)*,

We perform this section by the *radiated* manner, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10<sup>th</sup> harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

## Channel 1

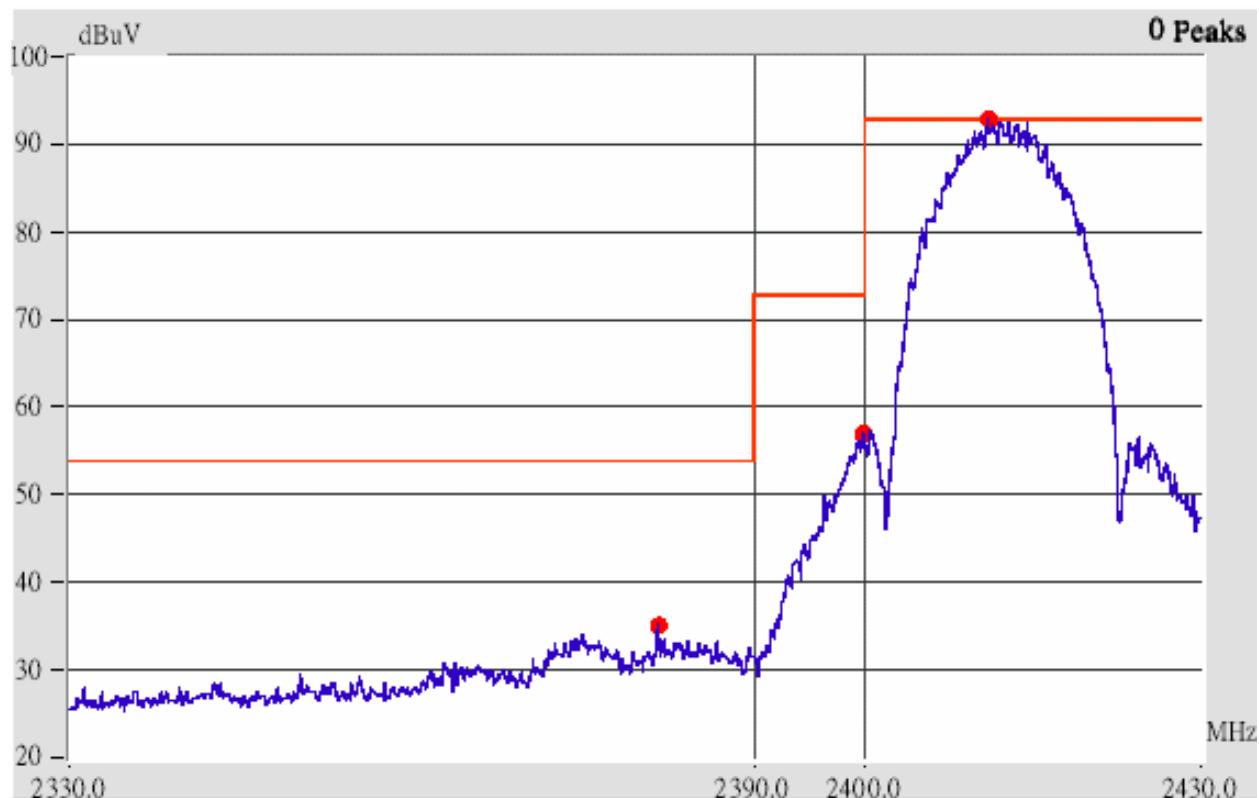


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude (dB $\mu$ V/m)		FCC Class B (3m)			
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	Peak	Average	Peak	Ave.	Margin (dB)	
2384.44	Hor	1.00	11	3.12	46.95	---	74.00	53.96	-7.01	
2390.07	Hor	1.00	258	3.14	44.30	---	74.00	53.96	-9.66	
2374.63	Ver	1.00	231	3.08	49.25	---	74.00	53.96	-4.71	
2390.07	Ver	1.00	69	3.14	46.30	---	74.00	53.96	-7.66	

## Channel 11

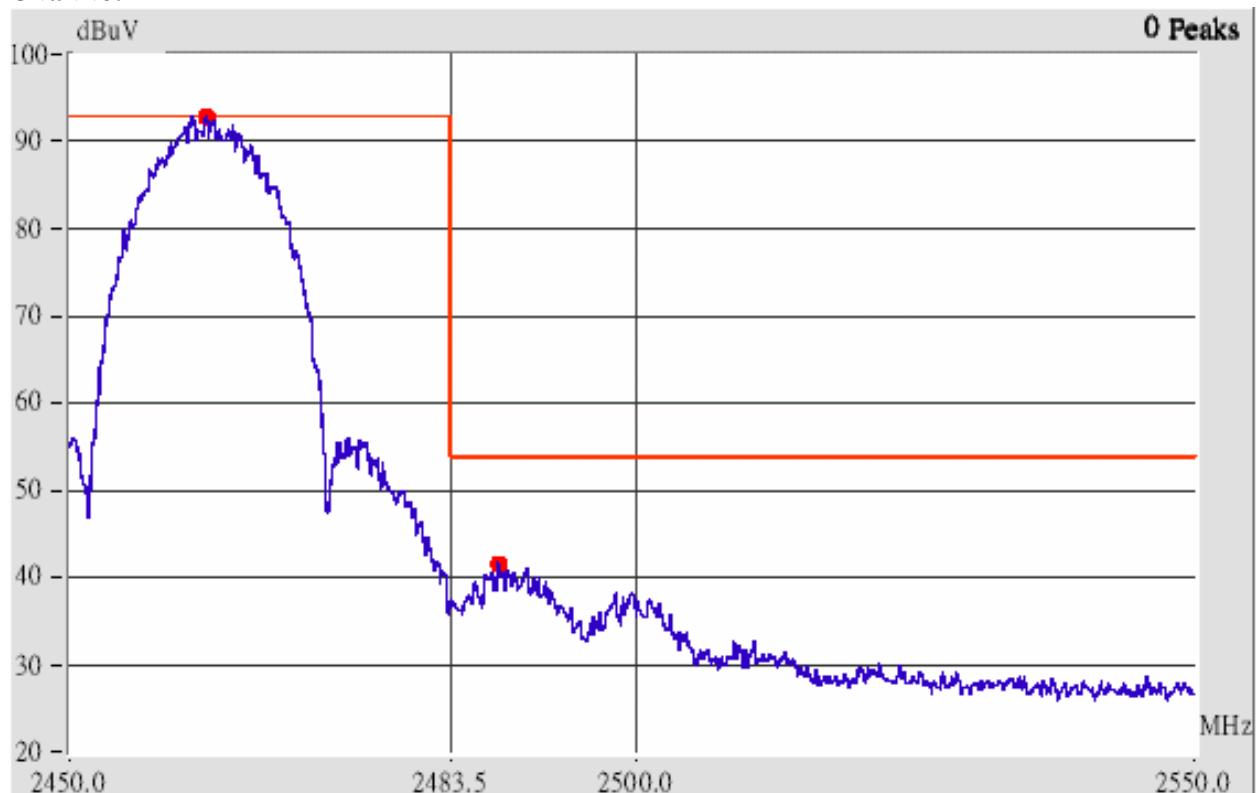

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		FCC Class B (3m)			
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dB $\mu$ V/m)		Limit (dB $\mu$ V/m)	Peak	Ave.	Margin (dB)
					Peak	Average				
2483.50	Hor	1.00	98	3.45	49.45	---	74.00	53.96	-4.51	
2487.99	Hor	1.00	196	3.46	52.46	---	74.00	53.96	-1.50	
2500.83	Hor	1.00	148	3.50	50.33	---	74.00	53.96	-3.63	
2483.50	Ver	1.00	225	3.45	46.11	---	74.00	53.96	-7.85	
2489.62	Ver	1.00	91	3.47	47.80	---	74.00	53.96	-6.16	
2511.91	Ver	1.00	116	3.52	47.52	---	74.00	53.96	-6.44	


## IX. Section 15.247(d): Power Spectral Density

### 9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

The attachments below show our observation.

### 9.2 Test Instruments Configuration

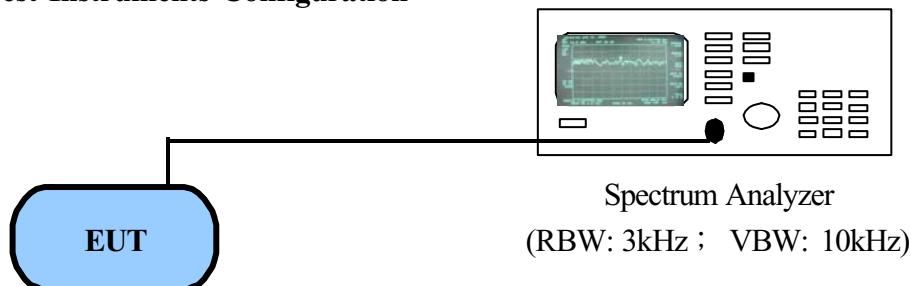

Test Configuration of Power Spectral Density

### 9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/11/02	09/11/03


### 9.4 Test Result of Power spectral density


The following table shows a summary of the test results of the Power Spectral Density.


Channel	Frequency (GHz)	Ppr (dBm)	Cable Loss (dB)	Ppq (dBm)	Limit (dB)	Margin (dB)
CH 01	2.412	-20.14	1.80	-18.34	8.00	-26.34
CH 06	2.437	-20.57	1.85	-18.72	8.00	-26.72
CH 11	2.462	-20.60	1.93	-18.67	8.00	-26.67

Note:

1. The attachment following by this page.
2. Ppr: spectrum read power density (using peak search mode),  
Ppq: actual peak power density in the spread spectrum band.
3. Ppq = Ppr + |Cable Loss|

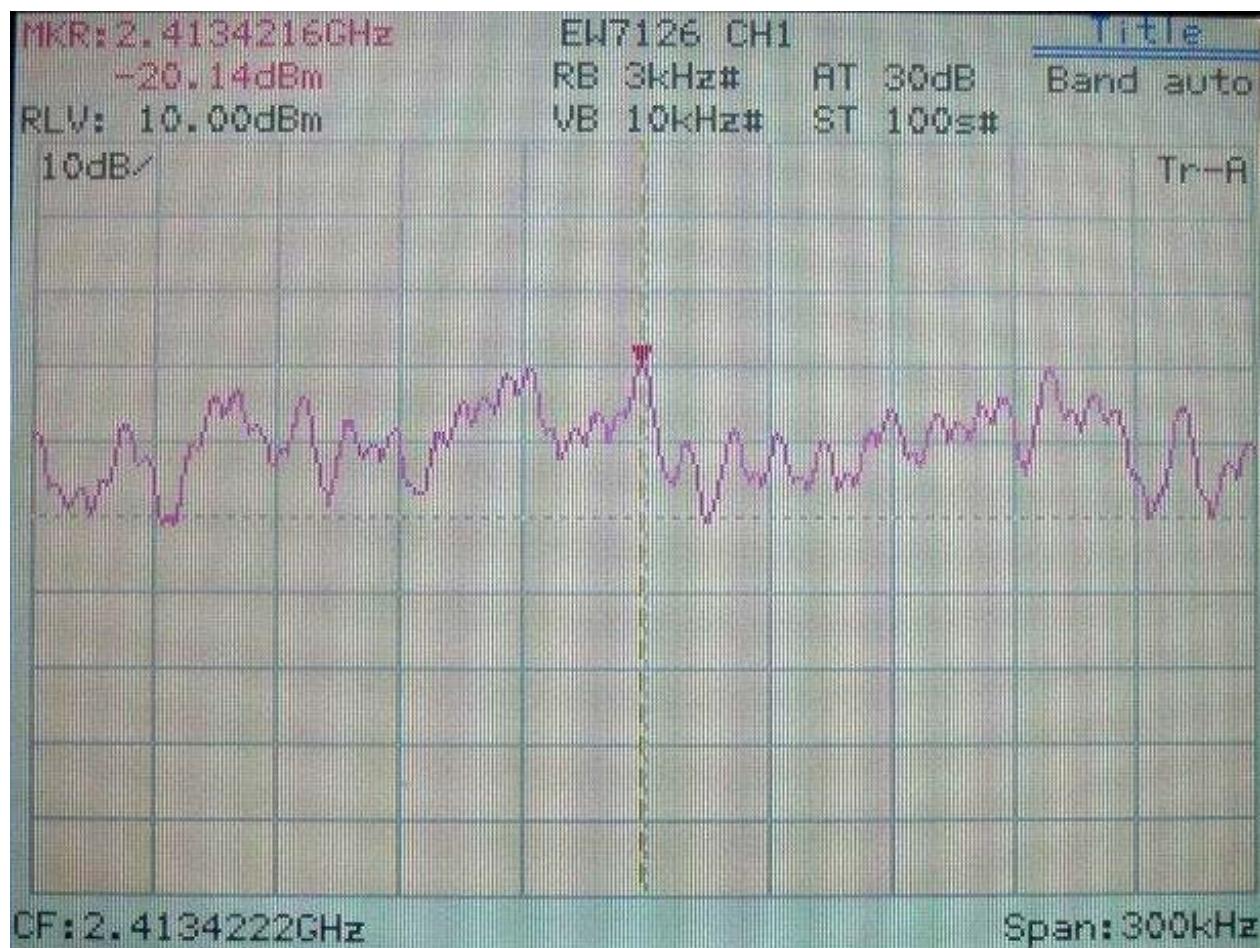*Channel 01*

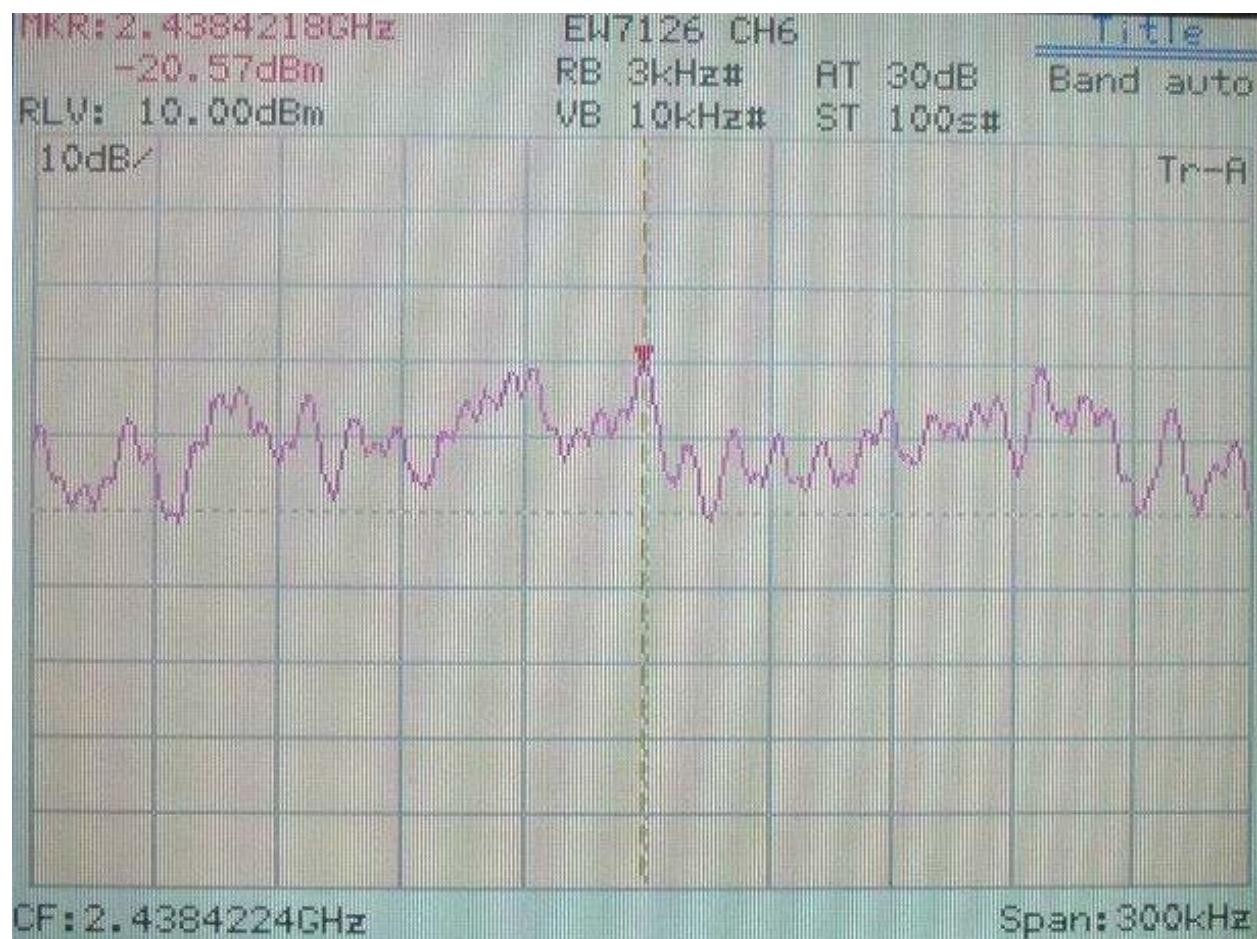*Channel 06*

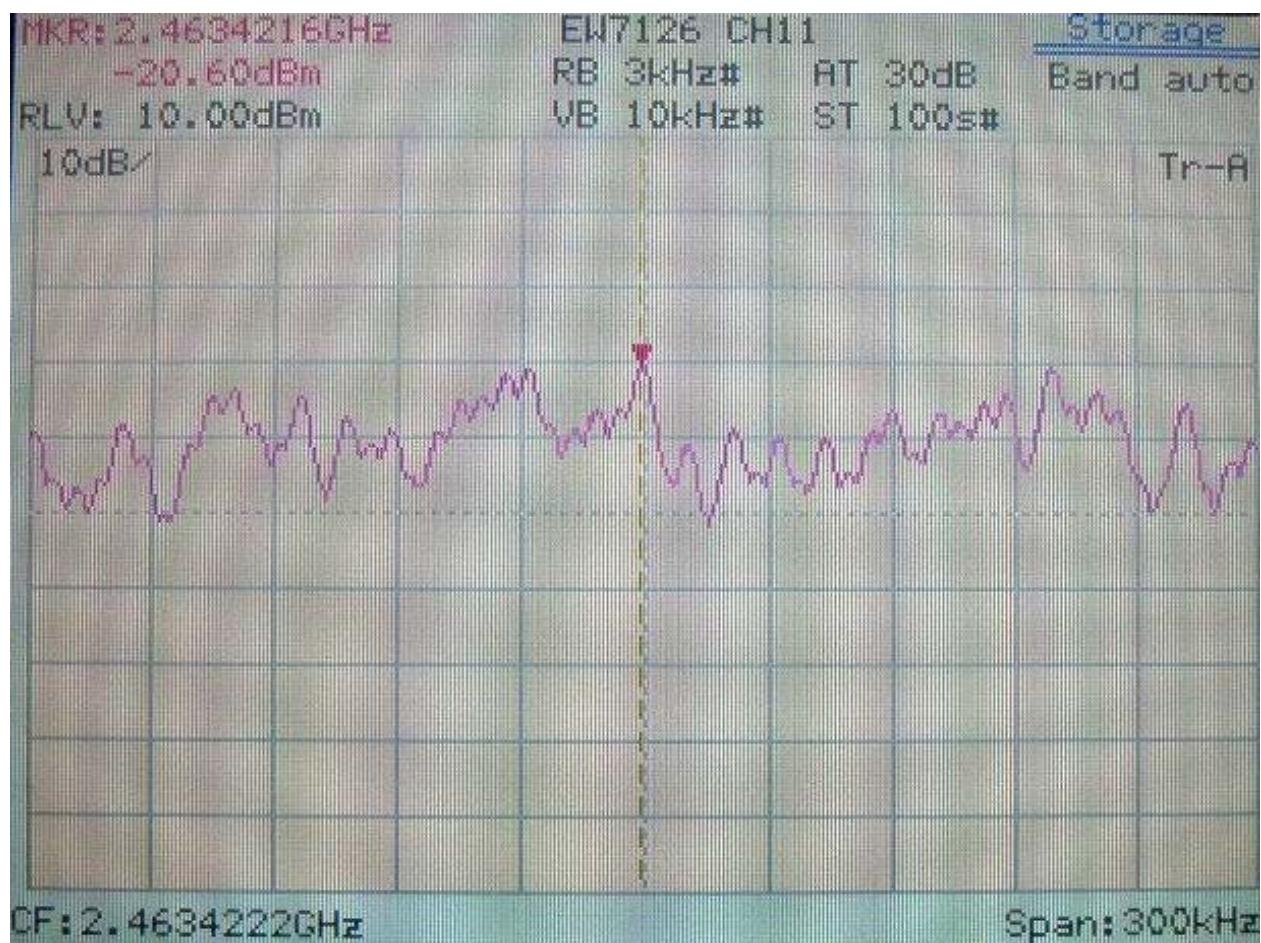*Channel 11*

## Appendix A

### Brand Name and Model Name List:

<b>Brand Name</b>	<b>Model Name</b>	<b>Brand Name</b>	<b>Model Name</b>
Edimax	EW-7126, GWA-E16	CONNECTLAND	WIRE-CNL-PCI
LevelOne	WNC-0100	AeroLAN Wireless PCI	AL3011
PLANET	WL-8303	2theMax	TNC-PCI11b
kingnet	KWI-B1R	ShAir Access	MIL-W1899
Longshine	LCS-8031-R1	AOpen	AOI-703E
Minitar	MNW2BPCI	AmbiCom	WL11C-PCI
AIRVAST	WN-600	AmbiCom	W117A-PCI
Xinetron	WI-2205	Sweex	LC700010
Surecom	EP/NE-9321	Digitus	DN-7006
Phee Net	WL-PCI/RT	hama	49058
Billington 802.11b PCI Wireless LAN Adapter	WL-100Rx-xx	Conceptronic	C11i
REPOTEC	RP-WP7126	PCLine	777111
ALFA	GWPCI04	NetSys	CDA-E16
JAHT	WN-1011PCI	AirLancer	PCI-11
CebitA	CWL110I	Intellinet	521710
EUSSO	GL2411-VPR, WL2411-VPR	Mecer	EW-7126
Micronet	SP906BB	GENUINE	GE-WPCI2011BED
Peabird	PEAB-WL-PCI/AA	Belkin	F5D6001