

RF Test Report

Applicant : Edimax Technology Co., Ltd.

Product Type : AC1200 Wireless LAN Dual Band Concurrent MU-MIMO Repeater

Trade Name : EDIMAX

Model Number : RE-7478RPC

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Receive Date : Jul. 19, 2018

Test Period : Sep. 07 ~ Oct. 17, 2018

Issue Date : Oct. 24, 2018

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Oct. 24, 2018	Initial Issue	Tobey Cheng

Verification of Compliance

Issued Date: Oct. 24, 2018

Applicant : Edimax Technology Co., Ltd.

Product Type : AC1200 Wireless LAN Dual Band Concurrent MU-MIMO Repeater

Trade Name : EDIMAX

Model Number : RE-7478RPC

FCC ID : NDD9574781803

EUT Rated Voltage : 100-240 Vac, 50-60 Hz, 0.25 A

Test Voltage : 120 Vac / 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By
(Manager)

: Fly Lu
(Fly Lu)

Reviewed By

(Testing Engineer)

: Eric Ou Yang
(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	5
2	EUT Description.....	7
3	Test Methodology.....	9
	3.1. Mode of Operation.....	9
	3.2. EUT Test Step.....	17
	3.3. Configuration of Test System Details.....	18
	3.4. Test Instruments	19
	3.5. Test Site Environment.....	20
4	Measurement Procedure.....	21
	4.1. AC Power Line Conducted Emission Measurement.....	21
	4.2. Radiated Emission Measurement.....	23
	4.3. Maximum Conducted Output Power Measurement.....	27
	4.4. 6 dB RF Bandwidth Measurement.....	28
	4.5. Maximum Power Spectral Density Measurement	29
	4.6. Out of Band Conducted Emissions Measurement.....	30
	4.7. Antenna Measurement	31
5	Test Results	32
	Annex A. Conducted Emission	32
	Annex B. Conducted Test Results	34
	Annex C. Radiated Emission Measurement	102



1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under Section 15.247
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9 kHz ~ 150 kHz	2.7
	150 kHz ~ 30 MHz	2.7
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.5
	18000 MHz ~ 26500 MHz	4.8
	26500 MHz ~ 40000 MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96 %	
Power Spectral Density	+0.71 dB / -0.77 dB	

2 EUT Description

Applicant	Edimax Technology Co., Ltd. No.278, Xinhua 1st Rd., Neihu Dist., Taipei City, Taiwan			
Manufacturer	Edimax Technology Co., Ltd. No.278, Xinhua 1st Rd., Neihu Dist., Taipei City, Taiwan			
Product Type	AC1200 Wireless LAN Dual Band Concurrent MU-MIMO Repeater			
Trade Name	EDIMAX			
Model Number	RE-7478RPC			
FCC ID	NDD9574781803			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 GI (ns)
IEEE 802.11b	2412 ~ 2462	DSSS	20 MHz	Up to 11 Mbps
IEEE 802.11g	2412 ~ 2462	OFDM	20 MHz	Up to 54 Mbps
IEEE 802.11n 2.4 GHz 20 MHz	2412 ~ 2462	OFDM	20 MHz	Up to 173.4 Mbps
IEEE 802.11n 2.4 GHz 40 MHz	2422 ~ 2452	OFDM	40 MHz	Up to 400 Mbps
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)
	ANT-0	ALX17M-222XX2	embedded antenna	3.85
	ANT-1	ALX17M-222XX3	embedded antenna	3.55
	G_{ANT}			3.70
Antenna Delivery	See section 3.1			
Operate Temp. Range	0 ~ +40 °C			



Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.065
IEEE 802.11g	0.195
IEEE 802.11n 2.4 GHz 20 MHz	0.201
IEEE 802.11n 2.4 GHz 40 MHz	0.182

Beamforming on

Frequency Band	Max. RF Output Power (W)
IEEE 802.11n 2.4 GHz 20 MHz	0.098
IEEE 802.11n 2.4 GHz 40 MHz	0.078

Equipment Type		
Outdoor access point	point-to-point	---
	point-to-multipoint	---
Indoor access point		V
Fixed point-to-point access points		---
Client devices		V

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11b Continuous TX mode
Mode 3: IEEE 802.11g Continuous TX mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2	V	V	V
Mode 3	V	V	V
Mode 4	V	V	V
Mode 5	V	V	V

Test Mode	Antenna Delivery	Data Rate	Test Channel
Mode 2	2TX (MIMO)	1 M	1, 6, 11
Mode 3	2TX (MIMO)	6 M	1, 6, 11
Mode 4	2TX (MIMO/Beamforming on)	13 M	1, 6, 11
Mode 5	2TX (MIMO/Beamforming on)	27 M	3, 6, 9

Duty cycle


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	2412.0	8.550	8.700	0.983	0.076	0.010
Mode 3	2412.0	1.425	1.522	0.936	0.286	0.702
Mode 4	2412.0	1.350	1.485	0.909	0.414	0.741
Mode 5	2422.0	0.675	0.720	0.938	0.280	1.481

Beamforming on

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 4	2412.0	1.350	1.455	0.928	0.325	0.741
Mode 5	2422.0	0.675	0.795	0.849	0.711	1.481

Duty Cycle Graphs


Mode 2: IEEE 802.11b Continuous TX mode

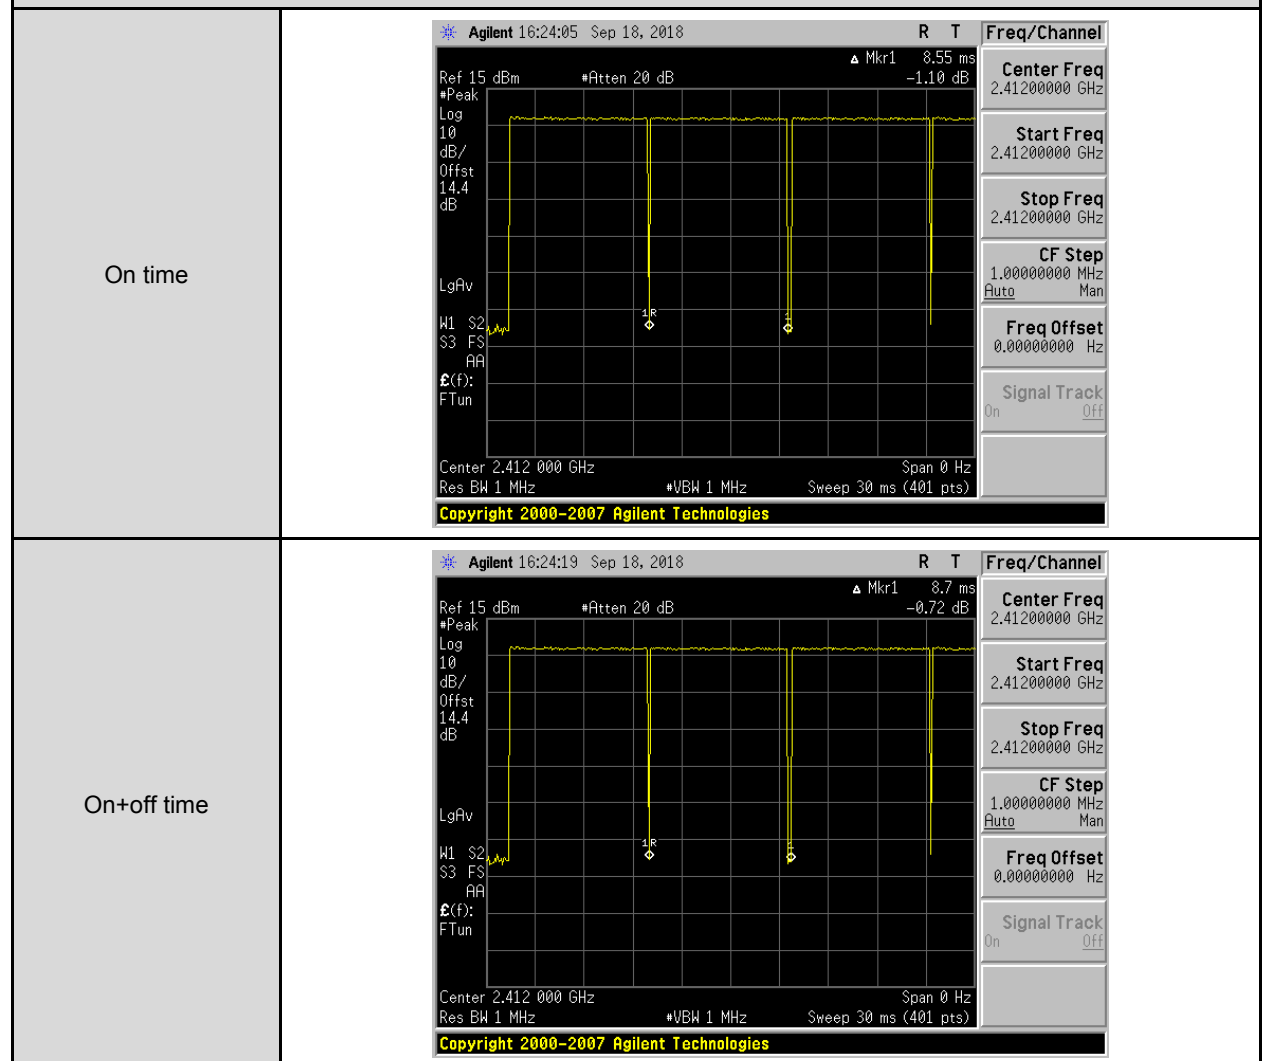


12 of 190

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode

On time

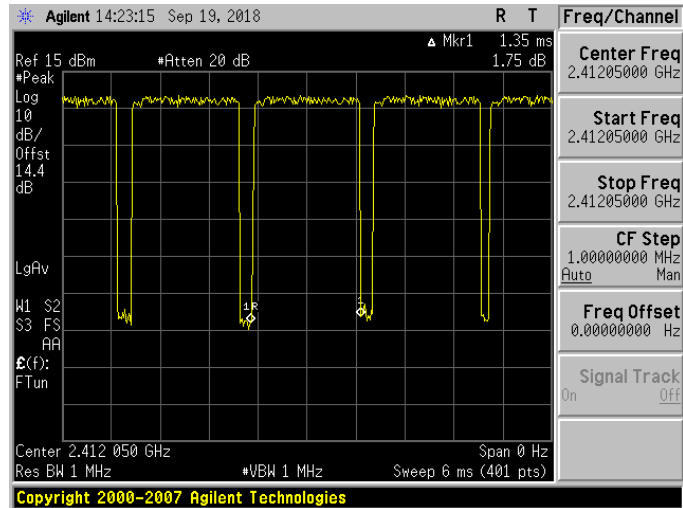


On+off time

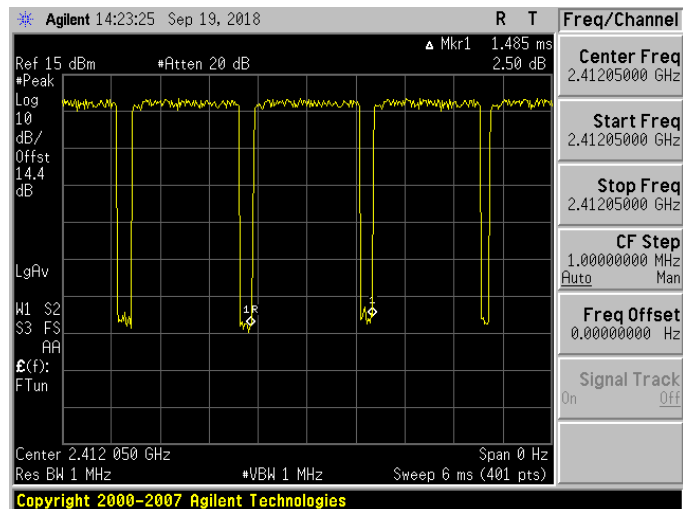


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode

On time

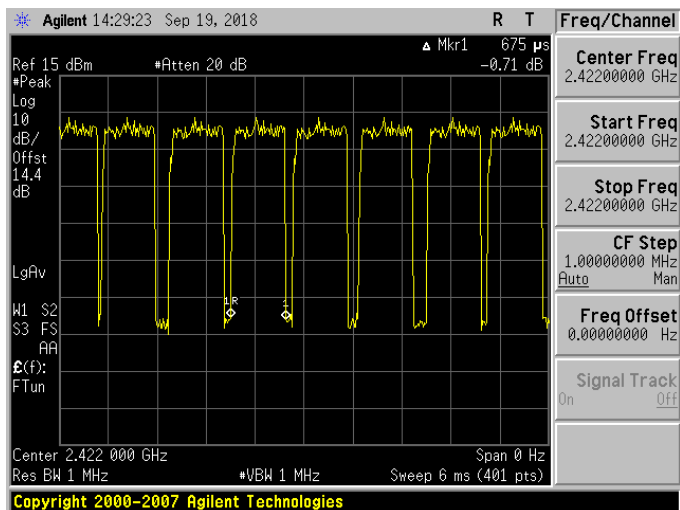


On+off time

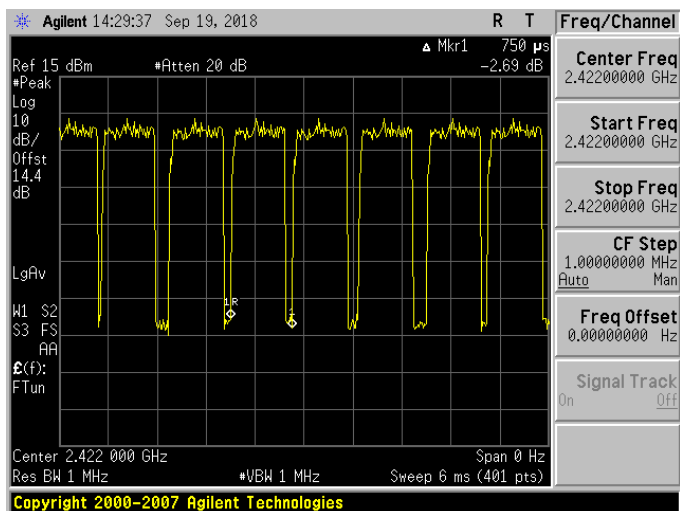


Beamforming on

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode

On time

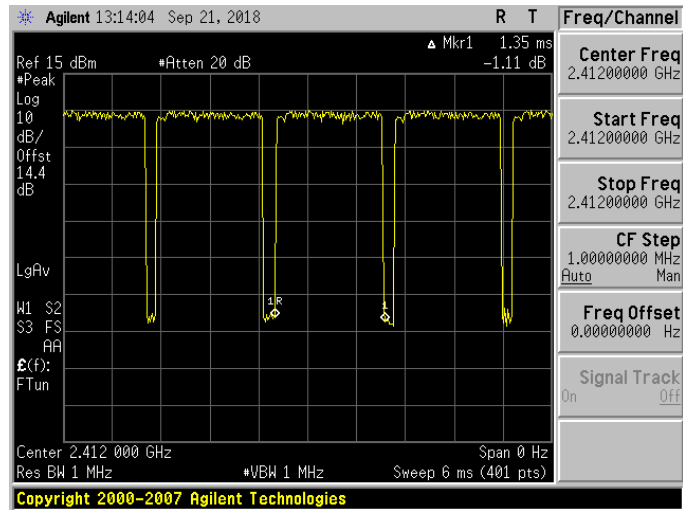


On+off time

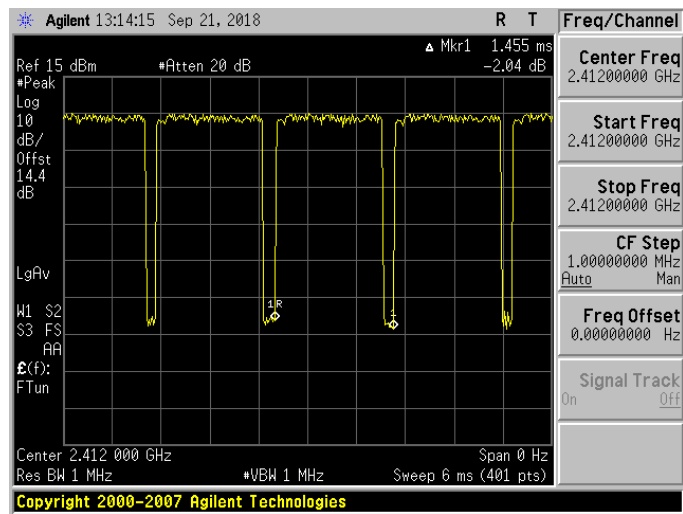


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode

On time

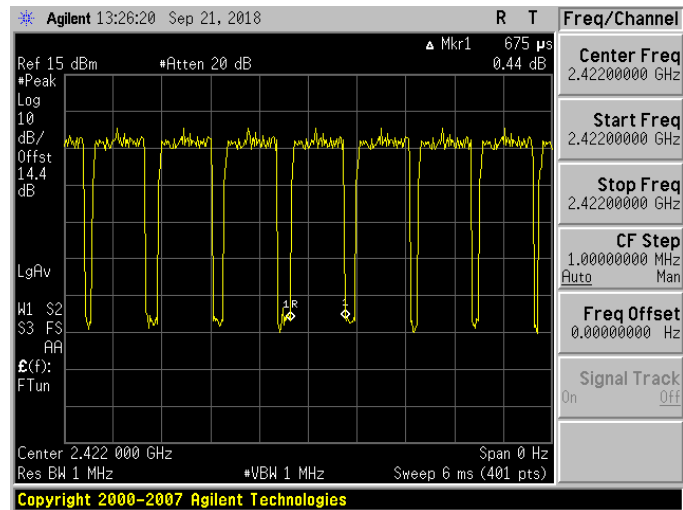

On+off time

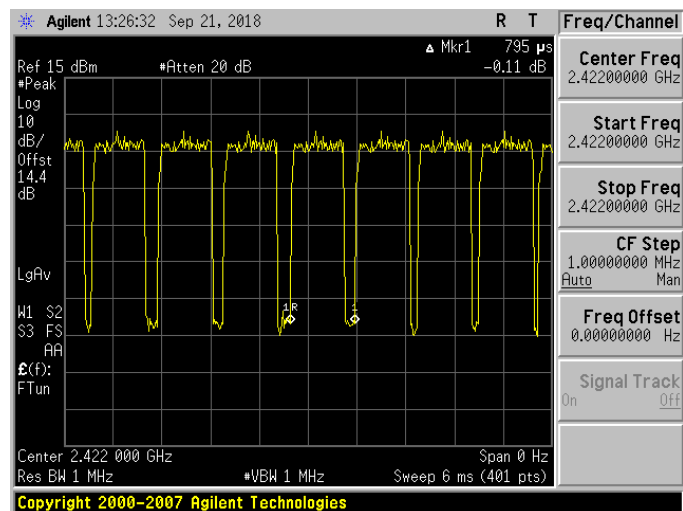


3.2. EUT Test Step

1.	Setup the EUT shown on “Configuration of Test System Details”.
2.	Turn on the power of all equipment.
3.	Turn on TX function
4.	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emission

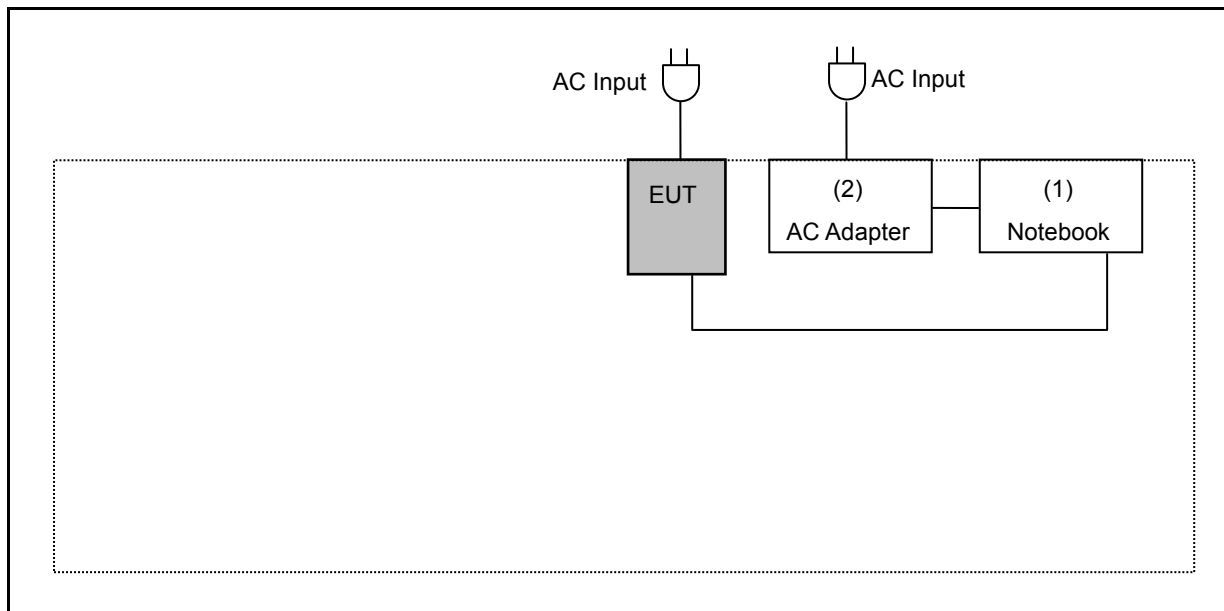

Radiated Emission

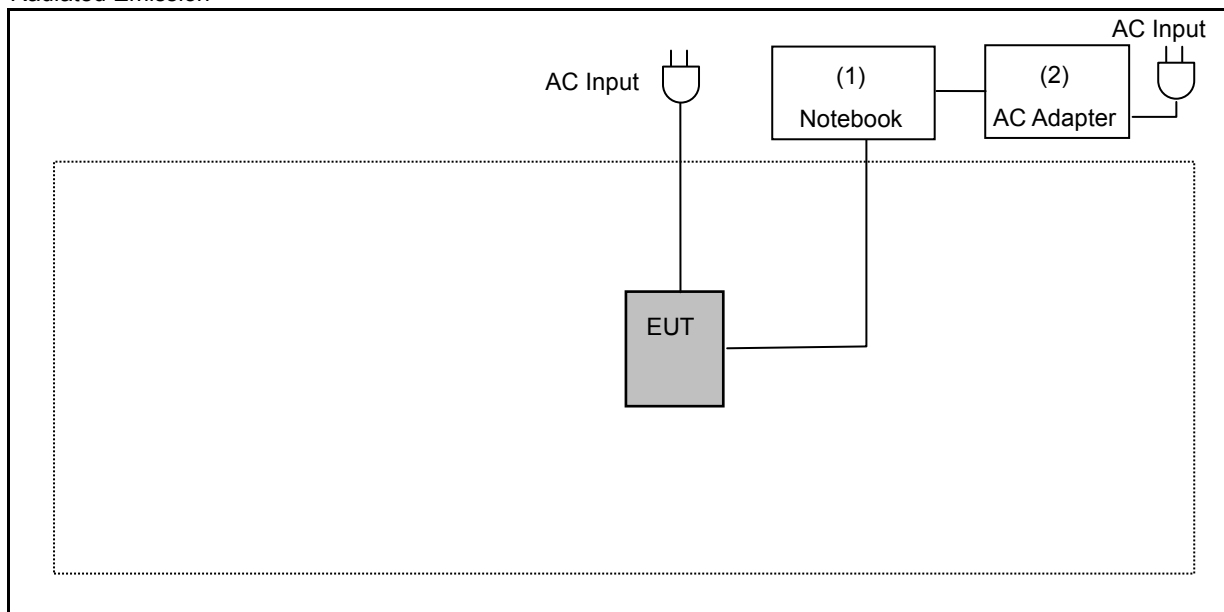

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	DELL	LATITUDE E6440	5HZBD72	---
(2)	AC Adapter	DELL	HA65NM130	---	Non-Shielded, 0.8 m



3.4. Test Instruments

For Conducted Emission

Test Period: Oct. 17, 2018

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/21/2018	1 year
LISN	R&S	ENV216	101040	04/11/2018	1 year
LISN	R&S	ENV216	101041	03/23/2018	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/17/2018	1 year

For Radiated Emissions

Test Period: Sep. 07 ~ Sep. 08, 2018

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/15/2018	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/16/2017	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/10/2018	1 year
Pre Amplifier (26.5~40 GHz)	EMCI	EMC2654045	980028	08/23/2018	1 year
Pre Amplifier (1~26.5 GHz)	EMCI	EMC012645SE	980289	01/17/2018	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/26/2017	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/23/2018	1 year
Horn Antenna (18~40 GHz)	ETS	3116	86467	09/19/2017	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/13/2018	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2018	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 3000	170814	10/31/2017	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2018	1 year

Note: N.C.R. = No Calibration Request.



For Conducted

Test Period: Sep. 14 ~ Sep. 21, 2018

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (3 Hz~13.2 GHz)	Agilent	E4445A	MY45300744	12/11/2017	1 year
Power Sensor	Anritsu	MA2411B	1126022	08/29/2018	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2018	1 year

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	990


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

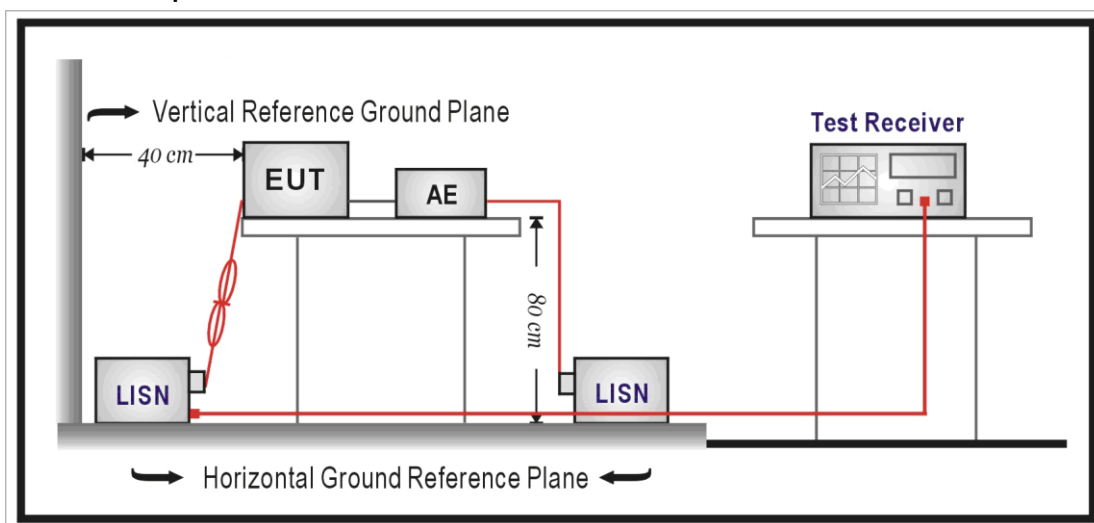

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

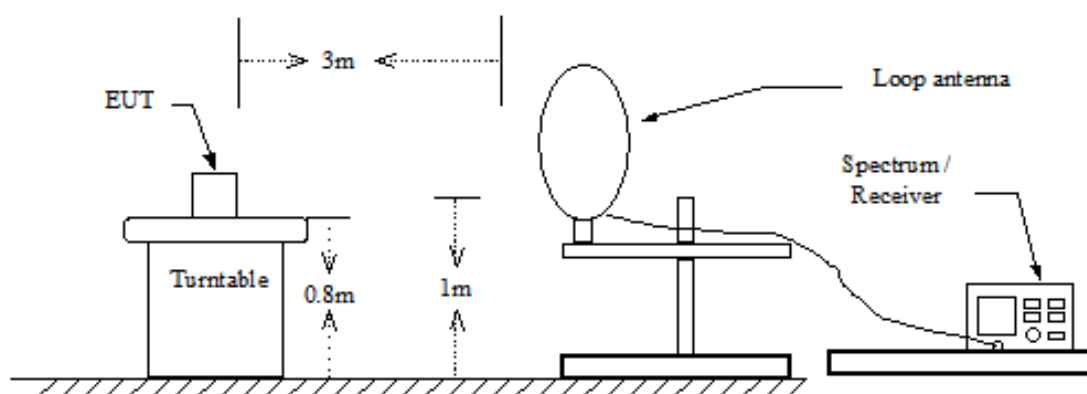

Below 1 GHz

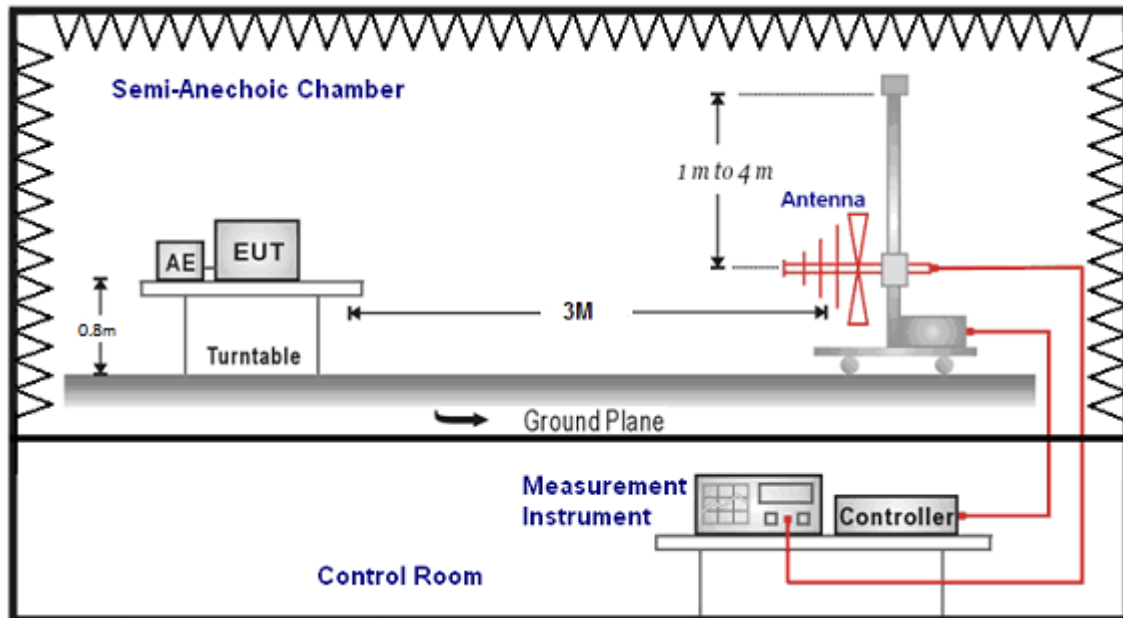

Above 1 GHz

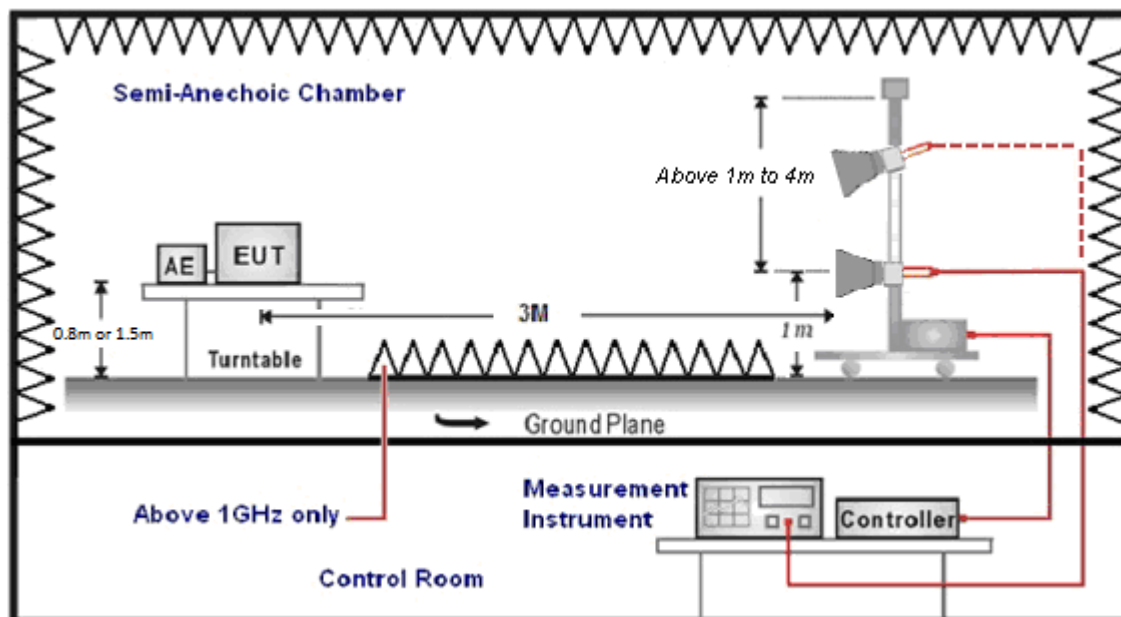

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.3. Maximum Conducted Output Power Measurement

■ Limit


For systems using digital modulation in the 2400-2483.5 MHz, the limit for maximum output power is 30 dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MIMO/BF mode :

- * Directional Gain = $10 \cdot \log\{[10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20}]^2 / NANT\}$ = 6.71 dBi > 6 dBi
- * power limit shall be reduced = $30 - 0.71 = 29.29$ dBm.

■ Test Setup

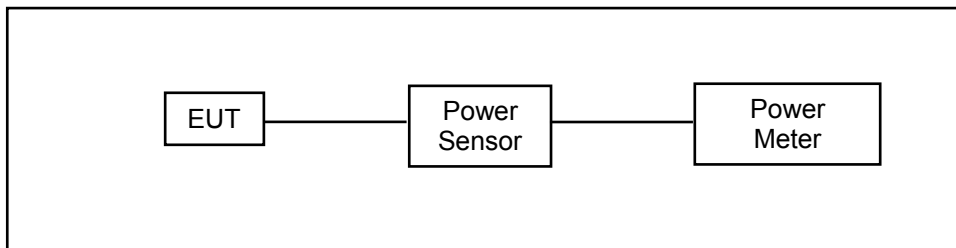

■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10-2013 section 11.9.2.3 Method AVGPM.


The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

4.4. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ Test Setup

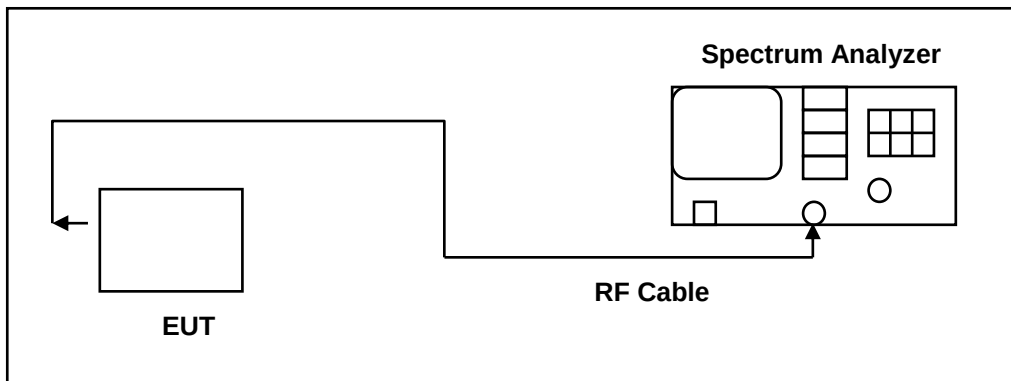

■ Test Procedure

The EUT tested to DTS test procedure of KDB 558074 D01 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Spectral Density Measurement


■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

MIMO/BF mode :

- * Directional Gain = $10 \cdot \log\{[10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20}]^2 / NANT\}$ = 6.71 dBi > 6 dBi
- * Power Spectral Density limit shall be reduced = $8 - 0.71 = 7.29$ dBm/3 kHz.

■ Test Setup

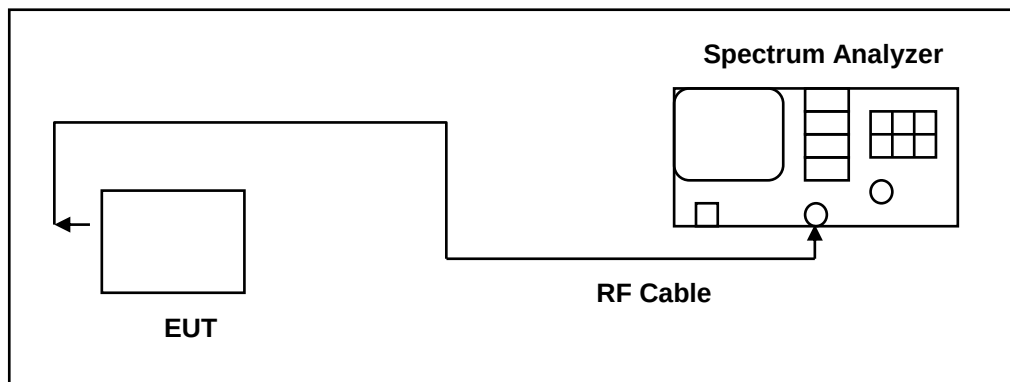

■ Test Procedure

The EUT tested to DTS test procedure of KDB 558074 D01 section 10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

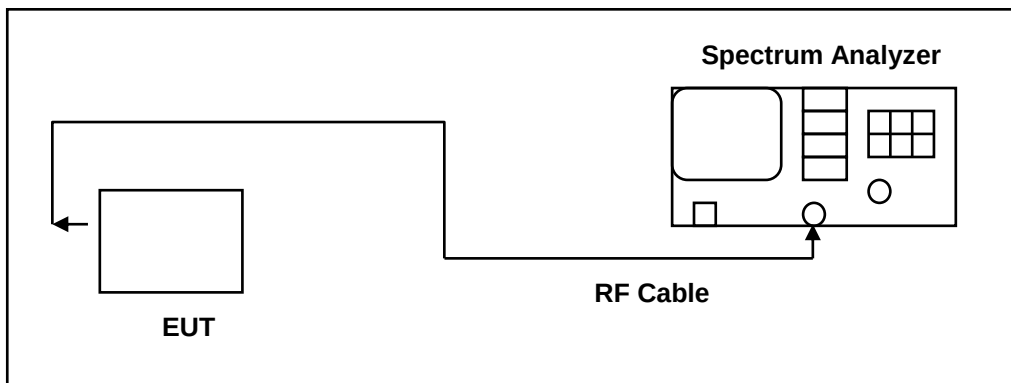

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Description

See section 2 – antenna information.

■ Directional Gain Calculated

Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$ = 6.71 dBi > 6 dBi

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b	6.71
IEEE 802.11g	6.71
IEEE 802.11n 2.4 GHz 20 MHz	6.71
IEEE 802.11n 2.4 GHz 40 MHz	6.71


Beamforming on

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11n 2.4 GHz 20 MHz	6.71
IEEE 802.11n 2.4 GHz 40 MHz	6.71

5 Test Results

Annex A. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

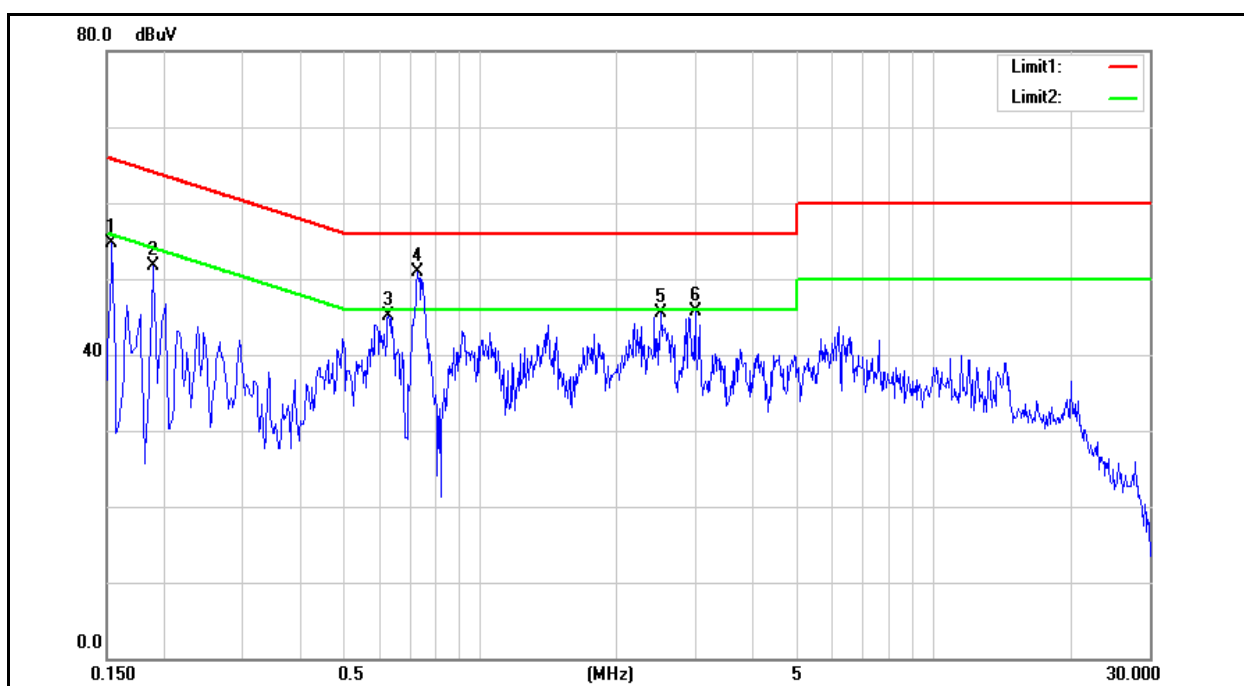


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	39.50	18.85	9.60	49.10	28.45	65.78	55.78	-16.68	-27.33	Pass
2	0.1900	33.75	16.14	9.60	43.35	25.74	64.04	54.04	-20.69	-28.30	Pass
3	0.6300	32.34	24.21	9.61	41.95	33.82	56.00	46.00	-14.05	-12.18	Pass
4	0.7300	38.61	29.02	9.62	48.23	38.64	56.00	46.00	-7.77	-7.36	Pass
5	2.5100	28.19	19.40	9.69	37.88	29.09	56.00	46.00	-18.12	-16.91	Pass
6	2.9860	27.33	18.42	9.70	37.03	28.12	56.00	46.00	-18.97	-17.88	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

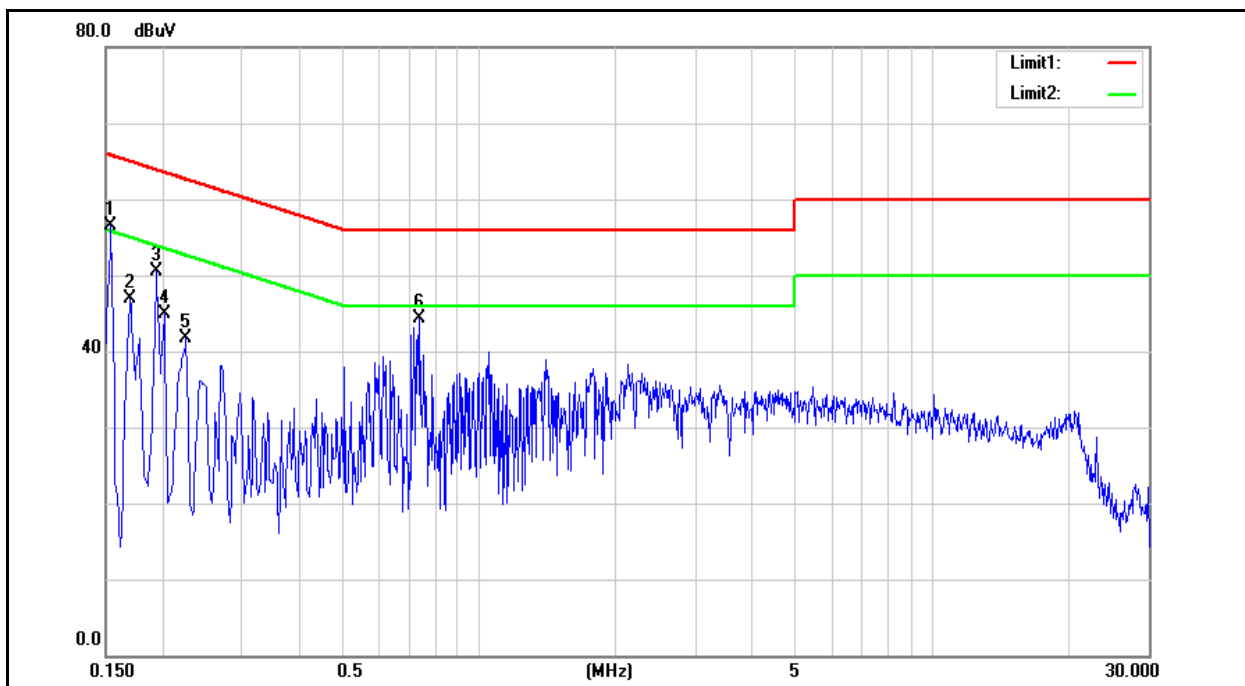

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	39.59	16.32	9.71	49.30	26.03	65.78	55.78	-16.48	-29.75	Pass
2	0.1700	33.90	17.37	9.71	43.61	27.08	64.96	54.96	-21.35	-27.88	Pass
3	0.1940	32.74	15.15	9.70	42.44	24.85	63.86	53.86	-21.42	-29.01	Pass
4	0.2020	28.74	12.58	9.70	38.44	22.28	63.53	53.53	-25.09	-31.25	Pass
5	0.2260	28.01	12.33	9.70	37.71	22.03	62.60	52.60	-24.89	-30.57	Pass
6	0.7420	32.41	19.97	9.72	42.13	29.69	56.00	46.00	-13.87	-16.31	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Annex B. Conducted Test Results

Maximum Conducted Output Power Measurement

ANT-0					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 2	2412	1 M	12.53	0.018	≤ 29.29
	2437		13.30	0.021	≤ 29.29
	2462		15.20	0.033	≤ 29.29
	2437	2 M	13.28	0.021	≤ 29.29
	2437	5.5 M	13.23	0.021	≤ 29.29
	2437	11 M	13.21	0.021	≤ 29.29
Mode 3	2412	6 M	14.39	0.027	≤ 29.29
	2437		20.10	0.102	≤ 29.29
	2462		17.60	0.058	≤ 29.29
	2437	9 M	20.08	0.102	≤ 29.29
	2437	12 M	20.05	0.101	≤ 29.29
	2437	18 M	20.04	0.101	≤ 29.29
	2437	24 M	20.10	0.102	≤ 29.29
	2437	36 M	19.87	0.097	≤ 29.29
	2437	48 M	19.97	0.099	≤ 29.29
	2437	54 M	19.89	0.097	≤ 29.29
Mode 4	2412	13M	14.21	0.026	≤ 29.29
	2437		20.11	0.103	≤ 29.29
	2462		17.28	0.053	≤ 29.29
	2437	28.8M	20.09	0.102	≤ 29.29
	2437	43.4M	20.07	0.102	≤ 29.29
	2437	57.8M	20.05	0.101	≤ 29.29
	2437	86.6M	20.06	0.101	≤ 29.29
	2437	115.6M	20.04	0.101	≤ 29.29
	2437	130M	20.05	0.101	≤ 29.29
	2437	144.4M	20.00	0.100	≤ 29.29
Mode 5	2422	27 M	14.70	0.030	≤ 29.29
	2437		19.60	0.091	≤ 29.29
	2452		18.01	0.063	≤ 29.29
	2437	60M	19.58	0.091	≤ 29.29
	2437	90M	19.51	0.089	≤ 29.29
	2437	120M	19.59	0.091	≤ 29.29
	2437	180M	19.57	0.091	≤ 29.29
	2437	240M	19.55	0.090	≤ 29.29
	2437	270M	19.59	0.091	≤ 29.29
	2437	300M	19.55	0.090	≤ 29.29

Note: The relevant measured result has the offset with cable loss already.

ANT-1					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 2	2412	1 M	12.62	0.018	≤ 29.29
	2437		13.40	0.022	≤ 29.29
	2462		15.04	0.032	≤ 29.29
	2437	2 M	13.35	0.022	≤ 29.29
	2437	5.5 M	13.36	0.022	≤ 29.29
	2437	11 M	13.34	0.022	≤ 29.29
Mode 3	2412	6 M	13.71	0.023	≤ 29.29
	2437		19.65	0.092	≤ 29.29
	2462		17.34	0.054	≤ 29.29
	2437	9 M	19.59	0.091	≤ 29.29
	2437	12 M	19.60	0.091	≤ 29.29
	2437	18 M	19.63	0.092	≤ 29.29
	2437	24 M	19.57	0.091	≤ 29.29
	2437	36 M	19.59	0.091	≤ 29.29
	2437	48 M	19.60	0.091	≤ 29.29
	2437	54 M	19.64	0.092	≤ 29.29
Mode 4	2412	13M	13.37	0.022	≤ 29.29
	2437		19.93	0.098	≤ 29.29
	2462		16.51	0.045	≤ 29.29
	2437	28.8M	19.87	0.097	≤ 29.29
	2437	43.4M	19.92	0.098	≤ 29.29
	2437	57.8M	19.90	0.098	≤ 29.29
	2437	86.6M	19.91	0.098	≤ 29.29
	2437	115.6M	19.88	0.097	≤ 29.29
	2437	130M	19.91	0.098	≤ 29.29
	2437	144.4M	19.86	0.097	≤ 29.29
Mode 5	2422	27 M	14.77	0.030	≤ 29.29
	2437		19.58	0.091	≤ 29.29
	2452		17.46	0.056	≤ 29.29
	2437	60M	19.49	0.089	≤ 29.29
	2437	90M	19.49	0.089	≤ 29.29
	2437	120M	19.52	0.090	≤ 29.29
	2437	180M	19.50	0.089	≤ 29.29
	2437	240M	19.49	0.089	≤ 29.29
	2437	270M	19.50	0.089	≤ 29.29
	2437	300M	19.51	0.089	≤ 29.29

Note: The relevant measured result has the offset with cable loss already.

ANT-0+1					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 2	2412	1 M	15.59	0.036	≤ 29.29
	2437		16.36	0.043	≤ 29.29
	2462		18.13	0.065	≤ 29.29
	2437	2 M	16.33	0.043	≤ 29.29
	2437	5.5 M	16.31	0.043	≤ 29.29
	2437	11 M	16.29	0.043	≤ 29.29
Mode 3	2412	6 M	17.07	0.051	≤ 29.29
	2437		22.89	0.195	≤ 29.29
	2462		20.48	0.112	≤ 29.29
	2437	9 M	22.85	0.193	≤ 29.29
	2437	12 M	22.84	0.192	≤ 29.29
	2437	18 M	22.85	0.193	≤ 29.29
	2437	24 M	22.85	0.193	≤ 29.29
	2437	36 M	22.74	0.188	≤ 29.29
	2437	48 M	22.80	0.191	≤ 29.29
	2437	54 M	22.78	0.190	≤ 29.29
Mode 4	2412	13M	16.82	0.048	≤ 29.29
	2437		23.03	0.201	≤ 29.29
	2462		19.92	0.098	≤ 29.29
	2437	28.8M	22.99	0.199	≤ 29.29
	2437	43.4M	23.01	0.200	≤ 29.29
	2437	57.8M	22.99	0.199	≤ 29.29
	2437	86.6M	23.00	0.199	≤ 29.29
	2437	115.6M	22.97	0.198	≤ 29.29
	2437	130M	22.99	0.199	≤ 29.29
	2437	144.4M	22.94	0.197	≤ 29.29
Mode 5	2422	27 M	17.75	0.060	≤ 29.29
	2437		22.60	0.182	≤ 29.29
	2452		20.75	0.119	≤ 29.29
	2437	60M	22.55	0.180	≤ 29.29
	2437	90M	22.51	0.178	≤ 29.29
	2437	120M	22.57	0.181	≤ 29.29
	2437	180M	22.55	0.180	≤ 29.29
	2437	240M	22.53	0.179	≤ 29.29
	2437	270M	22.56	0.180	≤ 29.29
	2437	300M	22.54	0.179	≤ 29.29

Note: The relevant measured result has the offset with cable loss already.

Beamforming on

ANT-0					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 4	2412	13M	10.53	0.011	≤ 29.29
	2437		17.26	0.053	≤ 29.29
	2462		13.95	0.025	≤ 29.29
	2437	28.8M	17.20	0.052	≤ 29.29
	2437	43.4M	17.21	0.053	≤ 29.29
	2437	57.8M	17.19	0.052	≤ 29.29
	2437	86.6M	17.22	0.053	≤ 29.29
	2437	115.6M	17.23	0.053	≤ 29.29
	2437	130M	17.25	0.053	≤ 29.29
	2437	144.4M	17.26	0.053	≤ 29.29
Mode 5	2422	27 M	11.82	0.015	≤ 29.29
	2437		16.11	0.041	≤ 29.29
	2452		14.91	0.031	≤ 29.29
	2437	60M	16.06	0.040	≤ 29.29
	2437	90M	16.01	0.040	≤ 29.29
	2437	120M	16.06	0.040	≤ 29.29
	2437	180M	16.03	0.040	≤ 29.29
	2437	240M	16.07	0.040	≤ 29.29
	2437	270M	16.08	0.041	≤ 29.29
	2437	300M	16.11	0.041	≤ 29.29

Note: The relevant measured result has the offset with cable loss already.

ANT-1					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 4	2412	13M	9.95	0.010	≤ 29.29
	2437		16.55	0.045	≤ 29.29
	2462		13.40	0.022	≤ 29.29
	2437	28.8M	16.49	0.045	≤ 29.29
	2437	43.4M	16.50	0.045	≤ 29.29
	2437	57.8M	16.49	0.045	≤ 29.29
	2437	86.6M	16.51	0.045	≤ 29.29
	2437	115.6M	16.51	0.045	≤ 29.29
	2437	130M	16.52	0.045	≤ 29.29
	2437	144.4M	16.51	0.045	≤ 29.29
Mode 5	2422	27 M	11.41	0.014	≤ 29.29
	2437		15.66	0.037	≤ 29.29
	2452		12.97	0.020	≤ 29.29
	2437	60M	15.62	0.036	≤ 29.29
	2437	90M	15.62	0.036	≤ 29.29
	2437	120M	15.66	0.037	≤ 29.29
	2437	180M	15.60	0.036	≤ 29.29
	2437	240M	15.62	0.036	≤ 29.29
	2437	270M	15.60	0.036	≤ 29.29
	2437	300M	15.65	0.037	≤ 29.29

Note: The relevant measured result has the offset with cable loss already.

ANT-0+1					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 4	2412	13M	13.26	0.021	≤ 29.29
	2437		19.93	0.098	≤ 29.29
	2462		16.69	0.047	≤ 29.29
	2437	28.8M	19.87	0.097	≤ 29.29
	2437	43.4M	19.88	0.097	≤ 29.29
	2437	57.8M	19.86	0.097	≤ 29.29
	2437	86.6M	19.89	0.097	≤ 29.29
	2437	115.6M	19.90	0.098	≤ 29.29
	2437	130M	19.91	0.098	≤ 29.29
	2437	144.4M	19.91	0.098	≤ 29.29
Mode 5	2422	27 M	14.63	0.029	≤ 29.29
	2437		18.90	0.078	≤ 29.29
	2452		17.06	0.051	≤ 29.29
	2437	60M	18.86	0.077	≤ 29.29
	2437	90M	18.83	0.076	≤ 29.29
	2437	120M	18.87	0.077	≤ 29.29
	2437	180M	18.83	0.076	≤ 29.29
	2437	240M	18.86	0.077	≤ 29.29
	2437	270M	18.86	0.077	≤ 29.29
	2437	300M	18.90	0.078	≤ 29.29

Note: The relevant measured result has the offset with cable loss already.

6 dB RF Bandwidth Measurement




Test Mode	Frequency (MHz)	Measurement (kHz)		Limit (kHz)
		ANT-0	ANT-1	
Mode 2	2412	9579	10053	≥ 500
	2437	9605	10055	≥ 500
	2462	10020	10057	≥ 500
Mode 3	2412	16327	16391	≥ 500
	2437	16340	16305	≥ 500
	2462	16314	16369	≥ 500
Mode 4	2412	16973	16667	≥ 500
	2437	16910	16669	≥ 500
	2462	17086	17596	≥ 500
Mode 5	2422	36337	36368	≥ 500
	2437	35731	36350	≥ 500
	2452	36406	36119	≥ 500

Beamforming on

Test Mode	Frequency (MHz)	Measurement (kHz)		Limit (kHz)
		ANT-0	ANT-1	
Mode 4	2412	16941	16668	≥ 500
	2437	16713	16698	≥ 500
	2462	16697	17079	≥ 500
Mode 5	2422	36344	36349	≥ 500
	2437	36102	36029	≥ 500
	2452	36346	35566	≥ 500


■ Test Graphs

Mode 2: IEEE 802.11b Continuous TX mode_ANT-0

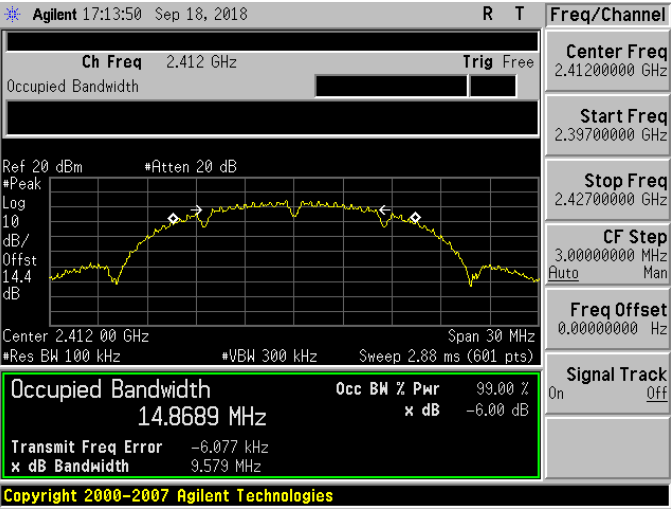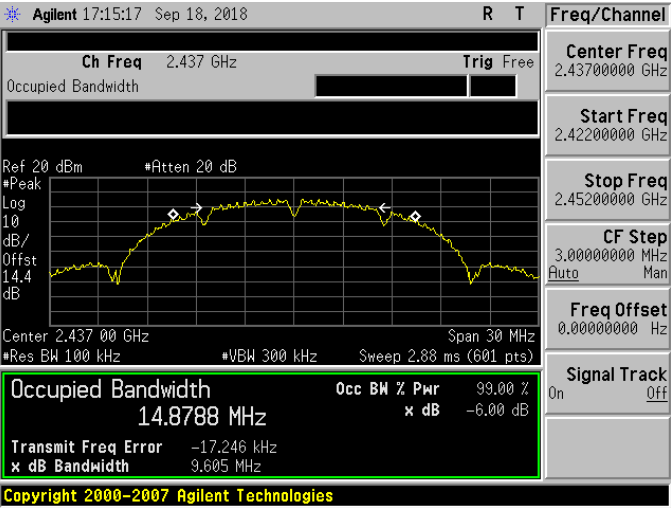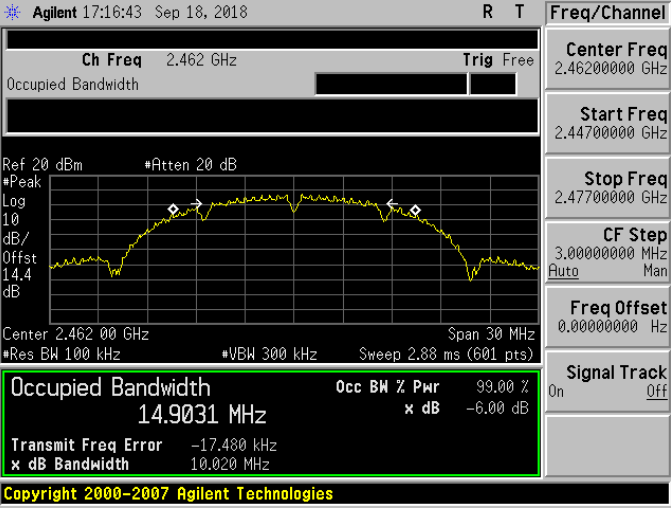
2412 MHz	 Agilent 17:13:50 Sep 18, 2018 R T Ch Freq 2.412 GHz Trig Free Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm #Atten 20 dB Peak Log 10 dB/Offst 14.4 dB Center 2.412 00 GHz Span 30 MHz Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 14.8689 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -6.077 kHz x dB Bandwidth 9.579 MHz Copyright 2000-2007 Agilent Technologies
2437 MHz	 Agilent 17:15:17 Sep 18, 2018 R T Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm #Atten 20 dB Peak Log 10 dB/Offst 14.4 dB Center 2.437 00 GHz Span 30 MHz Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 14.8788 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -17.246 kHz x dB Bandwidth 9.605 MHz Copyright 2000-2007 Agilent Technologies
2462 MHz	 Agilent 17:16:43 Sep 18, 2018 R T Ch Freq 2.462 GHz Trig Free Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm #Atten 20 dB Peak Log 10 dB/Offst 14.4 dB Center 2.462 00 GHz Span 30 MHz Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 14.9031 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -17.480 kHz x dB Bandwidth 10.020 MHz Copyright 2000-2007 Agilent Technologies

Mode 3: IEEE 802.11g Continuous TX mode_ANT-0


2412 MHz

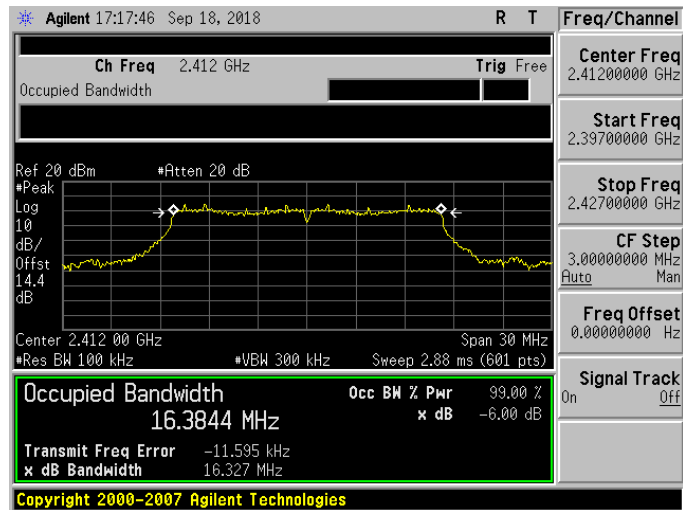

2437 MHz



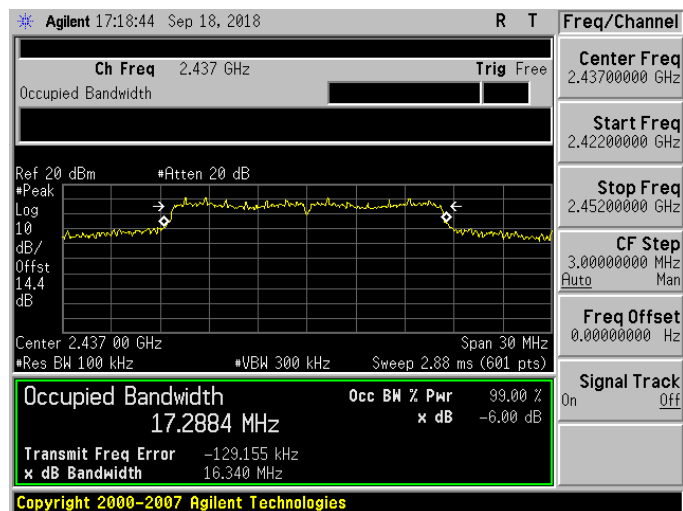


2462 MHz

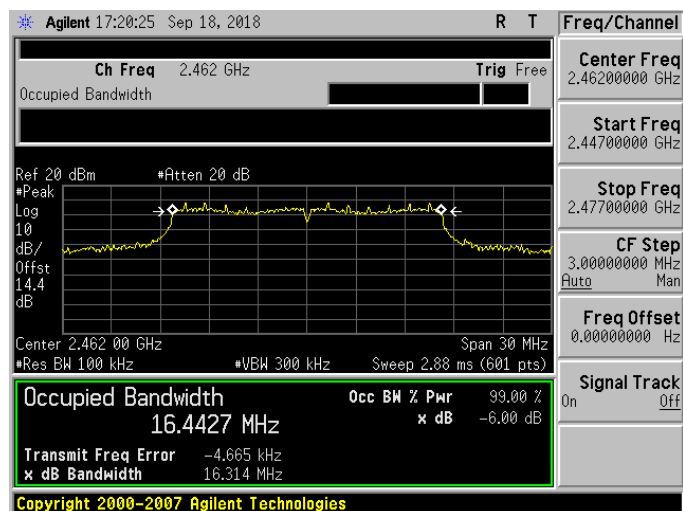




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0

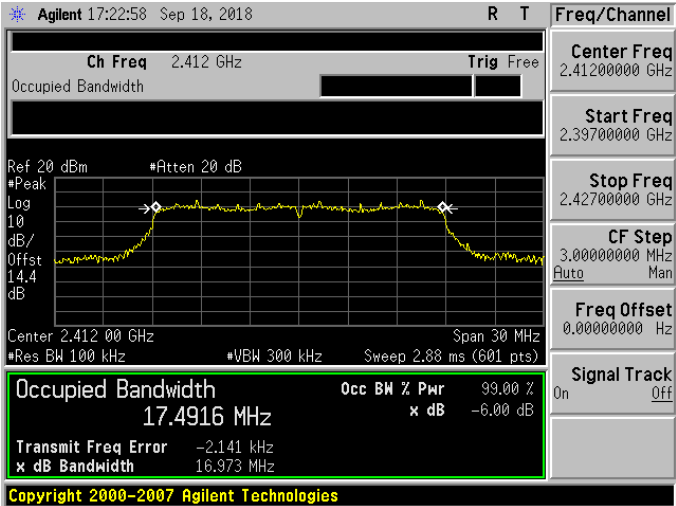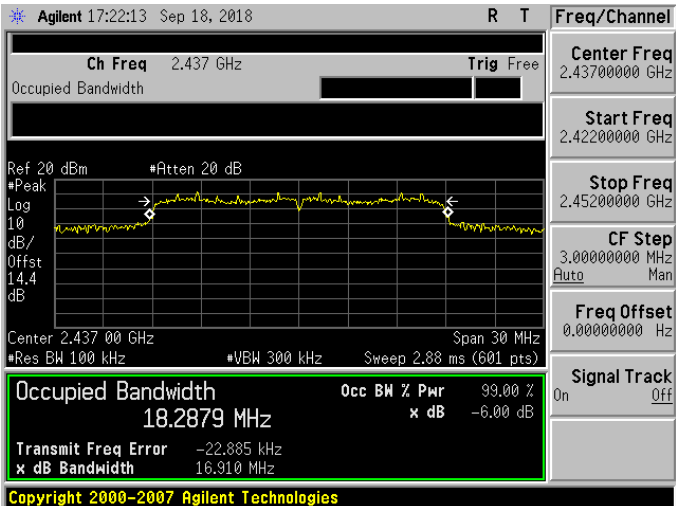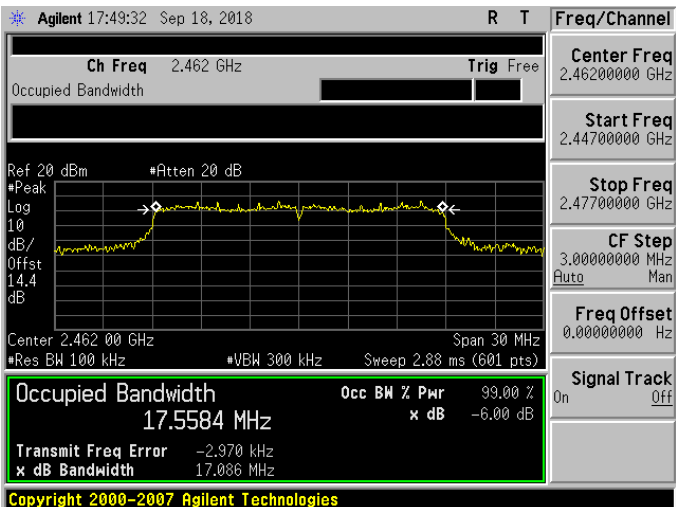2412 MHz	 Agilent 17:22:58 Sep 18, 2018 R T Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 20 dBm *Atten 20 dB *Peak Log 10 dB/Offst 14.4 dB Center 2.412 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.4916 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -2.141 kHz x dB Bandwidth 16.973 MHz Copyright 2000-2007 Agilent Technologies Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437 MHz	 Agilent 17:22:13 Sep 18, 2018 R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 20 dBm *Atten 20 dB *Peak Log 10 dB/Offst 14.4 dB Center 2.437 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 18.2879 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -22.885 kHz x dB Bandwidth 16.910 MHz Copyright 2000-2007 Agilent Technologies Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2462 MHz	 Agilent 17:49:32 Sep 18, 2018 R T Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 20 dBm *Atten 20 dB *Peak Log 10 dB/Offst 14.4 dB Center 2.462 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.5584 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -2.970 kHz x dB Bandwidth 17.086 MHz Copyright 2000-2007 Agilent Technologies Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

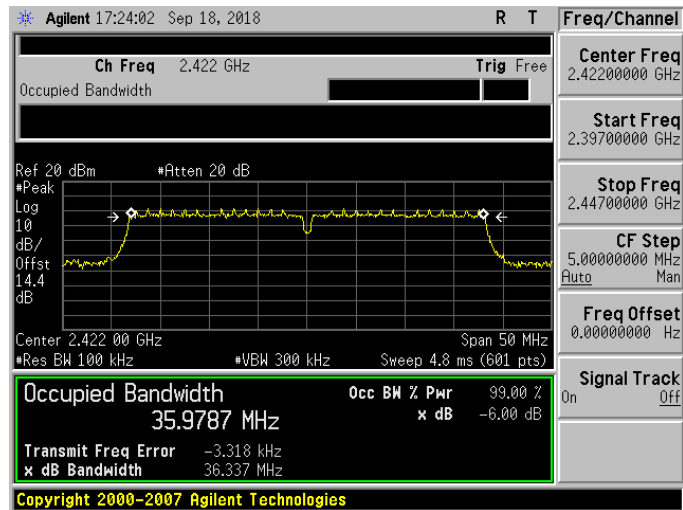

2437 MHz

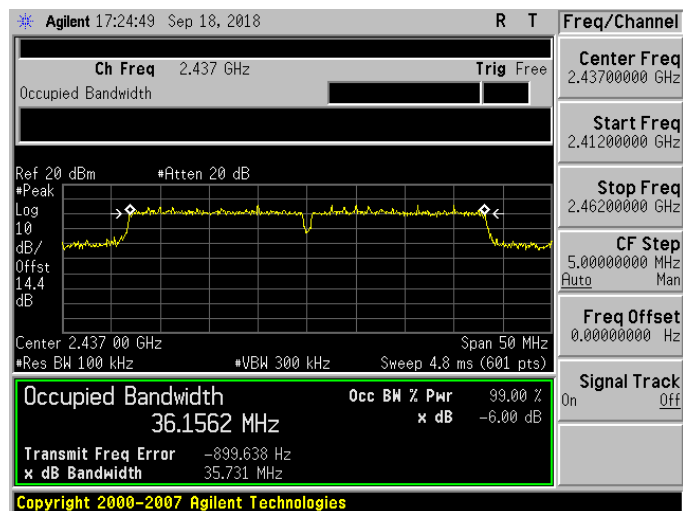


2452 MHz

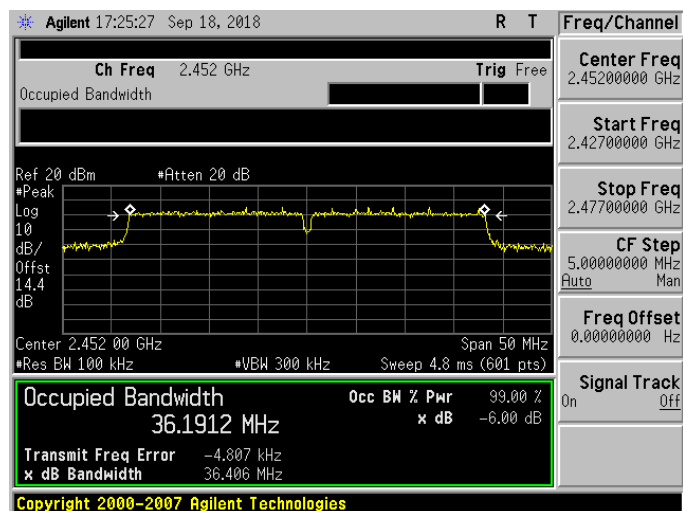


Mode 2: IEEE 802.11b Continuous TX mode_ANT-1


2412 MHz

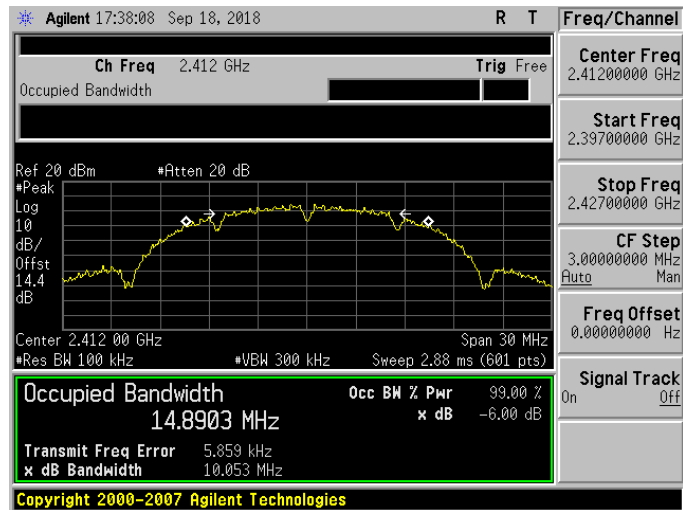

2437 MHz

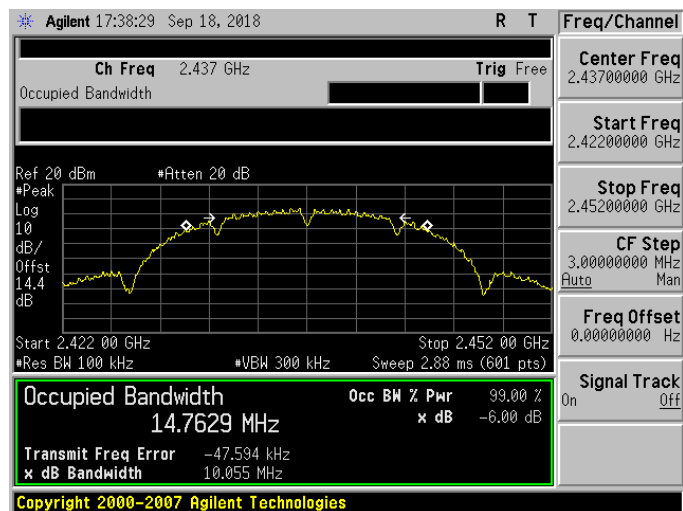


2462 MHz

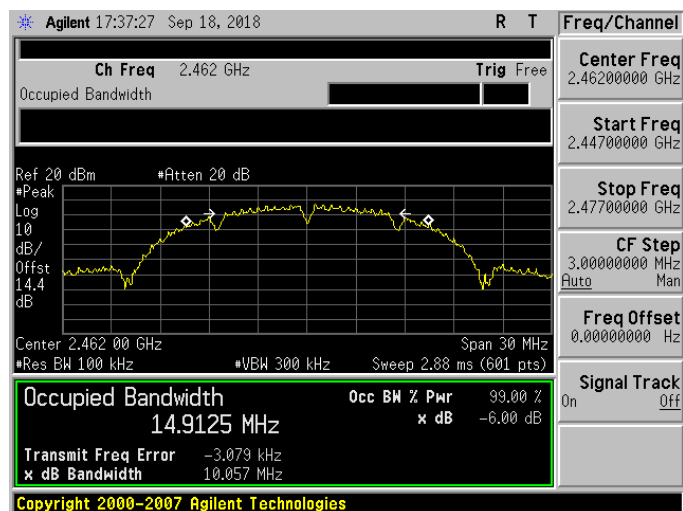


Mode 3: IEEE 802.11g Continuous TX mode_ANT-1


2412 MHz

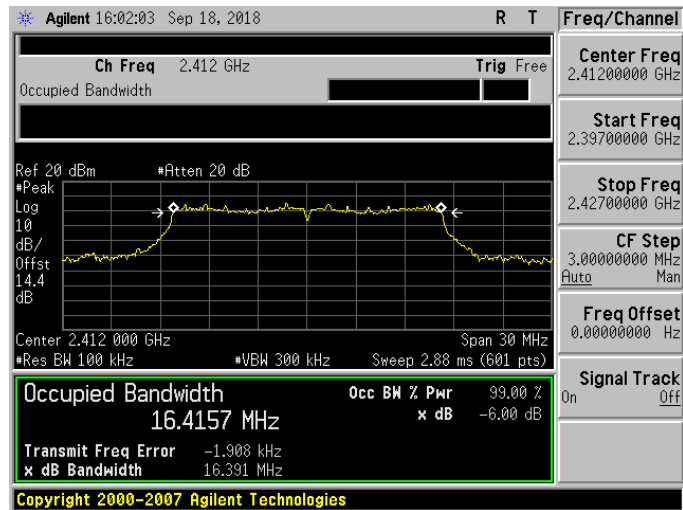

2437 MHz

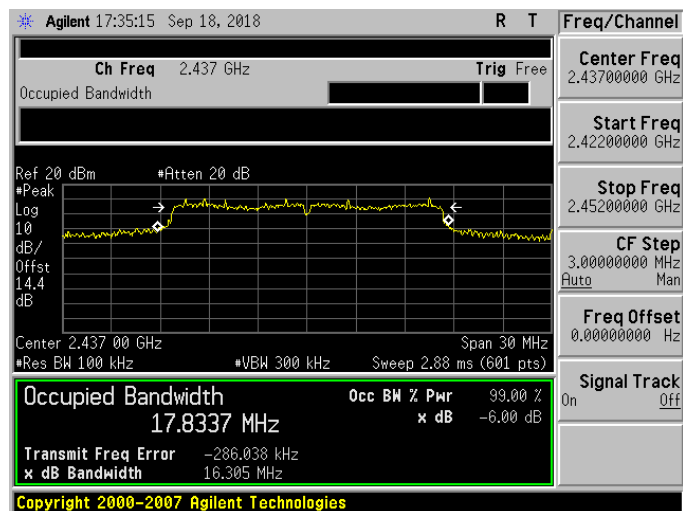


2462 MHz

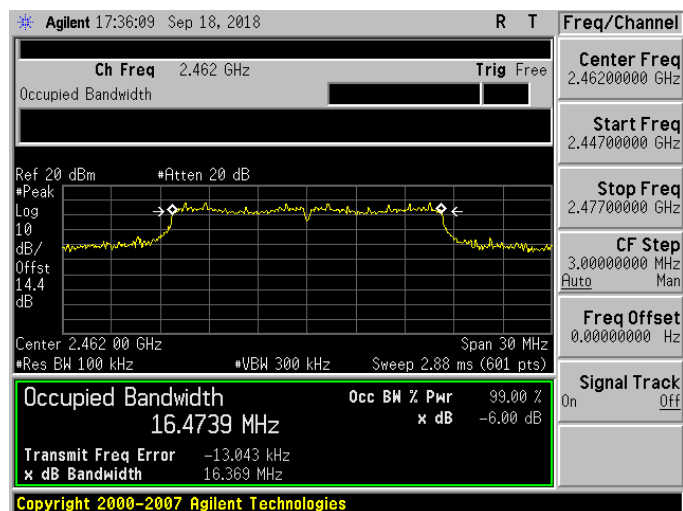


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

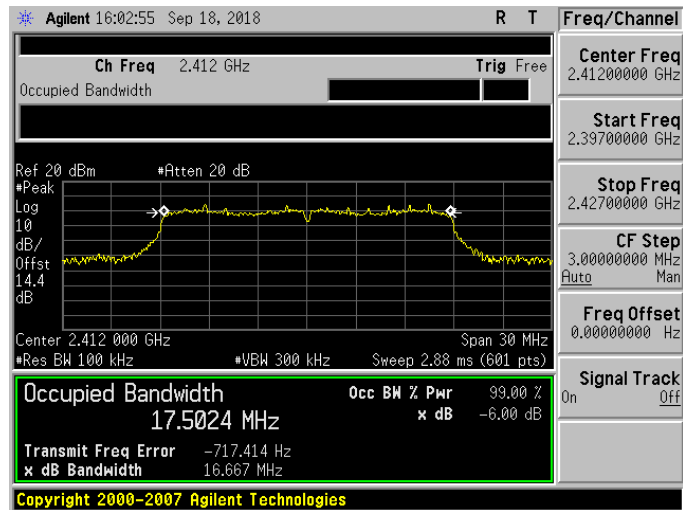

2437 MHz

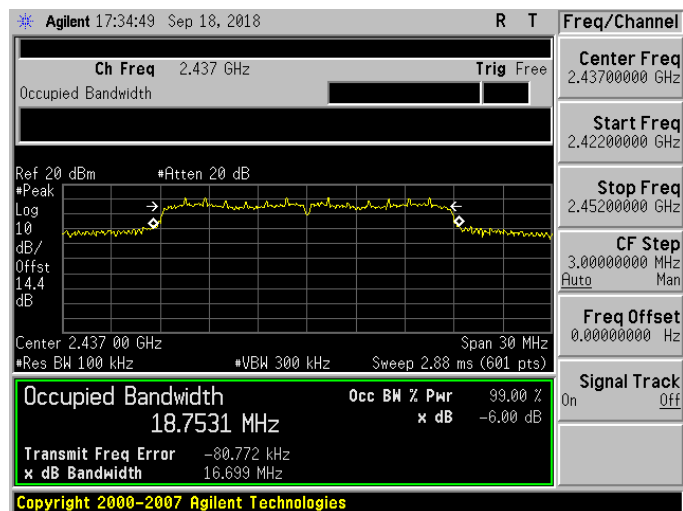


2462 MHz

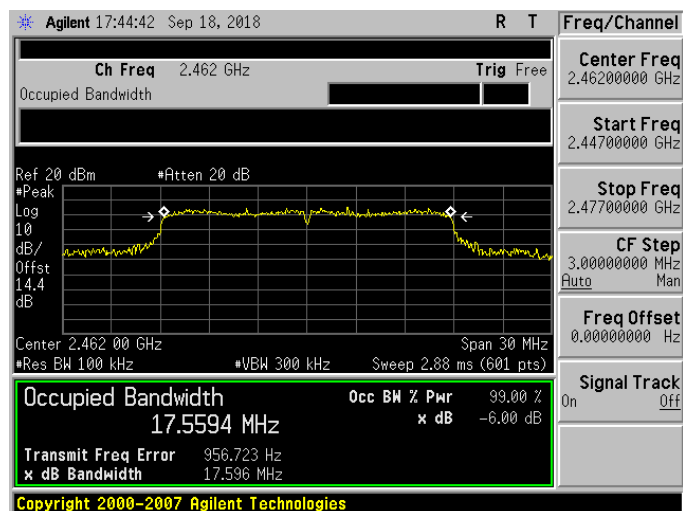




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

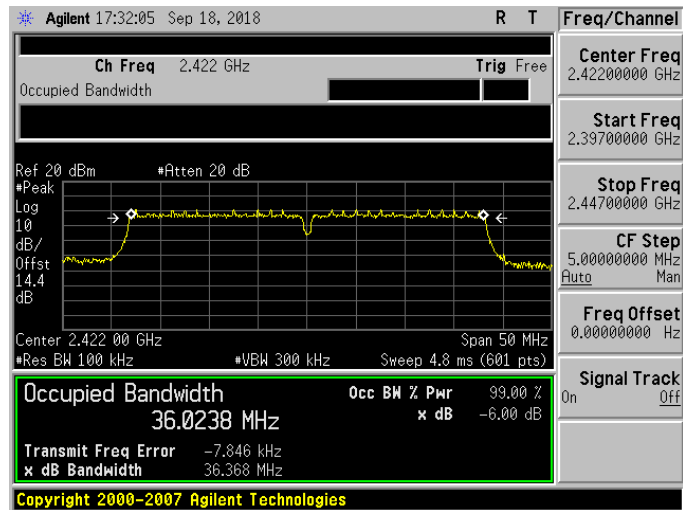

2437 MHz

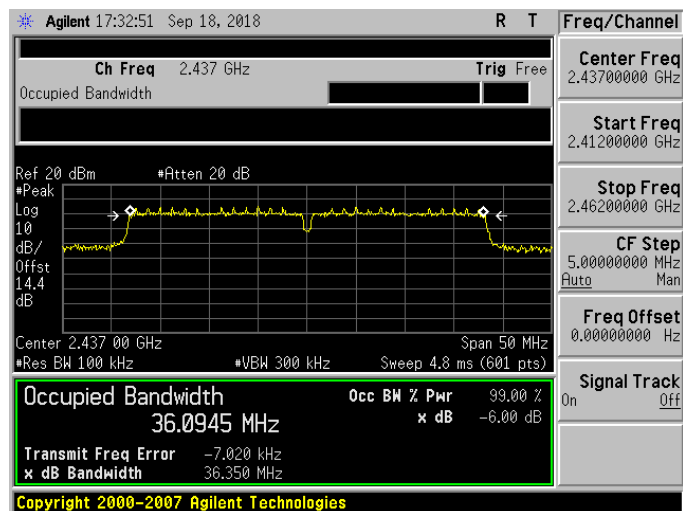

2452 MHz

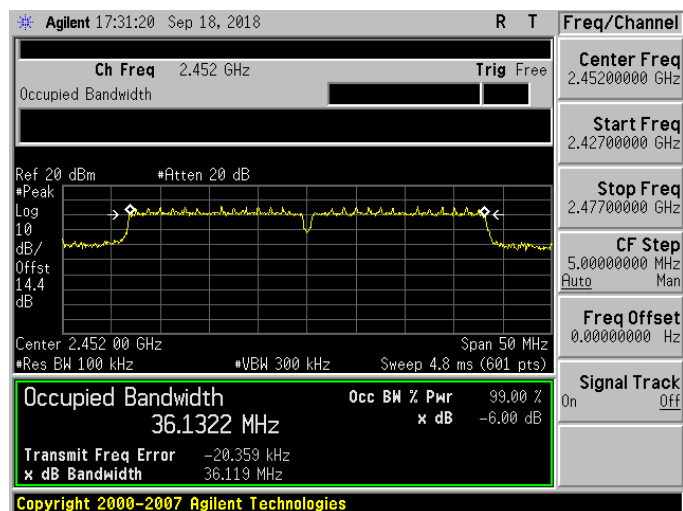





Beamforming on

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

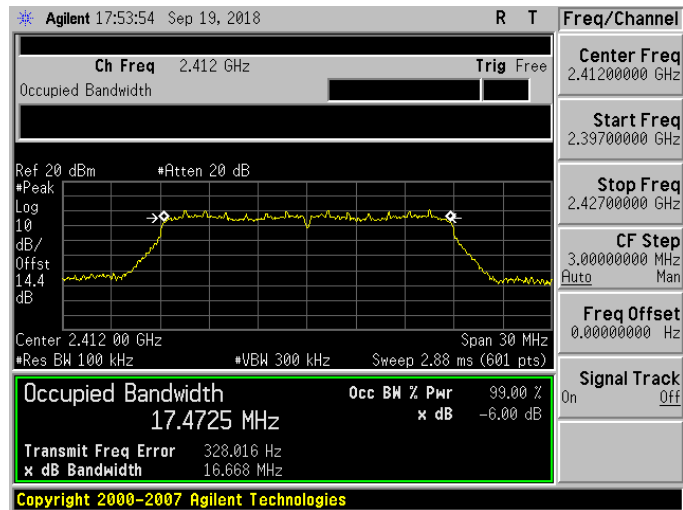

2437 MHz

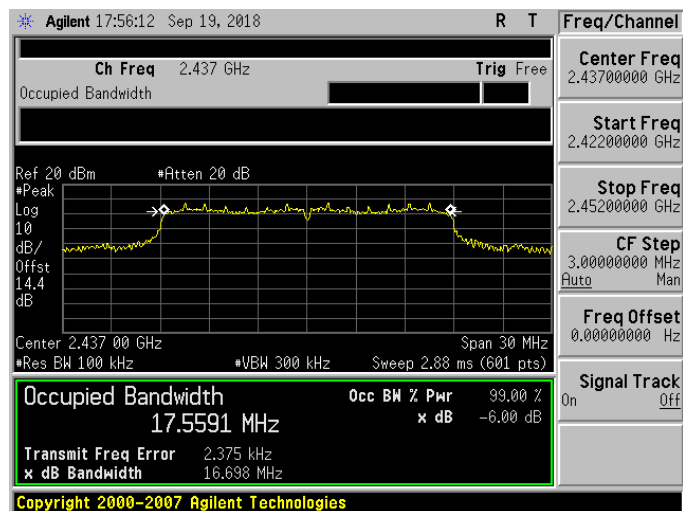


2462 MHz

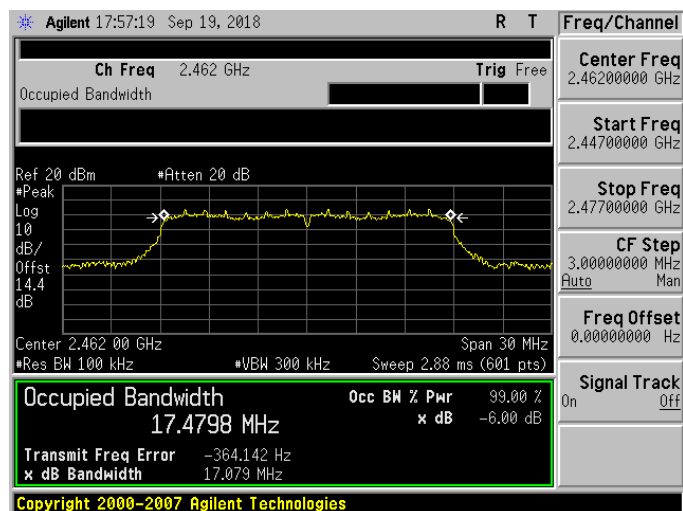




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

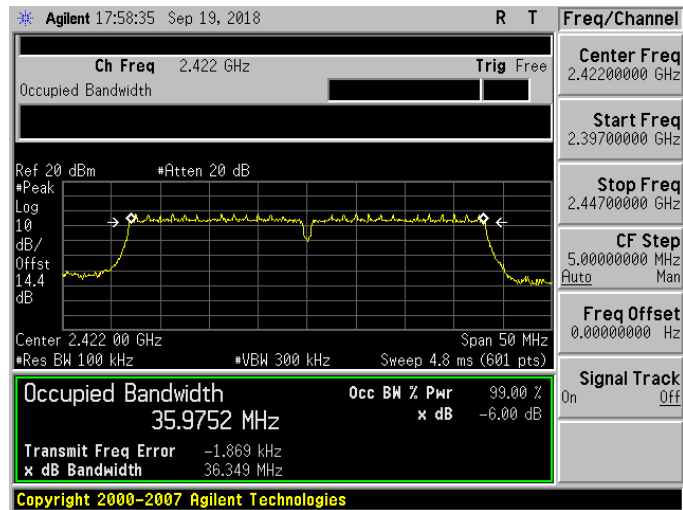

2437 MHz



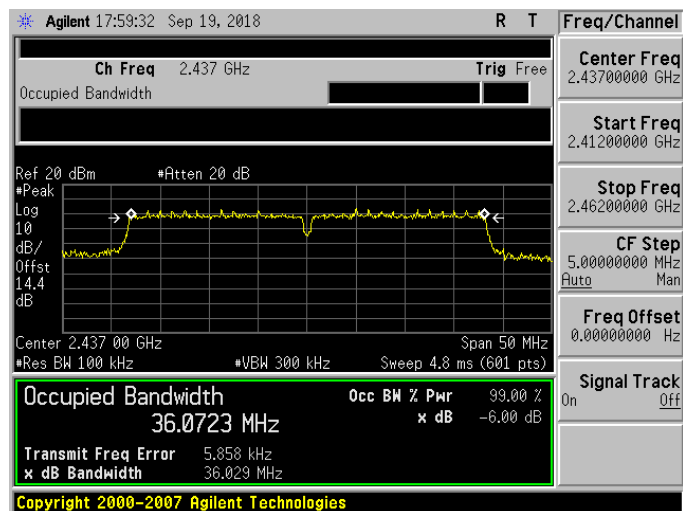


2452 MHz

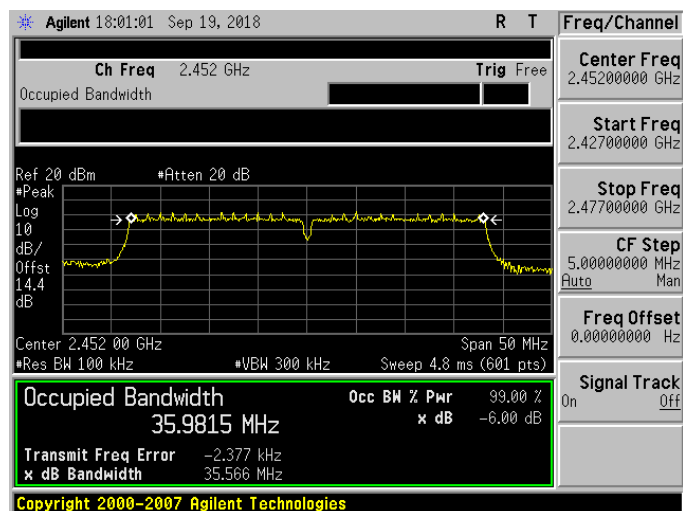




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1

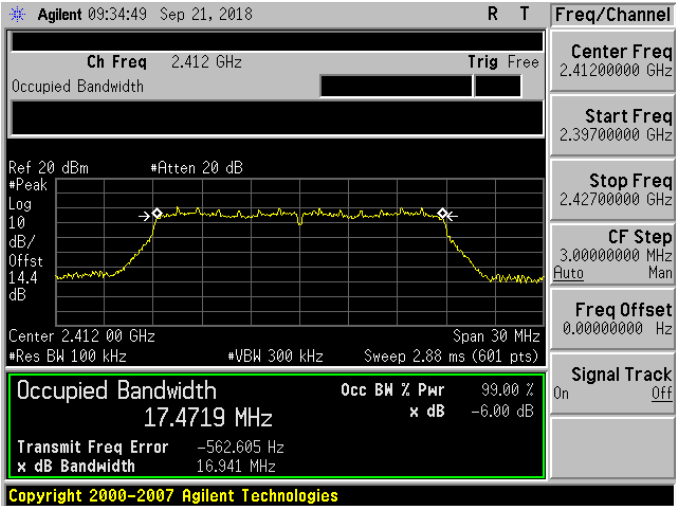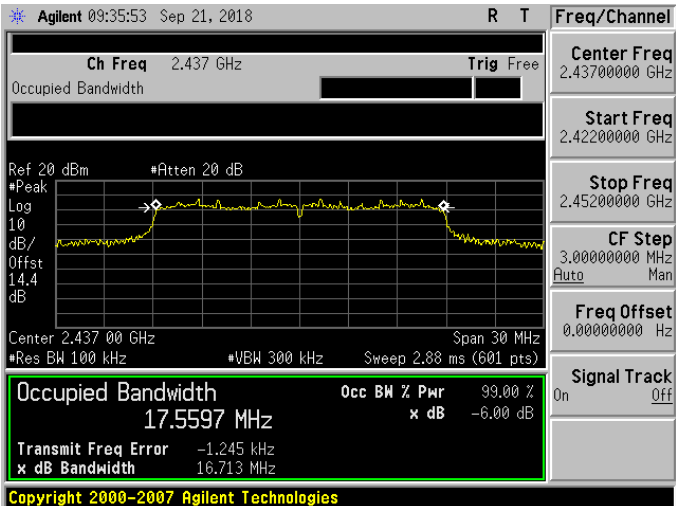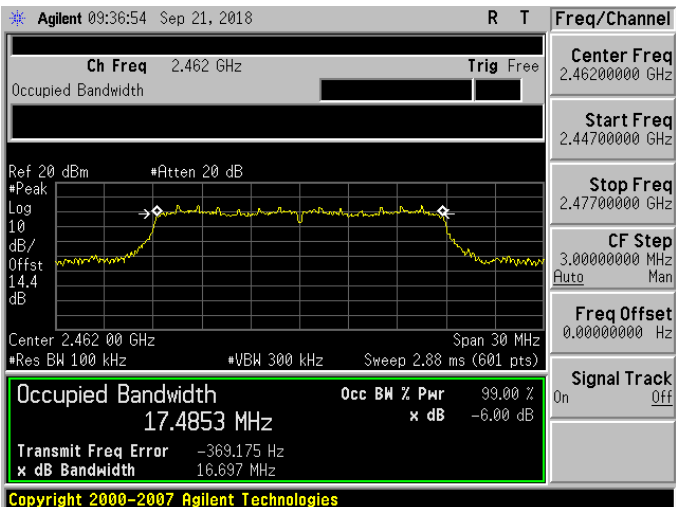2412 MHz	 Agilent 09:34:49 Sep 21, 2018 Ch Freq 2.412 GHz Trig Free Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm *Atten 20 dB Peak Log 10 dB/Offst 14.4 dB Center 2.412 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.4719 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -562.605 Hz x dB Bandwidth 16.941 MHz Copyright 2000-2007 Agilent Technologies
2437 MHz	 Agilent 09:35:53 Sep 21, 2018 Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm *Atten 20 dB Peak Log 10 dB/Offst 14.4 dB Center 2.437 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.5597 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -1.245 kHz x dB Bandwidth 16.713 MHz Copyright 2000-2007 Agilent Technologies
2462 MHz	 Agilent 09:36:54 Sep 21, 2018 Ch Freq 2.462 GHz Trig Free Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm *Atten 20 dB Peak Log 10 dB/Offst 14.4 dB Center 2.462 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.4853 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -369.175 Hz x dB Bandwidth 16.697 MHz Copyright 2000-2007 Agilent Technologies




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

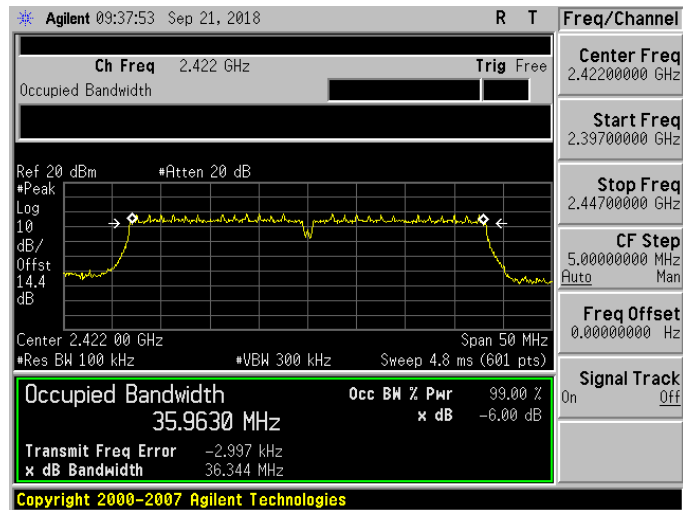

2437 MHz

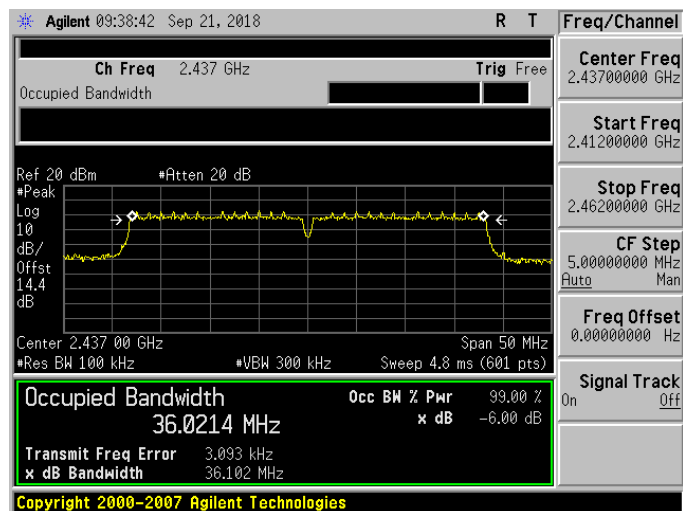

2452 MHz

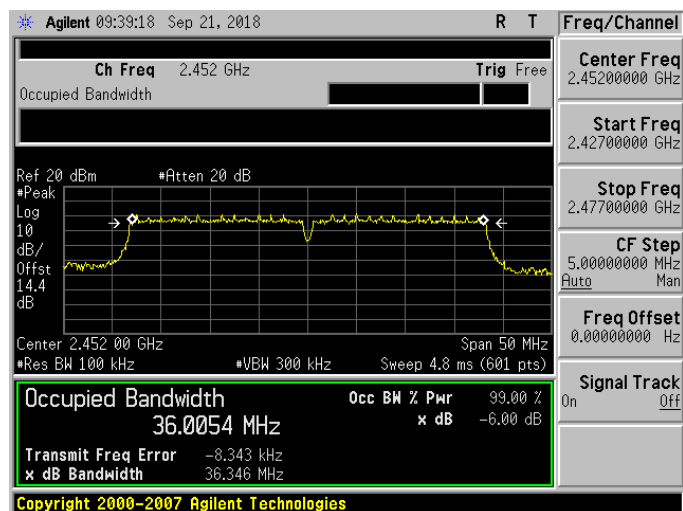

Maximum Power Spectral Density Measurement


Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)			Limit (dBm/ 3 kHz)
		ANT-0	ANT-1	ANT-0+1	
Mode 2	2412	-10.280	-10.040	-7.148	≤ 7.29
	2437	-7.770	-8.920	-5.297	≤ 7.29
	2462	-6.830	-6.810	-3.810	≤ 7.29
Mode 3	2412	-7.950	-9.720	-5.735	≤ 7.29
	2437	-3.220	-3.410	-0.304	≤ 7.29
	2462	-6.690	-7.230	-3.941	≤ 7.29
Mode 4	2412	-8.760	-10.630	-6.585	≤ 7.29
	2437	-3.450	-3.130	-0.277	≤ 7.29
	2462	-3.990	-6.360	-2.005	≤ 7.29
Mode 5	2422	-13.210	-13.380	-10.284	≤ 7.29
	2437	-10.250	-10.880	-7.543	≤ 7.29
	2452	-11.610	-12.650	-9.089	≤ 7.29

Beamforming on


Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)			Limit (dBm/ 3 kHz)
		ANT-0	ANT-1	ANT-0+1	
Mode 4	2412	-15.170	-14.650	-11.892	≤ 7.29
	2437	-8.140	-8.100	-5.110	≤ 7.29
	2462	-11.000	-11.560	-8.261	≤ 7.29
Mode 5	2422	-16.510	-16.840	-13.662	≤ 7.29
	2437	-12.980	-12.700	-9.827	≤ 7.29
	2452	-13.960	-13.560	-10.745	≤ 7.29

Mode 2: IEEE 802.11b Continuous TX mode_ANT-0


2412 MHz

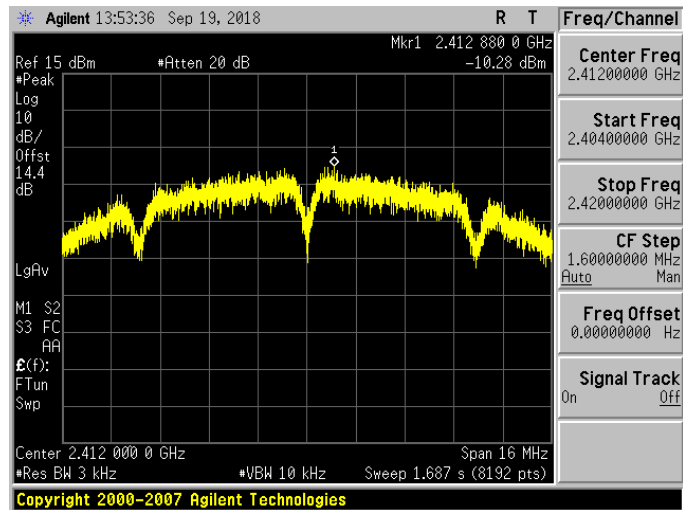

2437 MHz

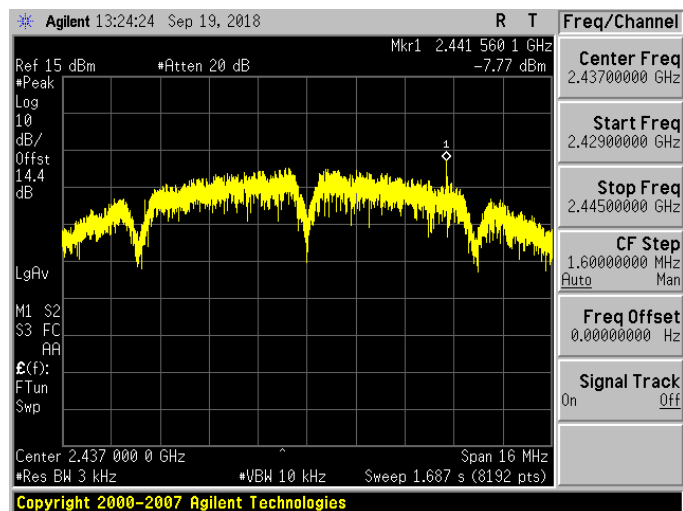


2462 MHz

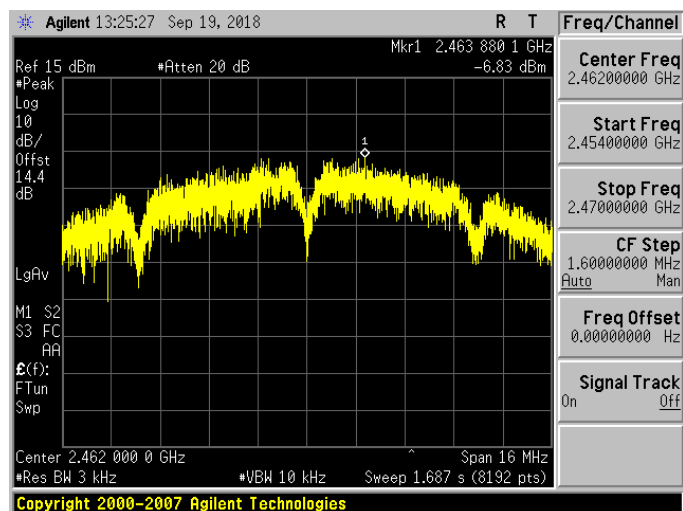


Mode 3: IEEE 802.11g Continuous TX mode_ANT-0


2412 MHz

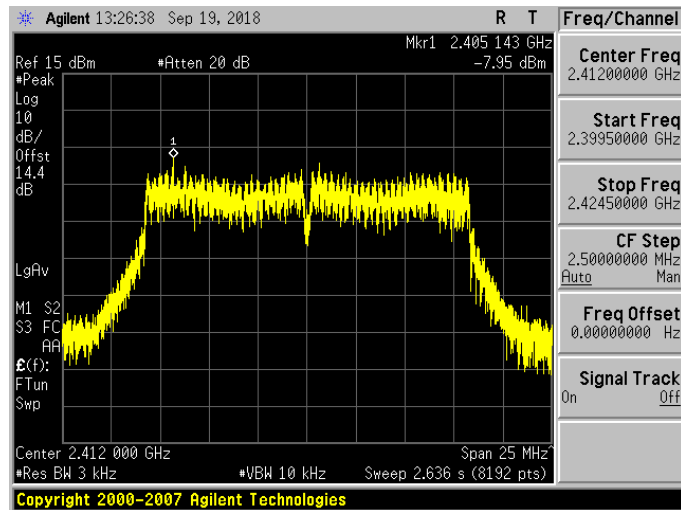

2437 MHz

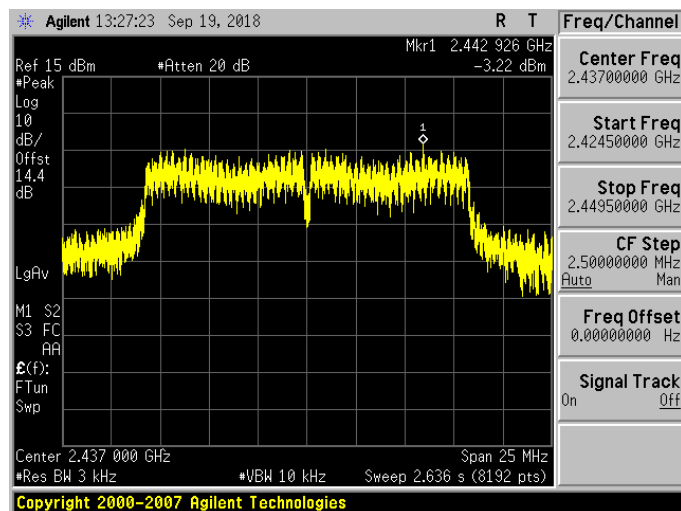


2462 MHz

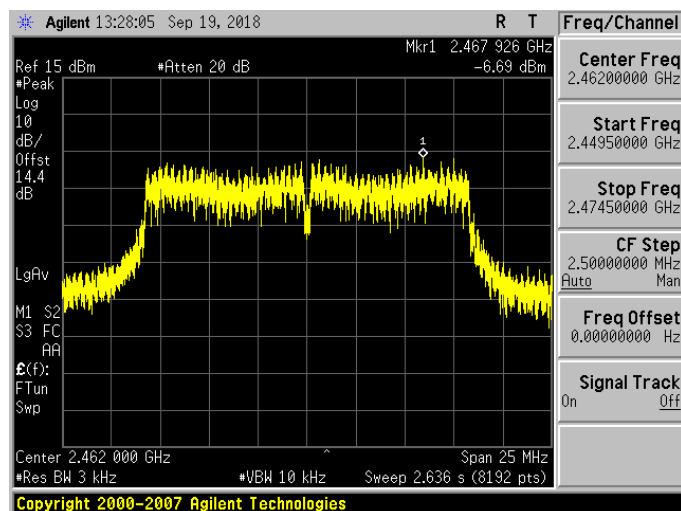


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

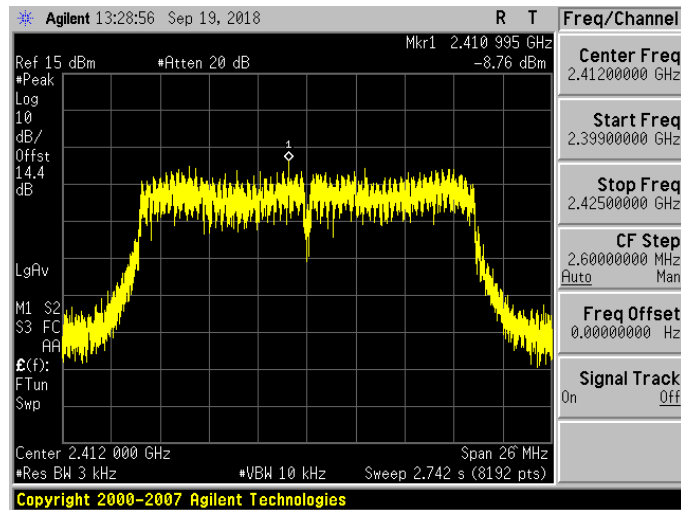

2437 MHz

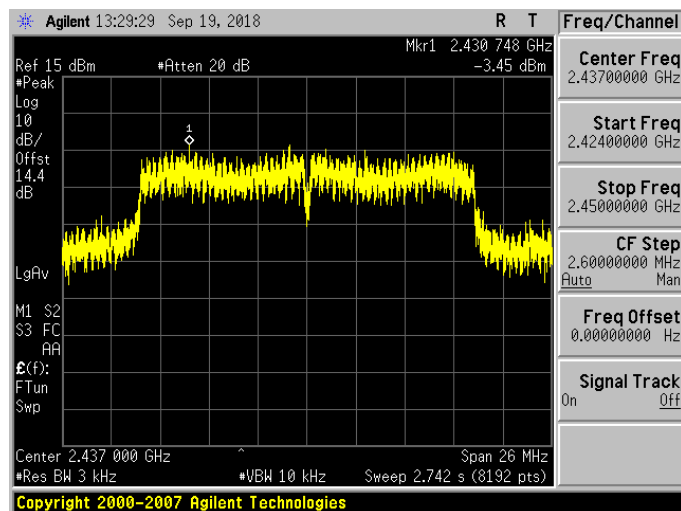


2462 MHz

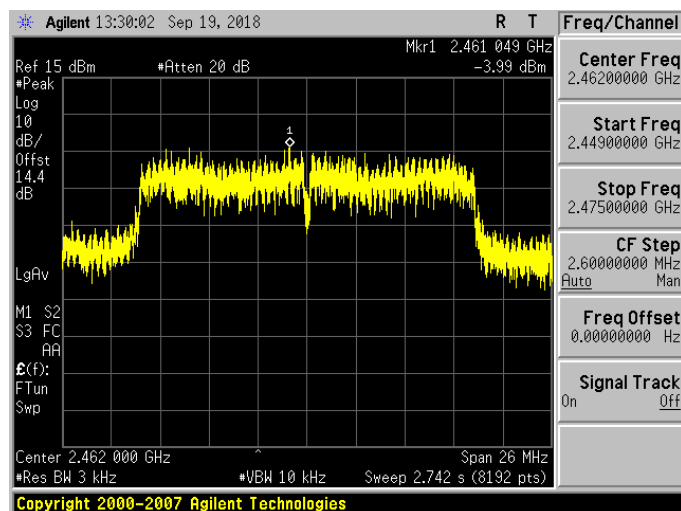


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

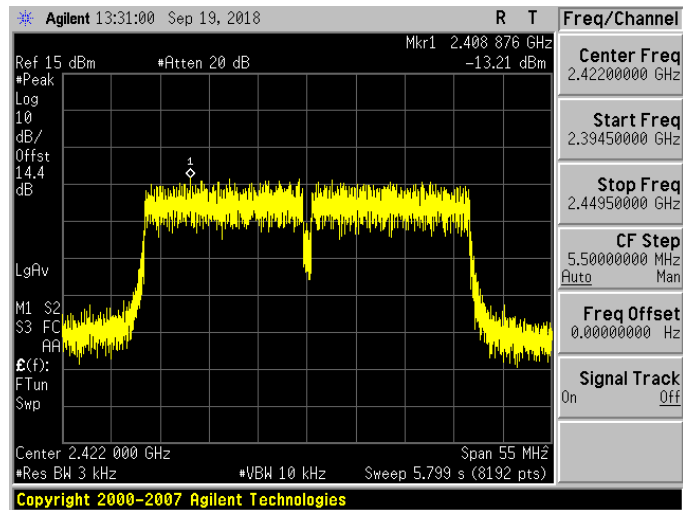

2437 MHz

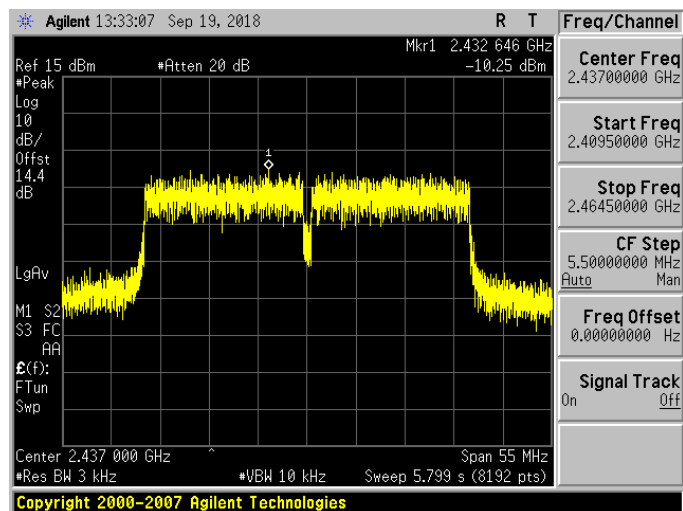


2452 MHz

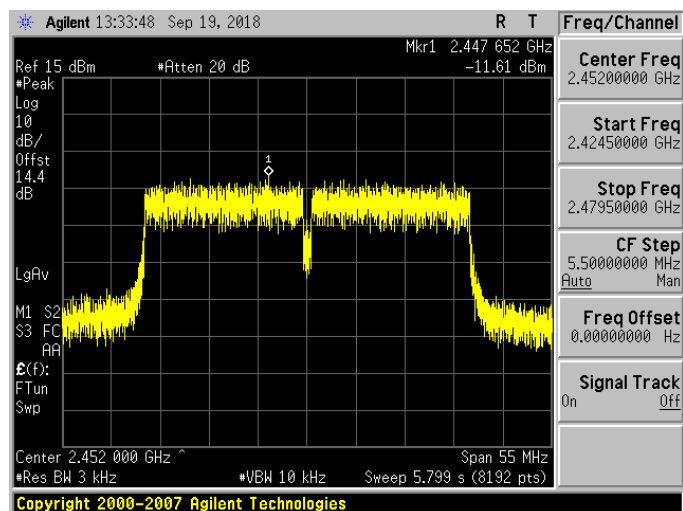




Mode 2: IEEE 802.11b Continuous TX mode_ANT-1


2412 MHz

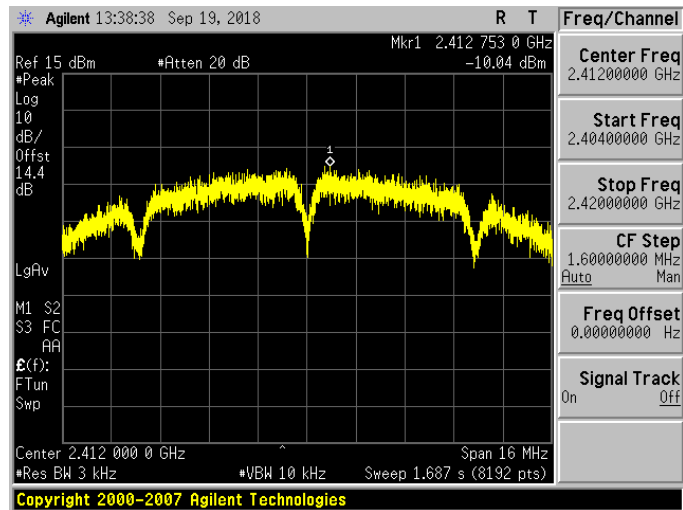

2437 MHz

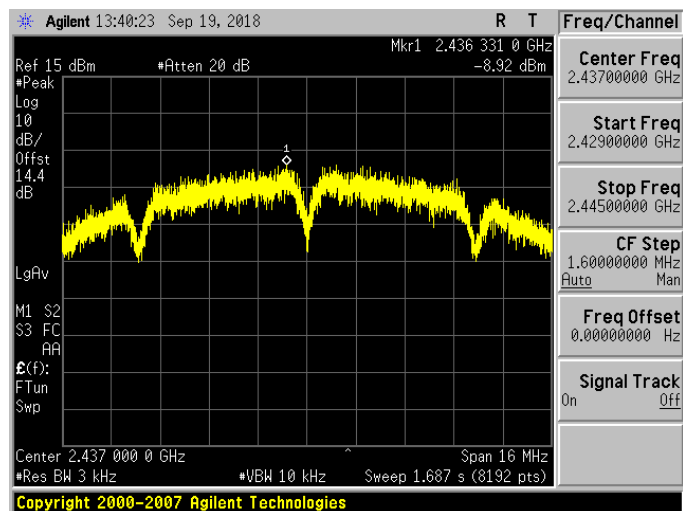


2462 MHz

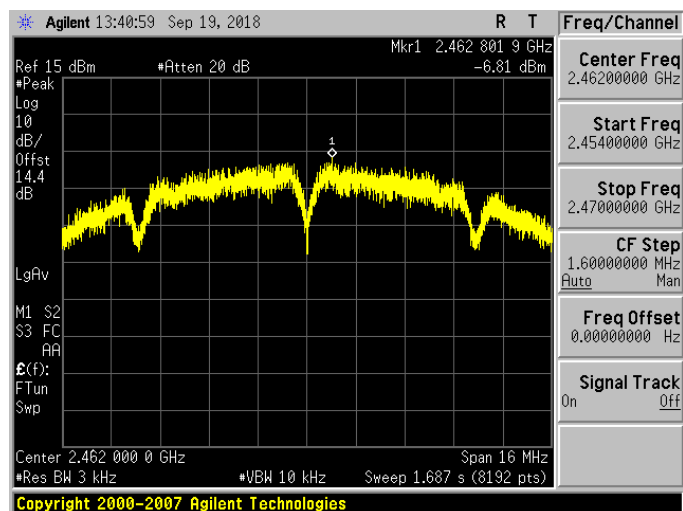


Mode 3: IEEE 802.11g Continuous TX mode_ANT-1


2412 MHz

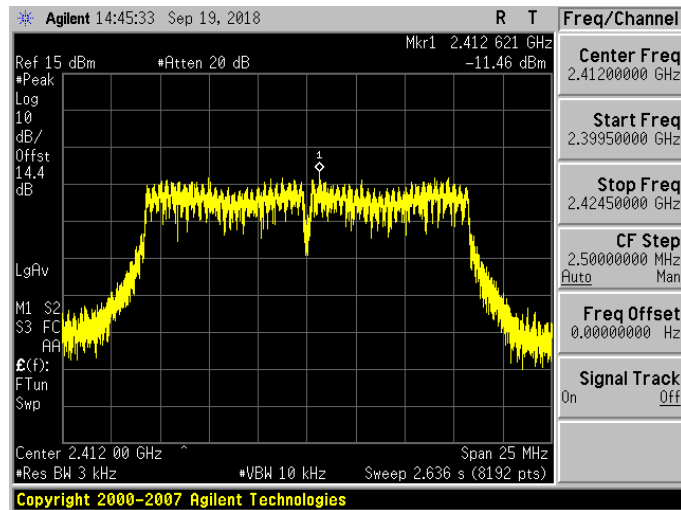

2437 MHz

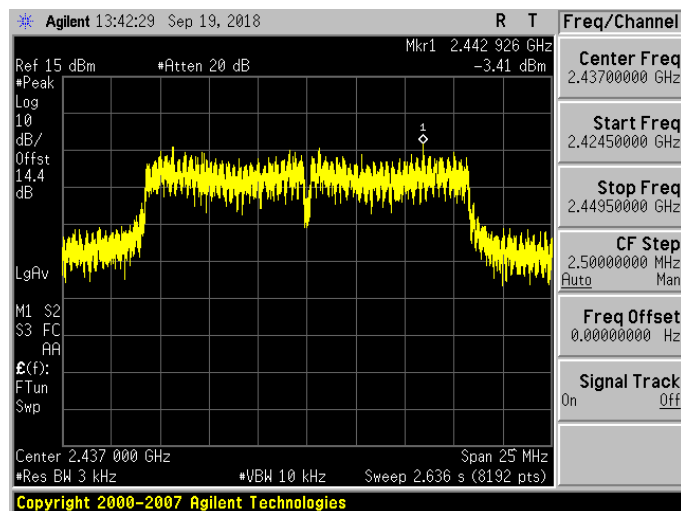


2462 MHz

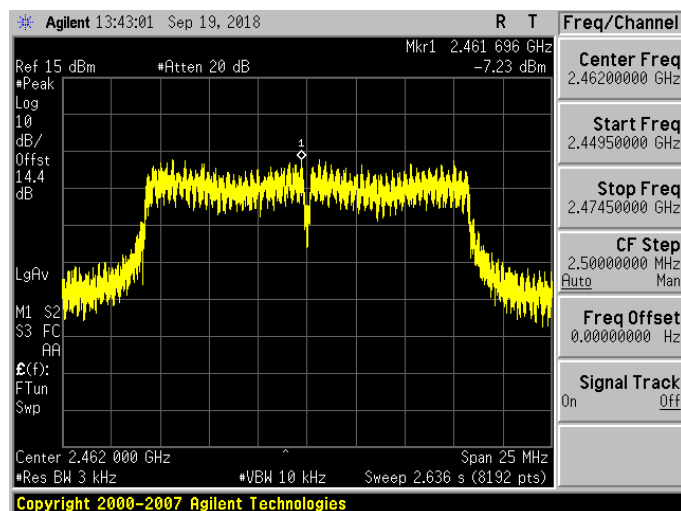


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

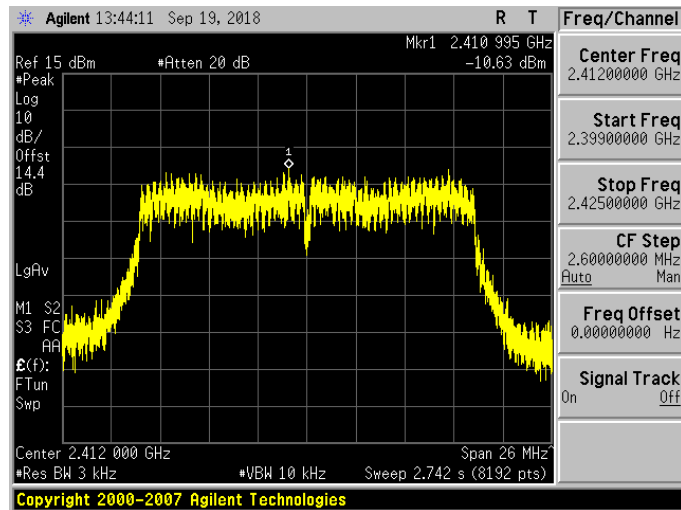

2437 MHz

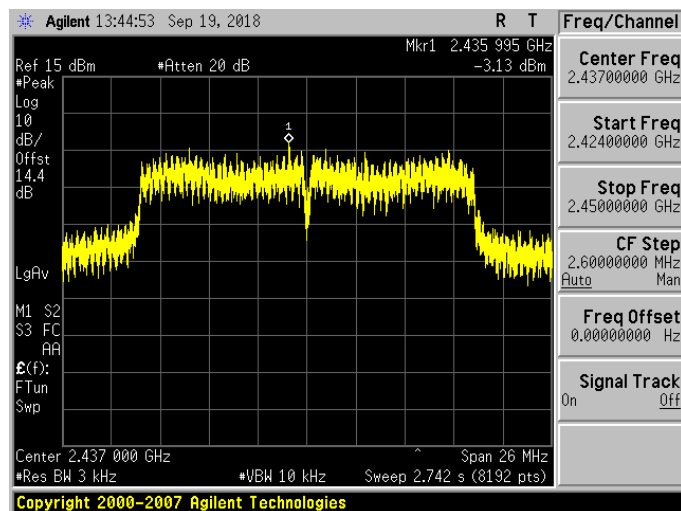


2462 MHz

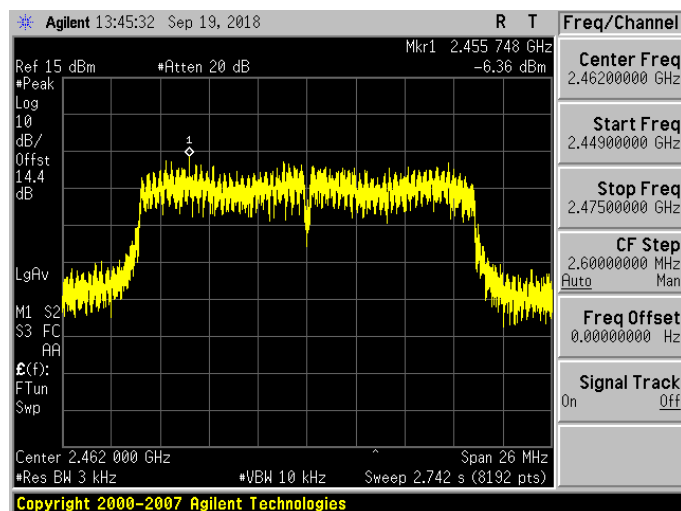


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

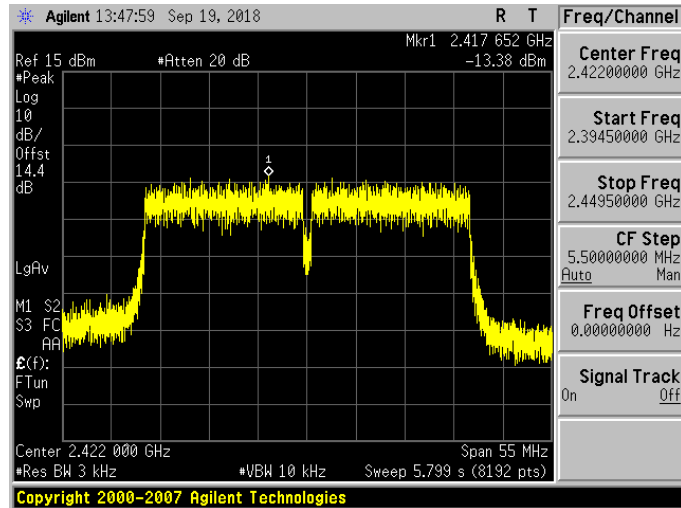

2437 MHz

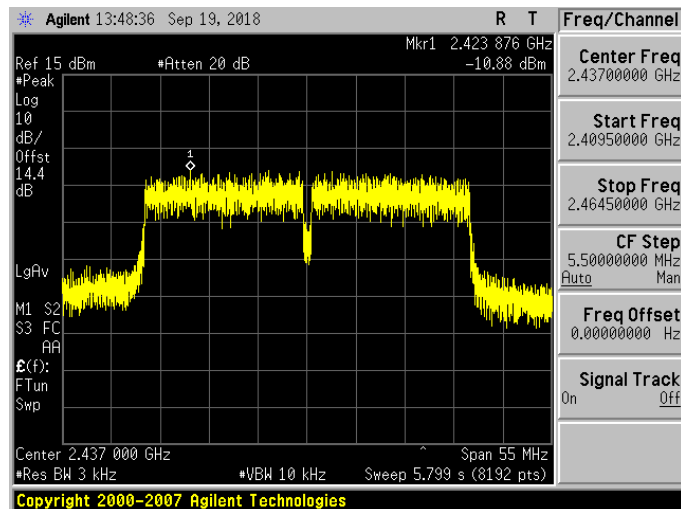


2452 MHz

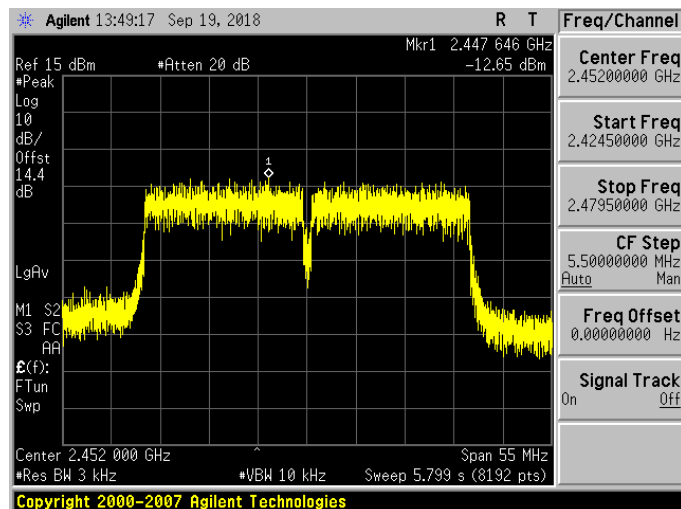


Beamforming on

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

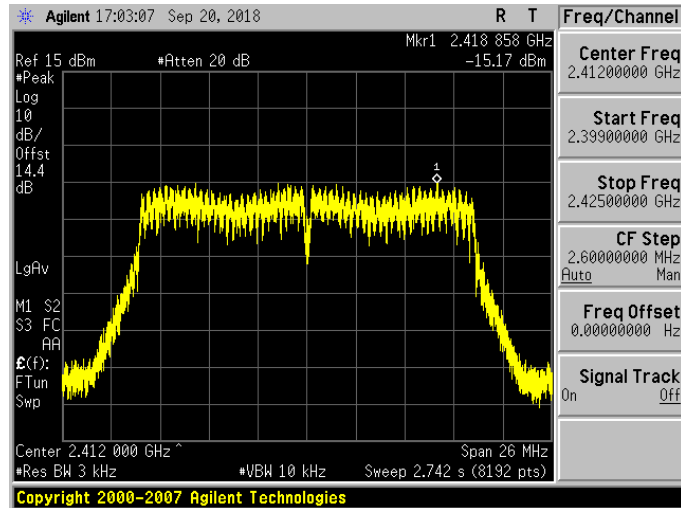

2437 MHz

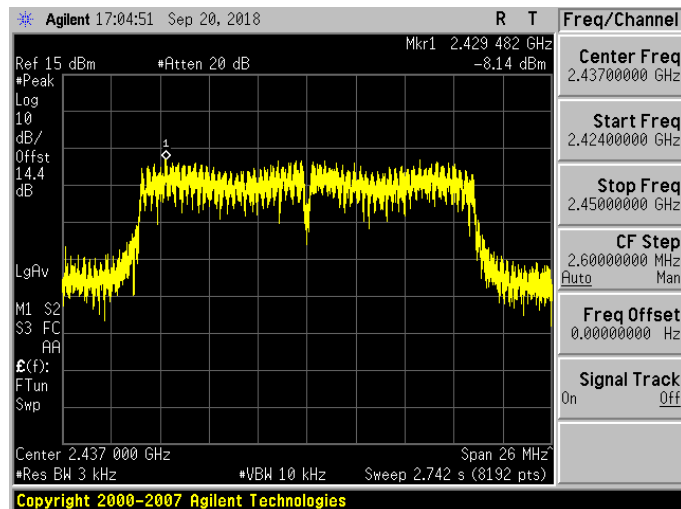


2462 MHz

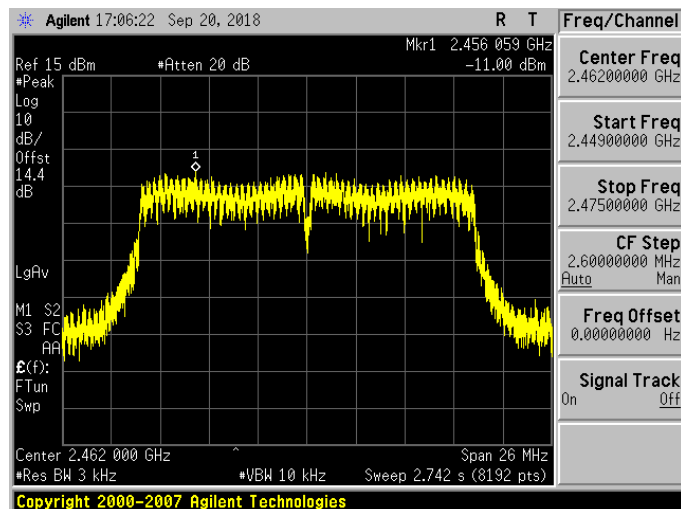


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

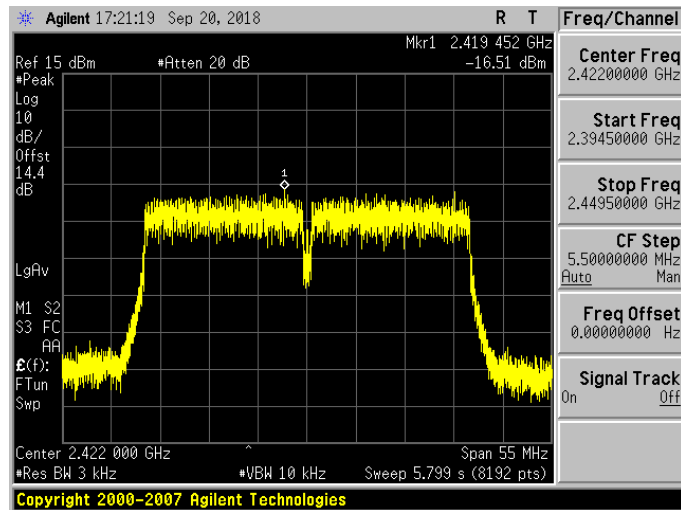

2437 MHz

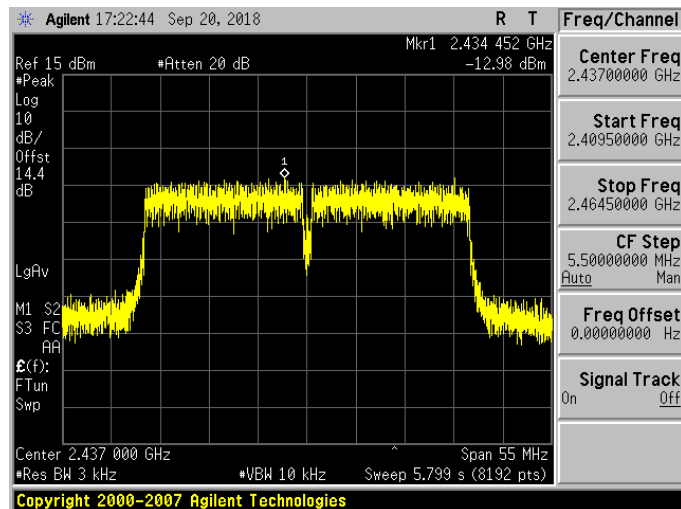


2452 MHz

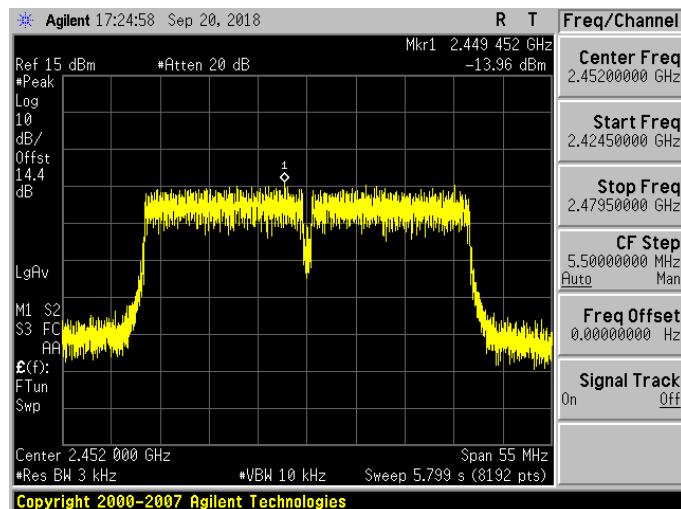


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

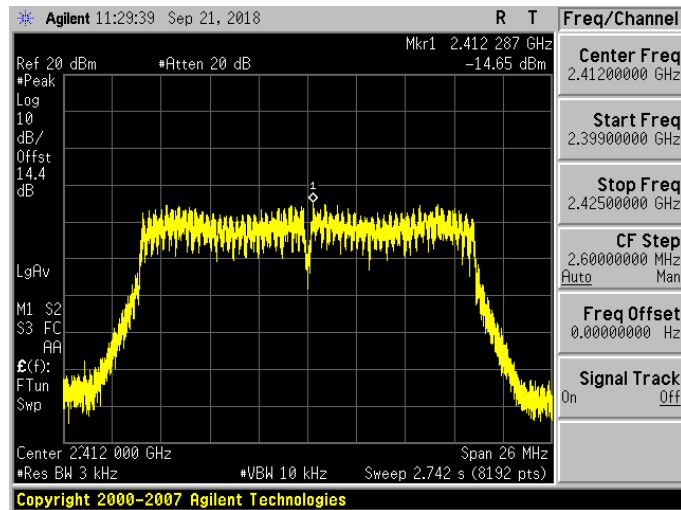

2437 MHz

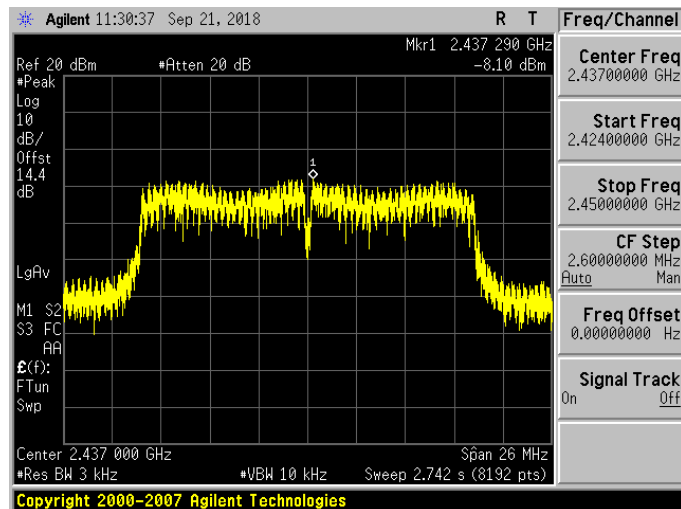


2462 MHz

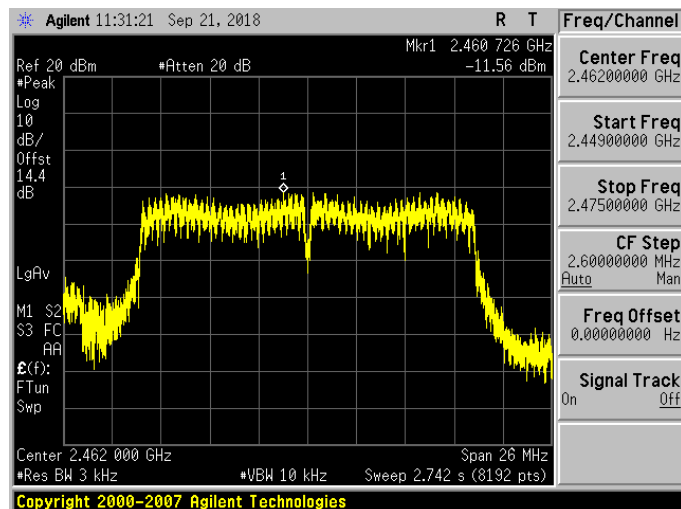


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

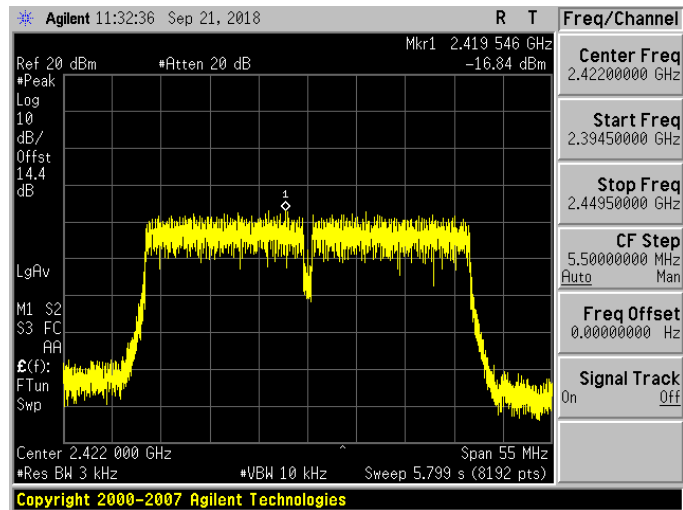

2437 MHz

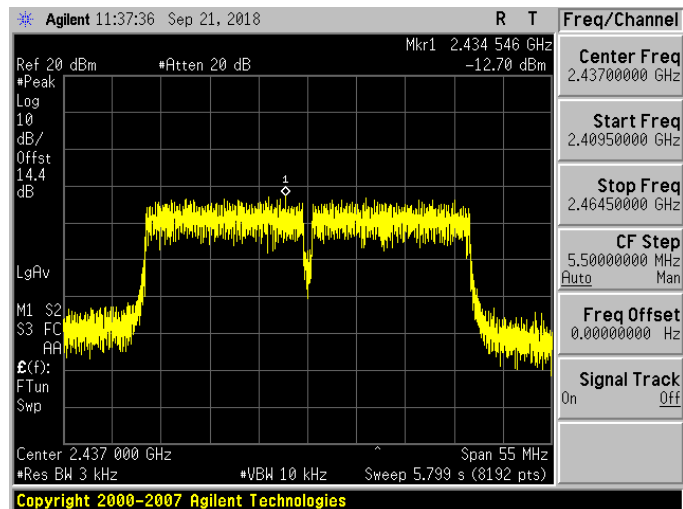

2452 MHz



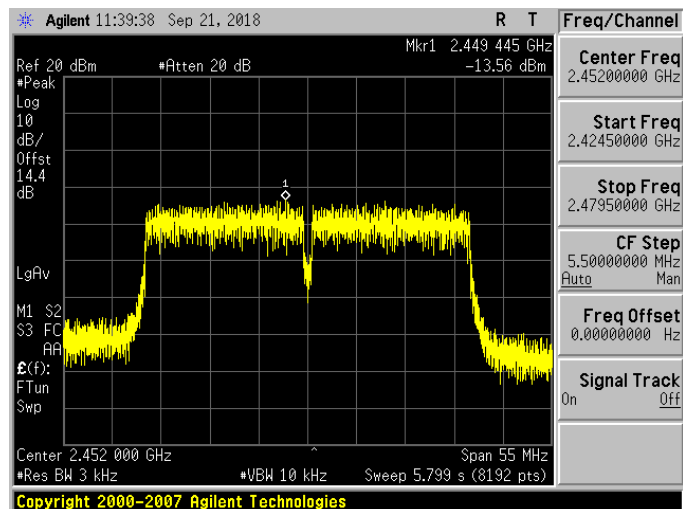


Out of Band Conducted Emissions Measurement

■ Test Graphs

Reference level


Mode 2: IEEE 802.11b Continuous TX mode_ANT-0

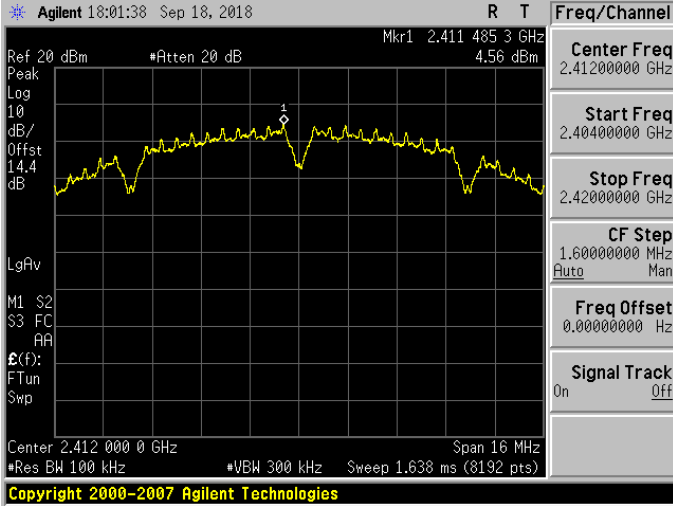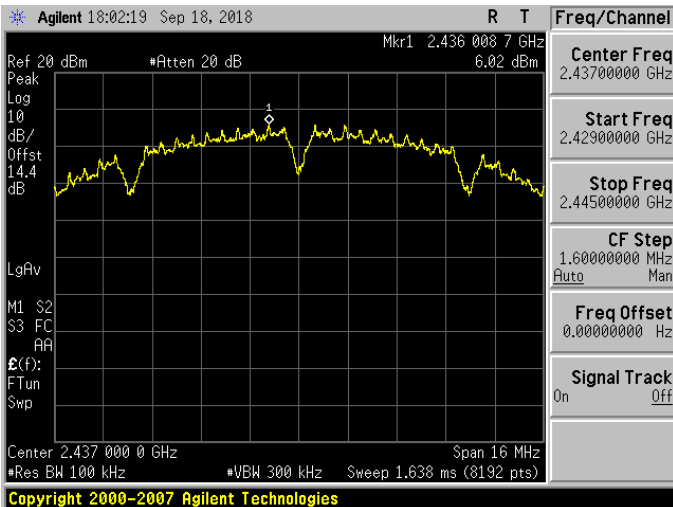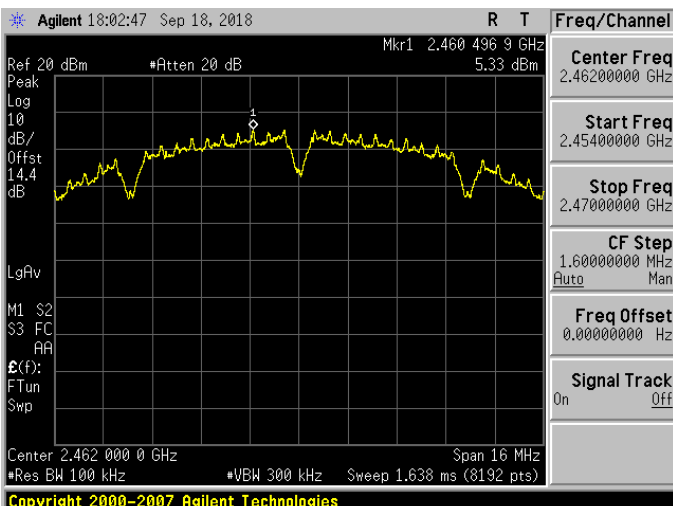2412 MHz	
2437 MHz	
2462 MHz	




Mode 3: IEEE 802.11g Continuous TX mode_ANT-0


2412 MHz

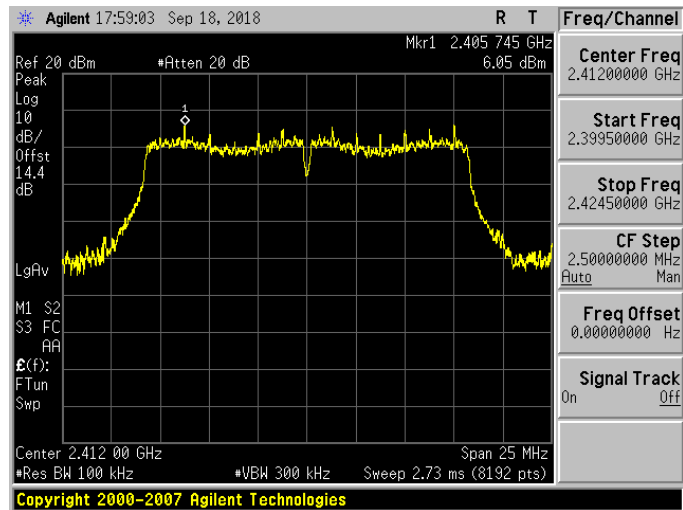

2437 MHz

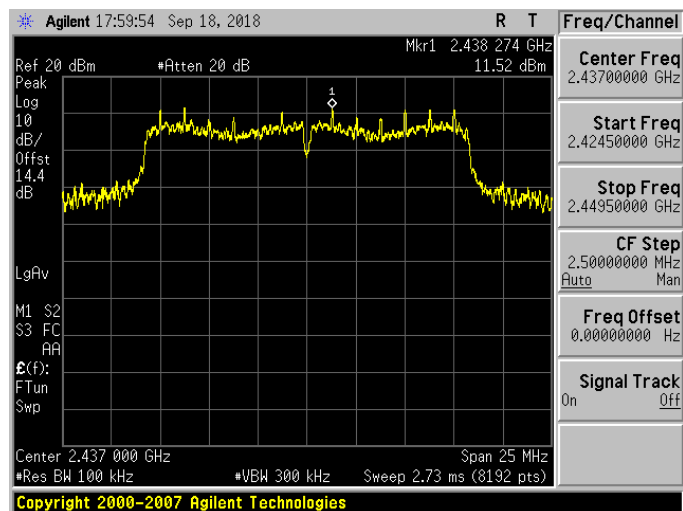


2462 MHz

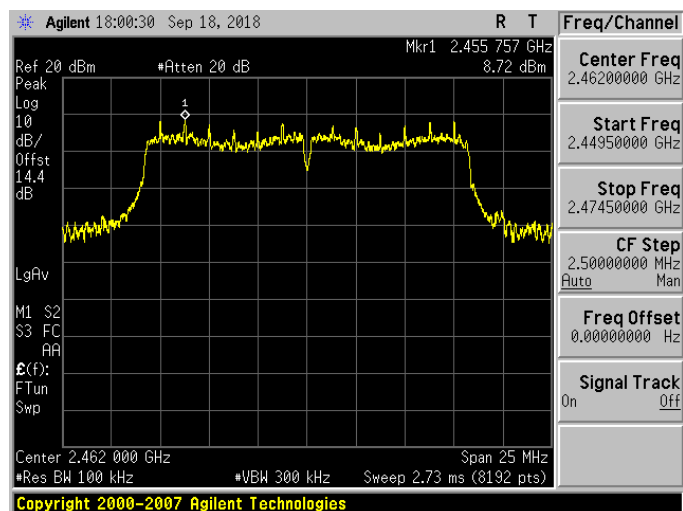




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

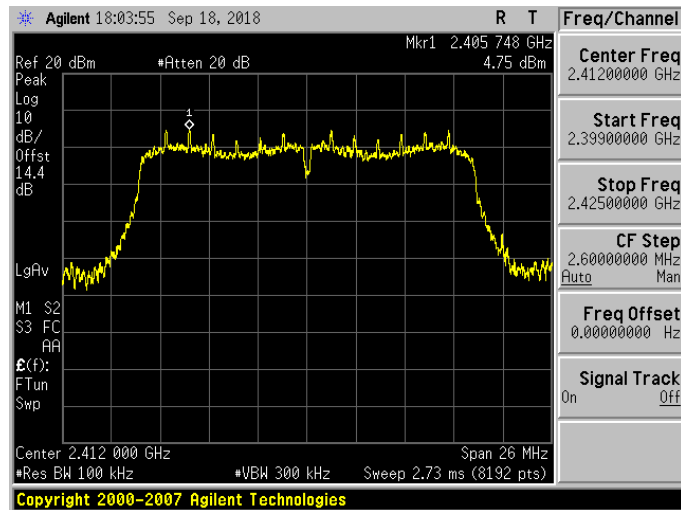

2437 MHz

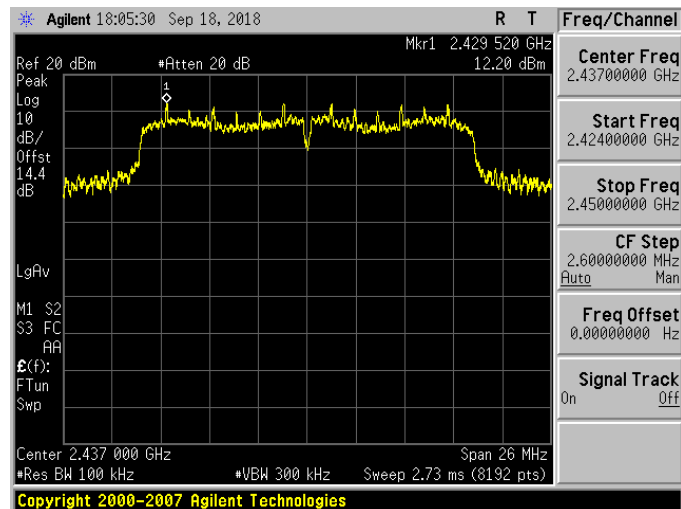


2462 MHz

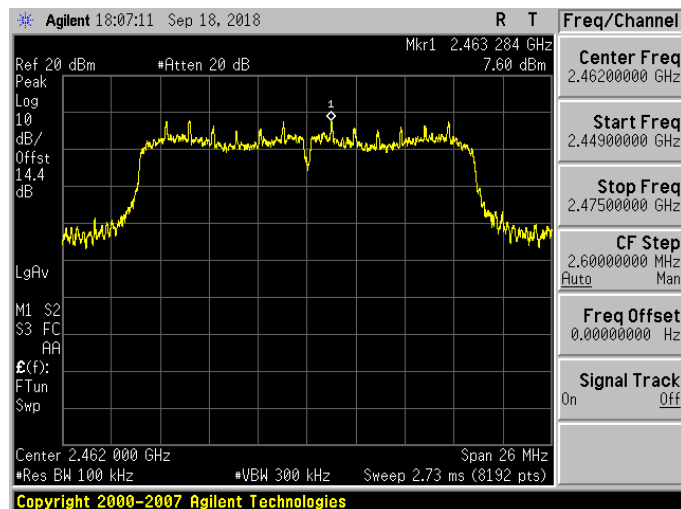




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

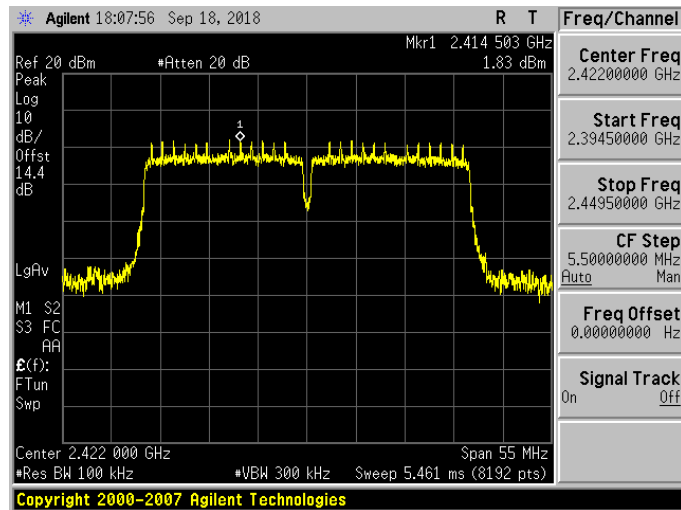

2437 MHz

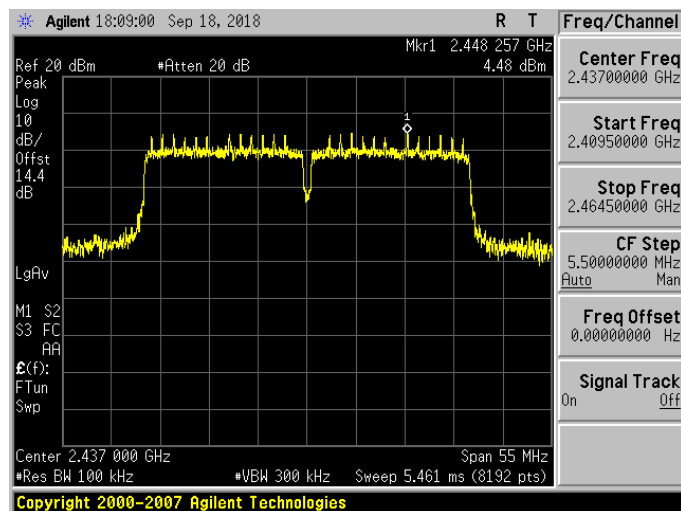


2452 MHz

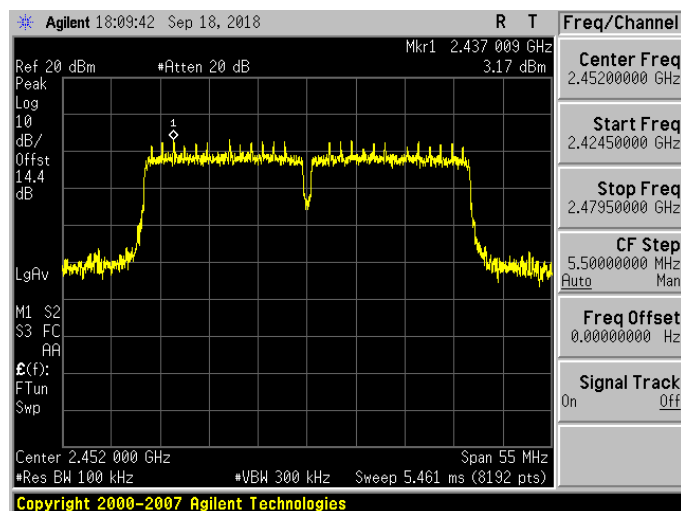


Mode 2: IEEE 802.11b Continuous TX mode_ANT-1


2412 MHz

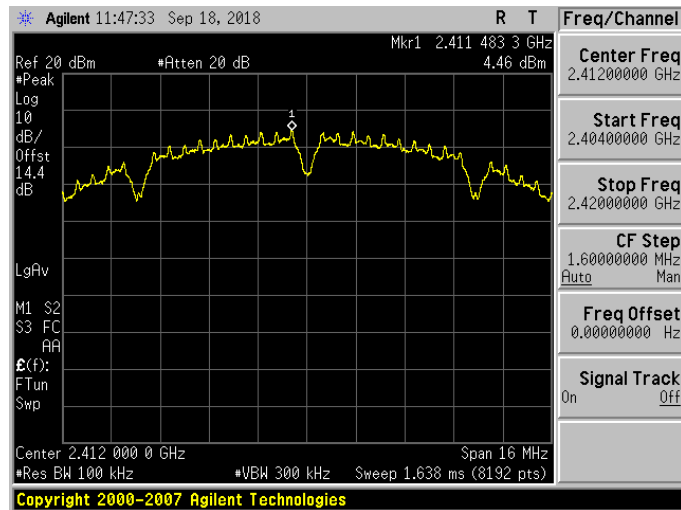

2437 MHz

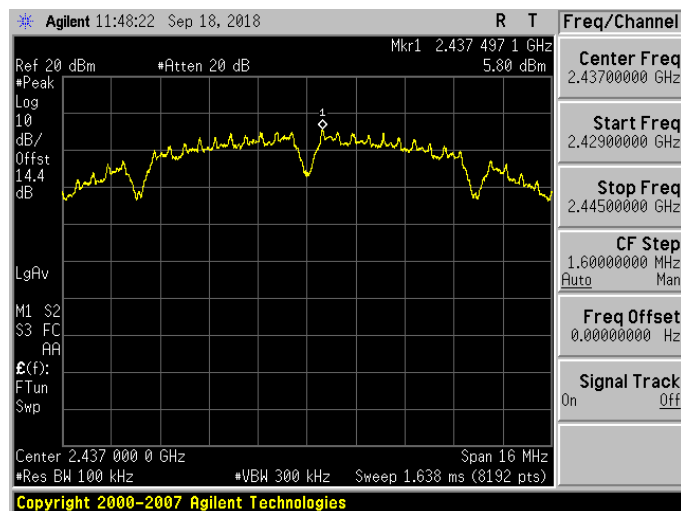


2462 MHz

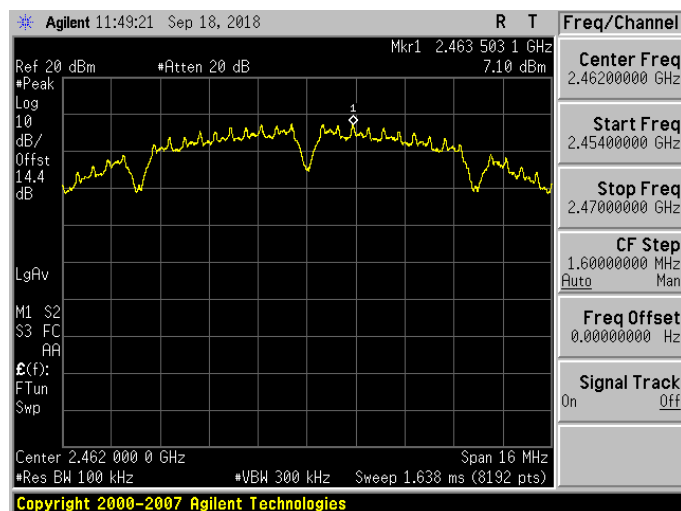


Mode 3: IEEE 802.11g Continuous TX mode_ANT-1


2412 MHz

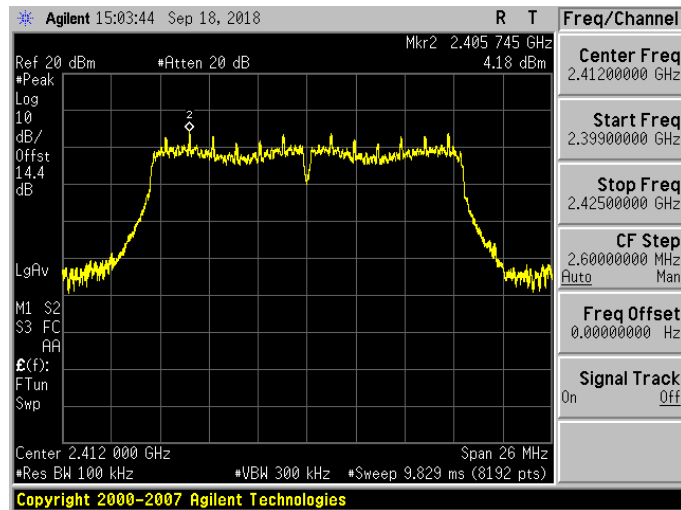

2437 MHz

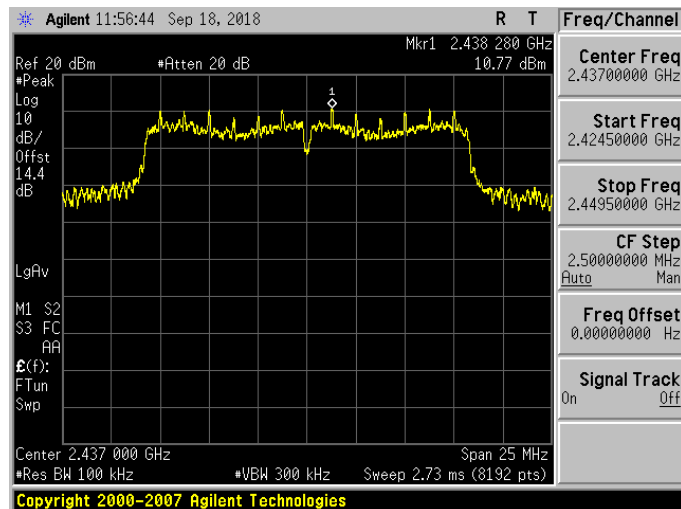


2462 MHz

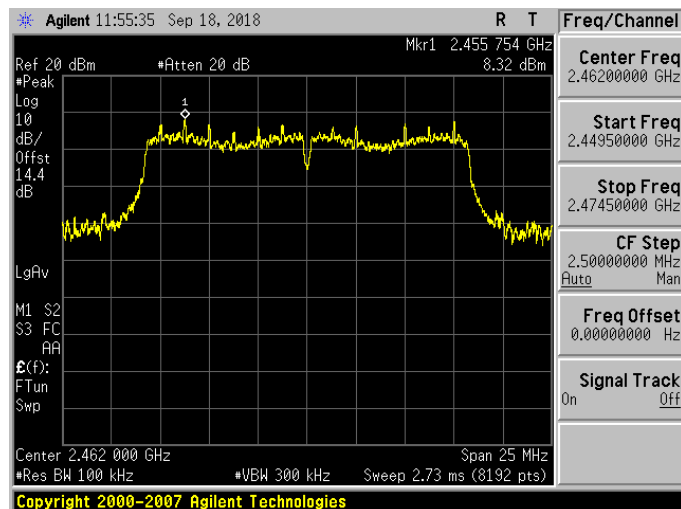


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

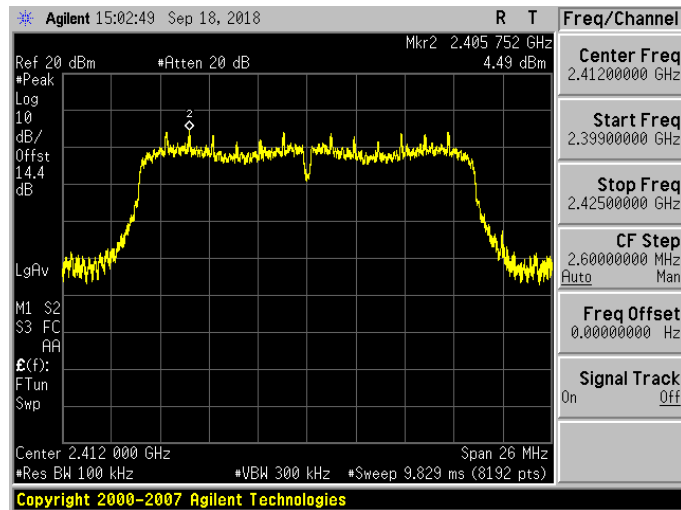

2437 MHz

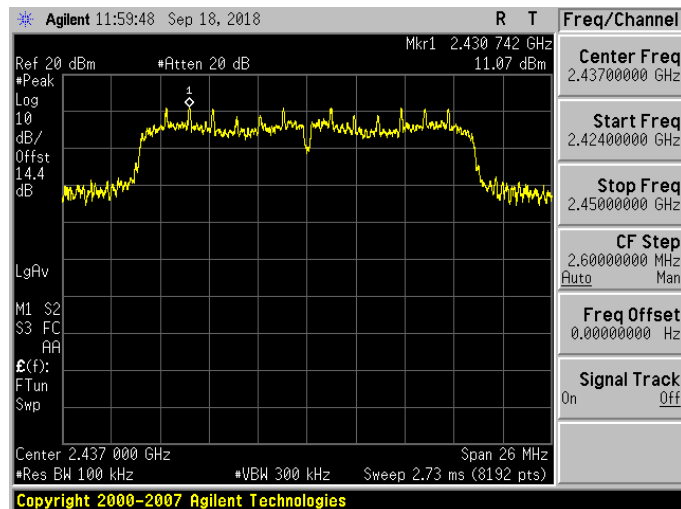


2462 MHz

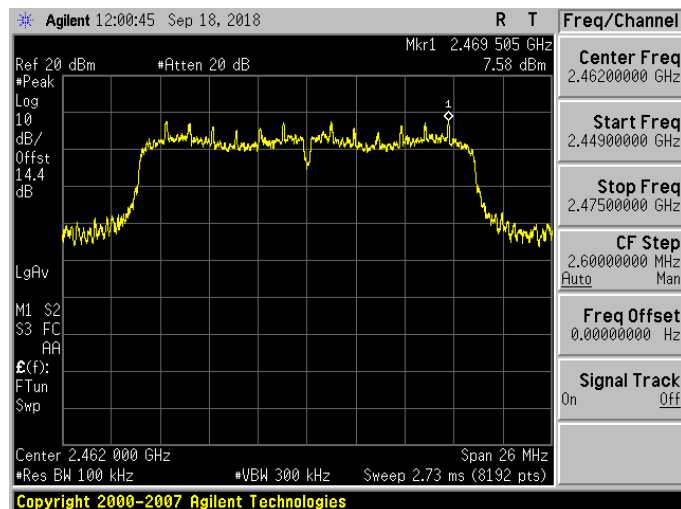




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

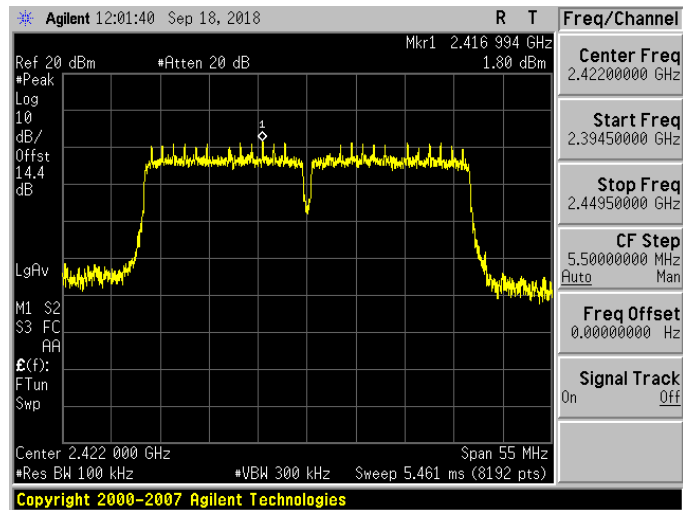

2437 MHz



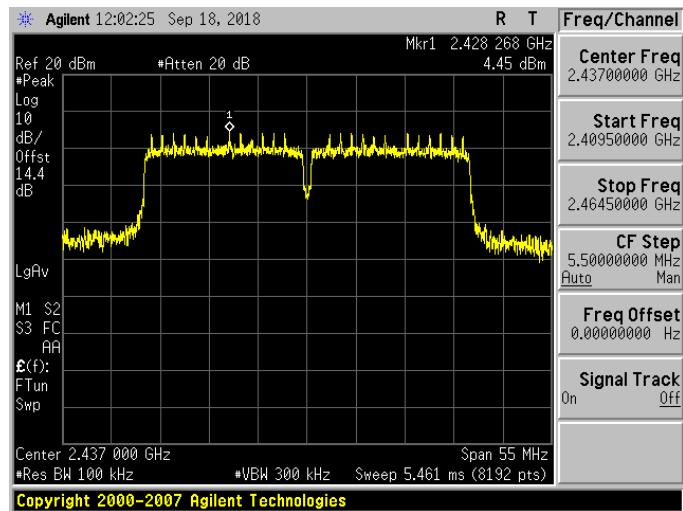


2452 MHz

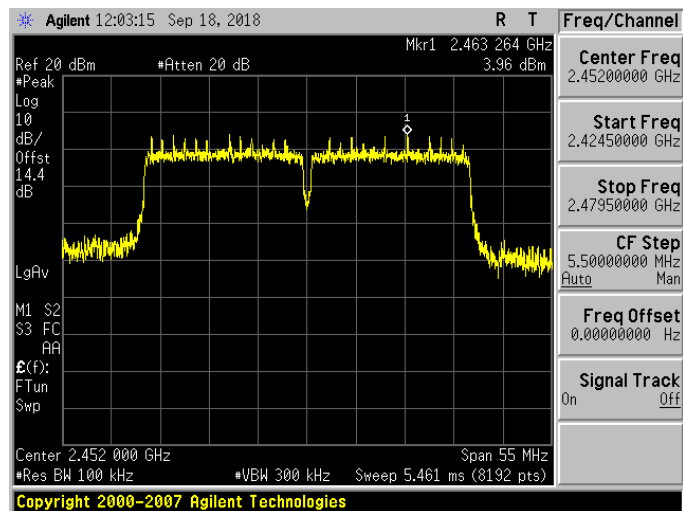

Out of Band Conducted Emissions


Mode 2: IEEE 802.11b Continuous TX mode_ANT-0

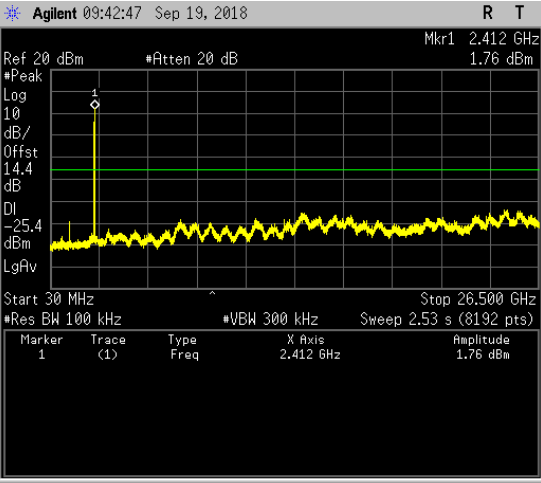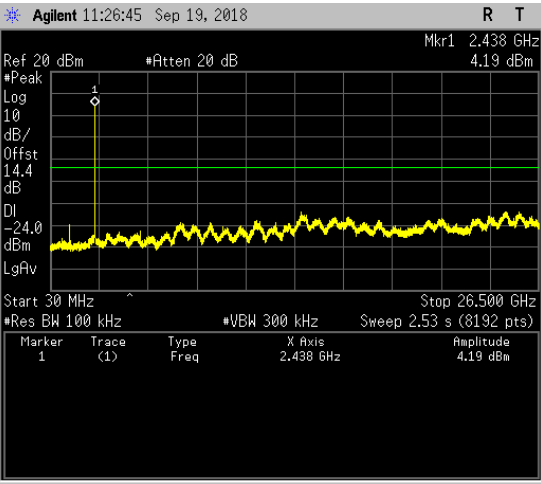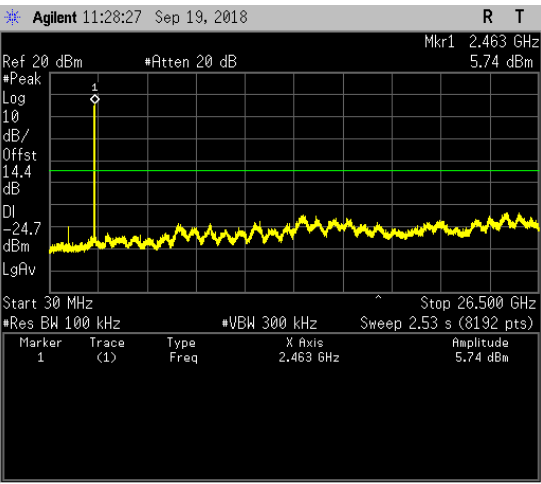2412 MHz	 Agilent 09:42:47 Sep 19, 2018 Ref 20 dBm *Atten 20 dB Mkr1 2.412 GHz 1.76 dBm *Peak Log 10 dB/Offst 14.4 dB DI -25.4 dBm LgAv Start 30 MHz Stop 26.500 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.53 s (8192 pts) Marker 1 Trace (1) Type Freq X Axis 2.412 GHz Amplitude 1.76 dBm Copyright 2000-2007 Agilent Technologies Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437 MHz	 Agilent 11:26:45 Sep 19, 2018 Ref 20 dBm *Atten 20 dB Mkr1 2.438 GHz 4.19 dBm *Peak Log 10 dB/Offst 14.4 dB DI -24.0 dBm LgAv Start 30 MHz Stop 26.500 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.53 s (8192 pts) Marker 1 Trace (1) Type Freq X Axis 2.438 GHz Amplitude 4.19 dBm Copyright 2000-2007 Agilent Technologies Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2462 MHz	 Agilent 11:28:27 Sep 19, 2018 Ref 20 dBm *Atten 20 dB Mkr1 2.463 GHz 5.74 dBm *Peak Log 10 dB/Offst 14.4 dB DI -24.7 dBm LgAv Start 30 MHz Stop 26.500 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.53 s (8192 pts) Marker 1 Trace (1) Type Freq X Axis 2.463 GHz Amplitude 5.74 dBm Copyright 2000-2007 Agilent Technologies Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off




Mode 3: IEEE 802.11g Continuous TX mode_ANT-0


2412 MHz

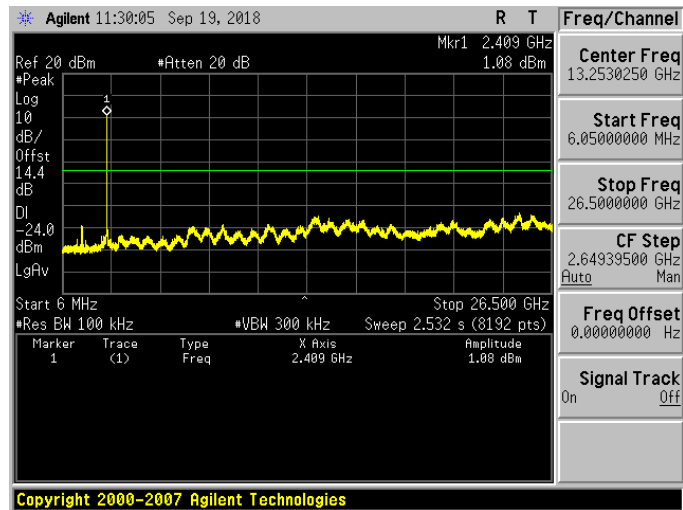

2437 MHz

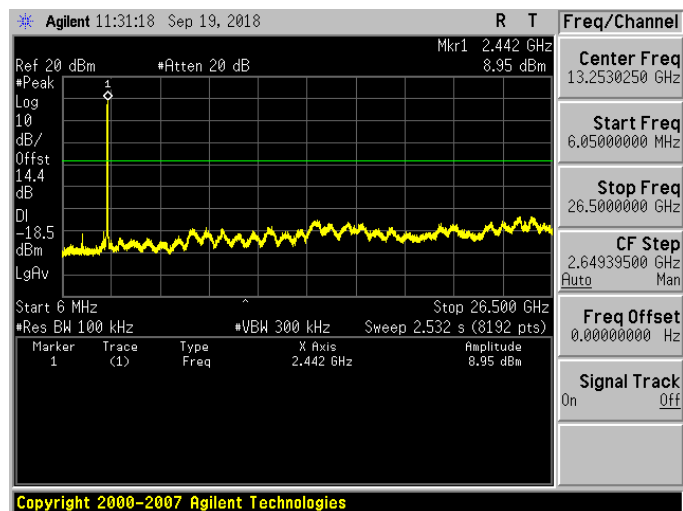


2462 MHz

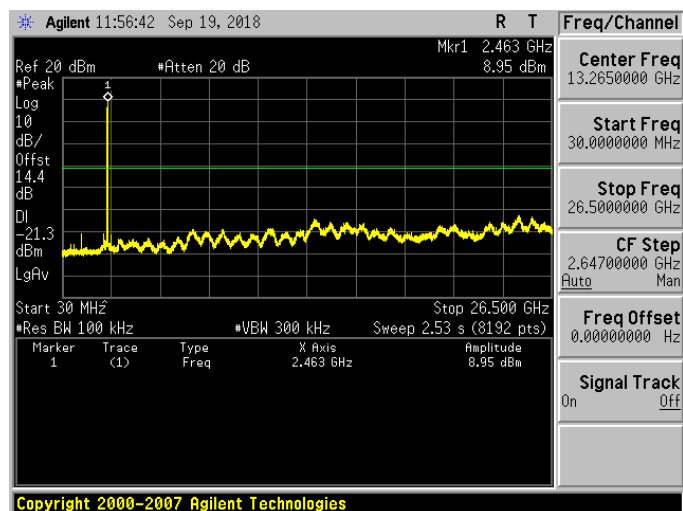


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

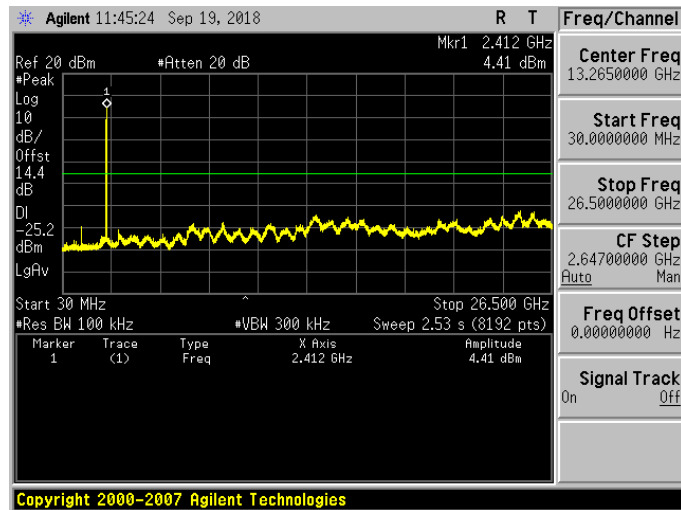

2437 MHz

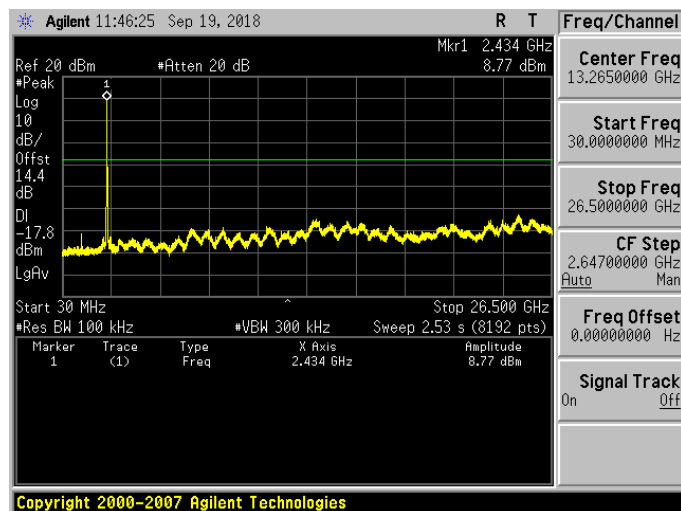


2462 MHz

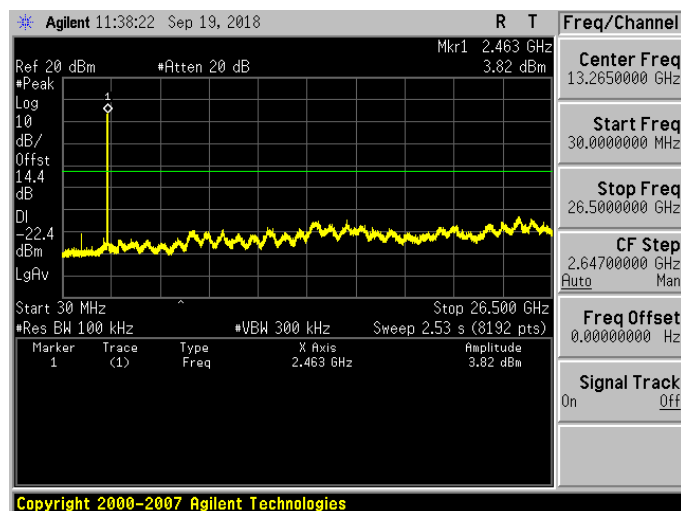




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

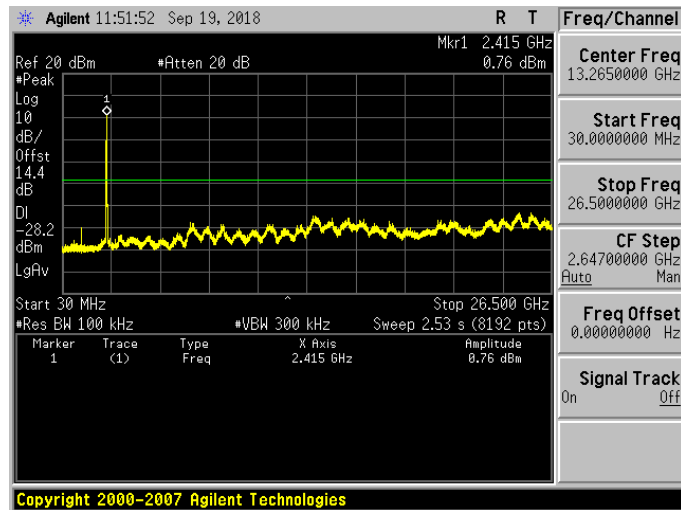

2437 MHz

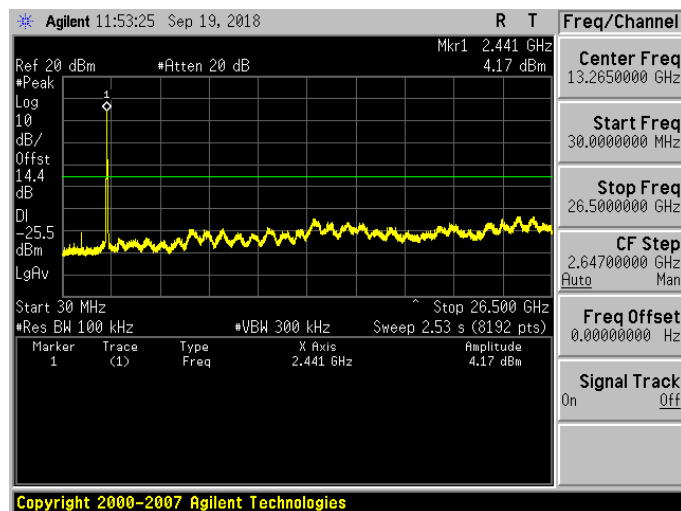


2452 MHz

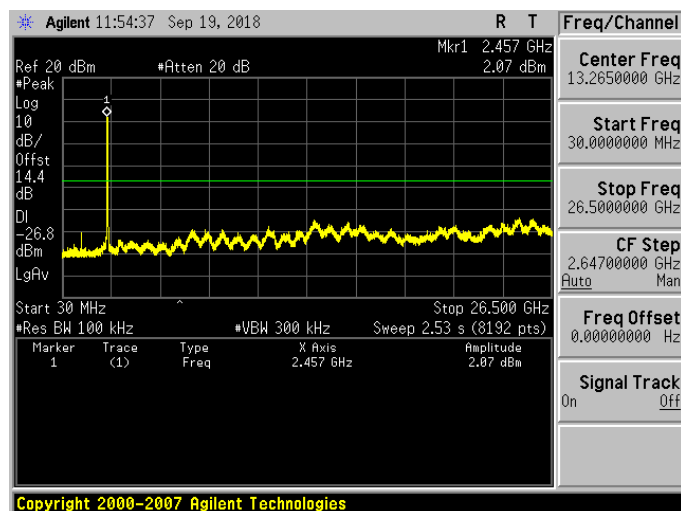




Mode 2: IEEE 802.11b Continuous TX mode_ANT-1


2412 MHz

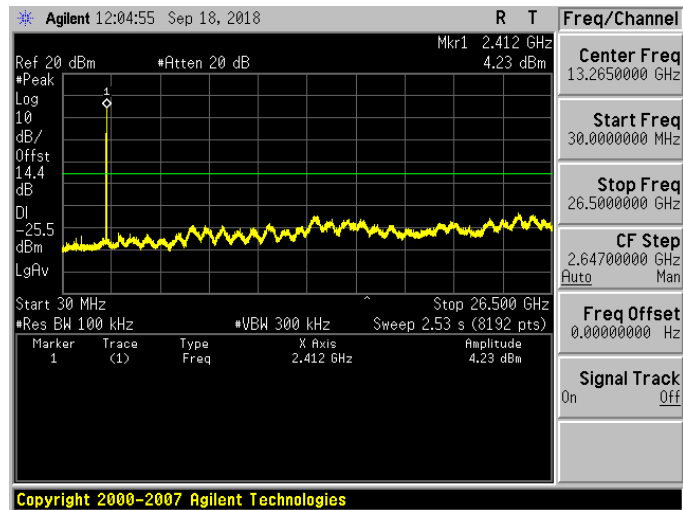

2437 MHz

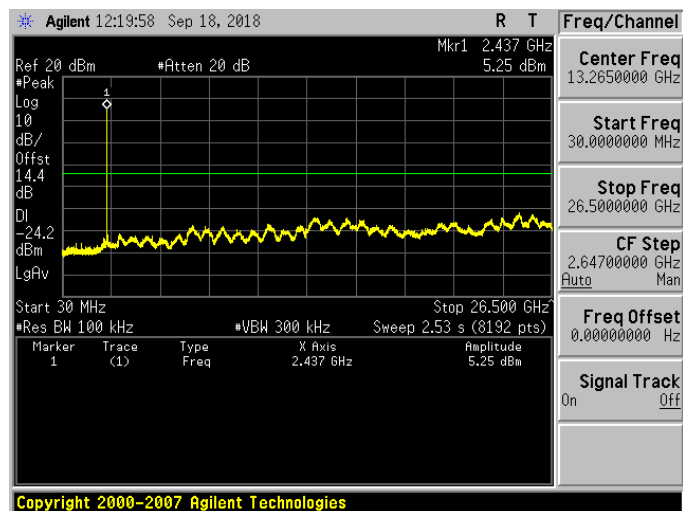


2462 MHz

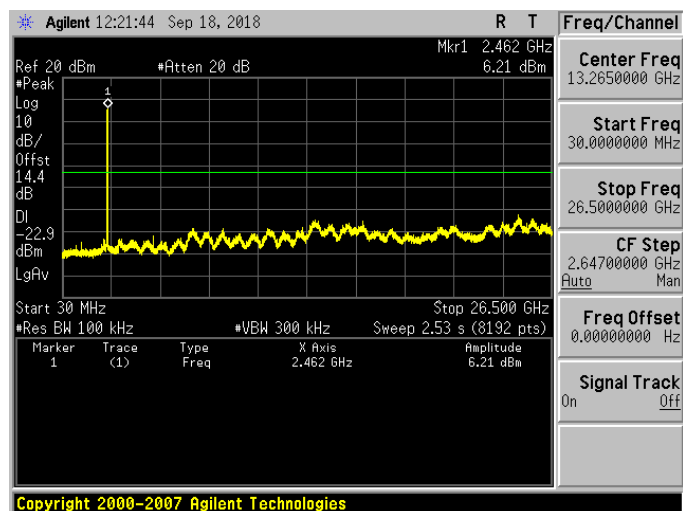


Mode 3: IEEE 802.11g Continuous TX mode_ANT-1


2412 MHz

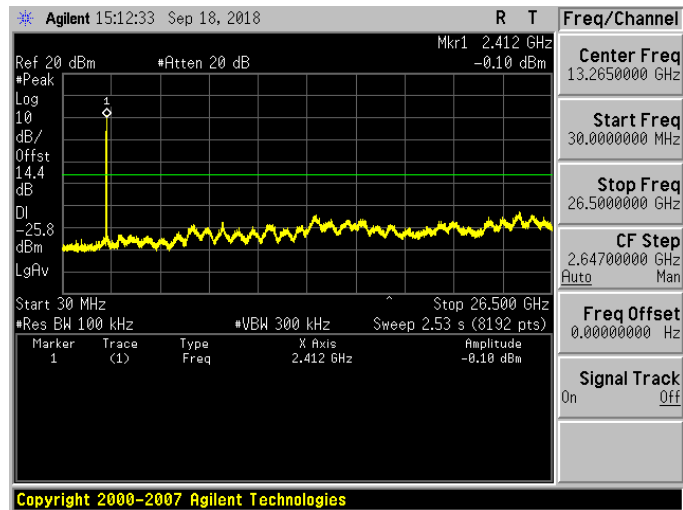

2437 MHz

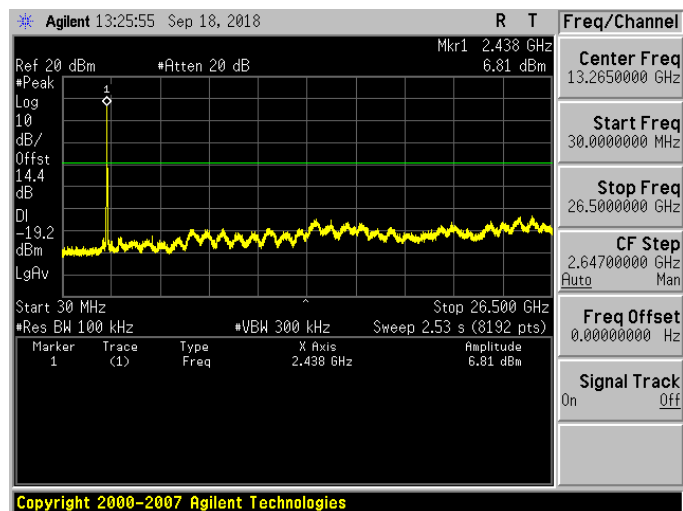


2462 MHz

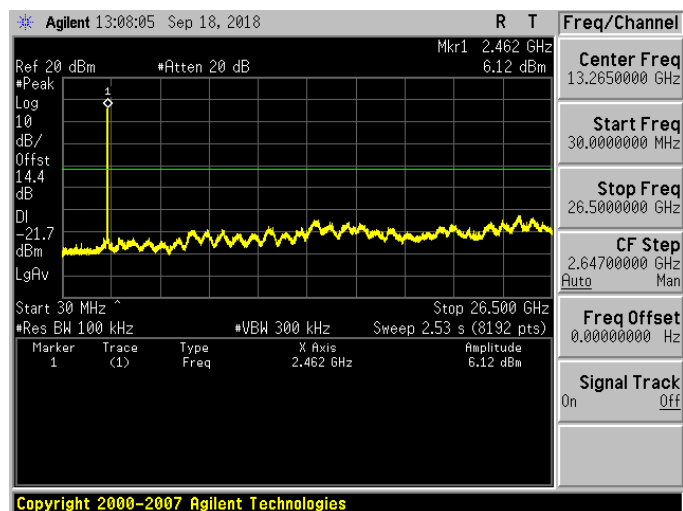


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

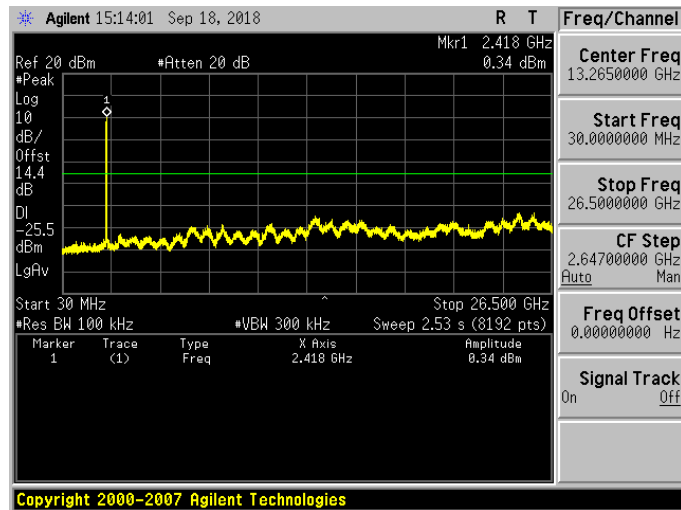

2437 MHz

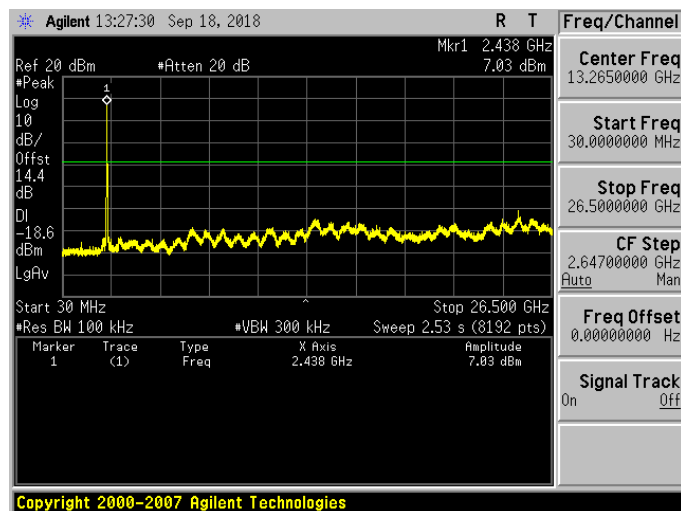


2462 MHz

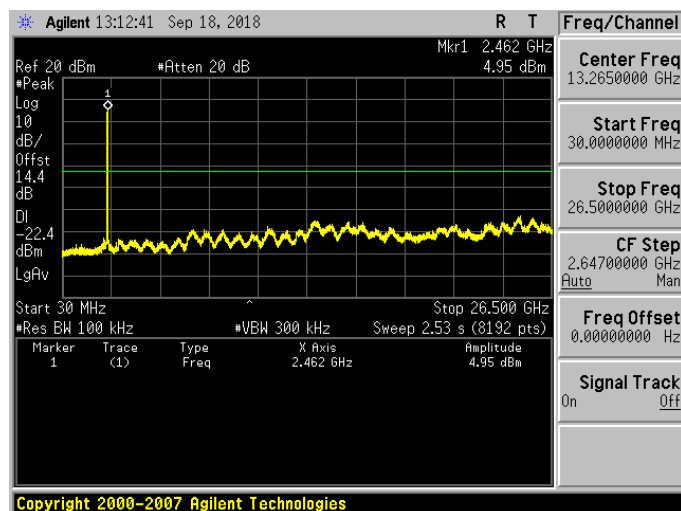




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

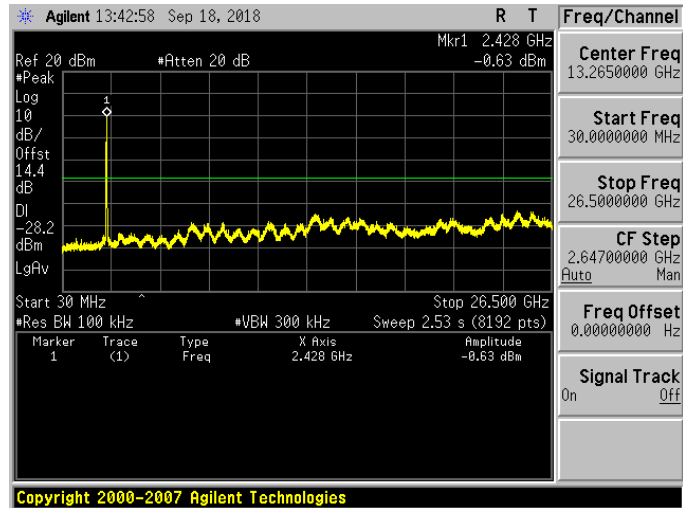

2437 MHz

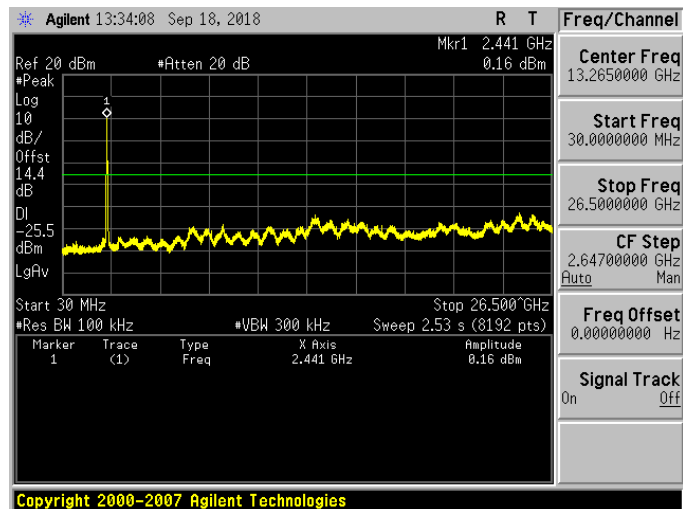


2452 MHz

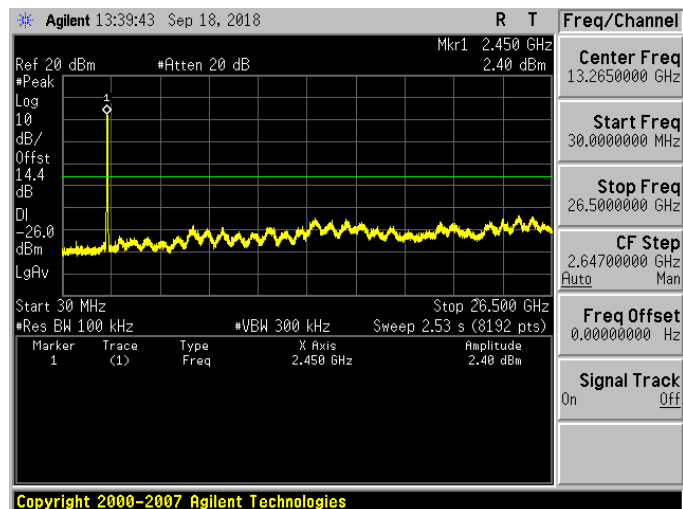


Conducted Band Edge

Mode 2: IEEE 802.11b Continuous TX mode_ANT-0

2412 MHz

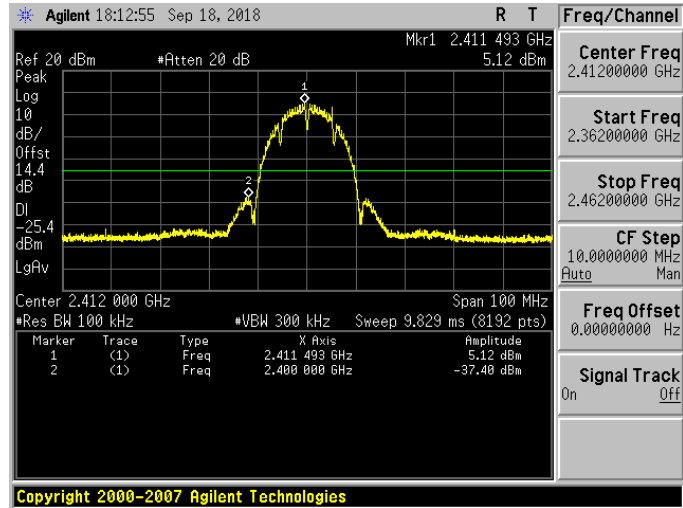


2462 MHz

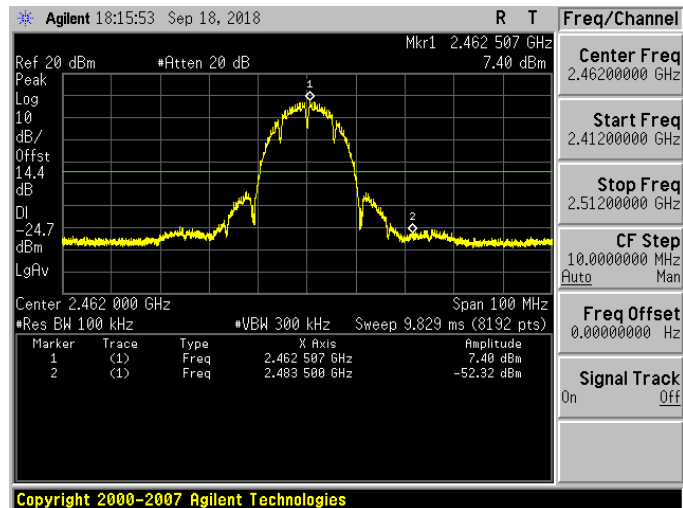


Mode 3: IEEE 802.11g Continuous TX mode_ANT-0

2412 MHz

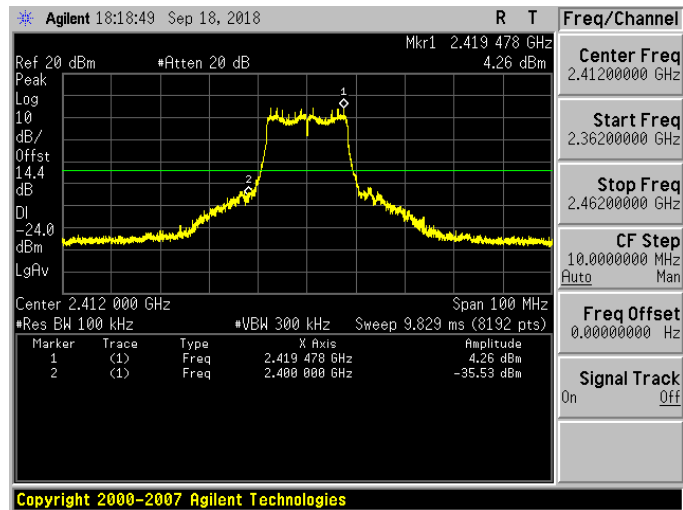


2462 MHz

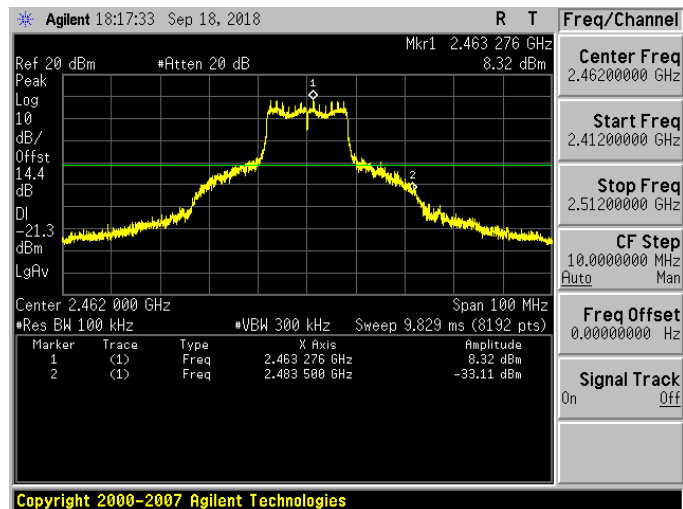


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0

2412 MHz

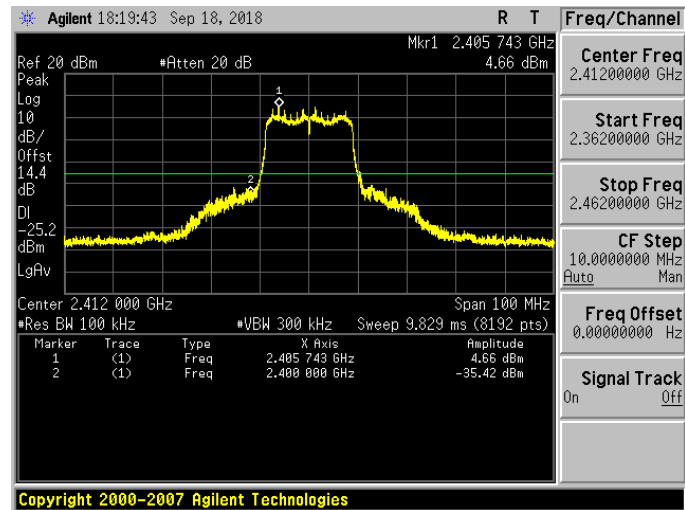


2462 MHz

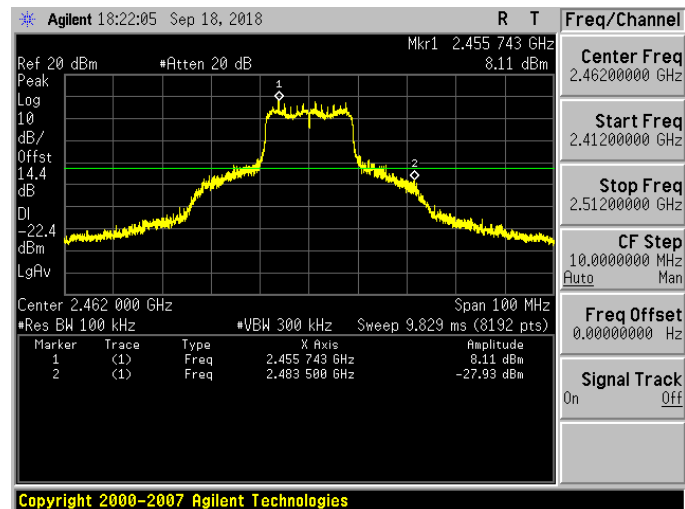


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0

2422 MHz

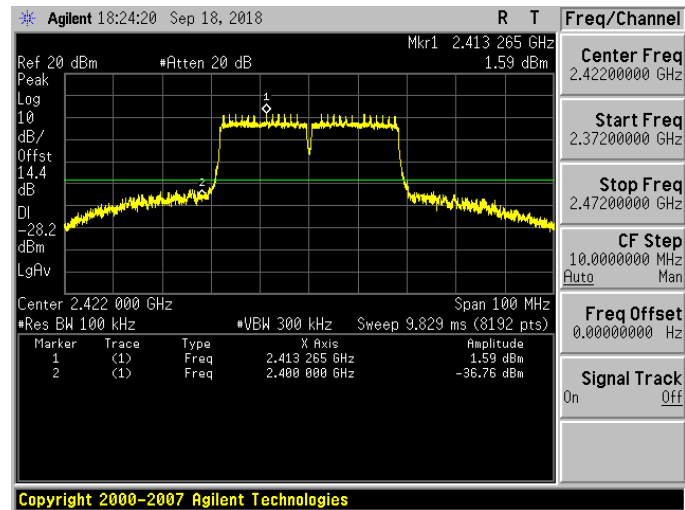


2452 MHz

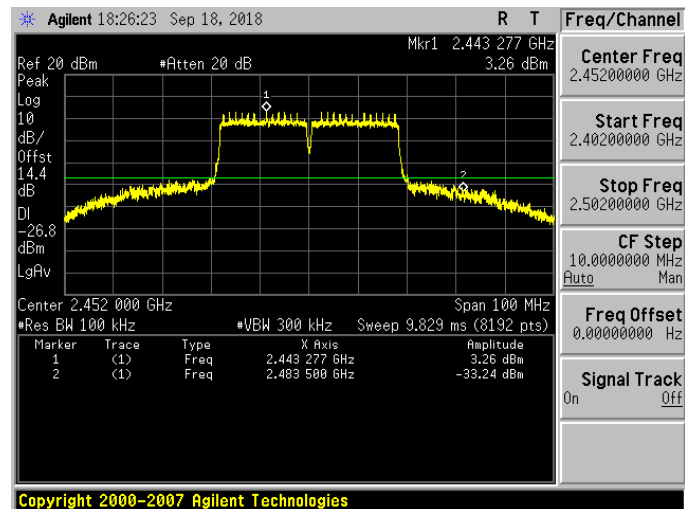


Mode 2: IEEE 802.11b Continuous TX mode_ANT-1

2412 MHz

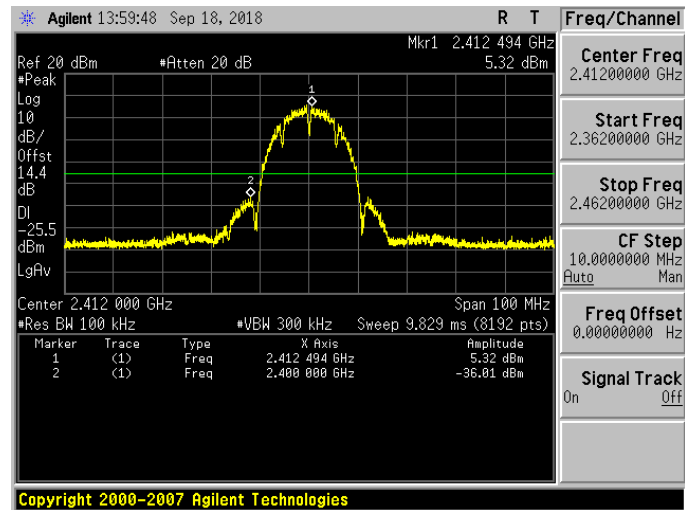


2462 MHz

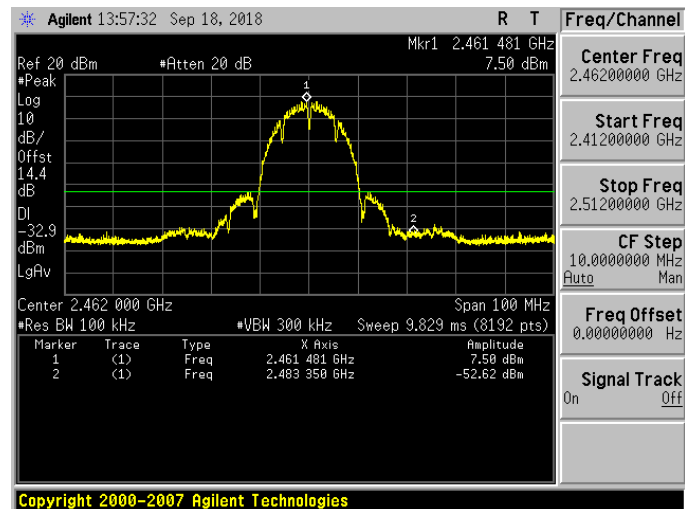


Mode 3: IEEE 802.11g Continuous TX mode_ANT-1

2412 MHz

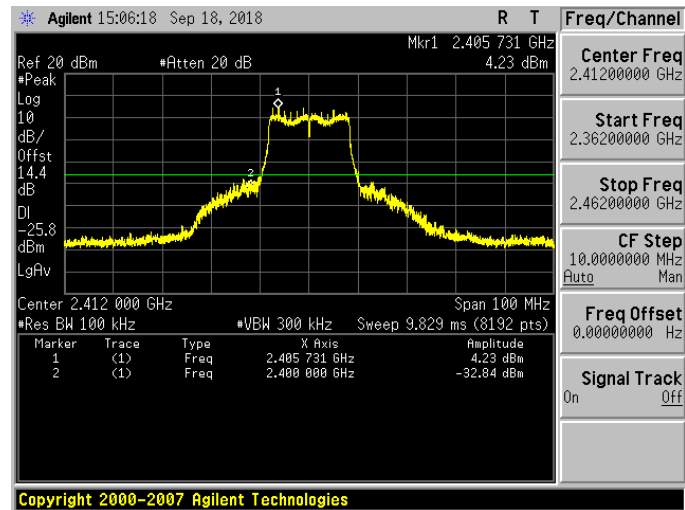


2462 MHz

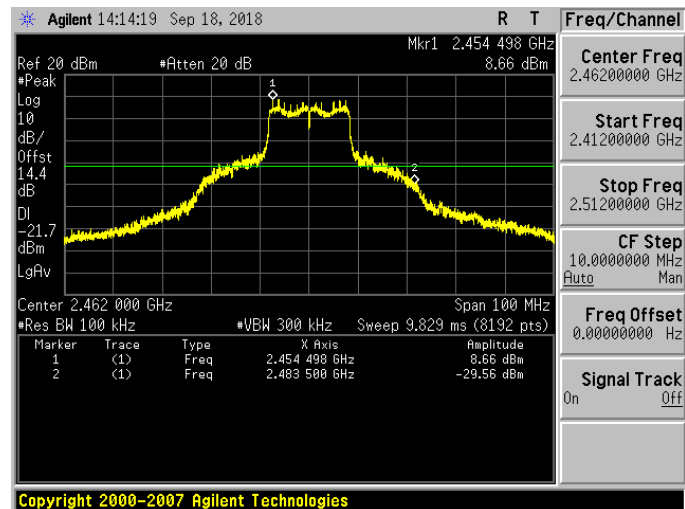


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1

2412 MHz

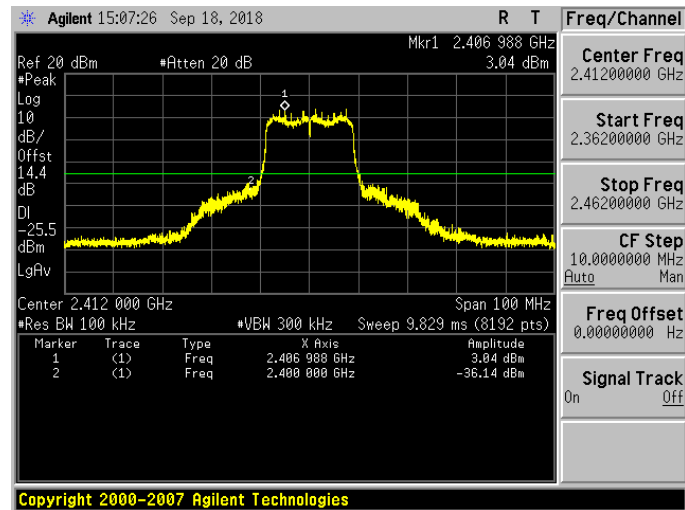


2462 MHz

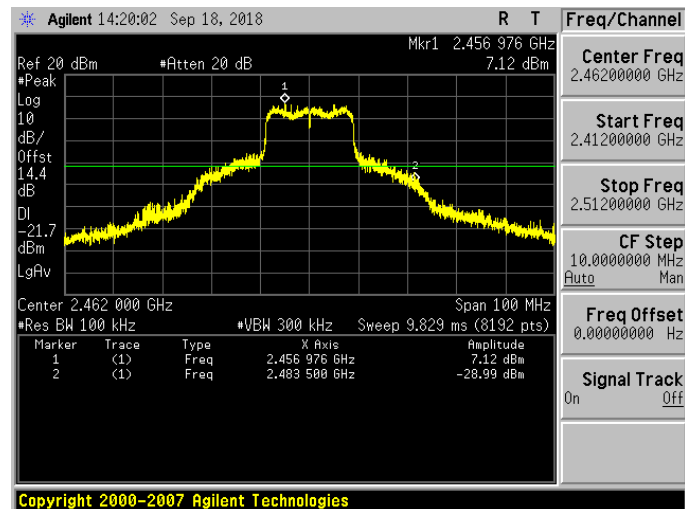


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1

2422 MHz

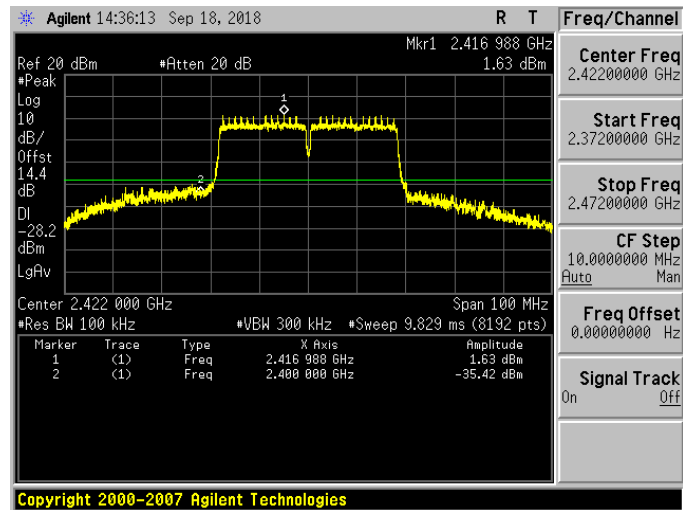

2452 MHz

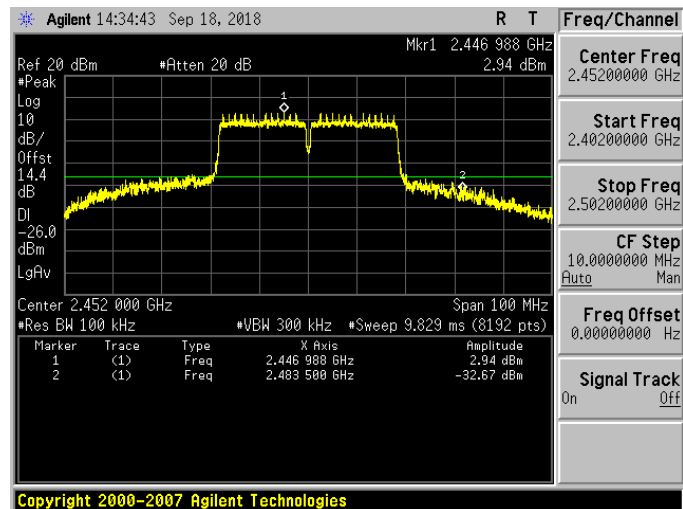


Beamforming on


Reference level

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

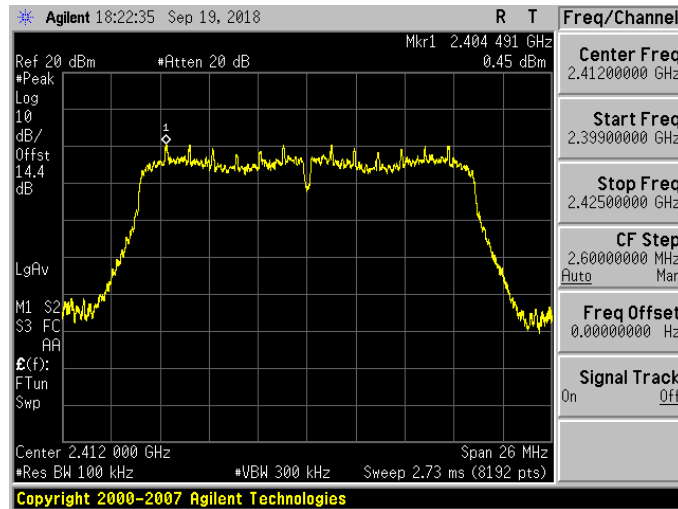

2437 MHz

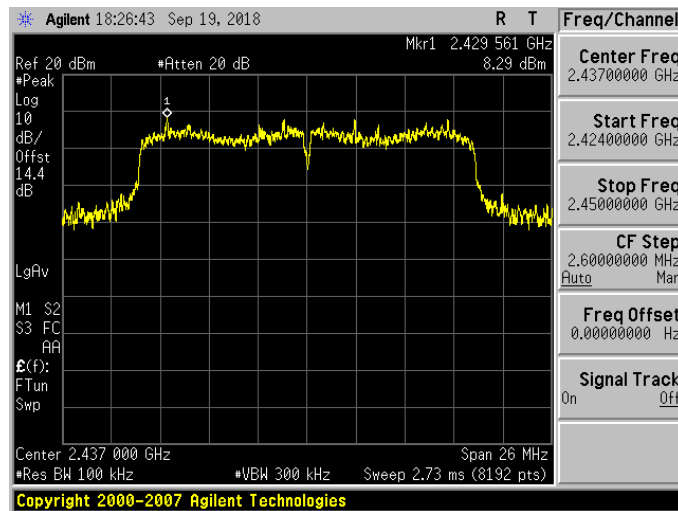


2462 MHz

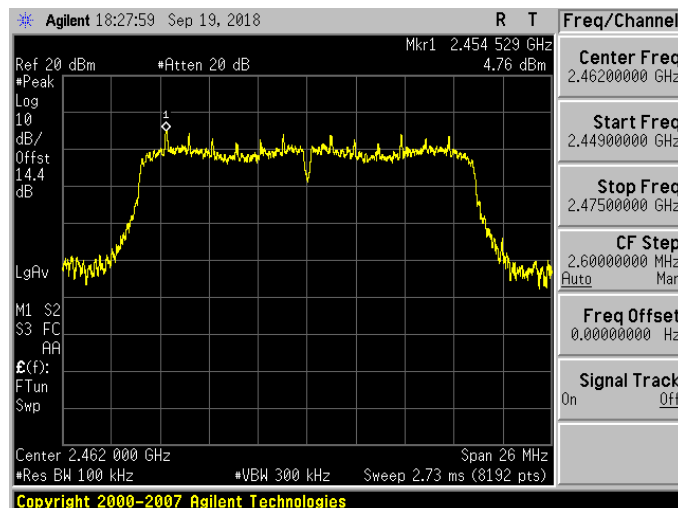


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

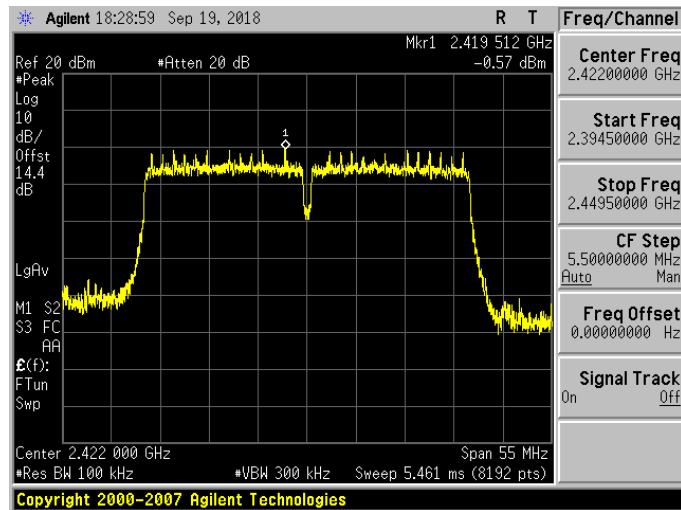

2437 MHz

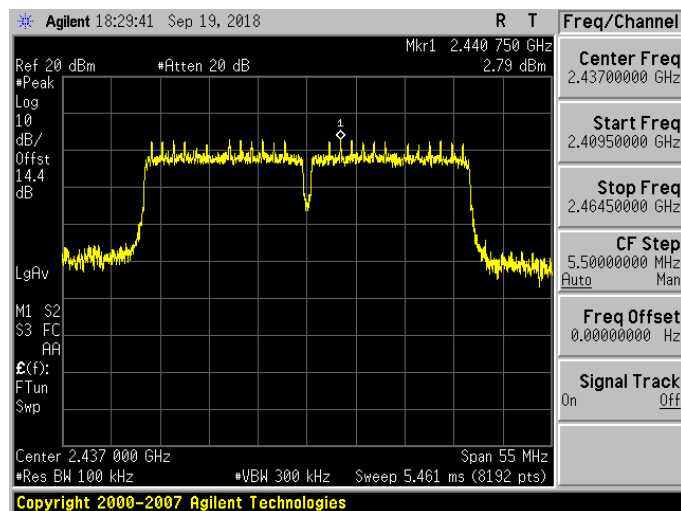


2452 MHz

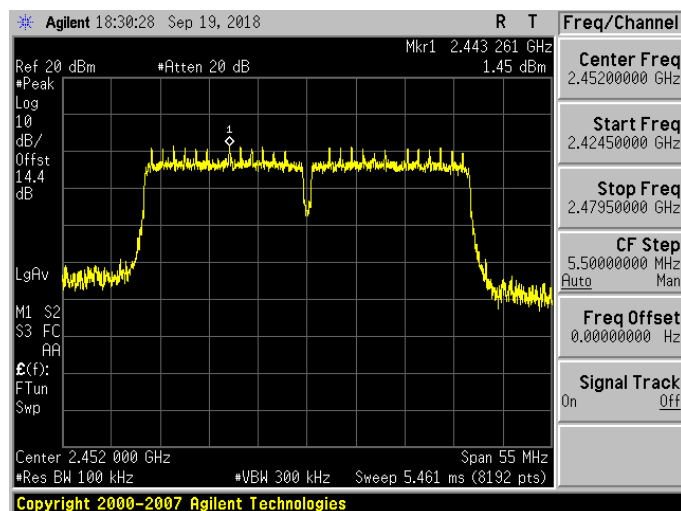


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

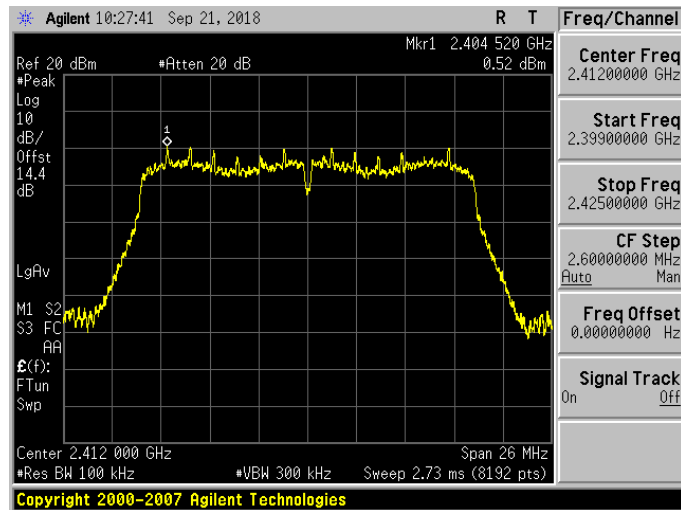

2437 MHz

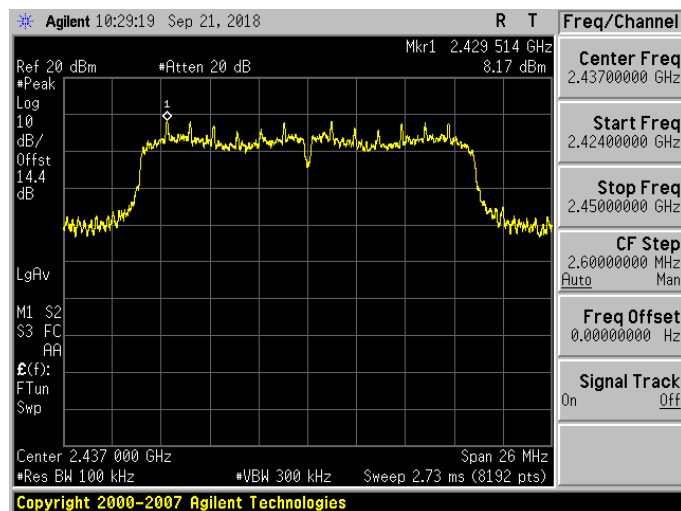


2462 MHz

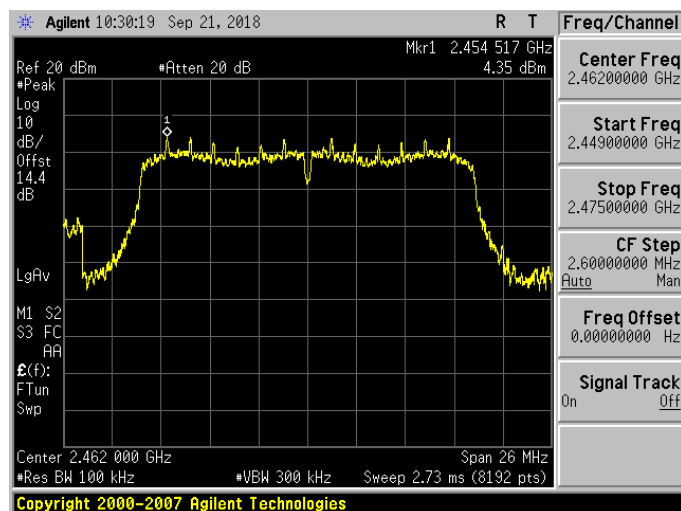


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

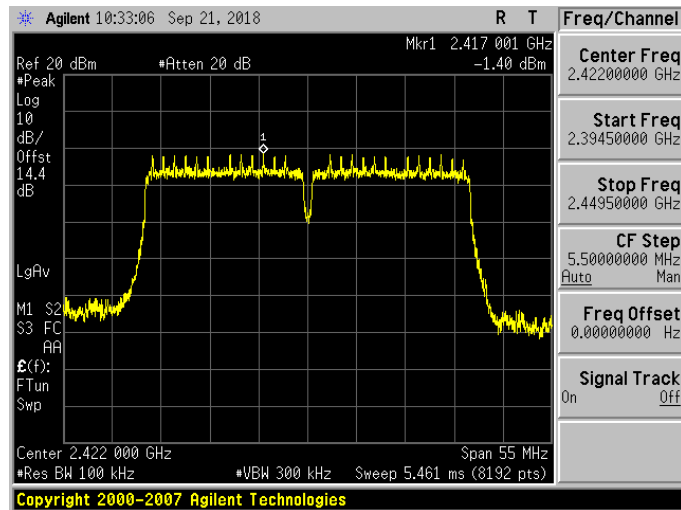

2437 MHz



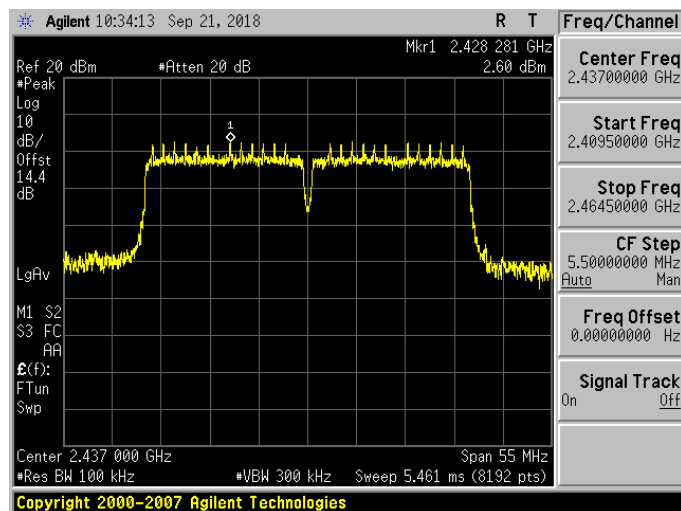


2452 MHz

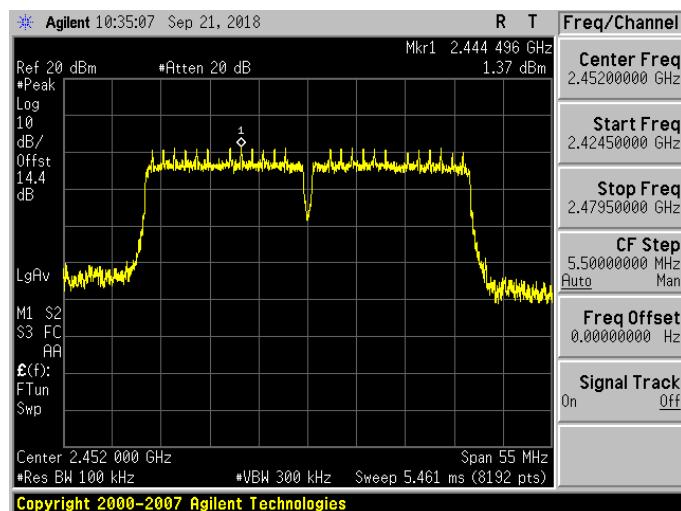

Out of Band Conducted Emissions


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0

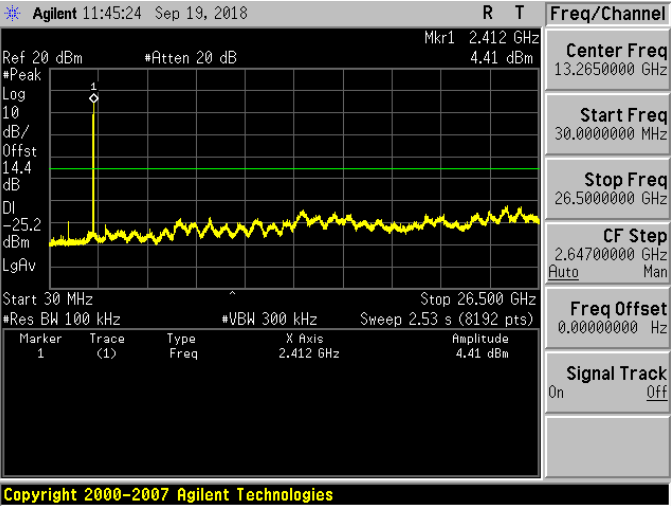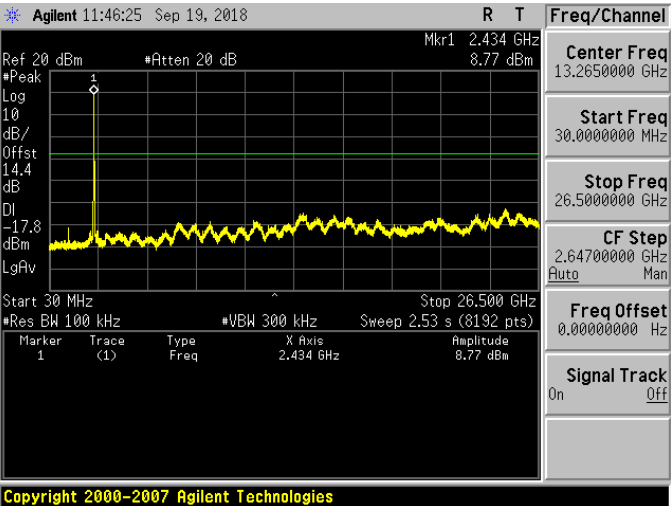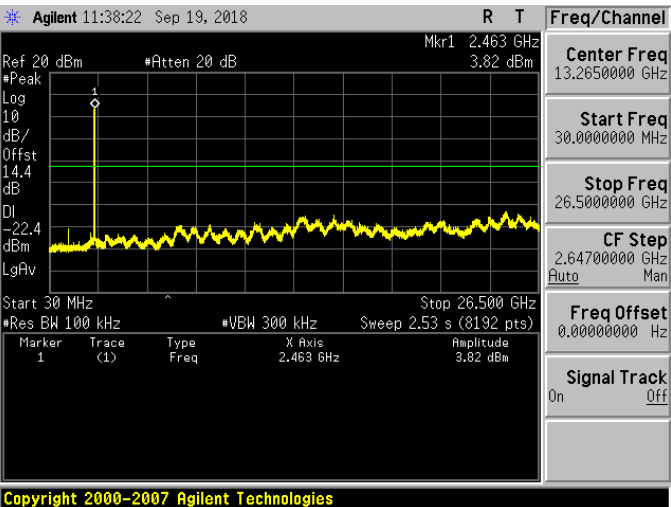2412 MHz	 Copyright 2000-2007 Agilent Technologies
2437 MHz	 Copyright 2000-2007 Agilent Technologies
2462 MHz	 Copyright 2000-2007 Agilent Technologies




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

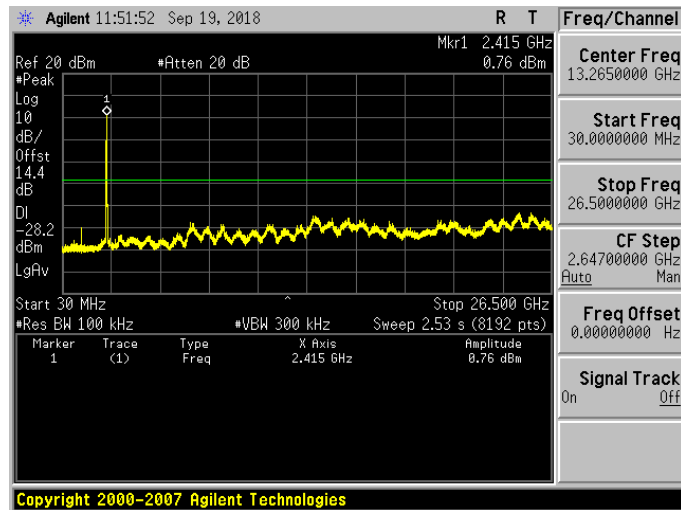

2437 MHz

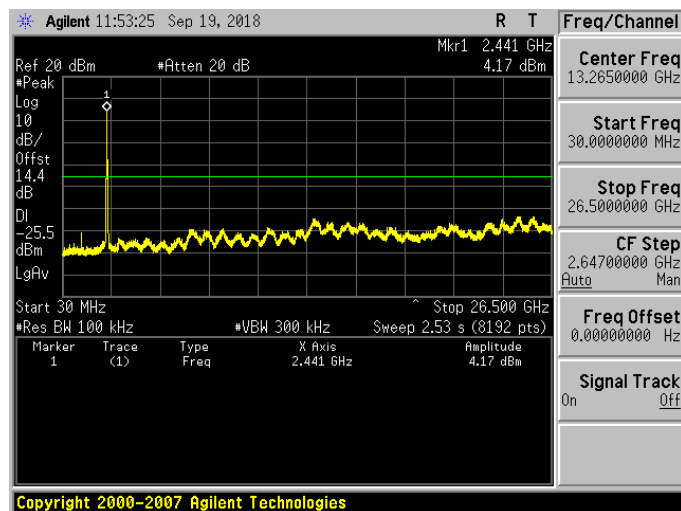


2452 MHz

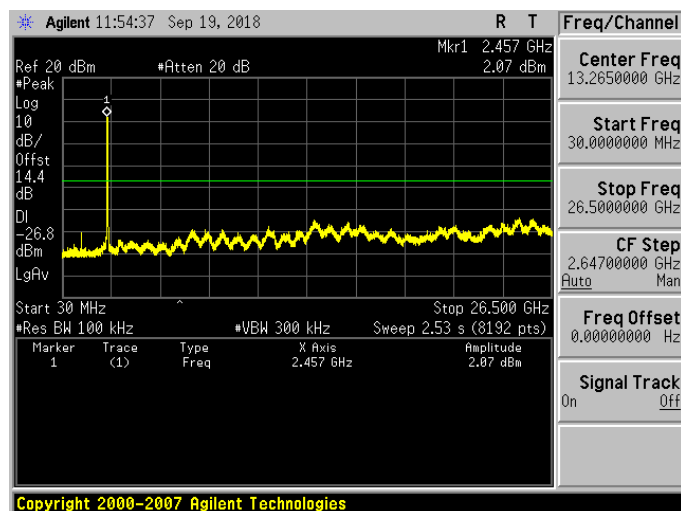




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

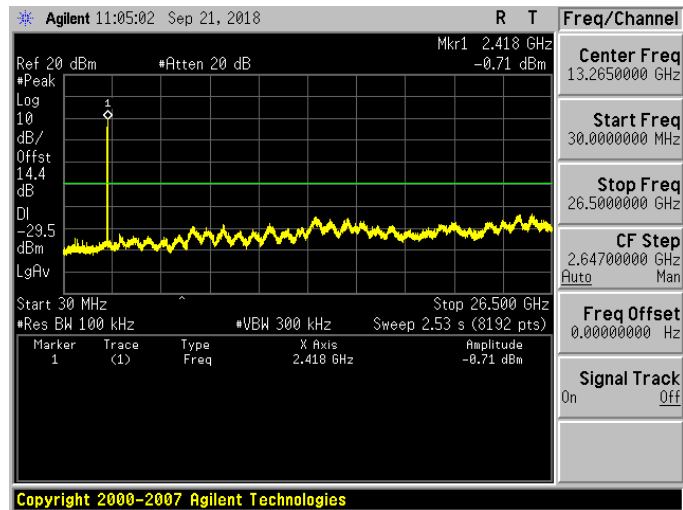

2437 MHz

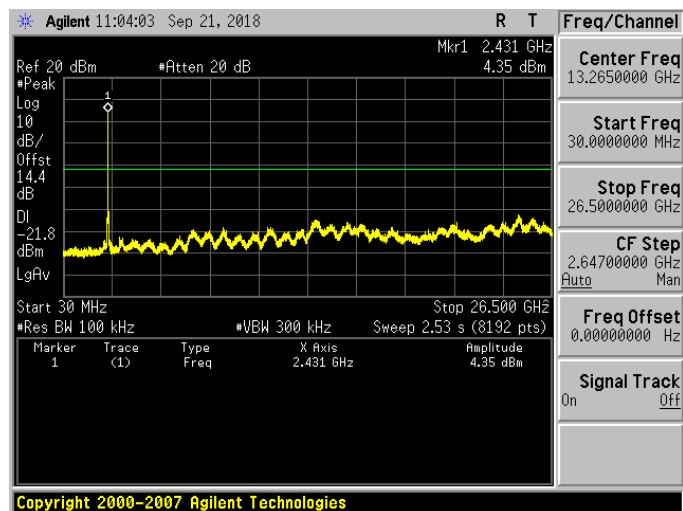


2462 MHz

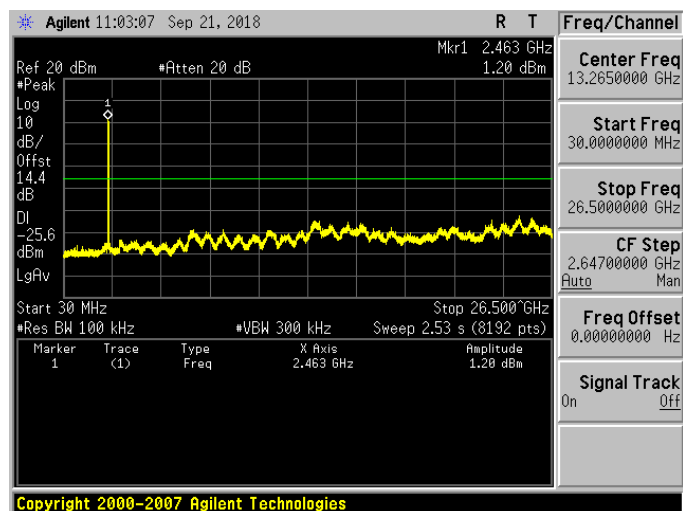


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

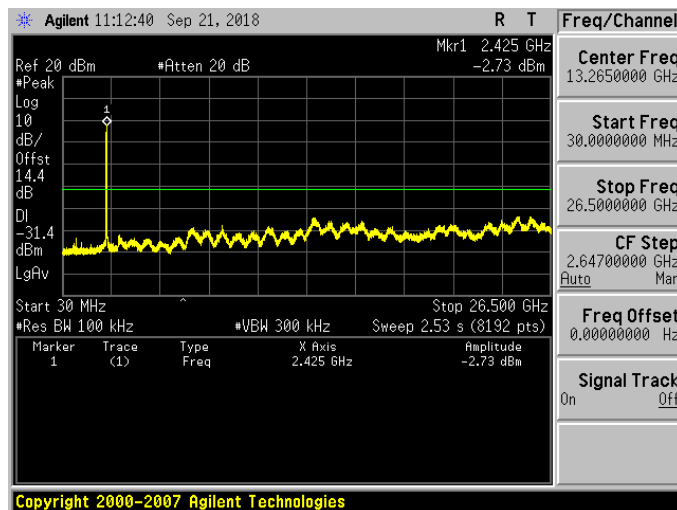

2437 MHz

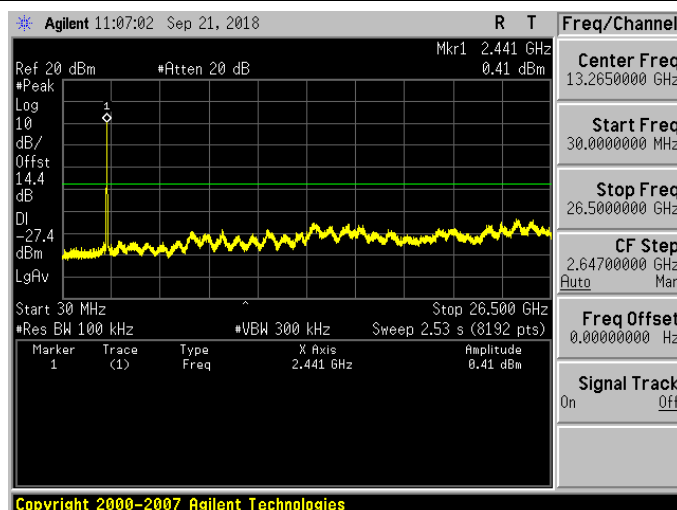


2452 MHz

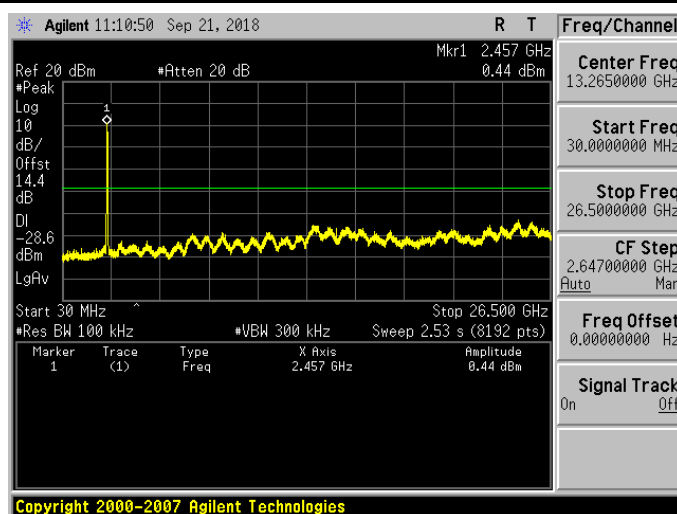


Conducted Band Edge

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0

2412 MHz

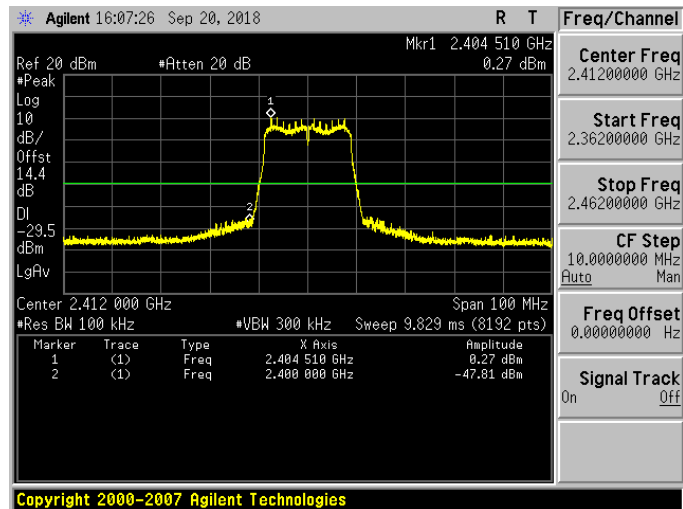


2462 MHz

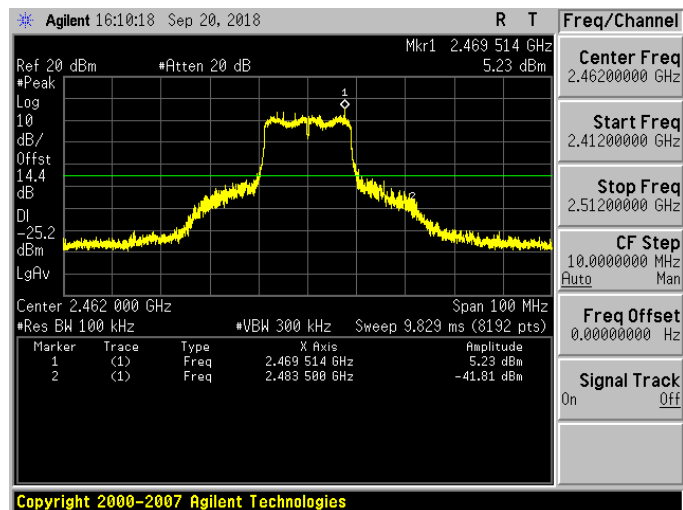


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0

2422 MHz

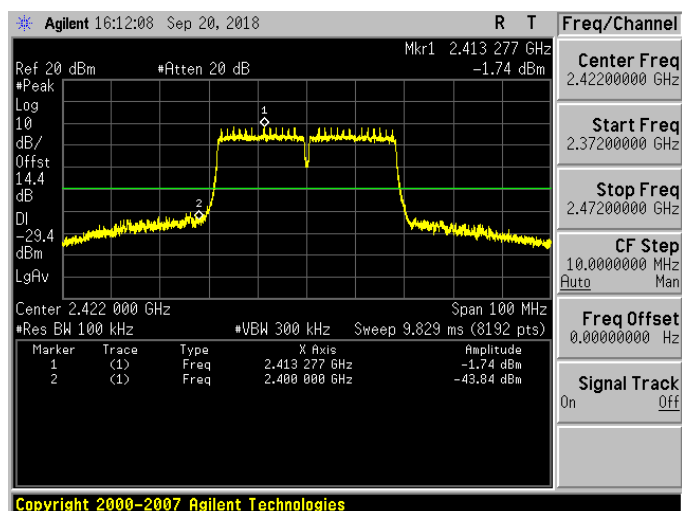


2452 MHz

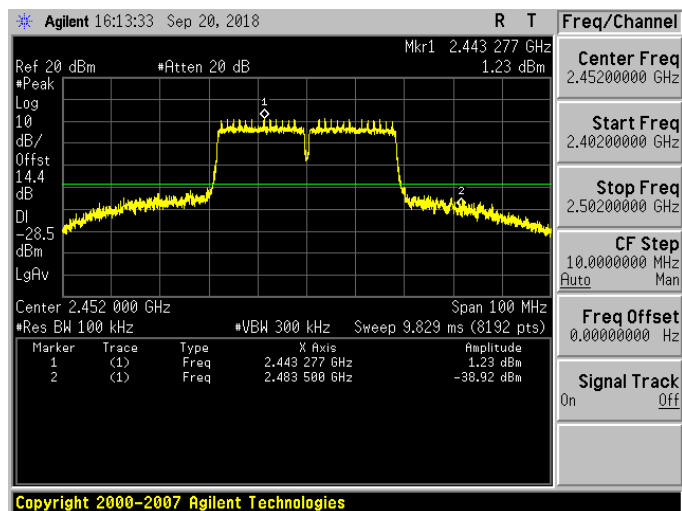


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1

2412 MHz

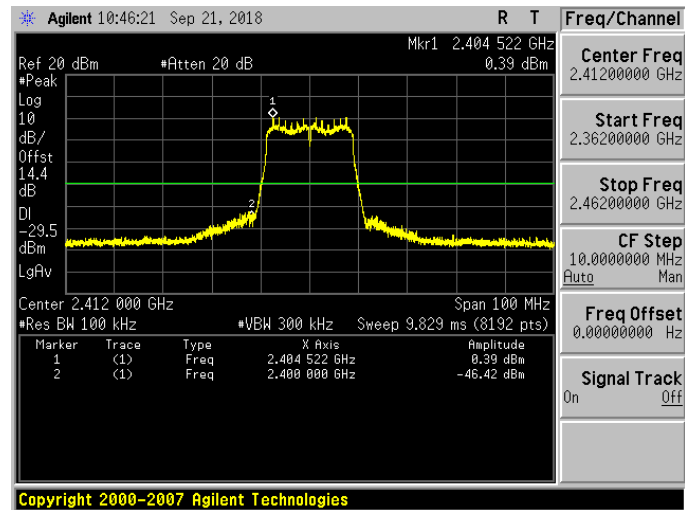


2462 MHz

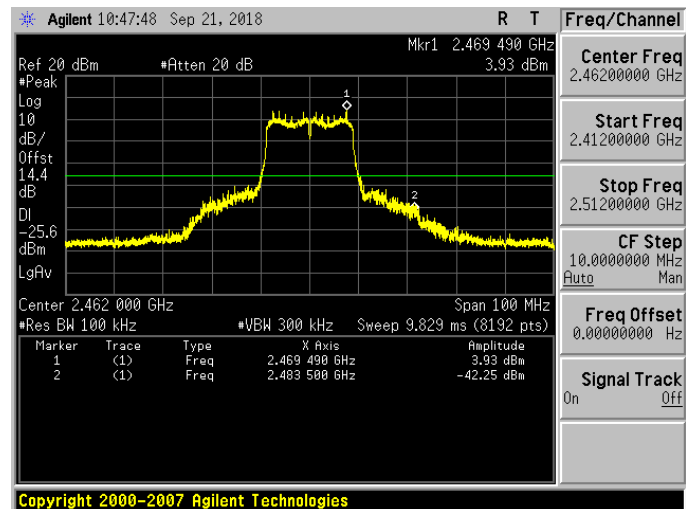


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1

2422 MHz

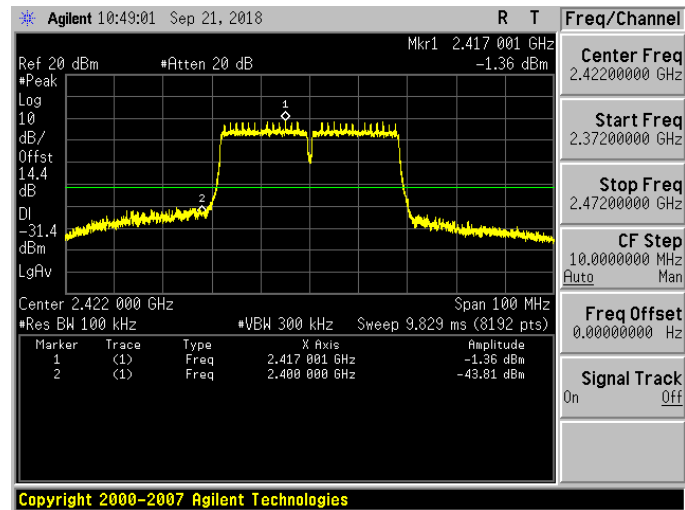

2452 MHz

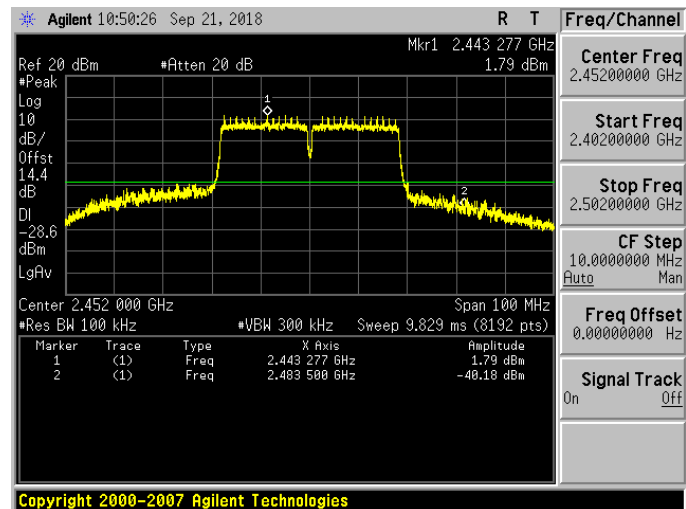

Annex C. Radiated Emission Measurement

Harmonic

Below 1 GHz

Standard:		FCC Part 15.247		Test Distance:		3 m	
Test item:		Harmonic		Power:		AC 120 V/60 Hz	
Mode:		Mode 1		Temp.(°C)/Hum.(%RH):		26(°C)/60 %RH	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
197.8100	36.80	-7.82	28.98	43.50	-14.52	QP	H
286.0800	34.28	-4.10	30.18	46.00	-15.82	QP	H
351.0700	32.75	-2.89	29.86	46.00	-16.14	QP	H
495.6000	35.22	0.10	35.32	46.00	-10.68	QP	H
648.8600	28.97	3.13	32.10	46.00	-13.90	QP	H
868.0800	27.62	7.44	35.06	46.00	-10.94	QP	H
272.5000	35.99	-4.65	31.34	46.00	-14.66	QP	V
384.0500	30.23	-2.14	28.09	46.00	-17.91	QP	V
497.5400	33.59	0.13	33.72	46.00	-12.28	QP	V
515.9700	38.46	0.44	38.90	46.00	-7.10	QP	V
658.5600	28.82	3.34	32.16	46.00	-13.84	QP	V
776.9000	30.08	5.92	36.00	46.00	-10.00	QP	V


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

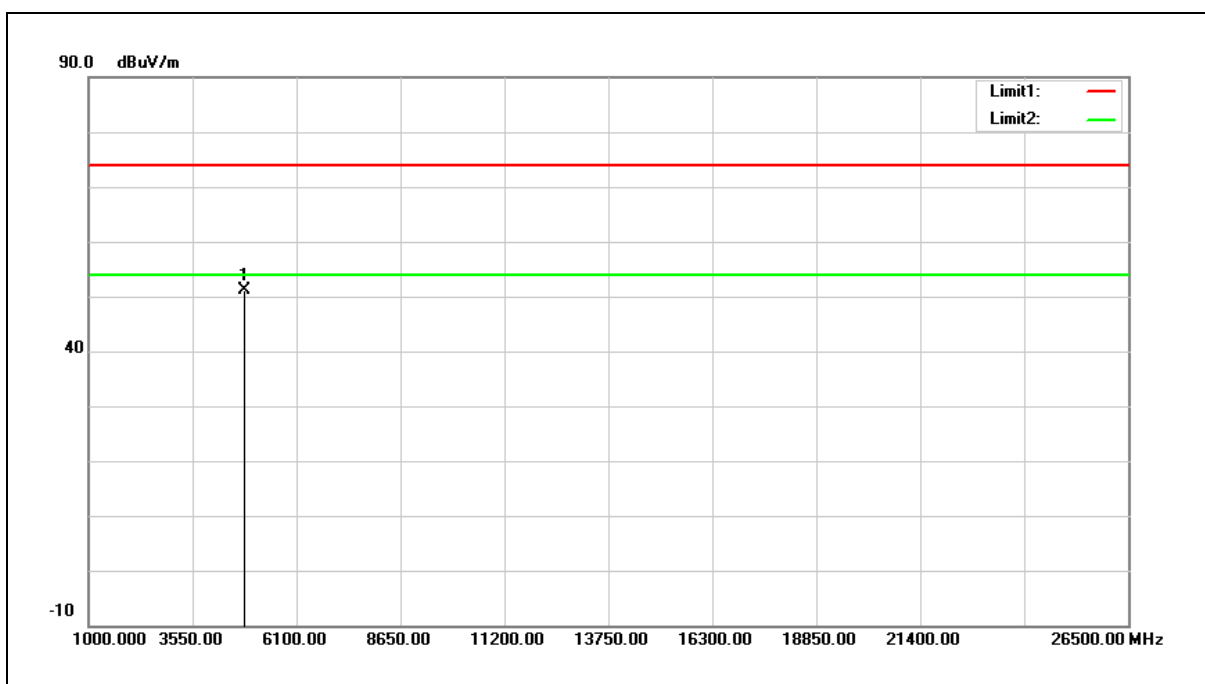


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	47.19	3.95	51.14	74.00	-22.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

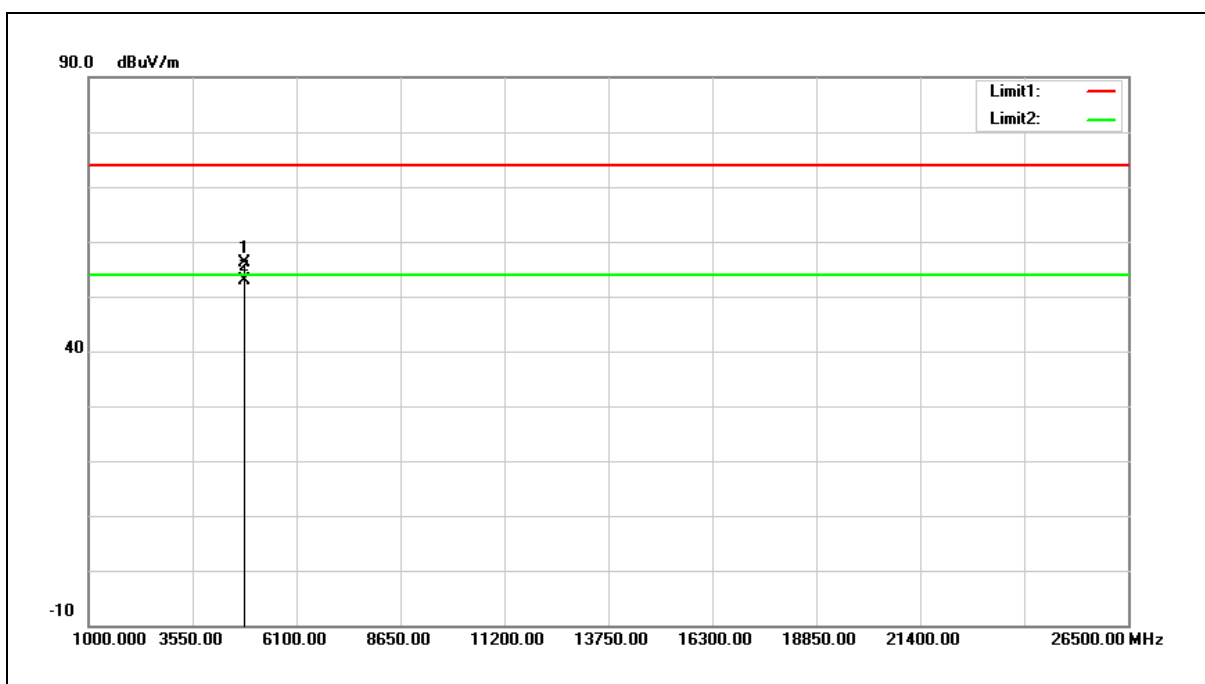


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	52.18	3.95	56.13	74.00	-17.87	peak
2	4824.000	48.97	3.95	52.92	54.00	-1.08	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

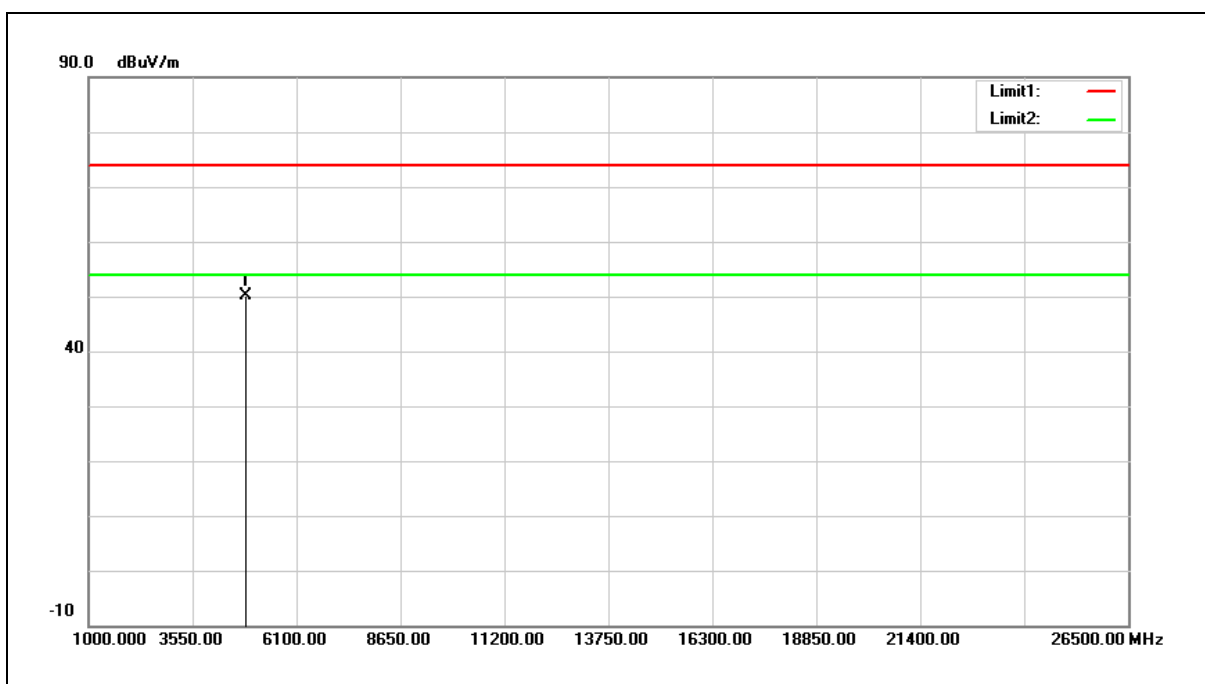


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	44.71	5.51	50.22	74.00	-23.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

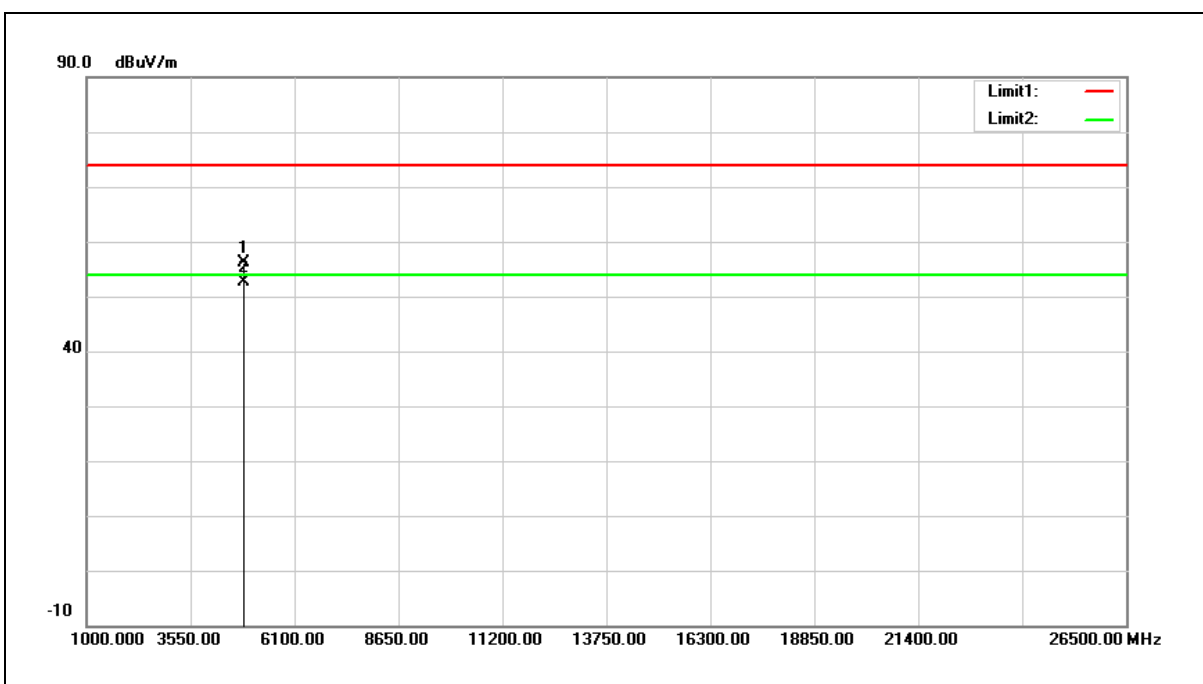


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	50.58	5.51	56.09	74.00	-17.91	peak
2	4874.000	47.19	5.51	52.70	54.00	-1.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

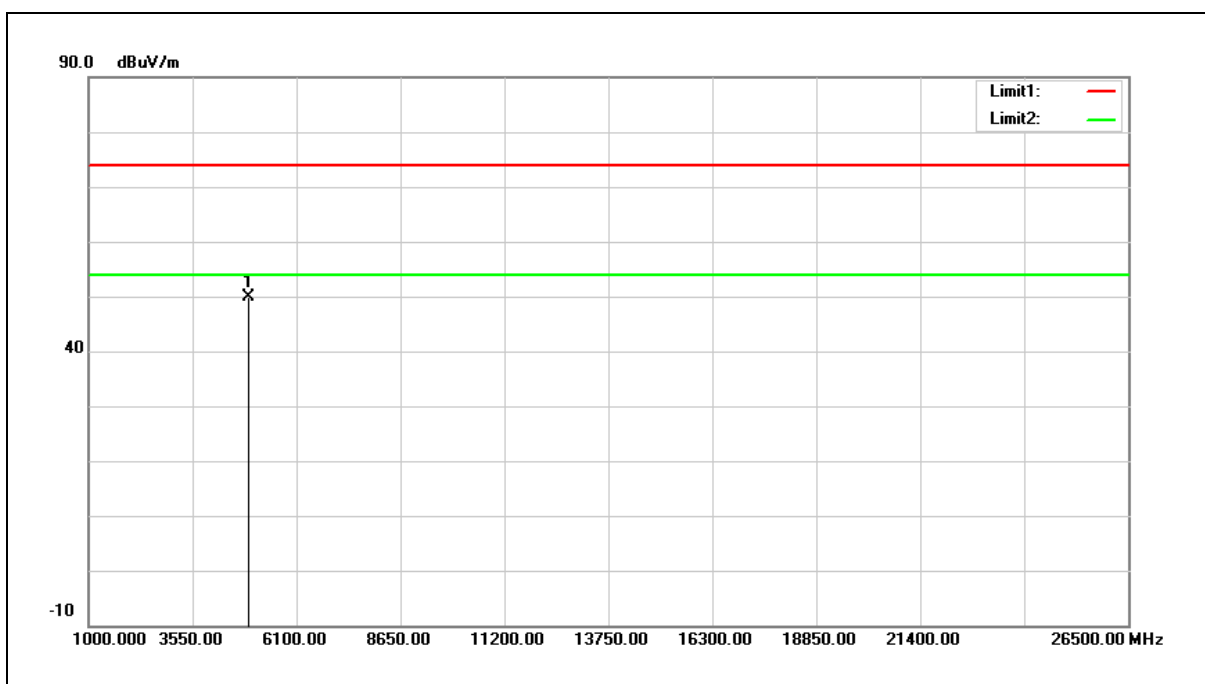


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	44.13	5.67	49.80	74.00	-24.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

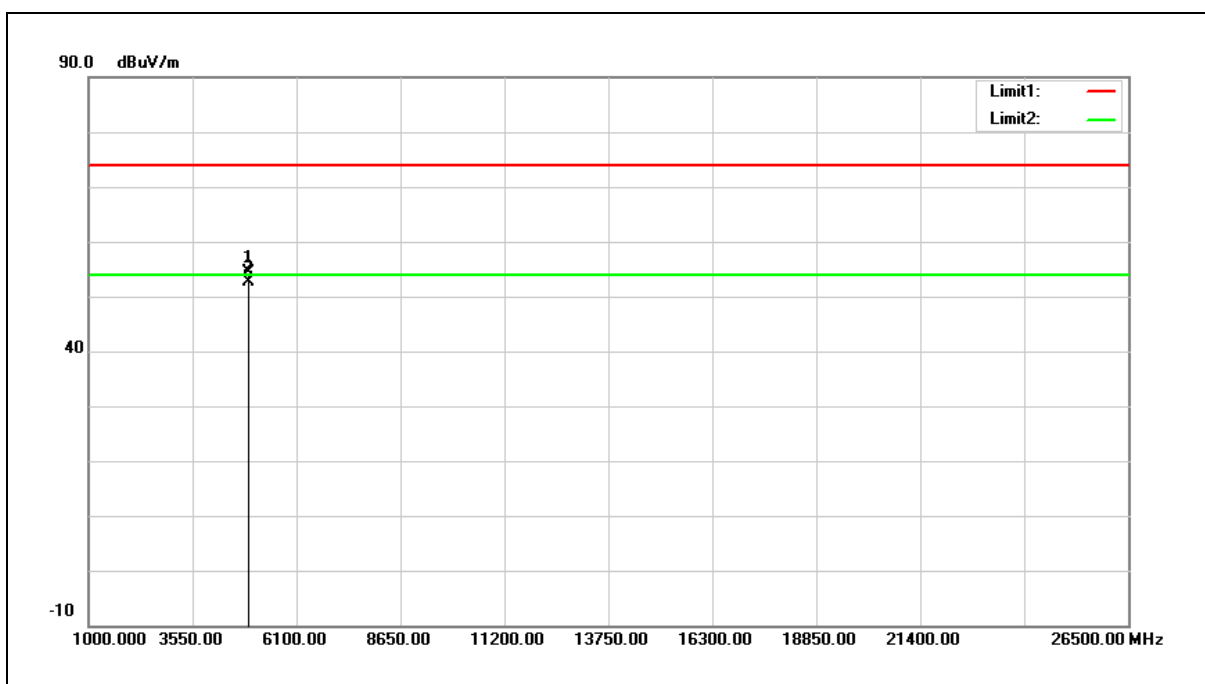


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	48.59	5.67	54.26	74.00	-19.74	peak
2	4924.000	46.91	5.67	52.58	54.00	-1.42	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

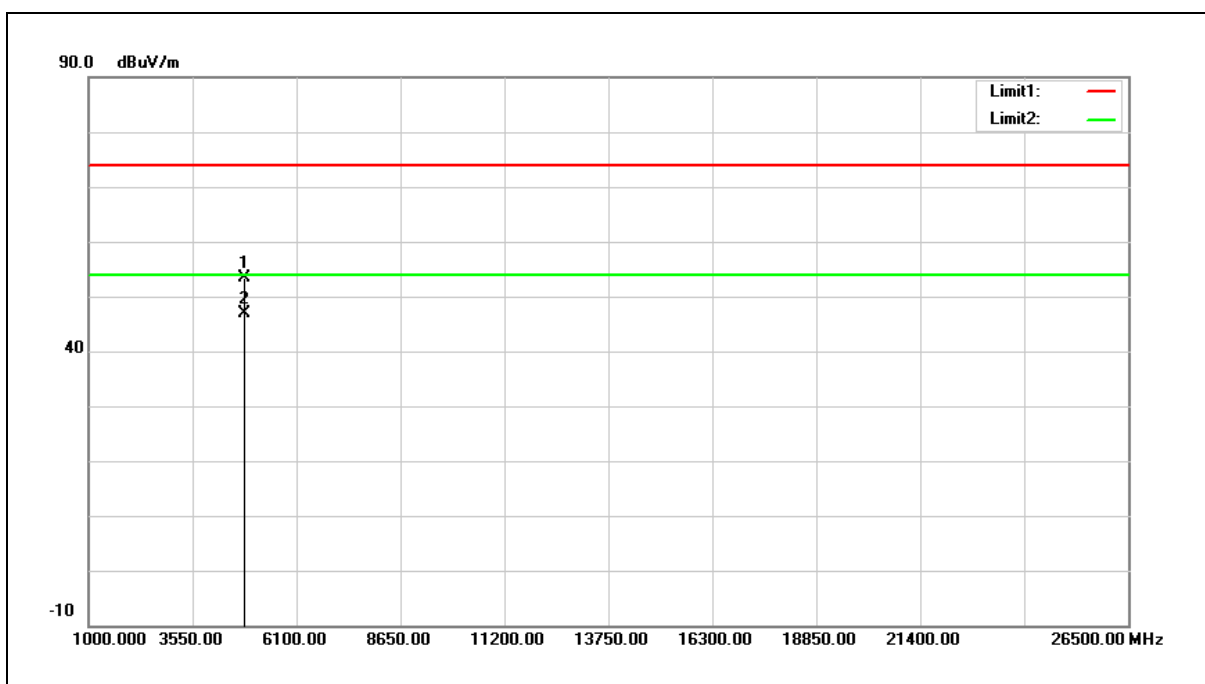


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	47.90	5.36	53.26	74.00	-20.74	peak
2	4824.000	41.52	5.36	46.88	54.00	-7.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

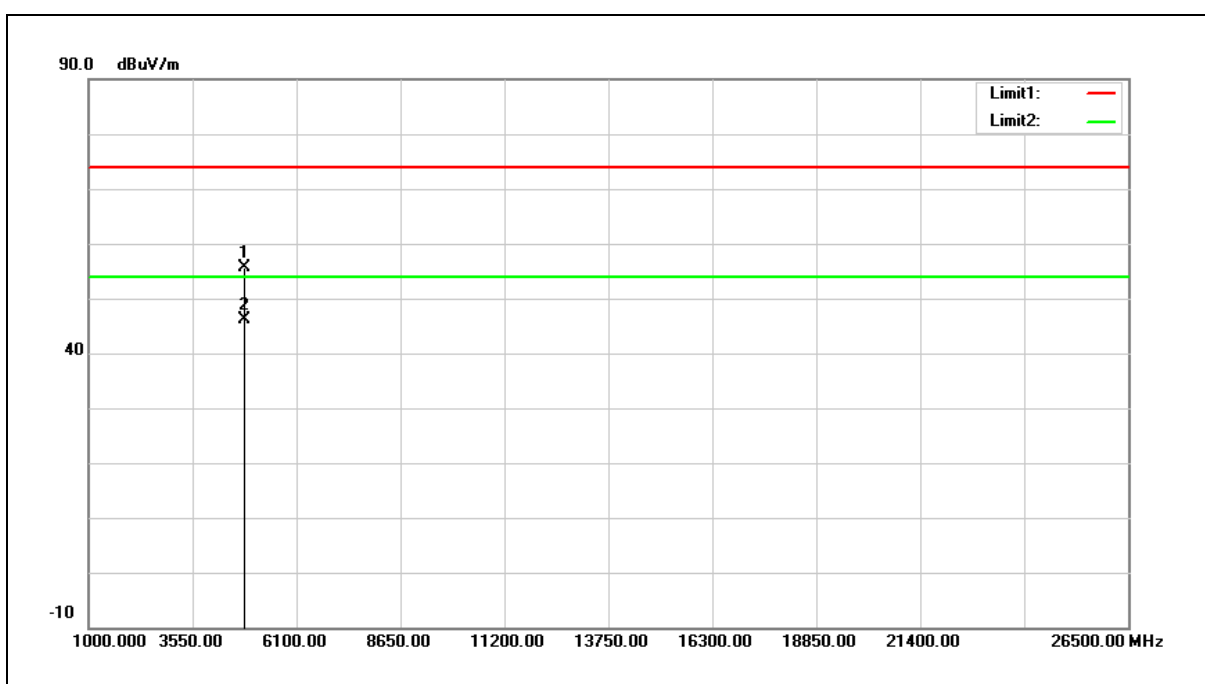


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	50.22	5.36	55.58	74.00	-18.42	peak
2	4824.000	40.76	5.36	46.12	54.00	-7.88	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

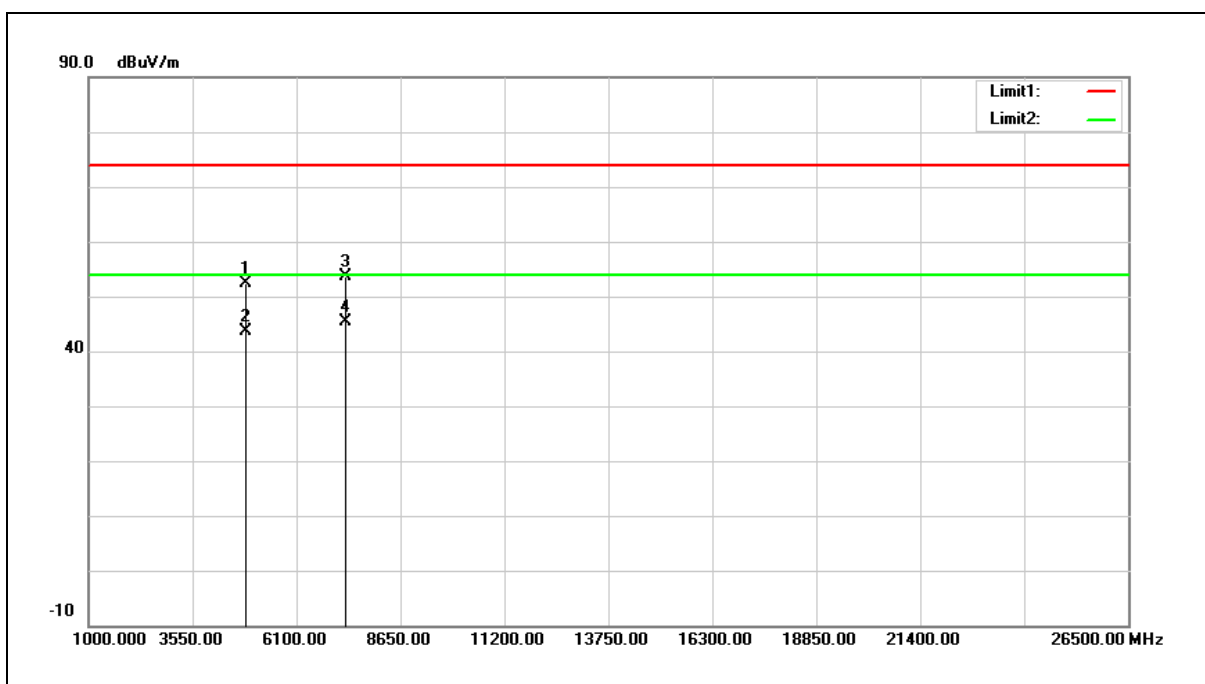


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	46.86	5.51	52.37	74.00	-21.63	peak
2	4874.000	38.17	5.51	43.68	54.00	-10.32	AVG
3	7311.000	41.57	12.17	53.74	74.00	-20.26	peak
4	7311.000	33.25	12.17	45.42	54.00	-8.58	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

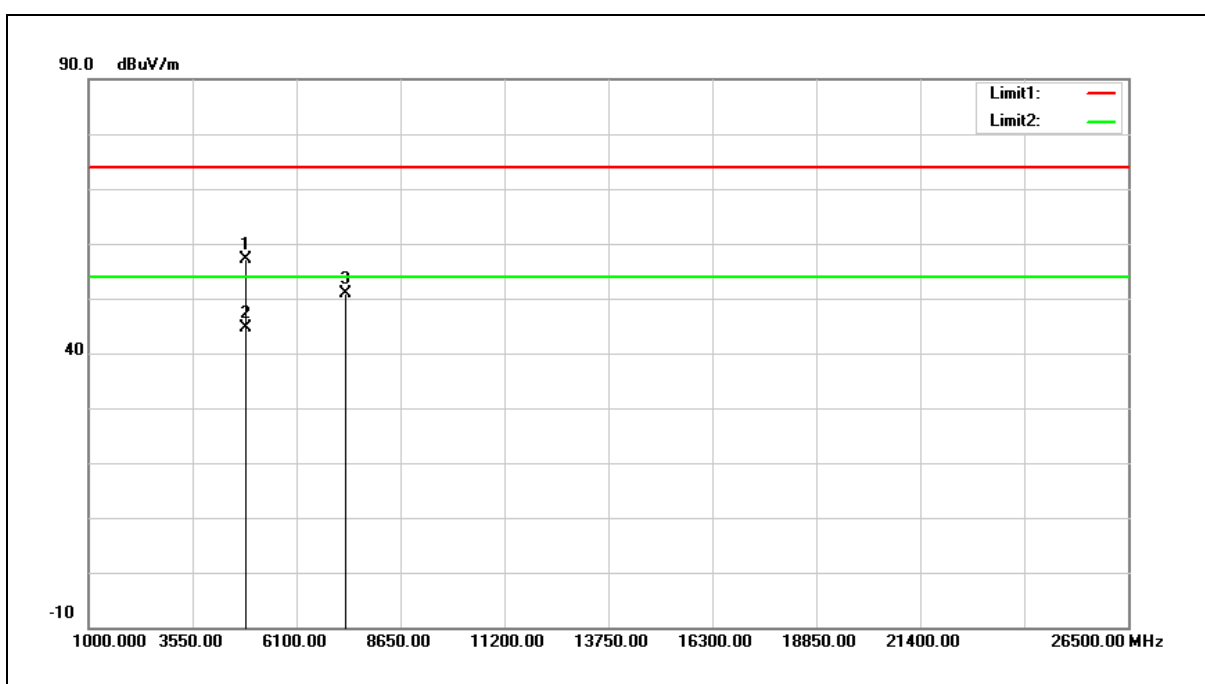


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	51.71	5.51	57.22	74.00	-16.78	peak
2	4874.000	39.22	5.51	44.73	54.00	-9.27	AVG
3	7311.000	38.60	12.17	50.77	74.00	-23.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

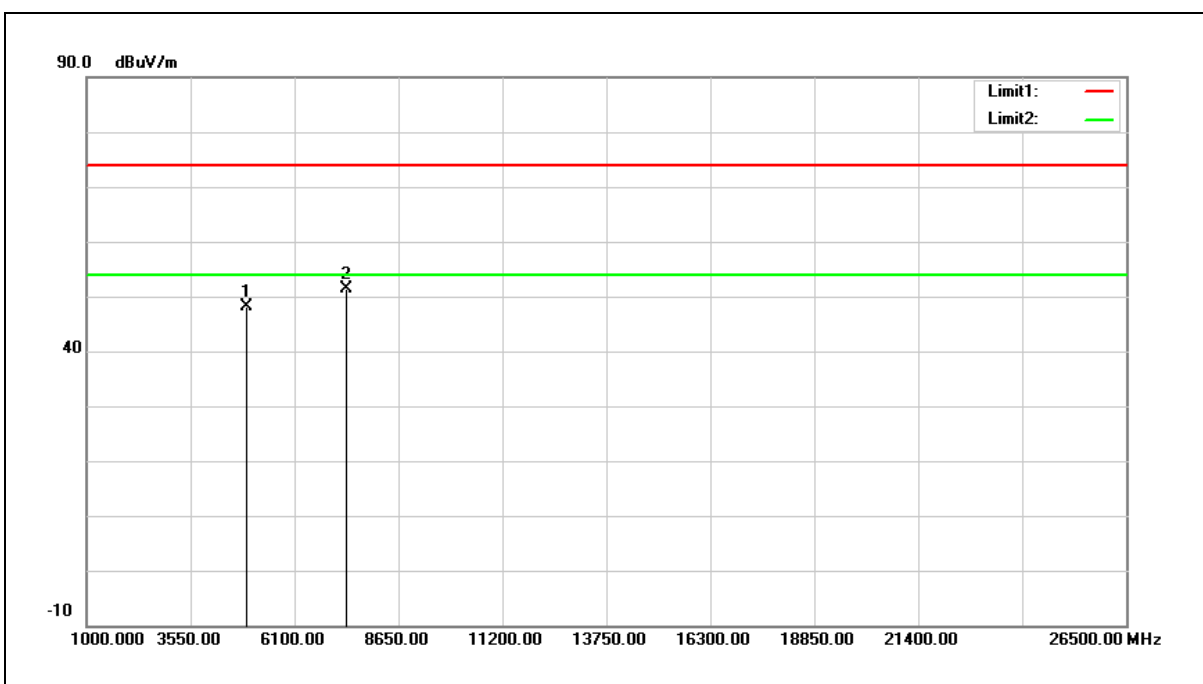


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	42.58	5.67	48.25	74.00	-25.75	peak
2	7386.000	38.87	12.44	51.31	74.00	-22.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

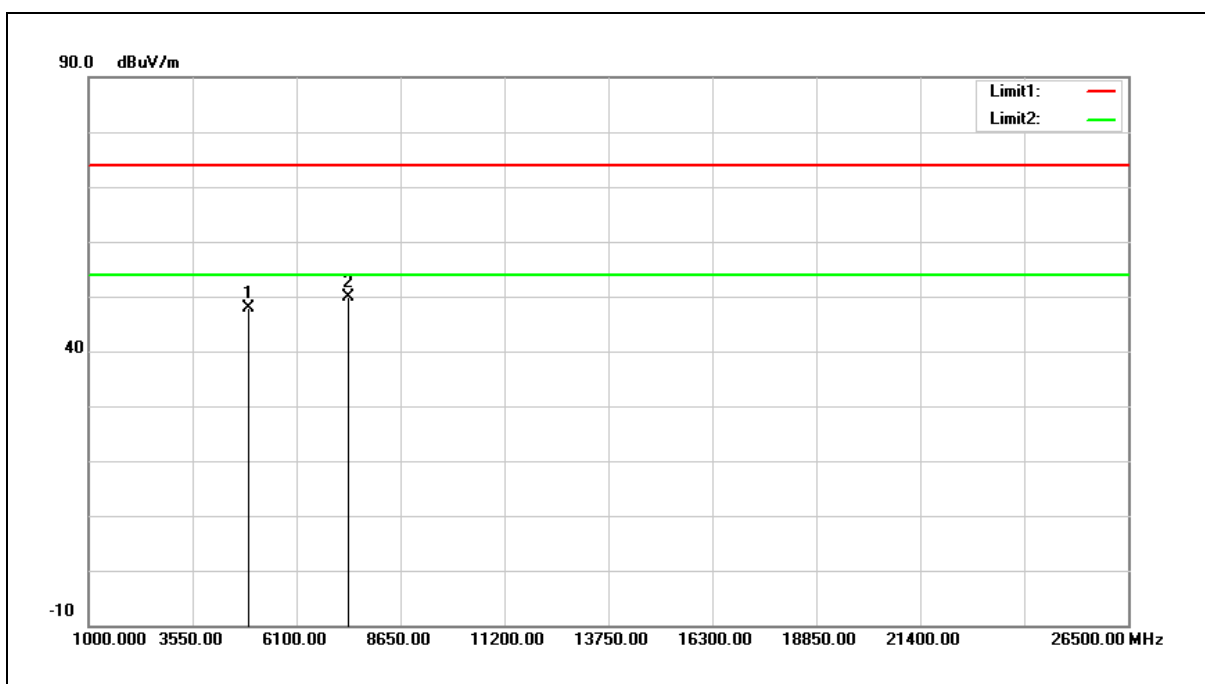


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	42.31	5.67	47.98	74.00	-26.02	peak
2	7386.000	37.32	12.44	49.76	74.00	-24.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

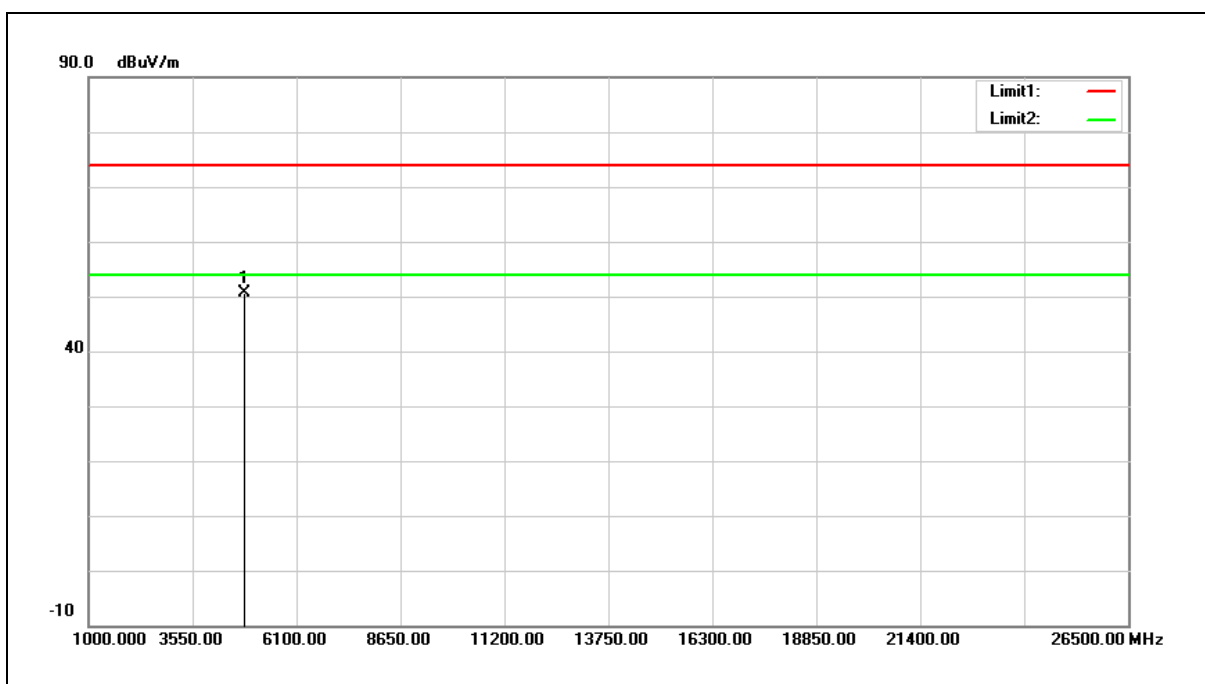


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	45.37	5.36	50.73	74.00	-23.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

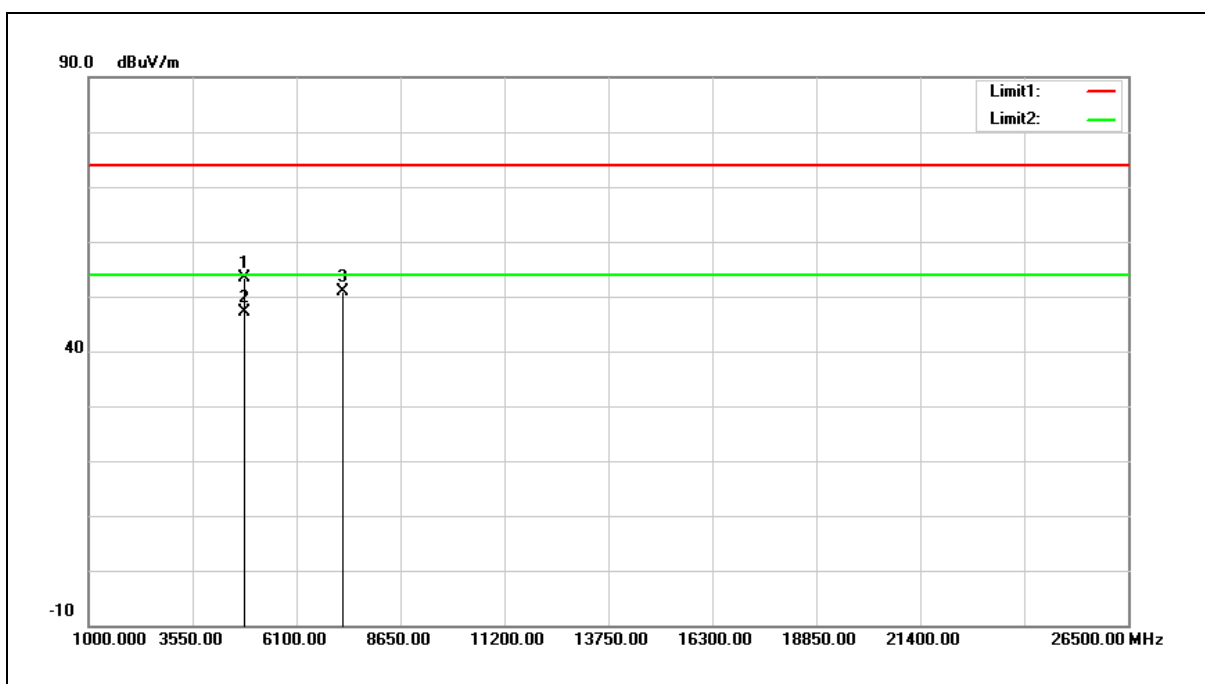


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	47.96	5.36	53.32	74.00	-20.68	peak
2	4824.000	41.67	5.36	47.03	54.00	-6.97	AVG
3	7236.000	38.89	11.92	50.81	74.00	-23.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

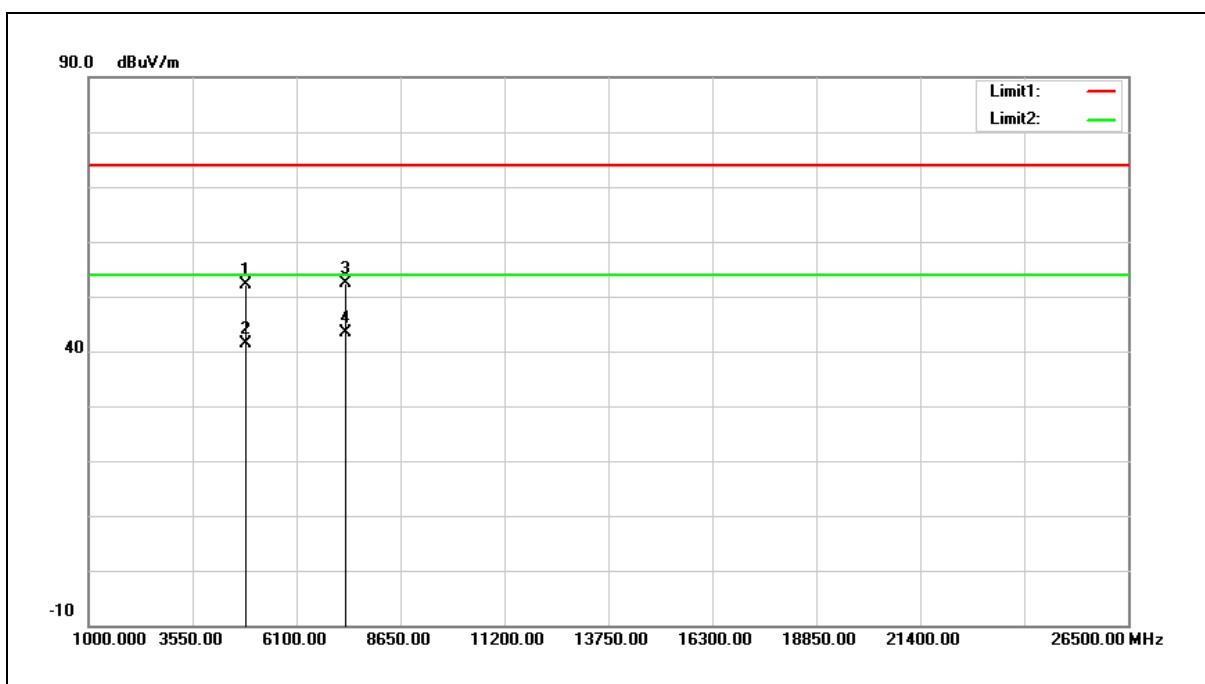


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	46.53	5.51	52.04	74.00	-21.96	peak
2	4874.000	35.98	5.51	41.49	54.00	-12.51	AVG
3	7311.000	40.31	12.17	52.48	74.00	-21.52	peak
4	7311.000	31.15	12.17	43.32	54.00	-10.68	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

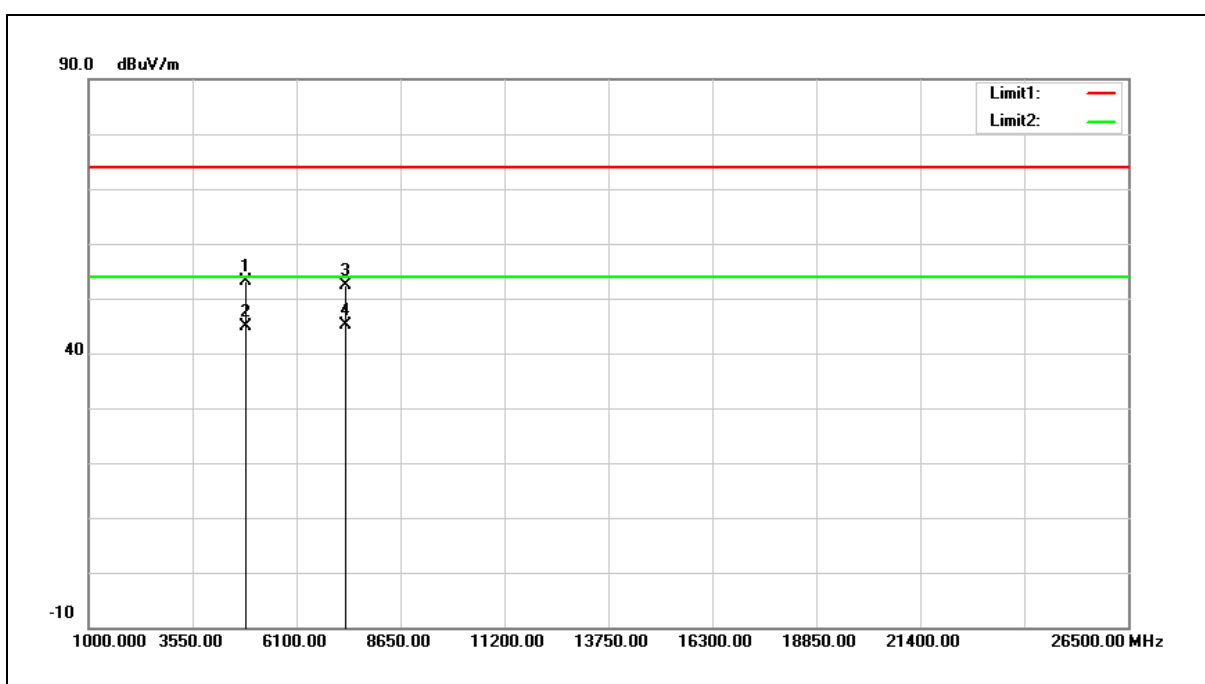


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	47.65	5.51	53.16	74.00	-20.84	peak
2	4874.000	39.36	5.51	44.87	54.00	-9.13	AVG
3	7311.000	40.20	12.17	52.37	74.00	-21.63	peak
4	7311.000	32.92	12.17	45.09	54.00	-8.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

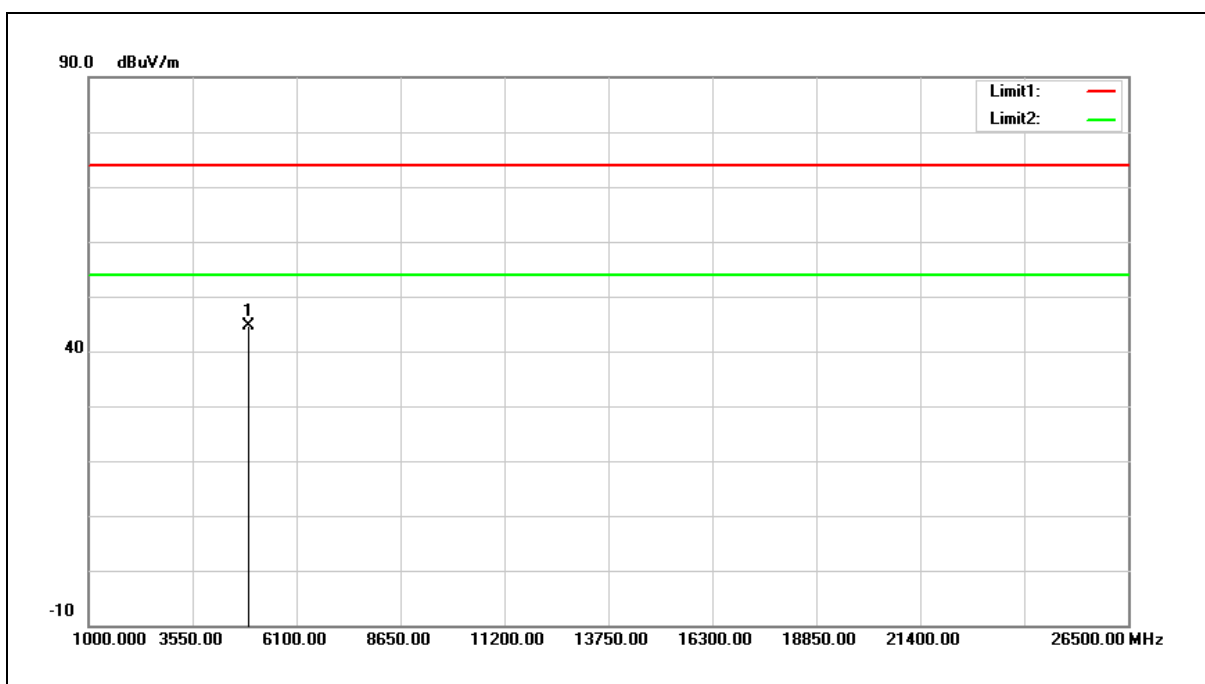


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.92	5.67	44.59	74.00	-29.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

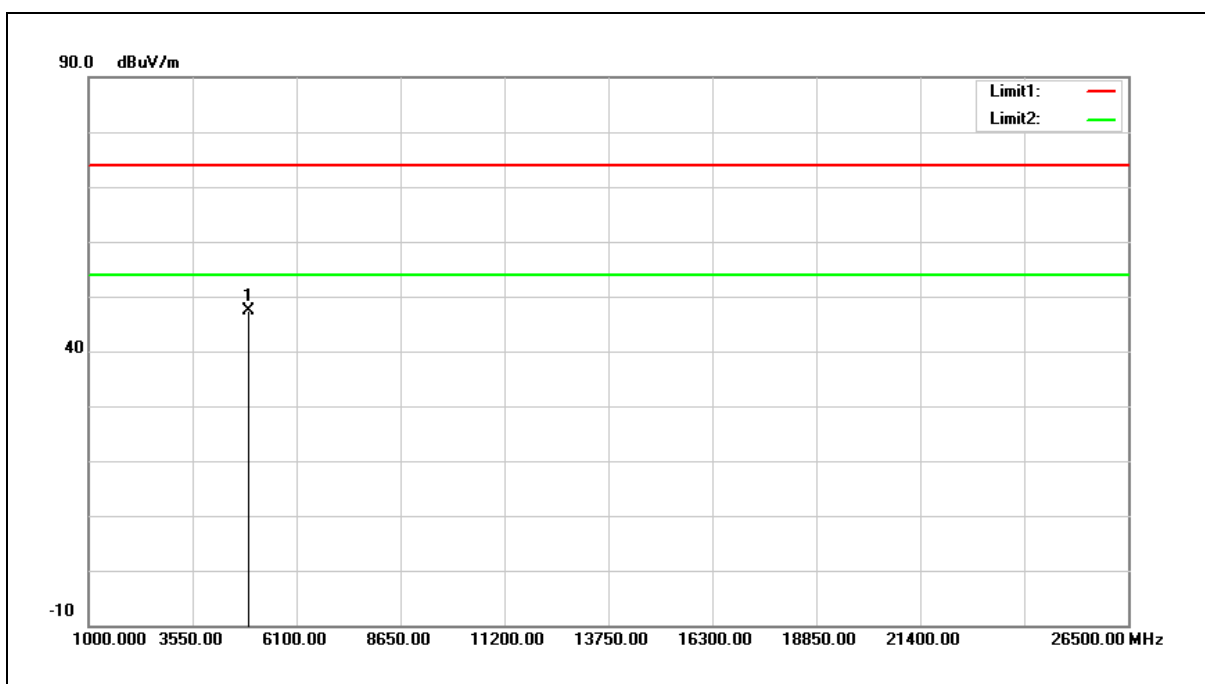


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	41.78	5.67	47.45	74.00	-26.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

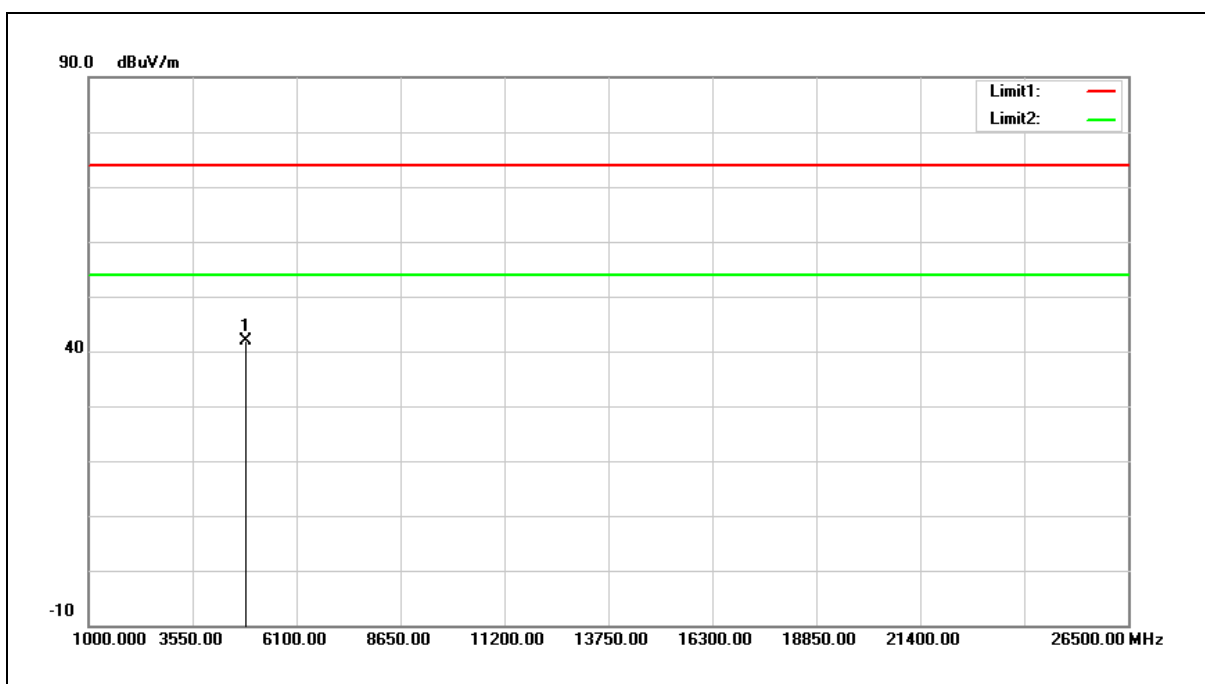

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.49	5.42	41.91	74.00	-32.09	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

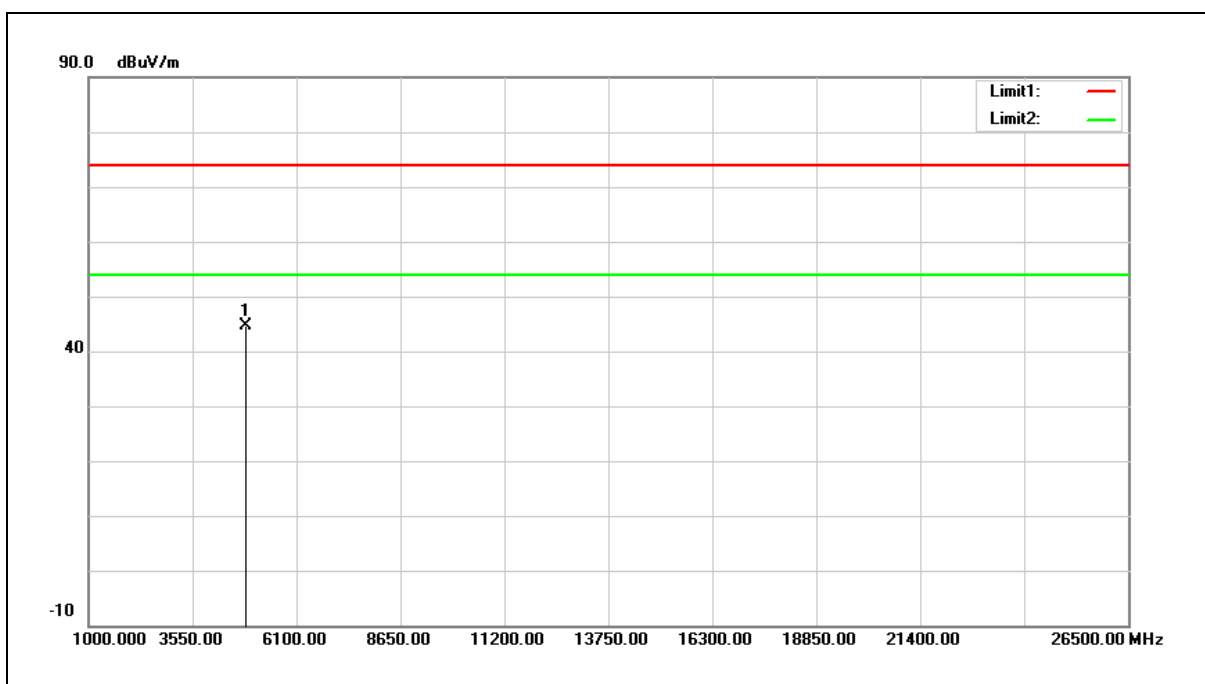

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	39.21	5.42	44.63	74.00	-29.37	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

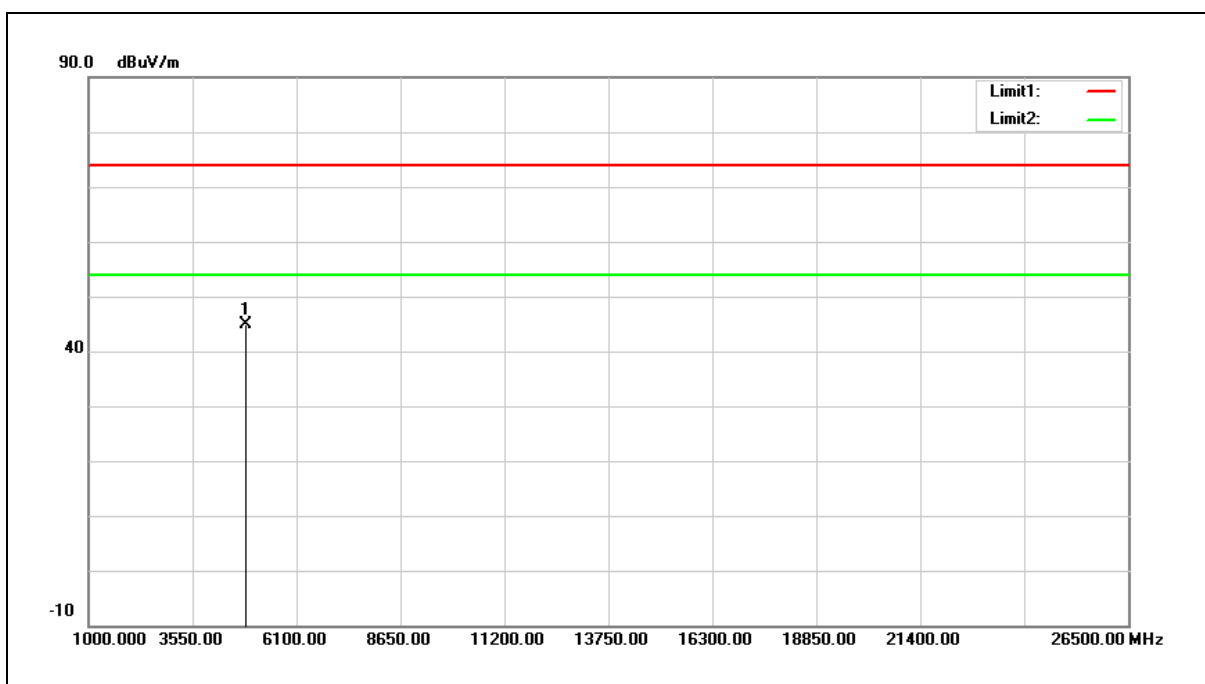


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	39.43	5.51	44.94	74.00	-29.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

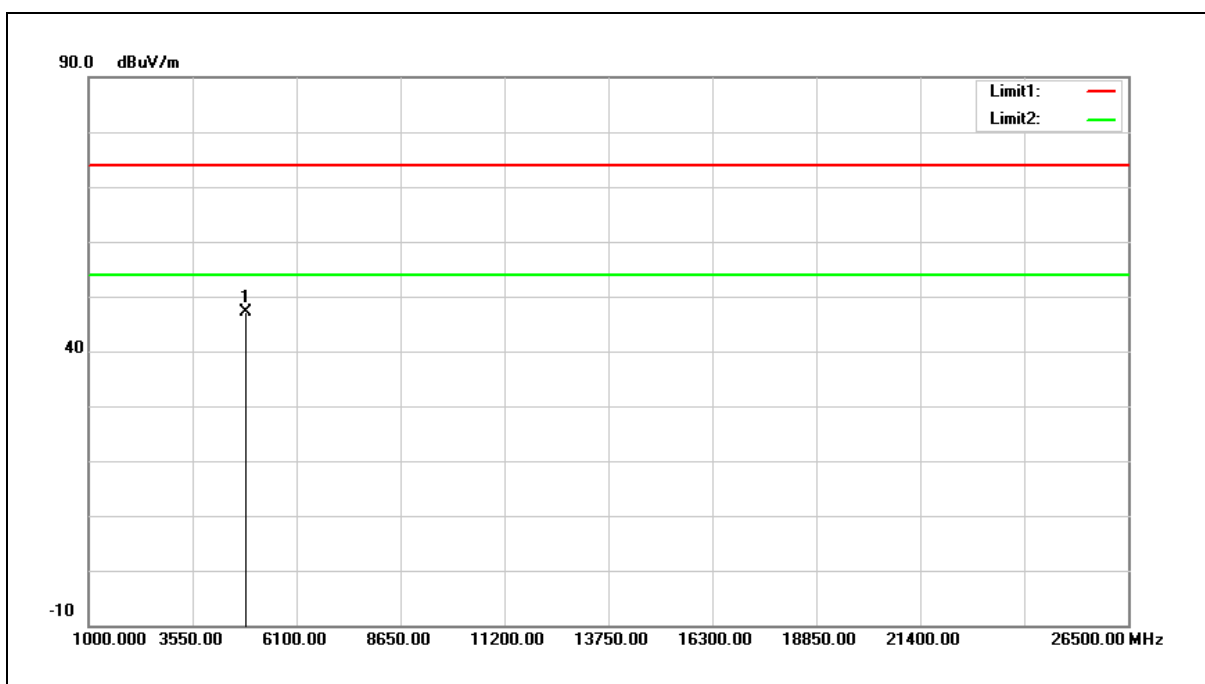

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	41.51	5.51	47.02	74.00	-26.98	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

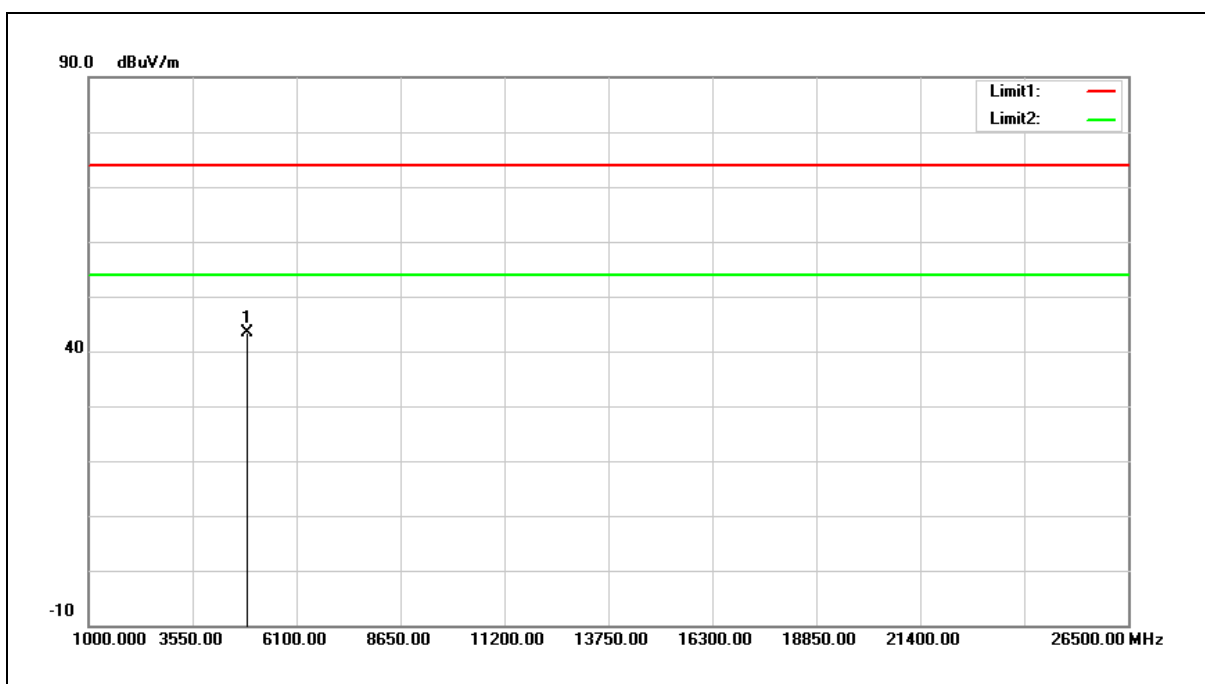


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.89	5.60	43.49	74.00	-30.51	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

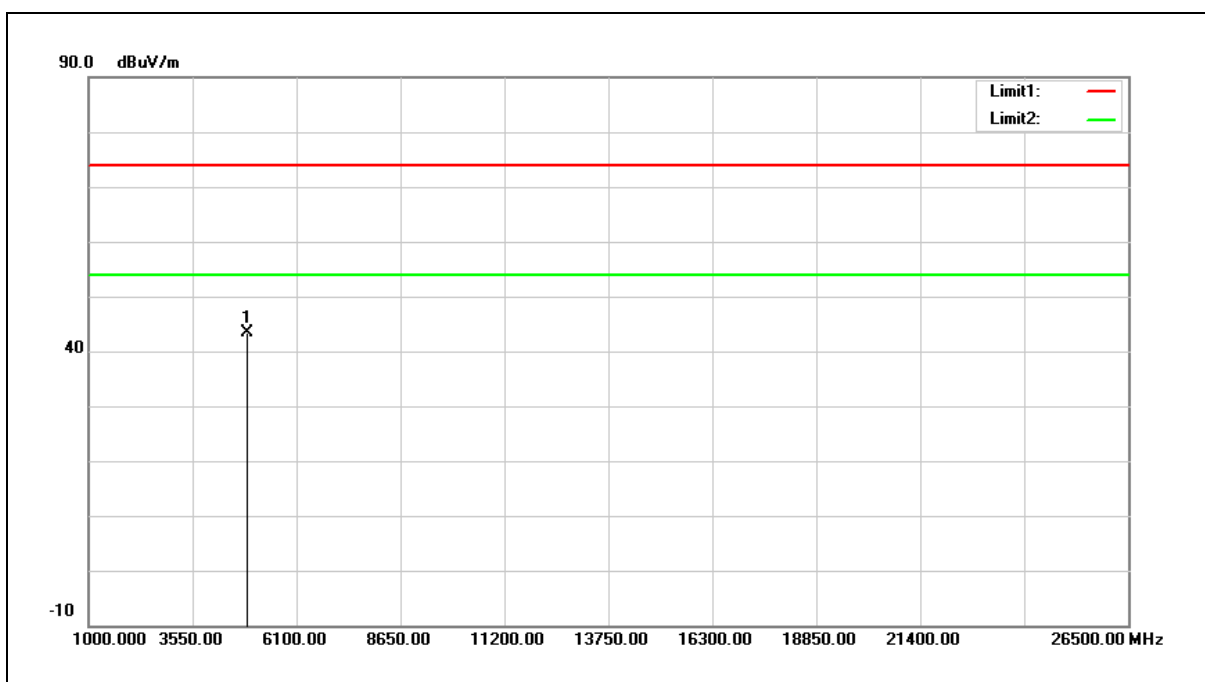


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.79	5.60	43.39	74.00	-30.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Transmitter Unwanted Emissions	Power:	AC 120 V/60 Hz
Test Mode:	Simultaneous Transmitting (DTS+NII)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

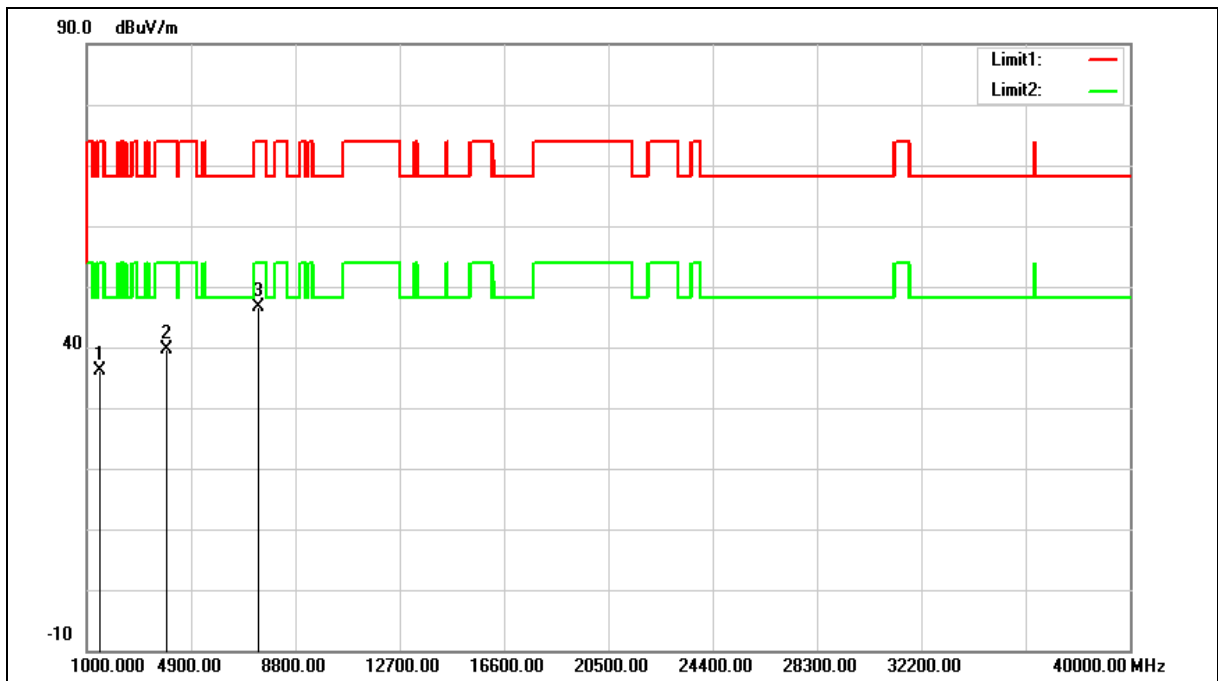


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1510.000	41.08	-4.90	36.18	74.00	-37.82	peak
2	3958.000	36.85	2.83	39.68	74.00	-34.32	peak
3	7426.000	33.96	12.57	46.53	74.00	-27.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Transmitter Unwanted Emissions	Power:	AC 120 V/60 Hz
Test Mode:	Simultaneous Transmitting (DTS+NII)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

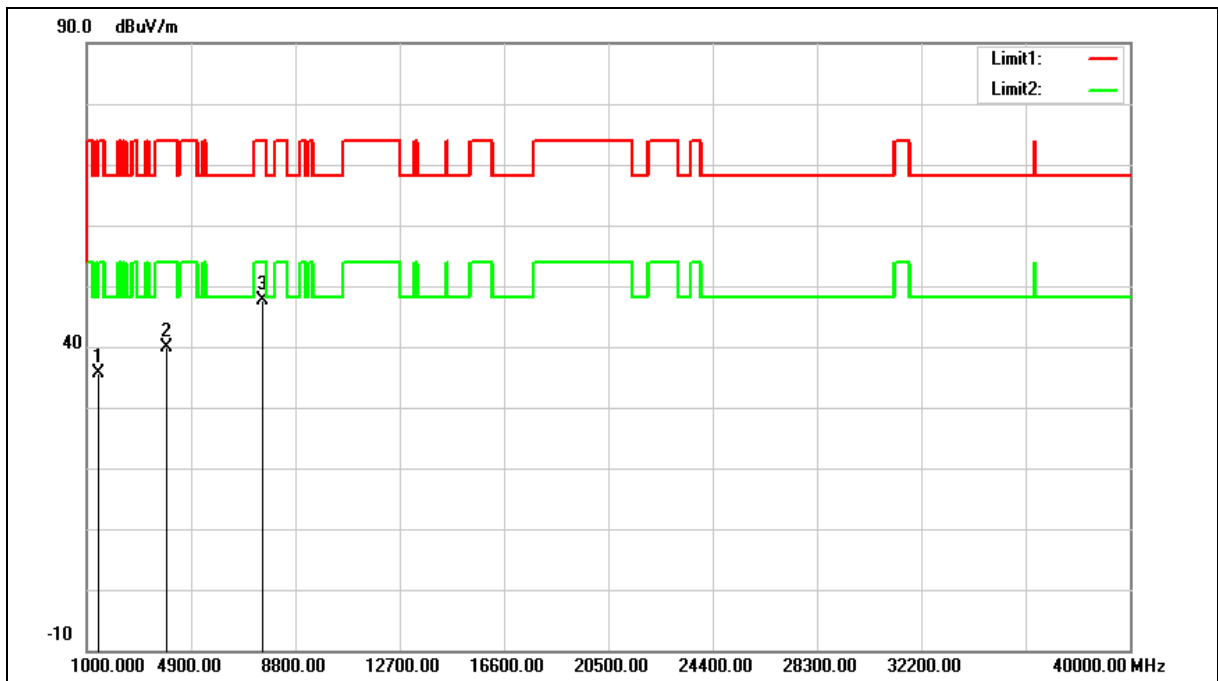

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1442.000	40.77	-5.20	35.57	74.00	-38.43	peak
2	3975.000	36.88	2.89	39.77	74.00	-34.23	peak
3	7545.000	34.85	12.90	47.75	74.00	-26.25	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

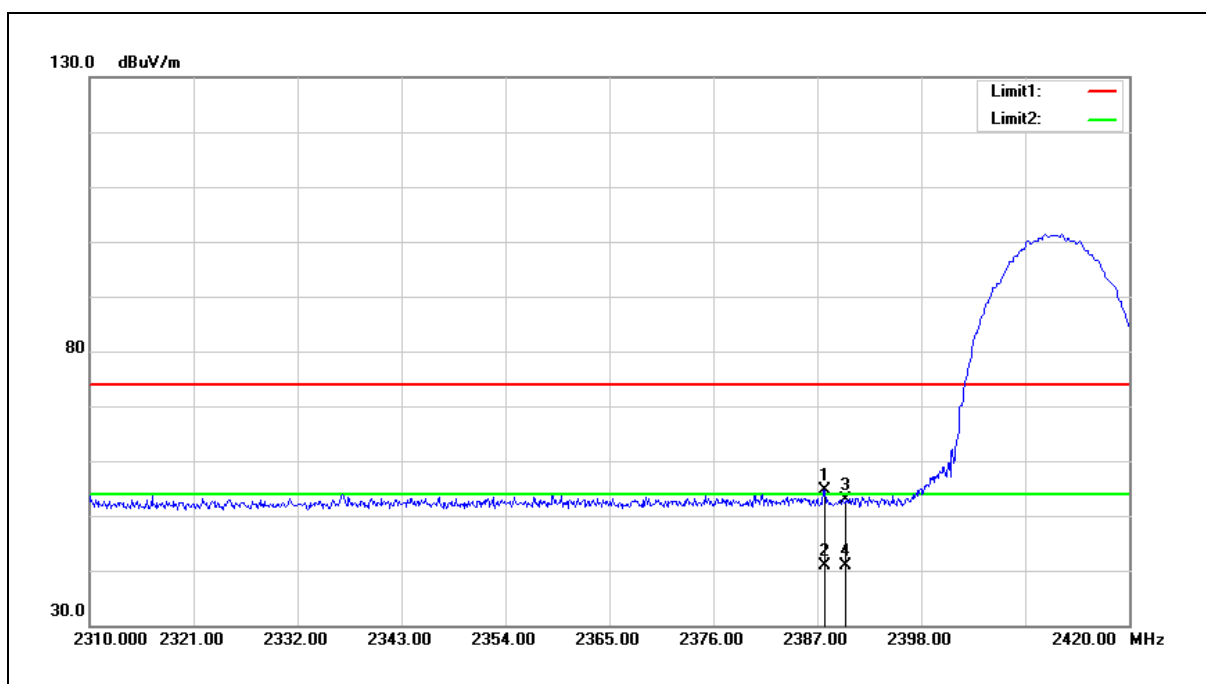


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.770	56.24	-1.52	54.72	74.00	-19.28	peak
2	2387.770	42.45	-1.52	40.93	54.00	-13.07	AVG
3	2390.000	54.44	-1.53	52.91	74.00	-21.09	peak
4	2390.000	42.52	-1.53	40.99	54.00	-13.01	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

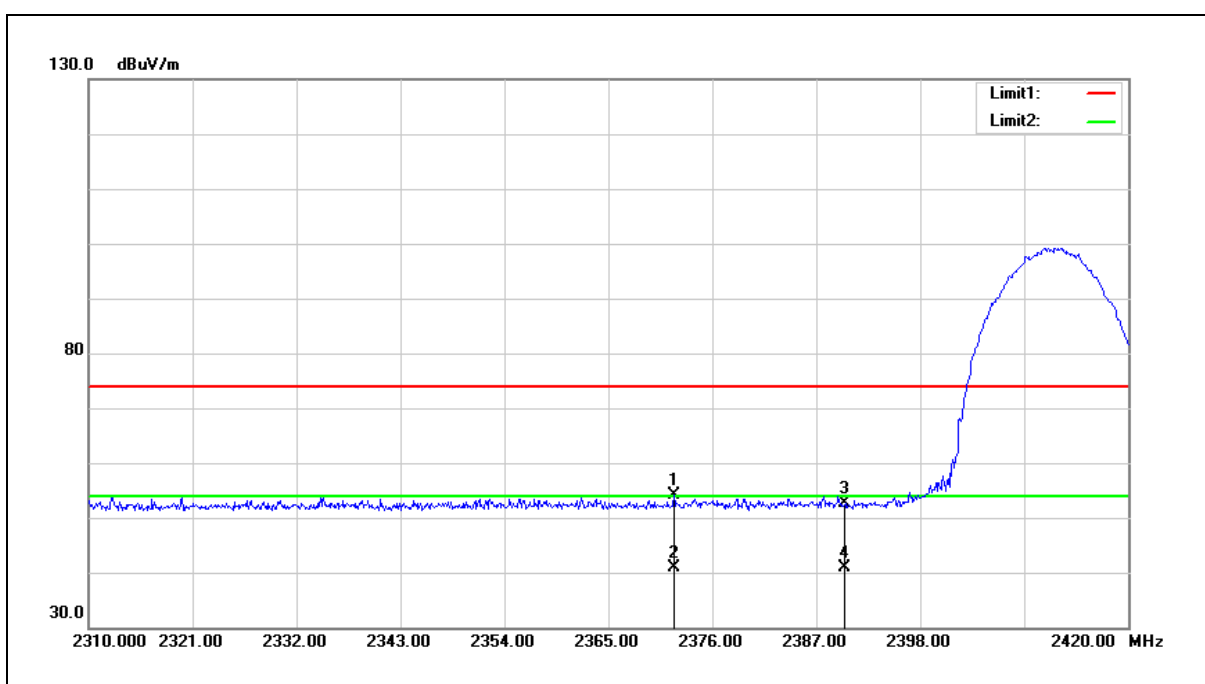

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.930	55.59	-1.58	54.01	74.00	-19.99	peak
2	2371.930	42.41	-1.58	40.83	54.00	-13.17	AVG
3	2390.000	54.16	-1.53	52.63	74.00	-21.37	peak
4	2390.000	42.46	-1.53	40.93	54.00	-13.07	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

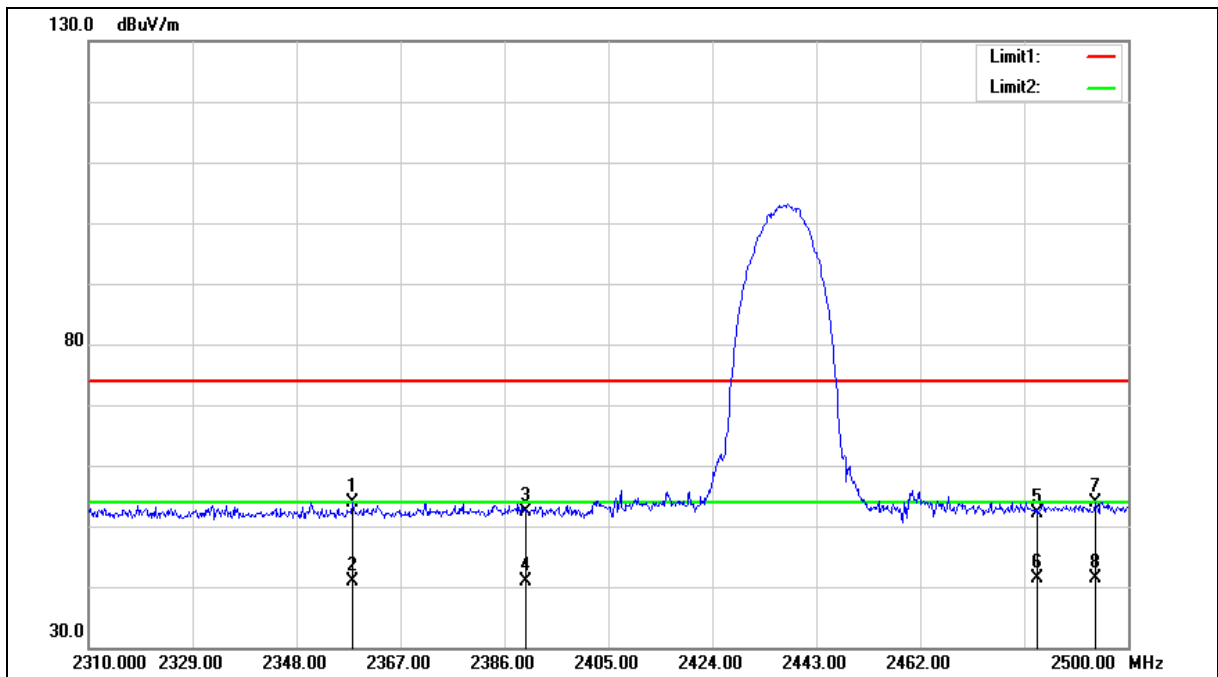

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2358.260	55.46	-1.64	53.82	74.00	-20.18	peak
2	2358.260	42.48	-1.64	40.84	54.00	-13.16	AVG
3	2390.000	53.98	-1.53	52.45	74.00	-21.55	peak
4	2390.000	42.50	-1.53	40.97	54.00	-13.03	AVG
5	2483.500	53.41	-1.17	52.24	74.00	-21.76	peak
6	2483.500	42.60	-1.17	41.43	54.00	-12.57	AVG
7	2493.920	55.13	-1.14	53.99	74.00	-20.01	peak
8	2493.920	42.53	-1.14	41.39	54.00	-12.61	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

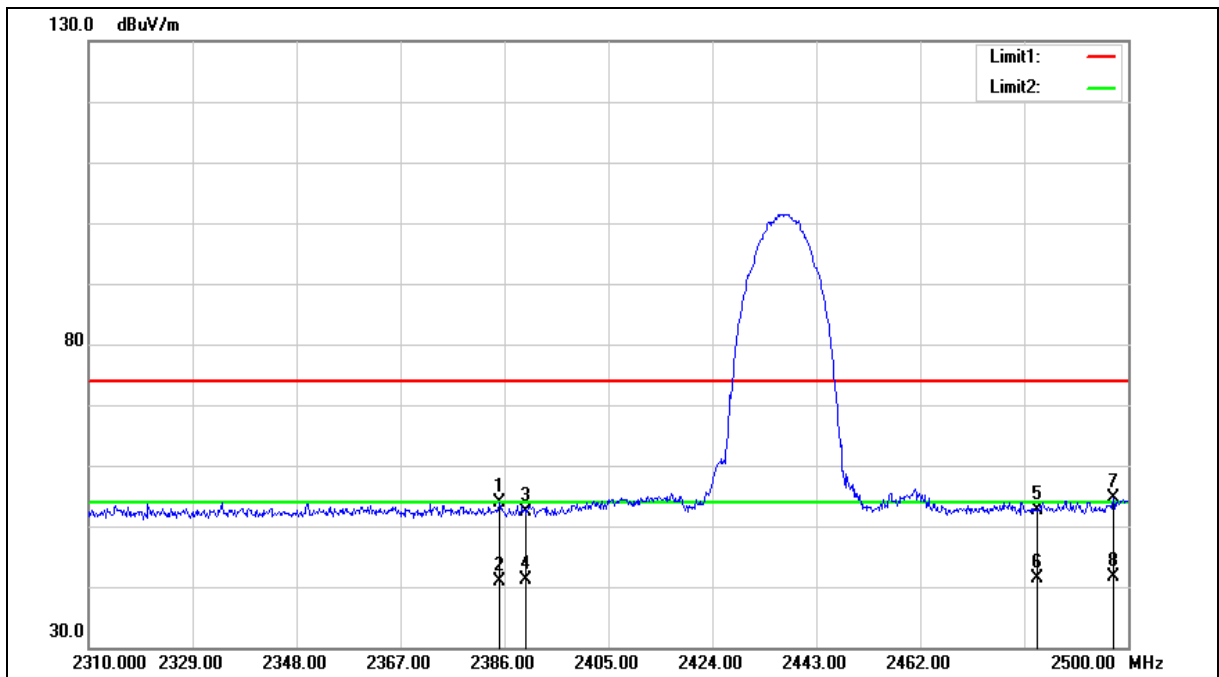

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.050	55.44	-1.54	53.90	74.00	-20.10	peak
2	2385.050	42.54	-1.54	41.00	54.00	-13.00	AVG
3	2390.000	54.01	-1.53	52.48	74.00	-21.52	peak
4	2390.000	42.58	-1.53	41.05	54.00	-12.95	AVG
5	2483.500	53.83	-1.17	52.66	74.00	-21.34	peak
6	2483.500	42.66	-1.17	41.49	54.00	-12.51	AVG
7	2497.340	55.69	-1.12	54.57	74.00	-19.43	peak
8	2497.340	42.65	-1.12	41.53	54.00	-12.47	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

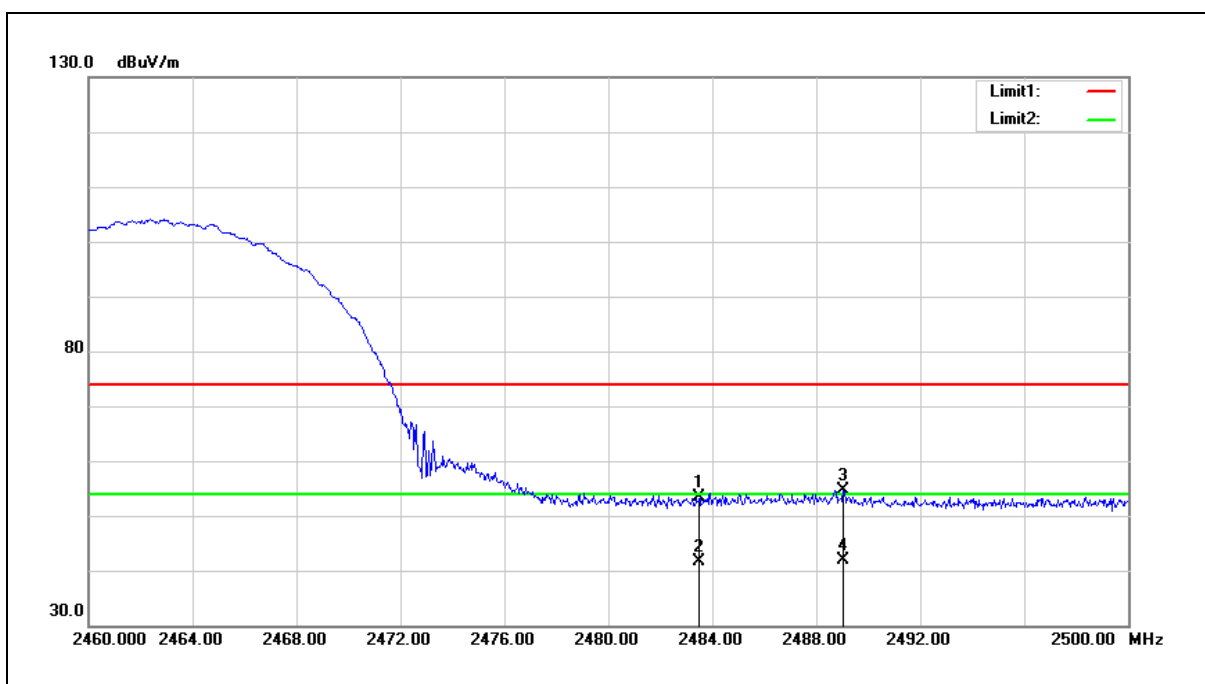


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.61	-1.17	53.44	74.00	-20.56	peak
2	2483.500	42.81	-1.17	41.64	54.00	-12.36	AVG
3	2489.040	55.82	-1.15	54.67	74.00	-19.33	peak
4	2489.040	43.11	-1.15	41.96	54.00	-12.04	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

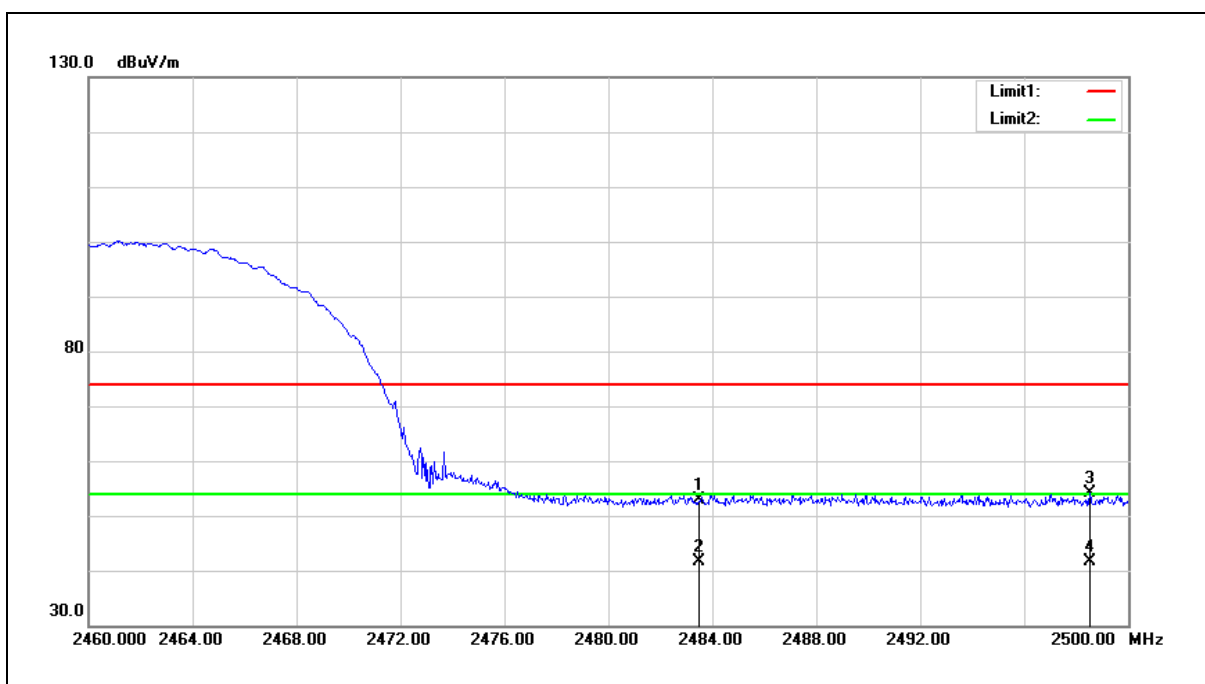


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.98	-1.17	52.81	74.00	-21.19	peak
2	2483.500	42.88	-1.17	41.71	54.00	-12.29	AVG
3	2498.520	55.14	-1.11	54.03	74.00	-19.97	peak
4	2498.520	42.75	-1.11	41.64	54.00	-12.36	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

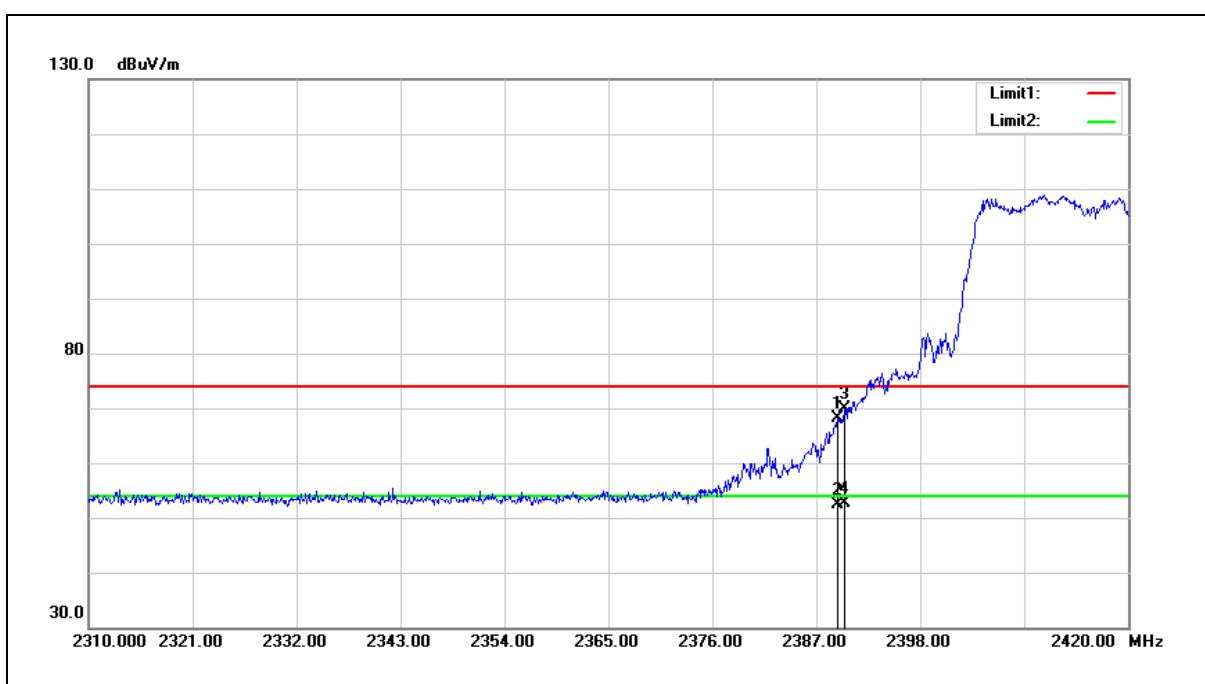


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	69.73	-1.53	68.20	74.00	-5.80	peak
2	2389.200	53.91	-1.53	52.38	54.00	-1.62	AVG
3	2390.000	71.34	-1.53	69.81	74.00	-4.19	peak
4	2390.000	54.18	-1.53	52.65	54.00	-1.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

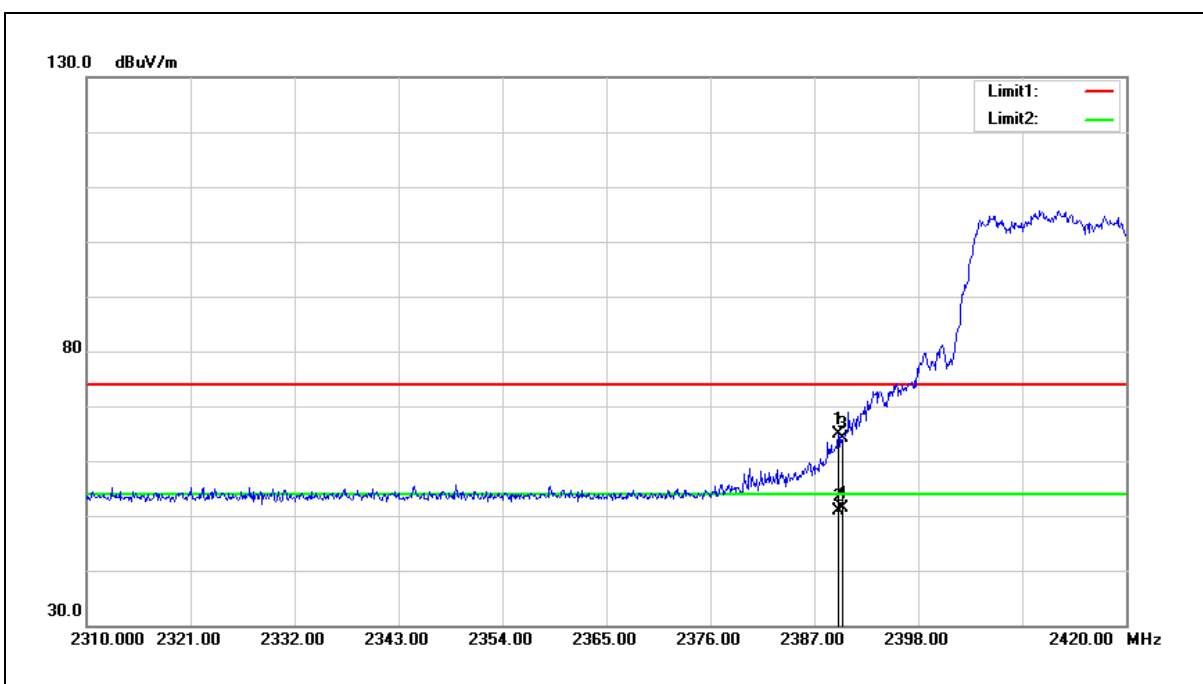

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	66.35	-1.53	64.82	74.00	-9.18	peak
2	2389.530	52.39	-1.53	50.86	54.00	-3.14	AVG
3	2390.000	65.66	-1.53	64.13	74.00	-9.87	peak
4	2390.000	52.90	-1.53	51.37	54.00	-2.63	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

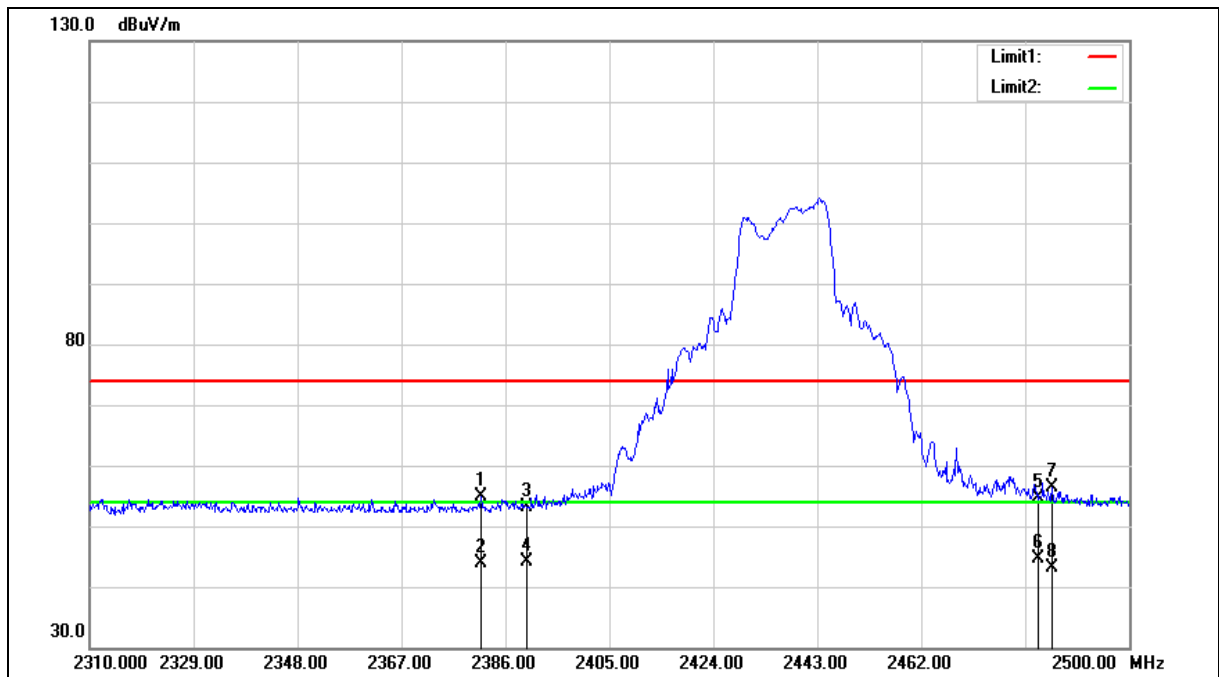

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.440	56.39	-1.55	54.84	74.00	-19.16	peak
2	2381.440	45.45	-1.55	43.90	54.00	-10.10	AVG
3	2390.000	54.65	-1.53	53.12	74.00	-20.88	peak
4	2390.000	45.62	-1.53	44.09	54.00	-9.91	AVG
5	2483.500	55.88	-1.17	54.71	74.00	-19.29	peak
6	2483.500	45.92	-1.17	44.75	54.00	-9.25	AVG
7	2485.940	57.48	-1.17	56.31	74.00	-17.69	peak
8	2485.940	44.22	-1.17	43.05	54.00	-10.95	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

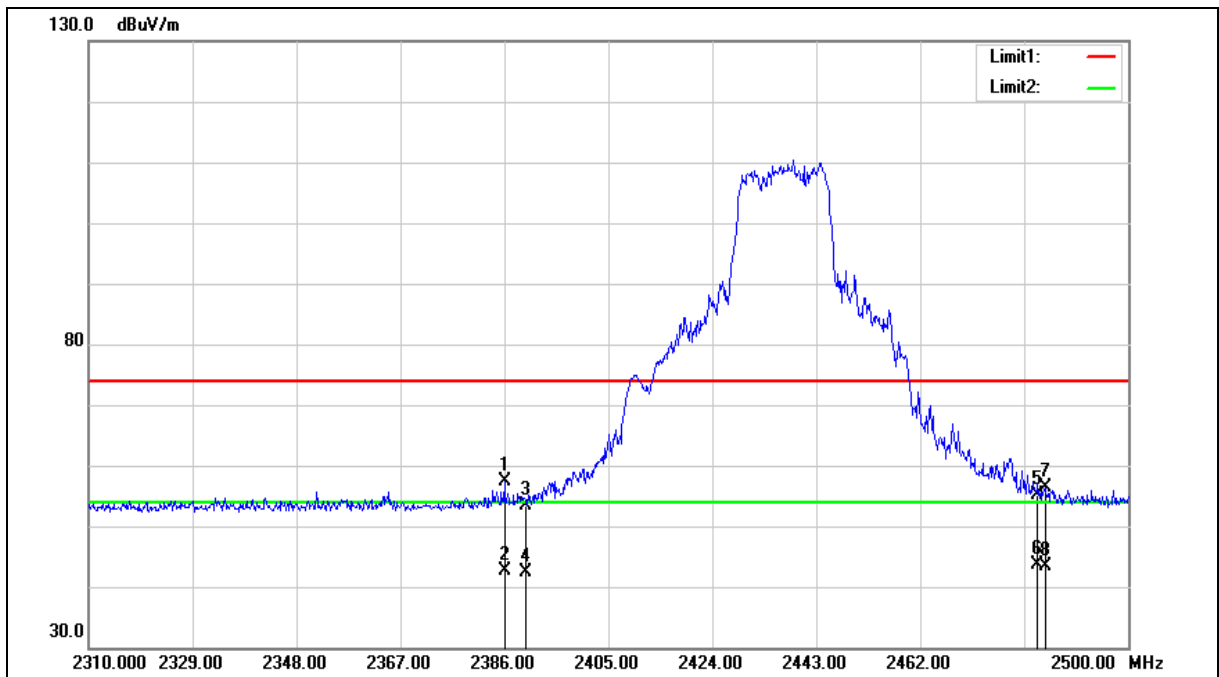

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.000	59.00	-1.53	57.47	74.00	-16.53	peak
2	2386.000	44.08	-1.53	42.55	54.00	-11.45	AVG
3	2390.000	55.01	-1.53	53.48	74.00	-20.52	peak
4	2390.000	43.91	-1.53	42.38	54.00	-11.62	AVG
5	2483.500	56.41	-1.17	55.24	74.00	-18.76	peak
6	2483.500	44.76	-1.17	43.59	54.00	-10.41	AVG
7	2484.800	57.45	-1.17	56.28	74.00	-17.72	peak
8	2484.800	44.46	-1.17	43.29	54.00	-10.71	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

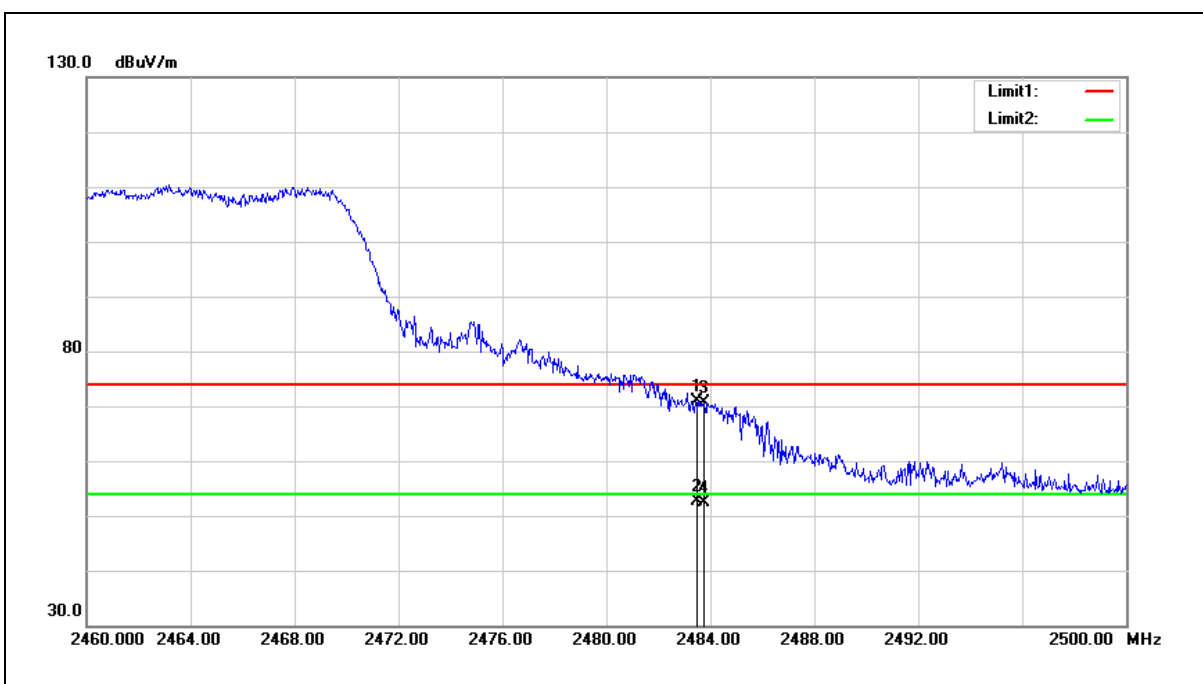


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	72.08	-1.17	70.91	74.00	-3.09	peak
2	2483.500	53.72	-1.17	52.55	54.00	-1.45	AVG
3	2483.760	71.73	-1.17	70.56	74.00	-3.44	peak
4	2483.760	53.65	-1.17	52.48	54.00	-1.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

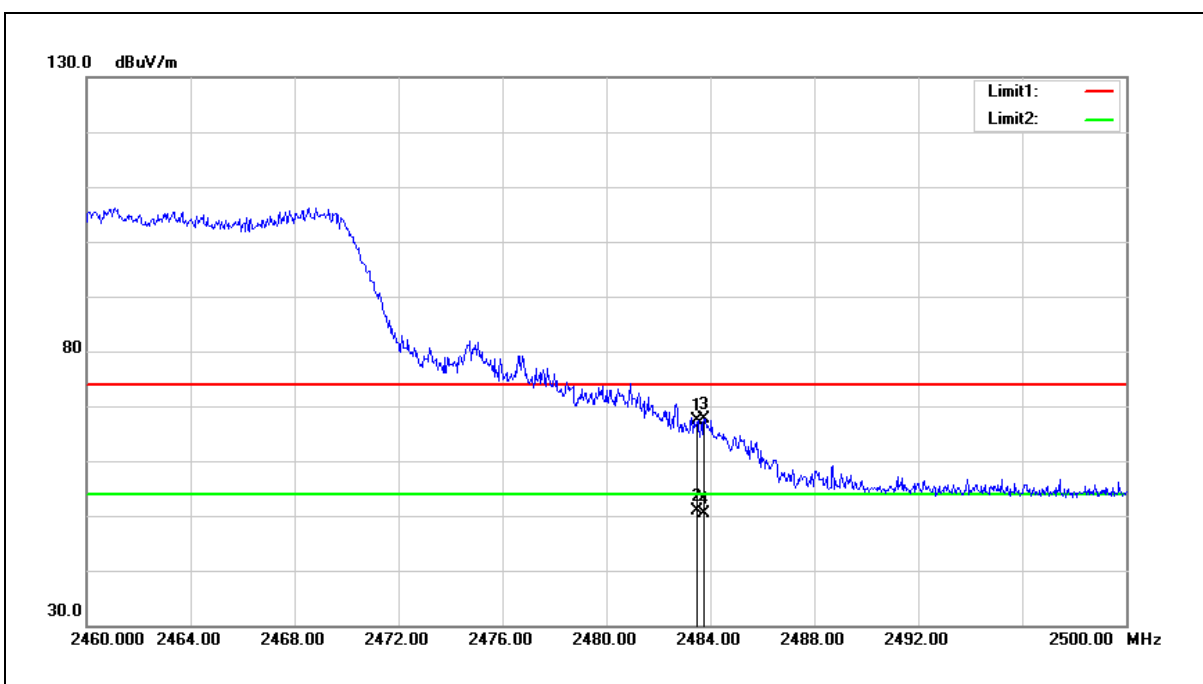


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	68.64	-1.17	67.47	74.00	-6.53	peak
2	2483.500	52.06	-1.17	50.89	54.00	-3.11	AVG
3	2483.760	68.74	-1.17	67.57	74.00	-6.43	peak
4	2483.760	51.60	-1.17	50.43	54.00	-3.57	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

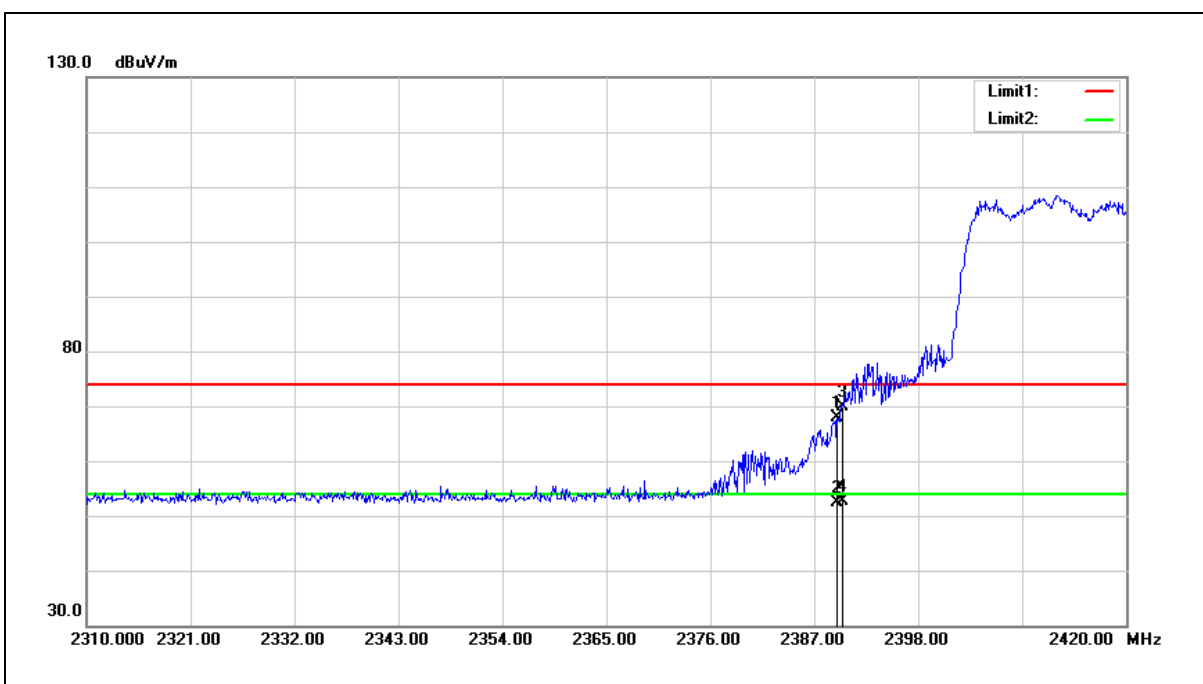


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	69.38	-1.53	67.85	74.00	-6.15	peak
2	2389.420	53.96	-1.53	52.43	54.00	-1.57	AVG
3	2390.000	71.31	-1.53	69.78	74.00	-4.22	peak
4	2390.000	54.17	-1.53	52.64	54.00	-1.36	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

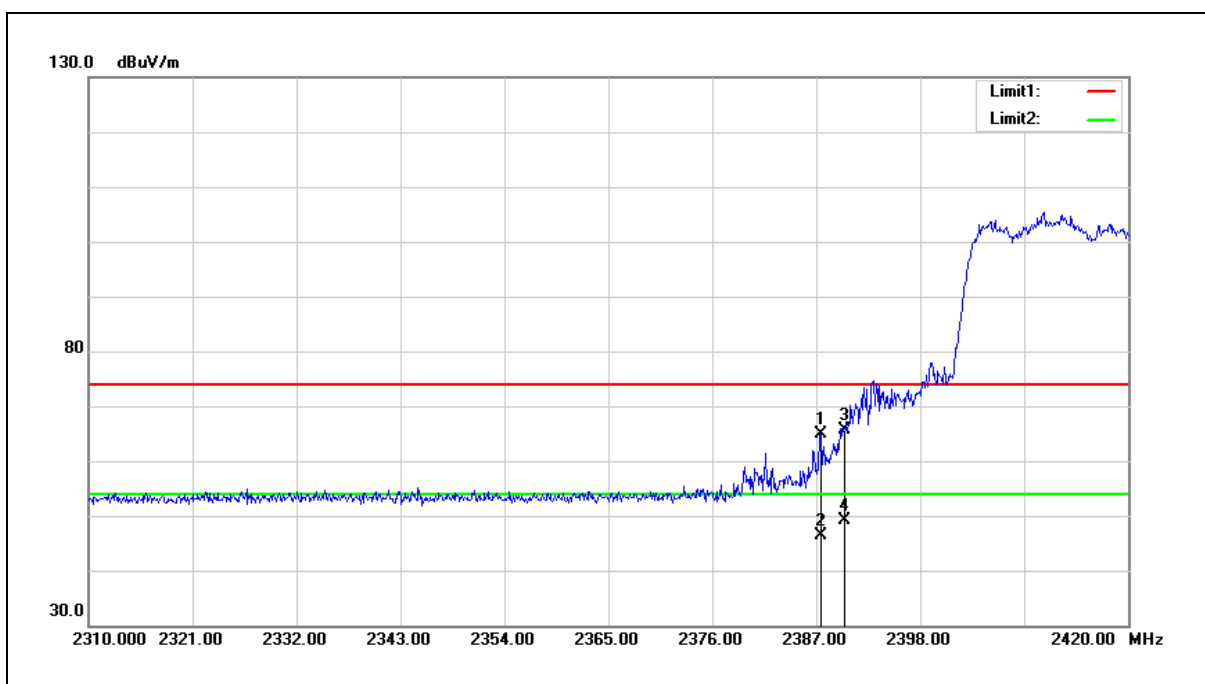

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.440	66.45	-1.52	64.93	74.00	-9.07	peak
2	2387.440	47.90	-1.52	46.38	54.00	-7.62	AVG
3	2390.000	67.21	-1.53	65.68	74.00	-8.32	peak
4	2390.000	50.59	-1.53	49.06	54.00	-4.94	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

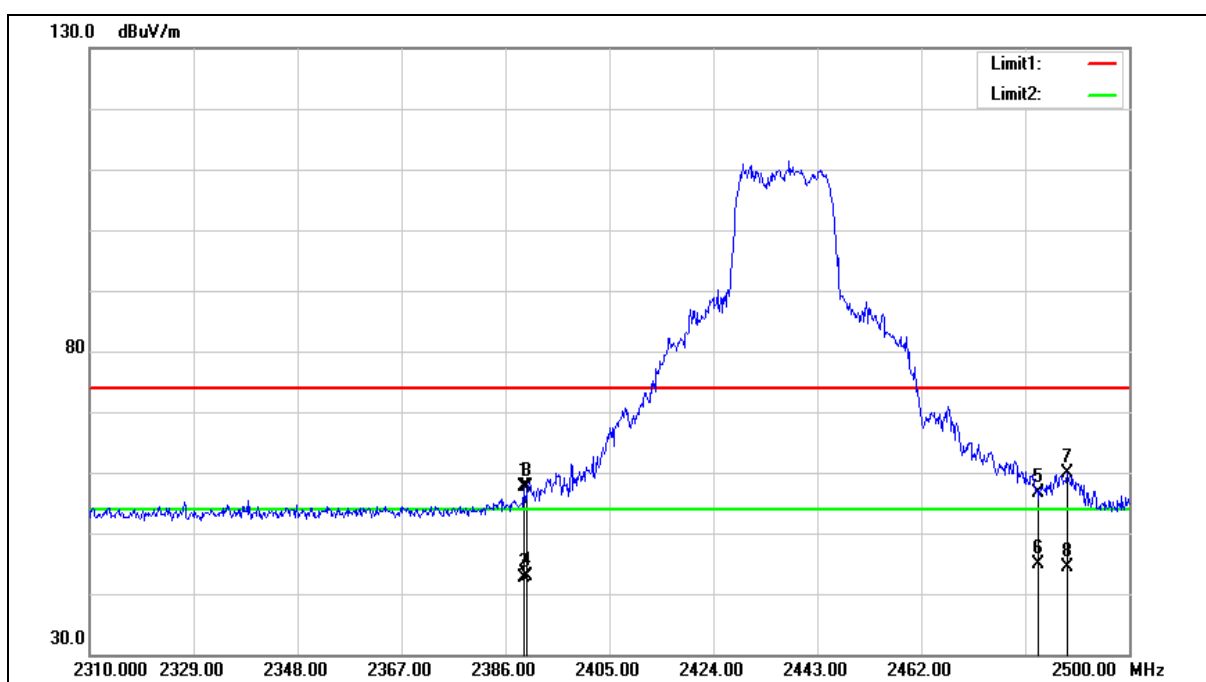

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	59.14	-1.53	57.61	74.00	-16.39	peak
2	2389.420	44.21	-1.53	42.68	54.00	-11.32	AVG
3	2390.000	59.19	-1.53	57.66	74.00	-16.34	peak
4	2390.000	44.32	-1.53	42.79	54.00	-11.21	AVG
5	2483.500	57.90	-1.17	56.73	74.00	-17.27	peak
6	2483.500	46.15	-1.17	44.98	54.00	-9.02	AVG
7	2488.790	61.14	-1.15	59.99	74.00	-14.01	peak
8	2488.790	45.47	-1.15	44.32	54.00	-9.68	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

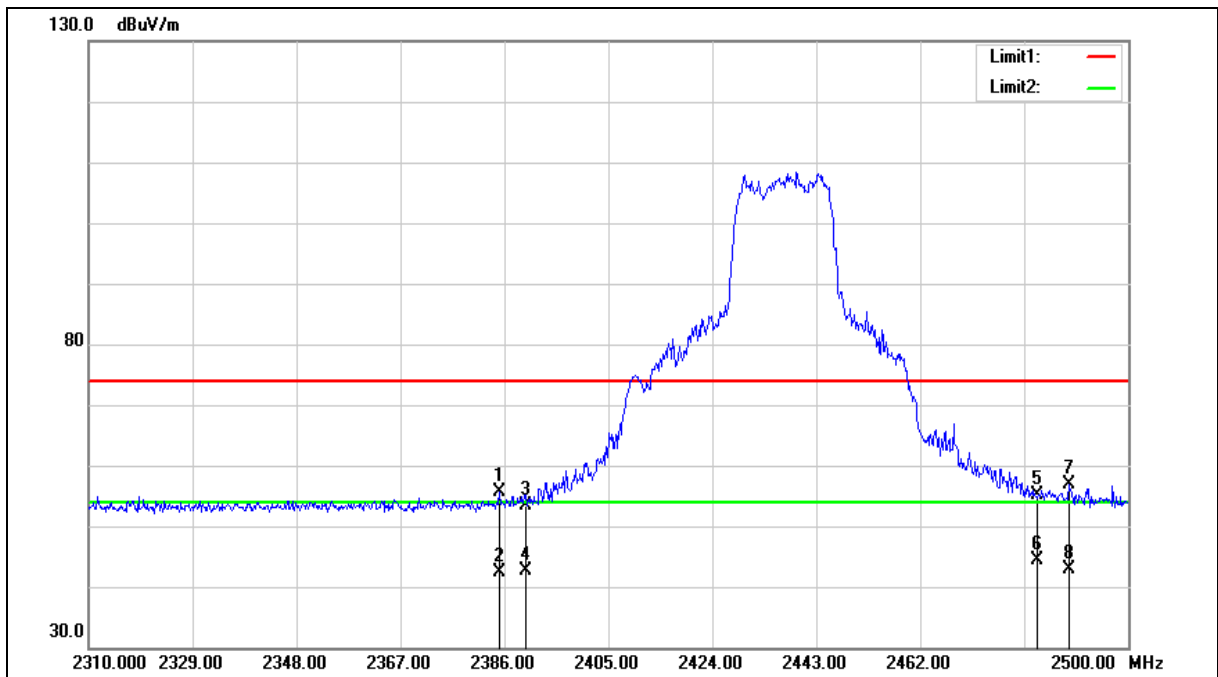



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.050	57.19	-1.54	55.65	74.00	-18.35	peak
2	2385.050	44.04	-1.54	42.50	54.00	-11.50	AVG
3	2390.000	54.94	-1.53	53.41	74.00	-20.59	peak
4	2390.000	44.04	-1.53	42.51	54.00	-11.49	AVG
5	2483.500	56.32	-1.17	55.15	74.00	-18.85	peak
6	2483.500	45.57	-1.17	44.40	54.00	-9.60	AVG
7	2489.170	57.98	-1.15	56.83	74.00	-17.17	peak
8	2489.170	43.95	-1.15	42.80	54.00	-11.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

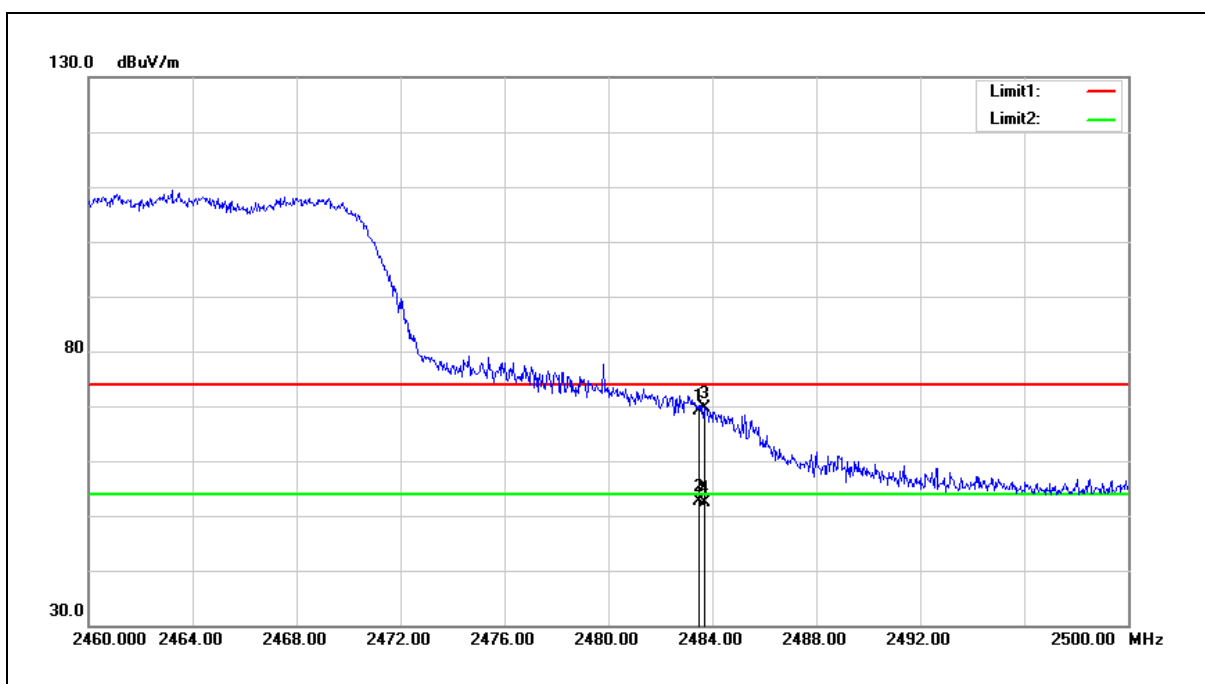


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	70.20	-1.17	69.03	74.00	-4.97	peak
2	2483.500	53.74	-1.17	52.57	54.00	-1.43	AVG
3	2483.720	70.68	-1.17	69.51	74.00	-4.49	peak
4	2483.720	53.57	-1.17	52.40	54.00	-1.60	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

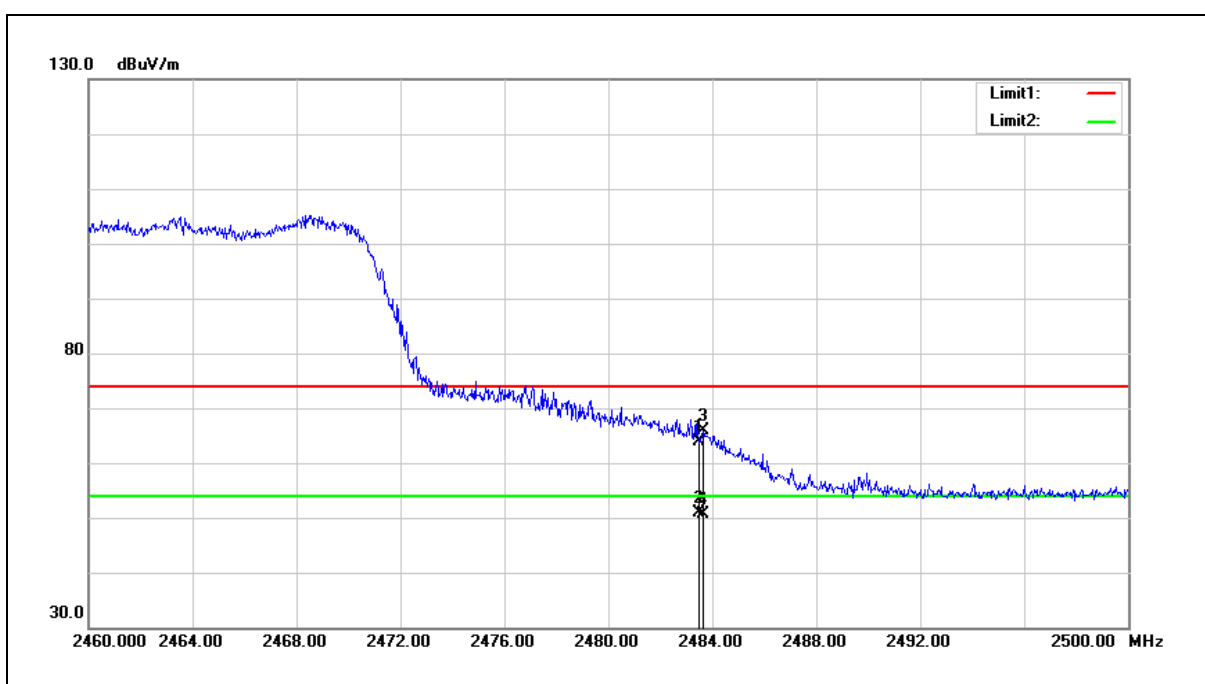


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	64.97	-1.17	63.80	74.00	-10.20	peak
2	2483.500	52.09	-1.17	50.92	54.00	-3.08	AVG
3	2483.640	67.15	-1.17	65.98	74.00	-8.02	peak
4	2483.640	51.74	-1.17	50.57	54.00	-3.43	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

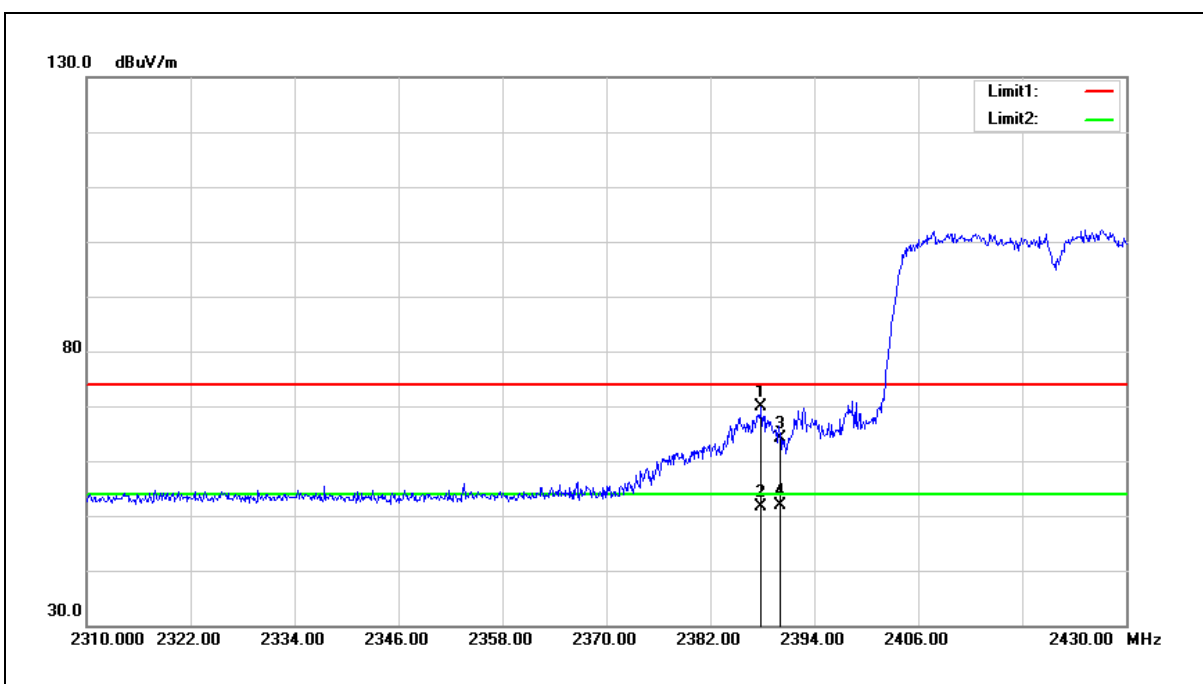


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.880	71.42	-1.52	69.90	74.00	-4.10	peak
2	2387.880	53.26	-1.52	51.74	54.00	-2.26	AVG
3	2390.000	65.54	-1.53	64.01	74.00	-9.99	peak
4	2390.000	53.51	-1.53	51.98	54.00	-2.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

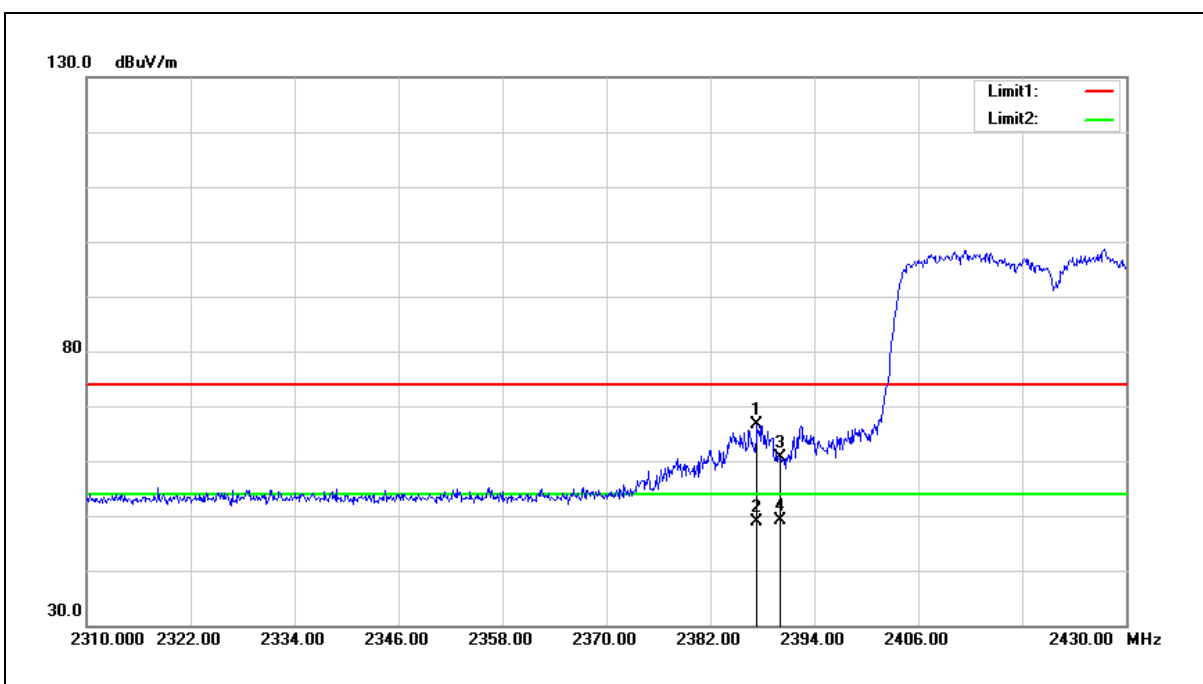

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.400	68.09	-1.52	66.57	74.00	-7.43	peak
2	2387.400	50.36	-1.52	48.84	54.00	-5.16	AVG
3	2390.000	62.05	-1.53	60.52	74.00	-13.48	peak
4	2390.000	50.54	-1.53	49.01	54.00	-4.99	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



130.0 dBuV/m

80

30.0

2310.00 2329.00 2348.00 2367.00 2386.00 2405.00 2424.00 2443.00 2462.00 2500.00 MHz

Limit1: —

Limit2: —

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.850	67.44	-1.52	65.92	74.00	-8.08	peak
2	2388.850	52.86	-1.52	51.34	54.00	-2.66	AVG
3	2390.000	65.76	-1.53	64.23	74.00	-9.77	peak
4	2390.000	54.36	-1.53	52.83	54.00	-1.17	AVG
5	2483.500	67.10	-1.17	65.93	74.00	-8.07	peak
6	2483.500	53.41	-1.17	52.24	54.00	-1.76	AVG
7	2484.420	67.25	-1.17	66.08	74.00	-7.92	peak
8	2484.420	52.90	-1.17	51.73	54.00	-2.27	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

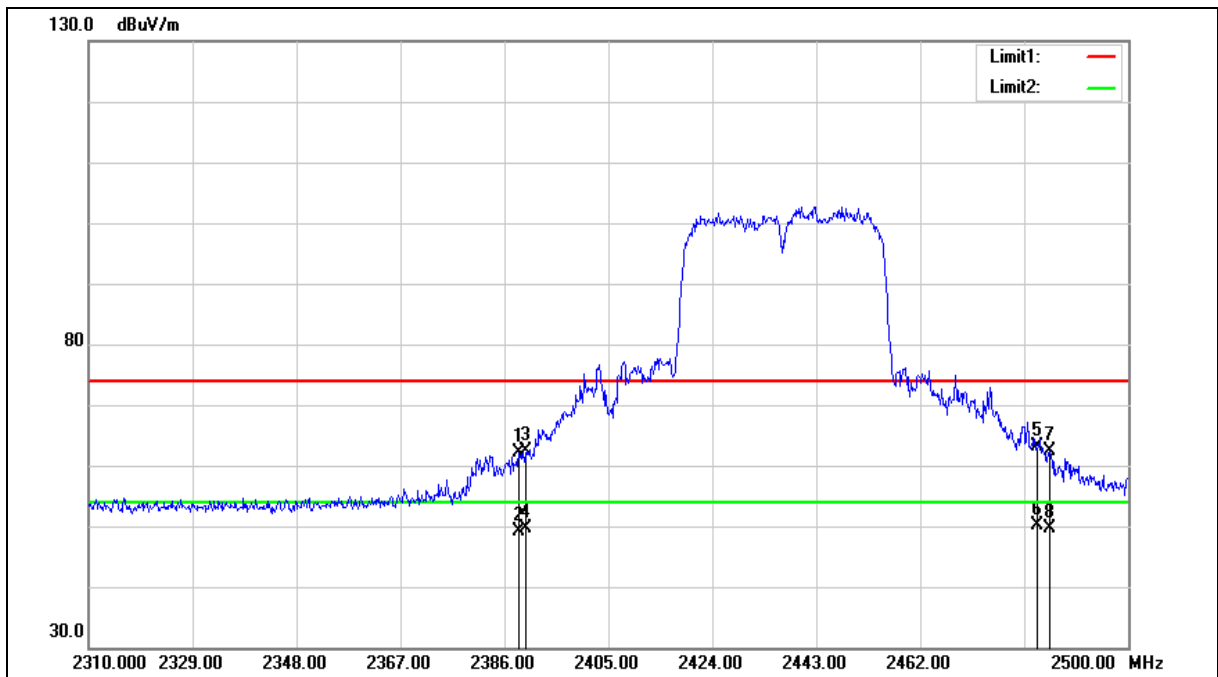

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.660	63.76	-1.52	62.24	74.00	-11.76	peak
2	2388.660	50.61	-1.52	49.09	54.00	-4.91	AVG
3	2390.000	63.87	-1.53	62.34	74.00	-11.66	peak
4	2390.000	51.19	-1.53	49.66	54.00	-4.34	AVG
5	2483.500	64.35	-1.17	63.18	74.00	-10.82	peak
6	2483.500	51.18	-1.17	50.01	54.00	-3.99	AVG
7	2485.750	63.61	-1.17	62.44	74.00	-11.56	peak
8	2485.750	50.74	-1.17	49.57	54.00	-4.43	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

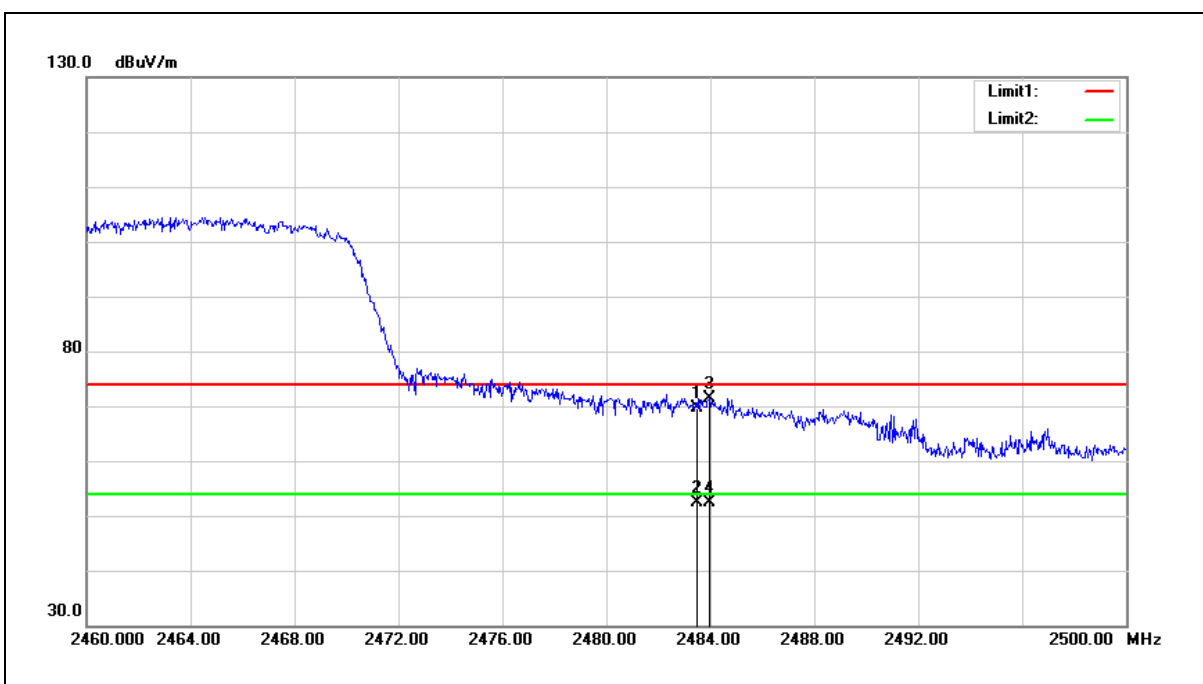


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	70.69	-1.17	69.52	74.00	-4.48	peak
2	2483.500	53.63	-1.17	52.46	54.00	-1.54	AVG
3	2483.960	72.57	-1.17	71.40	74.00	-2.60	peak
4	2483.960	53.46	-1.17	52.29	54.00	-1.71	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

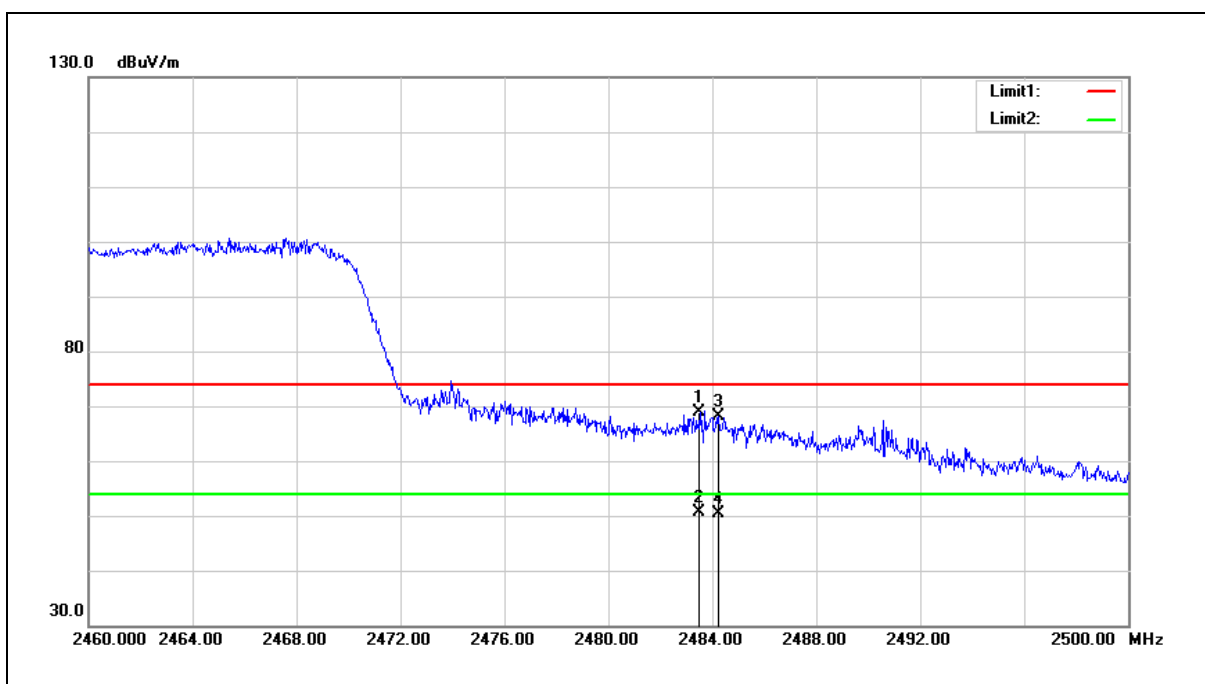

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	70.15	-1.17	68.98	74.00	-5.02	peak
2	2483.500	51.89	-1.17	50.72	54.00	-3.28	AVG
3	2484.240	69.27	-1.17	68.10	74.00	-5.90	peak
4	2484.240	51.58	-1.17	50.41	54.00	-3.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Beamforming on

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

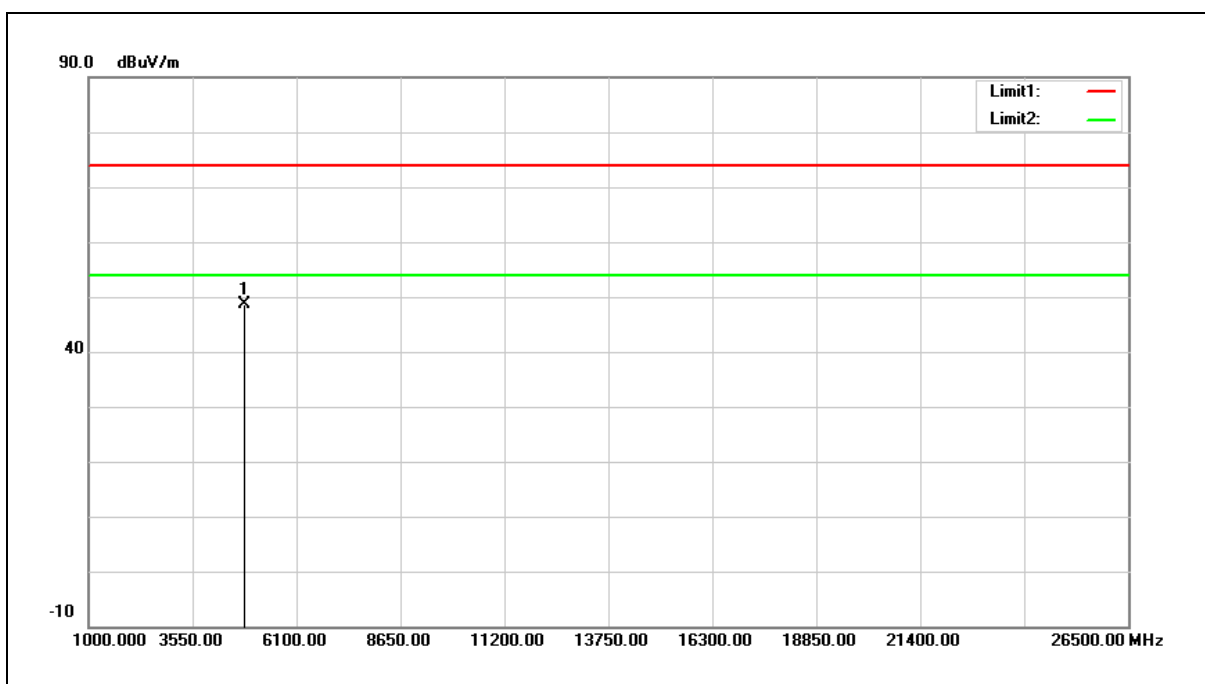


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	43.22	5.36	48.58	74.00	-25.42	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

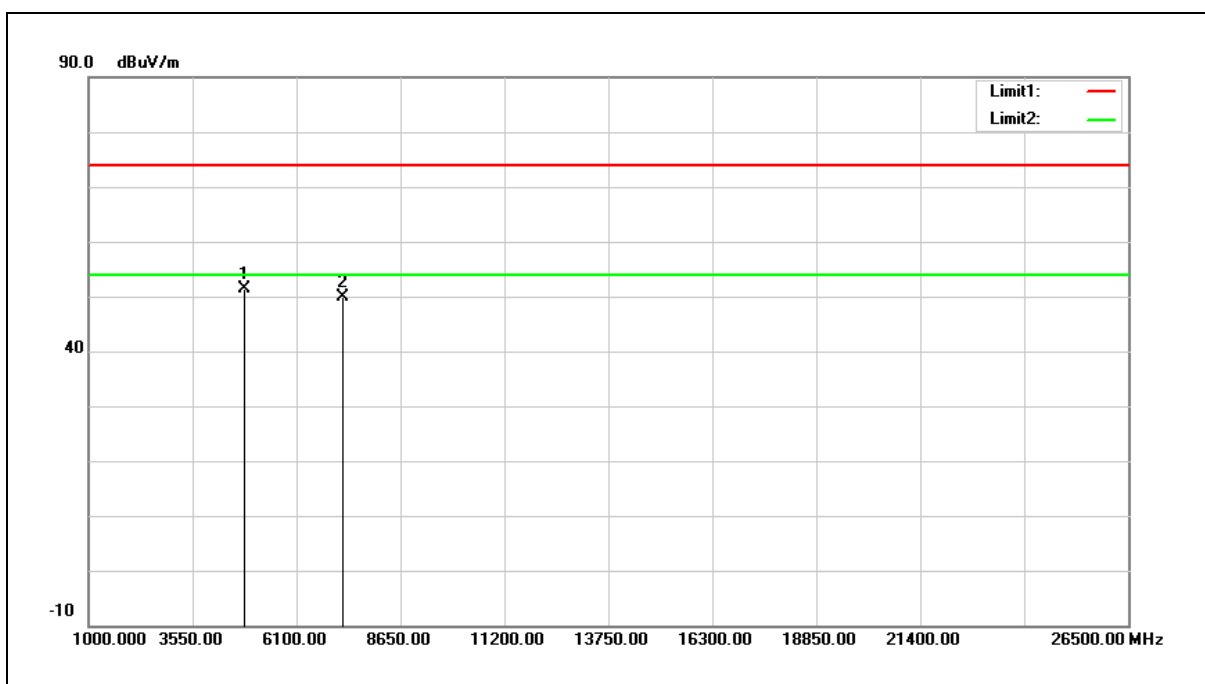


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	45.96	5.36	51.32	74.00	-22.68	peak
2	7236.000	37.89	11.92	49.81	74.00	-24.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

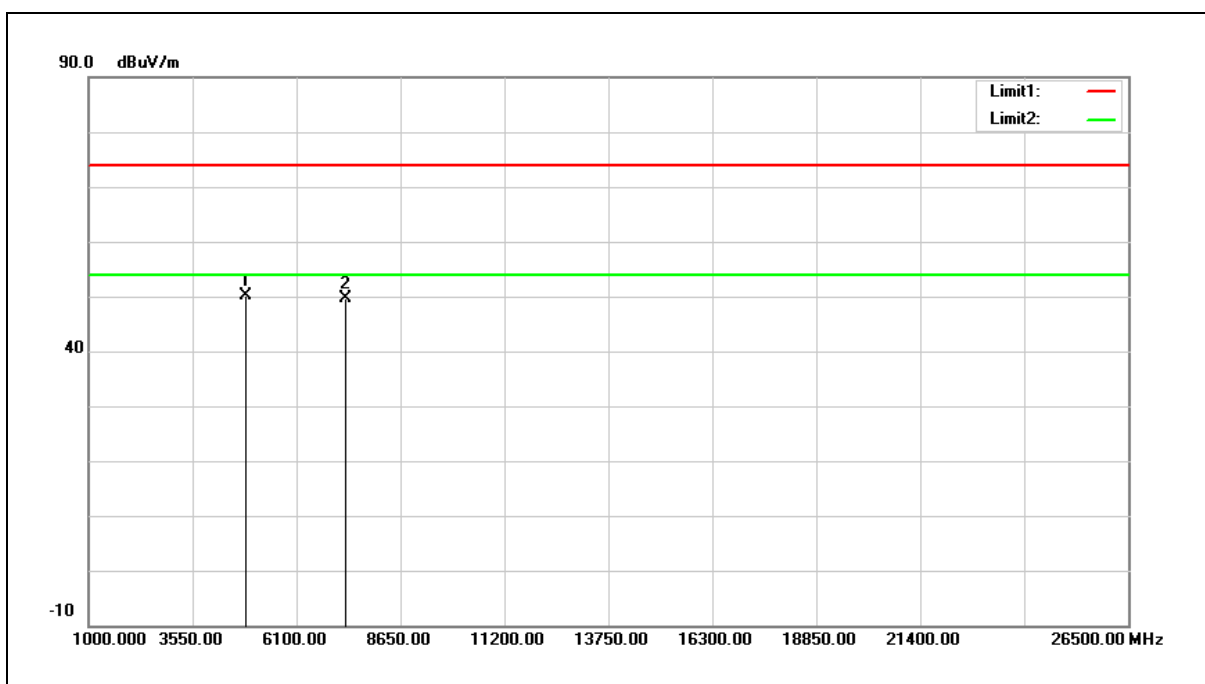


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	44.68	5.51	50.19	74.00	-23.81	peak
2	7311.000	37.51	12.17	49.68	74.00	-24.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

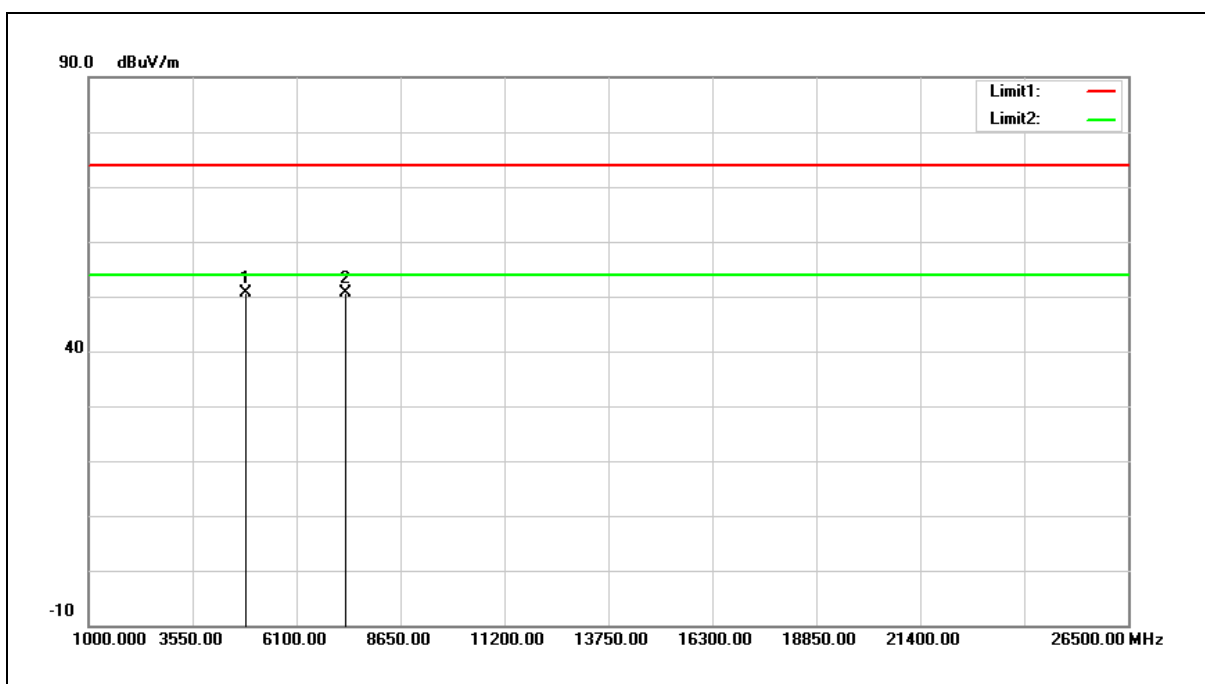


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	45.01	5.51	50.52	74.00	-23.48	peak
2	7311.000	38.40	12.17	50.57	74.00	-23.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

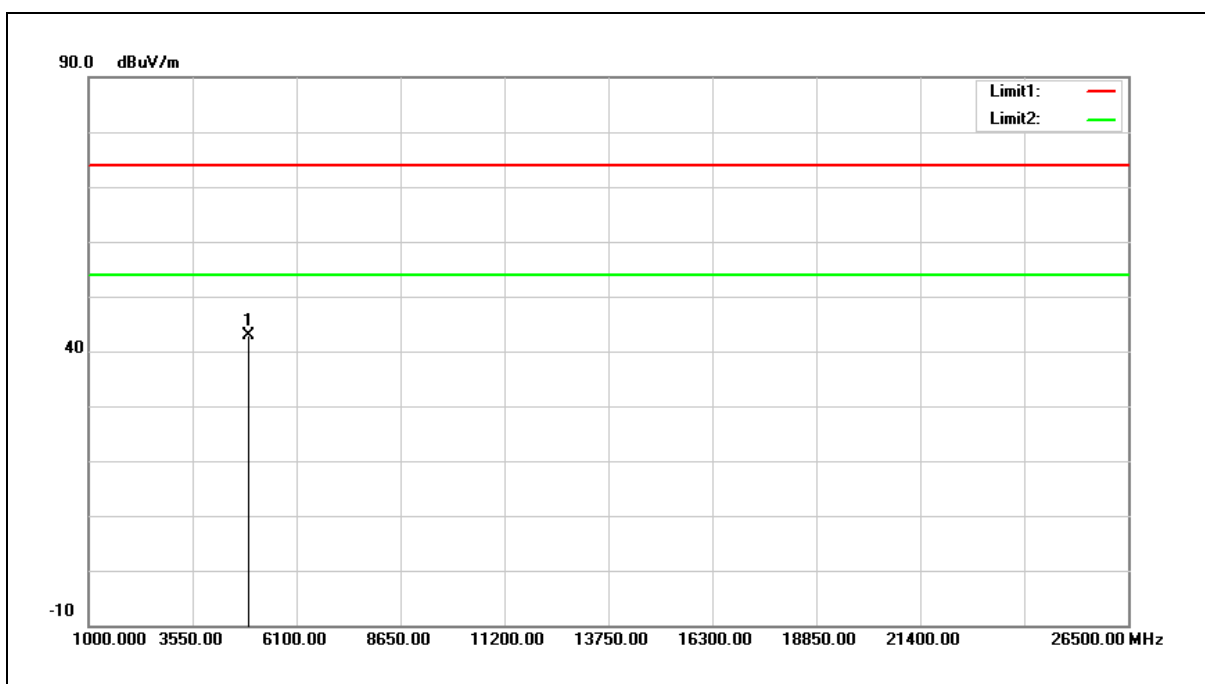


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.16	5.67	42.83	74.00	-31.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

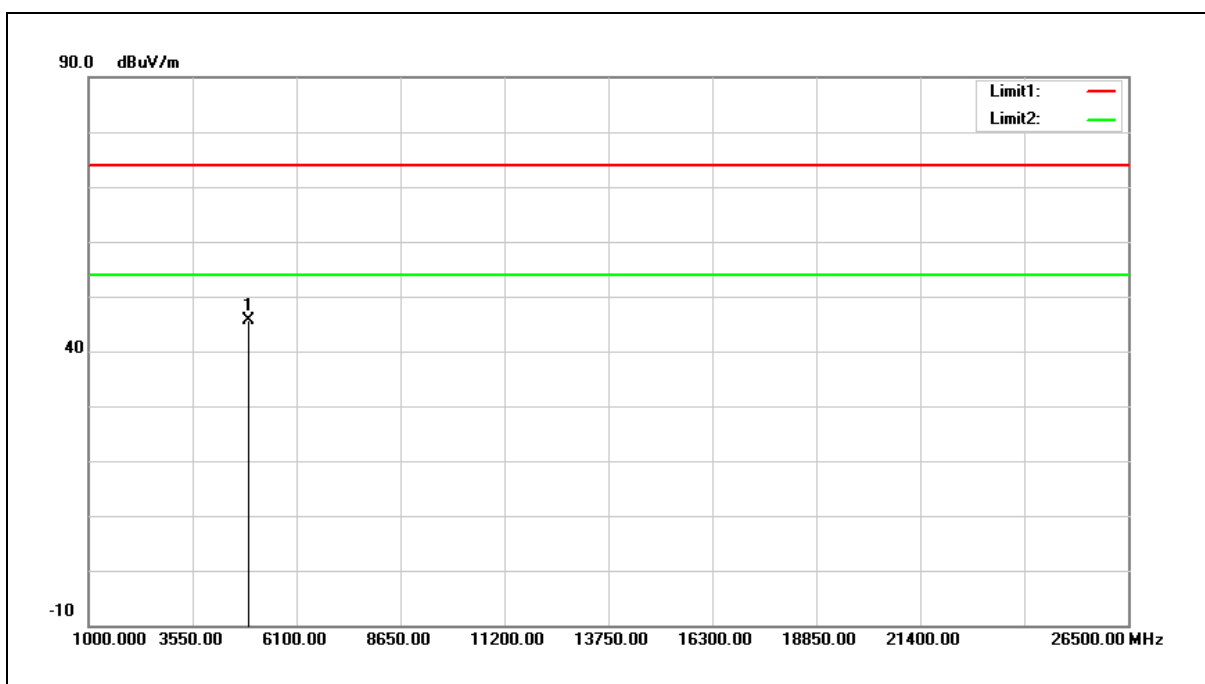


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	39.84	5.67	45.51	74.00	-28.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

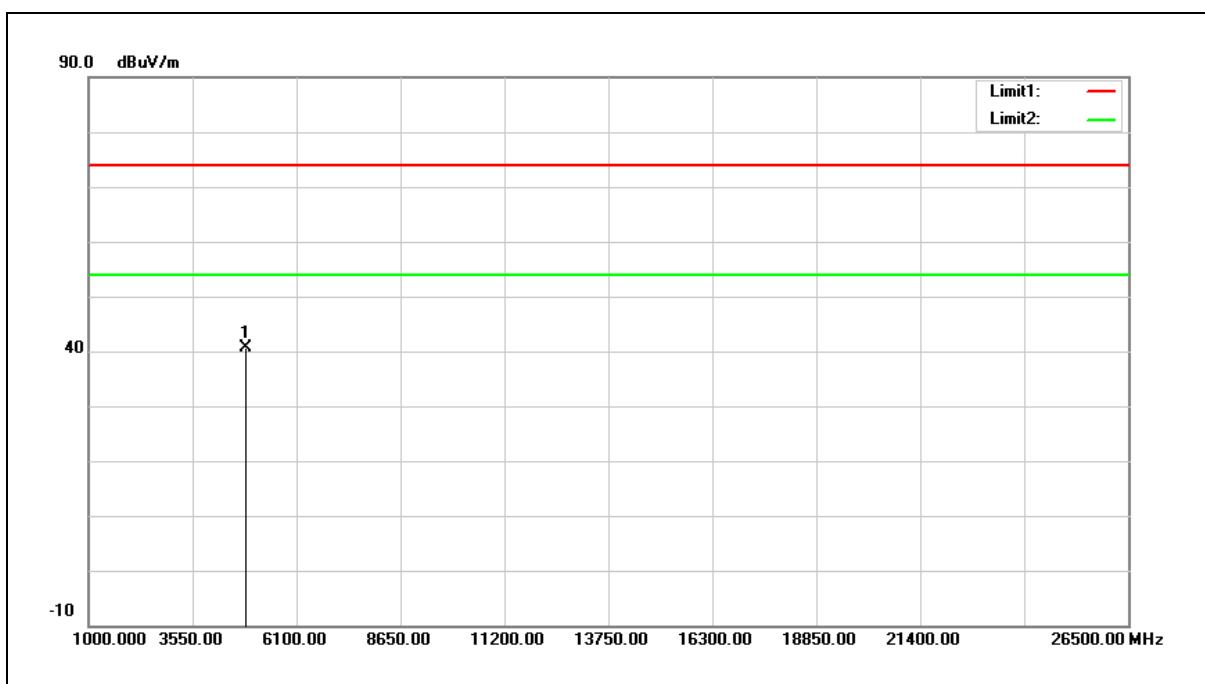


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	35.10	5.42	40.52	74.00	-33.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

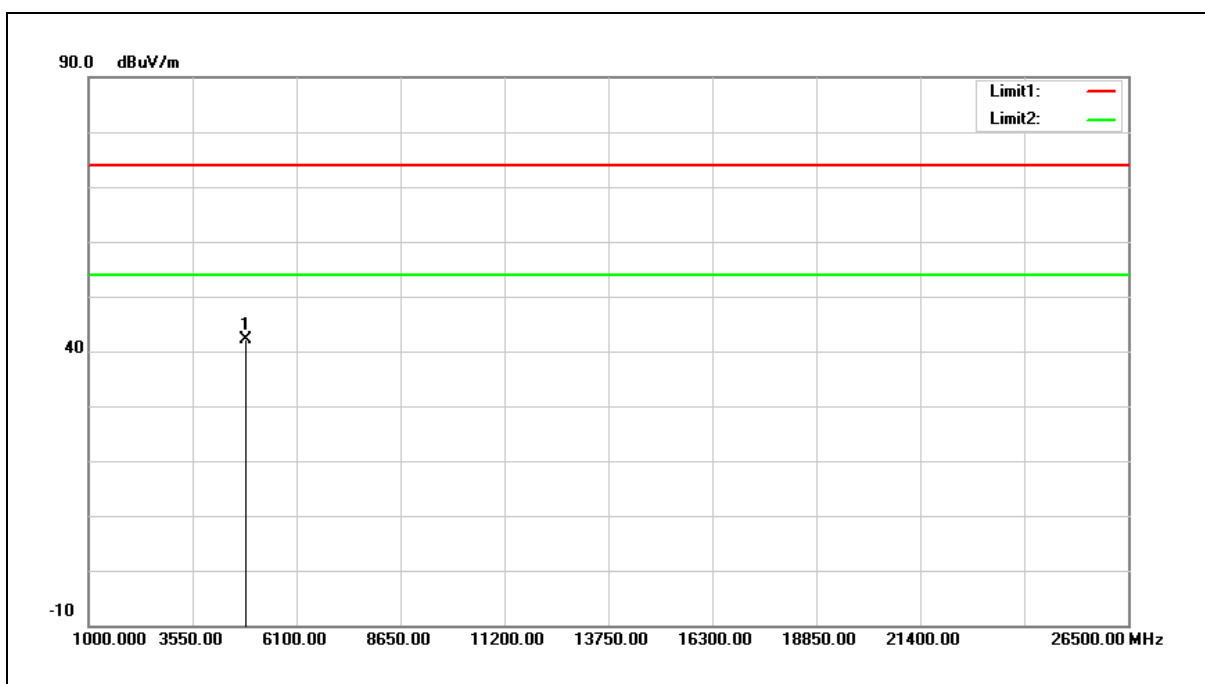


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.75	5.42	42.17	74.00	-31.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

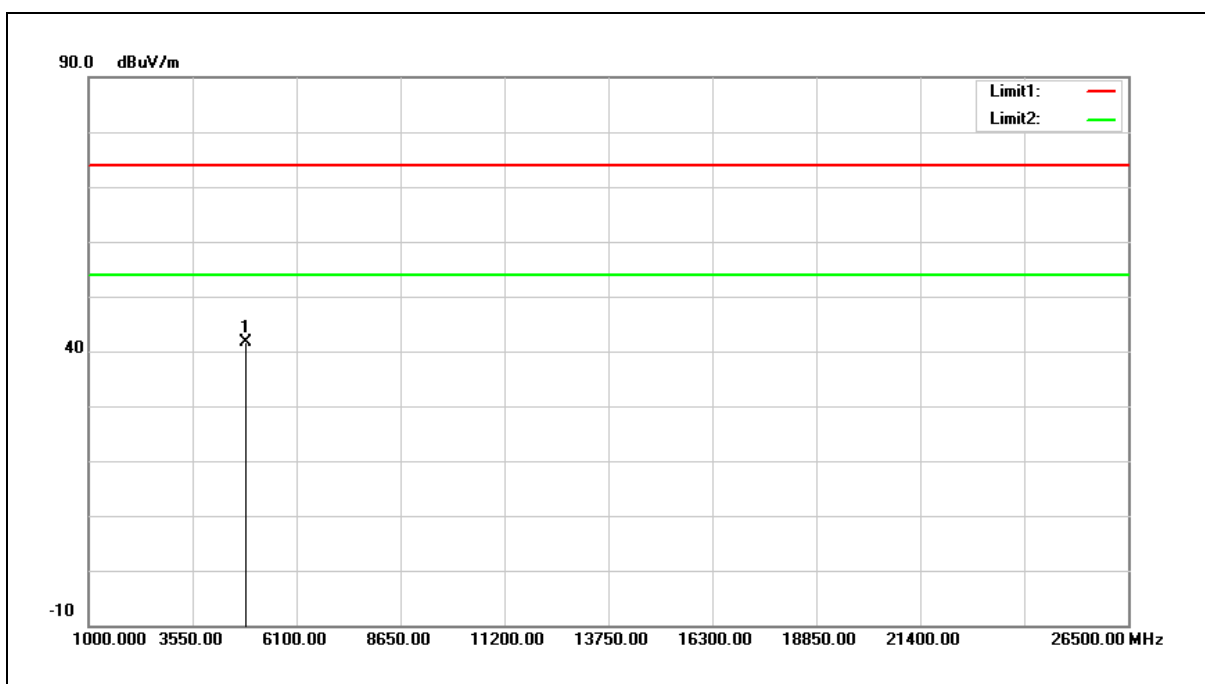


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.09	5.51	41.60	74.00	-32.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

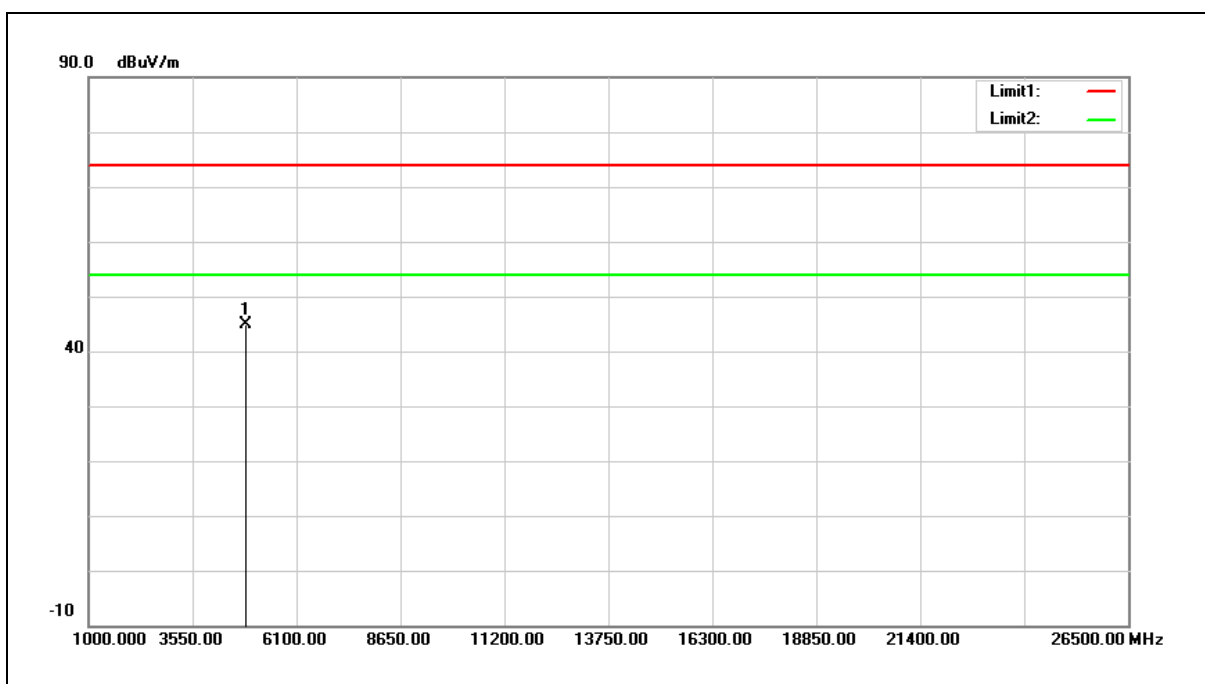


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	39.42	5.51	44.93	74.00	-29.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

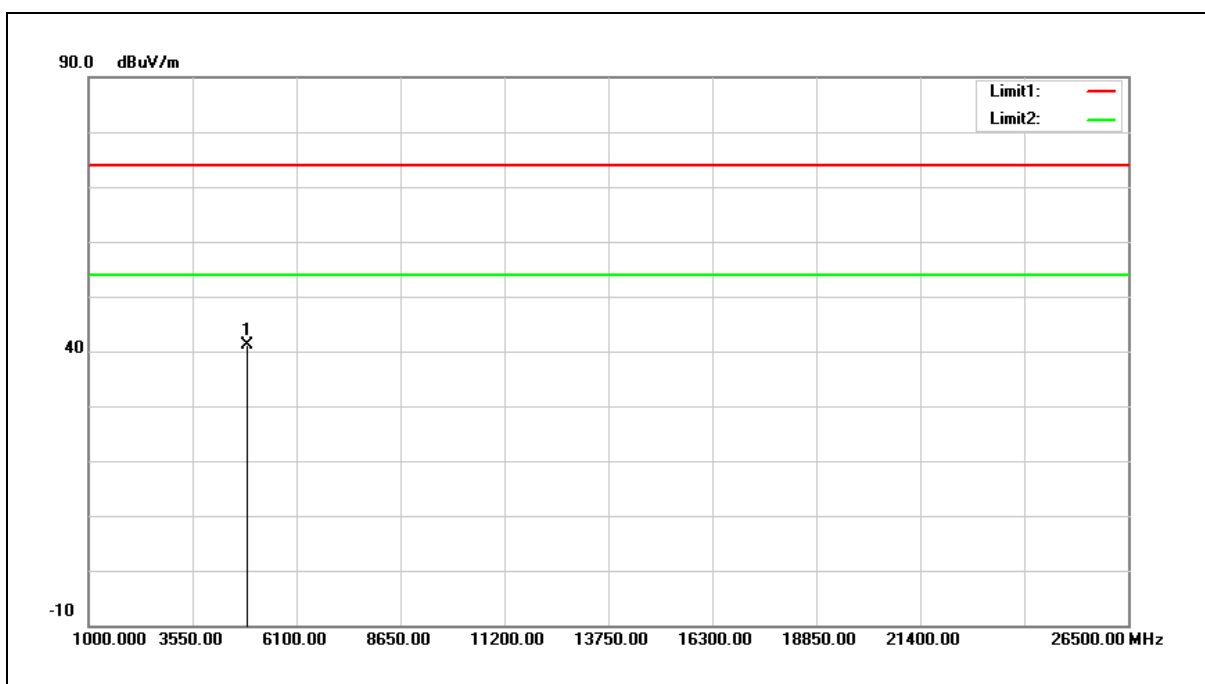


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.59	5.60	41.19	74.00	-32.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

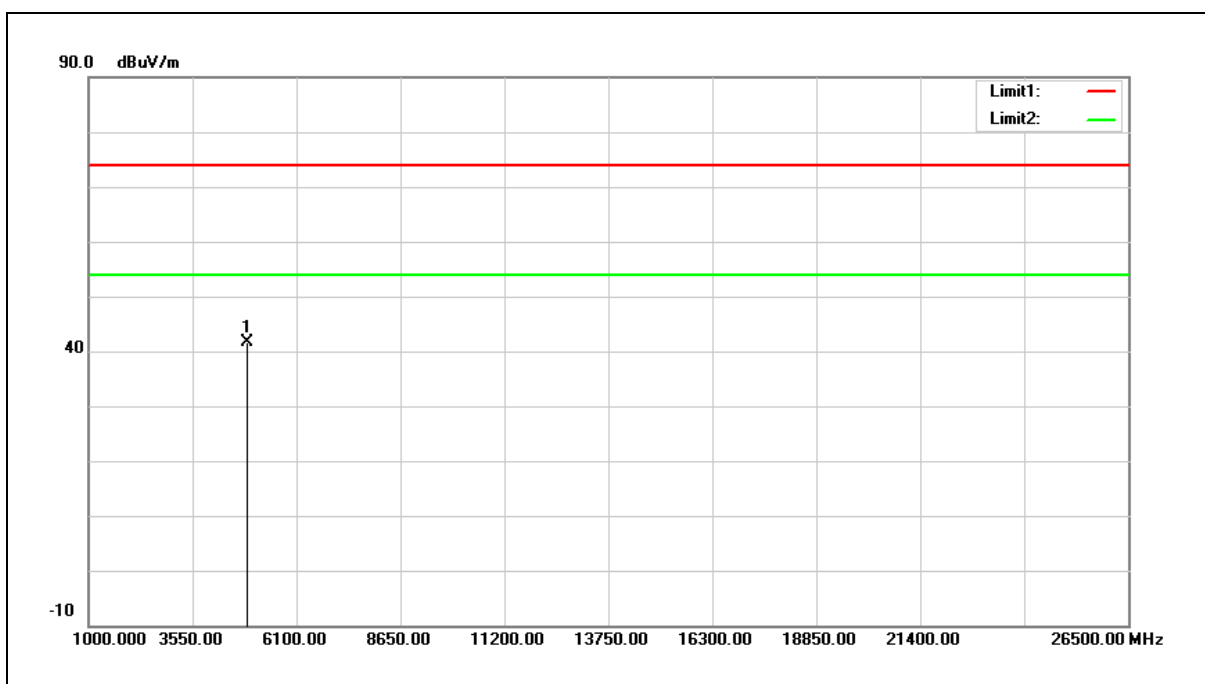


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.99	5.60	41.59	74.00	-32.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Transmitter Unwanted Emissions	Power:	AC 120 V/60 Hz
Test Mode:	Simultaneous Transmitting (DTS+NII)	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

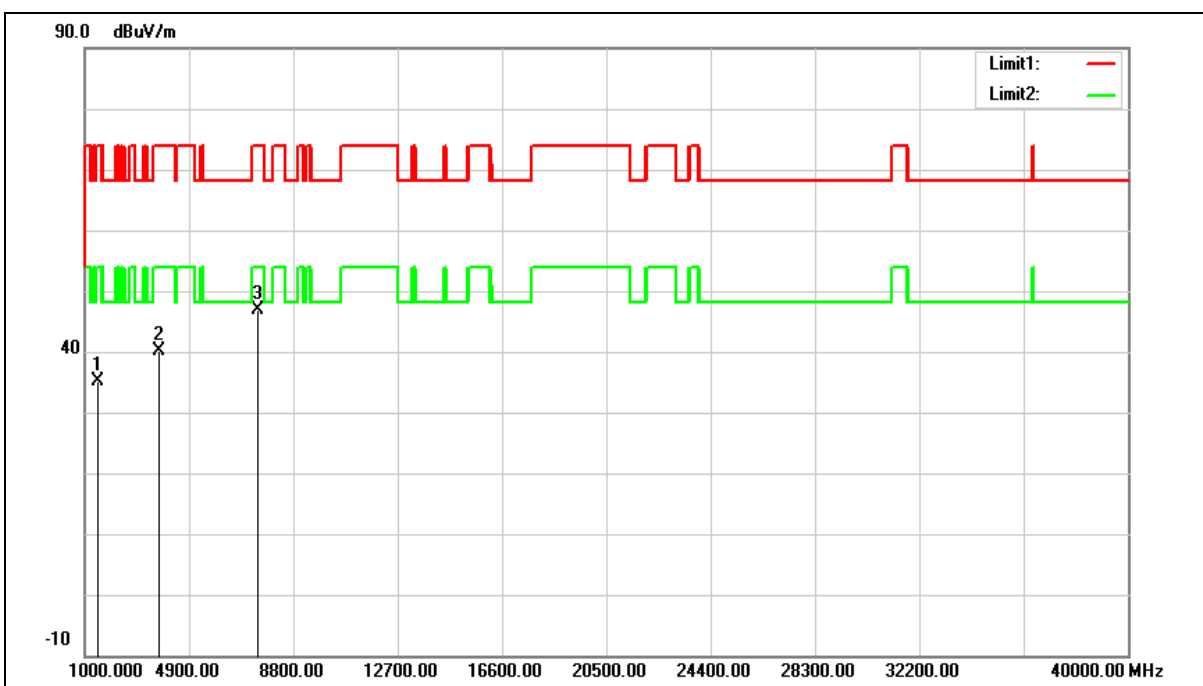


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1493.000	40.04	-4.97	35.07	74.00	-38.93	peak
2	3737.000	37.94	2.09	40.03	74.00	-33.97	peak
3	7477.000	34.12	12.74	46.86	74.00	-27.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Transmitter Unwanted Emissions	Power:	AC 120 V/60 Hz
Test Mode:	Simultaneous Transmitting (DTS+NII)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

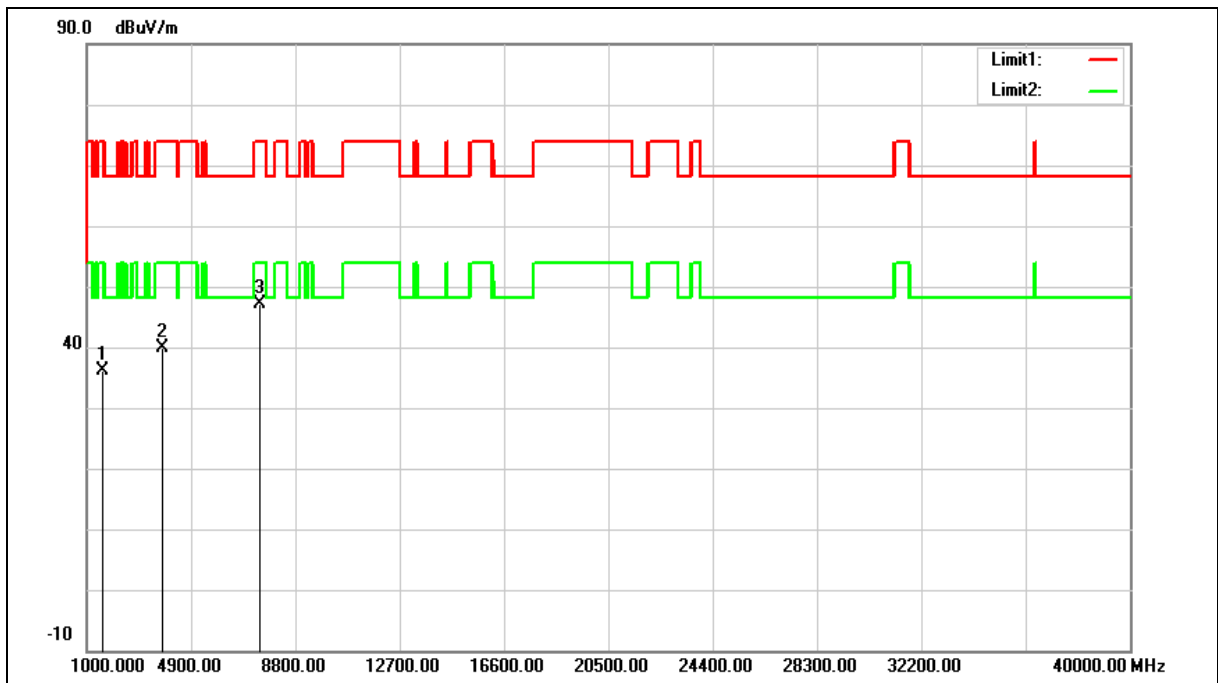

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1561.000	40.79	-4.69	36.10	74.00	-37.90	peak
2	3805.000	37.54	2.32	39.86	74.00	-34.14	peak
3	7494.000	34.41	12.81	47.22	74.00	-26.78	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

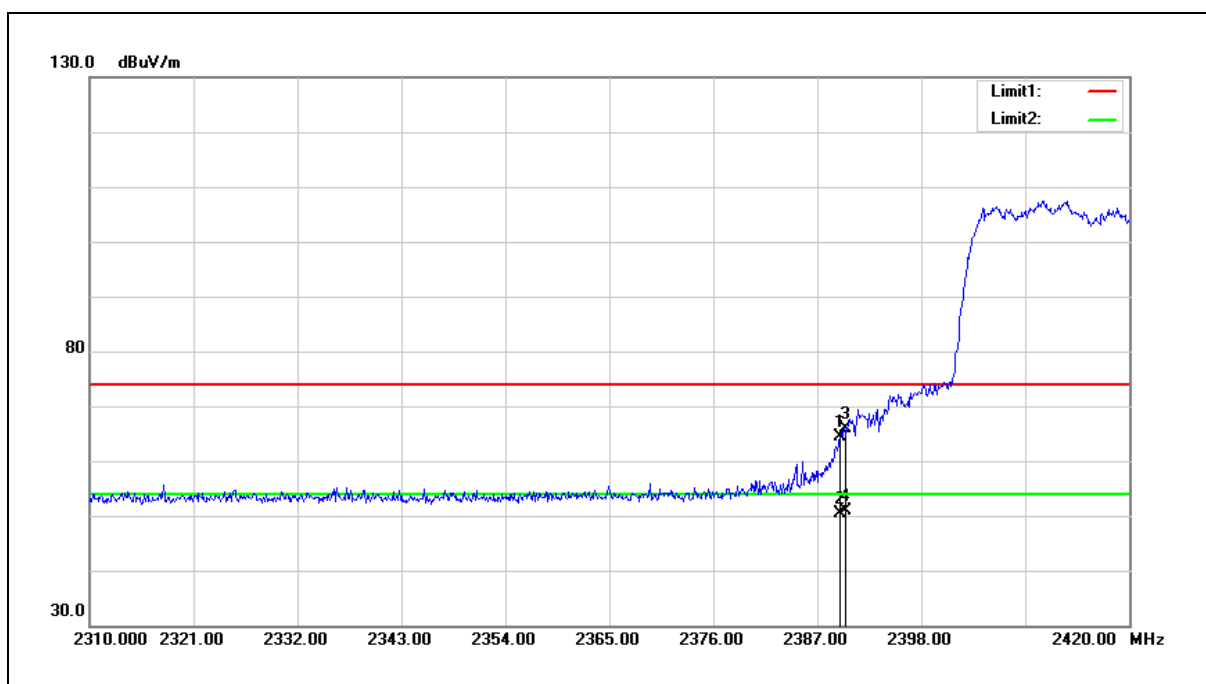


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	65.81	-1.53	64.28	74.00	-9.72	peak
2	2389.420	51.98	-1.53	50.45	54.00	-3.55	AVG
3	2390.000	67.42	-1.53	65.89	74.00	-8.11	peak
4	2390.000	52.42	-1.53	50.89	54.00	-3.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

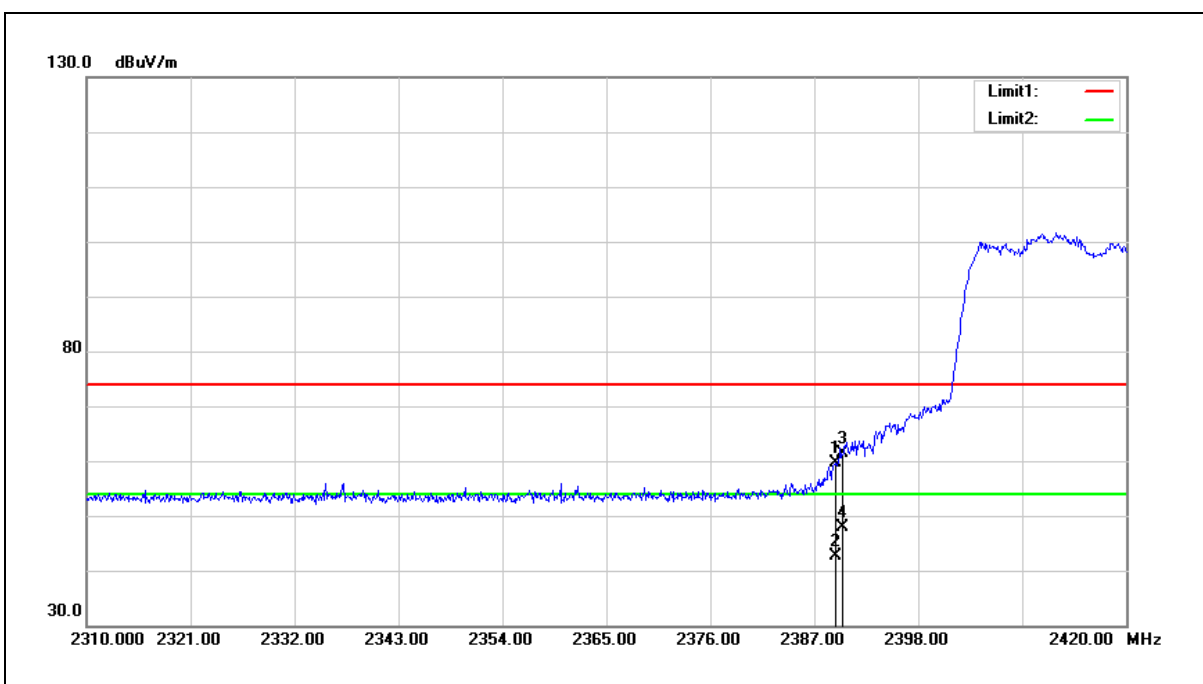

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.310	61.14	-1.53	59.61	74.00	-14.39	peak
2	2389.310	44.12	-1.53	42.59	54.00	-11.41	AVG
3	2390.000	62.93	-1.53	61.40	74.00	-12.60	peak
4	2390.000	49.40	-1.53	47.87	54.00	-6.13	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

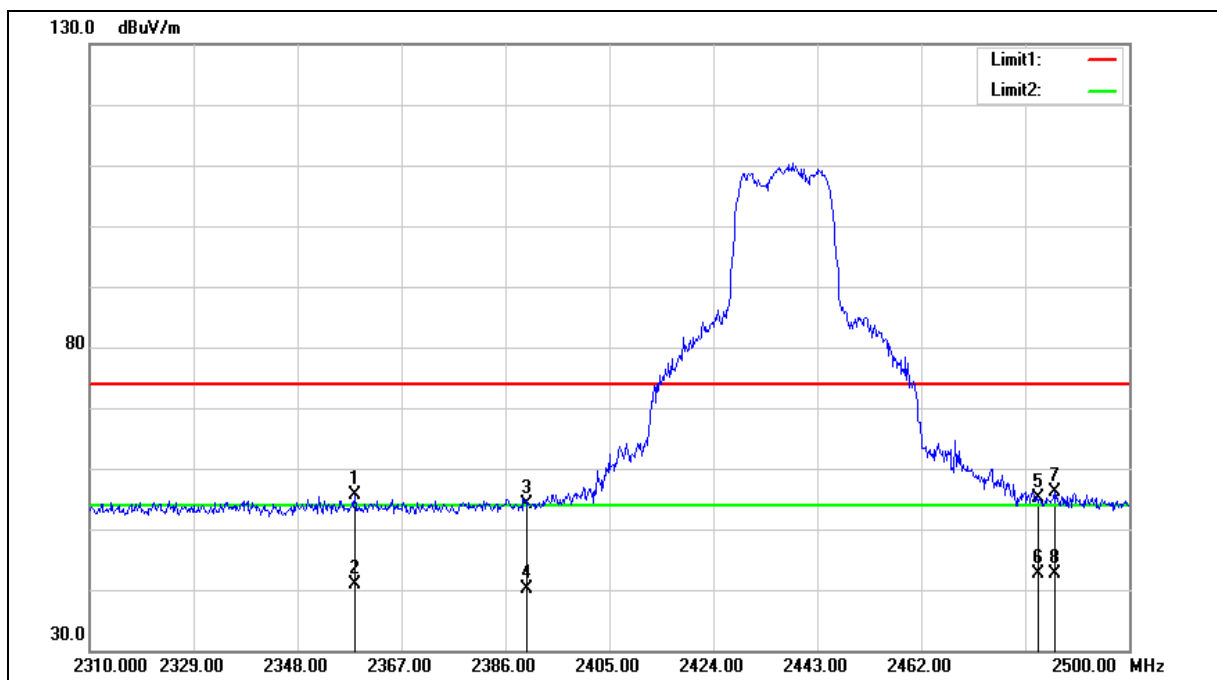

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2358.450	57.28	-1.64	55.64	74.00	-18.36	peak
2	2358.450	42.46	-1.64	40.82	54.00	-13.18	AVG
3	2390.000	55.65	-1.53	54.12	74.00	-19.88	peak
4	2390.000	41.74	-1.53	40.21	54.00	-13.79	AVG
5	2483.500	56.38	-1.17	55.21	74.00	-18.79	peak
6	2483.500	43.78	-1.17	42.61	54.00	-11.39	AVG
7	2486.320	57.20	-1.17	56.03	74.00	-17.97	peak
8	2486.320	43.82	-1.17	42.65	54.00	-11.35	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

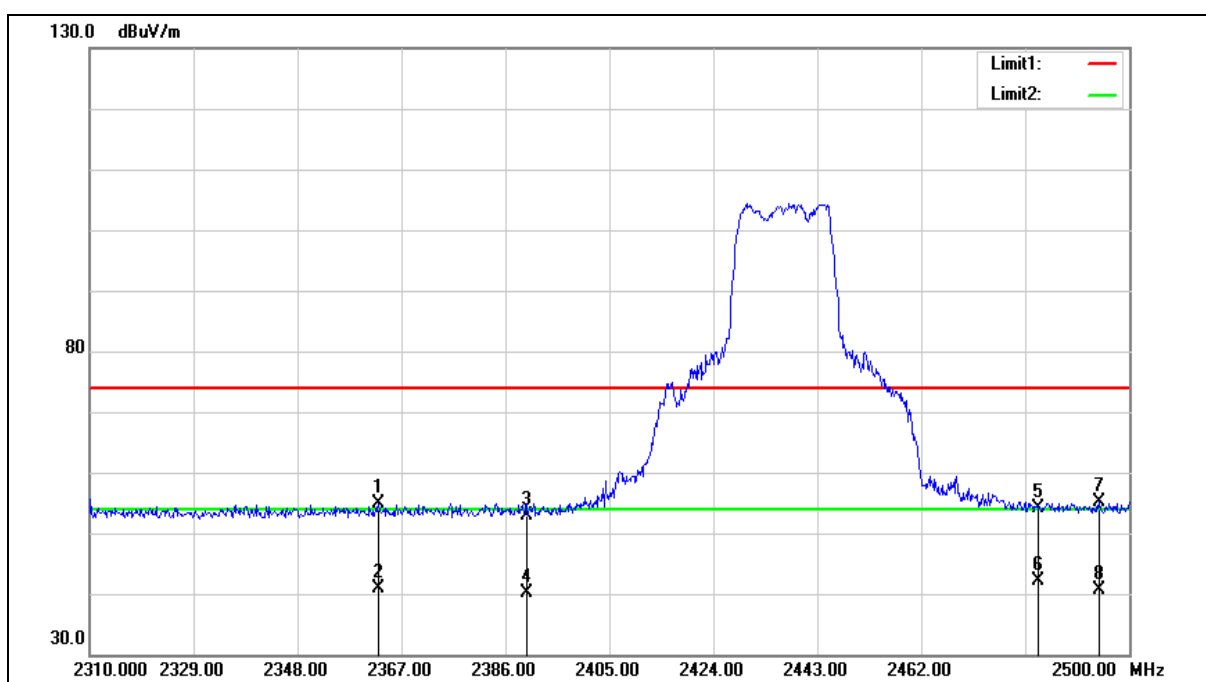

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.820	56.58	-1.62	54.96	74.00	-19.04	peak
2	2362.820	42.60	-1.62	40.98	54.00	-13.02	AVG
3	2390.000	54.43	-1.53	52.90	74.00	-21.10	peak
4	2390.000	41.74	-1.53	40.21	54.00	-13.79	AVG
5	2483.500	55.21	-1.17	54.04	74.00	-19.96	peak
6	2483.500	43.29	-1.17	42.12	54.00	-11.88	AVG
7	2494.490	56.34	-1.13	55.21	74.00	-18.79	peak
8	2494.490	41.68	-1.13	40.55	54.00	-13.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

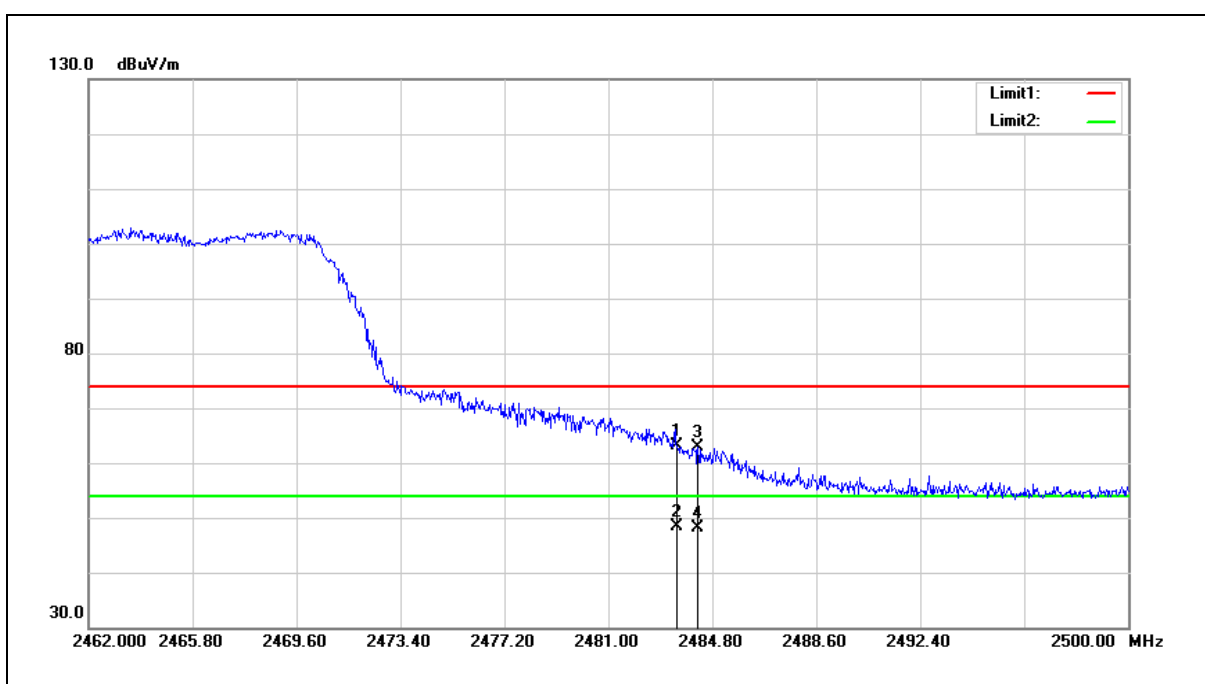


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	64.19	-1.17	63.02	74.00	-10.98	peak
2	2483.500	49.50	-1.17	48.33	54.00	-5.67	AVG
3	2484.268	64.13	-1.17	62.96	74.00	-11.04	peak
4	2484.268	49.29	-1.17	48.12	54.00	-5.88	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

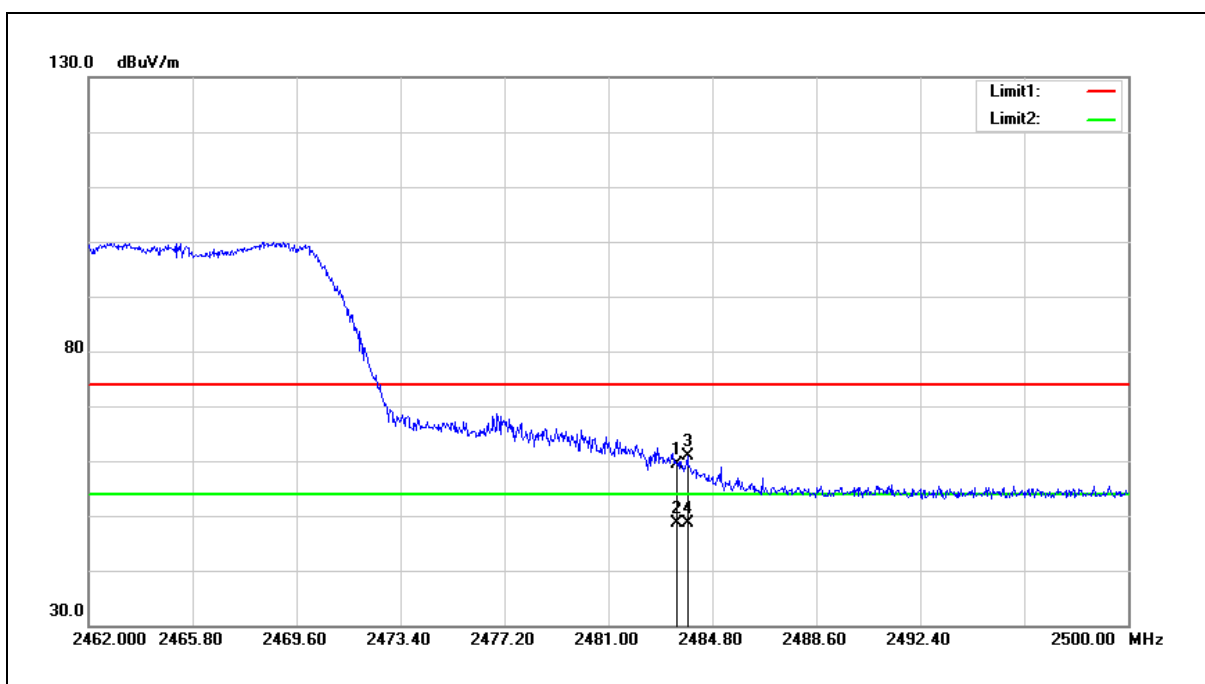


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	60.43	-1.17	59.26	74.00	-14.74	peak
2	2483.500	49.92	-1.17	48.75	54.00	-5.25	AVG
3	2483.888	62.00	-1.17	60.83	74.00	-13.17	peak
4	2483.888	49.80	-1.17	48.63	54.00	-5.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

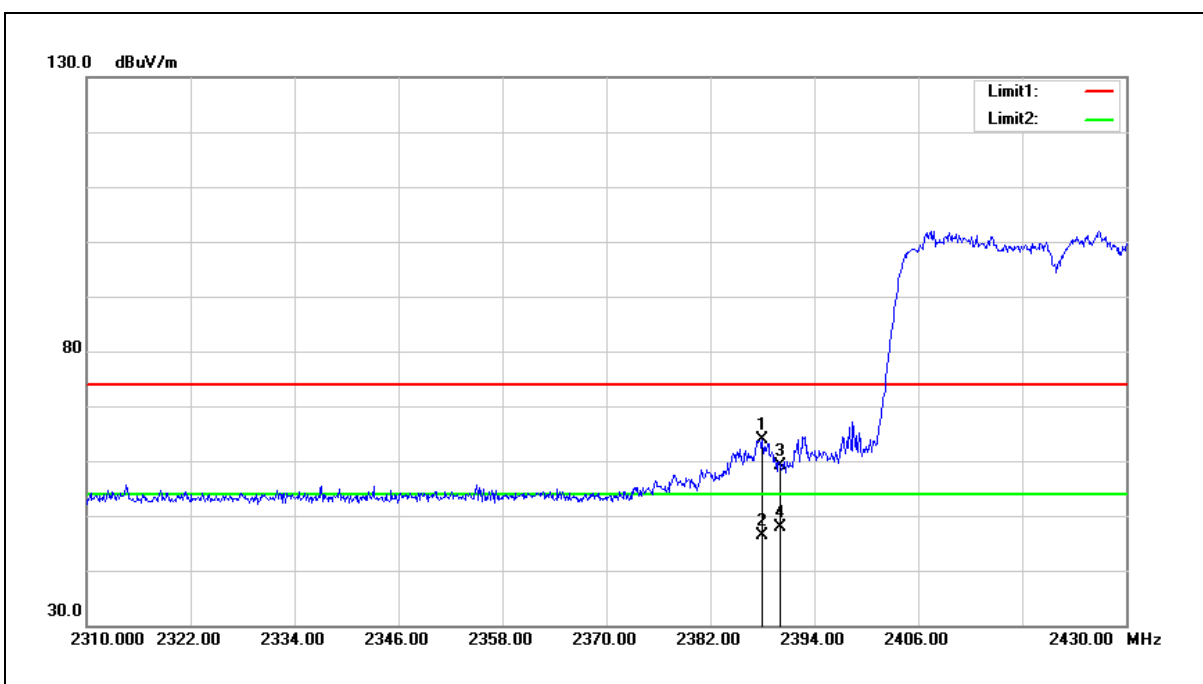


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.000	65.39	-1.52	63.87	74.00	-10.13	peak
2	2388.000	47.84	-1.52	46.32	54.00	-7.68	AVG
3	2390.000	60.69	-1.53	59.16	74.00	-14.84	peak
4	2390.000	49.34	-1.53	47.81	54.00	-6.19	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

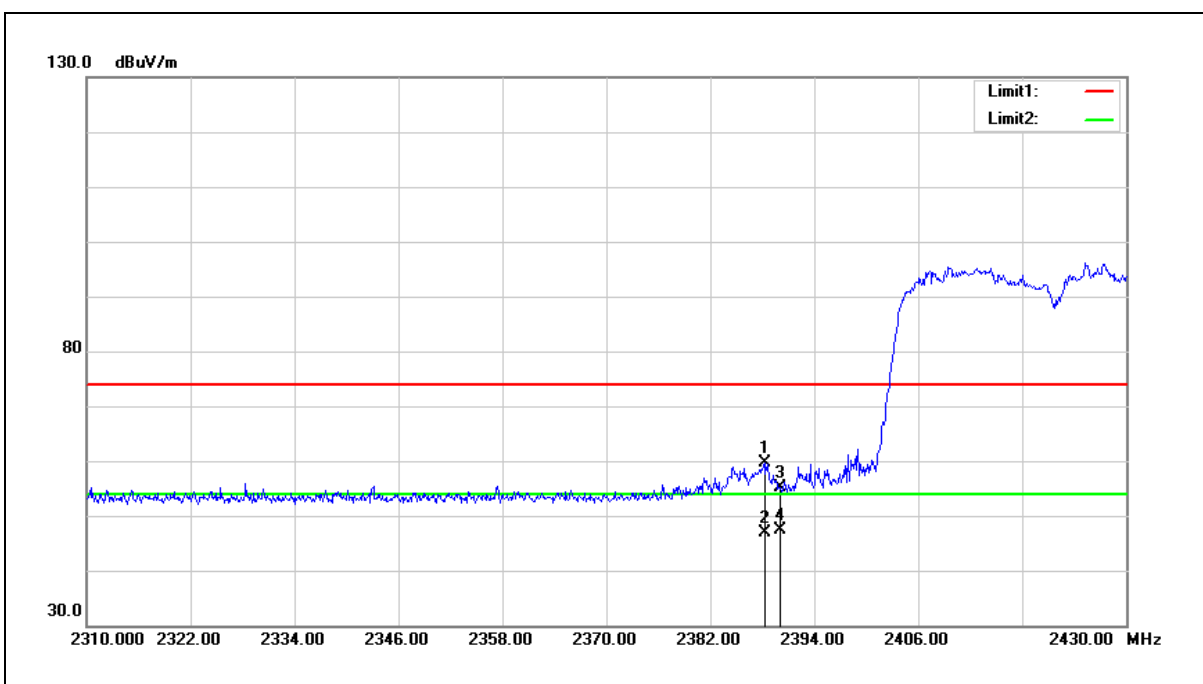

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.240	61.17	-1.52	59.65	74.00	-14.35	peak
2	2388.240	48.35	-1.52	46.83	54.00	-7.17	AVG
3	2390.000	56.70	-1.53	55.17	74.00	-18.83	peak
4	2390.000	48.87	-1.53	47.34	54.00	-6.66	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

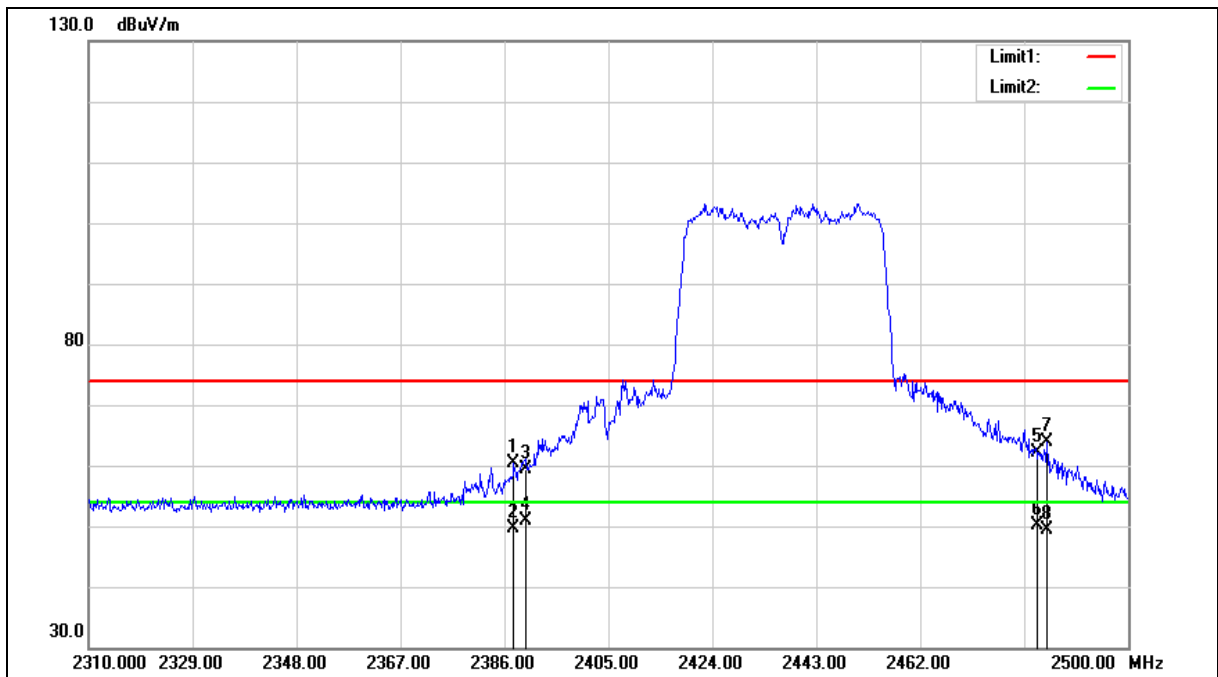

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.710	61.82	-1.52	60.30	74.00	-13.70	peak
2	2387.710	51.22	-1.52	49.70	54.00	-4.30	AVG
3	2390.000	60.87	-1.53	59.34	74.00	-14.66	peak
4	2390.000	52.46	-1.53	50.93	54.00	-3.07	AVG
5	2483.500	63.22	-1.17	62.05	74.00	-11.95	peak
6	2483.500	51.36	-1.17	50.19	54.00	-3.81	AVG
7	2485.180	64.97	-1.17	63.80	74.00	-10.20	peak
8	2485.180	50.51	-1.17	49.34	54.00	-4.66	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

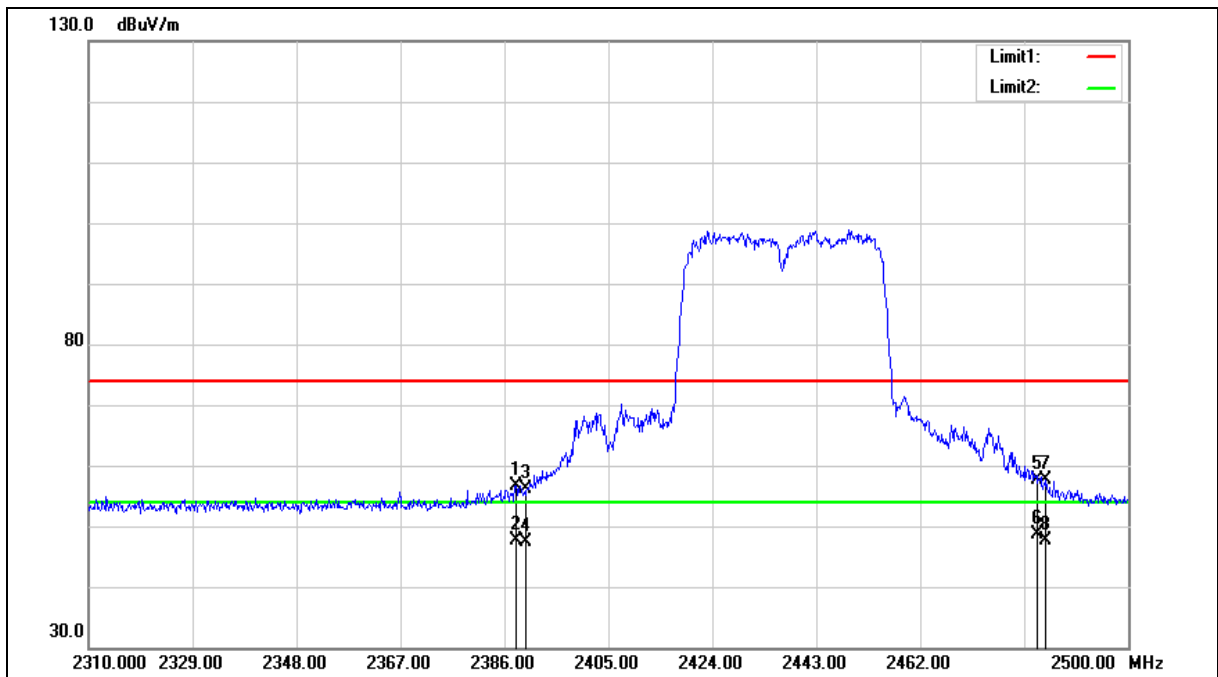



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.090	58.26	-1.52	56.74	74.00	-17.26	peak
2	2388.090	49.08	-1.52	47.56	54.00	-6.44	AVG
3	2390.000	57.59	-1.53	56.06	74.00	-17.94	peak
4	2390.000	48.88	-1.53	47.35	54.00	-6.65	AVG
5	2483.500	58.92	-1.17	57.75	74.00	-16.25	peak
6	2483.500	49.90	-1.17	48.73	54.00	-5.27	AVG
7	2484.990	58.70	-1.17	57.53	74.00	-16.47	peak
8	2484.990	48.69	-1.17	47.52	54.00	-6.48	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

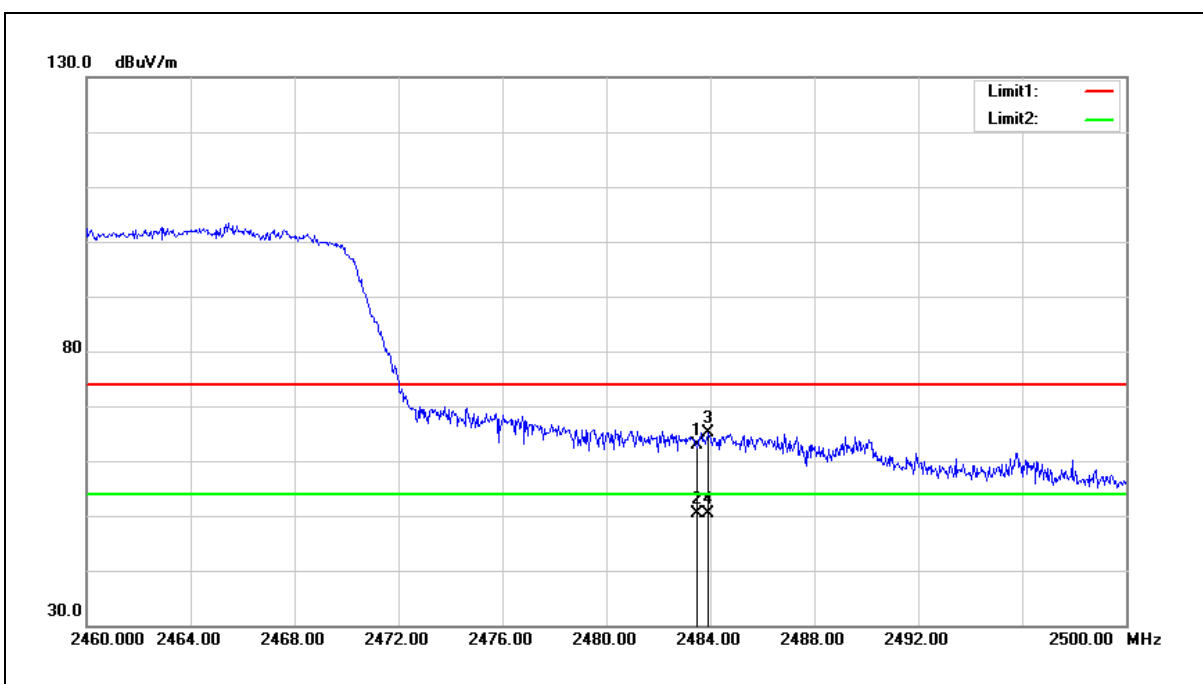


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.98	-1.17	62.81	74.00	-11.19	peak
2	2483.500	51.53	-1.17	50.36	54.00	-3.64	AVG
3	2483.920	66.20	-1.17	65.03	74.00	-8.97	peak
4	2483.920	51.62	-1.17	50.45	54.00	-3.55	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

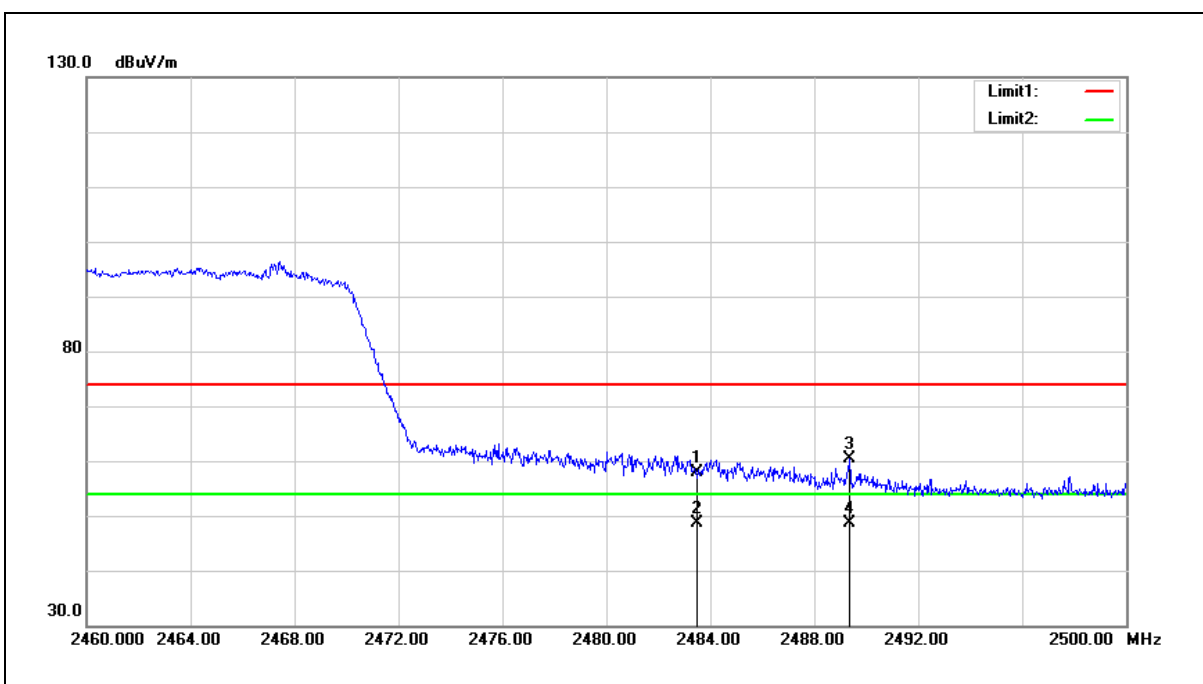

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.97	-1.17	57.80	74.00	-16.20	peak
2	2483.500	49.72	-1.17	48.55	54.00	-5.45	AVG
3	2489.360	61.43	-1.15	60.28	74.00	-13.72	peak
4	2489.360	49.87	-1.15	48.72	54.00	-5.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.