


Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/07/2017
Ant.Polar.:	Vertical		

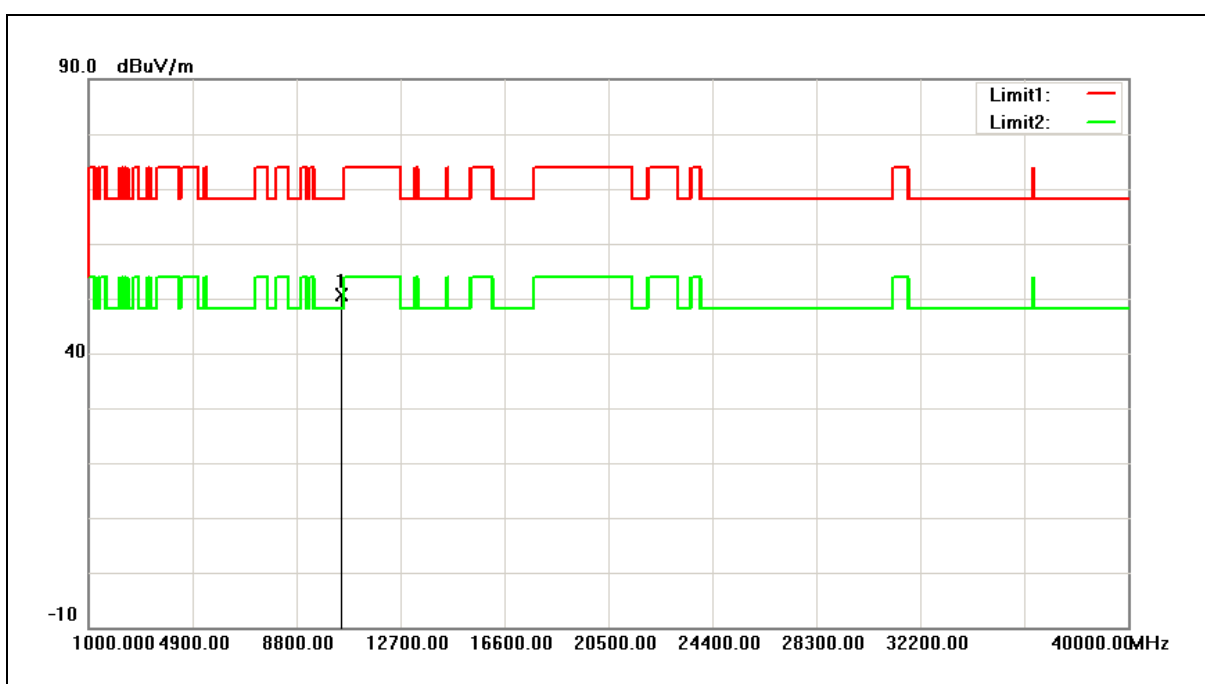


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	45.02	5.63	50.65	68.20	-17.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/07/2017
Ant.Polar.:	Horizontal		

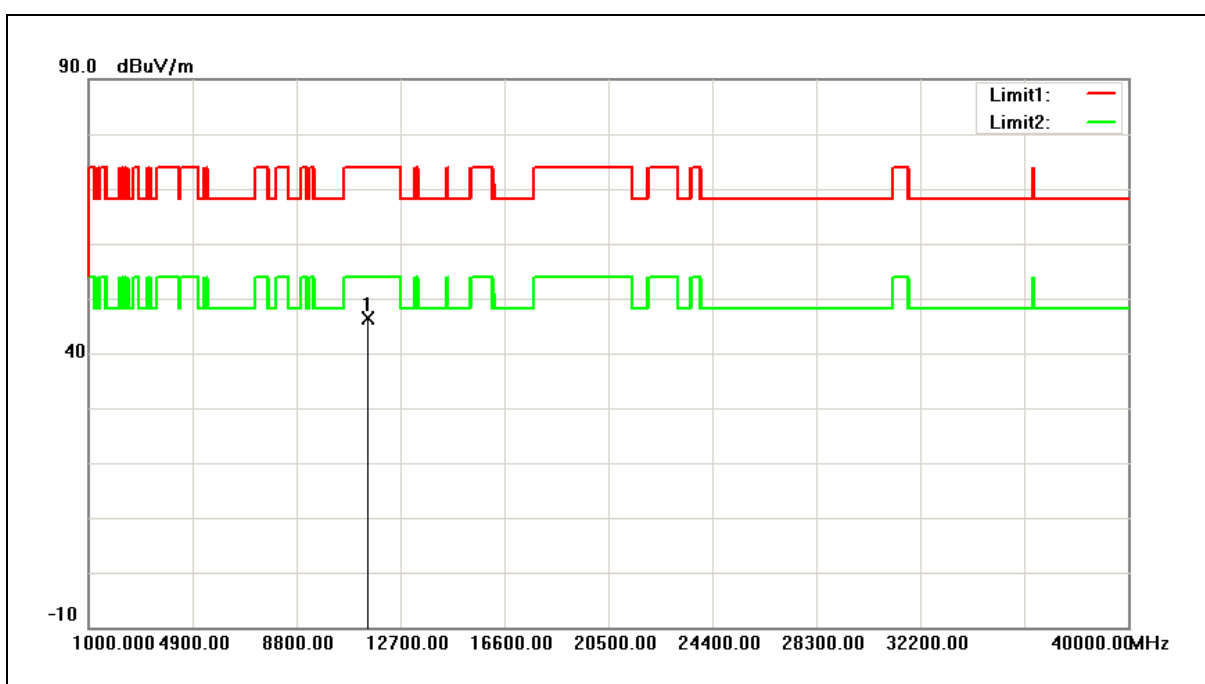


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	39.84	6.61	46.45	74.00	-27.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/07/2017
Ant.Polar.:	Vertical		

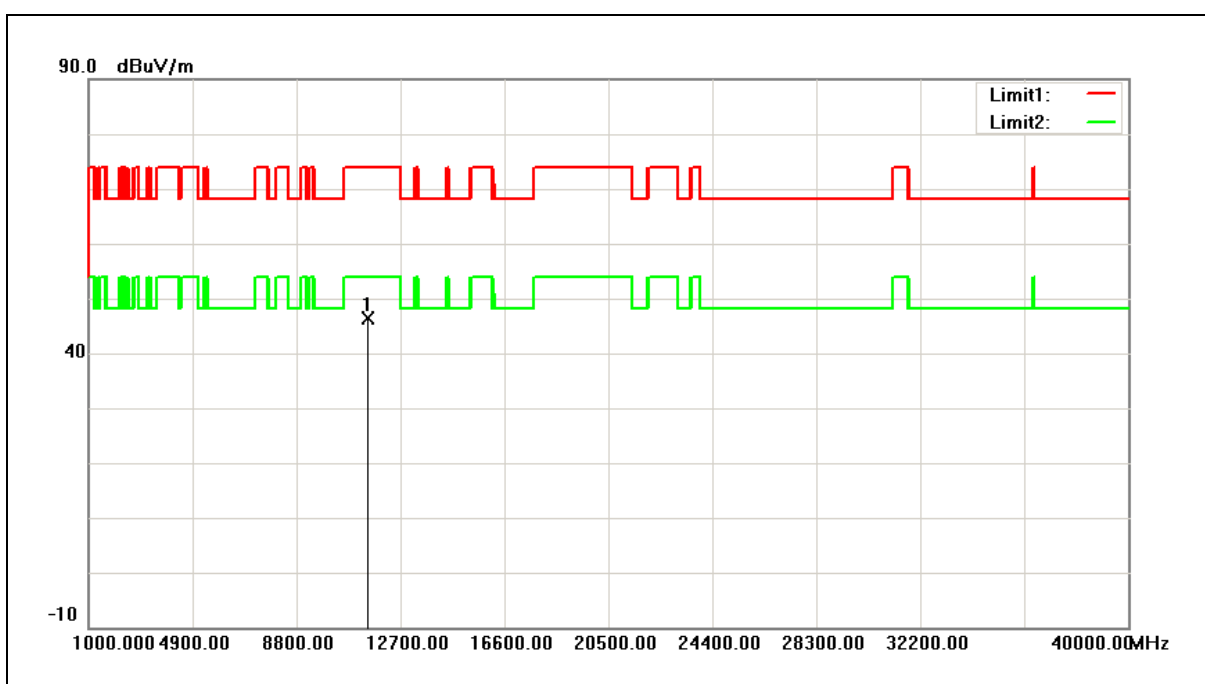


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	39.77	6.61	46.38	74.00	-27.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/07/2017
Ant.Polar.:	Horizontal		

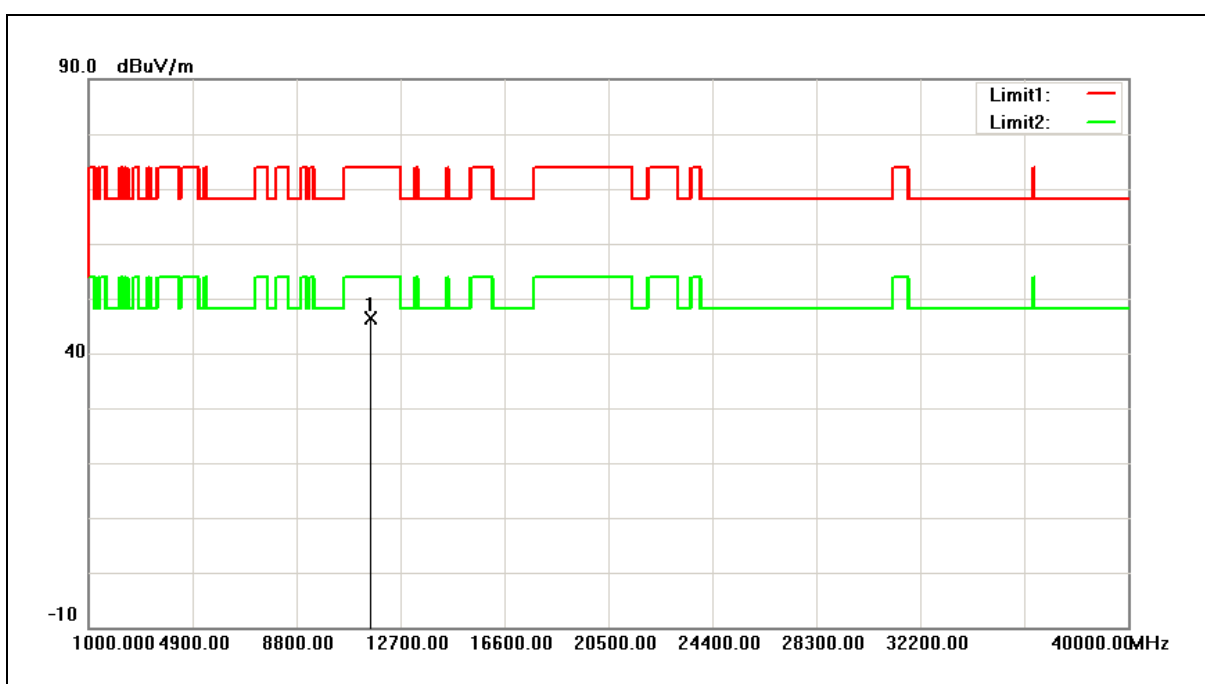

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	39.69	6.80	46.49	74.00	-27.51	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/07/2017
Ant.Polar.:	Vertical		

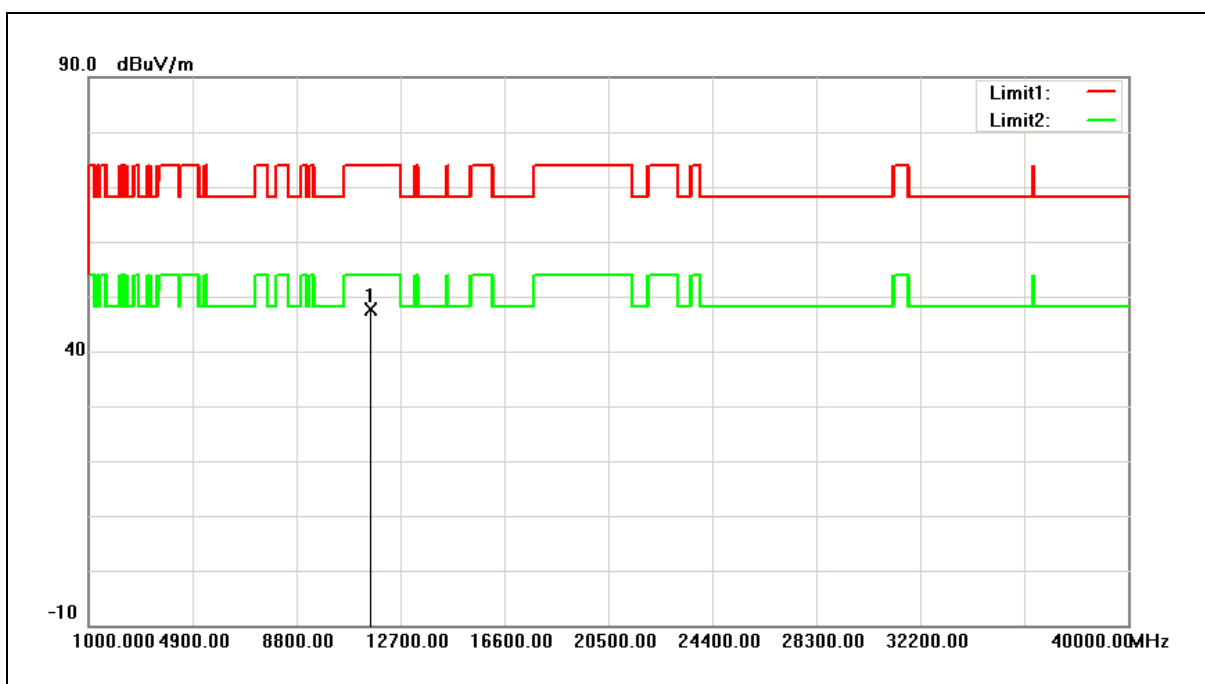


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	40.92	6.80	47.72	74.00	-26.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/07/2017
Ant.Polar.:	Horizontal		

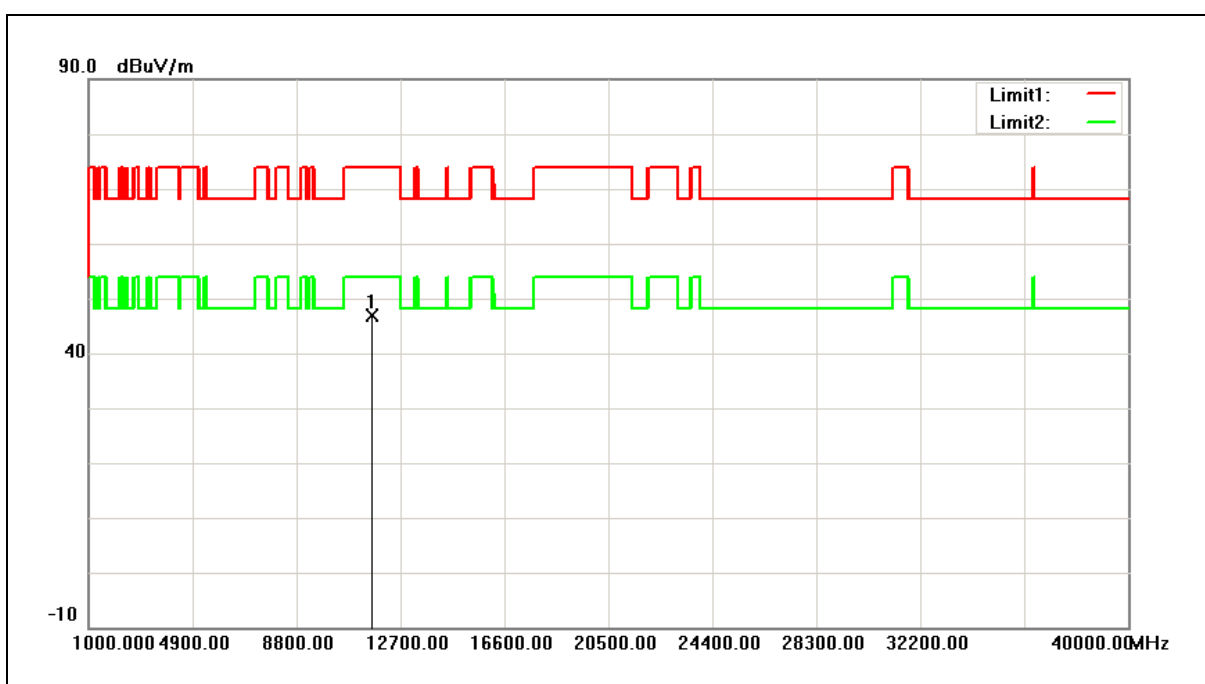


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	39.80	7.01	46.81	74.00	-27.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/07/2017
Ant.Polar.:	Vertical		

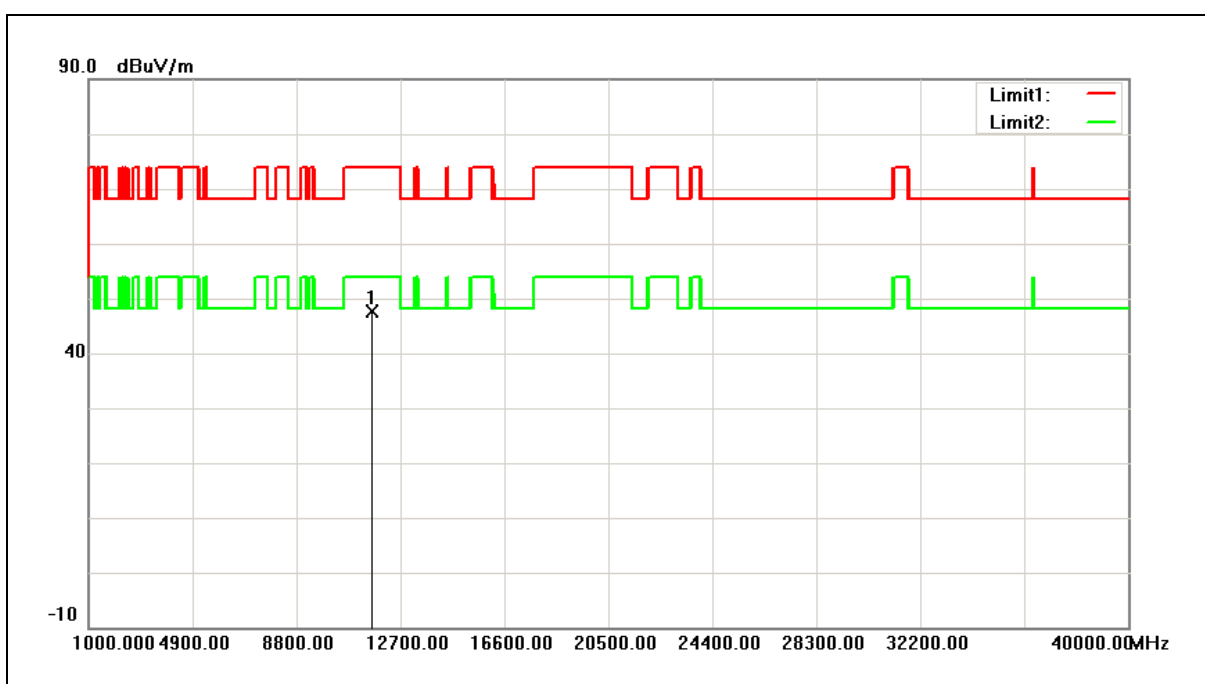

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	40.61	7.01	47.62	74.00	-26.38	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Horizontal		

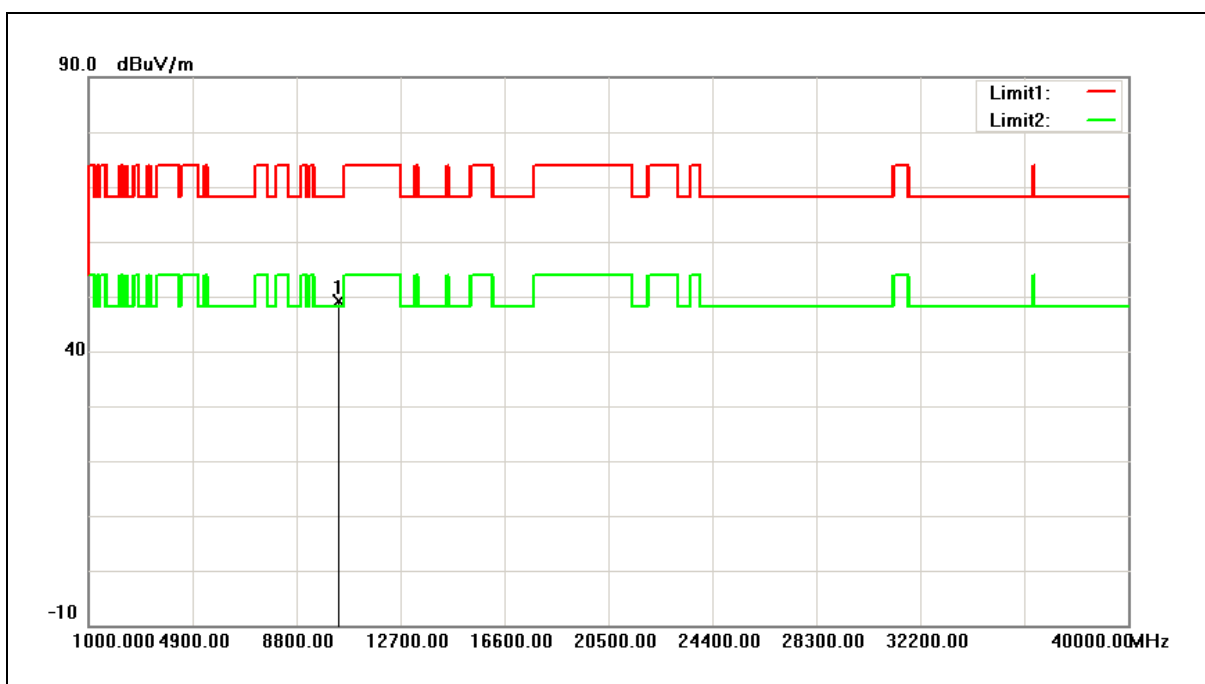


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	43.88	5.36	49.24	68.20	-18.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Vertical		

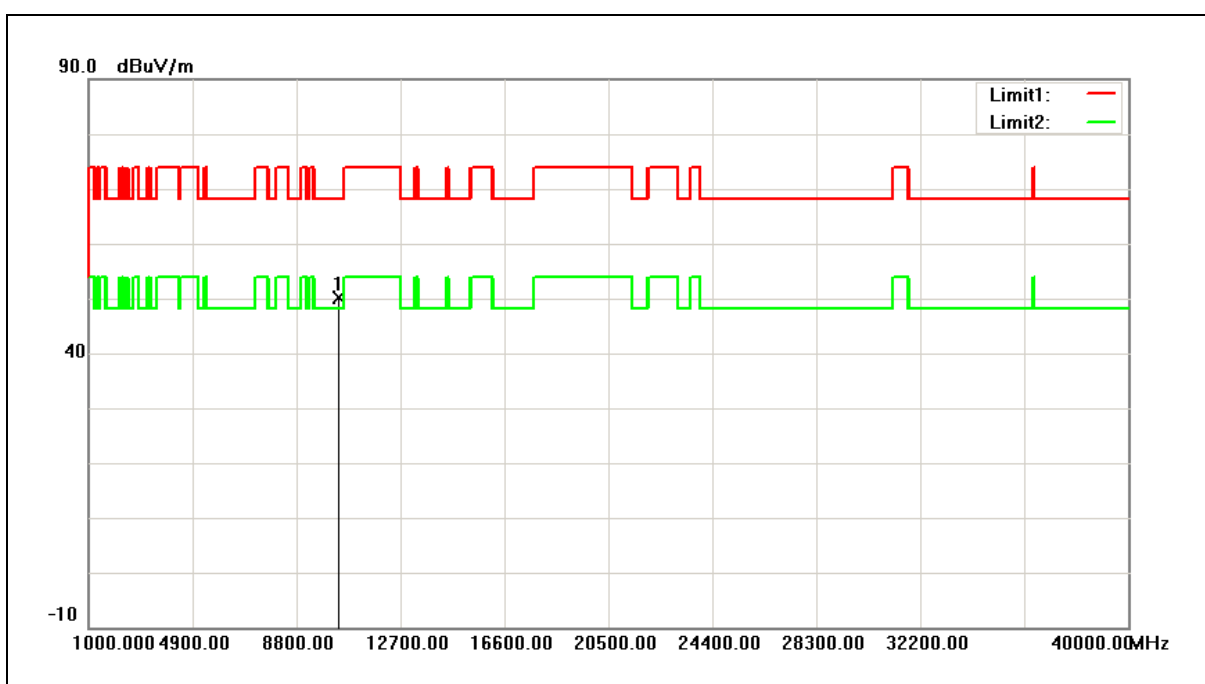


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	44.68	5.36	50.04	68.20	-18.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Horizontal		

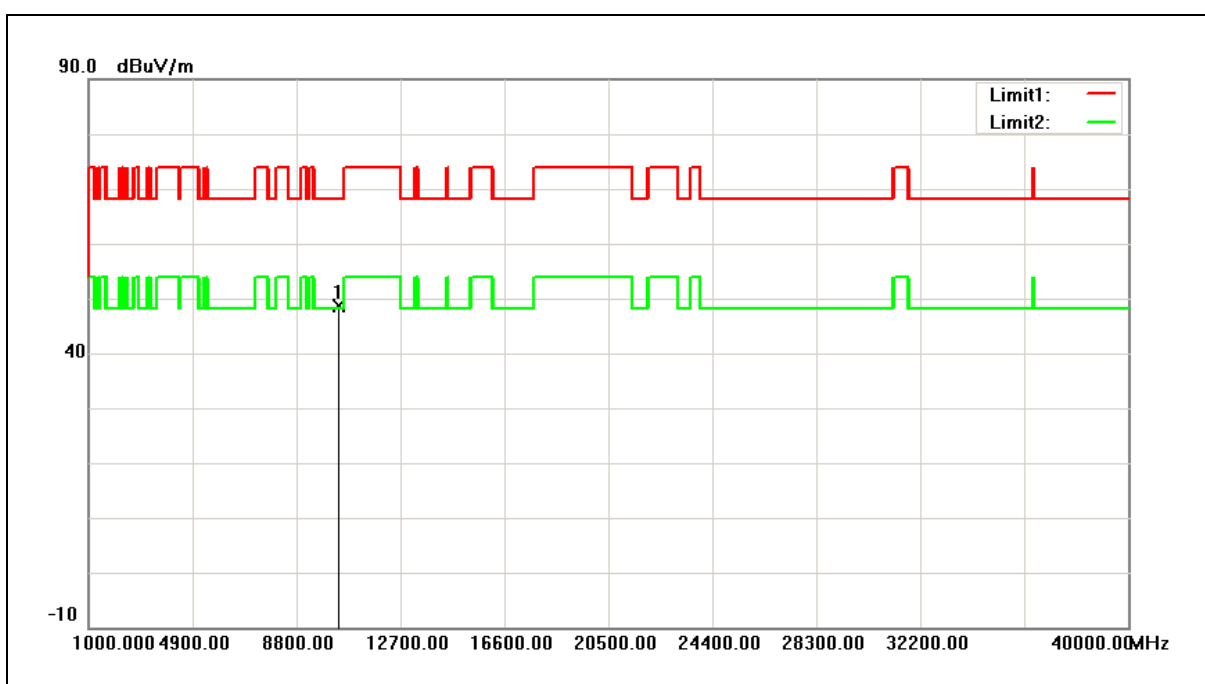


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	43.16	5.45	48.61	68.20	-19.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Vertical		

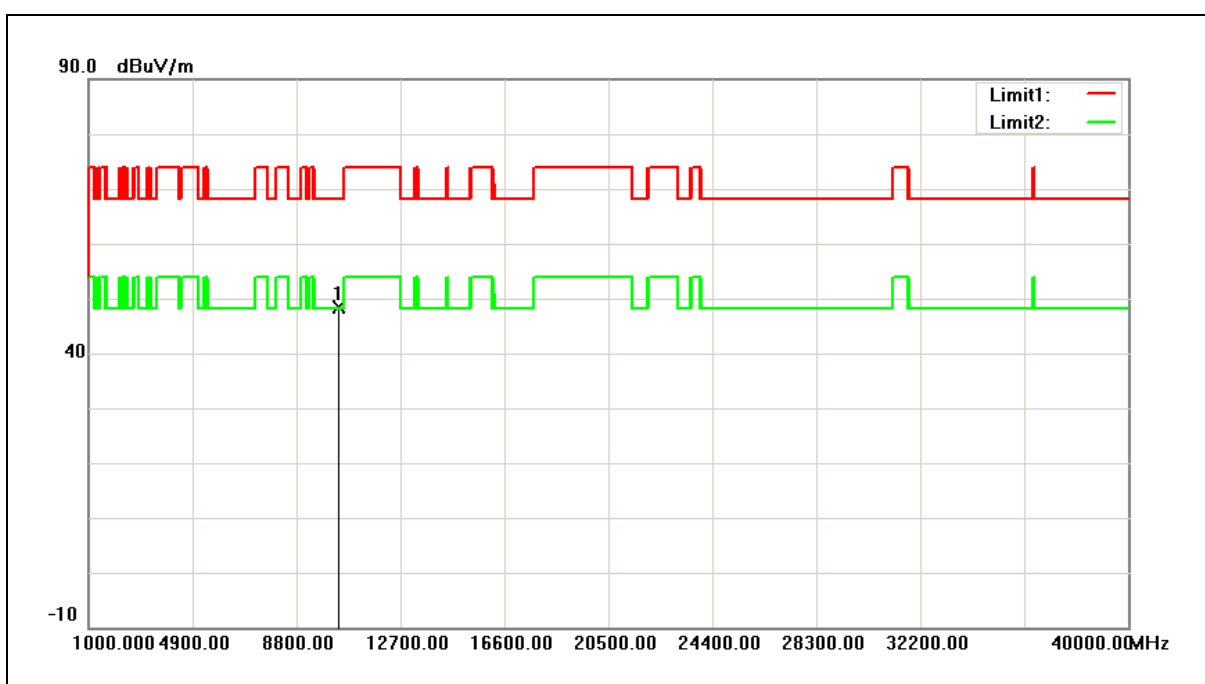


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	42.90	5.45	48.35	68.20	-19.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Horizontal		

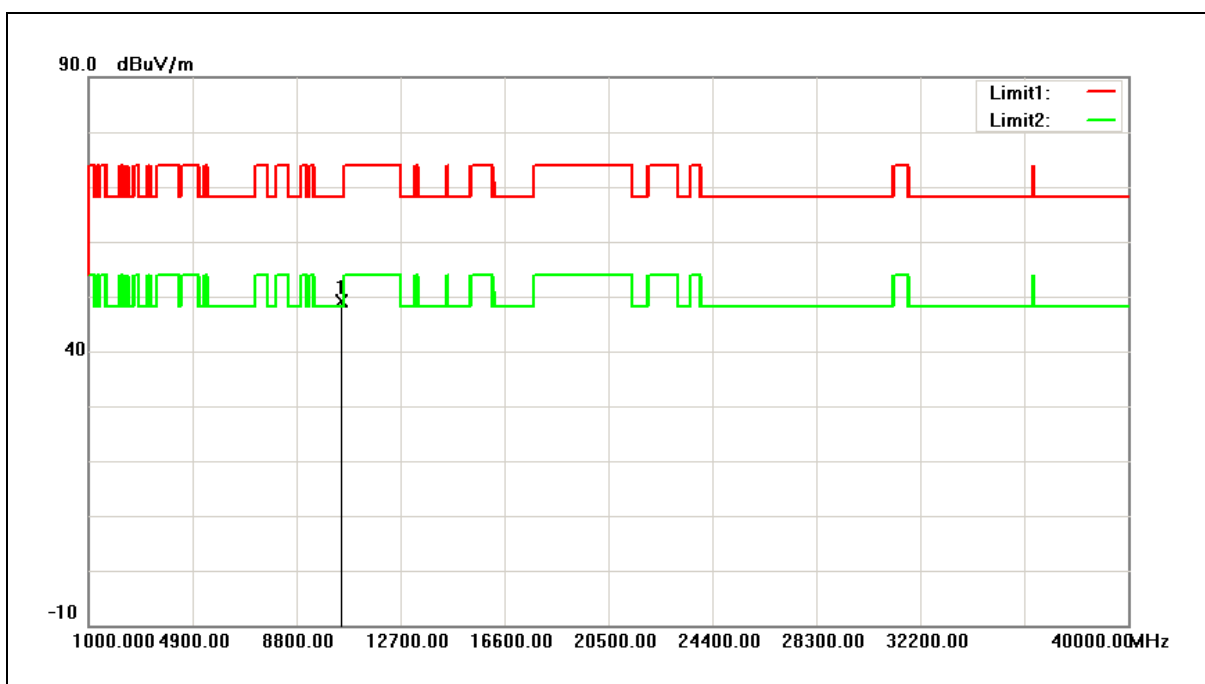


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	43.39	5.63	49.02	68.20	-19.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Vertical		

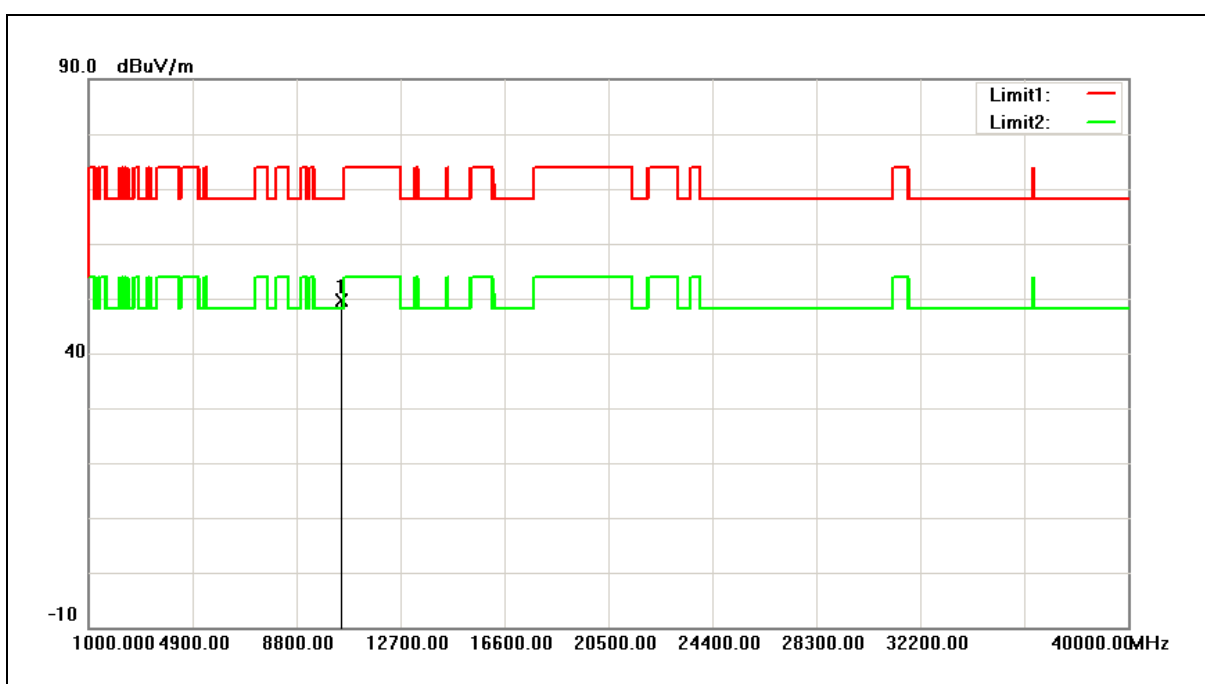


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	43.88	5.63	49.51	68.20	-18.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Horizontal		

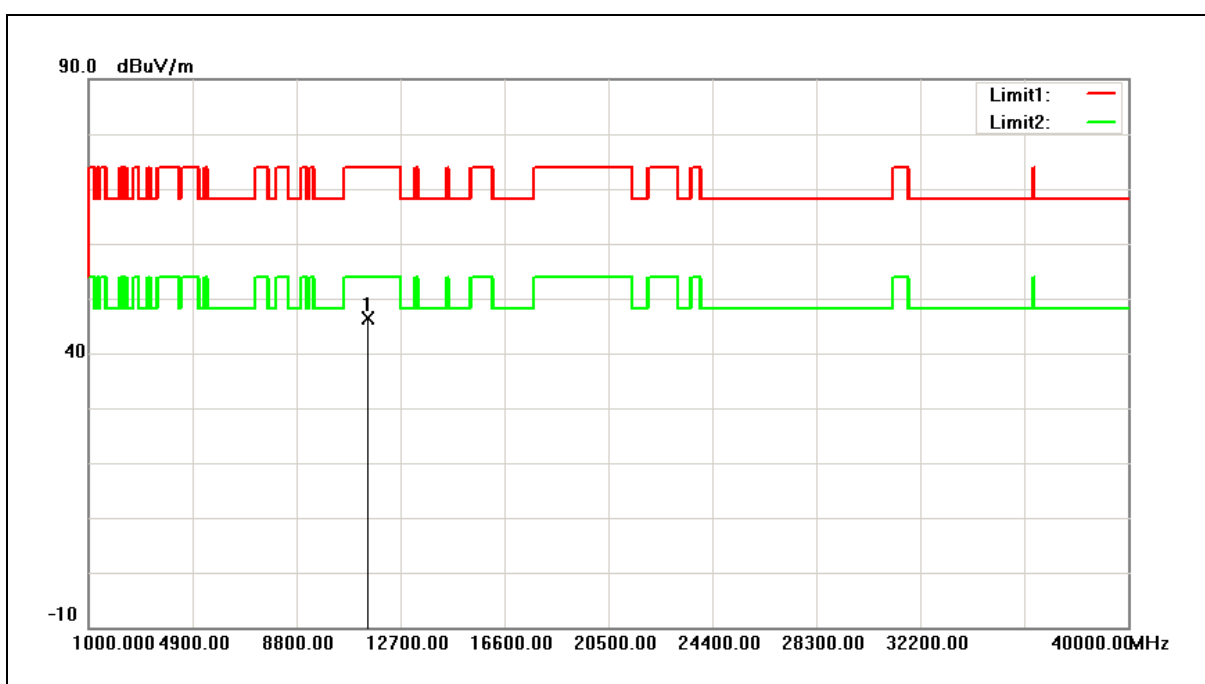

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	39.83	6.61	46.44	74.00	-27.56	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Vertical		

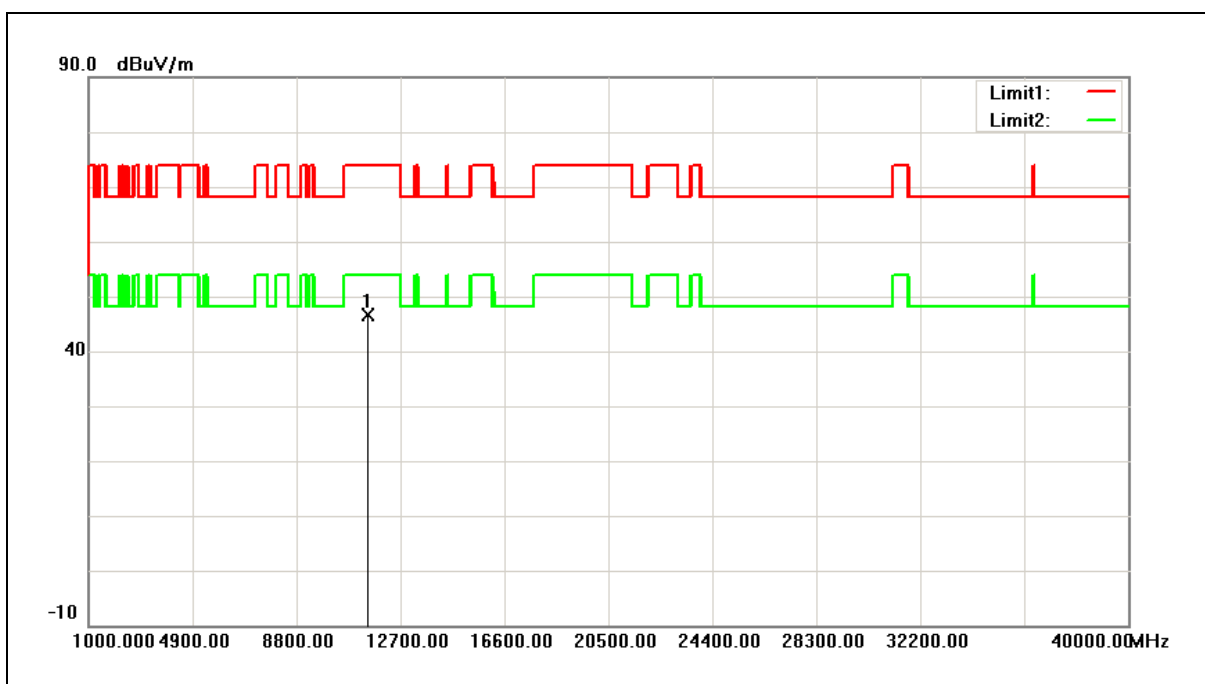


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	40.10	6.61	46.71	74.00	-27.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Horizontal		

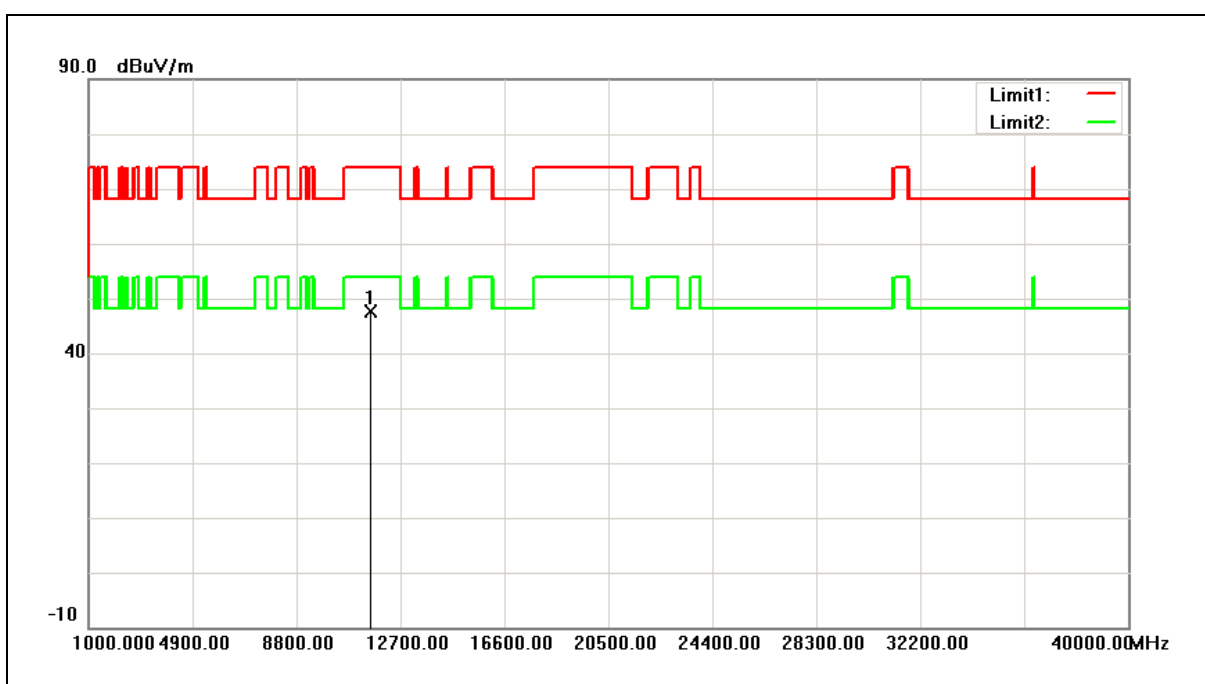

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	40.93	6.80	47.73	74.00	-26.27	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Vertical		

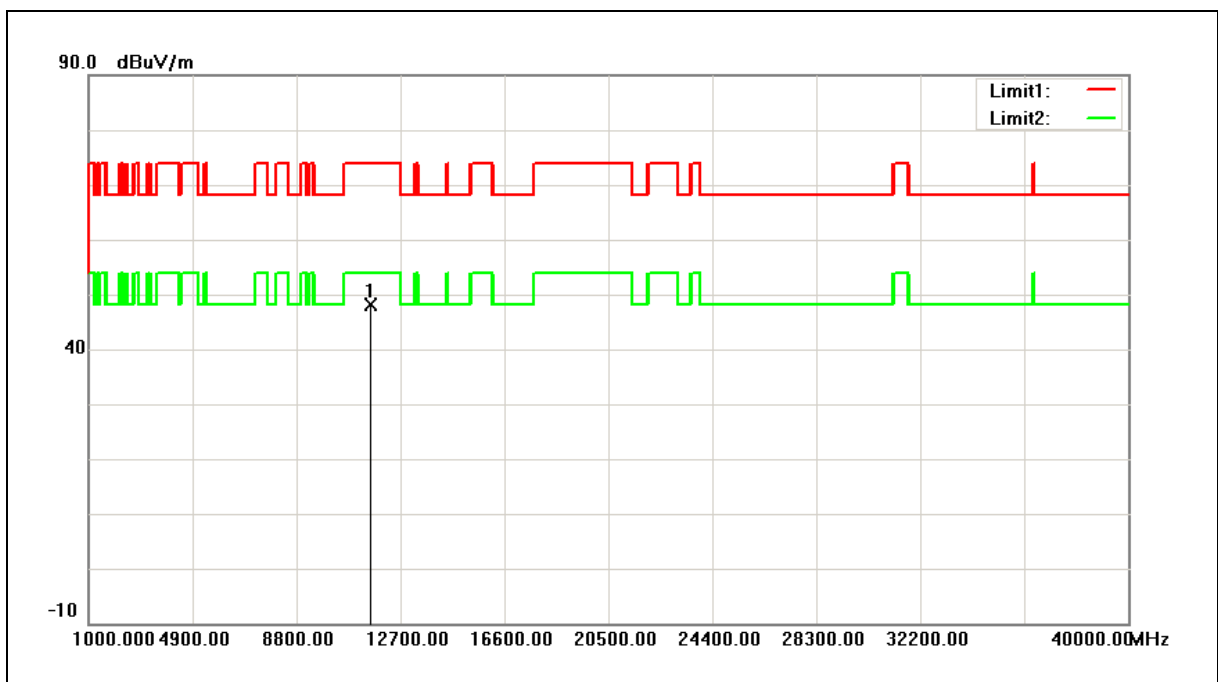

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	41.44	6.80	48.24	74.00	-25.76	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Horizontal		

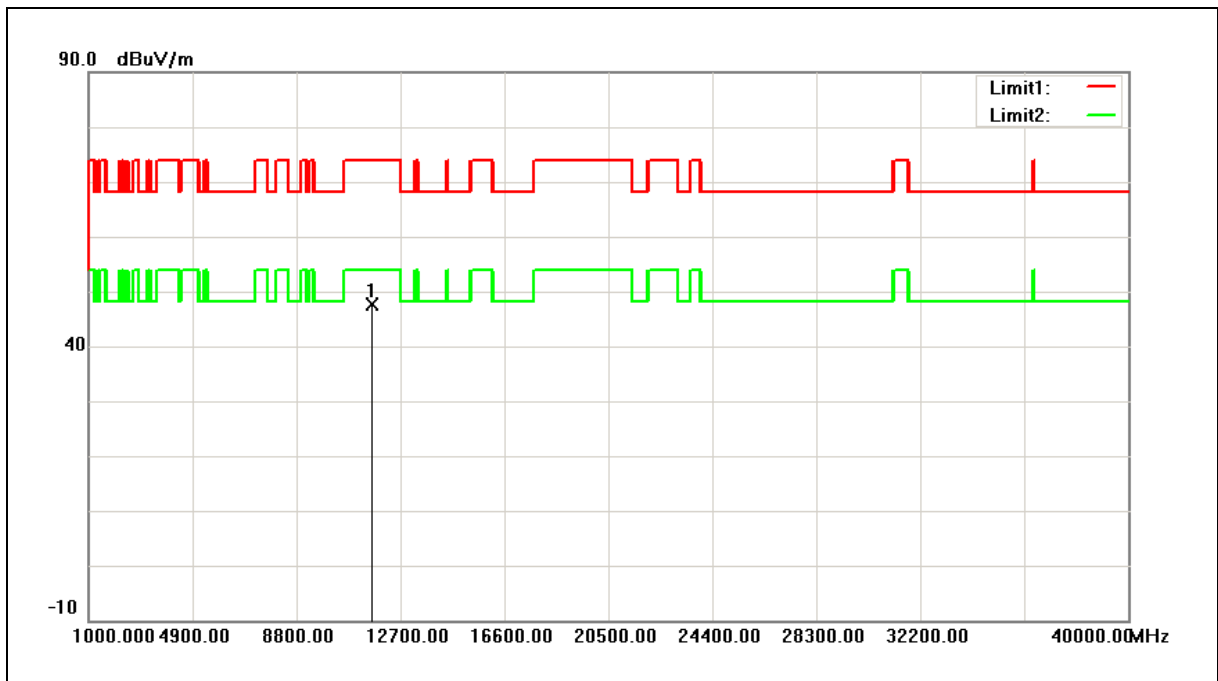

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	40.58	7.01	47.59	74.00	-26.41	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/07/2017
Ant.Polar.:	Vertical		

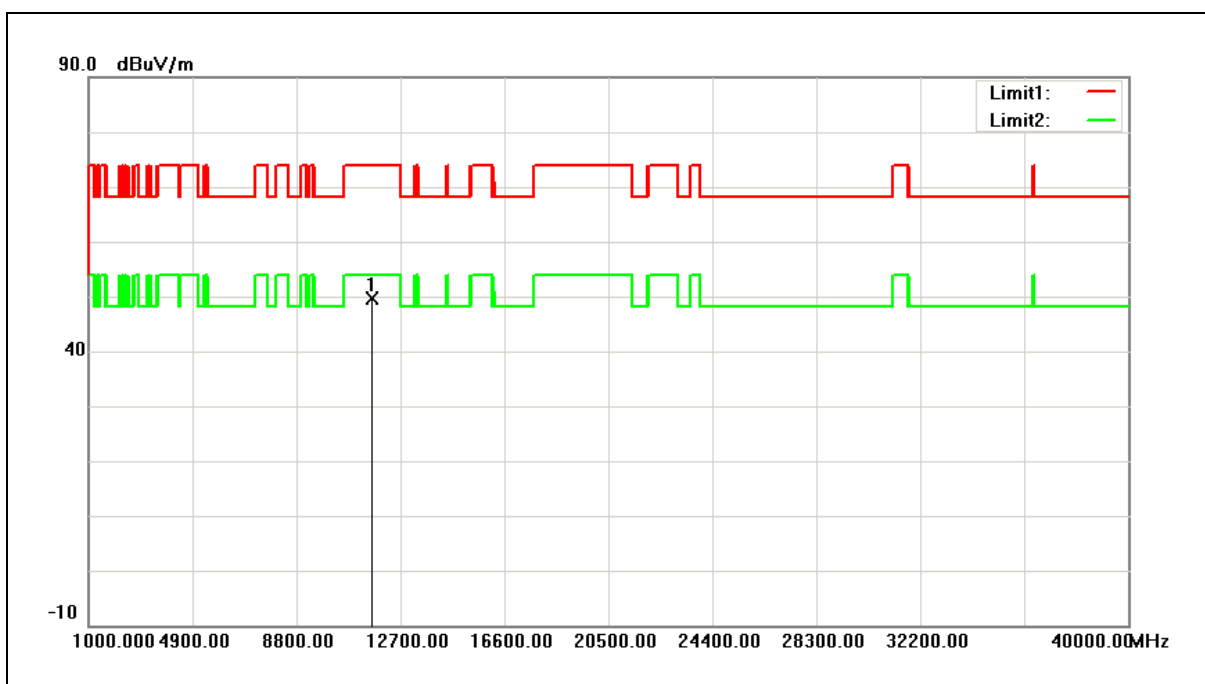


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	42.68	7.01	49.69	74.00	-24.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/07/2017
Ant.Polar.:	Horizontal		

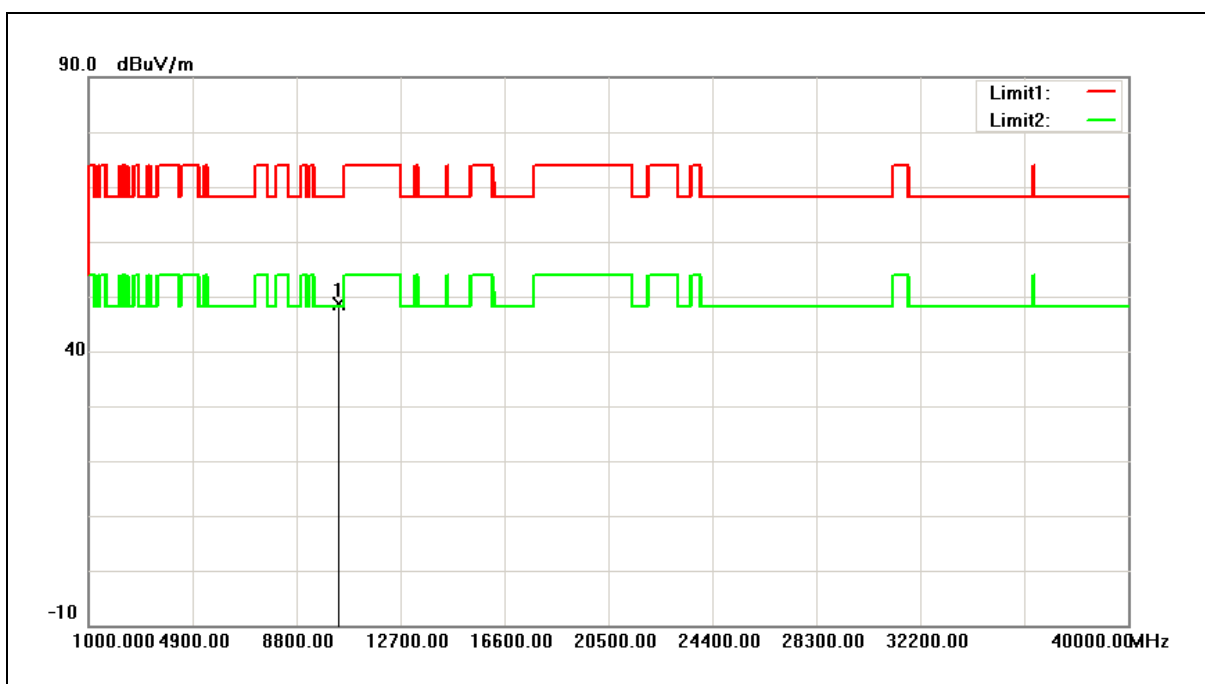

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	43.34	5.39	48.73	68.20	-19.47	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/07/2017
Ant.Polar.:	Vertical		

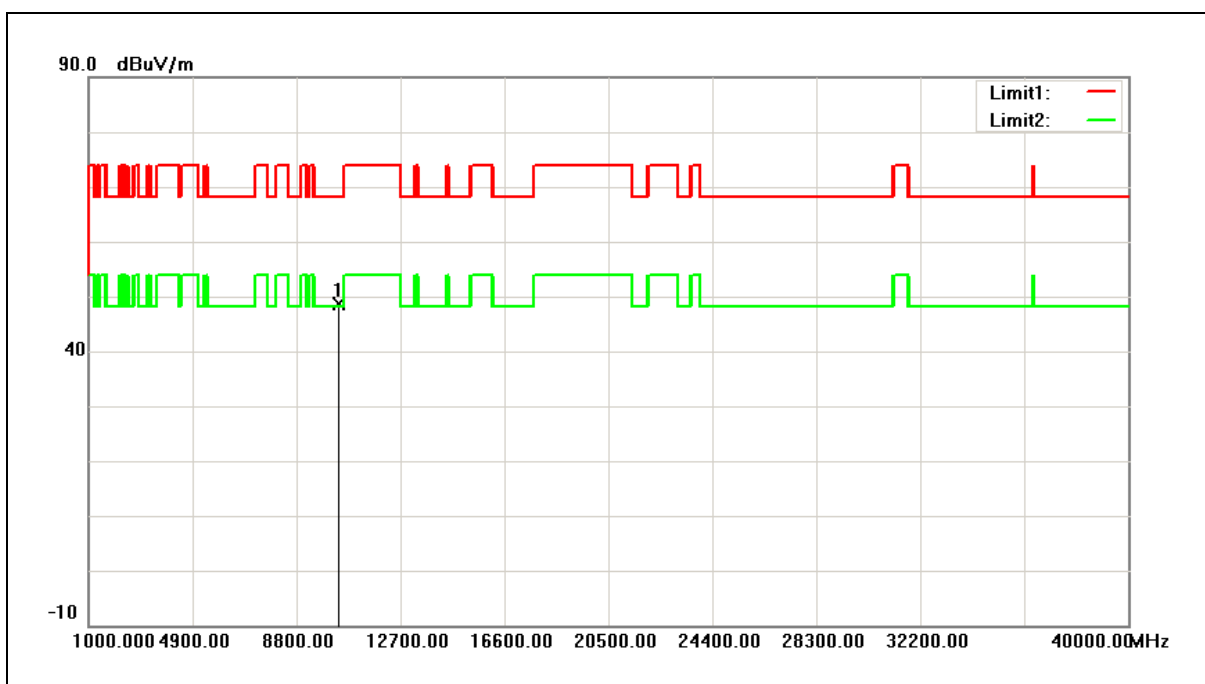


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	43.22	5.39	48.61	68.20	-19.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/07/2017
Ant.Polar.:	Horizontal		

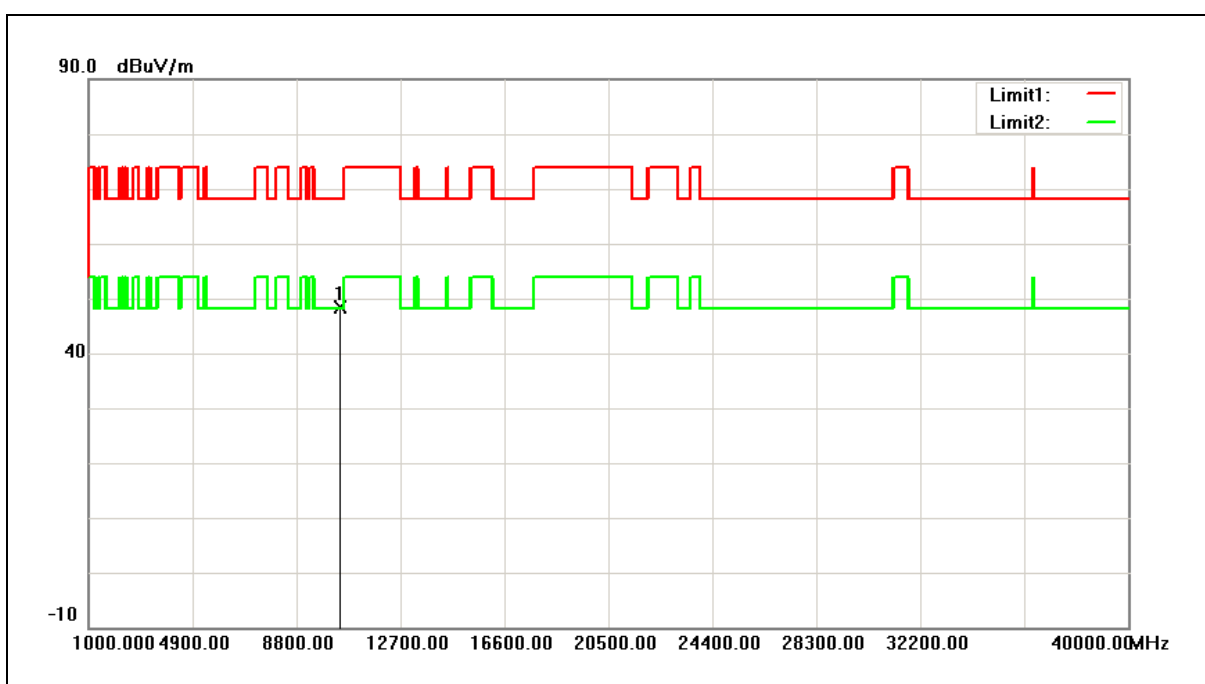


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	42.68	5.59	48.27	68.20	-19.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/07/2017
Ant.Polar.:	Vertical		

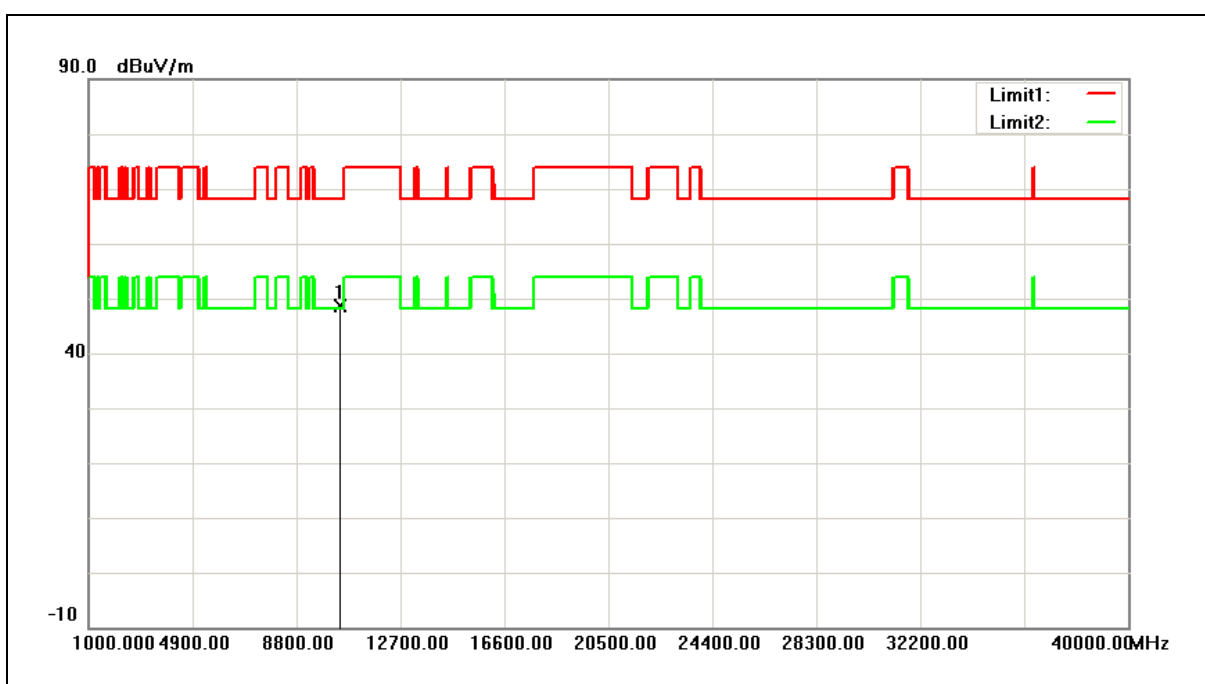


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	43.09	5.59	48.68	68.20	-19.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/07/2017
Ant.Polar.:	Horizontal		

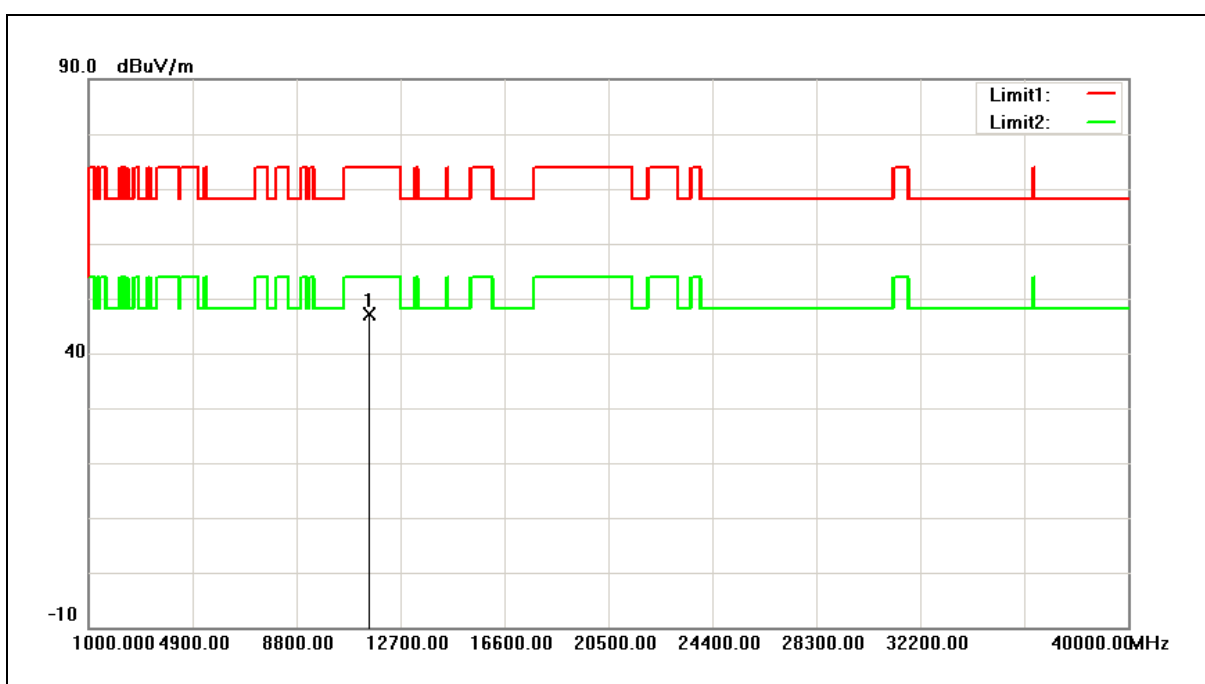


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	40.48	6.64	47.12	74.00	-26.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/07/2017
Ant.Polar.:	Vertical		

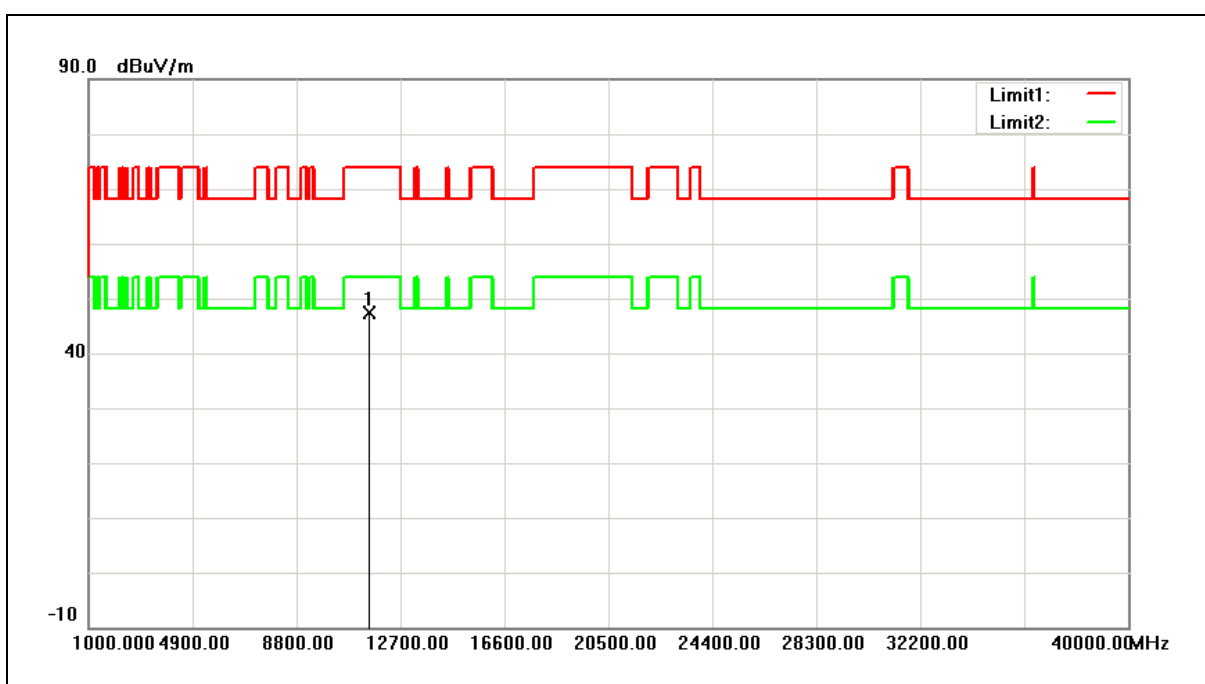


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	40.68	6.64	47.32	74.00	-26.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/07/2017
Ant.Polar.:	Horizontal		

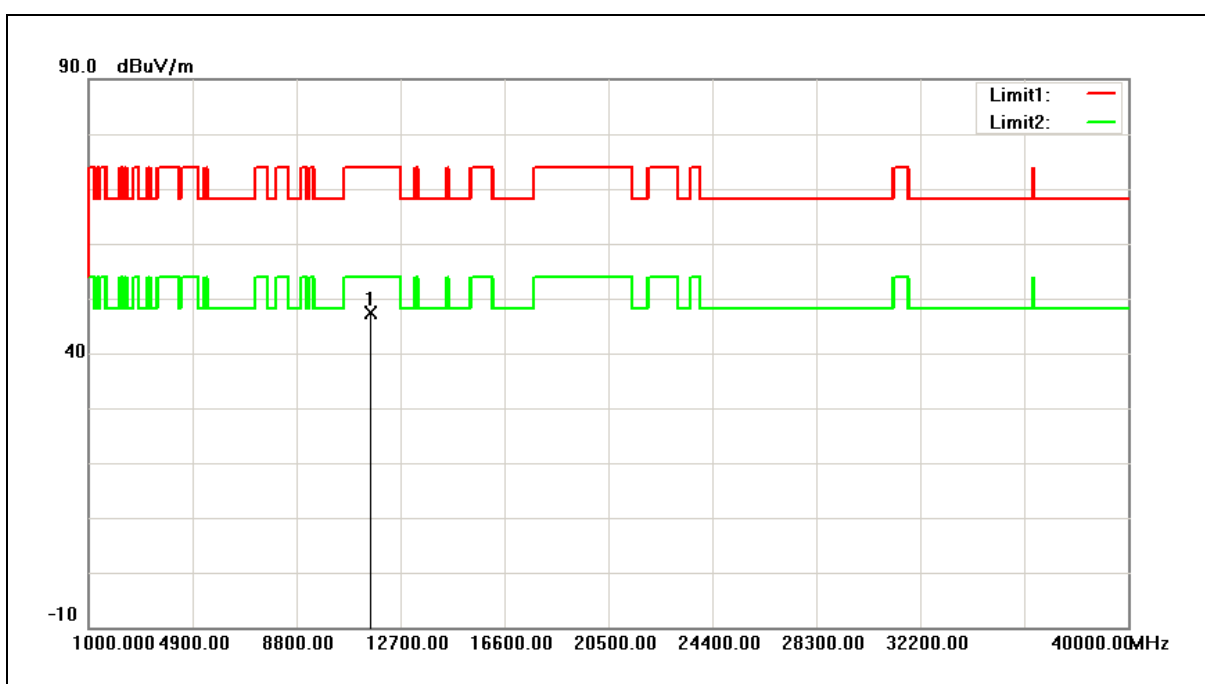


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	40.55	6.86	47.41	74.00	-26.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/07/2017
Ant.Polar.:	Vertical		

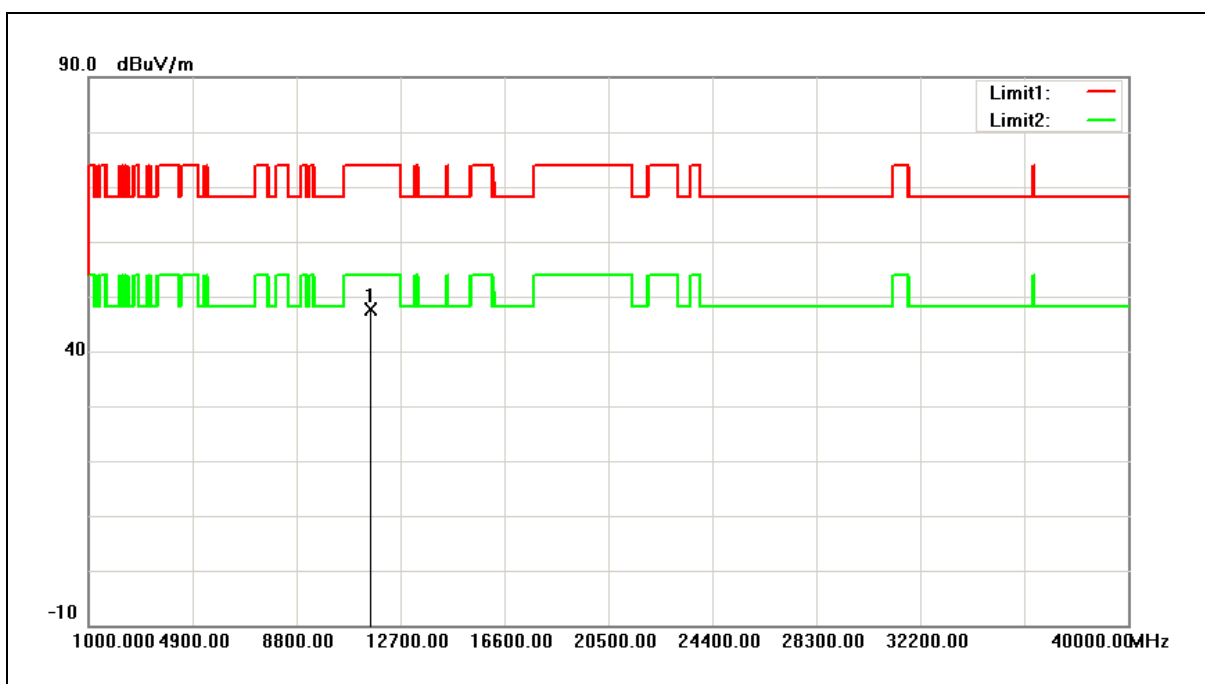


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	40.73	6.86	47.59	74.00	-26.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/07/2017
Ant.Polar.:	Horizontal		

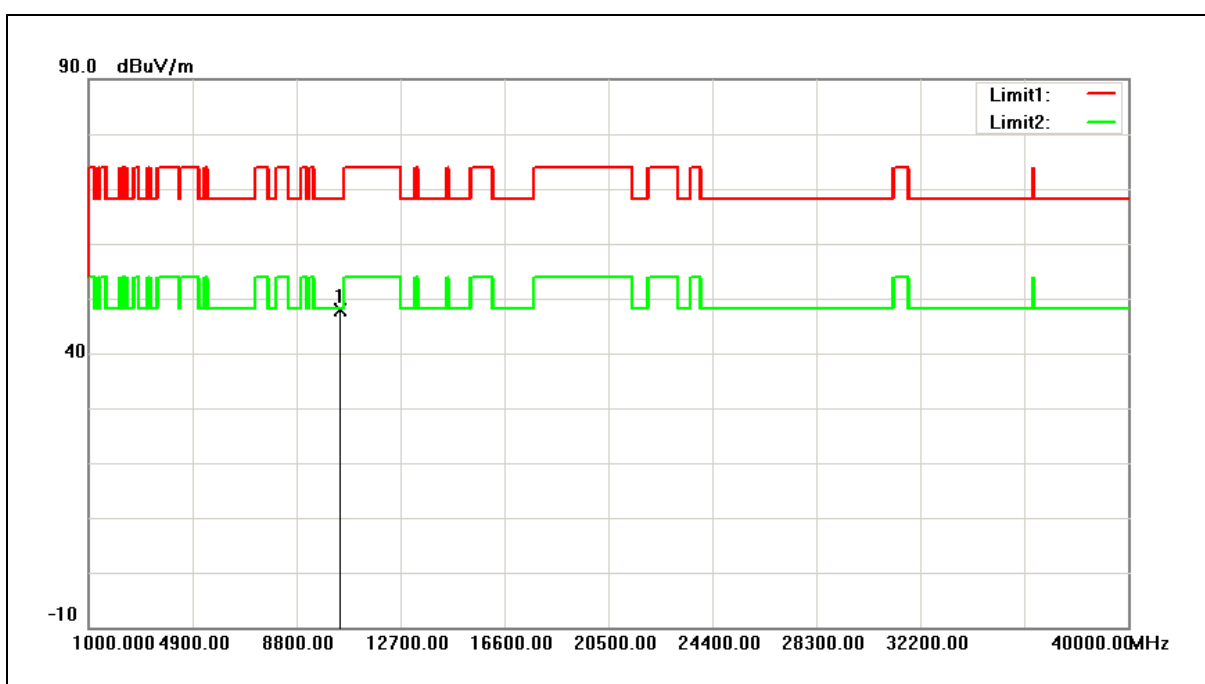

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	42.28	5.49	47.77	68.20	-20.43	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/07/2017
Ant.Polar.:	Vertical		

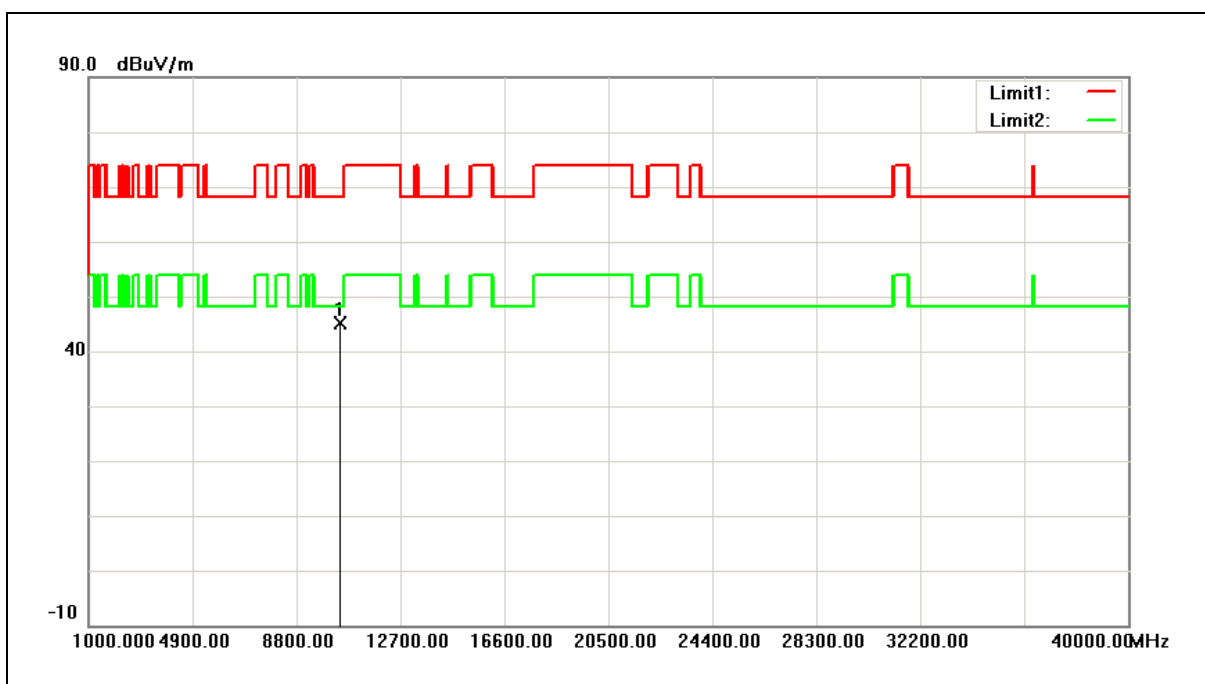


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	39.67	5.49	45.16	68.20	-23.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/07/2017
Ant.Polar.:	Horizontal		

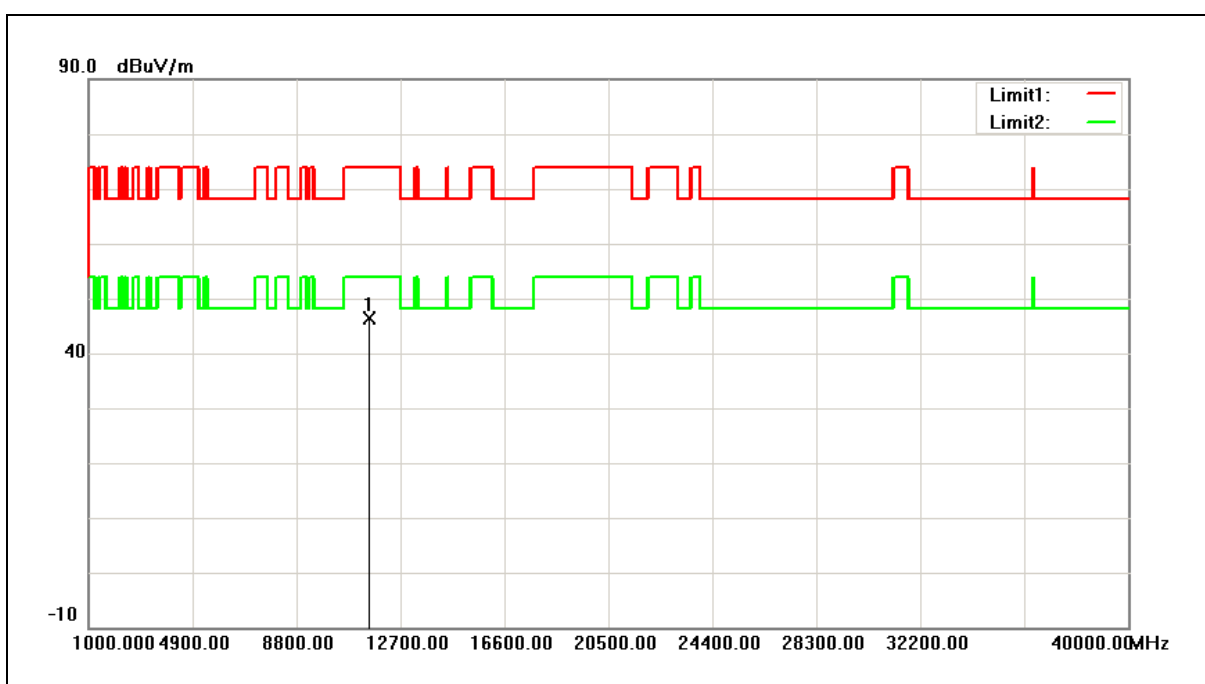


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	39.56	6.75	46.31	74.00	-27.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/07/2017
Ant.Polar.:	Vertical		

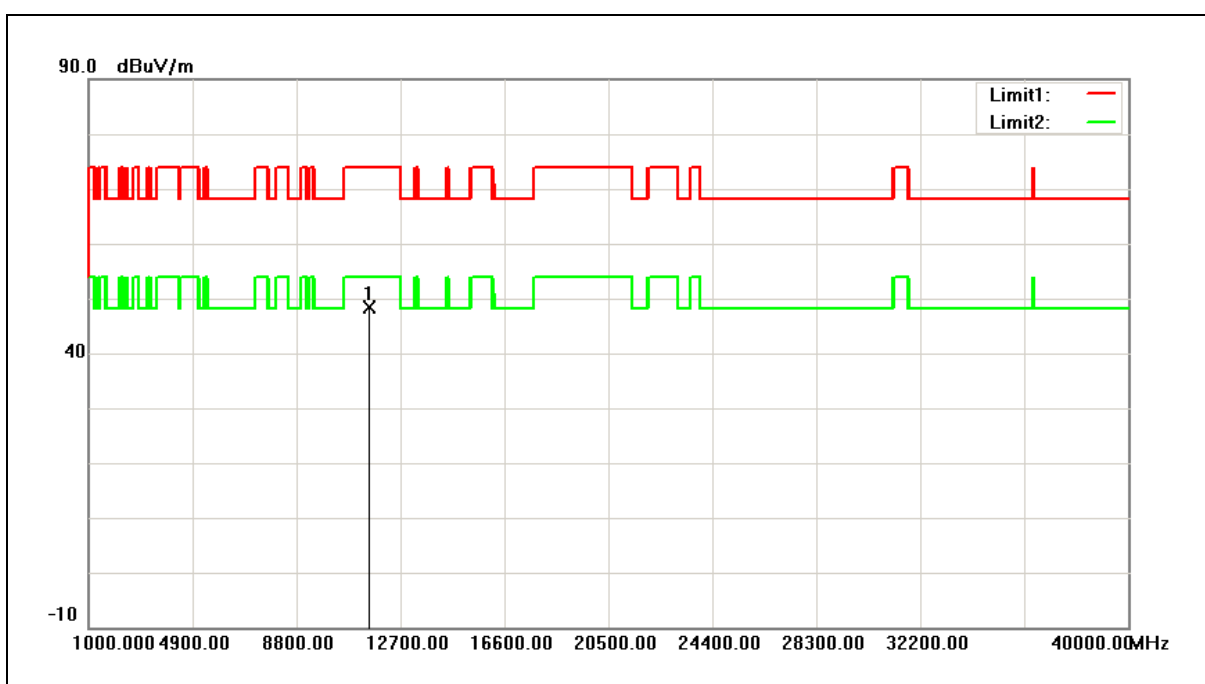


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	41.57	6.75	48.32	74.00	-25.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Transmitter Unwanted Emissions	Power:	AC 120V/60Hz
Test Mode:	Simultaneous Transmitting	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
	(DTS+NII)	Date:	06/07/2017
Ant.Polar.:	Horizontal		

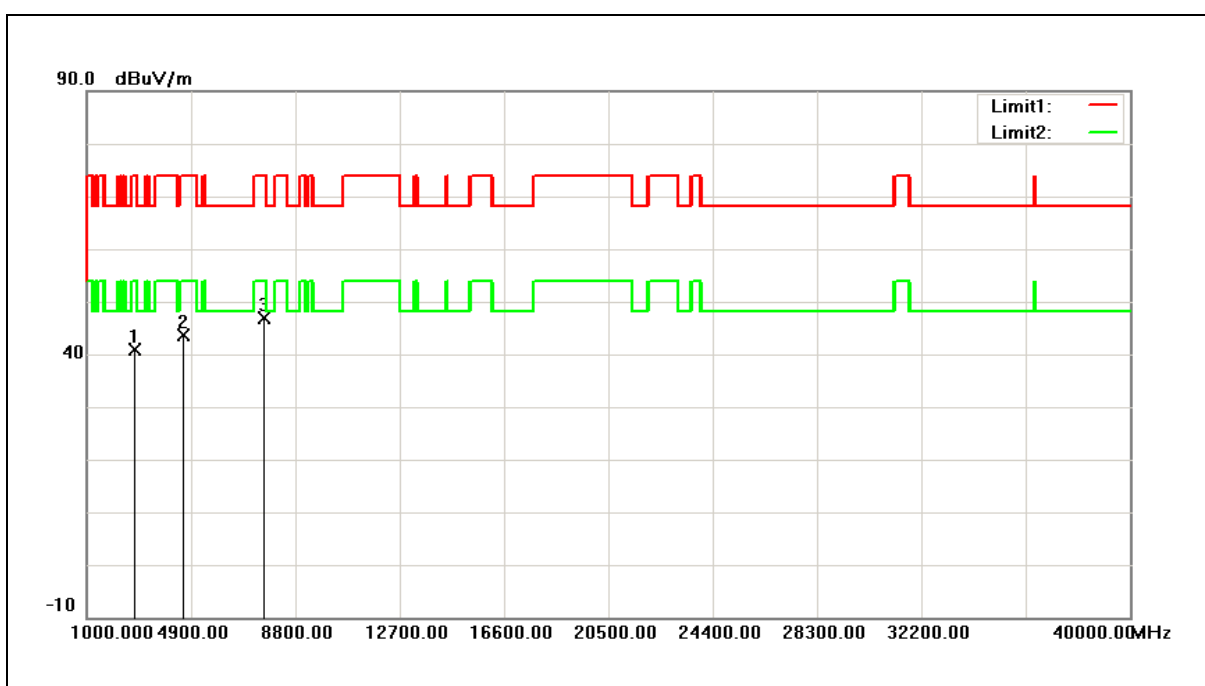


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	53.70	-12.85	40.85	74.00	-33.15	peak
2	4621.000	51.29	-7.71	43.58	74.00	-30.42	peak
3	7647.000	45.87	0.91	46.78	74.00	-27.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Transmitter Unwanted Emissions	Power:	AC 120V/60Hz
Test Mode:	Simultaneous Transmitting	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
	(DTS+NII)	Date:	06/07/2017
Ant.Polar.:	Vertical		

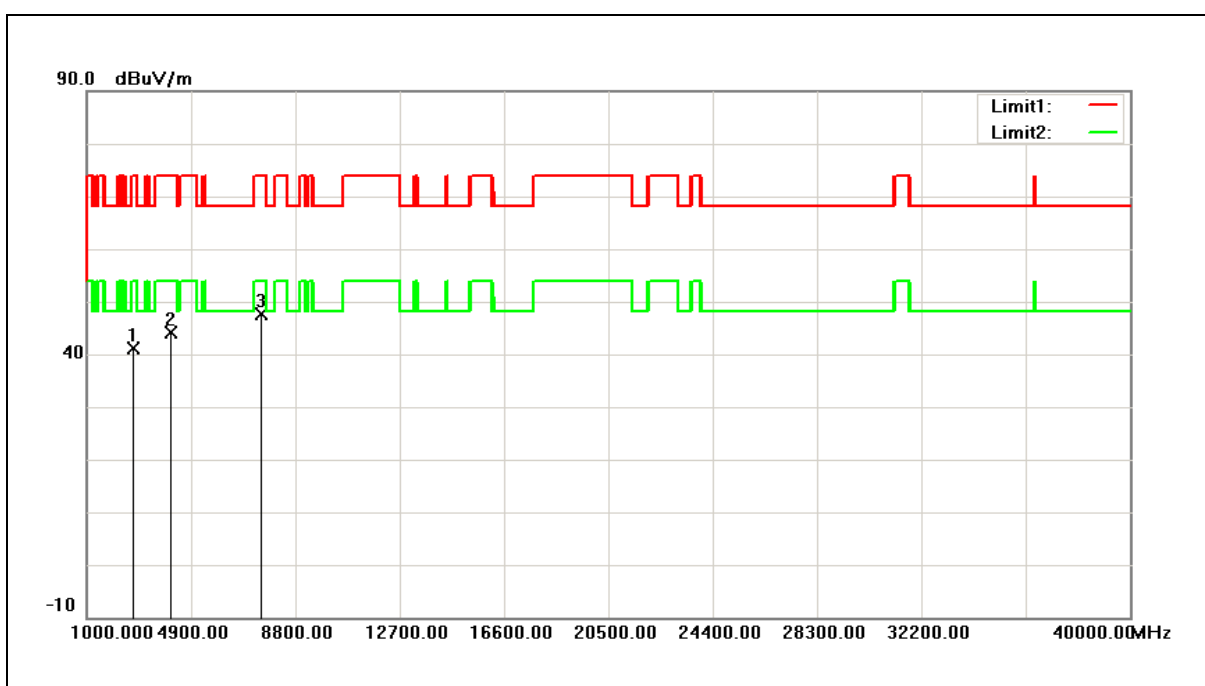

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	54.18	-12.93	41.25	74.00	-32.75	peak
2	4145.000	53.12	-9.00	44.12	74.00	-29.88	peak
3	7545.000	46.87	0.64	47.51	74.00	-26.49	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Horizontal		

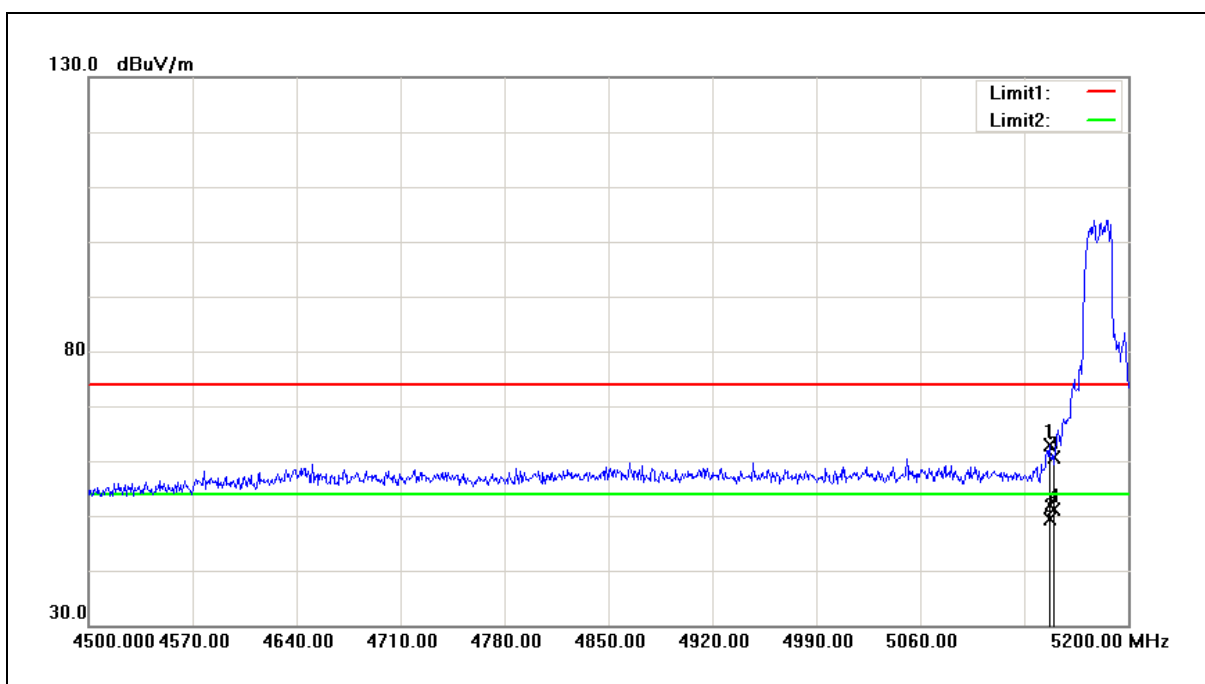


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	53.89	8.97	62.86	74.00	-11.14	peak
2	5146.800	40.41	8.97	49.38	54.00	-4.62	AVG
3	5150.000	51.67	8.97	60.64	74.00	-13.36	peak
4	5150.000	42.27	8.97	51.24	54.00	-2.76	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Vertical		

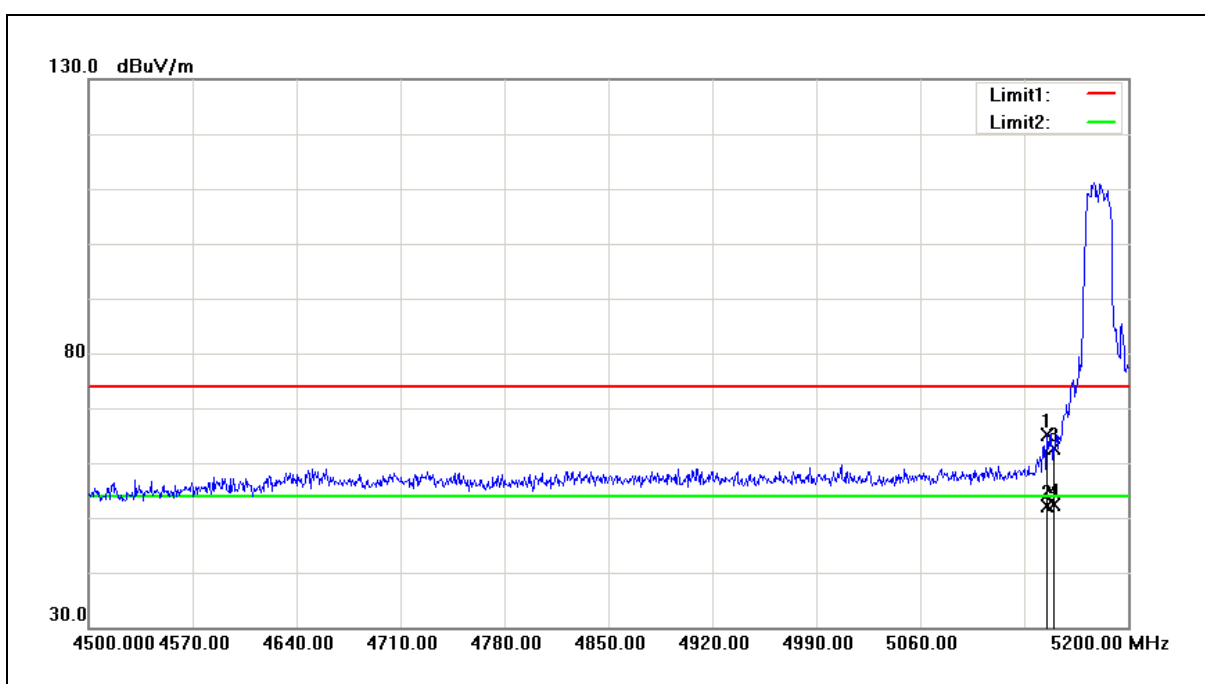

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.400	56.13	8.97	65.10	74.00	-8.90	peak
2	5145.400	43.24	8.97	52.21	54.00	-1.79	AVG
3	5150.000	53.74	8.97	62.71	74.00	-11.29	peak
4	5150.000	43.52	8.97	52.49	54.00	-1.51	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Horizontal		

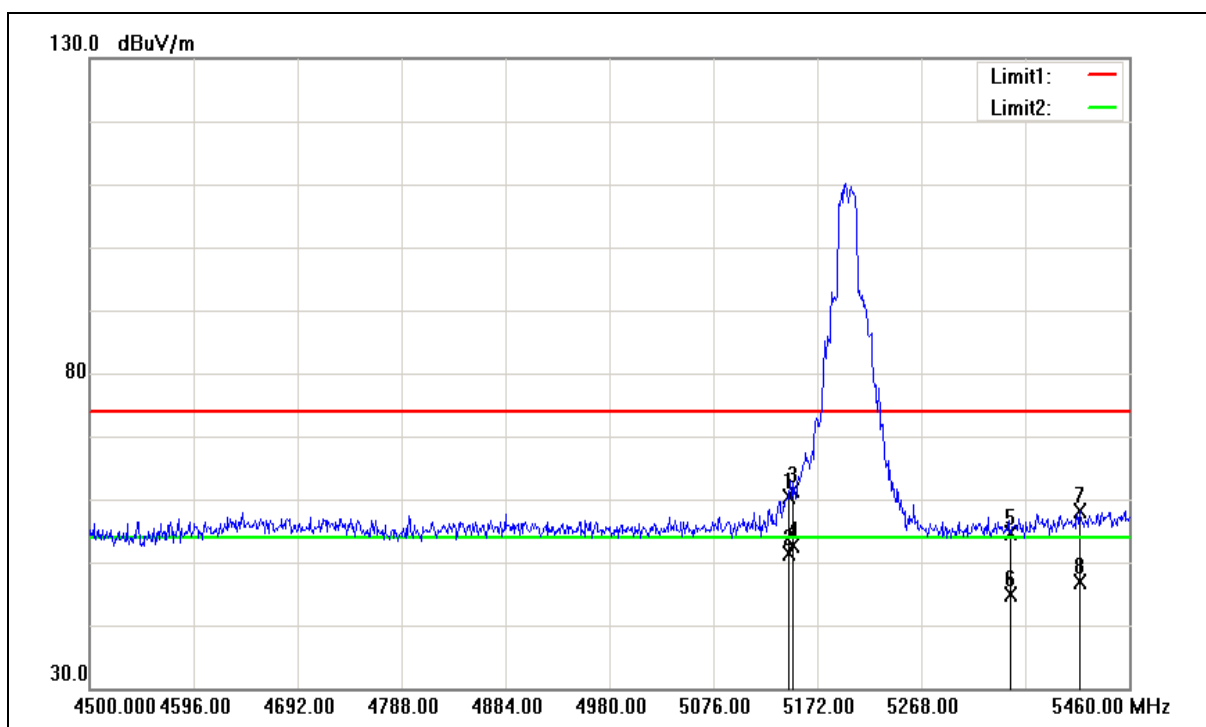



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.120	51.40	8.97	60.37	74.00	-13.63	peak
2	5145.120	42.41	8.97	51.38	54.00	-2.62	AVG
3	5150.000	52.45	8.97	61.42	74.00	-12.58	peak
4	5150.000	43.77	8.97	52.74	54.00	-1.26	AVG
5	5350.000	45.64	9.08	54.72	74.00	-19.28	peak
6	5350.000	35.90	9.08	44.98	54.00	-9.02	AVG
7	5413.920	49.01	9.13	58.14	74.00	-15.86	peak
8	5413.920	37.63	9.13	46.76	54.00	-7.24	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Vertical		

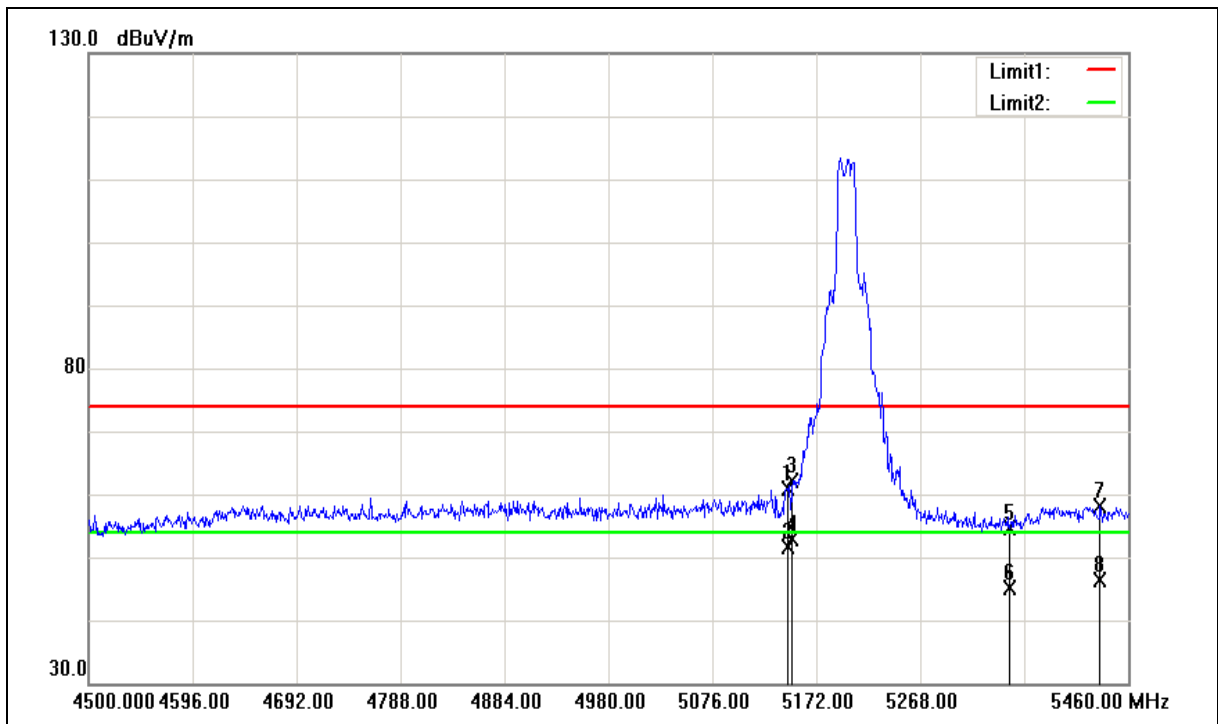



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.120	52.00	8.97	60.97	74.00	-13.03	peak
2	5145.120	42.56	8.97	51.53	54.00	-2.47	AVG
3	5150.000	53.24	8.97	62.21	74.00	-11.79	peak
4	5150.000	43.92	8.97	52.89	54.00	-1.11	AVG
5	5350.000	45.48	9.08	54.56	74.00	-19.44	peak
6	5350.000	36.04	9.08	45.12	54.00	-8.88	AVG
7	5434.080	48.88	9.14	58.02	74.00	-15.98	peak
8	5434.080	37.24	9.14	46.38	54.00	-7.62	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Horizontal		

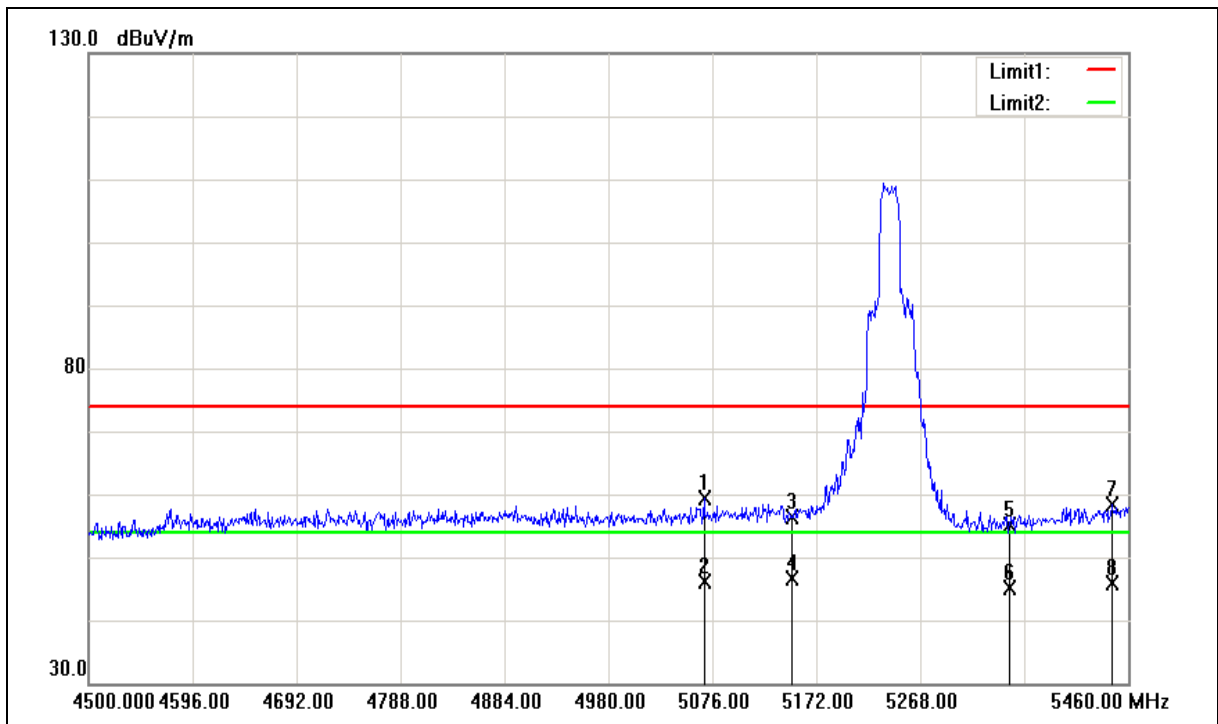



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5068.320	50.40	8.91	59.31	74.00	-14.69	peak
2	5068.320	37.33	8.91	46.24	54.00	-7.76	AVG
3	5150.000	47.39	8.97	56.36	74.00	-17.64	peak
4	5150.000	37.56	8.97	46.53	54.00	-7.47	AVG
5	5350.000	45.98	9.08	55.06	74.00	-18.94	peak
6	5350.000	35.93	9.08	45.01	54.00	-8.99	AVG
7	5444.640	49.28	9.15	58.43	74.00	-15.57	peak
8	5444.640	36.62	9.15	45.77	54.00	-8.23	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Vertical		

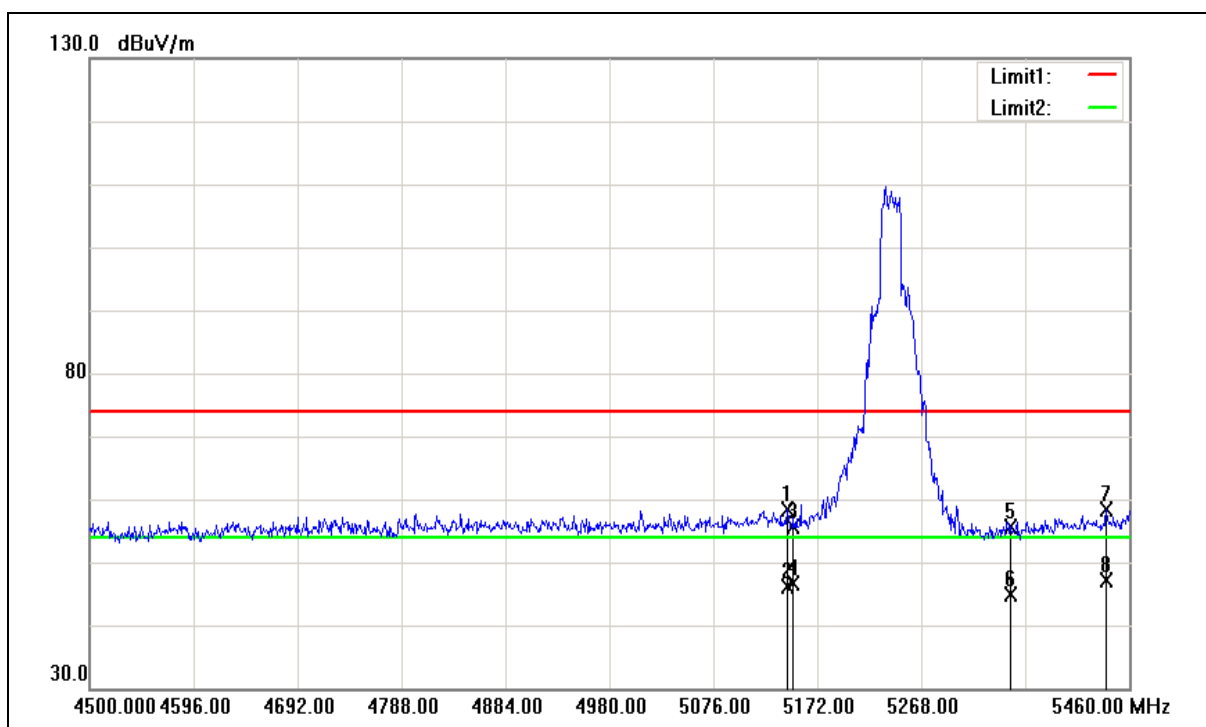



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/05/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.160	49.45	8.97	58.42	74.00	-15.58	peak
2	5144.160	37.14	8.97	46.11	54.00	-7.89	AVG
3	5150.000	46.63	8.97	55.60	74.00	-18.40	peak
4	5150.000	37.61	8.97	46.58	54.00	-7.42	AVG
5	5350.000	46.43	9.08	55.51	74.00	-18.49	peak
6	5350.000	35.84	9.08	44.92	54.00	-9.08	AVG
7	5438.880	49.35	9.15	58.50	74.00	-15.50	peak
8	5438.880	37.93	9.15	47.08	54.00	-6.92	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/06/2017
Ant.Polar.:	Horizontal		

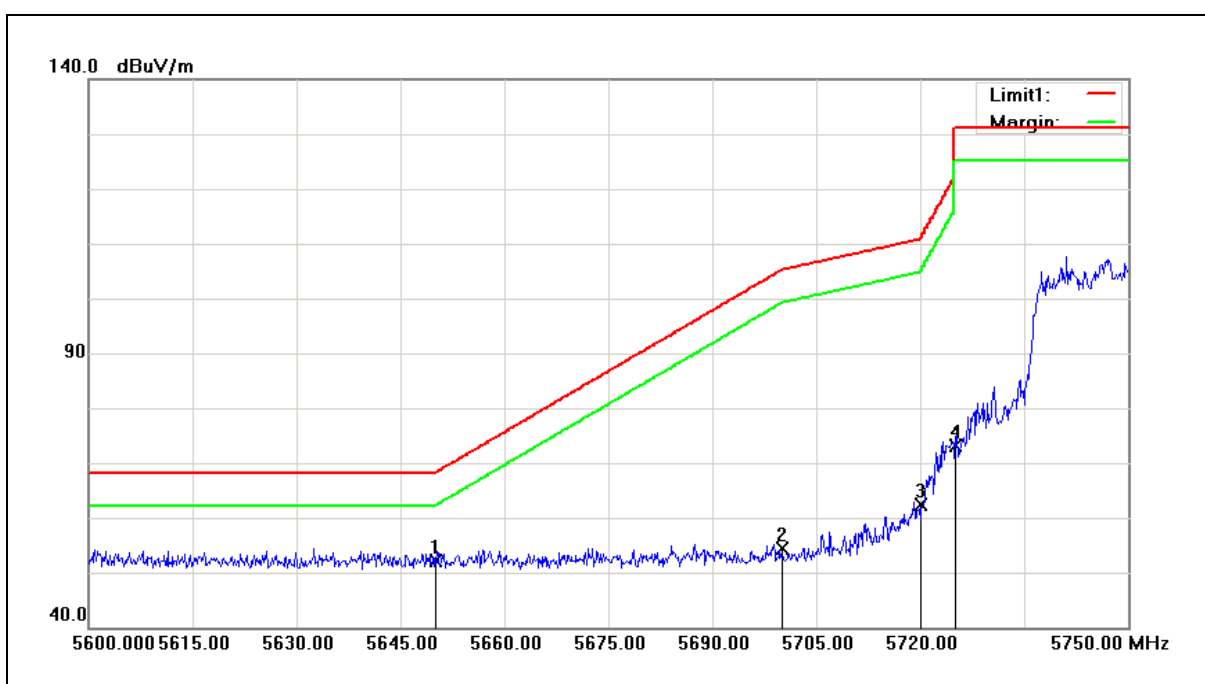


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	42.68	9.53	52.21	68.20	-15.99	peak
2	5700.000	44.67	9.64	54.31	105.20	-50.89	peak
3	5720.000	52.70	9.69	62.39	110.80	-48.41	peak
4	5725.000	63.42	9.70	73.12	122.20	-49.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/06/2017
Ant.Polar.:	Vertical		

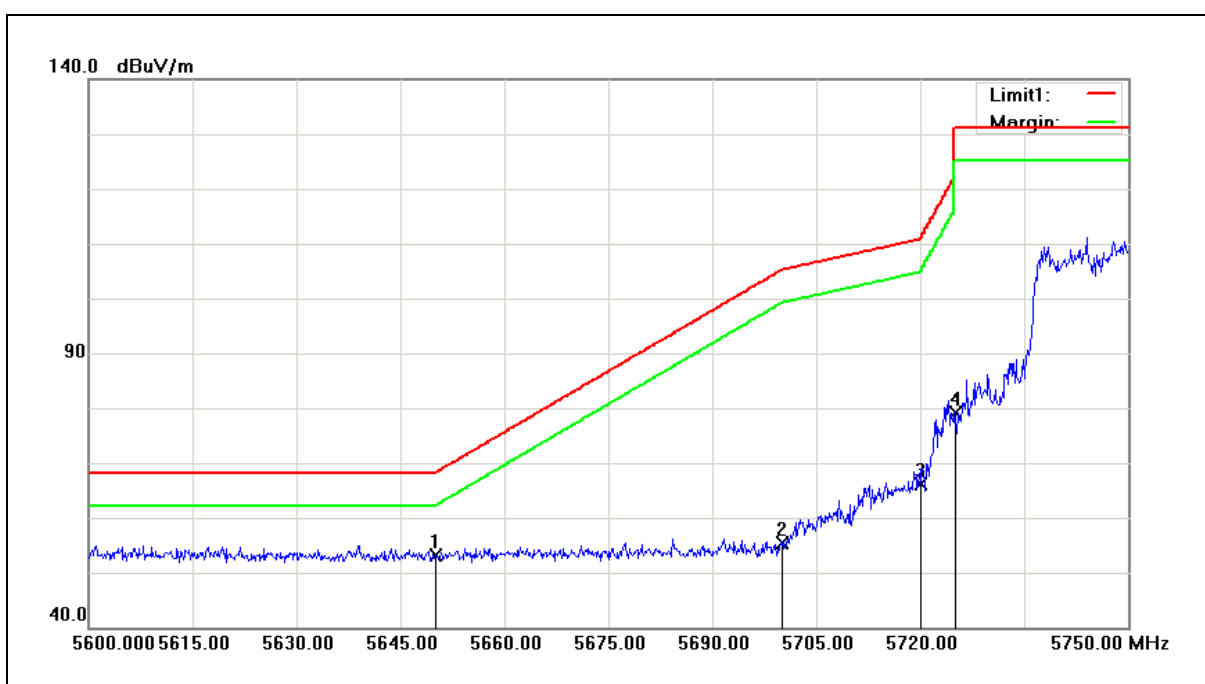

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	43.55	9.53	53.08	68.20	-15.12	peak
2	5700.000	45.62	9.64	55.26	105.20	-49.94	peak
3	5720.000	56.34	9.69	66.03	110.80	-44.77	peak
4	5725.000	69.51	9.70	79.21	122.20	-42.99	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/06/2017
Ant.Polar.:	Horizontal		

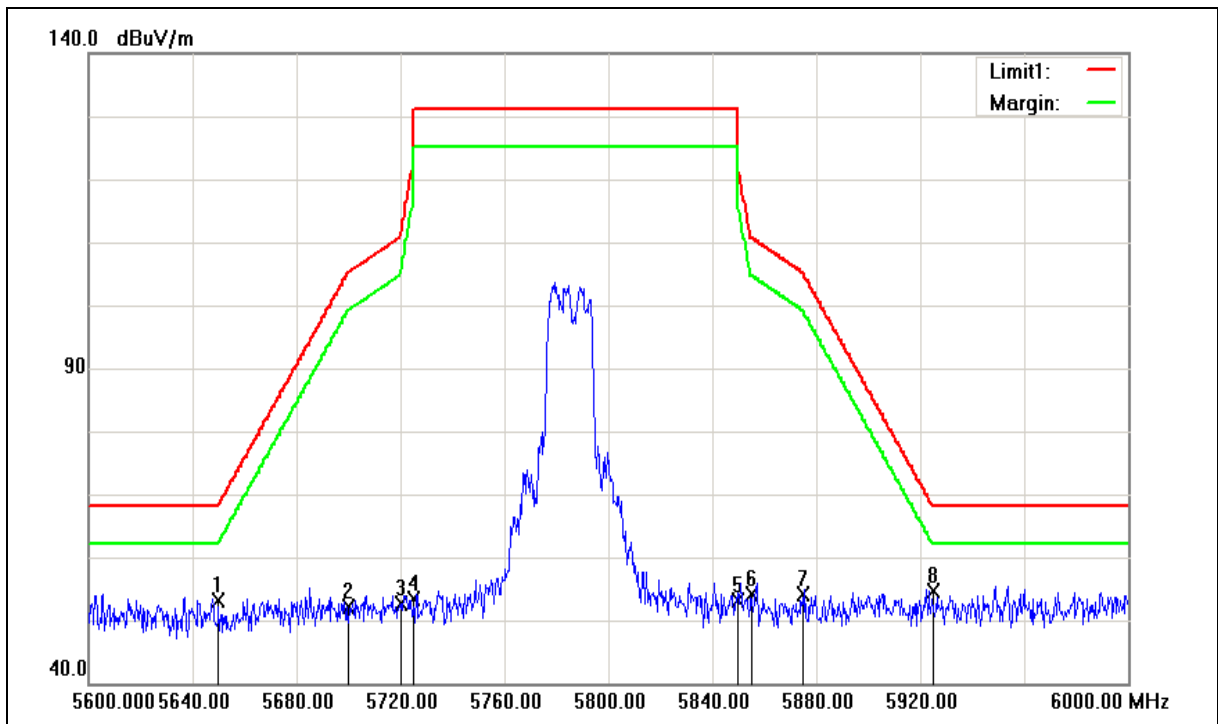



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/06/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	43.62	9.53	53.15	68.20	-15.05	peak
2	5700.000	42.60	9.64	52.24	105.20	-52.96	peak
3	5720.000	43.03	9.69	52.72	110.80	-58.08	peak
4	5725.000	43.68	9.70	53.38	122.20	-68.82	peak
5	5850.000	43.12	9.98	53.10	122.20	-69.10	peak
6	5855.000	44.23	9.99	54.22	110.80	-56.58	peak
7	5875.000	44.17	10.04	54.21	105.20	-50.99	peak
8	5925.000	44.50	10.16	54.66	68.20	-13.54	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/06/2017
Ant.Polar.:	Vertical		

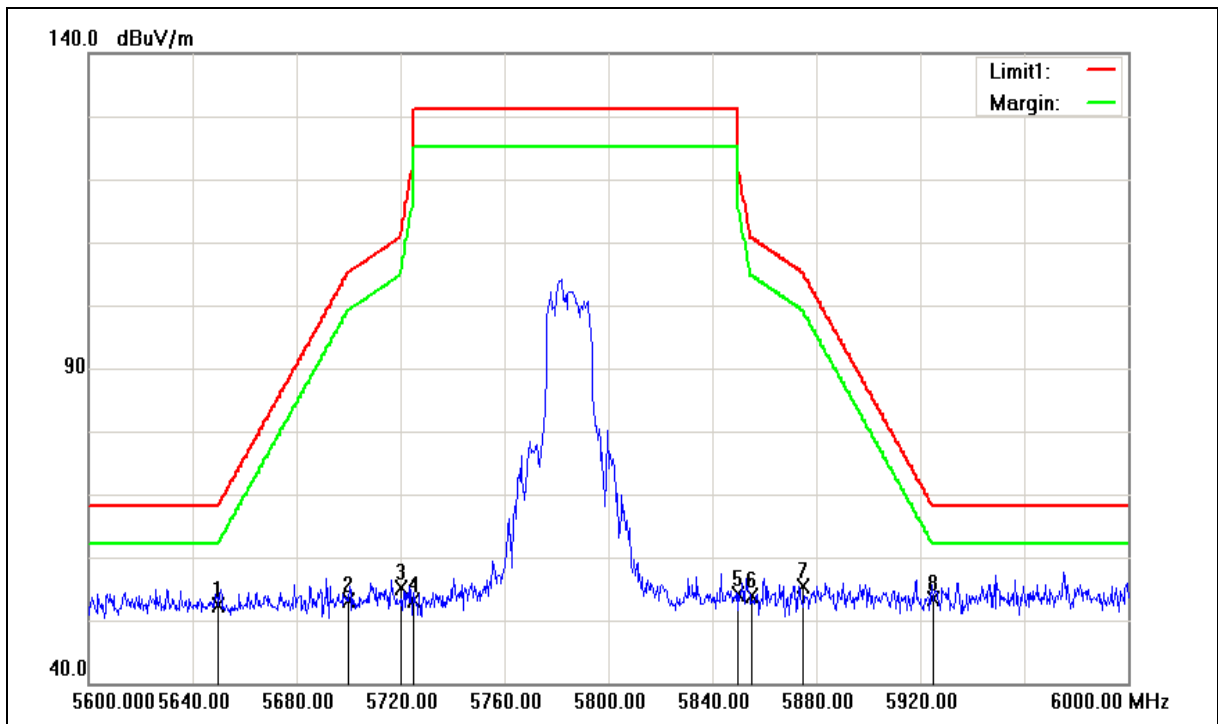



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/06/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	42.85	9.53	52.38	68.20	-15.82	peak
2	5700.000	43.51	9.64	53.15	105.20	-52.05	peak
3	5720.000	45.52	9.69	55.21	110.80	-55.59	peak
4	5725.000	43.42	9.70	53.12	122.20	-69.08	peak
5	5850.000	44.14	9.98	54.12	122.20	-68.08	peak
6	5855.000	43.89	9.99	53.88	110.80	-56.92	peak
7	5875.000	45.42	10.04	55.46	105.20	-49.74	peak
8	5925.000	43.28	10.16	53.44	68.20	-14.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/06/2017
Ant.Polar.:	Horizontal		

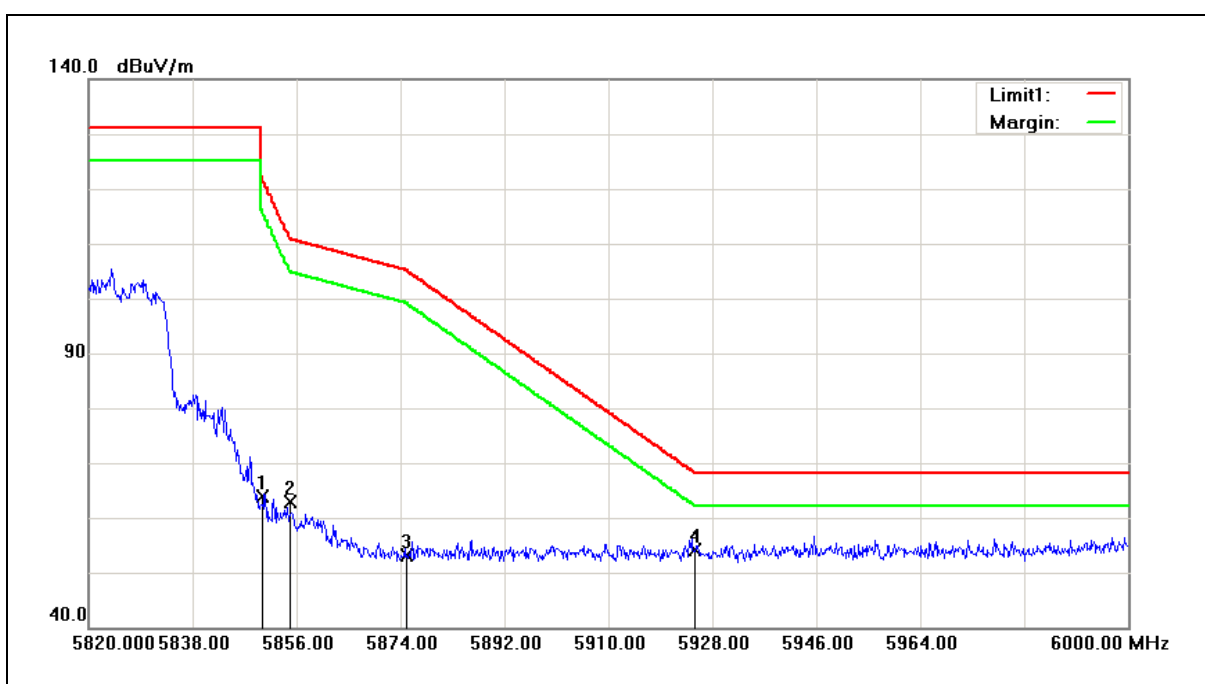


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	53.94	9.98	63.92	122.20	-58.28	peak
2	5855.000	52.85	9.99	62.84	110.80	-47.96	peak
3	5875.000	43.19	10.04	53.23	105.20	-51.97	peak
4	5925.000	44.01	10.16	54.17	68.20	-14.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/06/2017
Ant.Polar.:	Vertical		

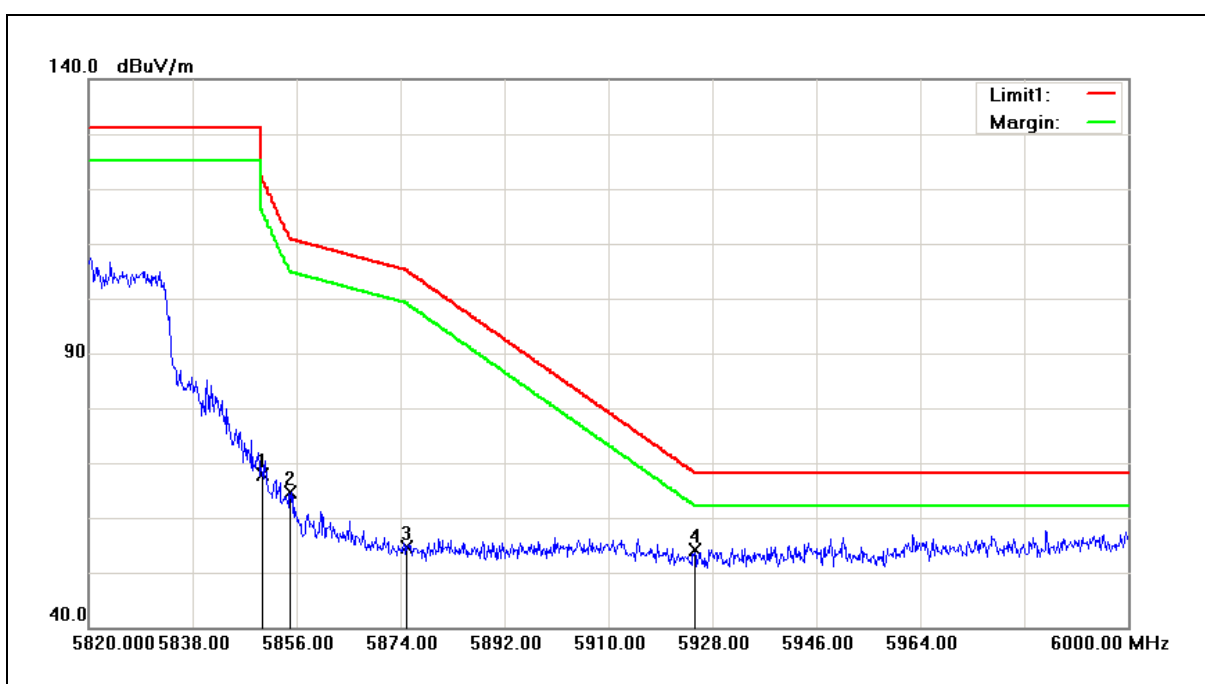


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	57.79	9.98	67.77	122.20	-54.43	peak
2	5855.000	54.52	9.99	64.51	110.80	-46.29	peak
3	5875.000	44.48	10.04	54.52	105.20	-50.68	peak
4	5925.000	43.88	10.16	54.04	68.20	-14.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Horizontal		

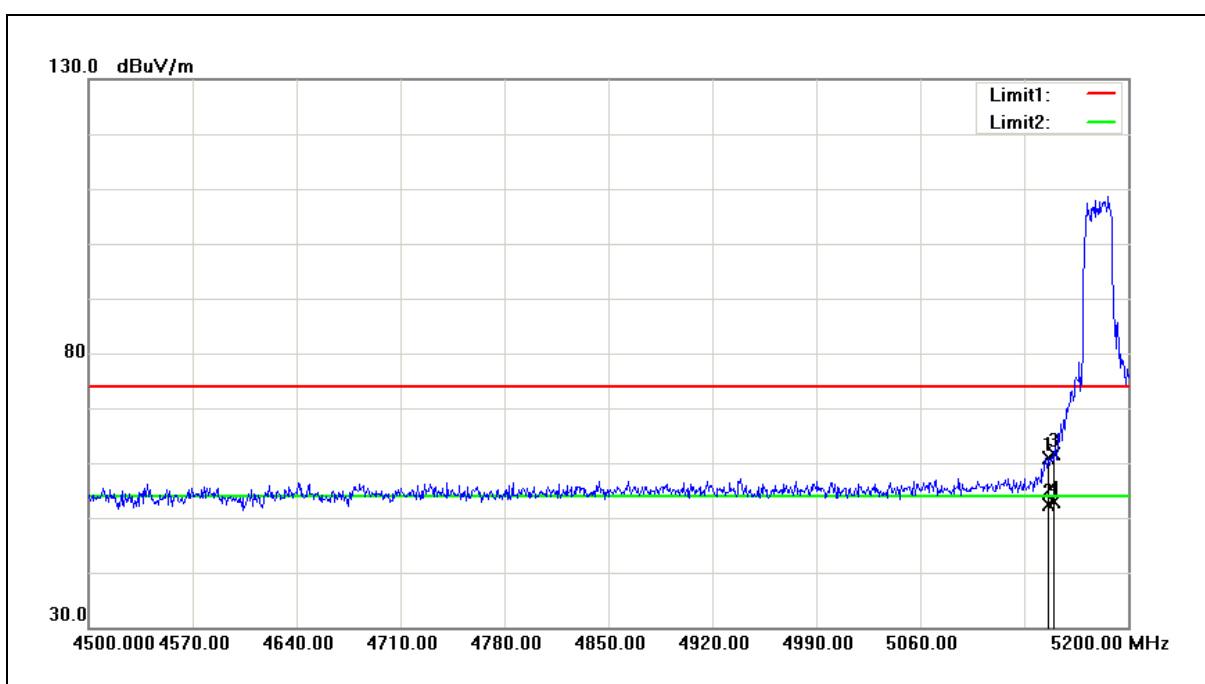


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.100	51.88	8.97	60.85	74.00	-13.15	peak
2	5146.100	43.47	8.97	52.44	54.00	-1.56	AVG
3	5150.000	52.76	8.97	61.73	74.00	-12.27	peak
4	5150.000	43.94	8.97	52.91	54.00	-1.09	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Vertical		

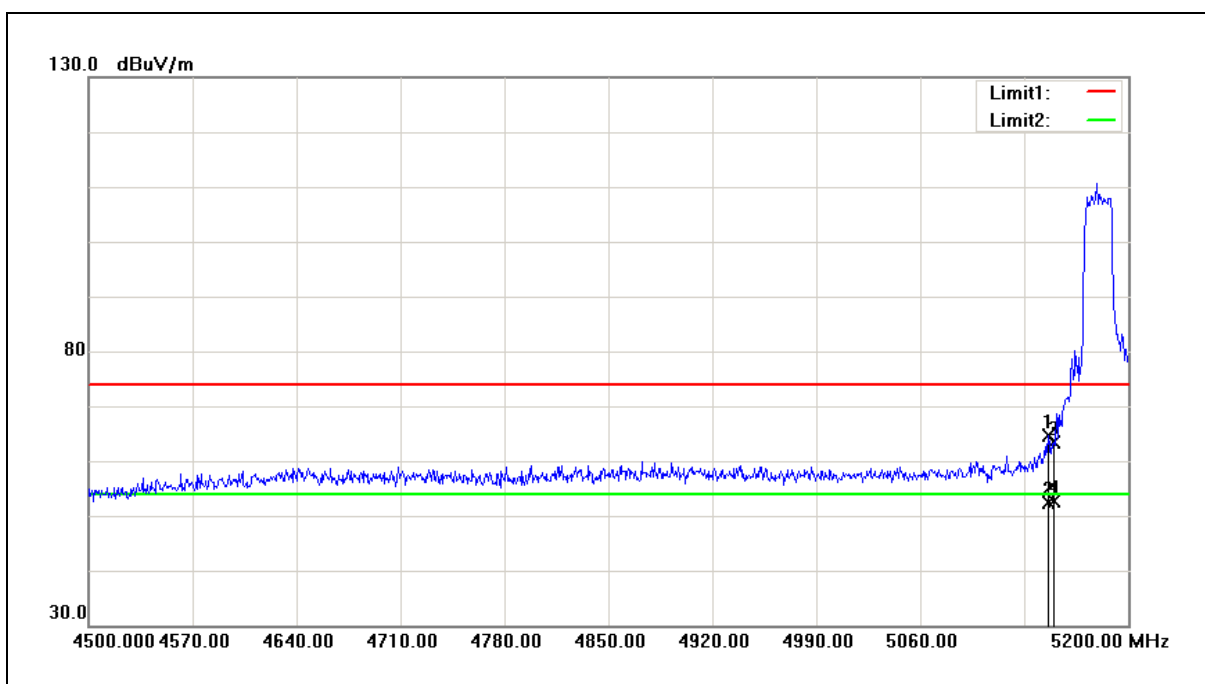

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.100	55.75	8.97	64.72	74.00	-9.28	peak
2	5146.100	43.51	8.97	52.48	54.00	-1.52	AVG
3	5150.000	54.48	8.97	63.45	74.00	-10.55	peak
4	5150.000	43.56	8.97	52.53	54.00	-1.47	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Horizontal		

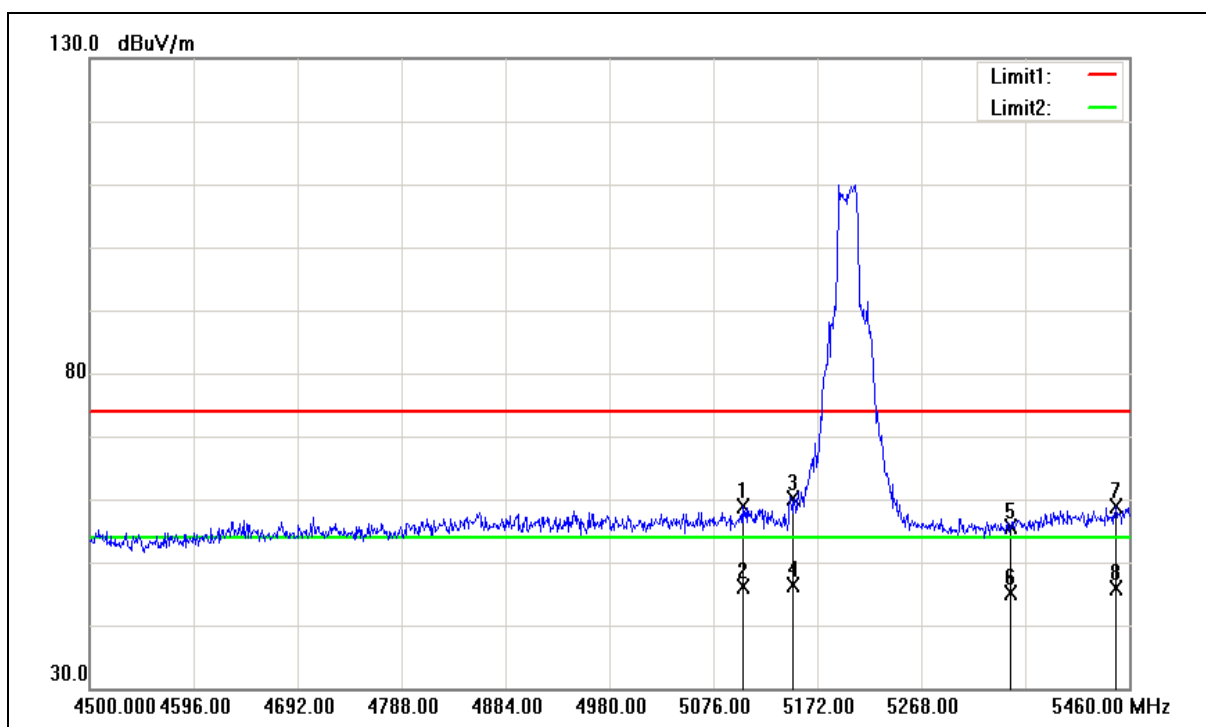



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5102.880	50.00	8.93	58.93	74.00	-15.07	peak
2	5102.880	37.19	8.93	46.12	54.00	-7.88	AVG
3	5150.000	51.23	8.97	60.20	74.00	-13.80	peak
4	5150.000	37.40	8.97	46.37	54.00	-7.63	AVG
5	5350.000	46.47	9.08	55.55	74.00	-18.45	peak
6	5350.000	35.98	9.08	45.06	54.00	-8.94	AVG
7	5447.520	49.63	9.15	58.78	74.00	-15.22	peak
8	5447.520	36.82	9.15	45.97	54.00	-8.03	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Vertical		

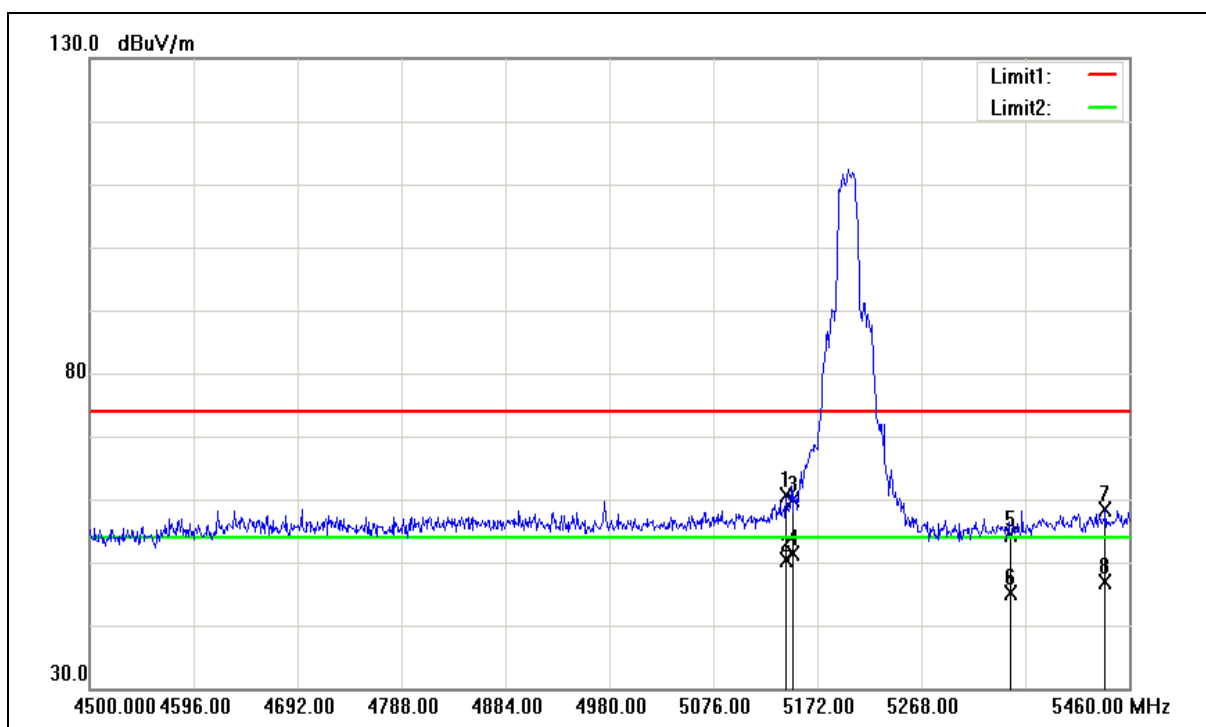



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.200	51.58	8.97	60.55	74.00	-13.45	peak
2	5143.200	41.39	8.97	50.36	54.00	-3.64	AVG
3	5150.000	50.99	8.97	59.96	74.00	-14.04	peak
4	5150.000	42.47	8.97	51.44	54.00	-2.56	AVG
5	5350.000	45.37	9.08	54.45	74.00	-19.55	peak
6	5350.000	36.03	9.08	45.11	54.00	-8.89	AVG
7	5437.920	49.11	9.15	58.26	74.00	-15.74	peak
8	5437.920	37.74	9.15	46.89	54.00	-7.11	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Horizontal		

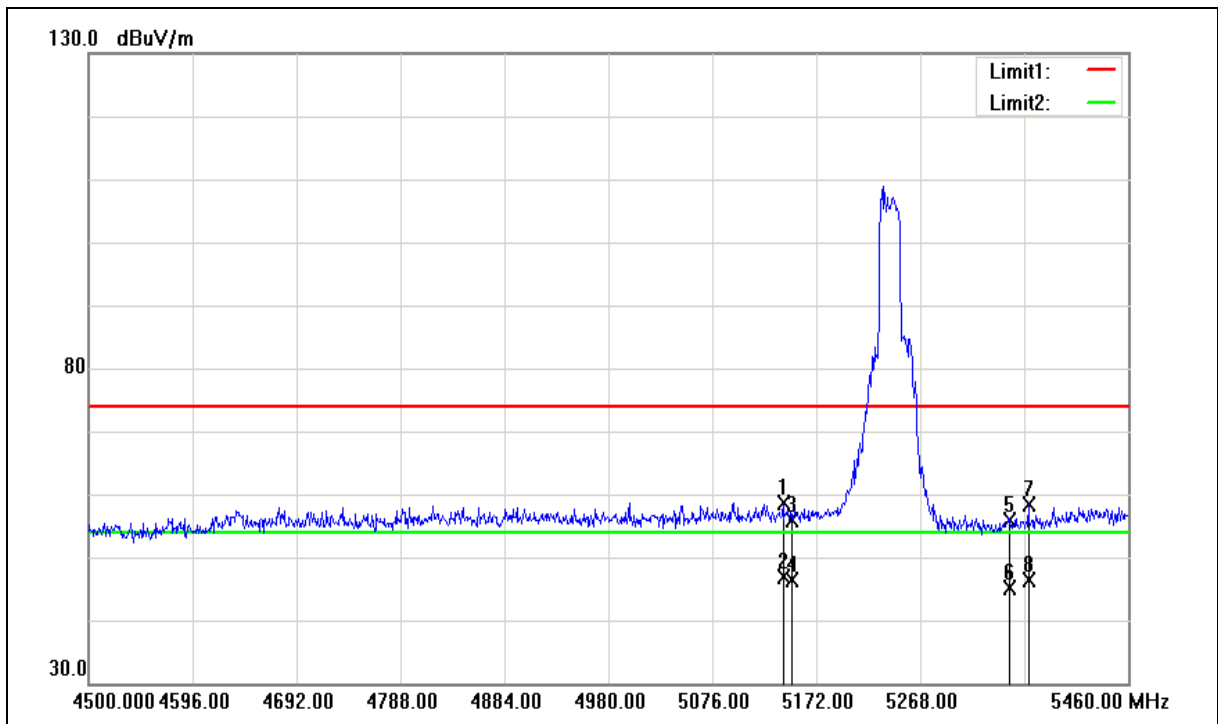



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.280	49.78	8.97	58.75	74.00	-15.25	peak
2	5141.280	37.91	8.97	46.88	54.00	-7.12	AVG
3	5150.000	46.86	8.97	55.83	74.00	-18.17	peak
4	5150.000	37.48	8.97	46.45	54.00	-7.55	AVG
5	5350.000	46.89	9.08	55.97	74.00	-18.03	peak
6	5350.000	36.05	9.08	45.13	54.00	-8.87	AVG
7	5367.840	49.25	9.10	58.35	74.00	-15.65	peak
8	5367.840	37.26	9.10	46.36	54.00	-7.64	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Vertical		

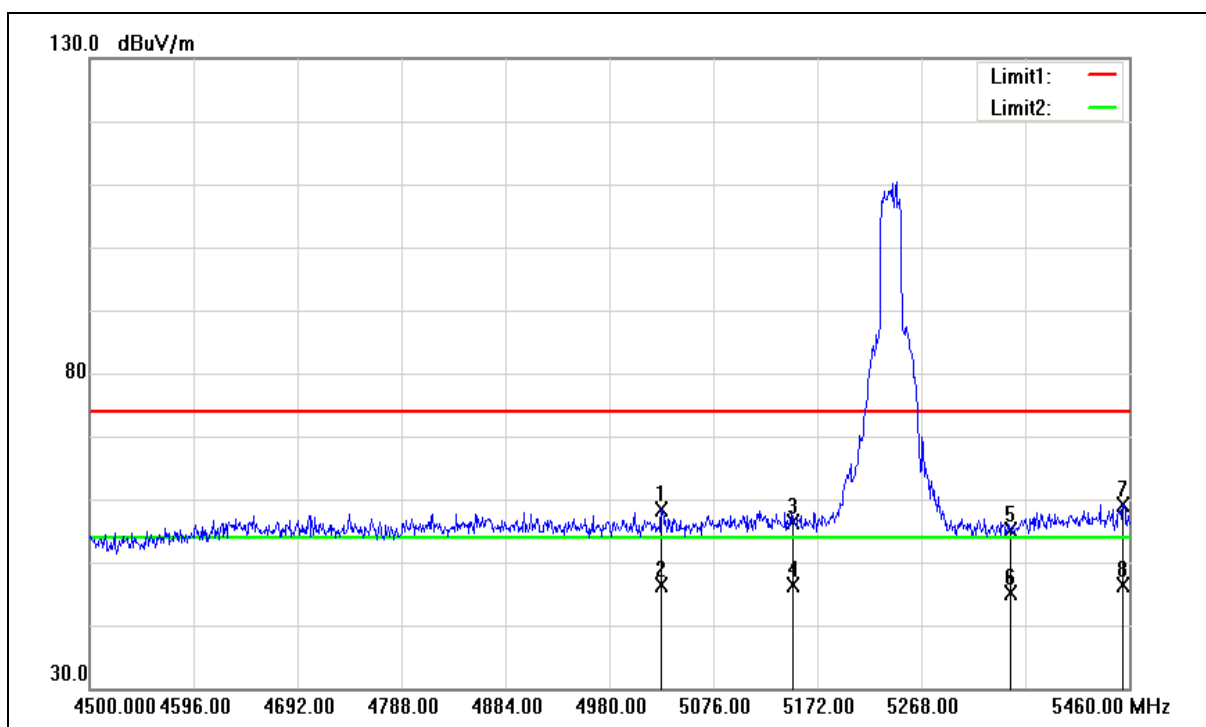



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/05/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5028.000	49.55	8.89	58.44	74.00	-15.56	peak
2	5028.000	37.46	8.89	46.35	54.00	-7.65	AVG
3	5150.000	47.34	8.97	56.31	74.00	-17.69	peak
4	5150.000	37.50	8.97	46.47	54.00	-7.53	AVG
5	5350.000	46.12	9.08	55.20	74.00	-18.80	peak
6	5350.000	36.13	9.08	45.21	54.00	-8.79	AVG
7	5454.240	49.94	9.15	59.09	74.00	-14.91	peak
8	5454.240	37.22	9.15	46.37	54.00	-7.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/06/2017
Ant.Polar.:	Horizontal		

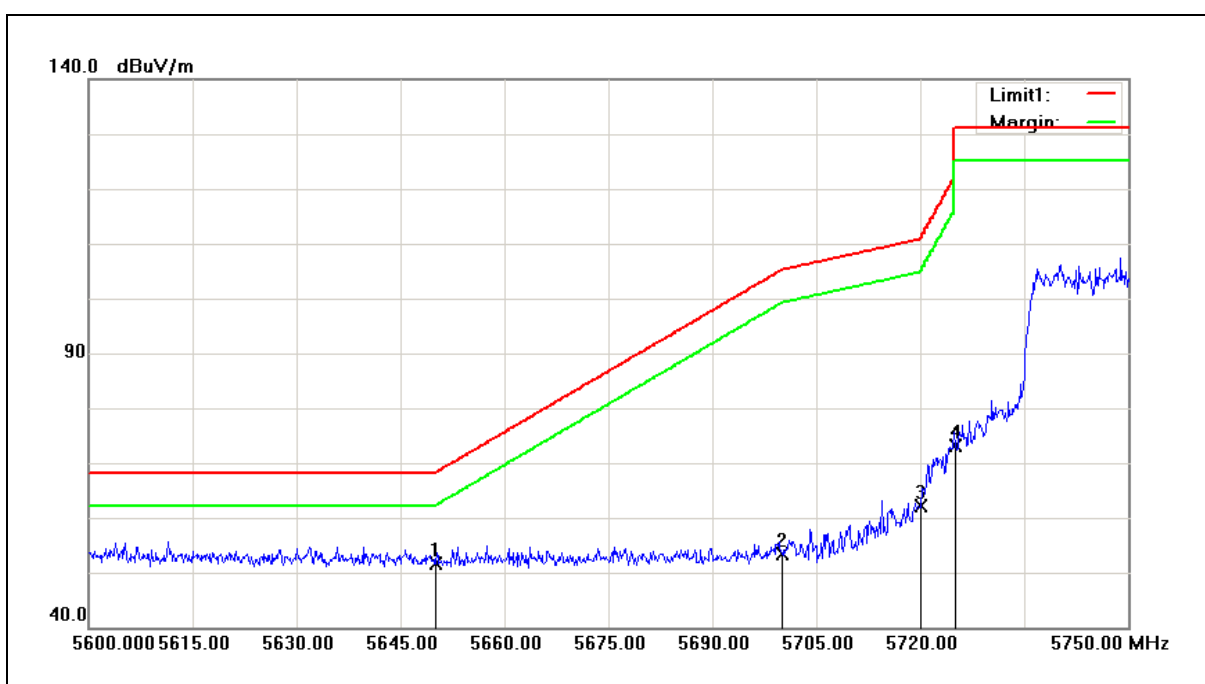


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	42.10	9.53	51.63	68.20	-16.57	peak
2	5700.000	43.72	9.64	53.36	105.20	-51.84	peak
3	5720.000	52.50	9.69	62.19	110.80	-48.61	peak
4	5725.000	63.33	9.70	73.03	122.20	-49.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/06/2017
Ant.Polar.:	Vertical		

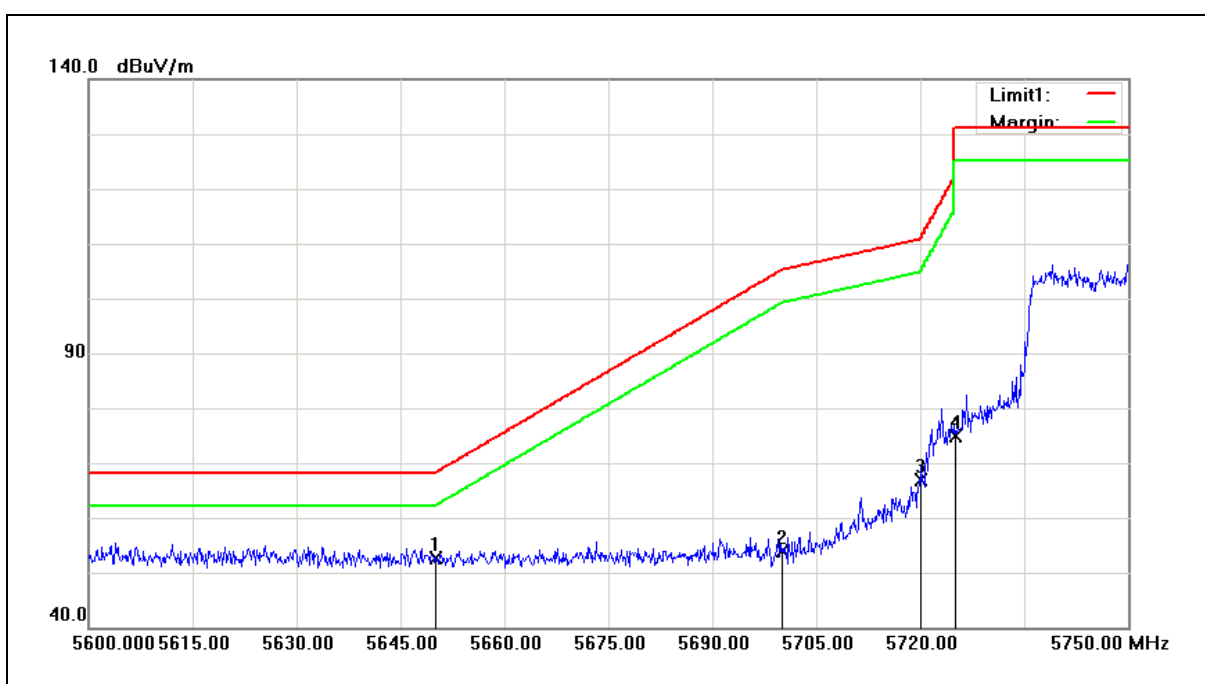

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	43.09	9.53	52.62	68.20	-15.58	peak
2	5700.000	44.27	9.64	53.91	105.20	-51.29	peak
3	5720.000	57.20	9.69	66.89	110.80	-43.91	peak
4	5725.000	65.28	9.70	74.98	122.20	-47.22	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/06/2017
Ant.Polar.:	Horizontal		

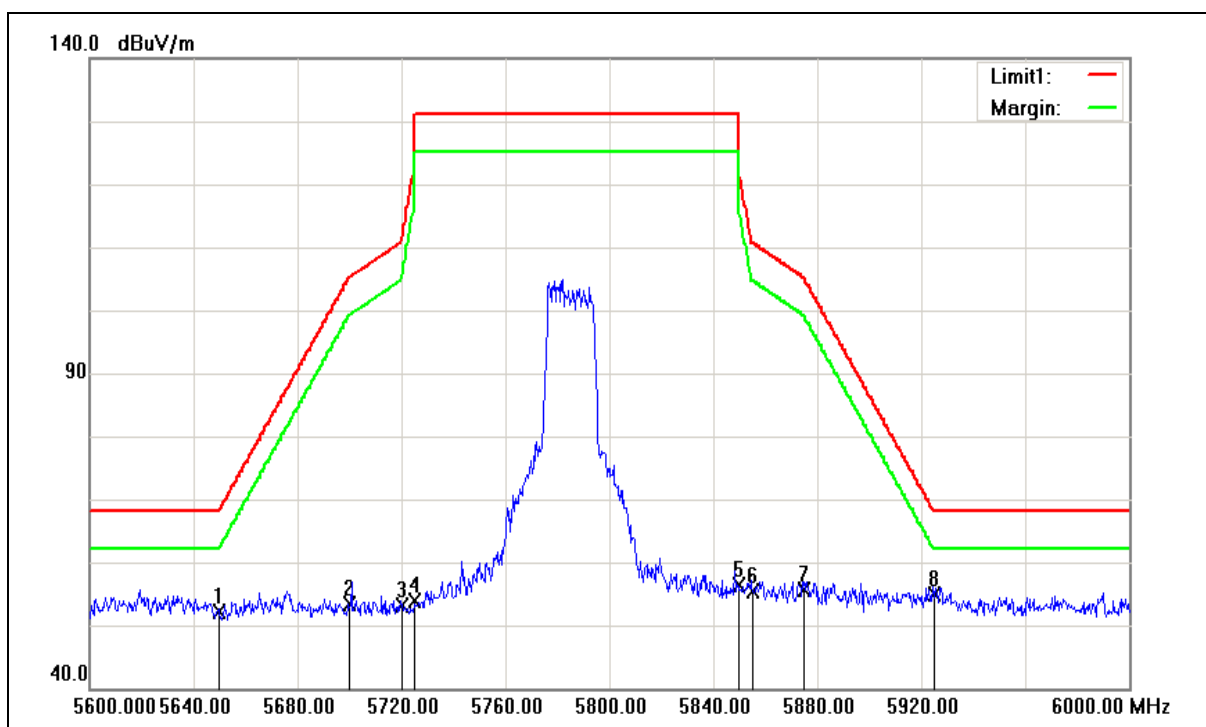



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/06/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	42.70	9.53	52.23	68.20	-15.97	peak
2	5700.000	43.63	9.64	53.27	105.20	-51.93	peak
3	5720.000	43.50	9.69	53.19	110.80	-57.61	peak
4	5725.000	44.22	9.70	53.92	122.20	-68.28	peak
5	5850.000	46.50	9.98	56.48	122.20	-65.72	peak
6	5855.000	45.27	9.99	55.26	110.80	-55.54	peak
7	5875.000	45.61	10.04	55.65	105.20	-49.55	peak
8	5925.000	44.70	10.16	54.86	68.20	-13.34	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/06/2017
Ant.Polar.:	Vertical		

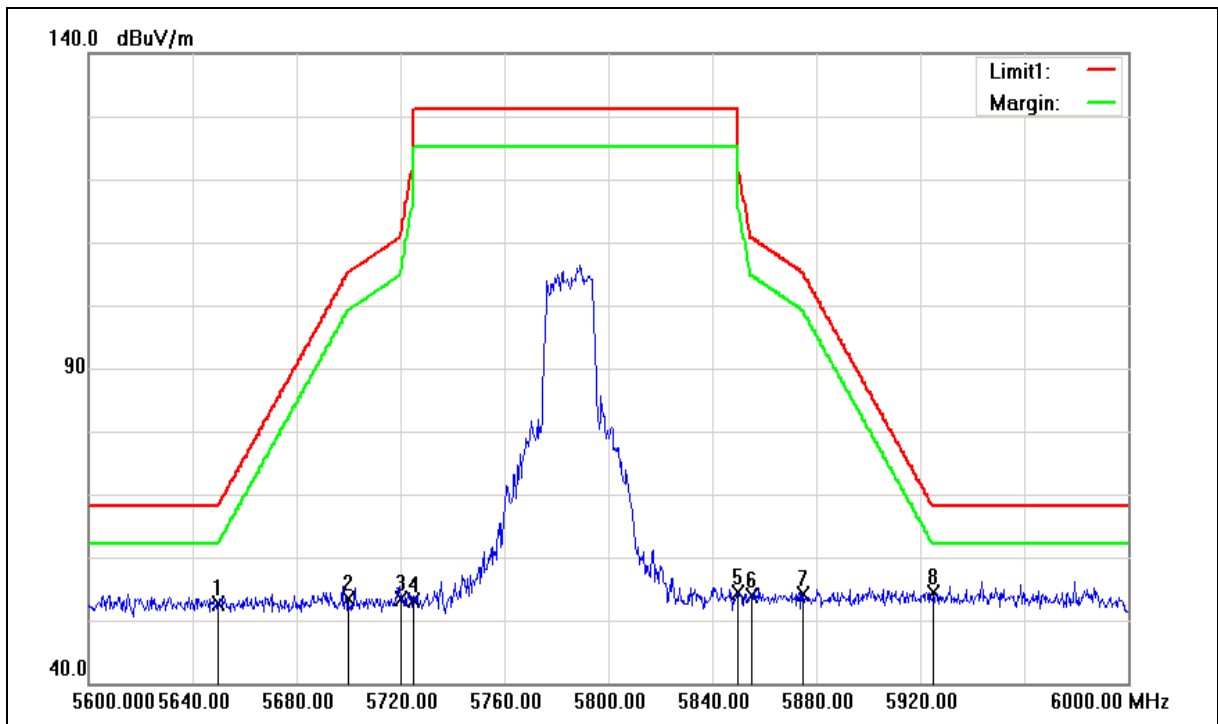



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/06/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	43.15	9.53	52.68	68.20	-15.52	peak
2	5700.000	43.63	9.64	53.27	105.20	-51.93	peak
3	5720.000	43.77	9.69	53.46	110.80	-57.34	peak
4	5725.000	43.38	9.70	53.08	122.20	-69.12	peak
5	5850.000	44.42	9.98	54.40	122.20	-67.80	peak
6	5855.000	43.84	9.99	53.83	110.80	-56.97	peak
7	5875.000	44.07	10.04	54.11	105.20	-51.09	peak
8	5925.000	44.15	10.16	54.31	68.20	-13.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/06/2017
Ant.Polar.:	Horizontal		

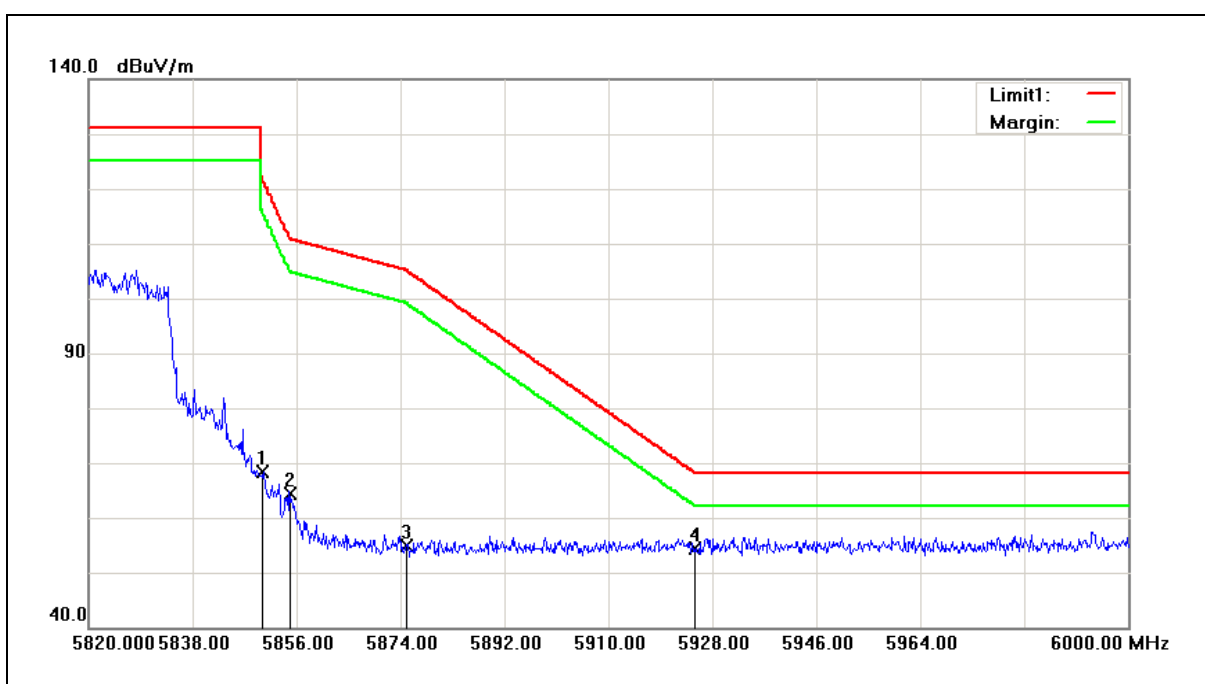


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	58.38	9.98	68.36	122.20	-53.84	peak
2	5855.000	54.29	9.99	64.28	110.80	-46.52	peak
3	5875.000	44.84	10.04	54.88	105.20	-50.32	peak
4	5925.000	44.21	10.16	54.37	68.20	-13.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/06/2017
Ant.Polar.:	Vertical		

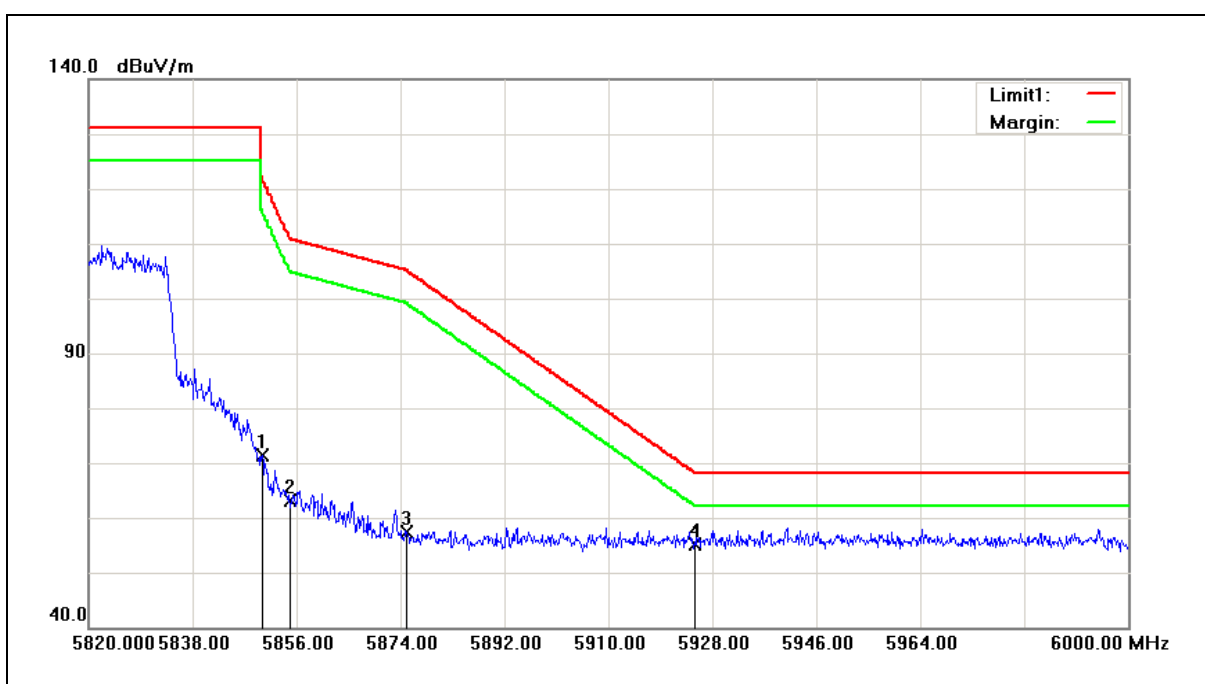

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	61.49	9.98	71.47	122.20	-50.73	peak
2	5855.000	53.10	9.99	63.09	110.80	-47.71	peak
3	5875.000	47.23	10.04	57.27	105.20	-47.93	peak
4	5925.000	44.88	10.16	55.04	68.20	-13.16	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Horizontal		

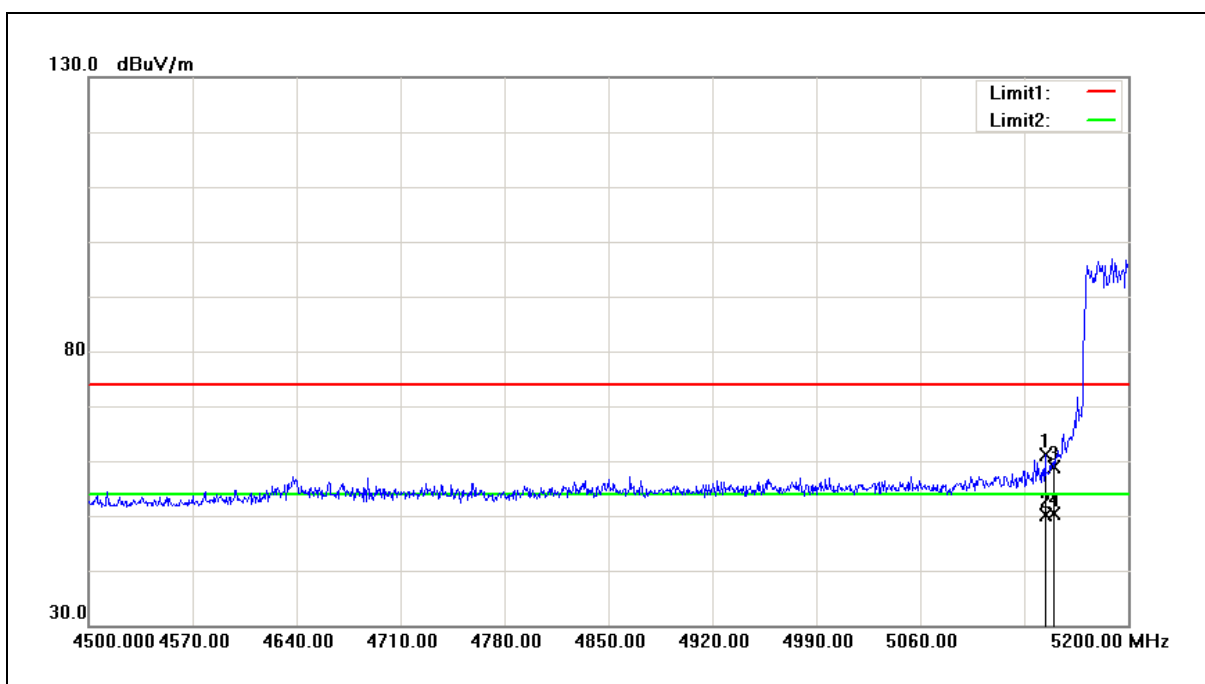


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.000	52.13	8.97	61.10	74.00	-12.90	peak
2	5144.000	41.26	8.97	50.23	54.00	-3.77	AVG
3	5150.000	49.89	8.97	58.86	74.00	-15.14	peak
4	5150.000	41.39	8.97	50.36	54.00	-3.64	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Vertical		

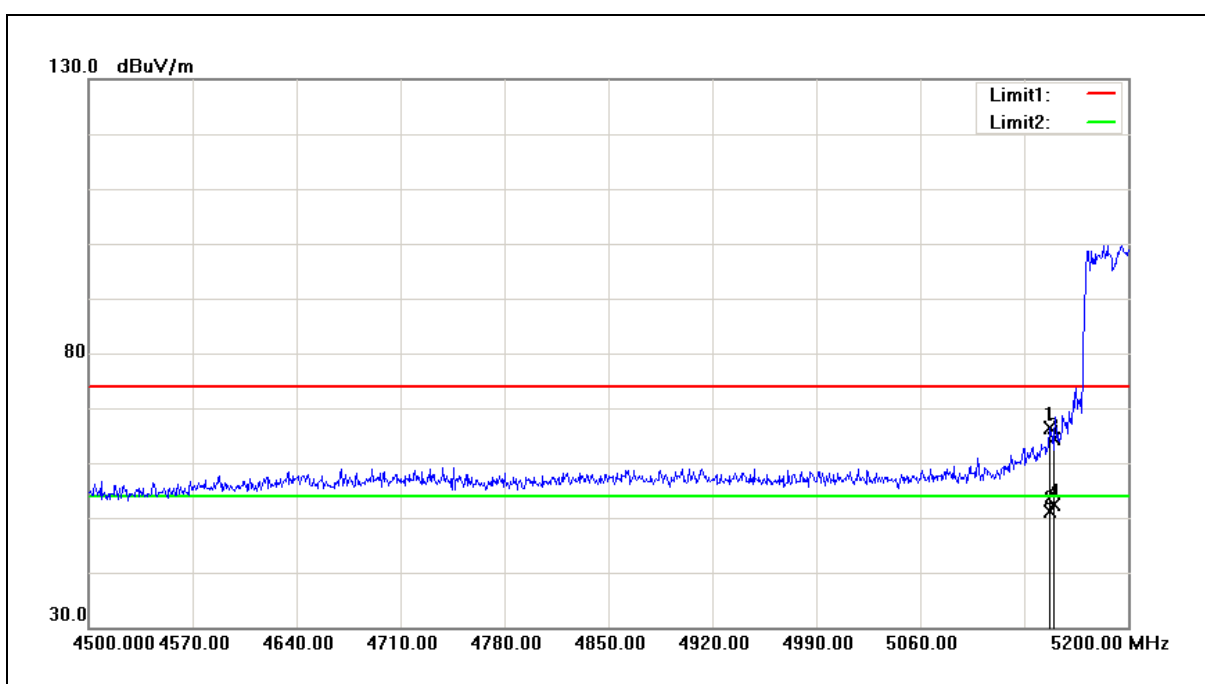

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.500	57.49	8.97	66.46	74.00	-7.54	peak
2	5147.500	42.21	8.97	51.18	54.00	-2.82	AVG
3	5150.000	55.33	8.97	64.30	74.00	-9.70	peak
4	5150.000	43.46	8.97	52.43	54.00	-1.57	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Horizontal		

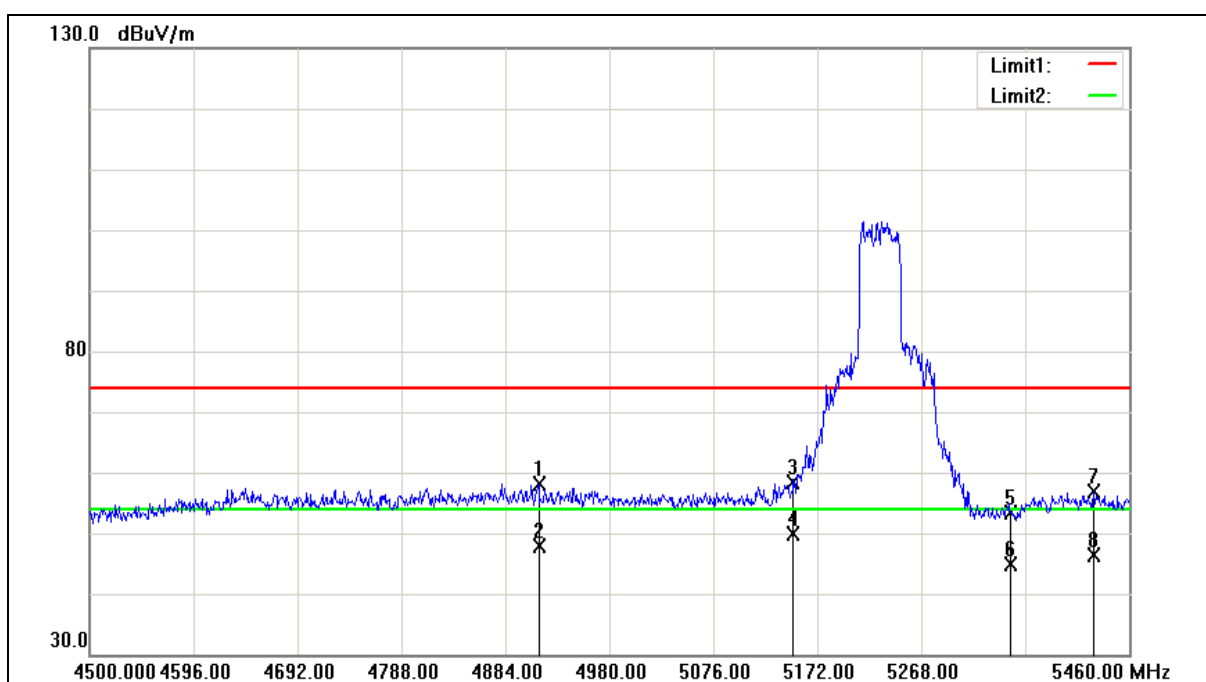



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.720	49.65	8.53	58.18	74.00	-15.82	peak
2	4914.720	39.33	8.53	47.86	54.00	-6.14	AVG
3	5150.000	49.34	8.97	58.31	74.00	-15.69	peak
4	5150.000	40.86	8.97	49.83	54.00	-4.17	AVG
5	5350.000	44.38	9.08	53.46	74.00	-20.54	peak
6	5350.000	35.89	9.08	44.97	54.00	-9.03	AVG
7	5427.360	47.72	9.14	56.86	74.00	-17.14	peak
8	5427.360	37.24	9.14	46.38	54.00	-7.62	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Vertical		

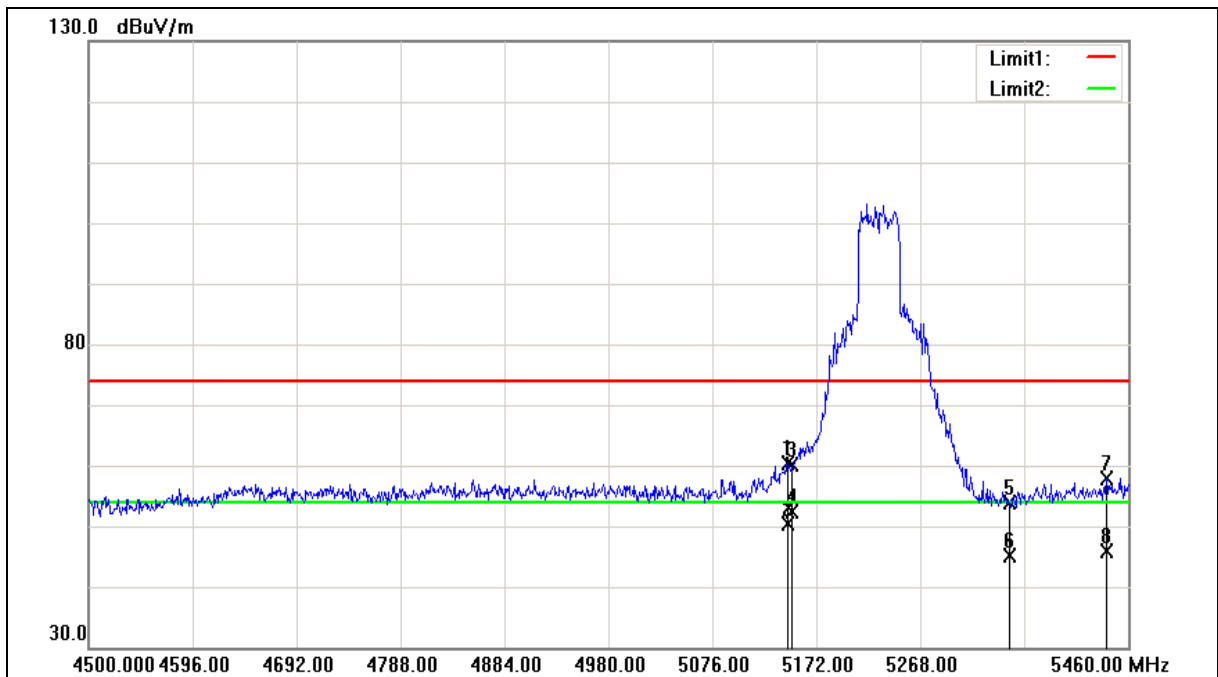



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.120	51.52	8.97	60.49	74.00	-13.51	peak
2	5145.120	41.38	8.97	50.35	54.00	-3.65	AVG
3	5150.000	51.23	8.97	60.20	74.00	-13.80	peak
4	5150.000	43.52	8.97	52.49	54.00	-1.51	AVG
5	5350.000	44.69	9.08	53.77	74.00	-20.23	peak
6	5350.000	36.16	9.08	45.24	54.00	-8.76	AVG
7	5439.840	48.65	9.15	57.80	74.00	-16.20	peak
8	5439.840	36.72	9.15	45.87	54.00	-8.13	AVG

Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Horizontal		

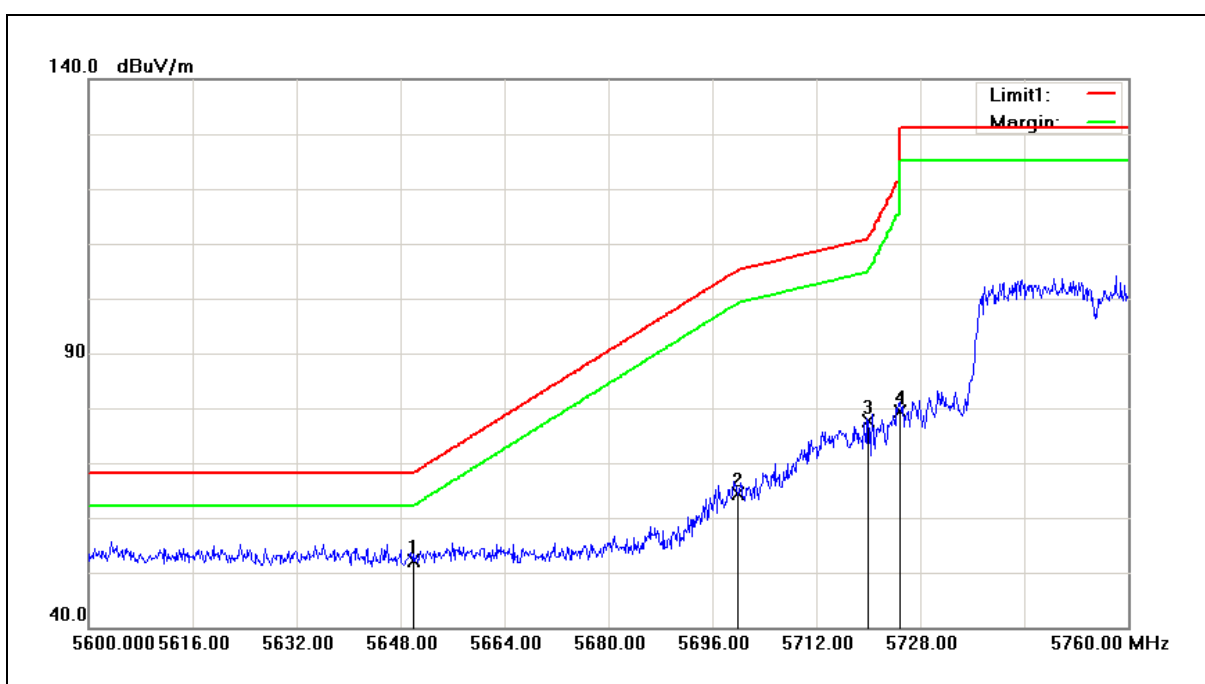


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	42.65	9.53	52.18	68.20	-16.02	peak
2	5700.000	54.69	9.64	64.33	105.20	-40.87	peak
3	5720.000	67.92	9.69	77.61	110.80	-33.19	peak
4	5725.000	69.68	9.70	79.38	122.20	-42.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Vertical		

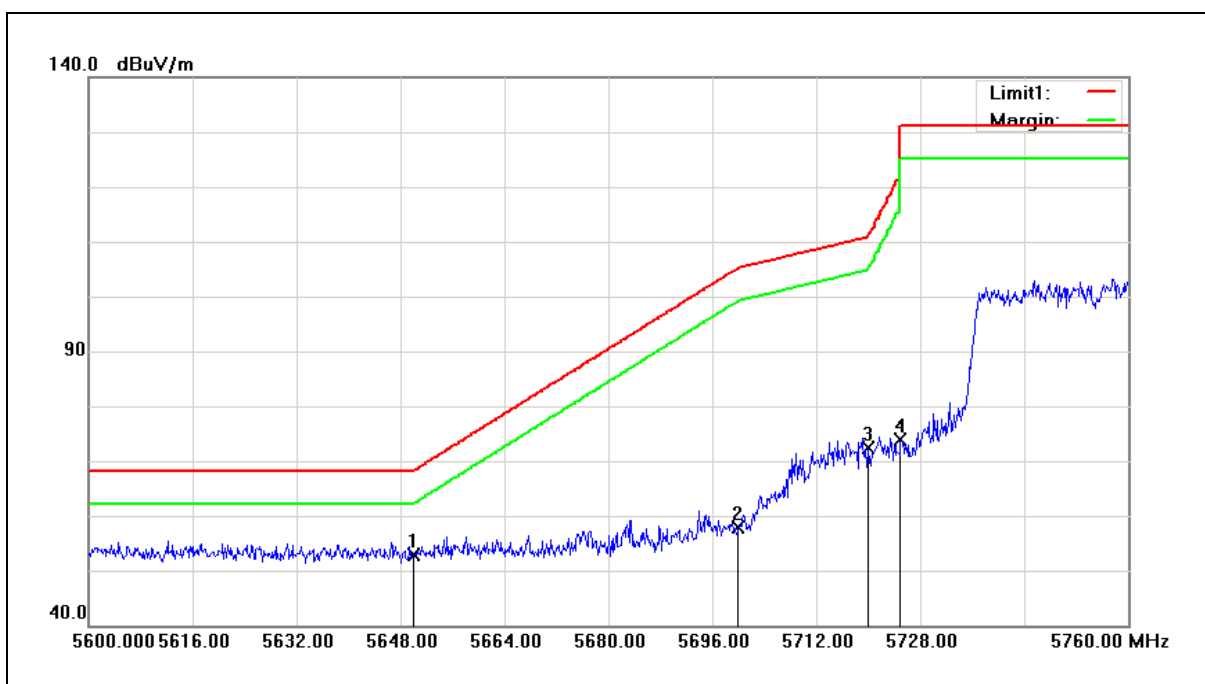


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	43.32	9.53	52.85	68.20	-15.35	peak
2	5700.000	48.34	9.64	57.98	105.20	-47.22	peak
3	5720.000	62.16	9.69	71.85	110.80	-38.95	peak
4	5725.000	64.10	9.70	73.80	122.20	-48.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Horizontal		

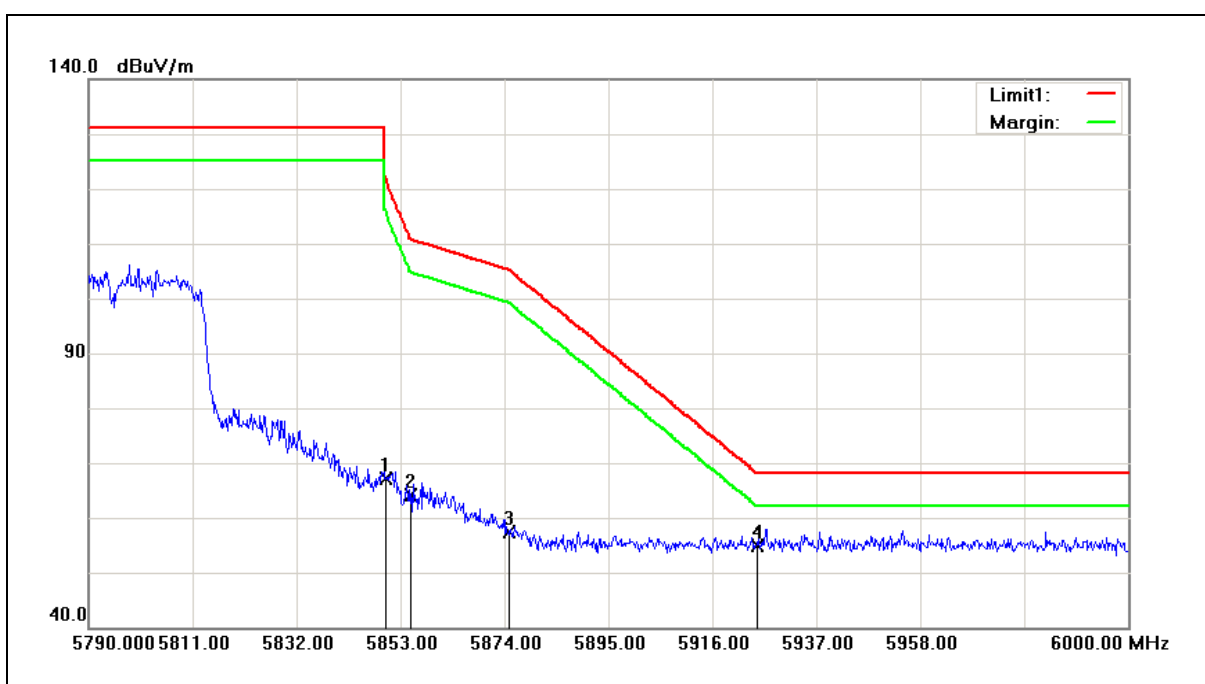


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	57.25	9.98	67.23	122.20	-54.97	peak
2	5855.000	54.05	9.99	64.04	110.80	-46.76	peak
3	5875.000	47.30	10.04	57.34	105.20	-47.86	peak
4	5925.000	44.65	10.16	54.81	68.20	-13.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/06/2017
Ant.Polar.:	Vertical		

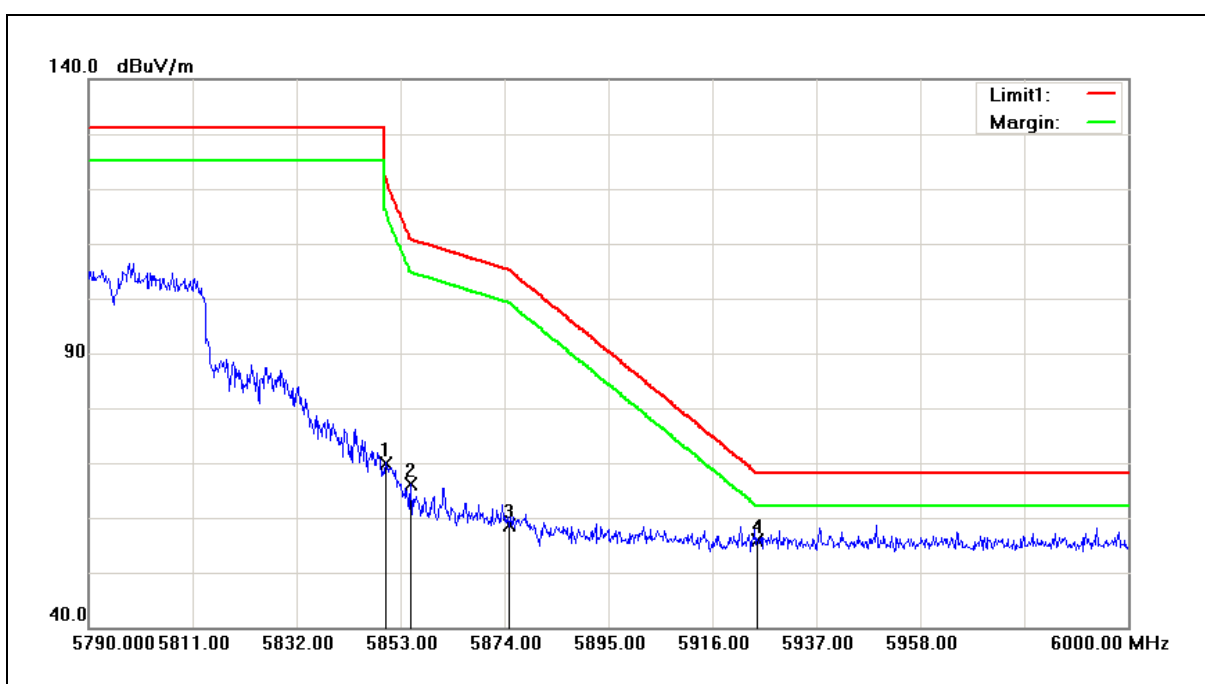

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	59.96	9.98	69.94	122.20	-52.26	peak
2	5855.000	56.12	9.99	66.11	110.80	-44.69	peak
3	5875.000	48.54	10.04	58.58	105.20	-46.62	peak
4	5925.000	45.65	10.16	55.81	68.20	-12.39	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/06/2017
Ant.Polar.:	Horizontal		

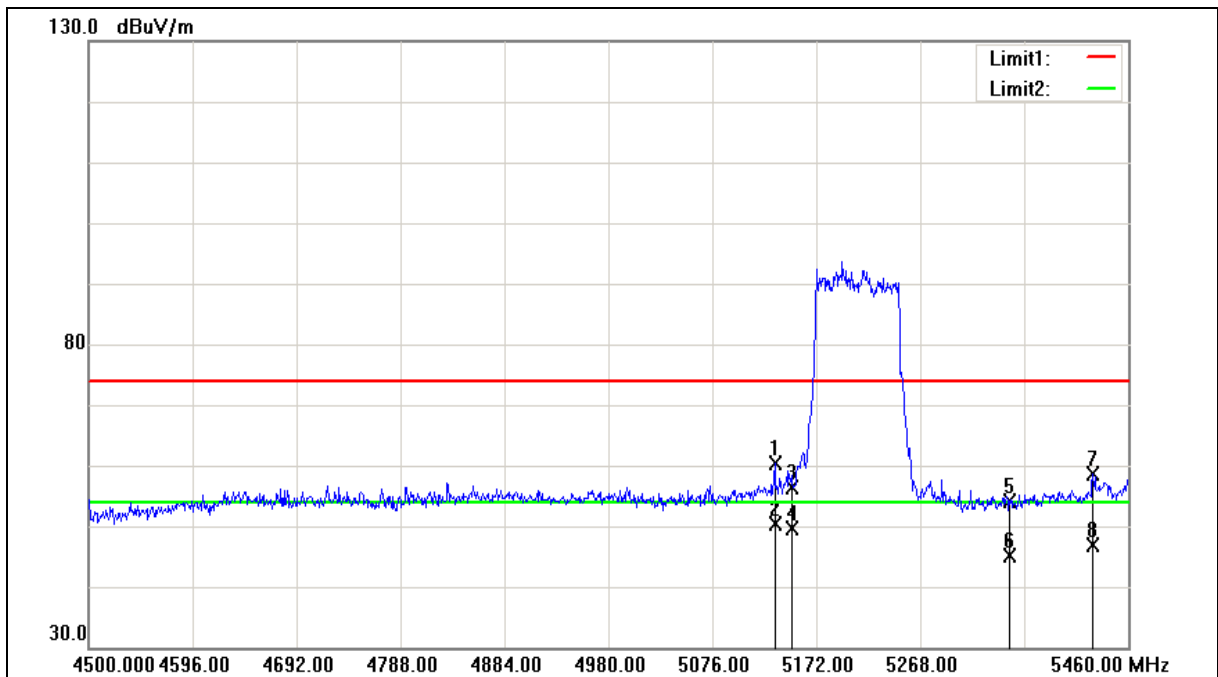



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/06/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.600	51.32	8.95	60.27	74.00	-13.73	peak
2	5133.600	41.40	8.95	50.35	54.00	-3.65	AVG
3	5150.000	47.52	8.97	56.49	74.00	-17.51	peak
4	5150.000	40.54	8.97	49.51	54.00	-4.49	AVG
5	5350.000	44.94	9.08	54.02	74.00	-19.98	peak
6	5350.000	35.94	9.08	45.02	54.00	-8.98	AVG
7	5427.360	49.49	9.14	58.63	74.00	-15.37	peak
8	5427.360	37.75	9.14	46.89	54.00	-7.11	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/06/2017
Ant.Polar.:	Vertical		

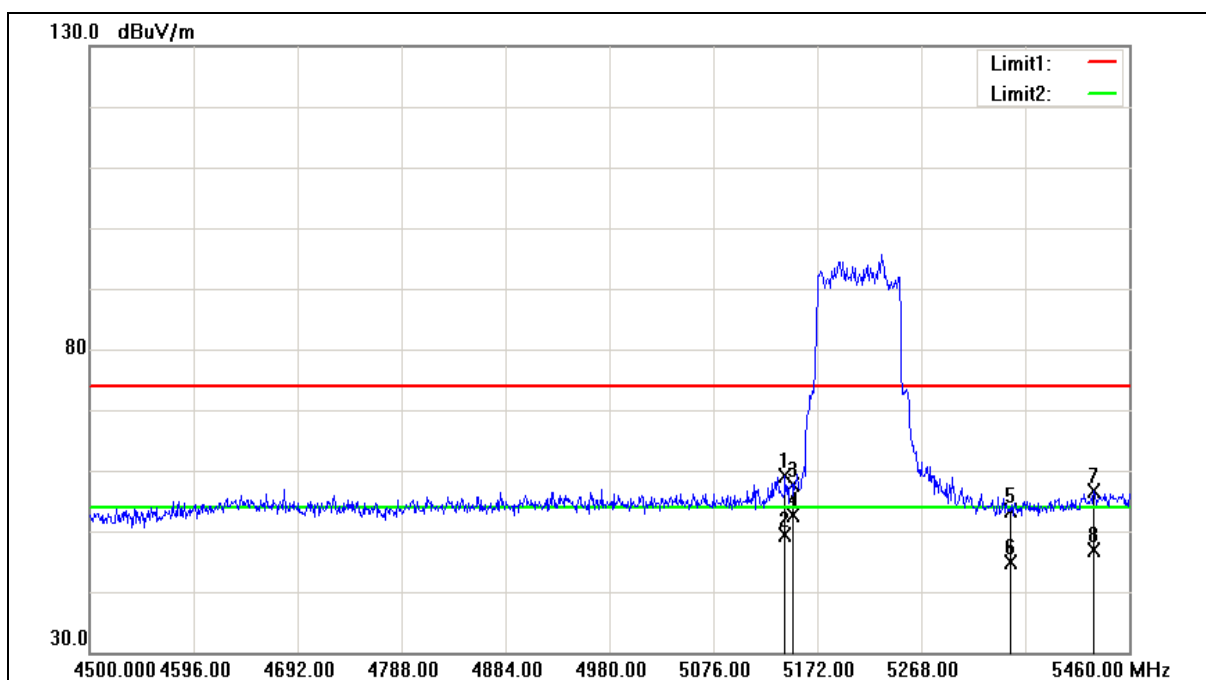



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/06/2017
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.240	50.18	8.97	59.15	74.00	-14.85	peak
2	5142.240	40.45	8.97	49.42	54.00	-4.58	AVG
3	5150.000	48.73	8.97	57.70	74.00	-16.30	peak
4	5150.000	43.64	8.97	52.61	54.00	-1.39	AVG
5	5350.000	44.39	9.08	53.47	74.00	-20.53	peak
6	5350.000	35.73	9.08	44.81	54.00	-9.19	AVG
7	5427.360	47.45	9.14	56.59	74.00	-17.41	peak
8	5427.360	37.69	9.14	46.83	54.00	-7.17	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard: FCC Part 15.407
Test item: Band edge
Frequency: 5775MHz
Mode: Mode 5
Ant.Polar.: Horizontal

Test Distance: 3m
Power: AC 120V/60Hz
Temp.(°C)/Hum.(%RH): 26(°C)/60%RH
Date: 06/06/2017

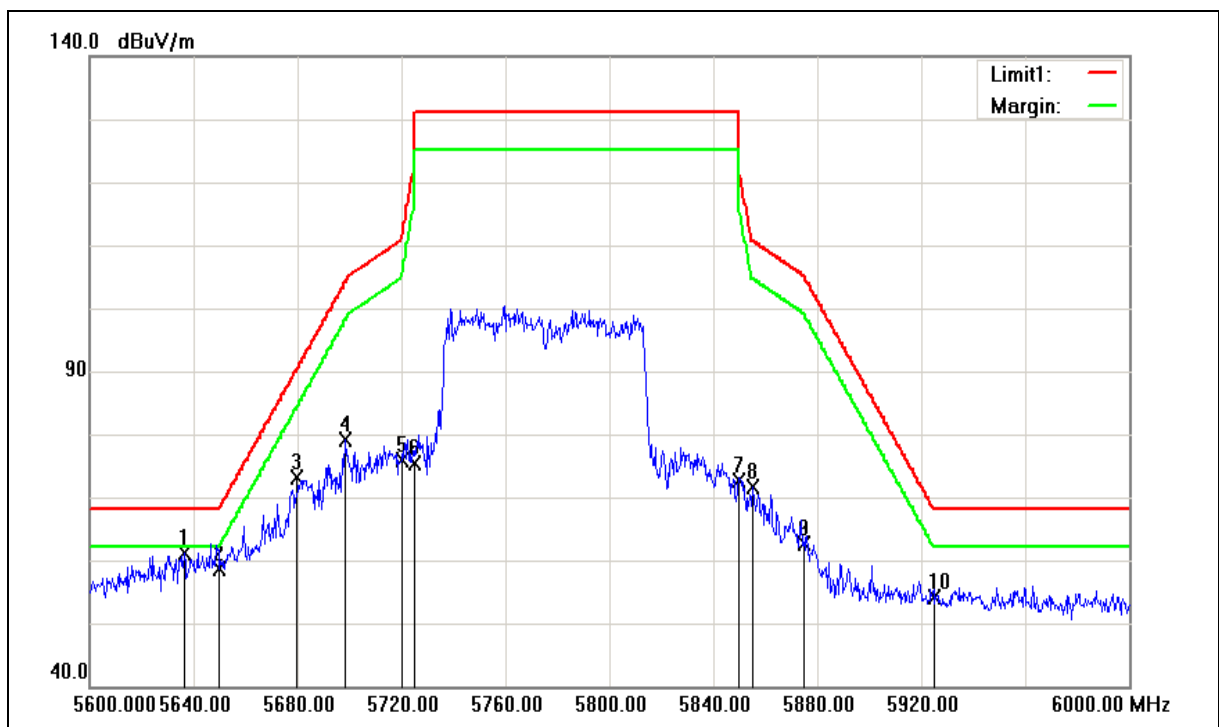



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/06/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5636.400	51.56	9.50	61.06	68.20	-7.14	peak
2	5650.000	49.13	9.53	58.66	68.20	-9.54	peak
3	5679.600	63.56	9.60	73.16	90.10	-16.94	peak
4	5698.400	69.50	9.64	79.14	104.02	-24.88	peak
5	5720.000	66.31	9.69	76.00	110.80	-34.80	peak
6	5725.000	65.62	9.70	75.32	122.20	-46.88	peak
7	5850.000	62.61	9.98	72.59	122.20	-49.61	peak
8	5855.000	61.62	9.99	71.61	110.80	-39.19	peak
9	5875.000	52.62	10.04	62.66	105.20	-42.54	peak
10	5925.000	44.02	10.16	54.18	68.20	-14.02	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/06/2017
Ant.Polar.:	Vertical		

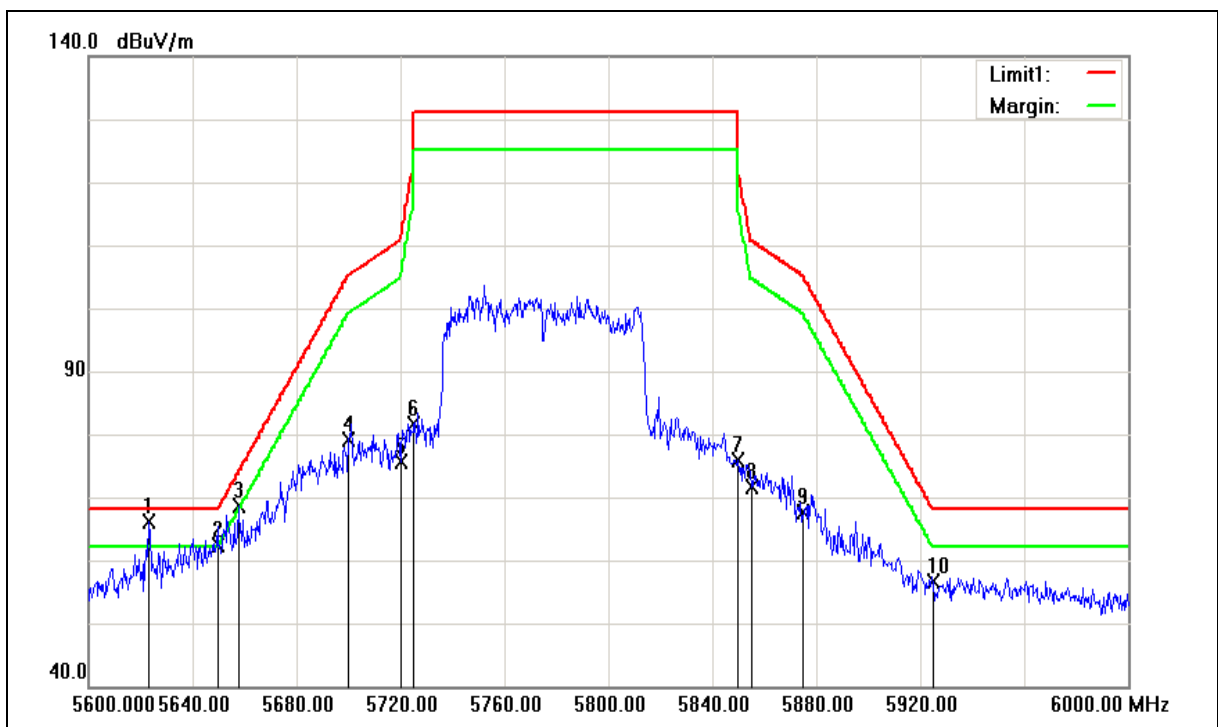



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/06/2017
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5623.200	56.70	9.46	66.16	68.20	-2.04	peak
2	5650.000	52.92	9.53	62.45	68.20	-5.75	peak
3	5657.600	59.06	9.54	68.60	73.82	-5.22	peak
4	5700.000	69.40	9.64	79.04	105.20	-26.16	peak
5	5720.000	66.03	9.69	75.72	110.80	-35.08	peak
6	5725.000	71.88	9.70	81.58	122.20	-40.62	peak
7	5850.000	66.01	9.98	75.99	122.20	-46.21	peak
8	5855.000	61.64	9.99	71.63	110.80	-39.17	peak
9	5875.000	57.55	10.04	67.59	105.20	-37.61	peak
10	5925.000	46.52	10.16	56.68	68.20	-11.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

4.4. Maximum Conducted Output Power Measurement

■ Limit


Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit
	Master
5.150 ~ 5.250 GHz	The lesser of 1W (30dBm)
5.725 ~ 5.850 GHz	The lesser of 1W (30dBm)

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices

- * CCD mode : Directional Gain = $G_{ANT} = 10 \cdot \log[(10^{G1/10} + 10^{G2/10} + \dots) / N_{ANT}] = 4.35 \text{ dBi} < 6 \text{ dBi}$
- * CCD mode power limit shall be reduced = $30 - 0 = 30 \text{ dBm}$ (5.150 ~ 5.250 GHz)
- * CCD mode power limit shall be reduced = $30 - 0 = 30 \text{ dBm}$ (5.725 ~ 5.850 GHz)

- * BF mode : Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / N_{ANT}\} = 7.36 \text{ dBi} > 6 \text{ dBi}$
- * BF mode power limit shall be reduced = $30 - 1.36 = 28.64 \text{ dBm}$ (5.150 ~ 5.250 GHz)
- * BF mode power limit shall be reduced = $30 - 1.36 = 28.64 \text{ dBm}$ (5.725 ~ 5.850 GHz)

■ Test Setup

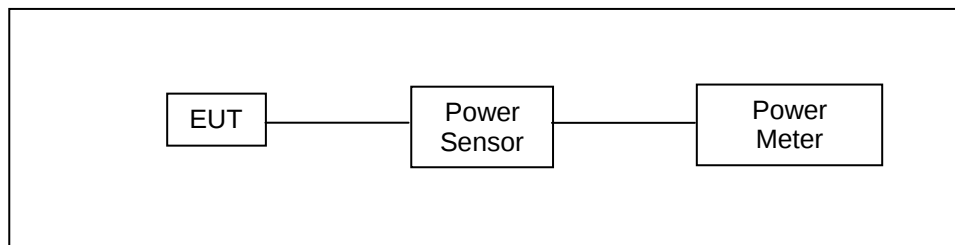

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/29/2016	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.



■ **Test Procedure**

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)

b) Method PM-G (Measurement using a gated RF average power meter)



Test Result

Test Item		Maximum Conducted Output Power						
Test Mode		Mode 2: IEEE 802.11a Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Output Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180	6M	18.13	0.065	18.51	0.071	21.33	0.136	≤ 30
5200		21.03	0.127	20.99	0.126	24.02	0.252	
5220		21.02	0.126	20.93	0.124	23.99	0.250	
5240		20.96	0.125	21.03	0.127	24.01	0.252	
5745		20.38	0.109	23.15	0.207	24.99	0.316	≤ 30
5765		20.74	0.119	23.17	0.207	25.13	0.326	
5785		20.81	0.121	23.13	0.206	25.13	0.326	
5805		21.14	0.130	22.83	0.192	25.08	0.322	
5825		21.40	0.138	23.10	0.204	25.34	0.342	
5180	54M	17.81	0.060	18.24	0.067	21.04	0.127	≤ 30
5200		20.72	0.118	20.65	0.116	23.70	0.234	
5220		20.63	0.116	20.63	0.116	23.64	0.231	
5240		20.64	0.116	20.80	0.120	23.73	0.236	
5745		20.10	0.102	22.90	0.195	24.73	0.297	≤ 30
5765		20.46	0.111	22.88	0.194	24.85	0.305	
5785		20.57	0.114	22.81	0.191	24.84	0.305	
5805		20.91	0.123	22.59	0.182	24.84	0.305	
5825		21.11	0.129	22.85	0.193	25.08	0.322	

Note: The relevant measured result has the offset with cable loss already.



Test Item		Maximum Conducted Output Power						
Test Mode		Mode 3: IEEE 802.11ac 20MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Output Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180	13M	17.44	0.055	17.90	0.062	20.69	0.117	≤ 30
5200		20.96	0.125	20.98	0.125	23.98	0.250	
5220		21.08	0.128	21.10	0.129	24.10	0.257	
5240		21.03	0.127	21.20	0.132	24.13	0.259	
5745		20.35	0.108	23.20	0.209	25.02	0.317	≤ 30
5765		20.63	0.116	23.23	0.210	25.13	0.326	
5785		20.11	0.103	23.25	0.211	24.97	0.314	
5805		21.07	0.128	23.70	0.234	25.59	0.362	
5825		21.18	0.131	23.23	0.210	25.34	0.342	
5180	173.4M	17.18	0.052	17.58	0.057	20.39	0.110	≤ 30
5200		20.69	0.117	20.63	0.116	23.67	0.233	
5220		20.75	0.119	20.83	0.121	23.80	0.240	
5240		20.77	0.119	20.88	0.122	23.84	0.242	
5745		20.10	0.102	22.93	0.196	24.75	0.299	≤ 30
5765		20.42	0.110	22.88	0.194	24.83	0.304	
5785		19.87	0.097	22.90	0.195	24.65	0.292	
5805		20.77	0.119	23.42	0.220	25.30	0.339	
5825		20.82	0.121	22.88	0.194	24.98	0.315	

Note: The relevant measured result has the offset with cable loss already.



Test Item		Maximum Conducted Output Power						
Test Mode		Mode 4: IEEE 802.11ac 40MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Output Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190	27M	16.11	0.041	16.41	0.044	19.27	0.085	≤ 30
5230		20.28	0.107	20.50	0.112	23.40	0.219	
5755		20.57	0.114	23.13	0.206	25.05	0.320	≤ 30
5795		21.54	0.143	23.67	0.233	25.74	0.375	
5190	400M	15.86	0.039	16.18	0.041	19.03	0.080	≤ 30
5230		19.98	0.100	20.27	0.106	23.14	0.206	
5755		20.28	0.107	22.85	0.193	24.76	0.299	≤ 30
5755		21.18	0.131	23.29	0.213	25.37	0.345	

Test Item		Maximum Conducted Output Power						
Test Mode		Mode 5: IEEE 802.11ac 80MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Output Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5210	58.6M	12.38	0.017	12.62	0.018	15.51	0.036	≤ 30
5775		20.35	0.108	23.14	0.206	24.98	0.314	≤ 30
5210	866.6M	12.05	0.016	12.21	0.017	15.14	0.033	≤ 30
5775		20.11	0.103	22.88	0.194	24.72	0.297	≤ 30

Note: The relevant measured result has the offset with cable loss already.

Beamforming on

Test Item		Maximum Conducted Output Power						
Test Mode		Mode 2: IEEE 802.11a Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Output Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180	6M	16.03	0.040	16.27	0.042	19.16	0.082	≤ 28.64
5200		19.10	0.081	19.11	0.081	22.12	0.163	
5220		18.79	0.076	18.85	0.077	21.83	0.152	
5240		18.72	0.074	19.05	0.080	21.90	0.155	
5745		18.62	0.073	20.72	0.118	22.81	0.191	≤ 28.64
5765		18.81	0.076	20.96	0.125	23.03	0.201	
5785		18.96	0.079	21.16	0.131	23.21	0.209	
5805		18.94	0.078	21.15	0.130	23.19	0.209	
5825		19.12	0.082	21.47	0.140	23.46	0.222	
5180	54M	15.75	0.038	15.99	0.040	18.88	0.077	≤ 28.64
5200		18.78	0.076	18.80	0.076	21.80	0.151	
5220		18.44	0.070	18.52	0.071	21.49	0.141	
5240		18.38	0.069	18.73	0.075	21.57	0.144	
5745		18.34	0.068	20.42	0.110	22.51	0.178	≤ 28.64
5765		18.59	0.072	20.59	0.115	22.71	0.187	
5785		18.65	0.073	20.88	0.122	22.92	0.196	
5805		18.67	0.074	20.83	0.121	22.89	0.195	
5825		18.83	0.076	21.15	0.130	23.15	0.207	

Note: The relevant measured result has the offset with cable loss already.



Test Item		Maximum Conducted Output Power						
Test Mode		Mode 3: IEEE 802.11ac 20MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Output Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180	13M	15.43	0.035	15.87	0.039	18.67	0.074	≤ 28.64
5200		19.05	0.080	19.13	0.082	22.10	0.162	
5220		19.18	0.083	19.26	0.084	22.23	0.167	
5240		19.11	0.081	19.33	0.086	22.23	0.167	
5745		18.47	0.070	20.77	0.119	22.78	0.190	≤ 28.64
5765		18.70	0.074	21.01	0.126	23.02	0.200	
5785		18.72	0.074	21.10	0.129	23.08	0.203	
5805		19.20	0.083	21.72	0.149	23.65	0.232	
5825		18.88	0.077	21.59	0.144	23.45	0.221	
5180	173.4M	15.08	0.032	15.59	0.036	18.35	0.068	≤ 28.64
5200		18.75	0.075	18.80	0.076	21.79	0.151	
5220		18.89	0.077	18.93	0.078	21.92	0.156	
5240		18.81	0.076	18.99	0.079	21.91	0.155	
5745		18.08	0.064	20.42	0.110	22.42	0.174	≤ 28.64
5765		18.48	0.070	20.77	0.119	22.78	0.190	
5785		18.52	0.071	20.76	0.119	22.79	0.190	
5805		18.93	0.078	21.39	0.138	23.34	0.216	
5825		18.55	0.072	21.20	0.132	23.08	0.203	

Note: The relevant measured result has the offset with cable loss already.



Test Item		Maximum Conducted Output Power						
Test Mode		Mode 4: IEEE 802.11ac 40MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Output Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190	27M	14.05	0.025	14.32	0.027	17.20	0.052	≤ 28.64
5230		18.50	0.071	18.47	0.070	21.50	0.141	
5755		18.95	0.079	21.02	0.126	23.12	0.205	≤ 28.64
5795		19.36	0.086	21.75	0.150	23.73	0.236	
5190	400M	13.69	0.023	14.11	0.026	16.92	0.049	≤ 28.64
5230		18.18	0.066	18.12	0.065	21.16	0.131	
5755		18.69	0.074	20.80	0.120	22.88	0.194	≤ 28.64
5755		19.06	0.081	21.36	0.137	23.37	0.217	

Test Item		Maximum Conducted Output Power						
Test Mode		Mode 5: IEEE 802.11ac 80MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Output Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5210	58.6M	10.24	0.011	10.57	0.011	13.42	0.022	≤ 28.64
5775		18.71	0.074	21.00	0.126	23.01	0.200	≤ 28.64
5210	866.6M	9.98	0.010	10.28	0.011	13.14	0.021	≤ 28.64
5775		18.46	0.070	20.72	0.118	22.75	0.188	≤ 28.64


Note: The relevant measured result has the offset with cable loss already.

4.5. 26dB RF Bandwidth Measurement

■ Limit

N/A

■ Test Setup

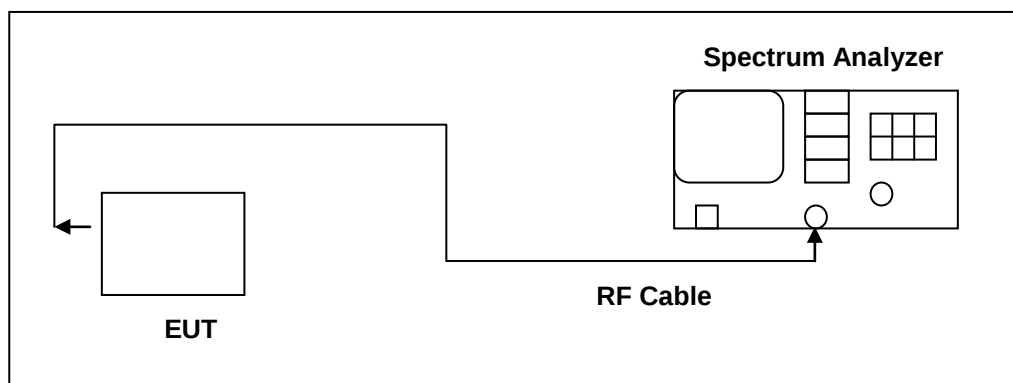

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

■ Test Procedure

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

Test Result

Test Item	26dB RF Bandwidth Measurement	
Test Mode	Mode 2: IEEE 802.11a Continuous TX mode	
Frequency (MHz)	ANT-0	ANT-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)
5180	22.730	22.390
5200	41.010	41.420
5240	41.400	39.230

Test Item	26dB RF Bandwidth Measurement	
Test Mode	Mode 3: IEEE 802.11ac 20MHz Continuous TX mode	
Frequency (MHz)	ANT-0	ANT-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)
5180	20.390	21.850
5200	42.520	41.260
5240	42.670	41.530

Test Item	26dB RF Bandwidth Measurement	
Test Mode	Mode 4: IEEE 802.11ac 40MHz Continuous TX mode	
Frequency (MHz)	ANT-0	ANT-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)
5190	45.080	39.790
5230	86.870	77.800

Test Item	26dB RF Bandwidth Measurement	
Test Mode	Mode 5: IEEE 802.11ac 80MHz Continuous TX mode	
Frequency (MHz)	ANT-0	ANT-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)
5210	87.950	86.500

Note: The 99% occupied bandwidth not crossed 5250MHz.



Beamforming on

Test Item	26dB RF Bandwidth Measurement	
Test Mode	Mode 2: IEEE 802.11a Continuous TX mode	
Frequency (MHz)	ANT-0	ANT-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)
5180	19.310	19.010
5200	19.410	20.200
5240	21.120	20.070

Test Item	26dB RF Bandwidth Measurement	
Test Mode	Mode 3: IEEE 802.11ac 20MHz Continuous TX mode	
Frequency (MHz)	ANT-0	ANT-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)
5180	20.200	19.970
5200	22.990	21.790
5240	20.380	22.780

Test Item	26dB RF Bandwidth Measurement	
Test Mode	Mode 4: IEEE 802.11ac 40MHz Continuous TX mode	
Frequency (MHz)	ANT-0	ANT-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)
5190	40.360	39.940
5230	40.780	45.030

Test Item	26dB RF Bandwidth Measurement	
Test Mode	Mode 5: IEEE 802.11ac 80MHz Continuous TX mode	
Frequency (MHz)	ANT-0	ANT-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)
5210	91.360	92.990

Note: The 99% occupied bandwidth not crossed 5250MHz.



■ Test Graphs

Mode 2: IEEE 802.11a Continuous TX mode_ ANT-0

5180 MHz	Ref Offset 11.8 dB Ref 30.00 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 25 MHz Sweep 1 ms Occupied Bandwidth 16.479 MHz Total Power 24.9 dBm Transmit Freq Error 4.451 kHz x dB Bandwidth 22.73 MHz OBW Power 99.00 % x dB -26.00 dB
5200 MHz	Ref Offset 11.8 dB Ref 30.00 dBm Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Span 45 MHz Sweep 1 ms Occupied Bandwidth 24.959 MHz Total Power 28.5 dBm Transmit Freq Error 1.4234 MHz x dB Bandwidth 41.01 MHz OBW Power 99.00 % x dB -26.00 dB
5240 MHz	Ref Offset 11.8 dB Ref 30.00 dBm Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Span 45 MHz Sweep 1 ms Occupied Bandwidth 25.666 MHz Total Power 28.8 dBm Transmit Freq Error 1.5658 MHz x dB Bandwidth 41.40 MHz OBW Power 99.00 % x dB -26.00 dB



Mode 3: IEEE 802.11ac 20MHz Continuous TX mode_ ANT-0

5180 MHz	 Ref Offset 11.8 dB Ref 30.00 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 25 MHz Sweep 1 ms Occupied Bandwidth 17.623 MHz Total Power 24.8 dBm Transmit Freq Error 349 Hz x dB Bandwidth 20.39 MHz OBW Power 99.00 % x dB -26.00 dB Frequency Center Freq 5.18000000 GHz CF Step 2.500000 MHz Freq Offset 0 Hz
5200 MHz	 Ref Offset 11.8 dB Ref 30.00 dBm Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Span 45 MHz Sweep 1 ms Occupied Bandwidth 26.526 MHz Total Power 28.5 dBm Transmit Freq Error 1.5613 MHz x dB Bandwidth 42.52 MHz OBW Power 99.00 % x dB -26.00 dB Frequency Center Freq 5.20000000 GHz CF Step 4.500000 MHz Freq Offset 0 Hz
5240 MHz	 Ref Offset 11.8 dB Ref 30.00 dBm Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Span 45 MHz Sweep 1 ms Occupied Bandwidth 26.040 MHz Total Power 28.1 dBm Transmit Freq Error 1.3672 MHz x dB Bandwidth 42.67 MHz OBW Power 99.00 % x dB -26.00 dB Frequency Center Freq 5.24000000 GHz CF Step 4.500000 MHz Freq Offset 0 Hz