



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 07/14/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5458.800           | 50.25             | 9.15                     | 59.40              | 74.00             | -14.60         | peak   |
| 2   | 5458.800           | 40.36             | 9.15                     | 49.51              | 54.00             | -4.49          | AVG    |
| 3   | 5460.000           | 48.90             | 9.15                     | 58.05              | 74.00             | -15.95         | peak   |
| 4   | 5460.000           | 40.97             | 9.15                     | 50.12              | 54.00             | -3.88          | AVG    |
| 5   | 5470.000           | 51.18             | 9.16                     | 60.34              | 68.20             | -7.86          | peak   |
| 6   | 5725.000           | 46.58             | 9.70                     | 56.28              | 68.20             | -11.92         | peak   |
| 7   | 5736.400           | 47.81             | 9.73                     | 57.54              | 74.00             | -16.46         | peak   |
| 8   | 5736.400           | 38.55             | 9.73                     | 48.28              | 54.00             | -5.72          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 07/14/2017   |
| Ant.Polar.: | Vertical        |                      |              |

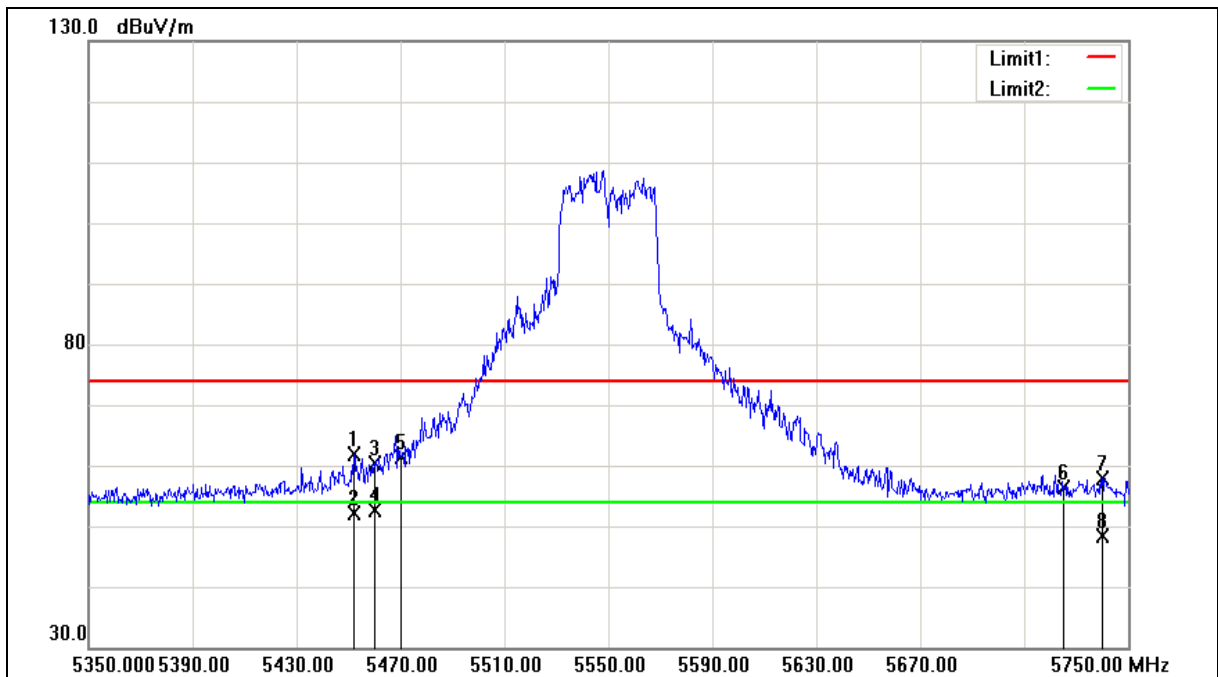



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 07/14/2017   |
| Ant.Polar.: | Vertical        |                      |              |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5452.000           | 52.63             | 9.15                     | 61.78              | 74.00             | -12.22         | peak   |
| 2   | 5452.000           | 43.04             | 9.15                     | 52.19              | 54.00             | -1.81          | AVG    |
| 3   | 5460.000           | 51.28             | 9.15                     | 60.43              | 74.00             | -13.57         | peak   |
| 4   | 5460.000           | 43.55             | 9.15                     | 52.70              | 54.00             | -1.30          | AVG    |
| 5   | 5470.000           | 52.23             | 9.16                     | 61.39              | 68.20             | -6.81          | peak   |
| 6   | 5725.000           | 46.56             | 9.70                     | 56.26              | 68.20             | -11.94         | peak   |
| 7   | 5740.000           | 48.14             | 9.73                     | 57.87              | 74.00             | -16.13         | peak   |
| 8   | 5740.000           | 38.63             | 9.73                     | 48.36              | 54.00             | -5.64          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5670MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 07/14/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

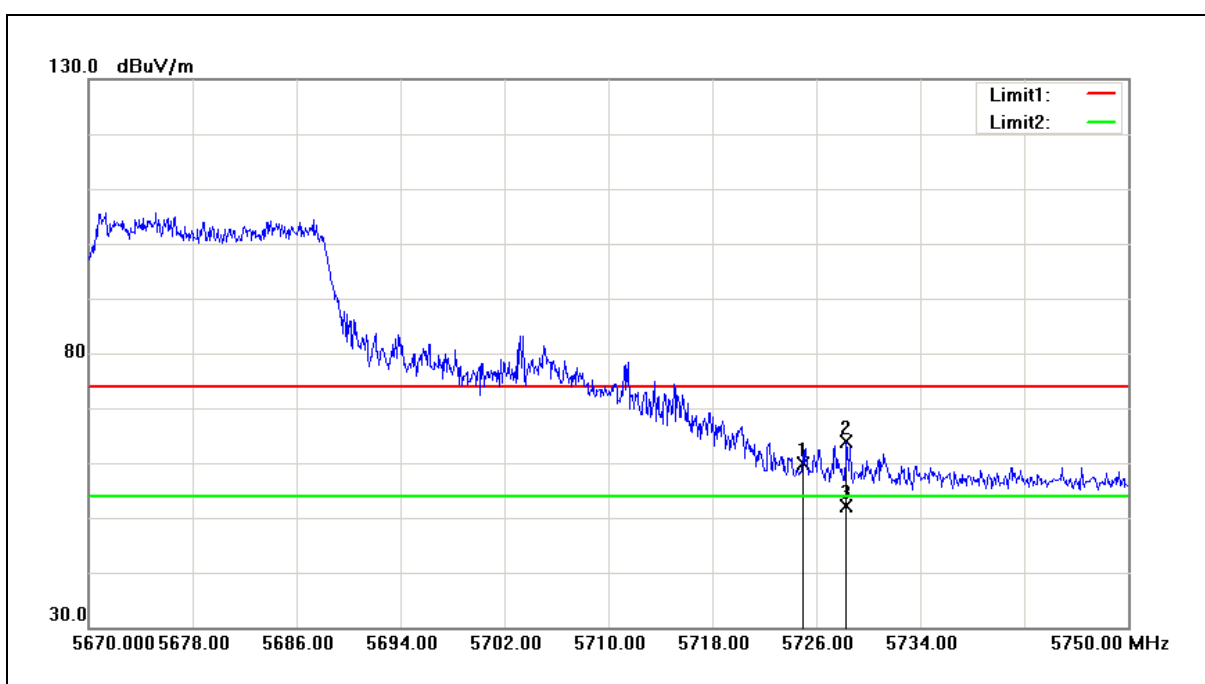


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5725.000        | 50.30          | 9.70                  | 60.00           | 68.20          | -8.2        | peak   |
| 2   | 5728.320        | 54.13          | 9.71                  | 63.84           | 74.00          | -10.16      | peak   |
| 3   | 5728.320        | 42.52          | 9.71                  | 52.23           | 54.00          | -1.77       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5670MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 07/14/2017   |
| Ant.Polar.: | Vertical        |                      |              |

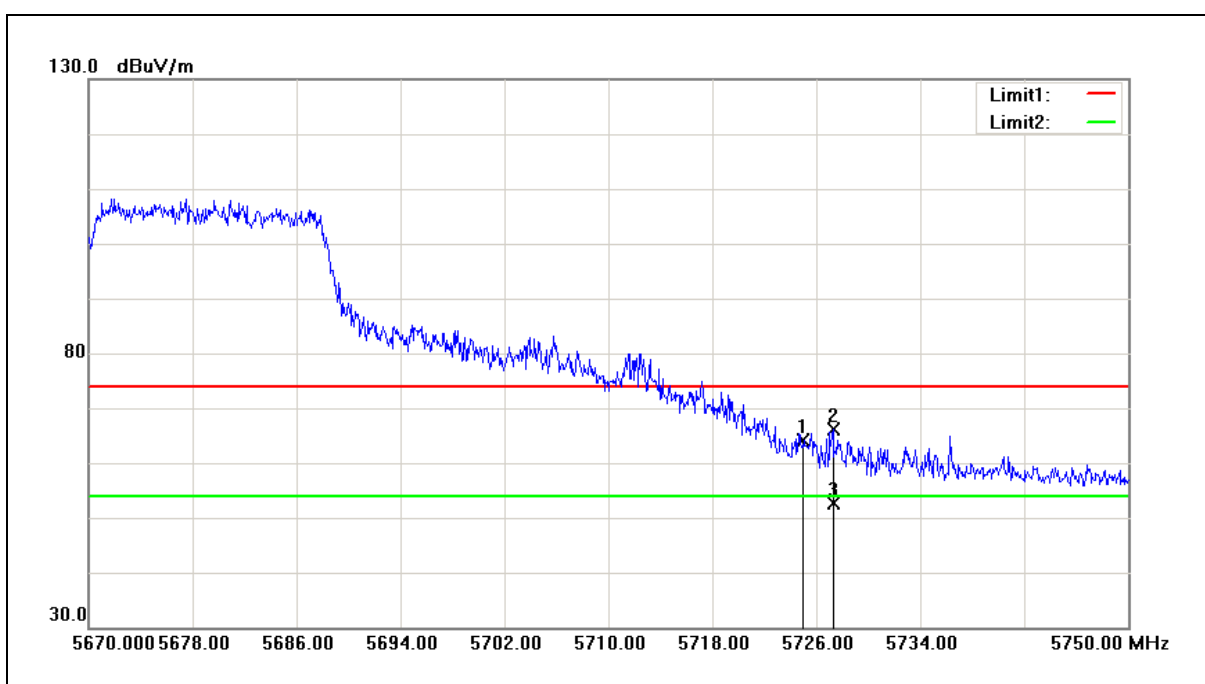

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5725.000        | 54.39          | 9.70                  | 64.09           | 68.20          | -4.11       | peak   |
| 2   | 5727.280        | 56.48          | 9.70                  | 66.18           | 74.00          | -7.82       | peak   |
| 3   | 5727.280        | 42.89          | 9.70                  | 52.59           | 54.00          | -1.41       | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

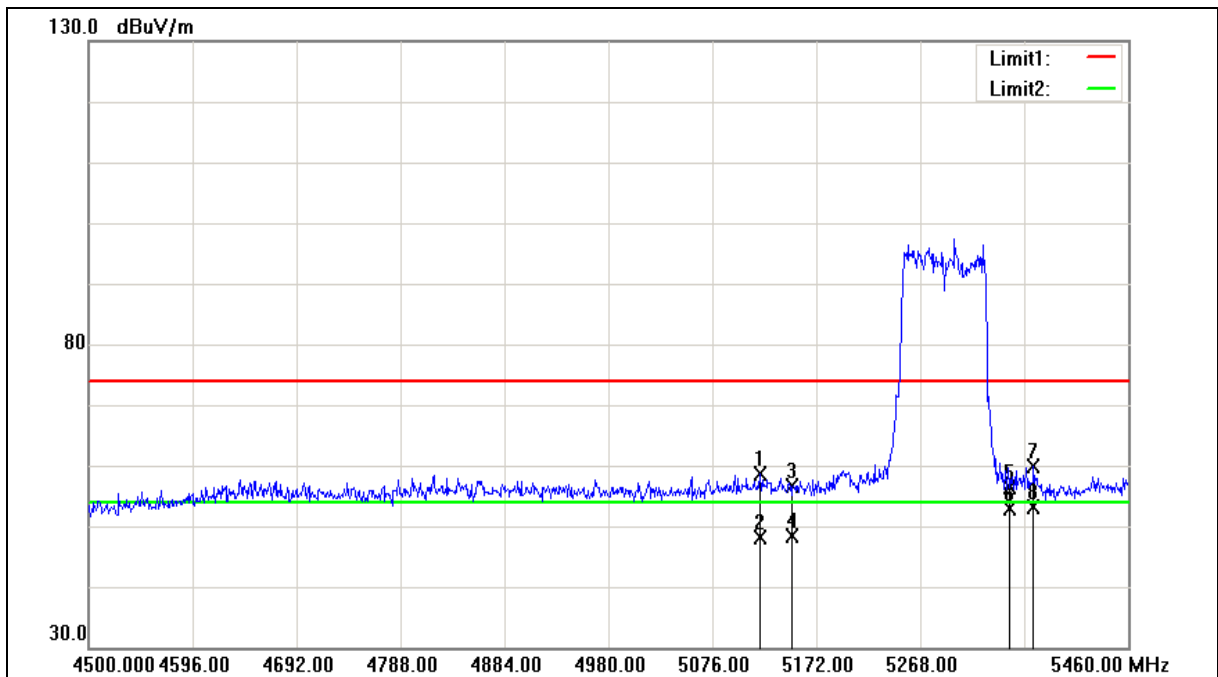



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                 | 07/14/2017   |
| Ant.Polar.: | Horizontal      |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.160           | 49.70             | 8.94                     | 58.64              | 74.00             | -15.36         | peak   |
| 2   | 5120.160           | 39.30             | 8.94                     | 48.24              | 54.00             | -5.76          | AVG    |
| 3   | 5150.000           | 47.61             | 8.97                     | 56.58              | 74.00             | -17.42         | peak   |
| 4   | 5150.000           | 39.36             | 8.97                     | 48.33              | 54.00             | -5.67          | AVG    |
| 5   | 5350.000           | 47.31             | 9.08                     | 56.39              | 74.00             | -17.61         | peak   |
| 6   | 5350.000           | 43.73             | 9.08                     | 52.81              | 54.00             | -1.19          | AVG    |
| 7   | 5372.640           | 50.72             | 9.10                     | 59.82              | 74.00             | -14.18         | peak   |
| 8   | 5372.640           | 44.14             | 9.10                     | 53.24              | 54.00             | -0.76          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Report Number: 1707FR22

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Vertical        |                      |              |

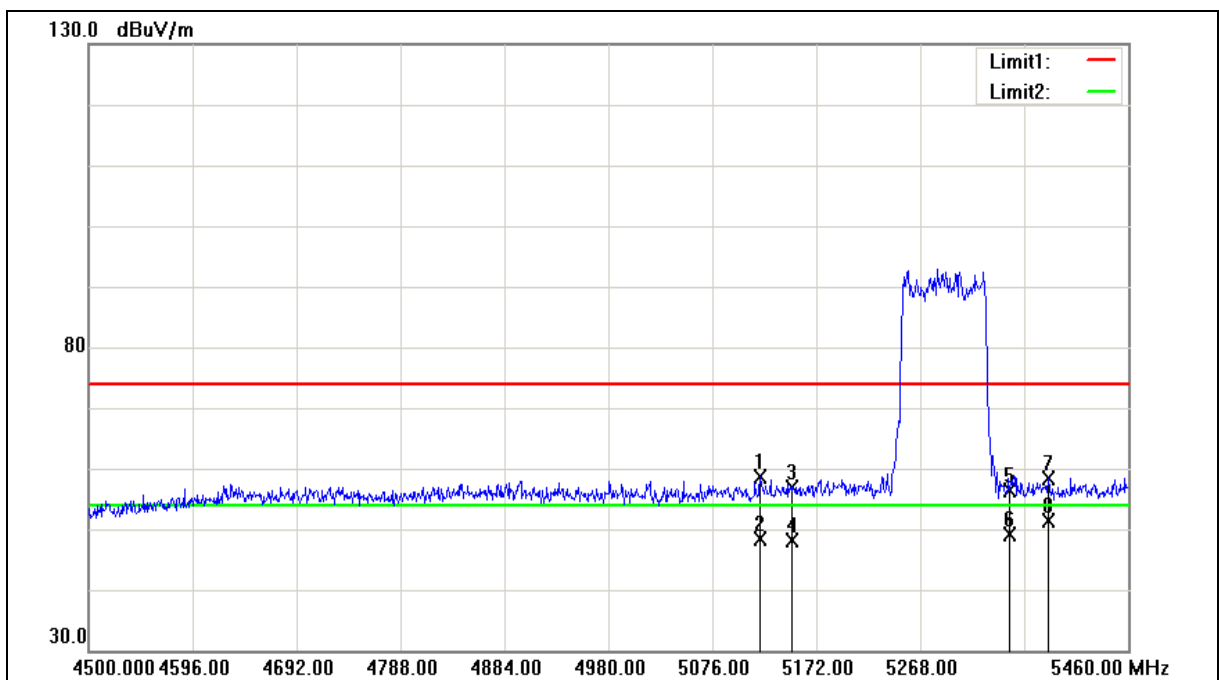



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Vertical        |                      |              |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.160           | 49.61             | 8.94                     | 58.55              | 74.00             | -15.45         | peak   |
| 2   | 5120.160           | 39.40             | 8.94                     | 48.34              | 54.00             | -5.66          | AVG    |
| 3   | 5150.000           | 47.88             | 8.97                     | 56.85              | 74.00             | -17.15         | peak   |
| 4   | 5150.000           | 39.21             | 8.97                     | 48.18              | 54.00             | -5.82          | AVG    |
| 5   | 5350.000           | 47.26             | 9.08                     | 56.34              | 74.00             | -17.66         | peak   |
| 6   | 5350.000           | 39.98             | 9.08                     | 49.06              | 54.00             | -4.94          | AVG    |
| 7   | 5386.080           | 49.35             | 9.11                     | 58.46              | 74.00             | -15.54         | peak   |
| 8   | 5386.080           | 42.24             | 9.11                     | 51.35              | 54.00             | -2.65          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5530MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

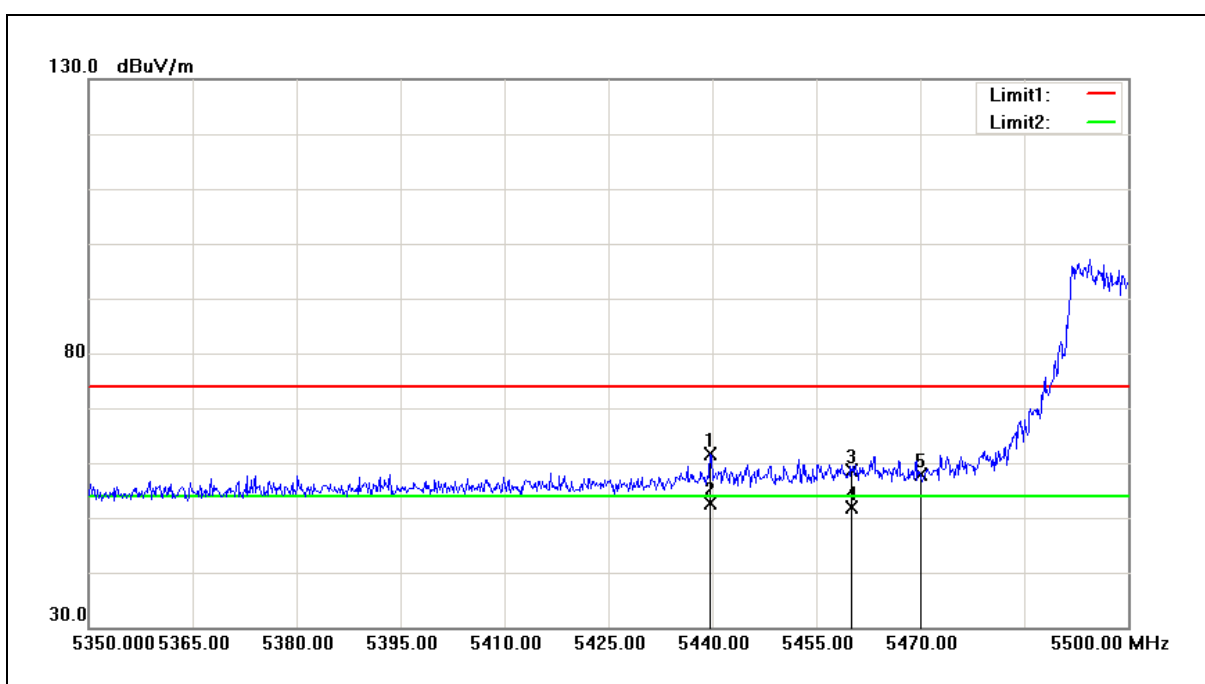


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5439.700        | 52.45          | 9.15                  | 61.60           | 74.00          | -12.40      | peak   |
| 2   | 5439.700        | 43.47          | 9.15                  | 52.62           | 54.00          | -1.38       | AVG    |
| 3   | 5460.000        | 49.57          | 9.15                  | 58.72           | 74.00          | -15.28      | peak   |
| 4   | 5460.000        | 42.75          | 9.15                  | 51.90           | 54.00          | -2.10       | AVG    |
| 5   | 5470.000        | 48.71          | 9.16                  | 57.87           | 68.20          | -10.33      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5530MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Vertical        |                      |              |

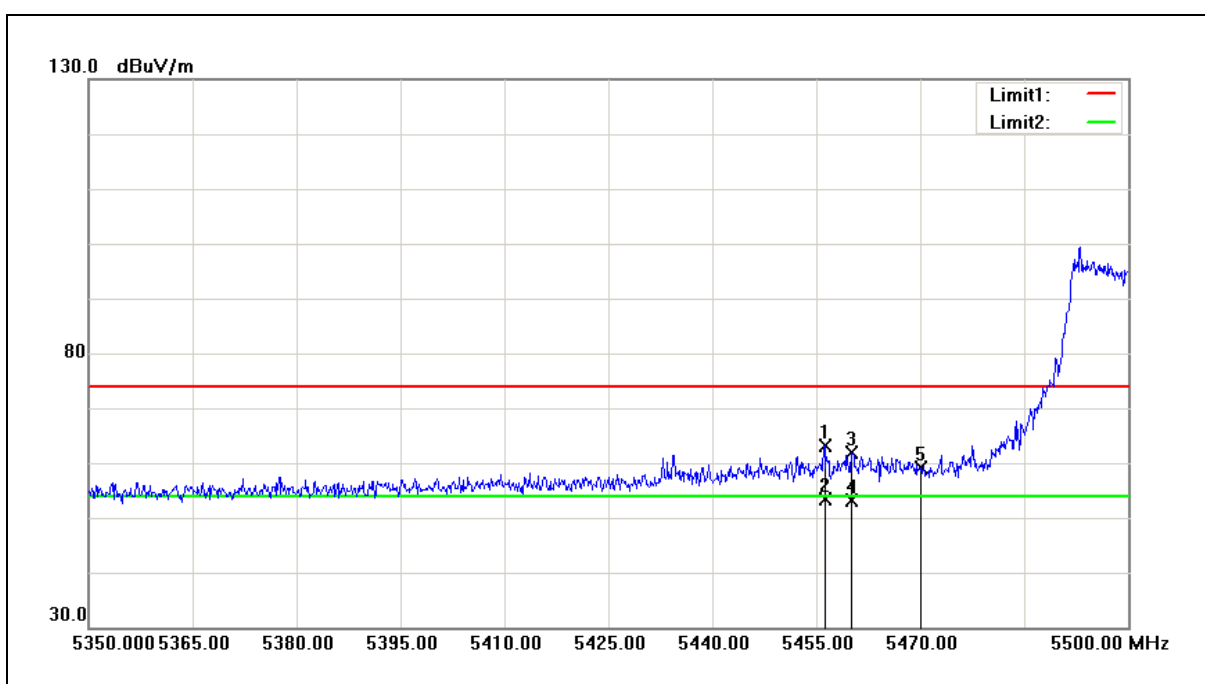

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5456.200        | 53.92          | 9.15                  | 63.07           | 74.00          | -10.93      | peak   |
| 2   | 5456.200        | 44.34          | 9.15                  | 53.49           | 54.00          | -0.51       | AVG    |
| 3   | 5460.000        | 52.73          | 9.15                  | 61.88           | 74.00          | -12.12      | peak   |
| 4   | 5460.000        | 44.06          | 9.15                  | 53.21           | 54.00          | -0.79       | AVG    |
| 5   | 5470.000        | 49.95          | 9.16                  | 59.11           | 68.20          | -9.09       | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

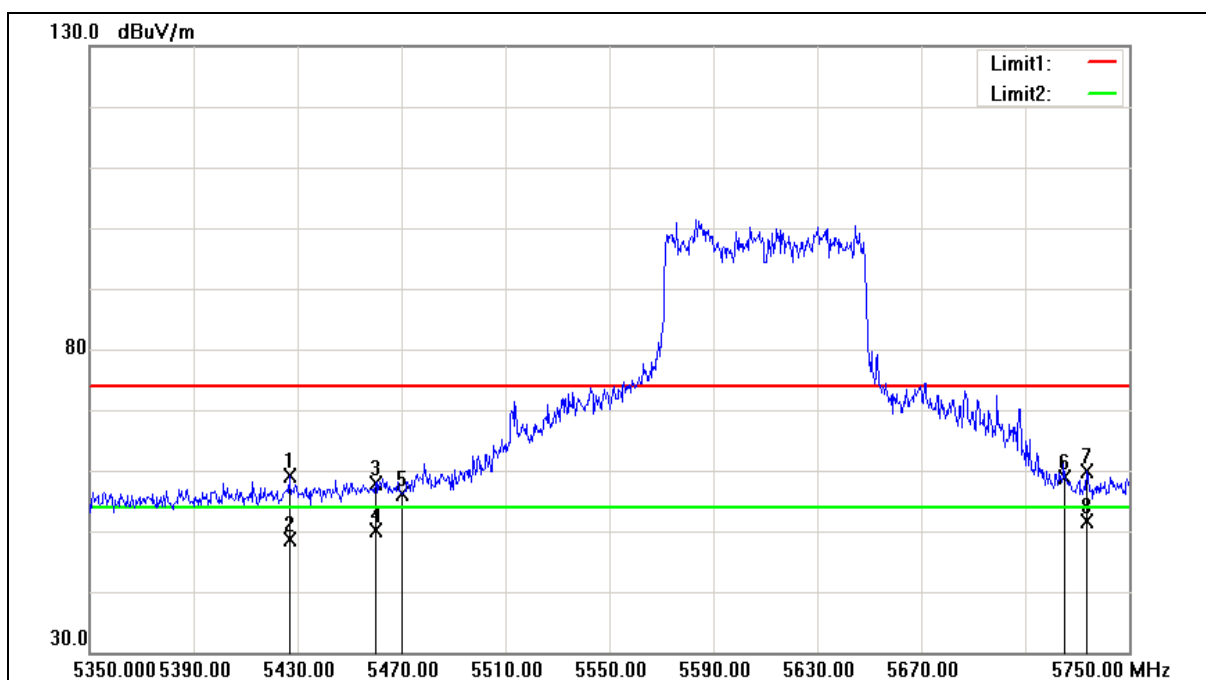



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5426.800           | 49.96             | 9.14                     | 59.10              | 74.00             | -14.90         | peak   |
| 2   | 5426.800           | 39.59             | 9.14                     | 48.73              | 54.00             | -5.27          | AVG    |
| 3   | 5460.000           | 48.85             | 9.15                     | 58.00              | 74.00             | -16.00         | peak   |
| 4   | 5460.000           | 40.93             | 9.15                     | 50.08              | 54.00             | -3.92          | AVG    |
| 5   | 5470.000           | 47.03             | 9.16                     | 56.19              | 68.20             | -12.01         | peak   |
| 6   | 5725.000           | 49.26             | 9.70                     | 58.96              | 68.20             | -9.24          | peak   |
| 7   | 5733.600           | 50.09             | 9.71                     | 59.80              | 74.00             | -14.20         | peak   |
| 8   | 5733.600           | 42.02             | 9.71                     | 51.73              | 54.00             | -2.27          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Vertical        |                      |              |

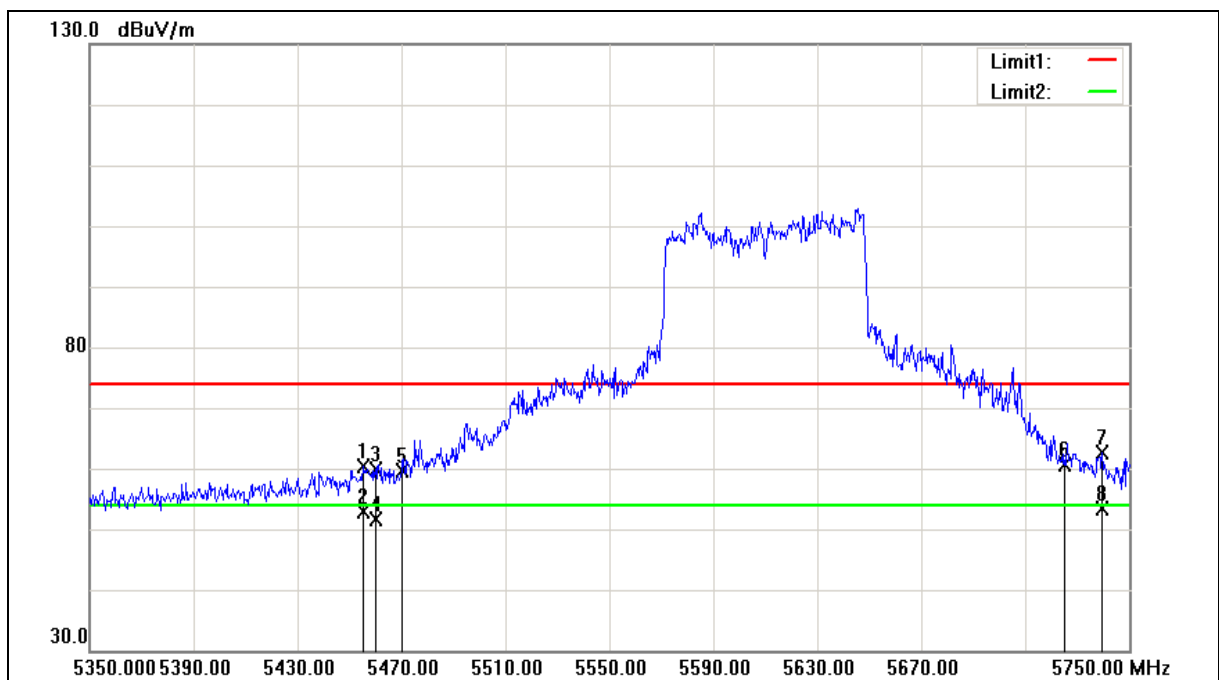



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 07/14/2017   |
| Ant.Polar.: | Vertical        |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5455.200           | 51.35             | 9.15                     | 60.50              | 74.00             | -13.50         | peak   |
| 2   | 5455.200           | 43.74             | 9.15                     | 52.89              | 54.00             | -1.11          | AVG    |
| 3   | 5460.000           | 50.71             | 9.15                     | 59.86              | 74.00             | -14.14         | peak   |
| 4   | 5460.000           | 42.50             | 9.15                     | 51.65              | 54.00             | -2.35          | AVG    |
| 5   | 5470.000           | 50.58             | 9.16                     | 59.74              | 68.20             | -8.46          | peak   |
| 6   | 5725.000           | 51.02             | 9.70                     | 60.72              | 68.20             | -7.48          | peak   |
| 7   | 5739.600           | 53.02             | 9.73                     | 62.75              | 74.00             | -11.25         | peak   |
| 8   | 5739.600           | 43.67             | 9.73                     | 53.40              | 54.00             | -0.60          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Beamforming on

Below 1GHz

| Standard:          |                   | FCC Part 15.407          |                    | Test Distance:       |                | 3m           |                     |
|--------------------|-------------------|--------------------------|--------------------|----------------------|----------------|--------------|---------------------|
| Test item:         |                   | Harmonic                 |                    | Power:               |                | AC 120V/60Hz |                     |
| Test Mode:         |                   | Mode 1                   |                    | Temp.(°C)/Hum.(%RH): |                | 26(°C)/60%RH |                     |
| Description:       |                   |                          |                    | Date:                |                | 05/19/2017   |                     |
| Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m)    | Margin<br>(dB) | Remark       | Ant.Polar.<br>H / V |
| 491.7200           | 32.31             | 0.89                     | 33.20              | 46.00                | -12.80         | QP           | H                   |
| 515.9700           | 34.63             | 1.37                     | 36.00              | 46.00                | -10.00         | QP           | H                   |
| 620.7300           | 28.59             | 3.55                     | 32.14              | 46.00                | -13.86         | QP           | H                   |
| 731.3100           | 28.55             | 5.59                     | 34.14              | 46.00                | -11.86         | QP           | H                   |
| 825.4000           | 27.67             | 7.17                     | 34.84              | 46.00                | -11.16         | QP           | H                   |
| 920.4600           | 26.90             | 9.15                     | 36.05              | 46.00                | -9.95          | QP           | H                   |
|                    |                   |                          |                    |                      |                |              |                     |
| 262.8000           | 26.81             | -4.15                    | 22.66              | 46.00                | -23.34         | QP           | V                   |
| 412.1800           | 27.63             | -0.72                    | 26.91              | 46.00                | -19.09         | QP           | V                   |
| 491.7200           | 33.20             | 0.89                     | 34.09              | 46.00                | -11.91         | QP           | V                   |
| 515.0000           | 32.27             | 1.34                     | 33.61              | 46.00                | -12.39         | QP           | V                   |
| 746.8300           | 28.24             | 5.95                     | 34.19              | 46.00                | -11.81         | QP           | V                   |
| 928.2200           | 26.49             | 9.28                     | 35.77              | 46.00                | -10.23         | QP           | V                   |


Note: 1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

2. Result = Correction factor + Reading

3. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.

Above 1GHz

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

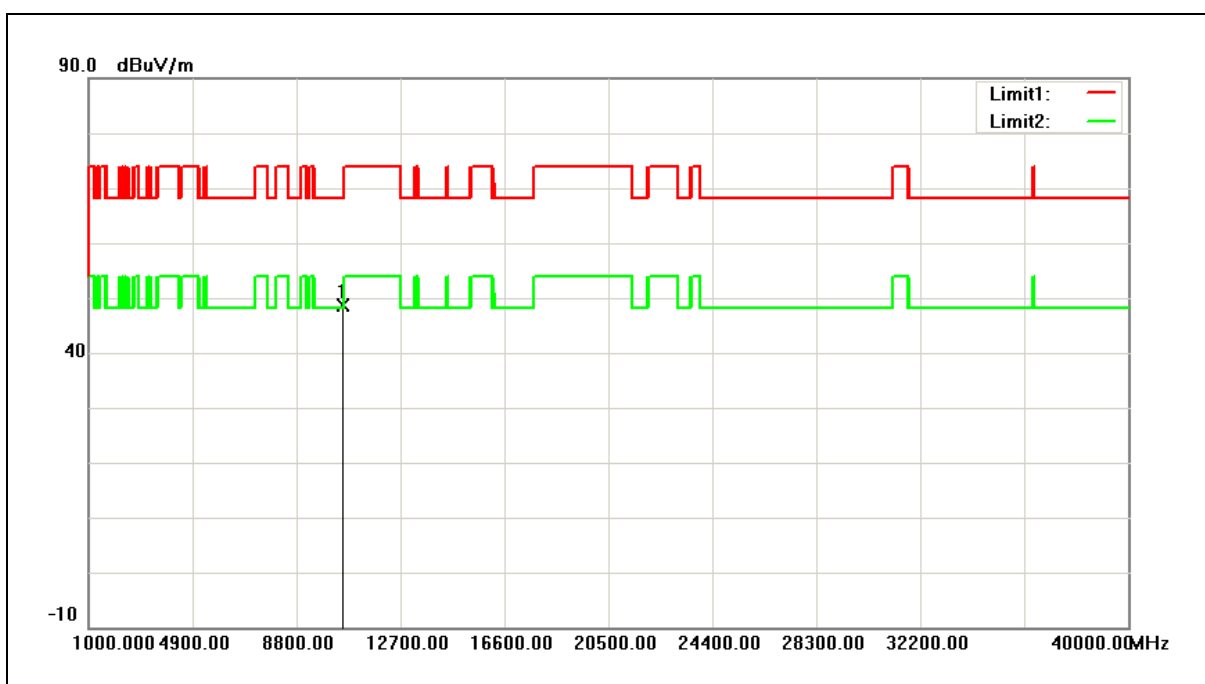


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 42.81          | 5.71                  | 48.52           | 68.20          | -19.68      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

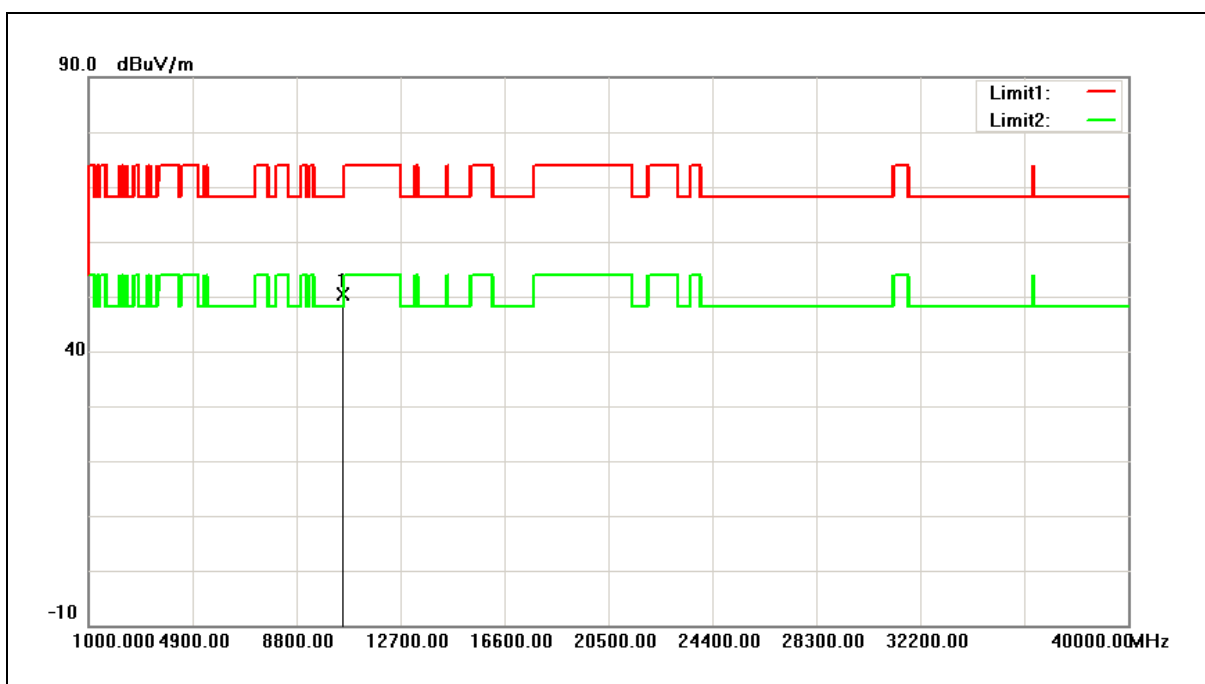


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10520.000          | 44.57             | 5.71                     | 50.28              | 68.20             | -17.92         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

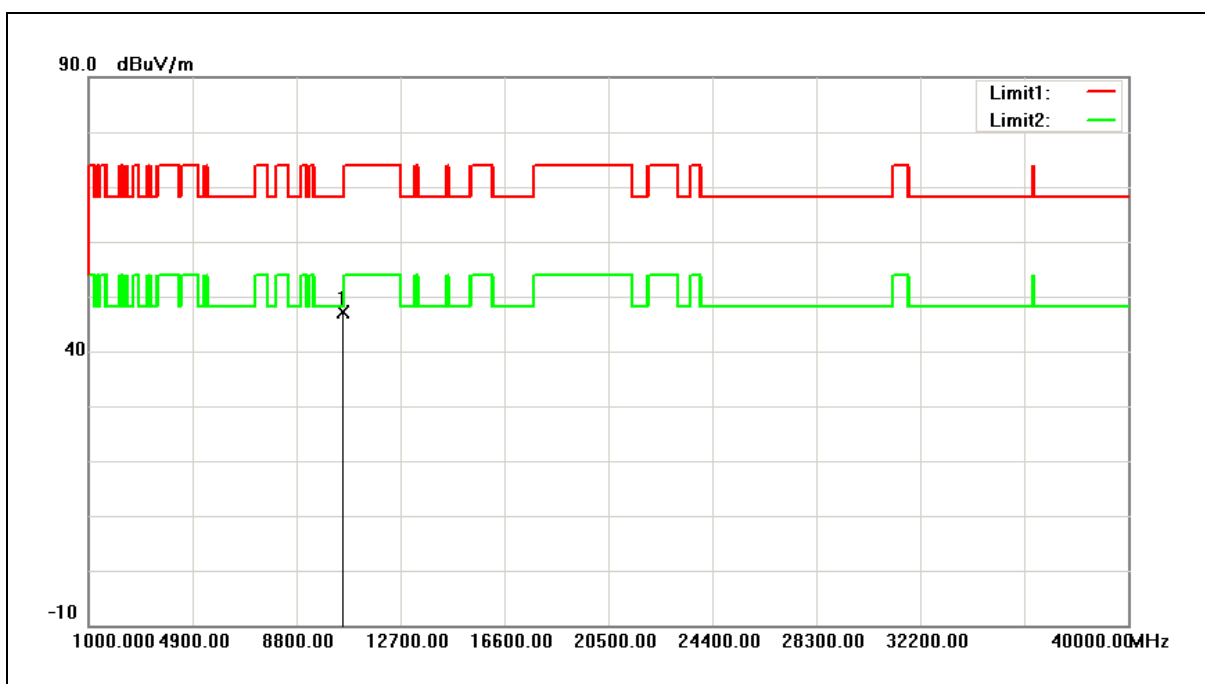


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10560.000          | 41.49             | 5.76                     | 47.25              | 68.20             | -20.95         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

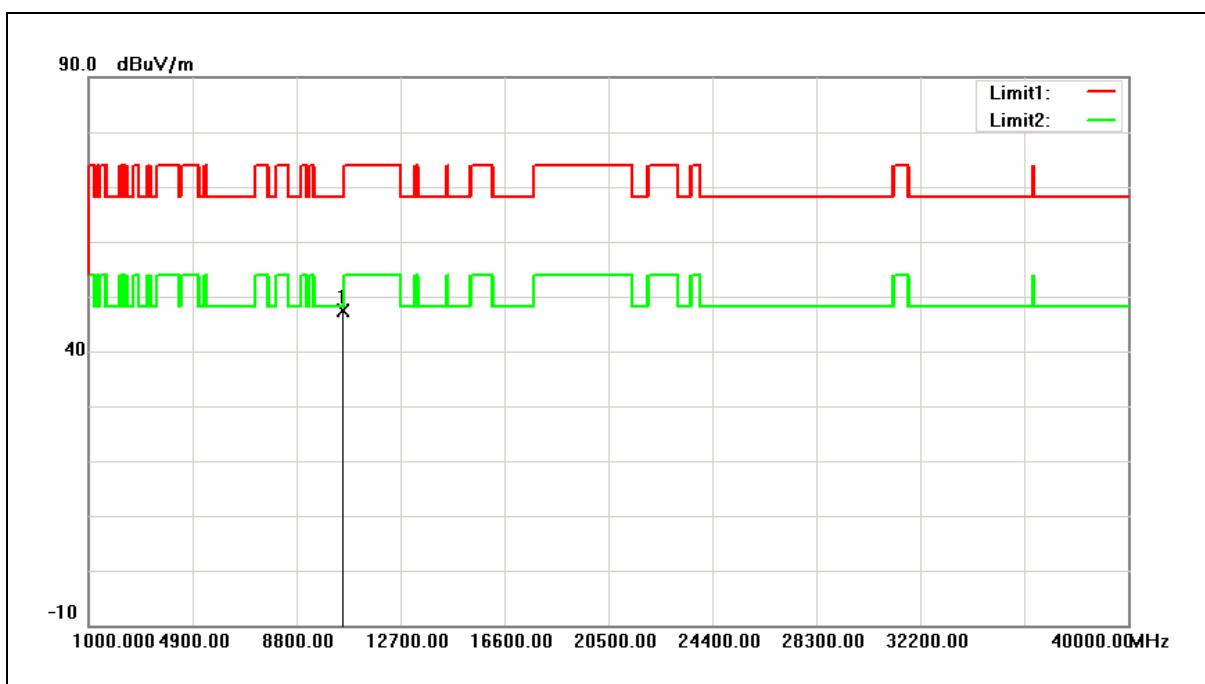


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10560.000          | 41.65             | 5.76                     | 47.41              | 68.20             | -20.79         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5320MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

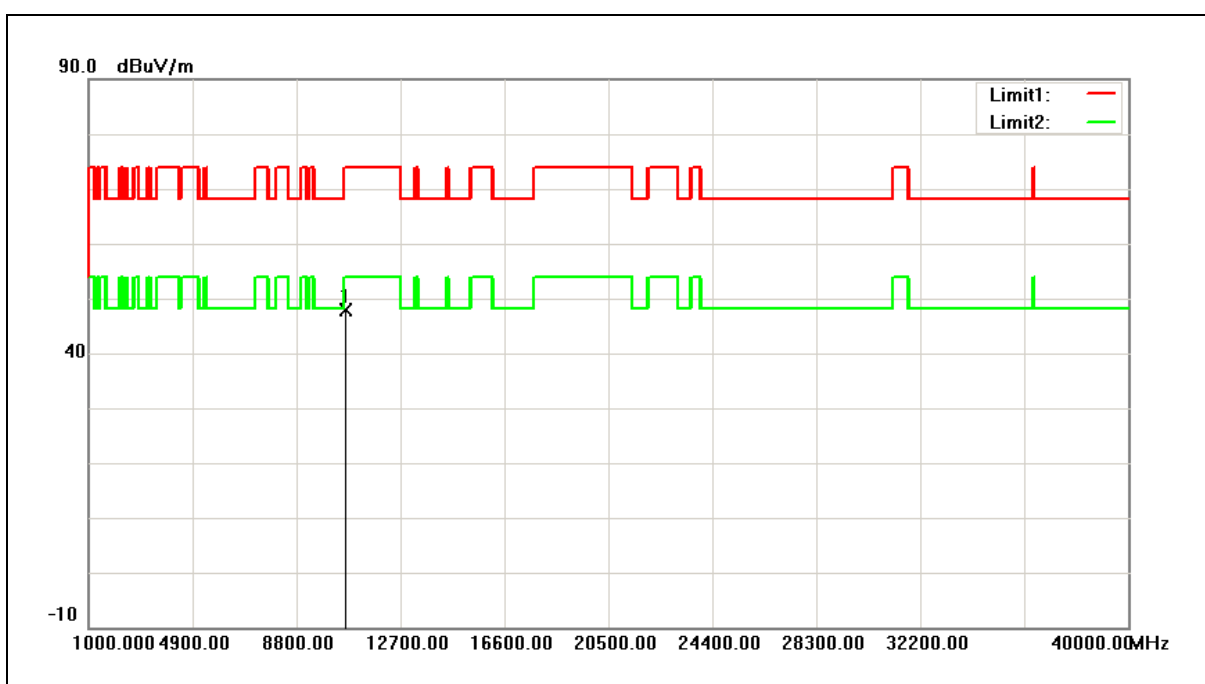


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 41.95          | 5.86                  | 47.81           | 74.00          | -26.19      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5320MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

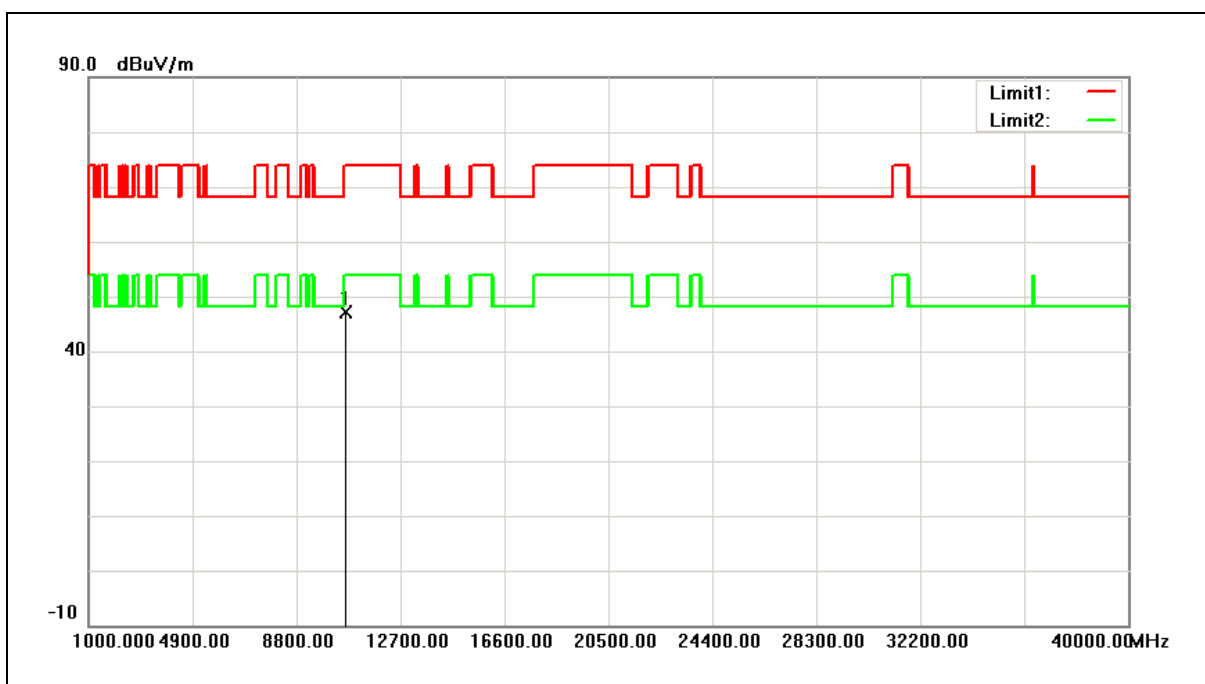


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 41.28          | 5.86                  | 47.14           | 74.00          | -26.86      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5500MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

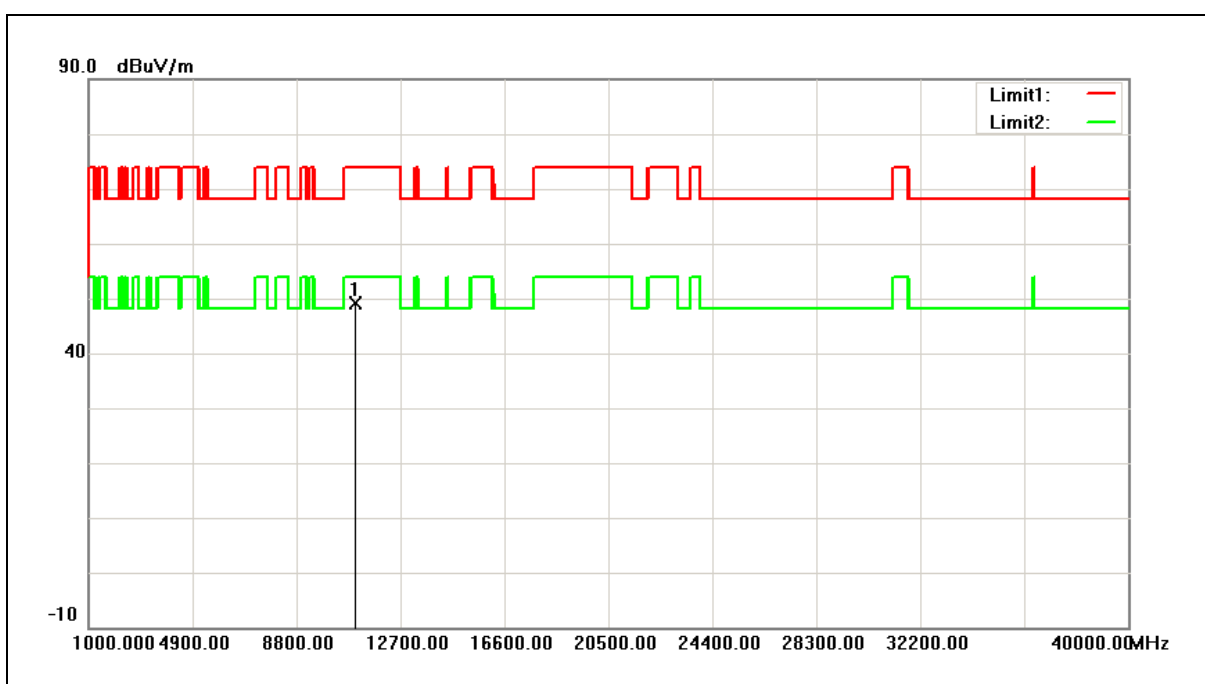


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 42.78          | 6.30                  | 49.08           | 74.00          | -24.92      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5500MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

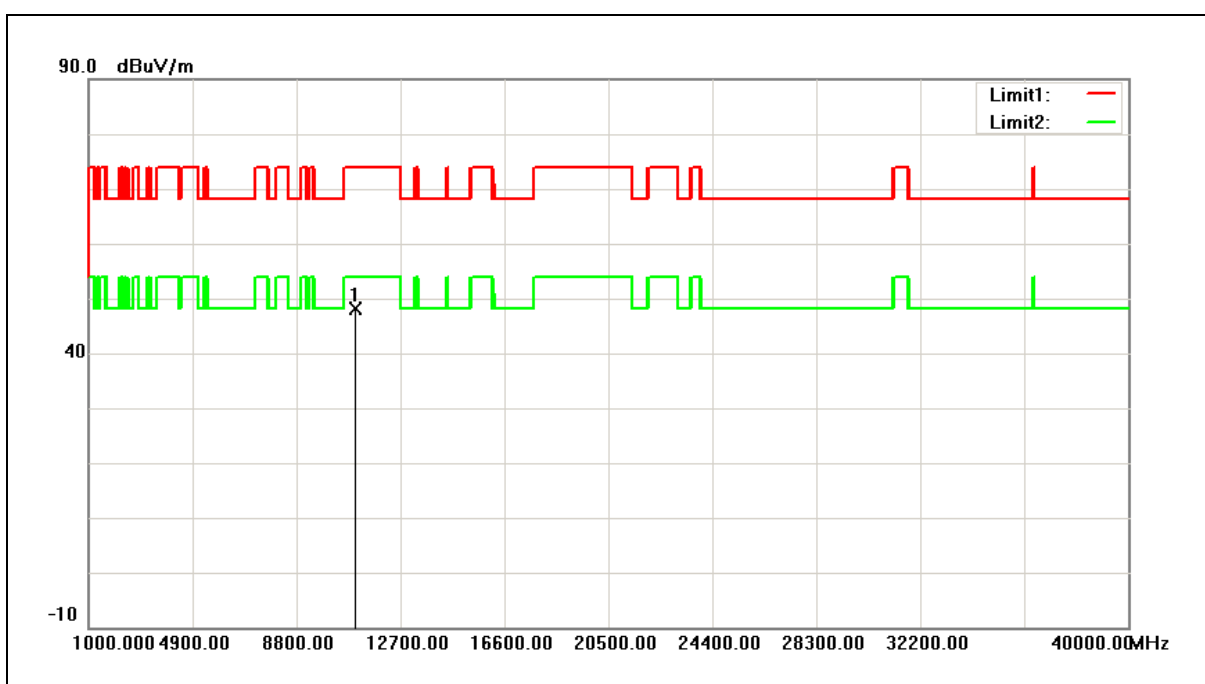


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 41.76          | 6.30                  | 48.06           | 74.00          | -25.94      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

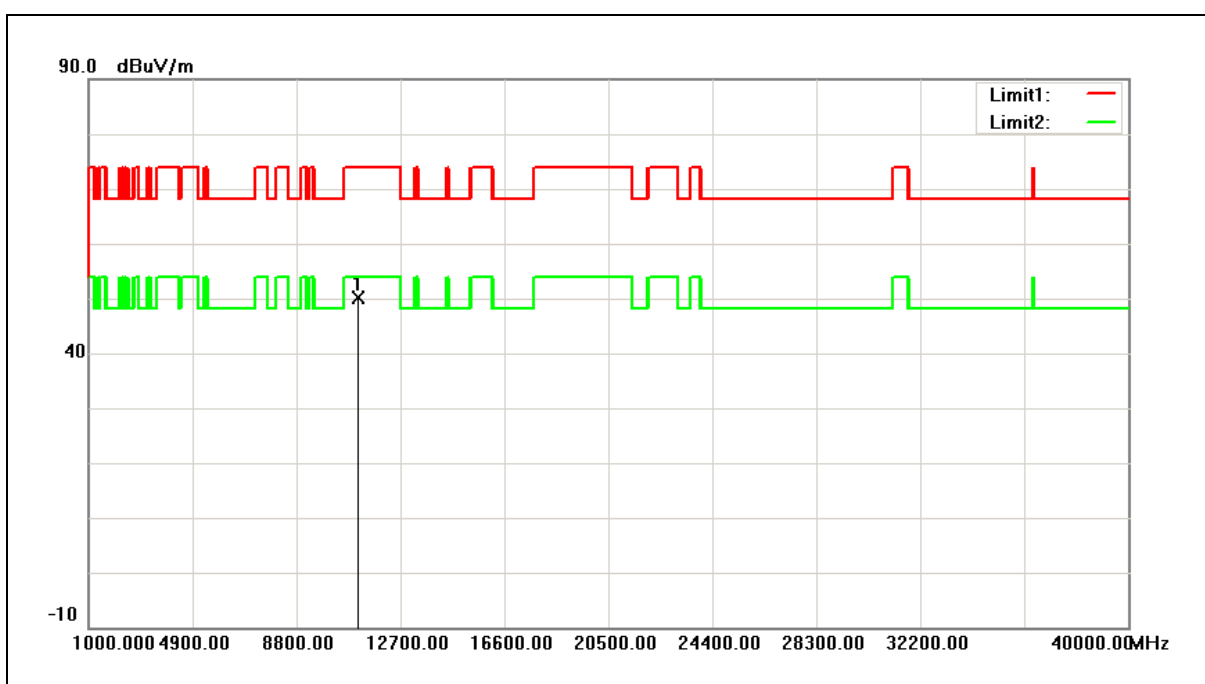


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11120.000       | 43.68          | 6.38                  | 50.06           | 74.00          | -23.94      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

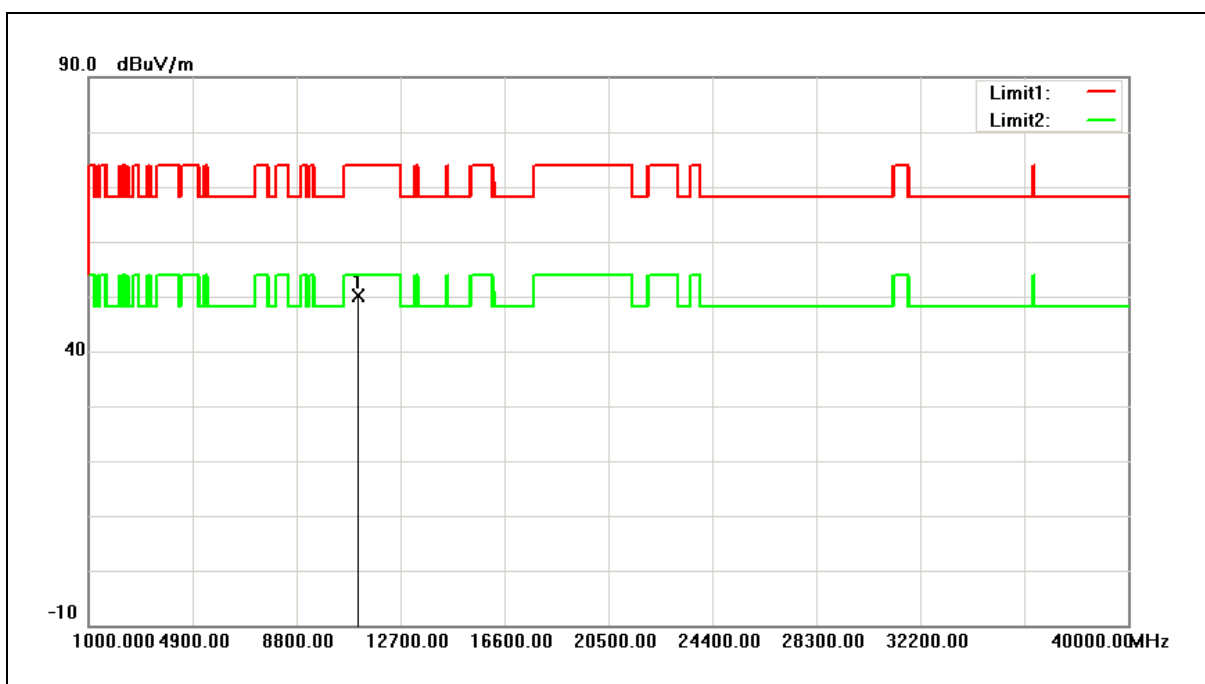


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11120.000          | 43.74             | 6.38                     | 50.12              | 74.00             | -23.88         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5700MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

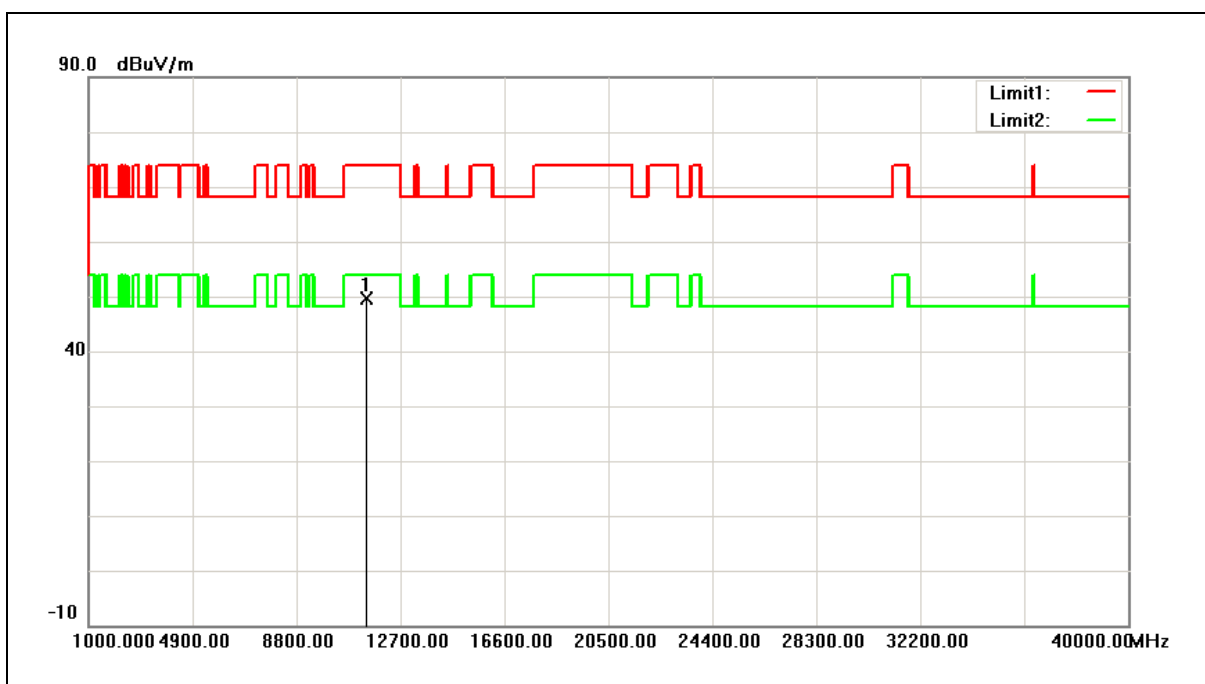


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 43.12          | 6.55                  | 49.67           | 74.00          | -24.33      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5700MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

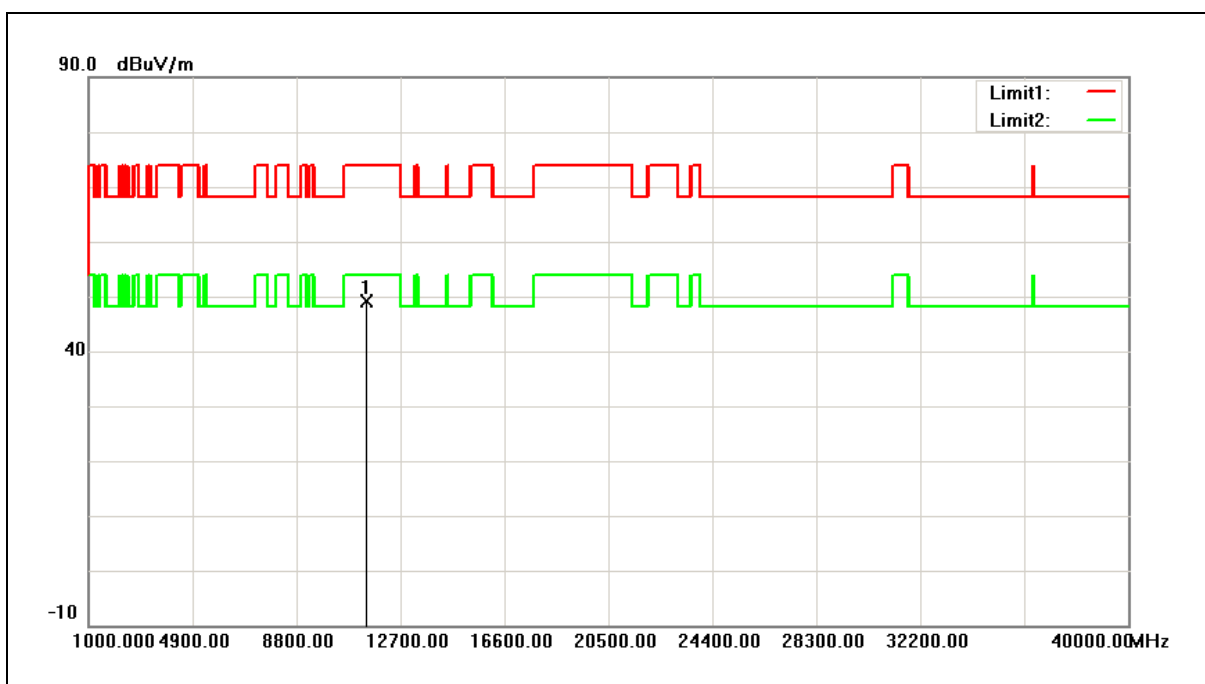


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11400.000          | 42.49             | 6.55                     | 49.04              | 74.00             | -24.96         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

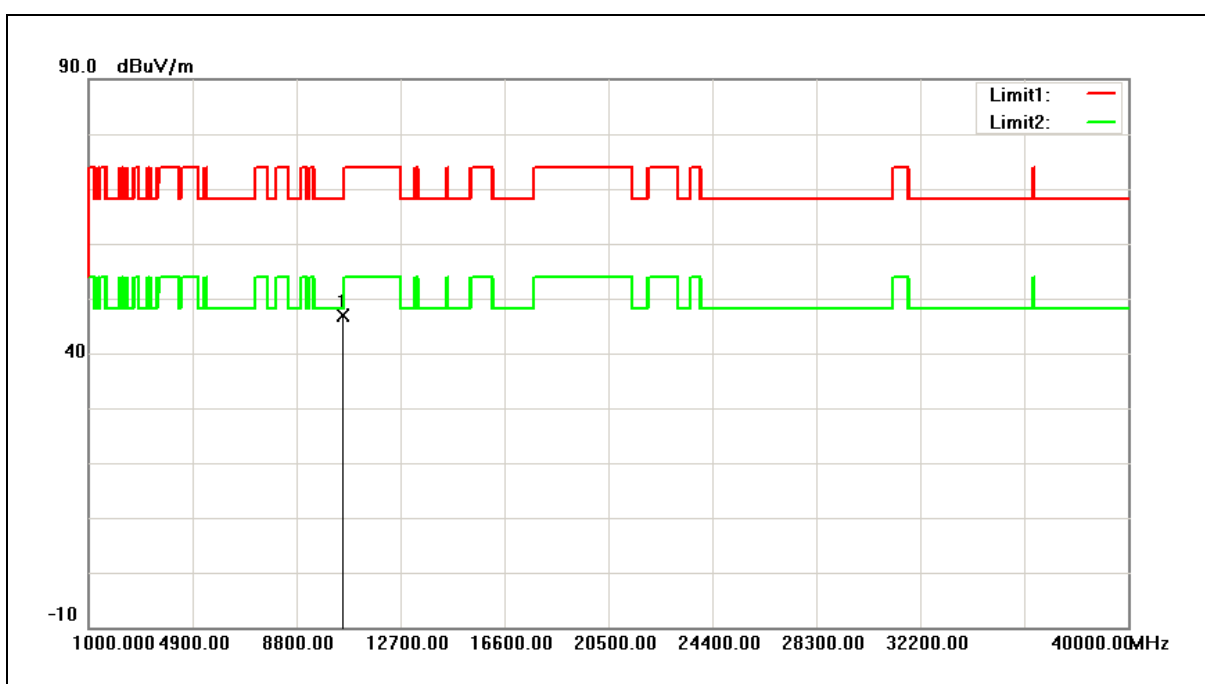


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10520.000          | 41.27             | 5.71                     | 46.98              | 68.20             | -21.22         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

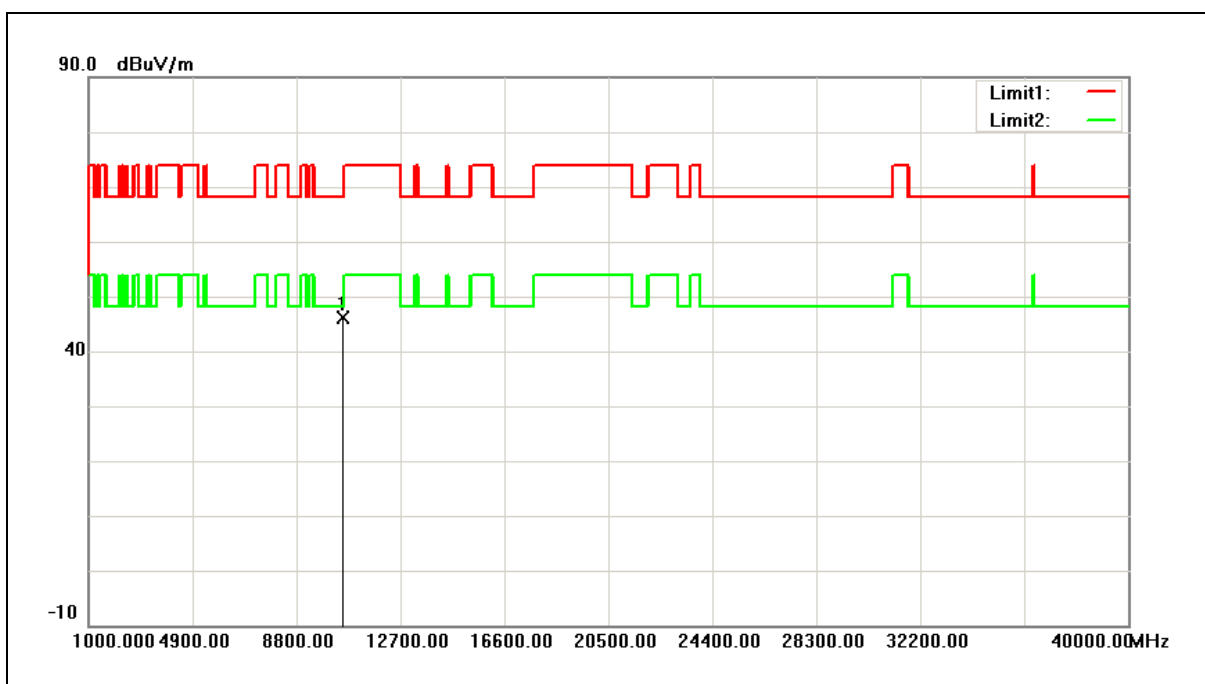


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 40.50          | 5.71                  | 46.21           | 68.20          | -21.99      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

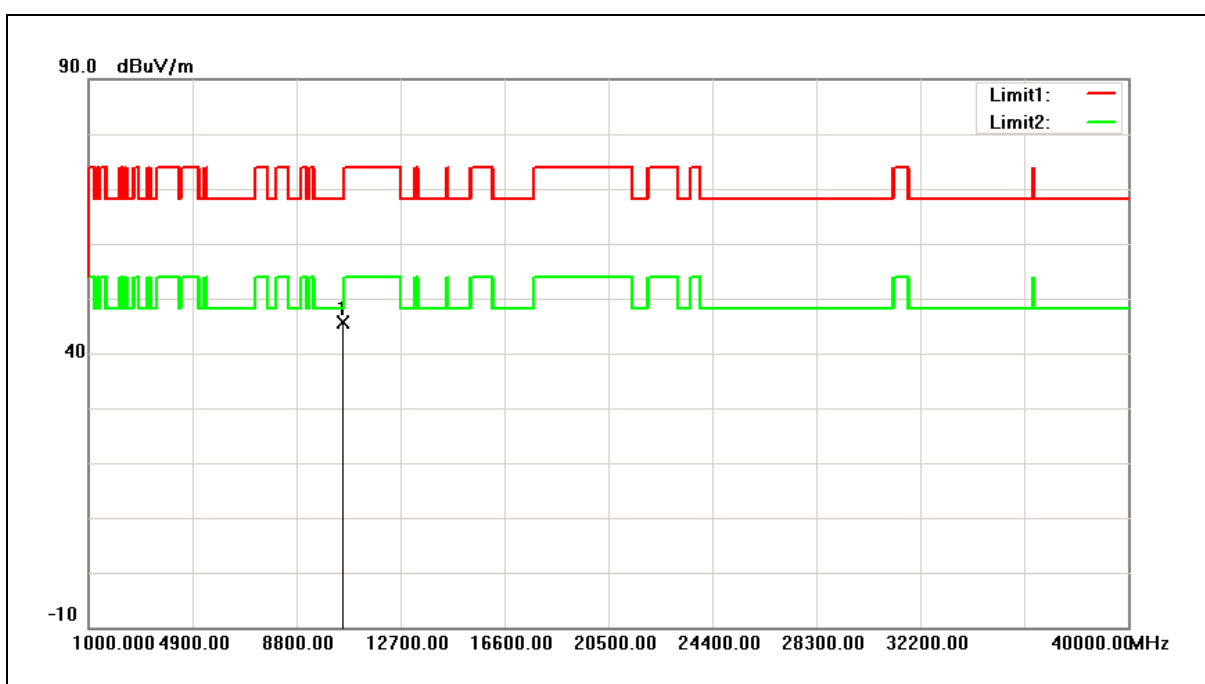


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10560.000       | 39.85          | 5.76                  | 45.61           | 68.20          | -22.59      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

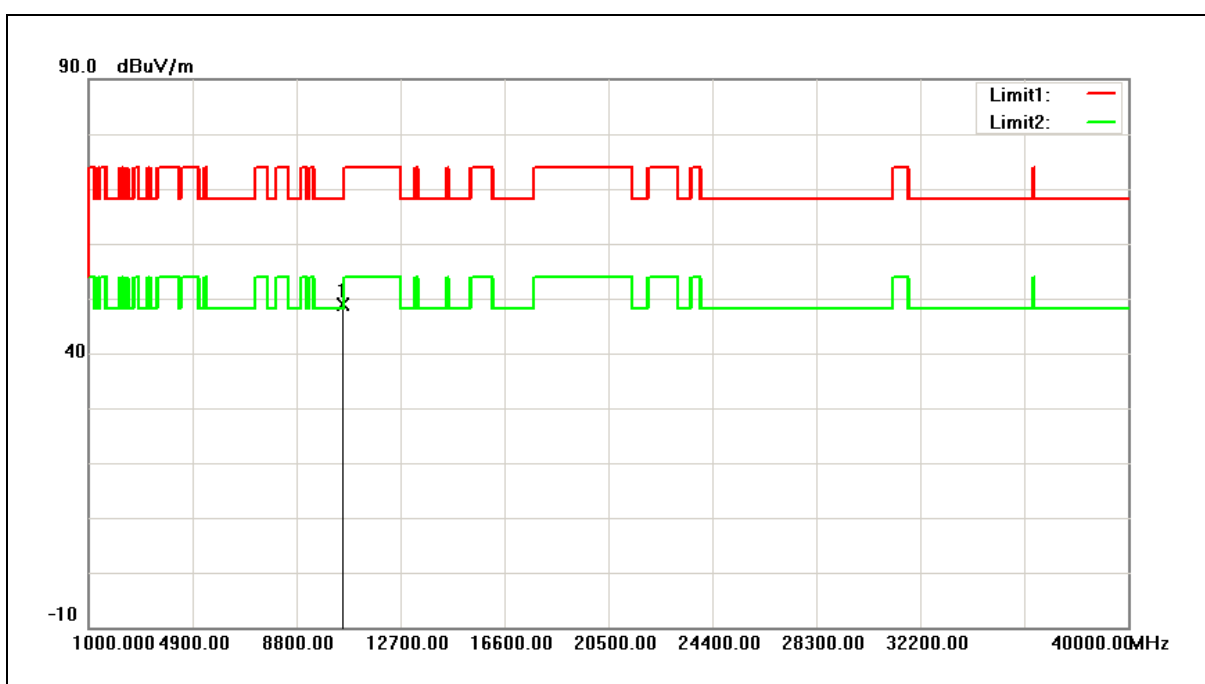


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10560.000       | 43.05          | 5.76                  | 48.81           | 68.20          | -19.39      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5320MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

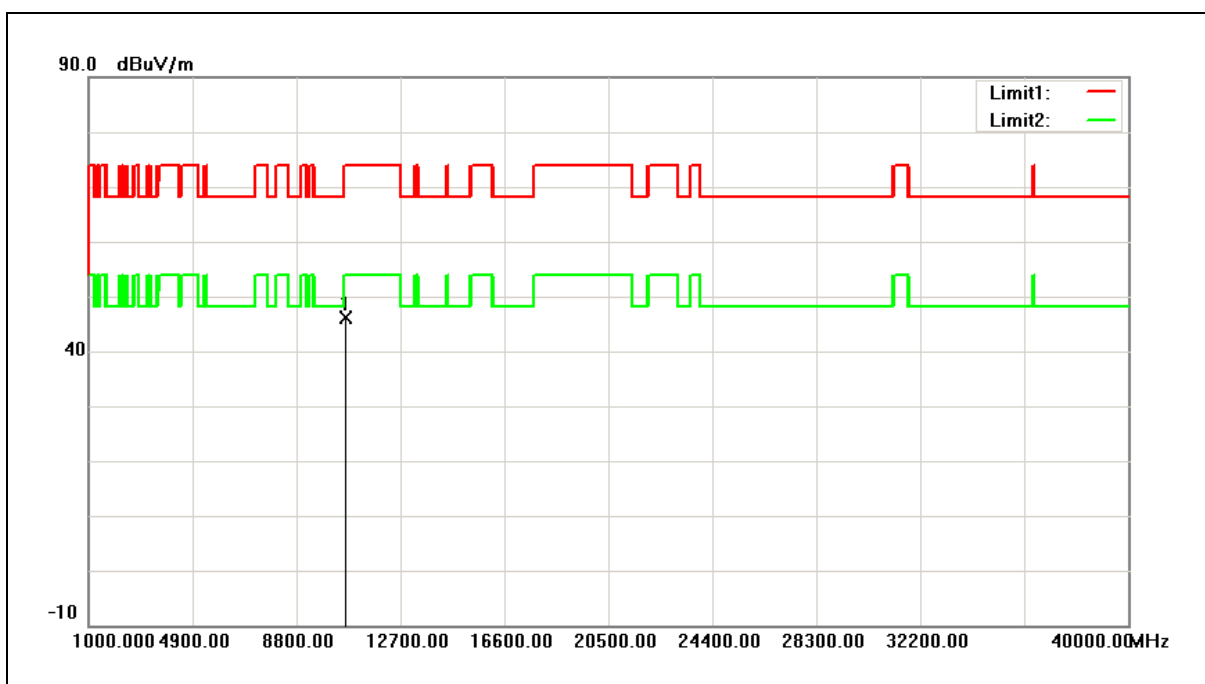


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10640.000          | 40.36             | 5.86                     | 46.22              | 74.00             | -27.78         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5320MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

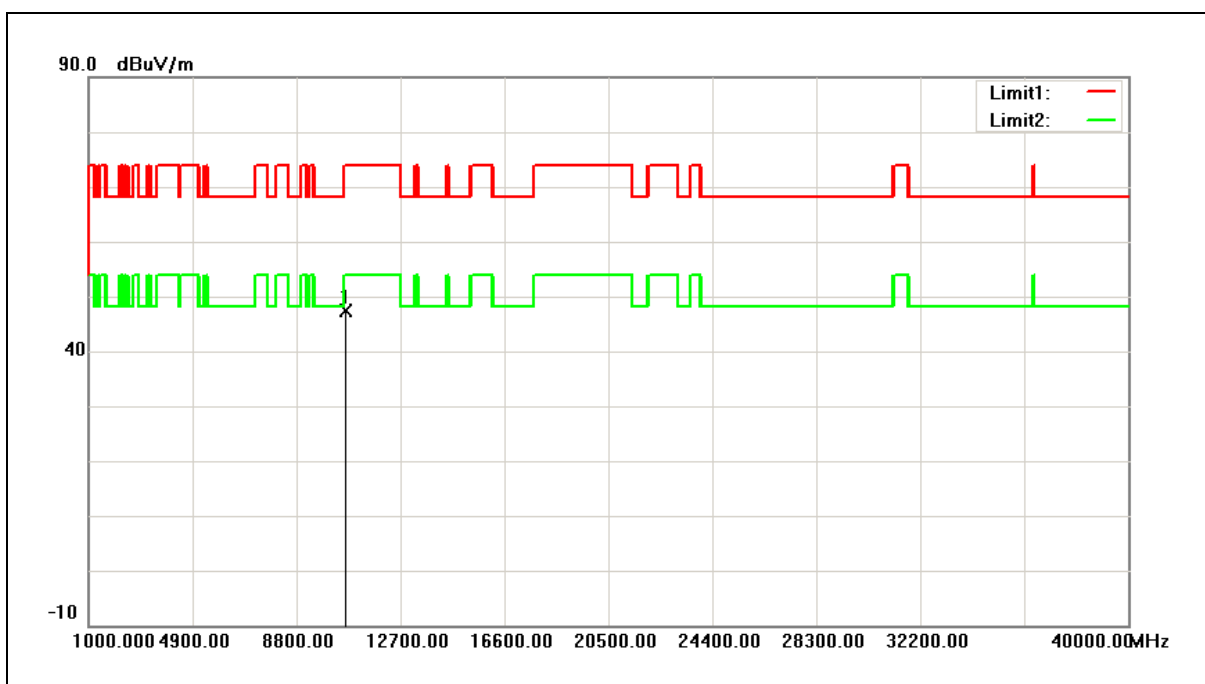


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 41.55          | 5.86                  | 47.41           | 74.00          | -26.59      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5500MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

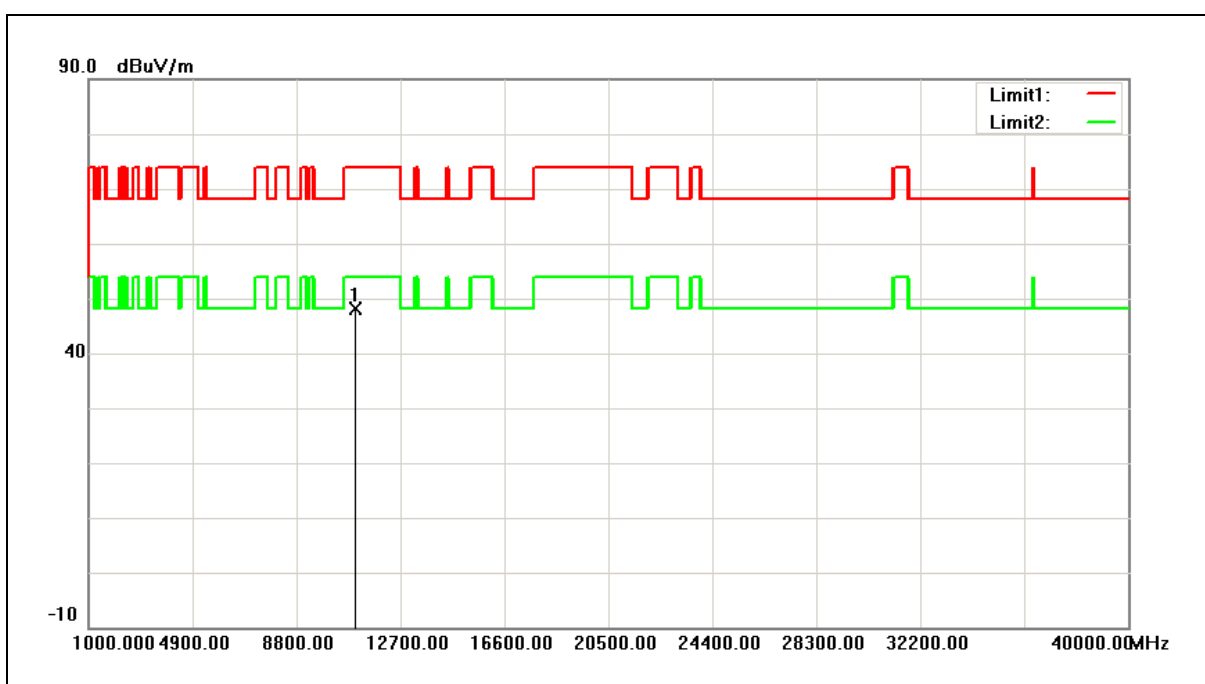


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11000.000          | 41.94             | 6.30                     | 48.24              | 74.00             | -25.76         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5500MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

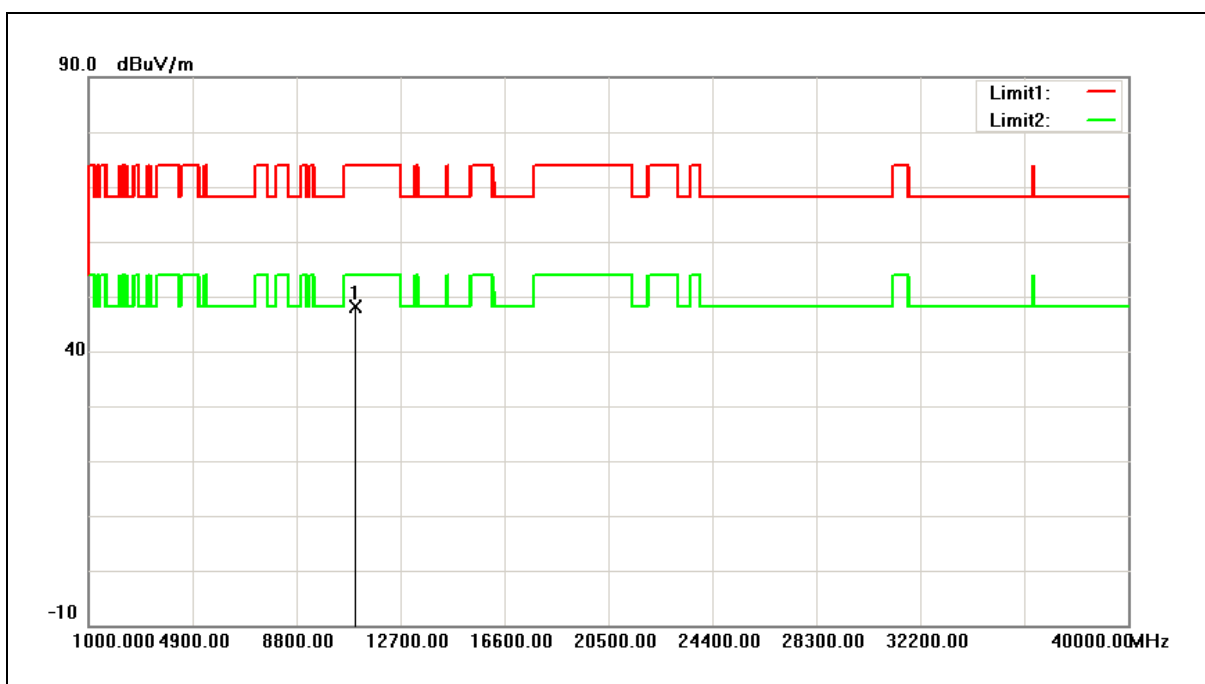


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11000.000          | 41.84             | 6.30                     | 48.14              | 74.00             | -25.86         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

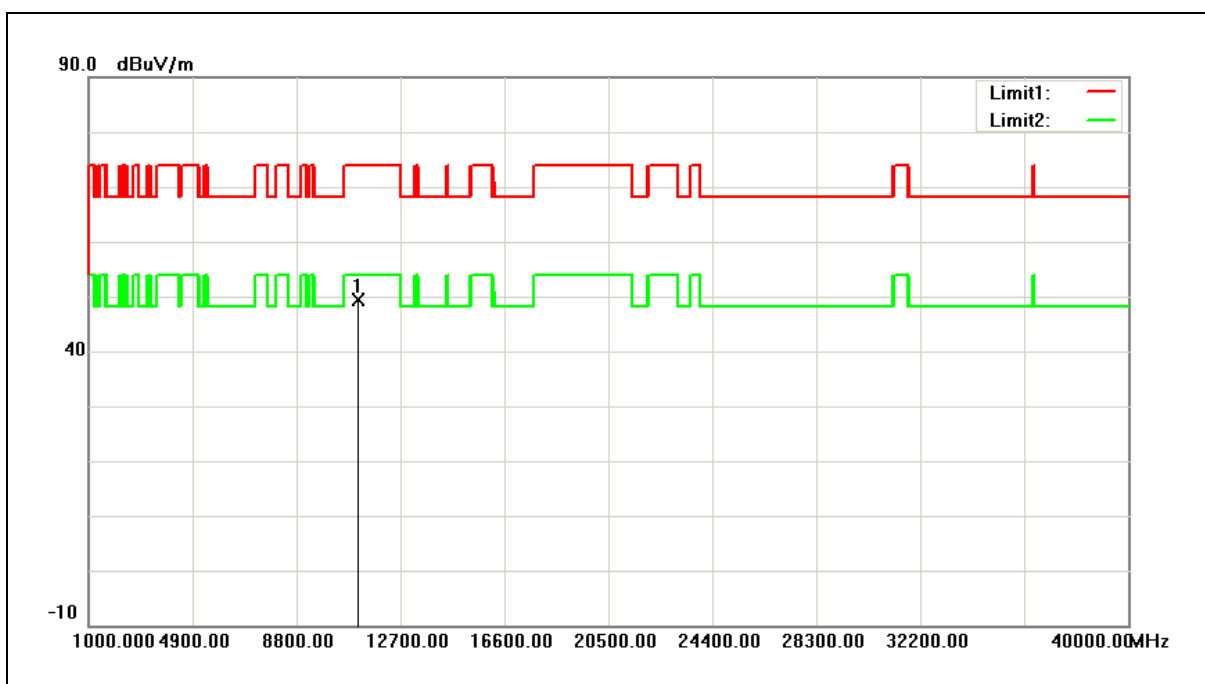


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11120.000          | 42.93             | 6.38                     | 49.31              | 74.00             | -24.69         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

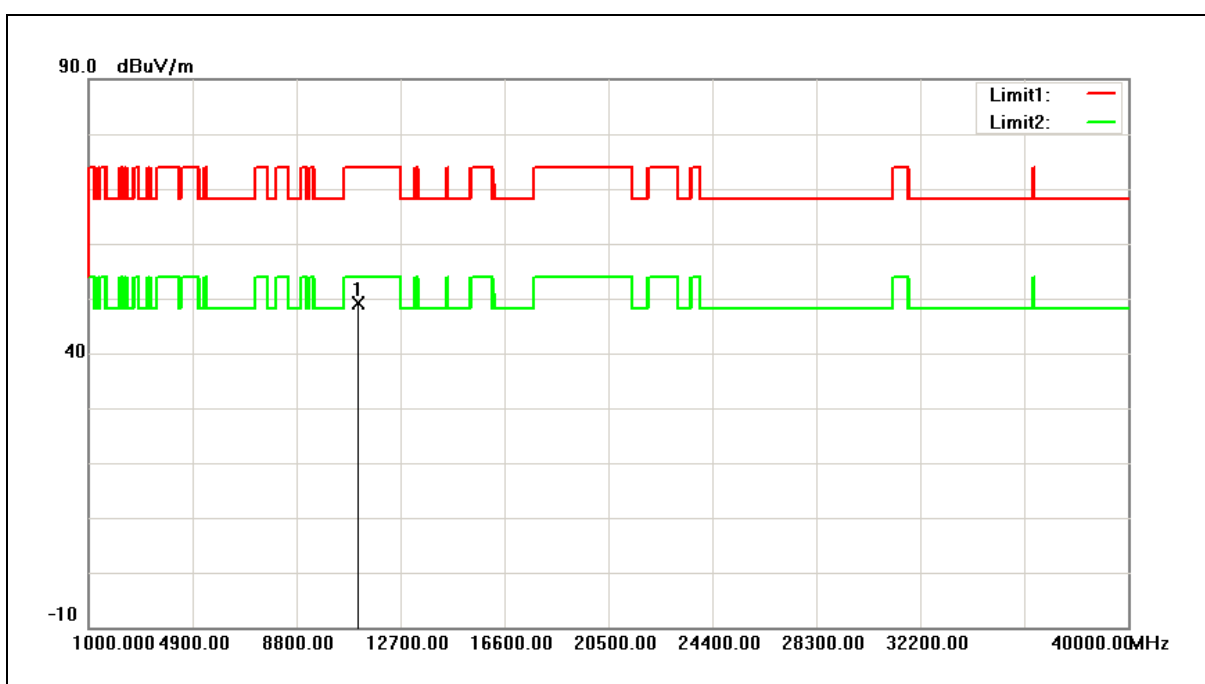


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11120.000          | 42.86             | 6.38                     | 49.24              | 74.00             | -24.76         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5700MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

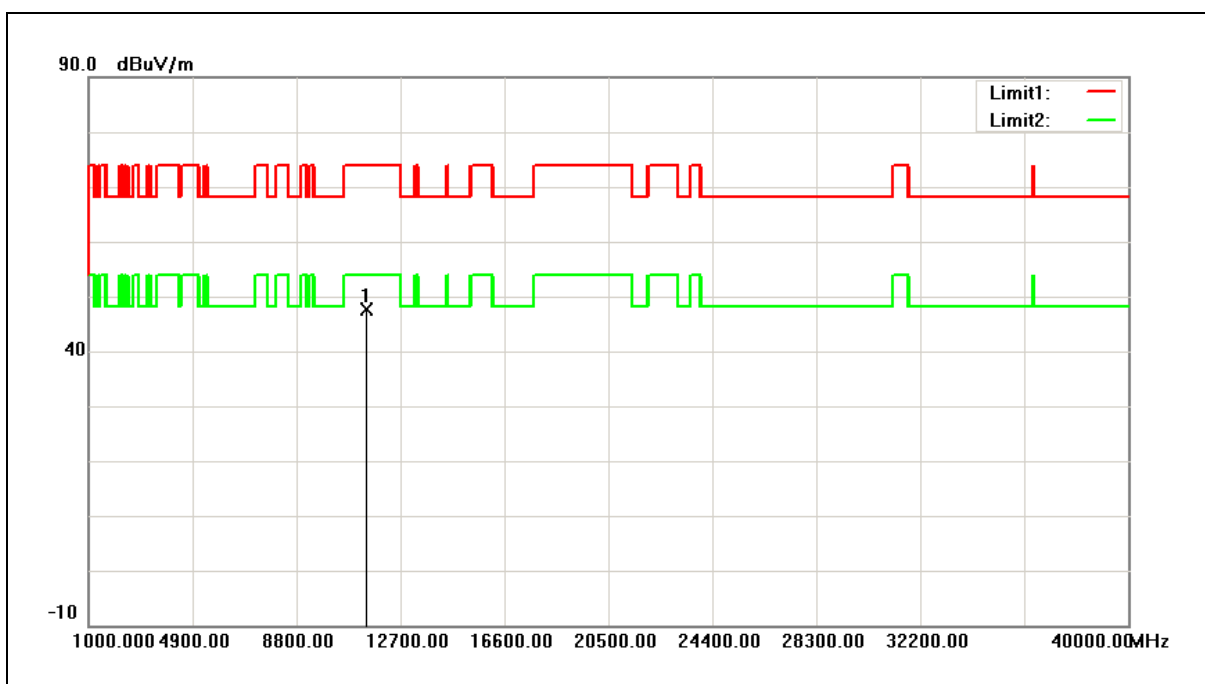


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11400.000          | 41.17             | 6.55                     | 47.72              | 74.00             | -26.28         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5700MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

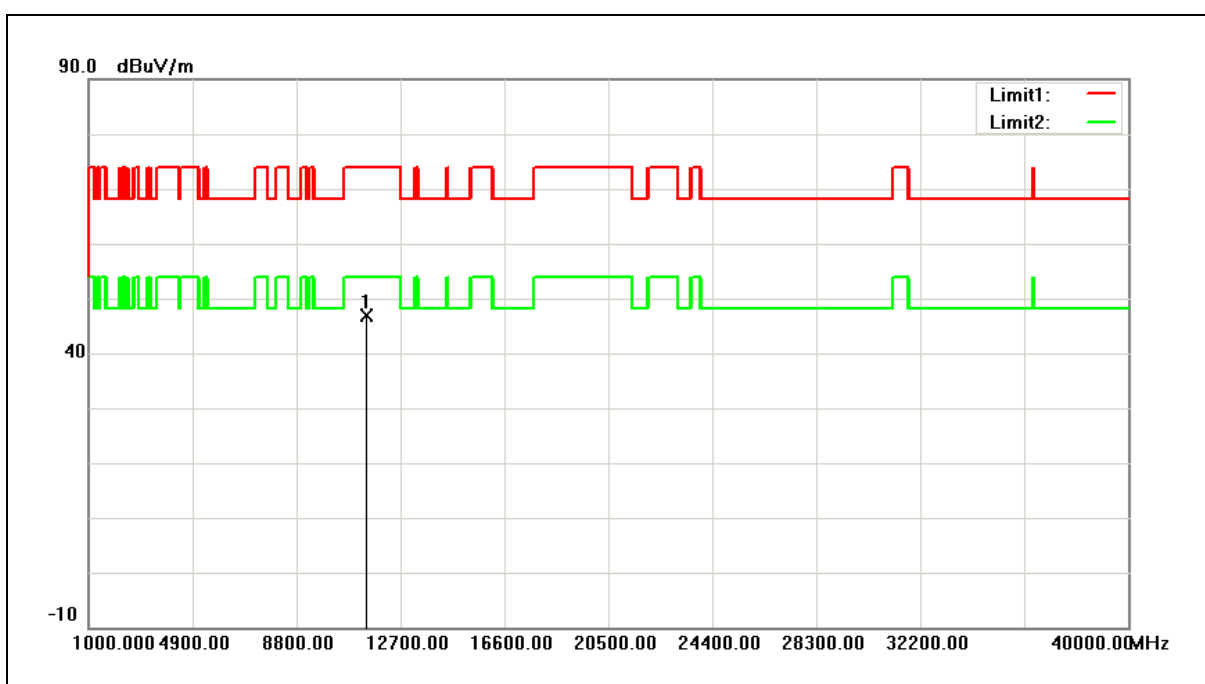


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 40.26          | 6.55                  | 46.81           | 74.00          | -27.19      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5270MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

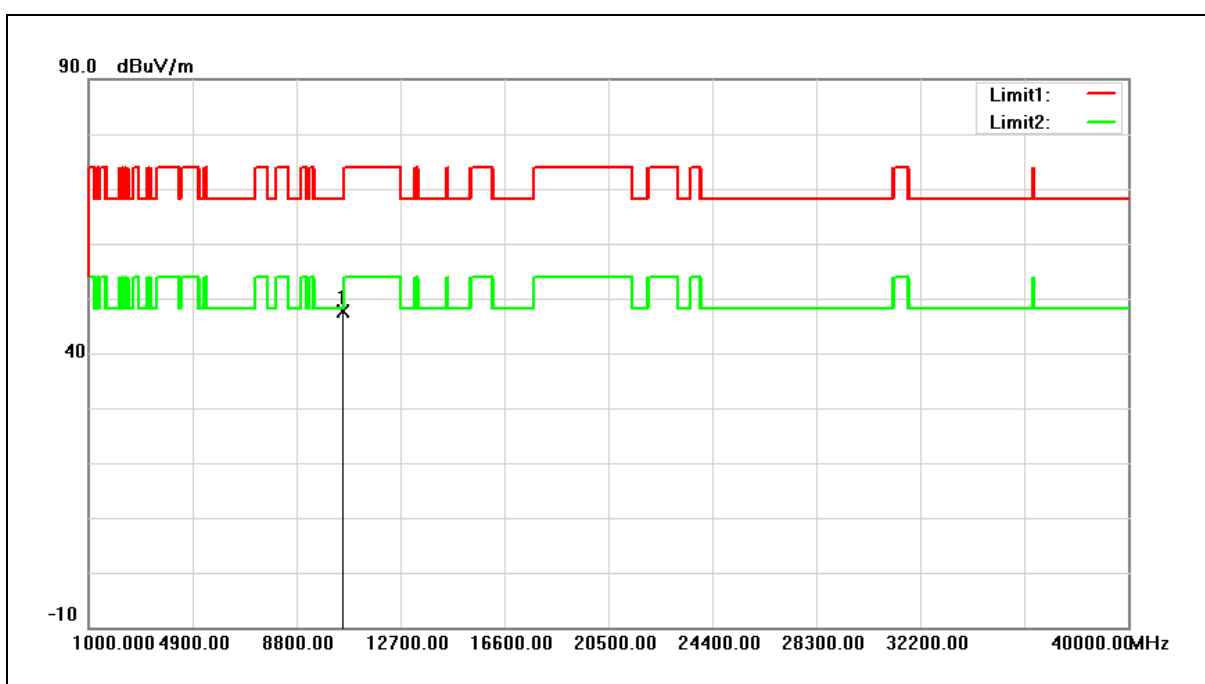


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10540.000       | 41.88          | 5.73                  | 47.61           | 68.20          | -20.59      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5270MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

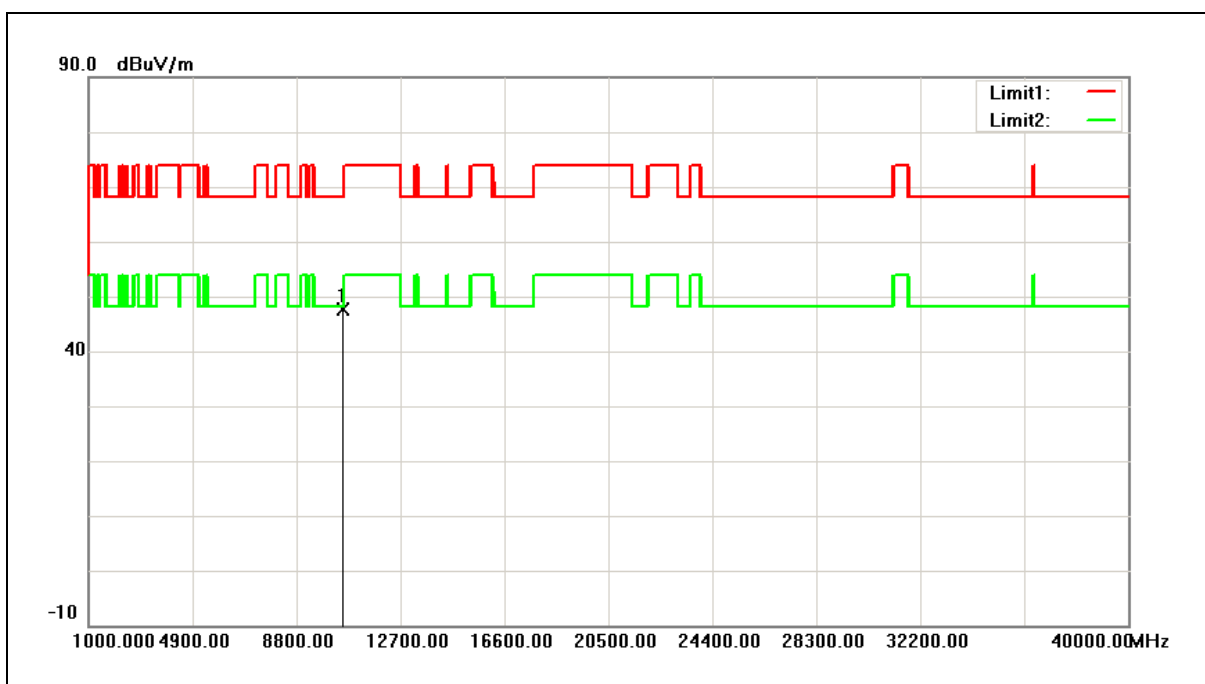


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10540.000       | 41.89          | 5.73                  | 47.62           | 68.20          | -20.58      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5310MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

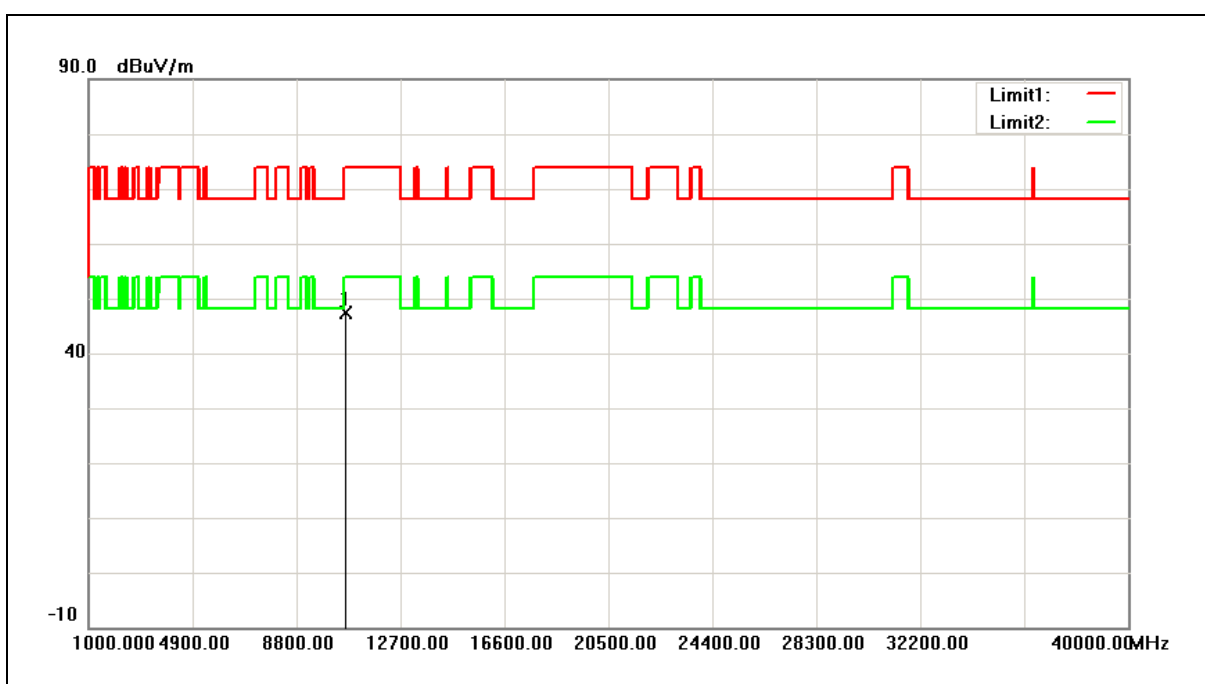


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10620.000       | 41.46          | 5.82                  | 47.28           | 74.00          | -26.72      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5310MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

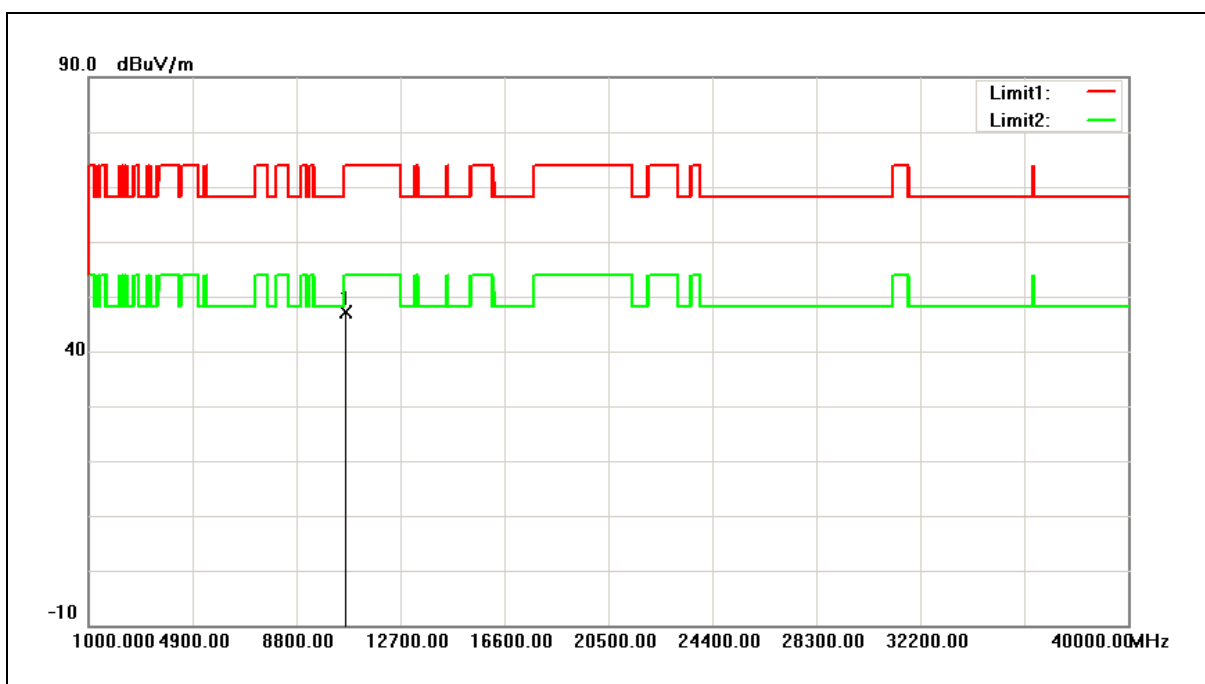


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10620.000       | 41.37          | 5.82                  | 47.19           | 74.00          | -26.81      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5510MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

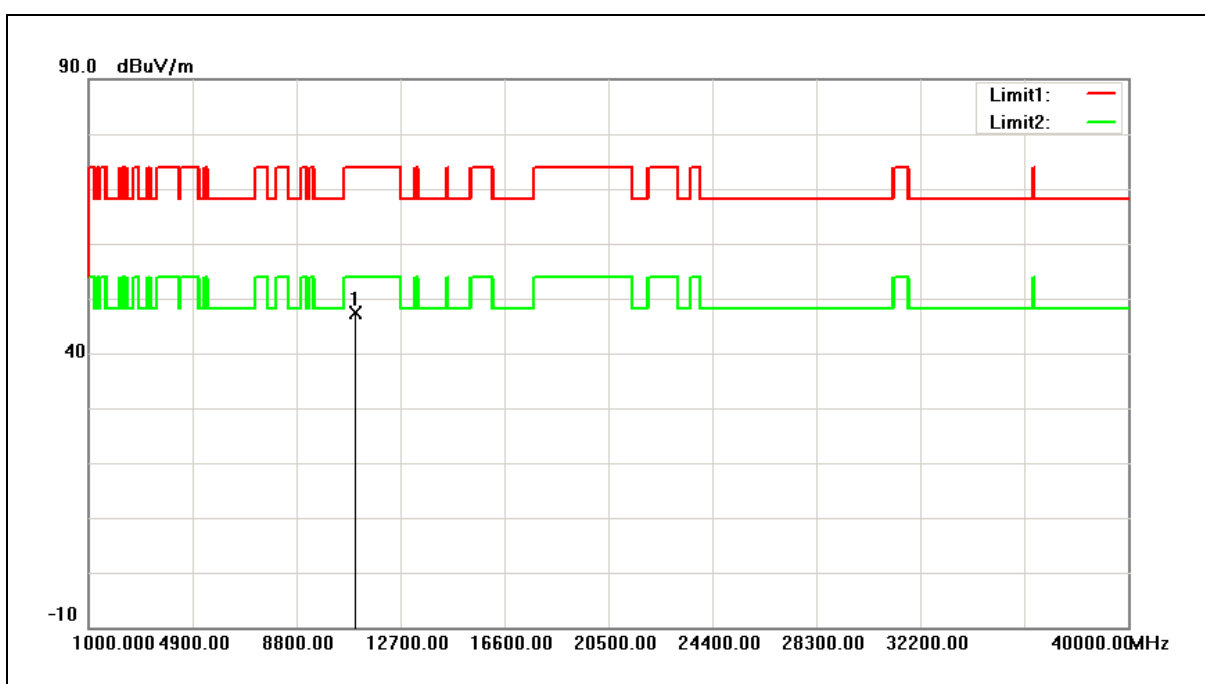


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11020.000       | 41.10          | 6.32                  | 47.42           | 74.00          | -26.58      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5510MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

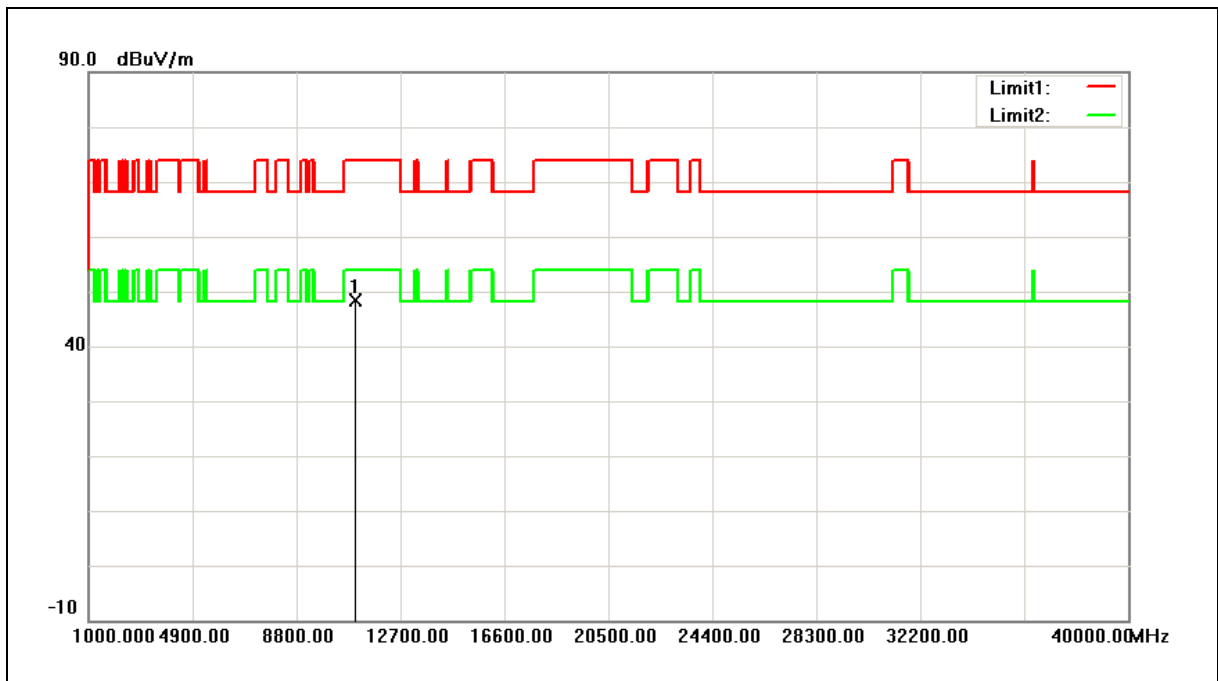


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11020.000          | 42.17             | 6.32                     | 48.49              | 74.00             | -25.51         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

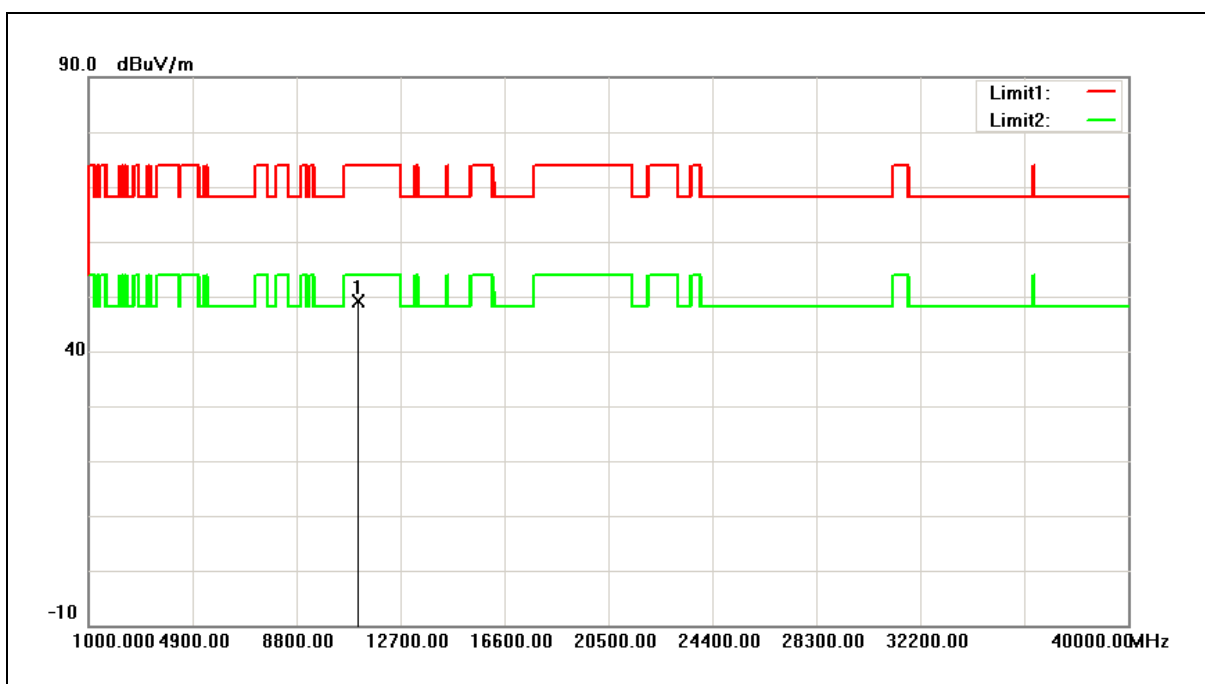


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11100.000          | 42.67             | 6.36                     | 49.03              | 74.00             | -24.97         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Harmonic        | Power:                | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                 | 06/07/2017   |
| Ant.Polar.: | Vertical        |                       |              |

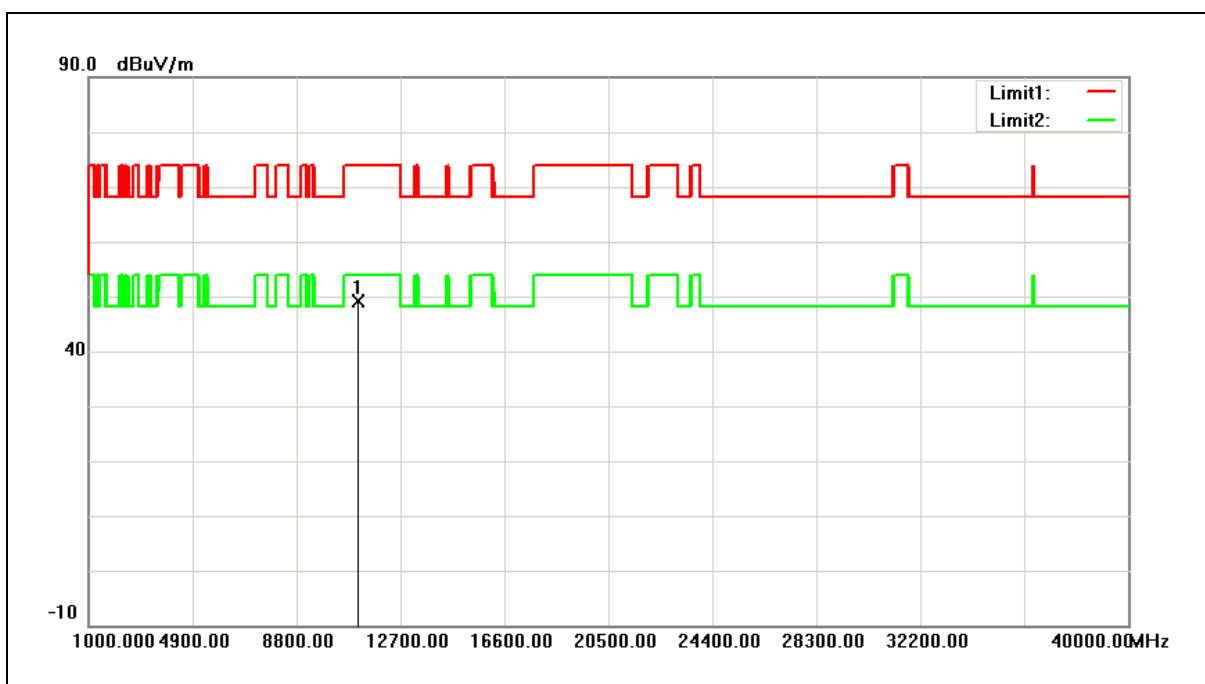


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11100.000       | 42.81          | 6.36                  | 49.17           | 74.00          | -24.83      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5670MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

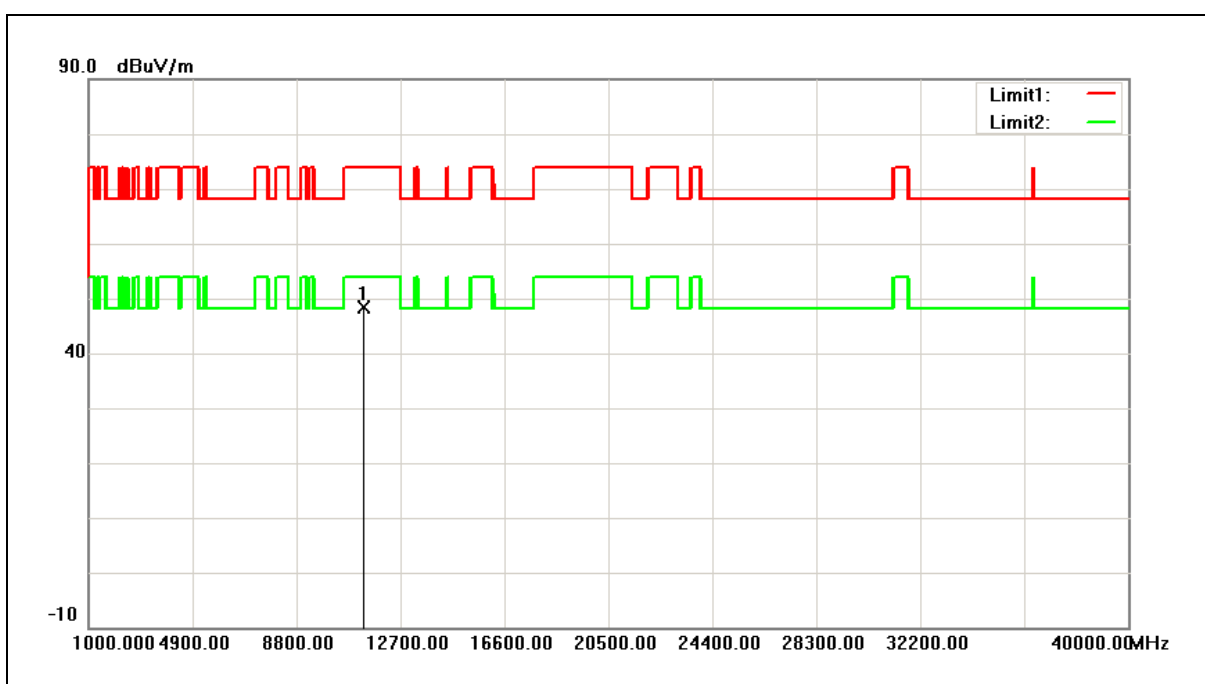


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11340.000       | 41.77          | 6.52                  | 48.29           | 74.00          | -25.71      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5670MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

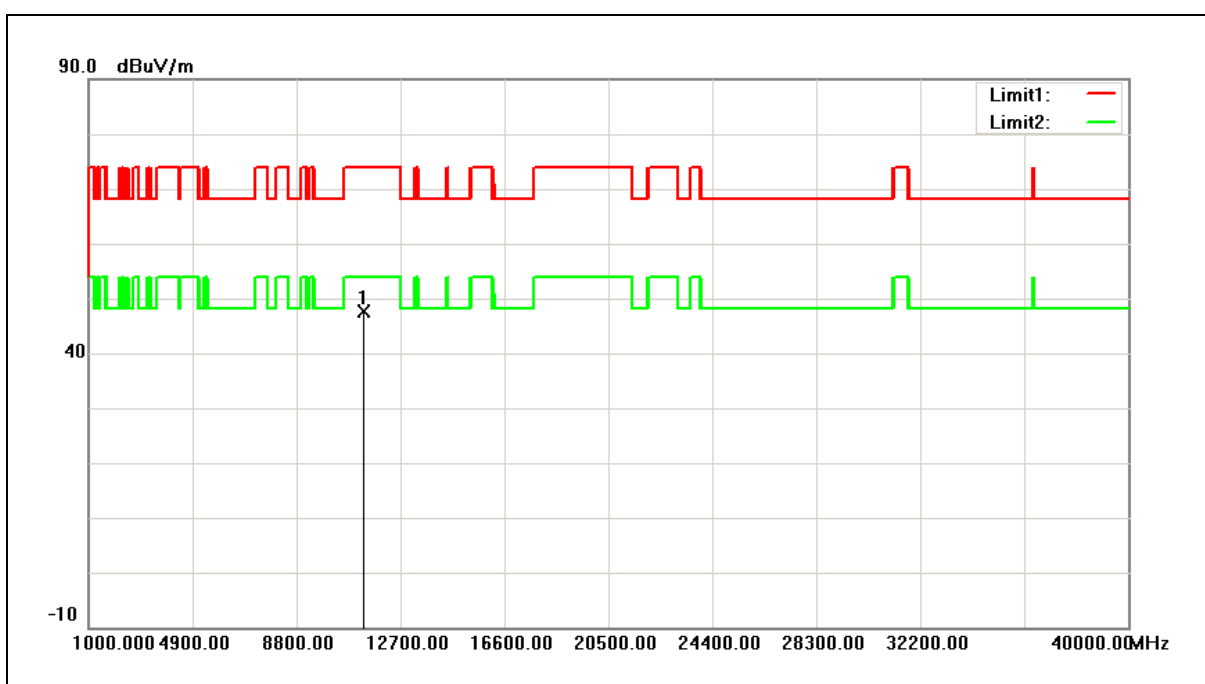


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11340.000       | 41.09          | 6.52                  | 47.61           | 74.00          | -26.39      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

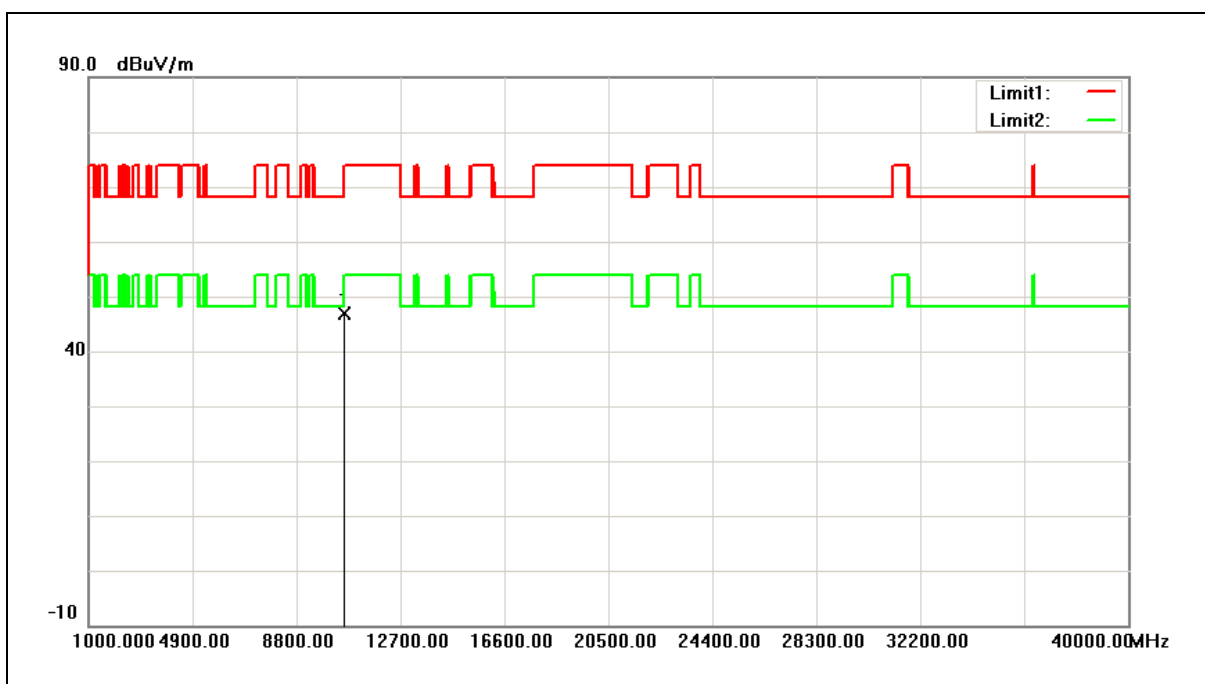


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10580.000          | 41.16             | 5.78                     | 46.94              | 68.20             | -21.26         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

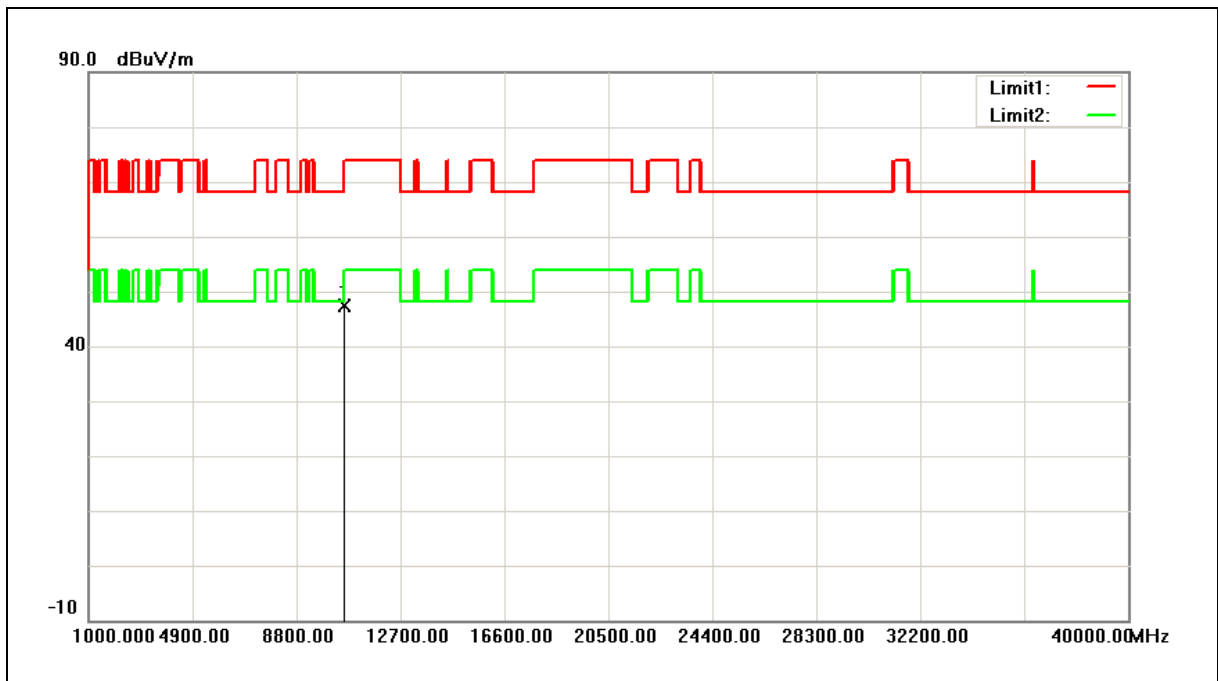


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10580.000          | 41.57             | 5.78                     | 47.35              | 68.20             | -20.85         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5530MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

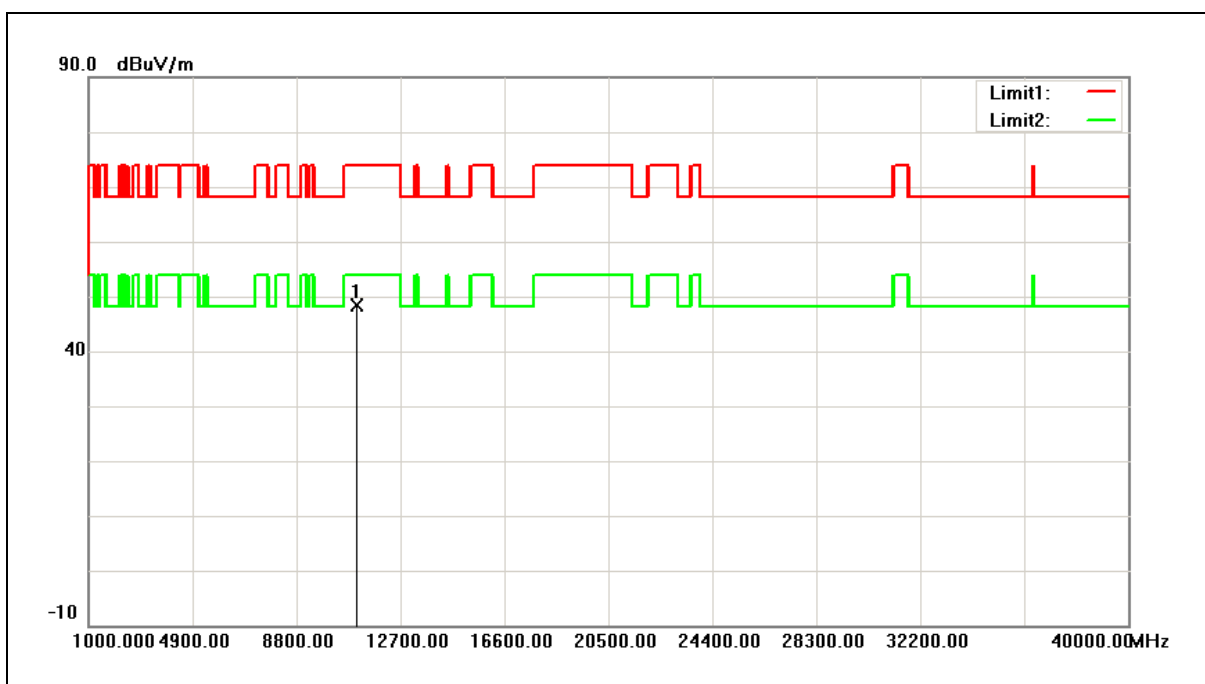


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11060.000          | 41.99             | 6.33                     | 48.32              | 74.00             | -25.68         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5530MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

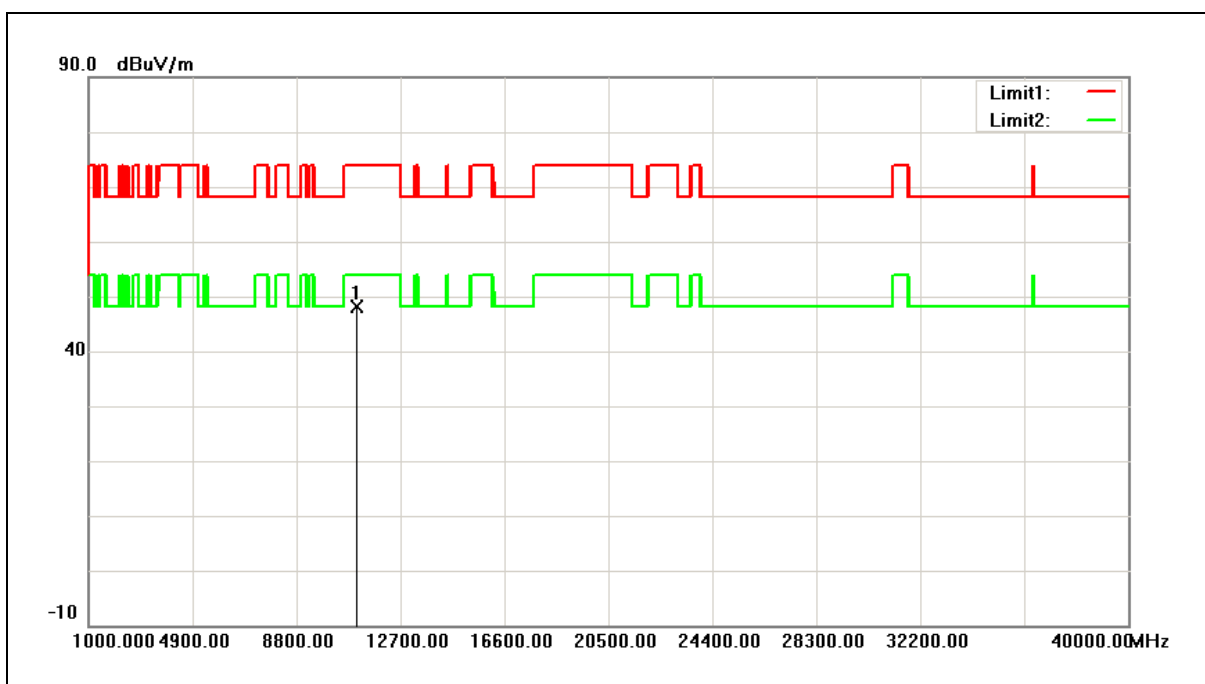


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11060.000       | 41.85          | 6.33                  | 48.18           | 74.00          | -25.82      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

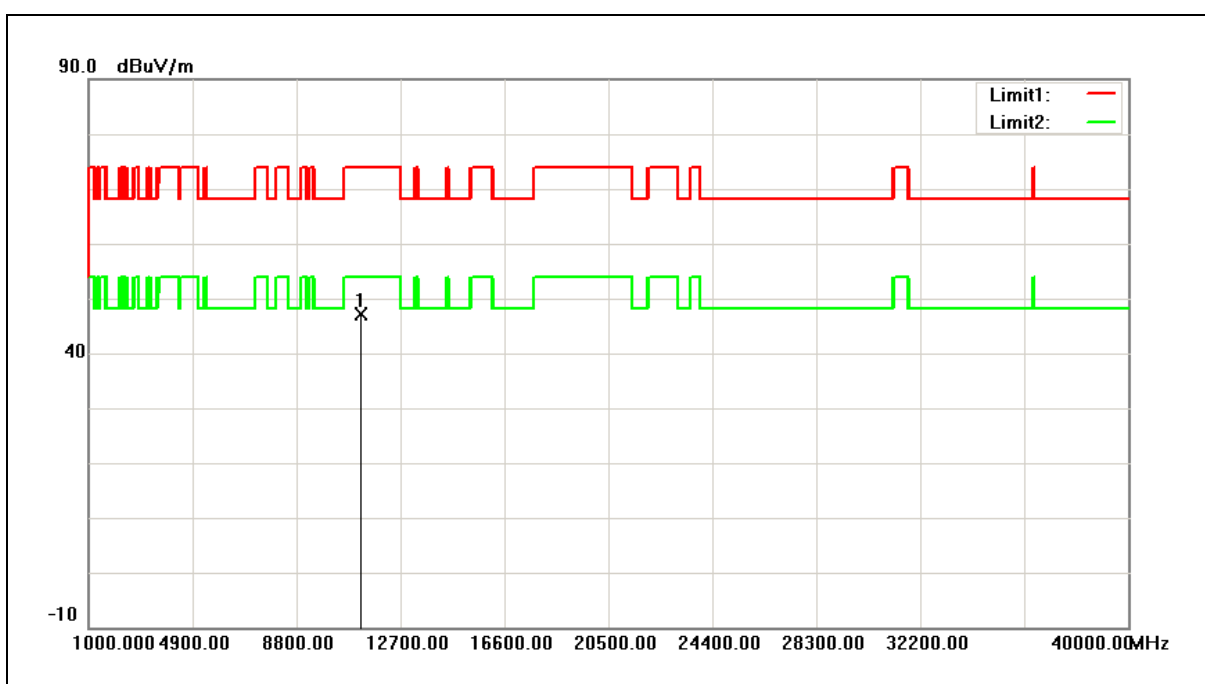


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11220.000       | 40.68          | 6.43                  | 47.11           | 74.00          | -26.89      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Harmonic        | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical        |                      |              |

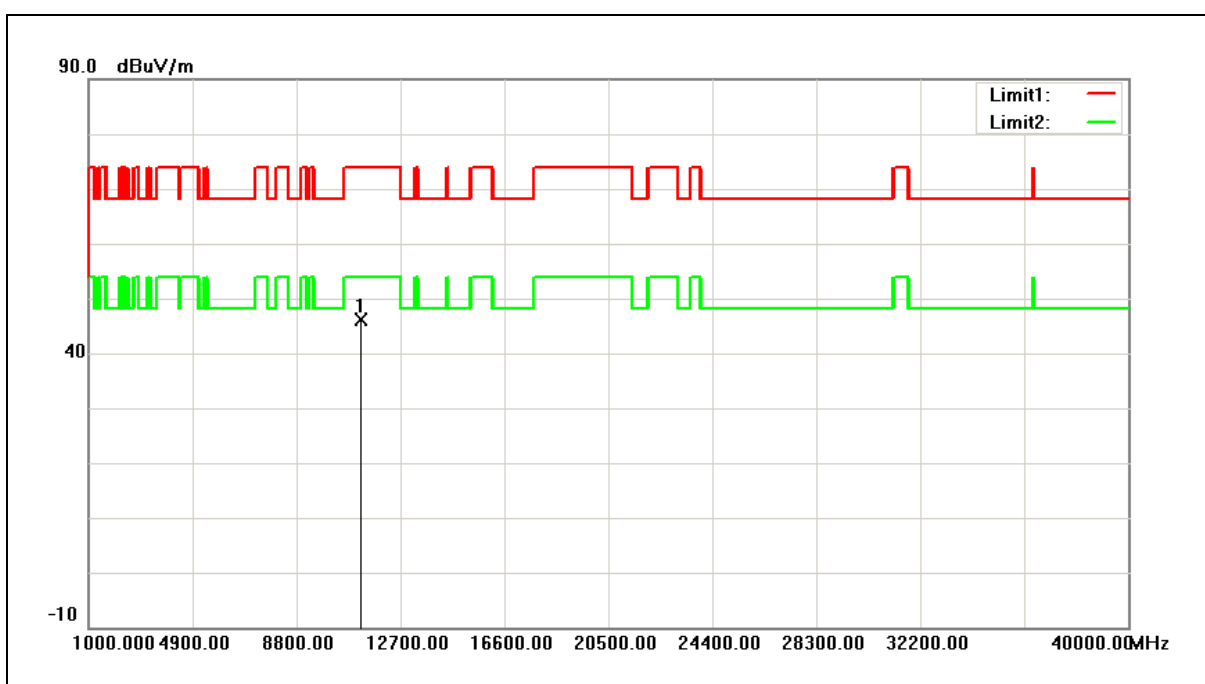


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11220.000       | 39.79          | 6.43                  | 46.22           | 74.00          | -27.78      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                                |                      |              |
|-------------|--------------------------------|----------------------|--------------|
| Standard:   | FCC Part 15.407                | Test Distance:       | 3m           |
| Test item:  | Transmitter Unwanted Emissions | Power:               | AC 120V/60Hz |
| Test Mode:  | Simultaneous Transmitting      | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
|             | (DTS+NII)                      | Date:                | 06/07/2017   |
| Ant.Polar.: | Horizontal                     |                      |              |

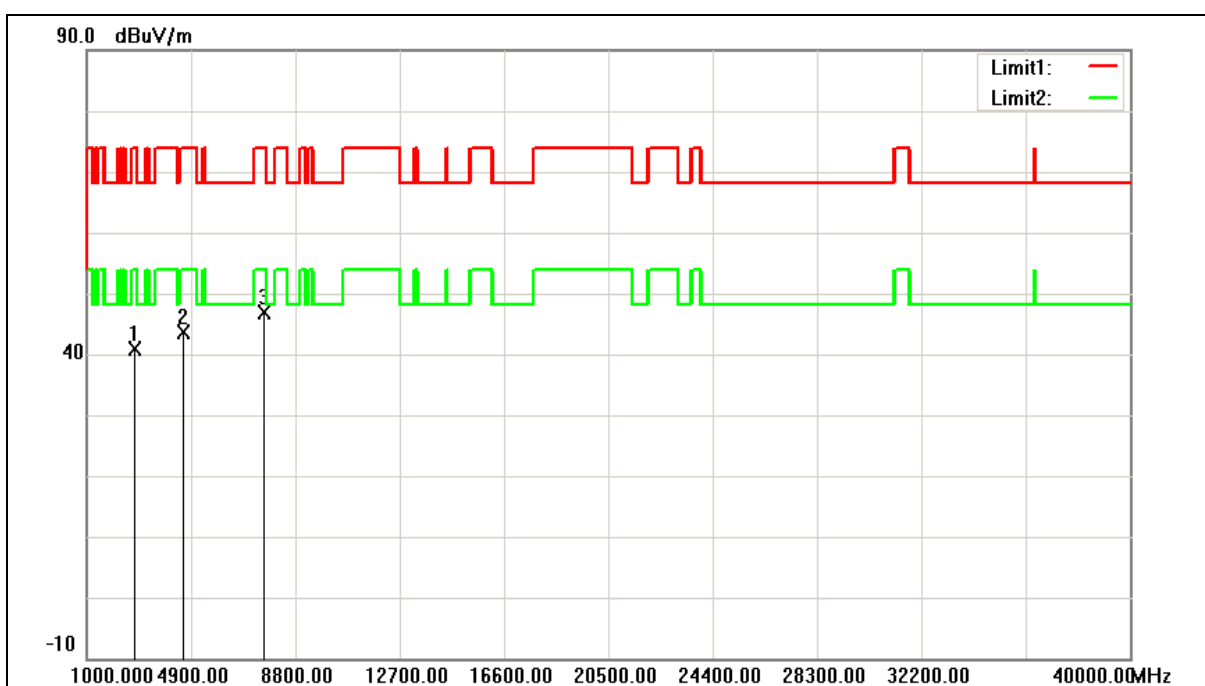


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2785.000        | 53.70          | -12.85                | 40.85           | 74.00          | -33.15      | peak   |
| 2   | 4621.000        | 51.29          | -7.71                 | 43.58           | 74.00          | -30.42      | peak   |
| 3   | 7647.000        | 45.87          | 0.91                  | 46.78           | 74.00          | -27.22      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                                |                      |              |
|-------------|--------------------------------|----------------------|--------------|
| Standard:   | FCC Part 15.407                | Test Distance:       | 3m           |
| Test item:  | Transmitter Unwanted Emissions | Power:               | AC 120V/60Hz |
| Test Mode:  | Simultaneous Transmitting      | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
|             | (DTS+NII)                      | Date:                | 06/07/2017   |
| Ant.Polar.: | Vertical                       |                      |              |

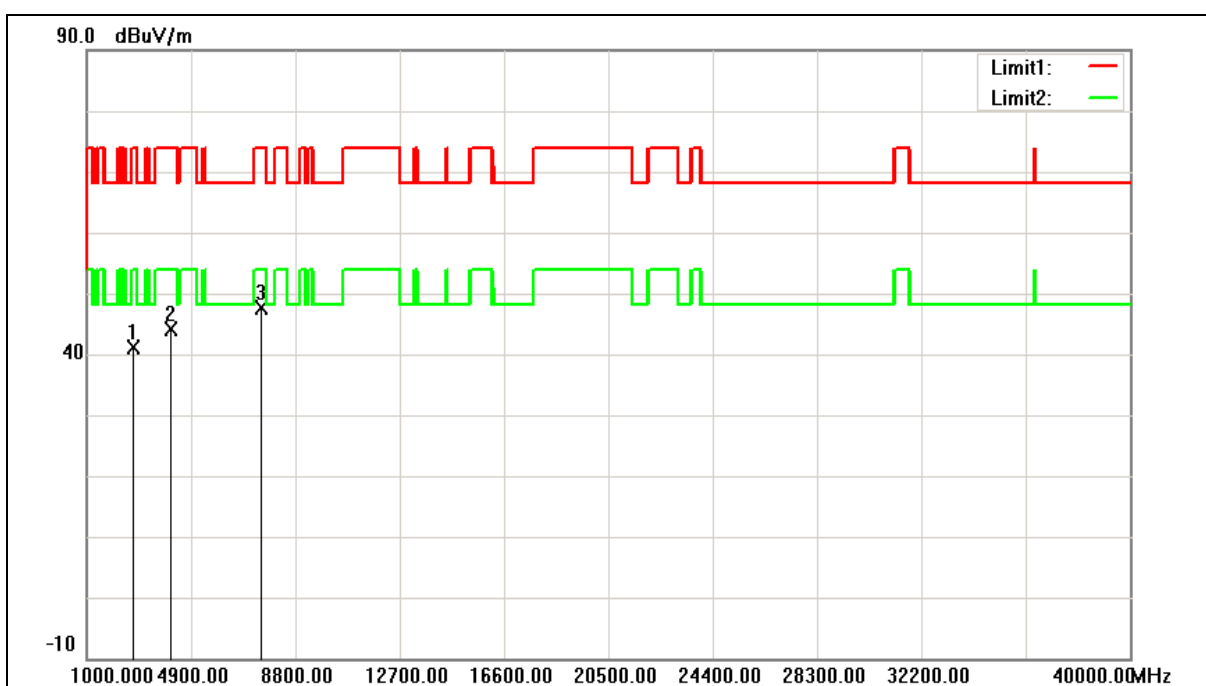

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2751.000        | 54.18          | -12.93                | 41.25           | 74.00          | -32.75      | peak   |
| 2   | 4145.000        | 53.12          | -9.00                 | 44.12           | 74.00          | -29.88      | peak   |
| 3   | 7545.000        | 46.87          | 0.64                  | 47.51           | 74.00          | -26.49      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

### Band Edge

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

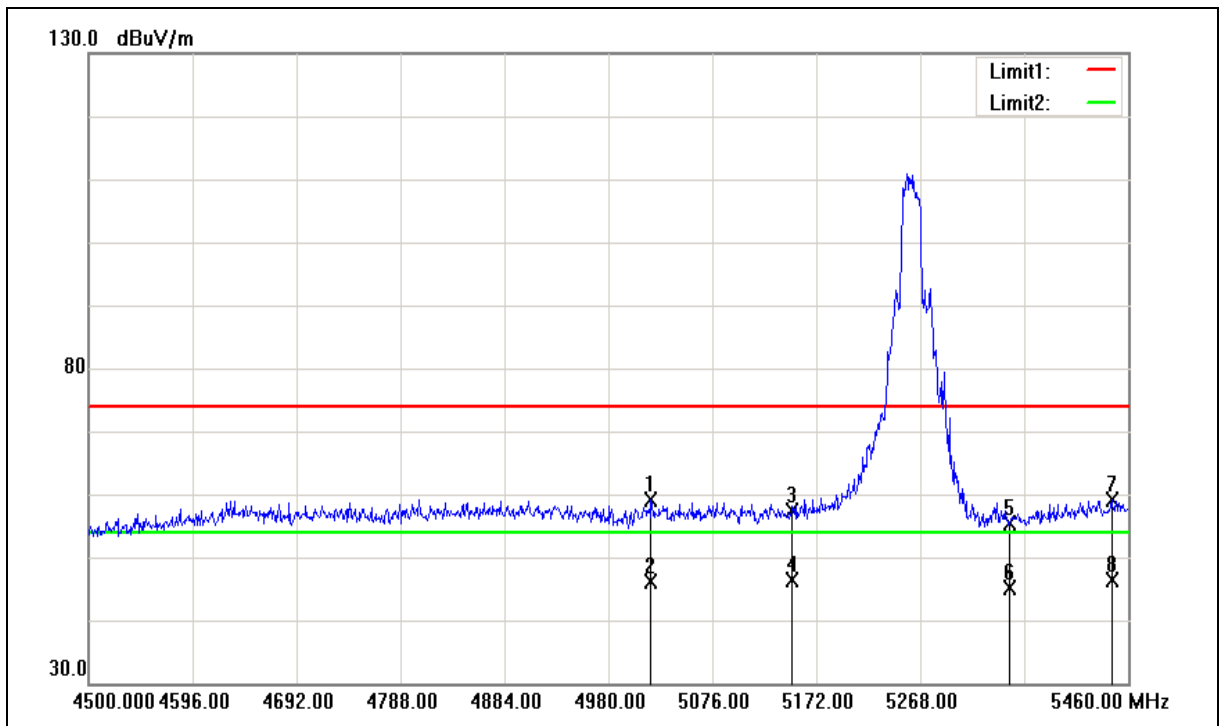



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5019.360           | 50.31             | 8.88                     | 59.19              | 74.00             | -14.81         | peak   |
| 2   | 5019.360           | 37.14             | 8.88                     | 46.02              | 54.00             | -7.98          | AVG    |
| 3   | 5150.000           | 48.53             | 8.97                     | 57.50              | 74.00             | -16.50         | peak   |
| 4   | 5150.000           | 37.41             | 8.97                     | 46.38              | 54.00             | -7.62          | AVG    |
| 5   | 5350.000           | 46.28             | 9.08                     | 55.36              | 74.00             | -18.64         | peak   |
| 6   | 5350.000           | 36.03             | 9.08                     | 45.11              | 54.00             | -8.89          | AVG    |
| 7   | 5444.640           | 49.92             | 9.15                     | 59.07              | 74.00             | -14.93         | peak   |
| 8   | 5444.640           | 37.12             | 9.15                     | 46.27              | 54.00             | -7.73          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

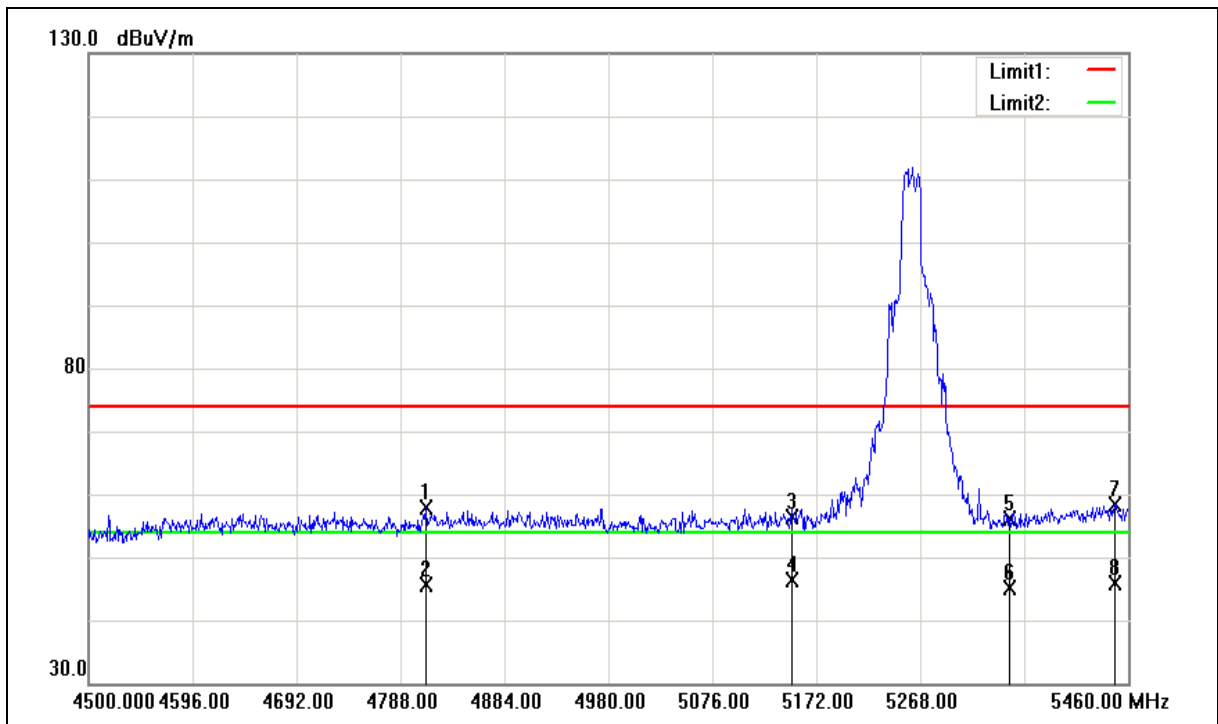



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Vertical        |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4811.040           | 49.83             | 8.11                     | 57.94              | 74.00             | -16.06         | peak   |
| 2   | 4811.040           | 37.57             | 8.11                     | 45.68              | 54.00             | -8.32          | AVG    |
| 3   | 5150.000           | 47.44             | 8.97                     | 56.41              | 74.00             | -17.59         | peak   |
| 4   | 5150.000           | 37.30             | 8.97                     | 46.27              | 54.00             | -7.73          | AVG    |
| 5   | 5350.000           | 46.95             | 9.08                     | 56.03              | 74.00             | -17.97         | peak   |
| 6   | 5350.000           | 36.10             | 9.08                     | 45.18              | 54.00             | -8.82          | AVG    |
| 7   | 5447.520           | 49.29             | 9.15                     | 58.44              | 74.00             | -15.56         | peak   |
| 8   | 5447.520           | 36.74             | 9.15                     | 45.89              | 54.00             | -8.11          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

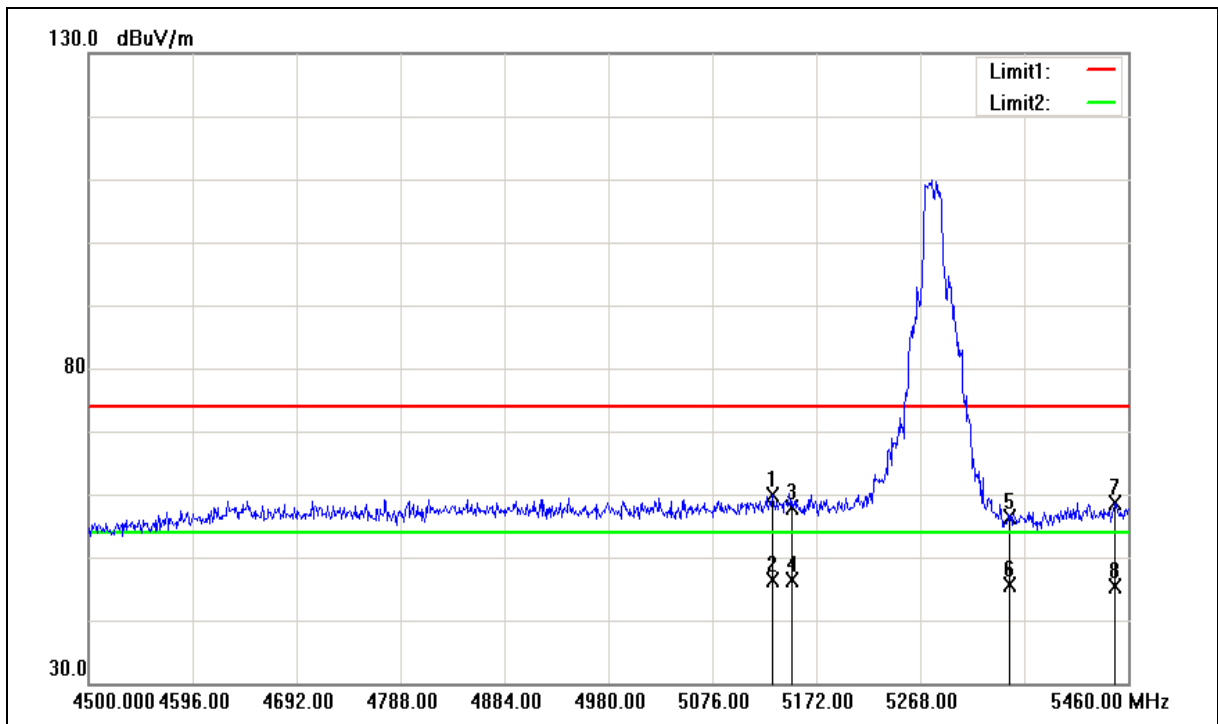

|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5131.680           | 51.03             | 8.95                     | 59.98              | 74.00             | -14.02         | peak   |
| 2   | 5131.680           | 37.52             | 8.95                     | 46.47              | 54.00             | -7.53          | AVG    |
| 3   | 5150.000           | 48.99             | 8.97                     | 57.96              | 74.00             | -16.04         | peak   |
| 4   | 5150.000           | 37.47             | 8.97                     | 46.44              | 54.00             | -7.56          | AVG    |
| 5   | 5350.000           | 47.40             | 9.08                     | 56.48              | 74.00             | -17.52         | peak   |
| 6   | 5350.000           | 36.43             | 9.08                     | 45.51              | 54.00             | -8.49          | AVG    |
| 7   | 5447.520           | 49.41             | 9.15                     | 58.56              | 74.00             | -15.44         | peak   |
| 8   | 5447.520           | 36.24             | 9.15                     | 45.39              | 54.00             | -8.61          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

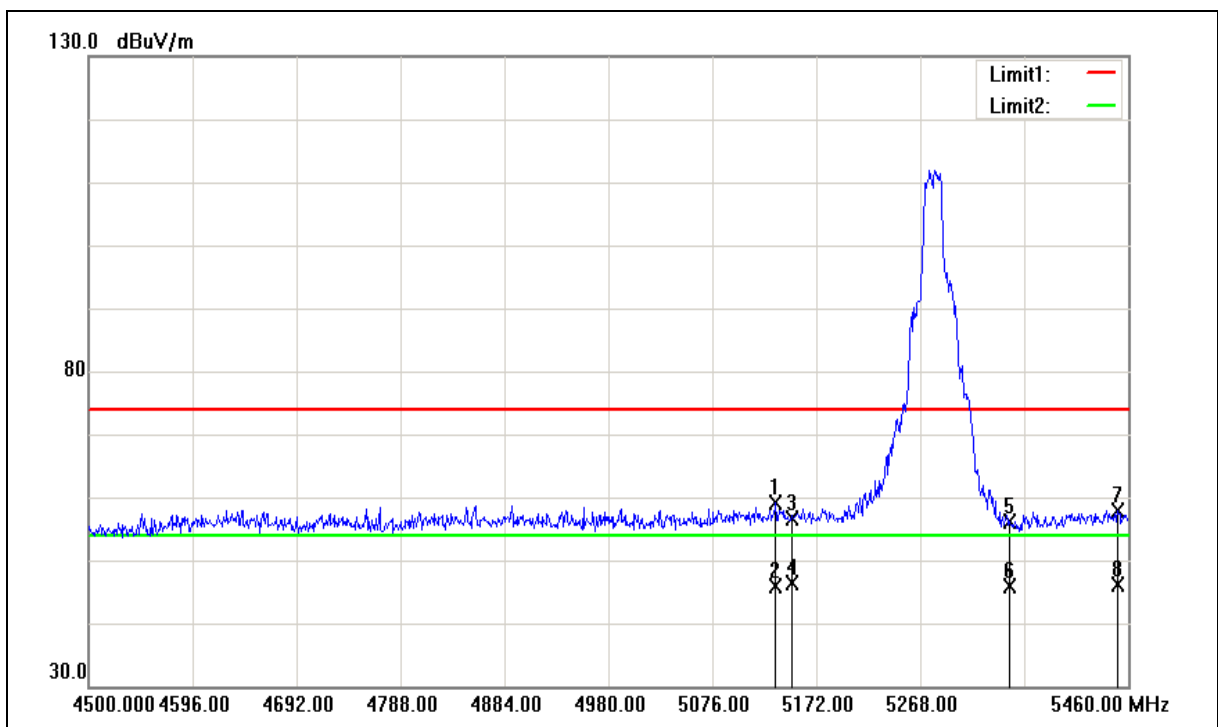

|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Vertical        |                       |              |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5134.560           | 50.13             | 8.95                     | 59.08              | 74.00             | -14.92         | peak   |
| 2   | 5134.560           | 36.97             | 8.95                     | 45.92              | 54.00             | -8.08          | AVG    |
| 3   | 5150.000           | 47.57             | 8.97                     | 56.54              | 74.00             | -17.46         | peak   |
| 4   | 5150.000           | 37.47             | 8.97                     | 46.44              | 54.00             | -7.56          | AVG    |
| 5   | 5350.000           | 46.96             | 9.08                     | 56.04              | 74.00             | -17.96         | peak   |
| 6   | 5350.000           | 36.73             | 9.08                     | 45.81              | 54.00             | -8.19          | AVG    |
| 7   | 5450.400           | 48.70             | 9.15                     | 57.85              | 74.00             | -16.15         | peak   |
| 8   | 5450.400           | 36.86             | 9.15                     | 46.01              | 54.00             | -7.99          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5320MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

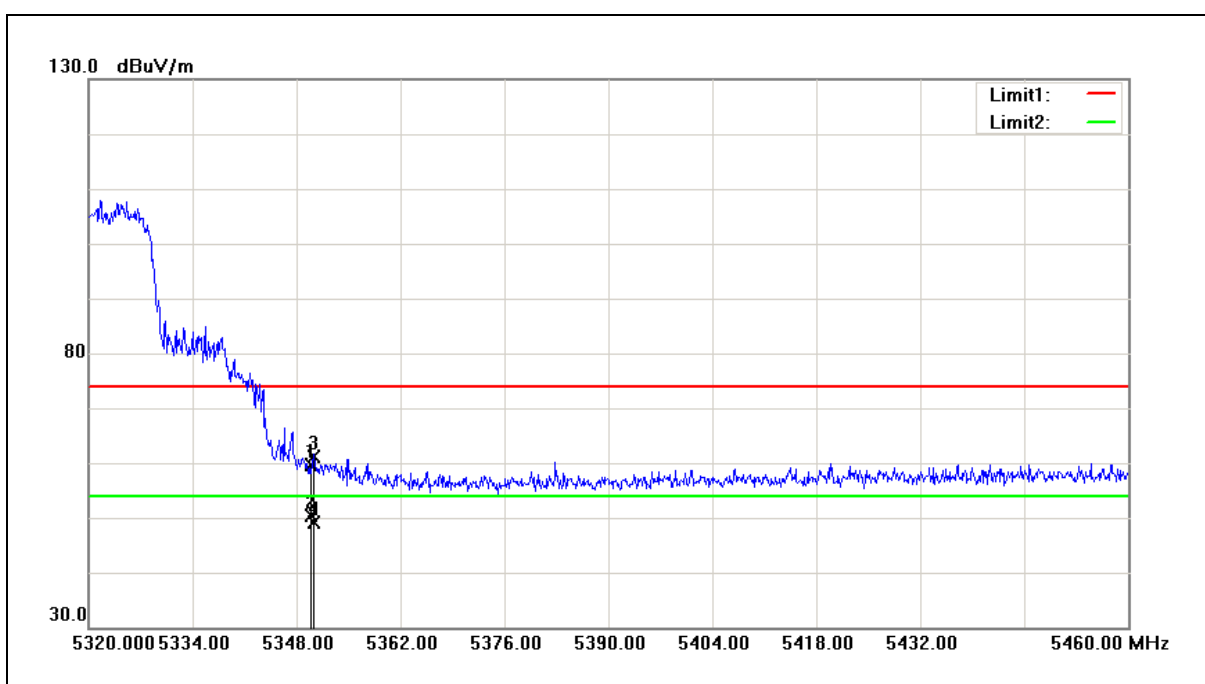


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 50.56          | 9.08                  | 59.64           | 74.00          | -14.36      | peak   |
| 2   | 5350.000        | 41.18          | 9.08                  | 50.26           | 54.00          | -3.74       | AVG    |
| 3   | 5350.380        | 52.16          | 9.08                  | 61.24           | 74.00          | -12.76      | peak   |
| 4   | 5350.380        | 40.06          | 9.08                  | 49.14           | 54.00          | -4.86       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5320MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

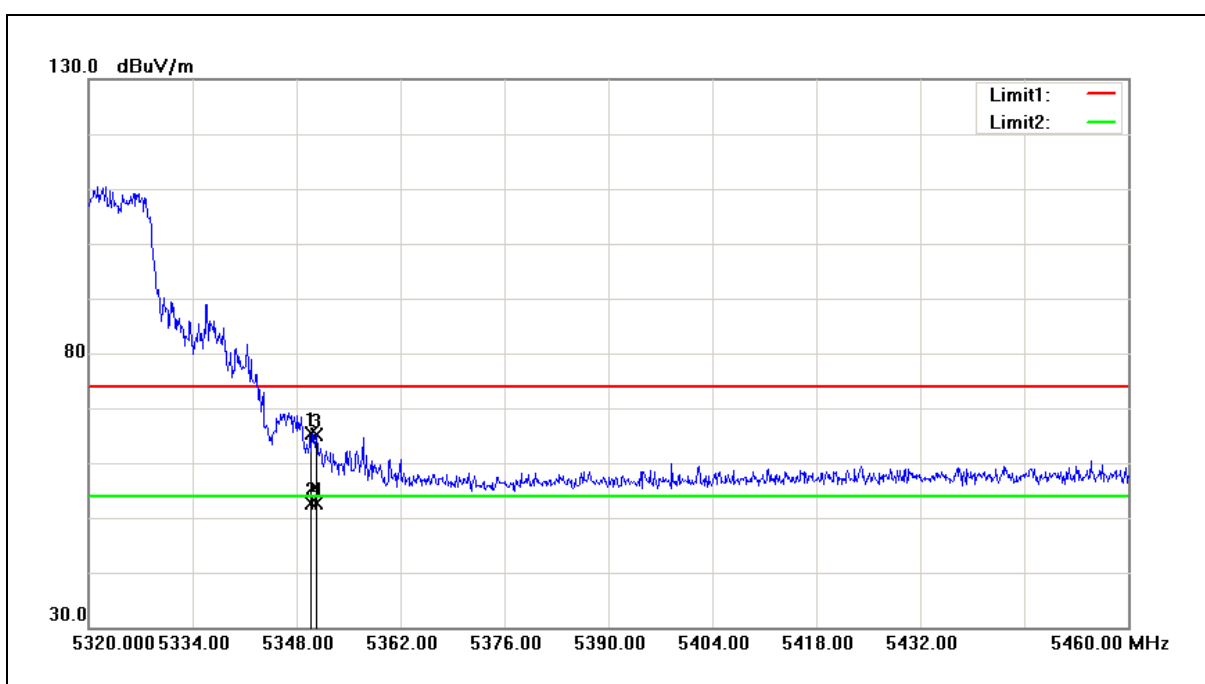


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 56.41          | 9.08                  | 65.49           | 74.00          | -8.51       | peak   |
| 2   | 5350.000        | 43.63          | 9.08                  | 52.71           | 54.00          | -1.29       | AVG    |
| 3   | 5350.660        | 56.04          | 9.08                  | 65.12           | 74.00          | -8.88       | peak   |
| 4   | 5350.660        | 43.50          | 9.08                  | 52.58           | 54.00          | -1.42       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5500MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

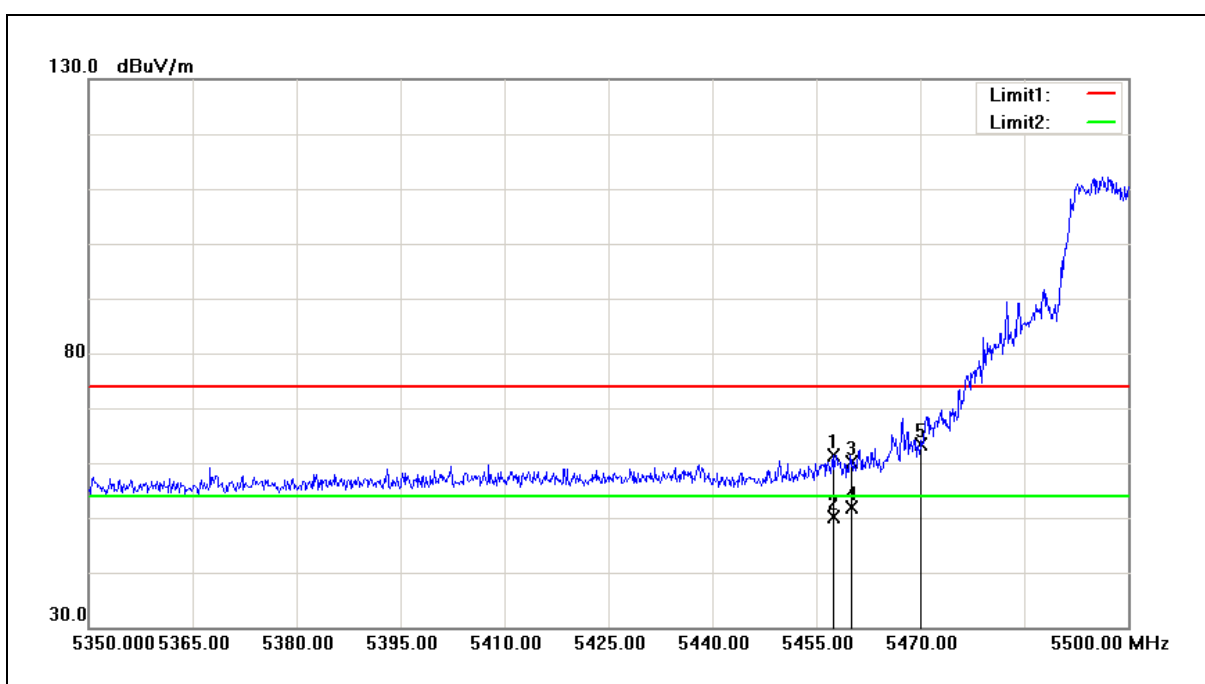


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5457.400        | 52.28          | 9.15                  | 61.43           | 74.00          | -12.57      | peak   |
| 2   | 5457.400        | 41.08          | 9.15                  | 50.23           | 54.00          | -3.77       | AVG    |
| 3   | 5460.000        | 51.08          | 9.15                  | 60.23           | 74.00          | -13.77      | peak   |
| 4   | 5460.000        | 42.73          | 9.15                  | 51.88           | 54.00          | -2.12       | AVG    |
| 5   | 5470.000        | 54.25          | 9.16                  | 63.41           | 68.20          | -4.79       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5500MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

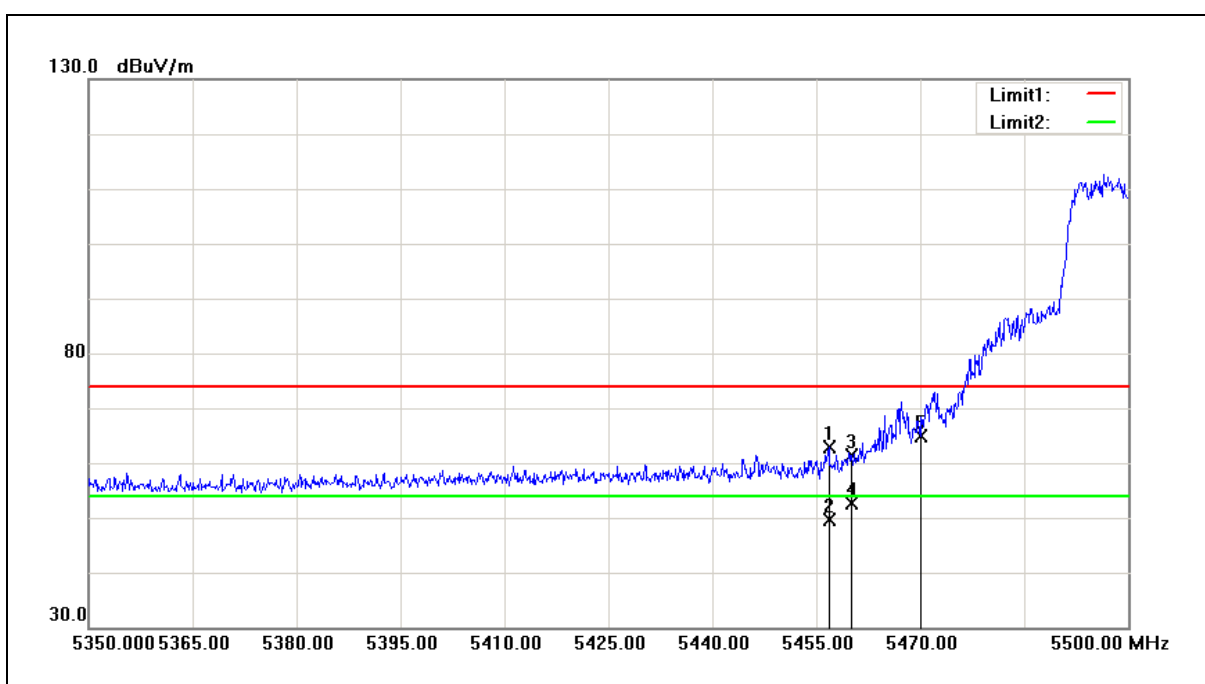


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5456.800        | 53.65          | 9.15                  | 62.80           | 74.00          | -11.20      | peak   |
| 2   | 5456.800        | 40.57          | 9.15                  | 49.72           | 54.00          | -4.28       | AVG    |
| 3   | 5460.000        | 52.23          | 9.15                  | 61.38           | 74.00          | -12.62      | peak   |
| 4   | 5460.000        | 43.56          | 9.15                  | 52.71           | 54.00          | -1.29       | AVG    |
| 5   | 5470.000        | 55.83          | 9.16                  | 64.99           | 68.20          | -3.21       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

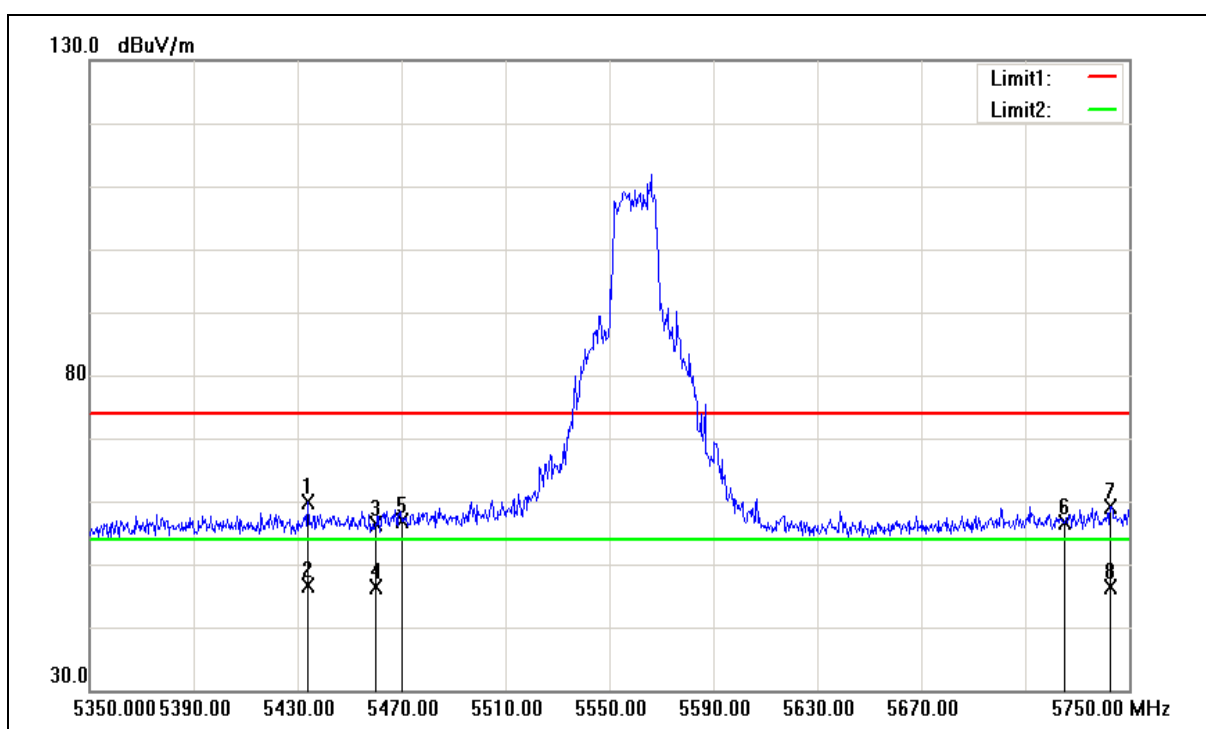



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5434.000           | 50.79             | 9.14                     | 59.93              | 74.00             | -14.07         | peak   |
| 2   | 5434.000           | 37.61             | 9.14                     | 46.75              | 54.00             | -7.25          | AVG    |
| 3   | 5460.000           | 47.17             | 9.15                     | 56.32              | 74.00             | -17.68         | peak   |
| 4   | 5460.000           | 37.13             | 9.15                     | 46.28              | 54.00             | -7.72          | AVG    |
| 5   | 5470.000           | 47.69             | 9.16                     | 56.85              | 68.20             | -11.35         | peak   |
| 6   | 5725.000           | 46.95             | 9.70                     | 56.65              | 68.20             | -11.15         | peak   |
| 7   | 5742.800           | 49.34             | 9.74                     | 59.08              | 74.00             | -14.92         | peak   |
| 8   | 5742.800           | 36.64             | 9.74                     | 46.38              | 54.00             | -7.62          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

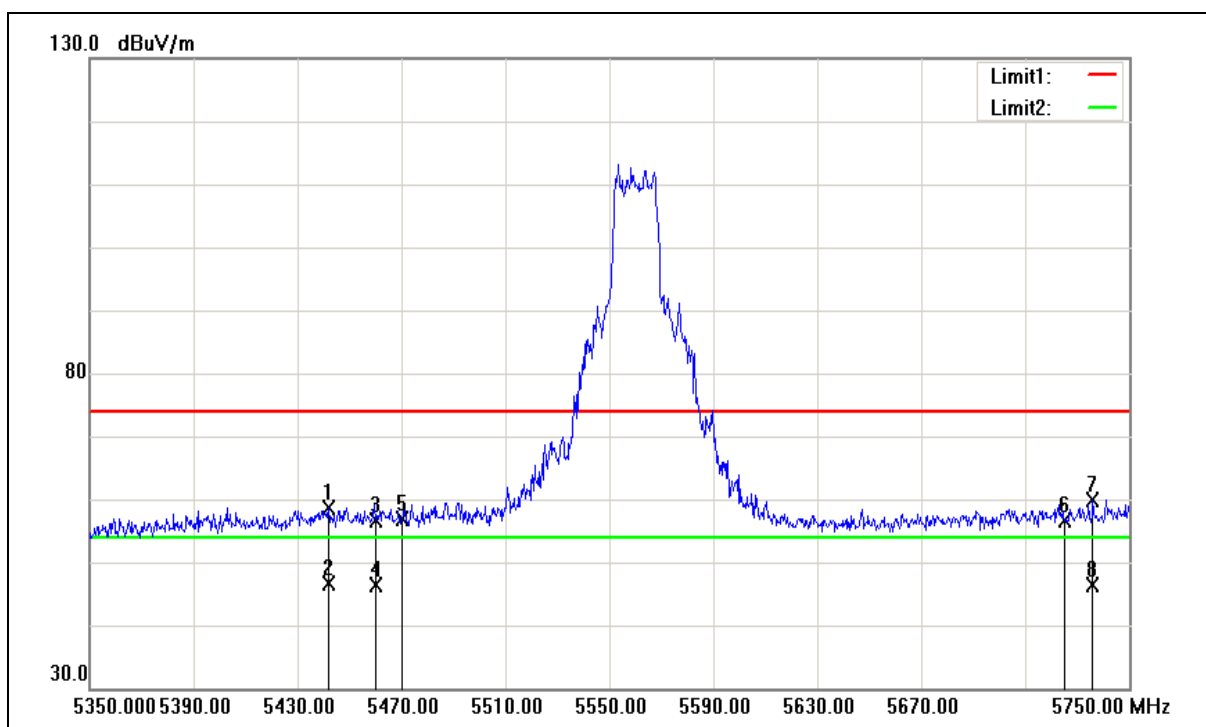



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Vertical        |                       |              |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5442.000           | 49.44             | 9.15                     | 58.59              | 74.00             | -15.41         | peak   |
| 2   | 5442.000           | 37.57             | 9.15                     | 46.72              | 54.00             | -7.28          | AVG    |
| 3   | 5460.000           | 47.49             | 9.15                     | 56.64              | 74.00             | -17.36         | peak   |
| 4   | 5460.000           | 37.33             | 9.15                     | 46.48              | 54.00             | -7.52          | AVG    |
| 5   | 5470.000           | 47.78             | 9.16                     | 56.94              | 68.20             | -11.26         | peak   |
| 6   | 5725.000           | 47.03             | 9.70                     | 56.73              | 68.20             | -11.47         | peak   |
| 7   | 5736.000           | 50.25             | 9.73                     | 59.98              | 74.00             | -14.02         | peak   |
| 8   | 5736.000           | 36.76             | 9.73                     | 46.49              | 54.00             | -7.51          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5700MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

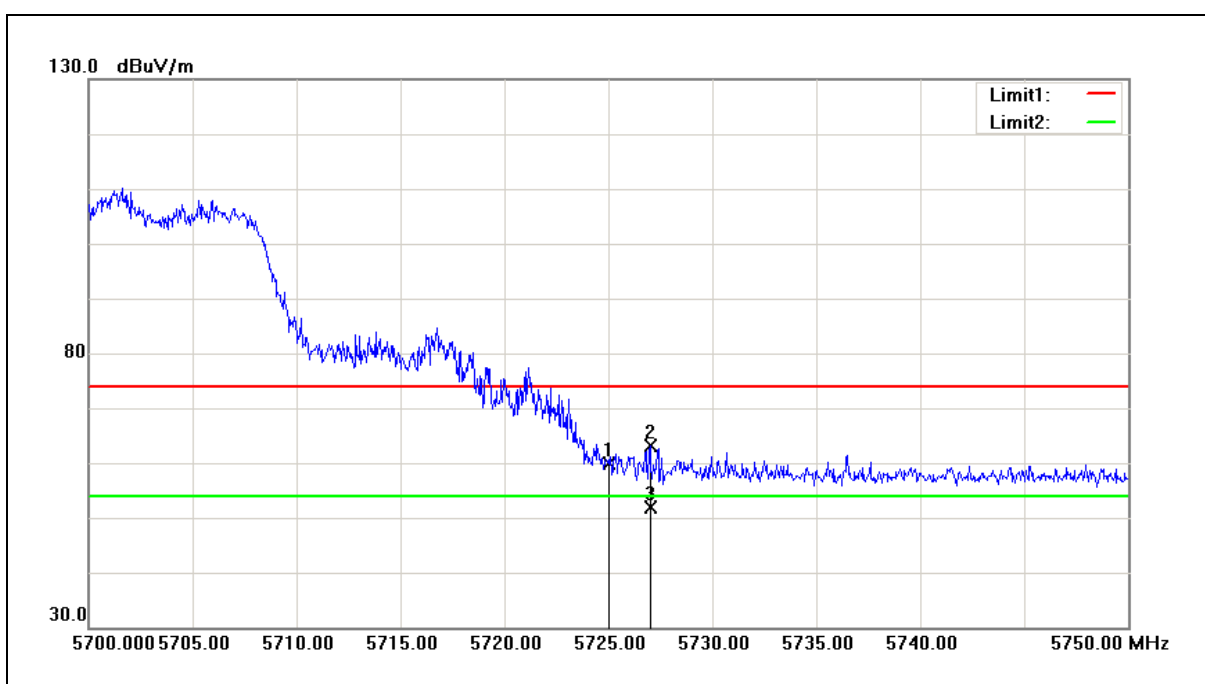


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5725.000        | 50.29          | 9.70                  | 59.99           | 68.20          | -8.21       | peak   |
| 2   | 5727.000        | 53.41          | 9.70                  | 63.11           | 74.00          | -10.89      | peak   |
| 3   | 5727.000        | 42.15          | 9.70                  | 51.85           | 54.00          | -2.15       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5700MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 2          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

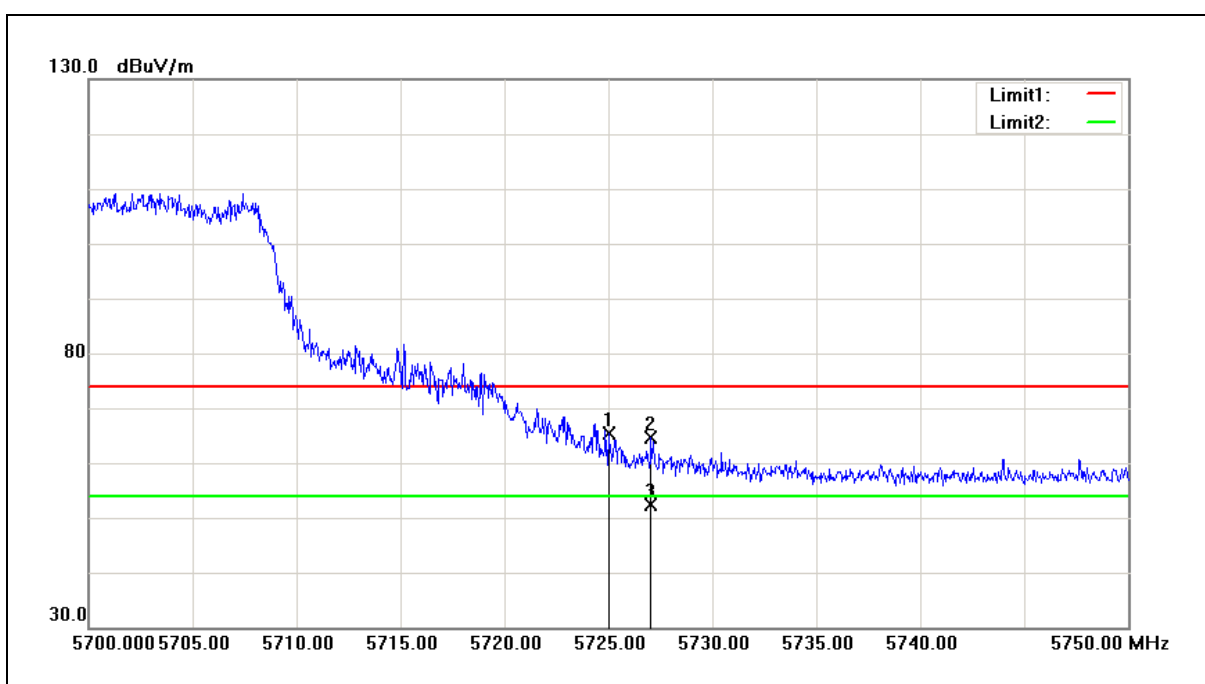

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5725.000        | 55.61          | 9.70                  | 65.31           | 68.20          | -2.89       | peak   |
| 2   | 5727.050        | 54.89          | 9.70                  | 64.59           | 74.00          | -9.41       | peak   |
| 3   | 5727.050        | 42.57          | 9.70                  | 52.27           | 54.00          | -1.73       | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

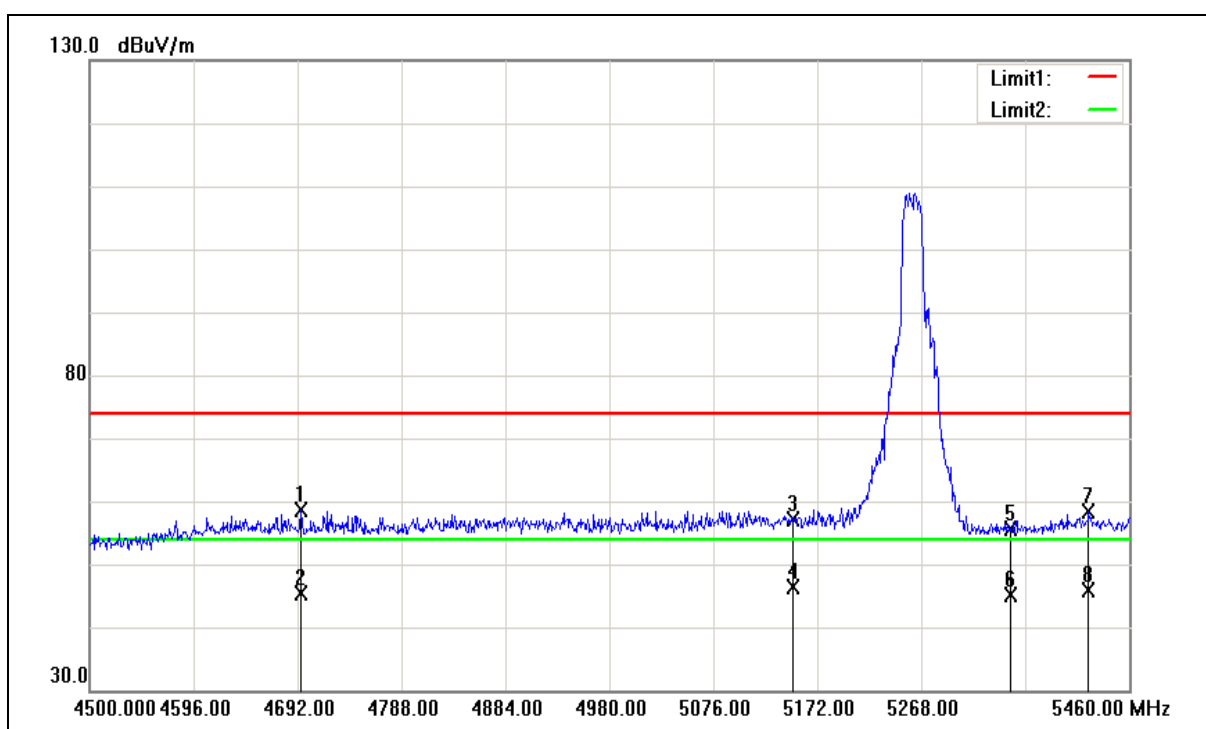



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4694.880           | 50.98             | 7.65                     | 58.63              | 74.00             | -15.37         | peak   |
| 2   | 4694.880           | 37.66             | 7.65                     | 45.31              | 54.00             | -8.69          | AVG    |
| 3   | 5150.000           | 48.20             | 8.97                     | 57.17              | 74.00             | -16.83         | peak   |
| 4   | 5150.000           | 37.51             | 8.97                     | 46.48              | 54.00             | -7.52          | AVG    |
| 5   | 5350.000           | 46.52             | 9.08                     | 55.60              | 74.00             | -18.40         | peak   |
| 6   | 5350.000           | 36.07             | 9.08                     | 45.15              | 54.00             | -8.85          | AVG    |
| 7   | 5422.560           | 49.26             | 9.14                     | 58.40              | 74.00             | -15.60         | peak   |
| 8   | 5422.560           | 36.86             | 9.14                     | 46.00              | 54.00             | -8.00          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

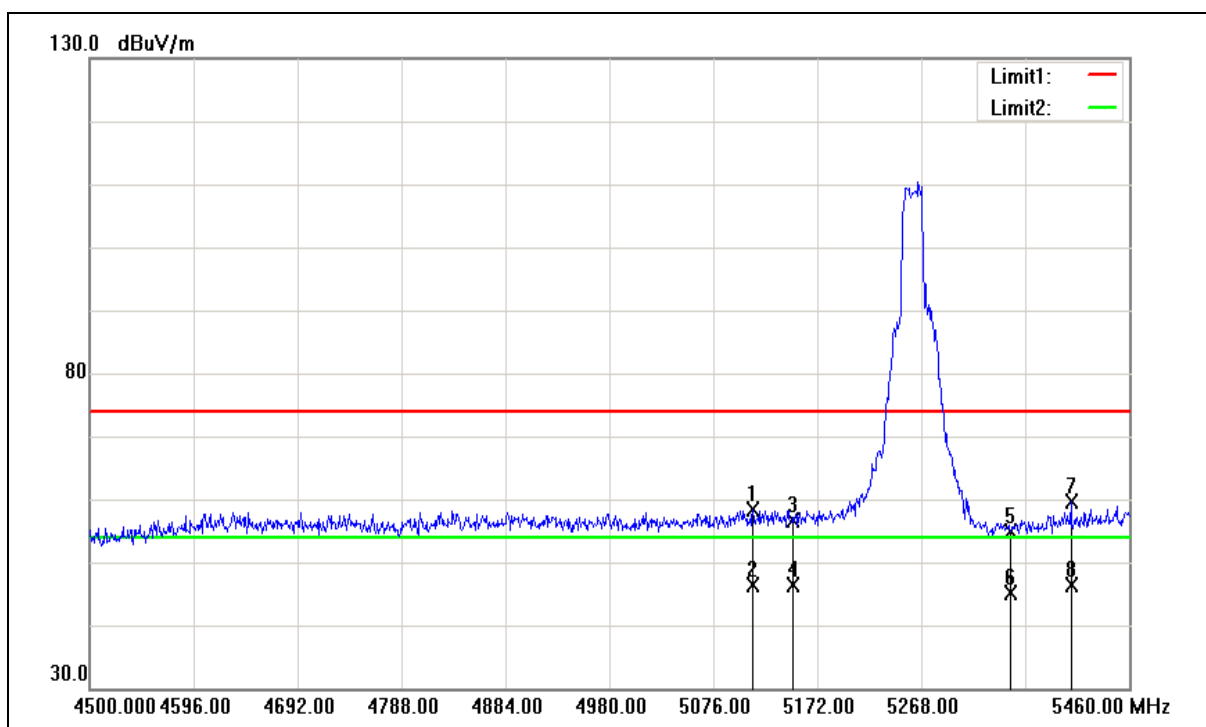



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5260MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Vertical        |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5112.480           | 49.44             | 8.93                     | 58.37              | 74.00             | -15.63         | peak   |
| 2   | 5112.480           | 37.49             | 8.93                     | 46.42              | 54.00             | -7.58          | AVG    |
| 3   | 5150.000           | 47.58             | 8.97                     | 56.55              | 74.00             | -17.45         | peak   |
| 4   | 5150.000           | 37.41             | 8.97                     | 46.38              | 54.00             | -7.62          | AVG    |
| 5   | 5350.000           | 45.81             | 9.08                     | 54.89              | 74.00             | -19.11         | peak   |
| 6   | 5350.000           | 36.16             | 9.08                     | 45.24              | 54.00             | -8.76          | AVG    |
| 7   | 5406.240           | 50.45             | 9.12                     | 59.57              | 74.00             | -14.43         | peak   |
| 8   | 5406.240           | 37.24             | 9.12                     | 46.36              | 54.00             | -7.64          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

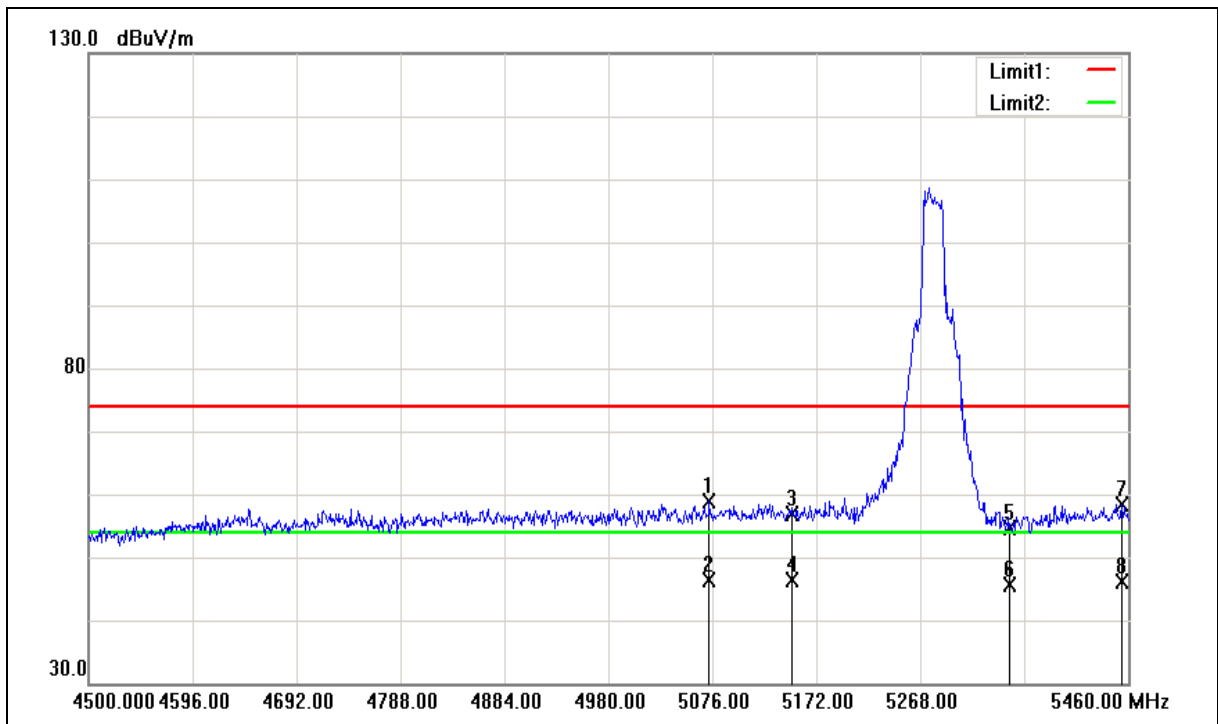



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5073.120           | 49.91             | 8.91                     | 58.82              | 74.00             | -15.18         | peak   |
| 2   | 5073.120           | 37.51             | 8.91                     | 46.42              | 54.00             | -7.58          | AVG    |
| 3   | 5150.000           | 47.96             | 8.97                     | 56.93              | 74.00             | -17.07         | peak   |
| 4   | 5150.000           | 37.51             | 8.97                     | 46.48              | 54.00             | -7.52          | AVG    |
| 5   | 5350.000           | 45.58             | 9.08                     | 54.66              | 74.00             | -19.34         | peak   |
| 6   | 5350.000           | 36.58             | 9.08                     | 45.66              | 54.00             | -8.34          | AVG    |
| 7   | 5454.240           | 49.28             | 9.15                     | 58.43              | 74.00             | -15.57         | peak   |
| 8   | 5454.240           | 37.10             | 9.15                     | 46.25              | 54.00             | -7.75          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

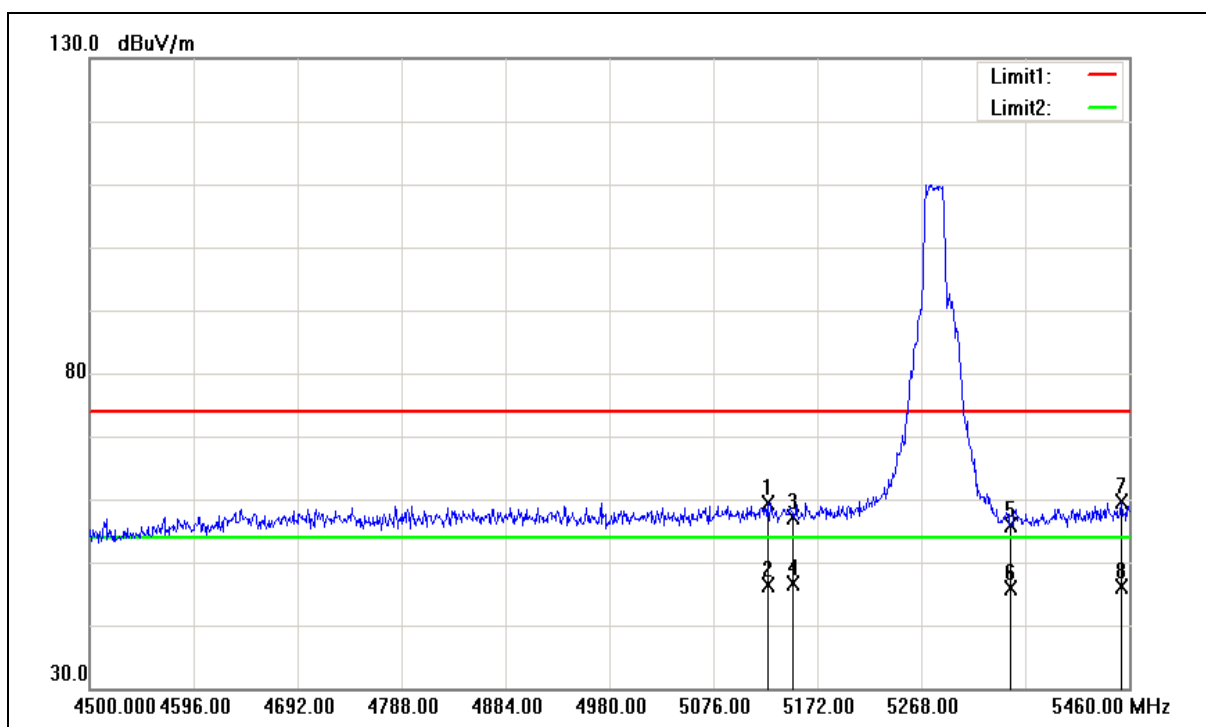



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5280MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Vertical        |                       |              |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5125.920           | 50.54             | 8.95                     | 59.49              | 74.00             | -14.51         | peak   |
| 2   | 5125.920           | 37.47             | 8.95                     | 46.42              | 54.00             | -7.58          | AVG    |
| 3   | 5150.000           | 48.12             | 8.97                     | 57.09              | 74.00             | -16.91         | peak   |
| 4   | 5150.000           | 37.62             | 8.97                     | 46.59              | 54.00             | -7.41          | AVG    |
| 5   | 5350.000           | 46.86             | 9.08                     | 55.94              | 74.00             | -18.06         | peak   |
| 6   | 5350.000           | 36.78             | 9.08                     | 45.86              | 54.00             | -8.14          | AVG    |
| 7   | 5452.320           | 50.59             | 9.15                     | 59.74              | 74.00             | -14.26         | peak   |
| 8   | 5452.320           | 37.06             | 9.15                     | 46.21              | 54.00             | -7.79          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5320MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

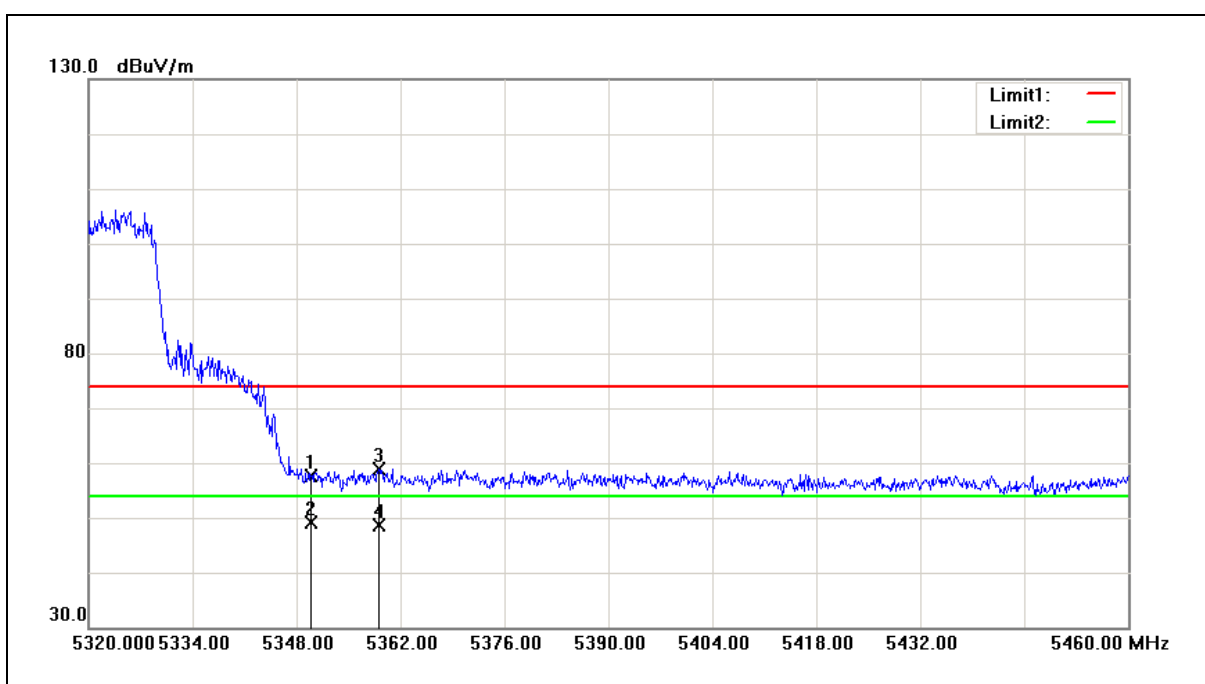


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 48.51          | 9.08                  | 57.59           | 74.00          | -16.41      | peak   |
| 2   | 5350.000        | 39.98          | 9.08                  | 49.06           | 54.00          | -4.94       | AVG    |
| 3   | 5359.060        | 49.90          | 9.08                  | 58.98           | 74.00          | -15.02      | peak   |
| 4   | 5359.060        | 39.67          | 9.08                  | 48.75           | 54.00          | -5.25       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5320MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

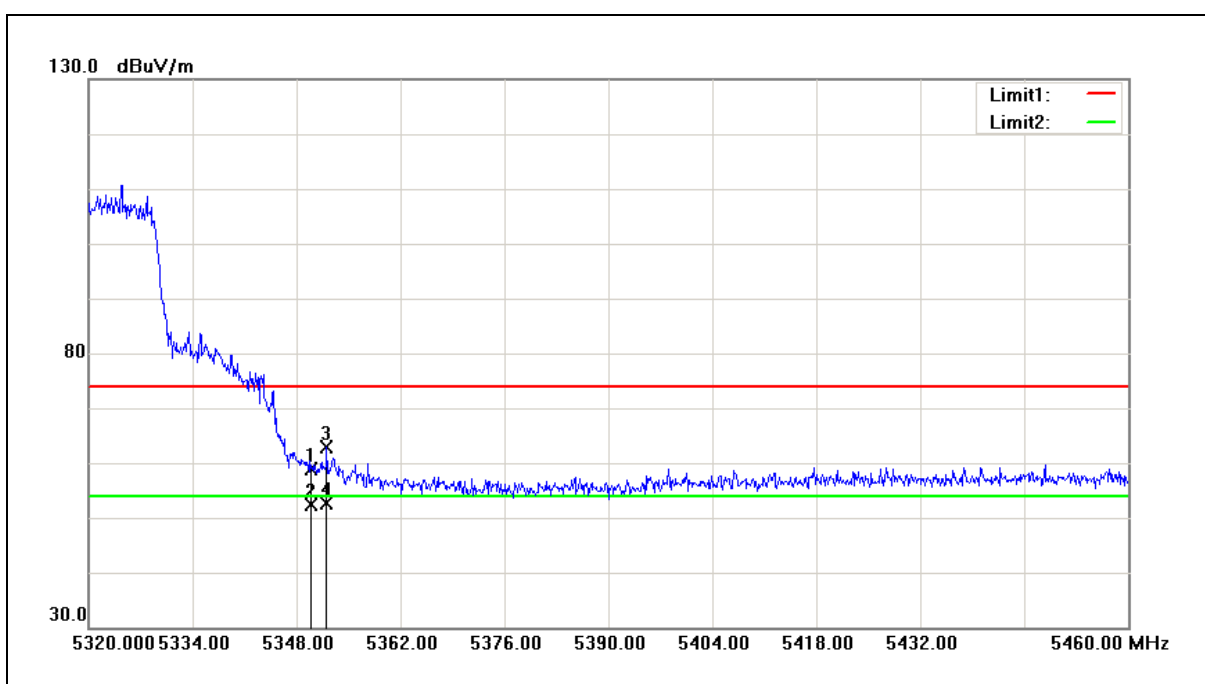


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 49.74          | 9.08                  | 58.82           | 74.00          | -15.18      | peak   |
| 2   | 5350.000        | 43.33          | 9.08                  | 52.41           | 54.00          | -1.59       | AVG    |
| 3   | 5352.060        | 53.87          | 9.08                  | 62.95           | 74.00          | -11.05      | peak   |
| 4   | 5352.060        | 43.54          | 9.08                  | 52.62           | 54.00          | -1.38       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5500MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

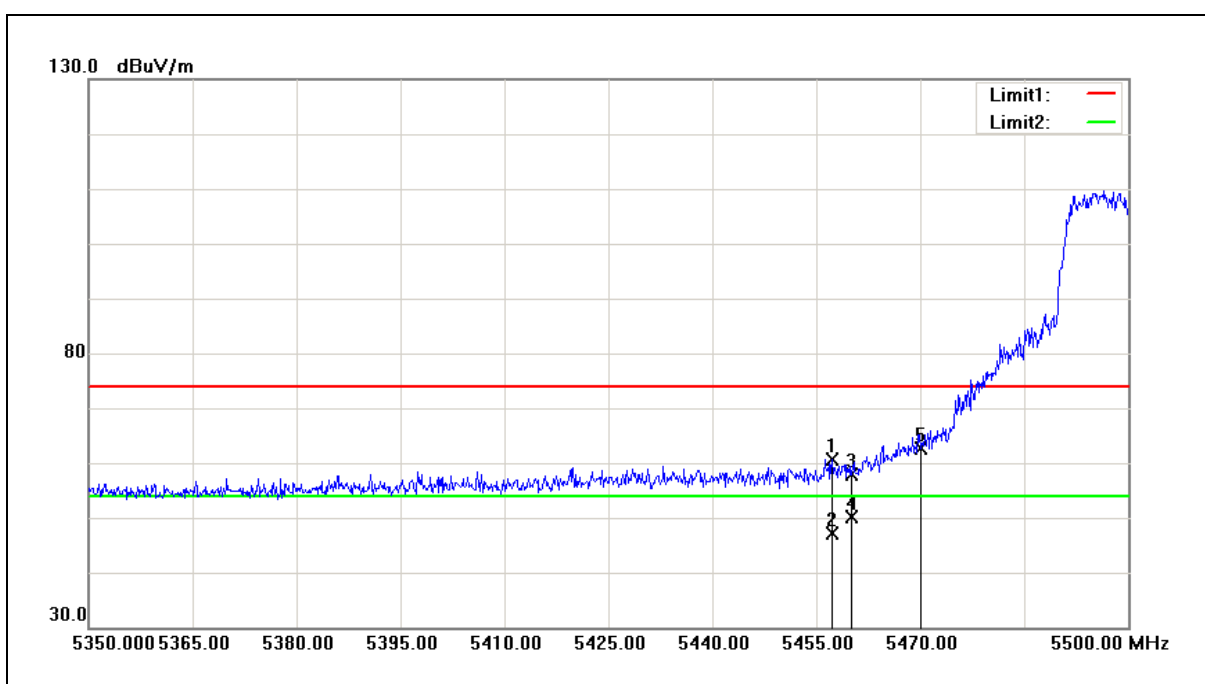


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5457.250        | 51.55          | 9.15                  | 60.70           | 74.00          | -13.30      | peak   |
| 2   | 5457.250        | 37.96          | 9.15                  | 47.11           | 54.00          | -6.89       | AVG    |
| 3   | 5460.000        | 48.79          | 9.15                  | 57.94           | 74.00          | -16.06      | peak   |
| 4   | 5460.000        | 40.93          | 9.15                  | 50.08           | 54.00          | -3.92       | AVG    |
| 5   | 5470.000        | 53.44          | 9.16                  | 62.60           | 68.20          | -5.6        | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5500MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

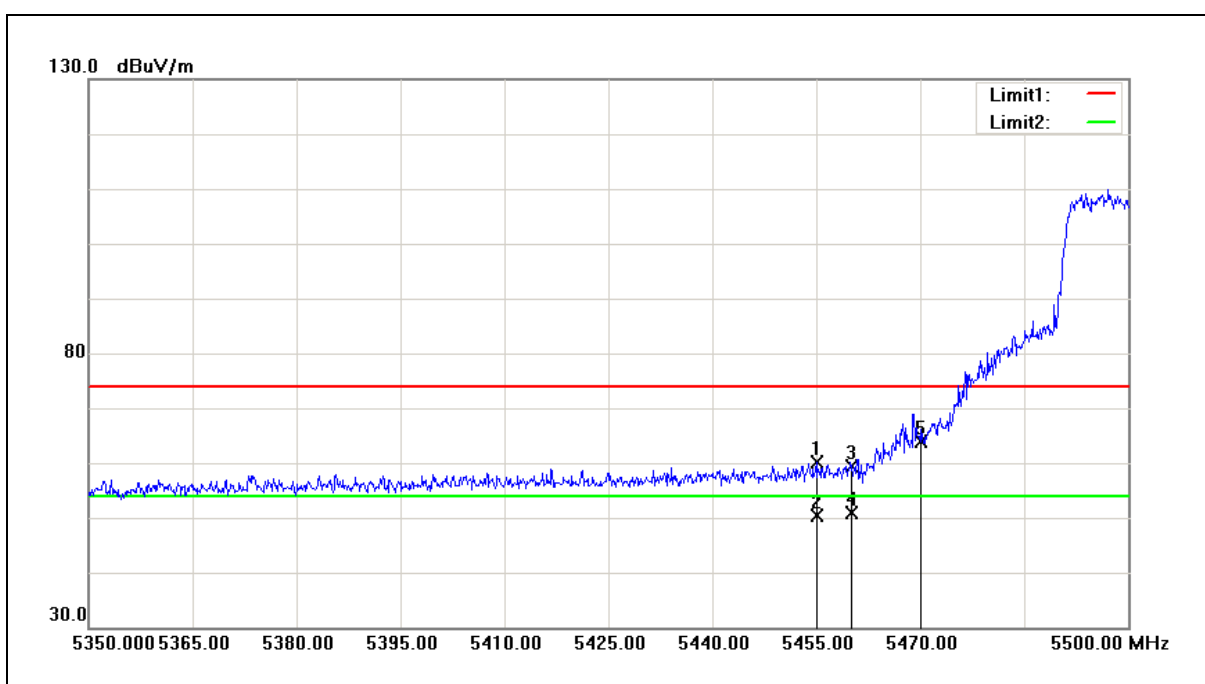

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5455.000        | 51.08          | 9.15                  | 60.23           | 74.00          | -13.77      | peak   |
| 2   | 5455.000        | 41.19          | 9.15                  | 50.34           | 54.00          | -3.66       | AVG    |
| 3   | 5460.000        | 50.13          | 9.15                  | 59.28           | 74.00          | -14.72      | peak   |
| 4   | 5460.000        | 41.71          | 9.15                  | 50.86           | 54.00          | -3.14       | AVG    |
| 5   | 5470.000        | 54.69          | 9.16                  | 63.85           | 68.20          | -4.35       | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

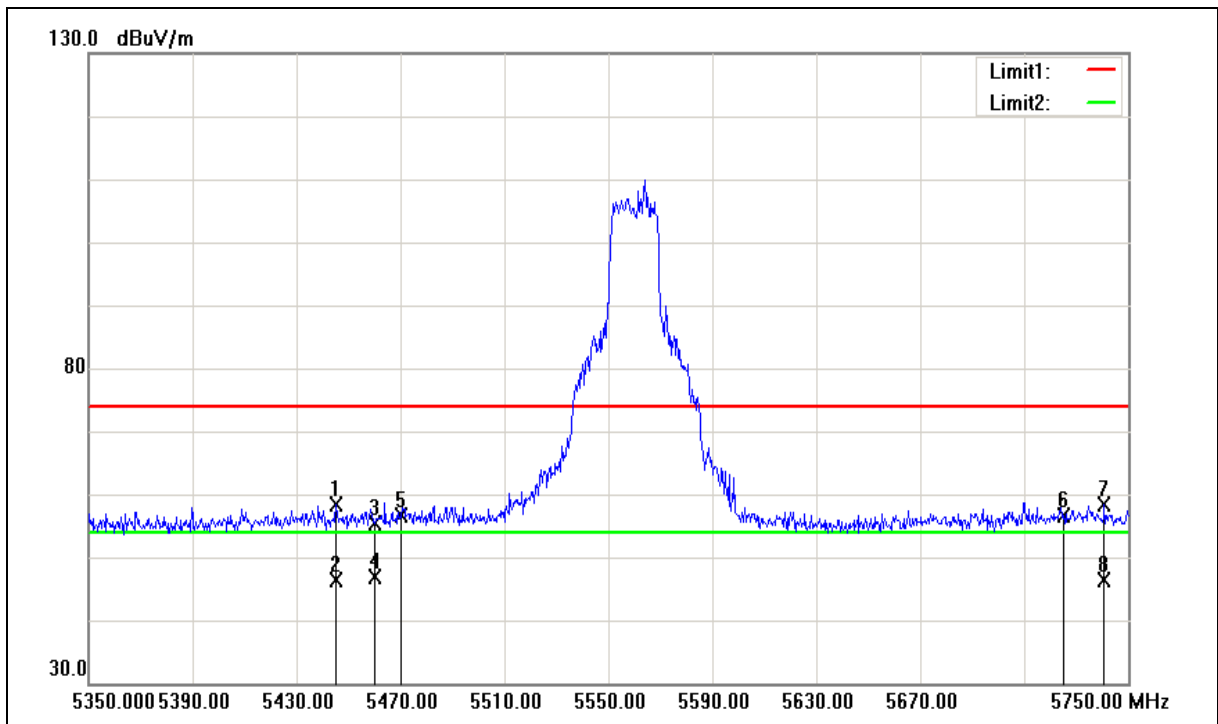



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5445.200           | 49.21             | 9.15                     | 58.36              | 74.00             | -15.64         | peak   |
| 2   | 5445.200           | 37.27             | 9.15                     | 46.42              | 54.00             | -7.58          | AVG    |
| 3   | 5460.000           | 46.32             | 9.15                     | 55.47              | 74.00             | -18.53         | peak   |
| 4   | 5460.000           | 37.73             | 9.15                     | 46.88              | 54.00             | -7.12          | AVG    |
| 5   | 5470.000           | 47.45             | 9.16                     | 56.61              | 68.20             | -11.59         | peak   |
| 6   | 5725.000           | 46.84             | 9.70                     | 56.54              | 68.20             | -11.66         | peak   |
| 7   | 5740.800           | 48.57             | 9.74                     | 58.31              | 74.00             | -15.69         | peak   |
| 8   | 5740.800           | 36.53             | 9.74                     | 46.27              | 54.00             | -7.73          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard: FCC Part 15.407  
 Test item: Band edge  
 Frequency: 5560MHz  
 Mode: Mode 3  
 Ant.Polar.: Vertical

Test Distance: 3m  
 Power: AC 120V/60Hz  
 Temp.(°C)/Hum.(%RH): 26(°C)/60%RH  
 Date: 06/05/2017

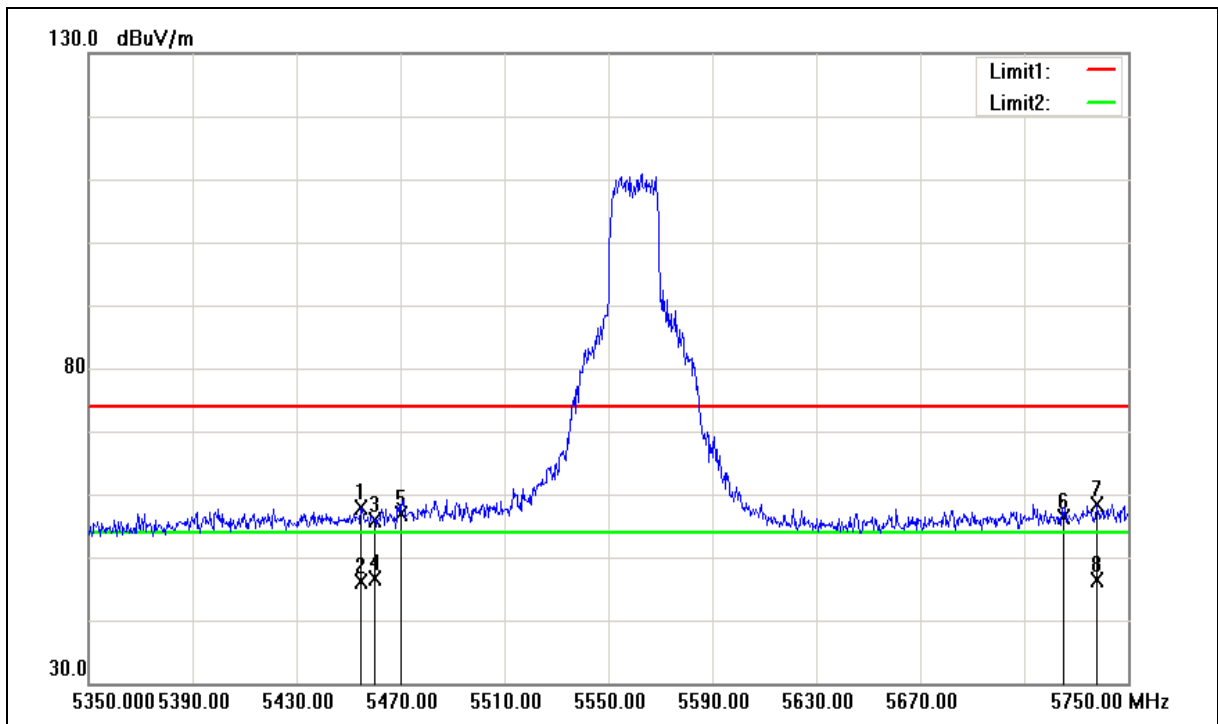



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5560MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                 | 06/05/2017   |
| Ant.Polar.: | Vertical        |                       |              |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5454.800           | 48.83             | 9.15                     | 57.98              | 74.00             | -16.02         | peak   |
| 2   | 5454.800           | 36.89             | 9.15                     | 46.04              | 54.00             | -7.96          | AVG    |
| 3   | 5460.000           | 46.69             | 9.15                     | 55.84              | 74.00             | -18.16         | peak   |
| 4   | 5460.000           | 37.60             | 9.15                     | 46.75              | 54.00             | -7.25          | AVG    |
| 5   | 5470.000           | 47.82             | 9.16                     | 56.98              | 68.20             | -11.22         | peak   |
| 6   | 5725.000           | 46.60             | 9.70                     | 56.30              | 68.20             | -11.9          | peak   |
| 7   | 5738.000           | 48.75             | 9.73                     | 58.48              | 74.00             | -15.52         | peak   |
| 8   | 5738.000           | 36.61             | 9.73                     | 46.34              | 54.00             | -7.66          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5700MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

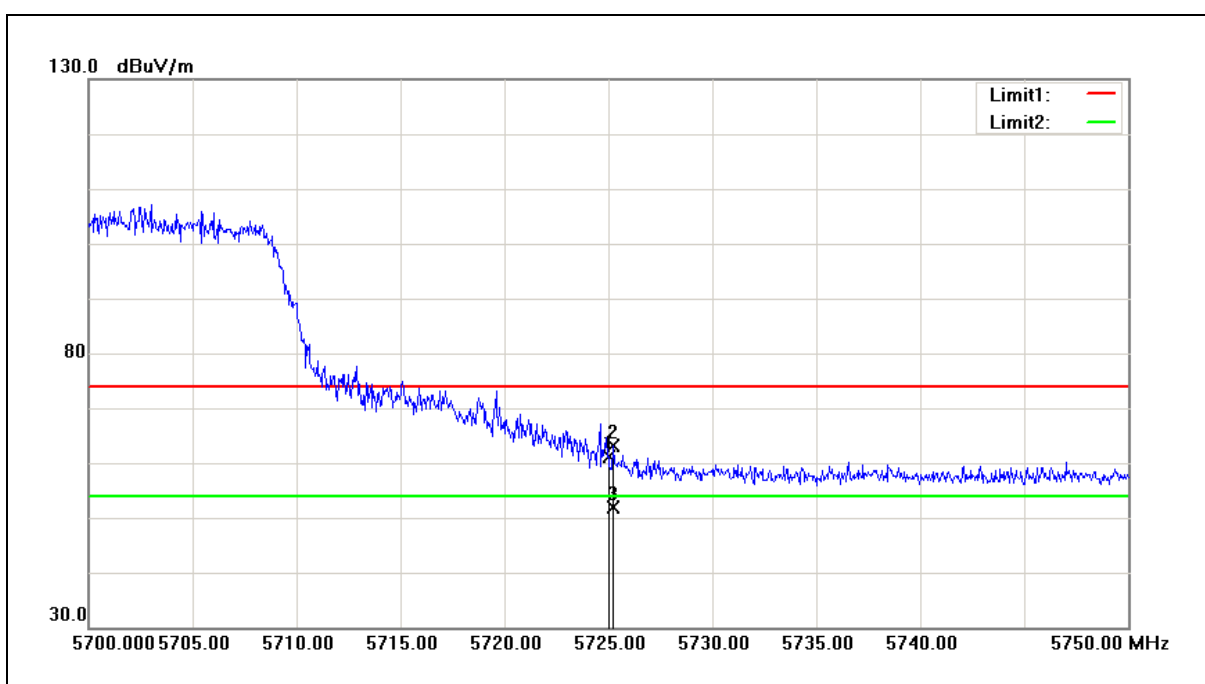


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5725.000        | 51.40          | 9.70                  | 61.10           | 68.20          | -7.1        | peak   |
| 2   | 5725.250        | 53.52          | 9.70                  | 63.22           | 74.00          | -10.78      | peak   |
| 3   | 5725.250        | 42.30          | 9.70                  | 52.00           | 54.00          | -2.00       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5700MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 3          | Date:                | 06/05/2017   |
| Ant.Polar.: | Vertical        |                      |              |

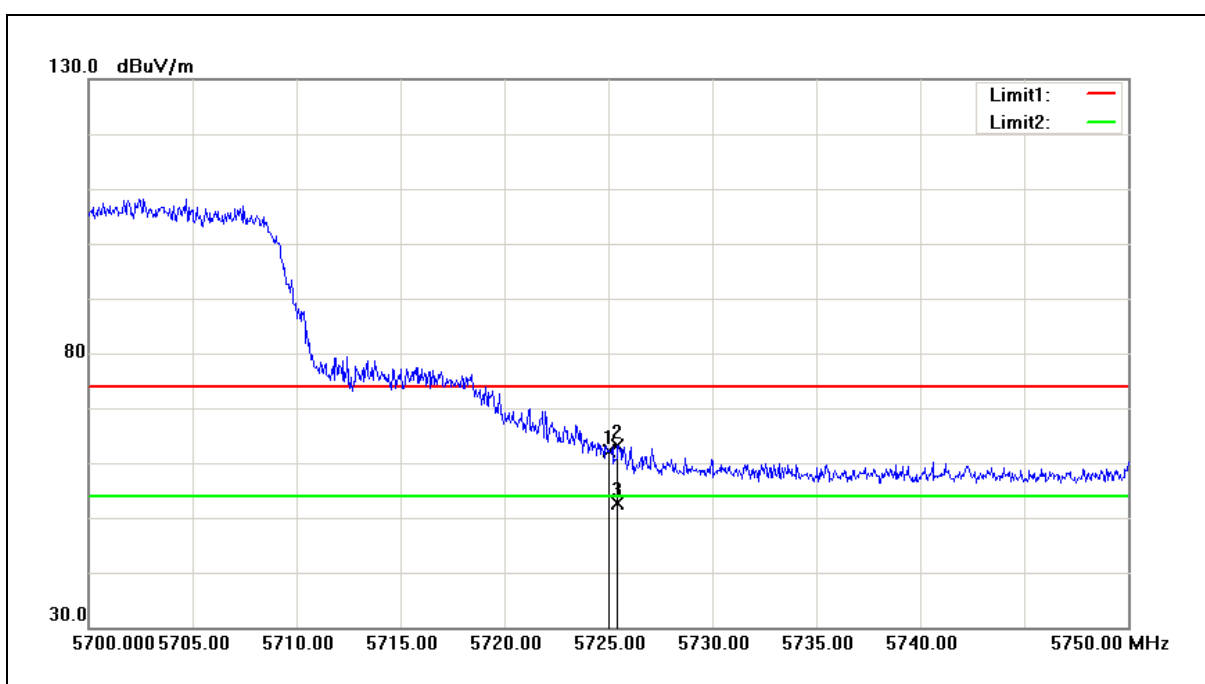

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5725.000        | 52.50          | 9.70                  | 62.20           | 68.20          | -6          | peak   |
| 2   | 5725.450        | 53.50          | 9.70                  | 63.20           | 74.00          | -10.80      | peak   |
| 3   | 5725.450        | 43.04          | 9.70                  | 52.74           | 54.00          | -1.26       | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5270MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

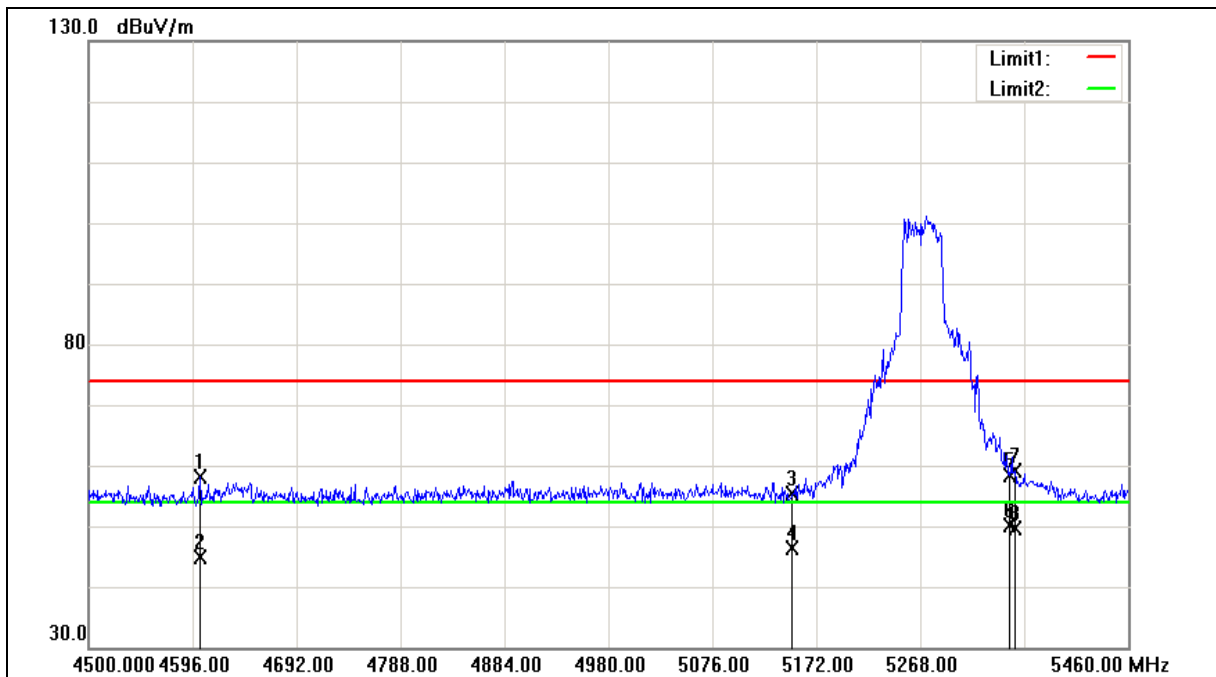



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5270MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4602.720           | 50.96             | 7.28                     | 58.24              | 74.00             | -15.76         | peak   |
| 2   | 4602.720           | 37.61             | 7.28                     | 44.89              | 54.00             | -9.11          | AVG    |
| 3   | 5150.000           | 46.36             | 8.97                     | 55.33              | 74.00             | -18.67         | peak   |
| 4   | 5150.000           | 37.44             | 8.97                     | 46.41              | 54.00             | -7.59          | AVG    |
| 5   | 5350.000           | 49.30             | 9.08                     | 58.38              | 74.00             | -15.62         | peak   |
| 6   | 5350.000           | 40.94             | 9.08                     | 50.02              | 54.00             | -3.98          | AVG    |
| 7   | 5355.360           | 50.09             | 9.08                     | 59.17              | 74.00             | -14.83         | peak   |
| 8   | 5355.360           | 40.43             | 9.08                     | 49.51              | 54.00             | -4.49          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Report Number: 1707FR22

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5270MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

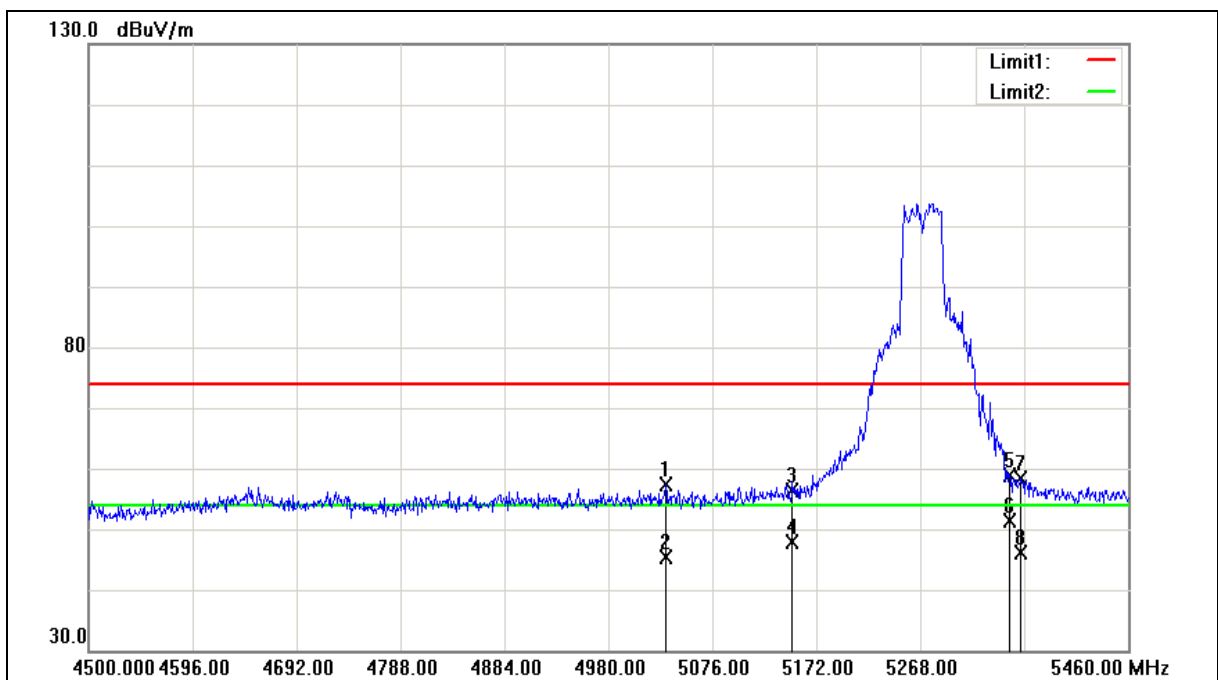



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5270MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                 | 06/06/2017   |
| Ant.Polar.: | Vertical        |                       |              |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5032.800           | 48.41             | 8.89                     | 57.30              | 74.00             | -16.70         | peak   |
| 2   | 5032.800           | 36.58             | 8.89                     | 45.47              | 54.00             | -8.53          | AVG    |
| 3   | 5150.000           | 47.41             | 8.97                     | 56.38              | 74.00             | -17.62         | peak   |
| 4   | 5150.000           | 38.84             | 8.97                     | 47.81              | 54.00             | -6.19          | AVG    |
| 5   | 5350.000           | 49.77             | 9.08                     | 58.85              | 74.00             | -15.15         | peak   |
| 6   | 5350.000           | 42.18             | 9.08                     | 51.26              | 54.00             | -2.74          | AVG    |
| 7   | 5361.120           | 49.21             | 9.09                     | 58.30              | 74.00             | -15.70         | peak   |
| 8   | 5361.120           | 36.95             | 9.09                     | 46.04              | 54.00             | -7.96          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5310MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

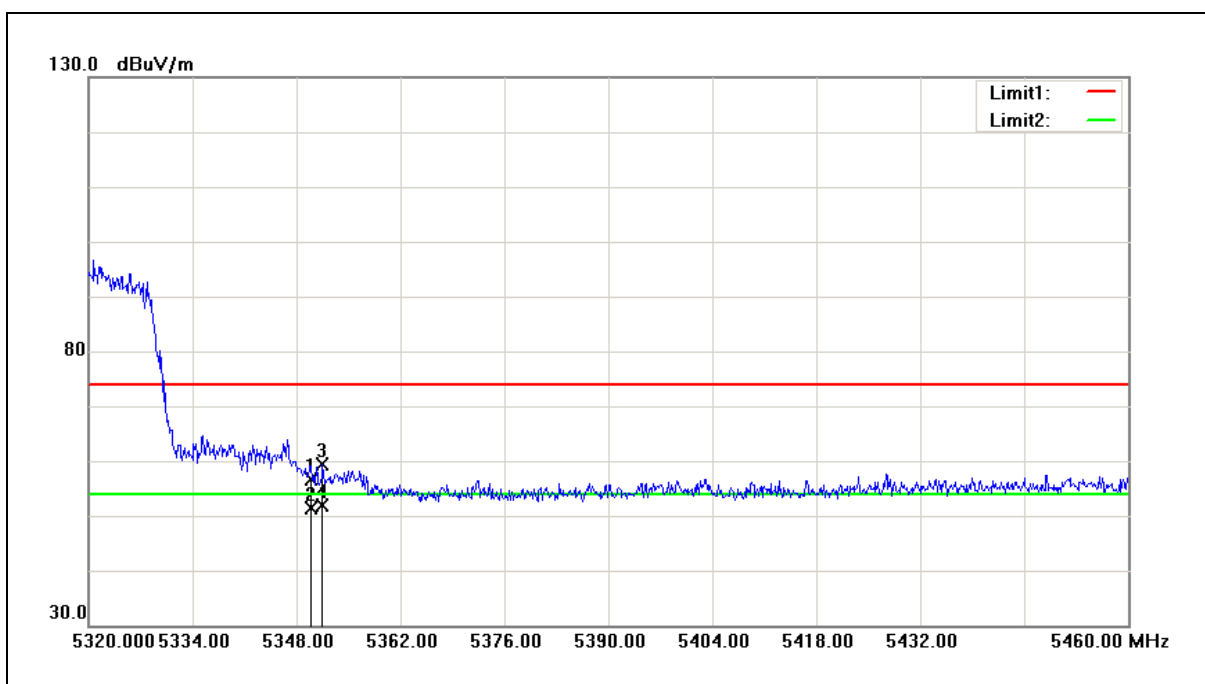

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 47.44          | 9.08                  | 56.52           | 74.00          | -17.48      | peak   |
| 2   | 5350.000        | 42.26          | 9.08                  | 51.34           | 54.00          | -2.66       | AVG    |
| 3   | 5351.500        | 50.40          | 9.08                  | 59.48           | 74.00          | -14.52      | peak   |
| 4   | 5351.500        | 42.69          | 9.08                  | 51.77           | 54.00          | -2.23       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5310MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |




| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 50.31          | 9.08                  | 59.39           | 74.00          | -14.61      | peak   |
| 2   | 5350.000        | 43.73          | 9.08                  | 52.81           | 54.00          | -1.19       | AVG    |
| 3   | 5354.160        | 54.62          | 9.08                  | 63.70           | 74.00          | -10.30      | peak   |
| 4   | 5354.160        | 42.96          | 9.08                  | 52.04           | 54.00          | -1.96       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5510MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

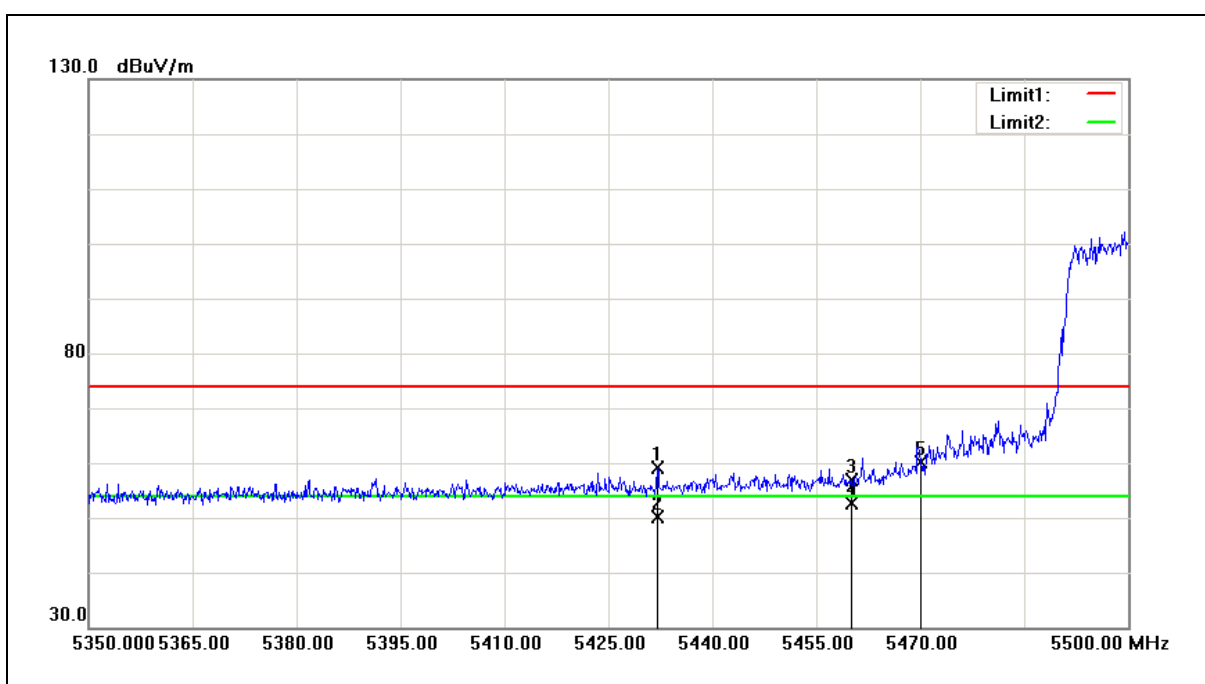


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5432.050        | 49.90          | 9.14                  | 59.04           | 74.00          | -14.96      | peak   |
| 2   | 5432.050        | 40.89          | 9.14                  | 50.03           | 54.00          | -3.97       | AVG    |
| 3   | 5460.000        | 47.76          | 9.15                  | 56.91           | 74.00          | -17.09      | peak   |
| 4   | 5460.000        | 43.39          | 9.15                  | 52.54           | 54.00          | -1.46       | AVG    |
| 5   | 5470.000        | 50.96          | 9.16                  | 60.12           | 68.20          | -8.08       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5510MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

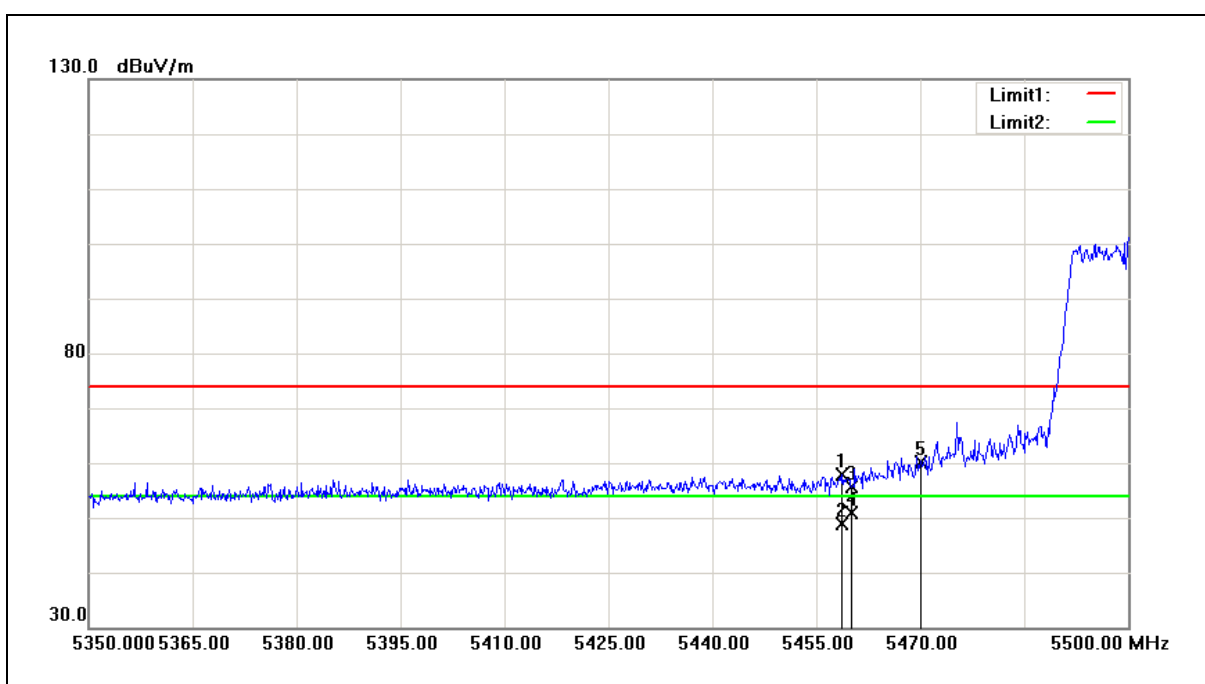

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5458.750        | 48.85          | 9.15                  | 58.00           | 74.00          | -16.00      | peak   |
| 2   | 5458.750        | 39.74          | 9.15                  | 48.89           | 54.00          | -5.11       | AVG    |
| 3   | 5460.000        | 46.37          | 9.15                  | 55.52           | 74.00          | -18.48      | peak   |
| 4   | 5460.000        | 41.79          | 9.15                  | 50.94           | 54.00          | -3.06       | AVG    |
| 5   | 5470.000        | 50.90          | 9.16                  | 60.06           | 68.20          | -8.14       | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

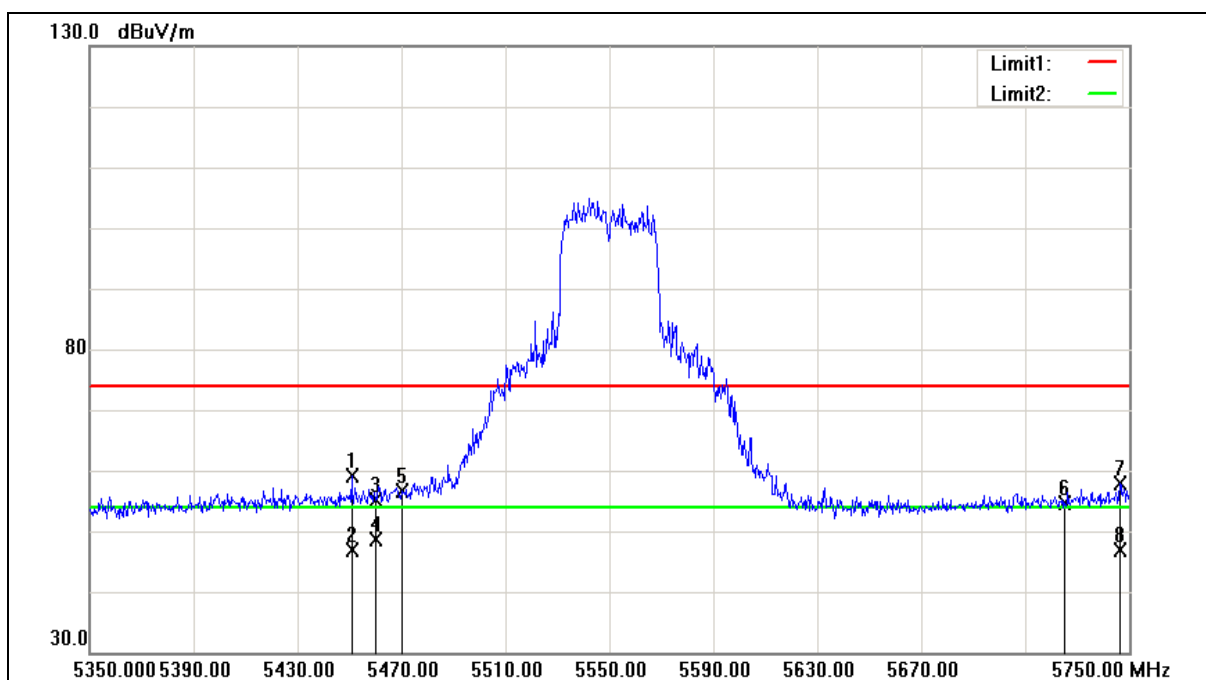



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5450.800           | 49.94             | 9.15                     | 59.09              | 74.00             | -14.91         | peak   |
| 2   | 5450.800           | 37.77             | 9.15                     | 46.92              | 54.00             | -7.08          | AVG    |
| 3   | 5460.000           | 46.09             | 9.15                     | 55.24              | 74.00             | -18.76         | peak   |
| 4   | 5460.000           | 39.44             | 9.15                     | 48.59              | 54.00             | -5.41          | AVG    |
| 5   | 5470.000           | 47.45             | 9.16                     | 56.61              | 68.20             | -11.59         | peak   |
| 6   | 5725.000           | 45.02             | 9.70                     | 54.72              | 68.20             | -13.48         | peak   |
| 7   | 5746.400           | 48.10             | 9.74                     | 57.84              | 74.00             | -16.16         | peak   |
| 8   | 5746.400           | 37.07             | 9.74                     | 46.81              | 54.00             | -7.19          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

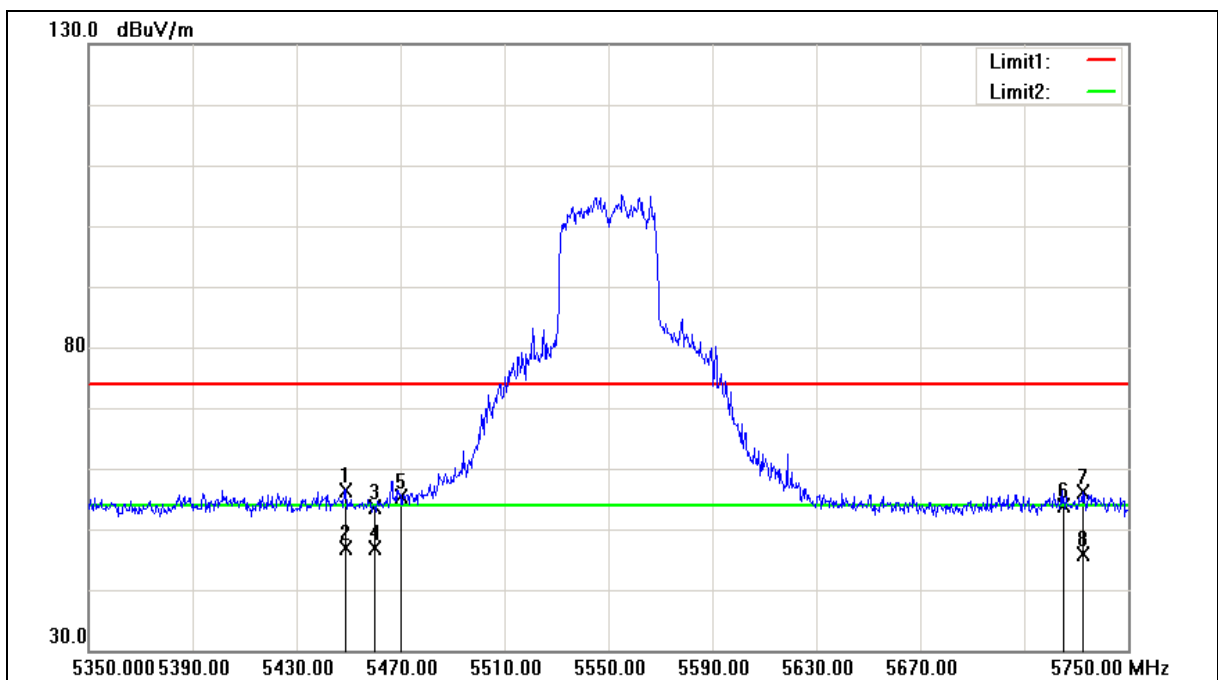



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5550MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5448.800           | 47.35             | 9.15                     | 56.50              | 74.00             | -17.50         | peak   |
| 2   | 5448.800           | 37.76             | 9.15                     | 46.91              | 54.00             | -7.09          | AVG    |
| 3   | 5460.000           | 44.43             | 9.15                     | 53.58              | 74.00             | -20.42         | peak   |
| 4   | 5460.000           | 37.66             | 9.15                     | 46.81              | 54.00             | -7.19          | AVG    |
| 5   | 5470.000           | 46.22             | 9.16                     | 55.38              | 68.20             | -12.82         | peak   |
| 6   | 5725.000           | 44.28             | 9.70                     | 53.98              | 68.20             | -14.22         | peak   |
| 7   | 5732.400           | 46.51             | 9.71                     | 56.22              | 74.00             | -17.78         | peak   |
| 8   | 5732.400           | 36.25             | 9.71                     | 45.96              | 54.00             | -8.04          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5670MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

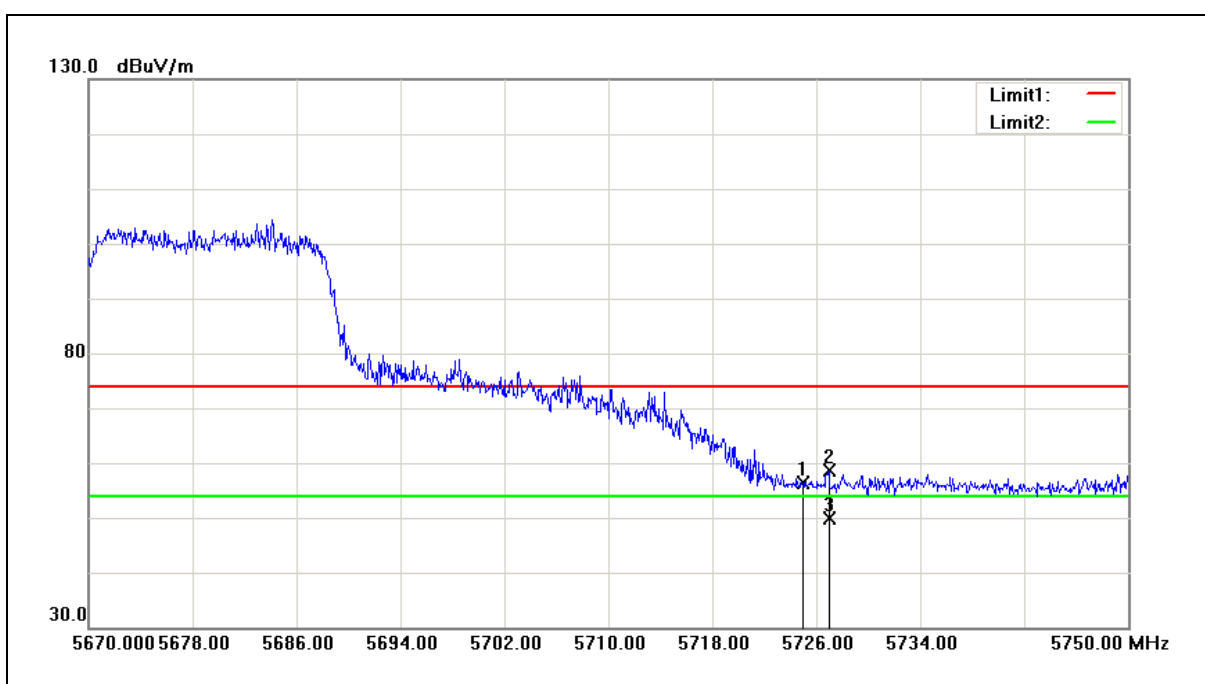


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5725.000        | 46.72          | 9.70                  | 56.42           | 68.20          | -11.78      | peak   |
| 2   | 5726.960        | 48.91          | 9.70                  | 58.61           | 74.00          | -15.39      | peak   |
| 3   | 5726.960        | 40.18          | 9.70                  | 49.88           | 54.00          | -4.12       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5670MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 4          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

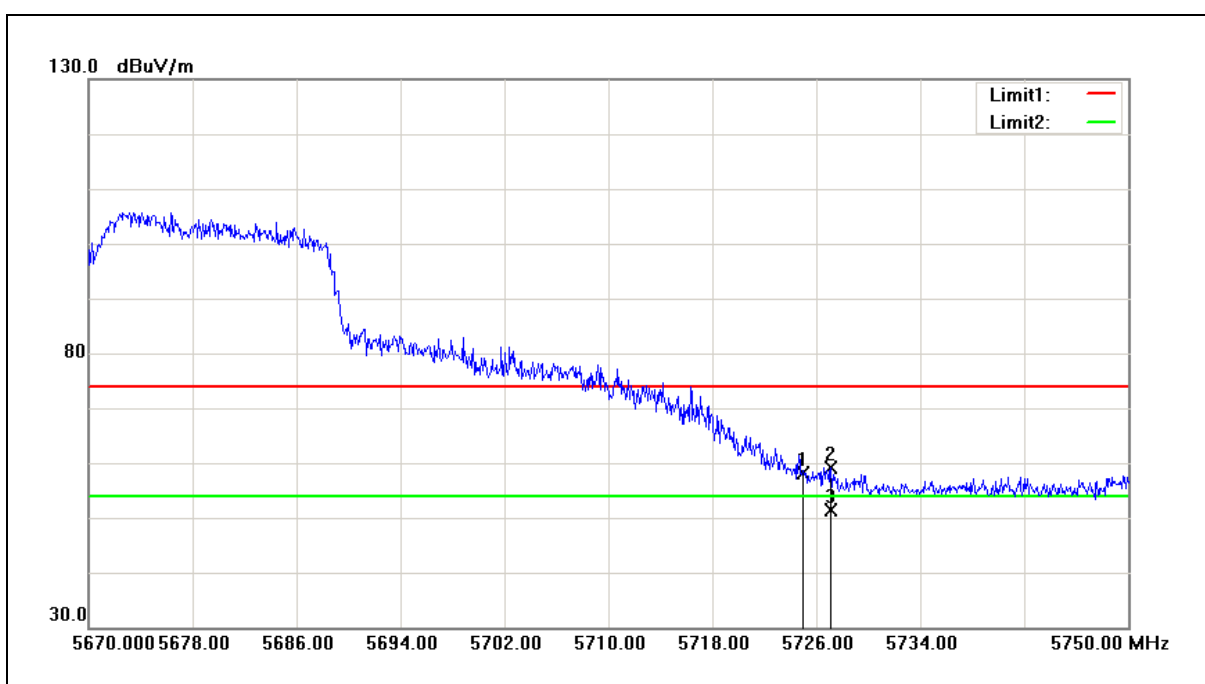

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5725.000        | 48.41          | 9.70                  | 58.11           | 68.20          | -10.09      | peak   |
| 2   | 5727.120        | 49.40          | 9.70                  | 59.10           | 74.00          | -14.90      | peak   |
| 3   | 5727.120        | 41.61          | 9.70                  | 51.31           | 54.00          | -2.69       | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

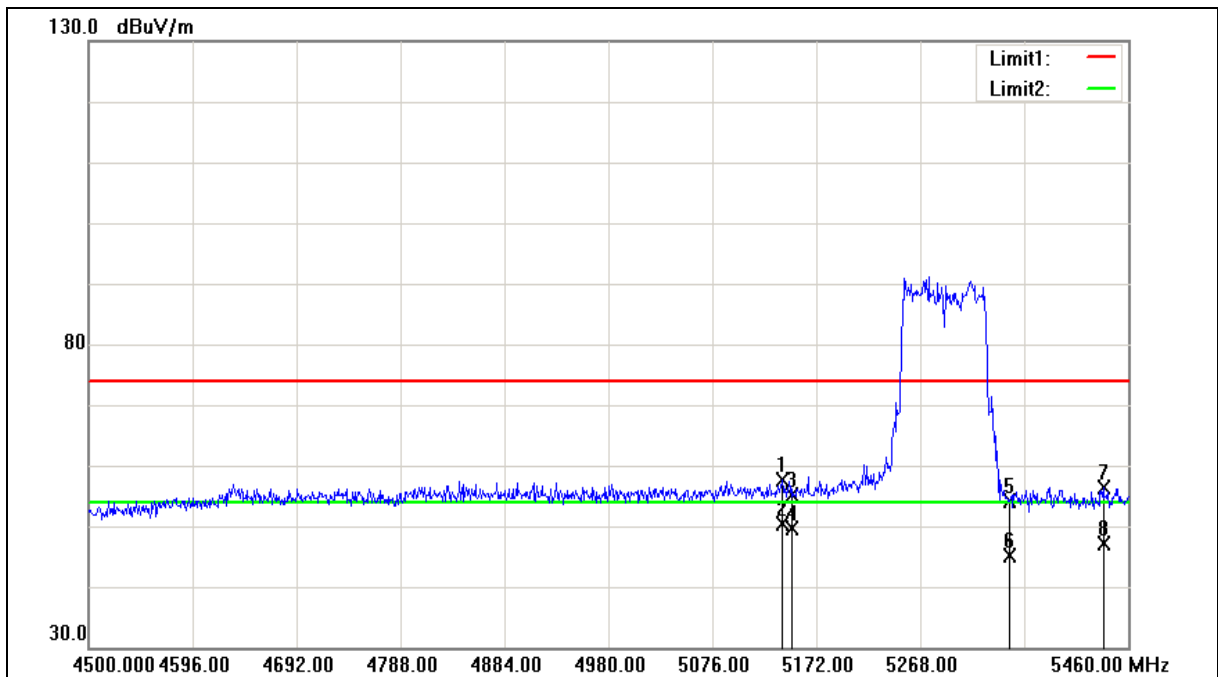



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                 | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                       |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5140.320           | 48.58             | 8.97                     | 57.55              | 74.00             | -16.45         | peak   |
| 2   | 5140.320           | 41.47             | 8.97                     | 50.44              | 54.00             | -3.56          | AVG    |
| 3   | 5150.000           | 46.21             | 8.97                     | 55.18              | 74.00             | -18.82         | peak   |
| 4   | 5150.000           | 40.55             | 8.97                     | 49.52              | 54.00             | -4.48          | AVG    |
| 5   | 5350.000           | 45.12             | 9.08                     | 54.20              | 74.00             | -19.80         | peak   |
| 6   | 5350.000           | 35.94             | 9.08                     | 45.02              | 54.00             | -8.98          | AVG    |
| 7   | 5436.960           | 47.30             | 9.14                     | 56.44              | 74.00             | -17.56         | peak   |
| 8   | 5436.960           | 37.87             | 9.14                     | 47.01              | 54.00             | -6.99          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Report Number: 1707FR22

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

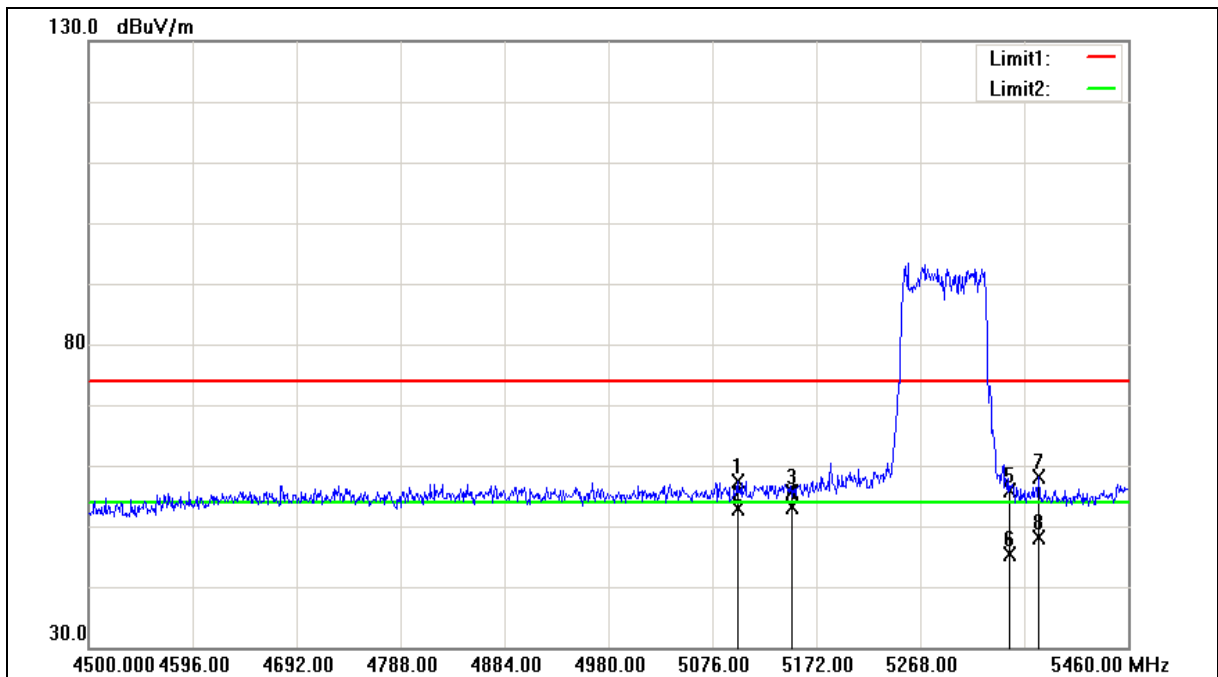



|             |                 |                       |              |
|-------------|-----------------|-----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:        | 3m           |
| Test item:  | Band edge       | Power:                | AC 120V/60Hz |
| Frequency:  | 5290MHz         | Temp.(°C)/Hum. (%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                 | 06/06/2017   |
| Ant.Polar.: | Vertical        |                       |              |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5099.040           | 48.54             | 8.93                     | 57.47              | 74.00             | -16.53         | peak   |
| 2   | 5099.040           | 43.91             | 8.93                     | 52.84              | 54.00             | -1.16          | AVG    |
| 3   | 5150.000           | 46.77             | 8.97                     | 55.74              | 74.00             | -18.26         | peak   |
| 4   | 5150.000           | 44.04             | 8.97                     | 53.01              | 54.00             | -0.99          | AVG    |
| 5   | 5350.000           | 46.82             | 9.08                     | 55.90              | 74.00             | -18.10         | peak   |
| 6   | 5350.000           | 36.19             | 9.08                     | 45.27              | 54.00             | -8.73          | AVG    |
| 7   | 5377.440           | 48.91             | 9.11                     | 58.02              | 74.00             | -15.98         | peak   |
| 8   | 5377.440           | 39.14             | 9.11                     | 48.25              | 54.00             | -5.75          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5530MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

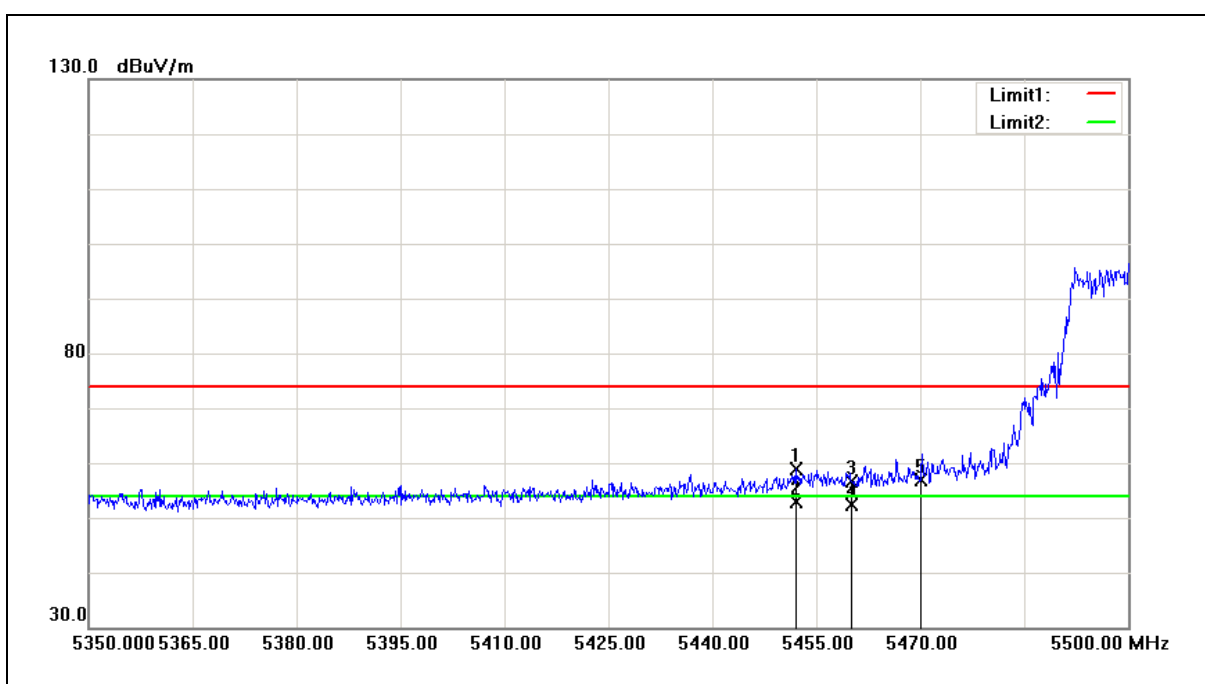


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5452.000        | 49.68          | 9.15                  | 58.83           | 74.00          | -15.17      | peak   |
| 2   | 5452.000        | 43.66          | 9.15                  | 52.81           | 54.00          | -1.19       | AVG    |
| 3   | 5460.000        | 47.58          | 9.15                  | 56.73           | 74.00          | -17.27      | peak   |
| 4   | 5460.000        | 43.23          | 9.15                  | 52.38           | 54.00          | -1.62       | AVG    |
| 5   | 5470.000        | 47.66          | 9.16                  | 56.82           | 68.20          | -11.38      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5530MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

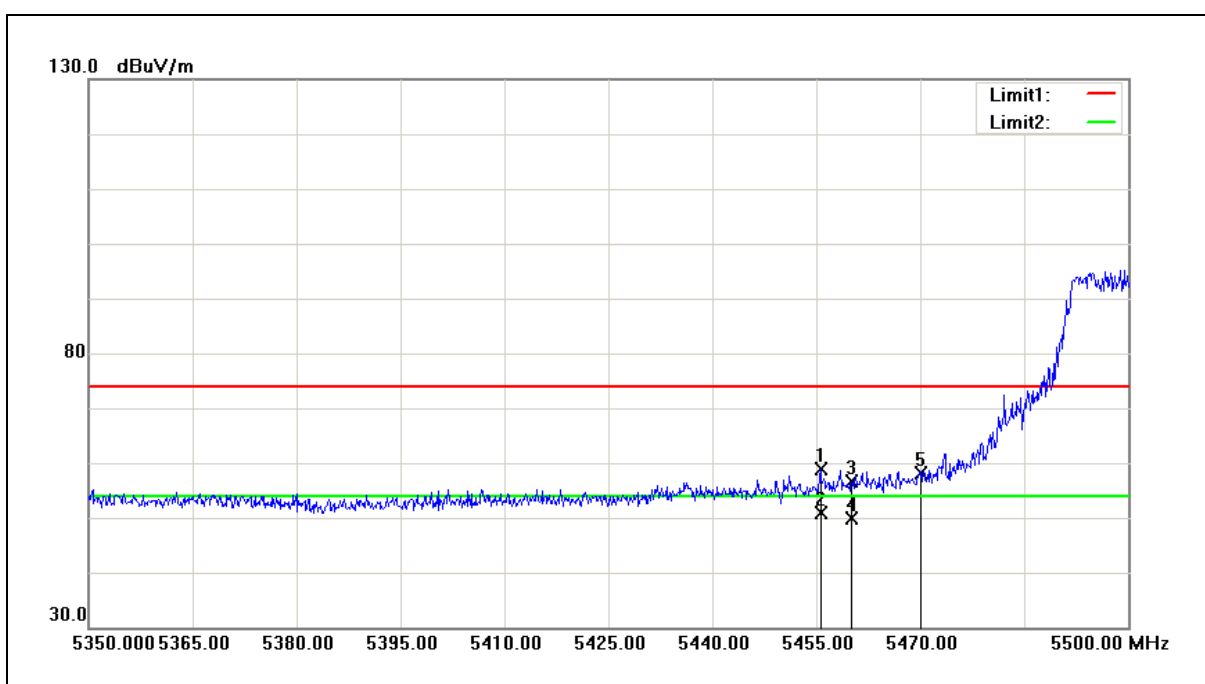

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5455.600        | 49.78          | 9.15                  | 58.93           | 74.00          | -15.07      | peak   |
| 2   | 5455.600        | 41.84          | 9.15                  | 50.99           | 54.00          | -3.01       | AVG    |
| 3   | 5460.000        | 47.37          | 9.15                  | 56.52           | 74.00          | -17.48      | peak   |
| 4   | 5460.000        | 40.85          | 9.15                  | 50.00           | 54.00          | -4.00       | AVG    |
| 5   | 5470.000        | 49.02          | 9.16                  | 58.18           | 68.20          | -10.02      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

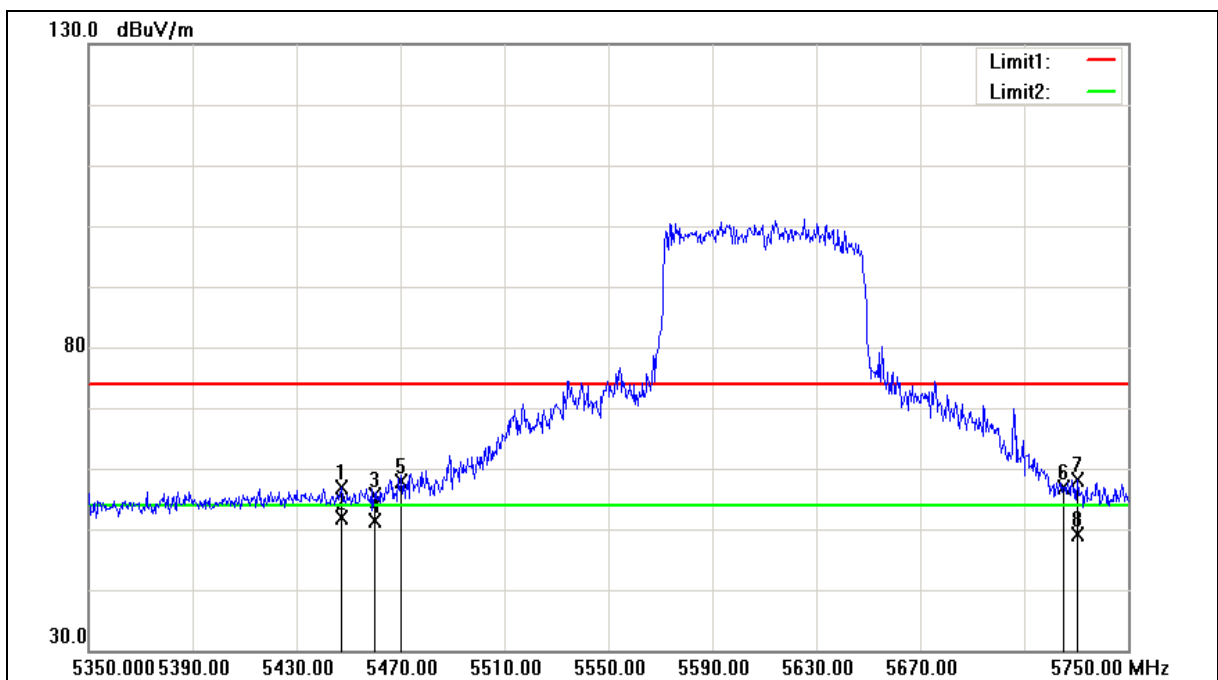



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/06/2017   |
| Ant.Polar.: | Horizontal      |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5447.200           | 47.73             | 9.15                     | 56.88              | 74.00             | -17.12         | peak   |
| 2   | 5447.200           | 42.76             | 9.15                     | 51.91              | 54.00             | -2.09          | AVG    |
| 3   | 5460.000           | 46.37             | 9.15                     | 55.52              | 74.00             | -18.48         | peak   |
| 4   | 5460.000           | 42.17             | 9.15                     | 51.32              | 54.00             | -2.68          | AVG    |
| 5   | 5470.000           | 48.70             | 9.16                     | 57.86              | 68.20             | -10.34         | peak   |
| 6   | 5725.000           | 47.21             | 9.70                     | 56.91              | 68.20             | -11.29         | peak   |
| 7   | 5730.400           | 48.50             | 9.71                     | 58.21              | 74.00             | -15.79         | peak   |
| 8   | 5730.400           | 39.50             | 9.71                     | 49.21              | 54.00             | -4.79          | AVG    |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

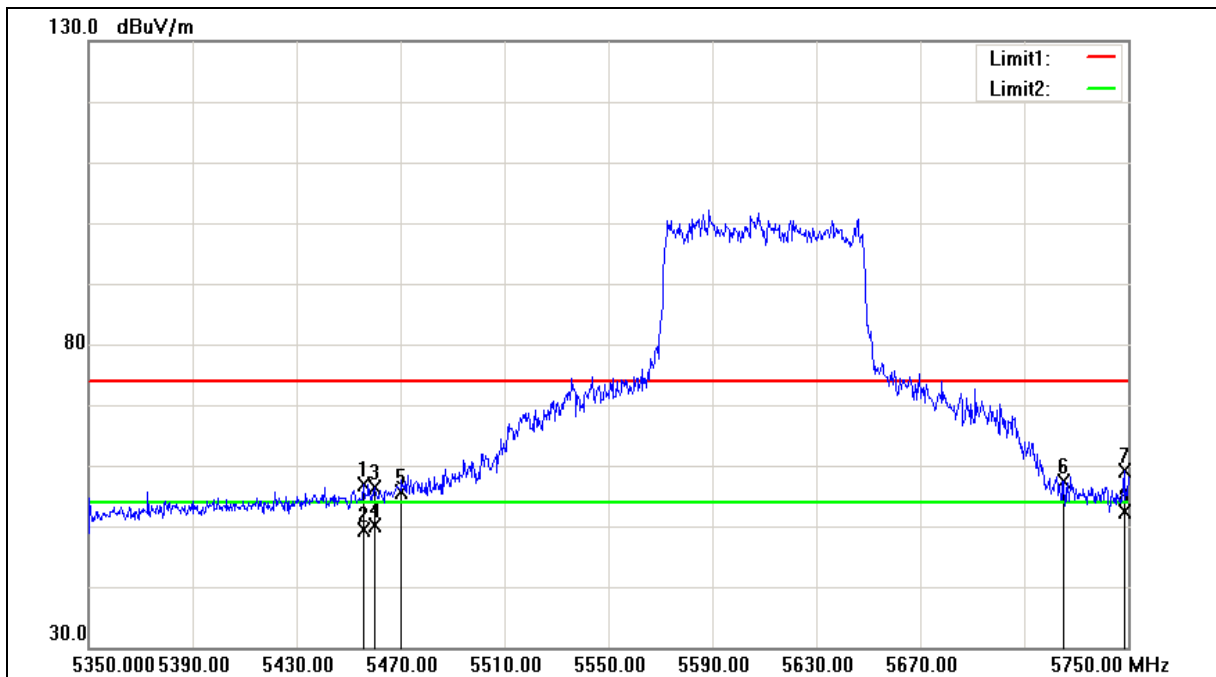



|             |                 |                      |              |
|-------------|-----------------|----------------------|--------------|
| Standard:   | FCC Part 15.407 | Test Distance:       | 3m           |
| Test item:  | Band edge       | Power:               | AC 120V/60Hz |
| Frequency:  | 5610MHz         | Temp.(°C)/Hum.(%RH): | 26(°C)/60%RH |
| Mode:       | Mode 5          | Date:                | 06/06/2017   |
| Ant.Polar.: | Vertical        |                      |              |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5455.600           | 47.65             | 9.15                     | 56.80              | 74.00             | -17.20         | peak   |
| 2   | 5455.600           | 40.18             | 9.15                     | 49.33              | 54.00             | -4.67          | AVG    |
| 3   | 5460.000           | 47.19             | 9.15                     | 56.34              | 74.00             | -17.66         | peak   |
| 4   | 5460.000           | 40.96             | 9.15                     | 50.11              | 54.00             | -3.89          | AVG    |
| 5   | 5470.000           | 46.59             | 9.16                     | 55.75              | 68.20             | -12.45         | peak   |
| 6   | 5725.000           | 47.64             | 9.70                     | 57.34              | 68.20             | -10.86         | peak   |
| 7   | 5748.400           | 49.48             | 9.75                     | 59.23              | 74.00             | -14.77         | peak   |
| 8   | 5748.400           | 42.73             | 9.75                     | 52.48              | 54.00             | -1.52          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

### 4.3. Maximum Conducted Output Power and Transmit power control Measurement

#### ■ Limit


Conducted Output Power

| Frequency Range (MHz) | FCC Limit                                        |
|-----------------------|--------------------------------------------------|
| 5.250 ~ 5.350 GHz     | The lesser of 250mW (24dBm) or 11dBm + 10log (B) |
| 5.470 ~ 5.725 GHz     | The lesser of 250mW (24dBm) or 11dBm + 10log (B) |

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

- \* CDD mode : Directional Gain =  $G_{ANT} = 10 \cdot \log\left[\frac{10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}}{NANT}\right] = 4.35 \text{ dBi} < 6 \text{ dBi}$
- \* CDD mode power limit shall be reduced = 24 - 0 = 24 dBm (5.250 ~ 5.350 GHz)
- \* CDD mode power limit shall be reduced = 24 - 0 = 24 dBm dBm (5.470 ~ 5.725 GHz)
- \* BF mode : Directional Gain =  $10 \cdot \log\left[\frac{10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20}}{NANT}\right]^2 = 7.36 \text{ dBi} > 6 \text{ dBi}$
- \* BF mode power limit shall be reduced = 24 - 1.36 = 22.64 dBm (5.250 ~ 5.350 GHz)
- \* BF mode power limit shall be reduced = 24 - 1.36 = 22.64 dBm dBm (5.470 ~ 5.725 GHz)

#### ■ Test Setup

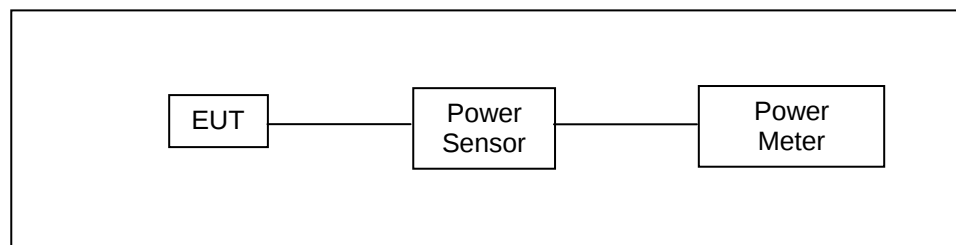

#### ■ Test Instruments

| Equipment       | Manufacturer | Model Number      | Serial Number | Cal. Date  | Remark |
|-----------------|--------------|-------------------|---------------|------------|--------|
| Power Sensor    | Anritsu      | MA2411B           | 1126022       | 08/29/2016 | 1 year |
| Power Meter     | Anritsu      | ML2495A           | 1135009       | 08/29/2016 | 1 year |
| Microwave Cable | EMCI         | EMC104-SM-SM-1500 | 140303        | 02/22/2017 | 1 year |
| Test Site       | ATL          | TE05              | TE05          | N.C.R.     | -----  |

Note: N.C.R. = No Calibration Request.



■ **Test Procedure**

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)

b) Method PM-G (Measurement using a gated RF average power meter)