

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment	: Wireless 450N Dual Band USB Adapter
Brand Name	: EDIMAX
Model No.	: EW-7733UND / GWU-H733Und / EW-7733UnD
Filing Type	: New Application
Applicant	: EDIMAX TECHNOLOGY CO., LTD.
Manufacturer	: No.3, Wu Chuan 3rd Road, Wu-Ku Industrial Park. Taipei Hsien, Taiwan
FCC ID	: NDD9577331111
Received Date	: Jul. 04, 2011
Final Test Date	: Aug. 31, 2011

Statement

Test result included is only for the 802.11b/g/n part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT	2
2 GENERAL INFORMATION.....	3
2.1 Product Details.....	3
2.2 Table for Filed Antenna.....	3
2.3 Table for Carrier Frequencies	4
2.4 Table for Test Modes	5
2.5 Table for Testing Locations.....	5
2.6 Table for Supporting Units	5
2.7 Table for Parameters of Test Software Setting.....	6
2.8 EUT Operation during Test	6
2.9 Test Configuration.....	7
3 TEST RESULT	8
3.1 AC Power Line Conducted Emissions Measurement	8
3.2 Maximum Peak Output Power Measurement	12
3.3 Power Spectral Density Measurement.....	15
3.4 6dB Spectrum Bandwidth Measurement	34
3.5 Radiated Emissions Measurement	53
3.6 Band Edge and Fundamental Emissions Measurement.....	83
3.7 Antenna Requirements	96
4 LIST OF MEASURING EQUIPMENTS.....	97
5 TEST LOCATION.....	99
6 TAF CERTIFICATE OF ACCREDITATION.....	100
APPENDIX A. TEST PHOTOS	A1 ~ A6
APPENDIX B. PHOTOGRAPHS OF EUT	B1 ~ B9

History of This Test Report

Original Issue Date: Sep. 16, 2011

Report No.: FR181701AC

■ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Wireless 450N Dual Band USB Adapter

Brand Name : EDIMAX

Model No. : EW-7733UND / GWU-H733Und /
EW-7733UnD

Applicant : EDIMAX TECHNOLOGY CO., LTD.

No.3, Wu Chuan 3rd Road, Wu-Ku Industrial Park.
Taipei Hsien, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 04, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Vice Manager

SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	11.65 dB
3.2	15.247(b)(3)	Maximum Peak Output Power	Complies	8.45 dB
3.3	15.247(e)	Power Spectral Density	Complies	18.54 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	3.02 dB
3.6	15.247(d)	Band Edge Emissions	Complies	1.06 dB
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7℃	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of IEEE 802.11b/g/n is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	Power from host
Data Modulation Data Rate (Mbps)	DSSS for IEEE 802.11b (DBPSK / DQPSK / CCK) (1/2/ 5.5/11) OFDM for IEEE 802.11g (BPSK / QPSK / 16QAM / 64QAM) (6/9/12/18/24/36/48/54) See the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11b/g/n (20MHz): 11 ; 11/n (40MHz): 9
Channel Band Width (99%)	802.11b/g : 11b: 15.16 MHz ; 11g: 16.48 MHz 802.11n : MCS 16 (20MHz) : 17.56 MHz ; MCS 16 (40MHz) : 36.00 MHz
Conducted Output Power	802.11b/g : 11b: 16.84 dBm ; 11g: 18.25 dBm 802.11n : MCS 16 (20MHz) : 21.55 dBm ; MCS 16 (40MHz) : 19.18 dBm

2.2 Table for Filed Antenna

Antenna					
No.	Type	Brand	Model	2.4GHz Gain (dBi)	5GHz Gain (dBi)
1	Internal PIFA	N/A	N/A	2	4
2	Internal PIFA	N/A	N/A	2	4
3	Internal PCB	N/A	N/A	2	2

2.4GHz Directional Gain					
Set	Modulaton	Transmitter Outputs Signals Correlated	Transmitter Outputs (N)	Antenna Combination (No.)	Directional Gain (dBi)
1	802.11b/g	N/A	1	2	2
2	802.11n	No	3	1, 2, 3	2

For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:

- Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N)$ dBi
- All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:

- Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi
- All transmit signals are completely uncorrelated, Directional Gain = $10 \log[10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10} / N]$ dBi

Antenna note:

- IEEE 802.11b/g only used external antenna for signal transmitting and receiving.
- IEEE 802.11n used internal antenna plus external antenna. (3T3R, MIMO technology)

IEEE 802.11n Modulation Scheme

MCS	Spatial	Modulation	Coding Rate	Data rate(Mbps)	
Index	Streams	Type	Type	20 MHz channel 800nsGI	40 MHz channel 800nsGI
0	1	BPSK	1/2	6.5	13.5
1	1	QPSK	1/2	13	27
2	1	QPSK	3/4	19.5	40.5
3	1	16-QAM	1/2	26	54
4	1	16-QAM	3/4	39	81
5	1	64-QAM	2/3	52	108
6	1	64-QAM	3/4	58.5	121.5
7	1	64-QAM	5/6	65	135
8	2	BPSK	1/2	13	27
9	2	QPSK	1/2	26	54
10	2	QPSK	3/4	39	81
11	2	16-QAM	1/2	52	108
12	2	16-QAM	3/4	78	162
13	2	64-QAM	2/3	104	216
14	2	64-QAM	3/4	117	243
15	2	64-QAM	5/6	130	270
16	3	BPSK	1/2	19.5	40.5
17	3	QPSK	1/2	39	81
18	3	QPSK	3/4	58.5	121.5
19	3	16-QAM	1/2	78	162
20	3	16-QAM	3/4	117	243
21	3	64-QAM	2/3	156	324
22	3	64-QAM	3/4	175.5	364.5
23	3	64-QAM	5/6	195	405

2.3 Table for Carrier Frequencies

There are two bandwidth systems for IEEE 802.11b/g/n.

For IEEE 802.11 b/g/n (20MHz) bandwidth systems use channel 1 ~ 11.

For IEEE 802.11 n (40MHz) bandwidth systems use channel 3 ~ 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

2.4 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Mode	Auto	-	-
Radiated Emissions Below 1GHz				
Maximum Peak Output Power Power Spectral Density	11b/CCK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	
	MCS 16 (20MHz)	19.5 Mbps	1/6/11	A/B/C; A+B+C
	MCS 16 (40MHz)	40.5 Mbps	3/6/9	
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	
	MCS 16 (20MHz)	19.5 Mbps	1/6/11	A/B/C
	MCS 16 (40MHz)	40.5 Mbps	3/6/9	
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	
	MCS 16 (20MHz)	19.5 Mbps	1/6/11	A+B+C
	MCS 16 (40MHz)	40.5 Mbps	3/6/9	
Band Edge Emissions	11b/CCK	1 Mbps	1/11	A
	11g/BPSK	6 Mbps	1/11	
	MCS 16 (20MHz)	19.5 Mbps	1/11	A+B+C
	MCS 16 (40MHz)	40.5 Mbps	3/9	

2.5 Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH02-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

2.6 Table for Supporting Units

Support Unit	Brand	Model	FCC ID	Remark
Notebook	DELL	PP20L	DoC	Conducted Emissions
(USB) Mouse	Microsoft	1004	N/A	
iPod nano	Apple	A1199	N/A	
AP (Remote Workstation)	D-Link	DNS-G120	DoC	
Notebook	DELL	PP20L	N/A	Radiated Emissions

2.7 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Single Chain:

Power Parameters of IEEE 802.11b/g

Test Software Version	Ralink RT3573 QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	0C	0E	11
IEEE 802.11g	00	00	00

For Three Chain:

Power Parameters of IEEE 802.11n Ant. A+ B+ C

Test Software Version	Ralink RT3573 QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n	00;00;00	00;00;02	00;00;04
IEEE 802.11n	01;00;06	02;00;07	04;00;08

2.8 EUT Operation during Test

For Conducted Emissions :

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The NB sends "H" messages to the panel, and the panel displays "H" patterns on the screen.

At the same time, the following programs were executed:

- Executed "ping.exe" to link with the remote workstation to receive and transmit data by WLAN.


For Radiated Emissions :

- Executed "Ralink RT3573 QA" to keep transmitting signals at fixed frequency.


2.9 Test Configuration

2.9.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

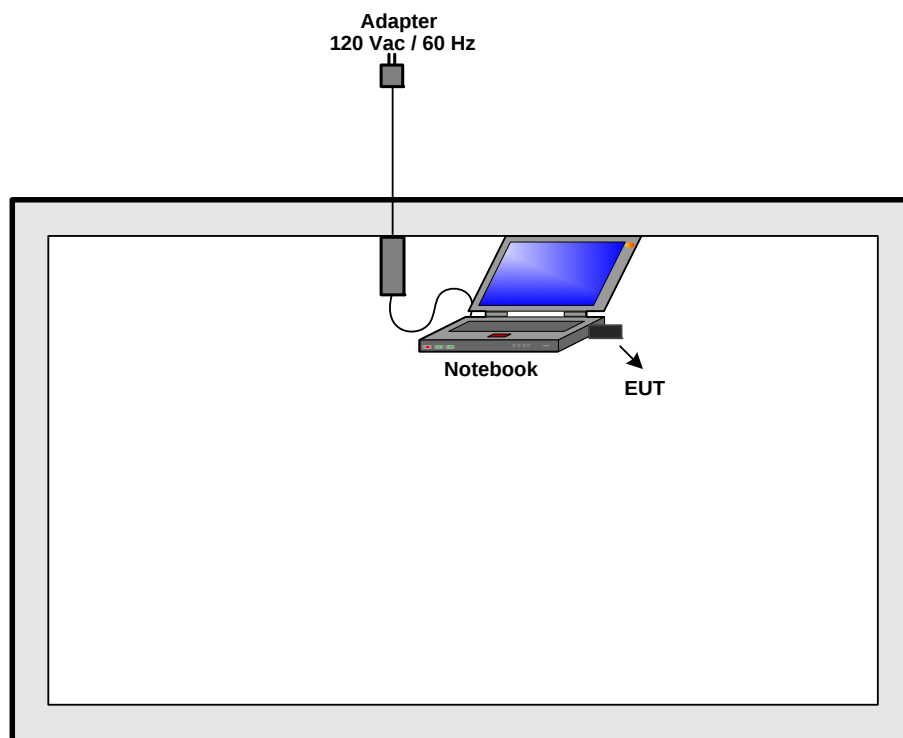

For radiated emissions above 1GHz

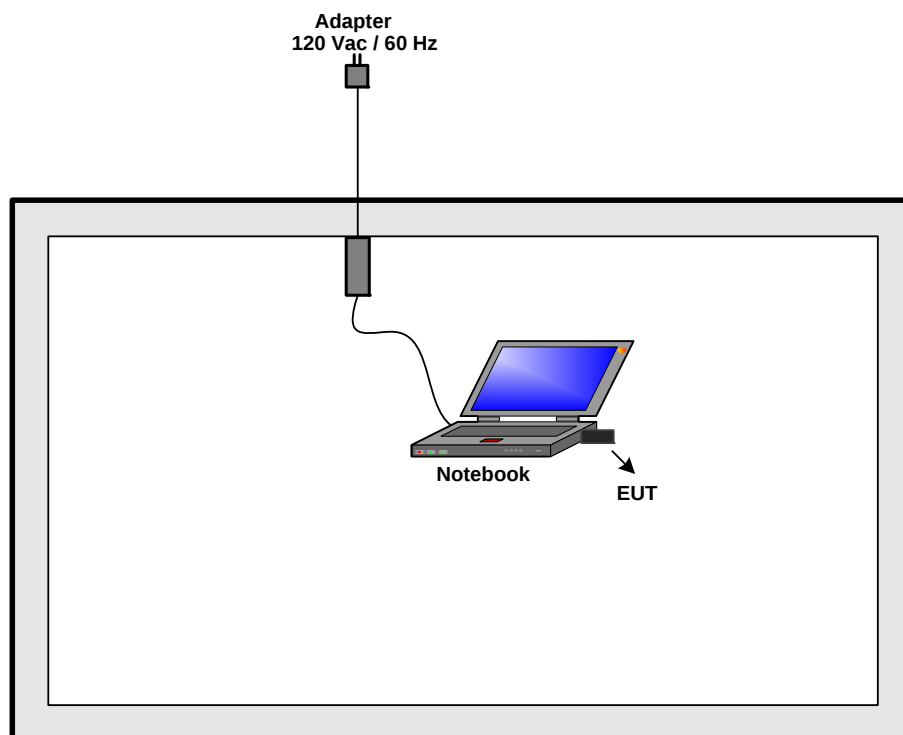

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	Aug. 31, 2011	Test Site No.	CO04-HY
Temperature	26.1°C	Humidity	56.8%
Test Engineer	Jason	Configuration	Normal Mode

Line

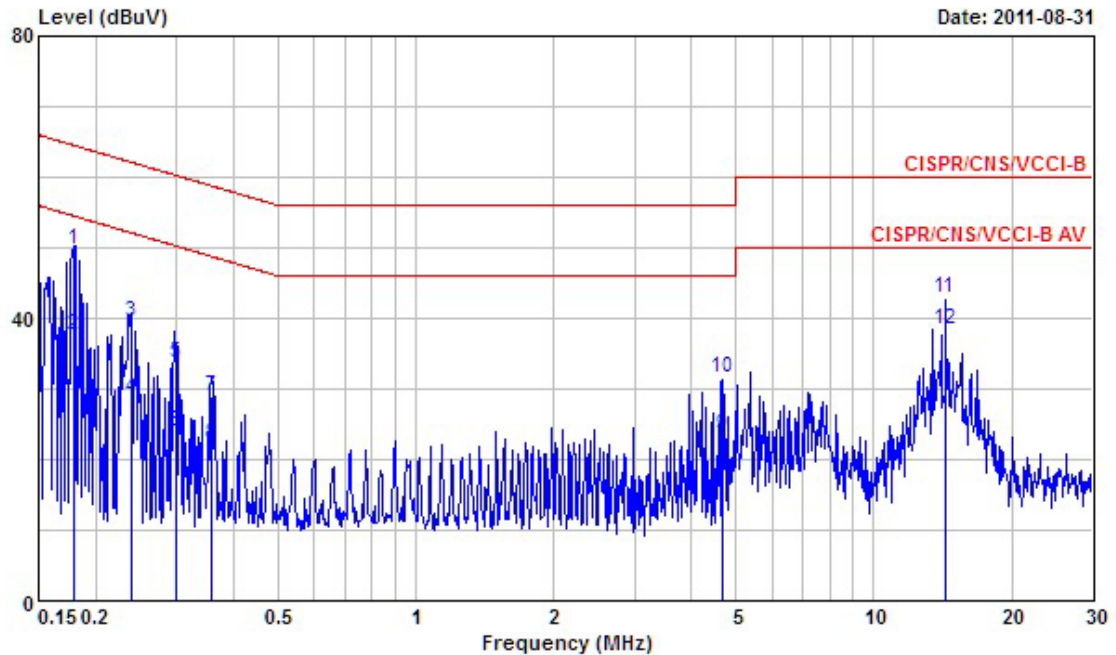

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1786590	49.61	-14.94	64.55	49.23	0.30	0.08	QP
2	0.1786590	37.53	-17.02	54.55	37.15	0.30	0.08	Average
3	0.2403720	39.44	-22.64	62.08	38.99	0.30	0.15	QP
4	0.2403720	28.63	-23.45	52.08	28.18	0.30	0.15	Average
5	0.2989200	33.69	-26.58	60.27	33.17	0.30	0.22	QP
6	0.2989200	24.07	-26.20	50.27	23.55	0.30	0.22	Average
7	0.3576520	28.82	-29.96	58.78	28.25	0.30	0.27	QP
8	0.3576520	22.05	-26.73	48.78	21.48	0.30	0.27	Average
9	4.665	23.42	-22.58	46.00	22.56	0.36	0.50	Average
10	4.665	31.59	-24.41	56.00	30.73	0.36	0.50	QP
11	14.300	43.00	-17.00	60.00	41.89	0.52	0.59	QP
12	14.300	38.35	-11.65	50.00	37.24	0.52	0.59	Average

Neutral

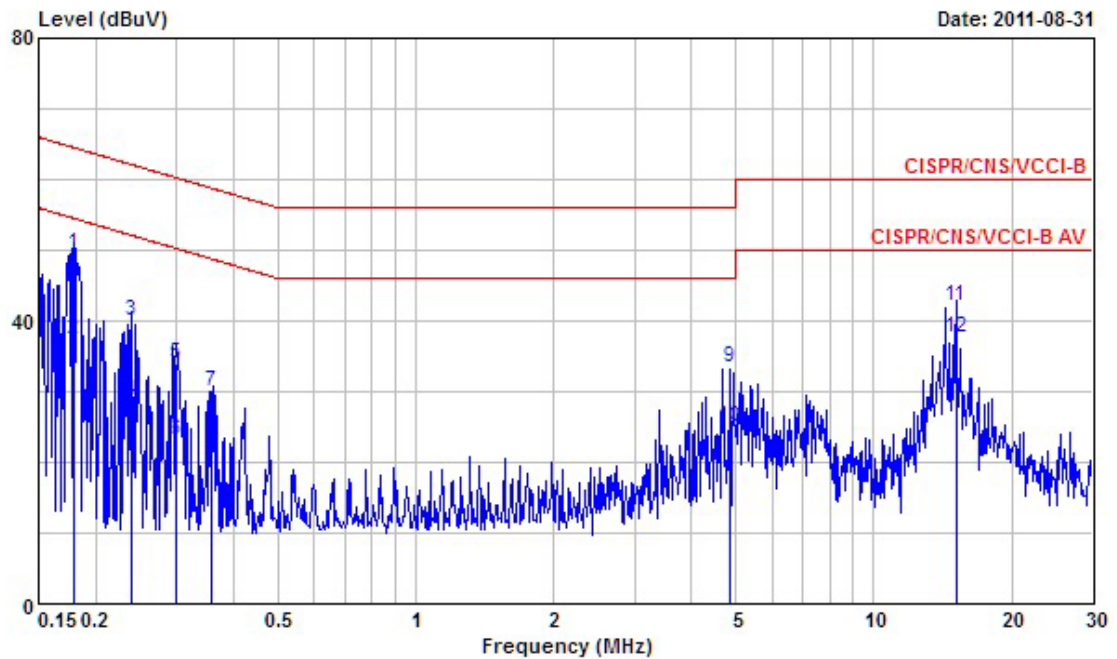

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1786590	49.53	-15.02	64.55	49.19	0.26	0.08	QP
2	0.1786590	37.36	-17.19	54.55	37.02	0.26	0.08	Average
3	0.2391010	40.04	-22.09	62.13	39.64	0.25	0.15	QP
4	0.2391010	28.76	-23.37	52.13	28.36	0.25	0.15	Average
5	0.2997800	34.02	-26.23	60.25	33.56	0.24	0.22	QP
6	0.2997800	23.28	-26.97	50.25	22.82	0.24	0.22	Average
7	0.3590620	30.00	-28.75	58.75	29.49	0.24	0.27	QP
8	0.3590620	20.49	-28.26	48.75	19.98	0.24	0.27	Average
9	4.845	33.41	-22.59	56.00	32.60	0.31	0.50	QP
10	4.845	25.10	-20.90	46.00	24.29	0.31	0.50	Average
11	15.115	42.05	-17.95	60.00	41.01	0.44	0.60	QP
12	15.115	37.51	-12.49	50.00	36.47	0.44	0.60	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 Maximum Peak Output Power Measurement

3.2.1 Limit

For systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.
4. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

3.2.4 Test Setup Layout

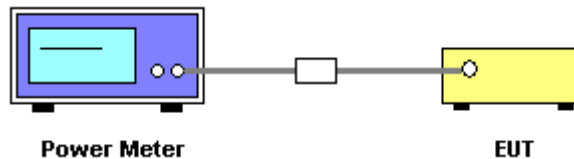

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Maximum Peak Output Power

Final Test Date	Aug. 25, 2011	Test Site No.	TH01-HY
Temperature	27.8°C	Humidity	69%
Test Engineer	Ian	Configurations	802.11b/g/n

For Single Chain:

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.84	30.00	Complies
6	2437 MHz	16.39	30.00	Complies
11	2462 MHz	16.57	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	18.25	30.00	Complies
6	2437 MHz	17.64	30.00	Complies
11	2462 MHz	15.69	30.00	Complies

For Three Chain:

Configuration of IEEE 802.11n Ant. A (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.94	30.00	Complies
6	2437 MHz	15.87	30.00	Complies
11	2462 MHz	14.97	30.00	Complies

Configuration of IEEE 802.11n Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	18.23	30.00	Complies
6	2437 MHz	17.15	30.00	Complies
11	2462 MHz	15.83	30.00	Complies

Configuration of IEEE 802.11n Ant. C (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.32	30.00	Complies
6	2437 MHz	14.36	30.00	Complies
11	2462 MHz	14.92	30.00	Complies

Configuration of IEEE 802.11n Ant. A+ B+ C (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.55	30.00	Complies
6	2437 MHz	20.71	30.00	Complies
11	2462 MHz	20.03	30.00	Complies

Configuration of IEEE 802.11n Ant. A (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.22	30.00	Complies
6	2437 MHz	14.12	30.00	Complies
9	2452 MHz	14.47	30.00	Complies

Configuration of IEEE 802.11n Ant. B (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.78	30.00	Complies
6	2437 MHz	14.69	30.00	Complies
9	2452 MHz	14.12	30.00	Complies

Configuration of IEEE 802.11n Ant. C (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.20	30.00	Complies
6	2437 MHz	14.41	30.00	Complies
9	2452 MHz	14.56	30.00	Complies

Configuration of IEEE 802.11n Ant. A+ B+ C (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	19.18	30.00	Complies
6	2437 MHz	19.18	30.00	Complies
9	2452 MHz	19.16	30.00	Complies

3.3 Power Spectral Density Measurement

3.3.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

3.3.4 Test Setup Layout

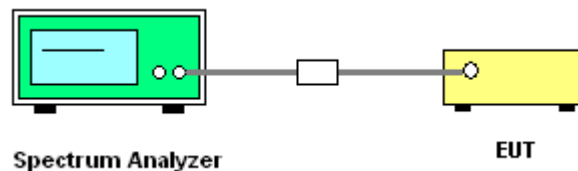

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Power Spectral Density

Final Test Date	Aug. 25, 2011	Test Site No.	TH01-HY
Temperature	27.8°C	Humidity	69%
Test Engineer	Ian	Configurations	802.11b/g/n

For Single Chain:

Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-10.82	8.00	Complies
6	2437 MHz	-10.95	8.00	Complies
11	2462 MHz	-10.54	8.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-18.57	8.00	Complies
6	2437 MHz	-20.68	8.00	Complies
11	2462 MHz	-21.38	8.00	Complies

For Three Chain:

Configuration of IEEE 802.11n Ant. A (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-19.89	8.00	Complies
6	2437 MHz	-20.57	8.00	Complies
11	2462 MHz	-23.37	8.00	Complies

Configuration of IEEE 802.11n Ant. B (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-20.90	8.00	Complies
6	2437 MHz	-22.45	8.00	Complies
11	2462 MHz	-24.09	8.00	Complies

Configuration of IEEE 802.11n Ant. C (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-22.39	8.00	Complies
6	2437 MHz	-21.45	8.00	Complies
11	2462 MHz	-22.99	8.00	Complies

Configuration of IEEE 802.11n Ant. A+ B+ C (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-16.17	8.00	Complies
6	2437 MHz	-16.65	8.00	Complies
11	2462 MHz	-18.69	8.00	Complies

Configuration of IEEE 802.11n Ant. A (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-27.61	8.00	Complies
6	2437 MHz	-26.39	8.00	Complies
9	2452 MHz	-25.69	8.00	Complies

Configuration of IEEE 802.11n Ant. B (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-26.58	8.00	Complies
6	2437 MHz	-27.74	8.00	Complies
9	2452 MHz	-28.08	8.00	Complies


Configuration of IEEE 802.11n Ant. C (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-27.25	8.00	Complies
6	2437 MHz	-26.73	8.00	Complies
9	2452 MHz	-25.98	8.00	Complies

Configuration of IEEE 802.11n Ant. A+ B+ C (40MHz)


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-22.35	8.00	Complies
6	2437 MHz	-22.15	8.00	Complies
9	2452 MHz	-21.69	8.00	Complies

For Single Chain:
Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

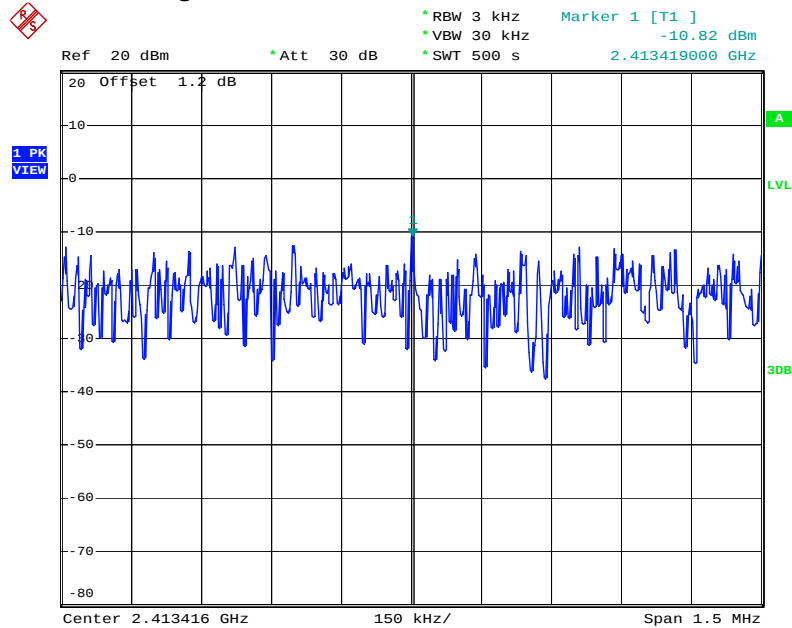


Date: 24.AUG.2011 14:23:30

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

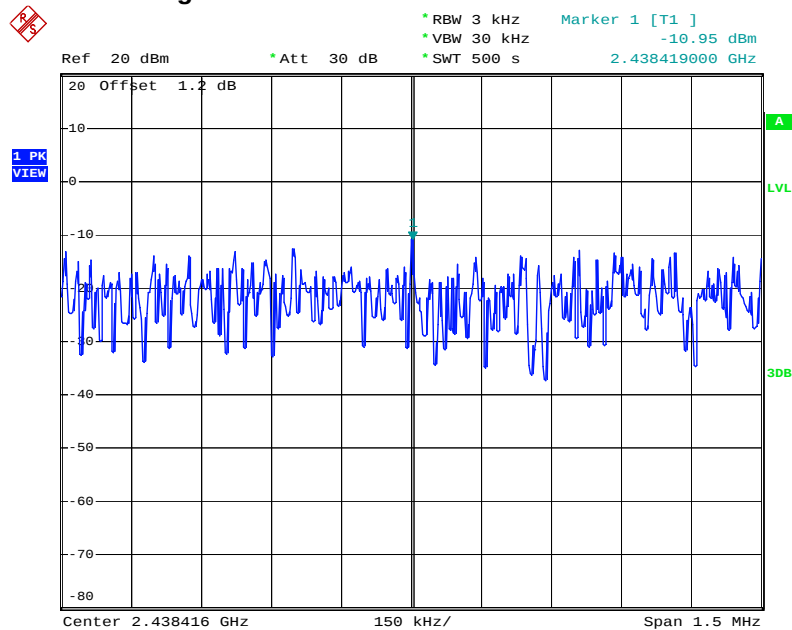


Date: 24.AUG.2011 14:26:03

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

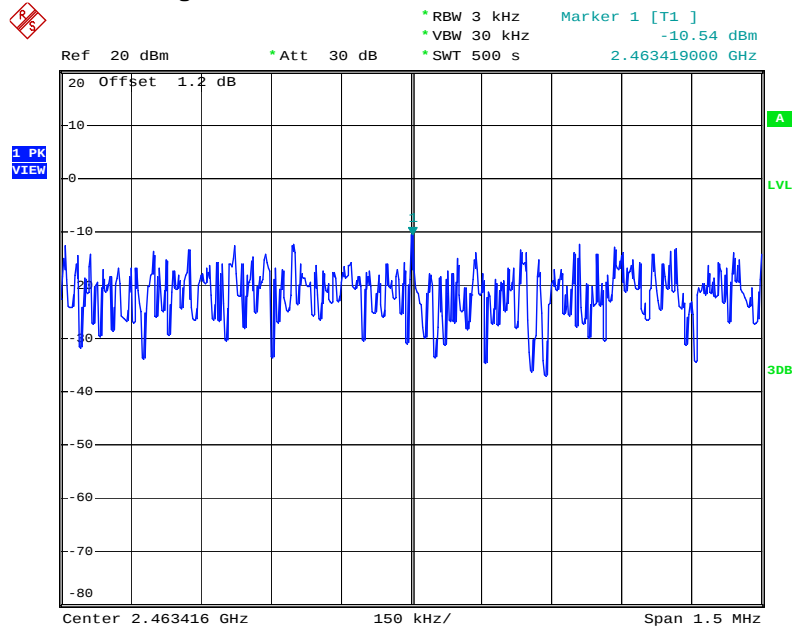


Date: 24.AUG.2011 14:33:37

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

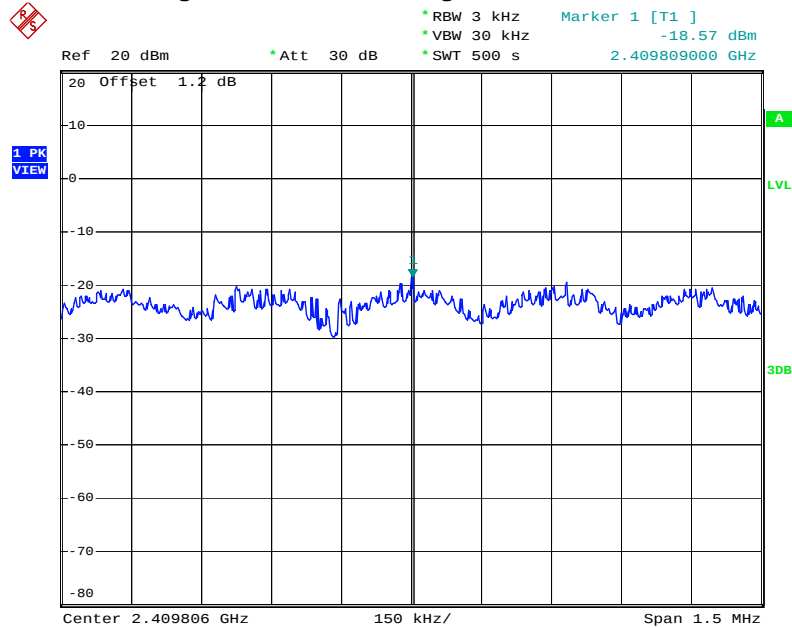


Date: 24.AUG.2011 14:38:16

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

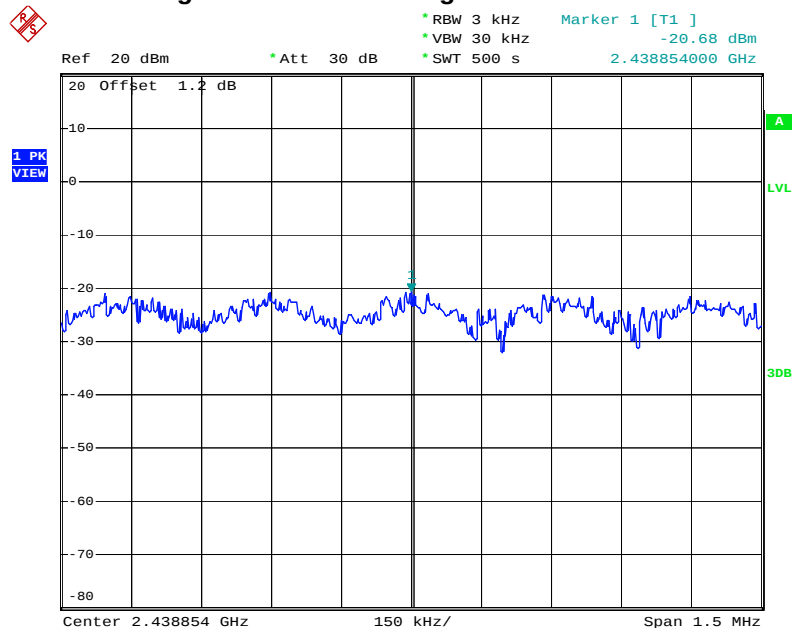


Date: 24.AUG.2011 14:42:12

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

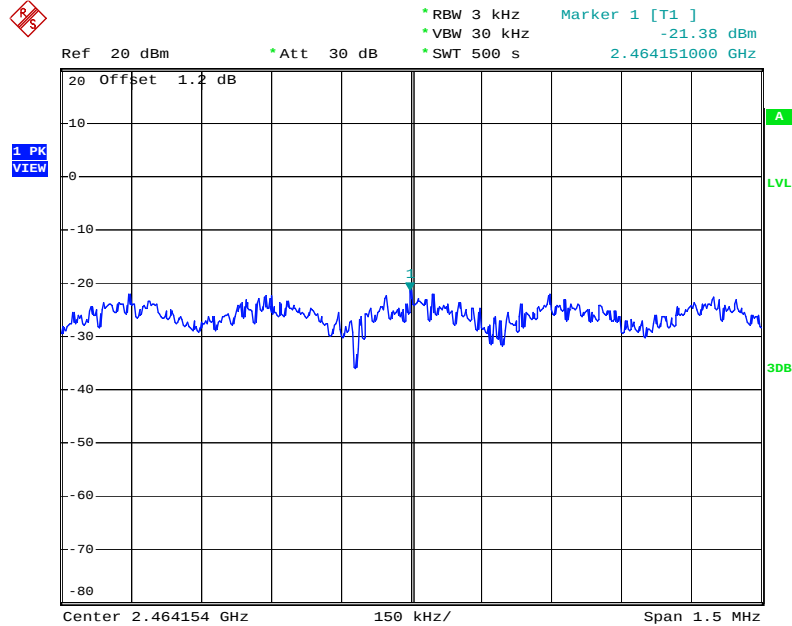


Date: 24.AUG.2011 14:45:20

For Three Chain:
Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 2412 MHz

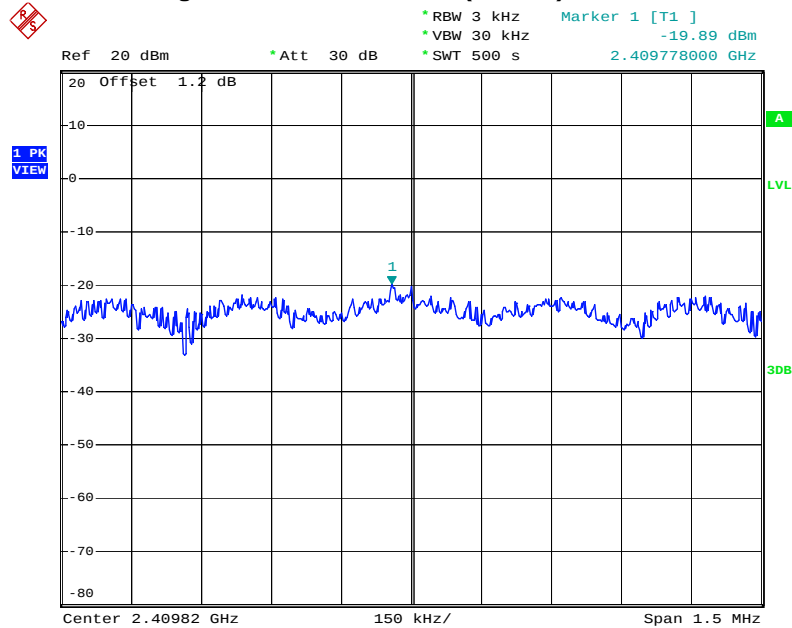


Date: 24.AUG.2011 15:42:37

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 2437 MHz

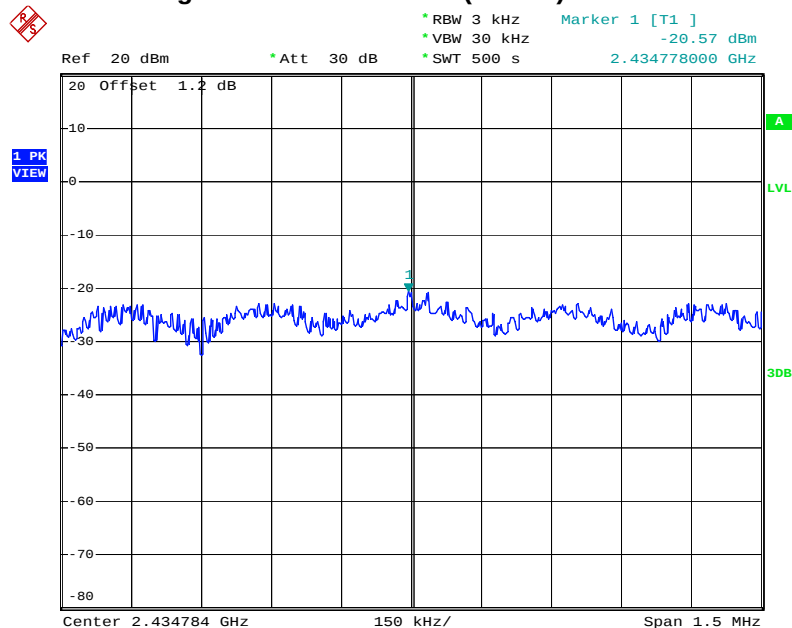


Date: 24.AUG.2011 18:10:05

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 2462 MHz

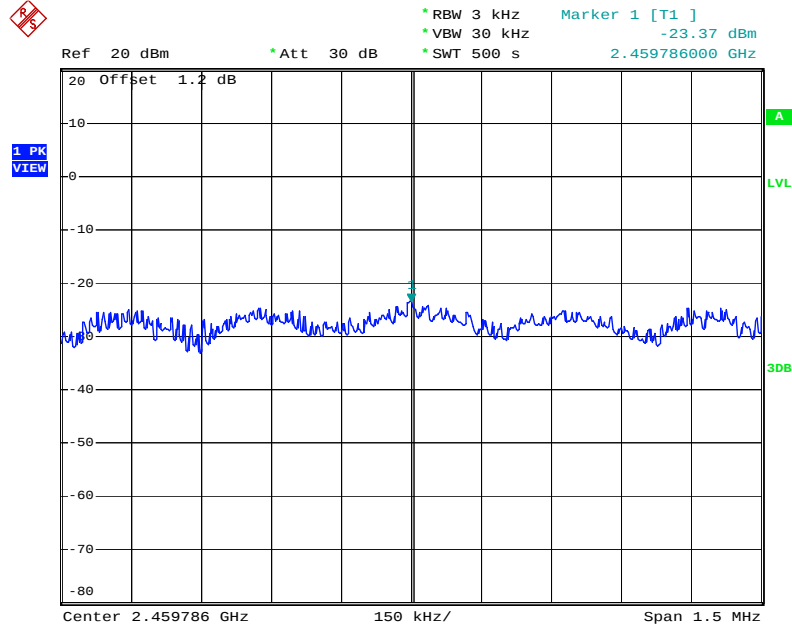


Date: 24.AUG.2011 18:13:52

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 2412 MHz

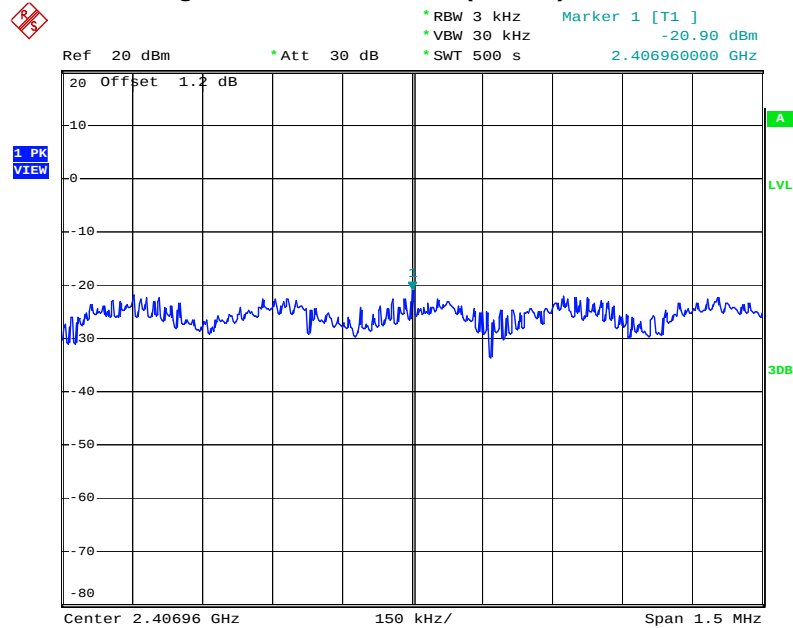


Date: 24.AUG.2011 18:22:51

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 2437 MHz

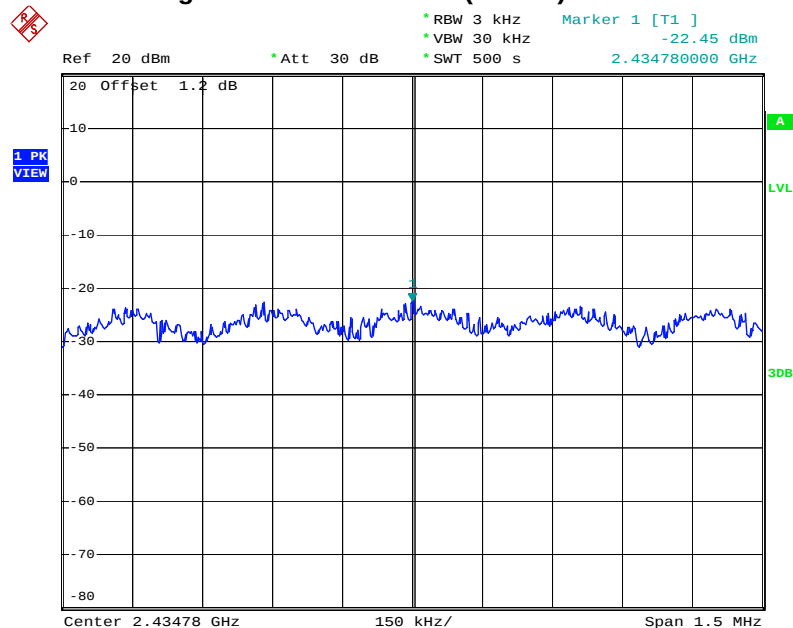


Date: 24.AUG.2011 18:24:48

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 2462 MHz

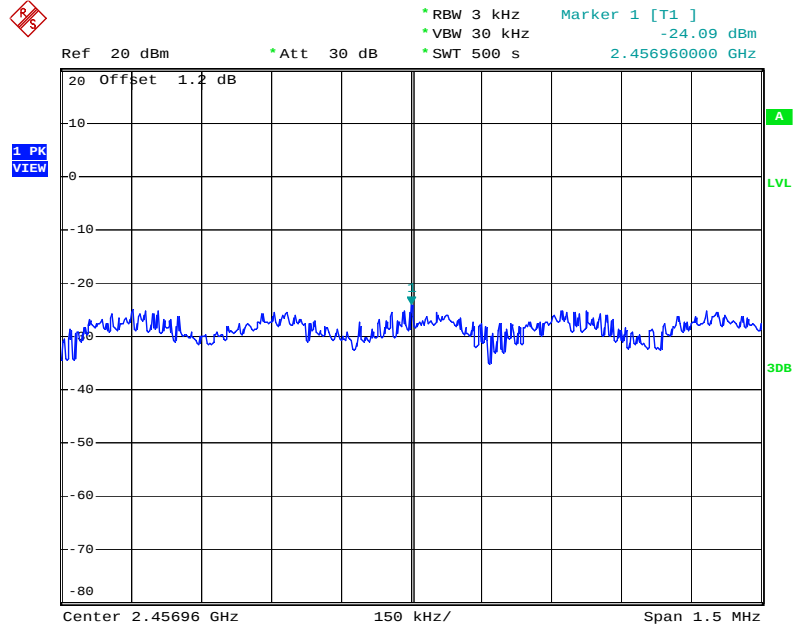


Date: 24.AUG.2011 18:27:38

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. C / 2412 MHz

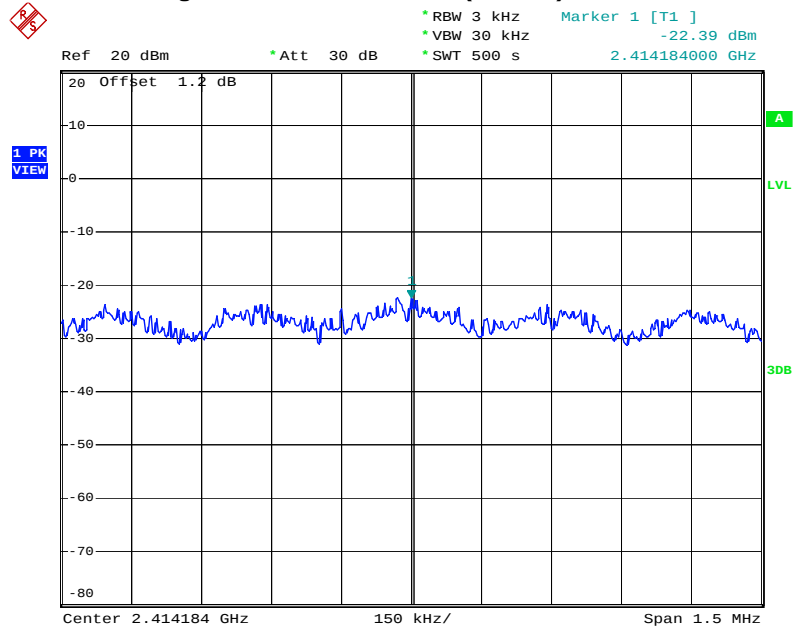


Date: 25.AUG.2011 09:19:40

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. C / 2437 MHz

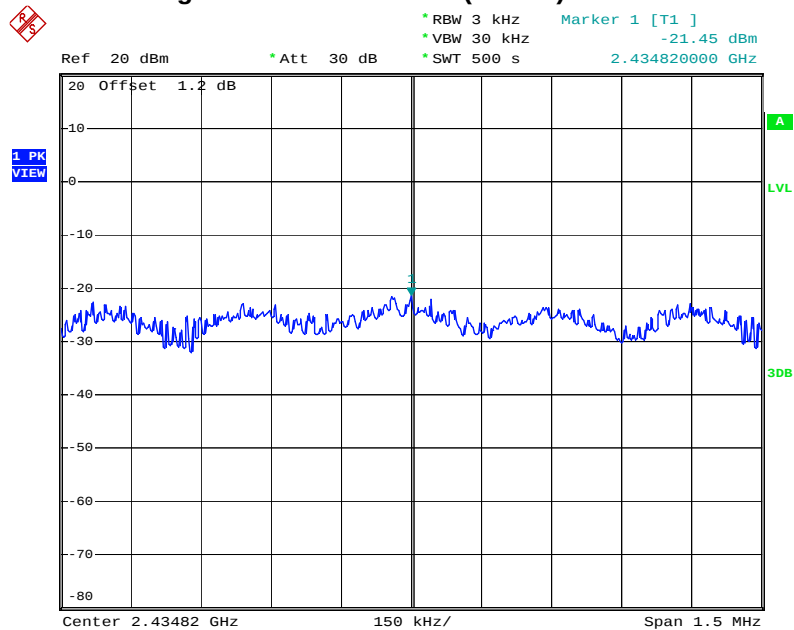


Date: 25.AUG.2011 09:39:14

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. C / 2462 MHz

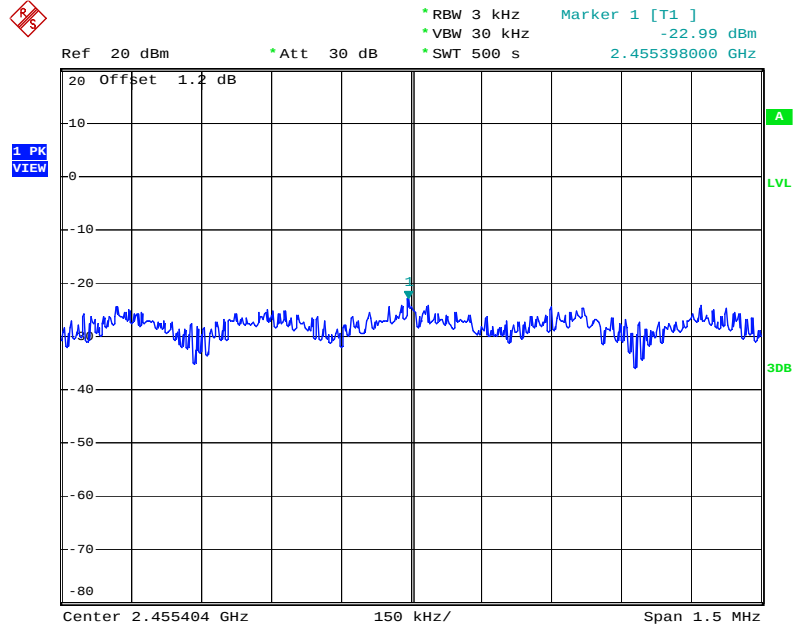


Date: 25.AUG.2011 11:24:19

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 2422 MHz

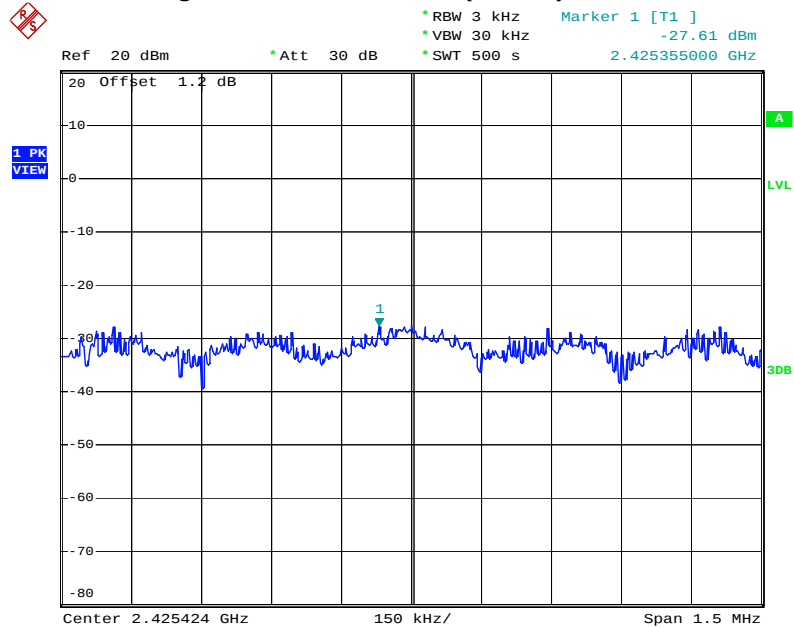


Date: 25.AUG.2011 11:42:03

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 2437 MHz

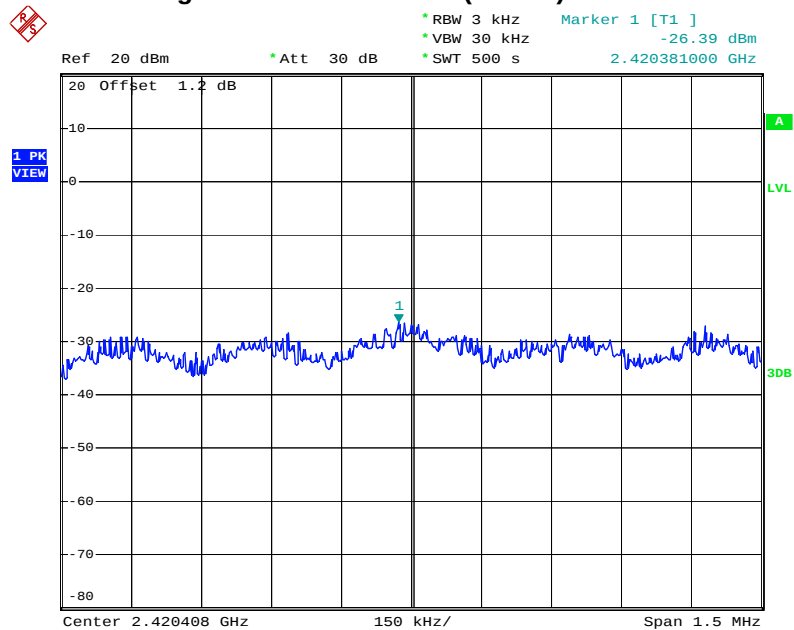


Date: 25.AUG.2011 11:46:25

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 2452 MHz

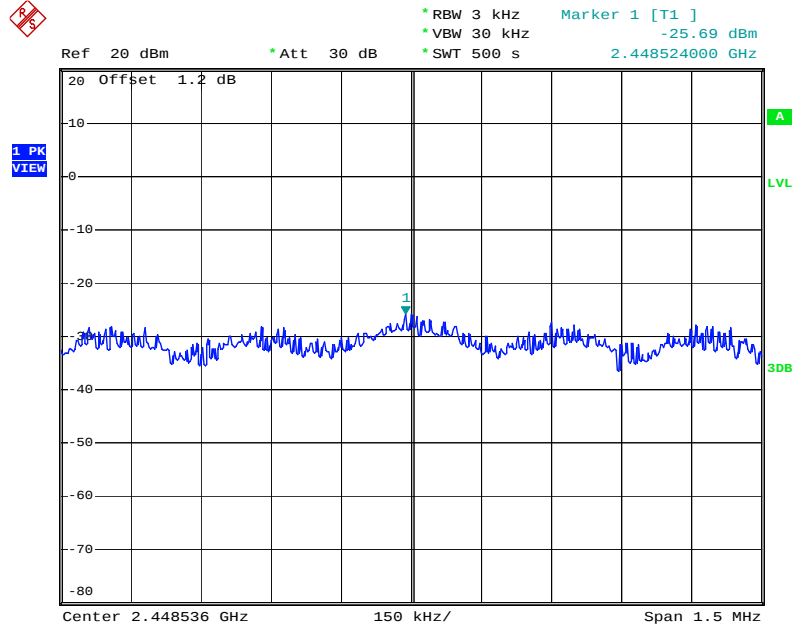


Date: 25.AUG.2011 11:49:25

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 2422 MHz

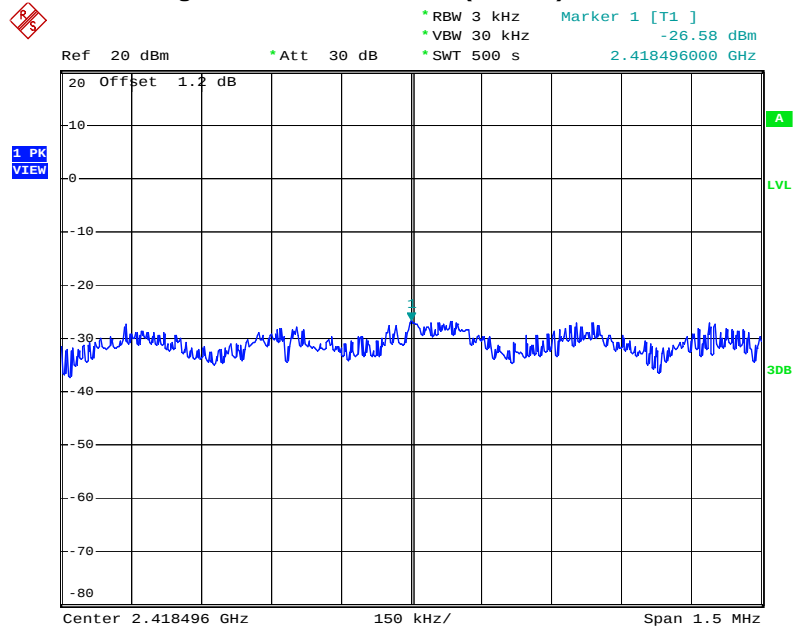


Date: 25.AUG.2011 13:36:52

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 2437 MHz

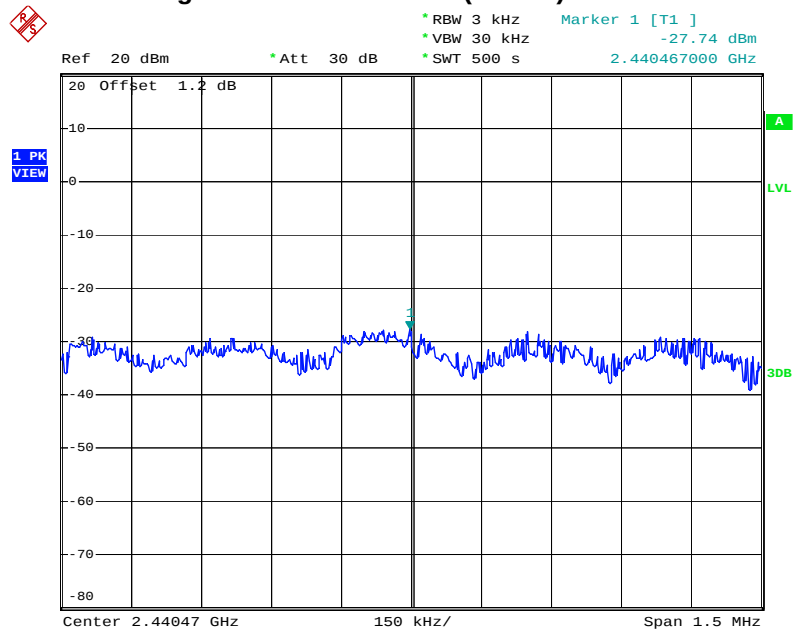


Date: 25.AUG.2011 13:39:49

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 2452 MHz

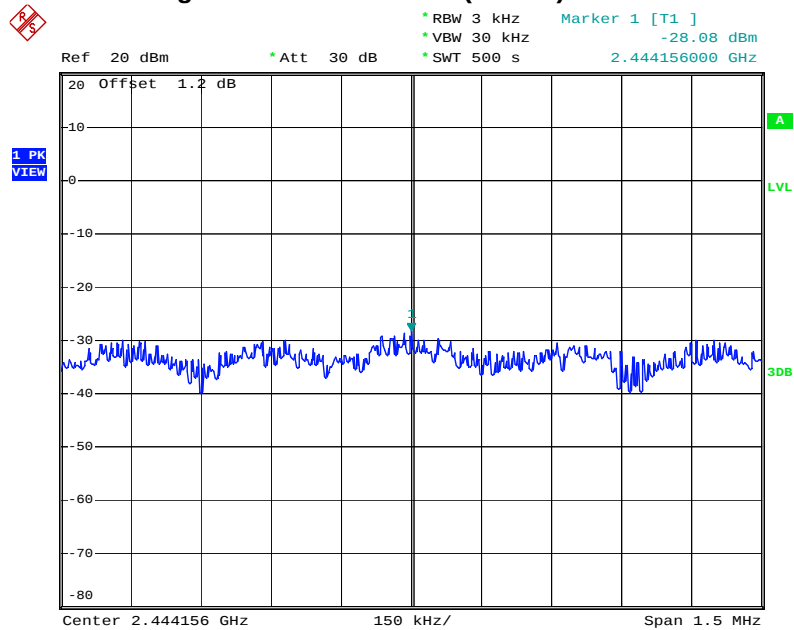


Date: 25.AUG.2011 13:42:44

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. C / 2422 MHz

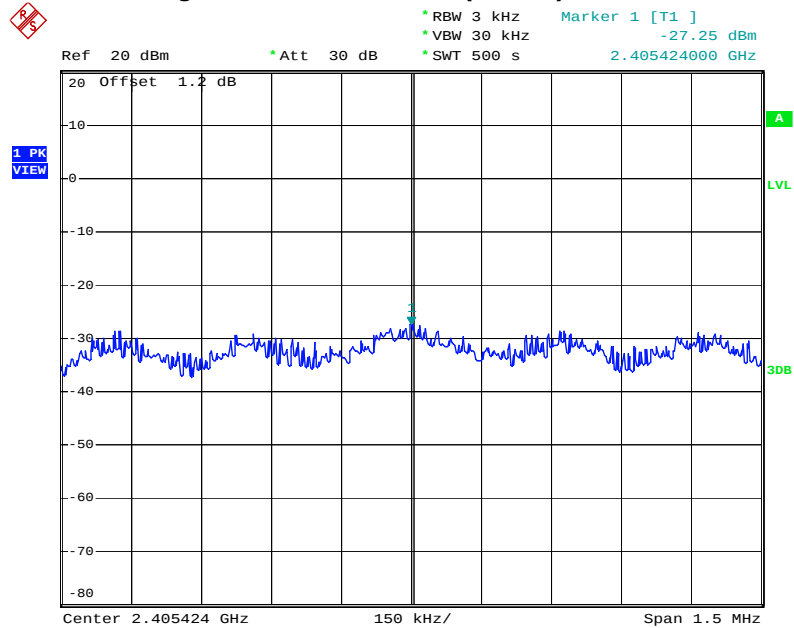


Date: 25.AUG.2011 13:49:08

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. C / 2437 MHz

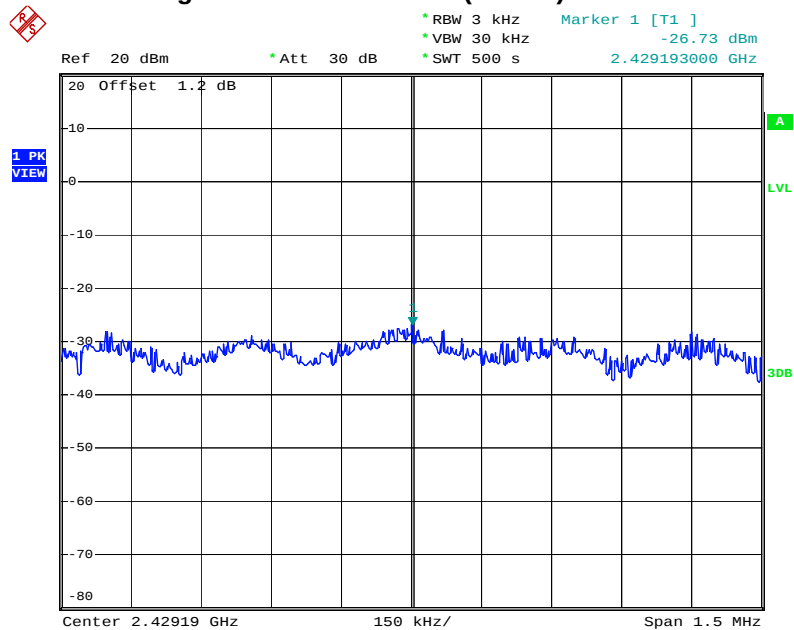

Date: 25.AUG.2011 13:51:09

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. C / 2452 MHz

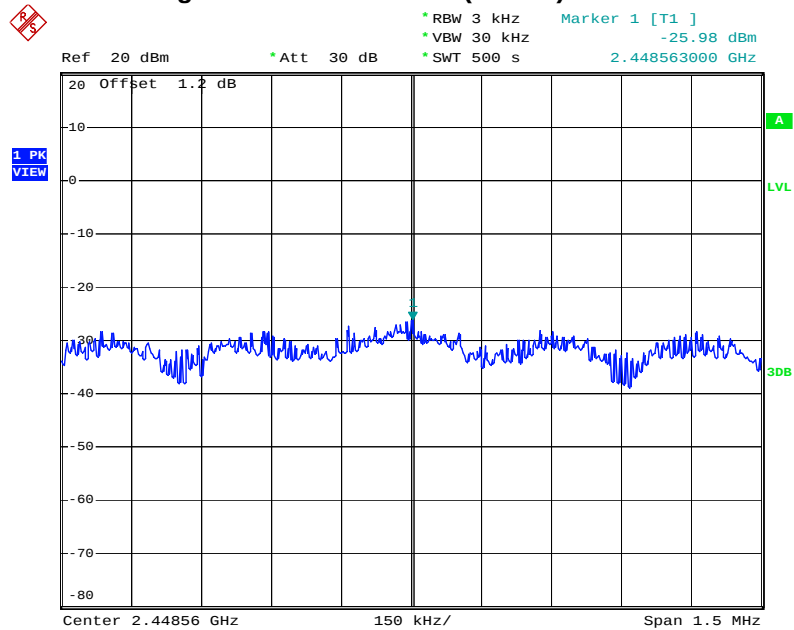

Date: 25.AUG.2011 13:53:59

3.4 6dB Spectrum Bandwidth Measurement

3.4.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

3.4.4 Test Setup Layout

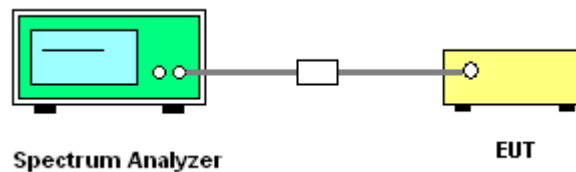

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of 6dB Spectrum Bandwidth

Final Test Date	Aug. 25, 2011	Test Site No.	TH01-HY
Temperature	27.8°C	Humidity	69%
Test Engineer	Ian	Configurations	802.11b/g/n

For Single Chain:

Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.20	15.16	500	Complies
6	2437 MHz	12.20	15.12	500	Complies
11	2462 MHz	12.20	15.16	500	Complies

Configuration IEEE 802.11g

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.64	16.48	500	Complies
6	2437 MHz	16.64	16.48	500	Complies
11	2462 MHz	16.64	16.48	500	Complies

For Three Chain:

Configuration of IEEE 802.11n Ant. A (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.76	17.56	500	Complies
6	2437 MHz	17.76	17.56	500	Complies
11	2462 MHz	17.76	17.56	500	Complies

Configuration of IEEE 802.11n Ant. B (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.64	17.56	500	Complies
6	2437 MHz	17.64	17.56	500	Complies
11	2462 MHz	17.72	17.56	500	Complies

Configuration of IEEE 802.11n Ant. C (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.64	17.56	500	Complies
6	2437 MHz	17.68	17.56	500	Complies
11	2462 MHz	17.72	17.56	500	Complies

Configuration of IEEE 802.11n Ant. A (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.00	500	Complies
6	2437 MHz	36.48	36.00	500	Complies
9	2452 MHz	36.48	36.00	500	Complies


Configuration of IEEE 802.11n Ant. B (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.40	36.00	500	Complies
6	2437 MHz	36.40	36.00	500	Complies
9	2452 MHz	36.40	35.92	500	Complies

Configuration of IEEE 802.11n Ant. C (40MHz)


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.40	35.92	500	Complies
6	2437 MHz	36.40	35.92	500	Complies
9	2452 MHz	36.40	35.92	500	Complies

For Single Chain:
6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

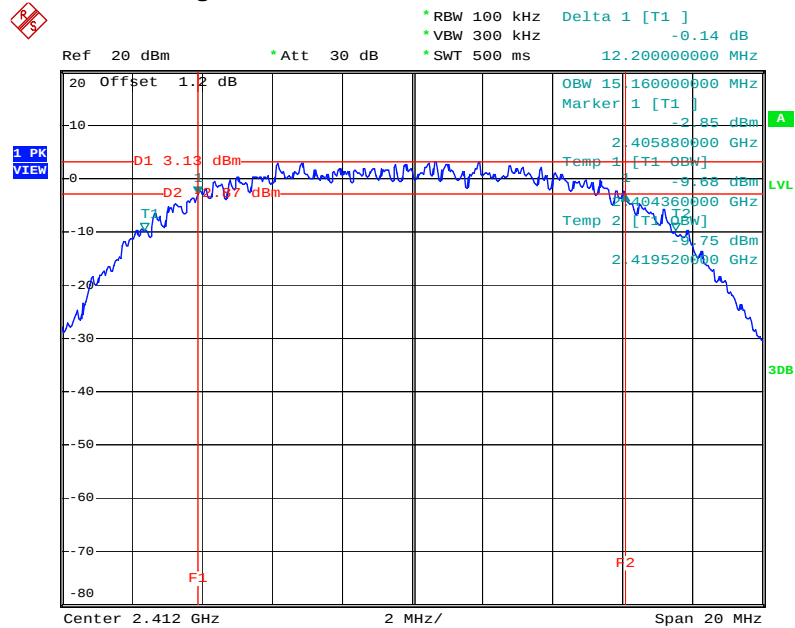


Date: 24.AUG.2011 14:21:37

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

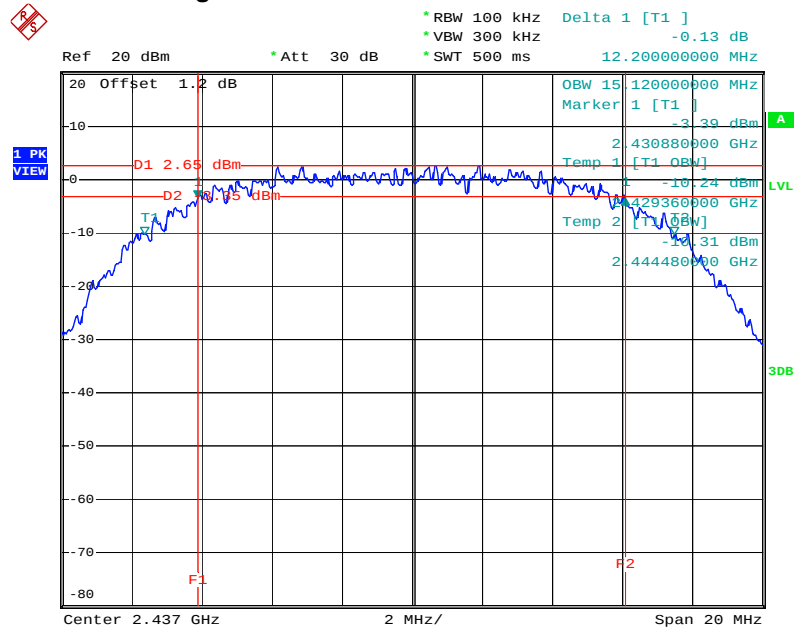


Date: 24.AUG.2011 14:25:10

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

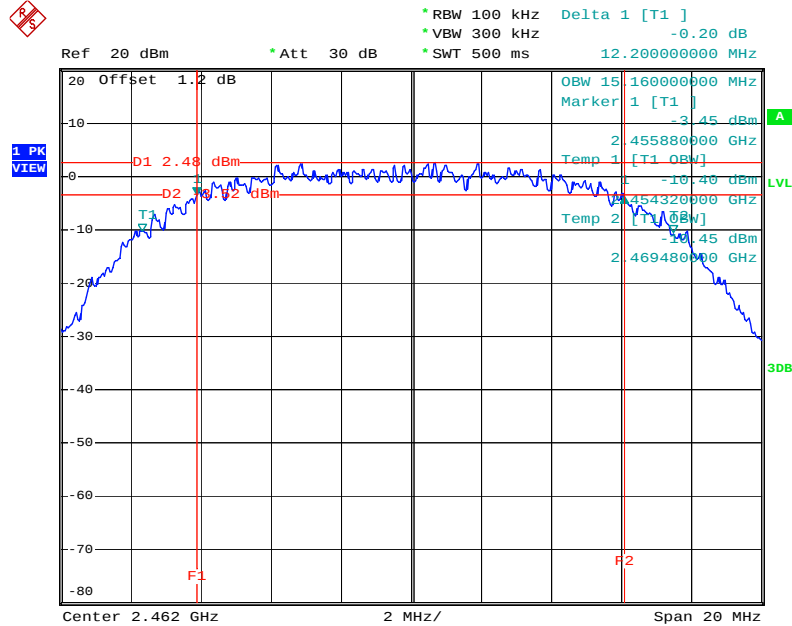


Date: 24.AUG.2011 14:27:48

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

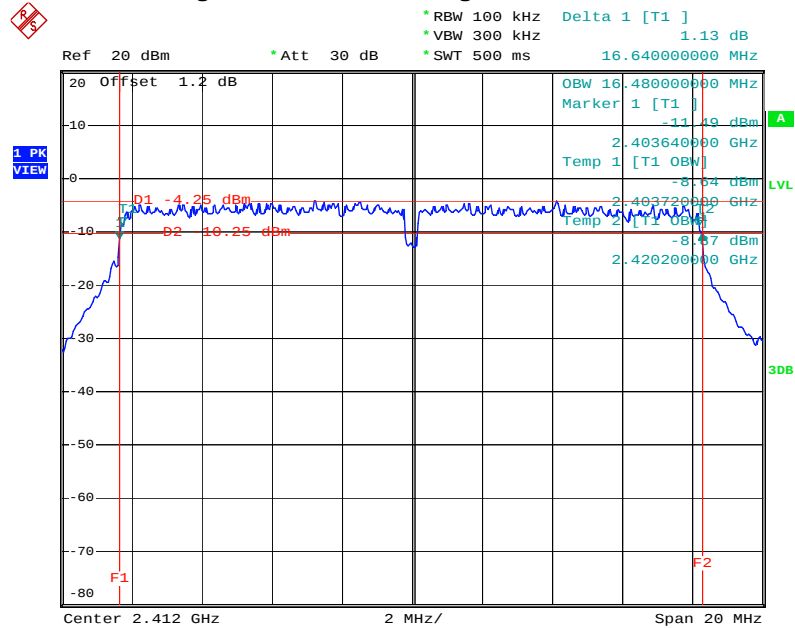


Date: 24.AUG.2011 14:36:07

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

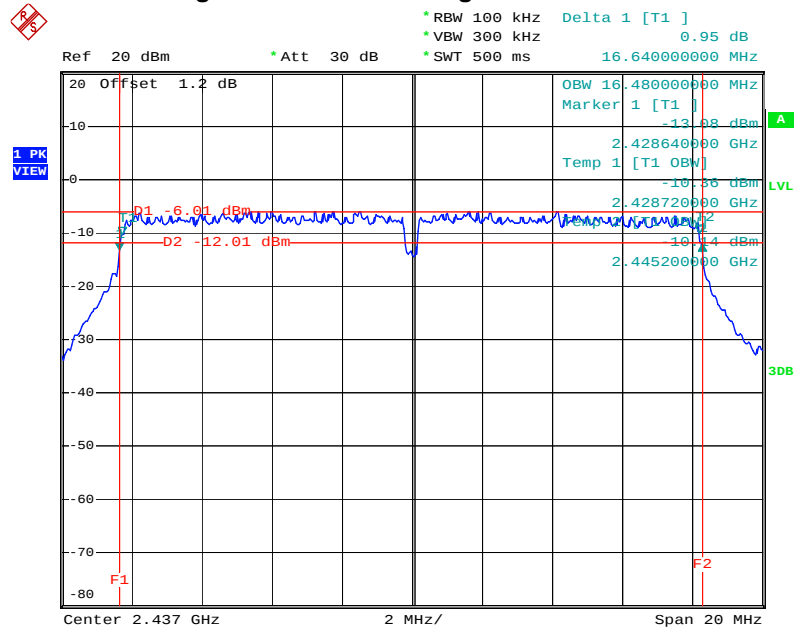


Date: 24.AUG.2011 14:39:51

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

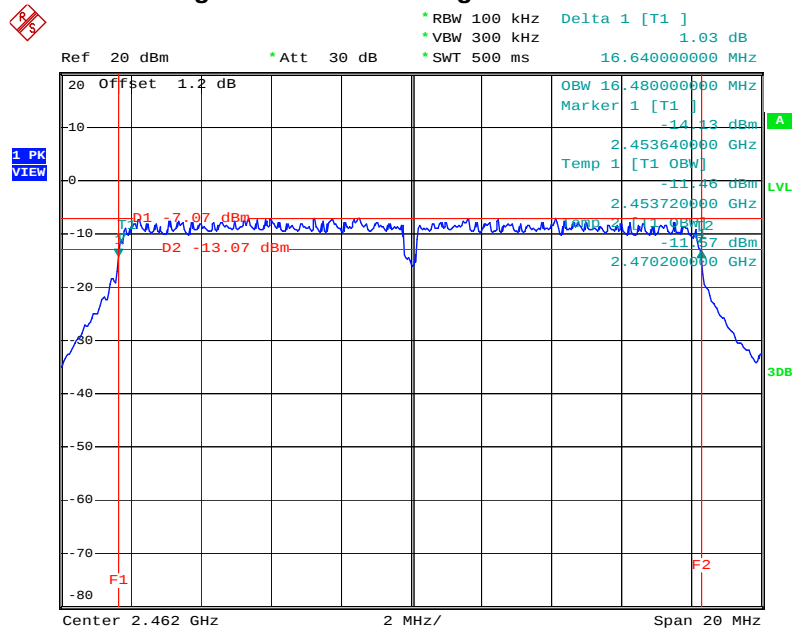


Date: 24.AUG.2011 14:43:42

For Three Chain:
6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 2412 MHz

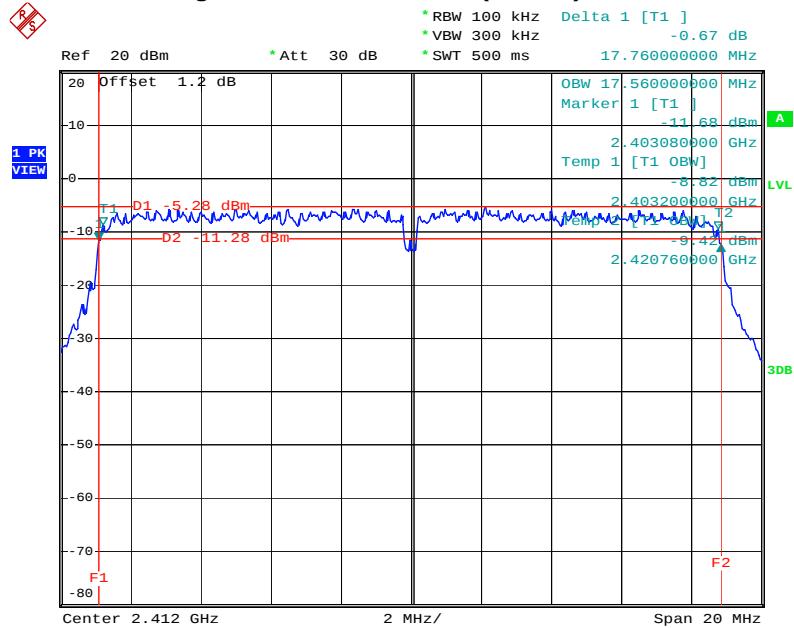


Date: 24.AUG.2011 15:40:46

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 2437 MHz

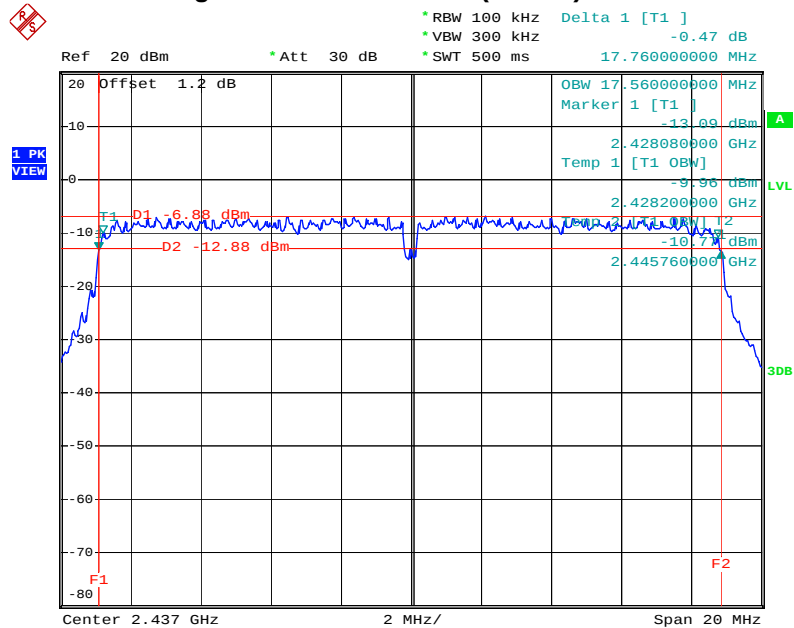


Date: 24.AUG.2011 16:12:40

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 2462 MHz

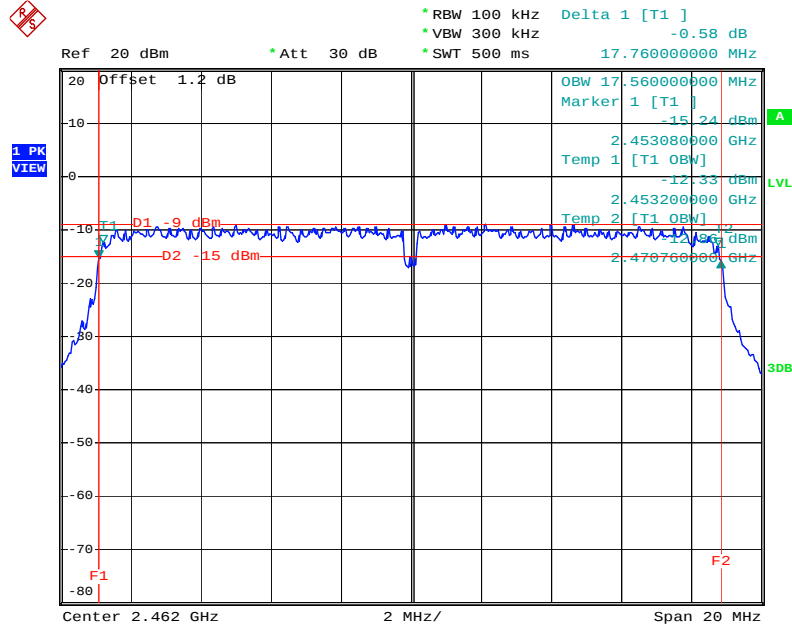


Date: 24.AUG.2011 18:12:04

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 2412 MHz

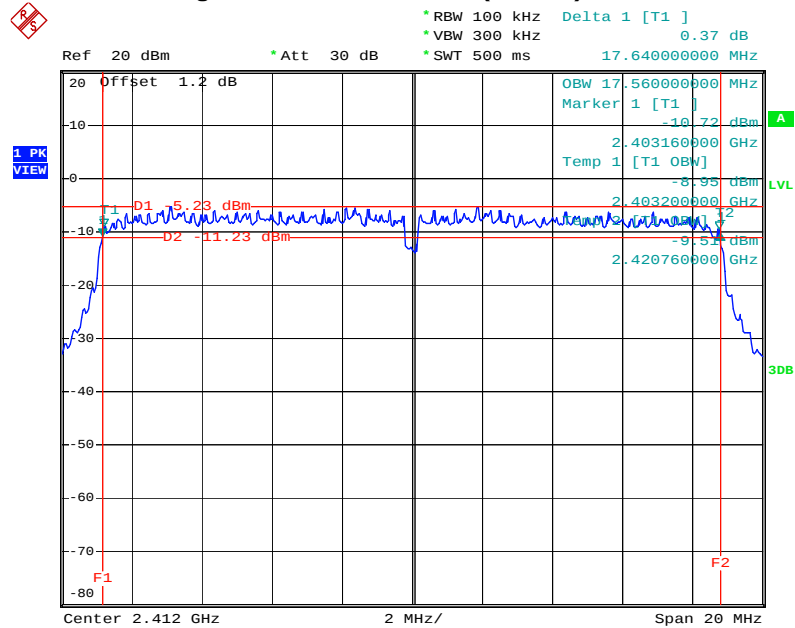

Date: 24.AUG.2011 18:19:44

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 2437 MHz

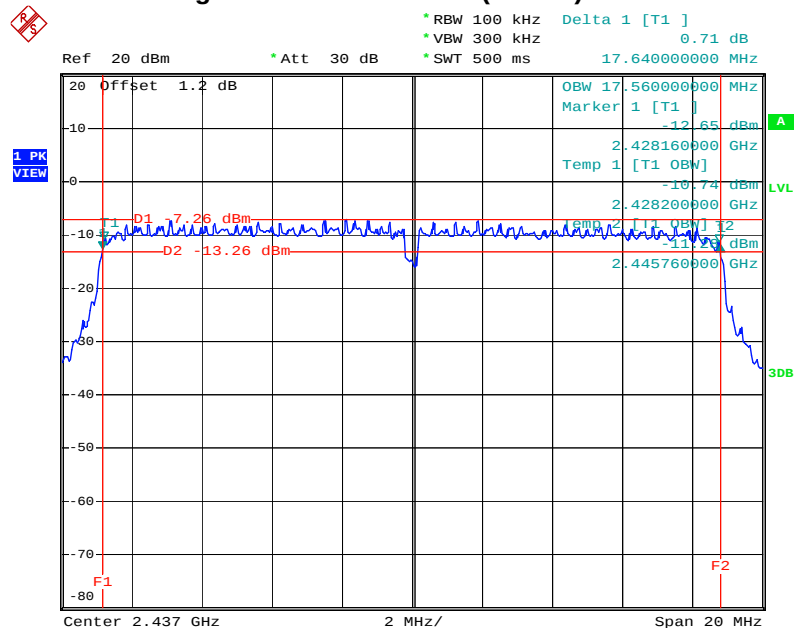


Date: 24.AUG.2011 18:24:04

Delta 1 [T1]
 -0.11 dB
 17.72000000 MHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 500 ms
 Ref 20 dBm
 Att 30 dB
 Offset 1.2 dB
 OBW 17.56000000 MHz
 Marker 1 [T1]
 -15.62 dBm
 2.453120000 GHz
 Temp 1 [T1 OBW]
 -11.88 dBm
 2.453200000 GHz
 Temp 2 [T1 OBW]
 -12.33 dBm
 2.470760000 GHz
 F1
 D1 -8.88 dBm
 D2 -14.88 dBm
 F2
 1 PK VIEW
 A
 LVL
 3DB
 Center 2.462 GHz
 2 MHz/
 Span 20 MHz


Date: 24.AUG.2011 18:26:15

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. C / 2412 MHz

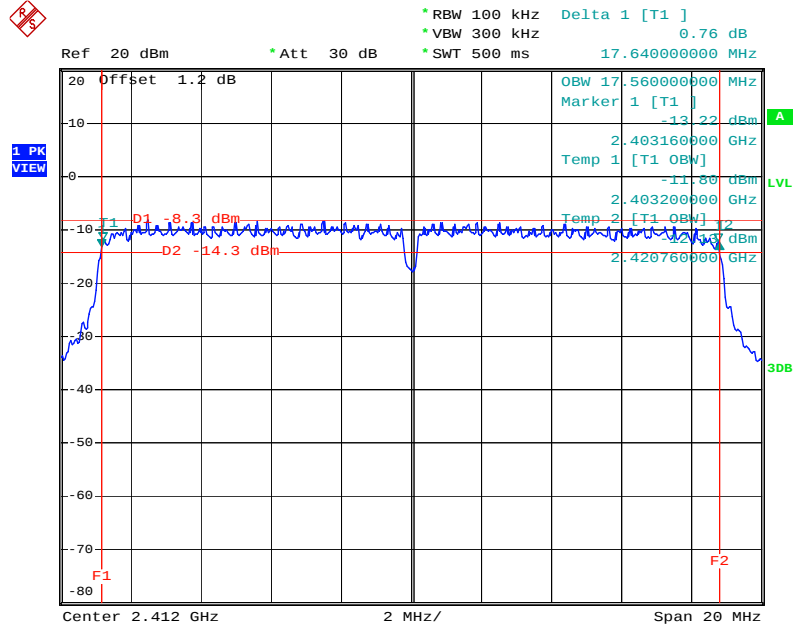

Date: 25.AUG.2011 09:14:53

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. C / 2437 MHz

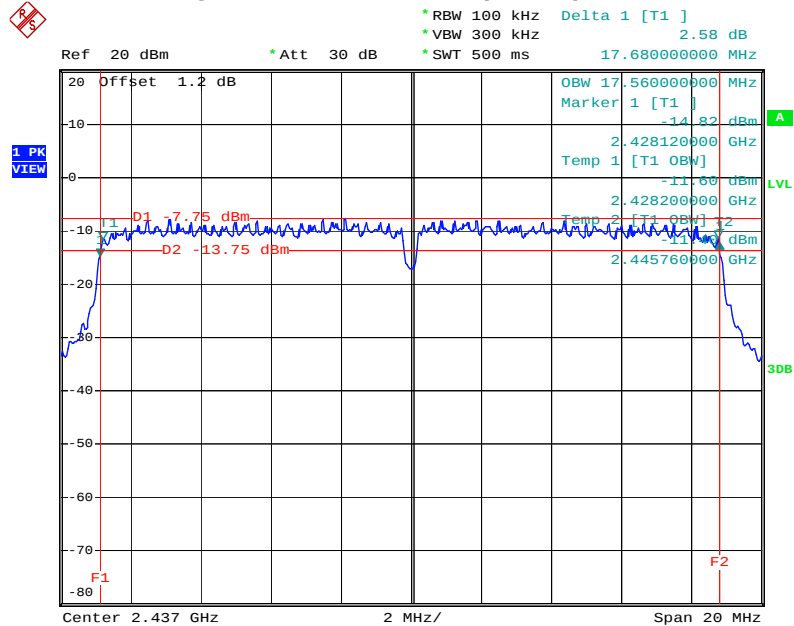

Date: 25.AUG.2011 09:37:01

1 PK VIEW

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 500 ms Delta 1 [T1] 0.34 dB 17.720000000 MHz

Offset 1.2 dB

OBW 17.560000000 MHz
Marker 1 [T1] -13.74 dBm
2.453120000 GHz
Temp 1 [T1 OBW] -10.38 dBm
2.453200000 GHz
2.470760000 GHz


D1 -6.72 dBm
D2 -12.72 dBm

F1 F2

Center 2.462 GHz 2 MHz/
Span 20 MHz


Date: 25.AUG.2011 10:06:08

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 2422 MHz

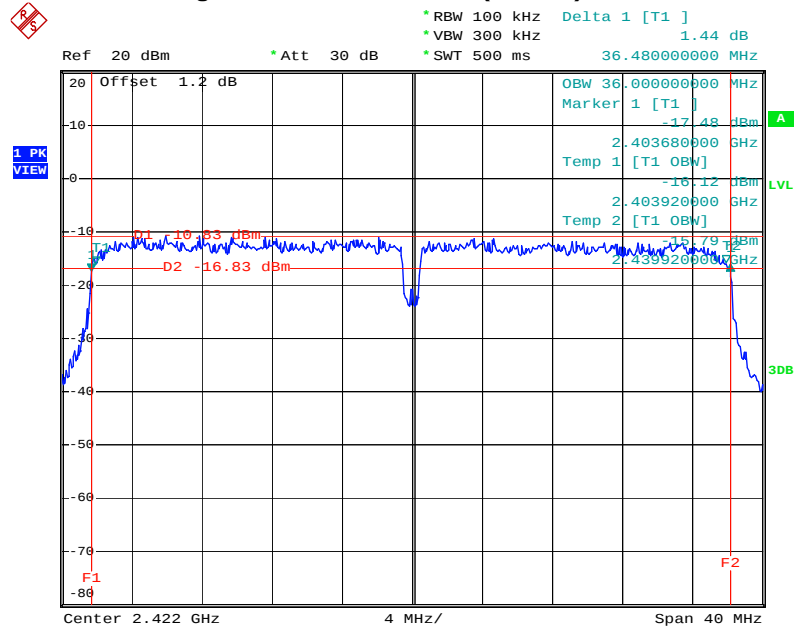


Date: 25.AUG.2011 11:40:09

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 2437 MHz

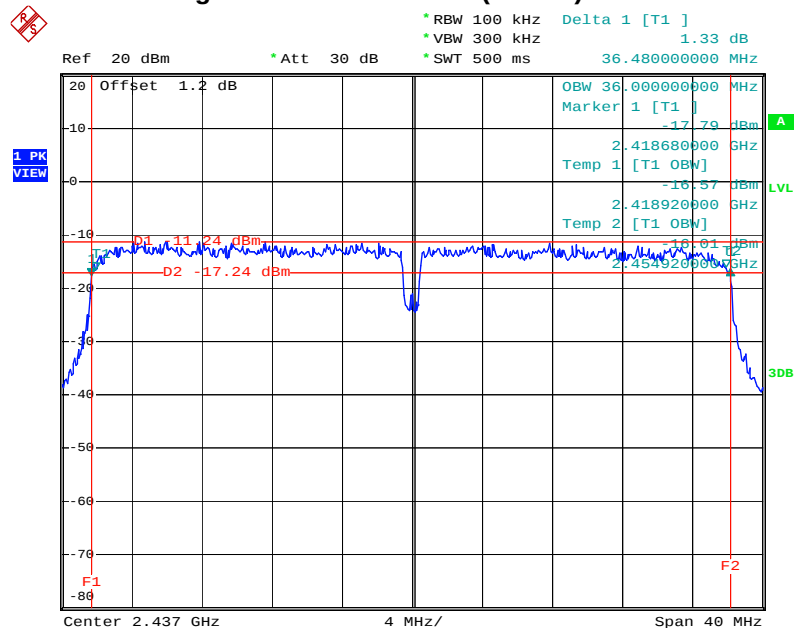


Date: 25.AUG.2011 11:45:21

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 2452 MHz

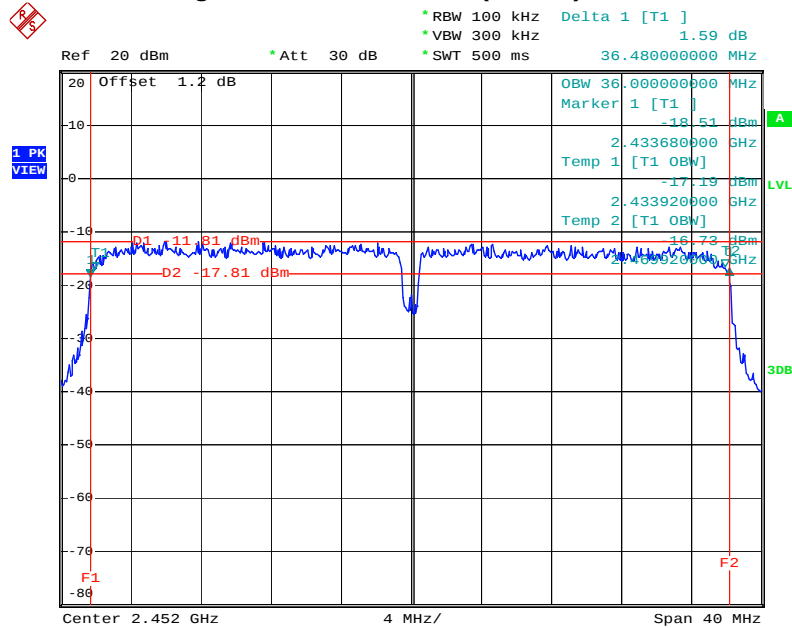


Date: 25.AUG.2011 11:47:30

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 2422 MHz

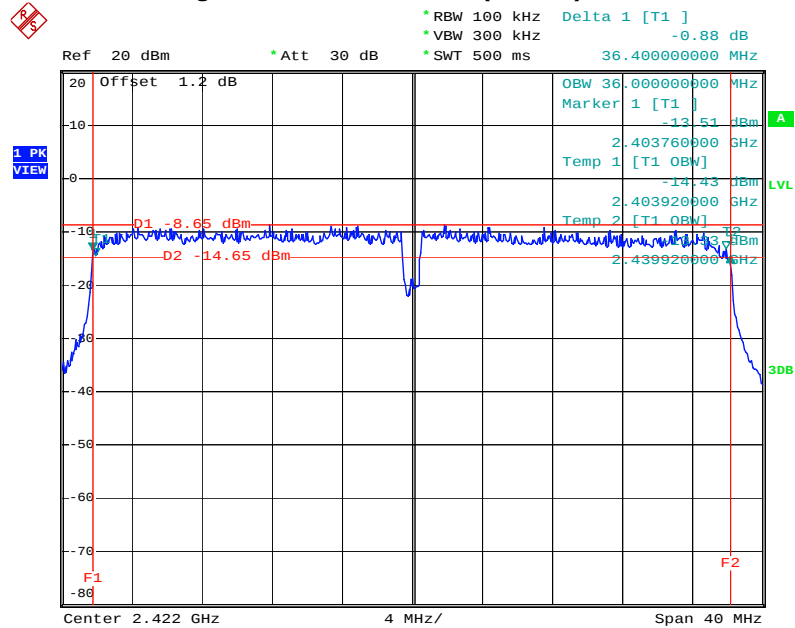

Date: 25.AUG.2011 13:34:48

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 2437 MHz

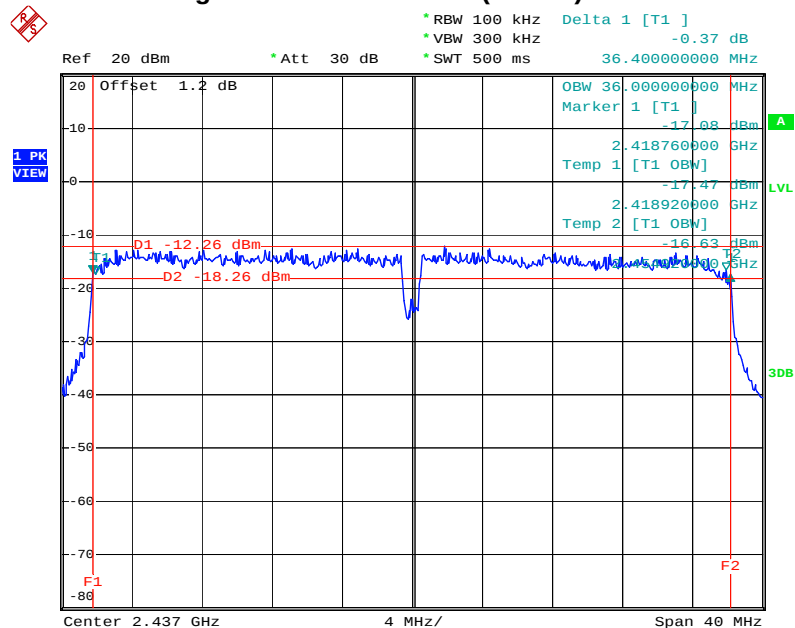

Date: 25.AUG.2011 13:38:37




A

LVL


3DB

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. C / 2422 MHz

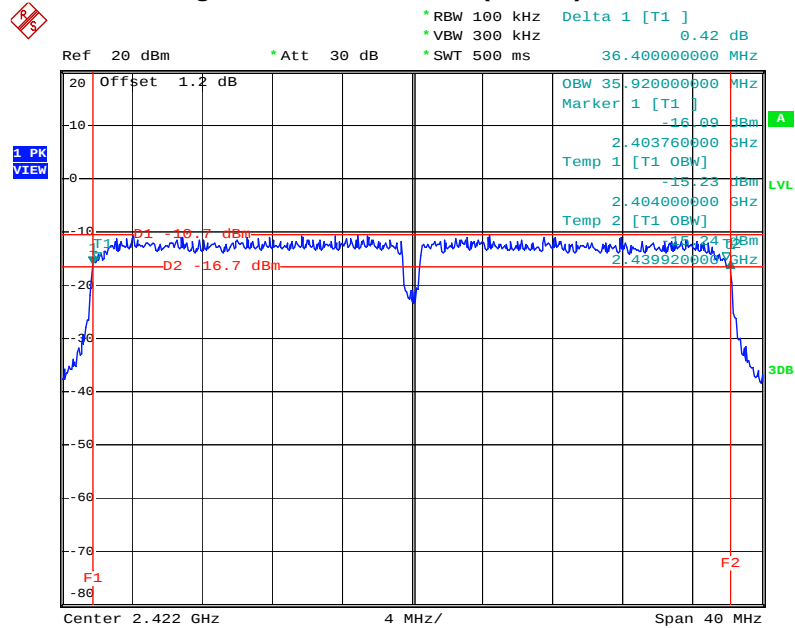


Date: 25.AUG.2011 13:47:18

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. CB / 2437 MHz

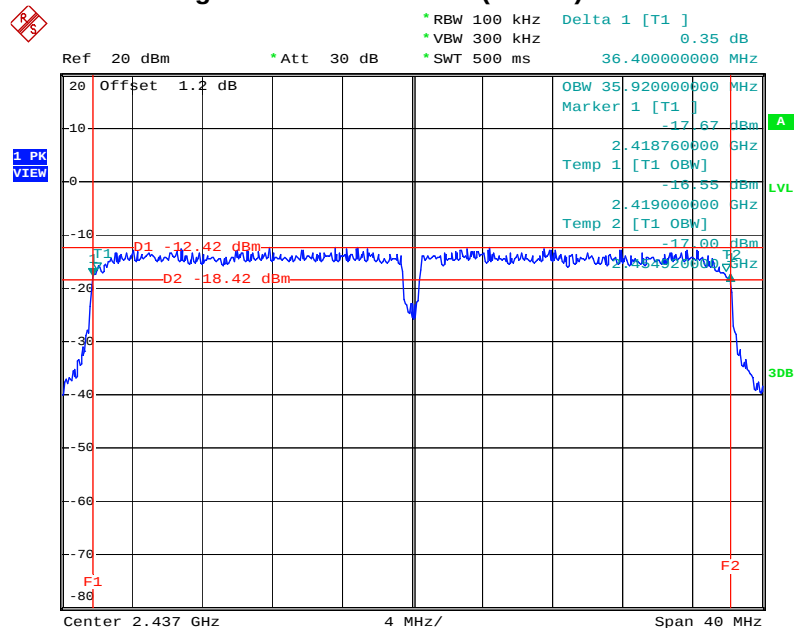

Date: 25.AUG.2011 13:50:16

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. C / 2452 MHz

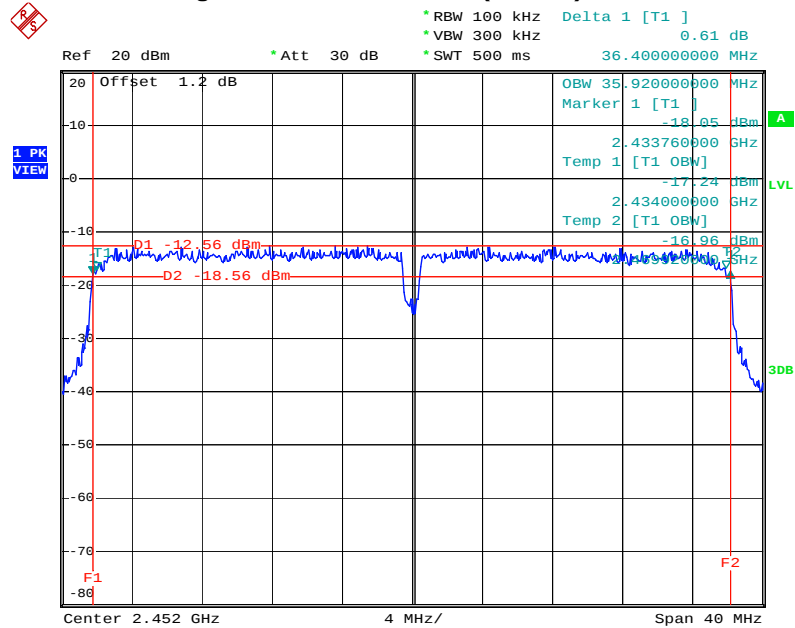

Date: 25.AUG.2011 13:52:27

3.5 Radiated Emissions Measurement

3.5.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4 Test Setup Layout

For radiated emissions below 30MHz

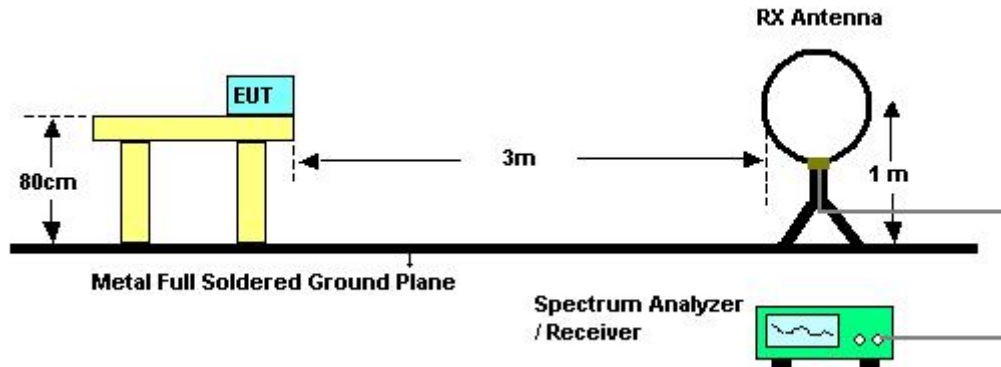

For radiated emissions above 30MHz

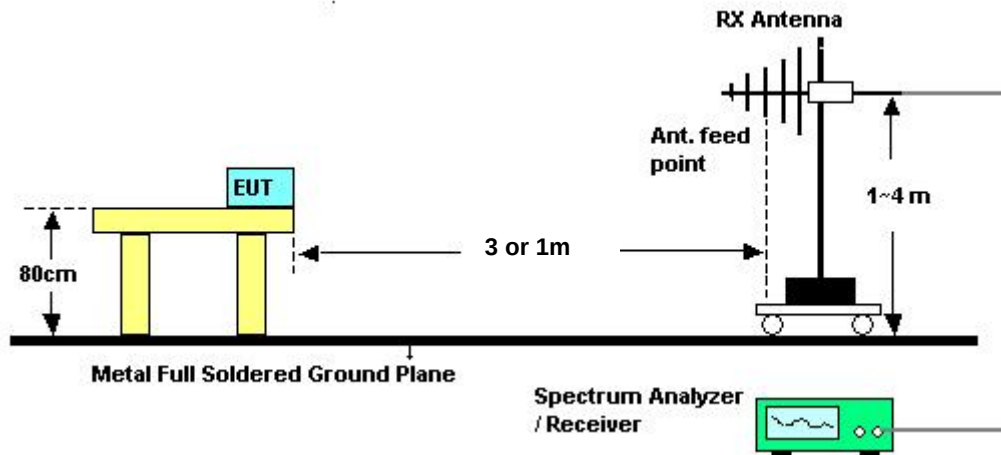

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor [9.54 dB].

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	Jul. 05, 2011	Test Site No.	03CH02-HY
Temperature	23℃	Humidity	58%
Test Engineer	Streak		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	Jul. 05, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	Normal Mode

Horizontal

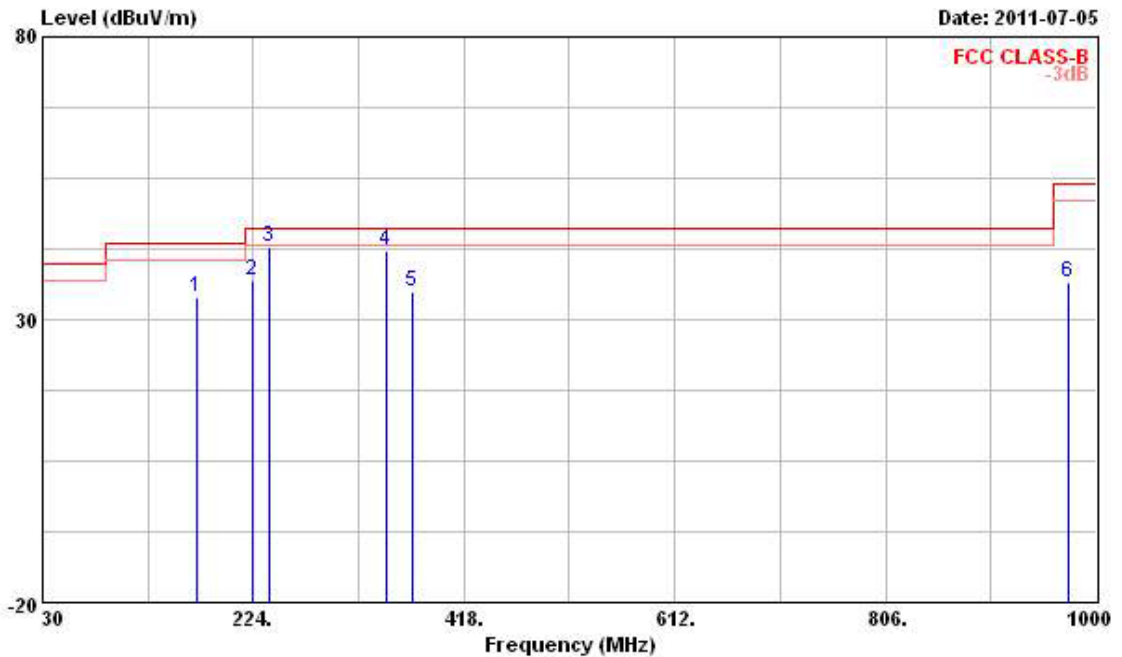

		Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	Ⓟ	171.620	33.95	-9.55	43.50	48.54	10.05	2.15	26.79	Peak	---	---
2	Ⓟ	223.030	36.90	-9.10	46.00	48.99	12.11	2.49	26.69	Peak	---	---
3	Ⓟ	238.550	42.97	-3.03	46.00	54.50	12.62	2.60	26.75	Peak	---	---
4	Ⓟ	347.190	42.31	-3.69	46.00	51.44	14.43	3.00	26.56	Peak	---	---
5	Ⓟ	370.470	34.84	-11.16	46.00	43.63	14.80	3.14	26.73	Peak	---	---
6		974.780	36.47	-17.53	54.00	36.03	21.88	5.36	26.80	Peak	---	---

Vertical

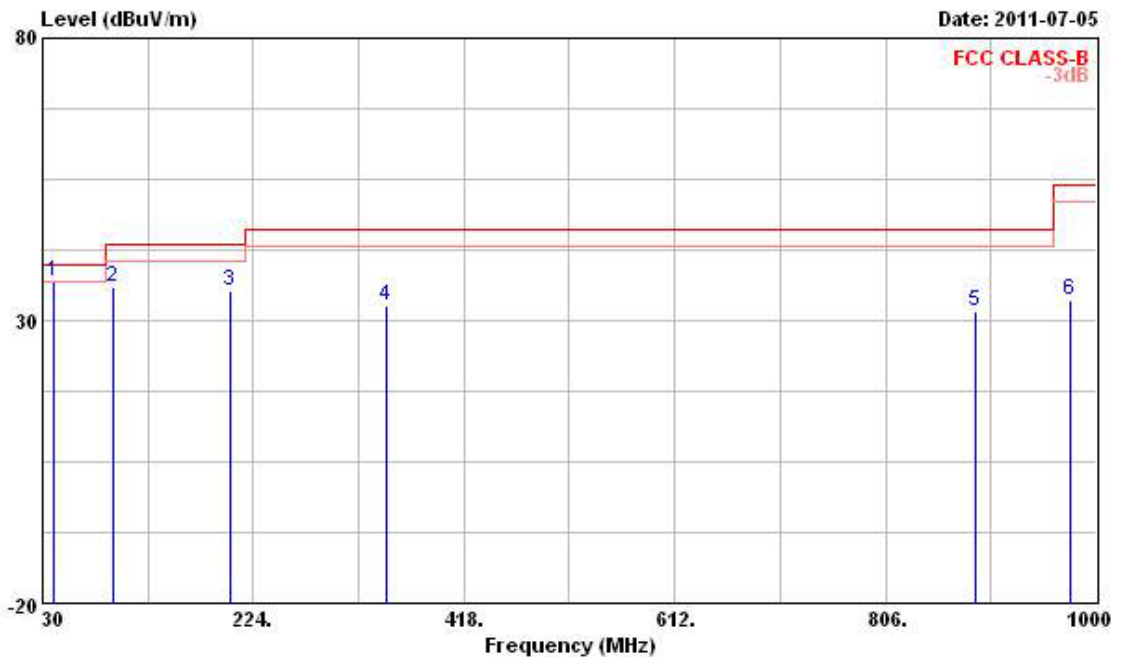

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	40.670	36.86	-3.14	40.00	50.00	13.01	1.01	27.16	QP	---	---
2	94.990	36.05	-7.45	43.50	51.56	10.34	1.54	27.39	Peak	---	---
3	203.630	35.11	-8.39	43.50	48.17	11.48	2.34	26.88	Peak	---	---
4	347.190	32.63	-13.37	46.00	41.76	14.43	3.00	26.56	Peak	---	---
5	889.420	31.61	-14.39	46.00	33.63	20.05	4.97	27.04	Peak	---	---
6	975.750	33.49	-20.51	54.00	33.03	21.90	5.36	26.80	Peak	---	---

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9 Results for Radiated Emissions (1GHz~10th Harmonic)

For Single Chain:

Final Test Date	Jul. 04, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11b Ch. 1


Horizontal

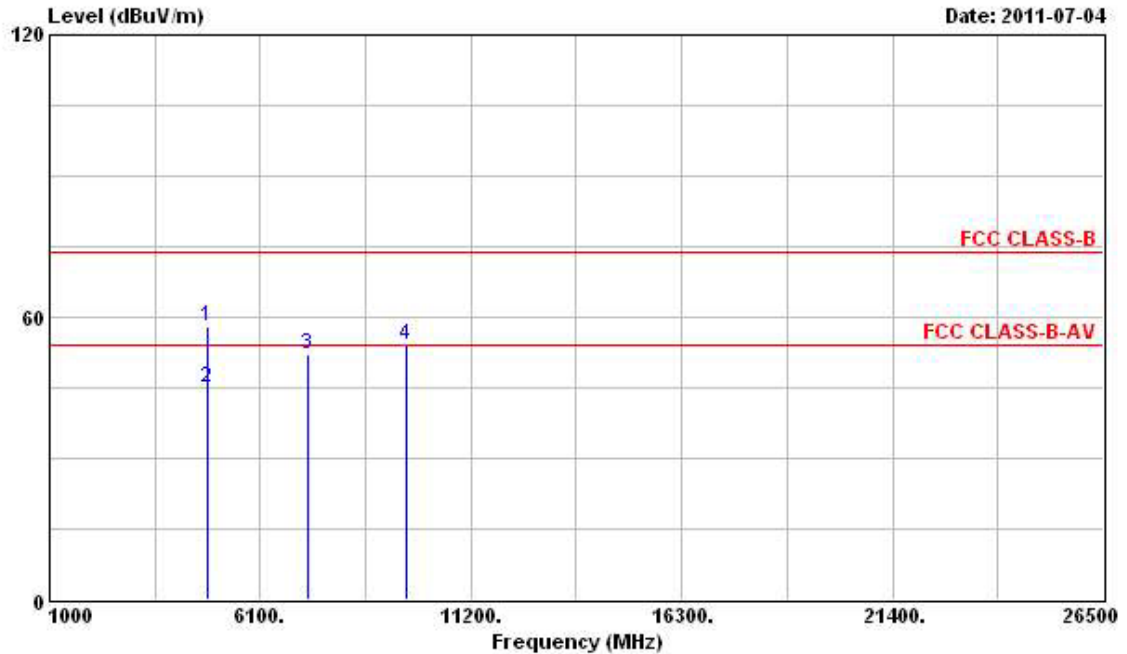

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	57.86	-16.14	74.00	52.03	35.76	4.58	34.51	Peak	---	---
2	4824.000	44.87	-9.13	54.00	39.04	35.76	4.58	34.51	Average	---	---
3	7236.000	52.15			42.96	37.85	5.63	34.29	Peak	---	---
4	9648.000	54.13			43.03	39.39	6.34	34.63	Peak	---	---

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

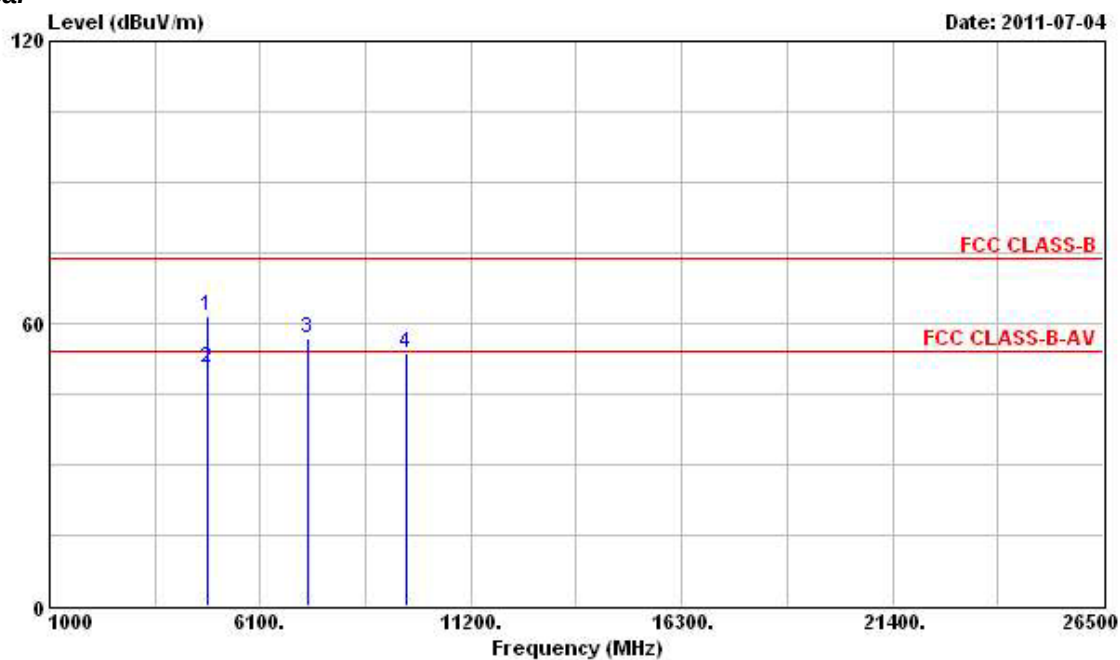

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	@ 4824.000	61.55	-12.45	74.00	56.35	35.13	4.58	34.51	Peak	---	---
2	@ 4824.000	50.46	-3.54	54.00	45.26	35.13	4.58	34.51	Average	---	---
3	7236.000	56.88			48.64	36.90	5.63	34.29	Peak	---	---
4	9648.000	53.83			43.53	38.59	6.34	34.63	Peak	---	---

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Aug. 20, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11b Ch. 6

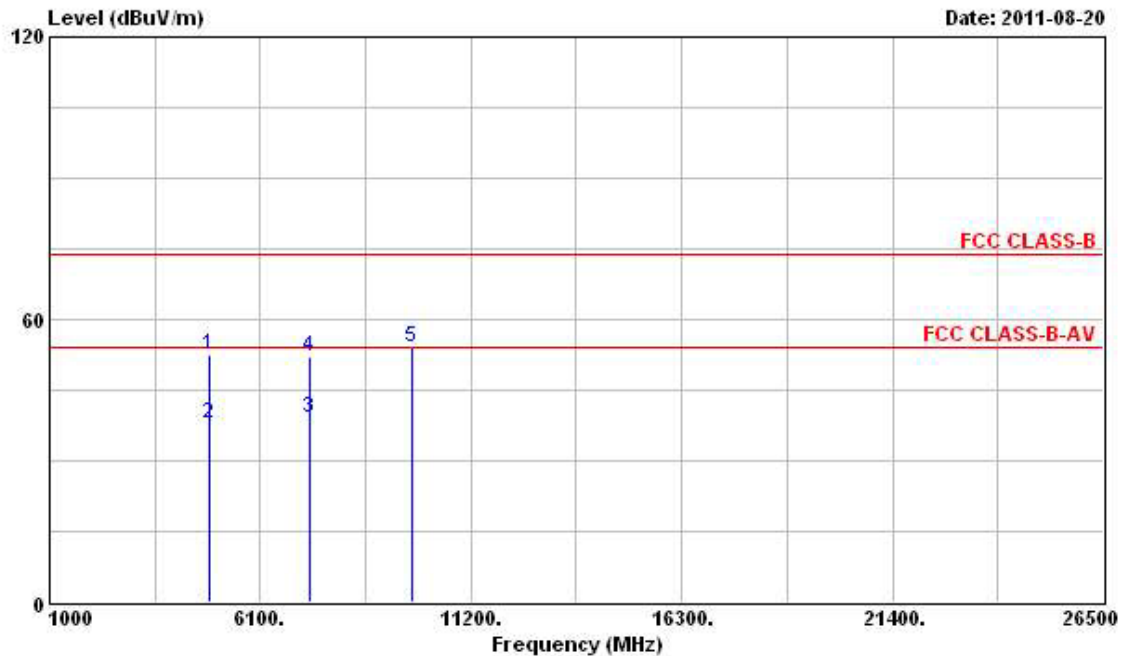Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	52.41	-21.59	74.00	46.75	35.83	4.61	34.78	Peak	---	---
2	4874.000	38.04	-15.96	54.00	32.38	35.83	4.61	34.78	Average	---	---
3	7311.000	39.25	-14.75	54.00	30.85	37.86	5.64	35.10	Average	---	---
4	7311.000	52.30	-21.70	74.00	43.90	37.86	5.64	35.10	Peak	---	---
5	9748.000	54.19	-----	-----	43.80	39.51	6.36	35.48	Peak	---	---

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

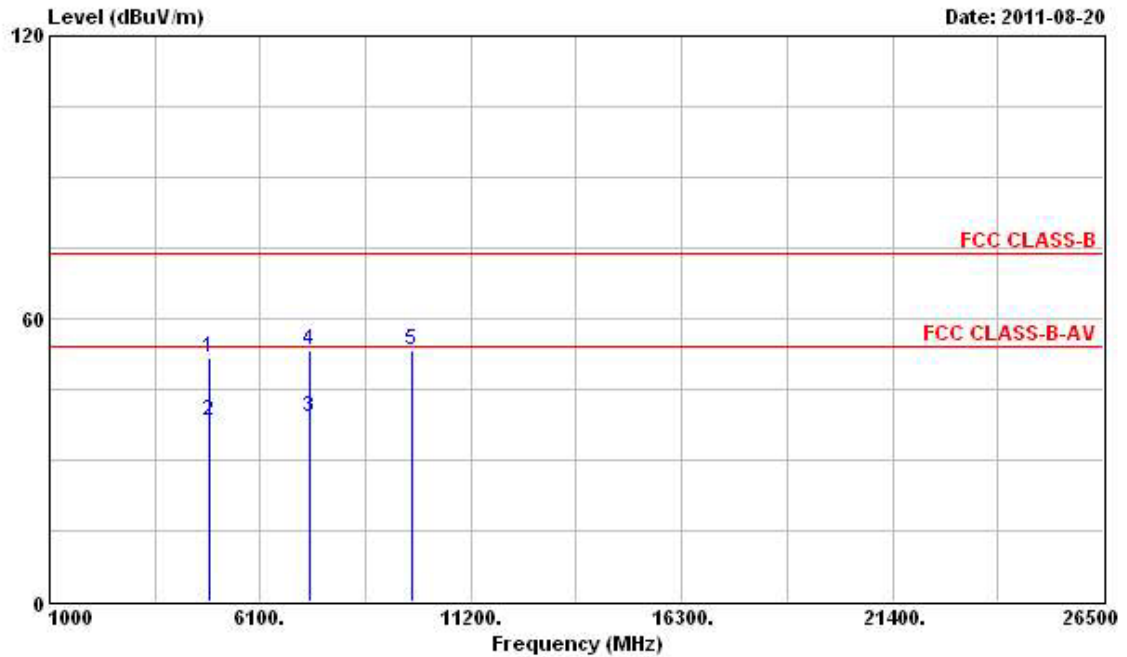

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	51.56	-22.44	74.00	46.55	35.18	4.61	34.78	Peak	---	---
2	4874.000	38.37	-15.63	54.00	33.36	35.18	4.61	34.78	Average	---	---
3	7311.000	39.11	-14.89	54.00	31.65	36.92	5.64	35.10	Average	---	---
4	7311.000	53.10	-20.90	74.00	45.64	36.92	5.64	35.10	Peak	---	---
5	9748.000	53.33			43.74	38.71	6.36	35.48	Peak	---	---

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Aug. 20, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11b Ch. 11

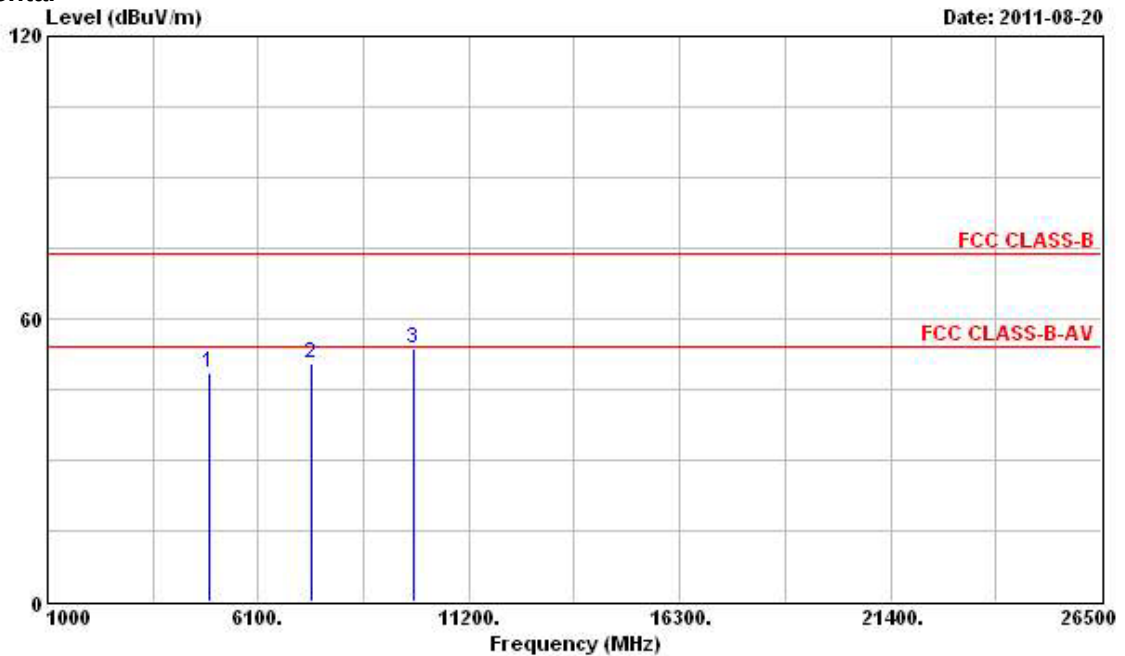Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	48.54	-5.46	54.00	42.73	35.90	4.68	34.77	PK	---	---
2	7386.000	50.37	-3.63	54.00	41.96	37.88	5.65	35.12	PK	---	---
3	9848.000	53.87			43.37	39.61	6.38	35.49	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

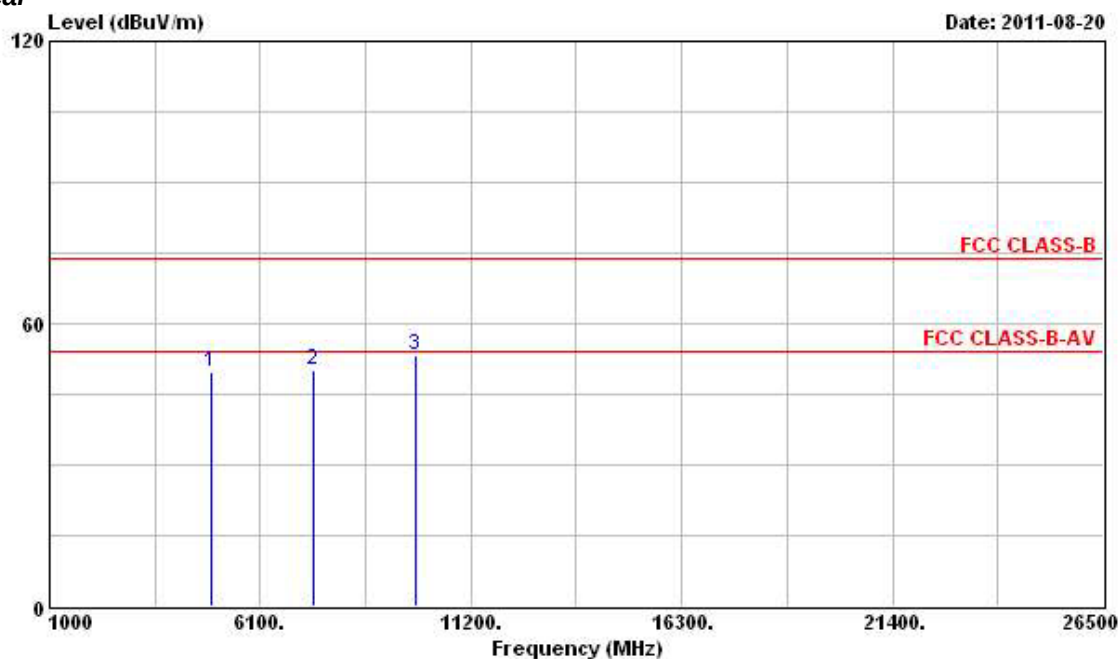

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4924.000	49.73	-4.27	54.00	44.59	35.23	4.68	34.77	PK	---	---
2 @	7386.000	50.18	-3.82	54.00	42.69	36.96	5.65	35.12	PK	---	---
3	9848.000	53.43			43.73	38.81	6.38	35.49	Peak	---	---

N Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Jul. 04, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11g Ch. 1

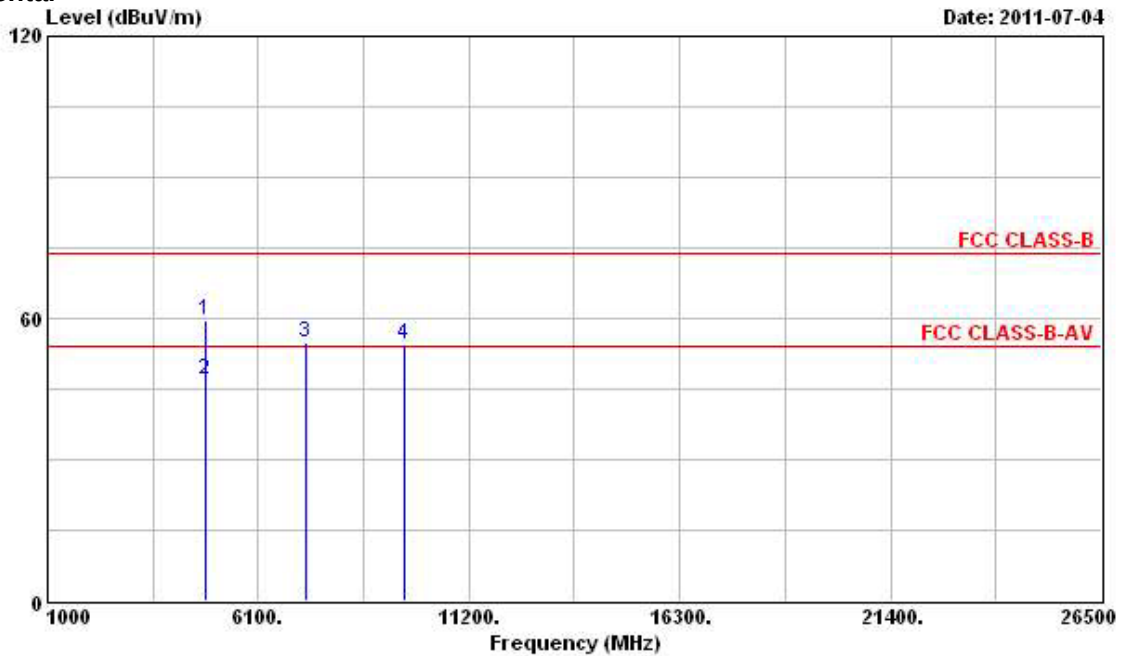Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	59.72	-14.28	74.00	53.89	35.76	4.58	34.51	Peak	---	---
2 @	4824.000	46.80	-7.20	54.00	40.97	35.76	4.58	34.51	Average	---	---
3	7236.000	55.06			45.87	37.85	5.63	34.29	Peak	---	---
4	9648.000	54.66			43.56	39.39	6.34	34.63	Peak	---	---

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

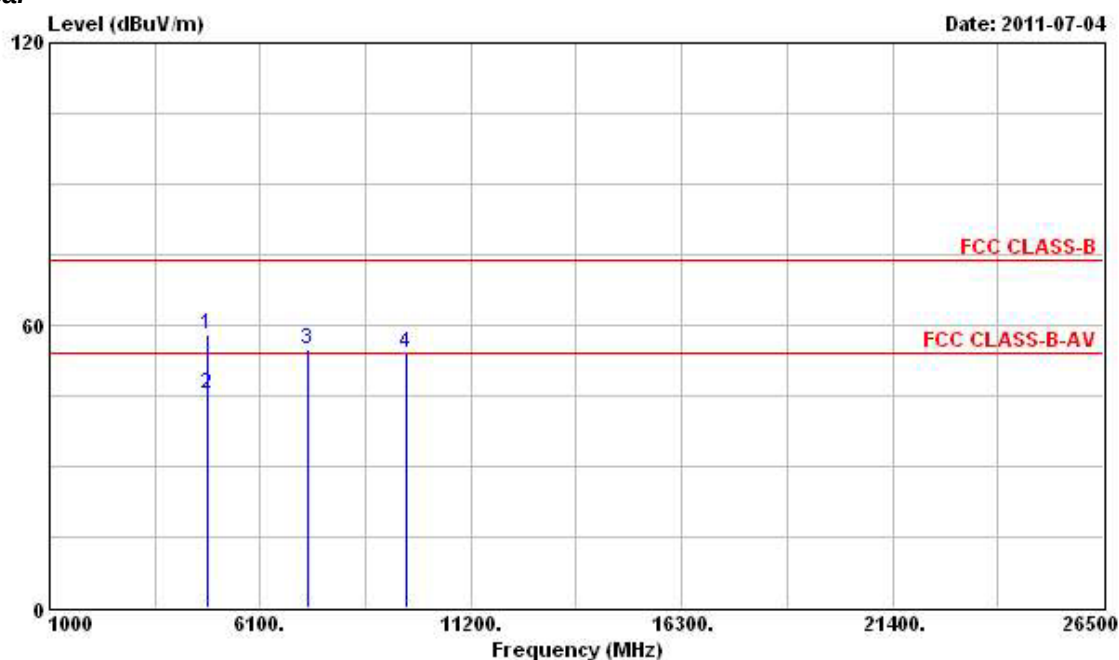

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	58.14	-15.86	74.00	52.94	35.13	4.58	34.51	Peak	---	---
2 @	4824.000	45.34	-8.66	54.00	40.14	35.13	4.58	34.51	Average	---	---
3	7236.000	54.99			46.75	36.90	5.63	34.29	Peak	---	---
4	9648.000	54.20			43.90	38.59	6.34	34.63	Peak	---	---

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Aug. 20, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11g Ch. 6

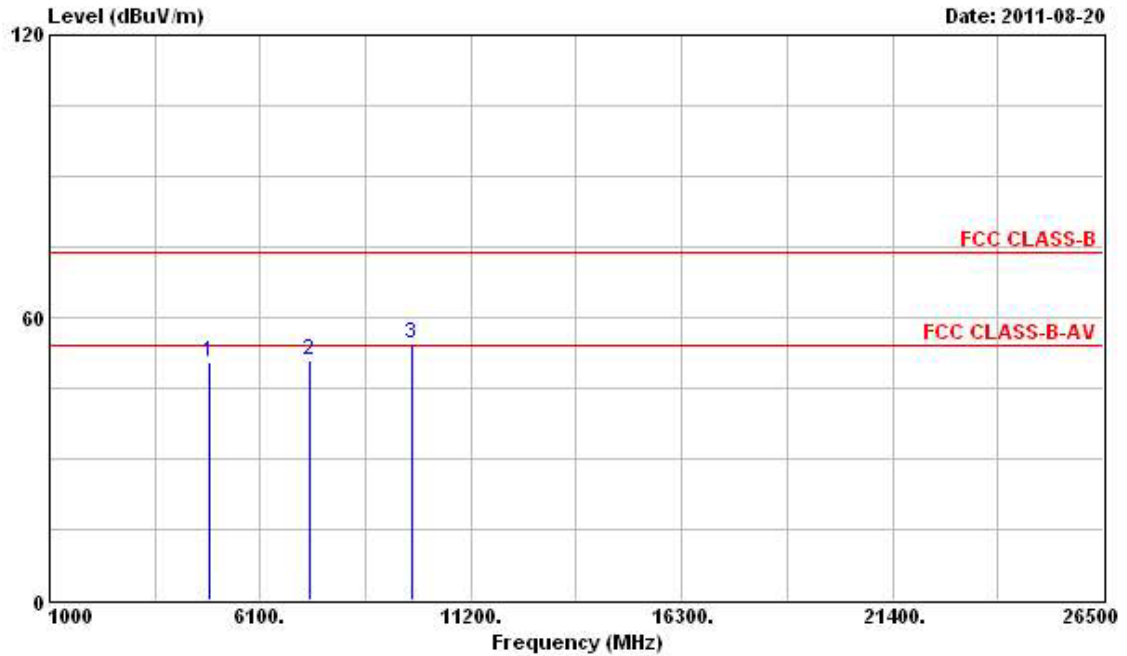Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4874.000	50.59	-3.41	54.00	44.93	35.83	4.61	34.78	PK	---	---
2 @	7311.000	50.98	-3.02	54.00	42.58	37.86	5.64	35.10	PK	---	---
3	9748.000	54.56			44.17	39.51	6.36	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

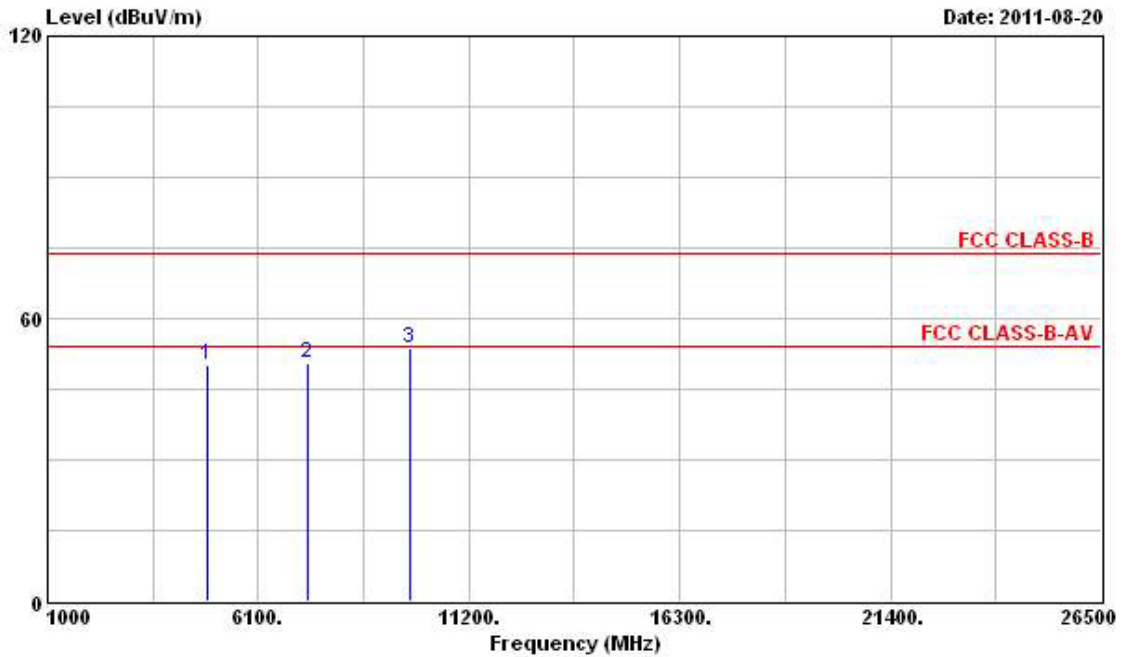

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4874.000	50.00	-4.00	54.00	44.99	35.18	4.61	34.78	PK	---	---
2 @	7311.000	50.55	-3.45	54.00	43.09	36.92	5.64	35.10	PK	---	---
3	9748.000	53.49			43.90	38.71	6.36	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Aug. 20, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11g Ch. 11

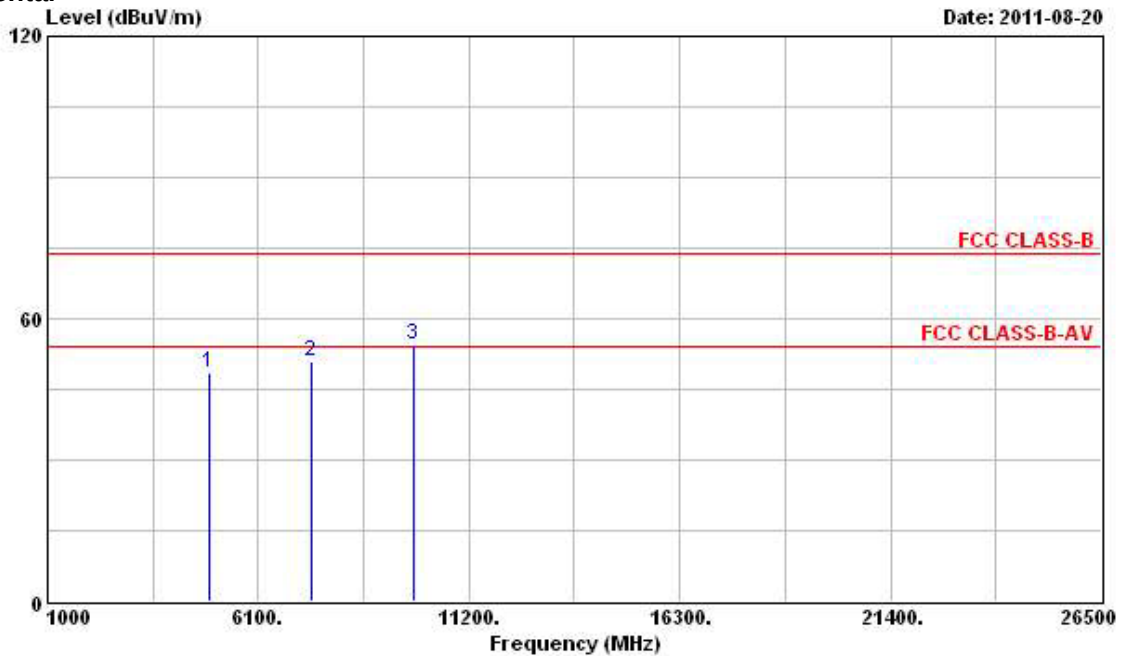Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.000	48.70	-5.30	54.00	42.89	35.90	4.68	34.77	PK	---	---
2	7386.000	50.93	-3.07	54.00	42.52	37.88	5.65	35.12	PK	---	---
3	9848.000	54.59			44.09	39.61	6.38	35.49	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

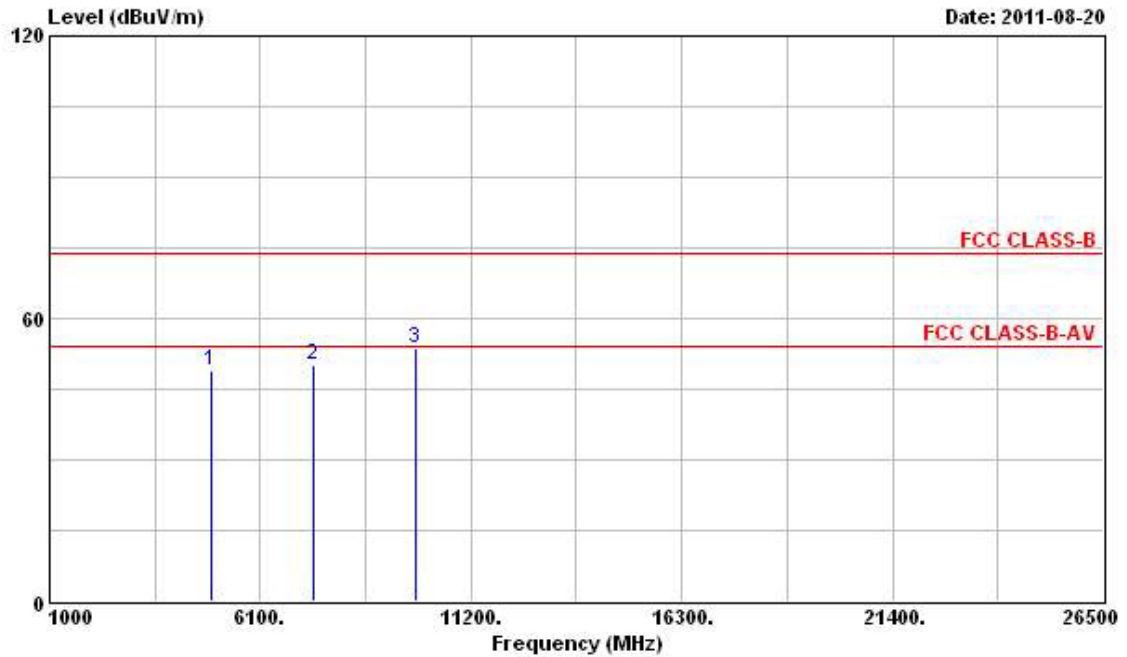


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4924.000	48.97	-5.03	54.00	43.83	35.23	4.68	34.77	PK	---	---
2 @	7386.000	49.99	-4.01	54.00	42.50	36.96	5.65	35.12	PK	---	---
3	9848.000	53.58			43.88	38.81	6.38	35.49	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

For Three Chain:

Final Test Date	Jul. 04, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11n (20MHz) Ch. 1


Horizontal

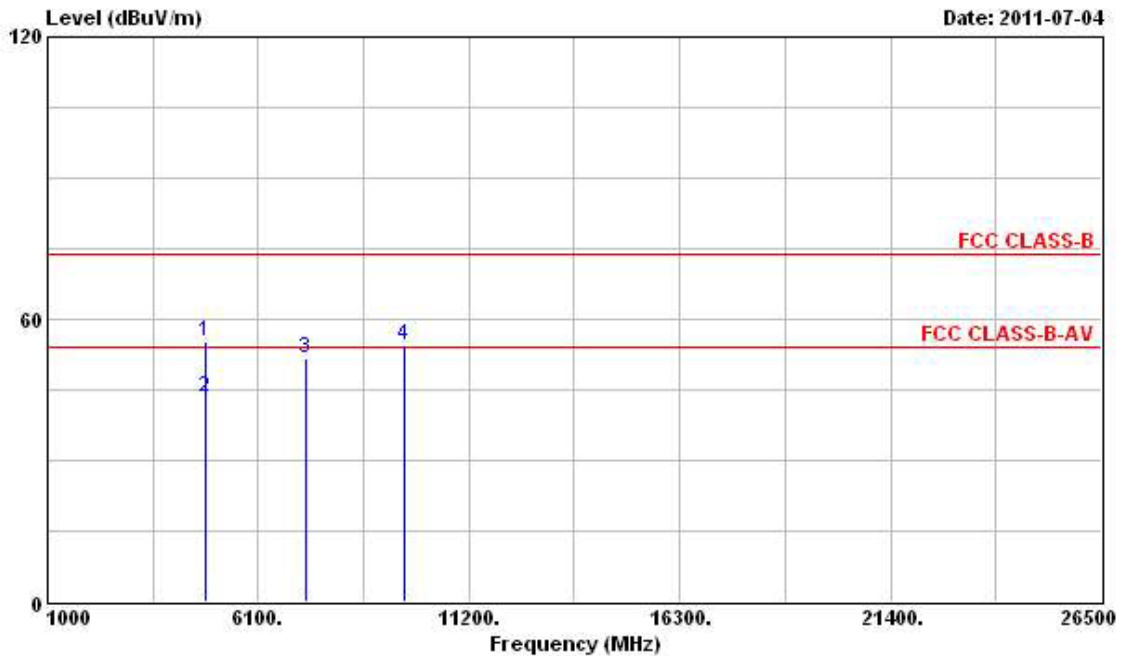

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	55.30	-18.70	74.00	49.47	35.76	4.58	34.51	Peak	---	---
2 @	4824.000	43.28	-10.72	54.00	37.45	35.76	4.58	34.51	Average	---	---
3	7236.000	51.85			42.66	37.85	5.63	34.29	Peak	---	---
4	9648.000	54.33			43.23	39.39	6.34	34.63	Peak	---	---

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

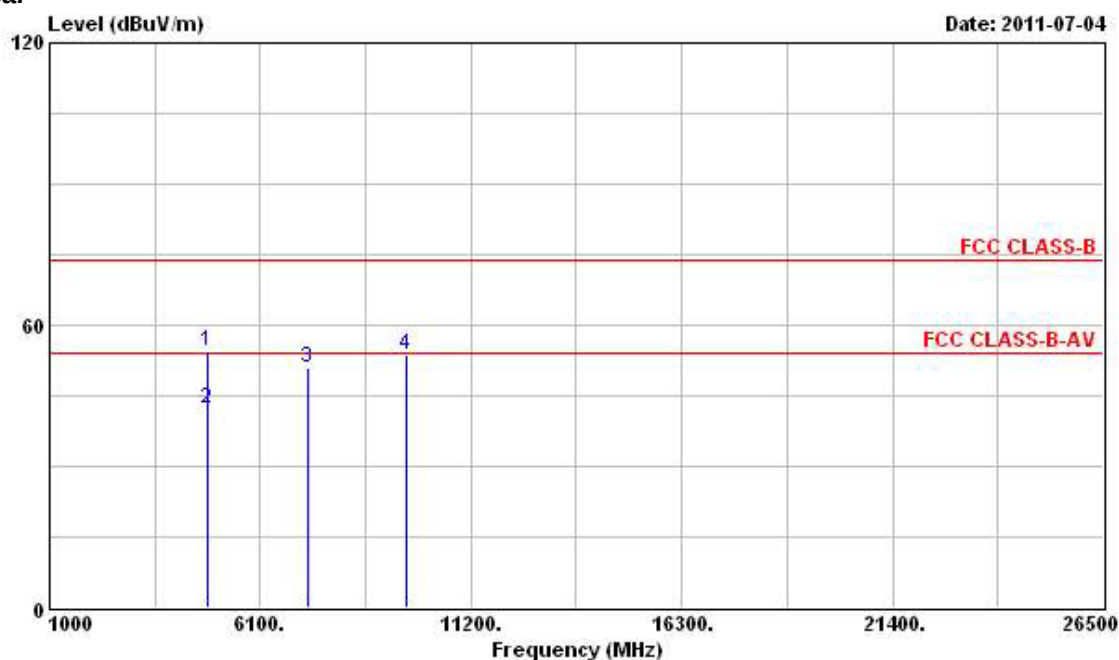

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.000	54.31	-19.69	74.00	49.11	35.13	4.58	34.51	Peak	---	---
2	@ 4824.000	42.10	-11.90	54.00	36.90	35.13	4.58	34.51	Average	---	---
3	7236.000	50.92			42.68	36.90	5.63	34.29	Peak	---	---
4	9648.000	53.67			43.37	38.59	6.34	34.63	Peak	---	---

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Aug. 20, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11n (20MHz) Ch. 6

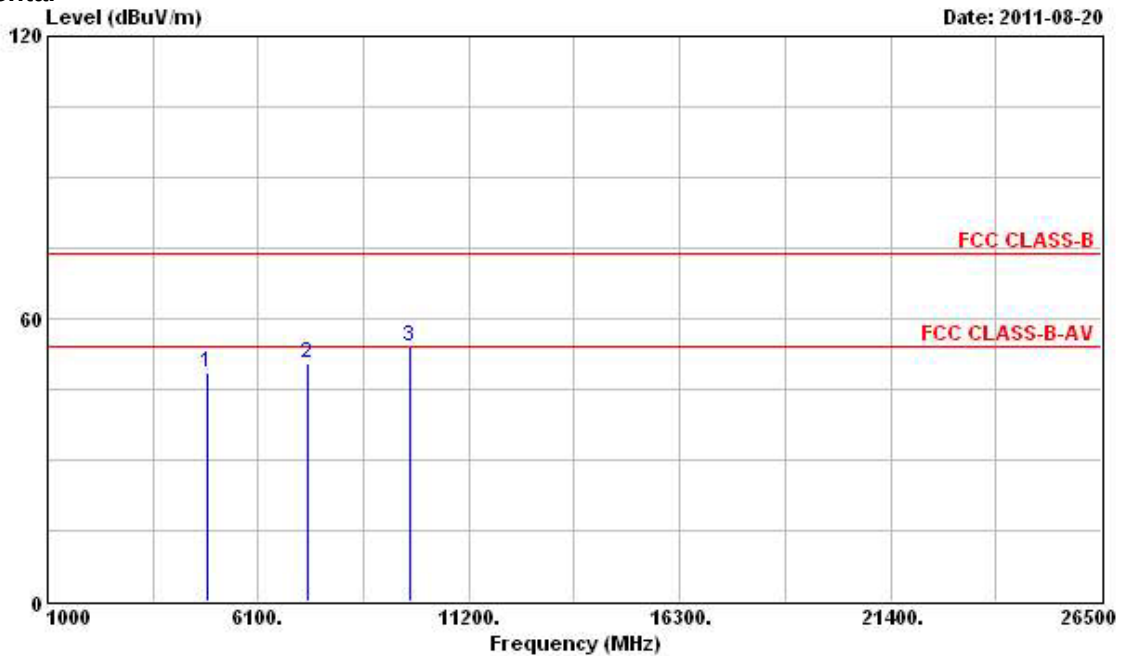Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4874.000	48.41	-5.59	54.00	42.75	35.83	4.61	34.78	PK	0	0
2 @	7311.000	50.62	-3.38	54.00	42.22	37.86	5.64	35.10	PK	0	0
3	9748.000	54.19			43.80	39.51	6.36	35.48	Peak	0	0

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

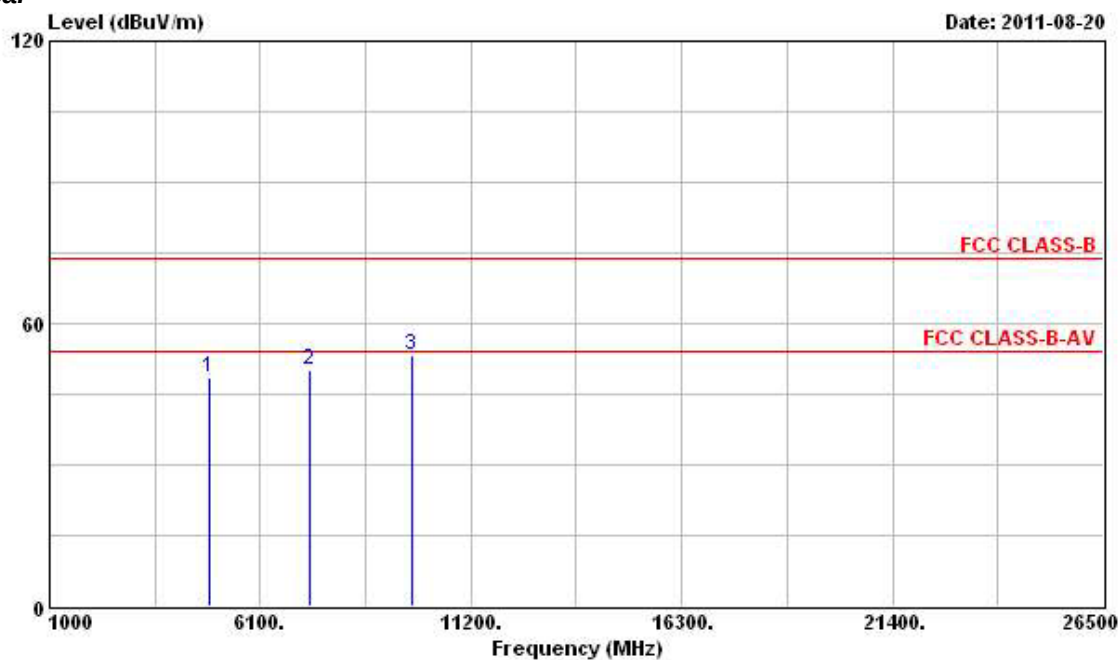

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4874.000	48.42	-5.58	54.00	43.41	35.18	4.61	34.78	PK	---	---
2 @	7311.000	49.99	-4.01	54.00	42.53	36.92	5.64	35.10	PK	---	---
3	9748.000	53.23			43.64	38.71	6.36	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Aug. 20, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11n (20MHz) Ch. 11

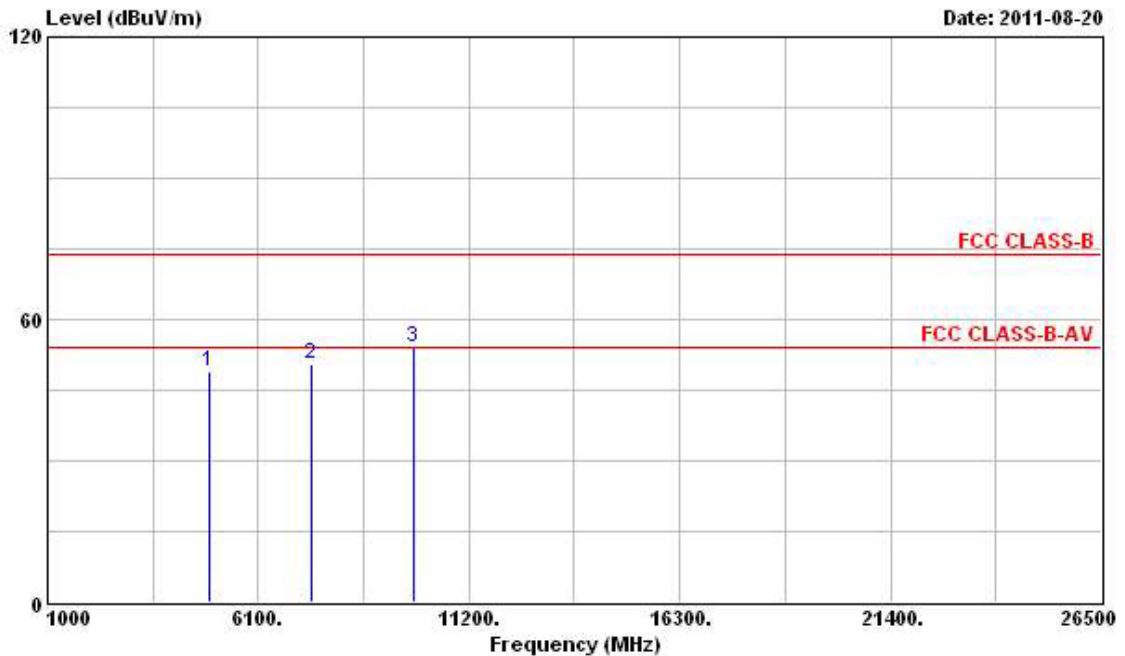Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4924.000	48.96	-5.04	54.00	43.15	35.90	4.68	34.77	PK	---	---
2 @	7386.000	50.62	-3.38	54.00	42.21	37.88	5.65	35.12	PK	---	---
3	9848.000	54.04			43.54	39.61	6.38	35.49	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

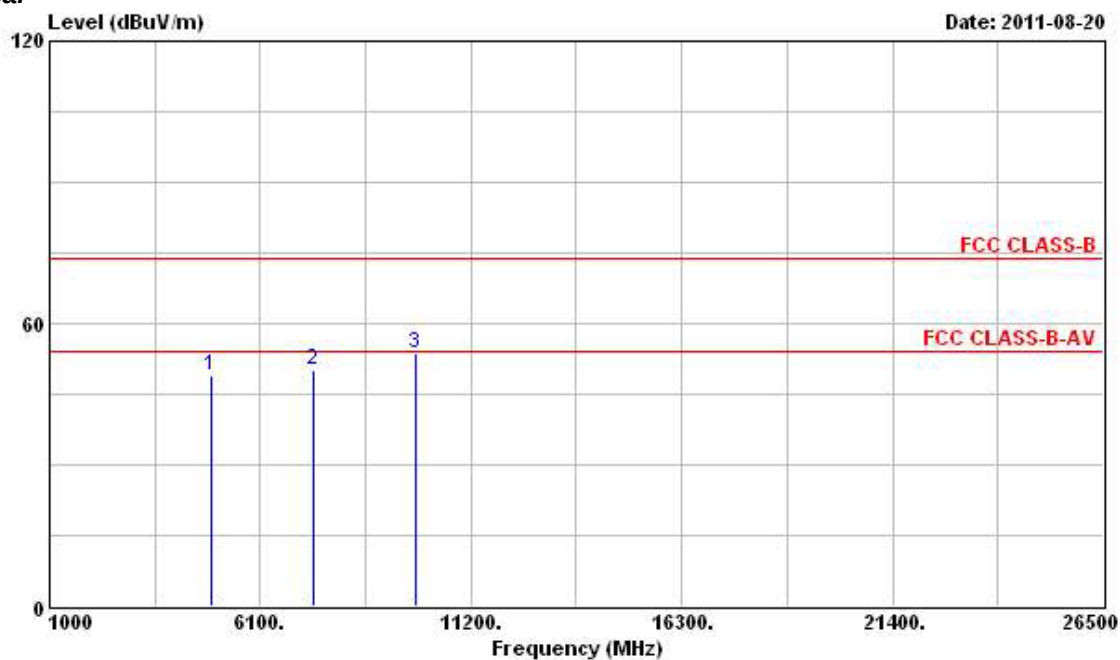

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4924.000	49.14	-4.86	54.00	44.00	35.23	4.68	34.77	PK	---	---
2 @	7386.000	50.29	-3.71	54.00	42.80	36.96	5.65	35.12	PK	---	---
3	9848.000	53.58			43.88	38.81	6.38	35.49	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Jul. 04, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11n (40MHz) Ch. 3

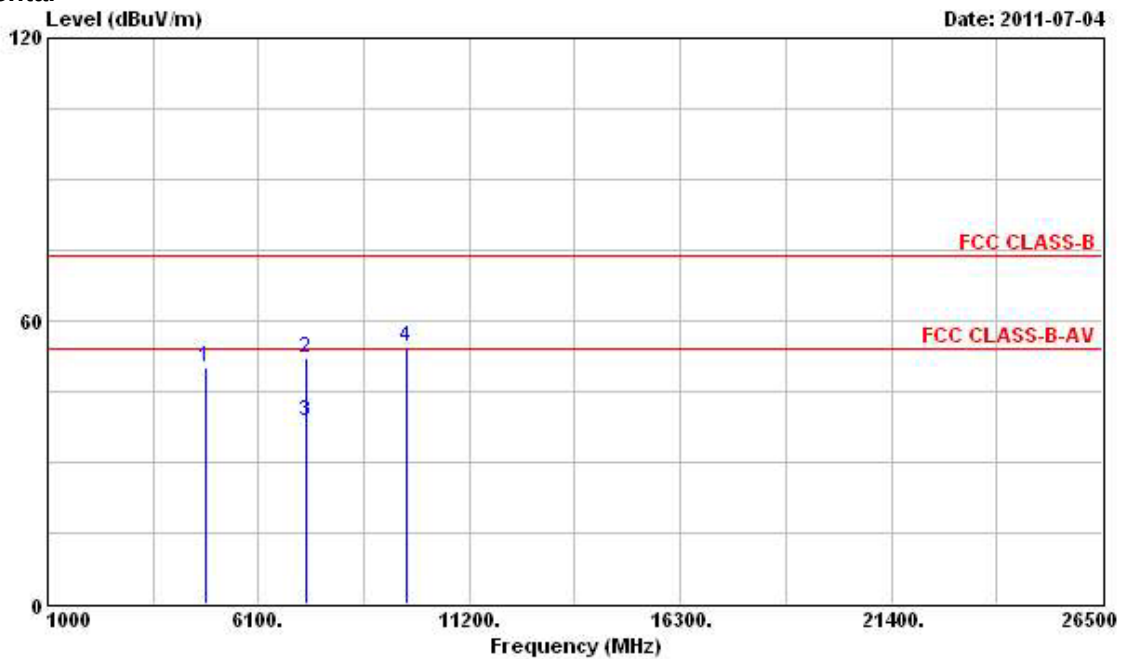Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4844.000	50.05	-3.95	54.00	44.14	35.78	4.61	34.48 PK	---	---
2	7266.000	52.04	-21.96	74.00	42.84	37.86	5.63	34.29 Peak	---	---
3	7266.000	38.81	-15.19	54.00	29.61	37.86	5.63	34.29 Average	---	---
4	9688.000	54.34			43.16	39.43	6.35	34.60 Peak	---	---

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

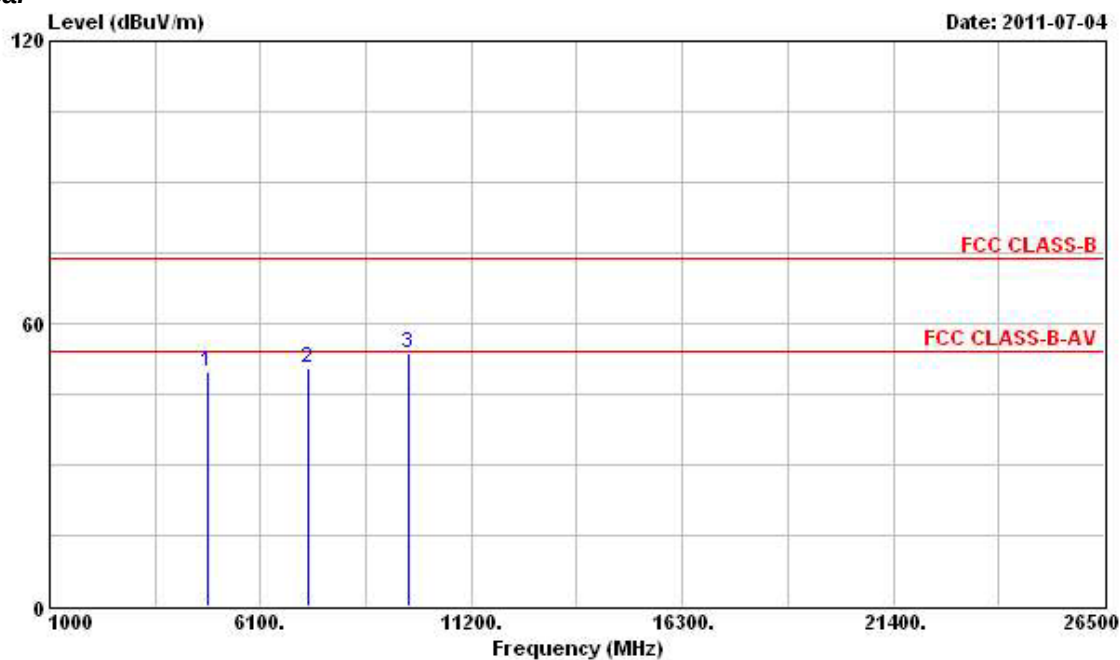

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4844.000	49.76	-4.24	54.00	44.49	35.14	4.61	34.48	PK	---	---
2	7266.000	50.72			42.47	36.91	5.63	34.29	Peak	---	---
3	9688.000	53.63			43.25	38.63	6.35	34.60	Peak	---	---

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Aug. 20, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11n (40MHz) Ch. 6

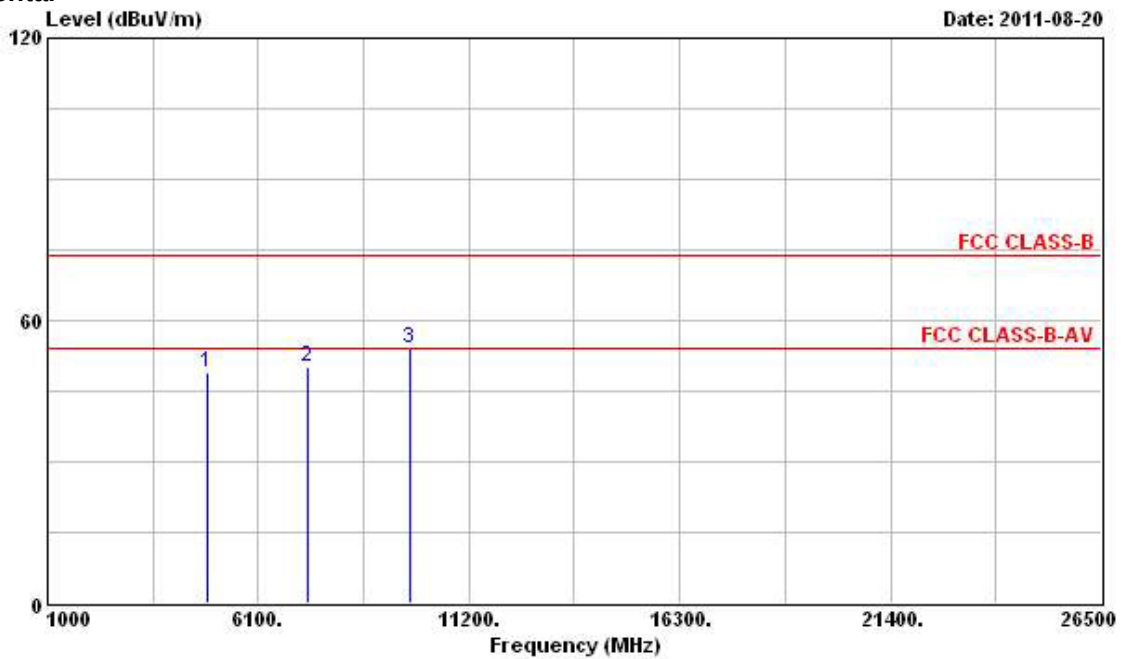Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.000	49.04	-4.96	54.00	43.38	35.83	4.61	34.78	PK	---	---
2	7311.000	50.20	-3.80	54.00	41.80	37.86	5.64	35.10	PK	---	---
3	9748.000	53.96			43.57	39.51	6.36	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

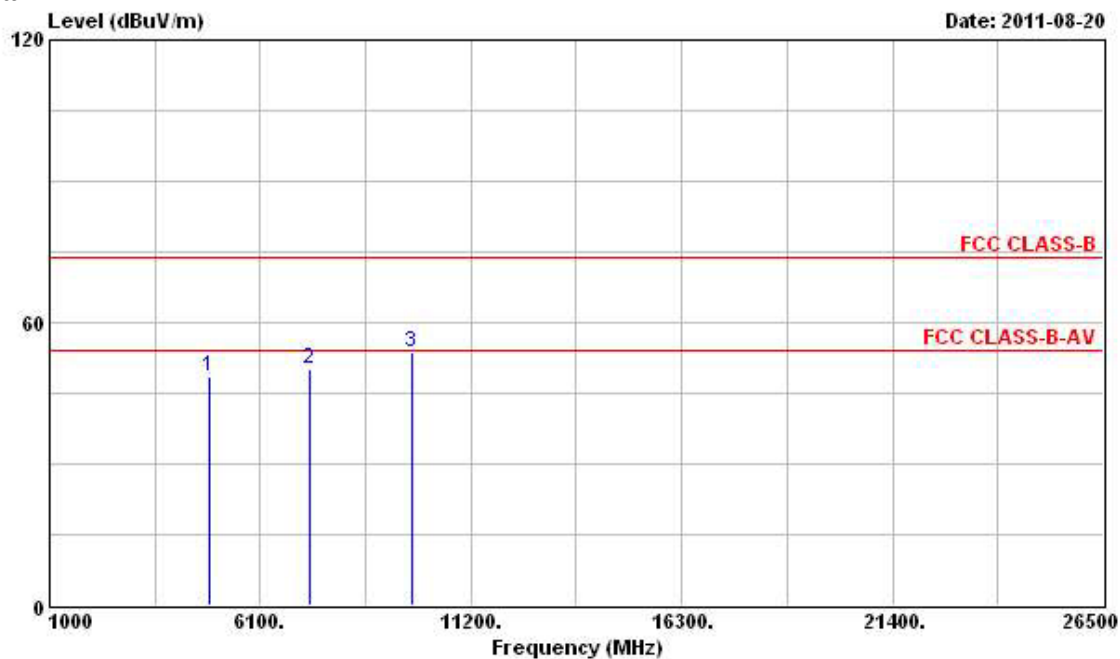

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4874.000	48.43	-5.57	54.00	43.42	35.18	4.61	34.78	PK	---	---
2 @	7311.000	50.01	-3.99	54.00	42.55	36.92	5.64	35.10	PK	---	---
3	9748.000	53.71			44.12	38.71	6.36	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Aug. 20, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11n (40MHz) Ch. 9

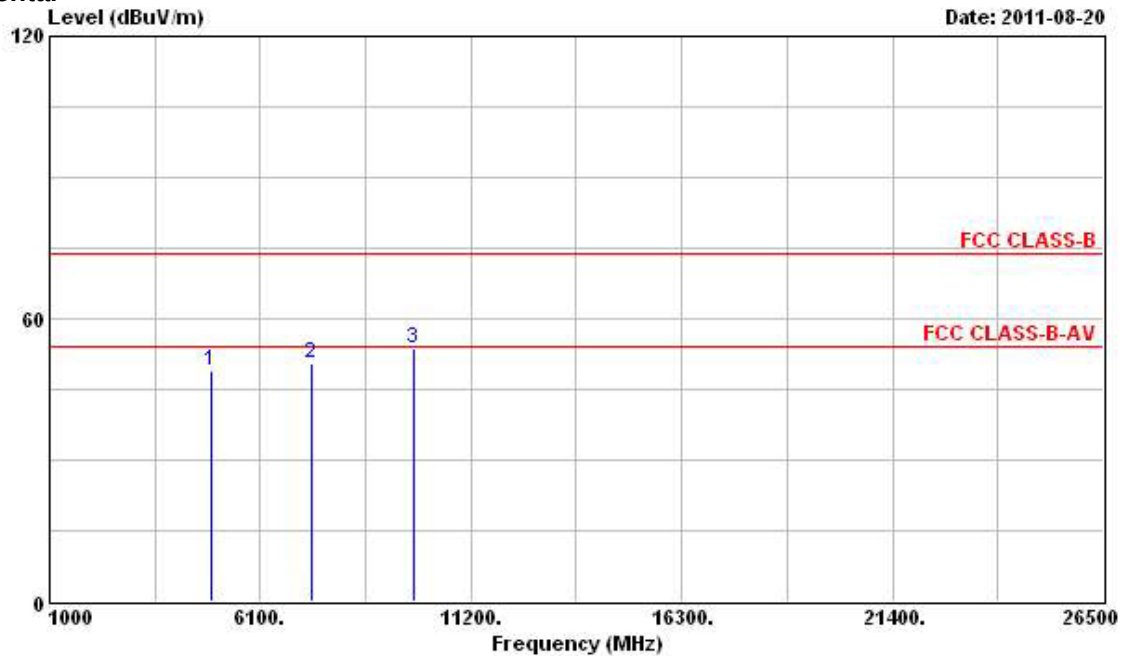Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4904.000	48.88	-5.12	54.00	43.14	35.88	4.64	34.78	PK	---	---
2 @	7356.000	50.63	-3.37	54.00	42.23	37.87	5.64	35.11	PK	---	---
3	9808.000	53.82			43.36	39.57	6.37	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

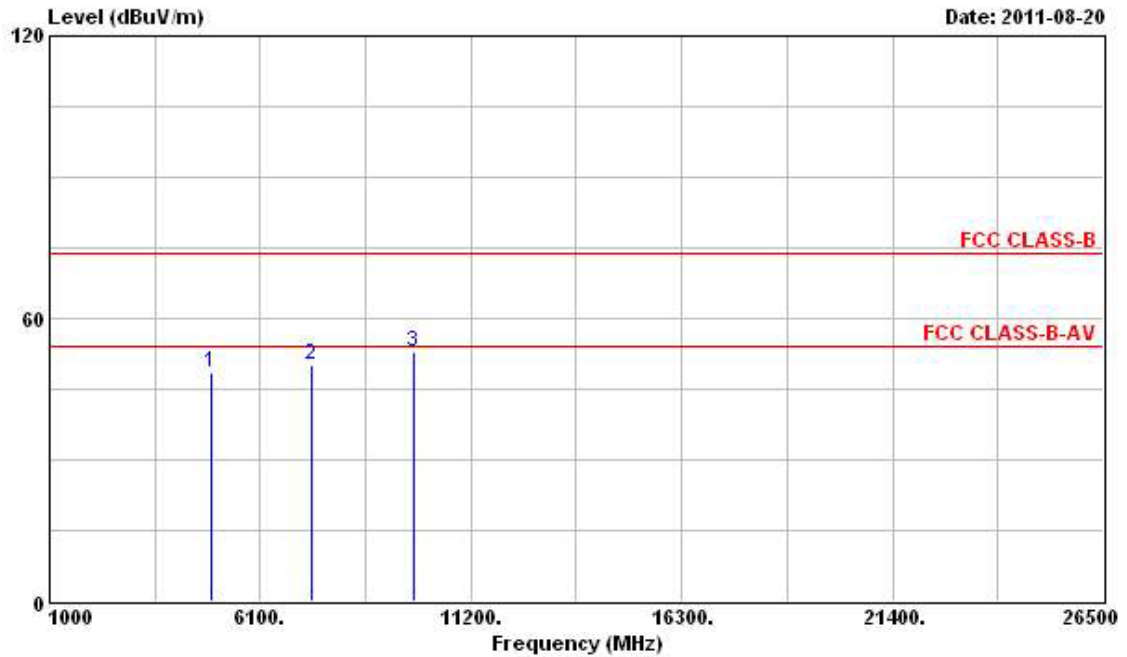

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4904.000	48.39	-5.61	54.00	43.32	35.21	4.64	34.78	PK	---	---
2 @	7356.000	50.05	-3.95	54.00	42.58	36.94	5.64	35.11	PK	---	---
3	9808.000	53.05			43.39	38.77	6.37	35.48	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6 Band Edge and Fundamental Emissions Measurement

3.6.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak

3.6.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.6.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7 Test Result of Band Edge and Fundamental Emissions

For Single Chain:

Final Test Date	Aug. 19, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11b Ch. 1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2390.000	52.77	-1.23	54.00	17.96	31.79	3.02	0.00	Average	---	---
2 @	2409.370	104.40			69.52	31.86	3.02	0.00	Average	---	---
1 @	2390.000	64.16	-9.84	74.00	29.35	31.79	3.02	0.00	Peak	---	---
2 @	2410.700	113.07			78.19	31.86	3.02	0.00	Peak	---	---

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2434.450	103.41			68.44	31.92	3.05	0.00	Average	---	---
1 @	2433.690	111.53			76.56	31.92	3.05	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2459.530	101.22			66.11	32.06	3.05	0.00	Average	---	---
2 @	2483.500	52.60	-1.40	54.00	17.39	32.13	3.08	0.00	Average	---	---
1 @	2458.770	110.70			75.59	32.06	3.05	0.00	Peak	---	---
2 @	2483.500	64.93	-9.07	74.00	29.72	32.13	3.08	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Aug. 19, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11g Ch.1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2390.000	52.92	-1.08	54.00	18.11	31.79	3.02	0.00	Average	---	---
2 @	2413.740	102.67			67.79	31.86	3.02	0.00	Average	---	---
1 @	2390.000	71.13	-2.87	74.00	36.32	31.79	3.02	0.00	Peak	---	---
2 @	2413.740	113.29			78.41	31.86	3.02	0.00	Peak	---	---

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2435.780	99.85			64.88	31.92	3.05	0.00	Average	---	---
1 @	2433.500	110.52			75.55	31.92	3.05	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2457.250	99.59			64.48	32.06	3.05	0.00	Average	---	---
2 @	2483.500	52.94	-1.06	54.00	17.73	32.13	3.08	0.00	Average	---	---
1 @	2455.730	110.15			75.04	32.06	3.05	0.00	Peak	---	---
2 @	2483.500	71.22	-2.78	74.00	36.01	32.13	3.08	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Three Chain:

Final Test Date	Aug. 19, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11n (20MHz) Ch.1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2359.780	52.79	-1.21	54.00	18.15	31.65	2.99	0.00	Average	---	---
2 @	2404.810	100.63			65.75	31.86	3.02	0.00	Average	---	---
1 @	2390.000	66.08	-7.92	74.00	31.27	31.79	3.02	0.00	Peak	---	---
2 @	2410.130	112.37			77.49	31.86	3.02	0.00	Peak	---	---

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2429.700	99.39			64.42	31.92	3.05	0.00	Average	---	---
1 @	2431.410	110.98			76.01	31.92	3.05	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2454.780	99.58			64.47	32.06	3.05	0.00	Average	---	---
2 @	2483.500	52.66	-1.34	54.00	17.45	32.13	3.08	0.00	Average	---	---
1 @	2456.300	111.01			75.90	32.06	3.05	0.00	Peak	---	---
2 @	2483.500	67.48	-6.52	74.00	32.27	32.13	3.08	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Aug. 19, 2011	Test Site No.	03CH02-HY
Temperature	23°C	Humidity	58%
Test Engineer	Streak	Configuration	802.11n (40MHz) Ch.3, 6, 9

Channel 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2390.000	52.86	-1.14	54.00	18.05	31.79	3.02	0.00	Average	---	---
2 @	2419.060	98.04			63.16	31.86	3.02	0.00	Average	---	---
1 @	2389.420	69.81	-4.19	74.00	35.00	31.79	3.02	0.00	Peak	---	---
2 @	2417.730	109.26			74.38	31.86	3.02	0.00	Peak	---	---

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2427.610	94.47			59.50	31.92	3.05	0.00	Average	---	---
1 @	2432.740	106.19			71.22	31.92	3.05	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Channel 9

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2440.340	95.28			60.24	31.99	3.05	0.00	Average	---	---
2 @	2483.500	52.24	-1.76	54.00	17.03	32.13	3.08	0.00	Average	---	---
1 @	2442.810	106.71			71.67	31.99	3.05	0.00	Peak	---	---
2 @	2483.500	68.09	-5.91	74.00	32.88	32.13	3.08	0.00	Peak	---	---

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band

Final Test Date	Aug. 25, 2011	Test Site No.	TH01-HY
Temperature	27.8°C	Humidity	69%
Test Engineer	Ian	Configurations	802.11b/g/n


For Single Chain:

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

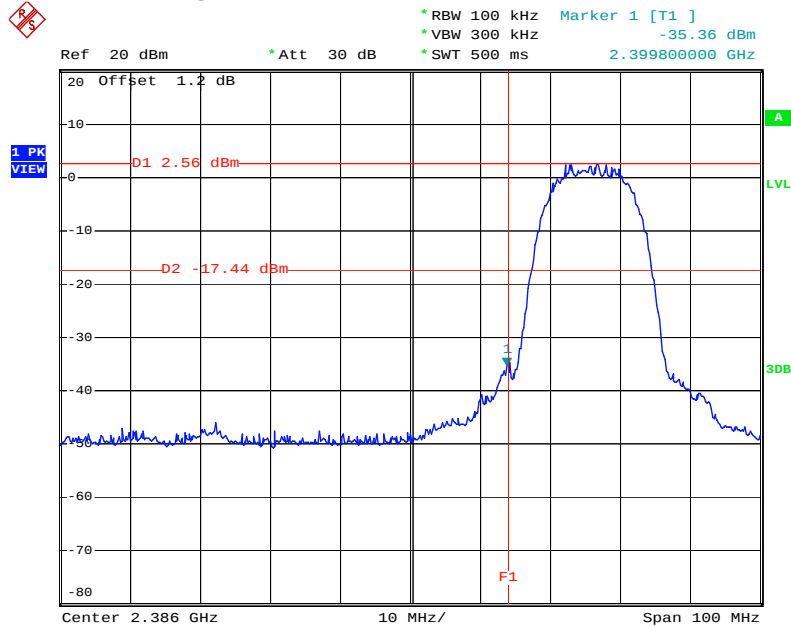


Date: 24.AUG.2011 14:22:41

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

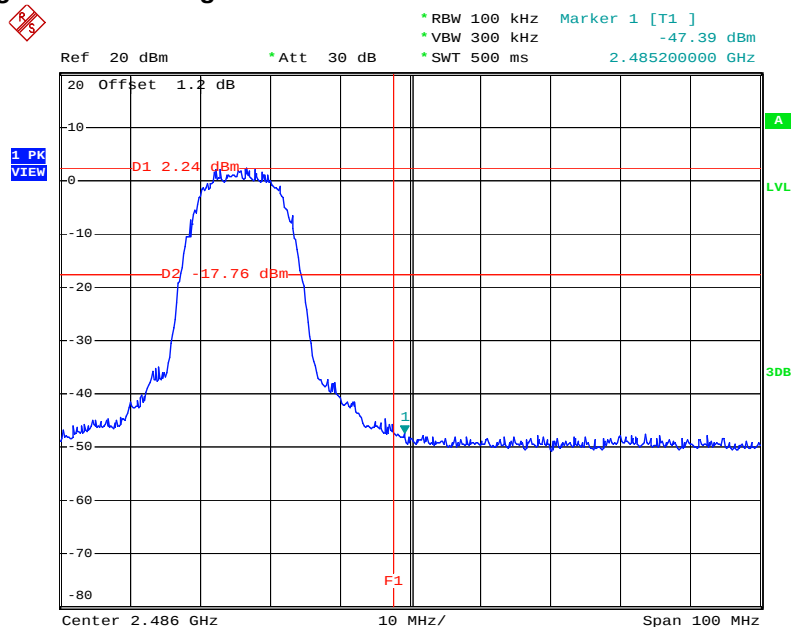


Date: 24.AUG.2011 14:30:10

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

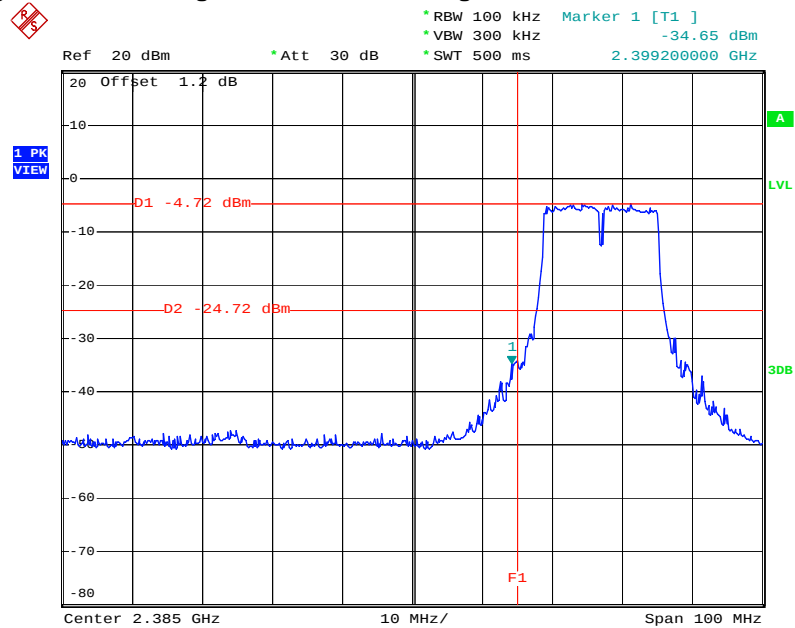


Date: 24.AUG.2011 14:37:05

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

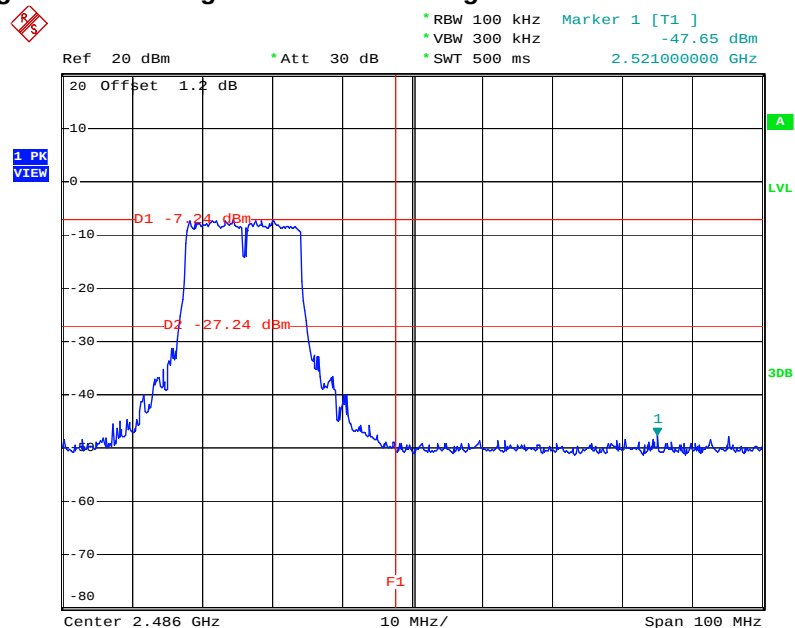


Date: 24.AUG.2011 14:44:27

For Three Chain
Low Band Edge Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 2412 MHz

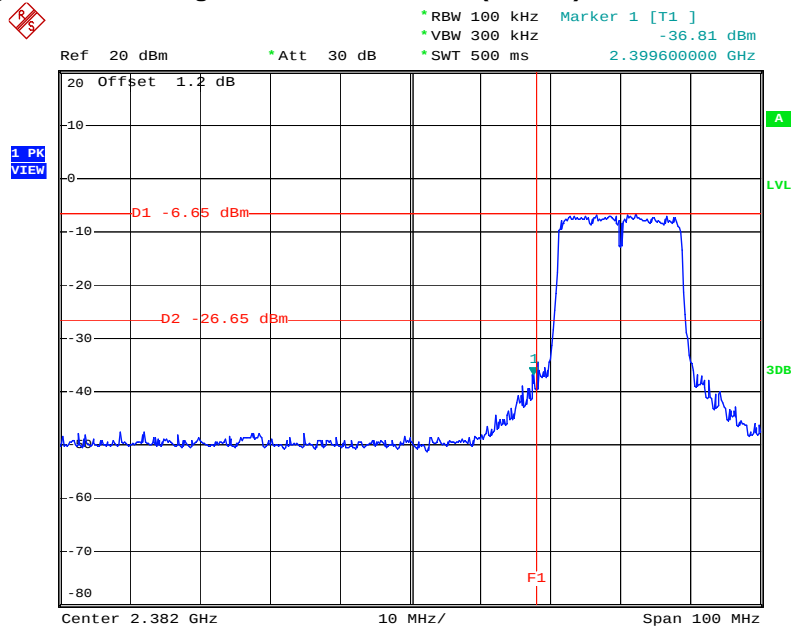


Date: 24.AUG.2011 15:41:39

High Band Edge Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 2462 MHz

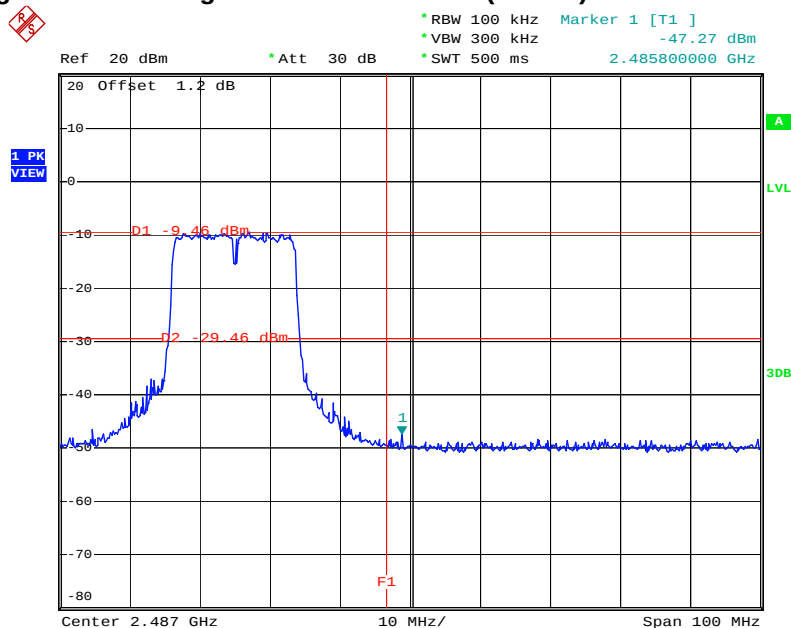


Date: 24.AUG.2011 18:12:56

Low Band Edge Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 2412 MHz

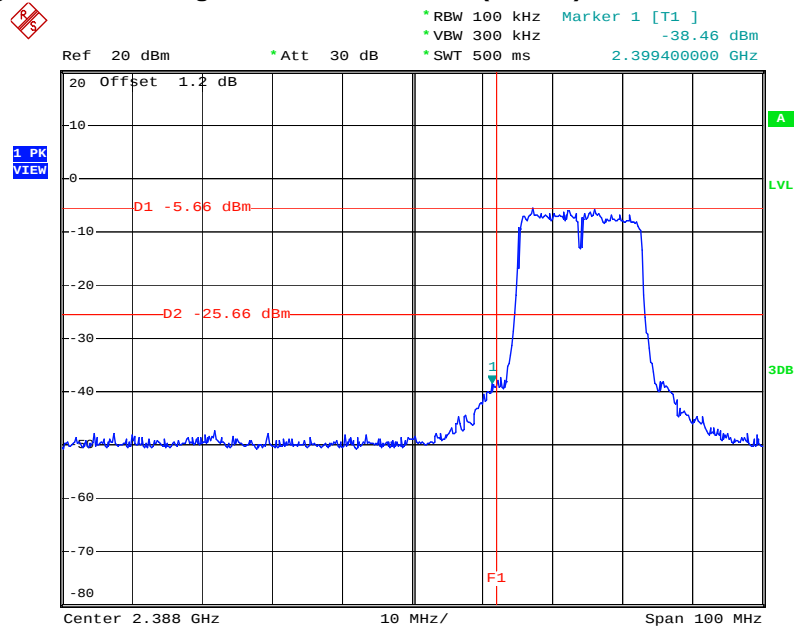


Date: 24.AUG.2011 18:20:25

High Band Edge Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 2462 MHz

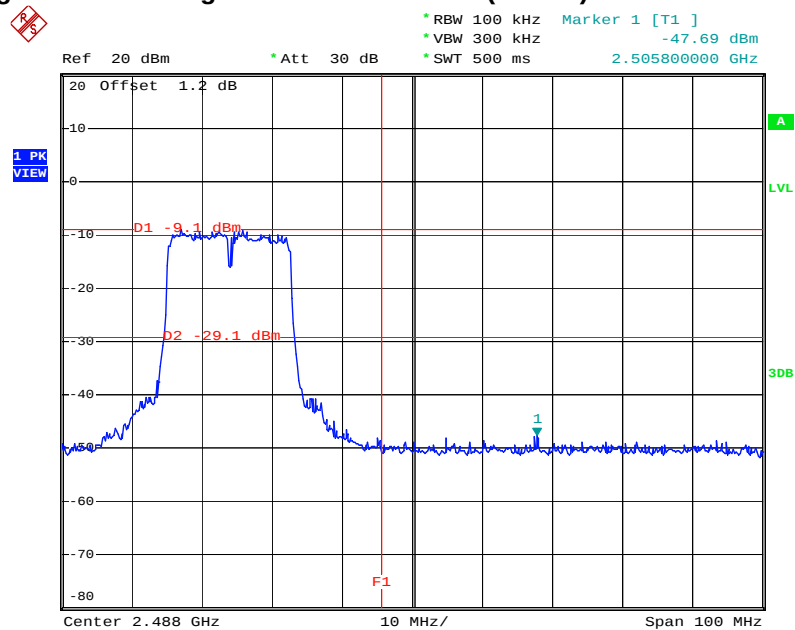


Date: 24.AUG.2011 18:26:51

Low Band Edge Plot on Configuration IEEE 802.11n (20MHz) Ant. C / 2412 MHz

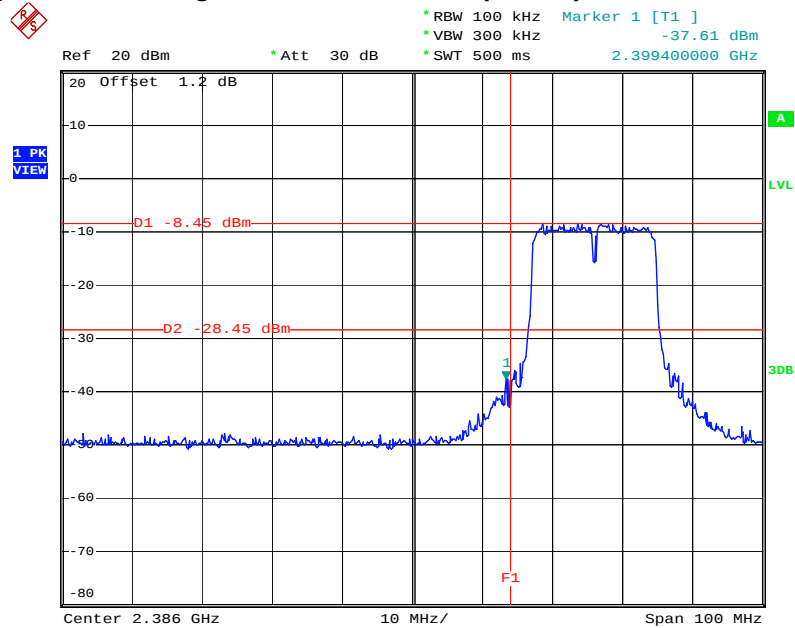


Date: 25.AUG.2011 09:18:20

High Band Edge Plot on Configuration IEEE 802.11n (20MHz) Ant. C / 2462 MHz

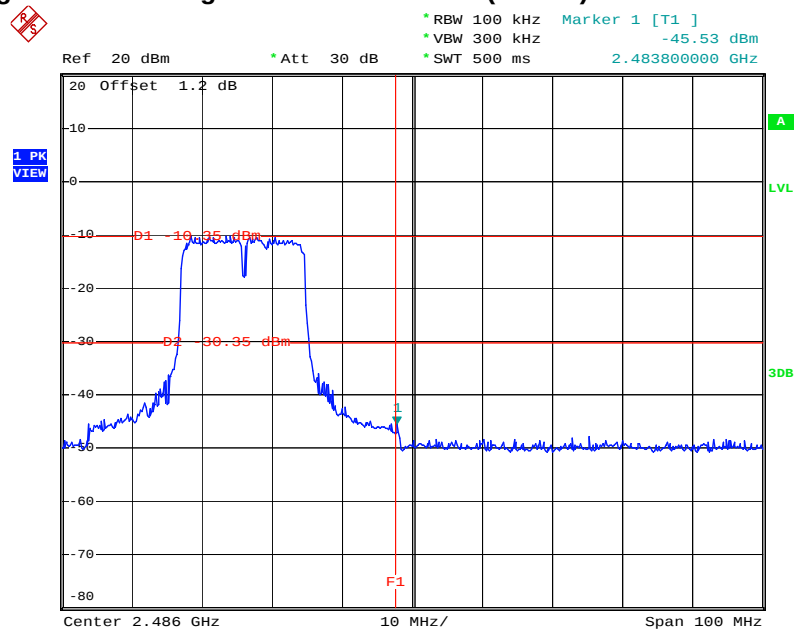


Date: 25.AUG.2011 11:26:01

Low Band Edge Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 2422 MHz

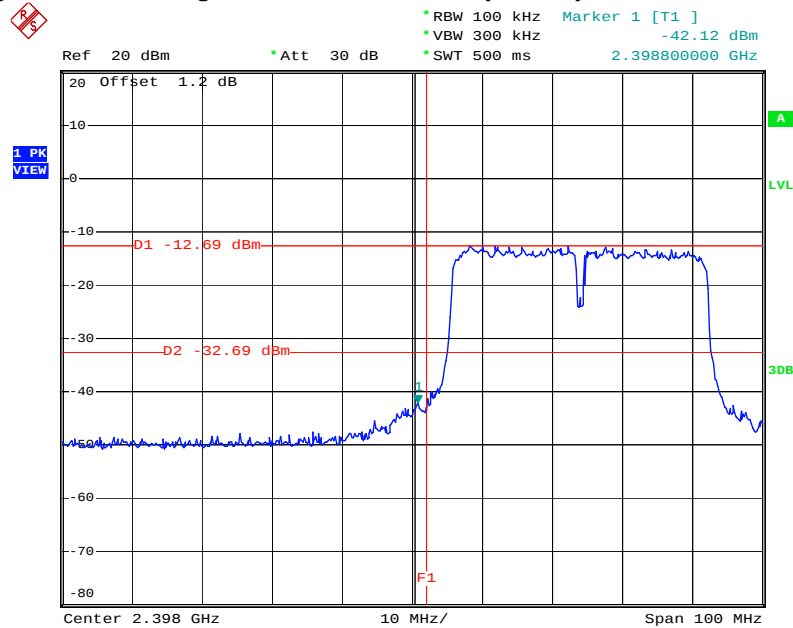


Date: 25.AUG.2011 11:41:03

High Band Edge Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 2452 MHz

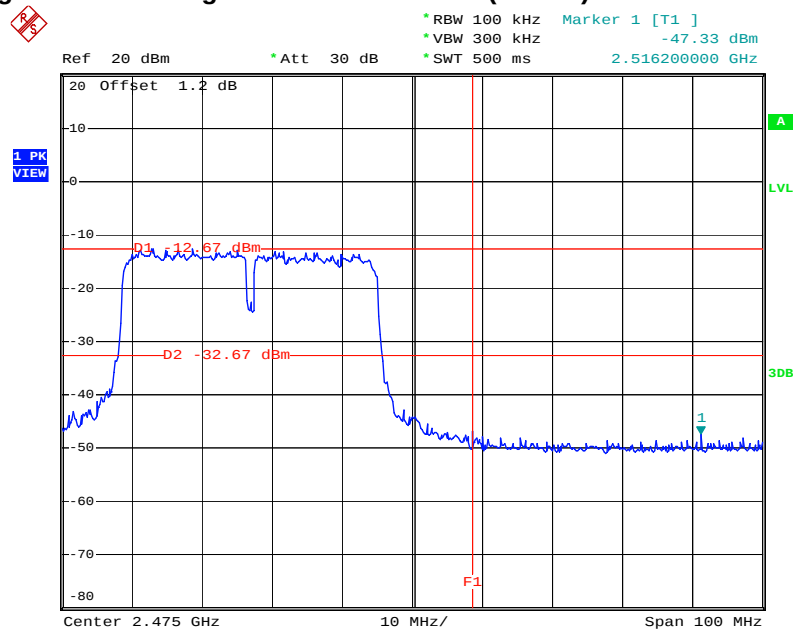


Date: 25.AUG.2011 11:48:28

Low Band Edge Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 2422 MHz

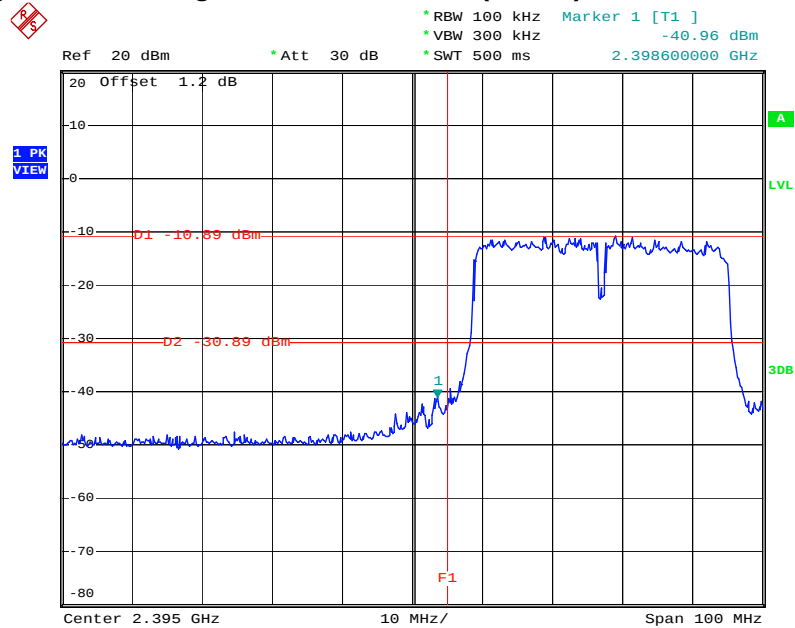


Date: 25.AUG.2011 13:35:53

High Band Edge Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 2452 MHz

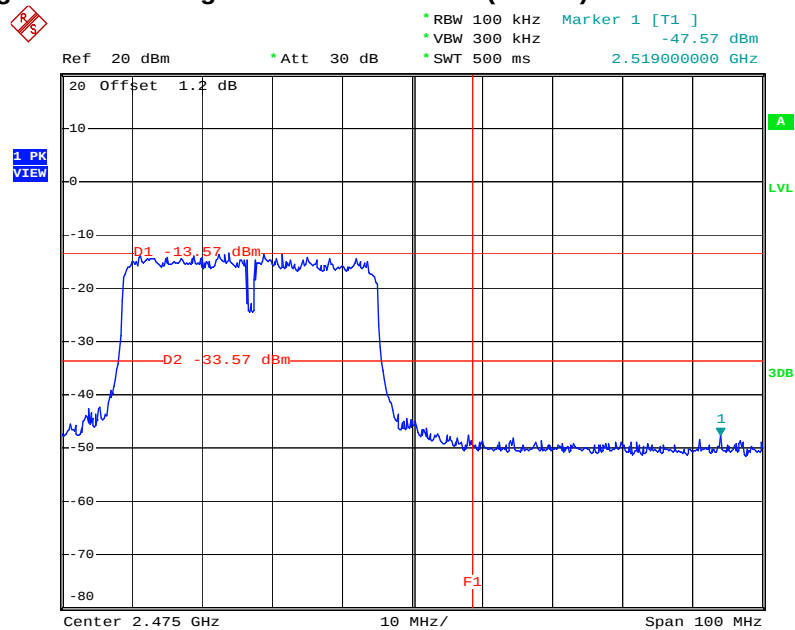


Date: 25.AUG.2011 13:41:47

Low Band Edge Plot on Configuration IEEE 802.11n (40MHz) Ant. C / 2422 MHz

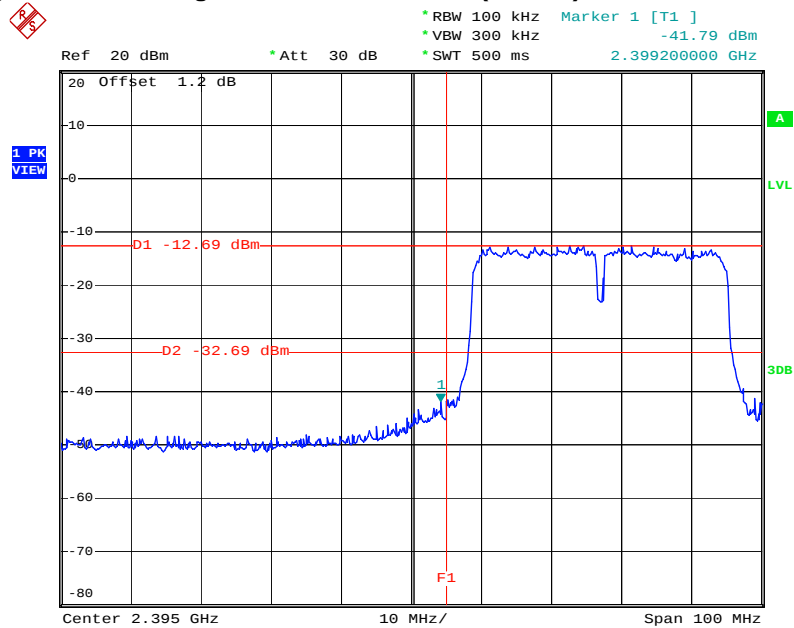

Date: 25.AUG.2011 13:48:04

High Band Edge Plot on Configuration IEEE 802.11n (40MHz) Ant. C / 2452 MHz

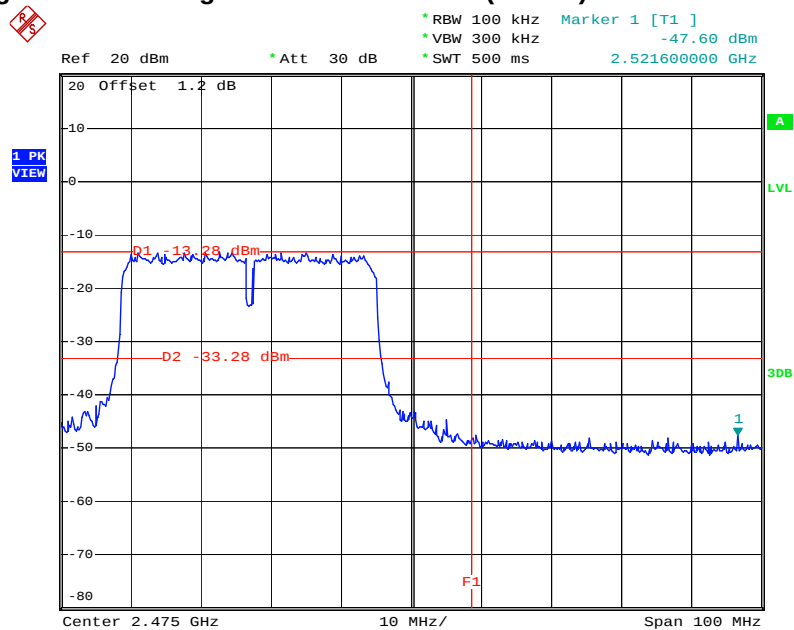

Date: 25.AUG.2011 13:53:10

3.7 Antenna Requirements

3.7.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.7.2 Antenna Connector Construction

Please refer to section 2.2 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 20, 2011	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99041	9kHz – 30MHz	Mar. 10, 2011	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	May 04, 2011	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz – 30MHz	Apr. 21, 2011	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 30	100023	9KHz ~ 30GHz	Mar. 15, 2011	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 03, 2011	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Oct. 22, 2010	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2010	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 07, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Jan. 06, 2011	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Jan. 06, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz ~ 40 GHz	Feb. 11, 2011	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz ~ 1 GHz 3m	May 11, 2011	Radiation (03CH02-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz ~ 2 GHz	Jan. 25, 2011	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz ~ 26.5 GHz	Aug. 04, 2011	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1 GHz ~ 18 GHz	Nov. 11, 2010	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz ~ 1 GHz	Mar. 07, 2011	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1 GHz ~ 40 GHz	Mar. 07, 2011	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz ~ 2 GHz	Oct. 16, 2010	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 11, 2011

P1, total 24 pages