

DATE: 26 July 2009

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Crow Electronic Engineering Ltd.

Equipment under test:

Wireless PIR Detector

FW NEO F9

Written by:



D. Shidowsky, Documentation

Approved by:



A. Sharabi, Test Engineer

Approved by:


I. Raz

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Crow Electronic Engineering Ltd.

Wireless PIR Detector

FW NEO F9

FCC ID: NFCFW-NEO-9F

05 August 2009

This report concerns: Original Grant: x
 Class I change:
 Class II change:

Equipment type: Part 15 Field Disturbance Sensor

47CFR15 Section 15.245

Measurement procedure used is ANSI C63.4-2003.

Application for Certification prepared by: Ishaishou Raz ITL (Product Testing) Ltd. Kfar Bin Nun D.N. Shimshon 99780 Israel e-mail Sraz@itl.co.il	Applicant for this device: (different from "prepared by") Shuki Segal Crow Electronic Engineering Ltd. 12 Kineret St. Airport City 70100 Israel Tel: +972-3-972-6000 Fax: +972-3-92-6001 e-mail: shukis@crow.co.il
--	---

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 Administrative Information.....	4
1.2 List of Accreditations	5
1.3 Product Description	6
1.4 Test Methodology.....	6
1.5 Test Facility	6
1.6 Measurement Uncertainty	6
2. SYSTEM TEST CONFIGURATION	7
2.1 Justification.....	7
2.2 EUT Exercise Software	7
2.3 Special Accessories	7
2.4 Equipment Modifications	7
2.5 Configuration of Tested System.....	7
3. RADIATED MEASUREMENT TEST SET-UP PHOTO	8
4. FIELD STRENGTH OF FUNDAMENTAL	9
4.1 Test Specification	9
4.2 Test Procedure.....	9
4.3 Measured Data.....	9
4.4 Test Instrumentation Used, Field Strength of Fundamental	13
5. RADIATED EMISSION, 9 KHZ – 30 MHZ	14
5.1 Test Specification	14
5.2 Test Procedure.....	14
5.3 Measured Data.....	14
5.4 Test Instrumentation Used, Radiated Measurements	15
5.5 Field Strength Calculation	16
6. SPURIOUS RADIATED EMISSION 30 MHZ – 10 GHZ	17
6.1 Test Specification	17
6.2 Test Procedure.....	17
6.3 Test Data.....	18
6.4 Test Instrumentation Used, Radiated Measurements	20
7. BANDWIDTH	21
7.1 Test procedure	21
7.2 Test Equipment Used.....	22
8. BAND EDGE	23
8.1 Test procedure	23
8.2 Test Equipment Used.....	25
9. APPENDIX A - CORRECTION FACTORS	26
9.1 Correction factors for CABLE	26
9.2 Correction factors for CABLE	27
9.3 Correction factors for CABLE	28
9.4. Correction factors for LOG PERIODIC ANTENNA	29
9.5. Correction factors for LOG PERIODIC ANTENNA	30
9.6. Correction factors for BICONICAL ANTENNA.....	31
9.7. Correction factors for ACTIVE LOOP ANTENNA	32

1. General Information

1.1 Administrative Information

Manufacturer: Crow Electronic Engineering Ltd.

Manufacturer's Address: 12 Kineret St. Airport City
P.O.B. 293
Ben Gurion Airport 70100
Israel
Tel: +972-3-972-6000
Fax: +972-3-972-6001

Manufacturer's Representative: Yevgeny Itkin
Shuki Segal

Equipment Under Test (E.U.T): Wireless PIR Detector

Equipment Model No.: FW NEO F9

Equipment Serial No.: Not Designated

Date of Receipt of E.U.T: 10.06.09

Start of Test: 10.06.09

End of Test: 11.06.09

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15 Sub-part C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 *Product Description*

The EUT is wireless intrusion detector powered from 3V internal Lithium battery.

The EUT utilizes an internal antenna operating at 916.5 MHz.

The EUT communicates with control panels through the standard frequency band of 916 MHz.

1.4 *Test Methodology*

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 *Test Facility*

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 *Measurement Uncertainty*

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 ***Justification***

The E.U.T. was tested in the vertical position as it is a wall mounted device.

2.2 ***EUT Exercise Software***

The E.U.T. was operated using software version 6.02.

2.3 ***Special Accessories***

No special accessories were needed.

2.4 ***Equipment Modifications***

No modifications were needed in order to achieve compliance

2.5 ***Configuration of Tested System***




Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photo



Figure 2. Radiated Emission Test

4. Field Strength of Fundamental

4.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.245(b)

4.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (916.5 MHz) and Peak Detection. Measurements were also performed using Quasi-peak and average detectors.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.


4.3 Measured Data

JUDGEMENT: Passed by 18.6 dB

The EUT met the FCC Part 15, Subpart C, Section 15.245(b) specification requirements.

The details of the highest emissions are given in Figure 3 to Figure 5.

TEST PERSONNEL:

Tester Signature:  Date: 29.07.09

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Wireless PIR Detector
 Type FW NEO F9
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.245(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters Detector: Peak, Quasi-peak, Average

Freq. (MHz)	Pol. V/H	Peak Reading (dB μ V/m)	QP Reading (dB)	Average Reading	AVG Specification (dB μ V/m)	Margin (dB)
916.50	H	85.2	85.1	82.9	114.0	-31.1
916.50	V	97.8	97.7	95.4	114.0	-18.6

Figure 3. Field Strength of Fundamental.

Antenna Polarization: HORIZONTAL/VERTICAL.
Detector: Peak, Quasi-peak, Average

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. “Peak Reading” (dB μ V/m) included the “Correction Factors”.
3. “QP Reading” (dB μ V/m) included the “Correction Factors”.
4. “Average Reading” (dB μ V/m) included the “Correction Factors”.
5. “Correction Factors” (dB) = Test Antenna Correction Factor(dB) + Cable Loss.

Field Strength of Fundamental

E.U.T Description: Wireless PIR Detector
 Type: FW NEO F9
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.245(b)

Antenna Polarization: Horizontal

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

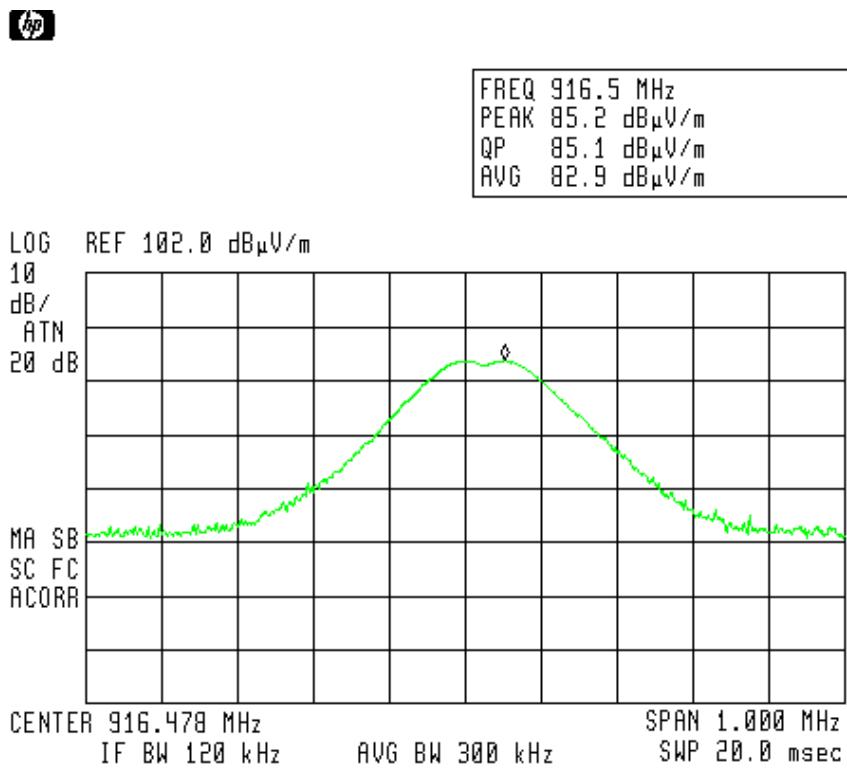


Figure 4. Field Strength of Fundamental
Antenna Polarization: HORIZONTAL
Detector: Peak, Quasi-peak, Average

Field Strength of Fundamental

E.U.T Description Wireless PIR Detector
Type FW NEO F9
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

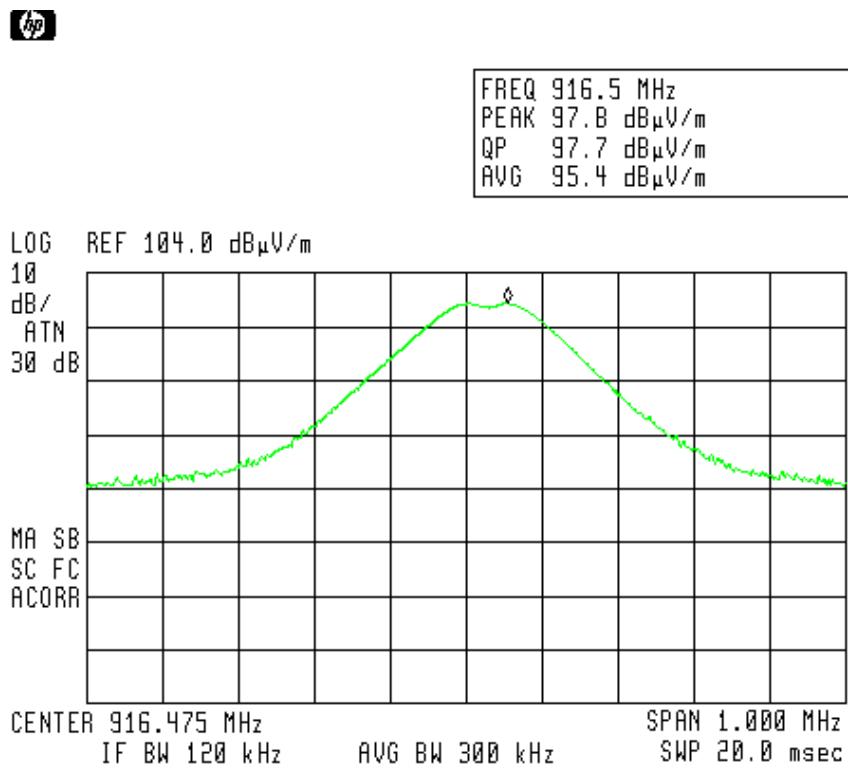


Figure 5. Field Strength of Fundamental

Antenna Polarization: VERTICAL
Detectors: Peak, Quasi-peak, Average

4.4 ***Test Instrumentation Used, Field Strength of Fundamental***

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

5. Radiated Emission, 9 kHz – 30 MHz

5.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

5.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of kHz. This frequency was measured using a peak detector.

5.3 Measured Data

JUDGEMENT: Passed

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

The signals in the band 9 kHz – 30 MHz were below the spectrum analyzer noise level, at least 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature: 

Date: 29.07.09

Typed/Printed Name: A. Sharabi

5.4 ***Test Instrumentation Used, Radiated Measurements***

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

5.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

6. Spurious Radiated Emission 30 MHz – 10 GHz

6.1 ***Test Specification***

30 MHz - 10 GHz, F.C.C., Part 15, Subpart C

6.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1. The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 10 GHz, a spectrum analyzer including a low noise amplifier was used. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

6.3 **Test Data**

JUDGEMENT: Passed by 36.0 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The margin between the emission level and the specification limit was 36.0 dB in the worst case at the frequency of 1833.00 MHz, horizontal polarization.

TEST PERSONNEL:

Tester Signature:  Date: 29.07.09

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description Wireless PIR Detector
 Type FW NEO F9
 Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 10 GHz
 Antenna: 3 meters distance Detectors: Peak, Average

Frequency (MHz)	Peak Reading (dB μ V/m)	Average Reading (dB μ V/m)	Antenna Polarity (H/V)	Specification (dB μ V/m)	Margin (dB)
1833.00	57.0	-	H	104.0	-47.0
1833.00	-	48.0	H	84.0	-36.0
1833.00	57.1	-	V	104.0	-46.9
1833.00	-	47.3	V	84.0	-36.7
5499.00	48.3	-	H	104.0	-55.7
5499.00	-	41.0	H	84.0	-43.0
5499.00	53.0	-	V	104.0	-51.0
5499.00	-	48.0	V	84.0	-36.0

**Figure 6. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Average Reading” includes correction factor.

“Correction Factor” for 30 MHz – 2.9 GHz = Antenna Factor + Cable Loss

“Correction Factor” above 2.9 GHz = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

6.4 ***Test Instrumentation Used, Radiated Measurements***

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 3, 2008	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	March 25, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7. Bandwidth

7.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 120 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points.

The EUT was set up as shown in Figure 1, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

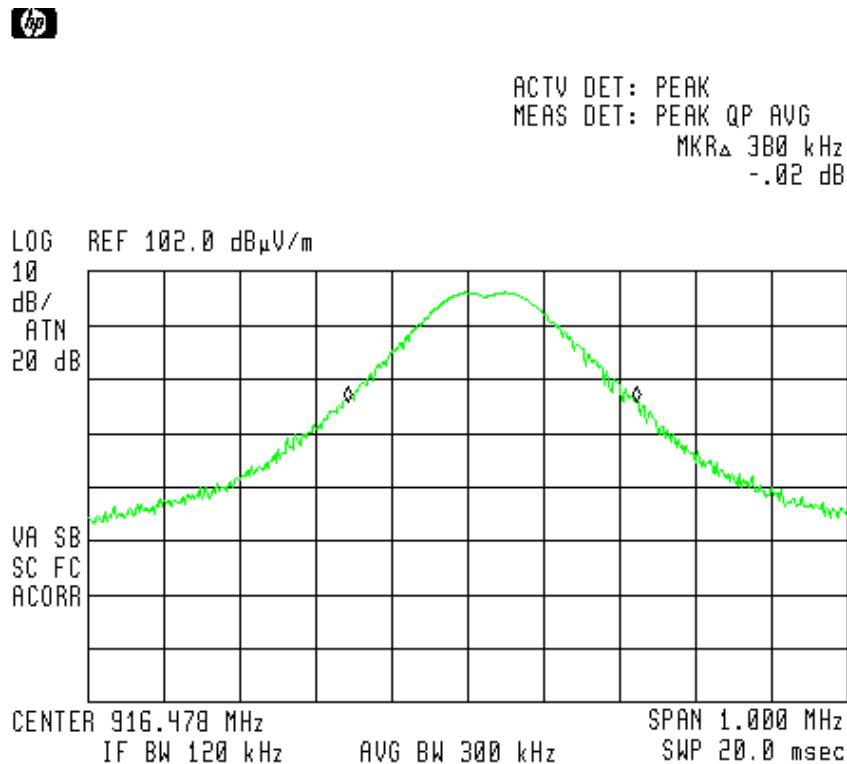


Figure 7

TEST PERSONNEL:

Tester Signature: 

Date: 29.07.09

Typed/Printed Name: A. Sharabi

7.2 **Test Equipment Used.**

Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 8 Test Equipment Used

8. Band Edge

8.1 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The EMI receiver was adjusted to the transmission channel at the maximum radiated level. The display line was set to radiated spurious emission Class B and the EMI receiver was set to the band edge frequencies.

Maximum power level below 902.00 MHz and above 928.00 MHz was measured relative to power level at 916.5 MHz.

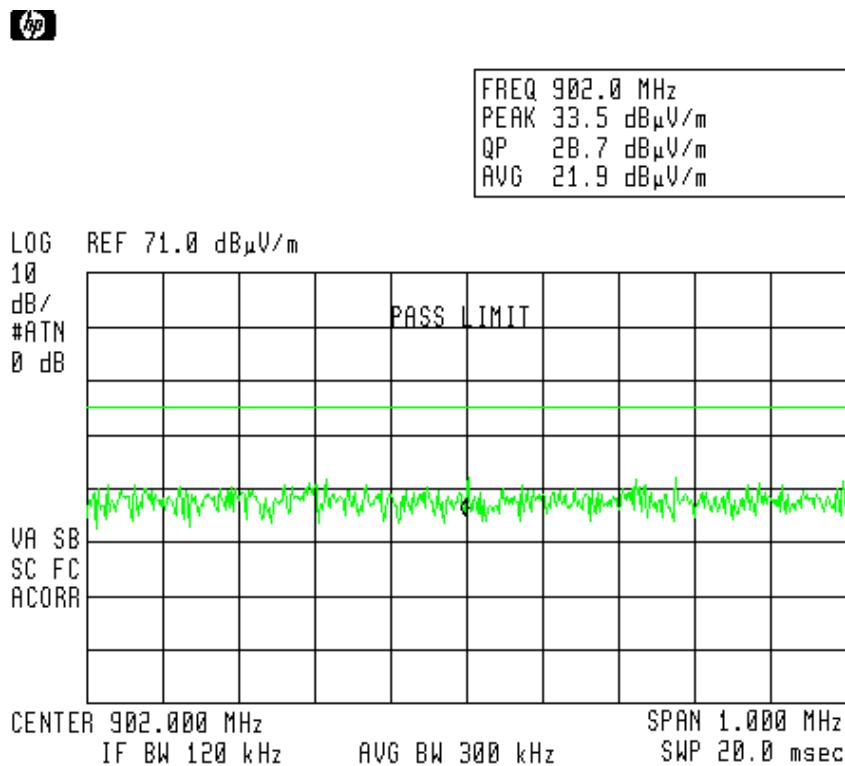


Figure 9 — 902.00 MHz

hp

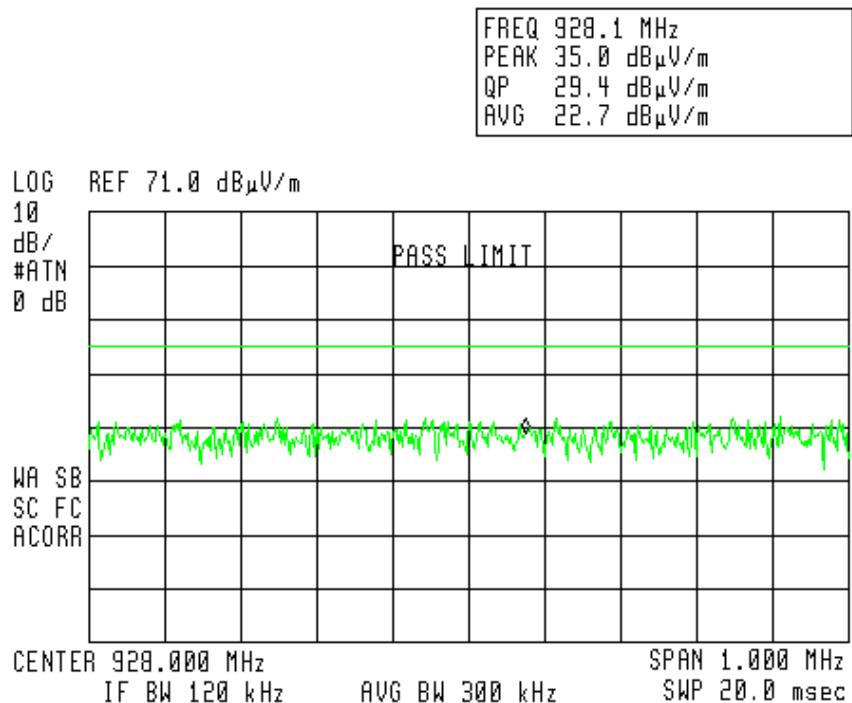


Figure 10 — 928.00 MHz

TEST PERSONNEL:

Tester Signature: 

Date: 29.07.09

Typed/Printed Name: A. Sharabi

8.2 **Test Equipment Used.**

Band Edge

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 years

Figure 11 Test Equipment Used

9. APPENDIX A - CORRECTION FACTORS

9.1 *Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.*

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

9.2 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

9.3 Correction factors for

CABLE from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

**9.4. Correction factors for LOG PERIODIC ANTENNA
Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters		Distance of 10 meters	
FREQUENCY (MHz)	AFE (dB/m)	FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1	200.0	9.0
250.0	10.2	250.0	10.1
300.0	12.5	300.0	11.8
400.0	15.4	400.0	15.3
500.0	16.1	500.0	15.6
600.0	19.2	600.0	18.7
700.0	19.4	700.0	19.1
800.0	19.9	800.0	20.2
900.0	21.2	900.0	21.1
1000.0	23.5	1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

9.5. Correction factors for LOG PERIODIC ANTENNA
Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

9.6. Correction factors for BICONICAL ANTENNA

Type BCD-235/B, at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

9.7. Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2