

**Application for Certification
For an RF Transmitter**

**ADD Eleco, Inc.
7207 Rio Flora Pl.
Downey, CA 90241**

Product: Wireless Microphone

Model: AD200P

FCC ID: NHAAD200P

REPORT # RC054780/00096

This report was prepared in accordance with the requirements of the FCC Rules and Regulations Part 2, Subpart J, 2.981 through 2.1005, Part 74.801, 74.861 and other applicable sections of the rules as indicated herein.

Prepared By:

Jake Tynes

**DNB Engineering, Inc.
3535 W. Commonwealth Ave.
Fullerton, CA 92833**

7 MARCH 2000

TABLE OF CONTENTS

Section	Title	Sheet #
1.0	ADMINISTRATIVE DATA	4
1.1	Certifications and Qualifications	4
1.2	Measurement Repeatability Information	4
 Note: The paragraph numbers in this report follow the application section numbers found in the FEDERAL COMMUNICATIONS COMMISSION Rules and Regulations, Part 2, Subpart J for Type Certification of electronic equipment.		
2.983 (a)	Request for Certification	5
2.983 (b)	Equipment Description	5
2.983 (c)	Anticipated Production Quantity	5
2.983 (d)	Technical Description	6
2.983 (d) (1)	Type of Emissions	6
2.983 (d) (2)	Frequency Range	6
2.983 (d) (3)	Operating Power Level	6
2.983 (d) (4)	Maximum Power Allowed in Applicable Part(s) of the Rules	6
2.983 (d) (5)	Final RF Amplifier Input Power	6
2.983 (d) (6)	Function of all Active Circuit Devices	7
2.983 (d) (7)	Circuit Diagram	8
2.983 (d) (8)	Instruction Book	8
2.983 (d) (9)	Tune Up Procedure	8
2.983 (d) (10)	Description of Frequency Determining Circuitry	9
2.983 (d) (11)	Description of Suppression Circuitry	9
2.983 (d) (12)	Description of Digital Modulation System	9
	Figure 1: EUT Circuit Diagram	10
	Figure 2: EUT Block Diagram	11
2.983 (e)	Test Data	12
2.983 (e) (1)	Measurement of RF Power Output per 2.985 and 74.861	12
	Figure 3: Block Diagram for All Conducted Tests	13
	Figure 4: Equipment List	14
	Figure 5: Test Setup Photo for All Conducted Tests	15
	Figure 6: Plot of RF Power Output	16
2.983 (e) (2)	Measurement of Modulation Characteristics per 2.987 and 74.861	17 - 19
	Figure 7: Block Diagram of Modulation Characteristics Test	20
	Figure 8: Test Equipment Log	21
	Figure 9: Photo of Modulation Characteristics Calibration	22
	Figure 10: Photo of Modulation Characteristics Test	23
	Figure 11: Test Data Sheet	24
	Figure 12: Frequency Response Curve	25
2.983 (e) (3)	Measurement of Occupied Bandwidth per 2.989 and 74.861	26
	Figure 13: Injected Audio Level	27
	Figure 14: Plot of Occupied Bandwidth	28

TABLE OF CONTENTS

Section	Title	Sheet #
2.983 (e) (4)	Measurement of Antenna Conducted Spurious Emissions per 2.991 and 74.861	29
	Figure 15: Highest Conducted Spurious Emissions	30
	Figures 16 - 18: Plots of Conducted Spurious Emissions	31 - 33
2.983 (e) (5)	Measurement of Radiated Spurious per 2.993 and 74.861	34 - 35
	Figure 19: RF Radiated Spurious Setup	36
	Figure 20: List of Radiated Spurious Test Equipment	37
	Figure 21: Photograph of Radiated Spurious Emissions Setup	38
	Figure 22: Photograph of Radiated Spurious Emissions Setup	39
	Figure 23: Photograph of Radiated Spurious Emissions Setup	40
	Figure 24: Photograph of Radiated Spurious Emissions Setup	41
	Figure 25: Radiated Spurious Emissions Test Data	42
	Figures 26 - 31: Plots of Radiated Spurious Emissions	43 - 48
2.983 (e) (6)	Measurement of Frequency Stability per 2.995 and 74.861	49
	Figure 32: Block Diagram of Frequency Stability Test	50
	Figure 33: Photograph of Frequency Stability Test Setup	51
	Figure 34: Photograph of Frequency Stability Test Setup	52
	Figure 35: Frequency Stability Test Data Sheet	53
	Figure 36: Frequency Stability Test Graph	54
2.983 (e) (7)	Frequency Spectrum to be Investigated per 2.997	55
2.983 (f)	FCC ID: Label	55
2.983 (g)	Photographs and/or Drawings Showing Equipment Construction Technique	56
2.983 (h), (i)	These sections are not applicable	
	Figure 37: Wireless Microphone (Fully Assembled)	57
	Figure 38: Front Panel	58
	Figure 39: Wireless Microphone w/ Battery Removed	59
	Figure 41: Board Detail 1	60
	Figure 42: Board Detail 2	61
APPENDIX A	Operating Manual	1 - 5

1.0 ADMINISTRATIVE DATA

1.1 Certifications and Qualifications

I certify that DNB Engineering, Inc conducted the tests performed in order to obtain the technical data presented in this application. Also, based on the results of the enclosed data, I have concluded that the equipment tested meets or exceeds the requirements of the Rules and Regulations governing this application.

1.2 Measurement Repeatability Information

The test data presented in this report has been acquired using the guidelines set forth in FCC Part 2.981 through 2.1005, and Part 90. The test results presented in this document are valid only for the equipment identified herein under the test conditions described. Repeatability of these test results will only be achieved with identical measurement conditions. These conditions include: The same test distance, EUT Height, Measurement Site Characteristics, and the same EUT System Components. The system must have the same Interconnecting Cables arranged in identical placement to that in the test set-up, with the system and/or EUT functioning in the identical mode of operation (i.e. software and so on) as on the date of the test. Any deviation from the test conditions and the environment on the date of the test may result in measurement repeatability difficulties.

All changes made to the EUT during the course of testing as identified in this test report must be incorporated into the EUT or identical models to ensure compliance with the FCC regulations.



Bryan Broaddus (Para. 1.1)
Manager, Test Dept.
DNB Engineering, Inc.
Tel. (714) 870-7781 FAX (714) 870-5081

2.983 (a) Request for Certification

Name of Applicant: ADD Eleco, Inc.
7207 Rio Flora Pl.
Downey, CA 90241

Applicant is: Manufacturer
 Vendor
 Licensee
 Prospective Licensee
 Other

Name of Manufacturer: ADD Eleco, Inc.

2.983 (b) Equipment Description

The EUT is a low power auxiliary station wireless microphone designed to operate within the 174 to 216 MHz (TV broadcast band).

Product: Wireless Microphone, Belt-clip Transmitter

Model: AD200P

FCC ID: NHAAD200P

2.983 (c) Anticipated Production Quantity

One Unit
 Multiple Units

2.983 (d) Technical Description

The EUT is a belt-clip wireless microphone that operates in the TV broadcast band between 174 and 216 MHz. The microphone requires a standard 9V transistor battery for operation. If the battery voltage drops below 6.2 Vdc, an LED battery level indicator next to the ON-OFF switch blinks to alert the user. The output power is 10 mW nominal into a 2 inch long flexible antenna.

2.983 (d) (1) Type of Emissions

- F3E F: Frequency Modulation
- 3: A single channel containing analogue information
- E: Telephony (including sound broadcasting)

2.983 (d) (2) Frequency Range

174 MHz to 216 MHz (crystal controlled, fixed, not selectable)

2.983 (d) (3) Operating Power Level

10 Milliwatts (nominal)

2.983 (d) (4) Maximum Power Allowed in Applicable Part(s) of the Rules

FCC rules: Maximum Power:

Part 74.861 (e) (1) (i) 174 to 216 MHz: 50 mW

2.983 (d) (5) Final RF Transmitter Input Power

N/A

2.983 (d) (6) Function of all Active Circuit Devices

Please refer to block diagram (Figure 1) and schematic (Figure 2).

A. Preamplifier

U2 amplifies the microphone input signal 24 dB to 34 dB, depending on the setting of VR2.

B. Compressor and Pre-Emphasis

Pre-Emphasis is governed by C12, R5 and the 20K resistor built-into U1. U1A forms a compressor with a unity gain level of 0.775 volt.

C. Deviation Control

U1B functions as a voltage controlled amplifier, with VR1 controlling the output level and thus the frequency deviation.

D. FM Modulator and Tripler

Q4 functions as a voltage-controlled crystal oscillator with the collector tuned to three times the crystal frequency. The frequency determining components for this oscillator consists of L1, D1 and X1 in series.

E. First Band-Pass Filter

A band-pass filter formed by L4, C29, C37 and C40 is tuned to three times the crystal frequency.

F. RF Amplifier and Tripler

Q5 triples the output frequency of FM modulator (Q4) for a total of nine times the crystal frequency. Q5 also amplifies the signal to 10 dBm (10 mW into a 50 ohm load).

G. Second Band Pass Filter

A band pass filter formed by L5, C39 and C42 is tuned to nine times the crystal frequency.

H. Voltage Regulator and Low Battery Indicator

U5 serves as a voltage regulator and low battery indicator. If the battery voltage drops to 6.2 volts, D3 will blink until the battery is changed.

2.983 (d) (7) Circuit Diagram

See Figure 1. Block diagram provided in Figure 2.

2.983 (d) (8) Instruction Book

Refer to Appendix A.

2.983 (d) (9) Tune-Up Procedure

- A. SW1 to OFF, VR1 to midrange and VR2 to midrange.
- B. Solder a 50 ohm coaxial cable (RG174) to the antenna terminal.
- C. Split this cable three ways to feed a spectrum analyzer, modulation analyzer and frequency counter
- D. On the modulation analyzer select 50 μ S deemphasis, 15 kHz LPF, FM mode and connect its audio output to an audio analyzer for distortion measurement.
- E. Solder a shielded cable to the preamplifier output.
- F. Connect the other end of the shielded cable to an AC voltmeter.
- G. Apply 9 volts to the battery terminals and switch SW1 on. Adjust C29, C33, C42 and L2 for maximum power.
- H. Adjust L1 for the proper frequency (nine times the crystal frequency) and repeat step G.
- I. Apply 30 mV of audio at 1 kHz to the microphone terminals. Adjust VR2 for 775 mV preamplifier output.
- J. Adjust VR1 for 12 kHz deviation. Adjust L2 and C29 for minimum distortion and maximum power.

2.983 (d) (10) Description of Frequency Determining Circuitry

The frequency determining components for this oscillator consists of L1, D1 and X1 in series.

2.983 (d) (11) Description of Suppression Circuitry

Suppression circuitry consists of the two band-pass filters described in 2.983 (d) (6), E and G.

2.983 (d) (12) Description of Digital Modulation System

Not applicable.

FIGURE 1: EUT Circuit Diagram 2.983 (d) (7)


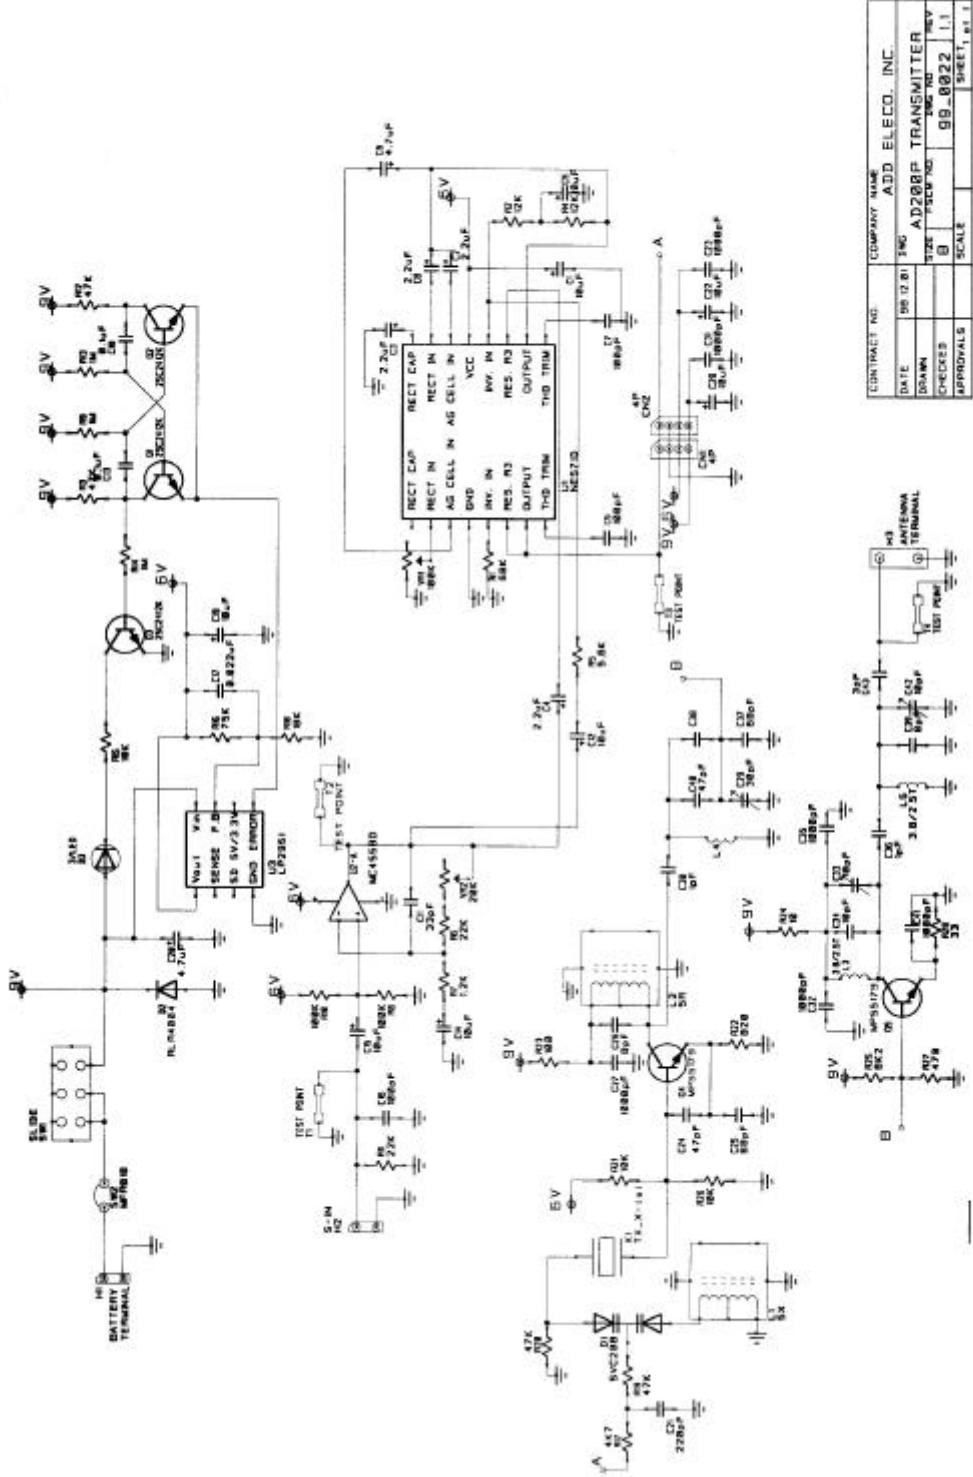


FIGURE 2: EUT Block Diagram 2.983 (d) (7)

AD200P Transmitter Block Diagram

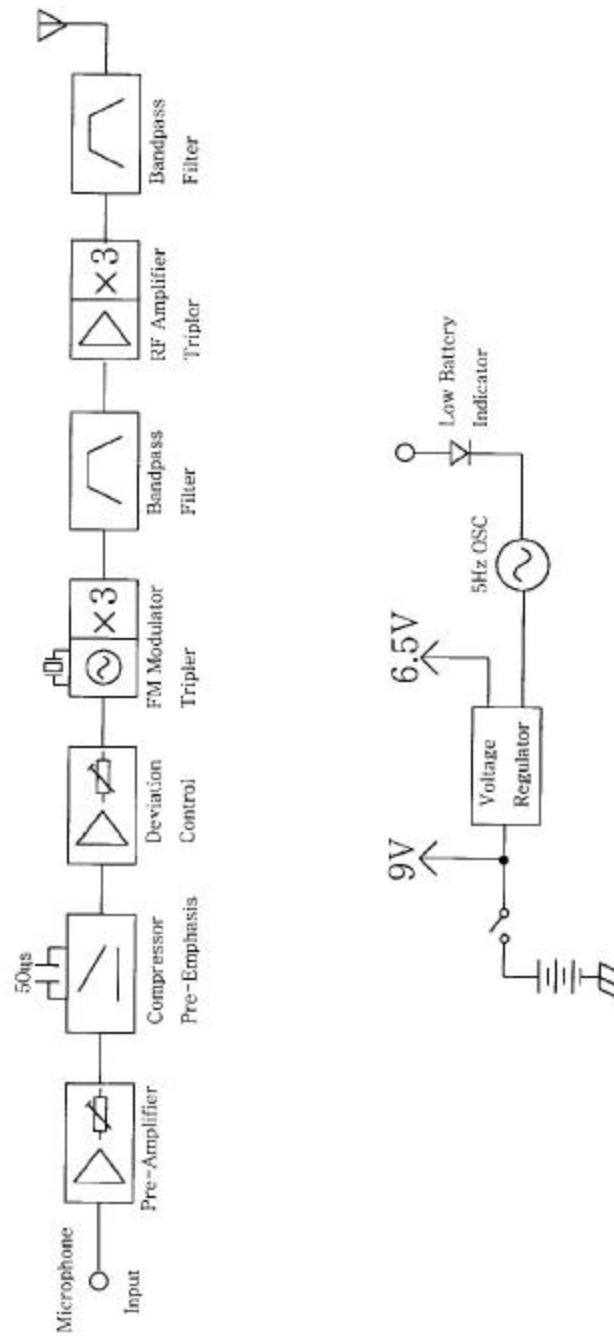

2.983 (e) Test Data

Refer to 2.983 (e) (1) through 2.93 (e) (7).

2.983 (e) (1) Measurement of RF Power Output per 2.985 and 74.681

Requirement

Power output shall be measured at the RF output terminals when the EUT is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements.

The maximum power is 50 mW from 174 to 216 MHz.

Test Method

The block diagram for all conducted tests is provided in Figure 3.

Output power is measured across a 50 ohm load with a directional coupler and a spectrum analyzer. A list of equipment used for all conducted tests is provided in Figure 4.

Test Results

Note: Prior to measuring the power output, the stock antenna was removed from the EUT and replaced with a cable and coaxial connector. The center conductor was connected to the RF output and the shield was connected to the EUT's ground plane. This was necessary to permit connecting the measuring apparatus to the RF output terminals. A similar cable was connected to the audio input connector to permit external modulation. A test setup photograph for all conducted tests is provided in Figure 5.

The measured RF power into 50 ohms was measured to be 4.9mW (6.9 dBm).

A plot of the measured power is provided in Figure 6.

FIGURE 3: Block Diagram for All Conducted Tests

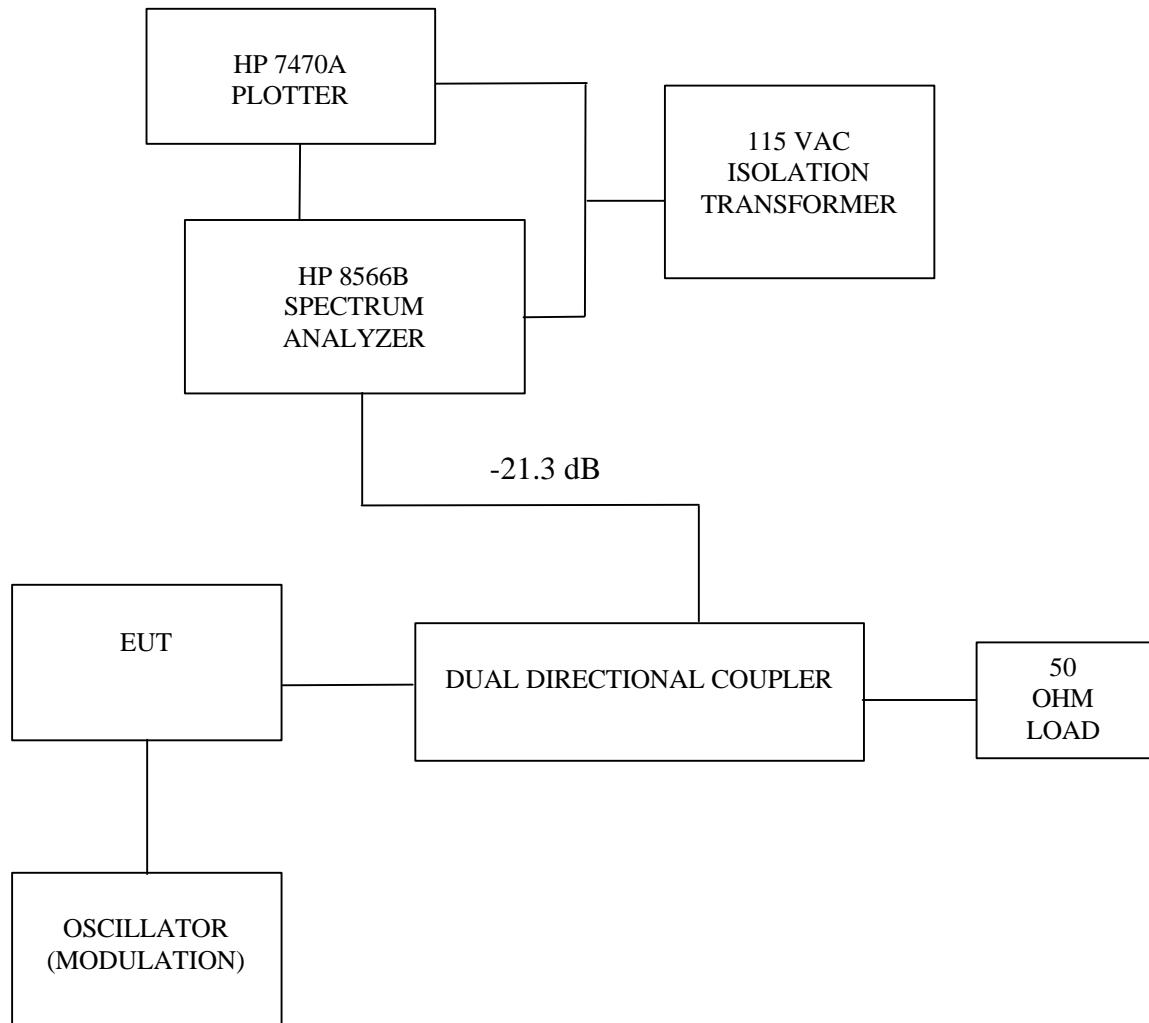


FIGURE 4: Equipment List

TEST EQUIPMENT LOG

Date: 2/24/00 Test Procedure: N/A
EUT: Wireless Microphone Part #: AD200P
Serial #: N/A Test Engineer: John Stanford

FIGURE 5: Test Setup Photo for All Conducted Tests


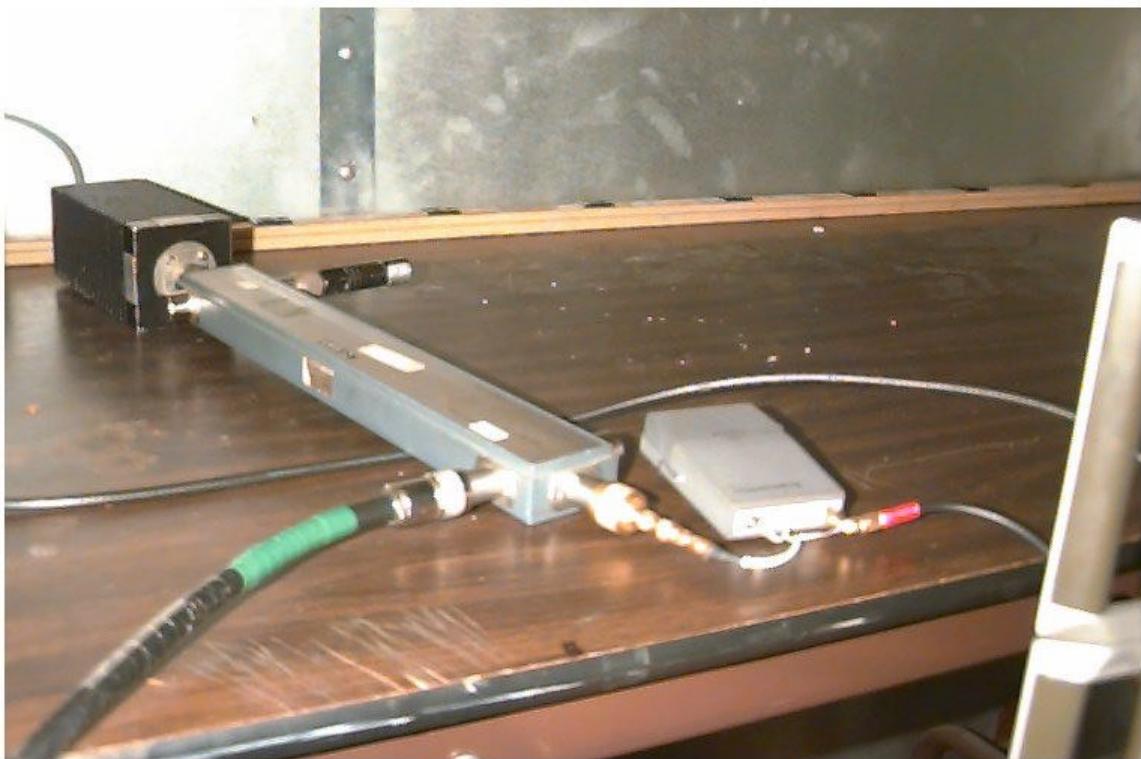


FIGURE 6: Plot of RF Power Output

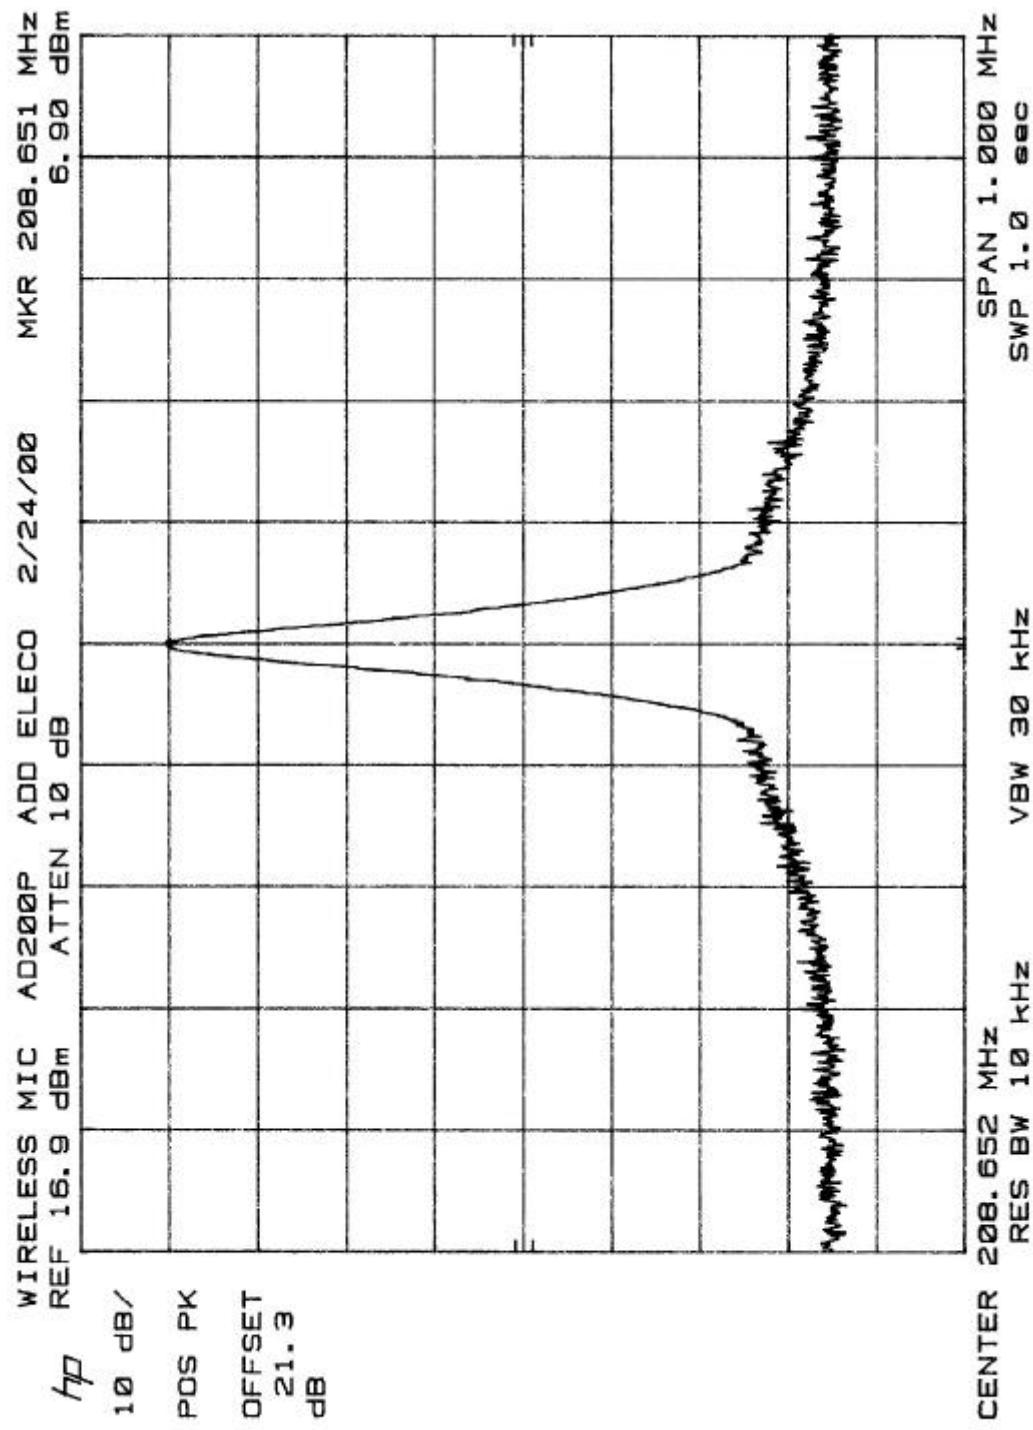

2.983 (e) (2) Measurement of Modulation Characteristics per 2.987 and 74.861

Requirement

The requirement of this test is to produce a plot of Frequency (X-axis) vs. Deviation (kHz) for a wireless microphone. From the determined characteristics, a suitable modulation frequency and amplitude for the occupied bandwidth measurement can be determined.

Test Method

The following equipment is required to perform this test:

1. Sound pressure meter (SPM)
2. Transducer (speaker) with a frequency response of 20 to 20 kHz
3. Audio oscillator, 20 Hz to 20 kHz
4. Audio amplifier, 20 Hz to 20 kHz
5. Oscilloscope and/or RMS voltmeter
6. Modulation monitor
7. Anechoic sound-proof room

Test Setup

To produce a frequency response curve (frequency vs. deviation), the non-linearities of the speaker must be nullified. This is accomplished by measuring the audio oscillator output level (Vp-p) necessary to produce a constant SPL of 86 dB at a constant distance (0.1 inches) from the transducer as measured on an SPM from 20 Hz to 20 kHz. Once this level is determined for the frequency range of interest, the same established drive levels are used with the sound pressure meter replaced with the wireless microphone under test.

A. Calibration

1. Arrange the test equipment per Figure 7 for calibration.
2. Turn on the SPM and calibrate the sound meter per operating instructions.
3. Place the speaker on the test bench.
4. Position the SPM in front of the reference speaker and align it with the center of the speaker cone.

5. Configure the sound pressure meter to the following settings:
 - a. Meter range: lower
 - b. Range: 45 – 125 dB
 - c. Weighting network: Lin
 - d. Meter function: Fast
 - e. Ext Filter: Out
6. Turn on the audio oscillator and amplifier.
7. Set the frequency generator to 20 Hz and increase the test level until the SPM reads 86 dB.
8. Record the frequency and peak-to-peak voltage on the test data sheet.
9. Repeat every 10 Hz up to 100 Hz, every 100 Hz up to 1 kHz and every 1 kHz up to 20 kHz.

B. Test

1. Replace the SPM with the wireless microphone positioned at the same distance from the transducer and with the microphone aligned with the center of the speaker.
2. Connect the RF output from the wireless microphone to the modulation monitor.
3. Turn on the modulation monitor and set the mode to FM and (PK – PK)/2.
4. Turn on the wireless microphone.
5. Turn on the audio oscillator and amplifier.
6. Set the frequency and amplitude to the first calibration frequency established at 20 Hz.
7. Record the deviation (in kHz) on the test data sheet.
8. Repeat steps 6 and 7 at each calibration frequency from 20 Hz to 20 kHz.

C. Determination of suitable audio injection level

1. Determine the peak deviation frequency from the frequency response curve.
2. Disconnect the microphone and connect the audio oscillator (without the amplifier) directly to the microphone input.

3. While monitoring the output with an oscilloscope, increase the drive level until the maximum deviation level or 75 kHz is obtained, whichever is less
4. Record this drive level.
5. Decrease the drive level until the frequency deviation has decreased to one-half of the maximum attained in step 3. Record this level.
6. Increase this level by 16 dB and record. This frequency and amplitude level will be used for the occupied bandwidth test.

Test Results

Peak deviation of 16.0 kHz occurred at a modulation frequency of 8 kHz.

See Figure 11 and 12.

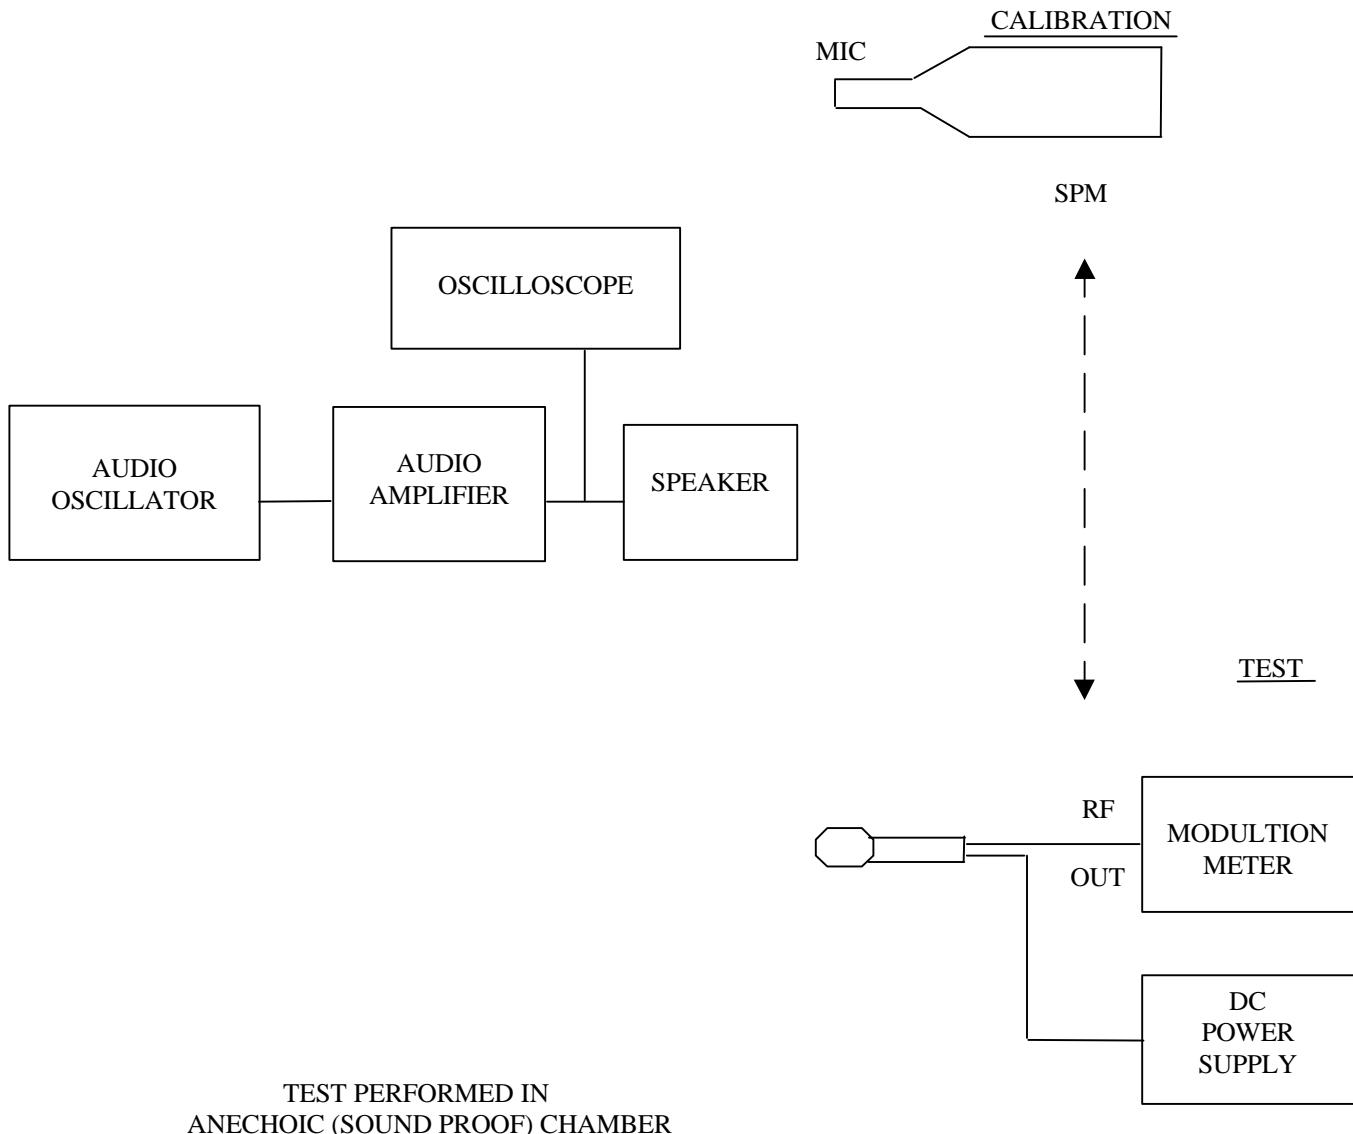
FIGURE 7: Block Diagram of Modulation Characteristics Test

FIGURE 8: Test Equipment Log

TEST EQUIPMENT LOG

Date: 2/22/00 Test Procedure: N/A

EUT: Wireless Microphone

Serial #: N/A Test Engineer: John Stanford

FIGURE 9: Photo of Modulation Characteristics Calibration

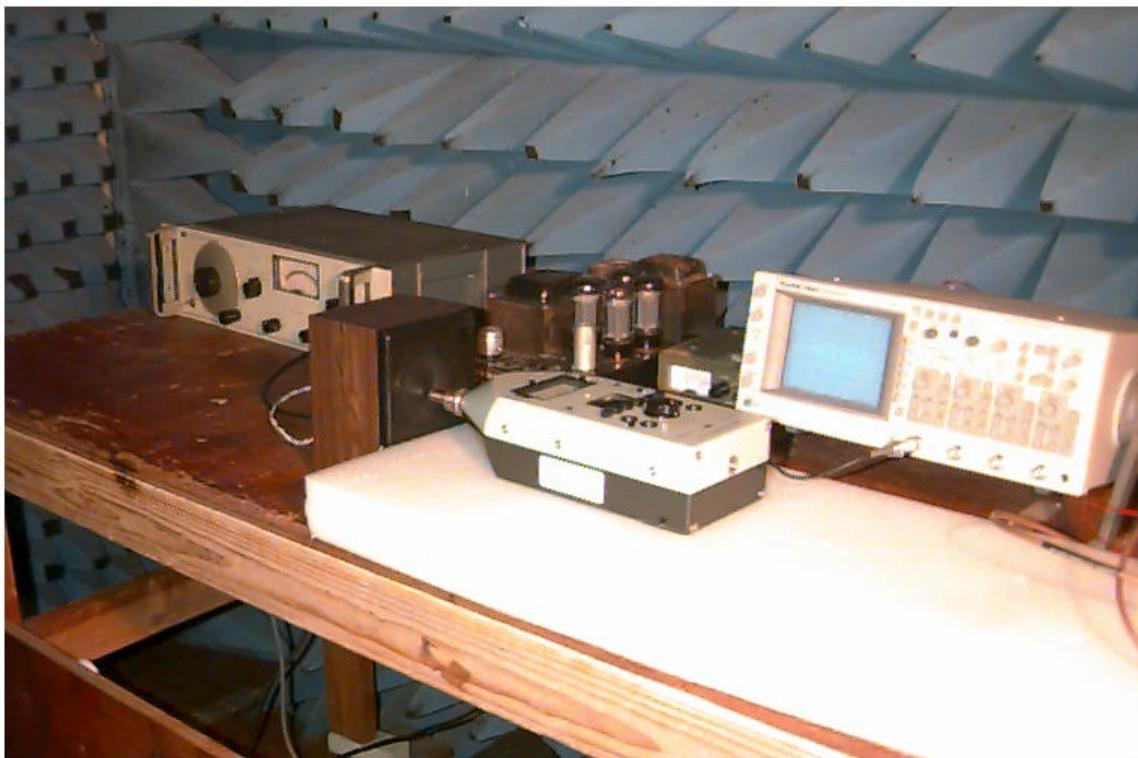


FIGURE 10: Photo of Modulation Characteristics Test

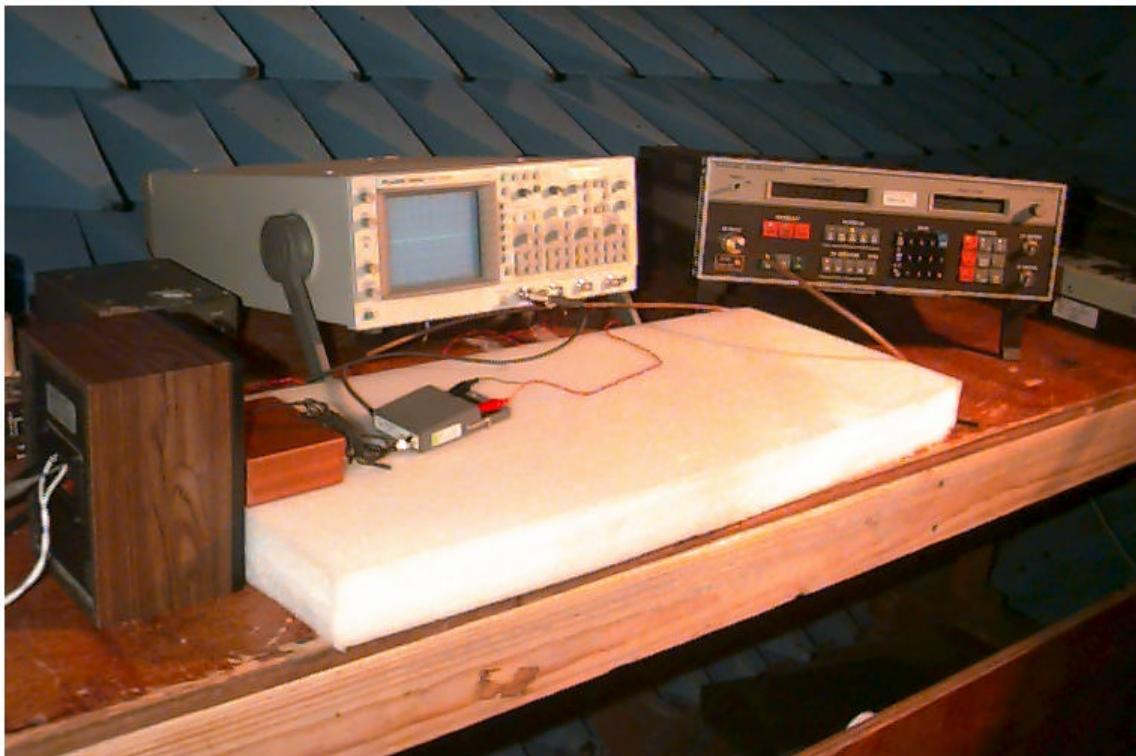



FIGURE 11: Test Data Sheet

TEST DATA SHEET

Date: 2/22/00Unit Under Test: AD200 P Wireless MicConstant Sound Pressure: 86 dB @ 0.1 inch Spacing

Frequency (Hz)	Transducer Drive (Vp-p)	Deviation (kHz)
20	2.49	17.0
30	2.05	16.5
40	1.50	16.5
50	1.16	16.3
60	1.10	16.5
70	0.930	16.2
80	0.845	16.5
90	0.880	16.8
100	0.880	16.8
200	0.183	12.4
300	0.148	13.6
400	0.178	12.5
500	0.200	12.3
600	0.216	11.5
700	0.199	10.9
800	0.198	10.7
900	0.194	10.4
1,000	0.248	10.7
2,000	0.524	12.7
3,000	0.545	11.8
4,000	0.672	10.8
5,000	0.926	15.0
6,000	0.836	10.1
7,000	4.34	14.2
8,000	1.12	16.0
9,000	3.43	15.3
10,000	2.54	15.6
11,000	3.18	13.4
12,000	15.7	10.2
13,000	47.0	9.8
14,000	32.9	15.2
15,000	16.5	11.7
16,000	22.3	14.1
17,000	9.7	10.2
18,000	4.8	5.6
19,000	11.2	7.6
20,000	25.9	8.6

FIGURE 12: Frequency Response Curve

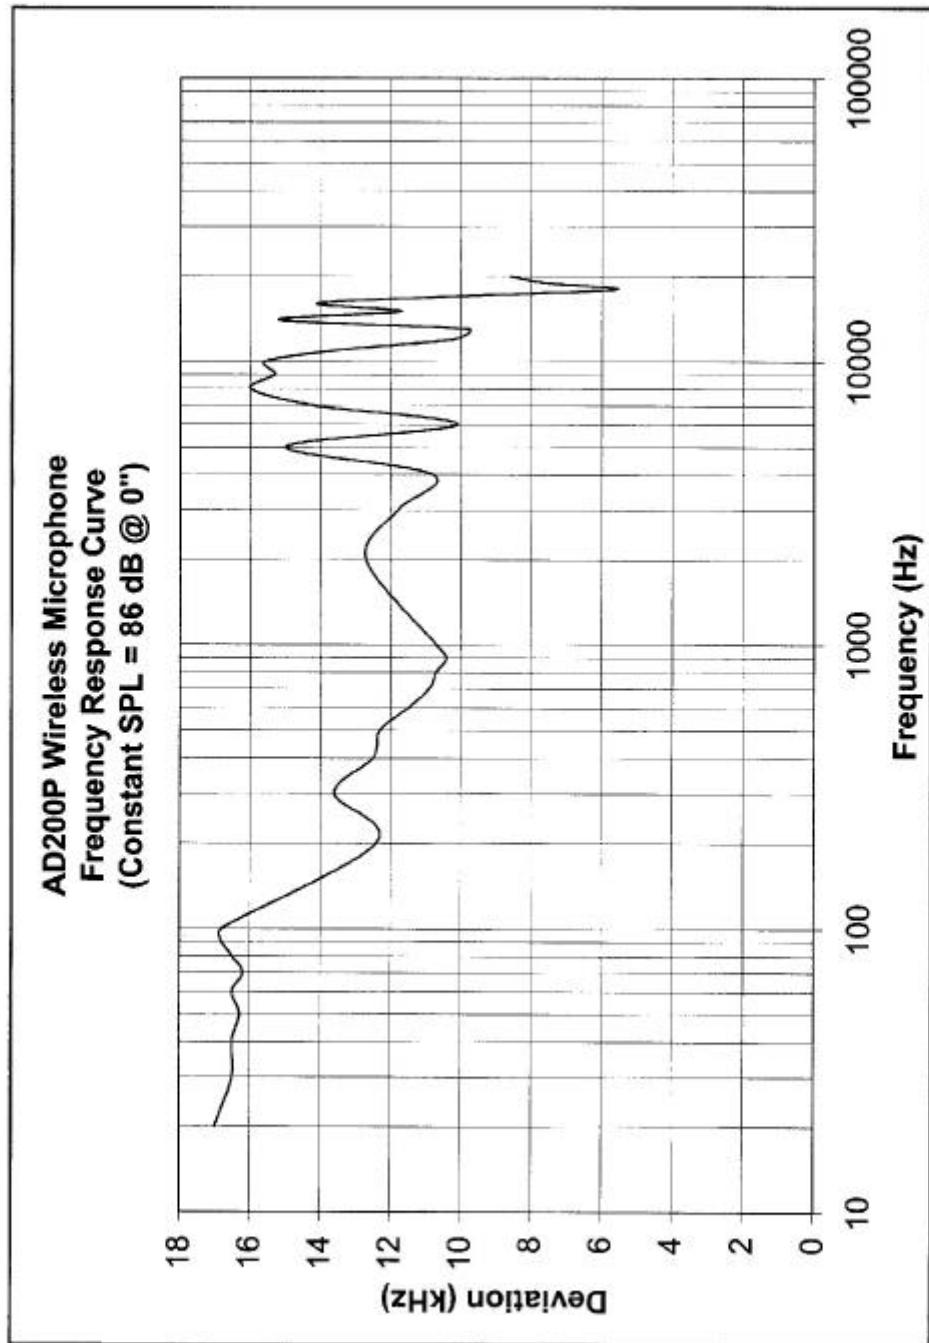

2.983 (e) (3) Measurement of Occupied Bandwidth per 2.989 and 74.861

Requirement

The following requirements apply for occupied bandwidth:

74.861 (e) (3) A maximum deviation of +/- 75 kHz is permitted when frequency modulation is used.

74.861 (e) (5) The operating bandwidth shall not exceed 200 kHz

74.861 (e) (6) The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (i) On any frequency >50% to 100% of authorized bandwidth: at least 25 dB.
- (ii) On any frequency >100% to 250% of authorized bandwidth: at least 35 dB.
- (iii) On any frequency >250% of authorized bandwidth: at least $43 + 10 \log_{10} P_o$.

Test Method

Connect the equipment per Figure 3. From the frequency response curve of Figure 12, the worst-case modulation frequency that resulted in the maximum deviation was 8 kHz with a corresponding deviation of 16 kHz. The microphone was disconnected and replaced with an audio oscillator tuned to this same modulation frequency. An audio level of 400 mVp-p resulted in a maximum deviation of 22.7 kHz. The audio level was decreased to a level corresponding to a peak deviation of 11.35 kHz (50% modulation). This level was 27 mVp-p. An increase of 16 dB brought the desired drive level to 170.4 mVp-p. (Figure 13) The resulting deviation level was 22.4 kHz

Test Results

The spectrum bandwidth was well within the limits specified in the FCC regulations as shown by the specified mask superimposed on the plot of the measured bandwidth shown in Figure 14.

FIGURE 13: Injected Audio Level


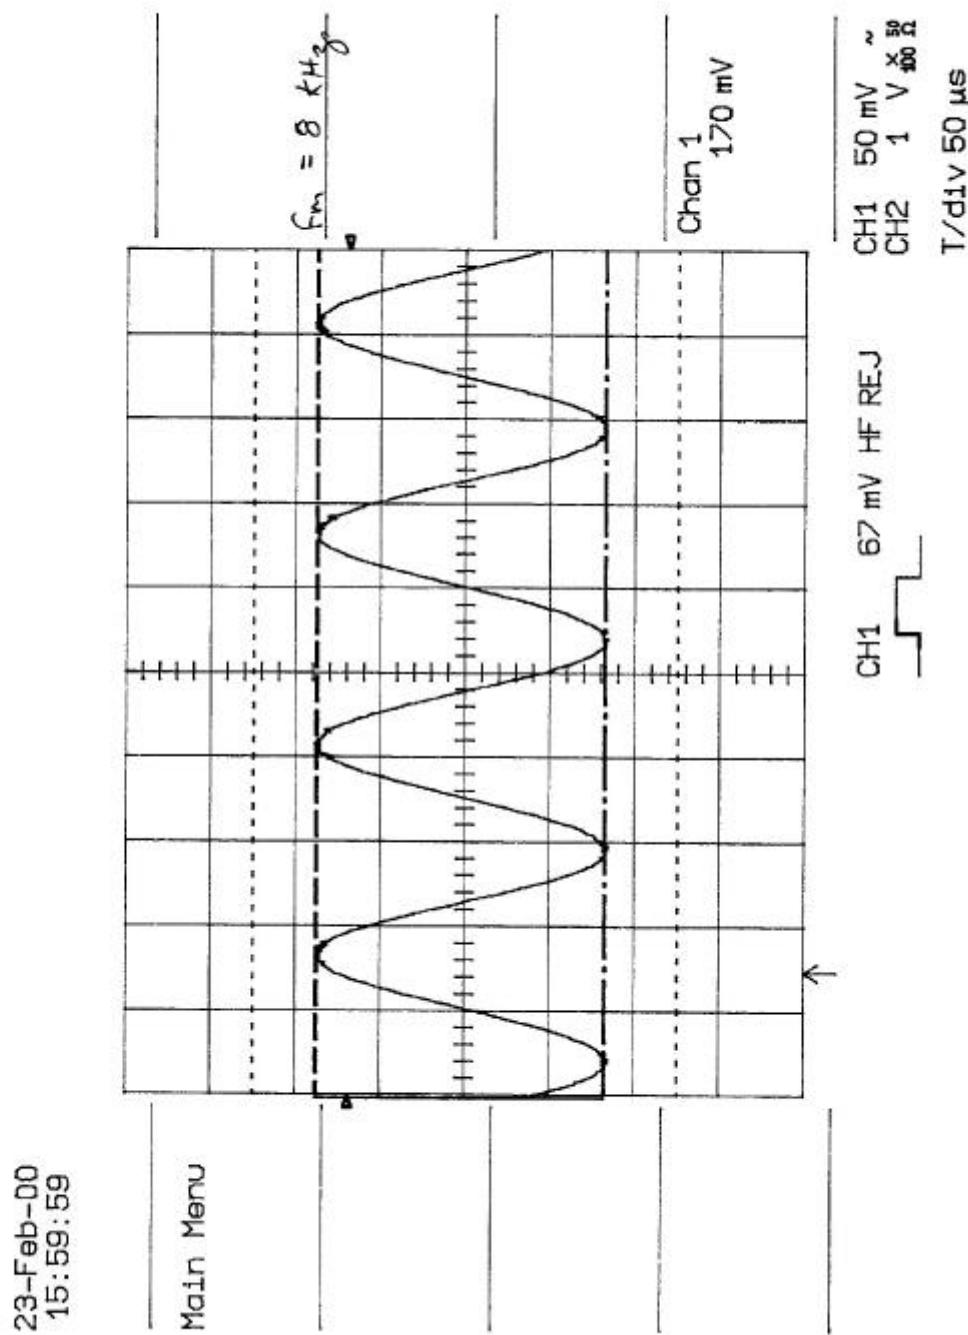


FIGURE 14: Plot of Occupied Bandwidth

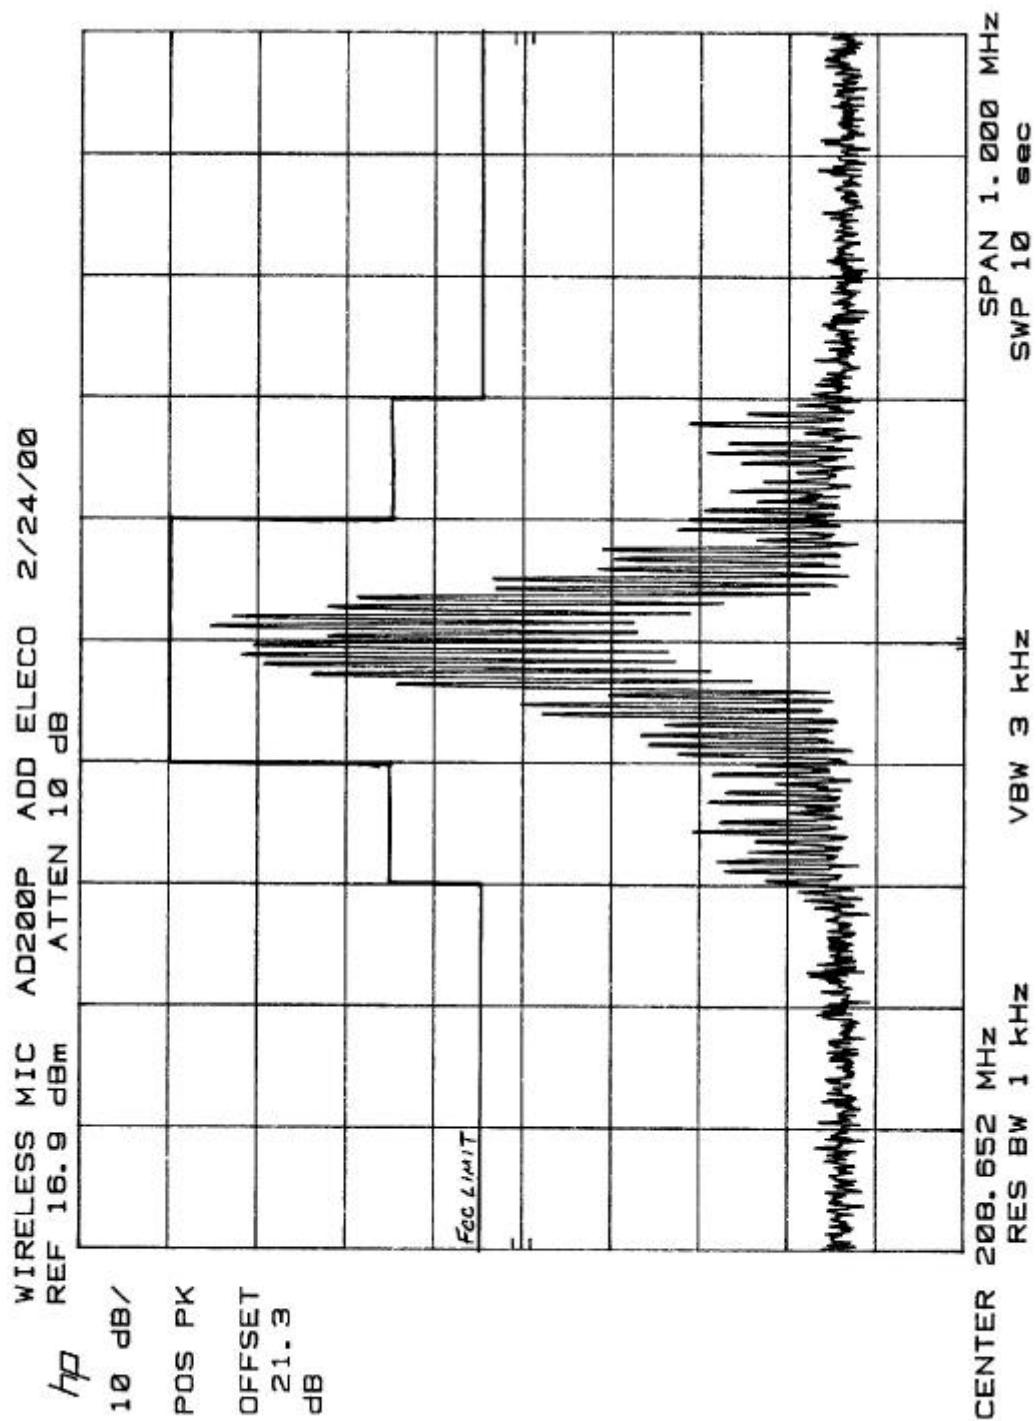

2.983 (e) (4) Measurement of Antenna Conducted Spurious Emissions per 2.991 and 74.861

Requirement

Conducted spurious emissions are emissions at the antenna terminals on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communication desired. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted. Conducted spurious emissions greater than 250% of the allocated bandwidth (200 kHz) shall be attenuated below the maximum level of the carrier frequency in accordance with the following formula:

$$\text{Spurious attenuation in dB} = 43 + 10 \log_{10} P_o$$

Where P_o = Output in Watts measured in 2.983m (e) (1)

$$= 43 + 10 \log_{10} (0.0049)$$

$$= 19.9 \text{ dBc (FCC limit)}$$

Test Method

Connect the equipment as shown in Figure 3. Adjust the spectrum analyzer to display the conducted frequency spectrum. Scan the frequency spectrum from the lowest radio frequency generated in the equipment through the 10th harmonic of the carrier frequency. Compare the carrier frequency amplitude to the amplitude of the individual emissions. Amplitudes shall be below the FCC limit.

Photograph of the test setup is provided in Figures 5.

Test Results

All spurious antenna conducted emissions were at least 19.9 dB below the carrier. The Figure 15 table summarizes the frequencies and amplitudes observed. Plots of the frequency spectrum are provided in Figures 16 through 18.

FIGURE 15: Highest Conducted Spurious Emissions

Table of Highest Conducted Spurious Emissions

Frequency (MHZ)	Amplitude (dBm)	dBc
139.10	-33.7	-40.6
162.28	-38.8	-45.7
185.47	-26.6	-33.5
231.83	-29.9	-36.8
255.02	-39.9	-46.8
278.20	-39.9	-46.8
301.38	-48.1	-55.0
324.57	-49.0	-55.9
347.75	-48.1	-55.0
370.94	-53.6	-60.5
394.12	-52.7	-59.6
417.30	-52.2	-59.1
440.49	-53.7	-60.6
463.67	-52.3	-59.2
494.90	-50.7	-57.6

FIGURE 16: Plot of Conducted Spurious Emissions

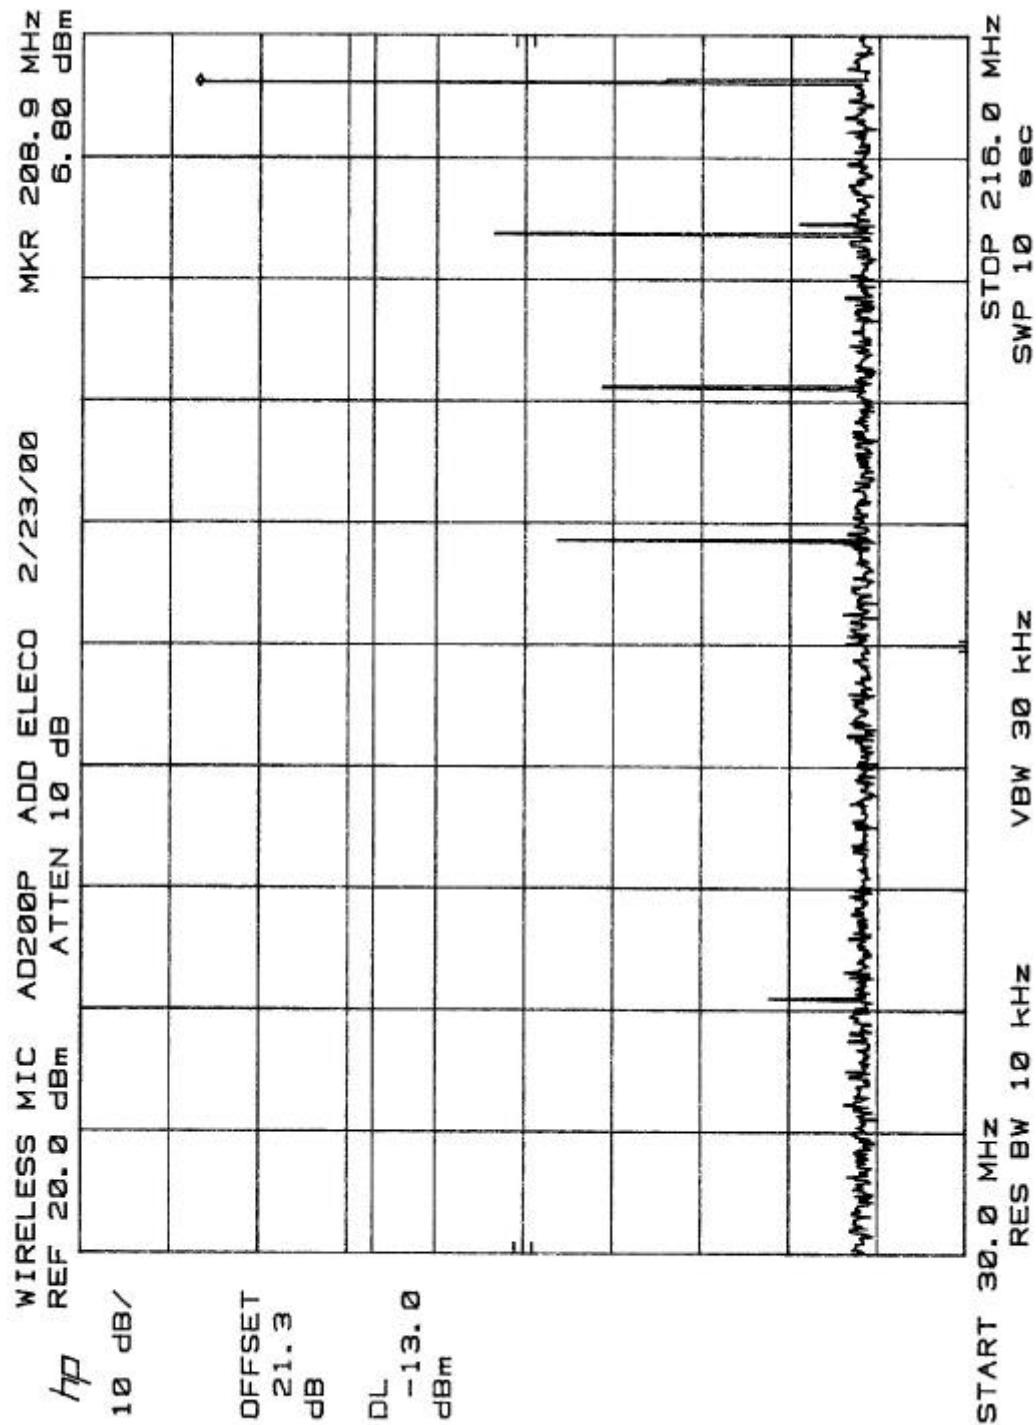


FIGURE 17: Plot of Conducted Spurious Emissions


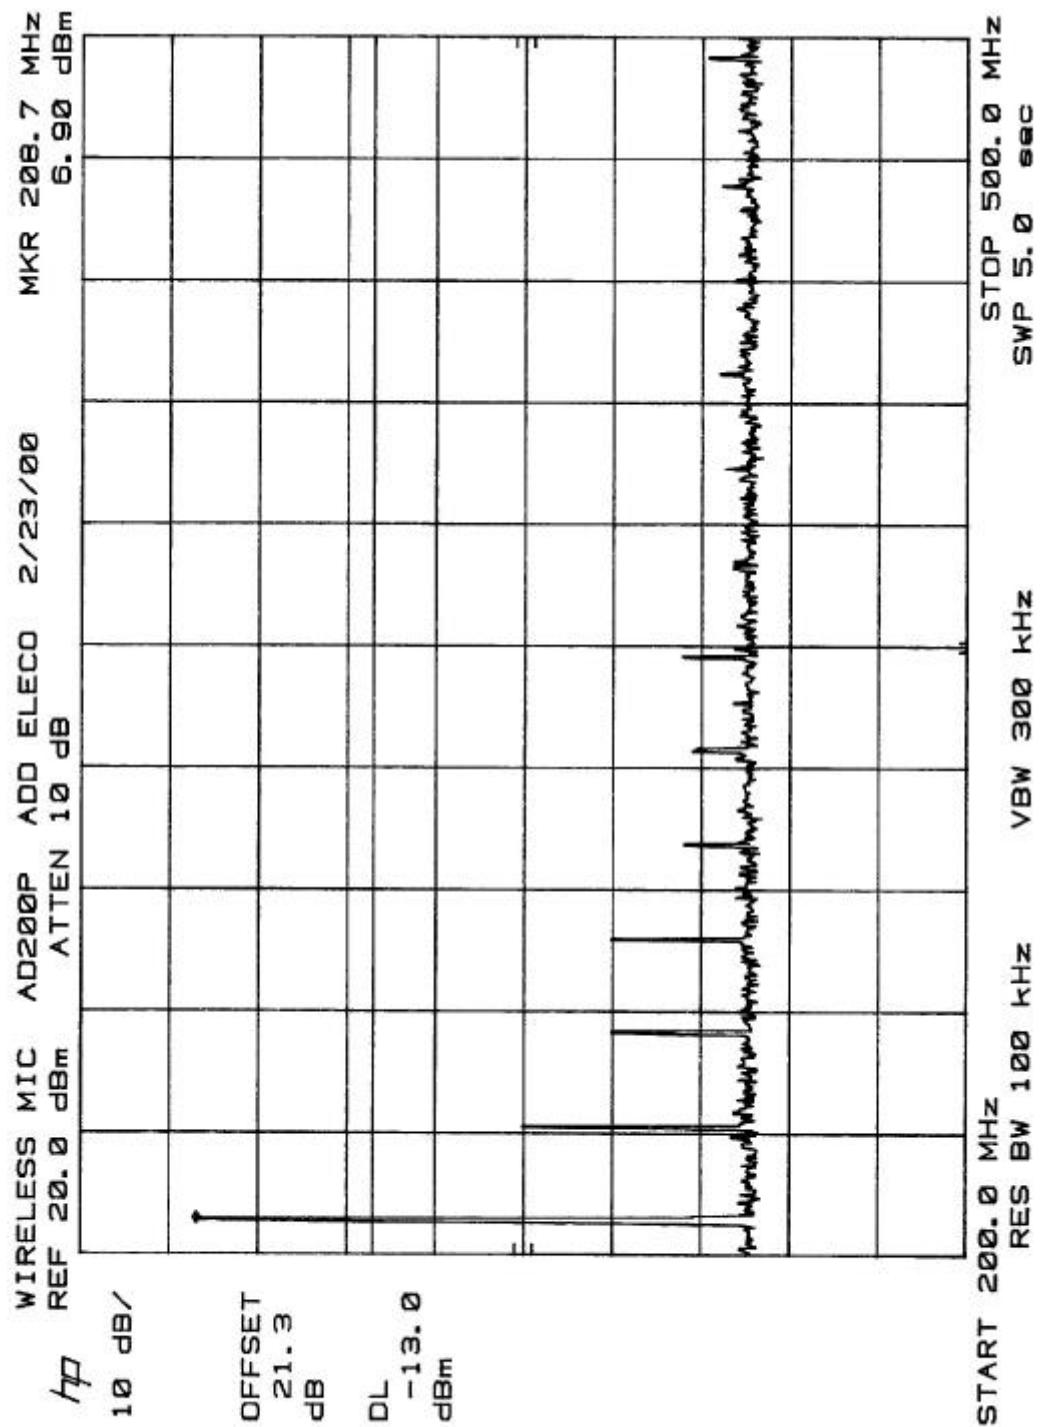


FIGURE 18: Plot of Conducted Spurious Emissions

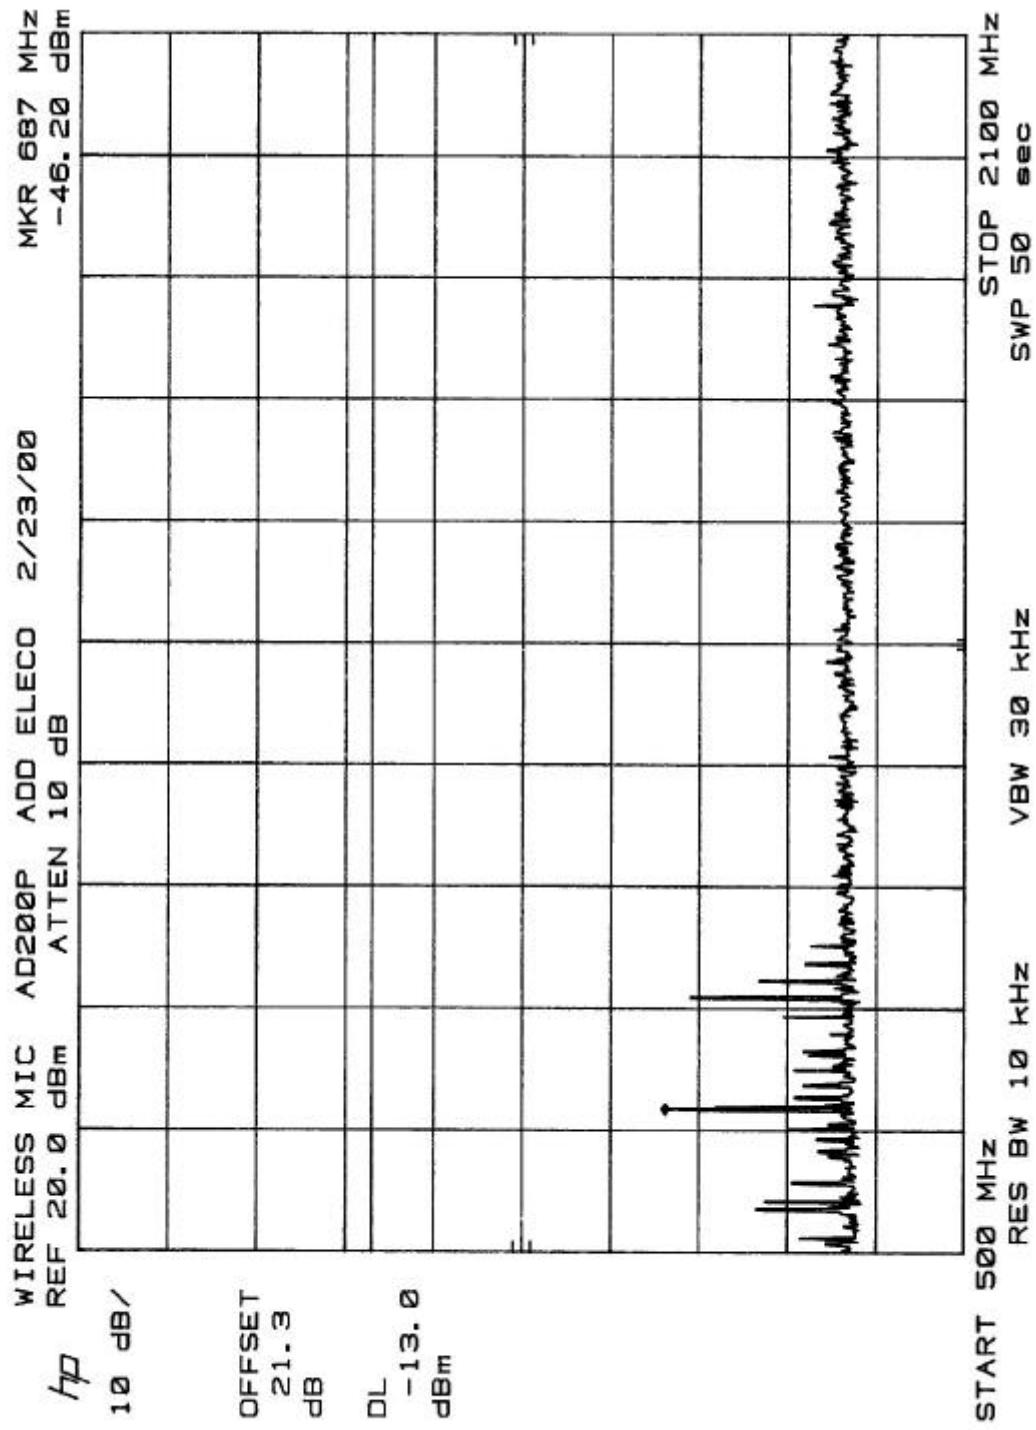

2.983 (e) (5) Measurement of Radiated Spurious Emissions per 2.993 and 74.861

Requirement

Radiated spurious emissions are undesired emissions generated during the process of development of the fundamental frequency. Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or other intermediate circuit elements under normal conditions on installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

Radiated spurious emissions are measured from the EUT with the antenna port terminated into a 50 ohm non-radiating load resistor.

All emissions shall be attenuated by at least $43 + 10 \log (P_o)$ where P_o is the measured power output or equivalent power delivered to a half-wave dipole antenna that produces the same signal levels as the EUT and associated antenna at the fundamental frequency (whichever is greater). Emissions up to and including the tenth harmonic of the fundamental shall be measured.

Modulation

External modulation was used for the radiated spurious test (170.4 mVp-p). The signal generator was placed on the floor of the turntable. A short length of coax cable was used to connect to the audio input connector.

Test Method

The test setup is shown in Figure 19. The spurious signals are measured in a three-meter semi-anechoic room that meets the site attenuation requirements of ANSI C63.4. The equipment under test is placed on a non-metallic table 80 cm above a turntable. Support equipment is placed below the table. The receive antenna is mounted on an elevator platform that can be positioned between 1 and 4 meters. At each spurious emission frequency, the turntable and antenna positioner are adjusted to obtain the maximum signal level. Emissions are recorded for both horizontal and vertically polarized antennas. Equipment is positioned in a manner similar to its final installation.

For determining the equivalent transmitted power, the maximum signal level at the fundamental frequency was established. The EUT was then removed and substituted with a half-wave dipole adjusted to resonate at the same frequency as the EUT and orientated in the same polarization to produce maximum signal into the receive antenna. The output power applied to the

dipole's connector required to obtain the same signal strength was then established. If this level was less than the measured power output, the measured power output level shall be used to calculate the FCC limit.

Test Results

The measured RF output power from the EUT was measured to be 4.9 mW as reported in 2.983 (e) (1). The equivalent power into a half-wave dipole required to generate the same measured signal level from the EUT (87.0 dBuV/m) was -1.1 dBm or 0.776 mW. The stock antenna has an equivalent gain of -8.0 dBd. Hence, the measured 4.9 mW power level was used to calculate the FCC limit.

The electric field at the fundamental frequency was calculated based on the accepted formula:

$$(1/3)*(R * P)^{1/2} \text{ where:}$$

$$R = 50 \text{ ohms}$$

$$P = 0.0049 \text{ Watts (4.9 mW)}$$

This field level is 0.165 V/m or approximately 104.3 dBuV/m.

Hence, all spurious emissions to be compliant must be less than 84.4 dBuV/m.

All emissions recorded were less than 84.4 dBuV/m or 19.9 dBc (decibels below carrier level).

A list of test equipment used for the radiated spurious test is provided in Figure 20.

Photographs of the actual test setup are shown in Figures 21 through 24.

The complete data set is included on the attached EXCEL spreadsheet in Figure 25.

Plots of the peak emissions recorded between 30 MHz and 2100 MHz are provided in Figures 26 through 31.

FIGURE 19: RF Radiated Spurious Setup

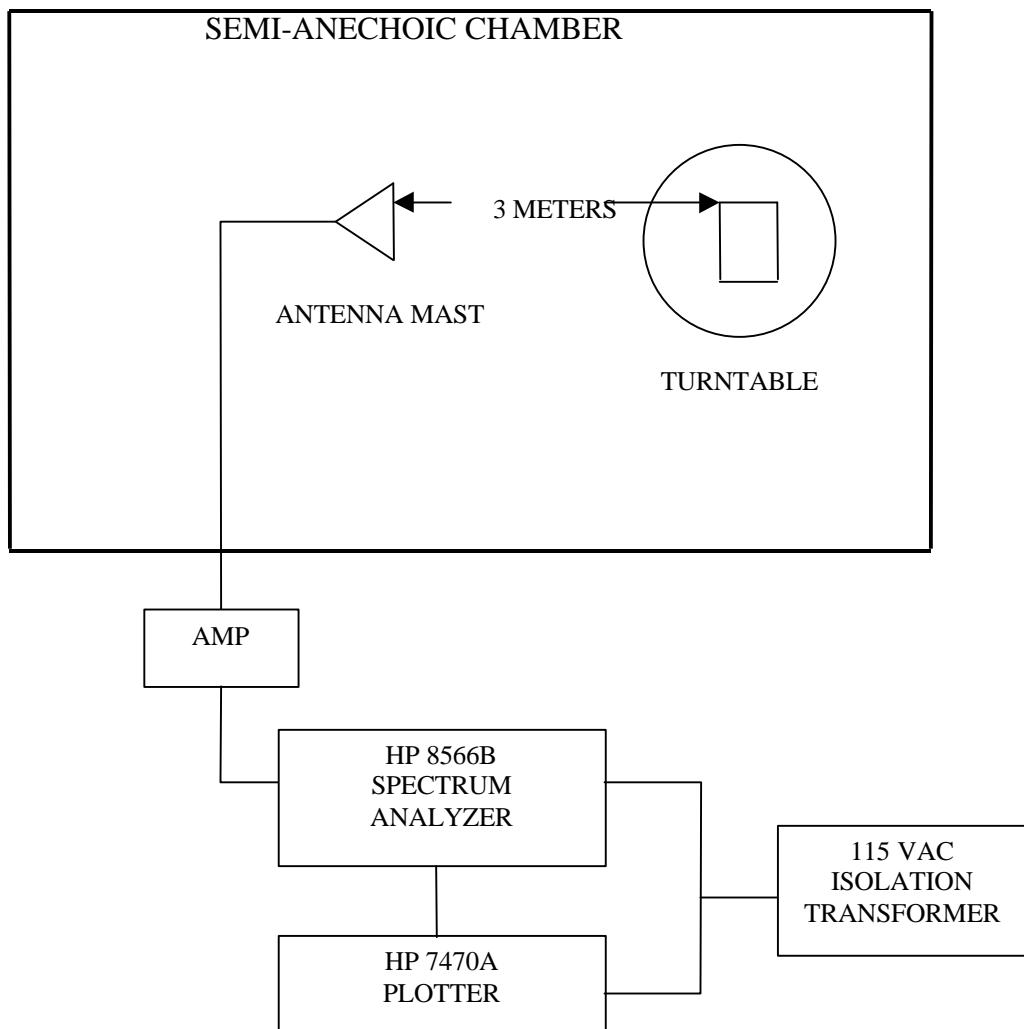


FIGURE 20: List of Radiated Spurious Test Equipment**TEST EQUIPMENT LOG**

Date: 02/28/00 Test Procedure: Radiated Spurious Emissions

EUT: Wireless Microphone Part #: AD200P

Serial #: N/A Test Engineer: John Stanford

DESCRIPTION	MANUFACTURER	MODEL # / SERIAL #	CAL. DUE DATE
Amplifier	MCL	ZFL-2000 (2 MHz to 2 GHz)	5/7/00
Antenna, 1/2 wave Dipole	Anritsu Electric Co., Ltd.	MP534A	Cal prior to test
Antenna, Biconical	A.H. Systems	SAS 200/540/528	07-14-00
Antenna, Log-Periodic	A.H. Systems	SAS 200/512/371	07-04-00
Non-Radiating Load	HP	50 ohms, 1 Watt	Cal prior to test
Signal Generator	Marconi	2024	Reference
Function Generator	HP	3312A / 1432A05041	Reference
Spectrum Analyzer	Hewlett Packard	8566B / 970137-1	02/20/01
Tower	EMCO	1050, 1196	Cal prior to use
Turntable	EMCO	1060C, 1017	Cal prior to use
Plotter	HP	7470A	Reference

FIGURE 21: Photograph of Radiated Spurious Emission Setup

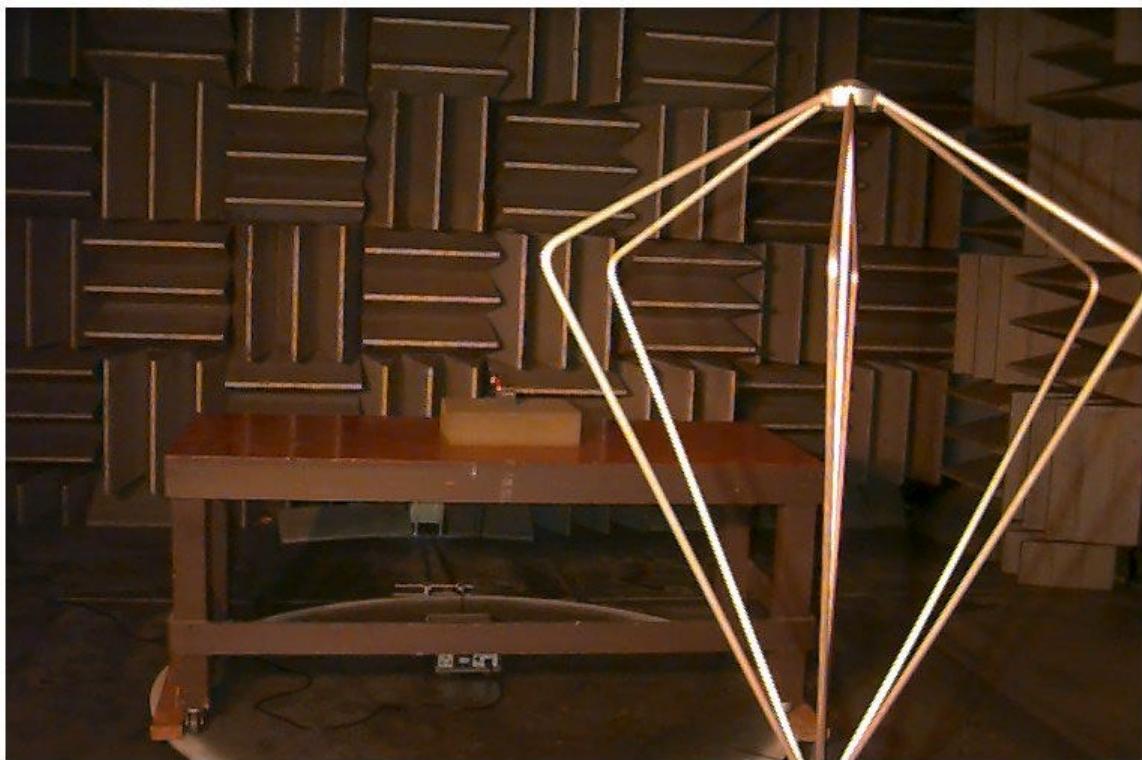


FIGURE 22: Photograph of Radiated Spurious Emission Setup

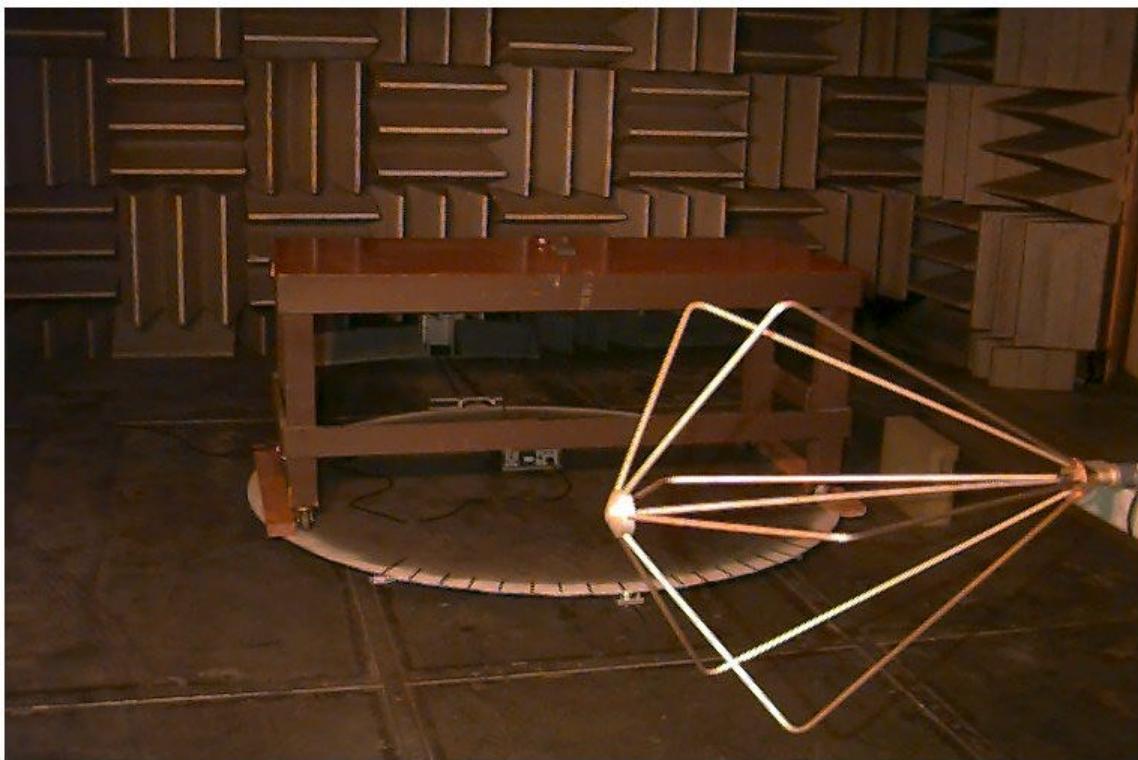


FIGURE 23: Photograph of Radiated Spurious Emission Setup

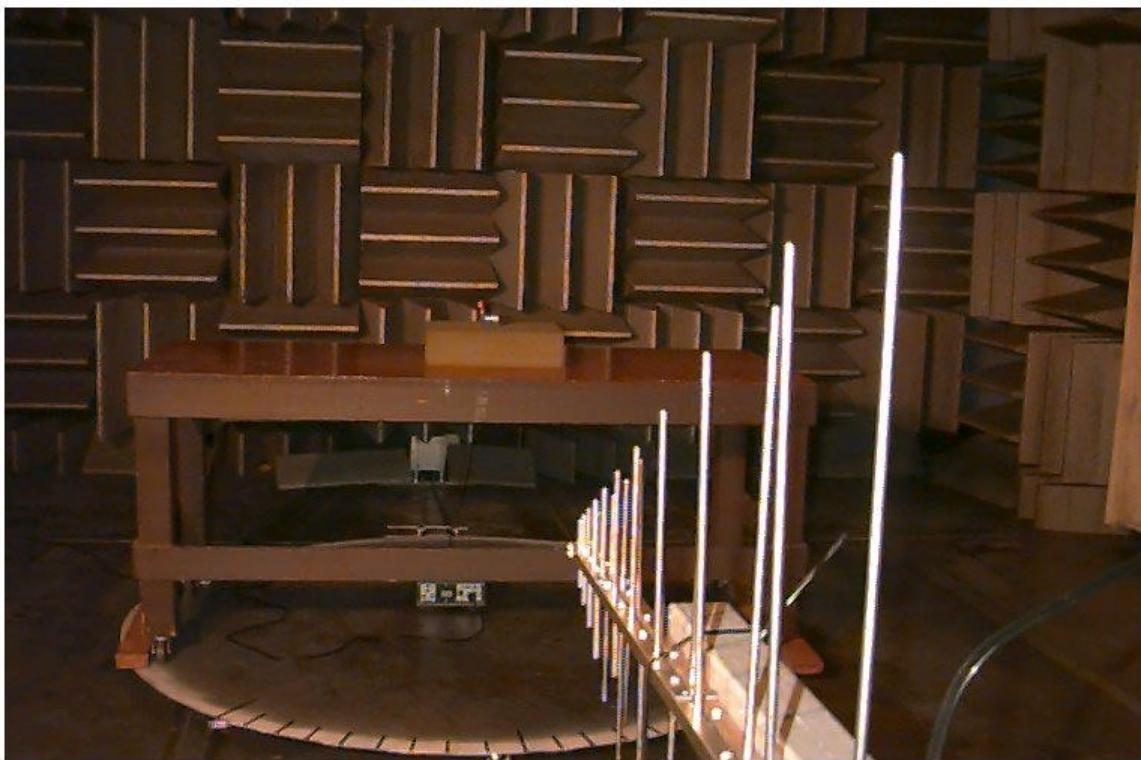


FIGURE 24: Photograph of Radiated Spurious Emission Setup

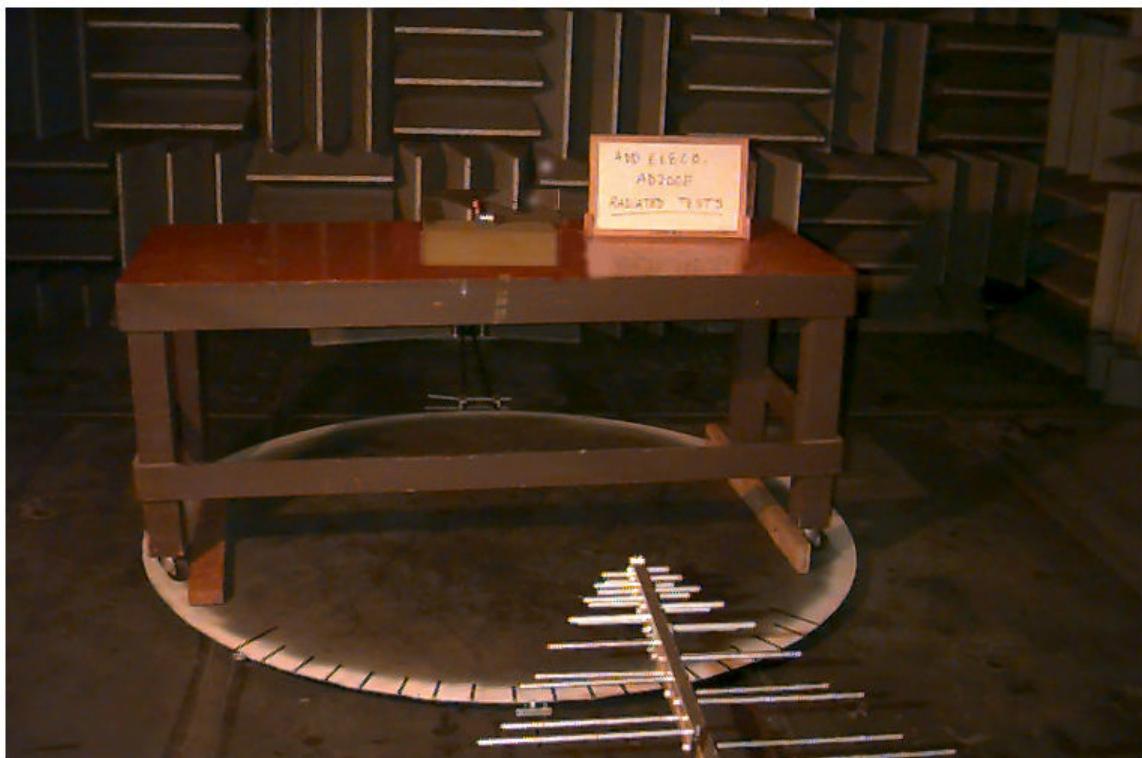


FIGURE 25: Radiated Spurious Emissions Test Data

Radiated Spurious		Position of EUT: Horizontal										Position of EUT: Vertical									
Type of Emission	Freq (MHz)	Horiz Height (cm)	Vert Height (cm)	Az (deg)	Az (deg)	Height (cm)	Az (deg)	Ant Factor (dBi)	Coax loss (dB)	Amp Gain (dB)	Adj Horiz (dBuV/m)	Adj Vert (dBuV/m)	Adj Vert (dBc)	Horiz (dBc)	Vert (dBc)						
S	25.18	25.6	187	105	40	100	180	18.2	0.6	22	22.4	36.8	61.9	67.5							
S	46.37	34.4	130	0	49.4	100	0	11.1	0.8	22	24.3	36.3	60.0	65.0							
S	69.55	48.9	126	90	68.5	100	0	9.2	0.9	22	37	67.6	67.3	46.7							
S	92.73	48.8	196	90	40.7	100	0	9.3	0.9	22	37	28.9	67.3	75.4							
S	115.92	30.8	231	90	32.8	100	0	10.8	1.1	22	20.8	22.8	83.5	81.5							
S	139.10	57.8	280	90	53.4	100	180	12.1	1.2	22	49.2	44.7	65.1	59.6							
S	162.28	47.6	297	106	48.9	100	162	12.6	1.2	22	39.4	40.7	64.9	63.6							
F	208.65	80	100	90	81.6	100	0	11.3	1.3	22	70.6	72.2	33.7	32.1							
S	231.83	48.3	100	31	52.3	100	58	11.5	1.4	22	39.2	45.2	65.1	61.1							
S	255.02	47.9	100	95	42.9	120	200	12.3	1.5	22	39.7	34.7	64.6	66.6							
S	278.20	52.8	100	88	47.3	100	190	12.7	1.6	22	45.1	38.6	59.2	64.7							
S	301.39	34.6	100	104	31.3	100	191	13.4	1.7	22	27.7	24.4	76.6	75.9							
S	324.57	30.8	100	105	29.5	150	155	14.6	1.7	22	25.3	24	79.0	80.3							
S	347.76	44.4	100	114	44.3	133	125	15.5	1.7	22	39.5	39.5	64.7	64.6							
S	370.94	37.7	100	115	33	160	6	15.5	1.8	22	33	28.3	71.3	76.0							
H	417.30	38.4	100	11	46.3	125	0	16.4	1.8	22	34.6	42.5	69.7	61.8							
S	486.86	31.2	100	134	31	208	29	17.7	2.2	22	28.1	28.9	75.2	75.4							
S	510.04	28.4	100	30	34.1	100	157	17.9	2.2	22	26.5	32.2	77.6	72.1							
H	625.95	31.9	130	0	32.6	100	145	19.6	2.5	22	32	32.8	72.3	71.4							
S	649.14	33.1	125	132	28.7	100	155	19.5	2.6	22	33.2	29.6	71.1	74.5							
S	765.05	30.1	124	80	22.2	100	165	21.7	2.9	22	32.7	24.8	71.6	79.5							
S	788.23	27.8	100	70	20.1	144	170	21.6	3	22	30.2	22.7	74.1	61.6							
S	811.41	33	100	49	27.9	143	208	21.8	3.1	22	35.9	30.6	68.4	73.5							
H	834.60	43.4	100	65	37.1	143	188	22.1	3.2	22	46.7	40.4	57.6	63.9							
S	857.78	37	100	109	26.6	144	170	22.4	3.3	22	40.7	39.5	63.6	70.8							
S	880.97	27.7	100	105	20.4	139	89	22.9	3.4	22	32	24.7	72.3	79.6							
H	1043.25	21.2	100	48	16.9	100	34	24.2	3.6	22	27.2	25.9	77.1	78.4							
H	1251.90	17.3	100	148	16.7	130	88	26.6	4	22	25.9	25.3	78.4	79.0							
H	1490.55	15.8	100	0	14.9	100	78	28.6	4.4	22	26.8	25.9	77.5	78.4							
H	1686.20	17.6	100	0	16.1	100	117	28.8	5	22	30.4	28.9	73.9	75.4							
H	1877.55	19.2	100	180	16.8	123	0	31.6	5.4	22	34.2	31.8	70.1	72.5							
H	2096.50	14.7	100	140	14	120	76	29.5	5.8	22	28	27.3	76.3	77.0							

F - Fundamental
 S - Spurious (F-multiples/for)
 H - Harmonic

FIGURE 26: Plot of Radiated Spurious Emissions

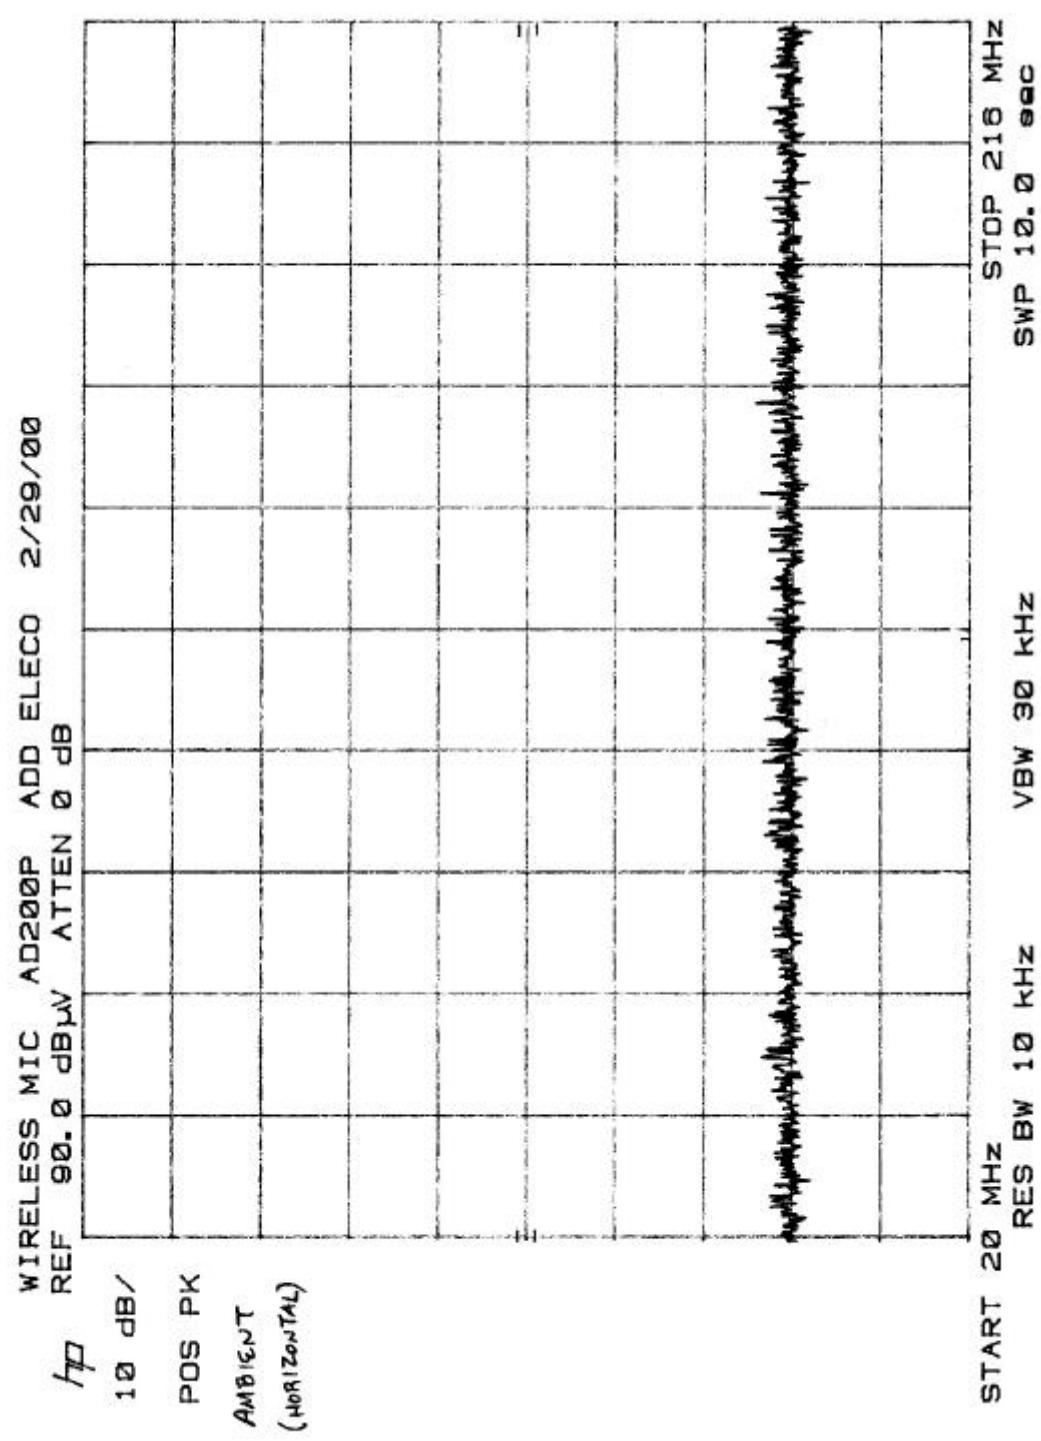


FIGURE 27: Plots of Radiated Spurious Emissions

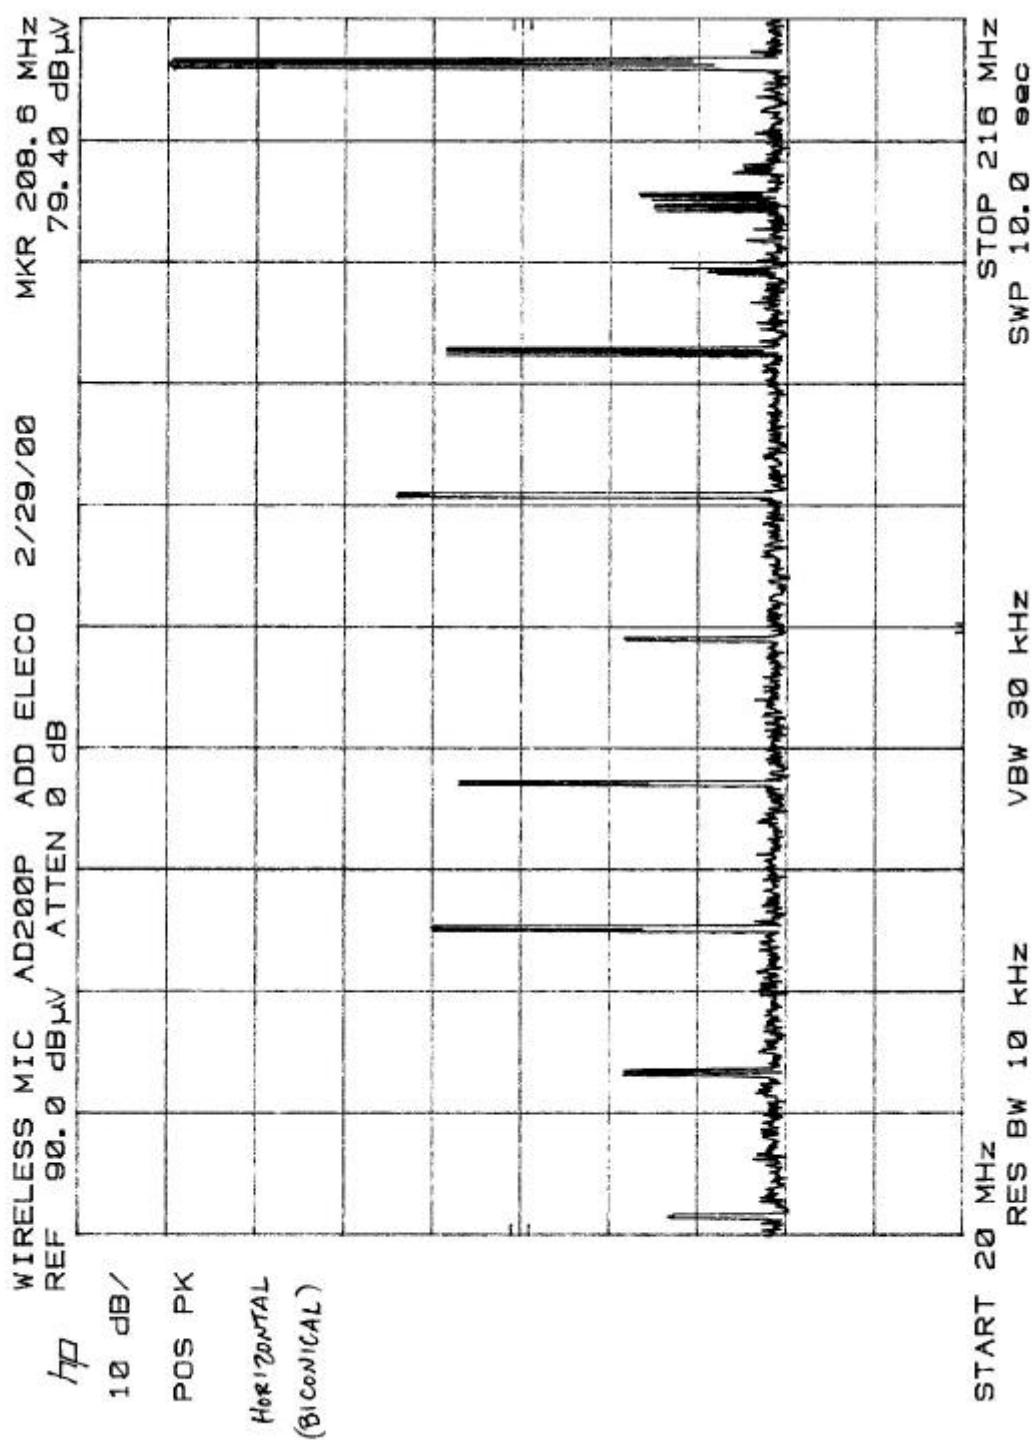


FIGURE 28: Plot of Radiated Spurious Emissions

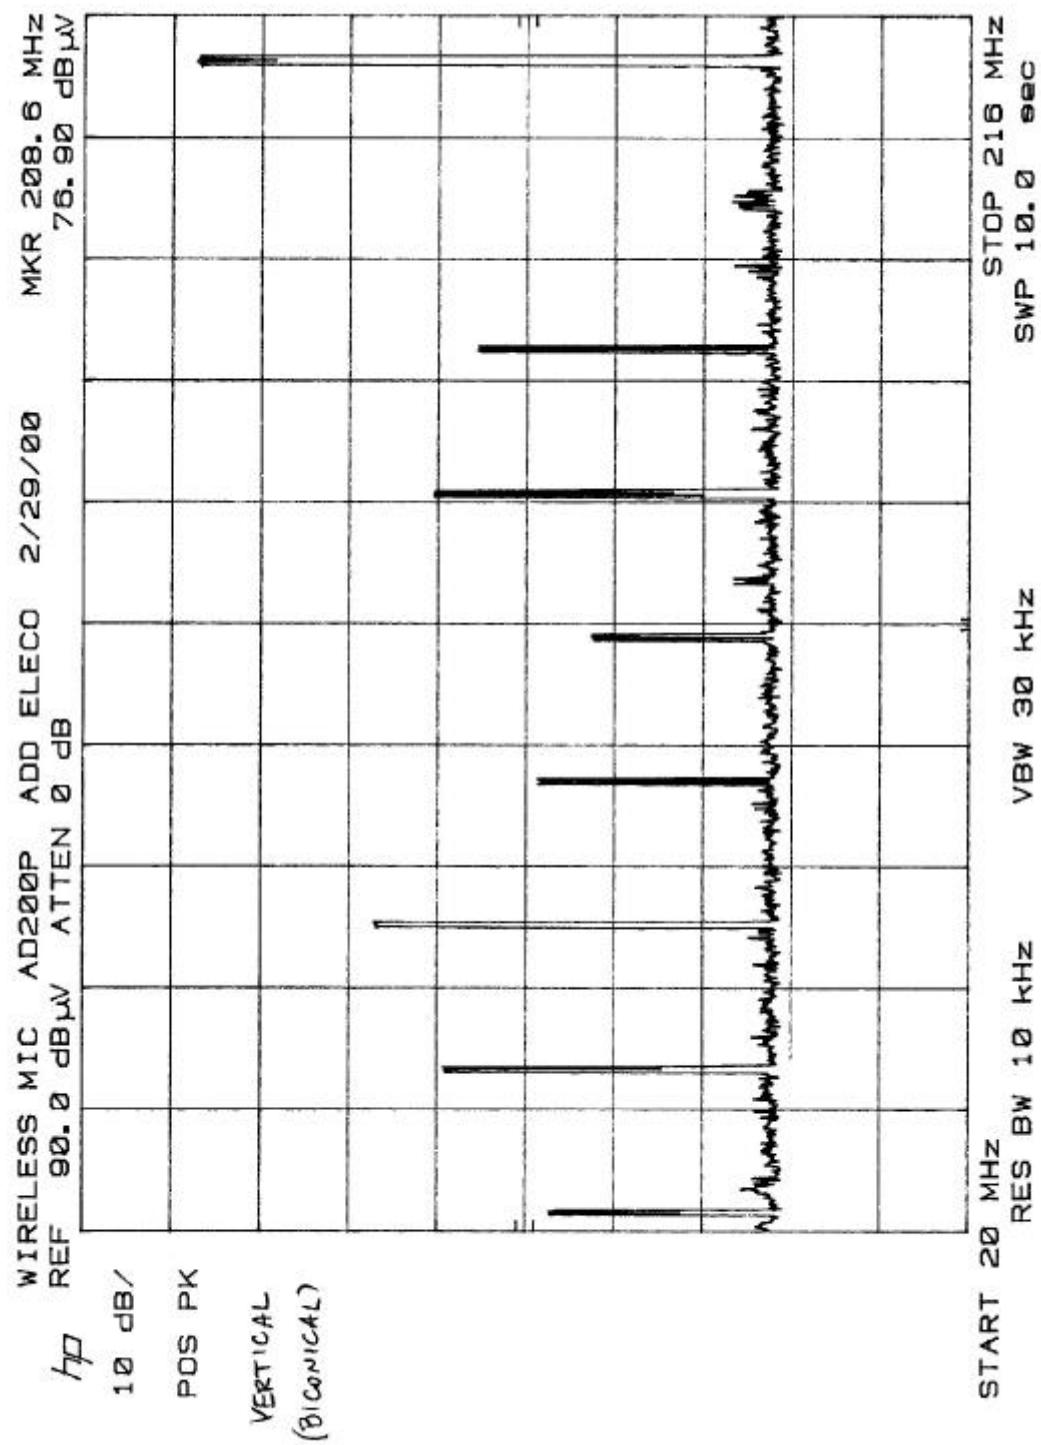


FIGURE 29: Plot of Radiated Spurious Emissions

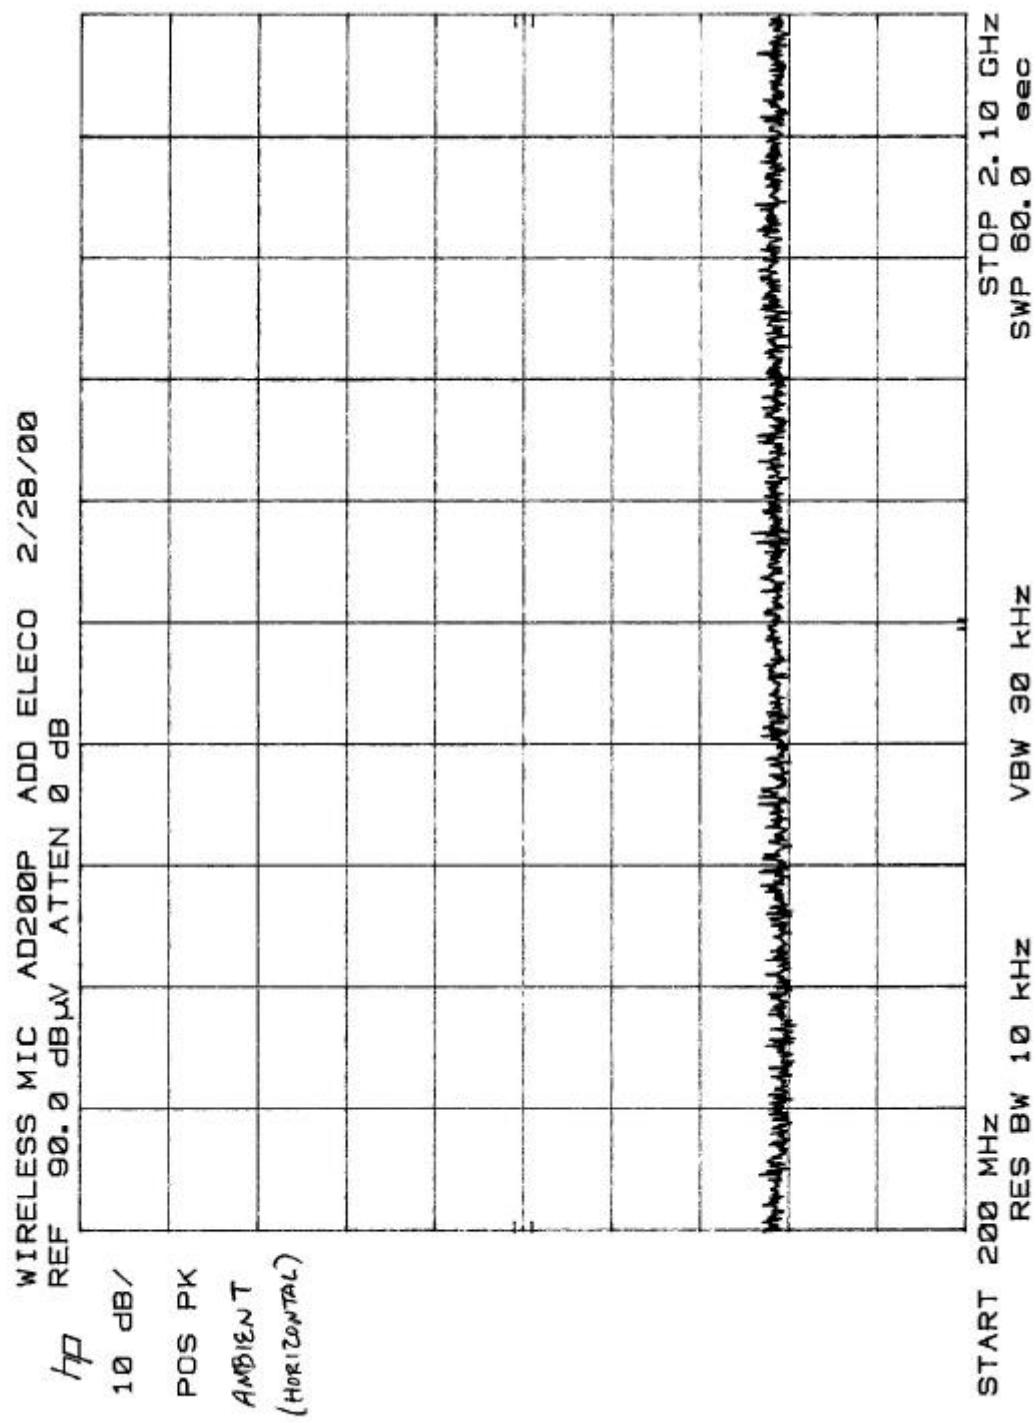


FIGURE 30: Plot of Radiated Spurious Emissions


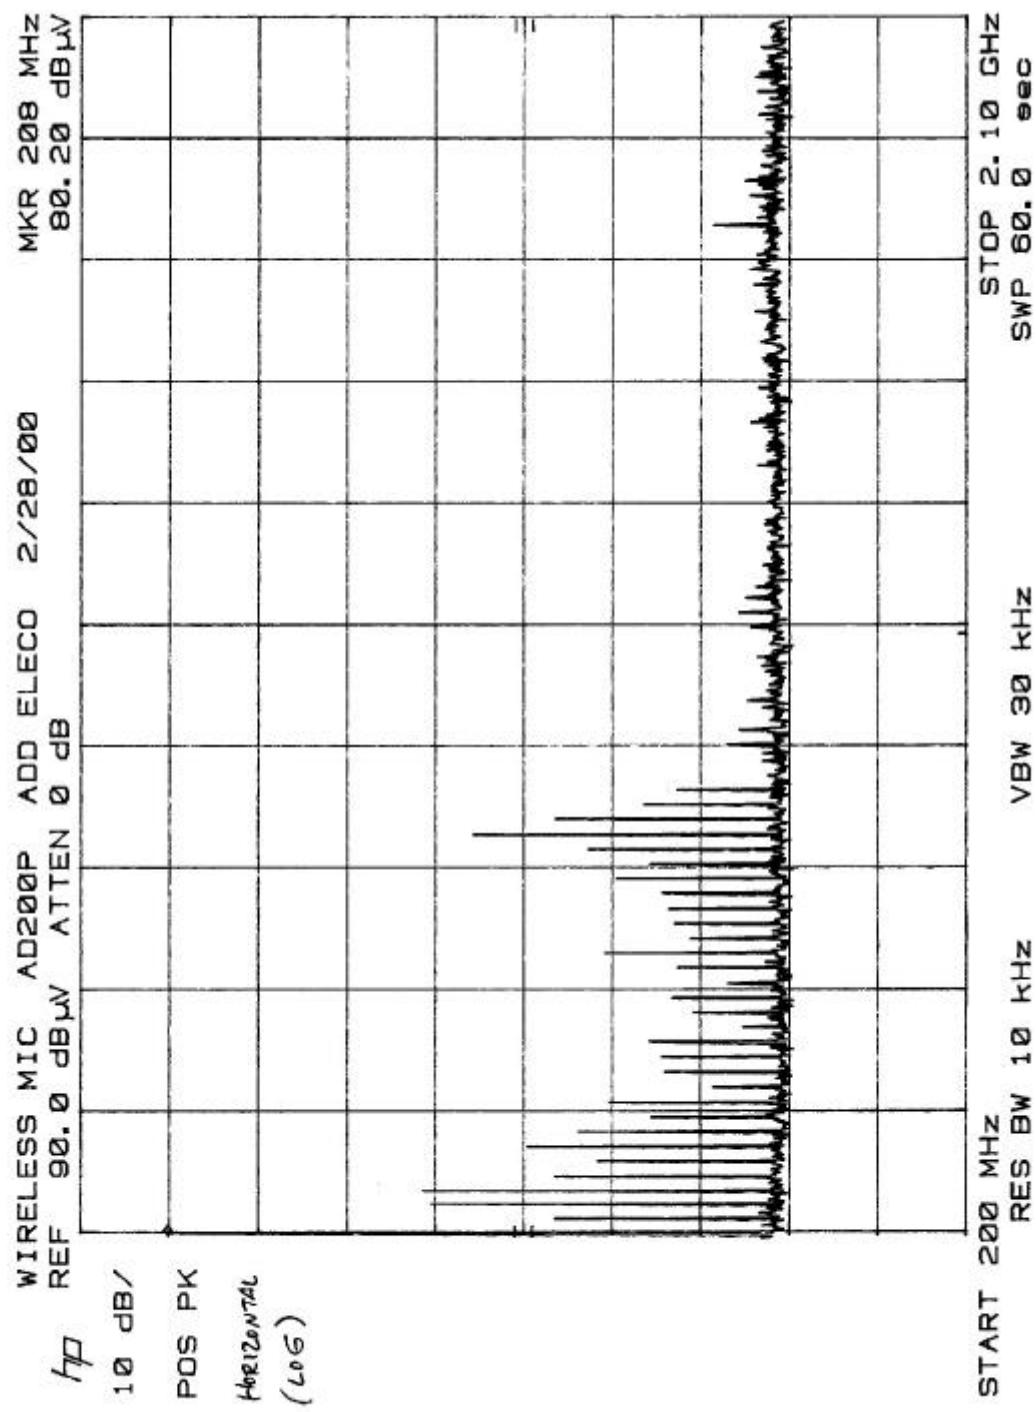


FIGURE 31: Plot of Radiated Spurious Emissions

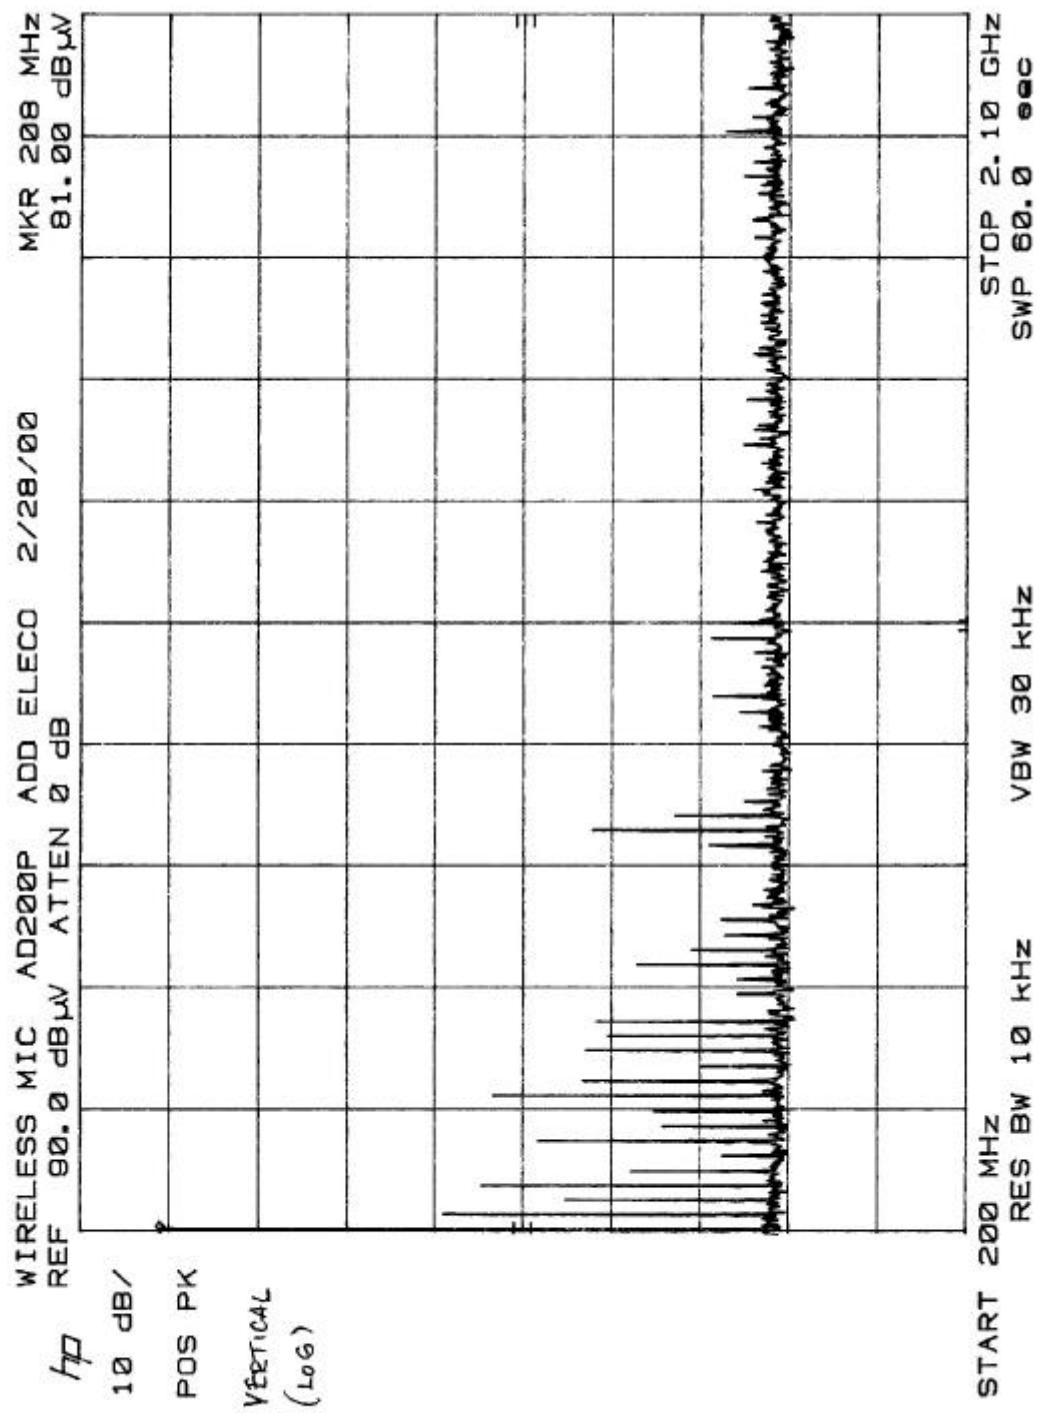

2.983 (e) (6) Measurement of Frequency Stability per 2.995 and 74.861

Requirement

Frequency stability is a measure of the frequency determining components ability to remain stable over a prescribed temperature range. The EUT shall be subjected to a temperature range of -30 to +50 deg. C. The output frequency shall be monitored to determine if the nominal frequency changes by more than the required tolerance at temperature increments of 10 degrees C. The required frequency tolerance per part 74.861 (e) (4) is 0.005%. For hand-carrier, battery-operated equipment, the frequency stability shall also be characterized with the primary supply voltage reduced to the end-point specified by the manufacturer.

Test Method

The EUT and support equipment was arranged as described in Figure 32. The EUT was placed in a temperature chamber. The DC power leads and RF output cable were brought outside of the temperature chamber. The DC power to the EUT was connected to an adjustable DC power supply and the RF output cable was connected to a frequency counter, both placed outside of the temperature chamber. The EUT was not modulated during test. The frequency was monitored and recorded with a supply voltage of 9 Vdc from -30 to +50 degrees C. The test was repeated with a supply voltage of 6.2 Vdc (minimum operating voltage as specified by the manufacturer) from -30 to +50 degrees C. Photographs of the test setup are shown in Figures 33 and 34.

Test Results

The EUT did not exhibit frequency drift that exceeded 0.005% of the measured fundamental frequency characterized at 10 degrees C. Test results are provided in Figure 35 and 36.

FIGURE 32: Block Diagram of Frequency Stability Test

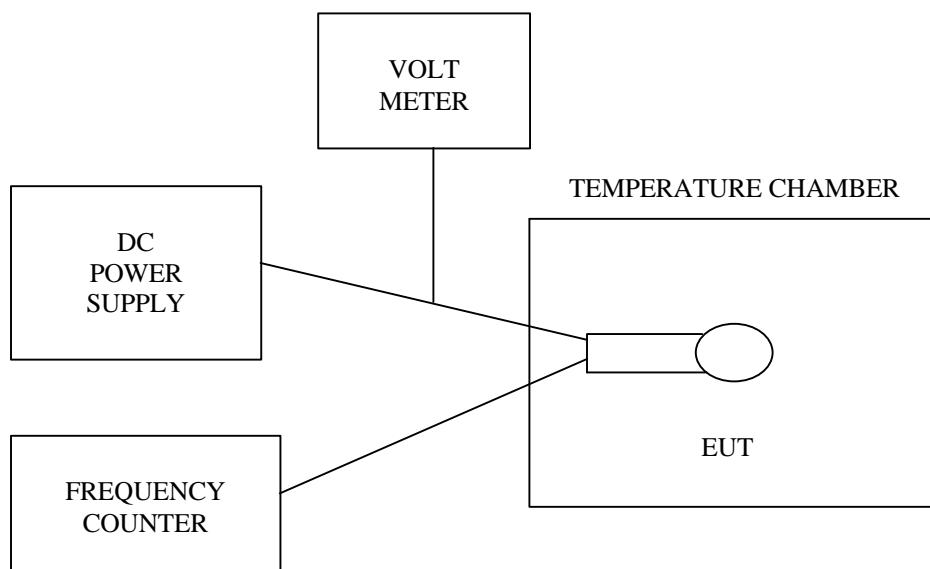


FIGURE 33: Photograph of Frequency Stability Test Setup



FIGURE 34: Photograph of Frequency Stability Test Setup



FIGURE 35: Frequency Stability Test Data Sheet

TEMPERATURE TEST DATA SHEET


DATE: FEBRUARY 22, 2000ENGINEER: MICHAEL SPAULDINGITEM UNDER TEST: AD200P ADD ELECO

Time	Battery Voltage (Vdc)	TEMP (deg C)	FREQ (Hz)	Lower Limit (-0.005%)	Upper Limit (+0.005%)
09:15	9	20	208,652,890		
10:20	9	10	208,651,970		
11:15	9	0	208,650,640		
12:30	9	-10	208,649,200		
13:30	9	-20	208,647,400		
14:30	9	-30	208,645,230		
15:35	9	20	208,652,860		
16:20	9	30	208,653,840		
09:10	9	40	208,654,760		
10:15	9	50	208,656,360		
				10433 F-10230- (208,642,457)	10433 F+10230- (208,663,328)
09:30	6.2	20	208,653,900		
10:40	6.2	10	208,652,980		
11:30	6.2	0	208,651,720		
12:55	6.2	-10	208,649,790		
13:45	6.2	-20	208,648,100		
14:40	6.2	-30	208,646,130		
15:50	6.2	20	208,653,750		
16:40	6.2	30	208,654,800		
09:35	6.2	40	208,655,750		
10:40	6.2	50	208,657,080		

Notes:

- 1) Allow sufficient soak time at each temperature before recording frequency.

FIGURE 36: Frequency Stability Test Graph

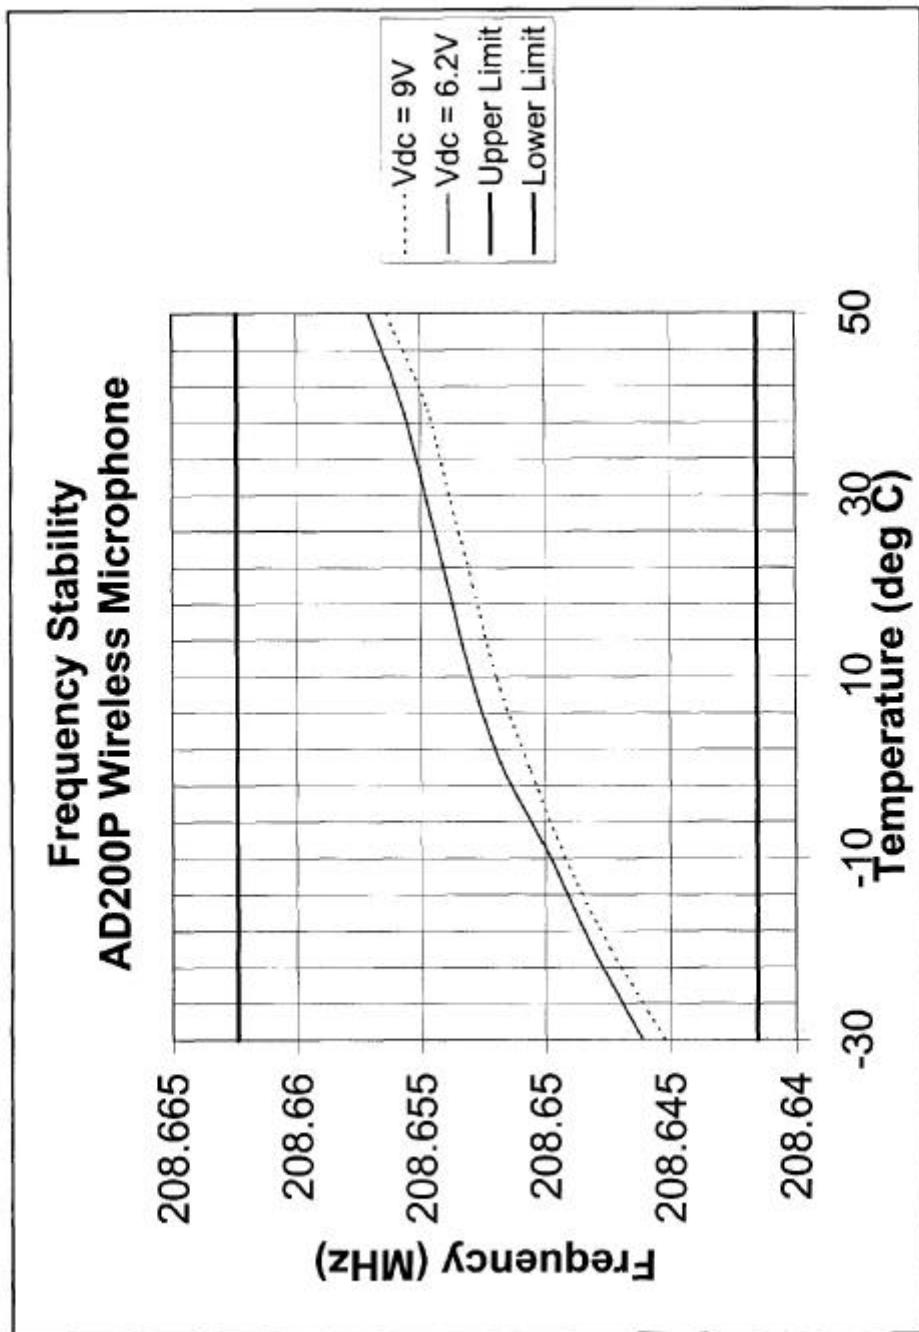

2.983 (e) (7) Frequency Spectrum to be Investigated per 2.997

The Frequency was searched from the lowest radio frequency generated in the equipment through the 10th harmonic of the carrier frequency

2.983 (f) FCC ID: Label

FCC ID: NHAAD200P

NOTES:

Label will be constructed of 0.02 inch aluminum as shown on the equipment with permanent adhesive. All information on the label will be etched or stamped. Both methods will exceed the expected lifetime of the equipment.

The label will be large enough to allow all information to be legible.

2.983 (g) Photographs and/or Drawings Showing Equipment Construction Techniques

Note: The Circuit Board shown in these photos has no components on the reverse side unless shown.

- Figure 37 WIRELESS MICROPHONE (FULLY ASSEMBLED)
- Figure 38 FRONT PANEL
- Figure 39 WIRELESS MICROPHONE W/ BATTERY REMOVED
- Figure 40 BOARD DETAIL 1
- Figure 41 BOARD DETAIL 2

FIGURE 37: Wireless Microphone (Fully Assembled)



FIGURE 38: Front Panel



FIGURE 39: Wireless Microphone w/ Battery Removed



FIGURE 40: Board Detail 1


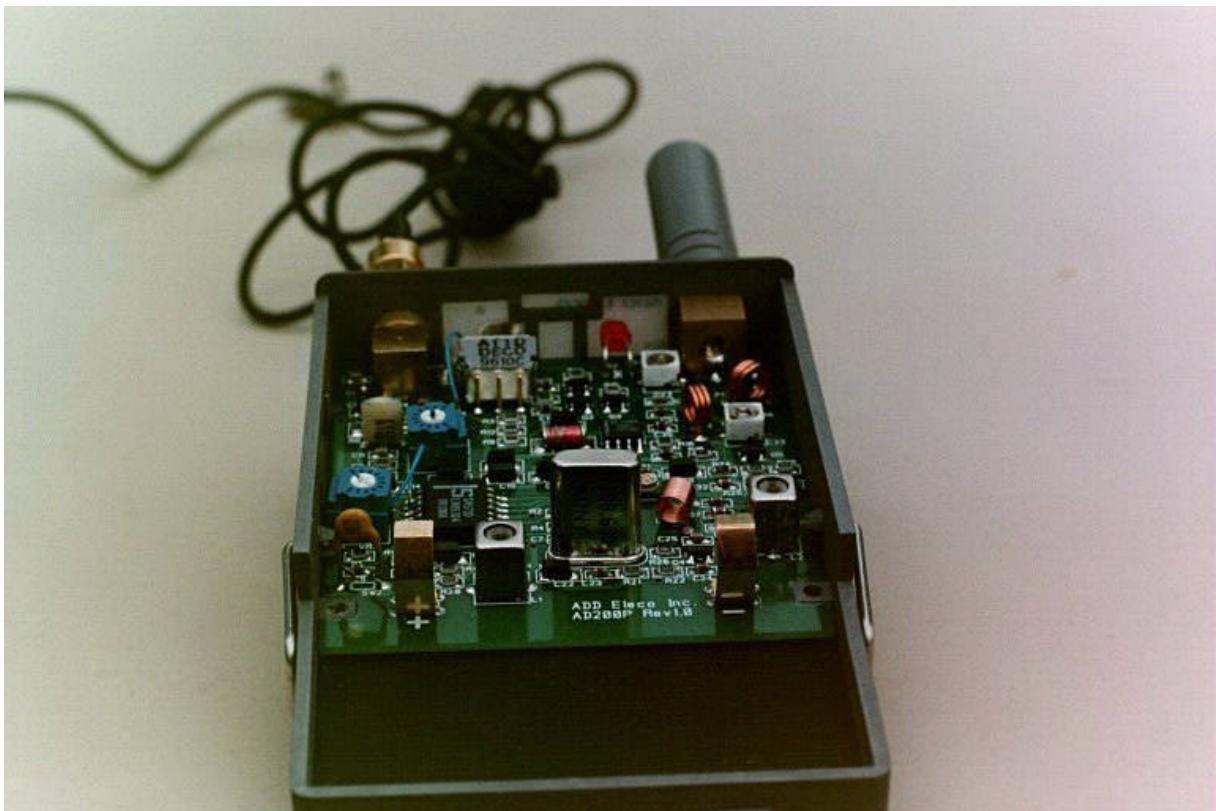


FIGURE 42: Board Detail 2

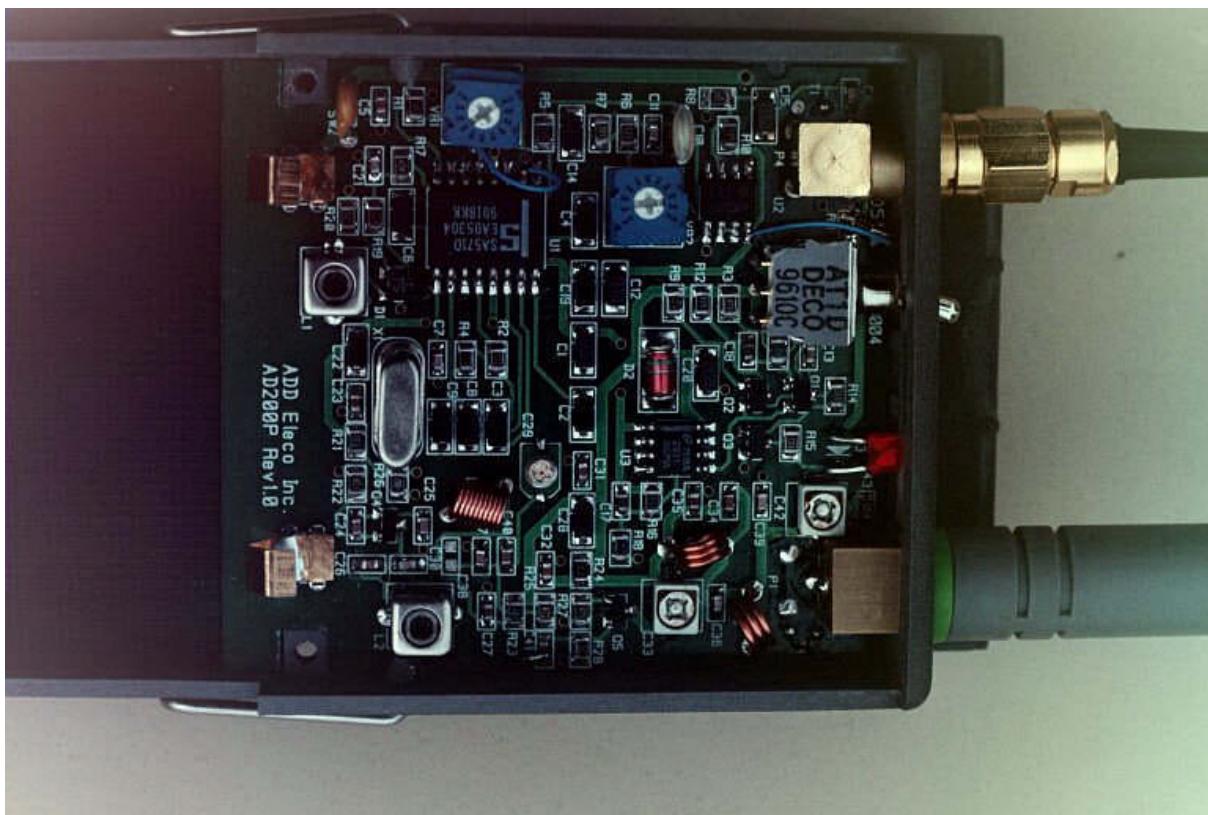

**APPENDIX A
INSTRUCTION MANUAL**