

FCC TEST REPORT

REPORT NO.: RF951219L10

MODEL NO.: SOHO-HPW1001 (refer to item 3.1 for more detail)

RECEIVED: Jan. 12, 2007

TESTED: Jan. 12 ~ Apr. 02, 2007

ISSUED: Apr. 04, 2007

APPLICANT: CAMEO Communications , INC

ADDRESS: 6F, NO.22, Chung Shin Rd., Hsi-Chih, Taipei
221, Taiwan

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS.....	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP.....	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	TEST INSTRUMENTS.....	21
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP.....	23
4.2.6	EUT OPERATING CONDITIONS	23
4.2.7	TEST RESULTS	24
4.3	6dB BANDWIDTH MEASUREMENT.....	31
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	31
4.3.2	TEST INSTRUMENTS.....	31
4.3.3	TEST PROCEDURE.....	32
4.3.4	DEVIATION FROM TEST STANDARD	32
4.3.5	TEST SETUP.....	32
4.3.6	EUT OPERATING CONDITIONS	32
4.3.7	TEST RESULTS	33
4.4	MAXIMUM PEAK OUTPUT POWER	37
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	37
4.4.2	TEST INSTRUMENTS.....	37
4.4.3	TEST PROCEDURES	38
4.4.4	DEVIATION FROM TEST STANDARD	38
4.4.5	TEST SETUP.....	38
4.4.6	EUT OPERATING CONDITIONS	38
4.4.7	TEST RESULTS	39
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	40
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	40
4.5.2	TEST INSTRUMENTS.....	40
4.5.3	TEST PROCEDURE.....	41
4.5.4	DEVIATION FROM TEST STANDARD	41

4.5.5	TEST SETUP	41
4.5.6	EUT OPERATING CONDITIONS	41
4.5.7	TEST RESULTS	42
4.6	BAND EDGES MEASUREMENT	46
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	46
4.6.2	TEST INSTRUMENTS.....	46
4.6.3	TEST PROCEDURE.....	46
4.6.4	DEVIATION FROM TEST STANDARD	46
4.6.5	EUT OPERATING CONDITION.....	46
4.6.6	TEST RESULTS	47
4.7	ANTENNA REQUIREMENT	55
4.7.1	STANDARD APPLICABLE	55
4.7.2	ANTENNA CONNECTED CONSTRUCTION	55
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	56
6	INFORMATION ON THE TESTING LABORATORIES	57
APPENDIX-A.....		A-1

1 CERTIFICATION

PRODUCT: 802.11g Homeplug WLAN AP
MODEL: SOHO-HPW1001 (refer to item 3.1 for more detail)
BRAND: CAMEO (refer to item 3.1 for more detail)
APPLICANT: CAMEO Communications , INC
TESTED: Jan. 12 ~ Apr. 02, 2007
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: **FCC Part 15, Subpart C (Section 15.247),**
ANSI C63.4-2003

The above equipment (Model: SOHO-HPW1001) have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Apr. 04, 2007
Andrea Hsia

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Apr. 04, 2007
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** Apr. 04, 2007
Gary Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -1.25dB at 0.186MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.04dB at 700.98MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.61 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11g Homeplug WLAN AP
MODEL NO.	SOHO-HPW1001
FCC ID	NHPHPW1001
POWER SUPPLY	100-240Vac from AC
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	56.624mW
ANTENNA TYPE	Dipole antenna with 2.0dBi gain
I/O PORTS	NA
DATA CABLE	NA
ASSOCIATED DEVICES	NA

NOTE:

- The models as below are identical to each other except for their model designation due to marketing requirement.

Company Name	Model
CAMEO	SOHO-HPW1001
TRENDware	TPL-210AP/U

- The EUT was powered by the following internal power supply:

Output:	3.3Vdc / 8Vdc, 1A/100mA
Input:	100~240Vac


- The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
- The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

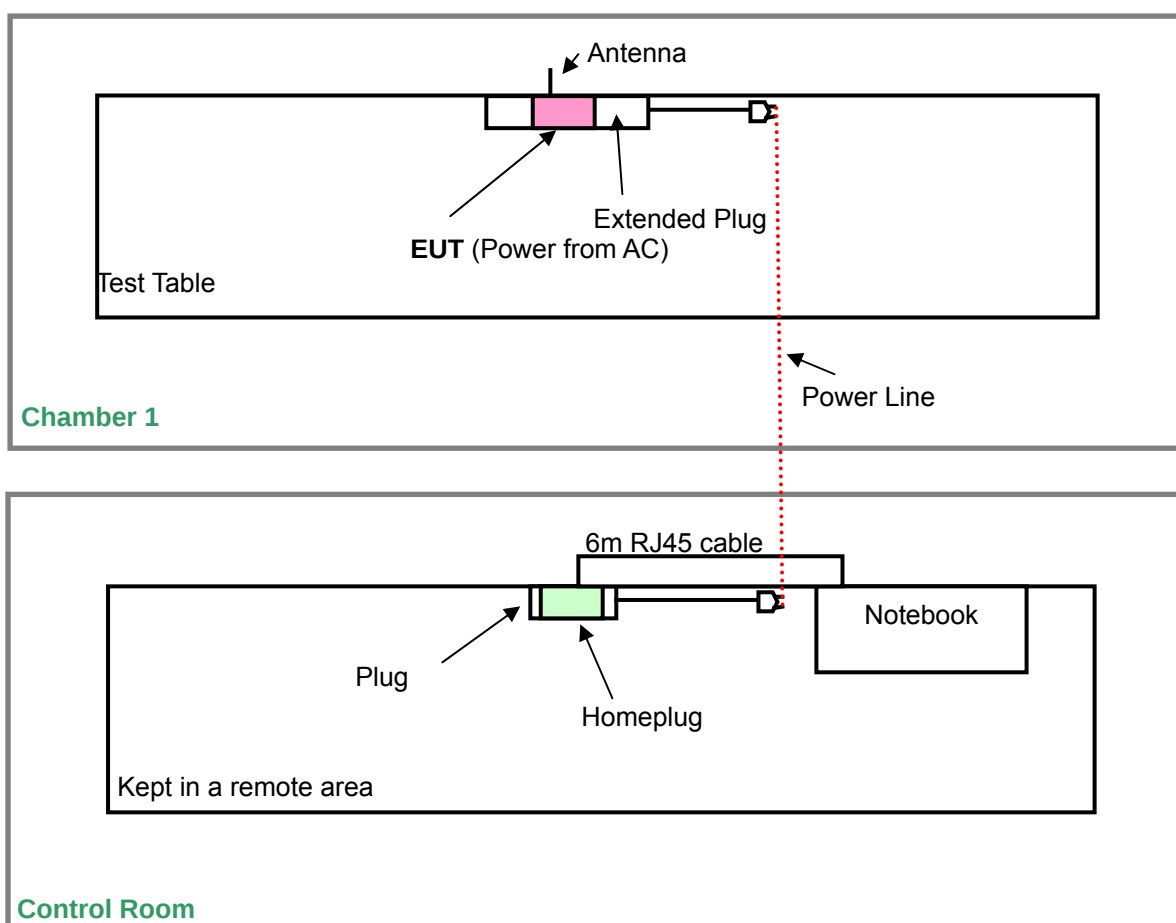

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	HOMEPLUG	D-LINK	DHP-200	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 ~ 2 acted as communication partners to transfer data.
3. Item 2 was supplied from client.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 07, 2007
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 06, 2008
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 13, 2008
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Sep. 14, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

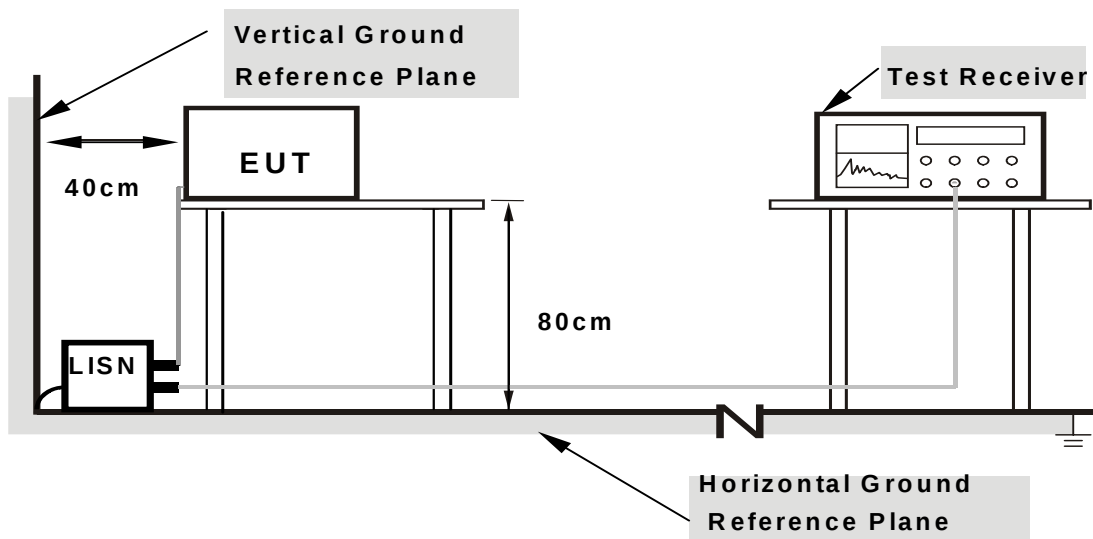

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Connected the EUT with the notebook system via Homeplug, and placed on a testing table.
- c. The notebook system connected with EUT and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The necessary accessories enable the system in full functions.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY	Match Tsui

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.187	0.21	60.69	52.46	60.90	52.67	64.19	54.19	-3.29	-1.52
2	0.279	0.21	54.78	45.48	54.99	45.69	60.85	50.85	-5.86	-5.16
3	0.373	0.21	49.42	39.56	49.63	39.77	58.44	48.44	-8.81	-8.67
4	0.466	0.21	41.36	-	41.57	-	56.58	46.58	-15.00	-
5	2.979	0.32	27.25	-	27.57	-	56.00	46.00	-28.43	-
6	25.000	1.45	29.50	-	30.95	-	60.00	50.00	-29.05	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

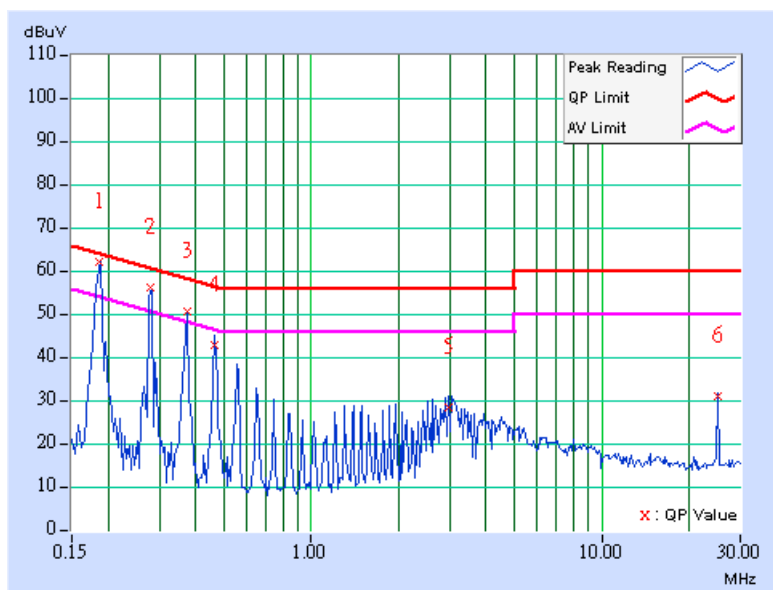

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY	Match Tsui

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.186	0.21	61.38	52.74	61.59	52.95	64.19	54.19	-2.61	-1.25
2	0.279	0.21	56.22	47.04	56.43	47.25	60.85	50.85	-4.42	-3.60
3	0.373	0.21	50.40	41.78	50.61	41.99	58.44	48.44	-7.83	-6.45
4	0.463	0.21	42.41	-	42.62	-	56.65	46.65	-14.02	-
5	2.984	0.32	28.70	-	29.02	-	56.00	46.00	-26.98	-
6	25.000	0.55	29.71	-	30.26	-	60.00	50.00	-29.74	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

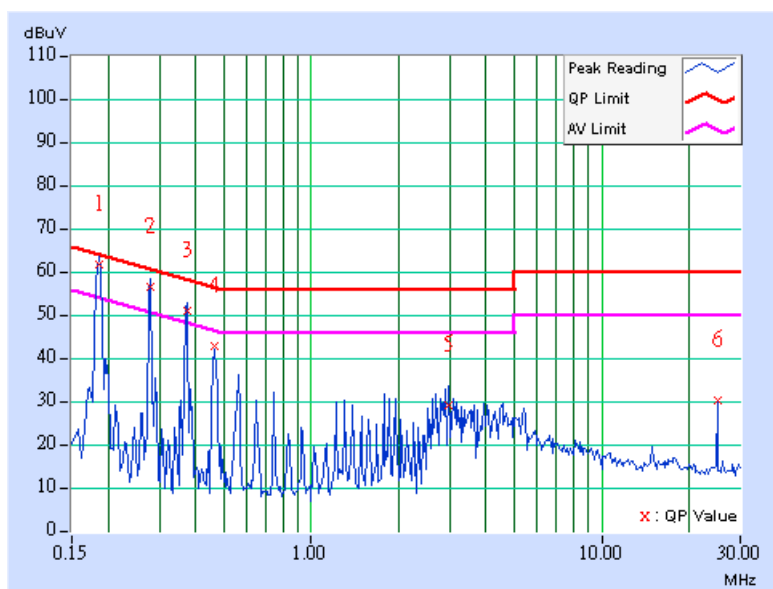

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY	Match Tsui

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.21	59.05	51.12	59.26	51.33	64.25	54.25	-4.99	-2.92
2	0.279	0.21	54.14	45.02	54.35	45.23	60.85	50.85	-6.50	-5.62
3	0.371	0.21	49.08	39.22	49.29	39.43	58.47	48.47	-9.18	-9.04
4	0.466	0.21	40.72	-	40.93	-	56.58	46.58	-15.64	-
5	3.063	0.33	26.59	-	26.92	-	56.00	46.00	-29.08	-
6	25.000	1.45	29.50	-	30.95	-	60.00	50.00	-29.05	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

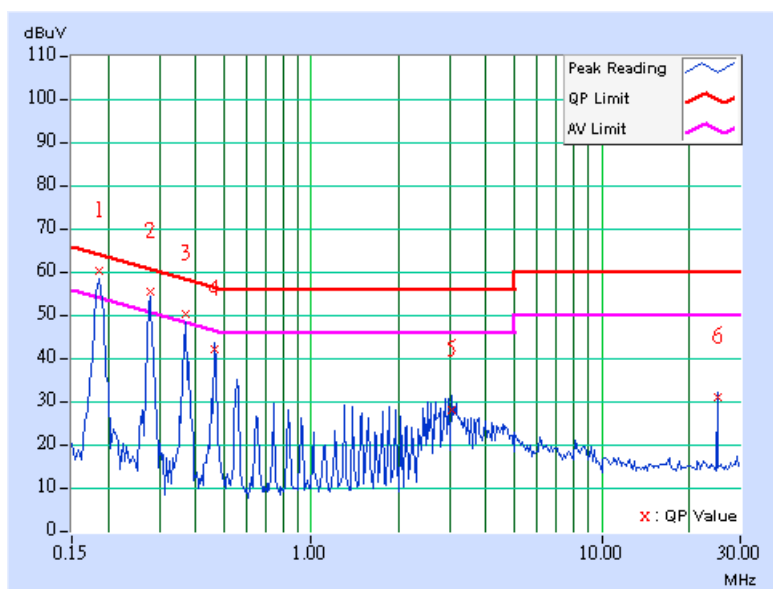

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY	Match Tsui

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.186	0.21	59.47	51.07	59.68	51.28	64.19	54.19	-4.52	-2.92
2	0.279	0.21	54.48	45.33	54.69	45.54	60.85	50.85	-6.16	-5.31
3	0.373	0.21	48.57	40.16	48.78	40.37	58.44	48.44	-9.66	-8.07
4	0.466	0.21	41.66	-	41.87	-	56.58	46.58	-14.70	-
5	2.691	0.30	28.53	-	28.83	-	56.00	46.00	-27.17	-
6	25.000	0.55	29.87	-	30.42	-	60.00	50.00	-29.58	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

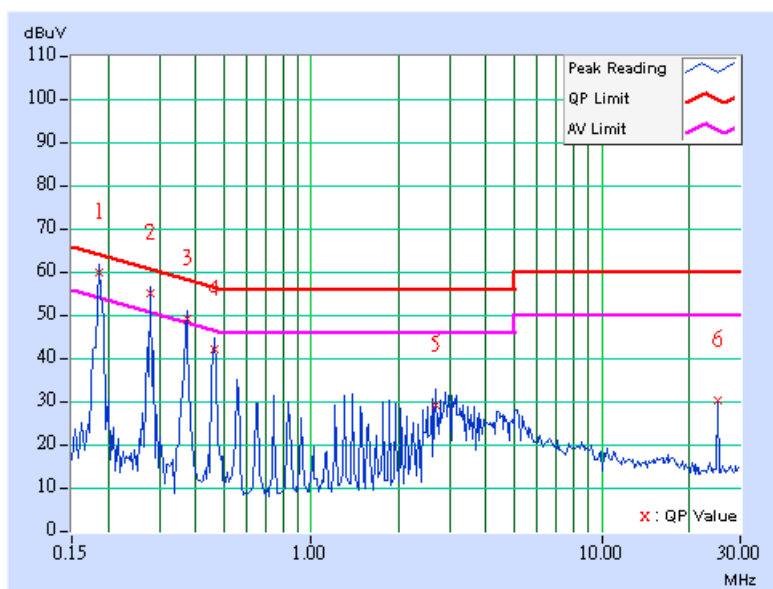

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.21	58.47	50.59	58.68	50.80	64.25	54.25	-5.57	-3.45
2	0.279	0.21	53.56	44.38	53.77	44.59	60.85	50.85	-7.08	-6.26
3	0.373	0.21	48.19	-	48.40	-	58.44	48.44	-10.04	-
4	0.465	0.21	40.53	-	40.74	-	56.60	46.60	-15.86	-
5	2.973	0.32	27.67	-	27.99	-	56.00	46.00	-28.01	-
6	25.000	1.45	30.44	-	31.89	-	60.00	50.00	-28.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

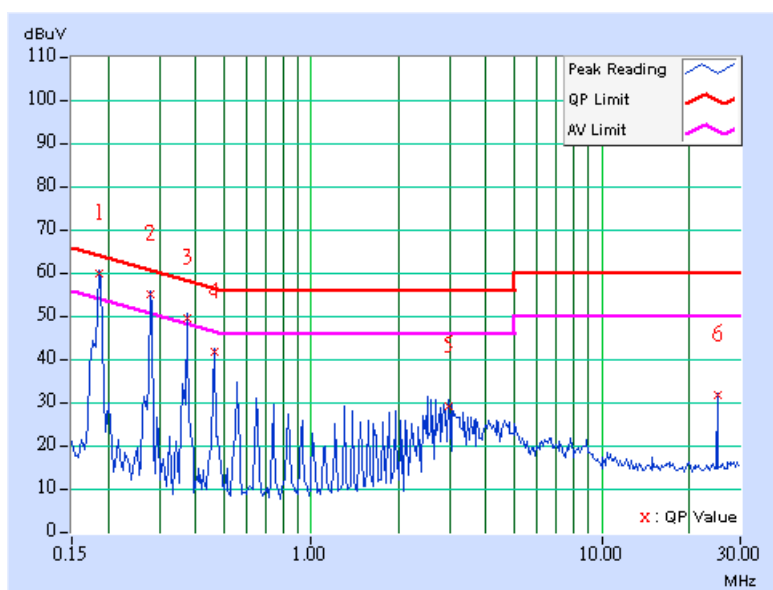

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY	Match Tsui

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.21	59.57	51.96	59.78	52.17	64.25	54.25	-4.47	-2.08
2	0.279	0.21	53.98	44.97	54.19	45.18	60.85	50.85	-6.66	-5.67
3	0.371	0.21	48.33	40.07	48.54	40.28	58.47	48.47	-9.93	-8.19
4	0.466	0.21	41.18	-	41.39	-	56.58	46.58	-15.18	-
5	2.980	0.32	27.97	-	28.29	-	56.00	46.00	-27.71	-
6	25.000	0.55	29.62	-	30.17	-	60.00	50.00	-29.83	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

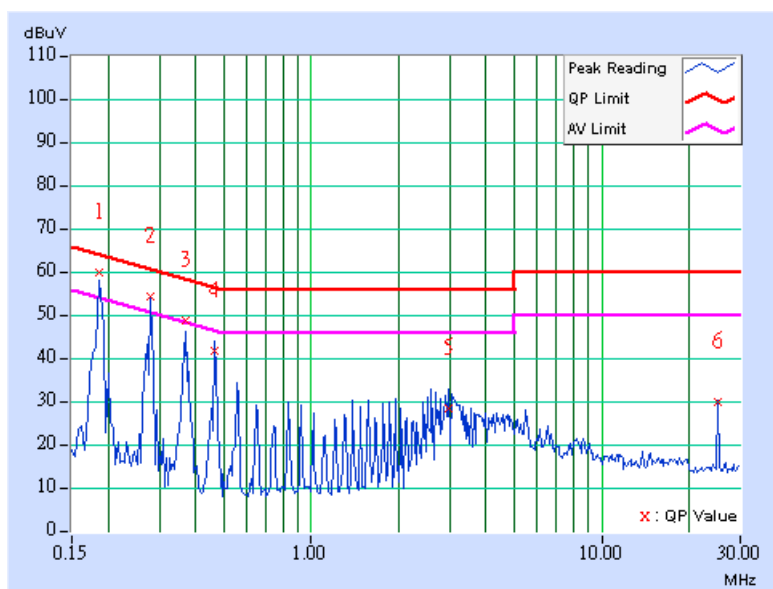

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May. 08, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 07, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 04, 2008
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Jul. 26, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 16, 2008
Preamplifier Agilent	8449B	3008A01911	Sep. 13, 2007
Preamplifier Agilent	8447D	2944A10638	Dec. 20, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189	Nov. 14, 2007
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 16, 2007
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Turn Table EMCO	2087-2.03	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC3789B-9.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

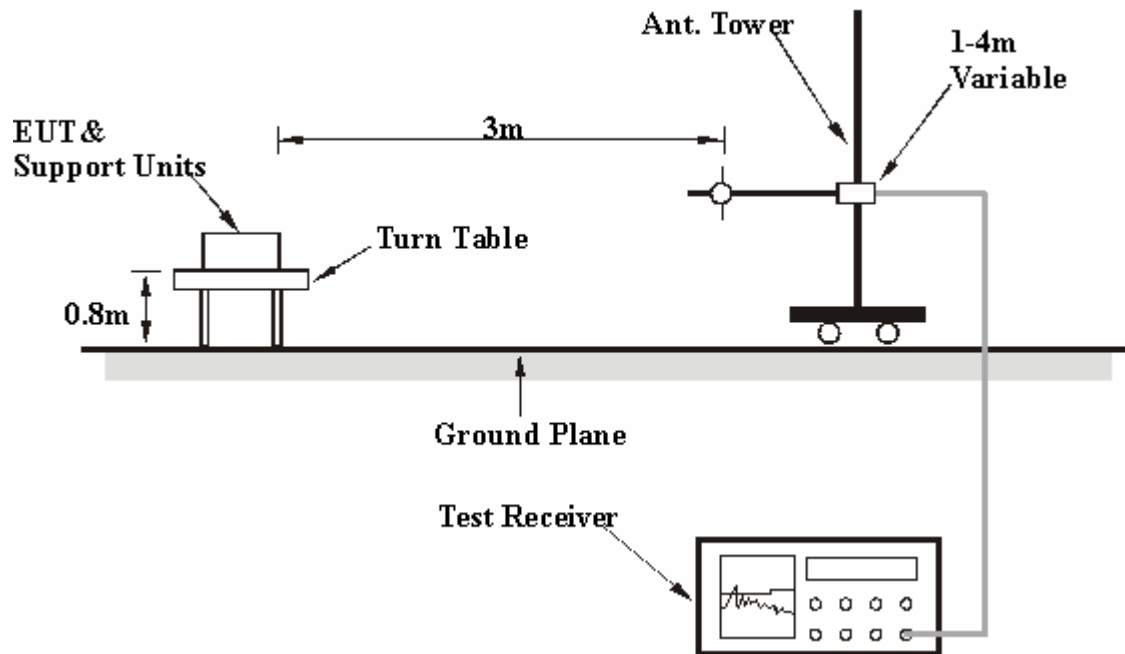

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

RADIATED WORST-CASE DATA: BELOW 1GHz

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 72%RH, 991hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	218.50	41.60 QP	46.00	-4.40	1.50 H	103	30.46	11.14
2	235.99	41.56 QP	46.00	-4.44	2.00 H	142	29.63	11.93
3	500.42	40.92 QP	46.00	-5.08	2.50 H	103	22.16	18.76
4	599.58	42.31 QP	46.00	-3.69	1.00 H	229	21.22	21.09
5	650.13	40.31 QP	46.00	-5.69	1.00 H	151	18.76	21.55
6	700.68	44.92 QP	46.00	-1.08	1.00 H	145	22.91	22.01
7	725.96	40.93 QP	46.00	-5.07	1.00 H	154	18.31	22.62
8	850.39	40.05 QP	46.00	-5.95	1.50 H	124	15.20	24.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.34	38.07 QP	40.00	-1.93	1.50 V	10	24.56	13.52
2	210.72	41.48 QP	43.50	-2.02	1.00 V	112	30.69	10.80
3	235.99	44.68 QP	46.00	-1.32	1.00 V	82	32.75	11.93
4	399.31	43.42 QP	46.00	-2.58	1.00 V	37	27.72	15.69
5	599.58	44.84 QP	46.00	-1.16	1.00 V	208	23.75	21.09
6	700.68	44.96 QP	46.00	-1.04	1.50 V	145	22.95	22.01
7	799.84	44.67 QP	46.00	-1.33	1.50 V	10	20.31	24.36
8	926.22	43.10 QP	46.00	-2.90	1.00 V	343	17.57	25.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	47.09 PK	74.00	-26.91	1.00 H	276	18.57	28.52
2	1900.00	43.68 AV	54.00	-10.32	1.00 H	276	15.16	28.52
3	2390.00	53.92 PK	74.00	-20.08	1.07 H	191	22.71	31.21
4	2390.00	44.99 AV	54.00	-9.01	1.07 H	191	13.78	31.21
5	*2412.00	102.80 PK			1.07 H	191	71.60	31.20
6	*2412.00	99.13 AV			1.07 H	191	67.93	31.20
7	2576.00	58.38 PK	82.80	-24.42	1.24 H	135	26.96	31.42
8	2576.00	51.04 AV	79.13	-28.09	1.24 H	135	19.62	31.42
9	4824.00	51.29 PK	74.00	-22.71	1.00 H	254	14.86	36.42
10	4824.00	47.90 AV	54.00	-6.10	1.00 H	254	11.47	36.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	48.76 PK	74.00	-25.24	1.31 V	214	20.24	28.52
2	1900.00	46.54 AV	54.00	-7.46	1.31 V	214	18.02	28.52
3	2390.00	55.03 PK	74.00	-18.97	1.63 V	240	23.82	31.21
4	2390.00	46.02 AV	54.00	-7.98	1.63 V	240	14.81	31.21
5	*2412.00	108.82 PK			1.63 V	240	77.62	31.20
6	*2412.00	105.23 AV			1.63 V	240	74.03	31.20
7	2576.00	61.76 PK	88.82	-27.06	1.03 V	54	30.34	31.42
8	2576.00	57.38 AV	85.23	-27.85	1.03 V	54	25.96	31.42
9	4824.00	50.12 PK	74.00	-23.88	1.37 V	135	13.69	36.42
10	4824.00	46.16 AV	54.00	-7.84	1.37 V	135	9.73	36.42

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	45.39 PK	74.00	-28.61	1.52 H	0	16.87	28.52
2	1900.00	42.00 AV	54.00	-12.00	1.52 H	0	13.48	28.52
3	2392.00	59.15 PK	82.67	-23.52	1.37 H	122	27.94	31.21
4	2392.00	52.25 AV	78.99	-26.74	1.37 H	122	21.04	31.21
5	*2437.00	102.67 PK			1.34 H	132	71.46	31.21
6	*2437.00	98.99 AV			1.34 H	132	67.78	31.21
7	2576.00	57.73 PK	82.67	-24.94	1.27 H	131	26.31	31.42
8	2576.00	50.57 AV	78.99	-28.42	1.27 H	131	19.15	31.42
9	4874.00	50.29 PK	74.00	-23.71	1.20 H	335	13.76	36.53
10	4874.00	47.57 AV	54.00	-6.43	1.20 H	335	11.04	36.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	47.31 PK	74.00	-26.69	1.34 V	212	18.79	28.52
2	1900.00	45.28 AV	54.00	-8.72	1.34 V	212	16.76	28.52
3	2392.00	62.83 PK	89.35	-27.05	1.34 V	101	31.62	31.21
4	2392.00	59.94 AV	85.57	-25.63	1.34 V	101	28.73	31.21
5	*2437.00	109.35 PK			1.06 V	309	78.14	31.21
6	*2437.00	105.57 AV			1.06 V	309	74.36	31.21
7	2576.00	60.94 PK	89.35	-28.41	1.30 V	360	29.52	31.42
8	2576.00	56.08 AV	85.57	-27.49	1.30 V	360	24.66	31.42
9	4874.00	51.79 PK	74.00	-22.21	1.44 V	140	15.26	36.53
10	4874.00	48.79 AV	54.00	-5.21	1.44 V	140	12.26	36.53

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	45.27 PK	74.00	-28.73	1.67 H	172	16.75	28.52
2	1900.00	41.49 AV	54.00	-12.51	1.67 H	172	12.97	28.52
3	2392.00	58.04 PK	83.02	-24.98	1.10 H	187	26.83	31.21
4	2392.00	51.62 AV	79.54	-27.92	1.10 H	187	20.41	31.21
5	*2462.00	103.02 PK			1.05 H	190	71.80	31.22
6	*2462.00	99.54 AV			1.05 H	190	68.32	31.22
7	2576.00	57.50 PK	83.02	-25.52	1.00 H	218	26.08	31.42
8	2576.00	49.34 AV	79.54	-30.20	1.00 H	218	17.92	31.42
9	4924.00	47.95 PK	74.00	-26.05	1.29 H	57	11.31	36.63
10	4924.00	43.41 AV	54.00	-10.59	1.29 H	57	6.77	36.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	47.12 PK	74.00	-26.88	1.00 V	207	18.60	28.52
2	1900.00	44.69 AV	54.00	-9.31	1.00 V	207	16.17	28.52
3	2392.00	62.63 PK	89.37	-29.74	1.09 V	324	31.42	31.21
4	2392.00	59.32 AV	85.50	-26.18	1.09 V	324	28.11	31.21
5	*2462.00	109.37 PK			1.71 V	153	78.15	31.22
6	*2462.00	105.50 AV			1.71 V	153	74.28	31.22
7	2576.00	60.45 PK	89.37	-28.92	1.04 V	4	29.03	31.42
8	2576.00	55.40 AV	85.50	-30.10	1.04 V	4	23.98	31.42
9	4924.00	51.95 PK	74.00	-22.05	1.19 V	262	15.31	36.63
10	4924.00	49.10 AV	54.00	-4.90	1.19 V	262	12.46	36.63

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	50.69 PK	74.00	-23.31	1.00 H	262	22.17	28.52
2	1900.00	43.10 AV	54.00	-10.90	1.00 H	262	14.58	28.52
3	2390.00	60.72 PK	74.00	-13.28	1.36 H	139	29.51	31.21
4	2390.00	47.64 AV	54.00	-6.36	1.36 H	139	16.43	31.21
5	*2412.00	101.59 PK			1.32 H	140	70.39	31.20
6	*2412.00	93.13 AV			1.32 H	140	61.93	31.20
7	4824.00	46.58 PK	74.00	-27.42	1.00 H	123	10.15	36.42
8	4824.00	33.52 AV	54.00	-20.48	1.00 H	123	-2.91	36.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1024.00	50.16 PK	74.00	-23.84	1.66 V	254	22.76	27.40
2	1024.00	47.60 AV	54.00	-6.40	1.66 V	254	20.20	27.40
3	2390.00	71.66 PK	74.00	-2.34	1.14 V	325	40.45	31.21
4	2390.00	52.45 AV	54.00	-1.55	1.14 V	325	21.24	31.21
5	*2412.00	110.43 PK			1.12 V	159	79.23	31.20
6	*2412.00	100.23 AV			1.12 V	159	69.03	31.20
7	2576.00	62.94 PK	90.43	-27.49	1.06 V	330	31.52	31.42
8	2576.00	58.59 AV	80.23	-21.64	1.06 V	330	27.17	31.42
9	4824.00	45.58 PK	74.00	-28.42	1.27 V	282	9.15	36.42
10	4824.00	33.85 AV	54.00	-20.15	1.27 V	282	-2.58	36.42

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	46.20 PK	74.00	-27.80	1.27 H	311	17.68	28.52
2	1900.00	43.29 AV	54.00	-10.71	1.27 H	311	14.77	28.52
3	2392.00	61.70 PK	83.24	-21.54	1.21 H	222	30.49	31.21
4	2392.00	56.69 AV	73.89	-16.99	1.21 H	222	25.48	31.21
5	*2437.00	103.24 PK			1.23 H	301	72.03	31.21
6	*2437.00	93.89 AV			1.23 H	301	62.68	31.21
7	2576.00	59.96 PK	83.24	-23.28	1.08 H	136	28.54	31.42
8	2576.00	53.96 AV	73.89	-19.93	1.08 H	136	22.54	31.42
9	4874.00	47.20 PK	74.00	-26.80	1.23 H	147	10.67	36.53
10	4874.00	33.56 AV	54.00	-20.44	1.23 H	147	-2.97	36.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	48.65 PK	74.00	-25.35	1.11 V	230	20.13	28.52
2	1900.00	45.25 AV	54.00	-8.75	1.11 V	230	16.73	28.52
3	2392.00	66.87 PK	91.92	-25.05	1.29 V	101	35.66	31.21
4	2392.00	62.47 AV	81.76	-19.29	1.29 V	101	31.26	31.21
5	*2437.00	111.92 PK			1.06 V	144	80.71	31.21
6	*2437.00	101.76 AV			1.06 V	144	70.55	31.21
7	2483.50	68.24 PK	74.00	-5.76	1.06 V	144	37.01	31.23
8	2483.50	50.14 AV	54.00	-3.86	1.06 V	144	18.91	31.23
9	2576.00	62.68 PK	91.92	-29.24	1.00 V	340	31.26	31.42
10	2576.00	58.96 AV	81.76	-22.80	1.00 V	340	27.54	31.42
11	4874.00	46.80 PK	74.00	-27.20	1.27 V	360	10.27	36.53
12	4874.00	34.56 AV	54.00	-19.44	1.27 V	360	-1.97	36.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1900.00	46.51 PK	74.00	-27.49	1.07 H	360	17.99	28.52
2	1900.00	44.54 AV	54.00	-9.46	1.07 H	360	16.02	28.52
3	2392.00	58.47 PK	80.13	-21.66	1.09 H	136	27.26	31.21
4	2392.00	53.47 AV	71.66	-18.19	1.09 H	136	22.26	31.21
5	*2462.00	100.13 PK			1.31 H	130	68.91	31.22
6	*2462.00	91.66 AV			1.31 H	130	60.44	31.22
7	2483.50	66.62 PK	74.00	-7.38	1.30 H	137	35.39	31.23
8	2483.50	48.20 AV	54.00	-5.80	1.30 H	137	16.97	31.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1050.00	51.12 PK	74.00	-22.87	1.00 V	263	23.75	27.37
2	1050.00	49.09 AV	54.00	-4.91	1.00 V	263	21.71	27.37
3	2392.00	65.82 PK	89.18	-23.36	1.32 V	77	34.61	31.21
4	2392.00	62.52 AV	79.89	-17.37	1.32 V	77	31.31	31.21
5	*2462.00	109.18 PK			1.32 V	13	77.96	31.22
6	*2462.00	99.89 AV			1.32 V	13	68.67	31.22
7	2483.50	70.34 PK	74.00	-3.66	1.31 V	322	39.11	31.23
8	2483.50	52.40 AV	54.00	-1.60	1.31 V	322	21.17	31.23
9	2576.00	63.02 PK	89.18	-26.16	1.04 V	350	31.60	31.42
10	2576.00	58.48 AV	79.89	-21.41	1.04 V	350	27.06	31.42
11	4924.00	45.49 PK	74.00	-28.51	1.55 V	339	8.85	36.63
12	4924.00	33.71 AV	54.00	-20.29	1.55 V	339	-2.93	36.63

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.08	0.5	PASS
6	2437	12.04	0.5	PASS
11	2462	12.04	0.5	PASS


CH 1

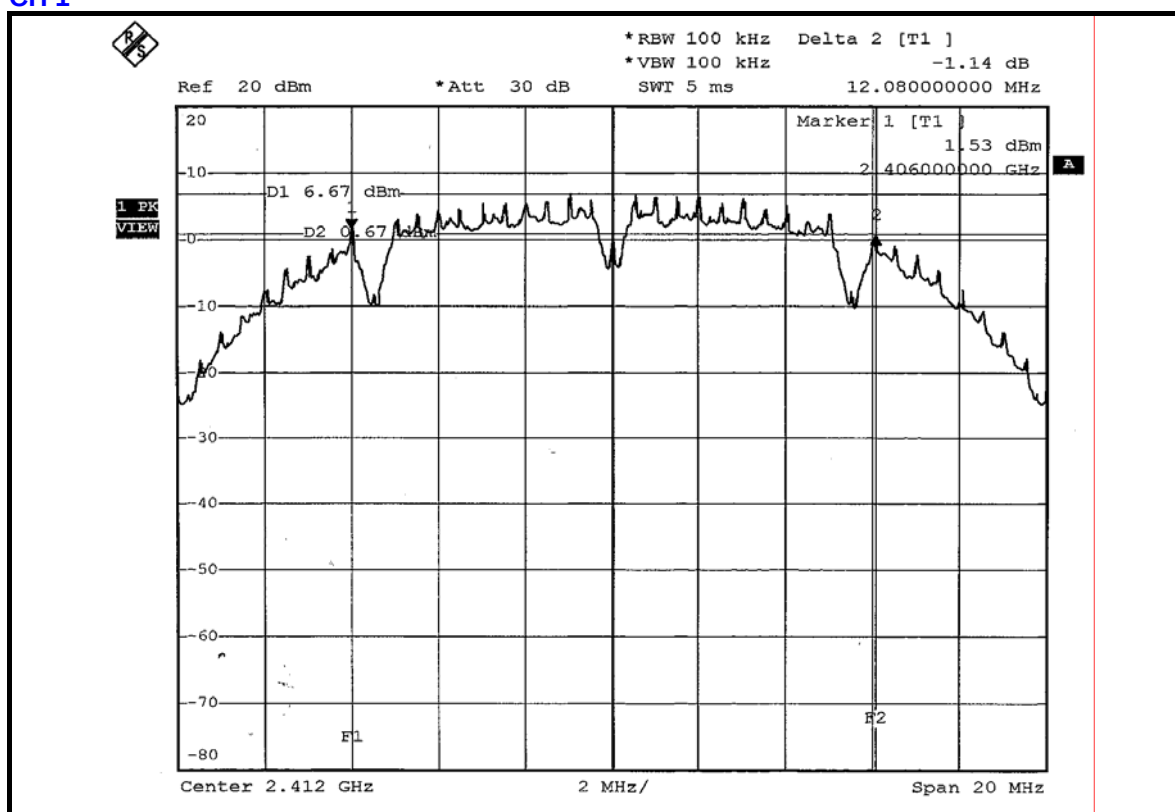

CH 6

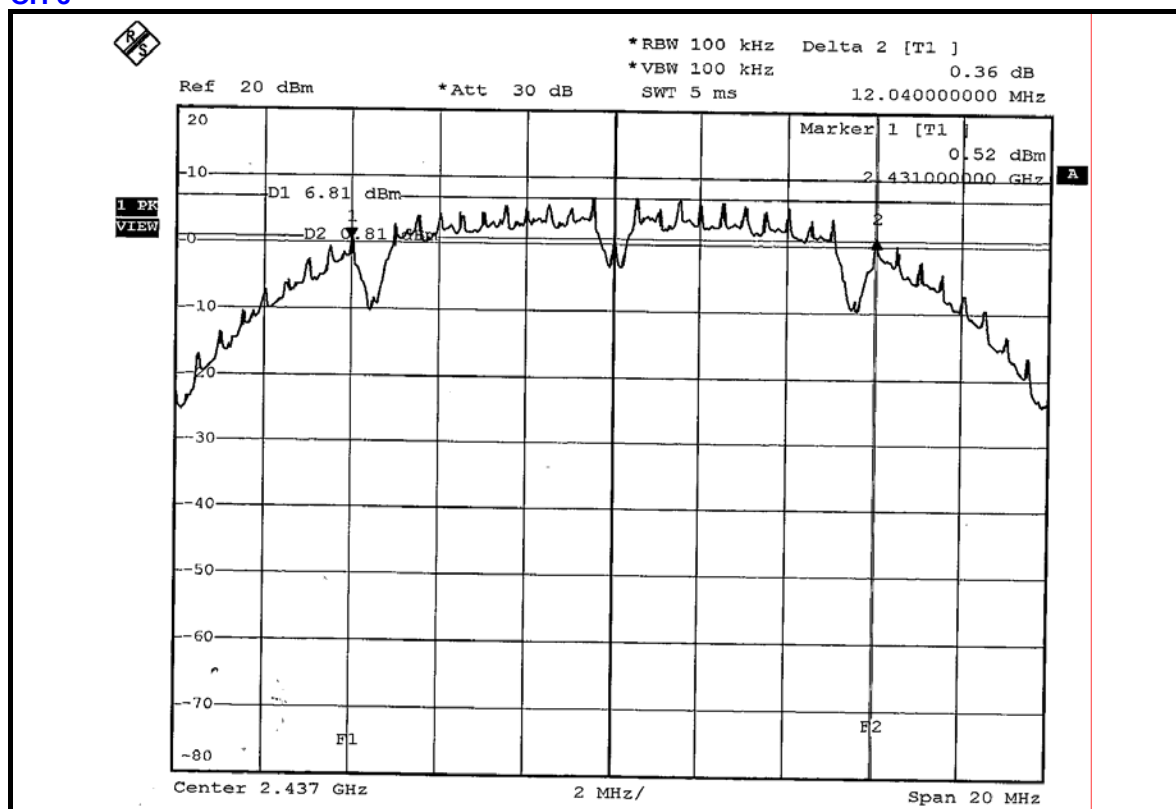

CH 11

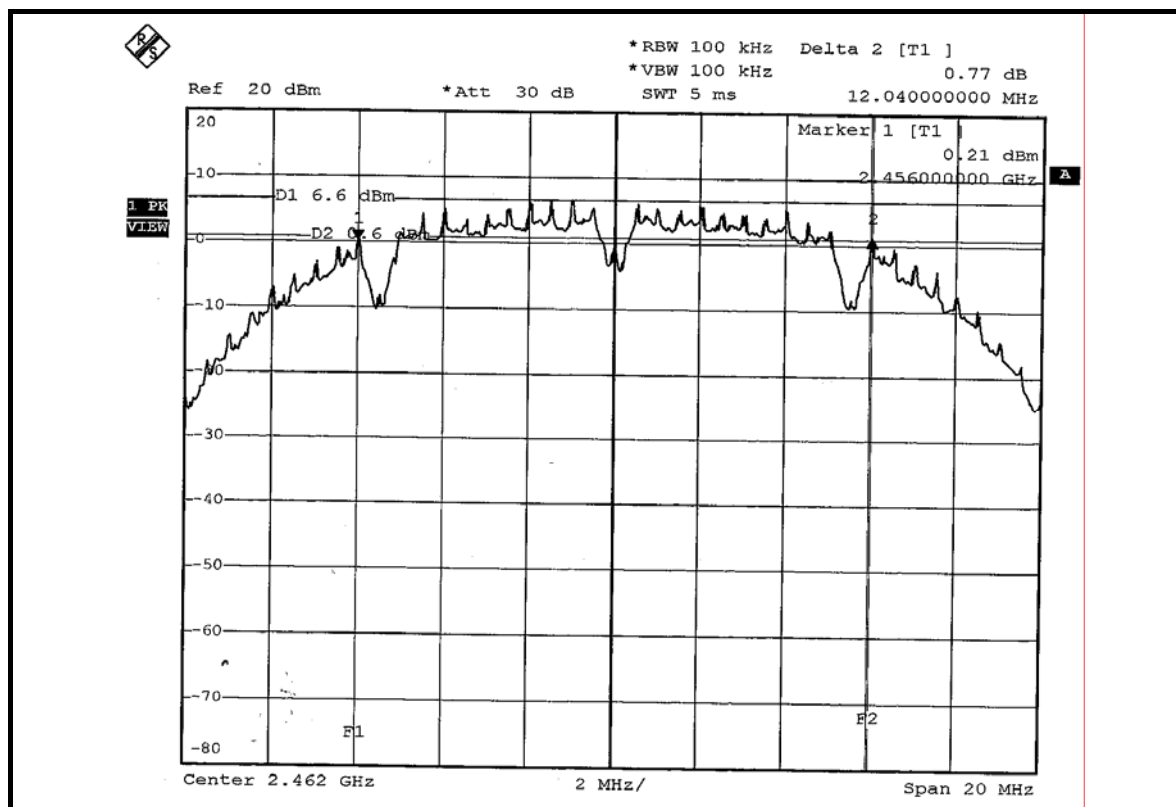


802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.36	0.5	PASS
6	2437	16.32	0.5	PASS
11	2462	16.36	0.5	PASS


CH 1

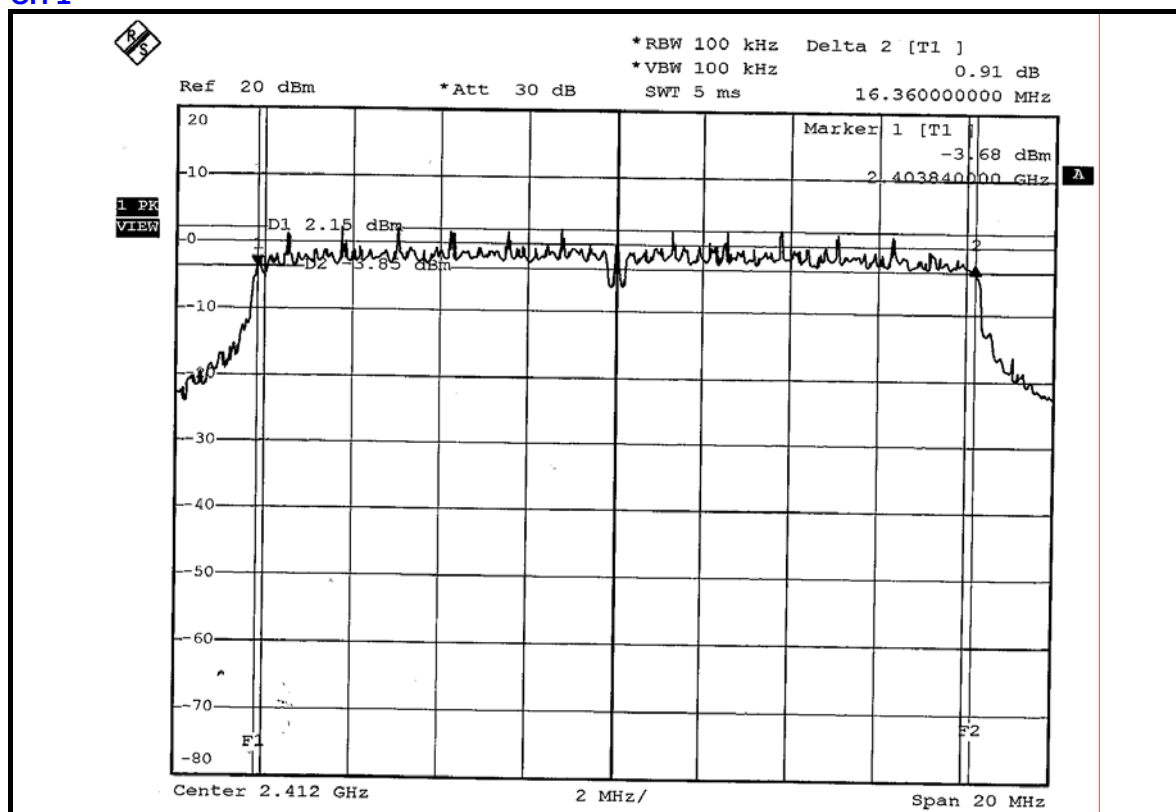

CH 6

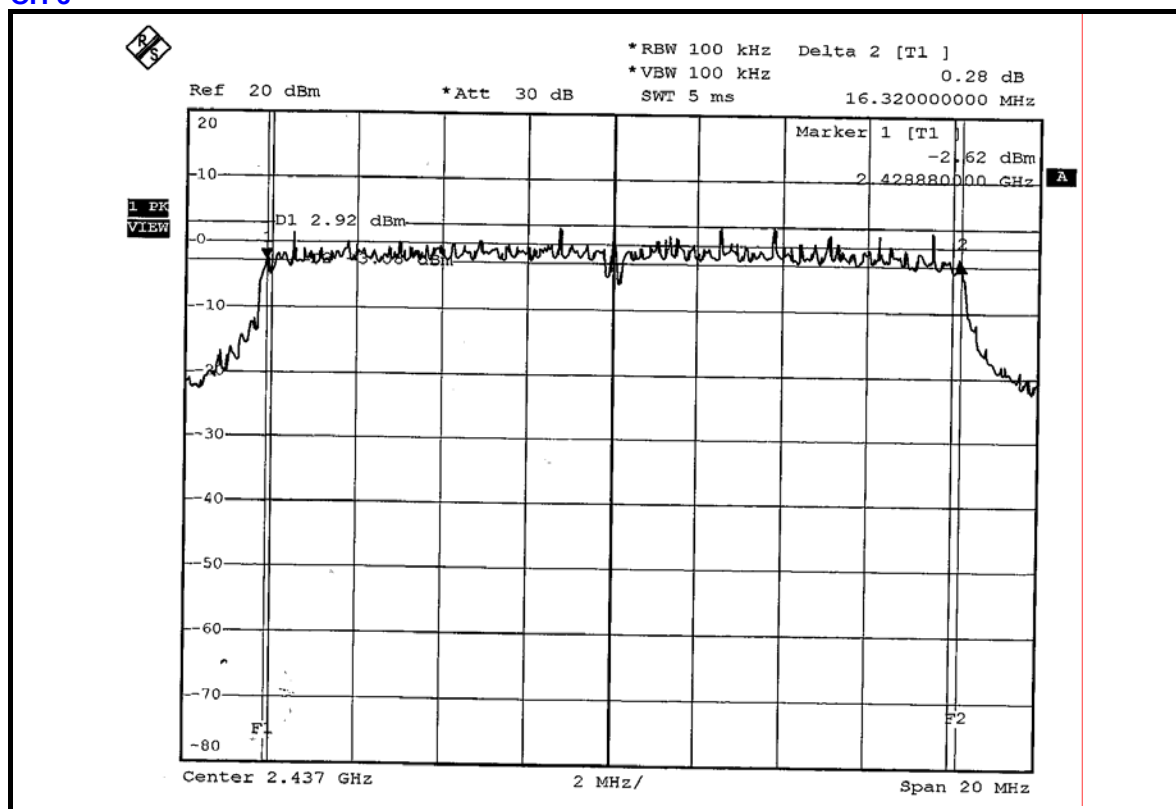

CH 11

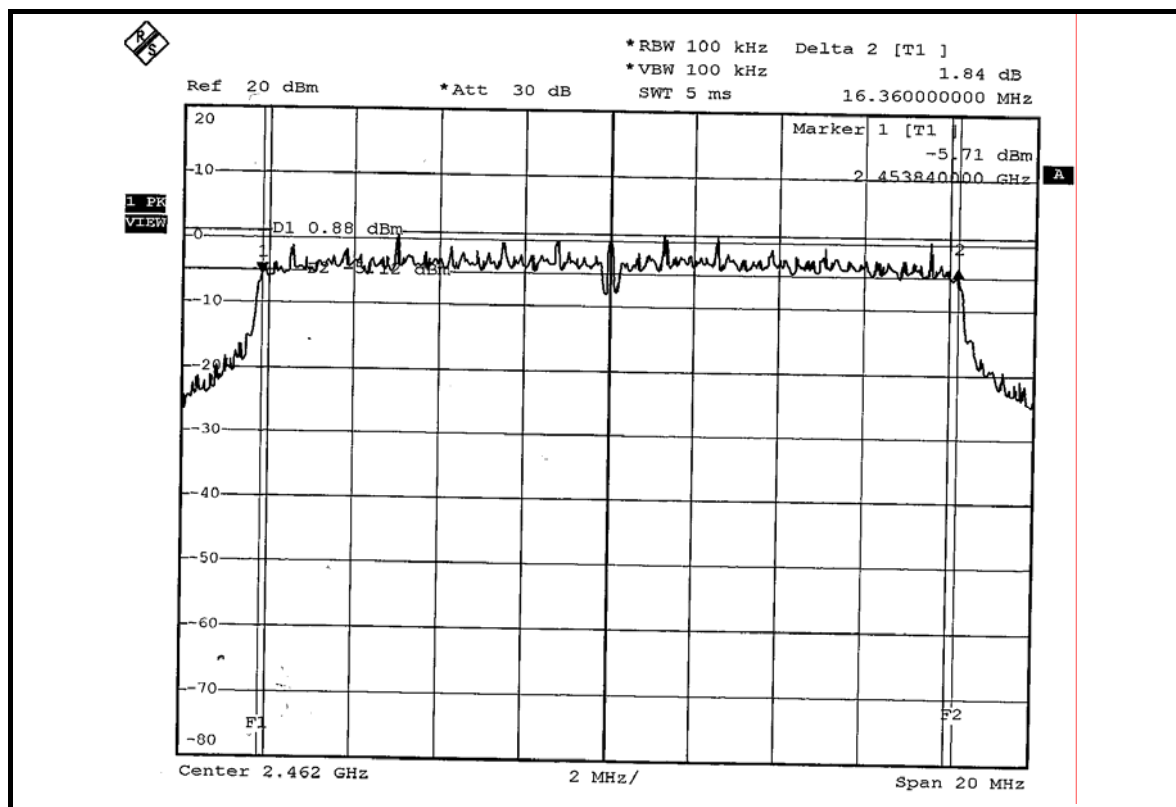

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007
Anritsu Synthesized Signal Generator	68247B	984703	May 08, 2007
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 27, 2007
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	54.075	17.33	30	PASS
6	2437	54.450	17.36	30	PASS
11	2462	54.576	17.37	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	53.951	17.32	27	PASS
6	2437	56.624	17.53	27	PASS
11	2462	38.194	15.82	27	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-2.84	8	PASS
6	2437	-2.77	8	PASS
11	2462	-3.18	8	PASS


CH 1

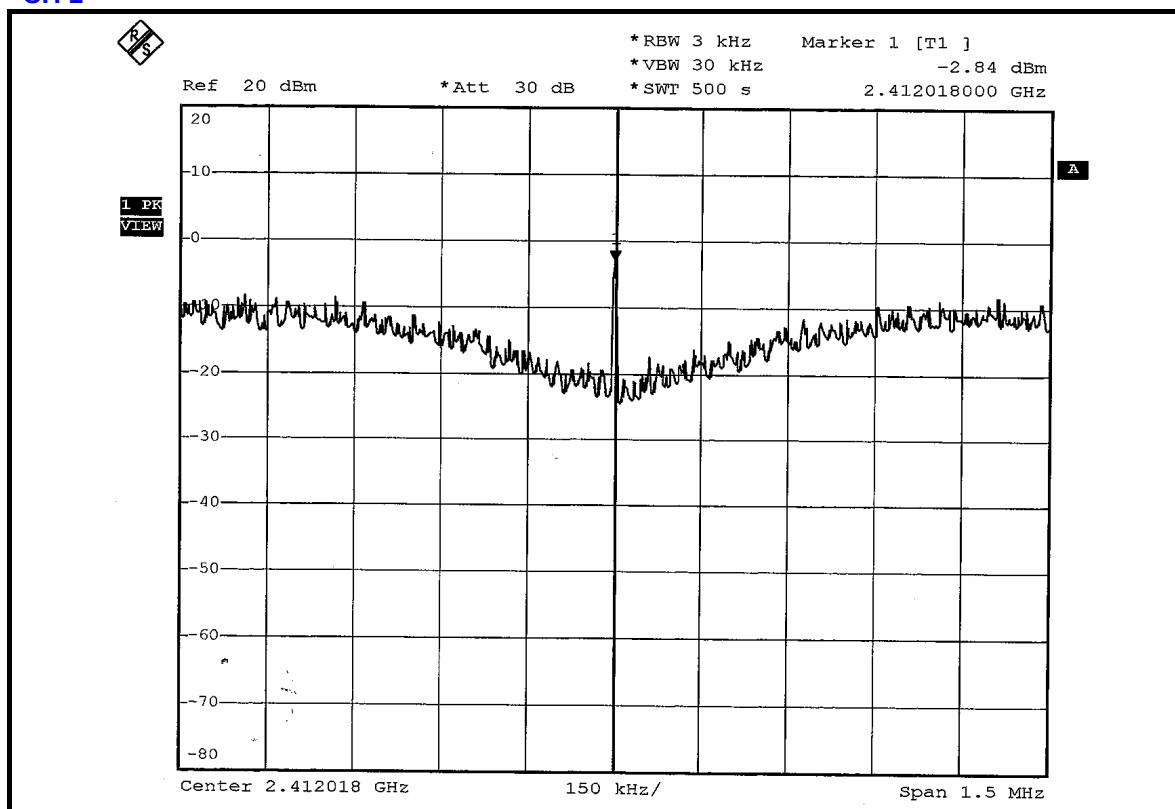

CH 6

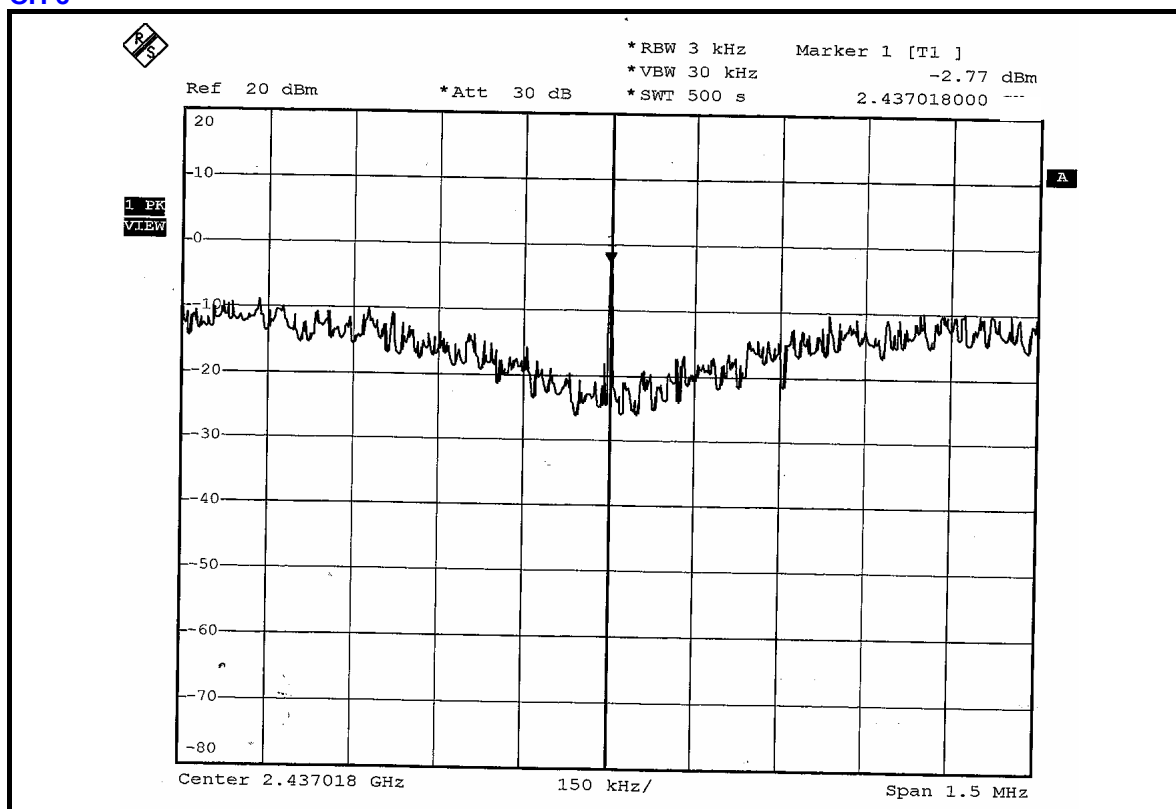

CH 11

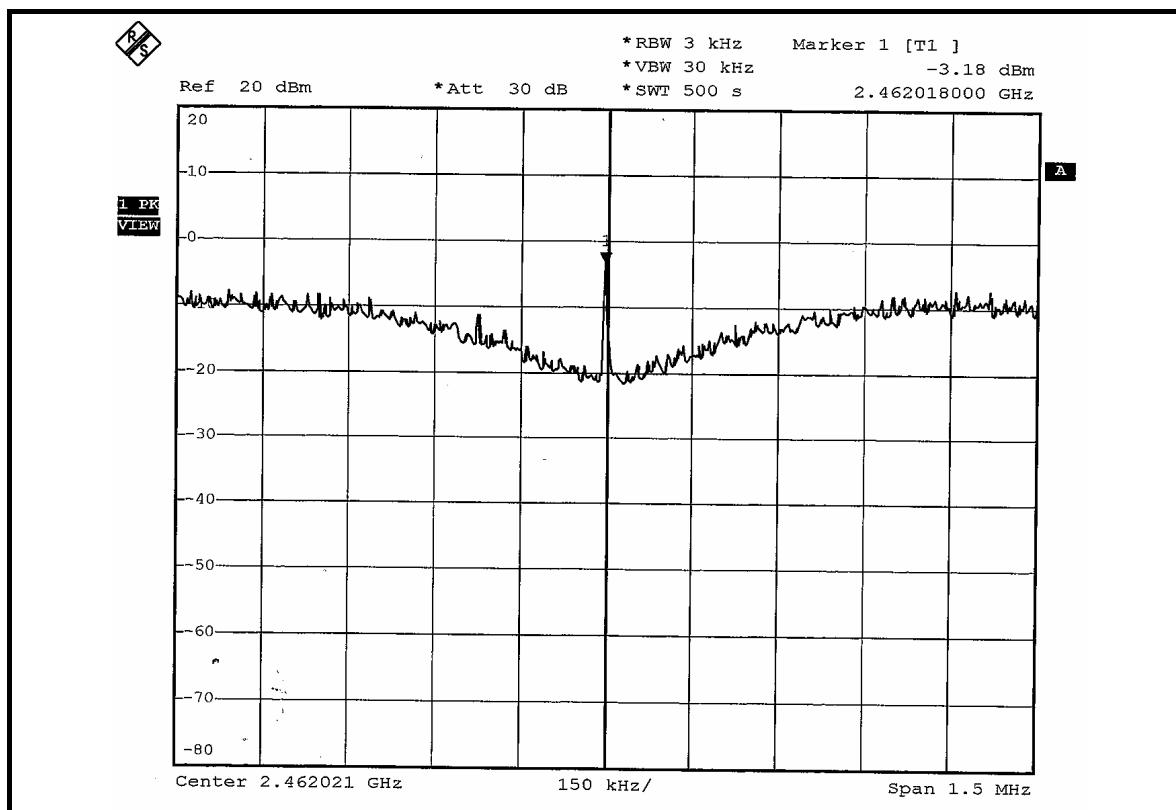


802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
TESTED BY	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-1.46	8	PASS
6	2437	-1.27	8	PASS
11	2462	-2.64	8	PASS


CH 1

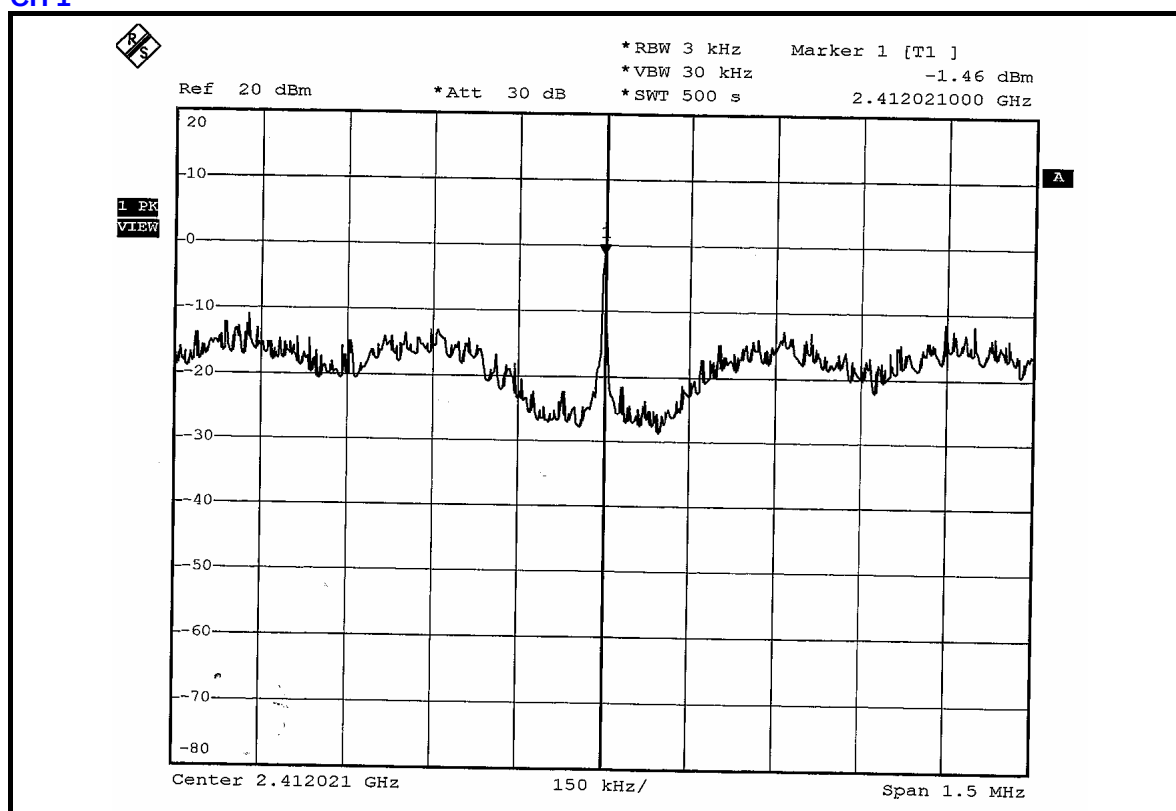

CH 6

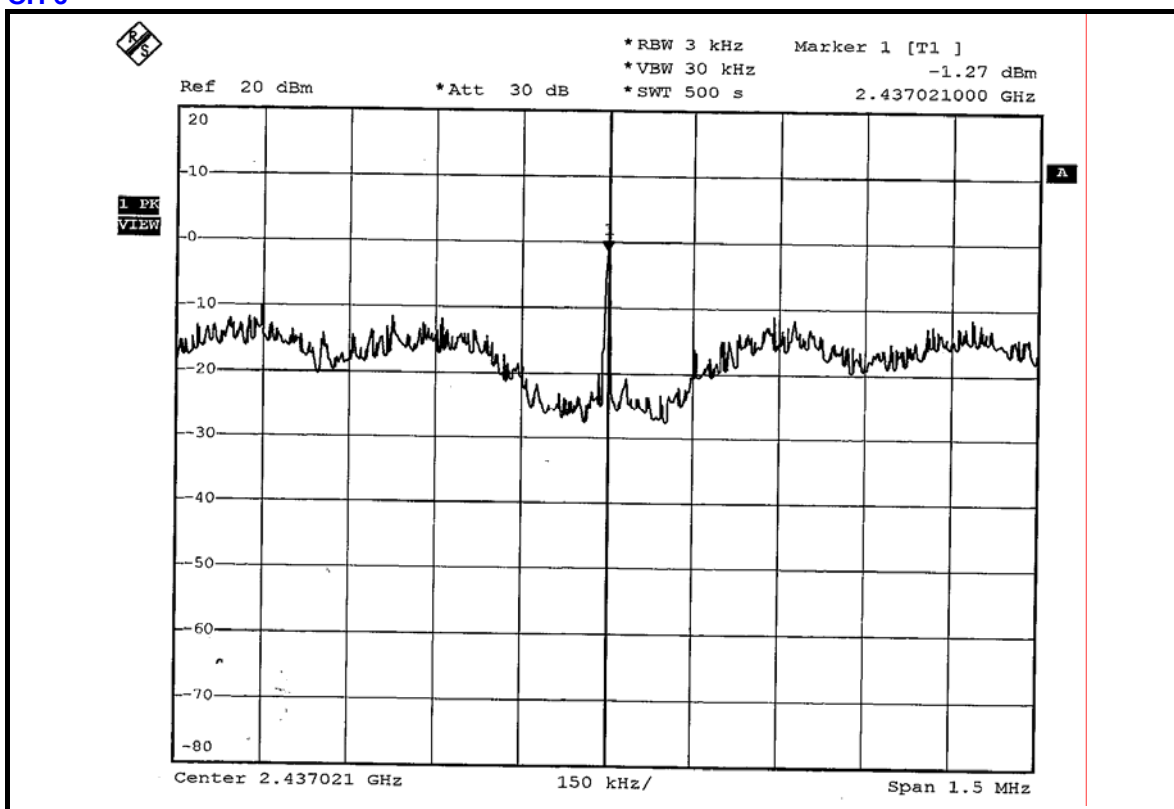

CH 11

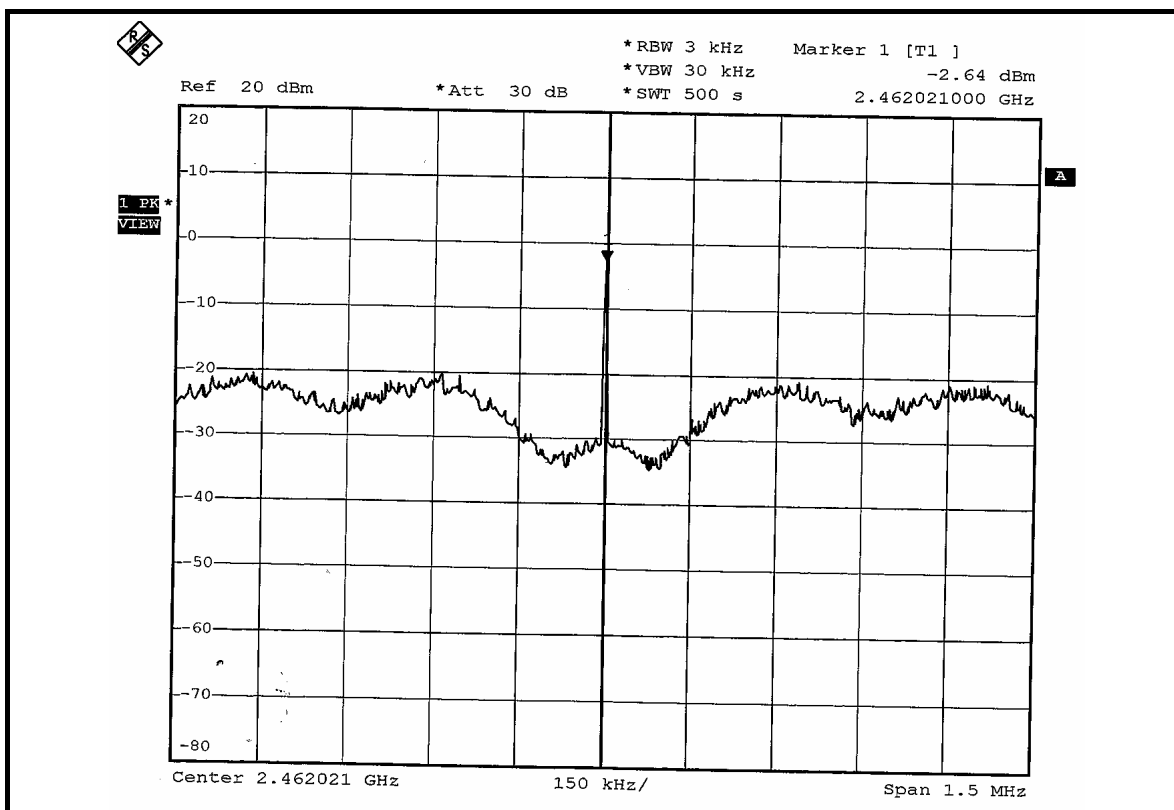

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=10Hz are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION



NOTE 1: The band edge emission plot on the next page shows 54.29dBc between carrier maximum power and local maximum emission in restrict band (2.3226GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.82dBuV/m (Peak), so the maximum field strength in restrict band is $108.82 - 54.29 = 54.53\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 60.16dBc between carrier maximum power and local maximum emission in restrict band (2.3894GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.23dBuV/m (Average), so the maximum field strength in restrict band is $105.23 - 60.16 = 45.07\text{dBuV/m}$ which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot on the next second page shows 55.91dBc between carrier maximum power and local maximum emission in restrict band (2.4847GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.37dBuV/m (Peak), so the maximum field strength in restrict band is $109.37 - 55.91 = 53.46\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 59.36dBc between carrier maximum power and local maximum emission in restrict band (2.4847GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.50dBuV/m (Average), so the maximum field strength in restrict band is $105.50 - 59.36 = 46.14\text{dBuV/m}$ which is under 54dBuV/m limit.

802.11b DSSS MODULATION

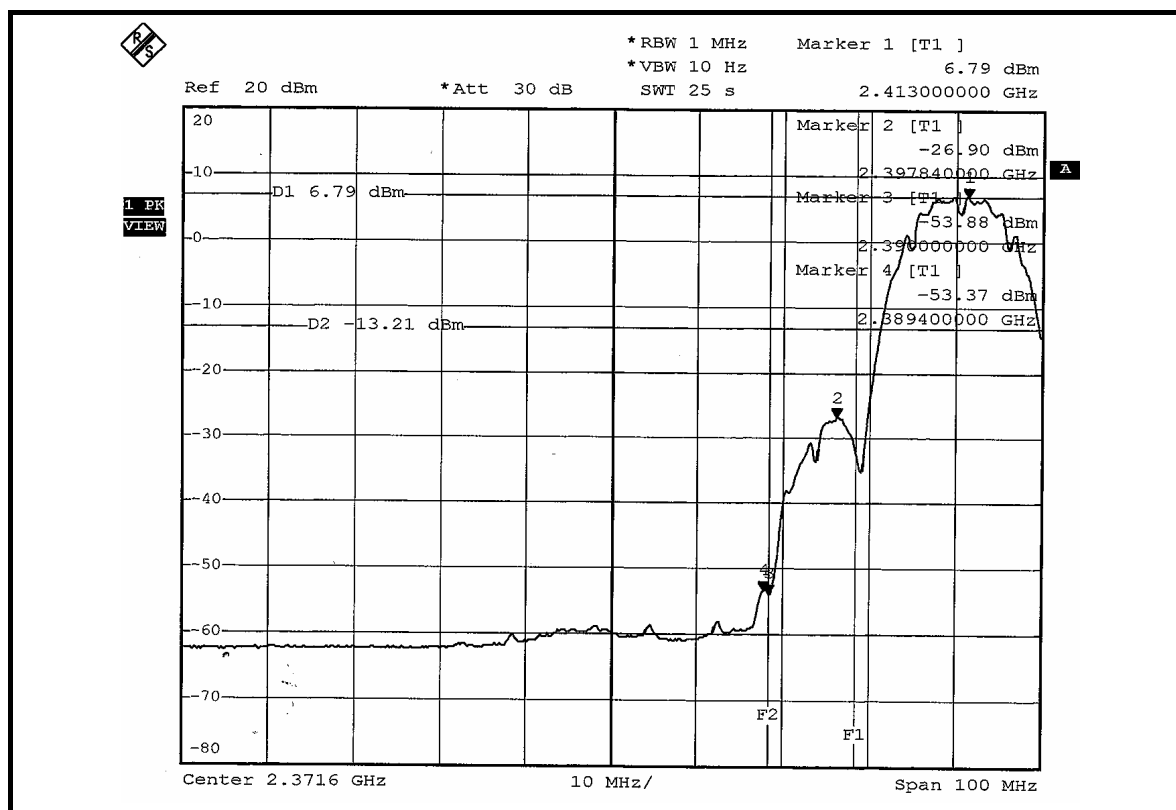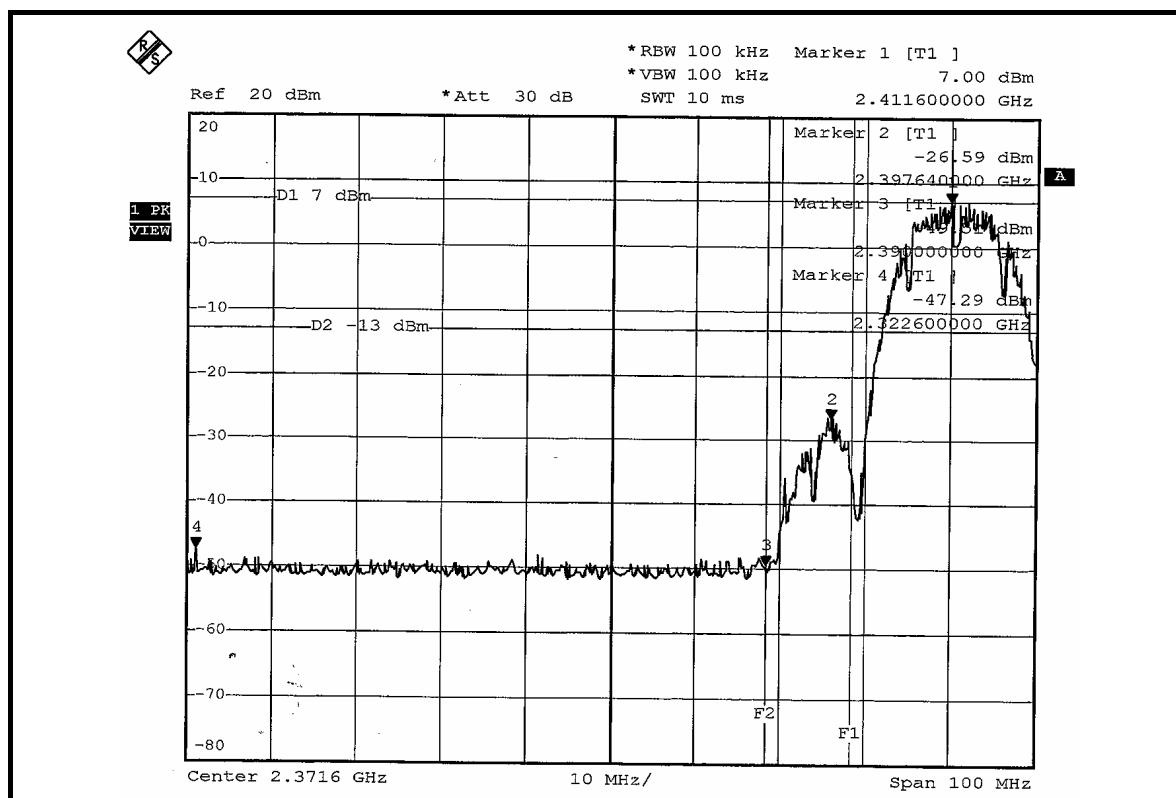

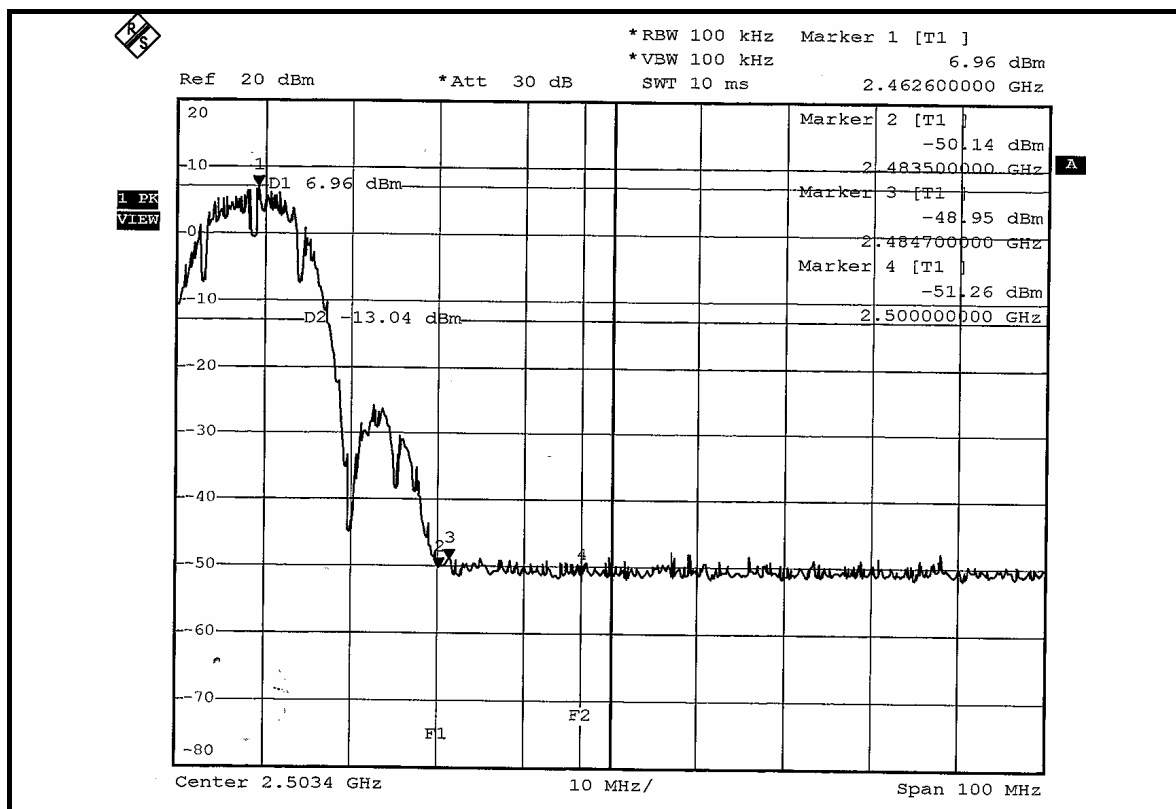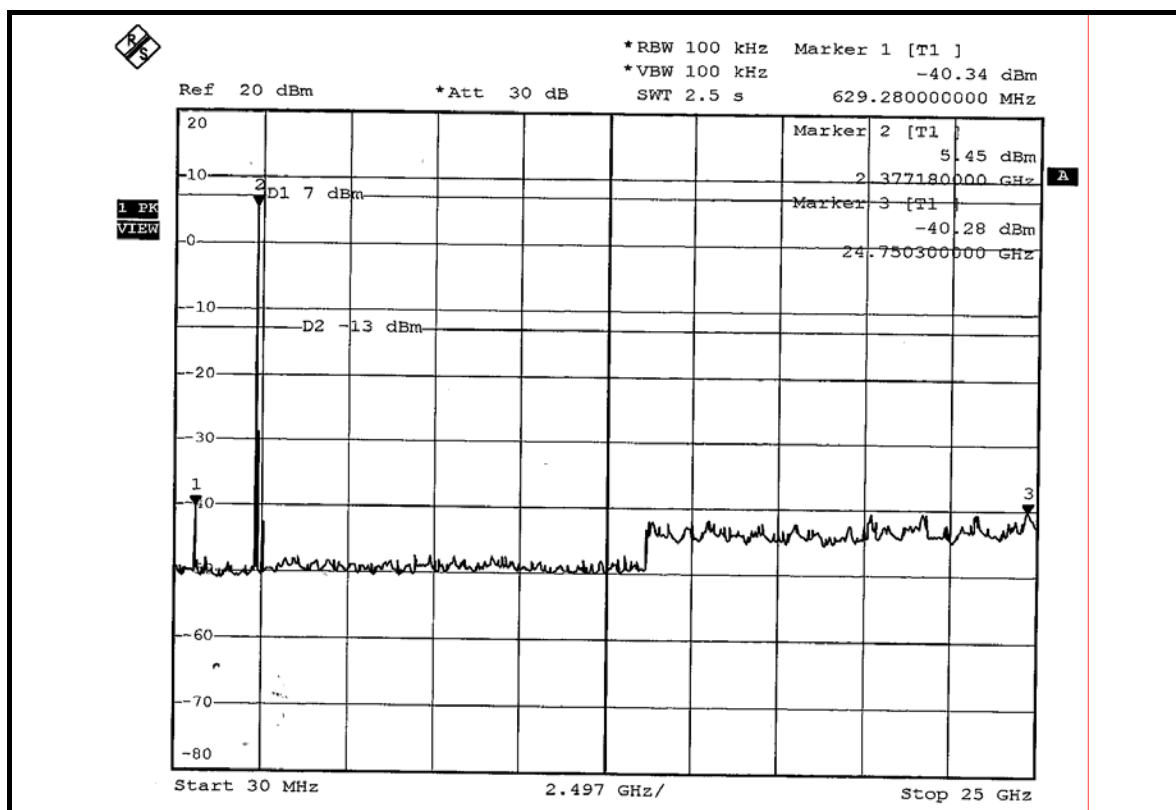

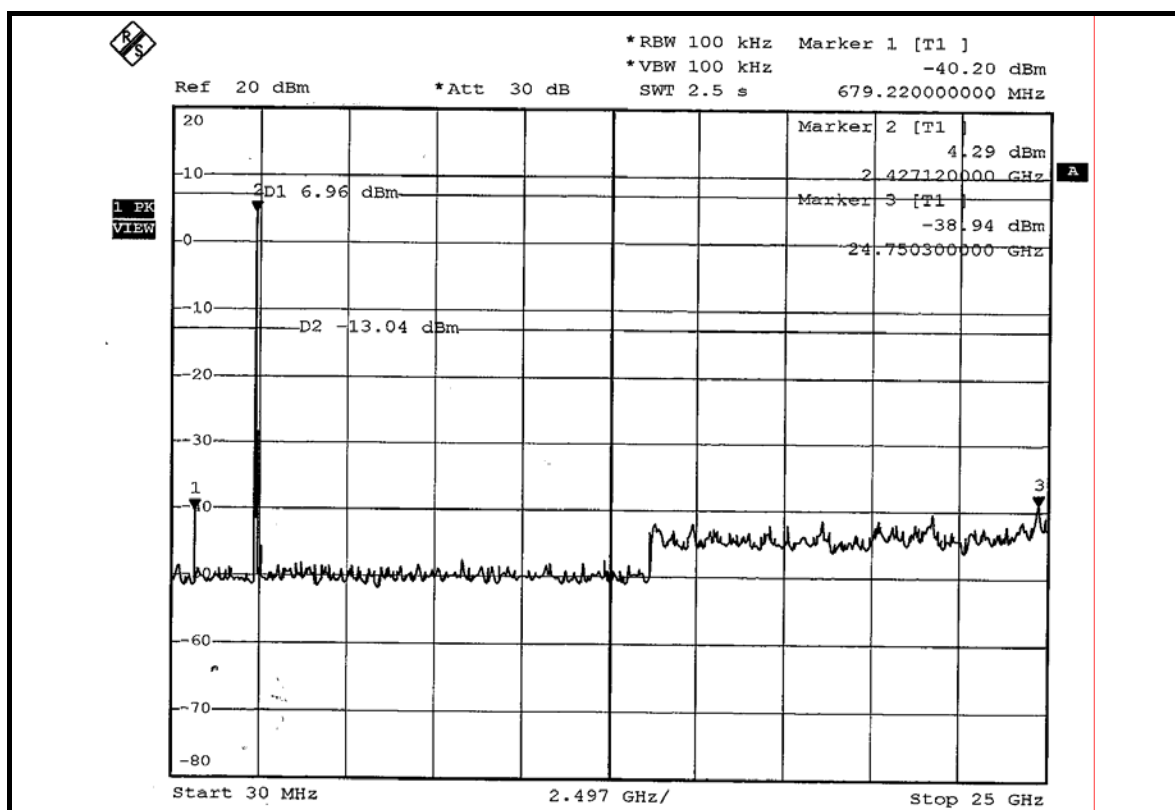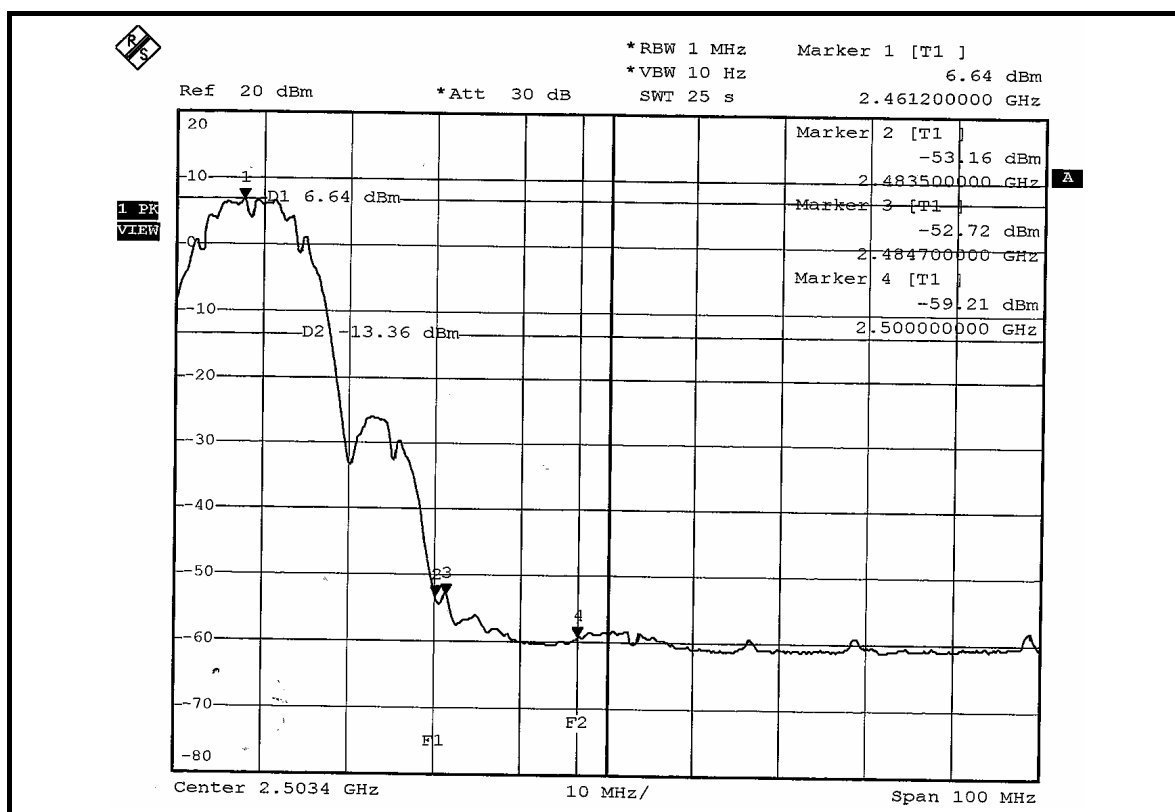



802.11g OFDM modulation



NOTE 1: The band edge emission plot on the next page shows 46.95dBc between carrier maximum power and local maximum emission in restrict band (2.3896GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.43dBuV/m (Peak), so the maximum field strength in restrict band is $110.43 - 46.95 = 63.48\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 48.83dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 100.23dBuV/m (Average), so the maximum field strength in restrict band is $100.23 - 48.83 = 51.40\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 44.06dBc between carrier maximum power and local maximum emission in restrict band (2.4839GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.18dBuV/m (Peak), so the maximum field strength in restrict band is $109.18 - 44.06 = 65.12\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 48.36dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.89dBuV/m (Average), so the maximum field strength in restrict band is $99.89 - 48.36 = 51.53\text{dBuV/m}$ which is under 54dBuV/m limit.

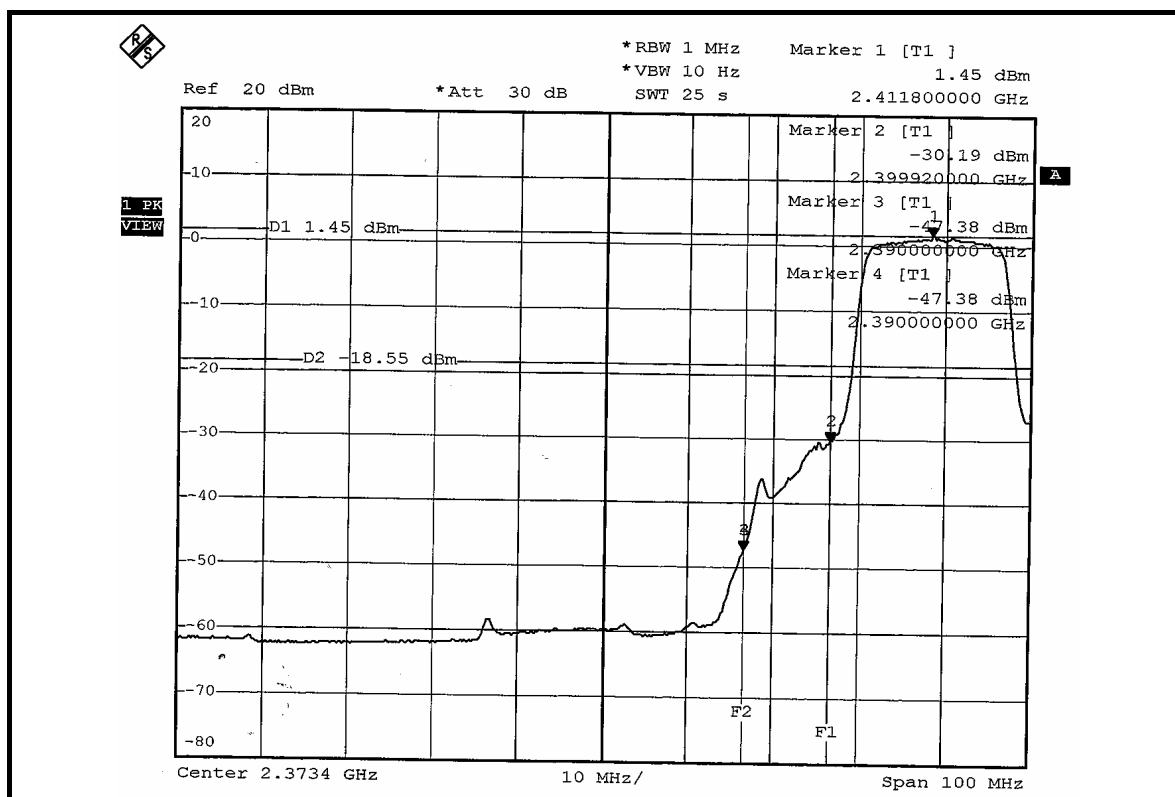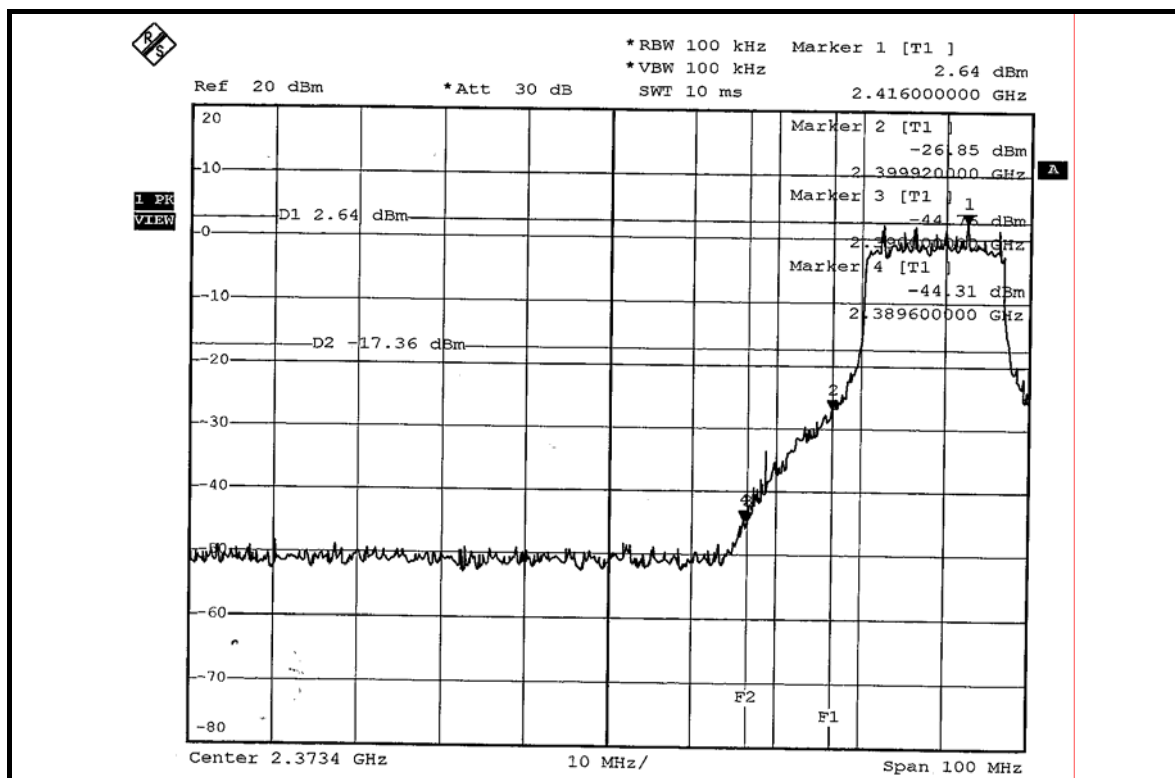

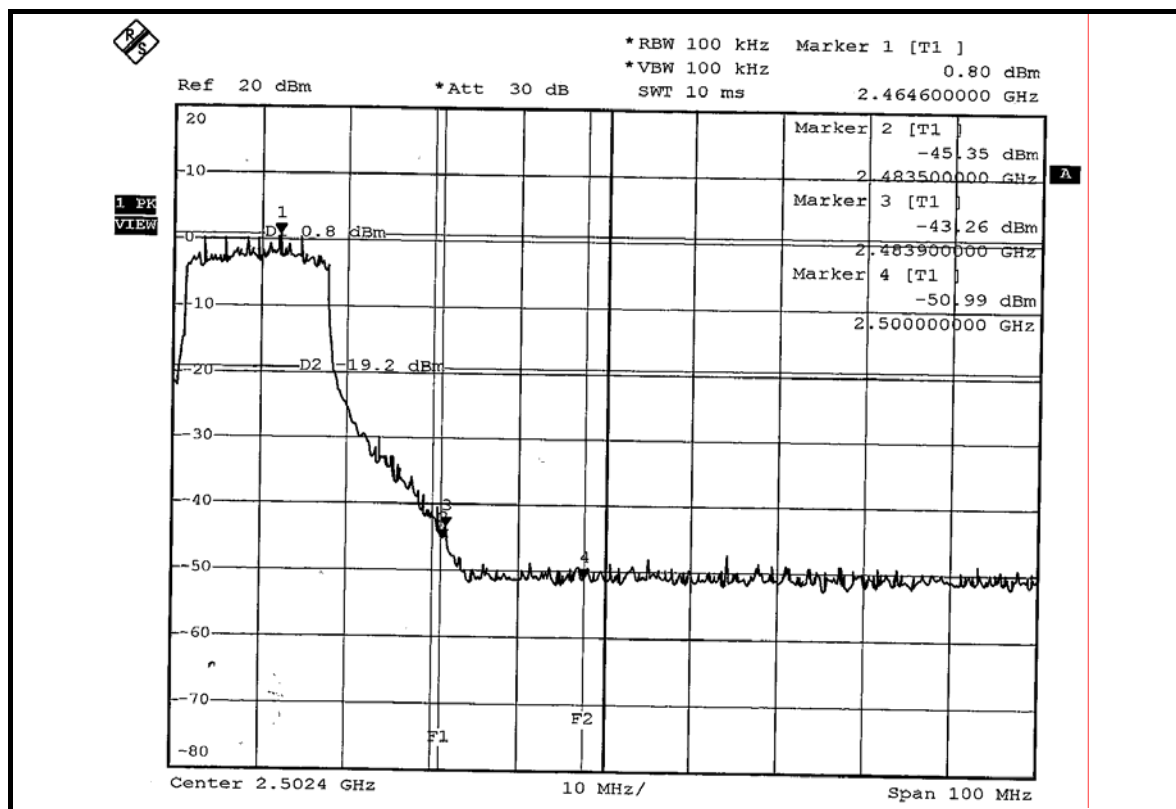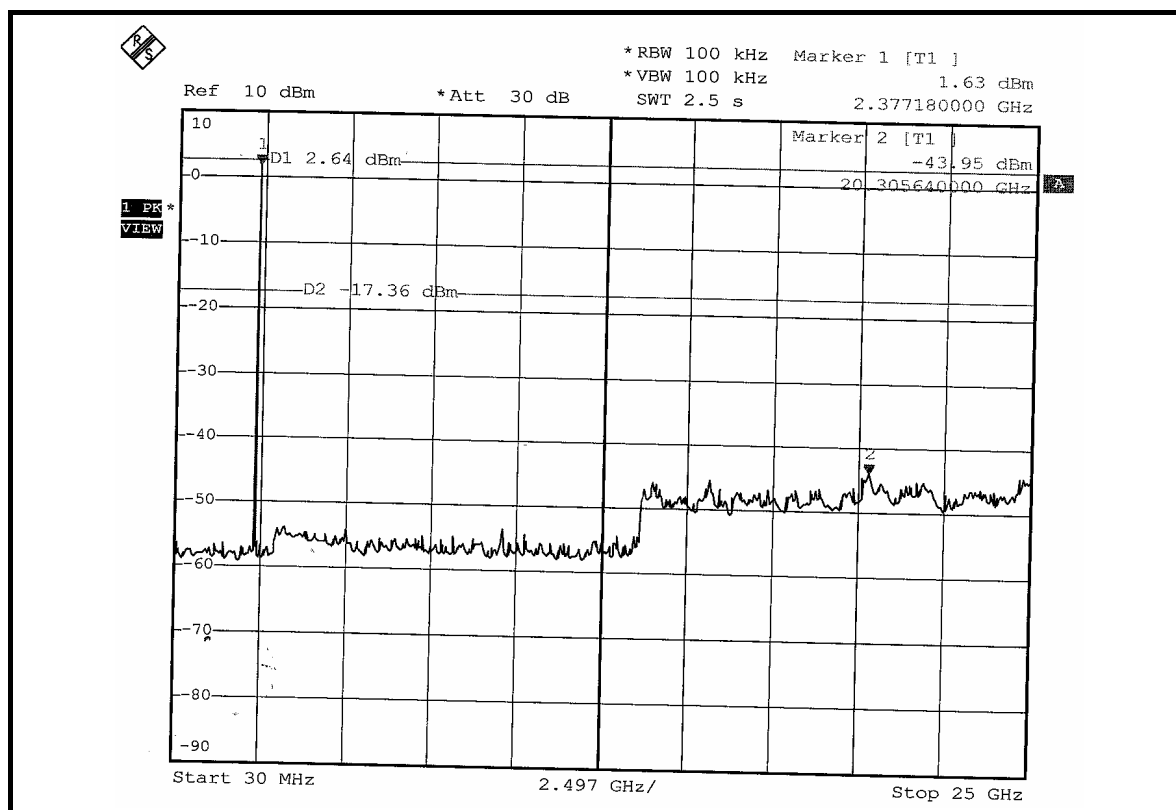

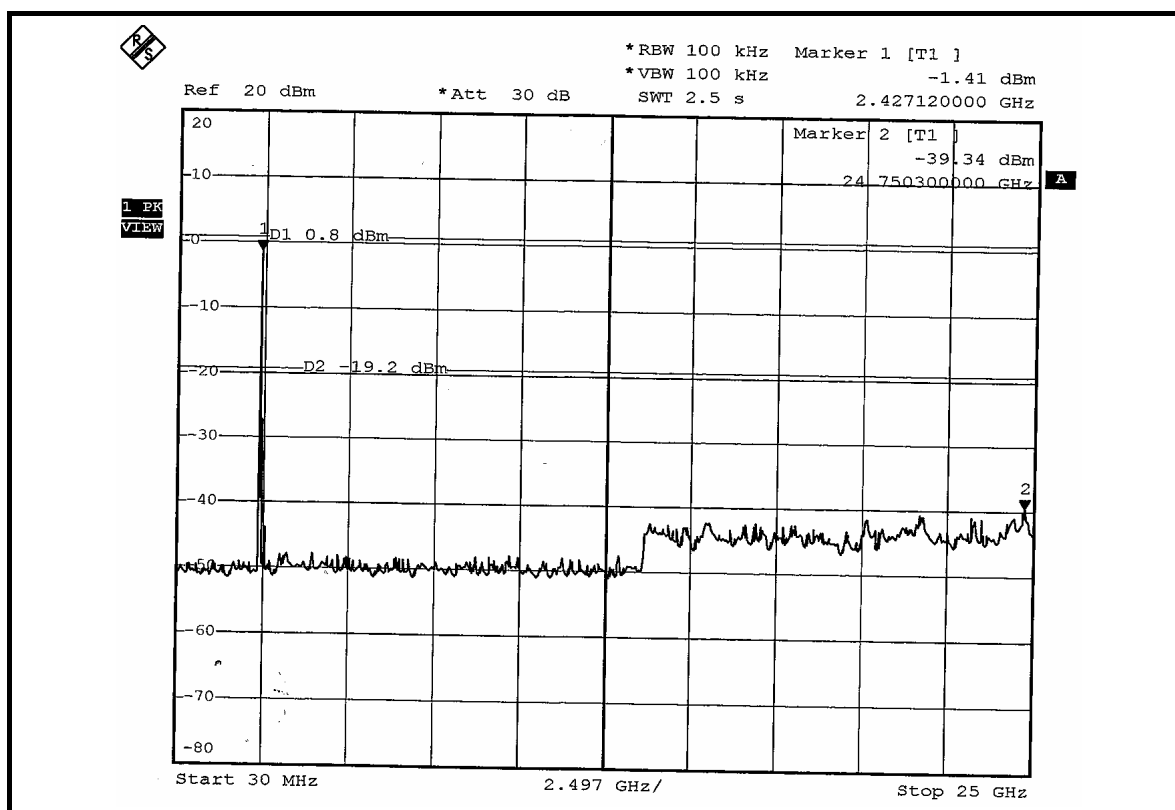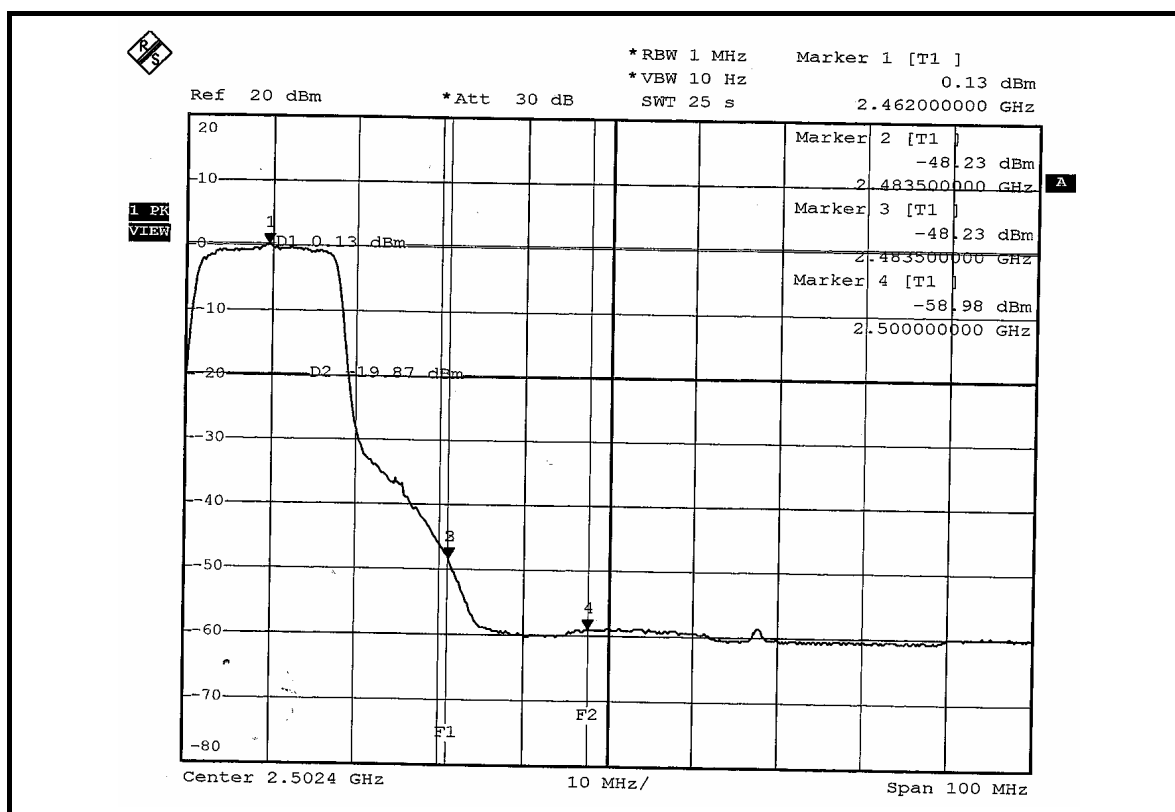

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with RSMA antenna connector. The maximum Gain of the antenna is 2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.