

FCC TEST REPORT

REPORT NO.: RF950801L13
MODEL NO.: WLG-2011
(refer to page 6 for other models)
RECEIVED: Aug. 02, 2006
TESTED: Aug. 02 ~ Aug. 07, 2006
ISSUED: Aug. 08, 2006

APPLICANT : CAMEO COMMUNICATIONS, INC.

ADDRESS : 5F, No. 42, Sec. 6, Mincyuan E. Rd., Neihu District,
Taipei City 114, Taiwan

ISSUED BY : Advance Data Technology Corporation

LAB ADDRESS : No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION : No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 78 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.4	DESCRIPTION OF SUPPORT UNITS	12
4	TEST TYPES AND RESULTS.....	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES.....	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP.....	15
4.1.6	EUT OPERATING CONDITIONS.....	15
4.1.7	TEST RESULTS.....	16
4.2	RADIATED EMISSION MEASUREMENT	32
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	32
4.2.2	TEST INSTRUMENTS	33
4.2.3	TEST PROCEDURES.....	34
4.2.4	DEVIATION FROM TEST STANDARD	34
4.2.5	TEST SETUP.....	35
4.2.6	EUT OPERATING CONDITIONS.....	35
4.2.7	TEST RESULTS.....	36
4.3	6dB BANDWIDTH MEASUREMENT	47
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	47
4.3.2	TEST INSTRUMENTS	47
4.3.3	TEST PROCEDURE	47
4.3.4	DEVIATION FROM TEST STANDARD	47
4.3.5	TEST SETUP.....	48
4.3.6	EUT OPERATING CONDITIONS.....	48
4.3.7	TEST RESULTS.....	49
4.4	MAXIMUM PEAK OUTPUT POWER	54
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	54
4.4.2	TEST INSTRUMENTS	54
4.4.3	TEST PROCEDURES.....	55
4.4.4	DEVIATION FROM TEST STANDARD	55
4.4.5	TEST SETUP.....	55
4.4.6	EUT OPERATING CONDITIONS.....	55

4.4.7	TEST RESULTS.....	56
4.5	POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.2	TEST INSTRUMENTS	57
4.5.3	TEST PROCEDURE	57
4.5.4	DEVIATION FROM TEST STANDARD	57
4.5.5	TEST SETUP	57
4.5.6	EUT OPERATING CONDITIONS	57
4.5.7	TEST RESULTS.....	58
4.6	BAND EDGES MEASUREMENT	63
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	63
4.6.2	TEST INSTRUMENTS	63
4.6.3	TEST PROCEDURE	63
4.6.4	DEVIATION FROM TEST STANDARD	63
4.6.5	EUT OPERATING CONDITION	63
4.6.6	TEST RESULTS.....	64
4.7	ANTENNA REQUIREMENT	76
4.7.1	STANDARD APPLICABLE	76
4.7.2	ANTENNA CONNECTED CONSTRUCTION	76
5	INFORMATION ON THE TESTING LABORATORIES	77
	APPENDIX-A	A-1

1 CERTIFICATION

PRODUCT: 108Mbps Super-G™ Wireless LAN Access Point

MODEL: WLG-2011 (refer to page 6 for other models)

BRAND: CAMEO (refer to page 6 for other brands)

APPLICANT: CAMEO COMMUNICATIONS, INC.

TESTED: Aug. 02 ~ Aug. 07, 2006

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jessie Wang , **DATE:** Aug. 08, 2006

Jessie Wang

**TECHNICAL
ACCEPTANCE** : Long Chen , **DATE:** Aug. 08, 2006

Responsible for RF

Long Chen

APPROVED BY : Gary Chang , **DATE:** Aug. 08, 2006

Gary Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.07dB at 0.181MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.74dB at 2390.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.64 dB
	200MHz ~ 1000MHz	3.65 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	108Mbps Super-G™ Wireless LAN Access Point
MODEL NO.	WLG-2011 (refer to note 1 for other models)
FCC ID	NHPWLG2011
POWER SUPPLY	5Vdc or 7.5Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (up to 108Mbps for turbo mode)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for Normal mode / 1 for Turbo mode
MAXIMUM OUTPUT POWER	84.528mW
ANTENNA TYPE	Dipole antenna with 2.10dBi gain Printed antenna with 0dBi gain (for receiver only)
DATA CABLE	NA
I/O PORTS	RJ45

NOTE:

- The models are identical as below to each other except for their model designation and brand name due to marketing requirement.

Brand	Model	Brand	Model
CAMEO	WLG-2011	Linktek	ET-WNA-0103R
Planet	WAP-4000	Linkpro	WLG-108AAP2B
X-net	WGTLAPBG	Eusso	UGL2454-APXR
Atlantisland	A02-WAP-54G	Infosmart	INAP88GA
ALLNET	ALL0285A	Encore	ENRXWI-SG
Level One	WAP-0003	TRENDware	TEW-450APB

- The EUT was powered by the following adapters:

Adapter 1	
BRAND:	JENTEC TECHNOLOGY CO., LTD
MODEL:	JTA0302D
INPUT:	100-240Vac, 0.5A, 50-60Hz
OUTPUT:	5.0Vdc, 2A
POWER LINE:	1.8m non-shielded cable without core

Adapter 2	
BRAND:	DVE
MODEL:	DV-0751AS
INPUT:	120Vac, 60Hz, 16W
OUTPUT:	7.5Vdc, 1A
POWER LINE:	1.8m non-shielded cable without core

3. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
4. This EUT is capable of providing data rates of up to 108Mbps in Turbo Mode depending upon reception quality.
5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES


For 802.11b/g: 11 channels are provided to this EUT for normal mode.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

For 802.11g: One channel is provided to this EUT for turbo mode.

CHANNEL	FREQUENCY
6	2437 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

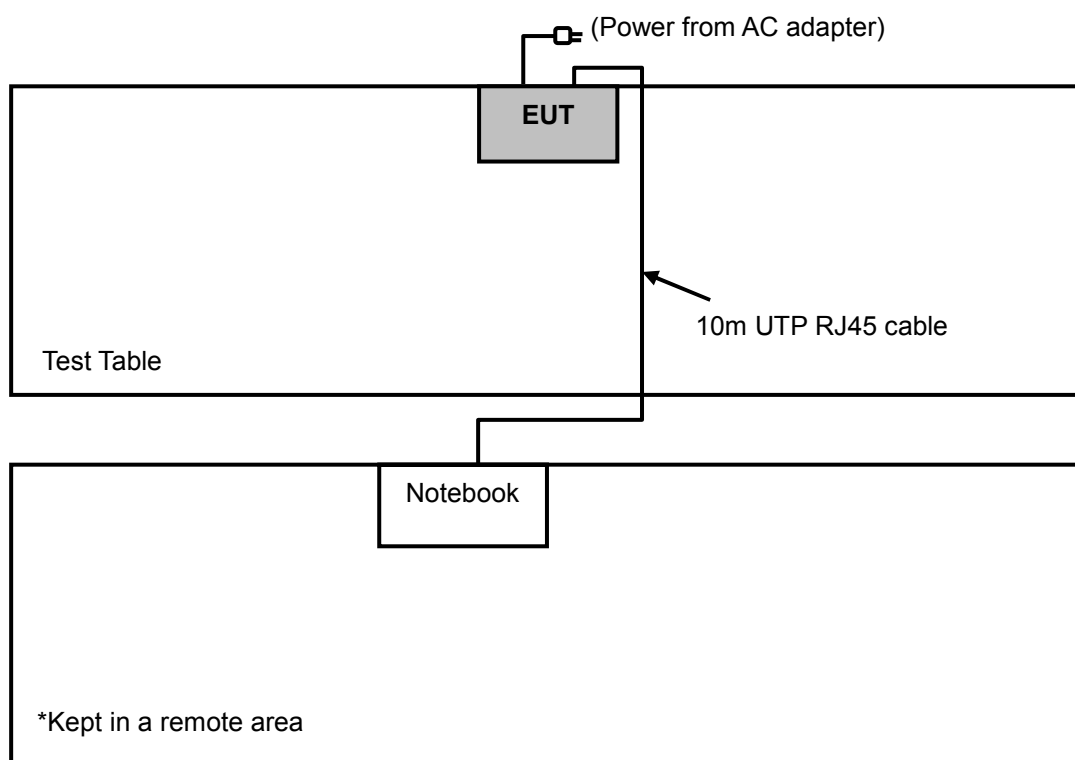

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT Configure Mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Adapter model: JTA0302D
B	√	√	-	-	Adapter model: DV-0751AS

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: “-” means no effect

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	QPSK	12
B	802.11g Turbo	6	6	OFDM	QPSK	12

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	11	OFDM	BPSK	6
B	802.11g	1 to 11	11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	QPSK	12
B	802.11g Turbo	6	6	OFDM	QPSK	12

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	QPSK	12

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	QPSK	12

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	QPSK	12

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE 1: All power cords of the above support units are non shielded (1.8m).

2: Item 1 acted as a communication partner to transfer data.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 02, 2006
RF signal cable Woken	5D-FB	Cable-HYCO3-0 1	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 22, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

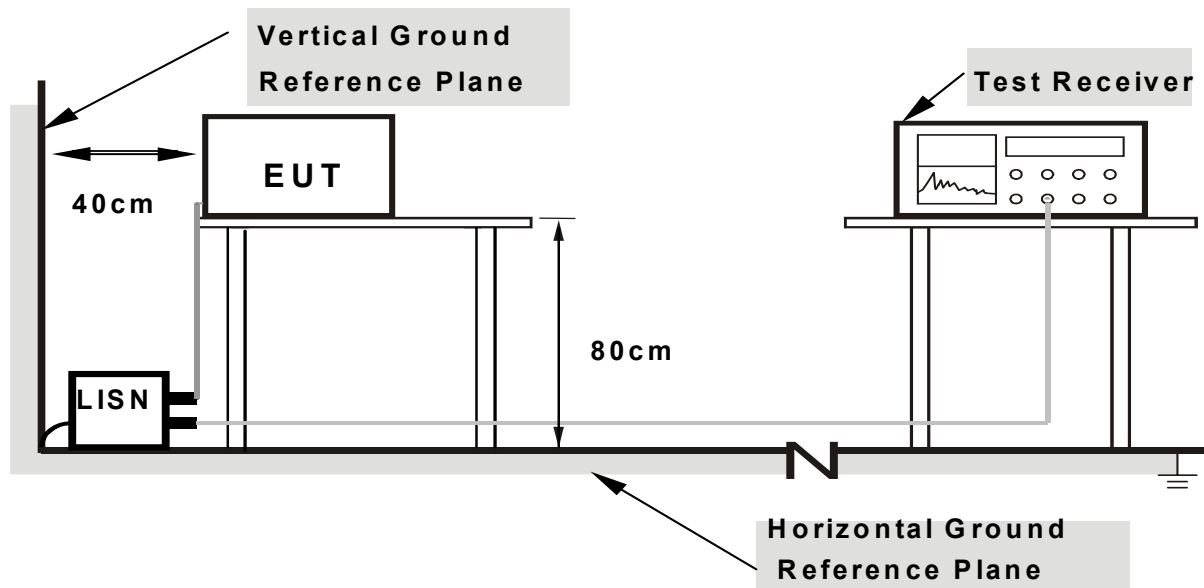

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another notebook system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency via an RJ45 cable.
- d. The communication partner sent data to EUT by command "PING".
- e. The notebook system sent "H" messages to its screen.
- f. Steps e were repeated.

4.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA_NORMAL MODE

ADAPTER MODEL: JTA0302D

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	54.36	44.86	54.46	44.96	64.43	54.43	-9.97	-9.47
2	0.240	0.10	45.37	-	45.47	-	62.10	52.10	-16.63	-
3	0.361	0.10	38.41	-	38.51	-	58.71	48.71	-20.20	-
4	1.992	0.10	36.20	-	36.30	-	56.00	46.00	-19.70	-
5	2.717	0.20	38.26	-	38.46	-	56.00	46.00	-17.54	-
6	16.230	0.91	24.61	-	25.52	-	60.00	50.00	-34.48	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

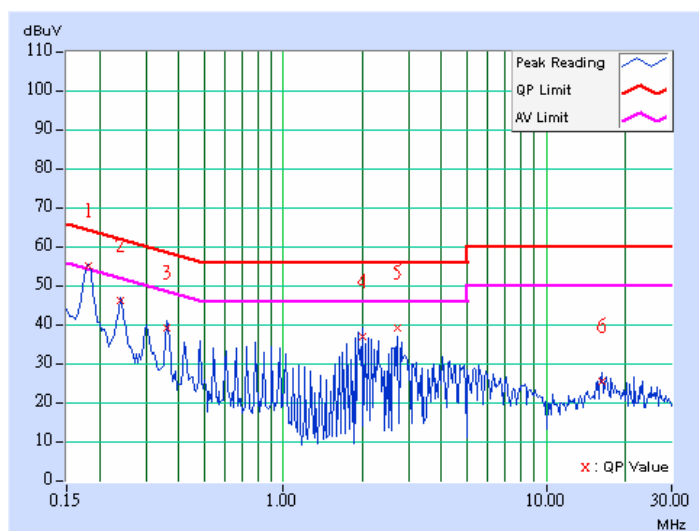

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	55.27	46.26	55.37	46.36	64.43	54.43	-9.06	-8.07
2	0.240	0.10	47.24	-	47.34	-	62.10	52.10	-14.76	-
3	0.361	0.10	41.03	-	41.13	-	58.71	48.71	-17.58	-
4	2.108	0.11	37.49	-	37.60	-	56.00	46.00	-18.40	-
5	2.711	0.20	38.11	-	38.31	-	56.00	46.00	-17.69	-
6	18.245	0.72	24.94	-	25.66	-	60.00	50.00	-34.34	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

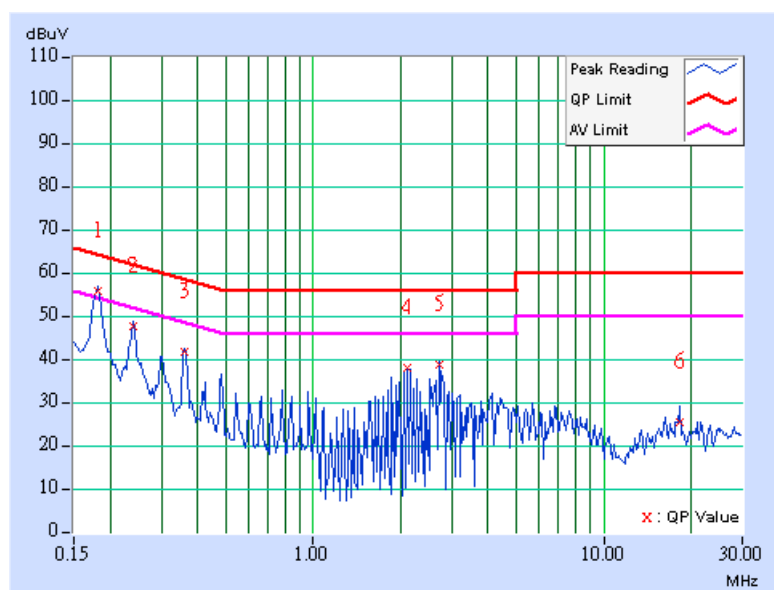

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	53.23	-	53.33	-	64.43	54.43	-11.10	-
2	0.244	0.10	44.52	-	44.62	-	61.97	51.97	-17.35	-
3	0.365	0.10	39.23	-	39.33	-	58.62	48.62	-19.29	-
4	2.063	0.11	38.78	-	38.89	-	56.00	46.00	-17.11	-
5	2.730	0.20	37.32	-	37.52	-	56.00	46.00	-18.48	-
6	16.230	0.91	24.57	-	25.48	-	60.00	50.00	-34.52	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

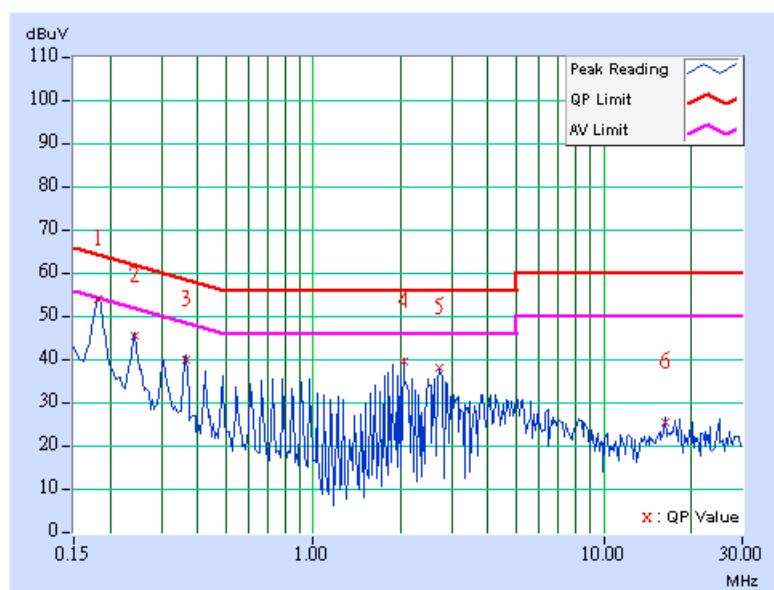

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	54.16	-	54.26	-	64.43	54.43	-10.17	-
2	0.244	0.10	45.83	-	45.93	-	61.97	51.97	-16.04	-
3	0.365	0.10	41.03	-	41.13	-	58.62	48.62	-17.49	-
4	2.061	0.11	37.97	-	38.08	-	56.00	46.00	-17.92	-
5	2.665	0.19	38.18	-	38.37	-	56.00	46.00	-17.63	-
6	16.230	0.79	24.73	-	25.52	-	60.00	50.00	-34.48	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

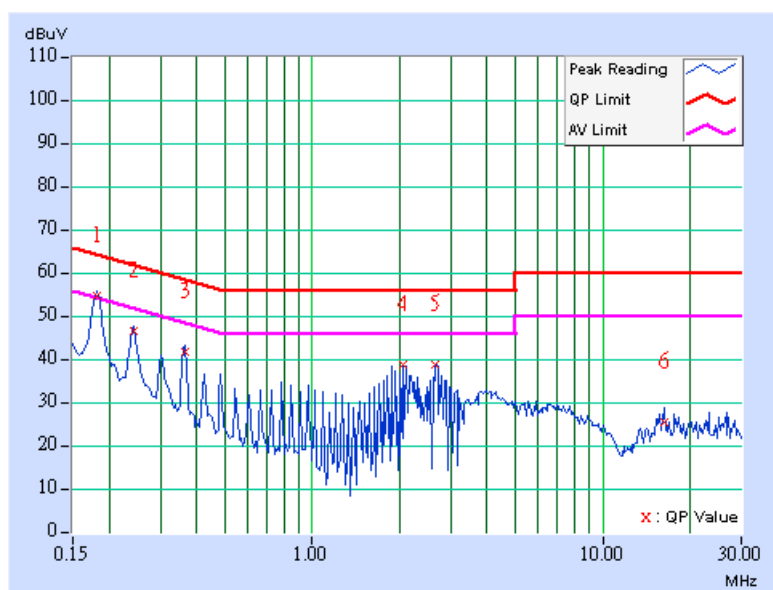

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	52.44	-	52.54	-	64.43	54.43	-11.89	-
2	0.244	0.10	44.24	-	44.34	-	61.97	51.97	-17.63	-
3	0.365	0.10	39.74	-	39.84	-	58.62	48.62	-18.78	-
4	2.066	0.11	36.05	-	36.16	-	56.00	46.00	-19.84	-
5	2.680	0.19	38.95	-	39.14	-	56.00	46.00	-16.86	-
6	16.230	0.91	24.51	-	25.42	-	60.00	50.00	-34.58	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

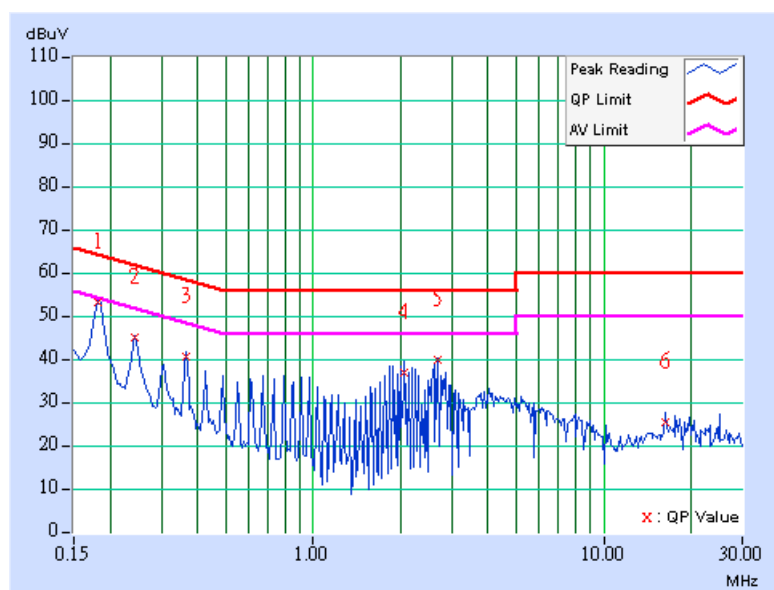

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	53.52	-	53.62	-	64.43	54.43	-10.81	-
2	0.244	0.10	45.67	-	45.77	-	61.97	51.97	-16.20	-
3	0.365	0.10	41.69	-	41.79	-	58.62	48.62	-16.83	-
4	2.066	0.11	38.60	-	38.71	-	56.00	46.00	-17.29	-
5	2.672	0.19	36.60	-	36.79	-	56.00	46.00	-19.21	-
6	16.229	0.79	25.30	-	26.09	-	60.00	50.00	-33.91	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

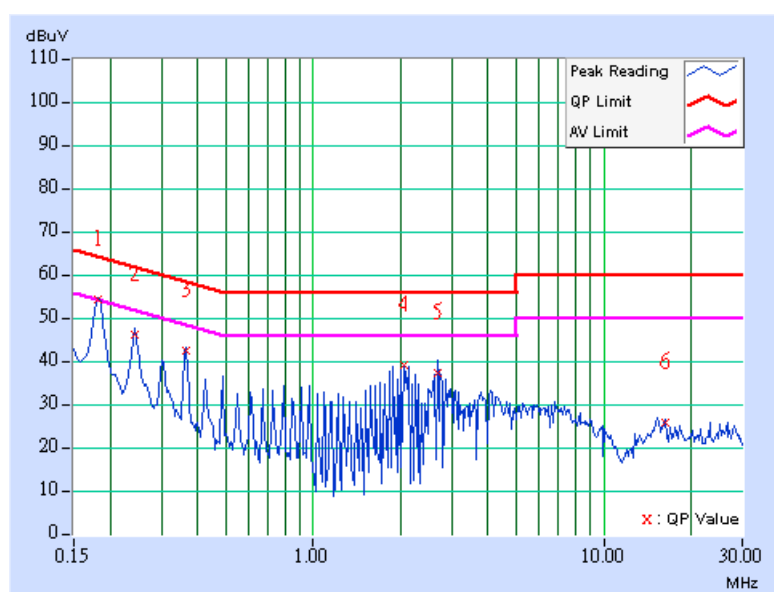


ADAPTER MODEL: DV-0751AS

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.10	40.94	-	41.04	-	62.66	52.66	-21.62	-
2	0.349	0.10	36.64	-	36.74	-	58.98	48.98	-22.24	-
3	0.521	0.10	35.14	-	35.24	-	56.00	46.00	-20.76	-
4	0.908	0.10	23.29	-	23.39	-	56.00	46.00	-32.61	-
5	1.141	0.11	22.34	-	22.45	-	56.00	46.00	-33.55	-
6	24.046	0.86	10.05	-	10.91	-	60.00	50.00	-49.09	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

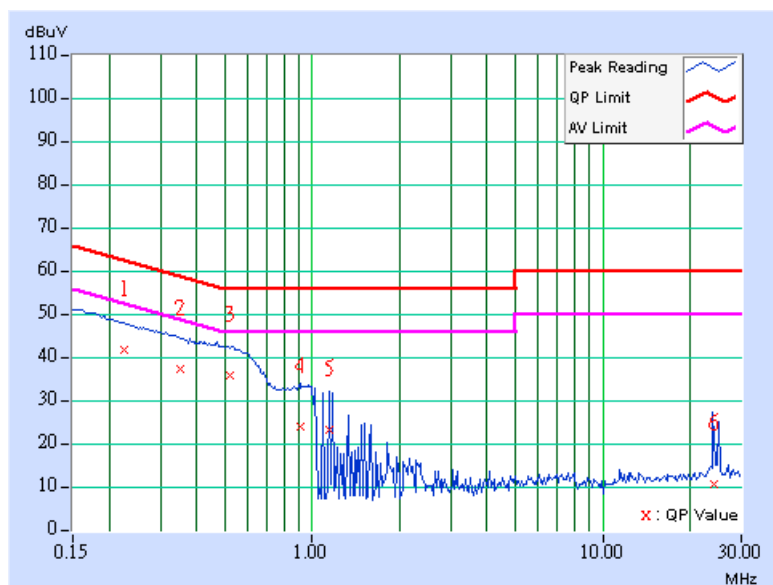

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.10	41.47	-	41.57	-	63.11	53.11	-21.54	-
2	0.361	0.10	36.57	-	36.67	-	58.71	48.71	-22.04	-
3	0.545	0.12	34.71	-	34.83	-	56.00	46.00	-21.17	-
4	1.140	0.20	20.55	-	20.75	-	56.00	46.00	-35.25	-
5	1.508	0.20	15.47	-	15.67	-	56.00	46.00	-40.33	-
6	23.547	0.75	7.81	-	8.56	-	60.00	50.00	-51.44	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

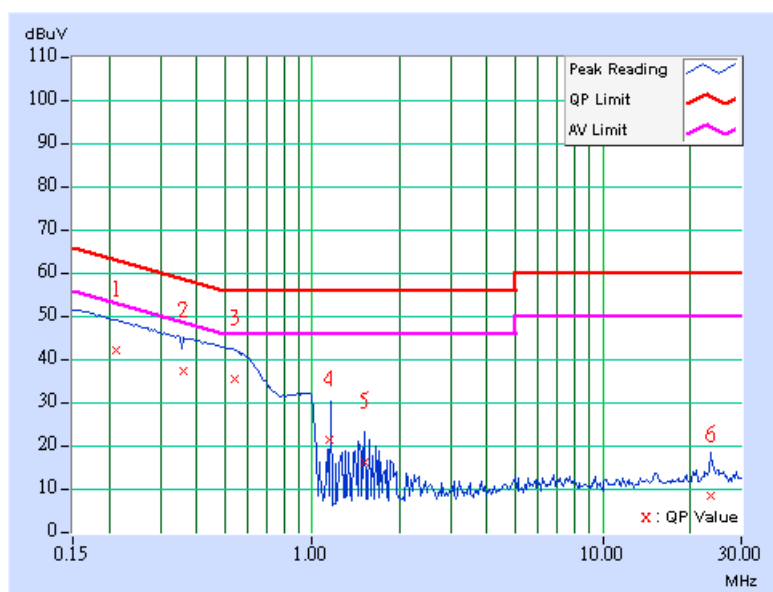

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	43.02	-	43.12	-	64.79	54.79	-21.67	-
2	0.291	0.10	38.07	-	38.17	-	60.51	50.51	-22.34	-
3	0.547	0.10	34.75	-	34.85	-	56.00	46.00	-21.15	-
4	0.989	0.10	23.39	-	23.49	-	56.00	46.00	-32.51	-
5	1.208	0.12	21.31	-	21.43	-	56.00	46.00	-34.57	-
6	23.952	0.85	5.69	-	6.54	-	60.00	50.00	-53.46	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

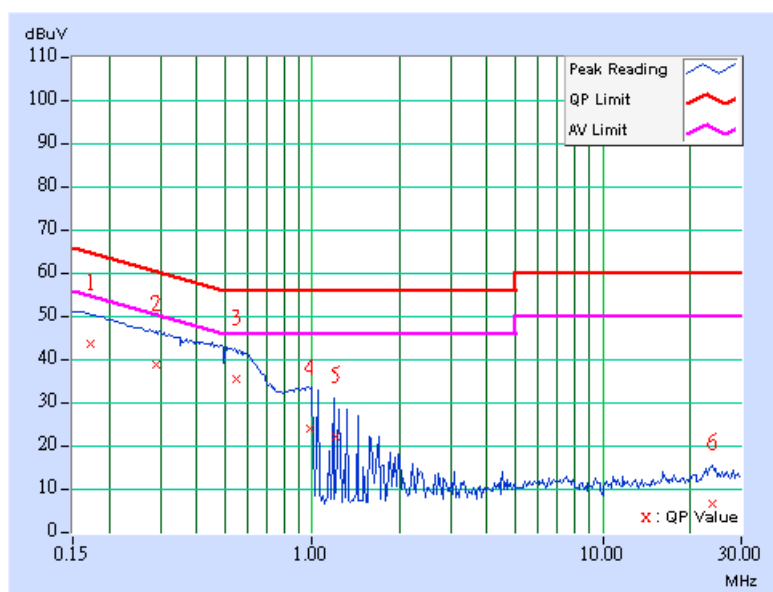

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.190	0.10	42.23	-	42.33	-	64.03	54.03	-21.70	-
2	0.353	0.10	36.64	-	36.74	-	58.89	48.89	-22.15	-
3	0.545	0.12	34.69	-	34.81	-	56.00	46.00	-21.19	-
4	0.987	0.20	21.96	-	22.16	-	56.00	46.00	-33.84	-
5	1.137	0.20	20.51	-	20.71	-	56.00	46.00	-35.29	-
6	23.129	0.73	11.26	-	11.99	-	60.00	50.00	-48.01	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

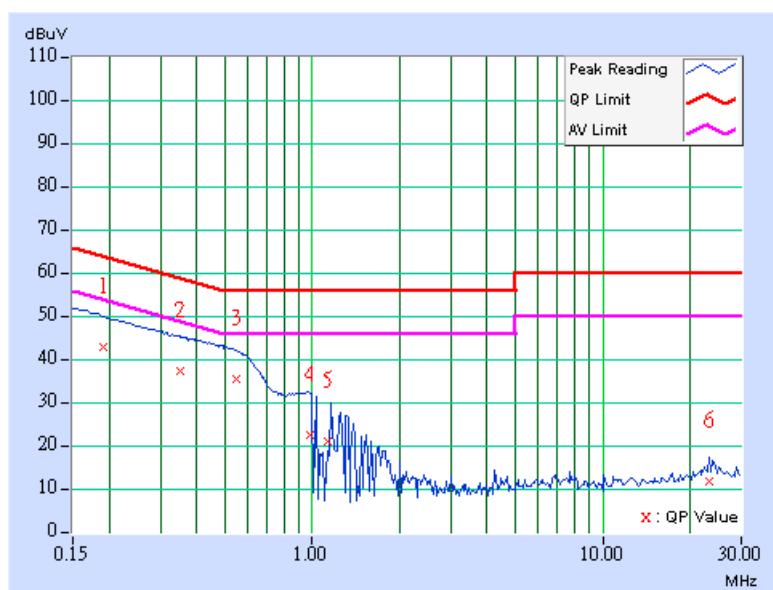

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	42.39	-	42.49	-	64.43	54.43	-21.94	-
2	0.271	0.10	39.12	-	39.22	-	61.08	51.08	-21.86	-
3	0.546	0.10	32.92	-	33.02	-	56.00	46.00	-22.98	-
4	0.986	0.10	24.28	-	24.38	-	56.00	46.00	-31.62	-
5	1.168	0.12	22.57	-	22.69	-	56.00	46.00	-33.31	-
6	23.129	0.79	9.60	-	10.39	-	60.00	50.00	-49.61	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

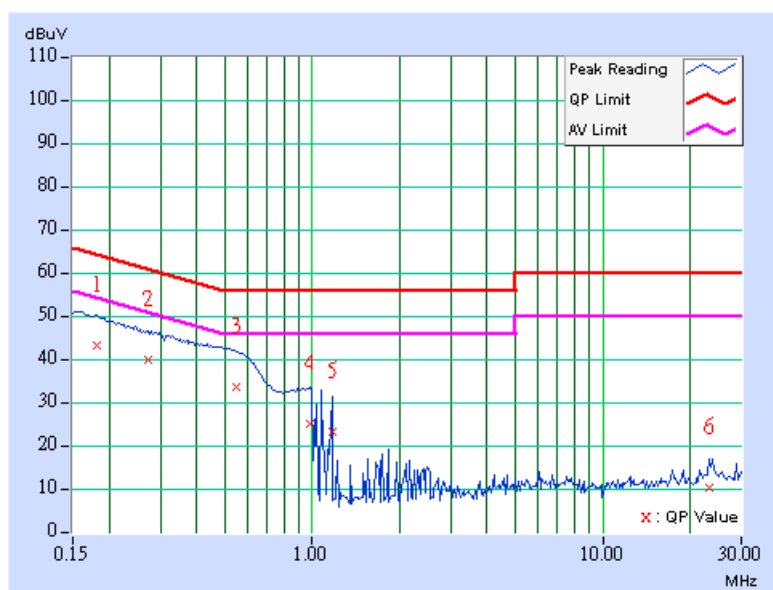

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.190	0.10	42.91	-	43.01	-	64.03	54.03	-21.02	-
2	0.308	0.10	38.12	-	38.22	-	60.03	50.03	-21.81	-
3	0.546	0.12	34.69	-	34.81	-	56.00	46.00	-21.19	-
4	0.974	0.20	22.08	-	22.28	-	56.00	46.00	-33.72	-
5	1.276	0.20	17.72	-	17.92	-	56.00	46.00	-38.08	-
6	25.000	0.83	8.22	-	9.05	-	60.00	50.00	-50.95	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

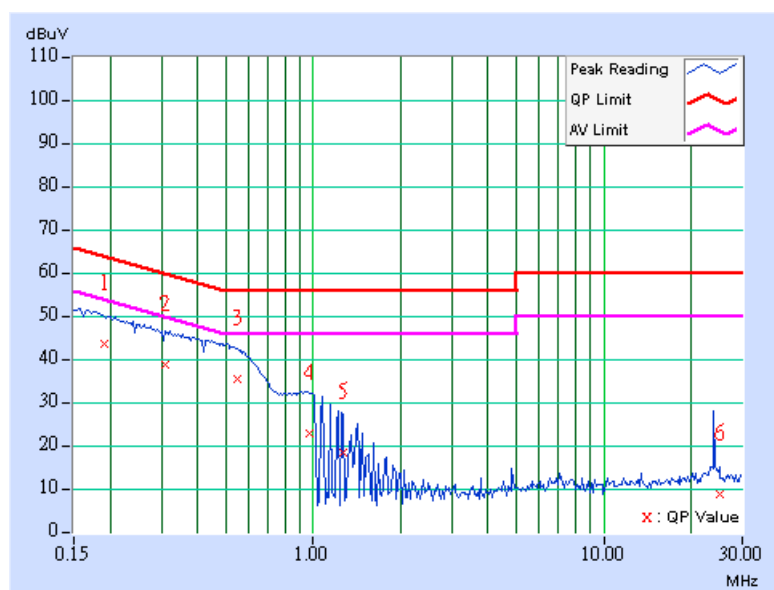


CONDUCTED WORST-CASE DATA_TURBO MODE

ADAPTER MODEL: JTA0302D

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	51.98	-	52.08	-	64.43	54.43	-12.35	-
2	0.244	0.10	44.08	-	44.18	-	61.97	51.97	-17.79	-
3	0.369	0.10	38.40	-	38.50	-	58.53	48.53	-20.03	-
4	2.012	0.10	38.82	-	38.92	-	56.00	46.00	-17.08	-
5	2.682	0.19	38.99	-	39.18	-	56.00	46.00	-16.82	-
6	16.230	0.91	25.36	-	26.27	-	60.00	50.00	-33.73	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

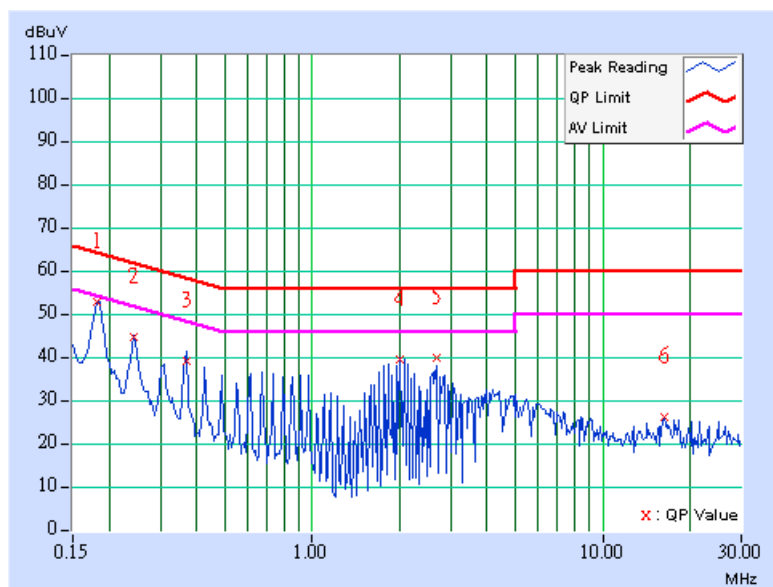

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	52.83	-	52.93	-	64.43	54.43	-11.50	-
2	0.244	0.10	45.51	-	45.61	-	61.97	51.97	-16.36	-
3	0.365	0.10	41.79	-	41.89	-	58.62	48.62	-16.73	-
4	2.070	0.11	38.17	-	38.28	-	56.00	46.00	-17.72	-
5	2.680	0.19	38.22	-	38.41	-	56.00	46.00	-17.59	-
6	16.168	0.79	23.88	-	24.67	-	60.00	50.00	-35.33	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

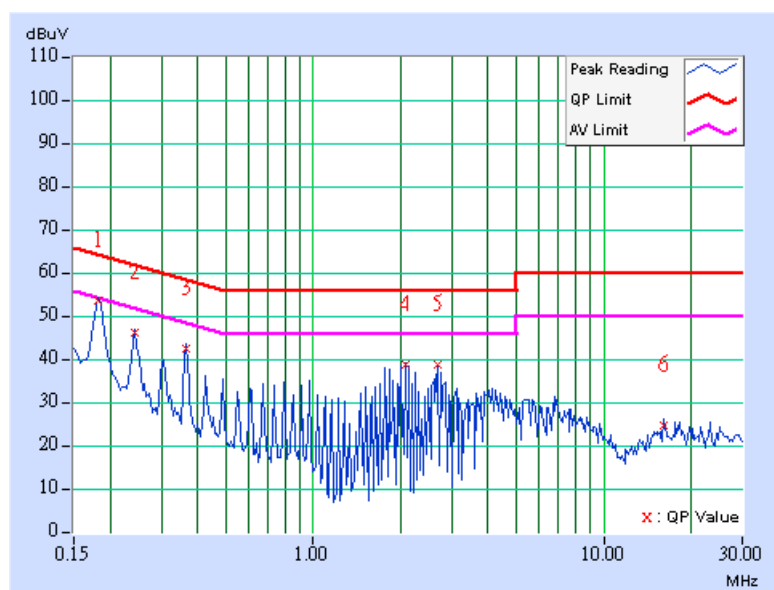


ADAPTER MODEL: DV-0751AS

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	42.43	-	42.53	-	64.08	54.08	-21.55	-
2	0.365	0.10	36.43	-	36.53	-	58.62	48.62	-22.09	-
3	0.605	0.10	32.95	-	33.05	-	56.00	46.00	-22.95	-
4	0.990	0.10	24.13	-	24.23	-	56.00	46.00	-31.77	-
5	1.209	0.12	21.43	-	21.55	-	56.00	46.00	-34.45	-
6	23.129	0.79	11.09	-	11.88	-	60.00	50.00	-48.12	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

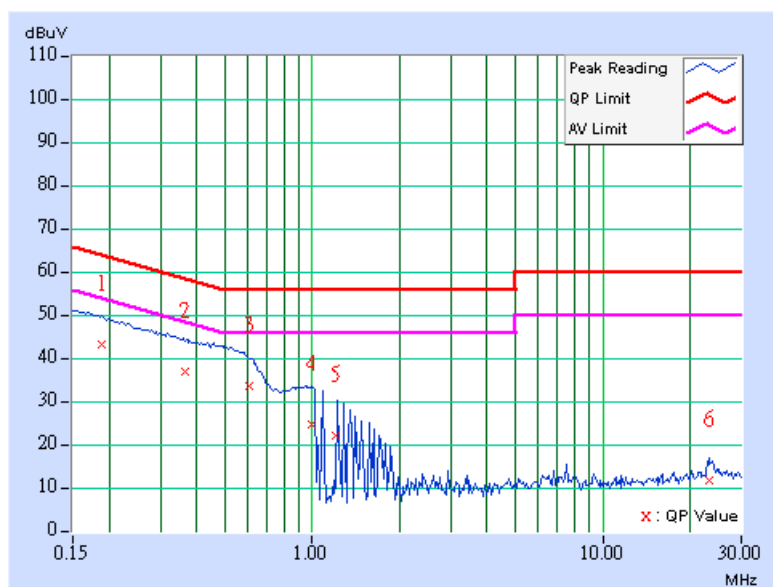

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	42.41	-	42.51	-	64.25	54.25	-21.74	-
2	0.307	0.10	37.82	-	37.92	-	60.06	50.06	-22.14	-
3	0.604	0.13	32.37	-	32.50	-	56.00	46.00	-23.50	-
4	0.986	0.20	21.92	-	22.12	-	56.00	46.00	-33.88	-
5	1.172	0.20	19.73	-	19.93	-	56.00	46.00	-36.07	-
6	23.129	0.73	11.82	-	12.55	-	60.00	50.00	-47.45	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

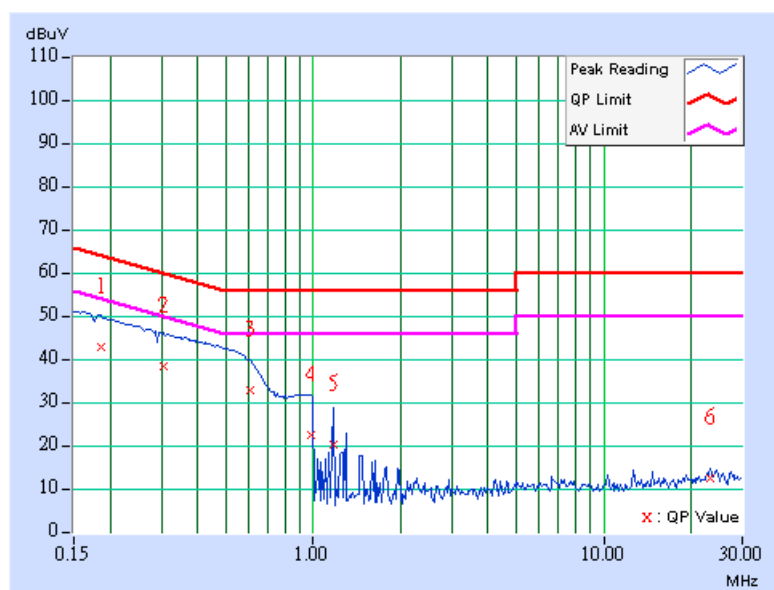

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 20, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 27, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 15, 2007
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 22, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170147	Jan. 26, 2007
Preamplifier Agilent	8449B	3008A01961	Oct. 23, 2006
Preamplifier Agilent	8447D	2944A10629	Oct. 27, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	214380/4	Jan. 16, 2007
RF signal cable HUBER+SUHNER	SUCOFLEX 104	219266/4	Jan. 16, 2007
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

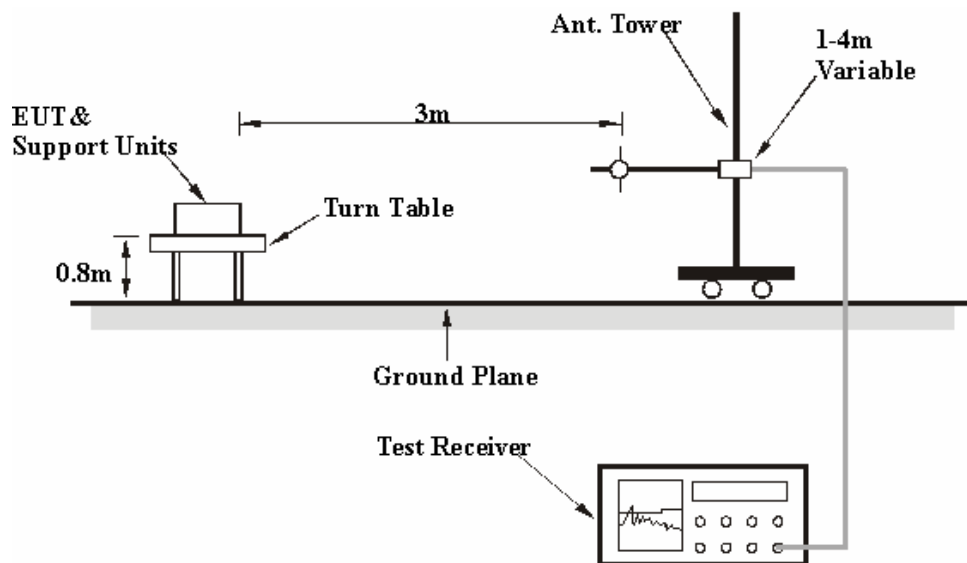

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

RADIATED WORST-CASE DATA: BELOW 1GHz_NORMAL MODE

ADAPTER MODEL: JTA0302D

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	28deg. C, 68%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	123.31	34.92 QP	43.50	-8.58	1.00 H	10	23.68	11.25
2	249.66	40.46 QP	46.00	-5.54	1.50 H	115	28.01	12.45
3	274.93	36.27 QP	46.00	-9.73	2.00 H	100	21.86	14.40
4	374.07	36.89 QP	46.00	-9.11	2.00 H	100	19.81	17.08
5	500.42	39.95 QP	46.00	-6.05	1.50 H	136	19.87	20.07
6	624.83	37.89 QP	46.00	-8.11	2.00 H	286	15.13	22.76
7	879.48	43.12 QP	46.00	-2.88	2.00 H	121	16.21	26.91
8	945.57	42.96 QP	46.00	-3.04	1.00 H	82	13.75	29.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.21	35.05 QP	40.00	-4.95	1.00 V	250	21.28	13.77
2	249.66	34.15 QP	46.00	-11.85	1.00 V	31	21.70	12.45
3	374.07	34.88 QP	46.00	-11.12	1.00 V	10	17.81	17.08
4	500.42	39.12 QP	46.00	-6.88	1.00 V	103	19.05	20.07
5	624.83	35.44 QP	46.00	-10.56	1.00 V	247	12.69	22.76
6	879.48	41.35 QP	46.00	-4.65	1.00 V	208	14.43	26.91
7	945.57	38.41 QP	46.00	-7.59	1.00 V	112	9.20	29.21

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ADAPTER MODEL: DV-0751AS

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	123.31	35.81 QP	43.50	-7.69	2.00 H	61	24.56	11.25
2	249.66	39.51 QP	46.00	-6.49	1.50 H	91	27.06	12.45
3	274.93	37.79 QP	46.00	-8.21	1.00 H	223	23.38	14.40
4	374.07	38.18 QP	46.00	-7.82	1.00 H	100	21.10	17.08
5	500.42	40.72 QP	46.00	-5.28	1.00 H	220	20.64	20.07
6	624.83	35.70 QP	46.00	-10.30	1.50 H	31	12.94	22.76
7	953.35	38.13 QP	46.00	-7.87	1.00 H	100	8.79	29.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.21	37.29 QP	40.00	-2.71	1.00 V	7	23.52	13.77
2	123.31	32.95 QP	43.50	-10.55	1.00 V	7	21.71	11.25
3	249.66	34.78 QP	46.00	-11.22	1.00 V	352	22.32	12.45
4	374.07	38.09 QP	46.00	-7.91	1.00 V	7	21.01	17.08
5	500.42	40.08 QP	46.00	-5.92	1.00 V	310	20.00	20.07
6	624.83	34.50 QP	46.00	-11.50	1.00 V	190	11.75	22.76
7	949.46	38.69 QP	46.00	-7.31	1.00 V	346	9.30	29.39

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

RADIATED WORST-CASE DATA: BELOW 1GHz_TURBO MODE

ADAPTER MODEL: JTA0302D

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	28deg. C, 68%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.21	27.30 QP	40.00	-12.70	1.00 H	1	13.53	13.77
2	123.31	34.74 QP	43.50	-8.76	1.00 H	1	23.49	11.25
3	148.58	30.18 QP	43.50	-13.32	1.00 H	10	16.75	13.43
4	249.66	39.87 QP	46.00	-6.13	2.00 H	40	27.42	12.45
5	274.93	32.56 QP	46.00	-13.44	1.50 H	121	18.16	14.40
6	374.07	35.79 QP	46.00	-10.21	1.50 H	121	18.71	17.08
7	500.42	40.84 QP	46.00	-5.16	1.00 H	325	20.76	20.07
8	624.83	37.61 QP	46.00	-8.39	2.50 H	223	14.85	22.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.05	31.16 QP	40.00	-8.84	1.00 V	184	18.15	13.01
2	123.31	34.33 QP	43.50	-9.17	1.00 V	340	23.08	11.25
3	249.66	34.46 QP	46.00	-11.54	1.00 V	298	22.01	12.45
4	374.07	36.78 QP	46.00	-9.22	1.00 V	328	19.70	17.08
5	500.42	38.33 QP	46.00	-7.67	1.00 V	199	18.26	20.07
6	624.83	35.70 QP	46.00	-10.30	1.00 V	184	12.95	22.76
7	875.59	30.48 QP	46.00	-15.52	1.00 V	10	3.60	26.88
8	955.29	30.34 QP	46.00	-15.66	1.00 V	319	1.04	29.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ADAPTER MODEL: DV-0751AS

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	123.31	36.13 QP	43.50	-7.37	1.00 H	10	24.88	11.25
2	249.66	38.45 QP	46.00	-7.55	2.50 H	25	25.99	12.45
3	374.07	38.51 QP	46.00	-7.49	1.50 H	103	21.44	17.08
4	500.42	39.56 QP	46.00	-6.44	1.00 H	247	19.48	20.07
5	624.83	36.91 QP	46.00	-9.09	2.00 H	286	14.16	22.76
6	949.46	36.71 QP	46.00	-9.29	1.50 H	139	7.32	29.39

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.21	36.25 QP	40.00	-3.75	1.50 V	355	22.48	13.77
2	125.25	33.22 QP	43.50	-10.28	1.00 V	355	21.72	11.50
3	249.66	34.85 QP	46.00	-11.15	1.00 V	343	22.39	12.45
4	374.07	37.46 QP	46.00	-8.54	1.00 V	328	20.38	17.08
5	500.42	40.31 QP	46.00	-5.69	1.00 V	88	20.24	20.07
6	624.83	34.31 QP	46.00	-11.69	1.00 V	238	11.55	22.76
7	949.46	37.33 QP	46.00	-8.67	1.00 V	340	7.94	29.39

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	54.56 PK	74.00	-19.44	1.08 H	19	23.18	31.38
2	2389.00	45.49 AV	54.00	-8.51	1.08 H	19	14.11	31.38
3	*2412.00	101.49 PK			1.10 H	17	70.03	31.46
4	*2412.00	98.13 AV			1.10 H	17	66.67	31.46
5	4824.00	50.72 PK	74.00	-23.28	1.22 H	240	13.59	37.13
6	4824.00	45.24 AV	54.00	-8.76	1.22 H	240	8.11	37.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	42.11 PK	74.00	-31.89	1.11 V	16	13.37	28.74
2	1608.00	35.69 AV	54.00	-18.31	1.11 V	16	6.95	28.74
3	2389.00	57.50 PK	74.00	-16.50	1.08 V	70	26.12	31.38
4	2389.00	49.54 AV	54.00	-4.46	1.08 V	70	18.16	31.38
5	*2412.00	110.66 PK			1.08 V	68	79.20	31.46
6	*2412.00	106.92 AV			1.08 V	68	75.46	31.46
7	4824.00	54.29 PK	74.00	-19.71	1.00 V	350	17.16	37.13
8	4824.00	52.07 AV	54.00	-1.93	1.00 V	350	14.94	37.13

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.53 PK			1.09 H	20	69.99	31.54
2	*2437.00	98.21 AV			1.09 H	20	66.67	31.54
3	4874.00	50.86 PK	74.00	-23.14	1.32 H	250	13.57	37.29
4	4874.00	45.62 AV	54.00	-8.38	1.32 H	250	8.33	37.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	42.31 PK	74.00	-31.69	1.16 V	18	13.52	28.79
2	1624.00	36.45 AV	54.00	-17.55	1.16 V	18	7.66	28.79
3	2390.00	55.16 PK	74.00	-18.84	1.07 V	16	23.78	31.39
4	2390.00	45.46 AV	54.00	-8.54	1.07 V	16	14.07	31.39
5	*2437.00	110.51 PK			1.07 V	21	78.97	31.54
6	*2437.00	107.05 AV			1.07 V	21	75.51	31.54
7	2483.50	55.71 PK	74.00	-18.29	1.07 V	24	24.01	31.70
8	2483.50	46.00 AV	54.00	-8.00	1.07 V	24	14.30	31.70
9	4874.00	54.88 PK	74.00	-19.12	1.38 V	12	17.59	37.29
10	4874.00	51.40 AV	54.00	-2.60	1.38 V	12	14.11	37.29

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.15 PK			1.08 H	19	69.53	31.62
2	*2462.00	98.06 AV			1.08 H	19	66.44	31.62
3	2487.00	55.61 PK	74.00	-18.39	1.08 H	20	23.90	31.71
4	2487.00	44.91 AV	54.00	-9.09	1.08 H	20	13.20	31.71
5	4924.00	51.00 PK	74.00	-23.00	1.26 H	294	13.56	37.44
6	4924.00	45.73 AV	54.00	-8.27	1.26 H	294	8.29	37.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	42.45 PK	90.46	-48.01	1.12 V	20	13.60	28.85
2	1641.00	37.15 AV	86.69	-49.54	1.12 V	20	8.30	28.85
3	*2462.00	110.46 PK			1.11 V	10	78.84	31.62
4	*2462.00	106.69 AV			1.11 V	10	75.07	31.62
5	2487.00	58.19 PK	74.00	-15.81	1.10 V	26	26.48	31.71
6	2487.00	48.62 AV	54.00	-5.38	1.10 V	26	16.91	31.71
7	4924.00	56.32 PK	74.00	-17.68	1.20 V	31	18.88	37.44
8	4924.00	51.76 AV	54.00	-2.24	1.20 V	31	14.32	37.44
9	9848.00	60.21 PK	90.46	-30.25	1.28 V	64	12.15	48.06
10	9848.00	52.80 AV	86.69	-33.89	1.28 V	64	4.74	48.06

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

802.11g OFDM MODULATION_NORMAL MODE

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.44 PK	74.00	-11.56	1.09 H	20	31.05	31.39
2	2390.00	46.82 AV	54.00	-7.18	1.09 H	20	15.43	31.39
3	*2412.00	100.90 PK			1.08 H	18	69.44	31.46
4	*2412.00	91.43 AV			1.08 H	18	59.97	31.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	41.06 PK	74.00	-32.94	1.22 V	21	12.32	28.74
2	1608.00	34.29 AV	54.00	-19.71	1.22 V	21	5.55	28.74
3	2390.00	69.17 PK	74.00	-4.83	1.14 V	309	37.78	31.39
4	2390.00	52.26 AV	54.00	-1.74	1.14 V	309	20.87	31.39
5	*2412.00	109.69 PK			1.12 V	309	78.23	31.46
6	*2412.00	100.56 AV			1.12 V	309	69.10	31.46
7	4824.00	49.13 PK	74.00	-24.87	1.38 V	3	12.00	37.13
8	4824.00	35.17 AV	54.00	-18.83	1.38 V	3	-1.96	37.13

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.51 PK	74.00	-20.49	1.34 H	26	22.12	31.39
2	2390.00	43.67 AV	54.00	-10.33	1.34 H	26	12.28	31.39
3	*2437.00	100.78 PK			1.11 H	24	69.24	31.54
4	*2437.00	91.36 AV			1.11 H	24	59.82	31.54
5	2483.50	54.24 PK	74.00	-19.76	1.38 H	25	22.54	31.70
6	2483.50	44.11 AV	54.00	-9.89	1.38 H	25	12.41	31.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	41.26 PK	74.00	-32.74	1.25 V	31	12.47	28.79
2	1624.00	35.65 AV	54.00	-18.35	1.25 V	31	6.86	28.79
3	2390.00	54.33 PK	74.00	-19.67	1.36 V	10	22.94	31.39
4	2390.00	44.73 AV	54.00	-9.27	1.36 V	10	13.34	31.39
5	*2437.00	109.47 PK			1.39 V	10	77.93	31.54
6	*2437.00	100.55 AV			1.39 V	10	69.01	31.54
7	2483.50	55.01 PK	74.00	-18.99	1.35 V	12	23.31	31.70
8	2483.50	45.93 AV	54.00	-8.07	1.35 V	12	14.23	31.70
9	4874.00	49.28 PK	74.00	-24.72	1.08 V	315	11.99	37.29
10	4874.00	35.36 AV	54.00	-18.64	1.08 V	315	-1.93	37.29

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.59 PK			1.09 H	19	68.97	31.62
2	*2462.00	91.22 AV			1.09 H	19	59.60	31.62
3	2483.50	58.50 PK	74.00	-15.50	1.06 H	10	26.80	31.70
4	2483.50	45.42 AV	54.00	-8.58	1.06 H	10	13.72	31.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	42.25 PK	89.43	-47.18	1.39 V	28	13.40	28.85
2	1641.00	35.33 AV	80.41	-45.08	1.39 V	28	6.48	28.85
3	*2462.00	109.43 PK			1.11 V	10	77.81	31.62
4	*2462.00	100.41 AV			1.11 V	10	68.79	31.62
5	2483.50	68.05 PK	74.00	-5.95	1.10 V	14	36.35	31.70
6	2483.50	51.99 AV	54.00	-2.01	1.10 V	14	20.29	31.70
7	4924.00	47.06 PK	74.00	-26.94	1.10 V	212	9.62	37.44
8	4924.00	34.83 AV	54.00	-19.17	1.10 V	212	-2.61	37.44

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

802.11g OFDM MODULATION_TURBO MODE

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.23 PK	74.00	-19.77	1.05 H	18	22.84	31.39
2	2390.00	44.16 AV	54.00	-9.84	1.05 H	18	12.77	31.39
3	*2437.00	100.05 PK			1.14 H	158	68.51	31.54
4	*2437.00	89.91 AV			1.14 H	158	58.37	31.54
5	2483.50	53.54 PK	74.00	-20.46	1.05 H	18	21.84	31.70
6	2483.50	44.75 AV	54.00	-9.25	1.05 H	18	13.05	31.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	41.62 PK	74.00	-32.38	1.10 V	329	12.83	28.79
2	1624.00	36.59 AV	54.00	-17.41	1.10 V	329	7.80	28.79
3	2390.00	56.96 PK	74.00	-17.04	1.11 V	15	25.57	31.39
4	2390.00	47.19 AV	54.00	-6.81	1.11 V	15	15.80	31.39
5	*2437.00	107.45 PK			1.10 V	9	75.91	31.54
6	*2437.00	97.95 AV			1.10 V	9	66.41	31.54
7	2483.50	58.44 PK	74.00	-15.56	1.10 V	12	26.74	31.70
8	2483.50	48.68 AV	54.00	-5.32	1.10 V	12	16.98	31.70
9	4874.00	47.28 PK	74.00	-26.72	1.13 V	156	9.99	37.29
10	4874.00	33.87 AV	54.00	-20.13	1.13 V	156	-3.42	37.29

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.06	0.5	PASS
6	2437	12.06	0.5	PASS
11	2462	11.98	0.5	PASS


CH1

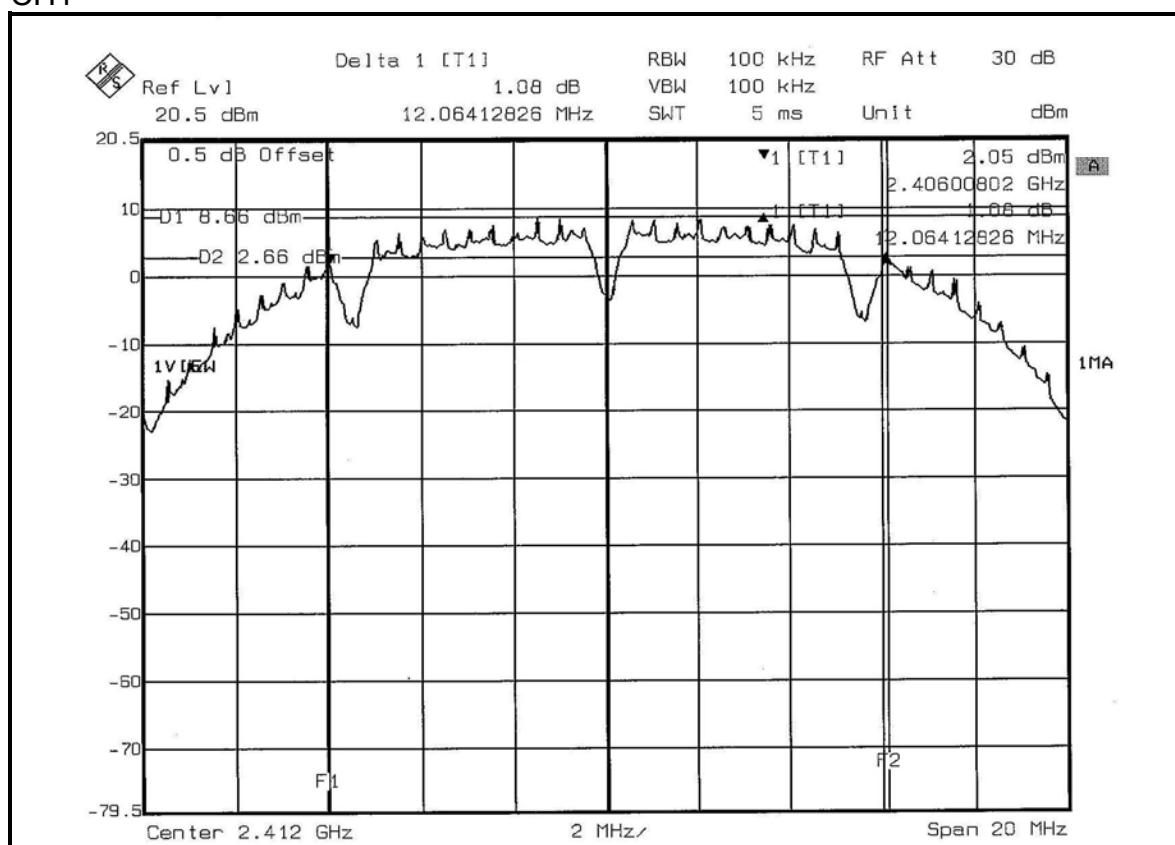


CH6

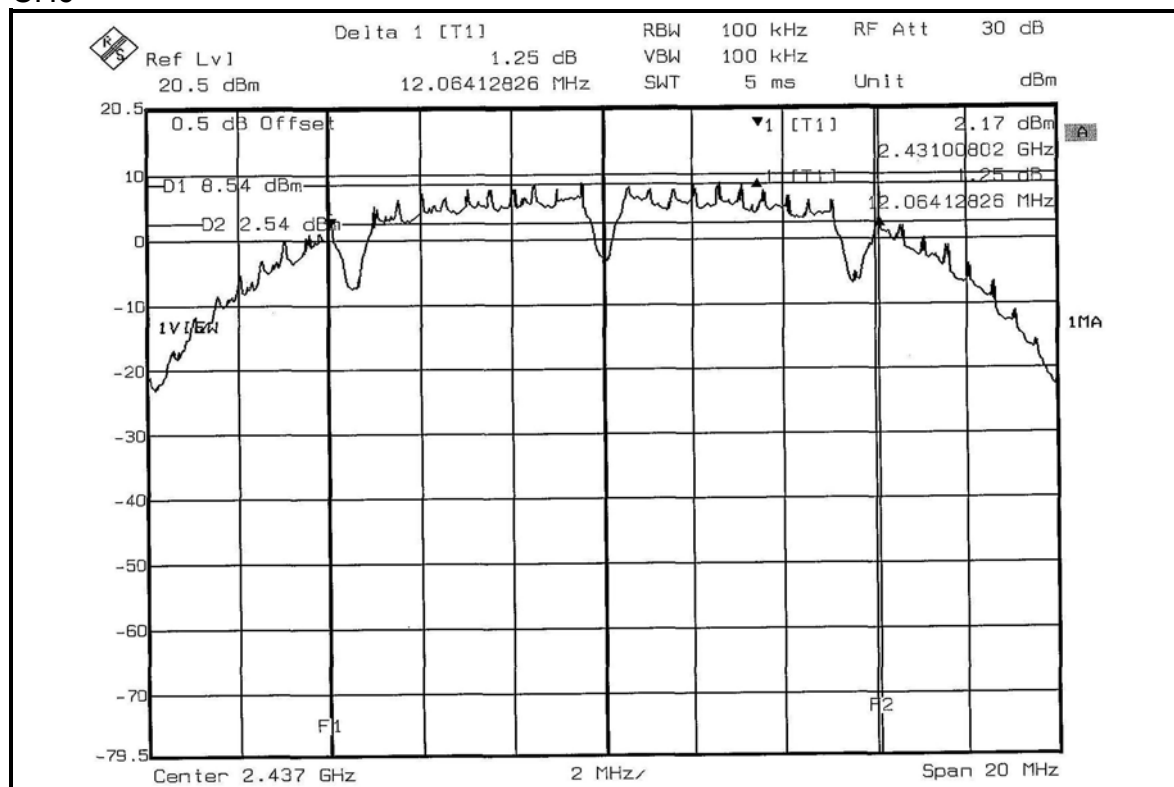


CH11

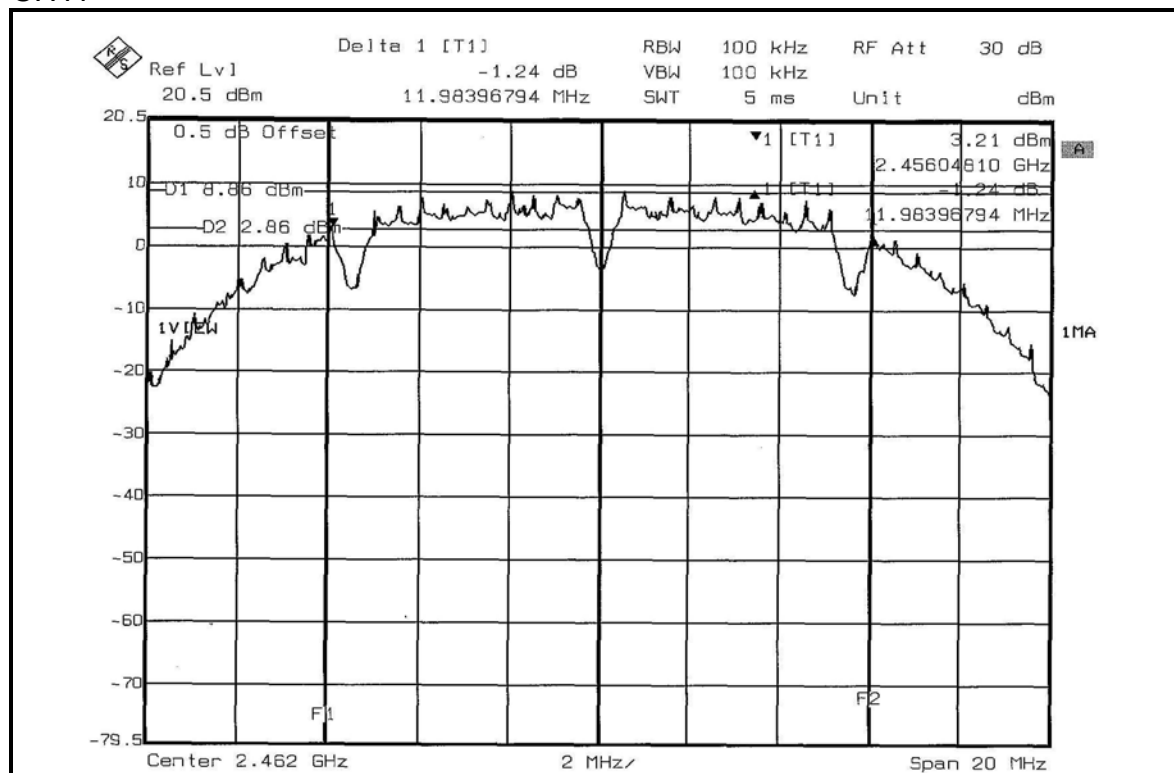

CH6

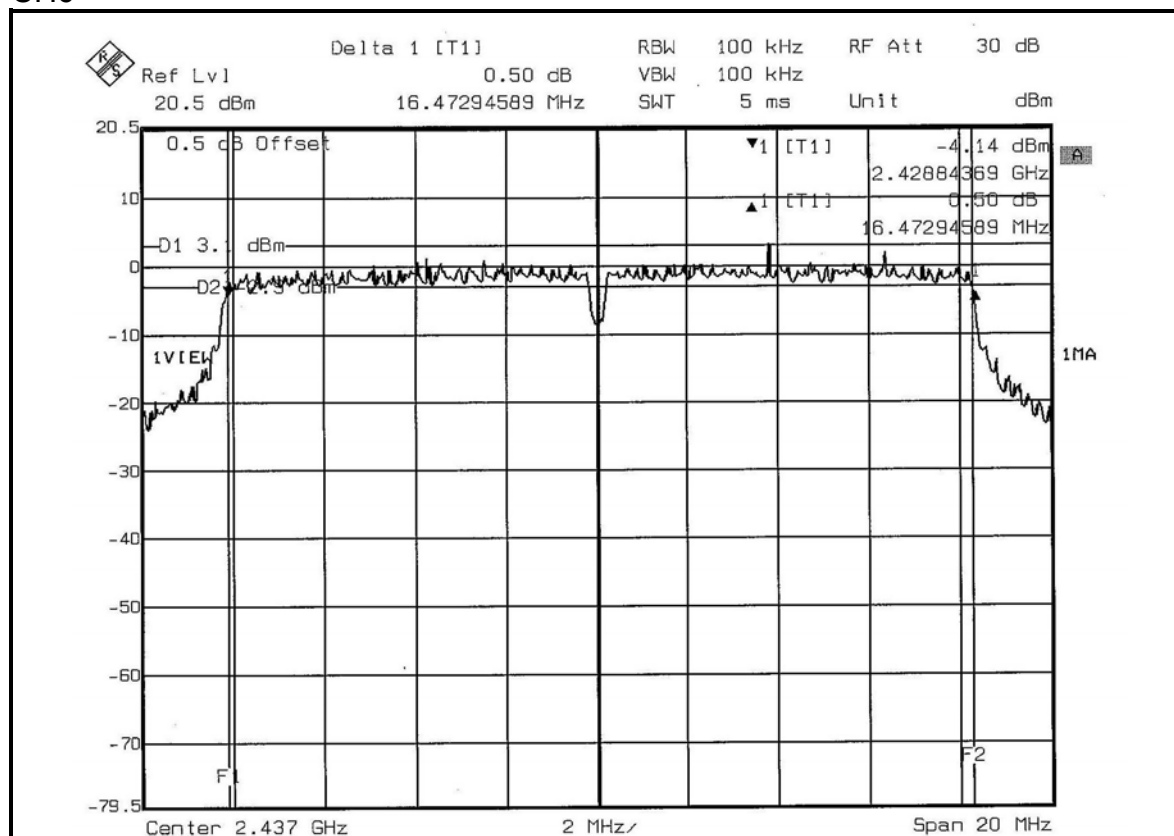

CH11

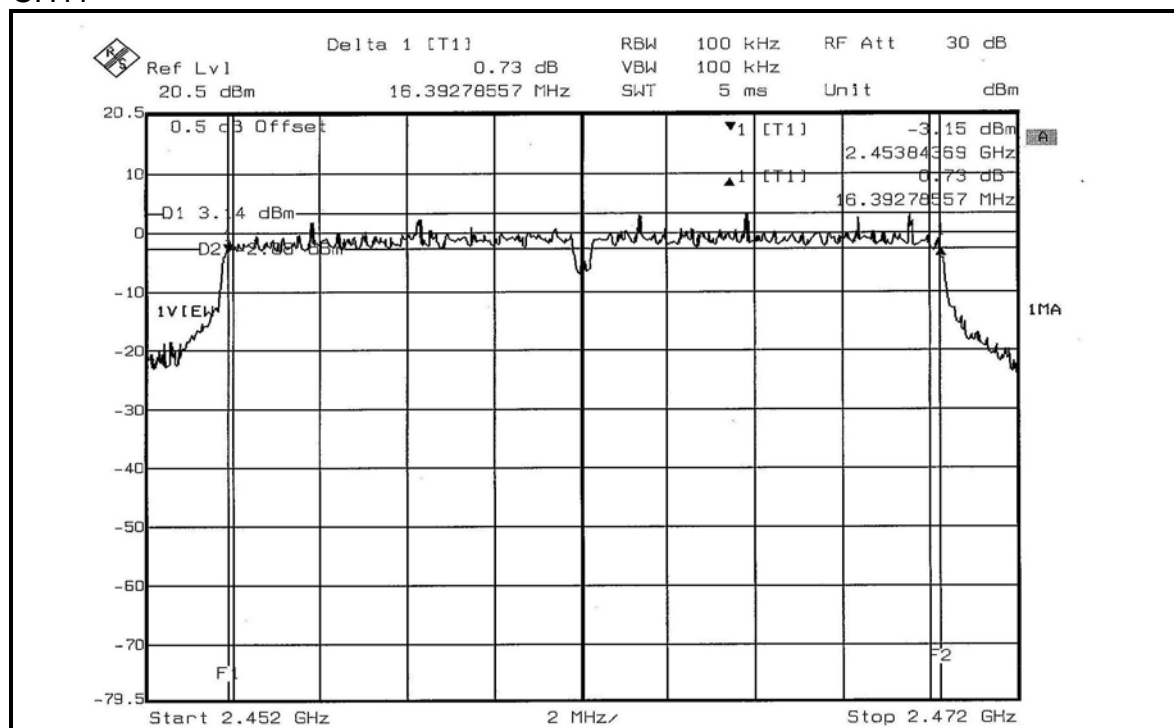


802.11g OFDM MODULATION_TURBO MODE

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	32.62	0.5	PASS

CH6

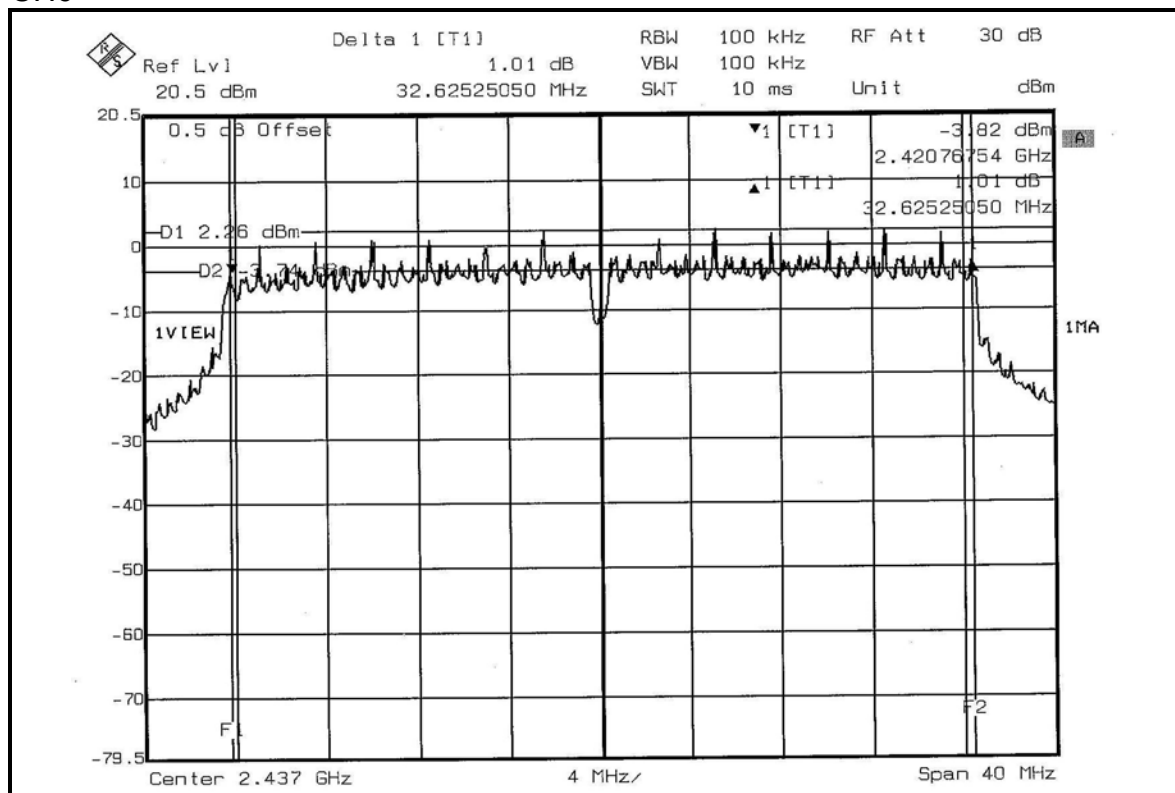

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 28, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	82.985	19.19	30	PASS
6	2437	83.368	19.21	30	PASS
11	2462	84.528	19.27	30	PASS

802.11g OFDM MODULATION_NORMAL MODE

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	63.973	18.06	30	PASS
6	2437	63.973	18.06	30	PASS
11	2462	63.241	18.01	30	PASS

802.11g OFDM MODULATION_TURBO MODE

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 67%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	63.680	18.04	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.


4.5.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-4.50	8	PASS
6	2437	-4.36	8	PASS
11	2462	-4.46	8	PASS


CH1

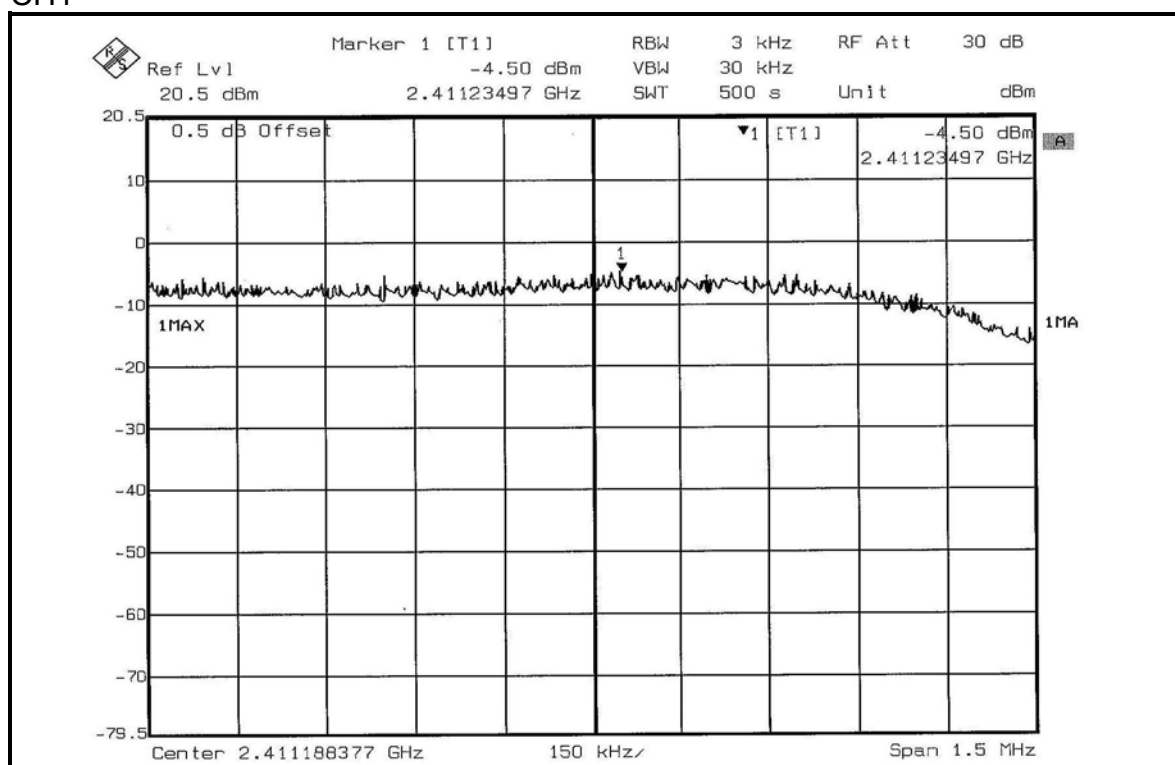

CH6

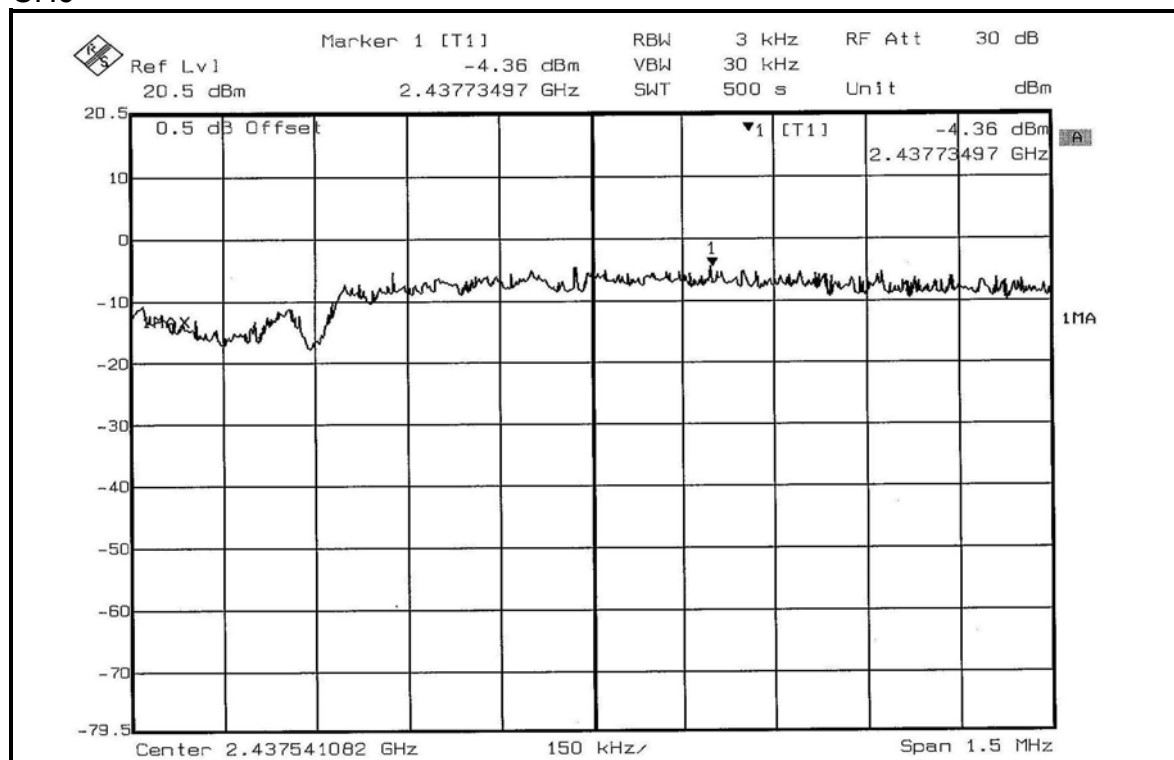

CH11

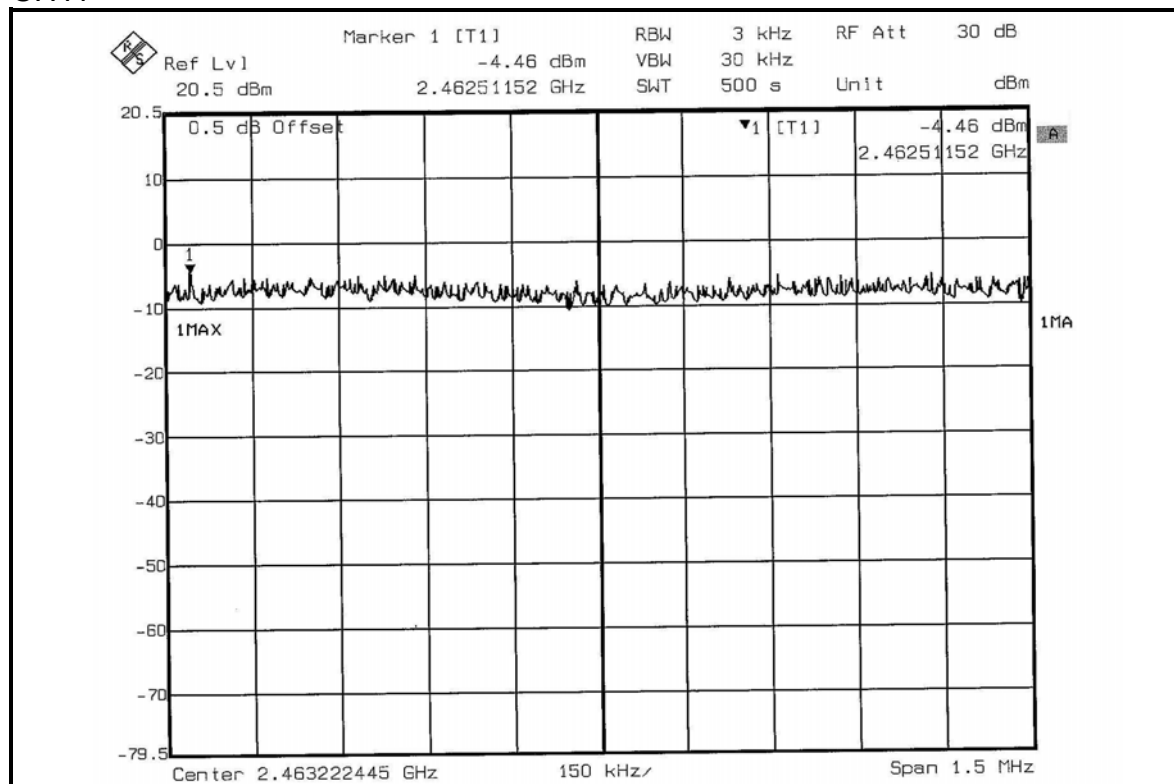


802.11g OFDM MODULATION_NORMAL MODE


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.18	8	PASS
6	2437	-10.28	8	PASS
11	2462	-10.20	8	PASS


CH1

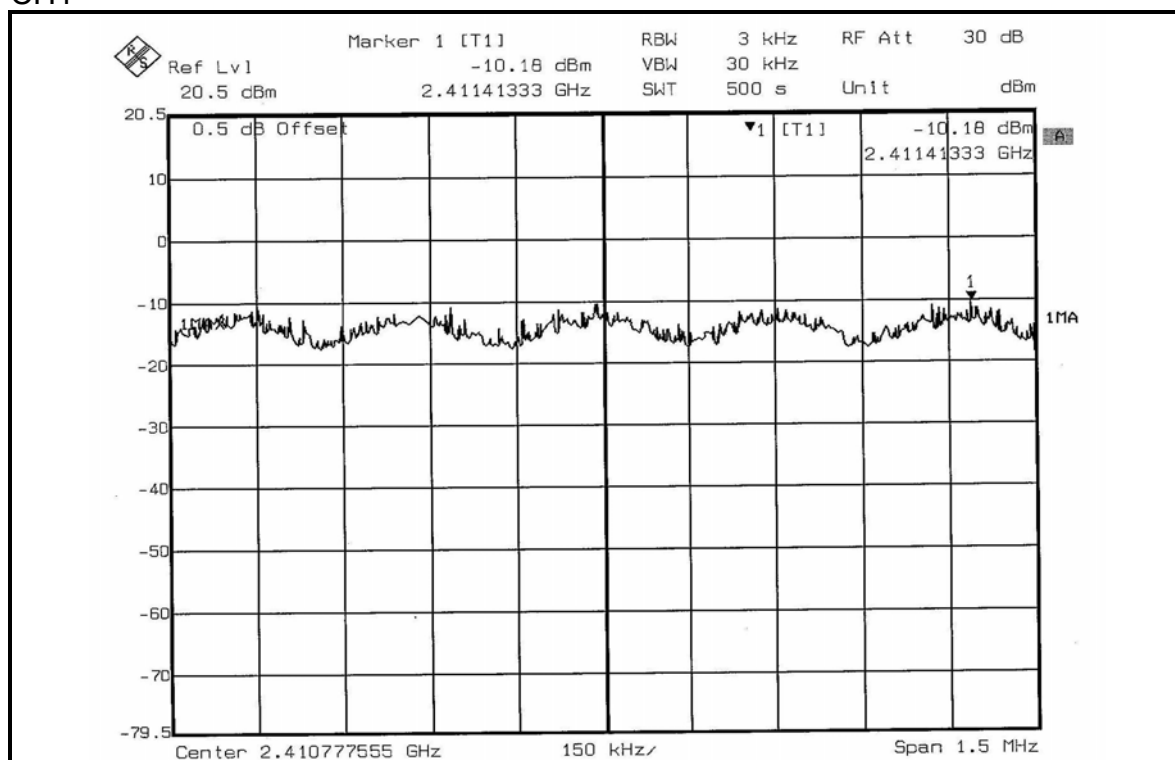

CH6

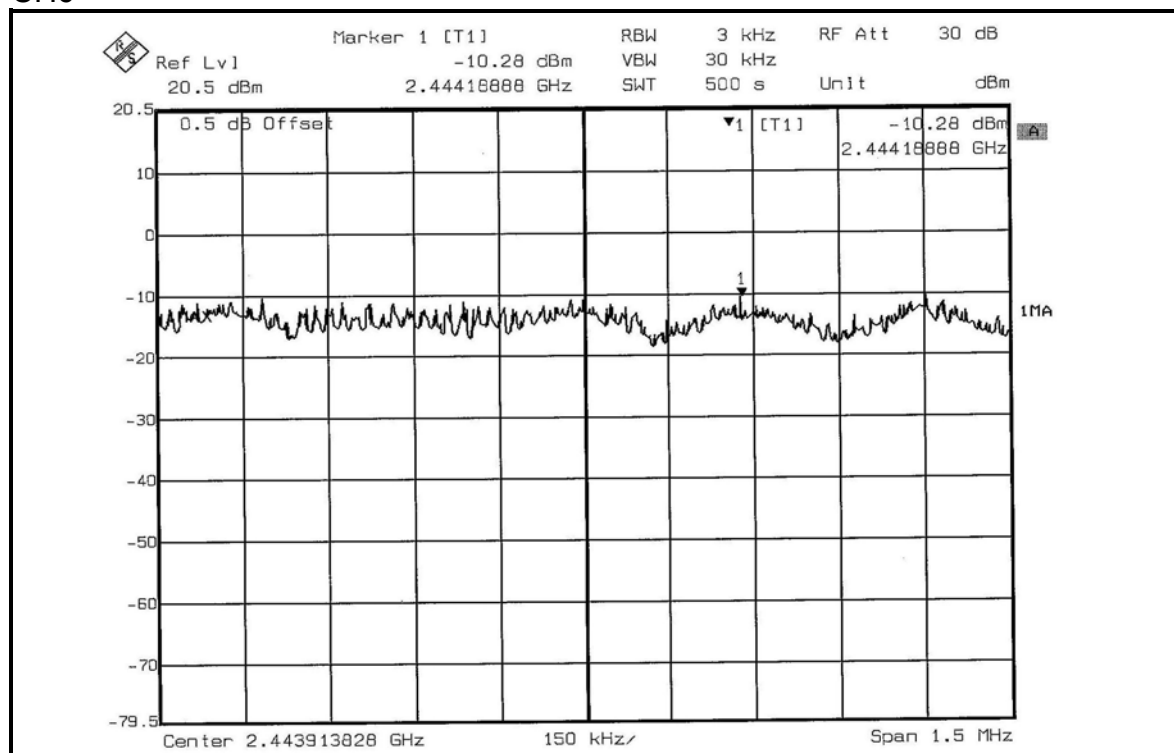

CH11

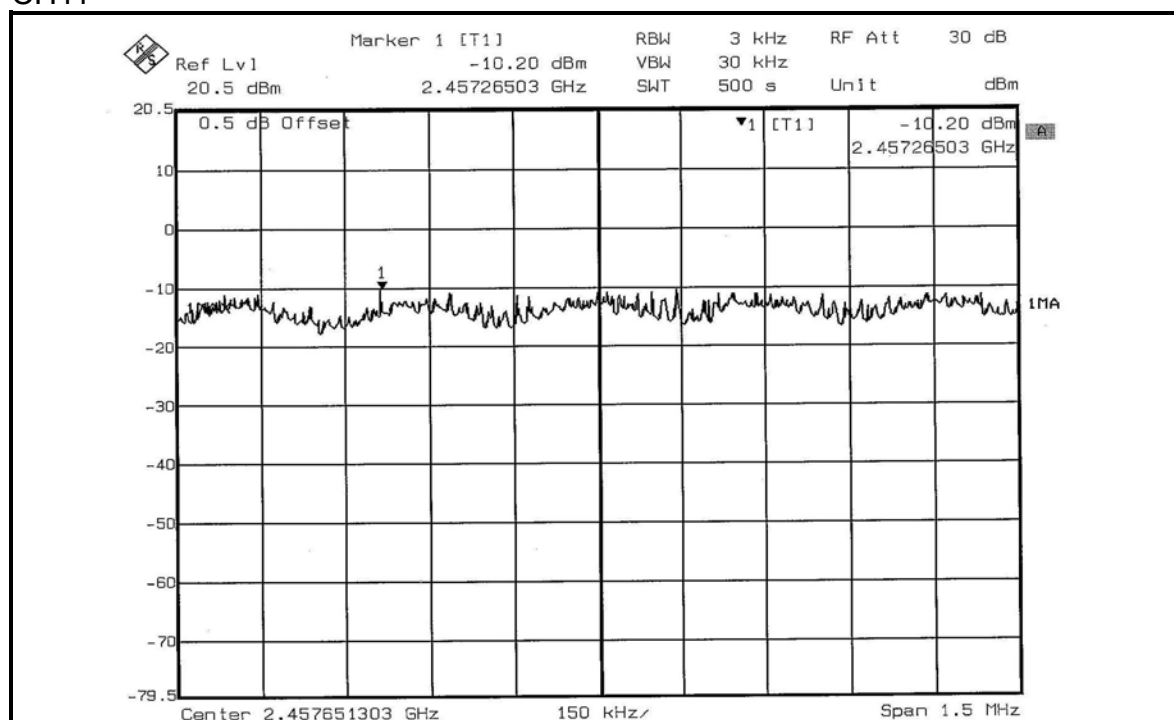


802.11g OFDM MODULATION_TURBO MODE

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-11.24	8	PASS

CH6

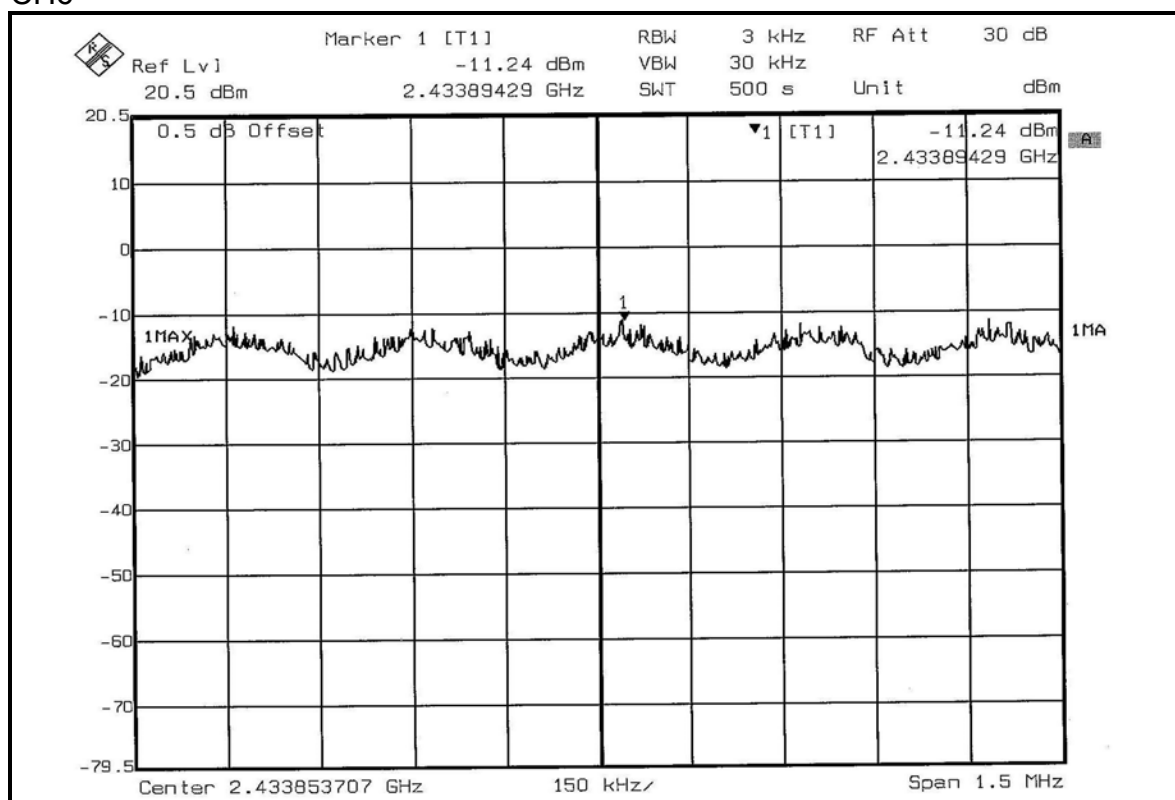

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 18 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS MODULATION



NOTE 1: The band edge emission plot on the next page shows 49.14dBc between carrier maximum power and local maximum emission in restrict band (2.38619GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.66dBuV/m (Peak), so the maximum field strength in restrict band is $110.66 - 49.14 = 61.52$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 54.18dBc between carrier maximum power and local maximum emission in restrict band (2.38599GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.92dBuV/m (Average), so the maximum field strength in restrict band is $106.92 - 54.18 = 52.74$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 50.85dBc between carrier maximum power and local maximum emission in restrict band (2.48810GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.46dBuV/m (Peak), so the maximum field strength in restrict band is $110.46 - 50.85 = 59.61$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 53.82dBc between carrier maximum power and local maximum emission in restrict band (2.48790GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.69dBuV/m (Average), so the maximum field strength in restrict band is $106.69 - 53.82 = 52.87$ dBuV/m which is under 54dBuV/m limit.

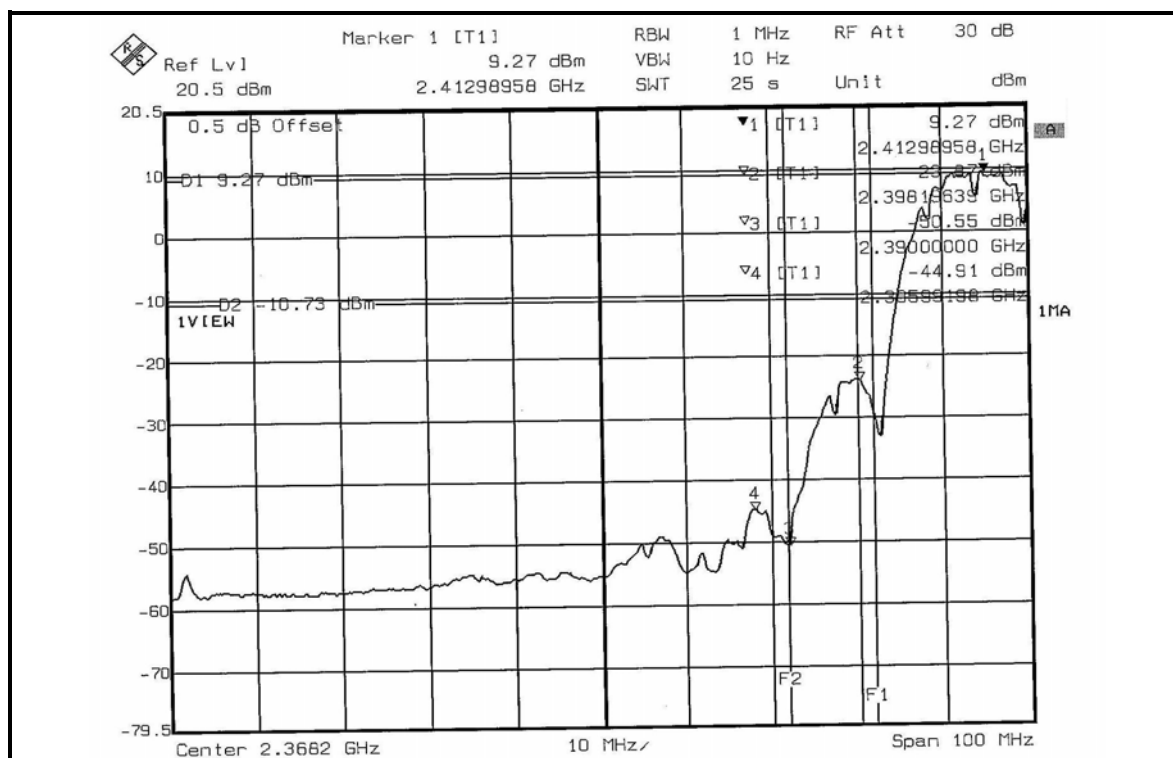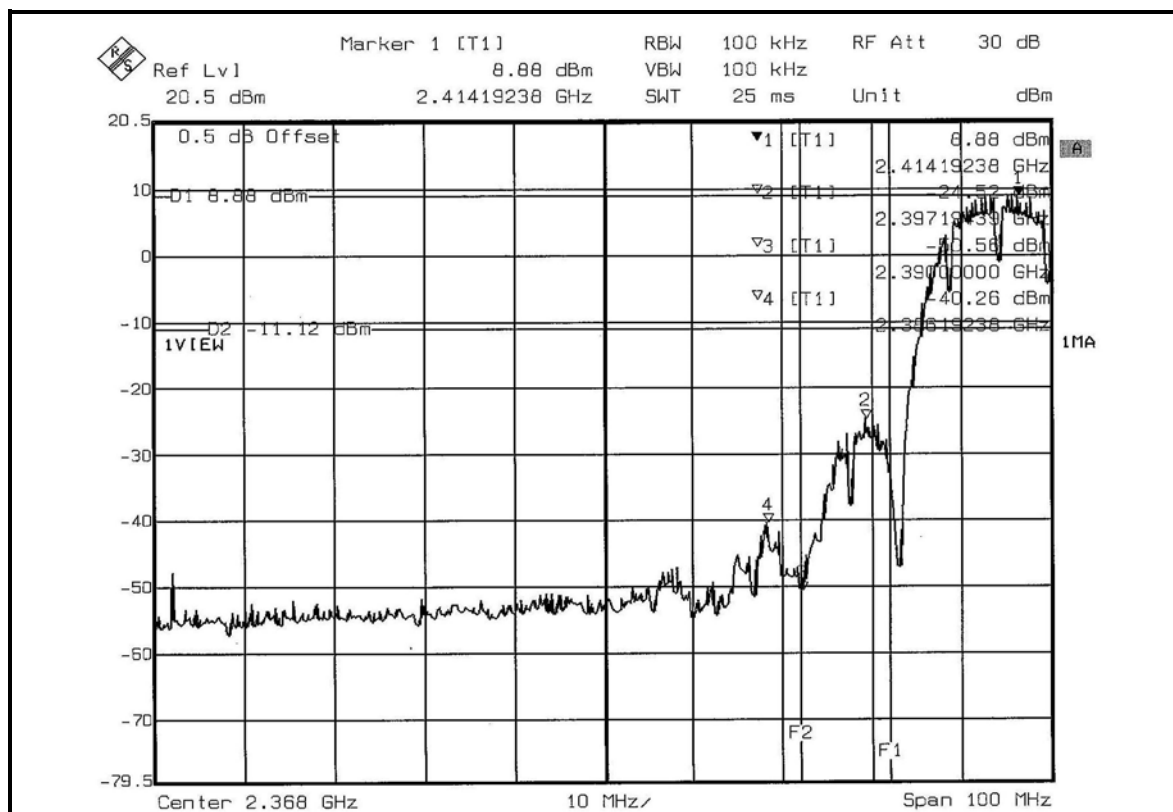

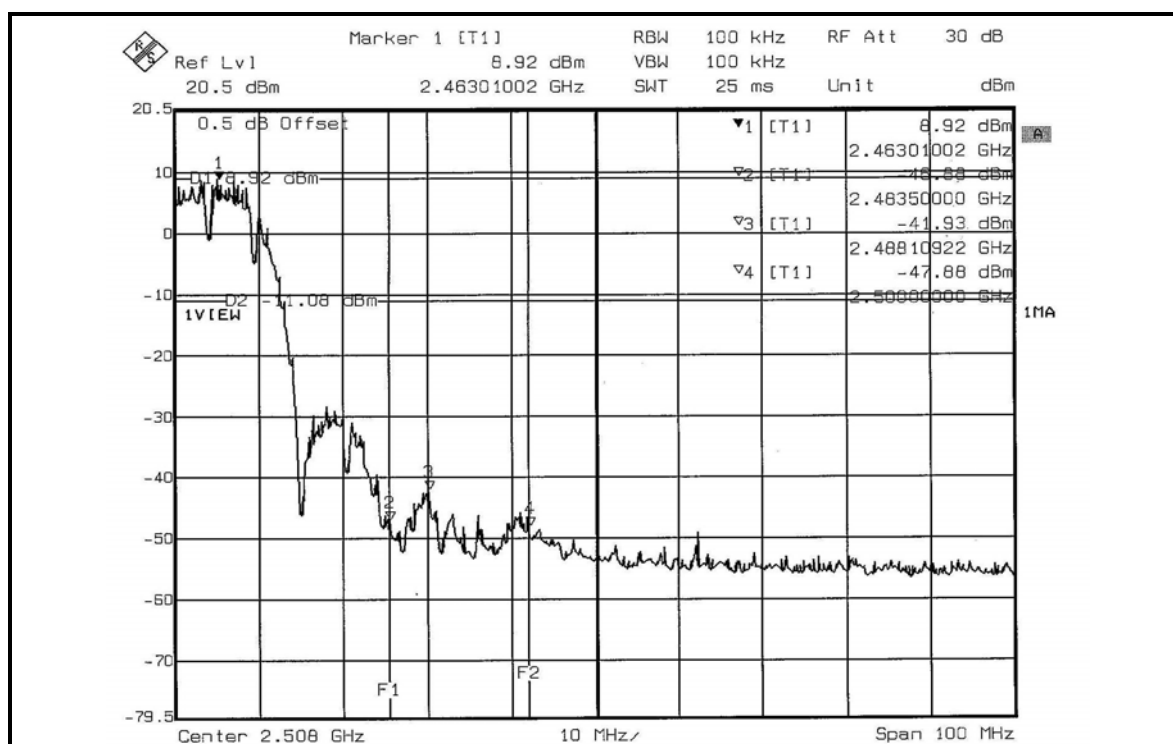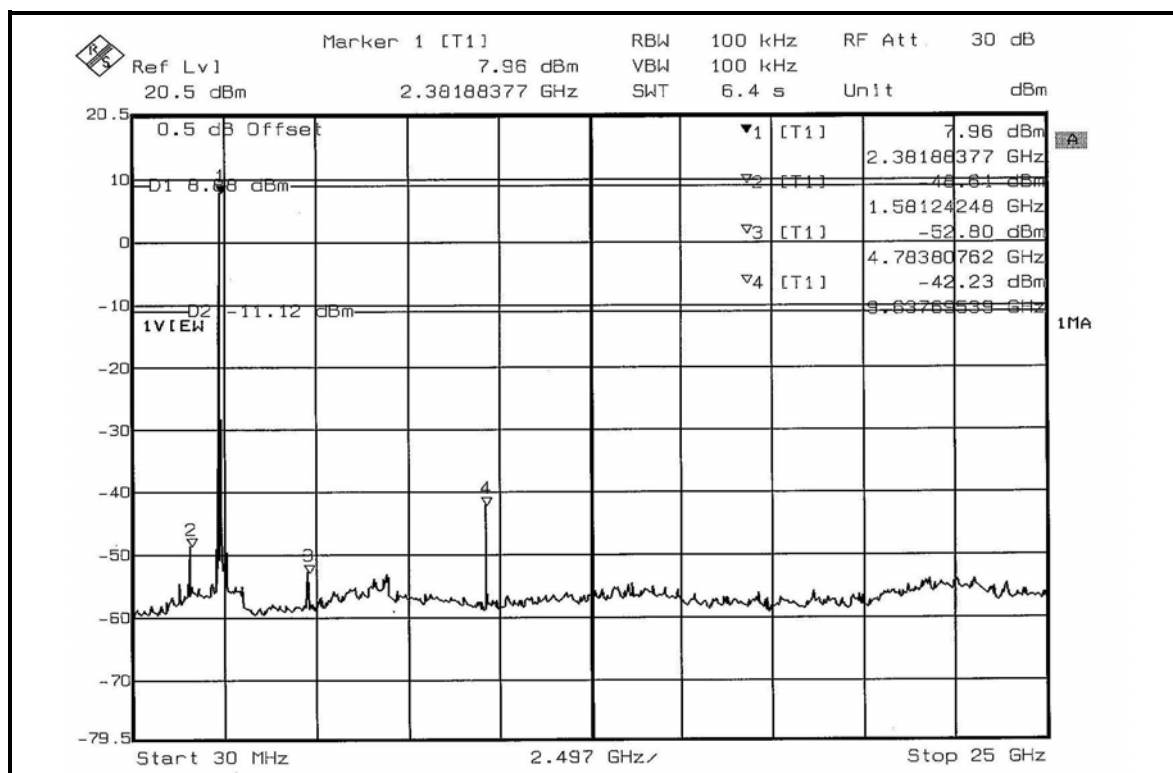

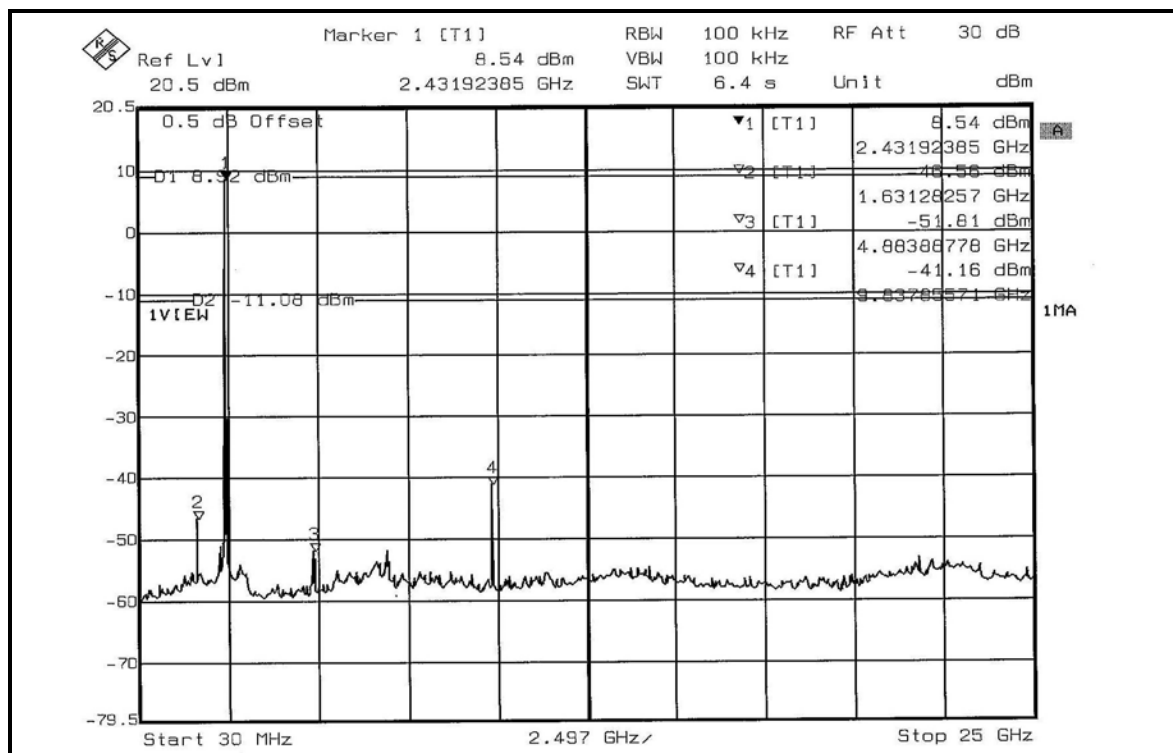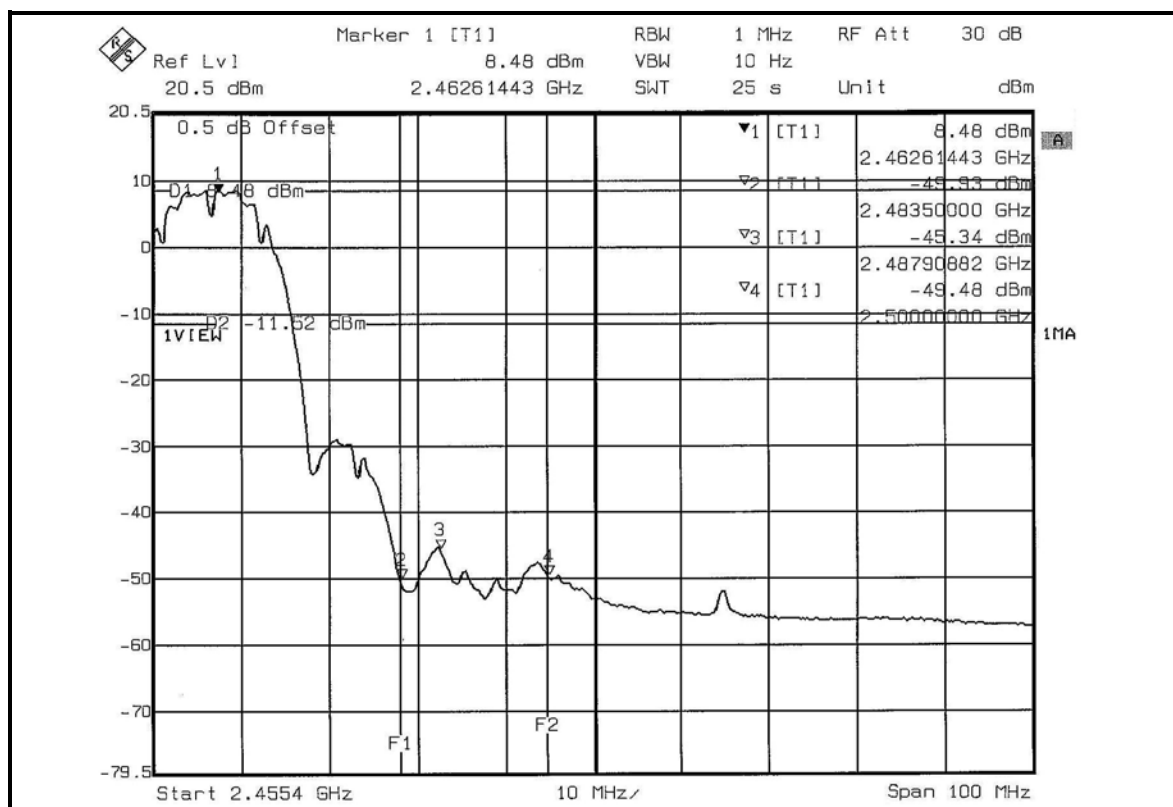



802.11g OFDM MODULATION_NORMAL MODE



NOTE 1: The band edge emission plot on the next page shows 45.61dBc between carrier maximum power and local maximum emission in restrict band (2.38959GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.69dBuV/m (Peak), so the maximum field strength in restrict band is $109.69 - 45.61 = 64.08$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 48.27dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 100.56dBuV/m (Average), so the maximum field strength in restrict band is $100.56 - 48.27 = 52.29$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 44.99dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.43dBuV/m (Peak), so the maximum field strength in restrict band is $109.43 - 44.99 = 64.44$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 47.79dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.41dBuV/m (Average), so the maximum field strength in restrict band is $100.41 - 47.79 = 52.62$ dBuV/m which is under 54dBuV/m limit.

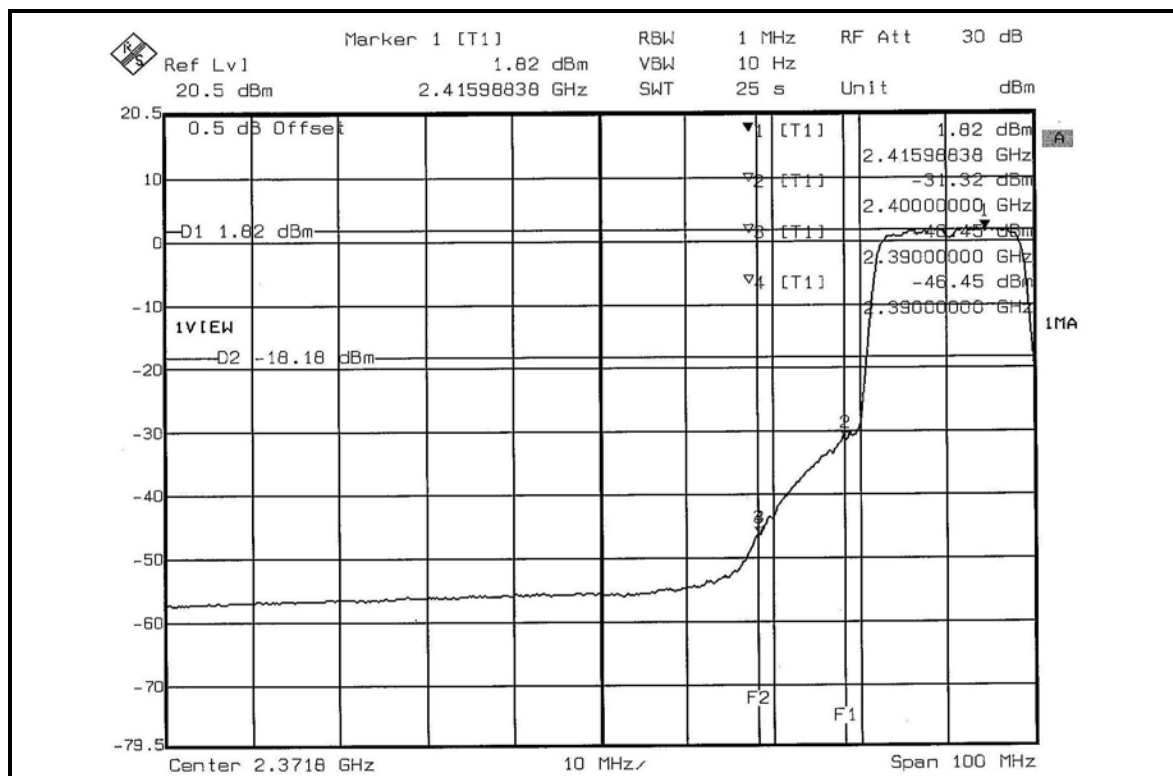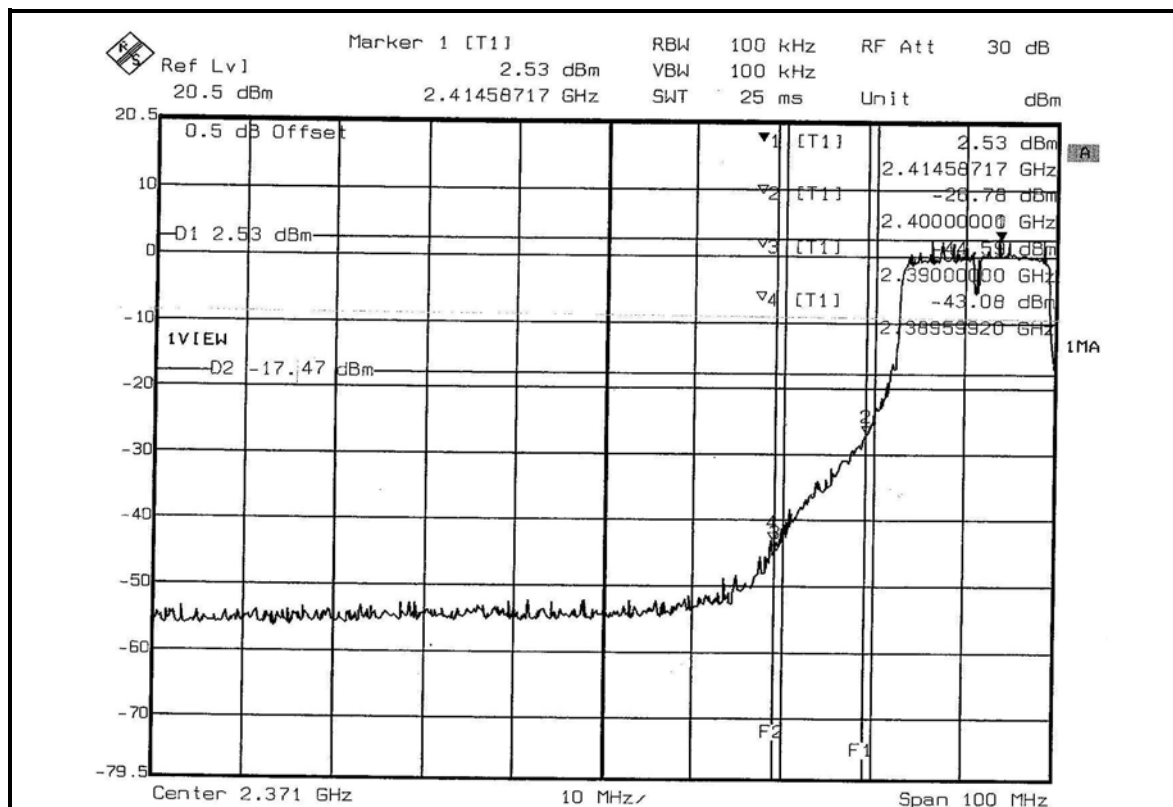

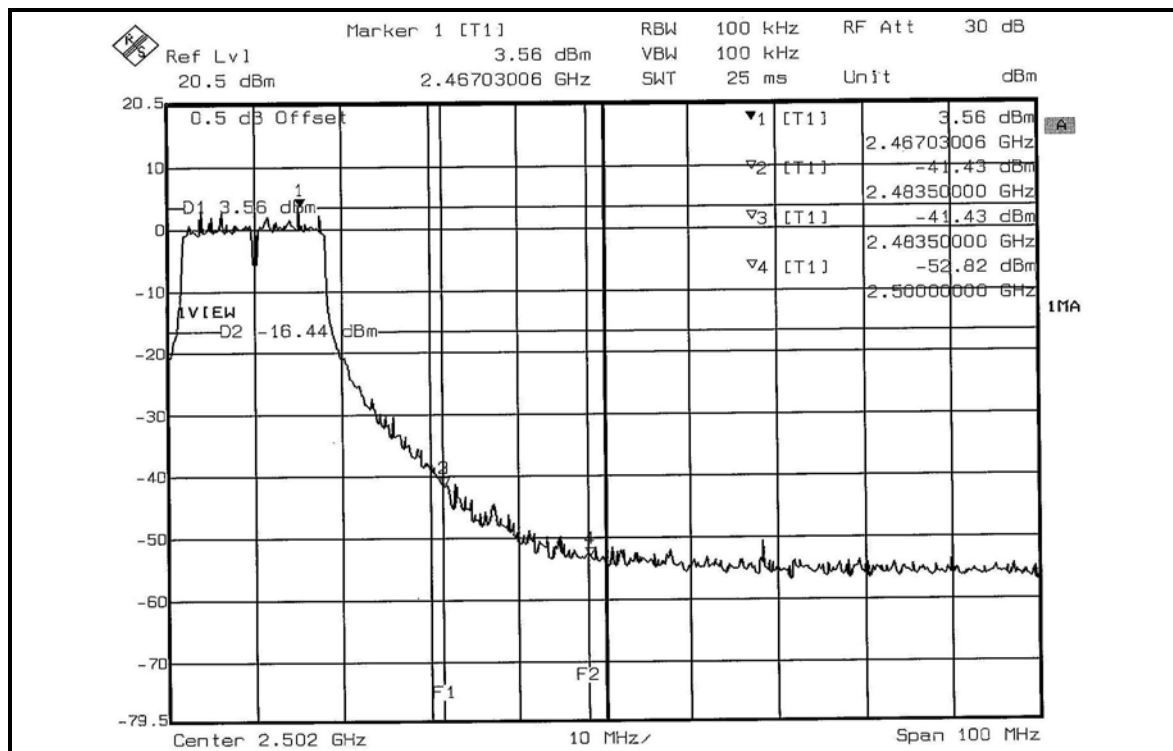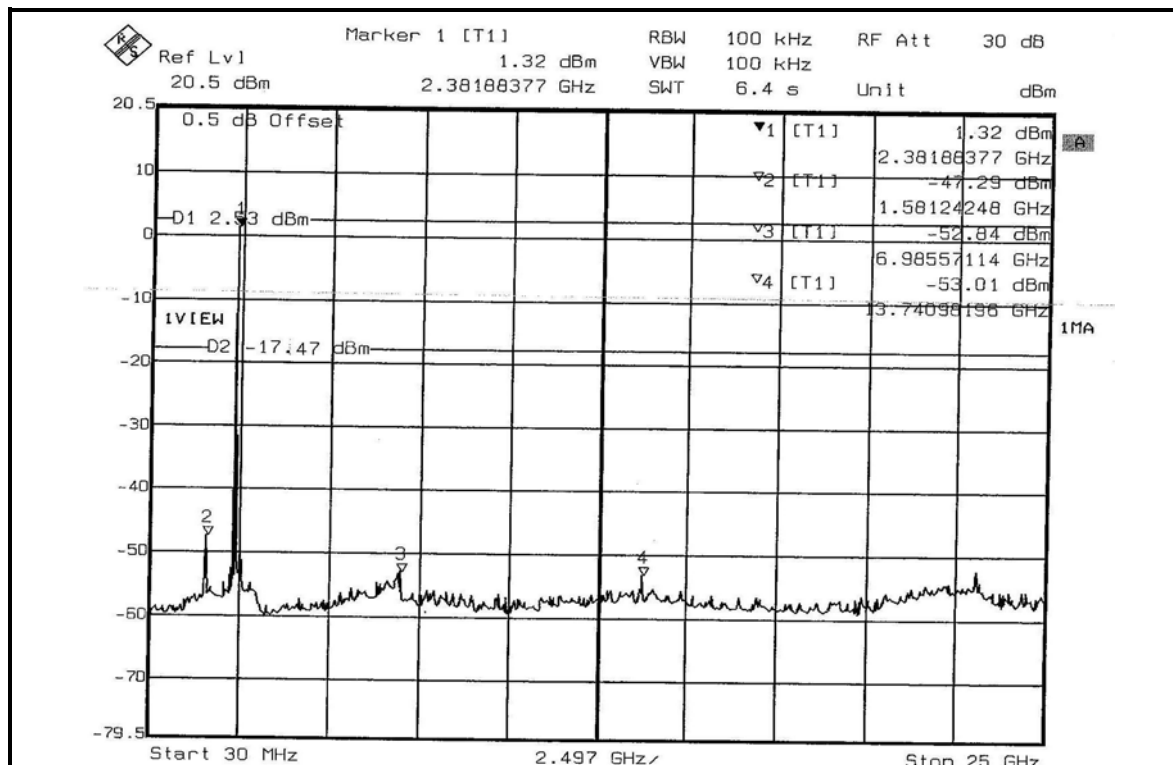

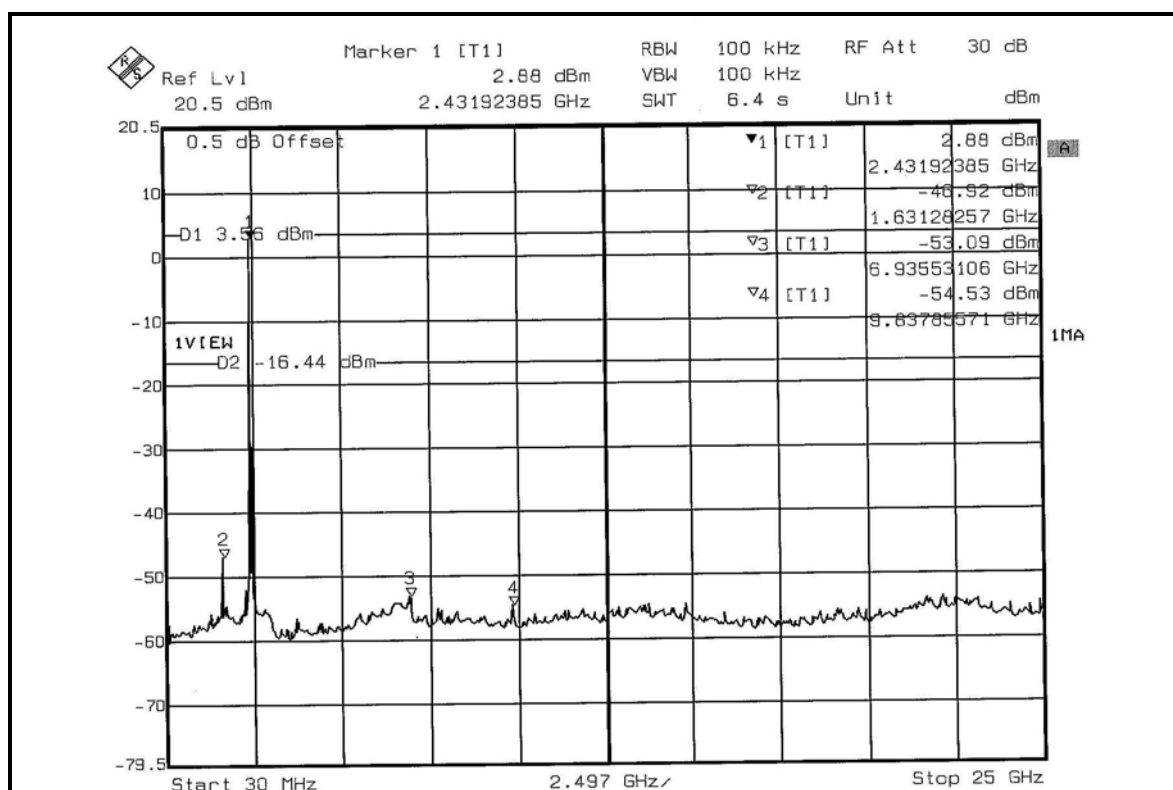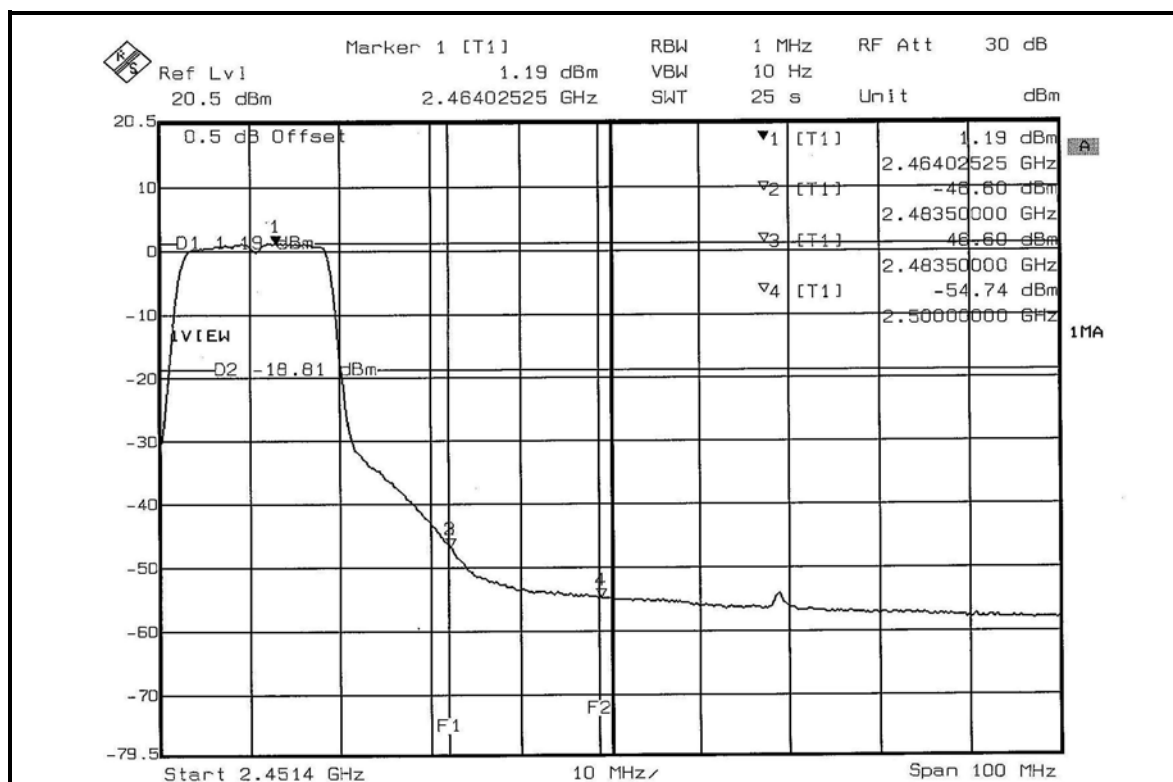



802.11g OFDM MODULATION_TURBO MODE



NOTE 1: The band edge emission plot on the next page shows 53.37dBc between carrier maximum power and local maximum emission in restrict band (2.31985GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 107.45dBuV/m (Peak), so the maximum field strength in restrict band is $107.45 - 53.37 = 54.08$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 51.36dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 97.95dBuV/m (Average), so the maximum field strength in restrict band is $97.95 - 51.36 = 46.59$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 51.79dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 107.45dBuV/m (Peak), so the maximum field strength in restrict band is $107.45 - 51.79 = 55.66$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 49.46dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 97.95dBuV/m (Average), so the maximum field strength in restrict band is $97.95 - 49.46 = 48.49$ dBuV/m which is under 54dBuV/m limit.

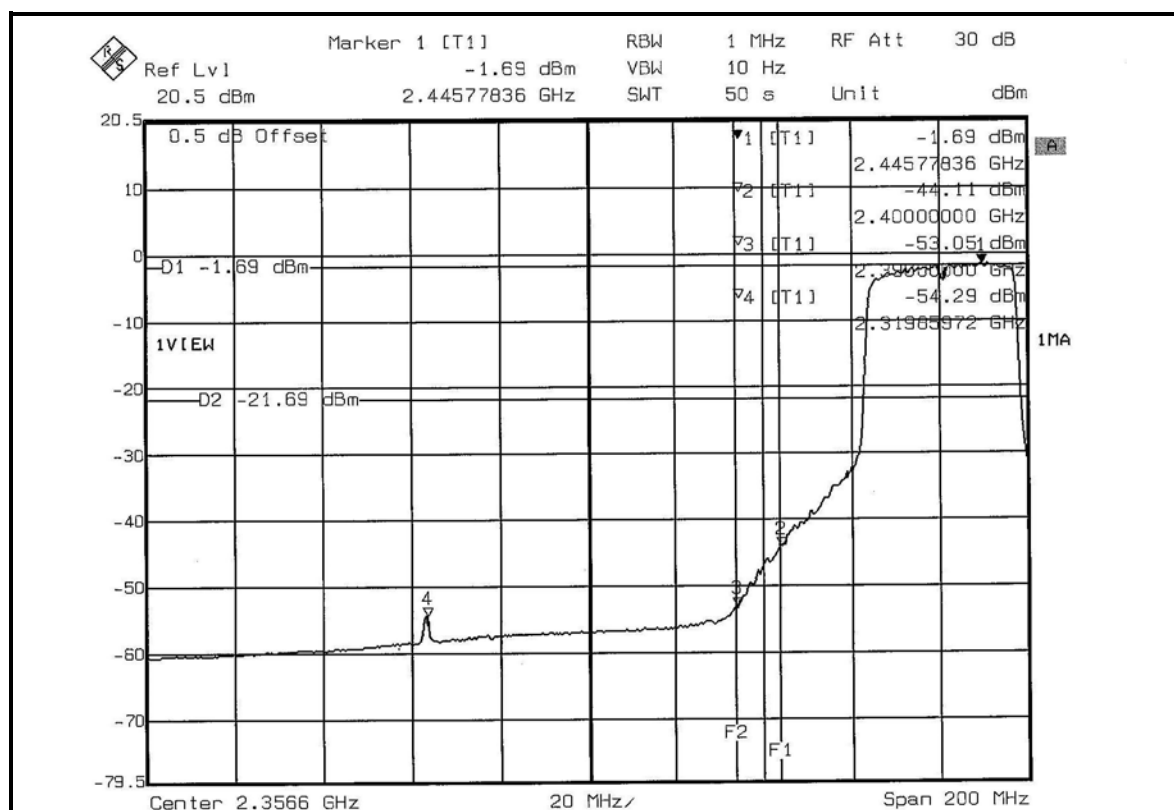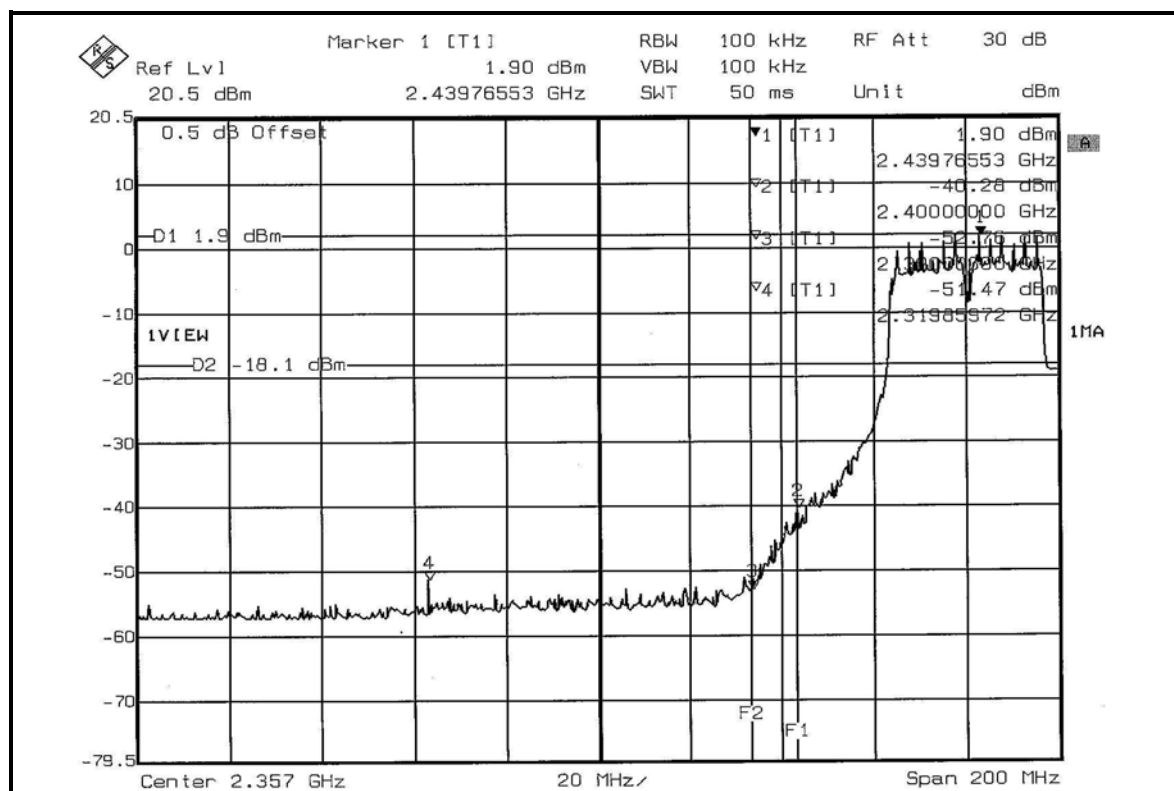

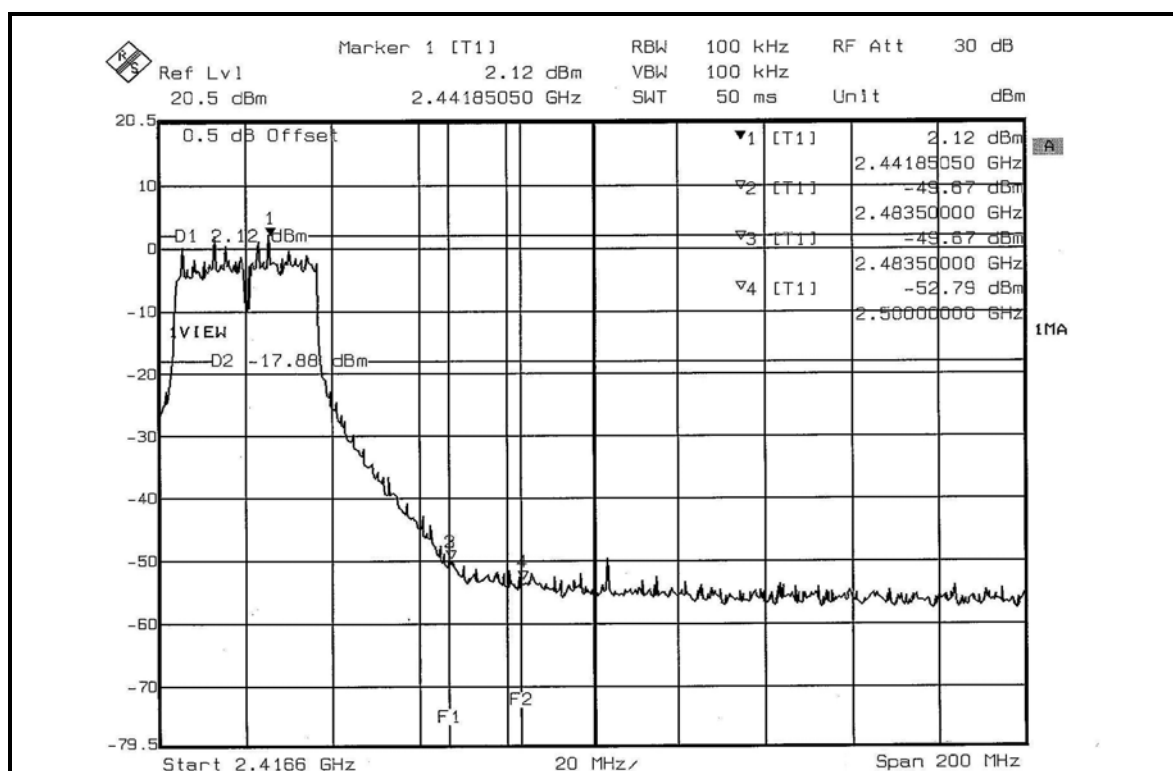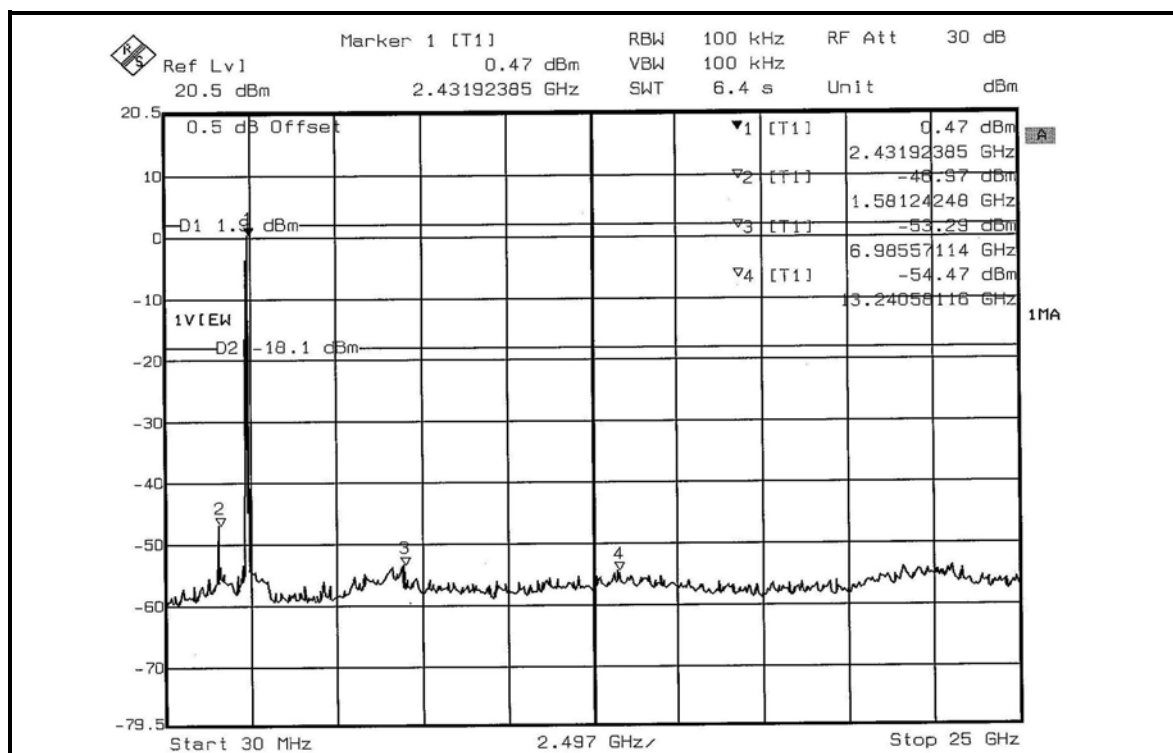

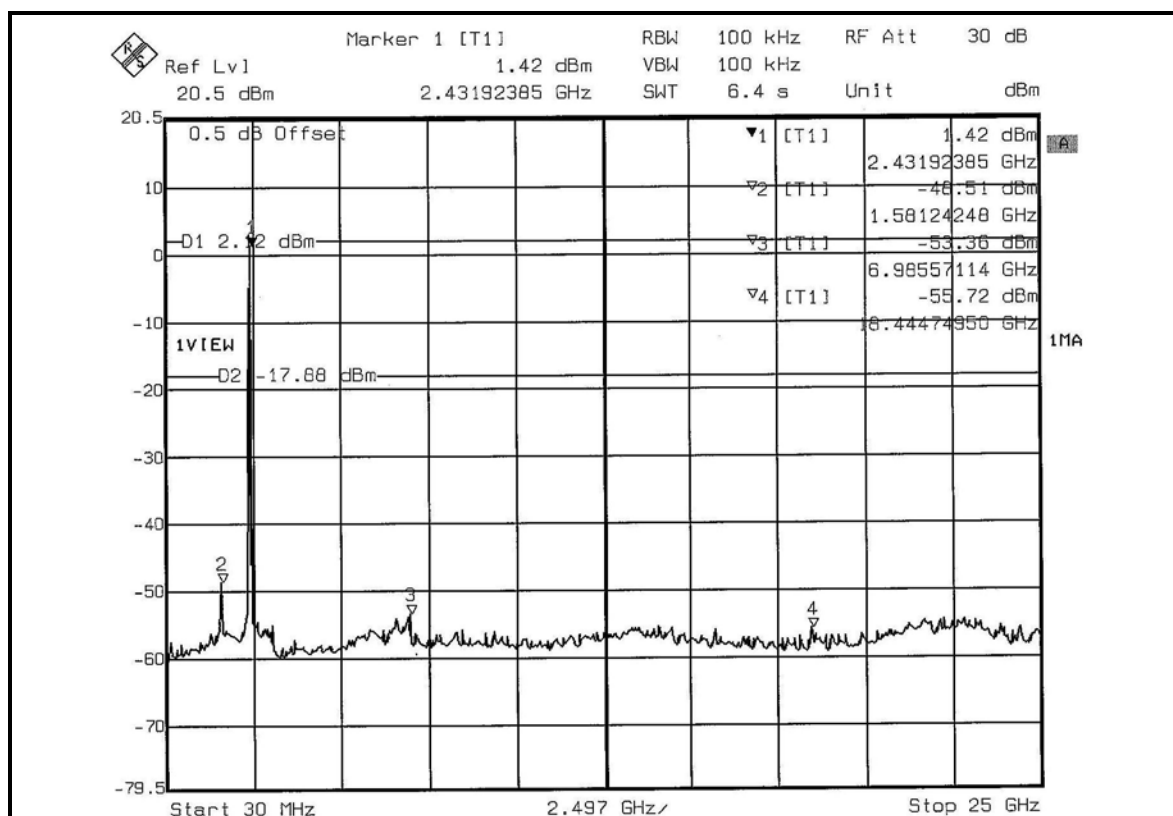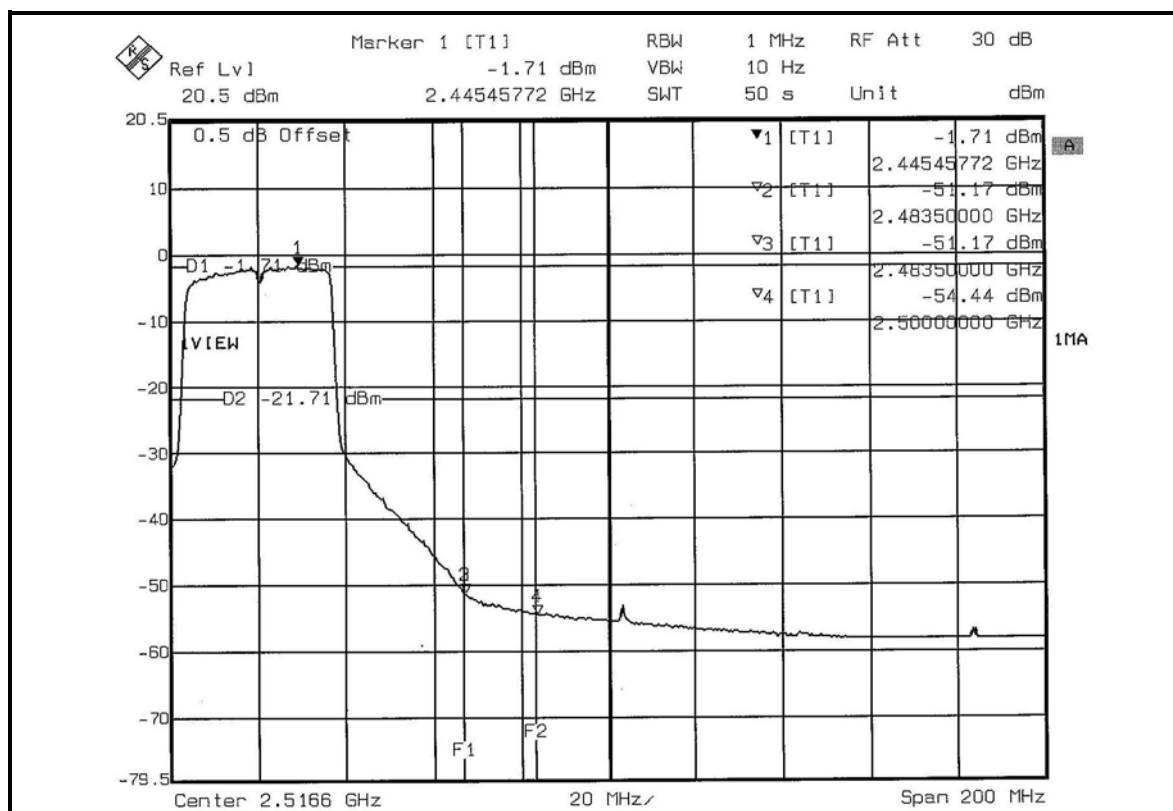

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna type used in this product is Dipole antenna with RSMA antenna connector. The maximum Gain of the antenna is 2.10dBi.

5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.