

Model: OM900-00001-D00

Serial No: 44900

FCC ID: NI8OM900

IC: 4630A-OM900


Input Power Max: 5.0VDC 1.5A & 3.3V 250mA

Operating Temperature: -40 to 75 deg. C

Temperature Code: T4A

This device complies with Part 15 of the FCC rules. Operation is subject to the following conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause any undesired operation.

Label

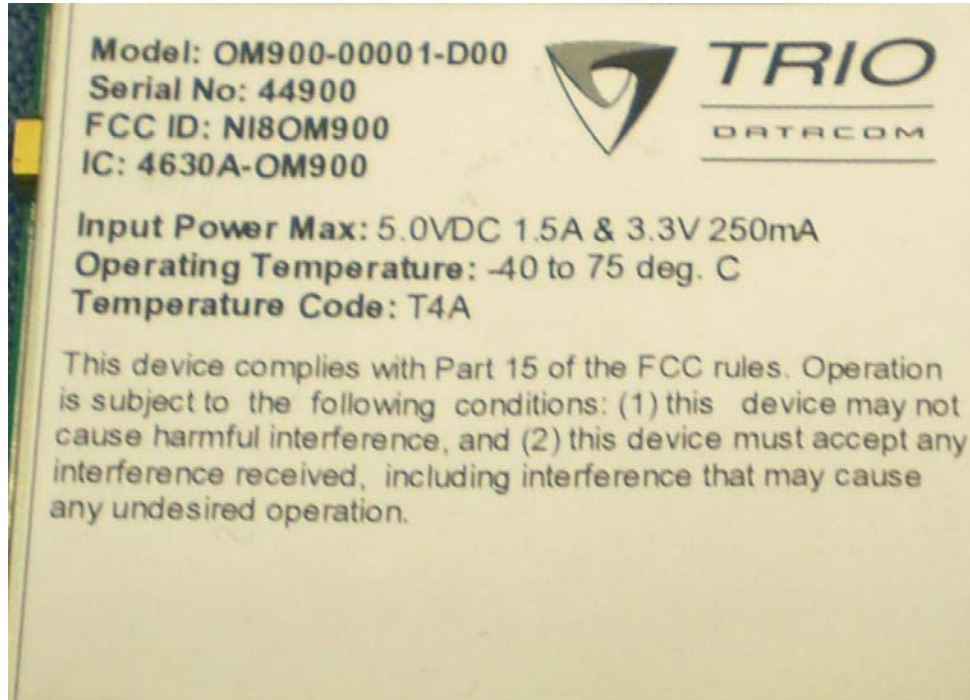

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Tf: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 30 of 37

The label is printed on UL/CSA approved 3M Transfer Polyester 0.3 MM (Part number 7815)

These label products utilize 3M™ Adhesive 310 which is a firm adhesive which resists oozing and provides high strength on a variety of surfaces.

The label is printed using thermal transfer printing using a UL approved ink ribbon listed on the 3M data sheet for indelible printing.