



**F2 Labs**  
16740 Peters Road  
Middlefield, Ohio 44062  
United States of America  
[www.f2labs.com](http://www.f2labs.com)

## **CERTIFICATION TEST REPORT**

---

**Manufacturing Address:** Zhen Jiangqiang Ling Electronic Co. Ltd.  
200 Xuefu Road  
Zhen Jiang  
Jiangsu 212016 CHINA

**Applicant Address:** Shanghai Qiangling Electronic Co., Ltd.  
139 Wang Dong RD S,  
SI Jing Song Jiang, Shanghai, 201601, CHINA

**Product Name:** TCP ColorSpree Limitless Color

**Product Description:** Bluetooth A19 Red Green Blue

**Model:** **A19RGB001**

**FCC ID:** **NIRA19RGB001**

**Testing Commenced:** **November 30, 2015**

**Testing Ended:** **Dec. 3, 2015**

**Summary of Test Results:** **In Compliance**

The EUT complies with the EMC requirements when manufactured identically as the unit tested in this report, including any required modifications. Any changes to the design or build of this unit subsequent to this testing may deem it non-compliant.

**Standards:**

- **FCC Part 15 Subpart C, Section 15.247**
- **FCC15.207 - Conducted Limits**
- **ANSI C63.10:2013**
- **FCC 15.31(e) Voltage Variations**



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

**Evaluation Conducted by:**

Joe Knepper, EMC Proj. Eng.

**Report Reviewed by:**

Ken Littell, EMC Tech. Mgr.

F2 Labs  
26501 Ridge Road  
Damascus, MD 20872  
Ph 301.253.4500  
Fax 301.253.5179

F2 Labs  
16740 Peters Road  
Middlefield, OH 44062  
Ph 440.632.5541  
Fax 440.632.5542

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



## TABLE OF CONTENTS

Section	Title	Page
1	ADMINISTRATIVE INFORMATION	4
2	SUMMARY OF TEST RESULTS/MODIFICATIONS	5
3	TABLE OF MEASURED RESULTS	6
4	ENGINEERING STATEMENT	7
5	EUT INFORMATION AND DATA	8
6	LIST OF MEASUREMENT INSTRUMENTATION	9
7	FCC Part 15.247(a)(2) – -6dB Occupied Bandwidth	10
8	FCC Part 15.247(b)(3) – Conducted Output Power	14
9	FCC Part 15.247(d) – Conducted Spurious Emissions	18
10	FCC Part 15.247(d) – Radiated Spurious Emission	31
11	FCC Part 15.247(e) – Peak Power Spectral Density (PSD)	63
12	FCC Part 15.207(a) – Conducted Limits	66
13	FCC Part 15.31(e) –Voltage Variation	69
14	Photos/Exhibits – Product Photos, Test Setups	73



## 1 ADMINISTRATIVE INFORMATION

### 1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

### 1.2 Measurement Procedure:

All measurements were performed according to the 2013 version of ANSI C63.10 and recommended FCC procedure of measurement of DTS operating under Section 15.247 and in KDB558074. A list of the measurement equipment can be found in Section 6.

### 1.3 Uncertainty Budget:

The uncertainty in EMC measurements arises from several factors which affect the results, some associated with environmental conditions in the measurement room, the test equipment being used and the measurement techniques adopted.

The measurement uncertainty budgets detailed below are calculated from the test and calibration data, and are expressed with a 95% confidence factor. Note: Only measurements listed below which relate to tests included in this Test Report are applicable to it.

Measurement Range	Expanded Uncertainty	Combined Uncertainty
Radiated Emissions <1 GHz @3m	±5.07dB	±2.54
Radiated Emissions <1 GHz @10m	±5.09dB	±2.55
Radiated Emissions 1 GHz to 2.7GHz	±3.62dB	±1.81
Radiated Emissions 2.7 GHz to 18GHz	±3.10dB	±1.55
AC Power Line Conducted Emissions, 150kHz to 30 MHz	±2.76dB	±1.38

This Uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 1.4 Document History

Document Number	Description	Issue Date	Approved By
F2LQ7271B-01E	First Issue	Dec. 18, 2015	K. Littell



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 2 SUMMARY OF TEST RESULTS

Test Name	Standard(s)	Results
-6dB Occupied Bandwidth	CFR 47 Part 15.247(a)(2) / KDB558074	Complies
Conducted Output Power	CFR 47 Part 15.247(b)(3) / KDB558074	Complies
Conducted Spurious Emissions	CFR 47 Part 15.247(d) / Part 15.207 / KDB558074	Complies
Radiated Spurious Emission with 2dBi Integral Antenna	CFR 47 Part 15.247(d) / Part 15.209 / KDB558074	Complies
Peak Power Spectral Density	CFR 47 Part 15.247(e) / KDB558074	Complies
Conducted Emissions	CFR 47 Part 15.207(a)	Complies
Voltage Variation	CFR 47 Part 15.31(e)	Complies

### Modifications Made to the Equipment

None

### 3 TABLE OF MEASURED RESULTS

Test	Low Channel 2.402 GHz	Mid Channel 2.442 GHz	High Channel 2.480 GHz
Conducted Output Power	0.1094mW (-9.61dBm)	0.0853mW (-10.69dBm)	0.0369mW (-14.32dBm)
Conducted Output Power at 100V	0.0516mW (-12.87dBm)	0.0656mW (-11.83dBm)	0.0779mW (-11.08dBm)
Conducted Output Power at 140V	0.0429mW (-13.67dBm)	0.0485mW (-13.14dBm)	0.0910mW (-10.41dBm)
Conducted Output Power Limit	1 Watt (30dBm)	1 Watt (30dBm)	1 Watt (30dBm)
E.I.R.P. with 2 dBi Integral antenna	0.173mW (-7.61dBm)	0.135mW (-8.69dBm)	0.144mW (-8.41dBm)
E.I.R.P. Limit	4 Watts (36.02dBm)	4 Watts (36.02dBm)	4 Watts (36.02dBm)
Peak Power Spectral Density	-20.52dBm	-20.66dBm	-24.01dBm
Peak Power Spectral Density Limit	8dBm	8dBm	8dBm
-6dB Occupied Bandwidth	0.7241 MHz	0.7317 MHz	0.7287 MHz
-6dB Occupied Bandwidth Limit	≥ 500KHz	≥ 500KHz	≥ 500KHz



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

#### 4 ENGINEERING STATEMENT

This report has been prepared on behalf of Shanghai Qiangling Electronic Co., Ltd. to provide documentation for the testing described herein. This equipment has been tested and found to comply with Part 15.247 of the FCC Rules using ANSI C63.10 2013 and KDB558074 standards. The test results found in this test report relate only to the items tested.



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 5 EUT INFORMATION AND DATA

### 5.1 Equipment Under Test:

Product: TCP ColorSpree Limitless Color

Model: A19RGB001

Serial Nos.: 1262-18, 1262-19, 1262-20

FCC ID: NIRA19RGB001

### 5.2 Trade Name:

TCP

### 5.3 Power Supply:

120V, 60 Hz

### 5.4 Applicable Rules:

CFR 47, Part 15.247, subpart C

### 5.5 Equipment Category:

Radio Transmitter-DTS

### 5.6 Antenna:

Internal Antenna

### 5.7 Accessories:

N/A

### 5.8 Test Item Condition:

The equipment to be tested was received in good condition.

### 5.9 Testing Algorithm:

EUT was set up in a normal testing manner, powered at 120V, 60 Hz. EUT transmitted at High (2.48 GHz), Mid (2.442 GHz) and Low (2.402 GHz) continuously.



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 6 LIST OF MEASUREMENT INSTRUMENTATION

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Shielded Chamber	CL166	AlbatrossProjects	B83117-DF435-T261	US140023	Jan. 1, 2016
Temp/Hum. Recorder	CL137	Extech	RH520	CH16992	May 7, 2016
Receiver	CL151	Rohde & Schwarz	ESU40	100319	Nov. 25, 2016
Horn Antenna	CL098	Emco	3115	9809-5580	Dec. 3, 2015
Pre-Amplifier	CL045	Hewlett-Packard	8447D	2944A08445	Nov. 2, 2016
Amplifier w/Monopole & 18" Loop	CL163	A.H. Systems, Inc.	EHA-52B	100	Apr. 20, 2016
Software:	Tile Version 1.0			Software Verified: Nov. 30, 2015	
Software:	EMC 32, Version 5.20.2			Software Verified: Nov. 30, 2015	
Antenna, Horn	CL114	A. H. Systems, Inc.	SAS-572	237	Oct. 16, 2016
Spectrum Analyzer	0141	Hewlett Packard	8591E	3520A04145	Jan. 8, 2016
Temp/Hum. Rec.	CL119	Extech	RH520	H005869	Feb. 9, 2016
Transient Limiter	0202	Hewlett Packard	11947A	3107A00729	June 27, 2018
LISN	CL184	Com-Power	LI-125A	191213	June 9, 2016
LISN	CL185	Com-Power	LI-125A	191214	June 9, 2016



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 7 FCC PART 15.247(a)(2) – OCCUPIED BANDWIDTH


### 7.1 Requirements:


The 6dB bandwidth shall be greater than 500 kHz.


Bandwidth measurements were made at the low (2.402 GHz), mid (2.442 GHz) and upper (2.480 GHz) frequencies. The bandwidth was measured using the analyzer's occupied bandwidth function.

## 7.2 Occupied Bandwidth Test Data

Test Date:	Nov. 30, 2015	Test Engineer:	J. Knepper
Standards:	CFR 47 Part 15.247(a)(2); KDB558074	Air Temperature:	19.3°C
		Relative Humidity:	46%

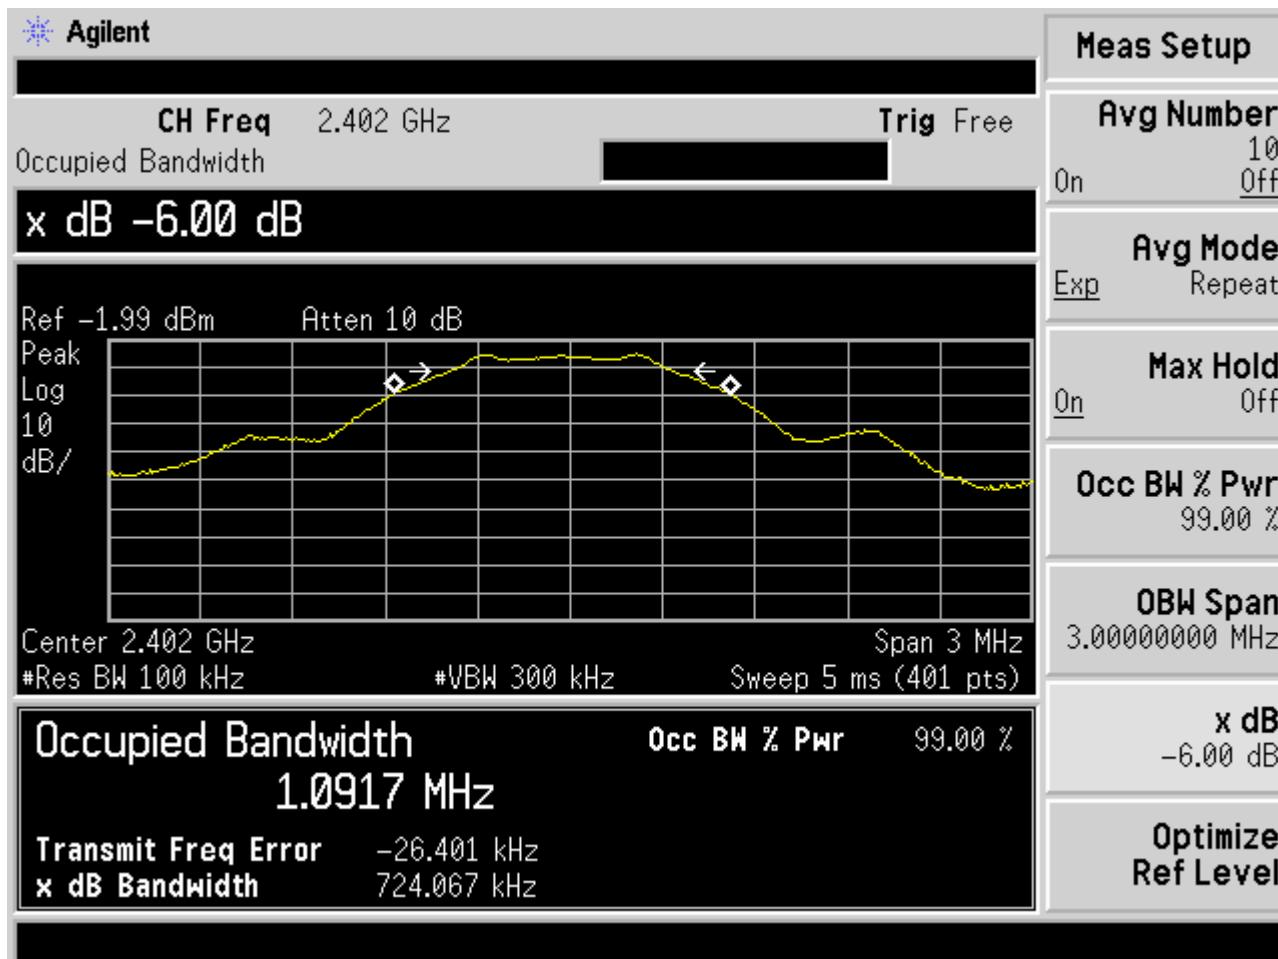

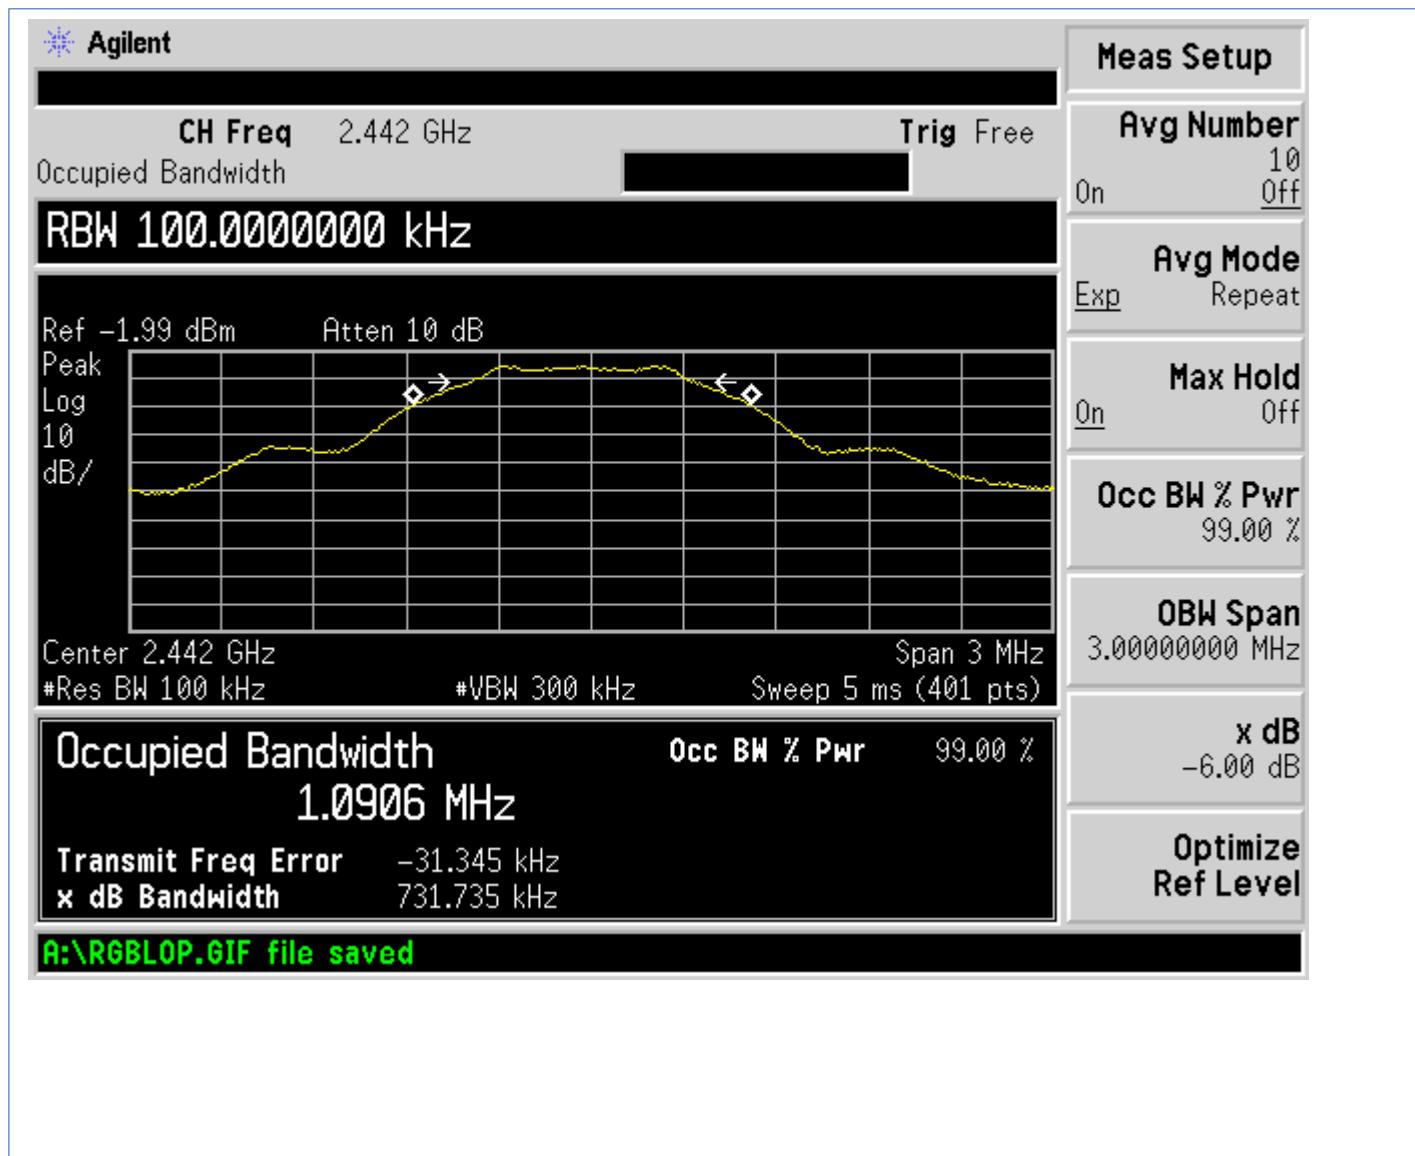

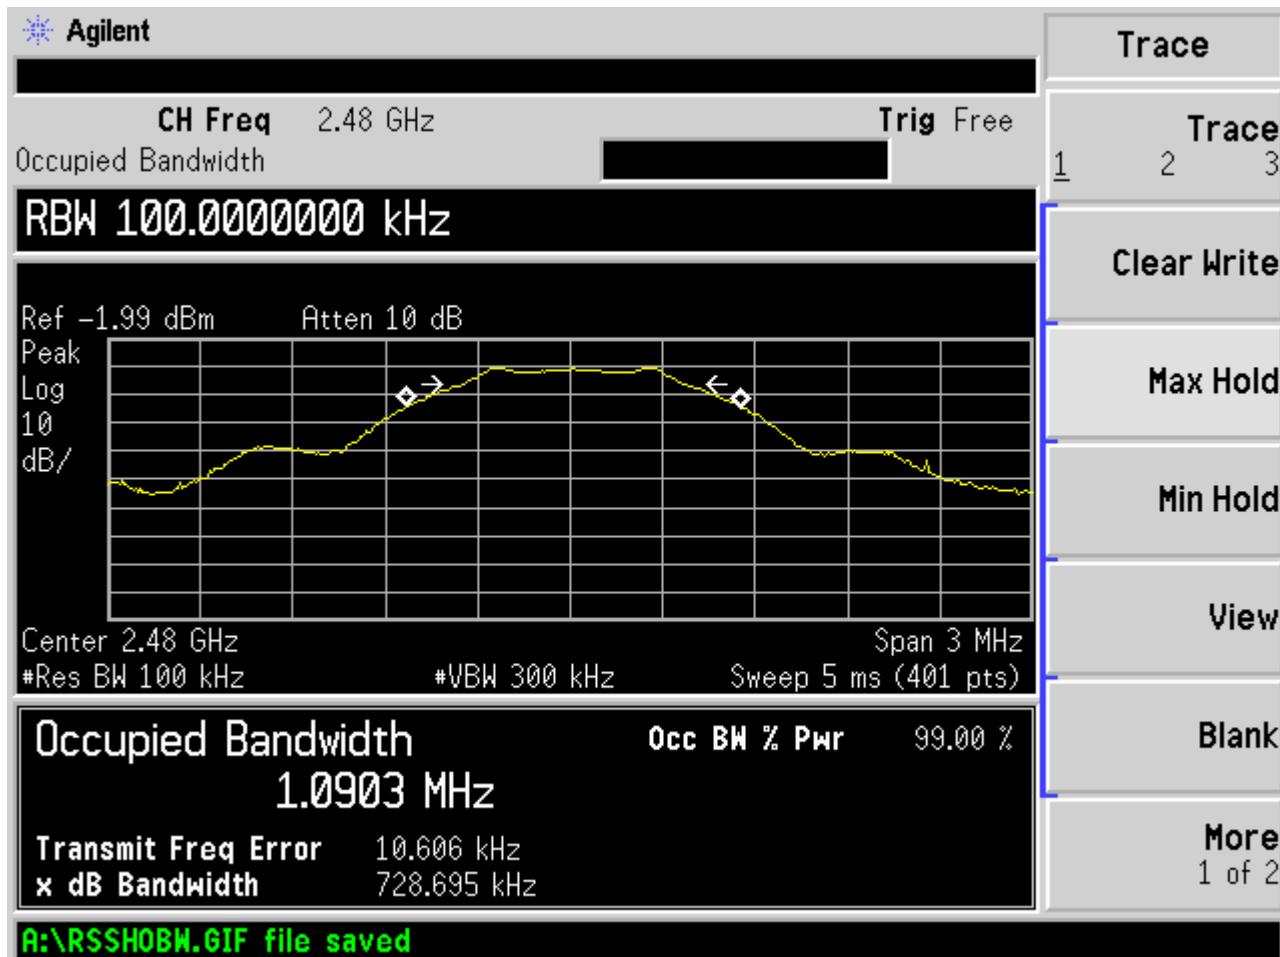



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 8 FCC PART 15.247(b)(3) – CONDUCTED OUTPUT POWER


The EUT antenna port was fitted with an SMA connector and directly connected to the input of the receiver. The peak power output was measured.


### 8.1 Requirements:


The peak power output shall be 1 watt (30 dBm) or less when using an antenna with a gain of less than 6dBi. For antennas having a gain of more than 6dBi, the limit is reduced by 1dB for every dB the antenna gain is over 6dBi.

## 8.2 Conducted Output Power Test Data

Test Date:	Nov. 30, 2015	Test Engineer:	J. Knepper
Standards:	CFR 47 Part 15.247(b)(3); KDB558074	Air Temperature:	19.3°C
		Relative Humidity:	46%

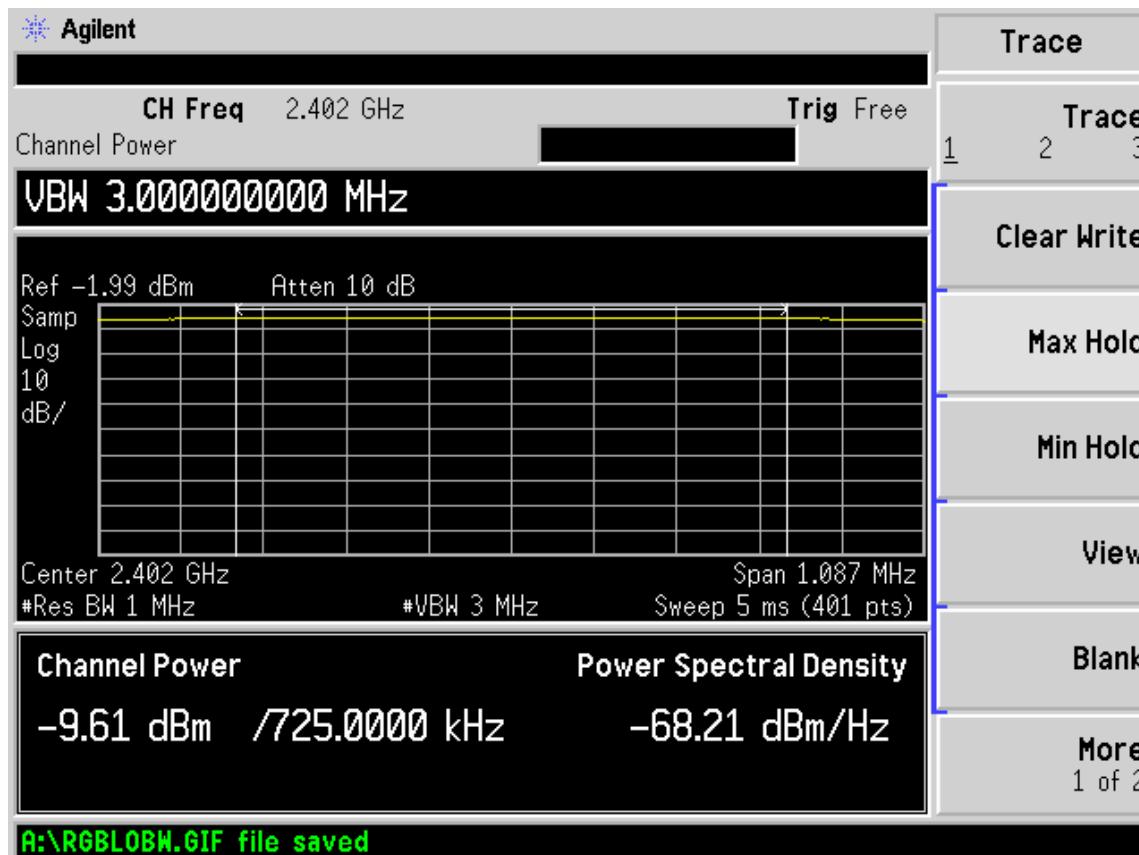

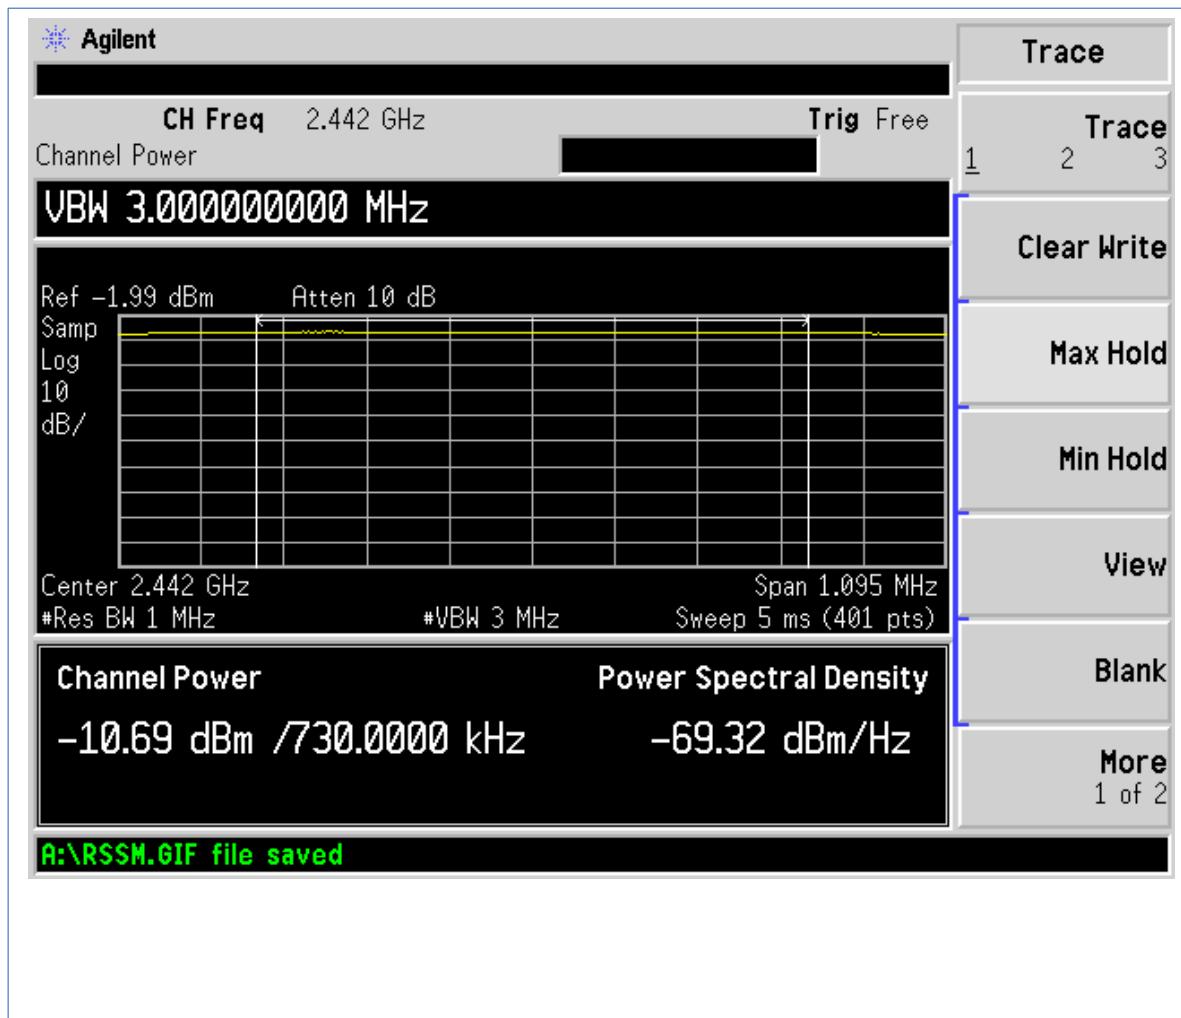

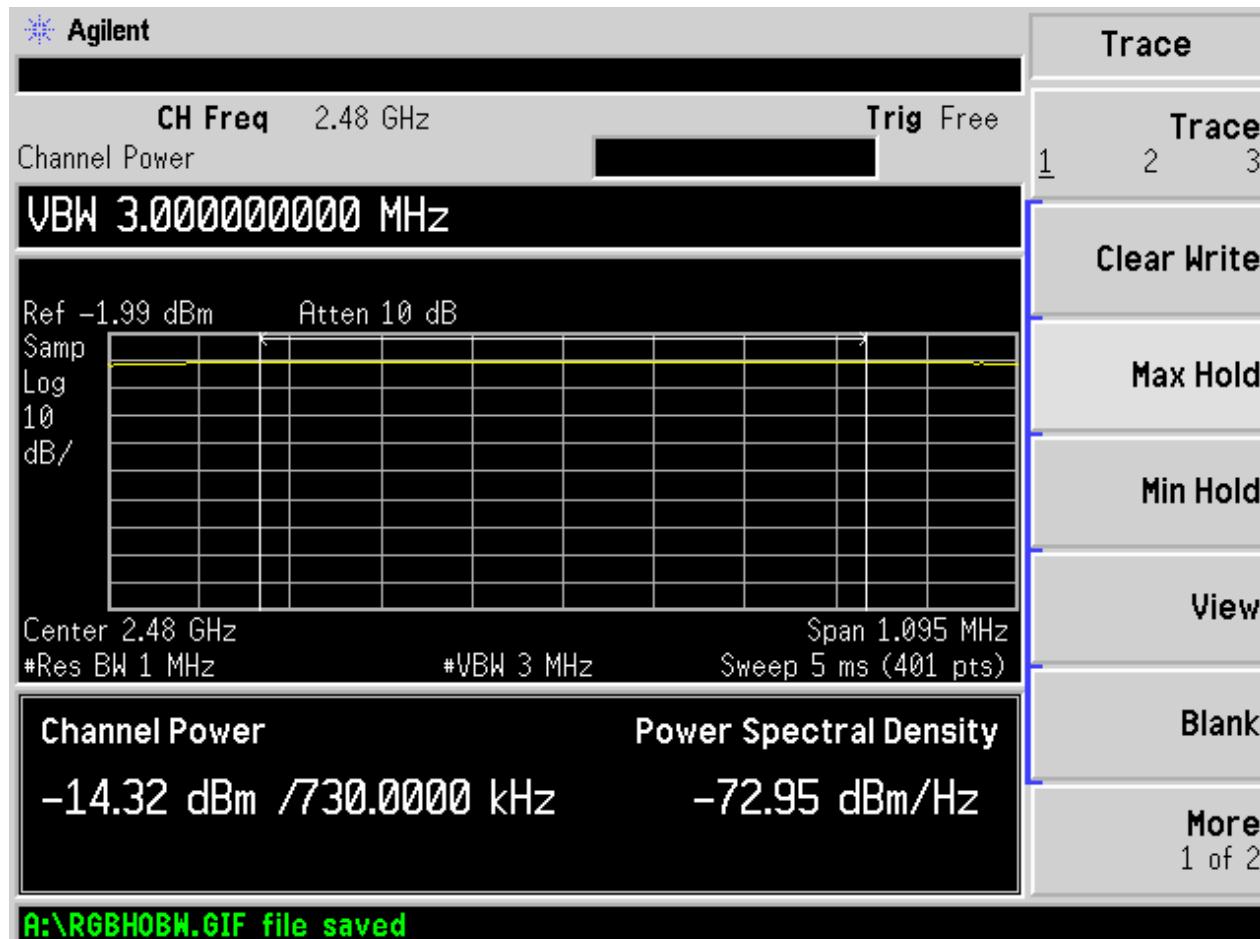



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 9 FCC Part 15.247(d) – CONDUCTED SPURIOUS EMISSIONS

The following tests were performed to demonstrate compliance.

### RF Antenna Conducted Test

The EUT antenna port was fitted with an SMA connector and directly connected to the input of the spectrum analyzer.

#### 9.1 Requirements:


All Spurious Emissions must be at least 20dB down from the highest emission level measured within the authorized band up through the tenth harmonic.

Spurious emissions measurements were made at the low, mid, and upper channels with the appropriate spectrum analyzer impulse bandwidth. Additionally, 6dB down points were measured for the low and high channels to verify band edge compliance.


## 9.2 Test Data – Conducted Spurious Emissions



Test Date:	Nov. 30, 2015	Test Engineer:	J. Knepper
Standards:	CFR 47 Part 15.247(d) / Part 15.209; KDB558074	Air Temperature:	19.5°C



### Low Channel: 0.009 MHz to 0.15 MHz


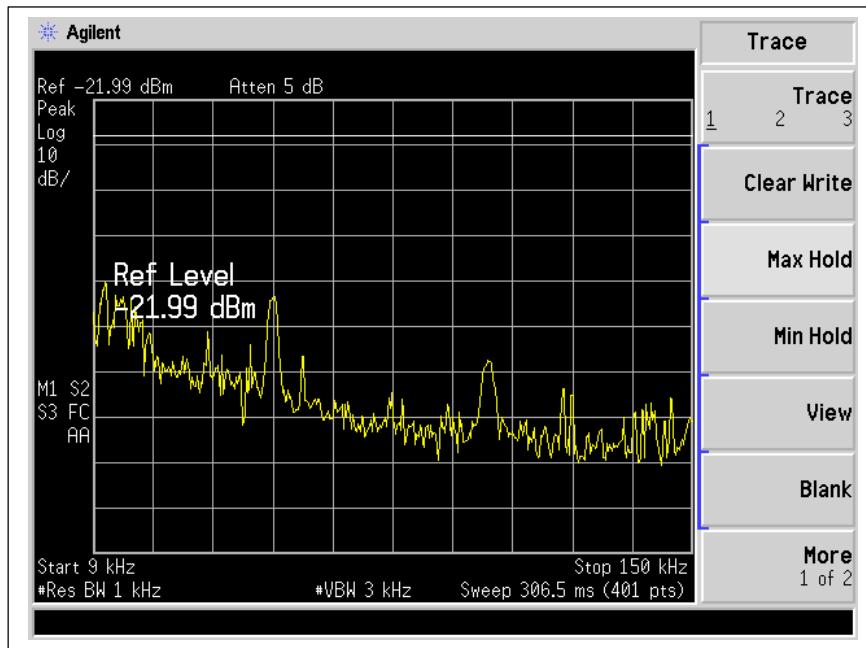




### Low Channel: 0.15 MHz to 30 MHz


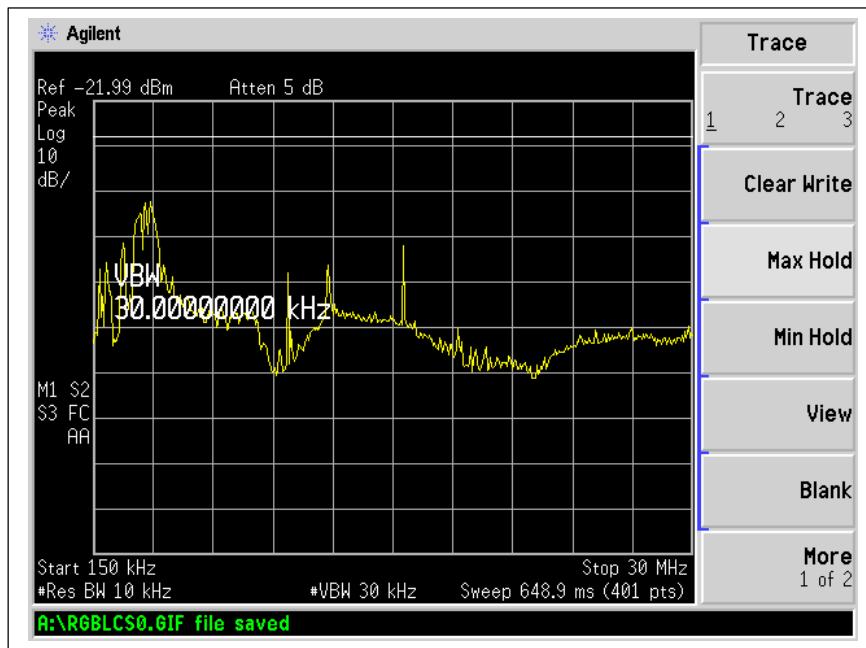


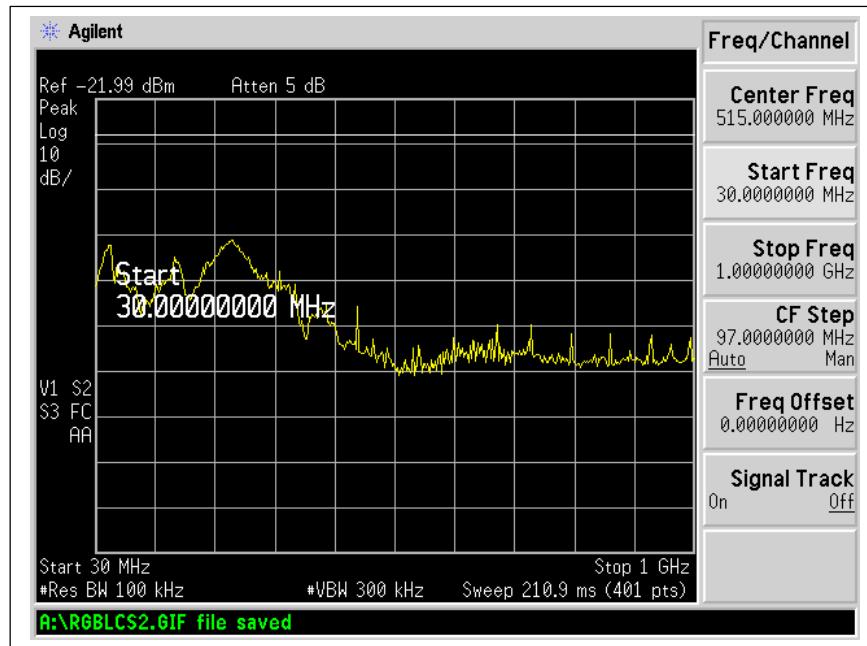
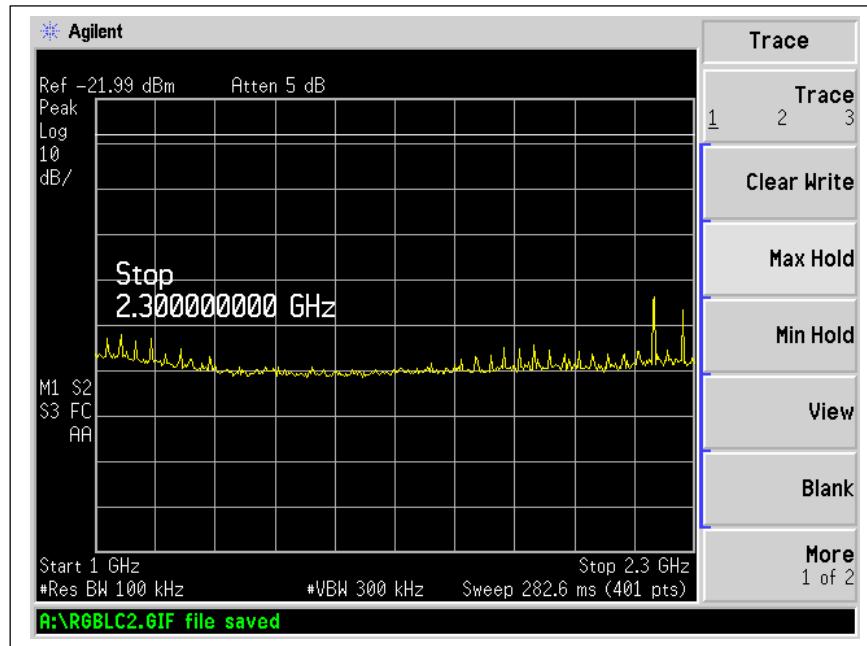
**Low Channel: 30 MHz to 1 GHz**

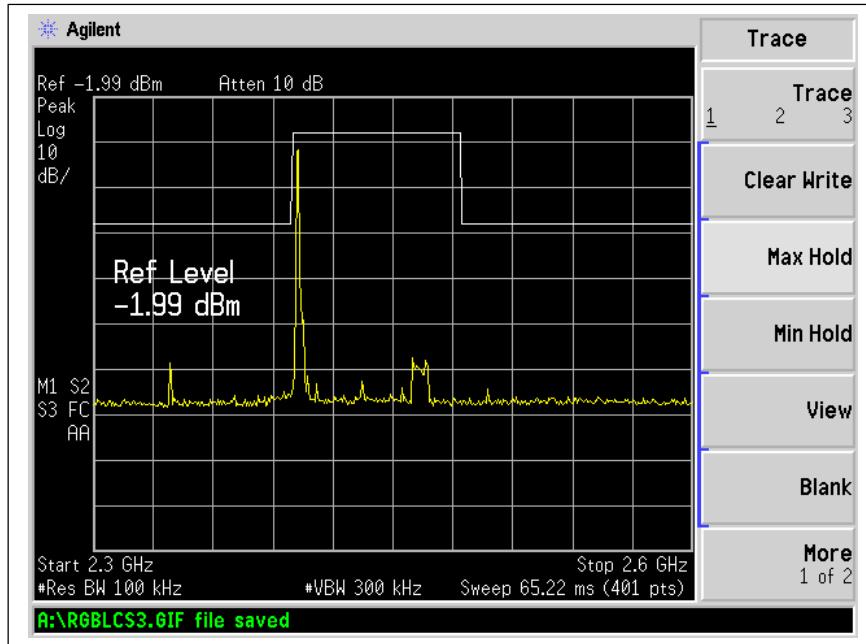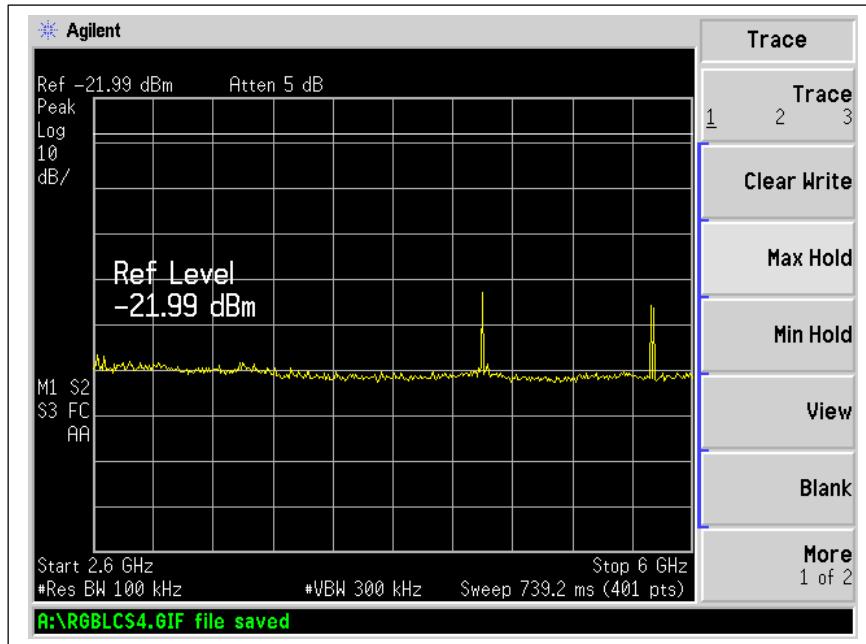**Low Channel: 1 GHz to 2.3 GHz**

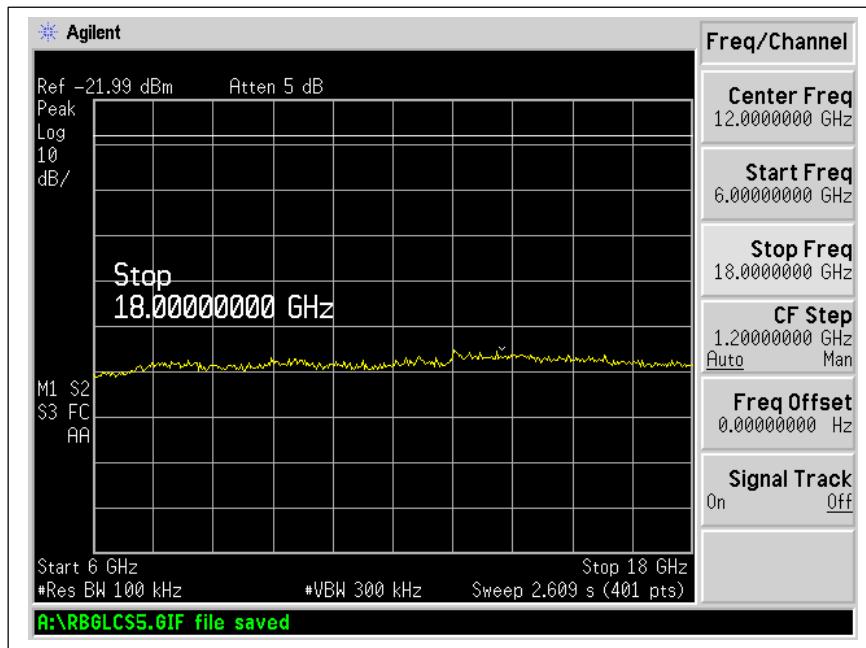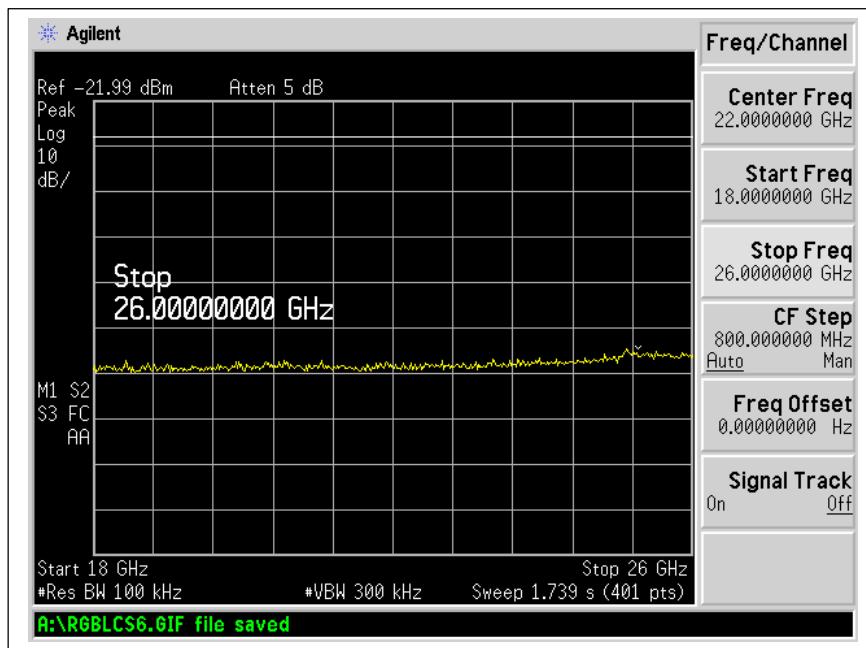
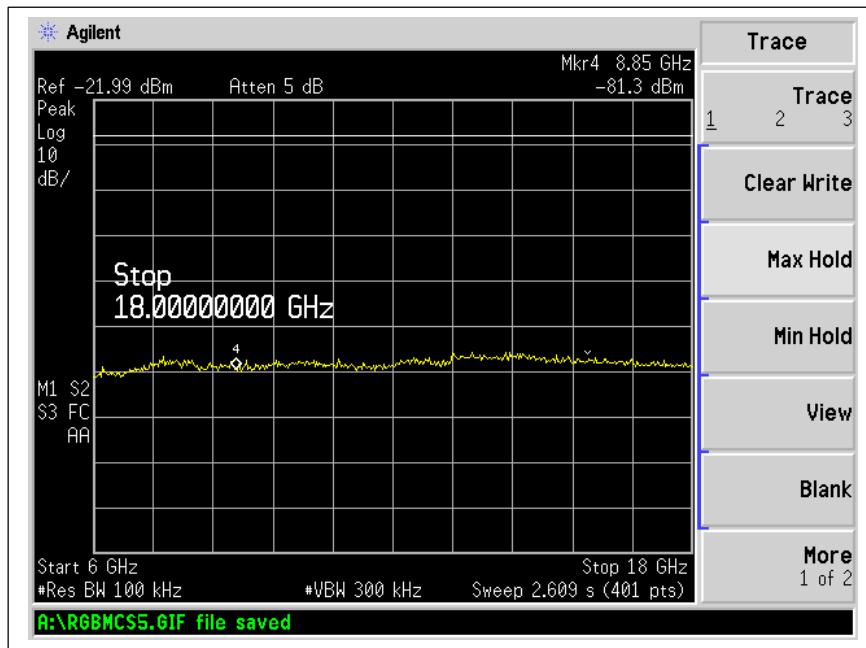
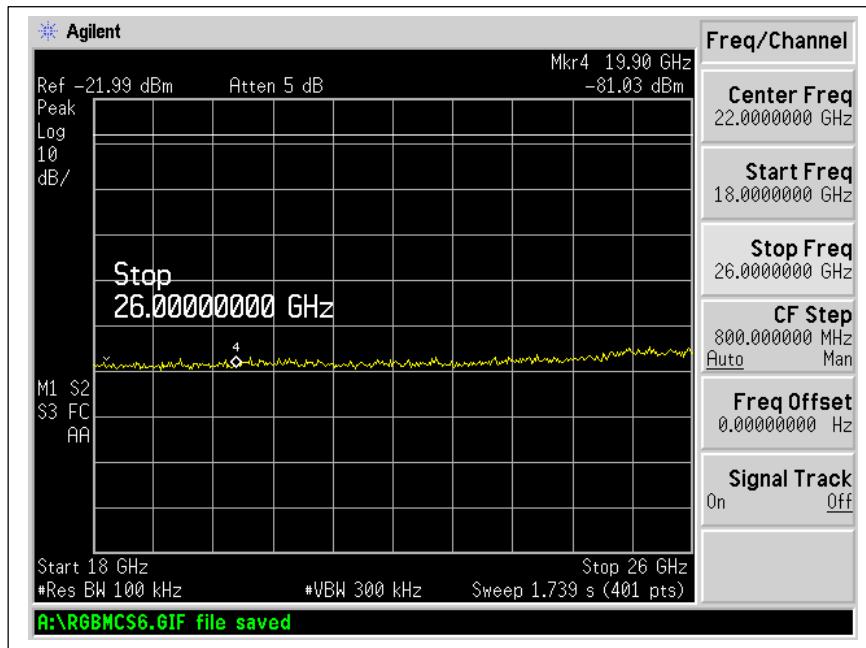
**Low Channel: 2.3 GHz to 2.6 GHz**

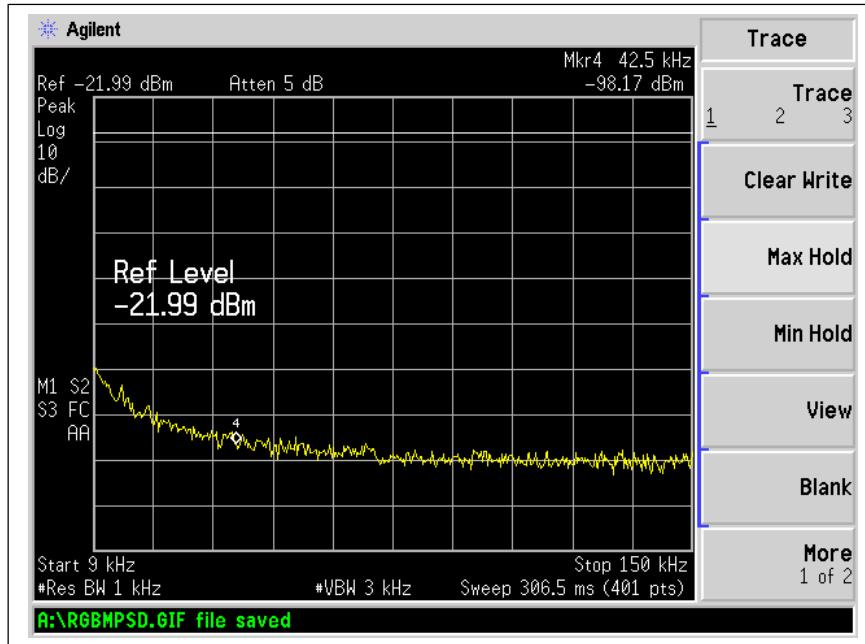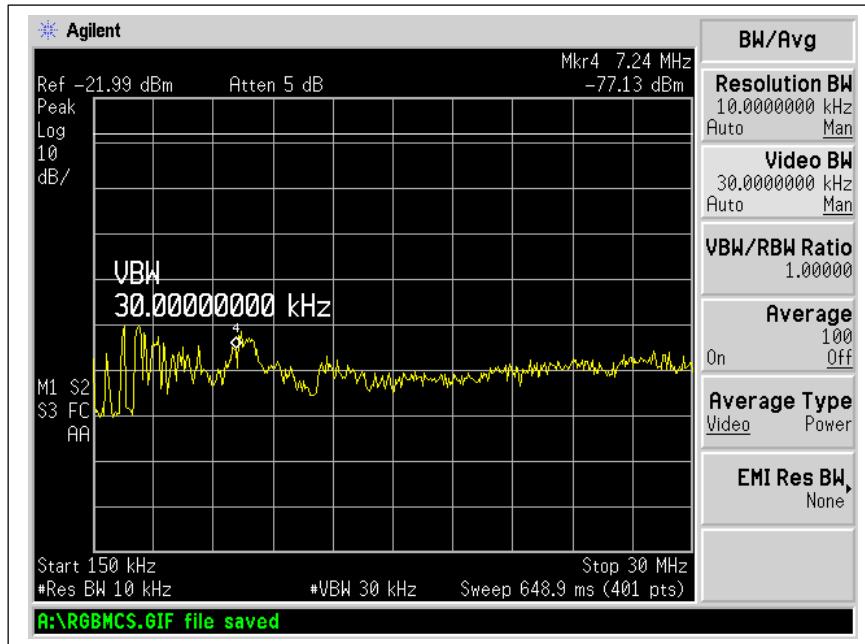**Low Channel: 2.6 GHz to 6 GHz**

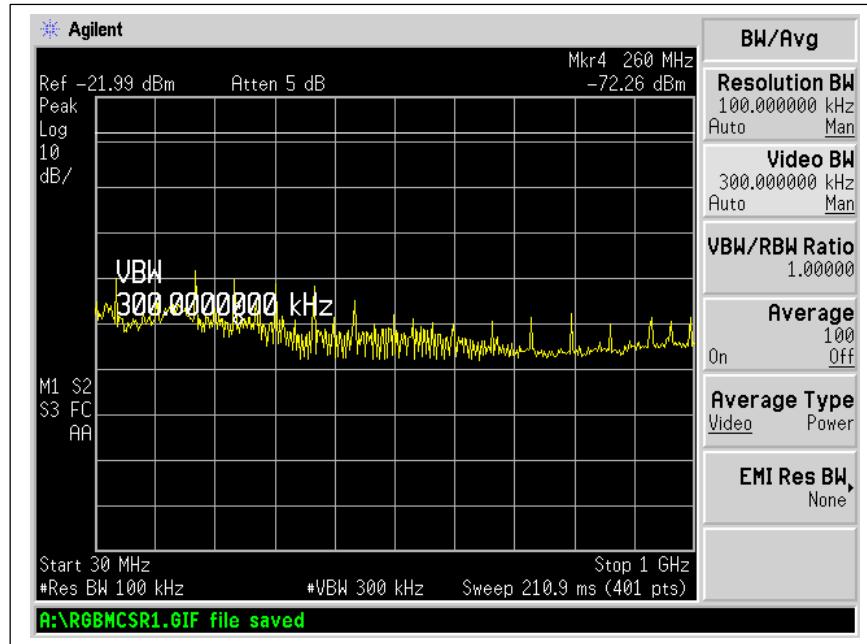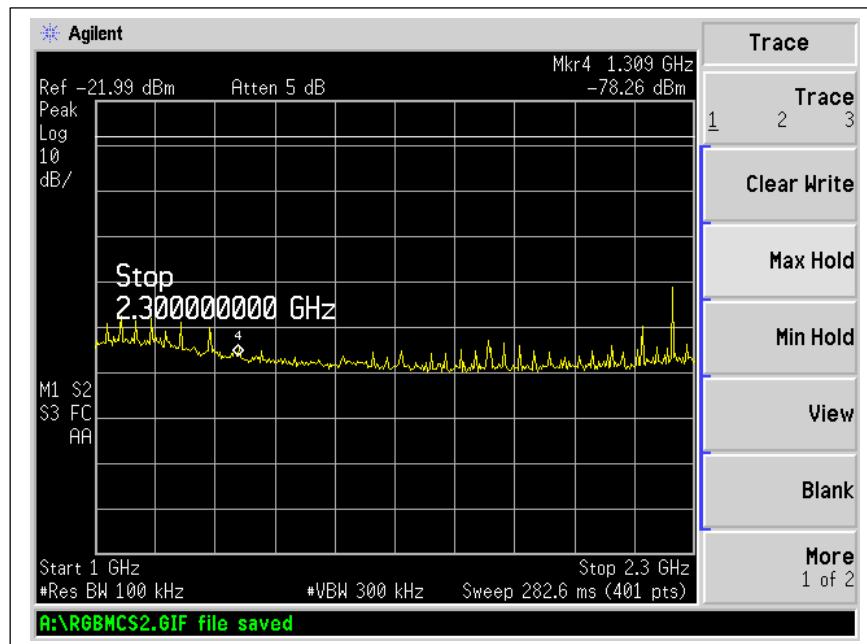
**Low Channel: 6 GHz to 18 GHz**

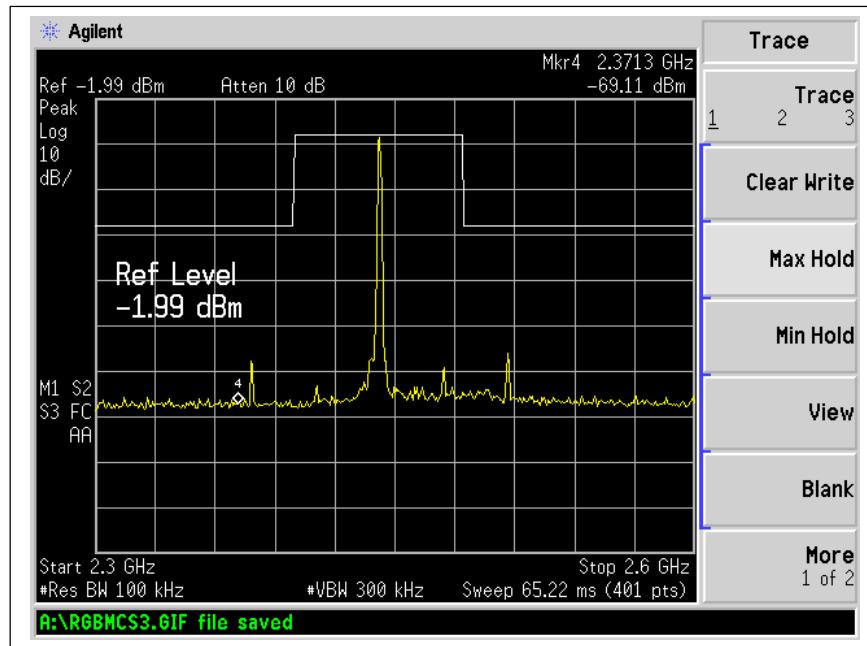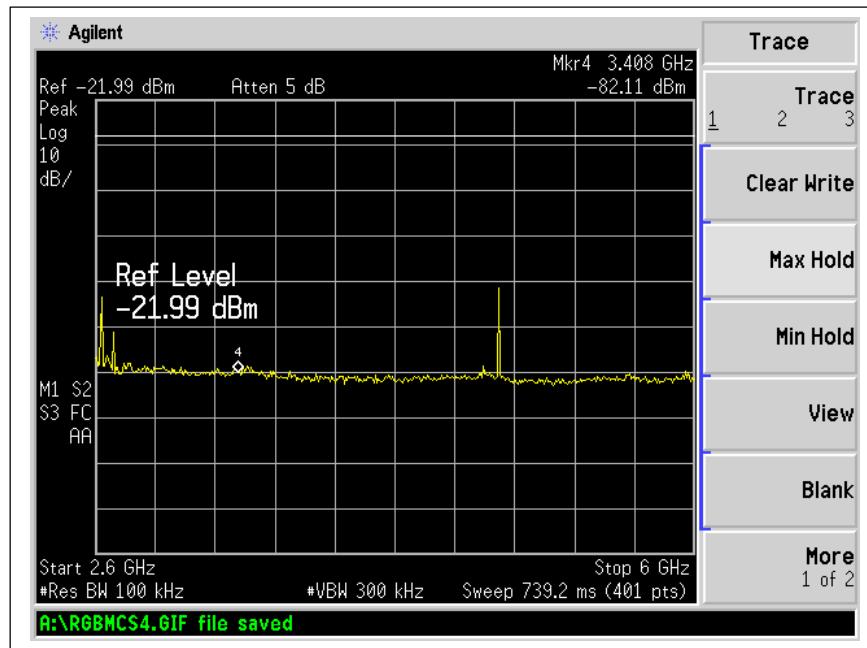**Low Channel: 18 GHz to 26 GHz**


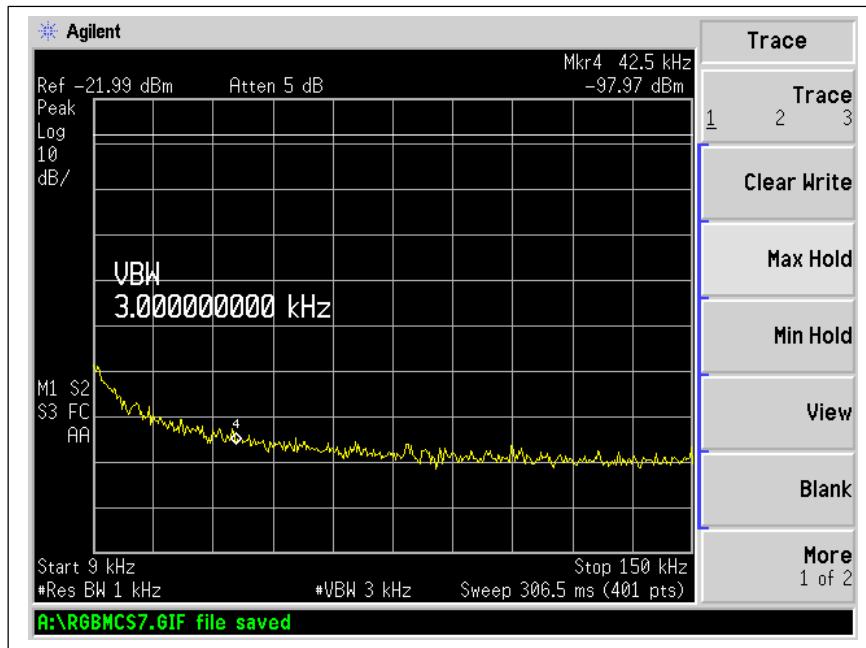
**Mid Channel: 0.009 MHz to 0.15 MHz**

**Mid Channel: 0.15 MHz to 30 MHz**


**Mid Channel: 30 MHz to 1 GHz**

**Mid Channel: 1 GHz to 2.3 GHz**


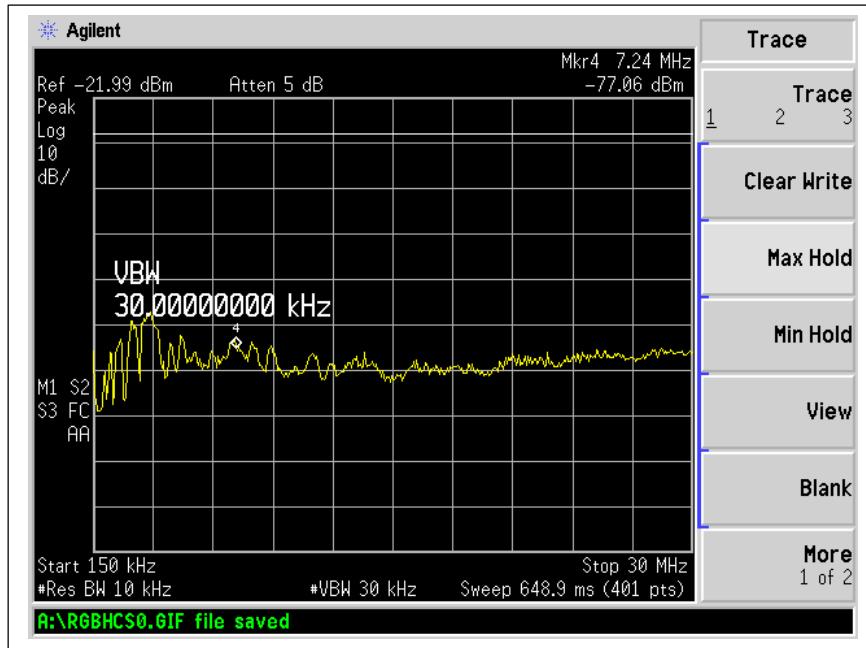
**Mid Channel: 2.3 GHz to 2.6 GHz**

**Mid Channel: 2.6 GHz to 6 GHz**


**Mid Channel: 6 GHz to 18 GHz**

**Mid Channel: 18 GHz to 26 GHz**


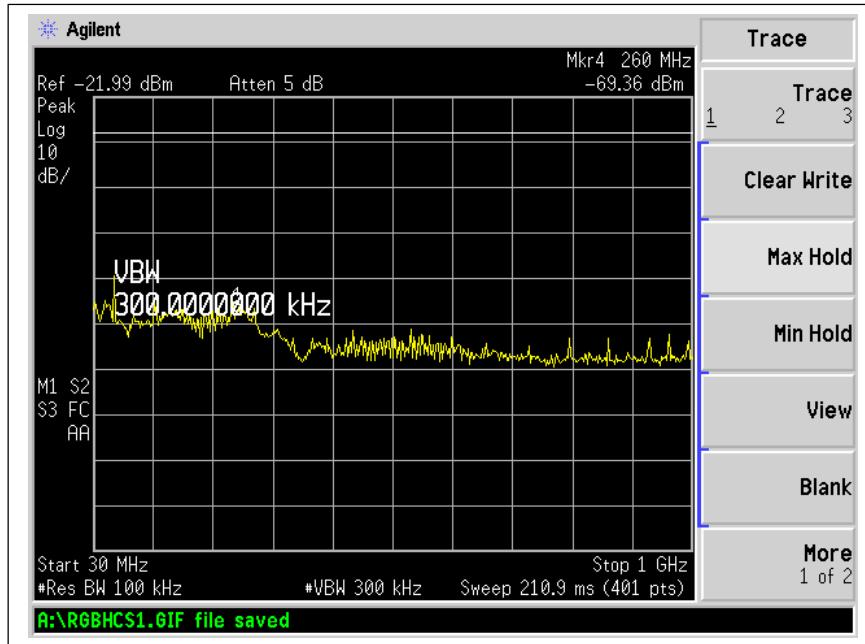
## High Channel: 0.009 MHz to 0.15 MHz




## High Channel: 0.15 MHz to 30 MHz





### High Channel: 30 MHz to 1 GHz




### High Channel: 1 GHz to 2.3 GHz

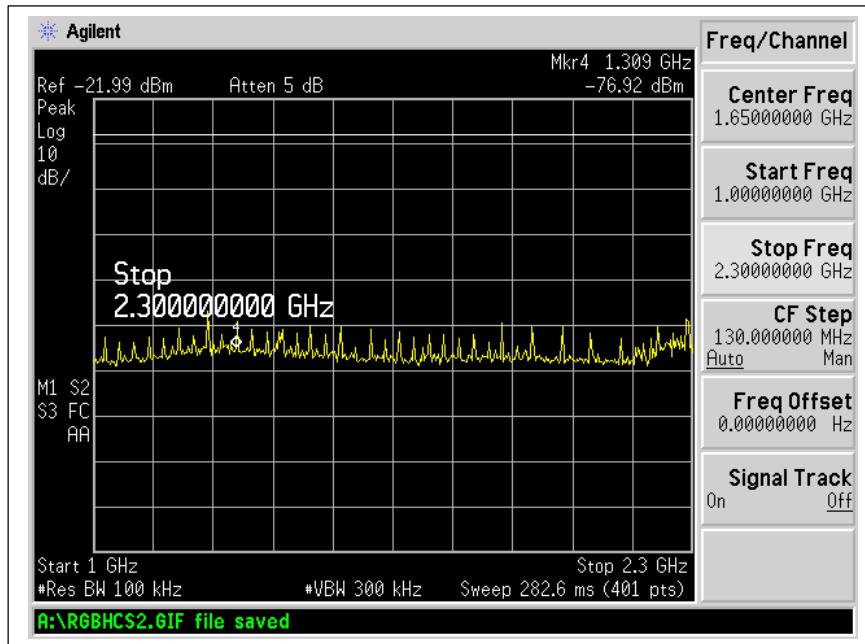


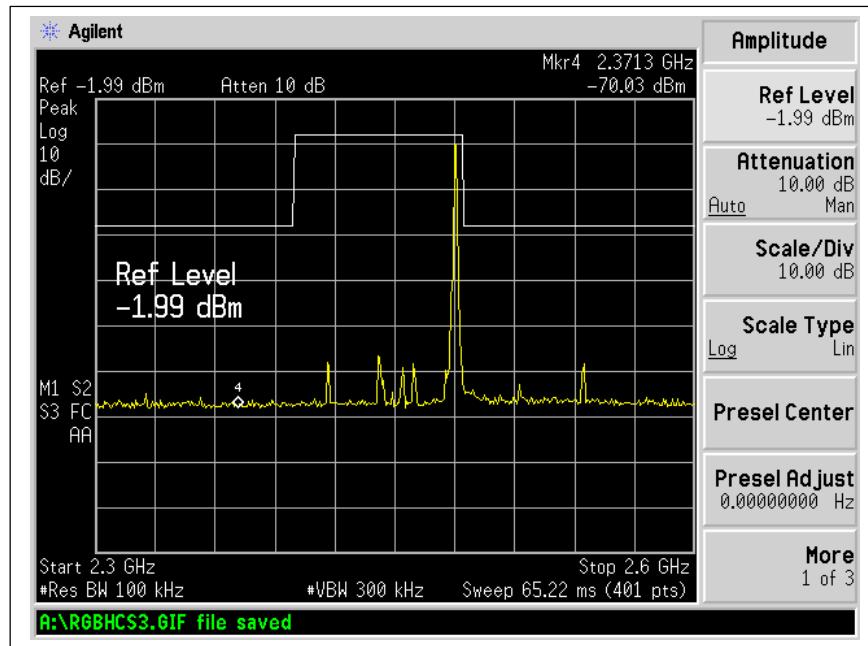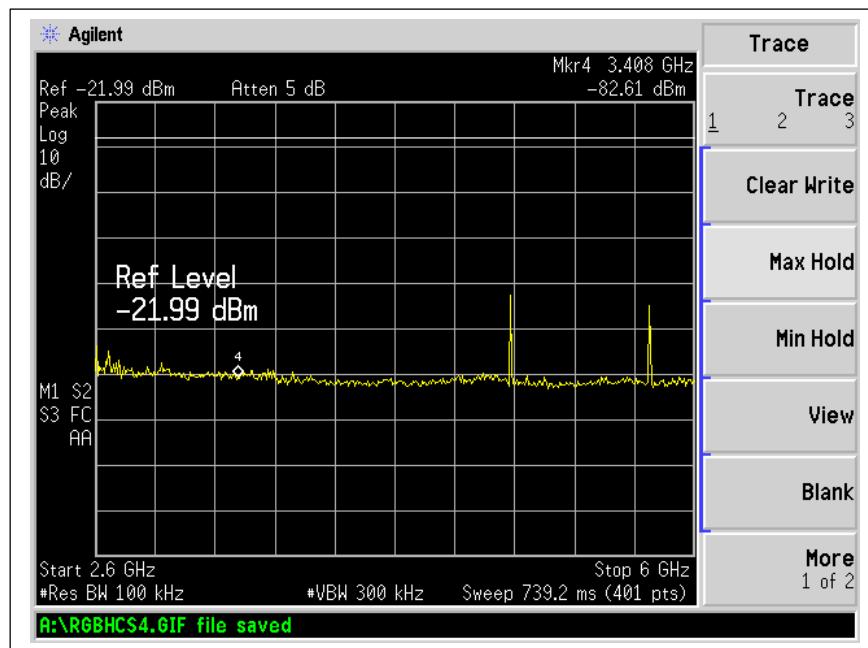**High Channel: 2.3 GHz to 2.6 GHz**

**High Channel: 2.6 GHz to 6 GHz**

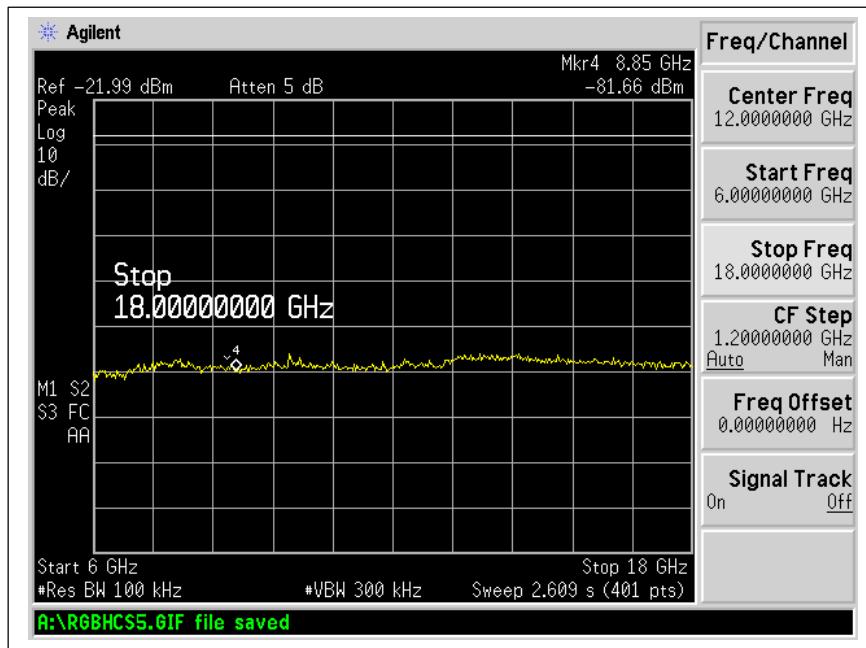
### High Channel: 6 GHz to 18 GHz

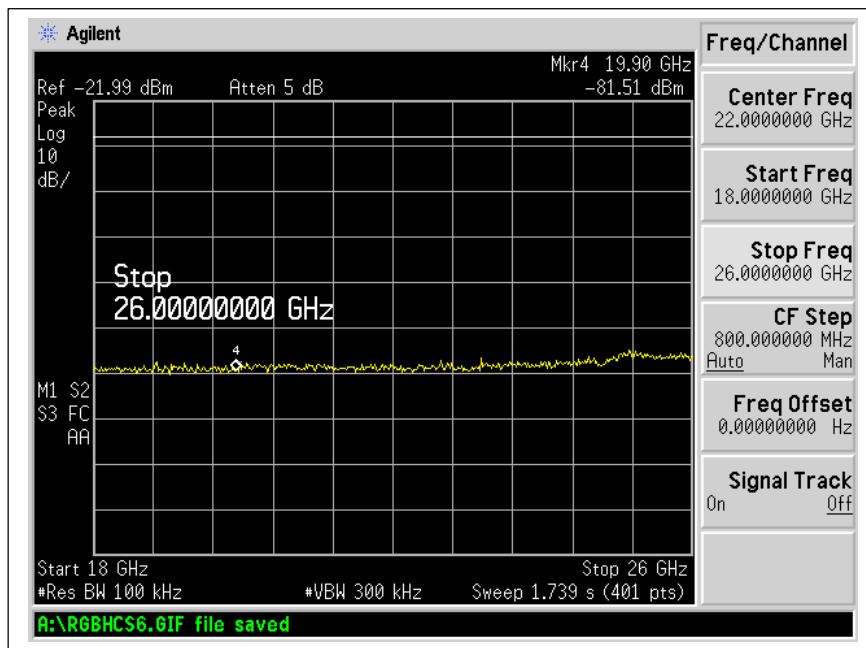

### High Channel: 18 GHz to 26 GHz





Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 10 RADIATED SPURIOUS EMISSION

The EUT antenna port was fitted with its internal antenna. Radiated emissions were measured in a Semi-Anechoic Chamber. All emissions generated that fall in the restricted bands per FCC Part 15.205 were examined.

### 10.1 Requirements:

All emissions that fall in the restricted bands defined in FCC Part 15.205 shall not exceed the maximum field strength listed in FCC Part 15.209(a).



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 10.2 Radiated Spurious Emission Test Data

<b>Test Date(s):</b>	Dec. 1-2, 2015	<b>Test Engineer:</b>	J. Knepper
<b>Standards:</b>	CFR 47 Part 15.247(d); Part 15.209 / KDB558074	<b>Air Temperature:</b>	19.6°C
		<b>Relative Humidity:</b>	47%

Notes: Plots are peak, max hold prescan data included only to determine what frequencies to investigate and measure. The EUT was initially placed in a semi-anechoic chamber, and rotated in all three orthogonal positions to maximize the emissions. Characterization measurements were then performed to determine at which frequencies significant emissions occurred. These graphs are shown below.

The equipment was fully exercised with all cabling attached to the EUT and was positioned in a semi-anechoic chamber for maximum emissions. While the equipment was energized, the receiving antenna was scanned from 1.0 meter to 4.0 meters in both vertical and horizontal polarities while the turntable was adjusted 360 degrees to determine the maximum field strength. The tables of measured results can be found below.

Some of the frequencies did not change with the EUT on or off. At those frequencies, the test distance was shortened to 1 meter and still no emissions from the EUT were visible or over the ambient or limit.

The plots are for reference only and the limit lines are not actual limit lines but merely a guide.




Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.

Model: A19RGB001

### Low Channel: 0.009 MHz to 0.15 MHz

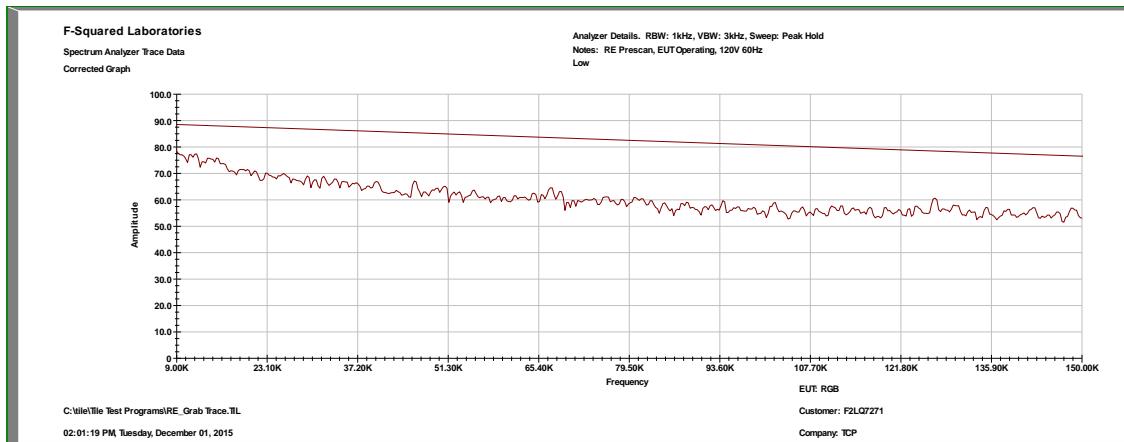

### Low Channel: 0.15 MHz to 0.5 MHz

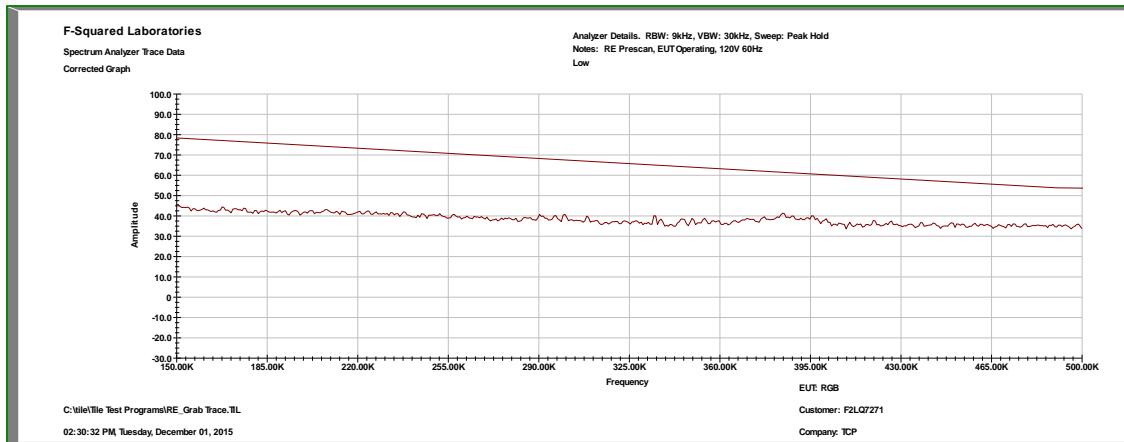




Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.



Model: A19RGB001

### Low Channel: 0.5 MHz to 5 MHz

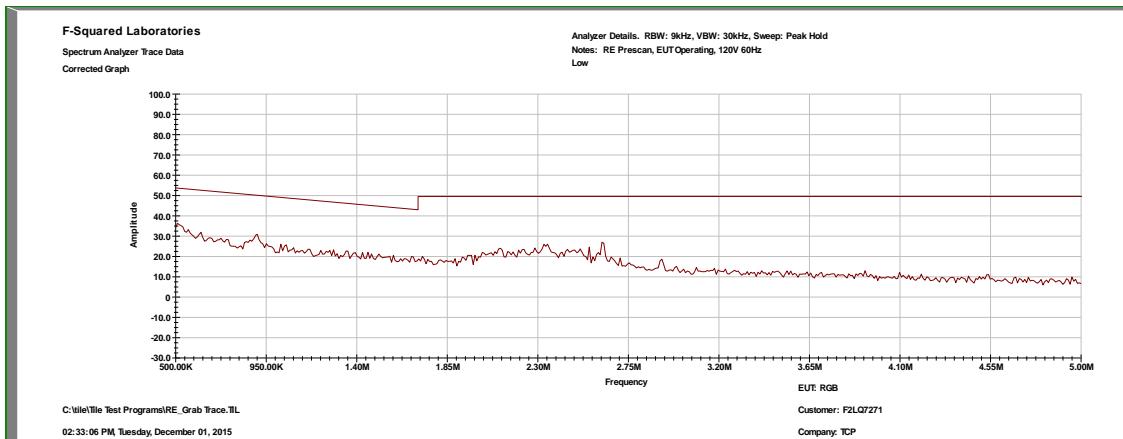


### Low Channel: 5 MHz to 30 MHz

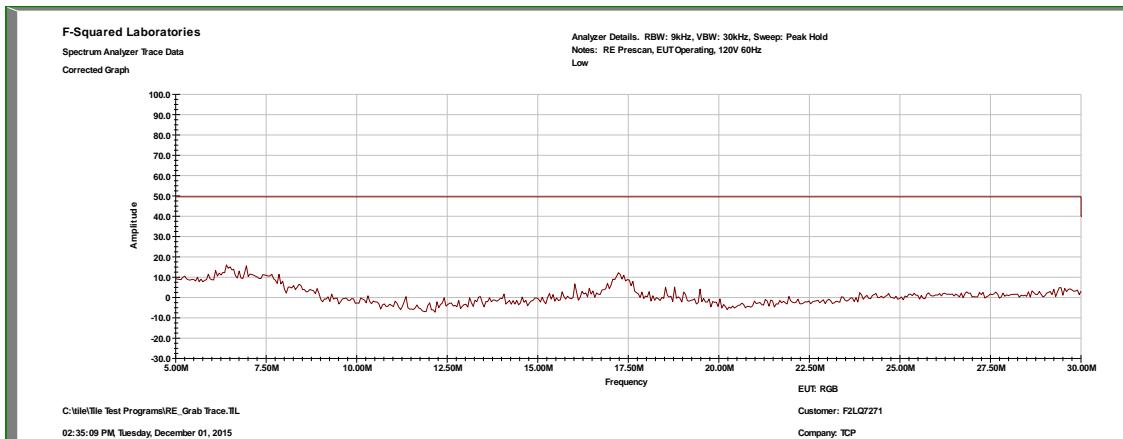


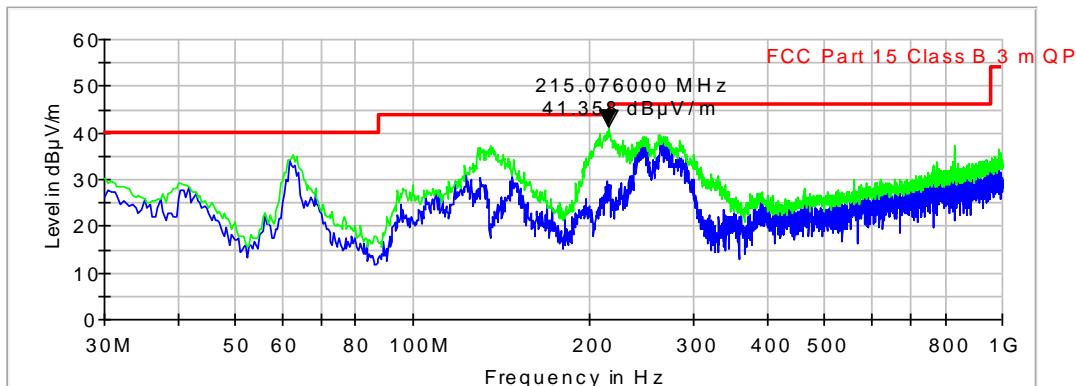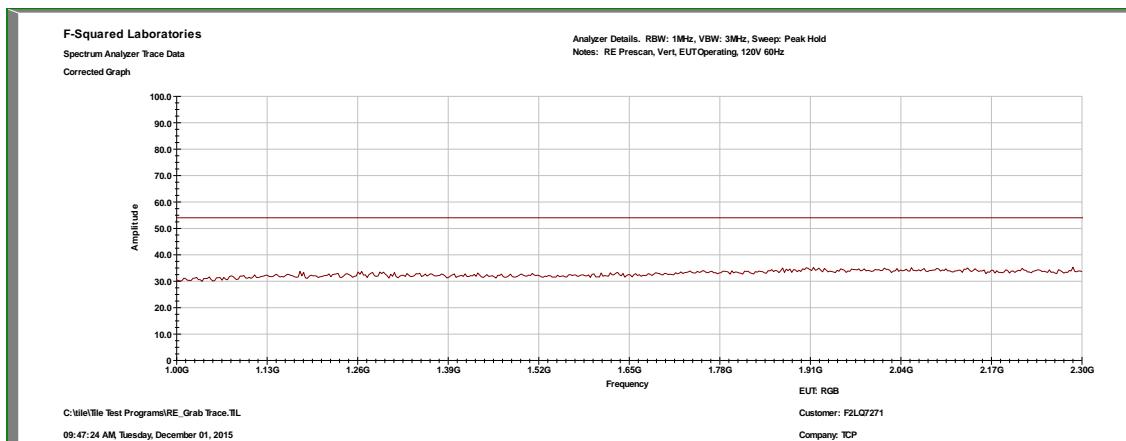**Low Channel: 30 MHz to 1 GHz, Vertical****Low Channel: 1 GHz to 2.3 GHz, Vertical**

### Low Channel: 2.3 GHz to 2.6 GHz, Vertical

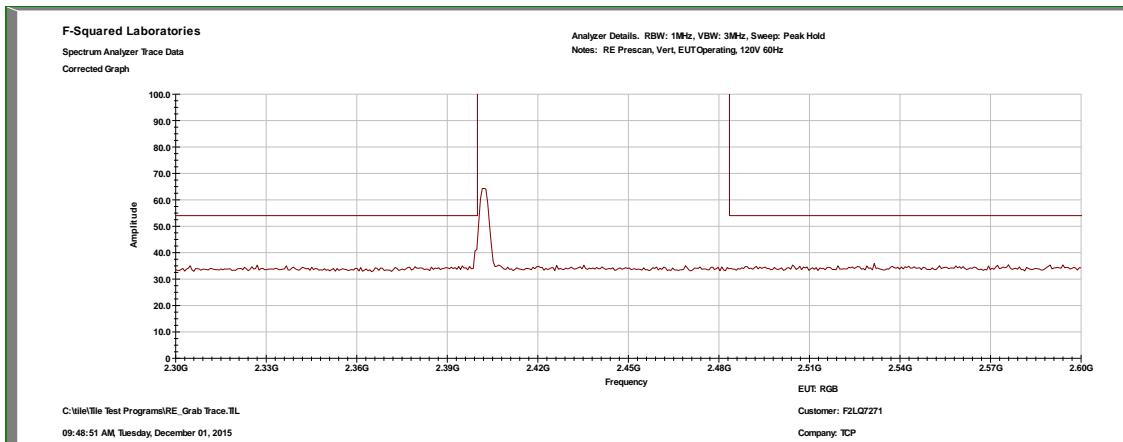

### Low Channel: 2.6 GHz to 6 GHz, Vertical

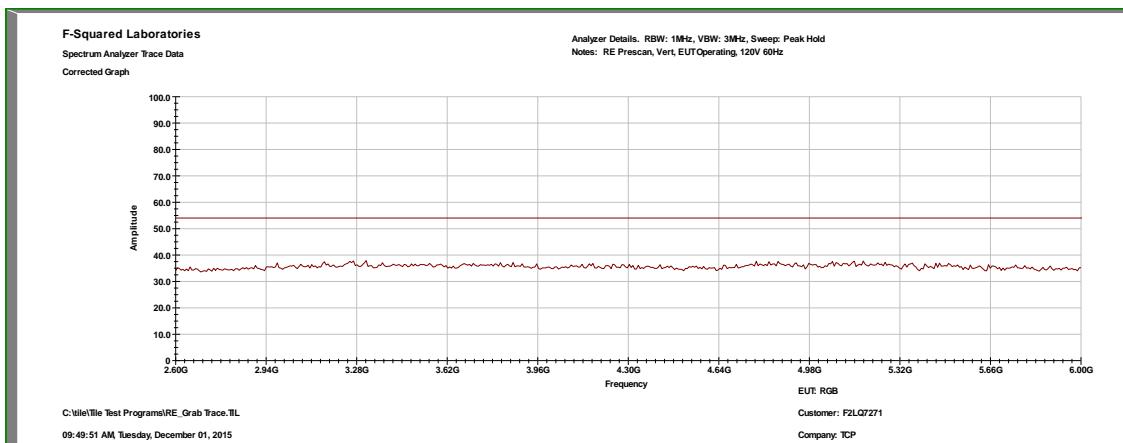




Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.



Model: A19RGB001

### Low Channel: 6 GHz to 18 GHz

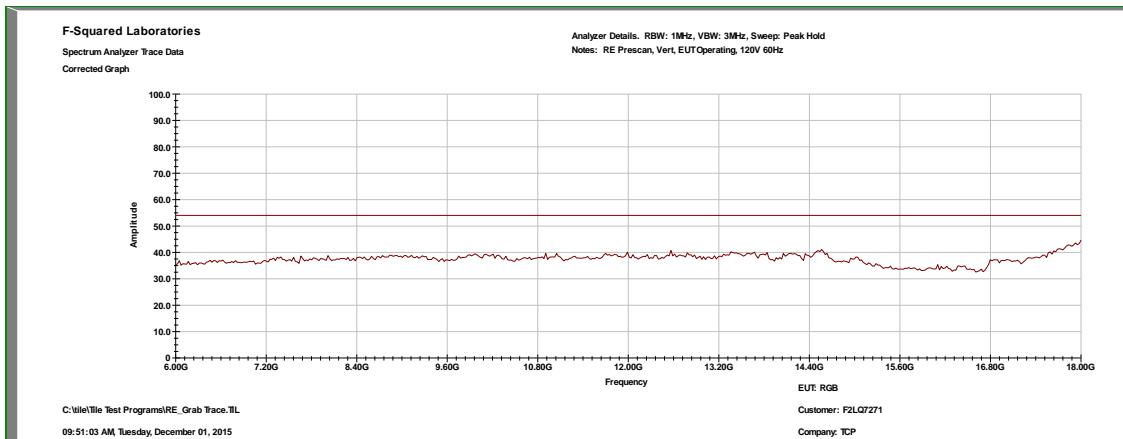

### Low Channel: 18 GHz to 26 GHz

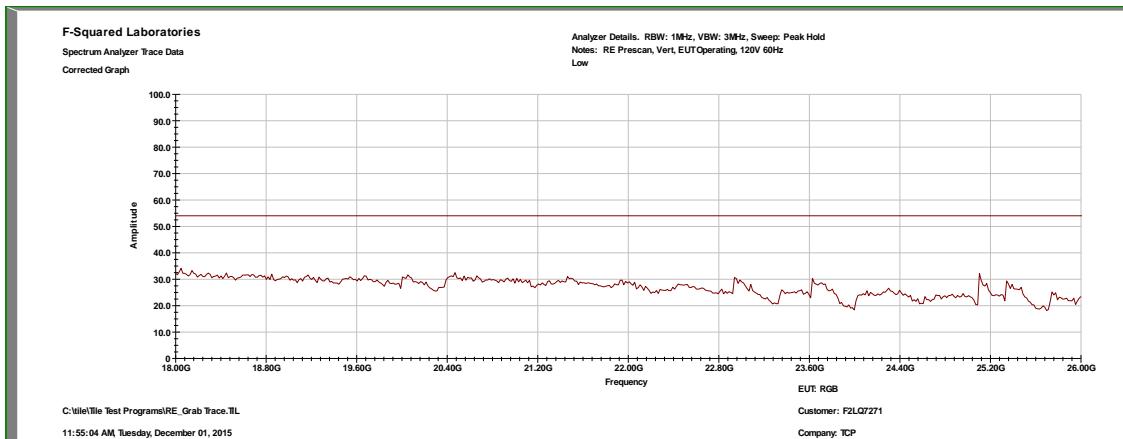

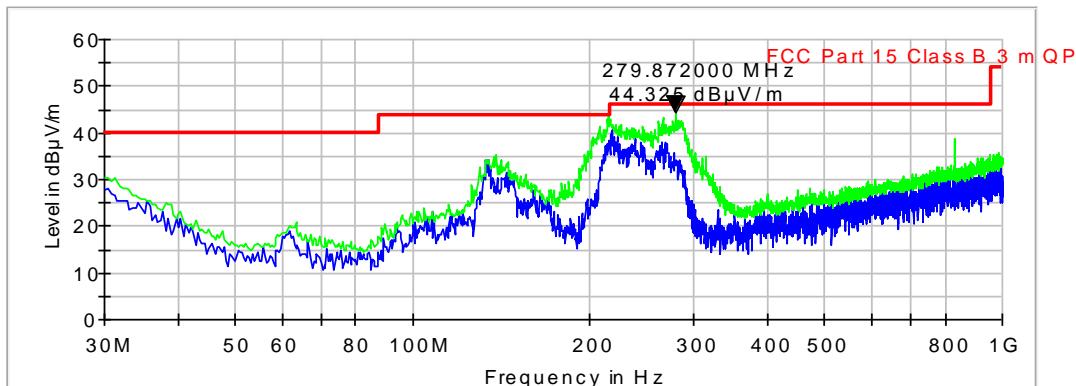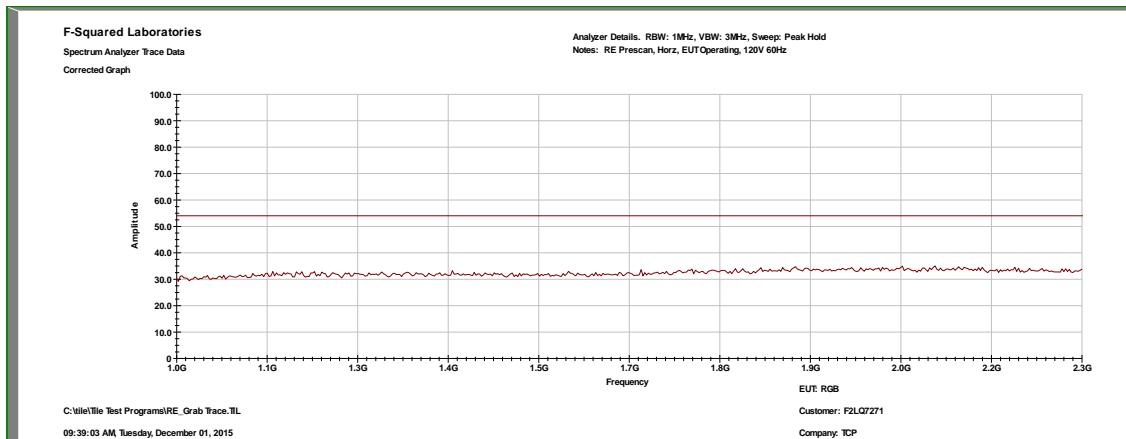**Low Channel: 30 MHz to 1 GHz, Horizontal**

**Low Channel: 1 GHz to 2.3 GHz, Horizontal**


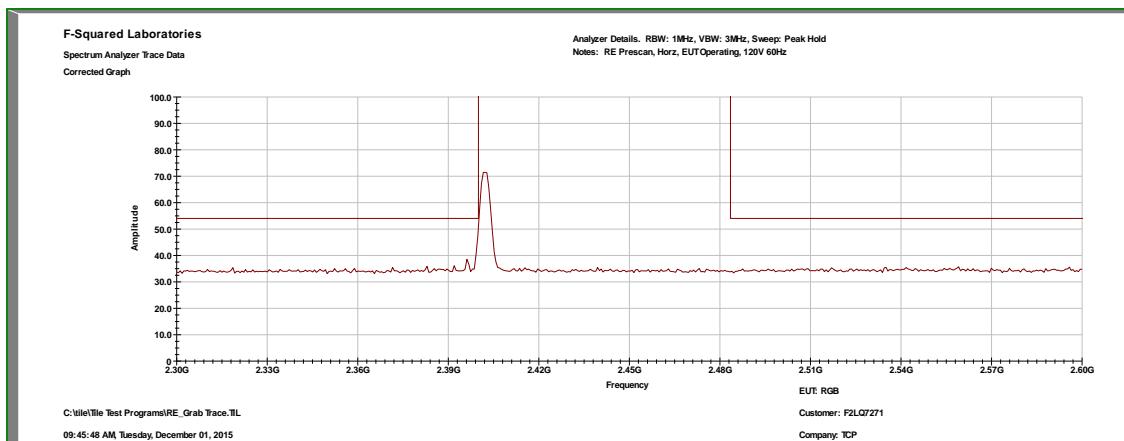


Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.



Model: A19RGB001

### Low Channel: 2.3 GHz to 2.6 GHz, Horizontal



### Low Channel: 2.6 GHz to 6 GHz, Horizontal

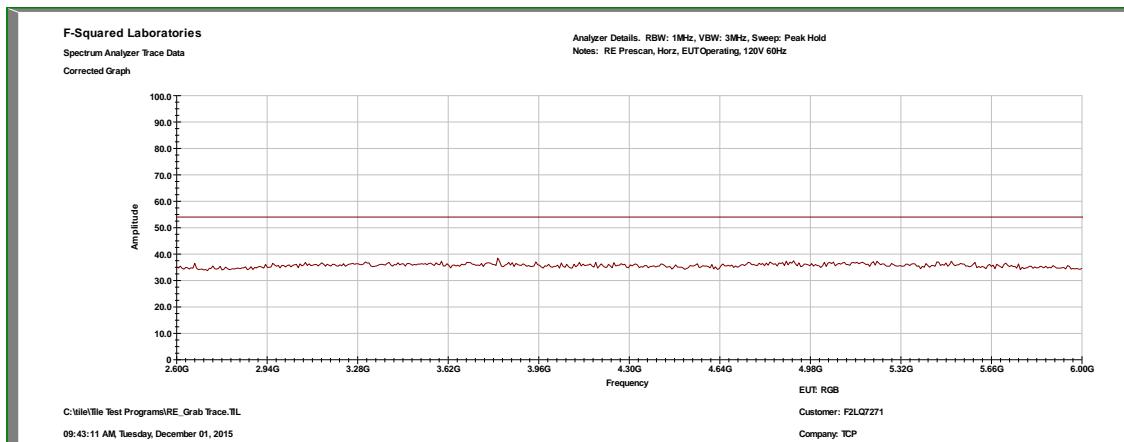

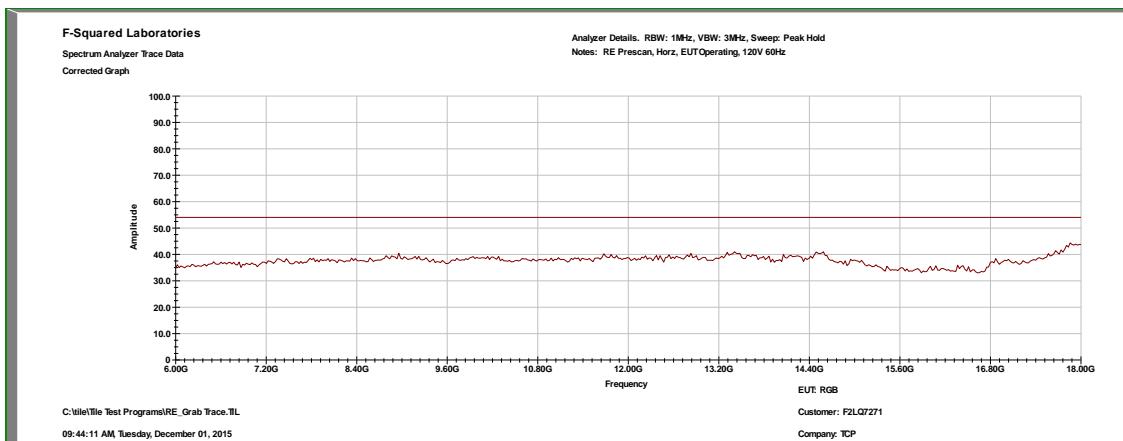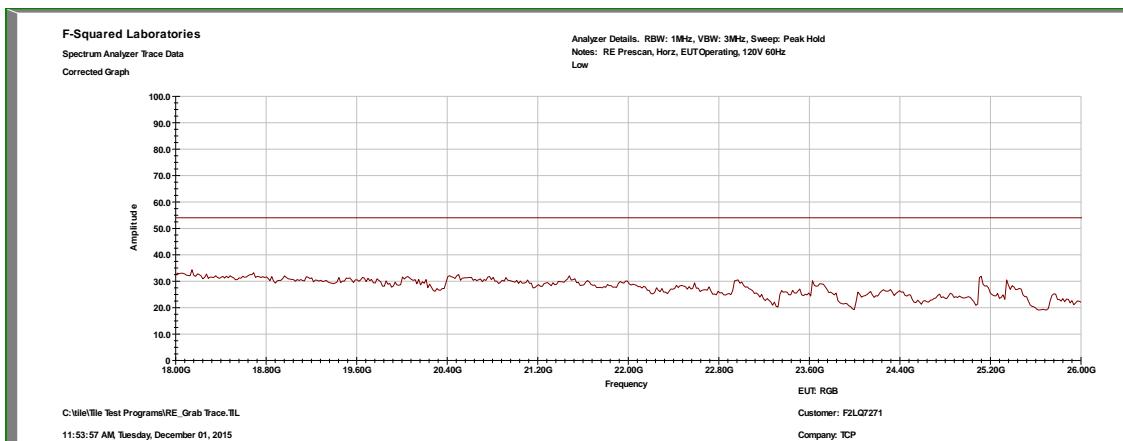**Low Channel: 6 GHz to 18 GHz, Horizontal****Low Channel: 18 GHz to 26 GHz, Horizontal**




Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.

Model: A19RGB001

### Mid Channel: 0.009 MHz to 0.15 MHz

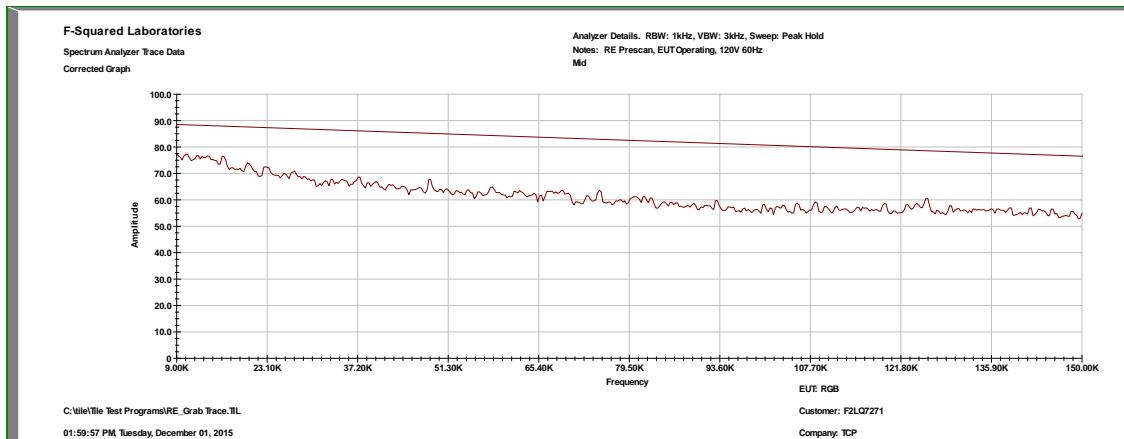

### Mid Channel: 0.15 MHz to 0.5 MHz

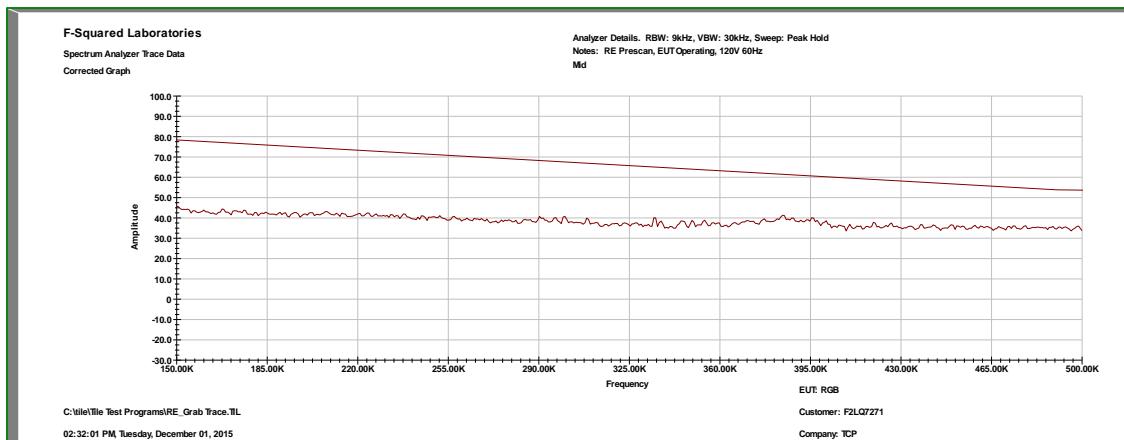




Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.



Model: A19RGB001

### Mid Channel: 0.5 MHz to 5 MHz

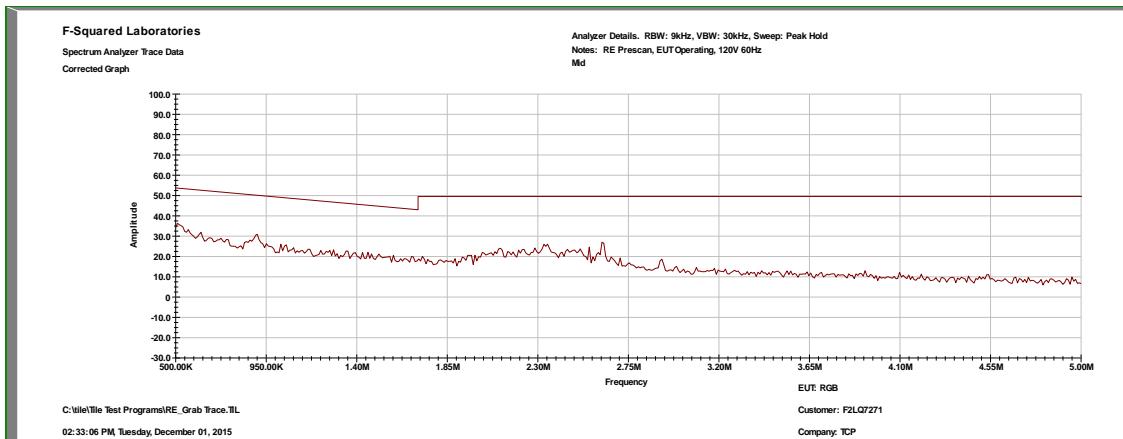

### Mid Channel: 5 MHz to 30 MHz

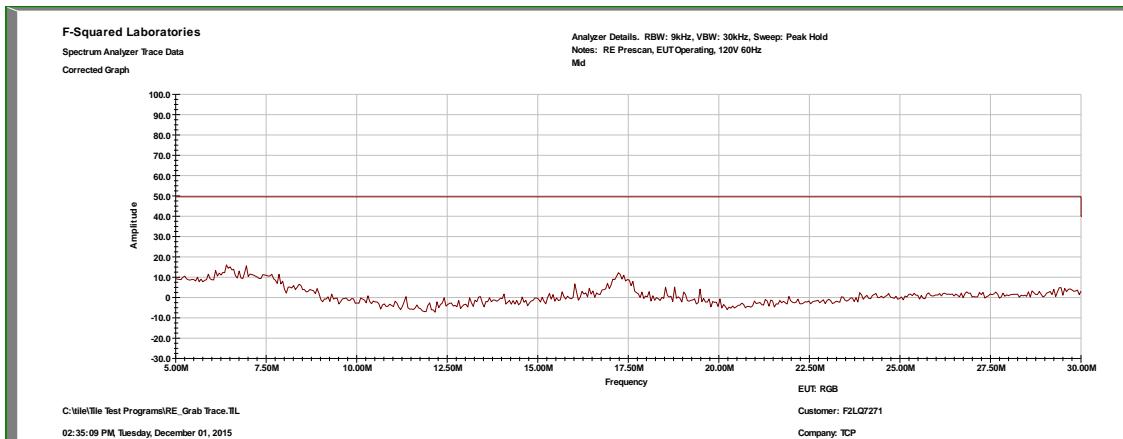

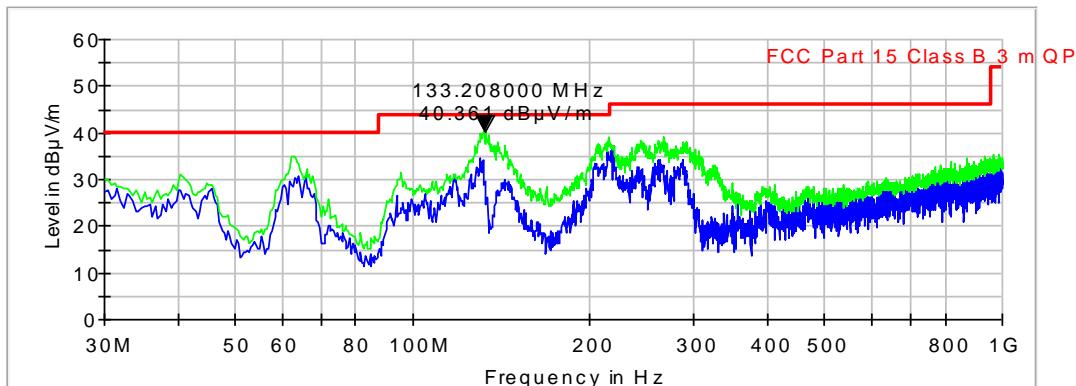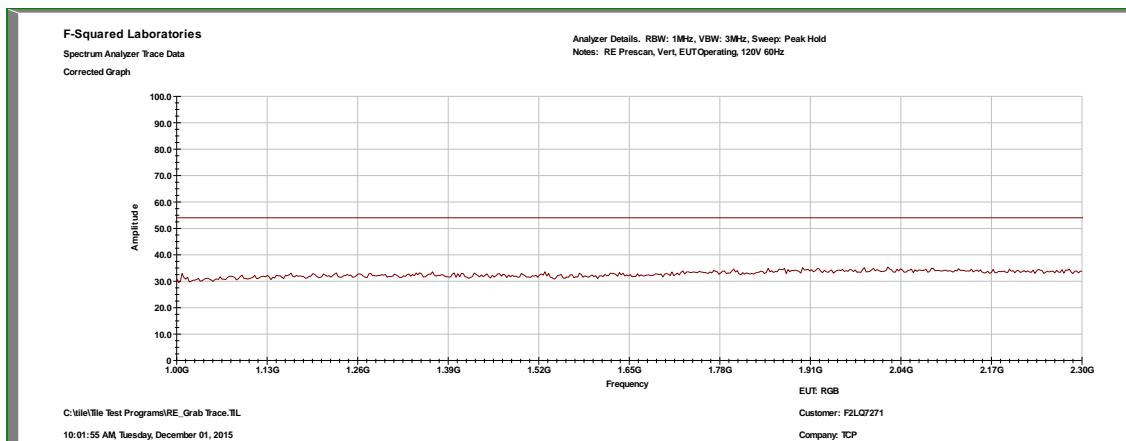**Mid Channel: 30 MHz to 1 GHz, Vertical**

**Mid Channel: 1 GHz to 2.3 GHz, Vertical**


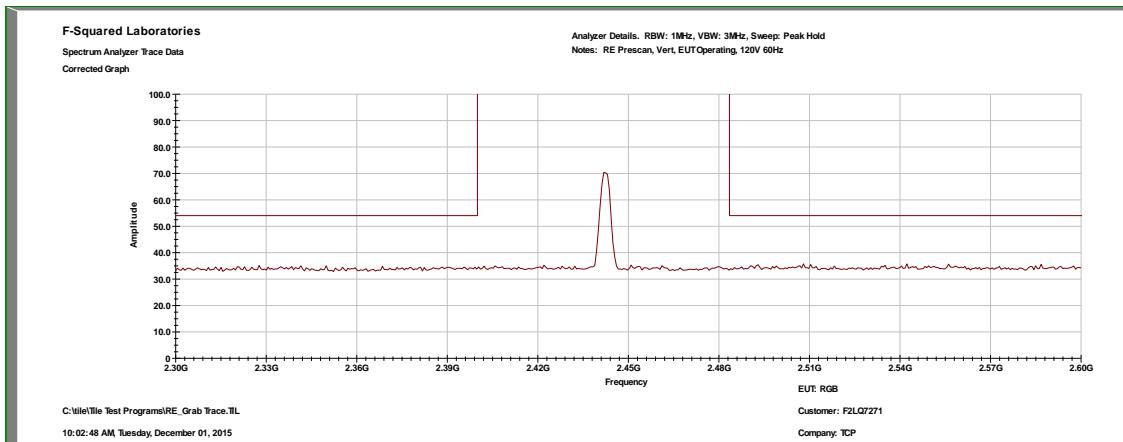


Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.



Model: A19RGB001



### Mid Channel: 2.3 GHz to 2.6 GHz, Vertical







### Mid Channel: 2.6 GHz to 6 GHz, Vertical

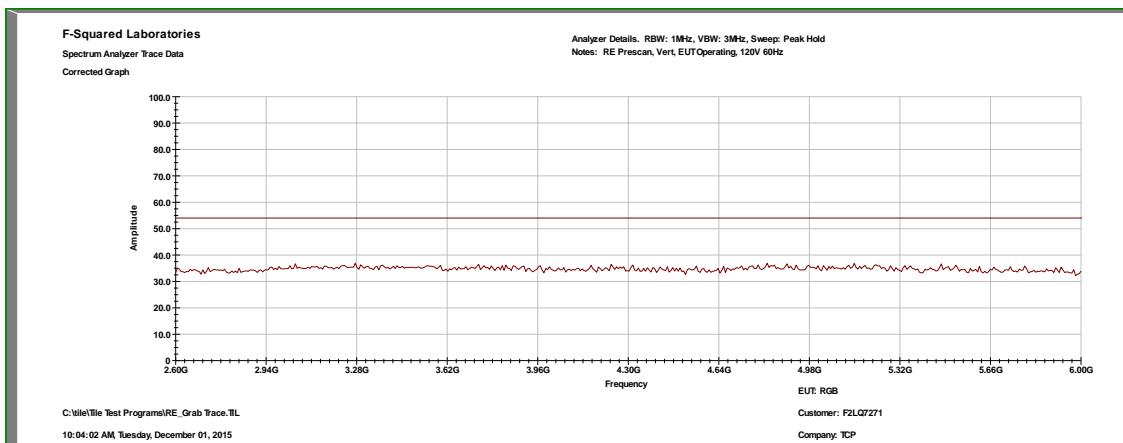

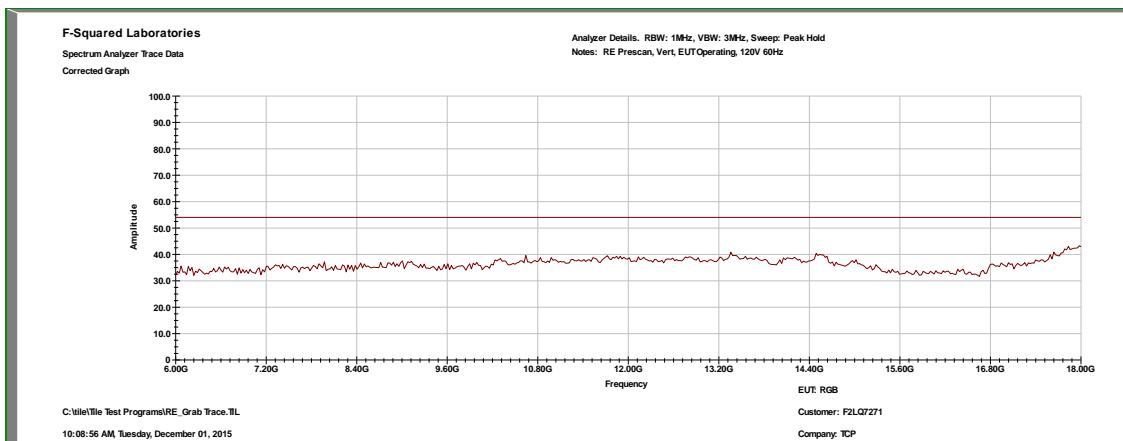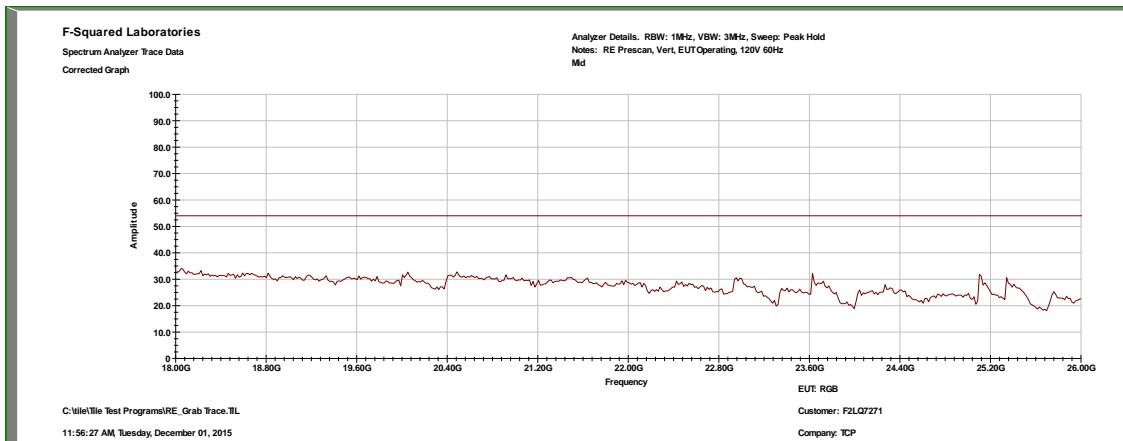**Mid Channel: 6 GHz to 18 GHz**

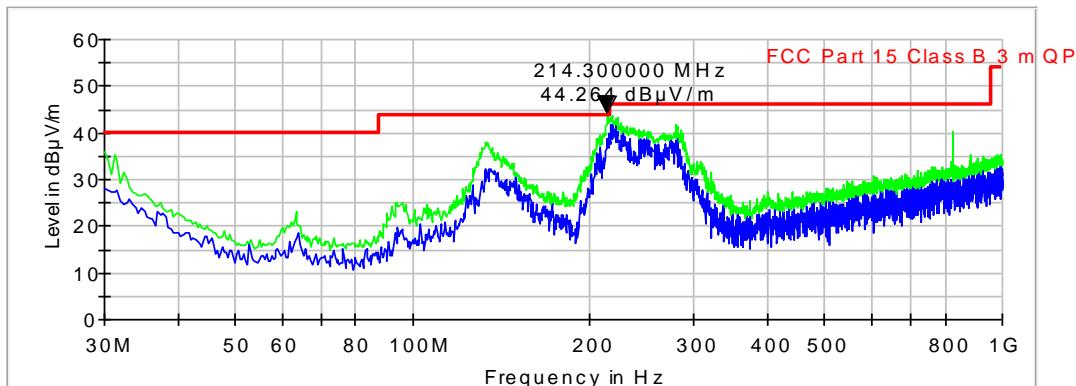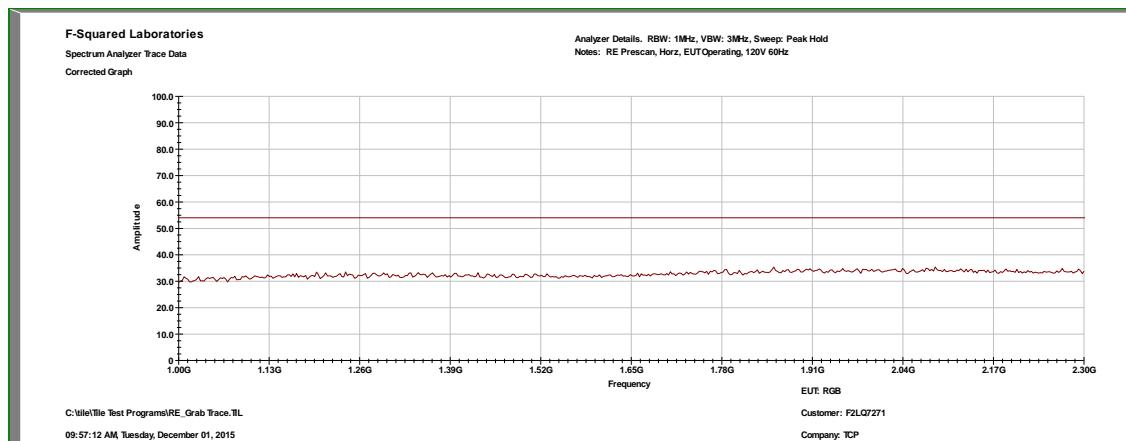**Mid Channel: 18 GHz to 26 GHz**

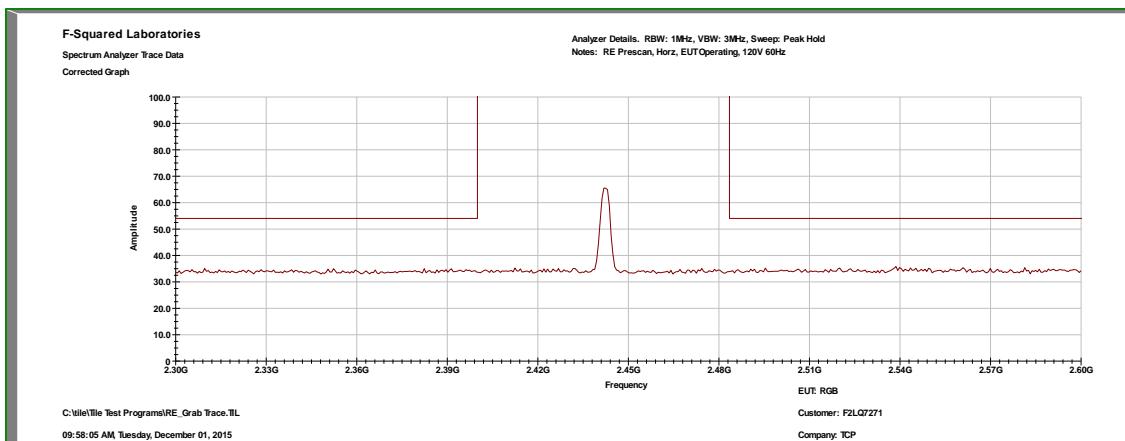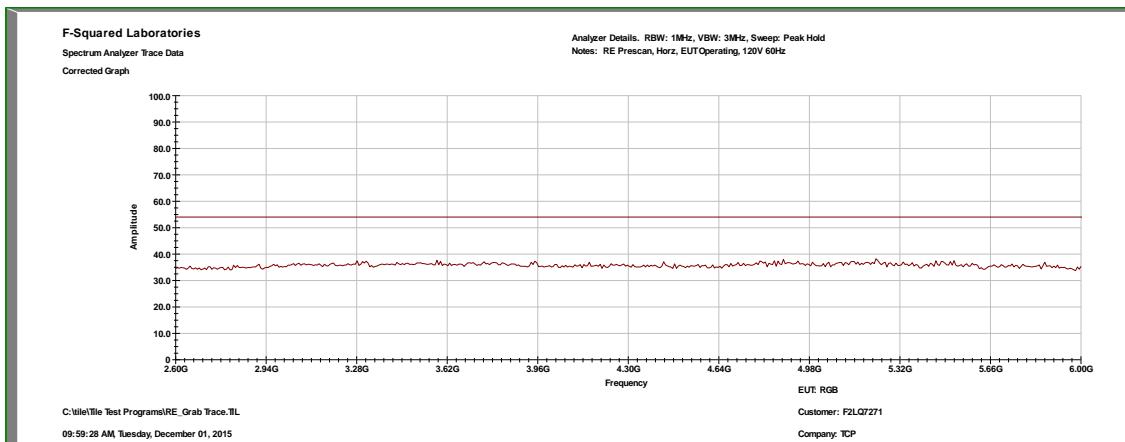
**Mid Channel: 30 MHz to 1 GHz, Horizontal**

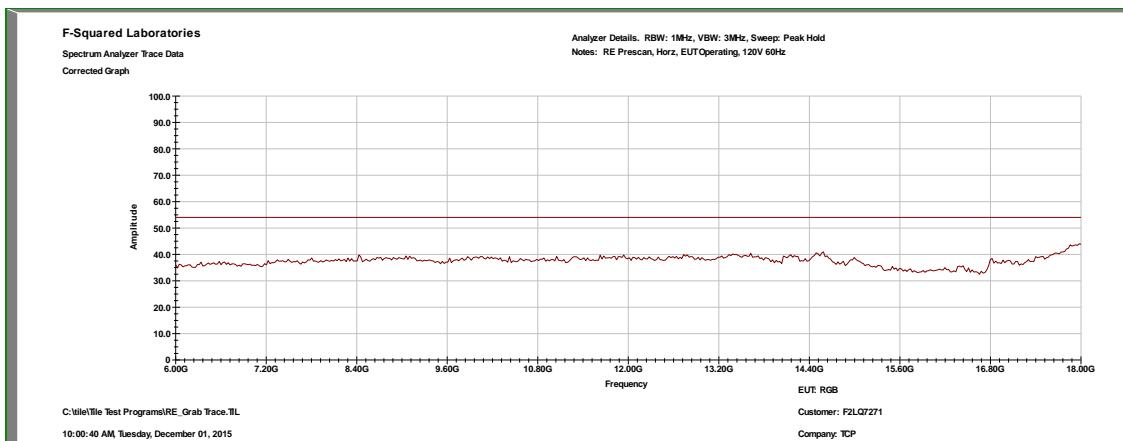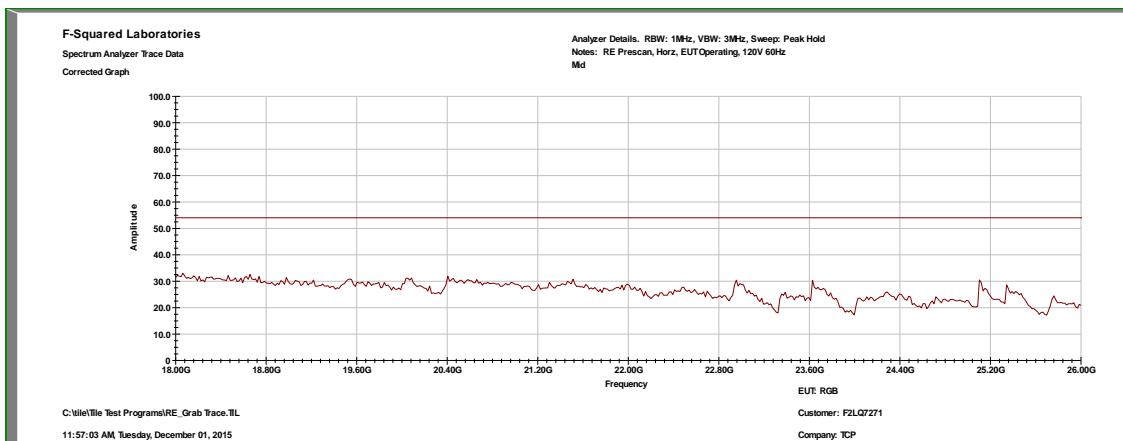**Mid Channel: 1 GHz to 2.3 GHz, Horizontal**


**Mid Channel: 2.3 GHz to 2.6 GHz, Horizontal****Mid Channel: 2.6 GHz to 6 GHz, Horizontal**

**Mid Channel: 6 GHz to 18 GHz, Horizontal**

**Mid Channel: 18 GHz to 26 GHz, Horizontal**


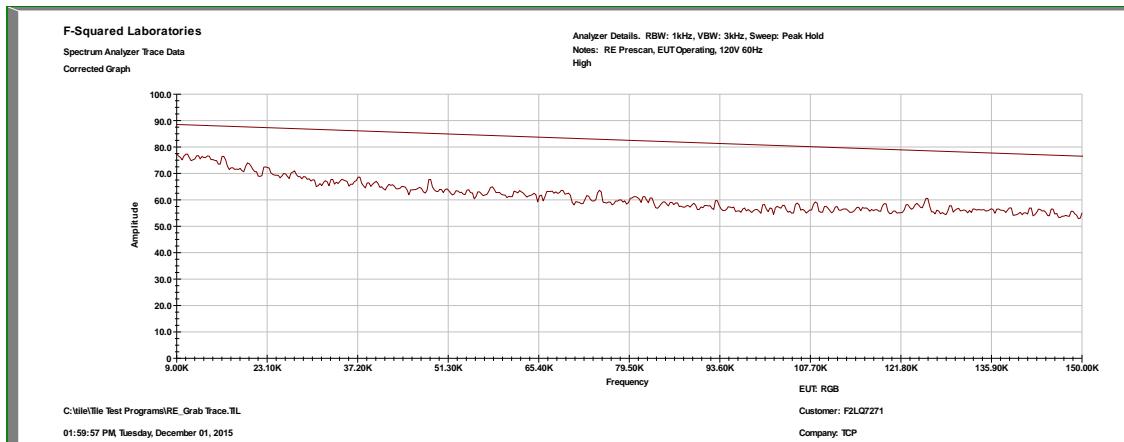


Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.

Model: A19RGB001

### High Channel: 0.009 MHz to 0.15 MHz



### High Channel: 0.15 MHz to 0.5 MHz

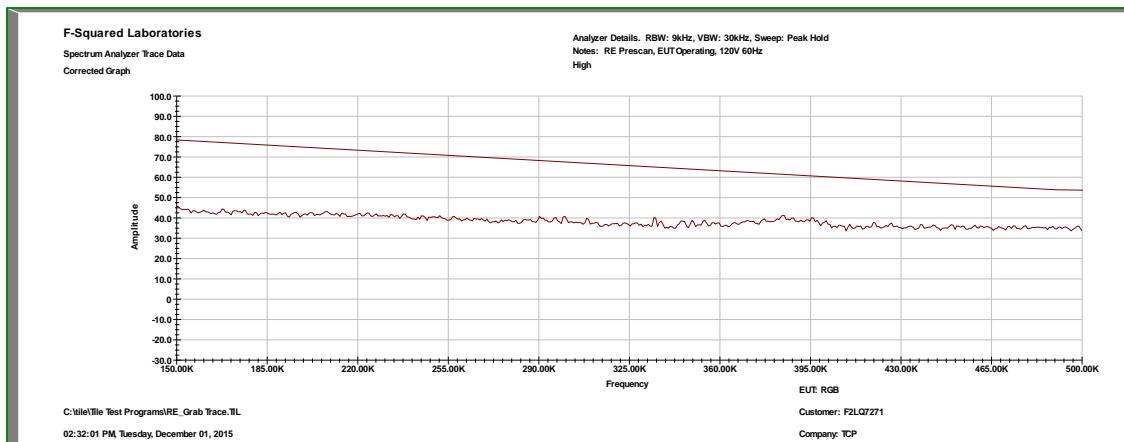




Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.



Model: A19RGB001

### High Channel: 0.5 MHz to 5 MHz

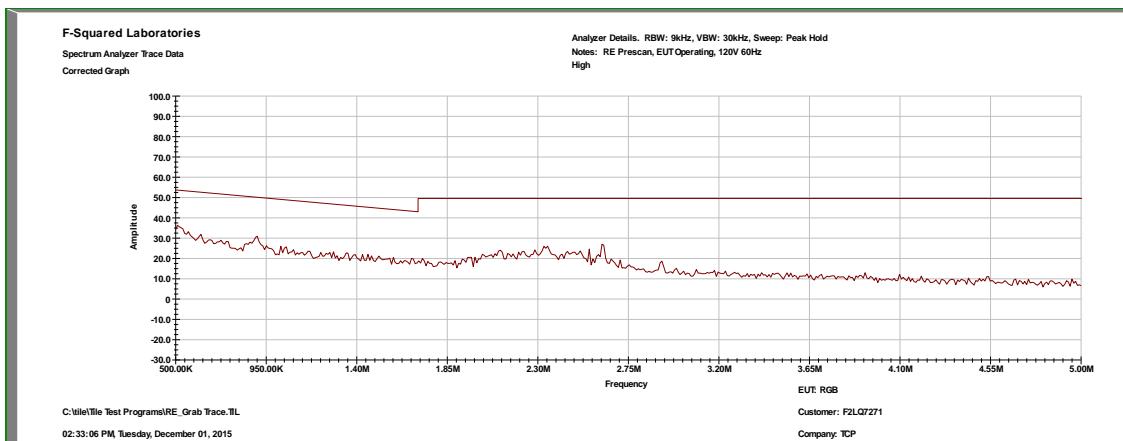


### High Channel: 5 MHz to 30 MHz

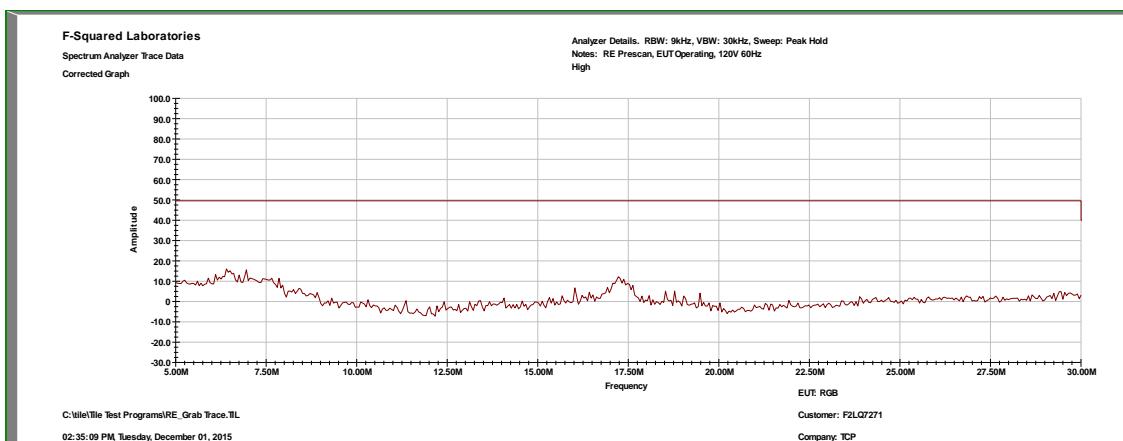


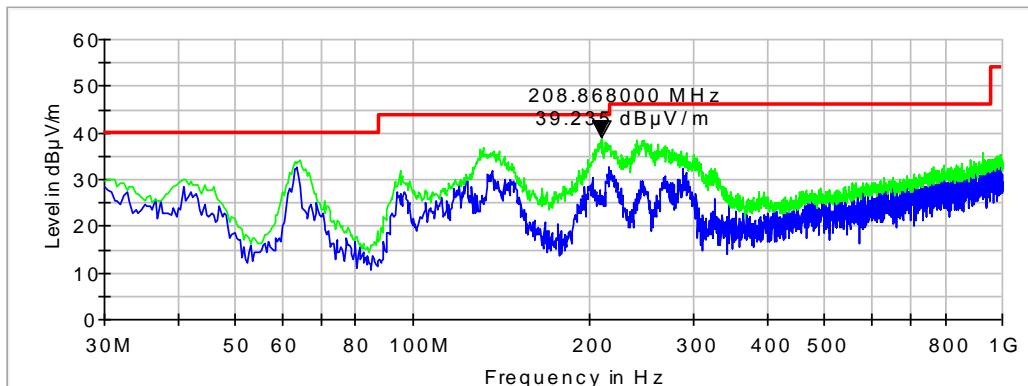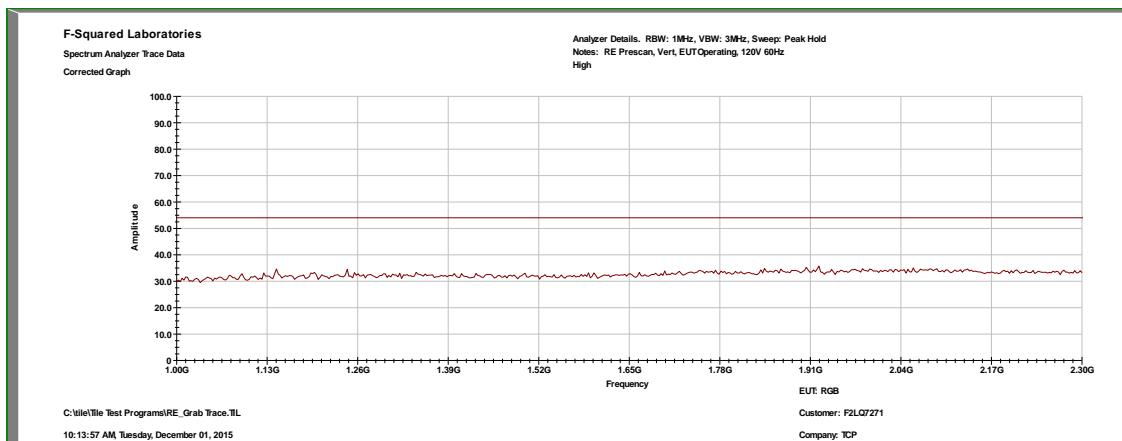**High Channel: 30 MHz to 1 GHz, Vertical**

**High Channel: 1 GHz to 2.3 GHz, Vertical**

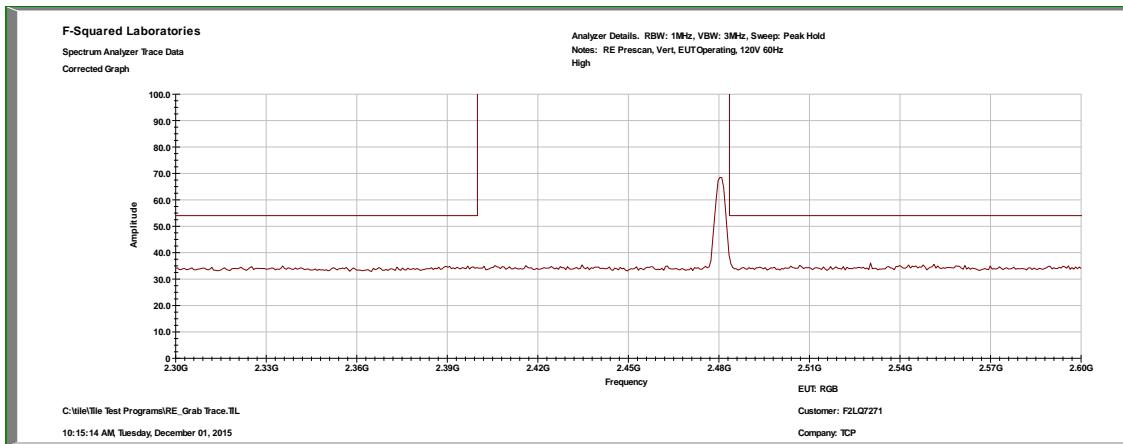
### High Channel: 2.3 GHz to 2.6 GHz, Vertical

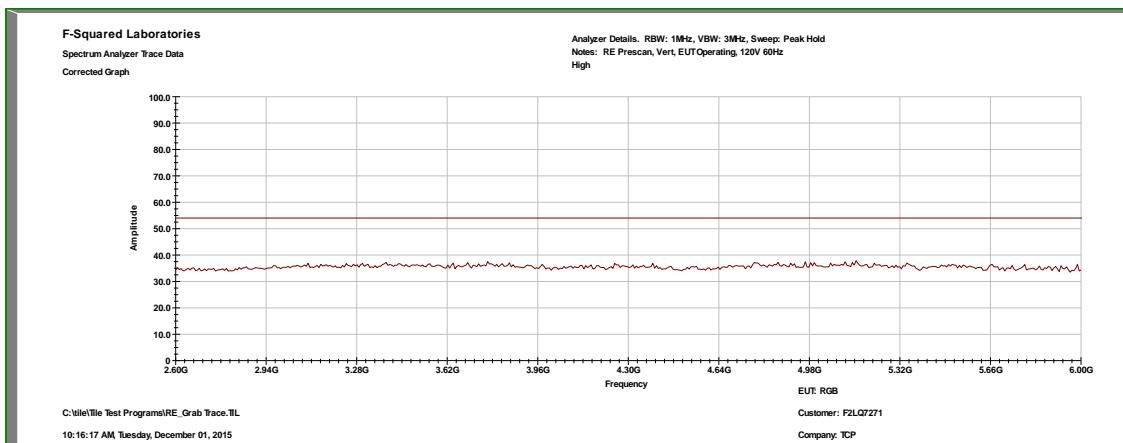

### High Channel: 2.6 GHz to 6 GHz, Vertical






Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.



Model: A19RGB001

## High Channel: 6 GHz to 18 GHz

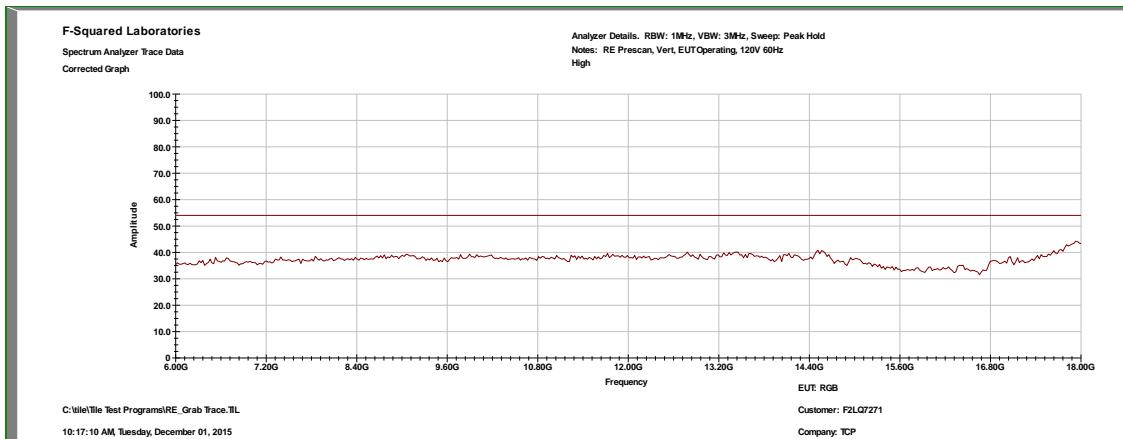


## High Channel: 18 GHz to 26 GHz

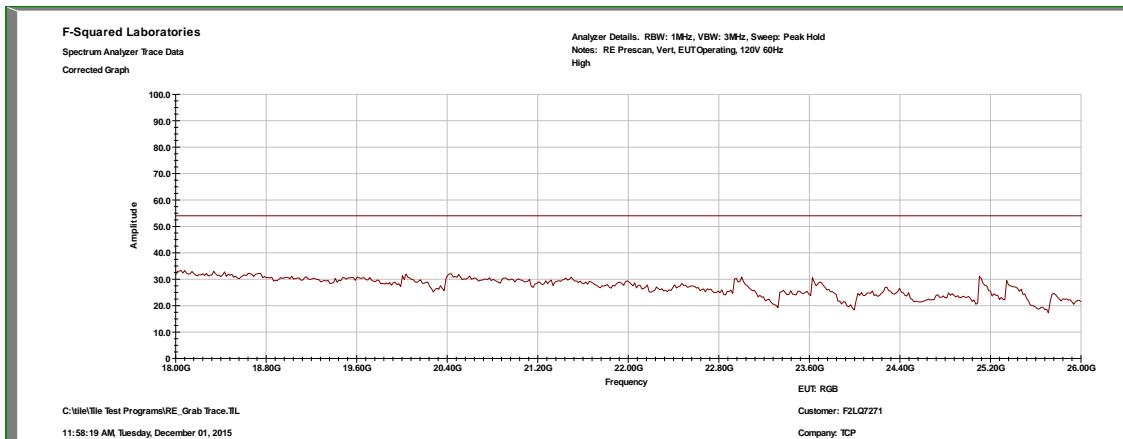


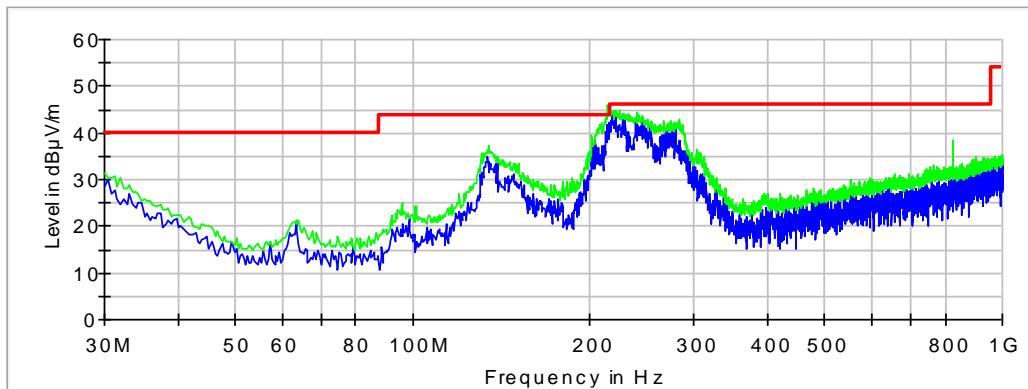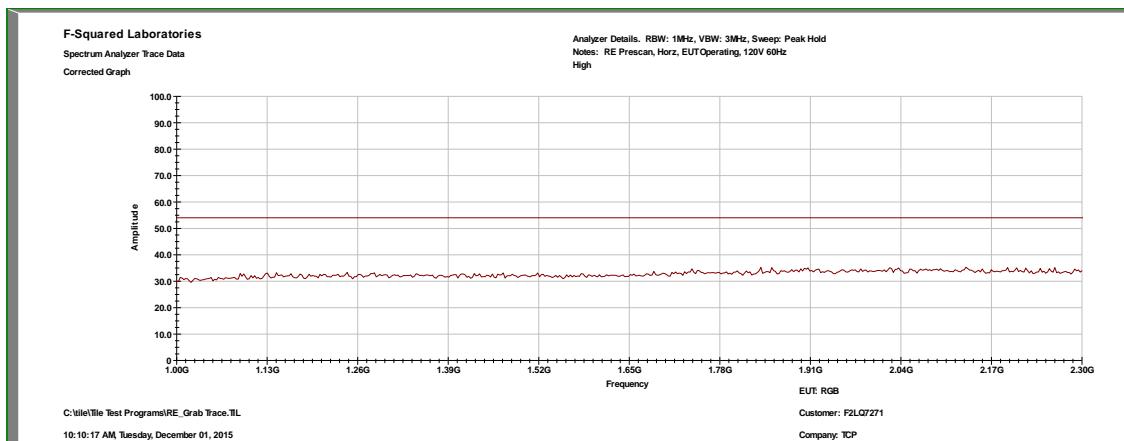**High Channel: 30 MHz to 1 GHz, Horizontal****High Channel: 1 GHz to 2.3 GHz, Horizontal**

### High Channel: 2.3 GHz to 2.6 GHz, Horizontal

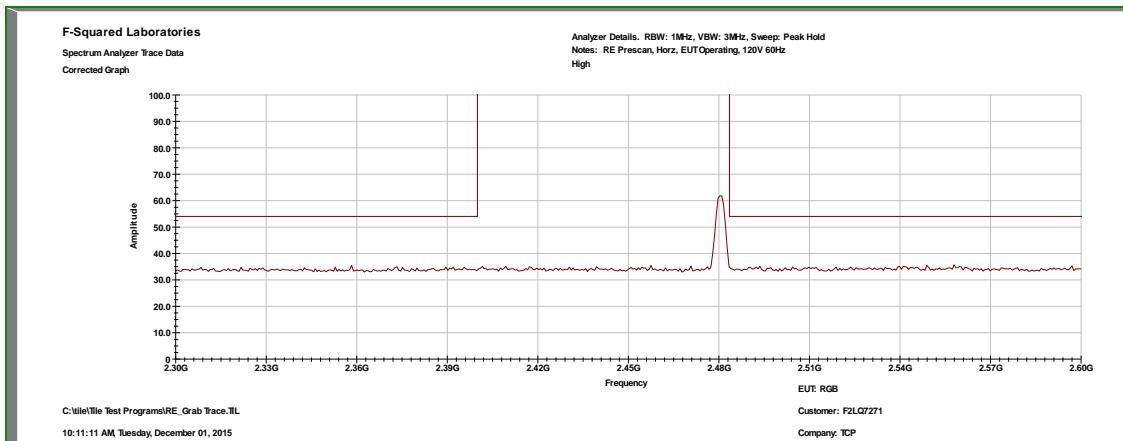

### High Channel: 2.6 GHz to 6 GHz, Horizontal

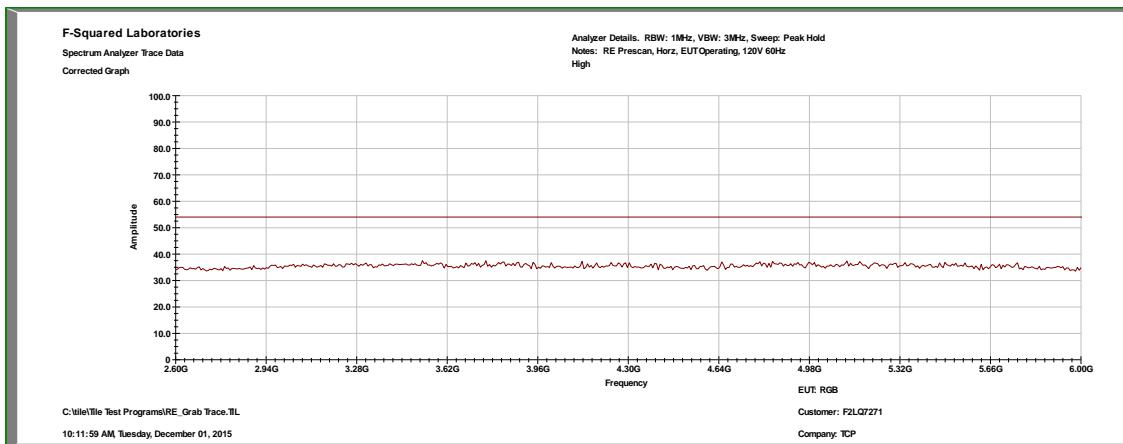




Order Number: F2LQ7271B


Client: Technical Consumer Products, Inc.

Model: A19RGB001

### High Channel: 6 GHz to 18 GHz, Horizontal

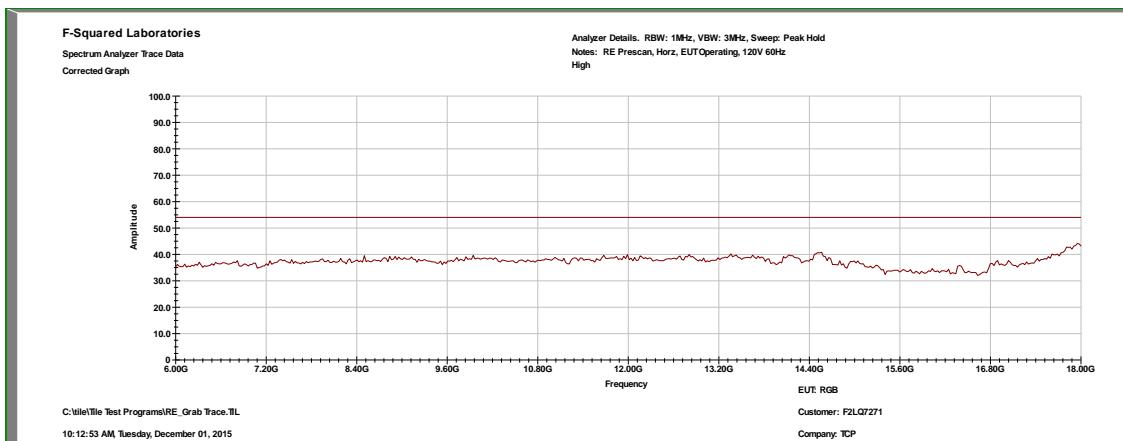

### High Channel: 18 GHz to 26 GHz, Horizontal

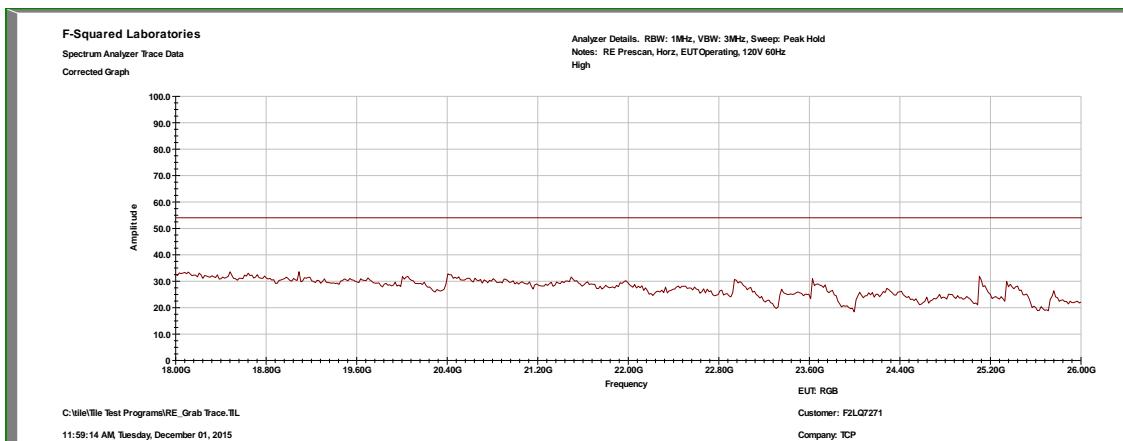

## Measurements


### Radiated Spurs, >1 GHz

#### Low Channel - MaxPeak

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2390.000000	V	38.4	6.7	45.10	74.0	-28.9
2390.000000	H	38.4	6.7	45.10	74.0	-28.9
2483.500000	V	38.6	6.9	45.50	74.0	-28.5
2483.500000	H	38.7	6.9	45.60	74.0	-28.4


#### Low Channel - Average

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2390.000000	V	24.7	6.7	31.40	54.0	-22.6
2390.000000	H	24.7	6.7	31.40	54.0	-22.6
2483.500000	V	24.7	6.9	31.60	54.0	-22.4
2483.500000	H	24.8	6.9	31.70	54.0	-22.3

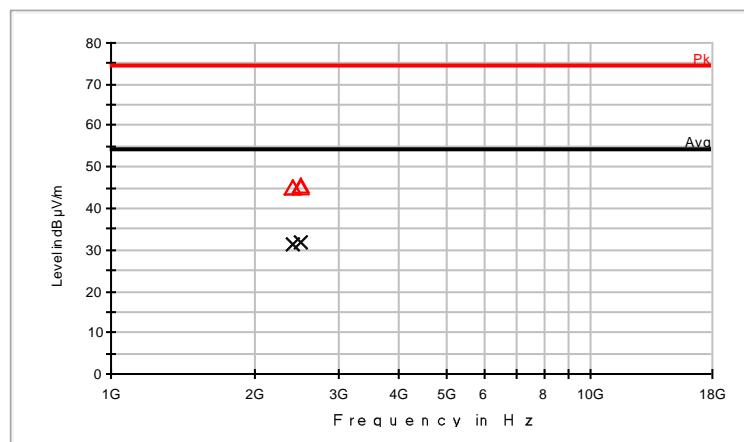

**Radiated Spurs, <1 GHz**
**Low Channel - QuasiPeak**

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
62.592000	V	22.4	7.9	30.30	40.0	-9.7
128.940000	V	17.6	14.2	31.80	43.5	-11.7
136.700000	V	19.9	13.7	33.60	43.5	-9.9
138.640000	H	14.5	13.5	28.00	43.5	-15.5
213.136000	V	26.9	11.3	38.20	43.5	-5.3
213.912000	H	29.1	11.3	40.40	43.5	-3.1
224.000000	H	26.6	11.6	38.20	46.0	-7.8
245.728000	V	24.5	12.3	36.80	46.0	-9.2
246.116000	H	25.3	12.3	37.60	46.0	-8.4
262.024000	V	23.8	13.1	36.90	46.0	-9.1
282.588000	H	26.6	13.8	40.40	46.0	-5.6
284.140000	V	19.8	13.8	33.60	46.0	-12.4

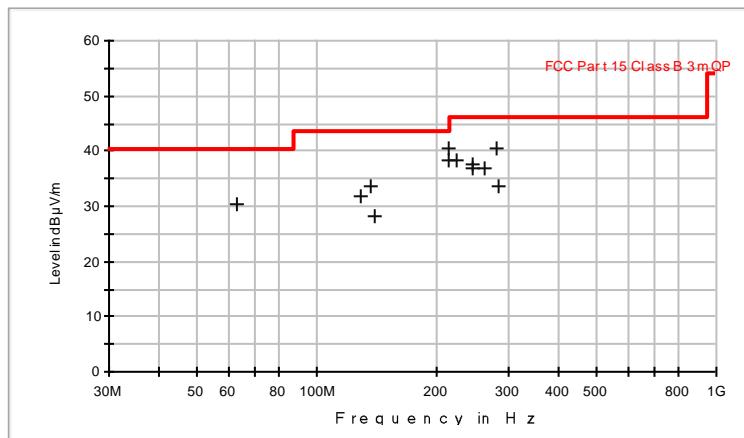


**Radiated Spurs, >1 GHz**
**Mid Channel - MaxPeak**

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2390.000000	V	38.7	6.7	45.40	74.0	-28.6
2390.000000	H	38.5	6.7	45.20	74.0	-28.8
2483.500000	H	38.9	6.9	45.80	74.0	-28.2
2483.500000	V	38.8	6.9	45.70	74.0	-28.3


**Low Channel - Average**

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2390.000000	V	24.7	6.7	31.40	54.0	-22.6
2390.000000	H	24.7	6.7	31.40	54.0	-22.6
2483.500000	H	24.8	6.9	31.70	54.0	-22.3
2483.500000	V	24.8	6.9	31.70	54.0	-22.3

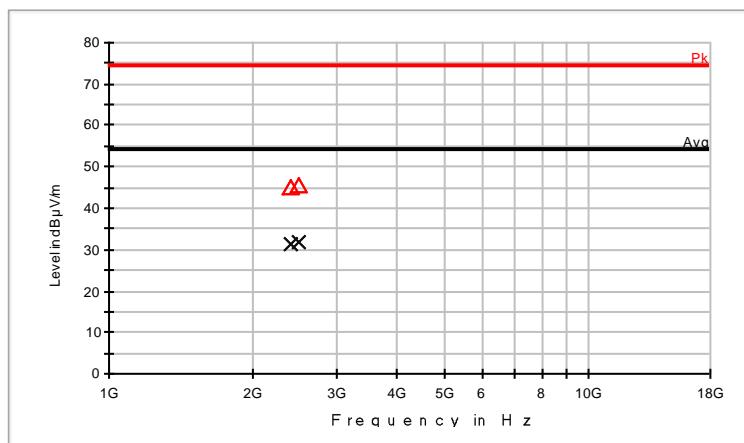

**Radiated Spurs, <1 GHz**
**Mid Channel - QuasiPeak**

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
62.592000	V	23.2	7.9	31.10	40.0	-8.9
95.572000	V	19.0	9.0	28.00	40.0	-12.0
133.208000	V	22.4	14.0	36.40	43.5	-7.1
133.984000	H	20.2	13.9	34.10	43.5	-9.4
214.300000	H	29.8	11.3	41.10	43.5	-2.4
214.688000	V	25.6	11.3	36.90	43.5	-6.6
216.628000	H	30.2	11.4	41.60	46.0	-4.4
231.760000	H	25.9	11.9	37.80	46.0	-8.2
244.176000	V	23.9	12.3	36.20	46.0	-9.8
246.504000	H	24.2	12.3	36.50	46.0	-9.5
266.292000	V	22.1	13.6	35.70	46.0	-10.3
279.484000	H	24.1	13.9	38.00	46.0	-8.0
287.632000	V	21.7	13.8	35.50	46.0	-10.5

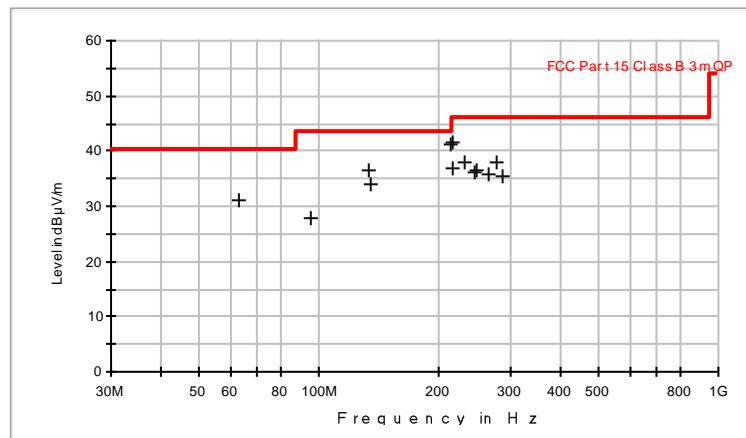


**Radiated Spurs, >1 GHz**
**High Channel - MaxPeak**

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2390.000000	H	38.4	6.7	45.10	74.0	-28.9
2390.000000	V	39.0	6.7	45.70	74.0	-28.3
2483.500000	V	38.4	6.9	45.30	74.0	-28.7
2483.500000	H	38.9	6.9	45.80	74.0	-28.2


**High Channel - Average**

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2390.000000	H	24.7	6.7	31.40	54.0	-22.6
2390.000000	V	24.7	6.7	31.40	54.0	-22.6
2483.500000	V	24.9	6.9	31.80	54.0	-22.2
2483.500000	H	24.8	6.9	31.70	54.0	-22.3

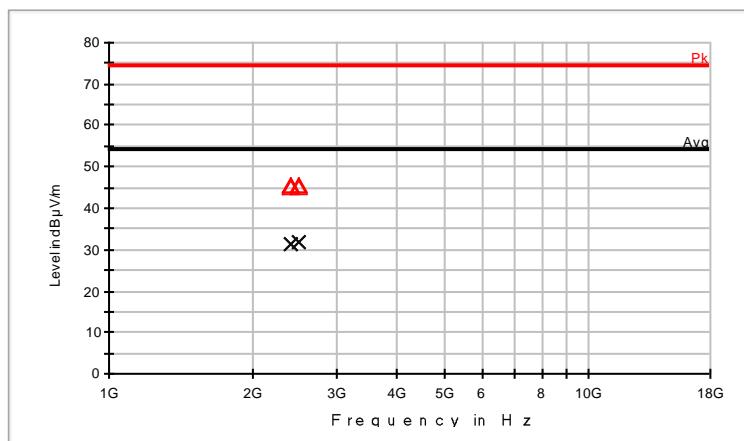

**Radiated Spurs, <1 GHz**
**High Channel - QuasiPeak**

Frequency (MHz)	Antenna Polarization	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
64.532000	V	21.8	8.1	29.90	40.0	-10.1
95.184000	V	18.2	8.9	27.10	43.5	-16.4
131.656000	V	20.1	14.0	34.10	43.5	-9.4
134.760000	H	20.0	13.9	33.90	43.5	-9.6
206.540000	V	24.3	11.5	35.80	43.5	-7.7
214.300000	H	30.2	11.3	41.50	43.5	-2.0
215.076000	H	30.3	11.3	41.60	43.5	-1.9
232.148000	H	27.1	11.9	39.00	46.0	-7.0
244.564000	V	23.9	12.3	36.20	46.0	-9.8
260.472000	H	24.3	12.9	37.20	46.0	-8.8
282.588000	H	24.8	13.8	38.60	46.0	-7.4
284.528000	V	19.9	13.8	33.70	46.0	-12.3

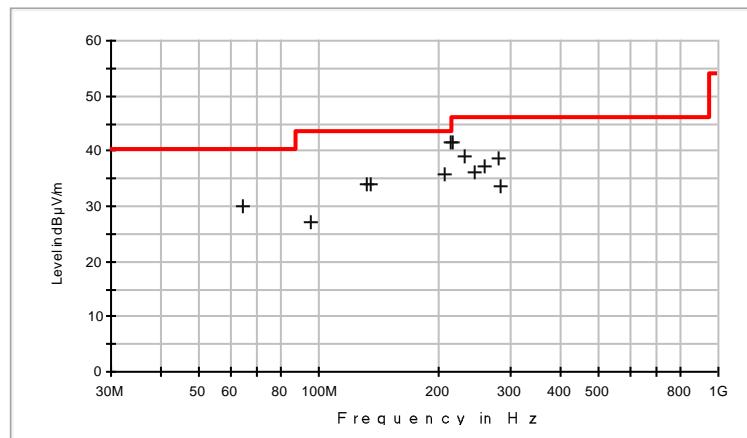



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 11 FCC PART 15.247(e) – PEAK POWER SPECTRAL DENSITY (PSD)

Peak power spectral density measurements were performed.

### 11.1 Requirements:


The peak power spectral density shall not exceed +8dBm in any 3 kHz band during any time interval of continuous transmission.

Power spectral density measurements were performed at a resolution bandwidth of 3 kHz (video bandwidth set at 10 KHz). The peak spectral densities were measured at the low, mid, and upper channels.


## 11.2 Peak Power Spectral Density Test Data


<b>Test Date(s):</b>	Nov. 30, 2015	<b>Test Engineer:</b>	J. Knepper
<b>Standards:</b>	CFR 47 Part 15.247(e); KDB558074	<b>Air Temperature:</b>	19.4°C
		<b>Relative Humidity:</b>	46%

### Low Channel

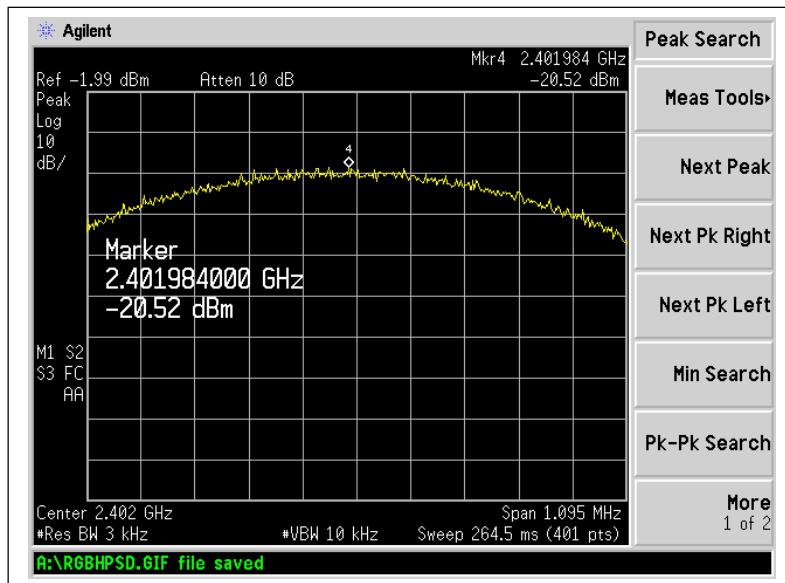

### Mid Channel

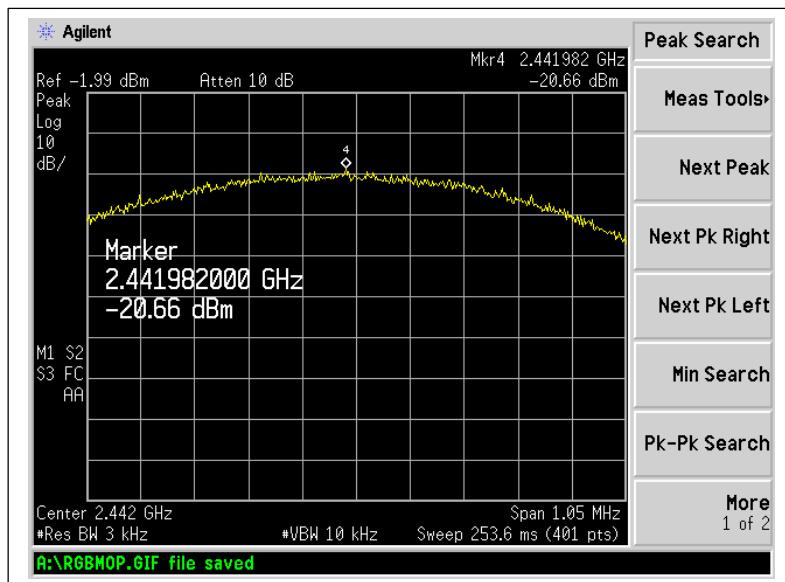

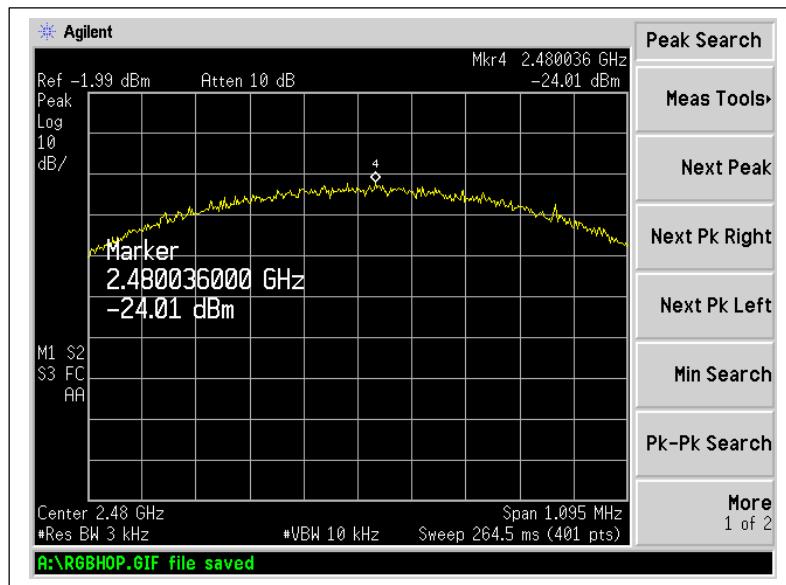**High Channel**

## 12 CONDUCTED EMISSIONS

### 12.1 Requirements

In accordance with FCC CFR 47 Part 15.207(a), "Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 12.2 Procedure

The EUT was placed on a 1.0 x 1.5 meter non-conductive table, 0.8 meter above a horizontal ground plane and 0.4 meter from a vertical ground plane. Power was provided to the EUT through a LISN bonded to a 3 x 2 meter ground plane. The LISN and peripherals were supplied power through a filtered AC power source. The output of the LISN was connected to the input of the receiver via a transient limiter, and emissions in the range 150 kHz to 30 MHz were measured. The measurements were recorded using the quasi-peak and average detectors as directed by the standard, and the resolution bandwidth during testing was 9 kHz. The raw measurements were corrected to allow for attenuation from the LISN, transient limiter and cables.


## 12.3 Conducted Emissions Test Data

<b>Test Date:</b>	Dec. 3, 2015	<b>Test Engineer:</b>	J. Knepper
<b>Rule:</b>	15.207	<b>Air Temperature:</b>	19.7° C
<b>Test Results:</b>	Pass	<b>Relative Humidity:</b>	46%

### Conducted Test – Line 1: 0.15 MHz to 30.0 MHz

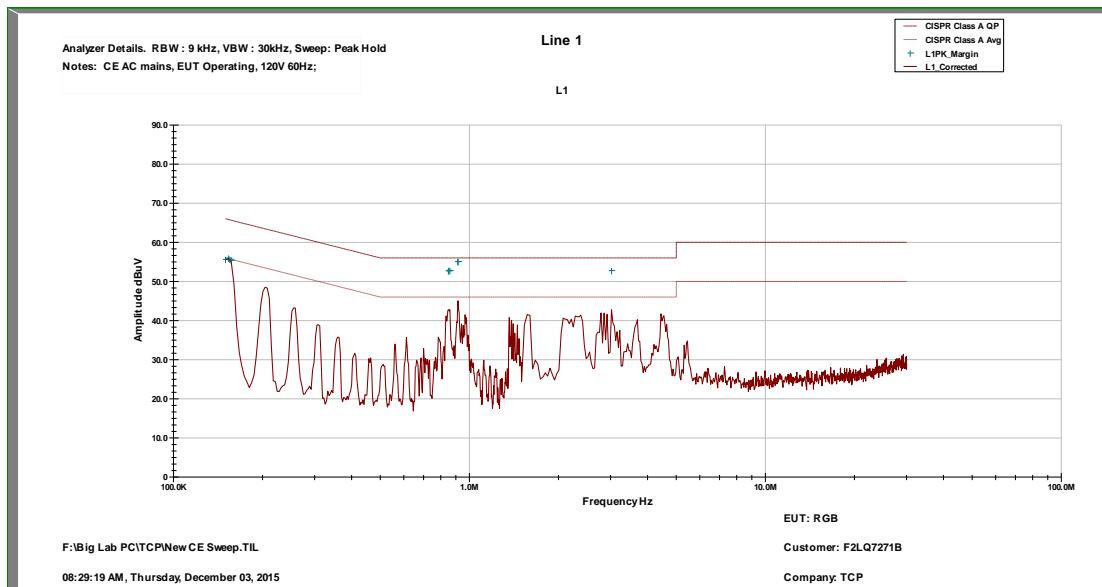

Top Discrete Measurements								
No.	Conductor	Frequency (MHz)	Detector	Level (dB $\mu$ V)	Adjustment (dB)	Results (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1	Line 1	0.15	Quasi-Peak	41.650	11.560	53.210	66.0	-12.790
		0.15	Average	32.132	11.560	43.692	56.0	-12.308
2	Line 1	0.153375	Quasi-Peak	44.320	11.506	55.826	65.8	-9.990
		0.153375	Average	33.970	11.506	45.476	55.8	-10.340
3	Line 1	0.155	Quasi-Peak	42.350	11.480	53.830	65.7	-11.898
		0.155	Average	32.173	11.480	43.653	55.7	-12.075
4	Line 1	0.15675	Quasi-Peak	39.540	11.452	50.992	65.6	-14.644
		0.15675	Average	28.242	11.452	39.694	55.6	-15.942
5	Line 1	0.848625	Quasi-Peak	29.610	10.280	39.890	56.0	-16.11
		0.848625	Average	12.485	10.280	22.765	46.0	-23.235
6	Line 1	0.852	Quasi-Peak	29.380	10.280	39.660	56.0	-16.340
		0.852	Average	10.898	10.280	21.178	46.0	-24.822
7	Line 1	0.85875	Quasi-Peak	23.370	10.280	33.650	56.0	-22.350
		0.85875	Average	7.713	10.280	17.993	46.0	-28.007
8	Line 1	0.91275	Quasi-Peak	19.010	10.275	29.285	56.0	-26.715
		0.91275	Average	7.917	10.275	18.192	46.0	-27.808
9	Line 1	0.916125	Quasi-Peak	26.730	10.274	37.004	56.0	-18.996
		0.916125	Average	6.710	10.274	16.984	46.0	-29.016
10	Line 1	3.01875	Quasi-Peak	22.580	10.231	32.811	56.0	-23.189
		3.01875	Average	2.135	10.231	12.366	46.0	-33.634

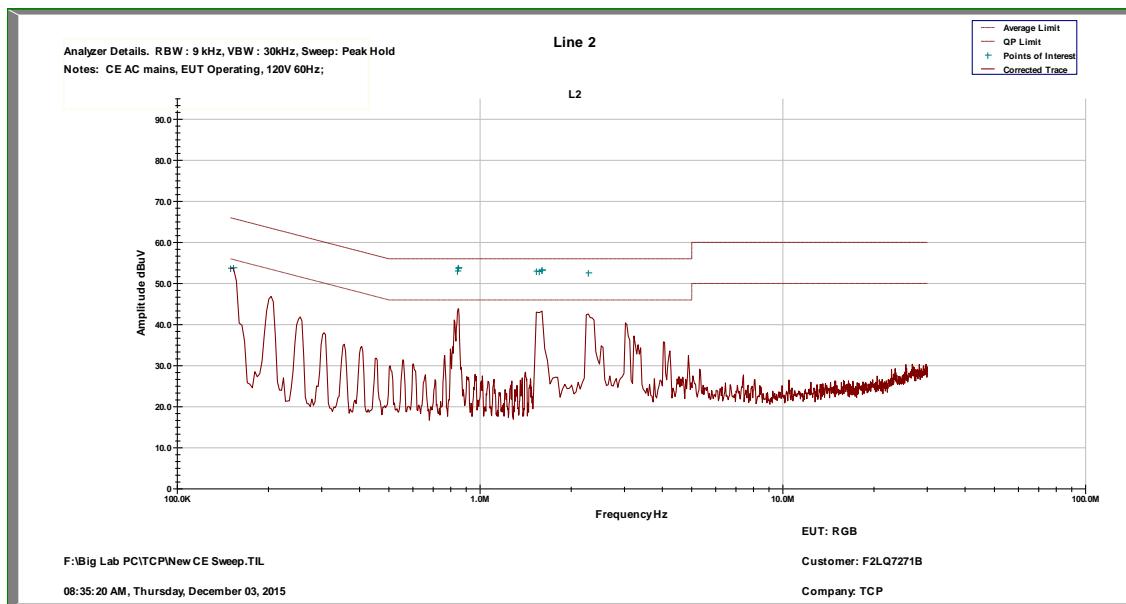**Conducted Test – Line 2: 0.15 MHz to 30.0 MHz**


Top Discrete Measurements									
No.	Conductor	Frequency (MHz)	Detector	Level (dB $\mu$ V)	Adjustment (dB)	Results (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	
1	Line 2	0.15	Quasi-Peak	42.060	11.560	53.620	66.0	-12.380	
		0.15	Average	20.583	11.560	32.143	56.0	-23.857	
2	Line 2	0.153375	Quasi-Peak	53.320	11.506	64.826	65.8	-0.990	
		0.153375	Average	22.408	11.506	33.914	55.8	-21.902	
3	Line 2	0.841875	Quasi-Peak	29.130	10.280	39.410	56.0	-16.590	
		0.841875	Average	10.785	10.280	21.065	46.0	-24.935	
4	Line 2	0.84525	Quasi-Peak	30.990	10.280	41.270	56.0	-14.730	
		0.84525	Average	11.972	10.280	22.252	46.0	-23.748	
5	Line 2	0.848625	Quasi-Peak	32.030	10.280	42.310	56.0	-13.69	
		0.848625	Average	14.993	10.280	25.273	46.0	-20.727	
6	Line 2	1.53375	Quasi-Peak	30.410	10.213	40.623	56.0	-15.377	
		1.53375	Average	7.643	10.213	17.856	46.0	-28.144	
7	Line 2	1.5675	Quasi-Peak	28.230	11.000	39.230	56.0	-16.770	
		1.5675	Average	3.128	11.000	14.128	46.0	-31.872	
8	Line 2	1.6	Quasi-Peak	29.390	10.220	39.610	56.0	-16.390	
		1.6	Average	3.440	10.220	13.660	46.0	-32.340	
9	Line 2	1.60125	Quasi-Peak	29.240	10.220	39.460	56.0	-16.540	
		1.60125	Average	3.033	10.220	13.253	46.0	-32.747	
10	Line 2	2.27625	Quasi-Peak	21.710	10.227	31.937	56.0	-24.063	
		2.27625	Average	-1.067	10.227	9.160	46.0	-36.840	



Order Number: F2LQ7271B

Client: Technical Consumer Products, Inc.

Model: A19RGB001

## 13 FCC 15.31(e) - EXTREME VOLTAGES

### 13.1 Requirements


For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery-operated equipment, the equipment tests shall be performed using a new battery.

## 13.3 Voltage Variation Test Data


Test Date:	Nov. 30, 2015	Test Engineer:	J. Knepper
Rule:	15.31(e)	Air Temperature:	19.3° C
Test Results:	Pass	Relative Humidity:	46%



## Low Channel

100V

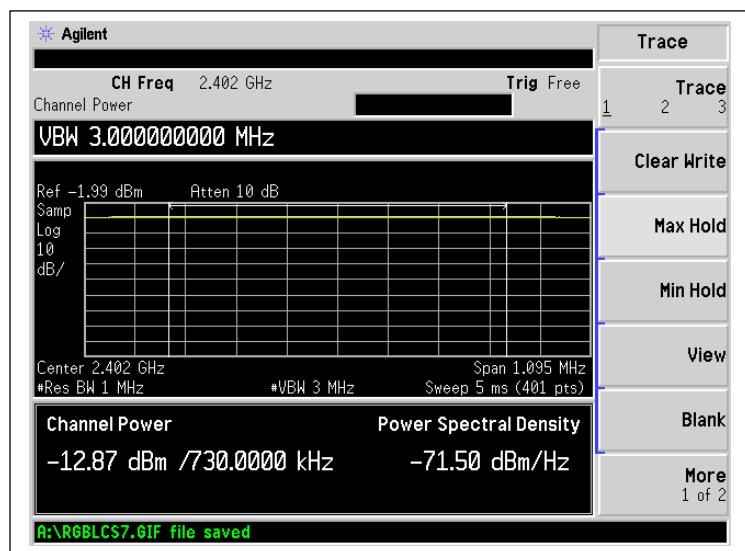


140V

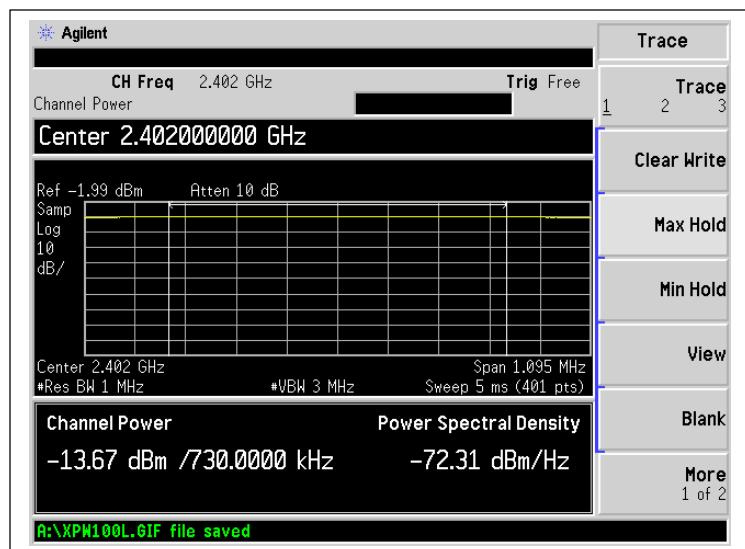

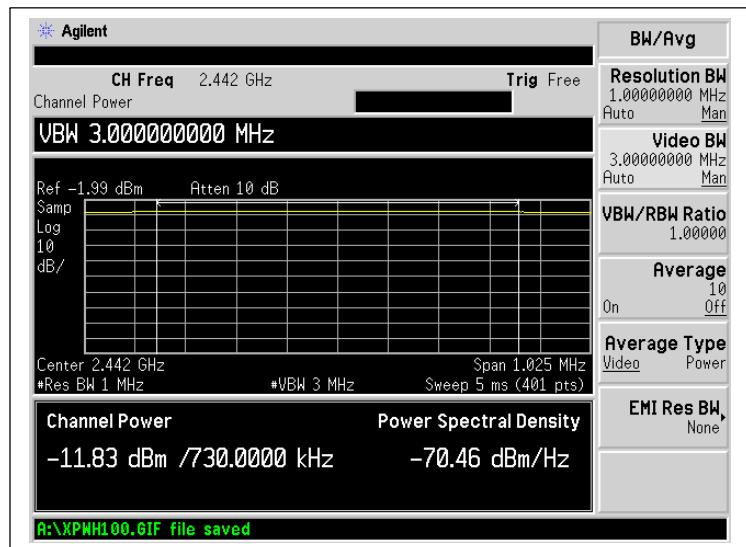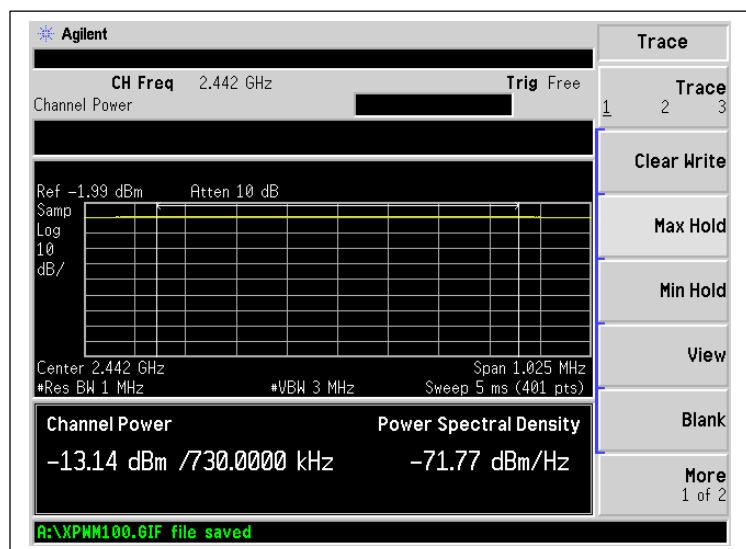
**Mid Channel**
**100V**

**140V**


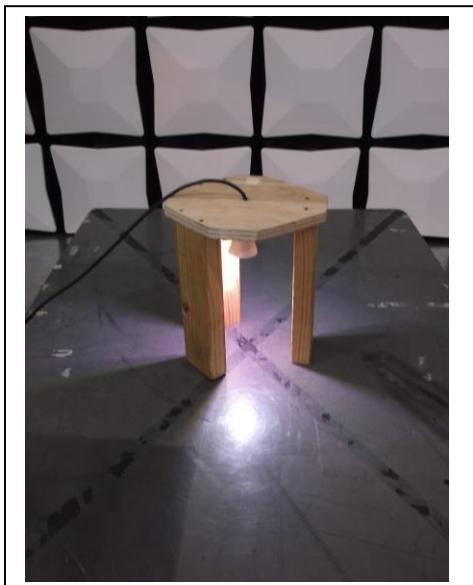
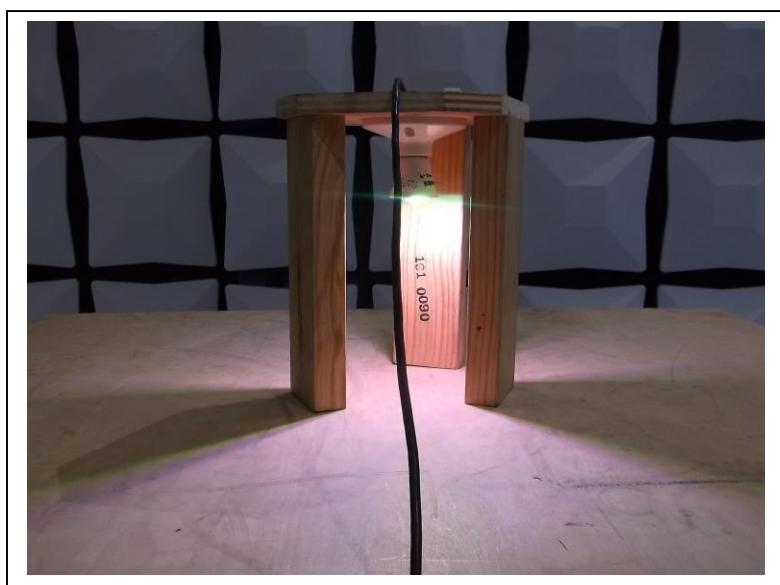
## High Channel

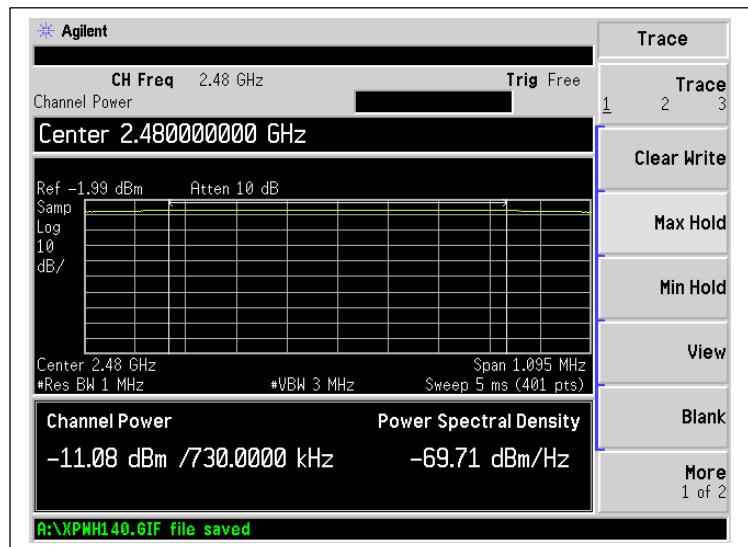100V

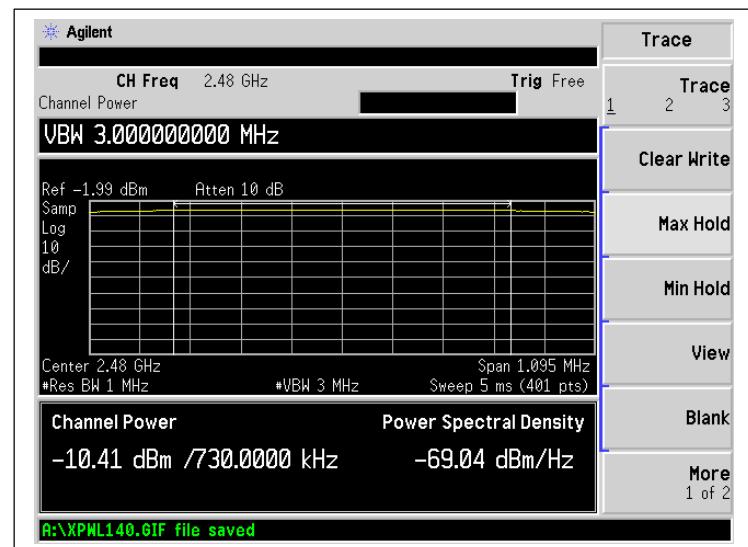


140V



**14 PHOTOGRAHPS/EXHIBITS – PRODUCT PHOTOS, TEST SETUPS****Radiated Spurious Emission, <1 GHz****Radiated Spurious Emission, >1 GHz**

**Conducted Output Power, Peak Power Spectral Density,  
-6dB Occupied Bandwidth, and Conducted Spurious Emissions**

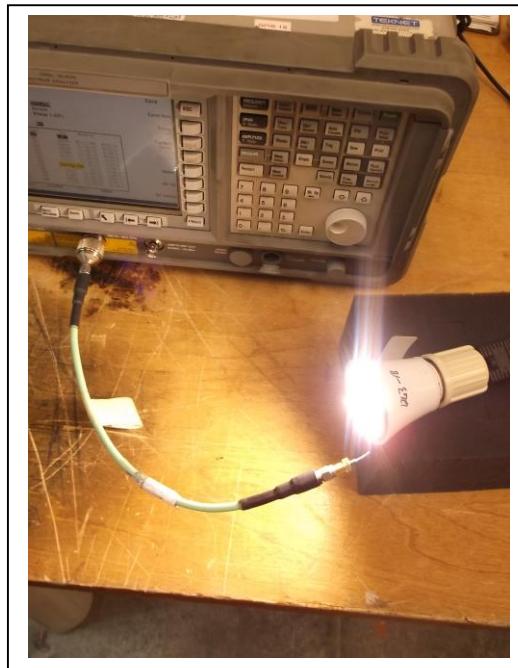

**Conducted Emissions**

