

FCC Test Report

Product Name	Optical Gaming Mouse Dock
Model No.	P707 (Dock)
FCC ID	NIYP707RX

Applicant	Dexin Corp
Address	14F-8, No. 258, Lian Cheng Rd Chung Ho City, Taipei Hsien, Taiwan

Date of Receipt	Dec. 11, 2020
Issued Date	Jan. 14, 2021
Report No.	20C0446R-E3032110120
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report


Issued Date: Jan. 14, 2021

Report No.: 20C0446R-E3032110120




Product Name	Optical Gaming Mouse Dock
Applicant	Dexin Corp
Address	14F-8, No. 258, Lian Cheng Rd Chung Ho City, Taipei Hsien, Taiwan
Manufacturer	Dexin Corp
Model No.	P707 (Dock)
FCC ID	NIYP707RX
EUT Rated Voltage	DC 5V (Power by USB)
EUT Test Voltage	DC 5V (Power by USB)
Trade Name	ASUS
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By



(Adm. Specialist / Ida Tung)

Tested By



(Senior Engineer / Ivan Chuang)

Approved By



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Test System.....	7
1.4. EUT Exercise Software	7
1.5. Test Facility	8
1.6. List of Test Equipment	9
1.7. Uncertainty	10
2. Conducted Emission.....	11
2.1. Test Setup	11
2.2. Limits	11
2.3. Test Procedure	12
2.4. Test Result of Conducted Emission.....	13
3. Radiated Emission.....	15
3.1. Test Setup	15
3.2. Limits	16
3.3. Test Procedure	17
3.4. Test Result of Radiated Emission.....	18
4. Band Edge	28
4.1. Test Setup	28
4.2. Limits	28
4.3. Test Procedure	29
4.4. Test Result of Band Edge	30
5. Duty Cycle	34
5.1. Test Setup	34
5.2. Test Result of Duty Cycle.....	35
6. EMI Reduction Method During Compliance Testing	36

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

Revision History

Report No.	Version	Description	Issued Date
20C0446R-E3032110120	V1.0	Initial issue of report.	Jan. 14, 2021

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Optical Gaming Mouse Dock
Trade Name	ASUS
Model No.	P707 (Dock)
FCC ID	NIYP707RX
Frequency Range	2403-2480MHz
Channel Number	78CH
Type of Modulation	GFSK
Antenna Type	Print on PCB Antenna
Antenna Gain	Refer to the table "Antenna List"
Channel Control	Auto
USB Cable	MFR: ASUS, M/N: P707 (Mouse), Non-shielded, 2m

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	ASUS	P707	Print on PCB Antenna	-2.21dBi for 2.4GHz

Note: The antenna of EUT is conform to FCC 15.203

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		
Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz		

Note:

1. The EUT is an Optical Gaming Mouse Dock with a built-in 2.4GHz wireless transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.249 for spread spectrum devices.
4. At result of radiation pretests(dock stand-alone and mouse+dock), only the worst case(mouse+dock) is shown in the report.

Test Mode	Mode 1: Transmit Mode 2: Normal mode
-----------	---


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	Latitude 5580	GDZN7H2	Non-shielded, 0.8m
2 Optical Gaming Mouse	ASUS	P707 (Mouse)	N/A	N/A

Signal Cable Type	Signal cable Description
A USB Cable	Non-shielded, 2m, two PCS.

1.3. Configuration of Test System

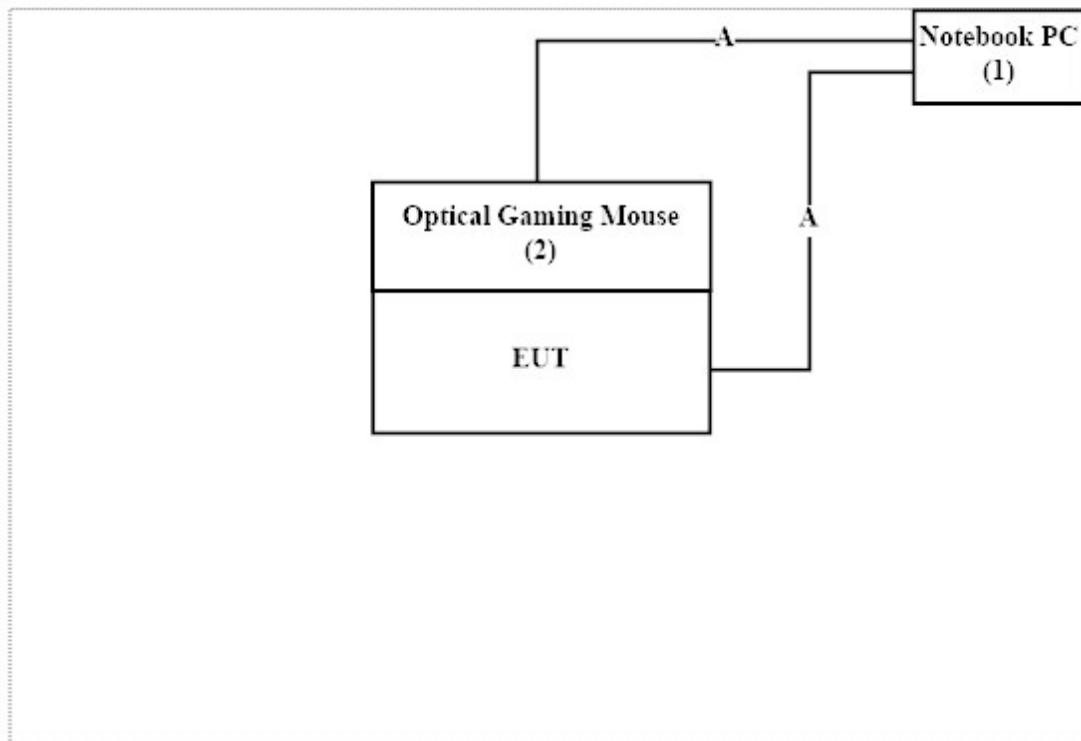

1.4. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.3.
- (2) Execute software "CMD V10.0.19041.685" on the Notebook PC.
- (3) Configure the test mode and the test channel
- (4) Start the continuous transmit.
- (5) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	53.6 %
Radiated Emission	Temperature (°C)	10~40 °C	21.7 °C
	Humidity (%RH)	10~90 %	64.4 %
Conductive	Temperature (°C)	10~40 °C	21.0 °C
	Humidity (%RH)	10~90 %	56.0 %

USA : FCC Registration Number: TW0023

Canada : IC Registration Number: 25880

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan, R.O.C.
Phone number : 886-2-2602-7968
Fax number : 866-2-2602-3286
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Two-Line V-Network	R&S	ENV216	101306	2020.03.25	2021.03.24
X	Two-Line V-Network	R&S	ENV216	101307	2020.04.17	2021.04.16
X	Coaxial Cable	DEKRA	RG400_BNC	RF001	2020.05.24	2021.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

For Conducted measurements /ASR2

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Spectrum Analyzer	Keysight	N9030B	MY56320509	2020.08.10	2021.08.09
	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2020.05.13	2021.05.12
	Power Sensor	KEYSIGHT	N1923A	MY59240002	2020.05.22	2021.05.21
	Power Sensor	KEYSIGHT	N1923A	MY59240003	2020.05.22	2021.05.21

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5

For Radiated measurements /ACB1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2020.03.16	2021.03.15
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2020.07.20	2021.07.19
X	Horn Antenna	ETS-Lindgren	3117	00201366	2020.09.21	2021.09.20
X	Horn Antenna	Com-Power	AH-840	101087	2020.06.08	2021.06.07
X	Pre-Amplifier	EMCI	EMC001330	980301	2020.06.04	2021.06.03
X	Pre-Amplifier	EMCI	EMC051845SE	980632	2020.08.21	2021.08.20
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2020.06.24	2021.06.23
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2020.06.10	2021.06.09
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Spectrum Analyzer	R&S	FSV40	101148	2020.03.16	2021.03.15
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2020.07.03	2021.07.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2020.06.10	2021.06.09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Radiated Emission	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Band Edge	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Duty Cycle	± 2.31 ms	

2. Conducted Emission

2.1. Test Setup

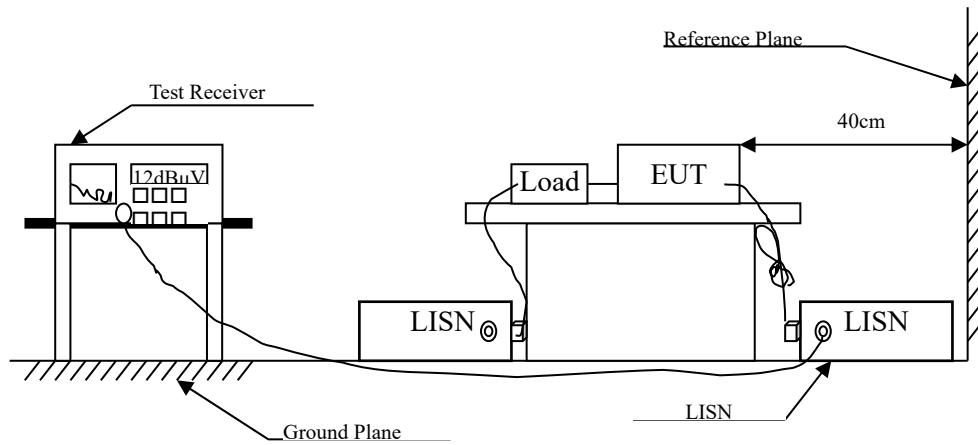

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure


The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Test Result of Conducted Emission

Product : Optical Gaming Mouse Dock
 Test Item : Conducted Emission Test
 Power Line : L 1
 Test Date : 2020/12/30
 Test Mode : Mode 1: Transmit (2440MHz)

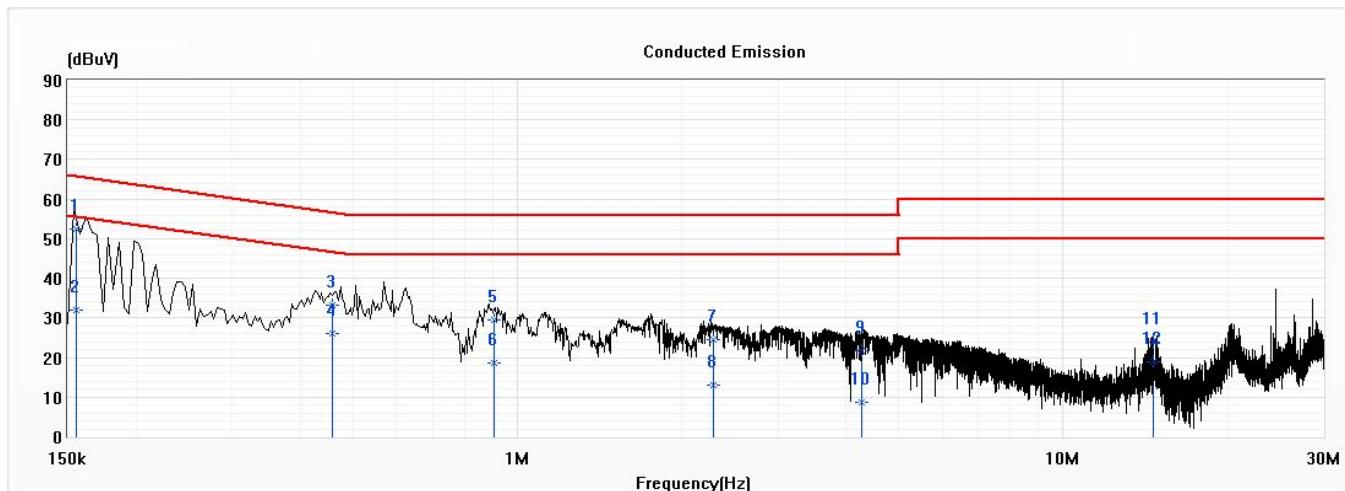


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
*1	0.155	52.44	65.70	-13.26	42.78	9.66	QP
2	0.155	32.04	55.70	-23.67	22.38	9.66	AV
3	0.458	33.23	56.72	-23.50	23.57	9.66	QP
4	0.458	25.95	46.72	-20.77	16.29	9.66	AV
5	0.908	29.41	56.00	-26.59	19.73	9.69	QP
6	0.908	18.62	46.00	-27.38	8.93	9.69	AV
7	2.287	24.65	56.00	-31.35	14.92	9.73	QP
8	2.287	12.96	46.00	-33.04	3.23	9.73	AV
9	4.276	21.77	56.00	-34.23	11.99	9.78	QP
10	4.276	8.69	46.00	-37.31	-1.08	9.78	AV
11	14.647	24.05	60.00	-35.95	14.11	9.95	QP
12	14.647	18.92	50.00	-31.08	8.98	9.95	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “*” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Optical Gaming Mouse Dock
 Test Item : Conducted Emission Test
 Power Line : N
 Test Date : 2020/12/30
 Test Mode : Mode 1: Transmit (2440MHz)

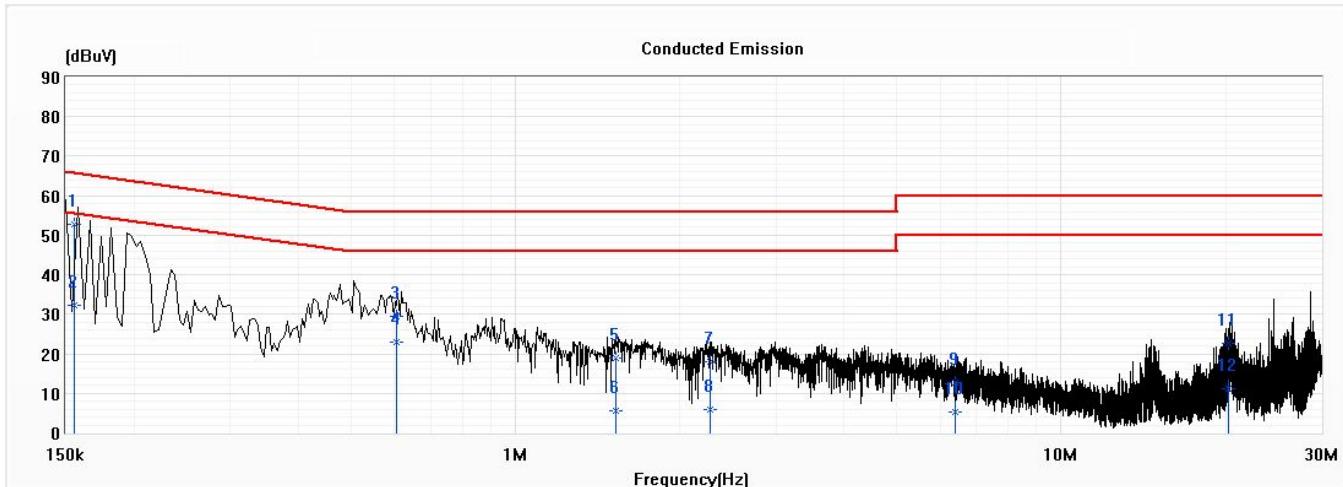

No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
*1	0.156	52.70	65.69	-12.99	43.03	9.67	QP
2	0.156	32.13	55.69	-23.56	22.46	9.67	AV
3	0.606	29.57	56.00	-26.43	19.89	9.67	QP
4	0.606	22.83	46.00	-23.17	13.16	9.67	AV
5	1.531	19.04	56.00	-36.96	9.33	9.72	QP
6	1.531	5.67	46.00	-40.33	-4.04	9.72	AV
7	2.278	17.94	56.00	-38.06	8.20	9.74	QP
8	2.278	6.03	46.00	-39.97	-3.70	9.74	AV
9	6.382	12.60	60.00	-47.40	2.76	9.83	QP
10	6.382	5.43	50.00	-44.57	-4.41	9.83	AV
11	20.260	22.63	60.00	-37.37	12.58	10.05	QP
12	20.260	11.08	50.00	-38.92	1.03	10.05	AV


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “*” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30MHz

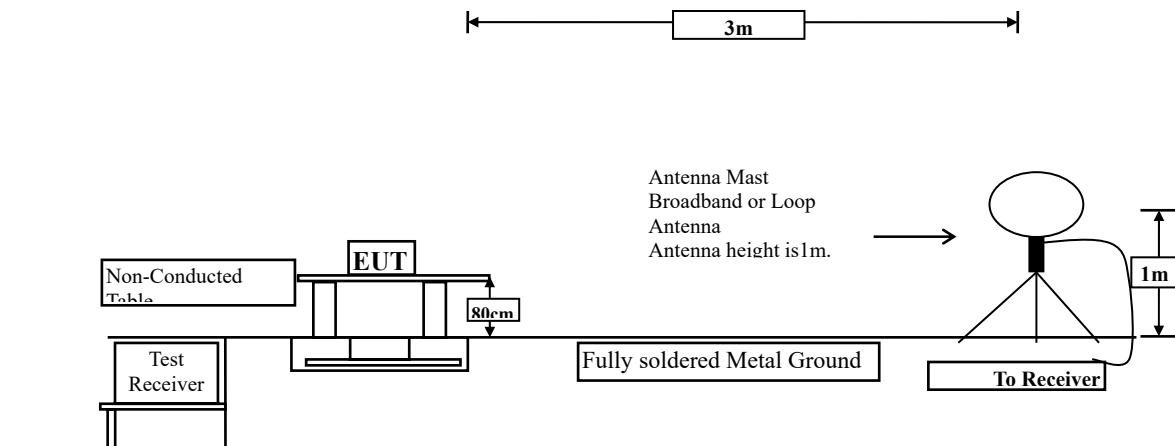

Radiated Emission Below 1GHz

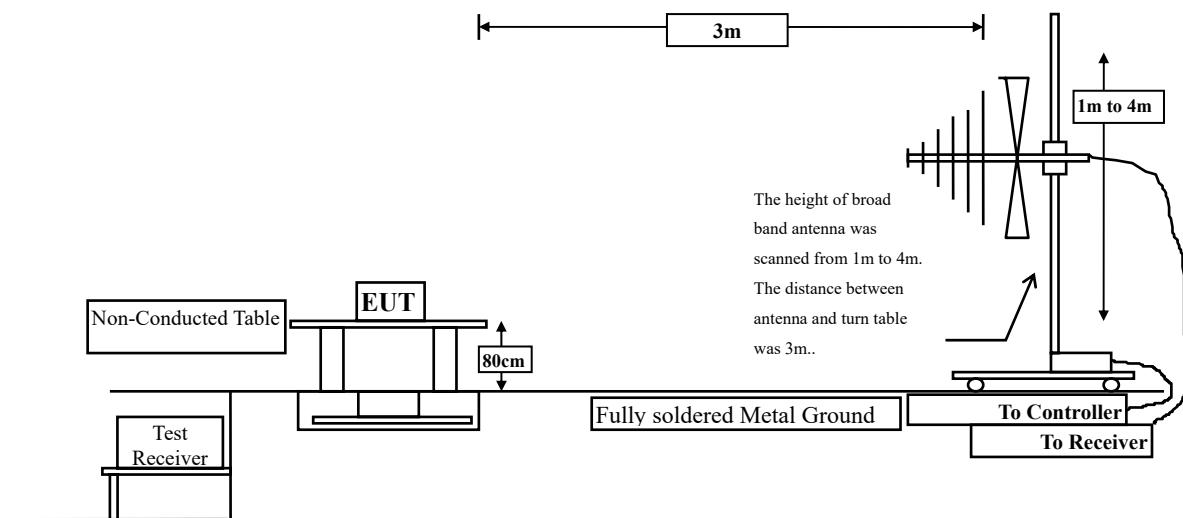

Radiated Emission Above 1GHz

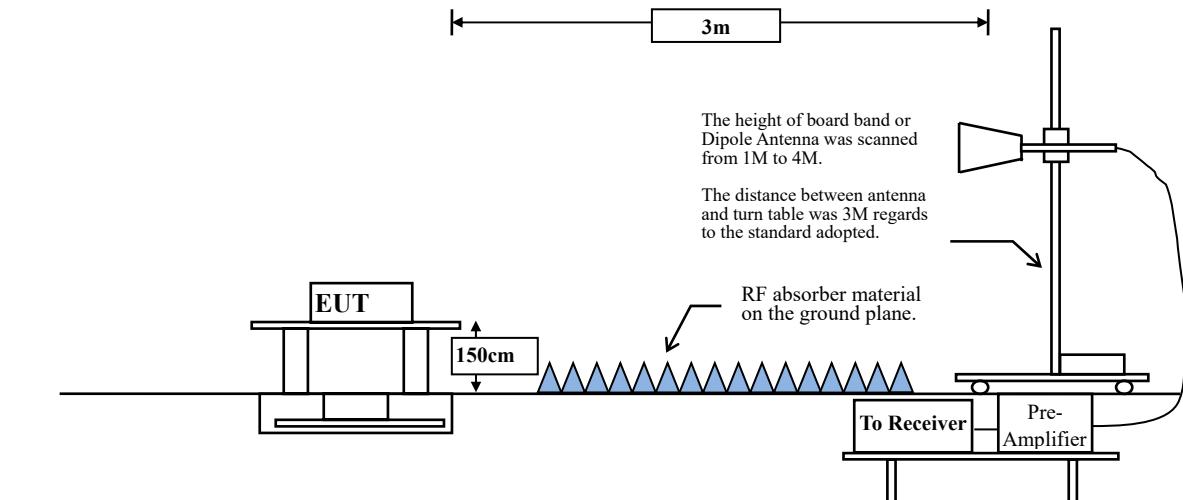

3.2. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dB μ V /m @3m)	(uV/m @3m)	(dB μ V /m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54
24000-24250	250	108	2500	68

Remarks : 1. RF Voltage (dB μ V /m) = 20 log RF Voltage (uV/m)

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dB μ V /m) = 20 log E field strength (uV/m)

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.


The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.4. Test Result of Radiated Emission

Product : Optical Gaming Mouse Dock
 Test Item : Fundamental Radiated Emission
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit

Horizontal

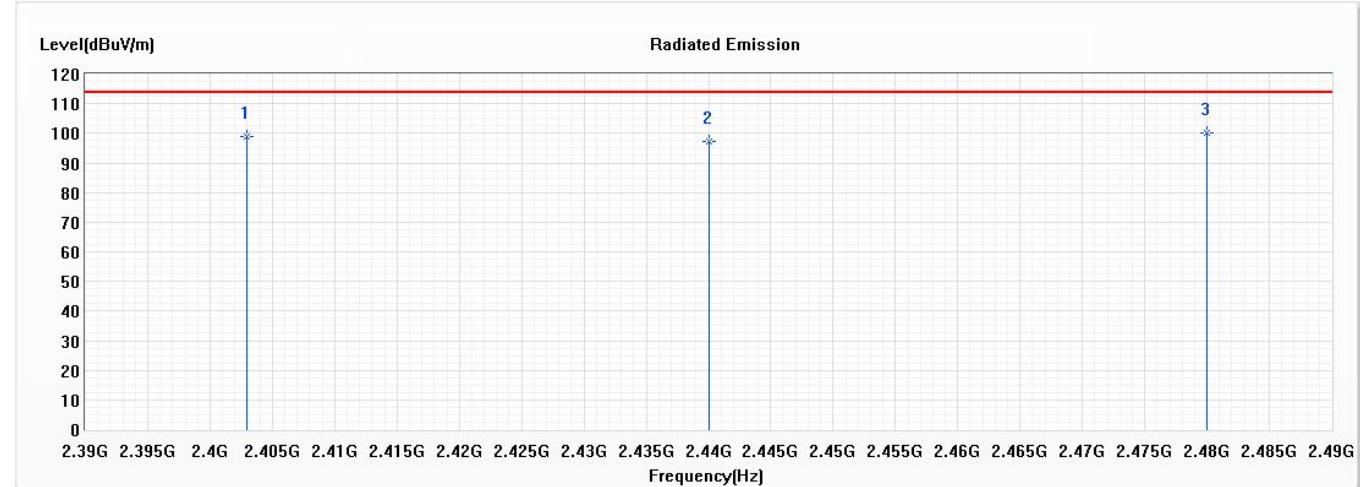

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2403.000	98.97	114.00	-15.03	114.90	-15.93	PK
2	2440.000	97.38	114.00	-16.62	113.18	-15.80	PK
* 3	2480.000	100.10	114.00	-13.90	115.82	-15.72	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss -Amplifier gain.


Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Margin (dB)	Average Limit (dB μ V/m)
2403	98.97	-17.329	81.641	-12.359	94.000
2440	97.38	-17.329	80.051	-13.949	94.000
2480	100.1	-17.329	82.771	-11.229	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Fundamental Radiated Emission
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit

Vertical

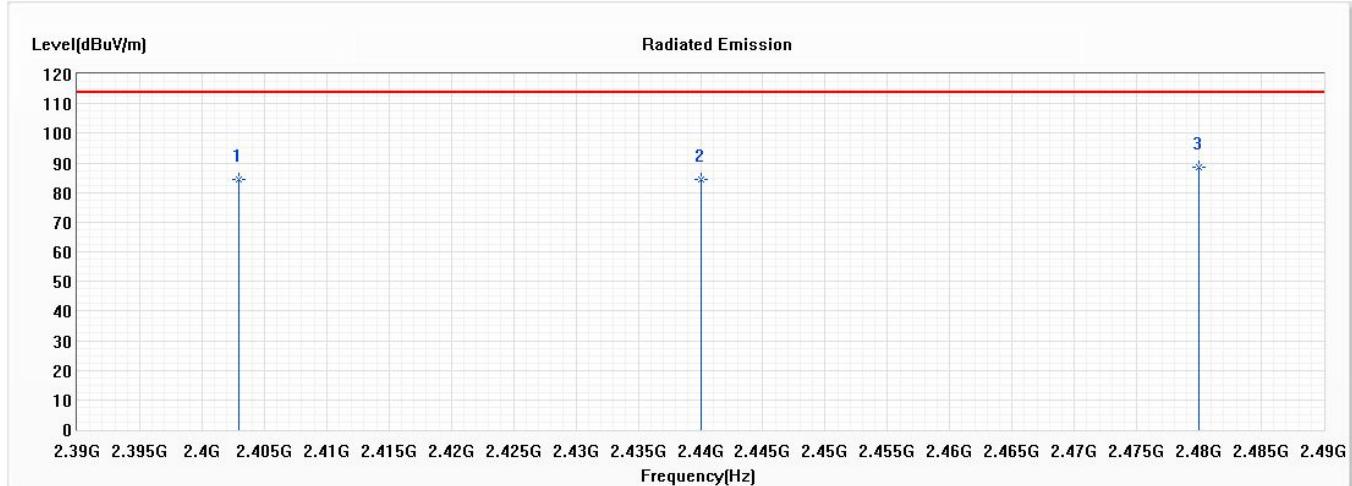

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2403.000	84.39	114.00	-29.61	100.32	-15.93	PK
2	2440.000	84.39	114.00	-29.61	100.19	-15.80	PK
* 3	2480.000	88.61	114.00	-25.39	104.33	-15.72	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss -Amplifier gain.


Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Margin (dB)	Average Limit (dB μ V/m)
2403	84.39	-17.329	67.061	-26.939	94.000
2440	84.39	-17.329	67.061	-26.939	94.000
2480	88.61	-17.329	71.281	-22.719	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2403MHz)

Horizontal

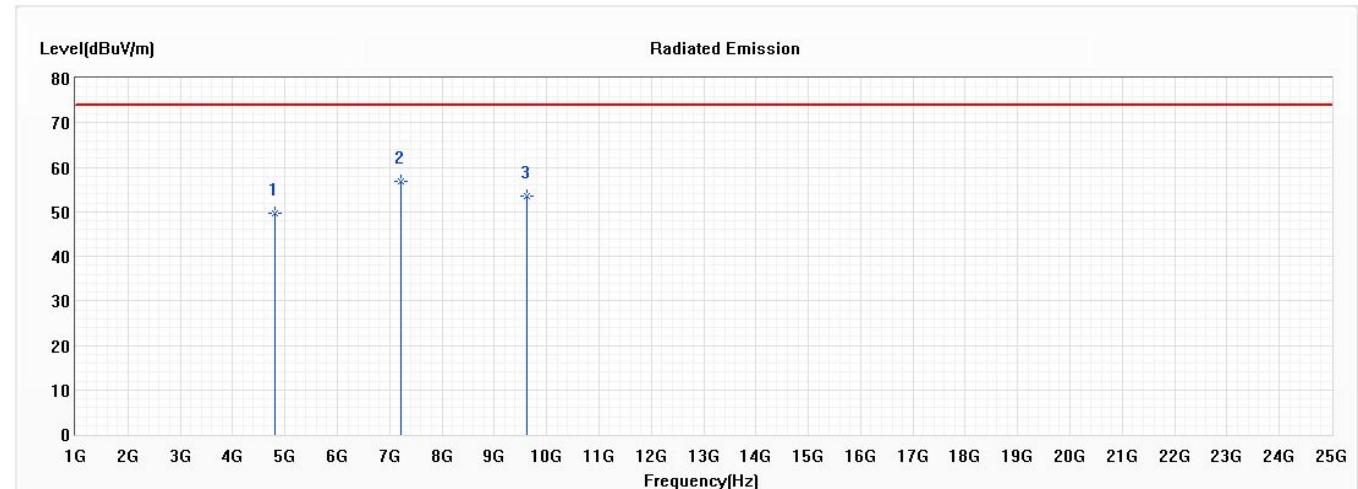

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4806.000	49.55	74.00	-24.45	62.58	-13.03	PK
* 2	7209.000	56.75	74.00	-17.25	68.44	-11.69	PK
3	9612.000	53.63	74.00	-20.37	64.81	-11.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Average Measurement dB μ V/m	Margin dB	Peak Limit dB μ V/m	Average Limit dB μ V/m
------------------	-------------------------------------	----------------------------	--	--------------	-------------------------------	----------------------------------

Average Detector:


7209	56.75	-17.329	39.421	-14.579	74.000	54.000
------	-------	---------	--------	---------	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2403MHz)

Vertical

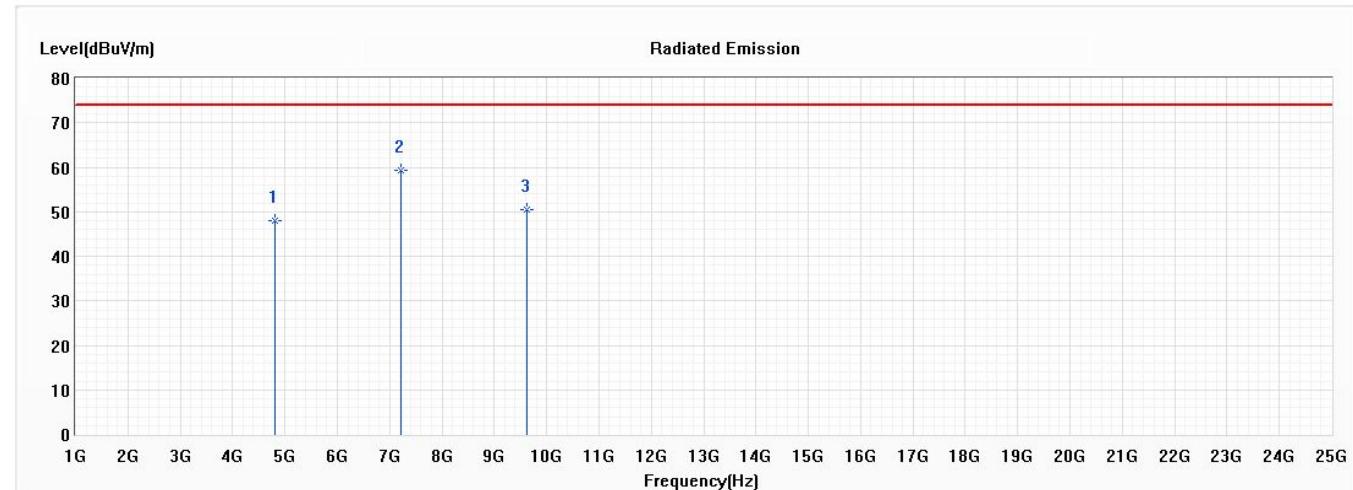

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4806.000	47.87	74.00	-26.13	60.90	-13.03	PK
* 2	7209.000	59.29	74.00	-14.71	70.98	-11.69	PK
3	9612.000	50.53	74.00	-23.47	61.71	-11.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Average Measurement dB μ V/m	Margin dB	Peak Limit dB μ V/m	Average Limit dB μ V/m
------------------	-------------------------------------	----------------------------	--	--------------	-------------------------------	----------------------------------

Average Detector:


7209	59.29	-17.329	41.961	-12.039	74.000	54.000
------	-------	---------	--------	---------	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2440MHz)

Horizontal

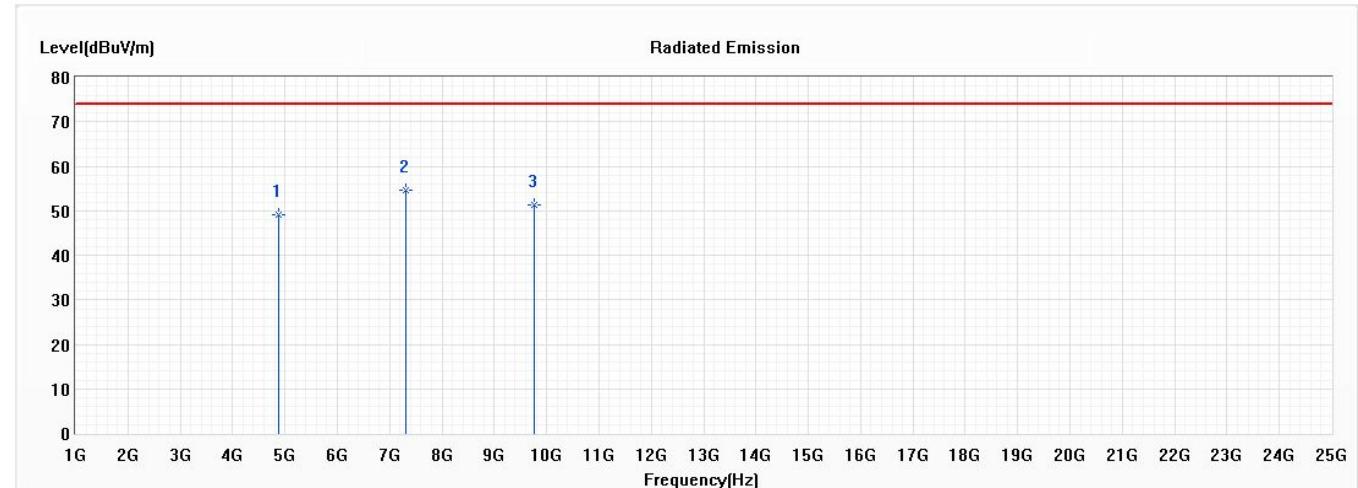

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4880.000	49.24	74.00	-24.76	62.26	-13.02	PK
* 2	7320.000	54.59	74.00	-19.41	66.54	-11.95	PK
3	9760.000	51.22	74.00	-22.78	62.17	-10.95	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Average Measurement dB μ V/m	Margin dB	Peak Limit dB μ V/m	Average Limit dB μ V/m
------------------	-------------------------------------	----------------------------	--	--------------	-------------------------------	----------------------------------

Average Detector:


7320	54.59	-17.329	37.261	-16.739	74.000	54.000
------	-------	---------	--------	---------	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2440MHz)

Vertical

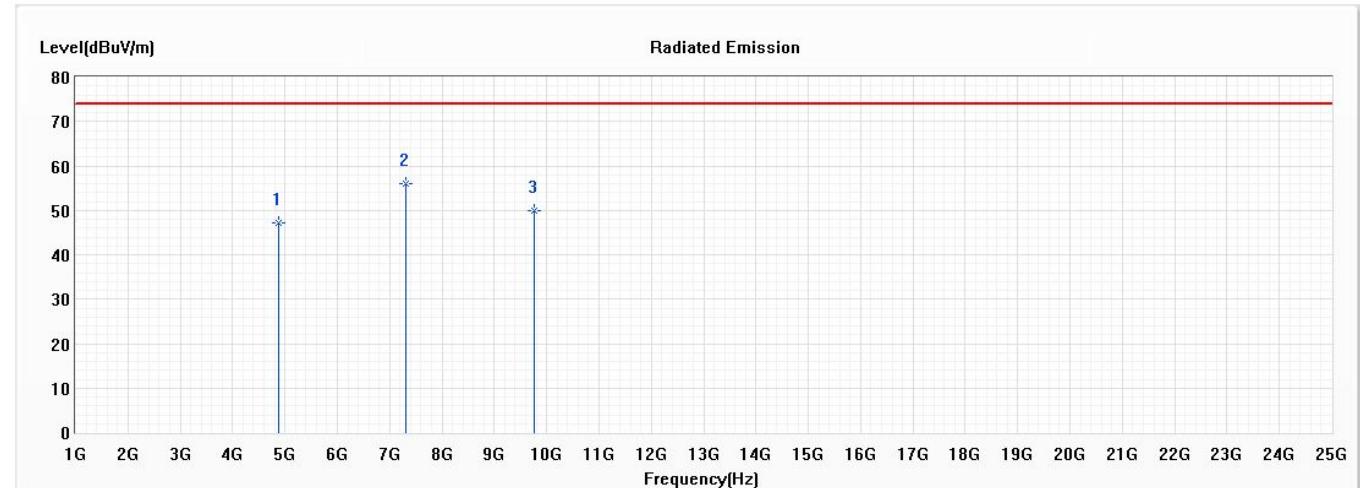

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4880.000	47.09	74.00	-26.91	60.11	-13.02	PK
* 2	7320.000	55.95	74.00	-18.05	67.90	-11.95	PK
3	9760.000	49.90	74.00	-24.10	60.85	-10.95	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Average Measurement dB μ V/m	Margin dB	Peak Limit dB μ V/m	Average Limit dB μ V/m
------------------	-------------------------------------	----------------------------	--	--------------	-------------------------------	----------------------------------

Average Detector:


7320	55.95	-17.329	38.621	-15.379	74.000	54.000
------	-------	---------	--------	---------	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2480MHz)

Horizontal

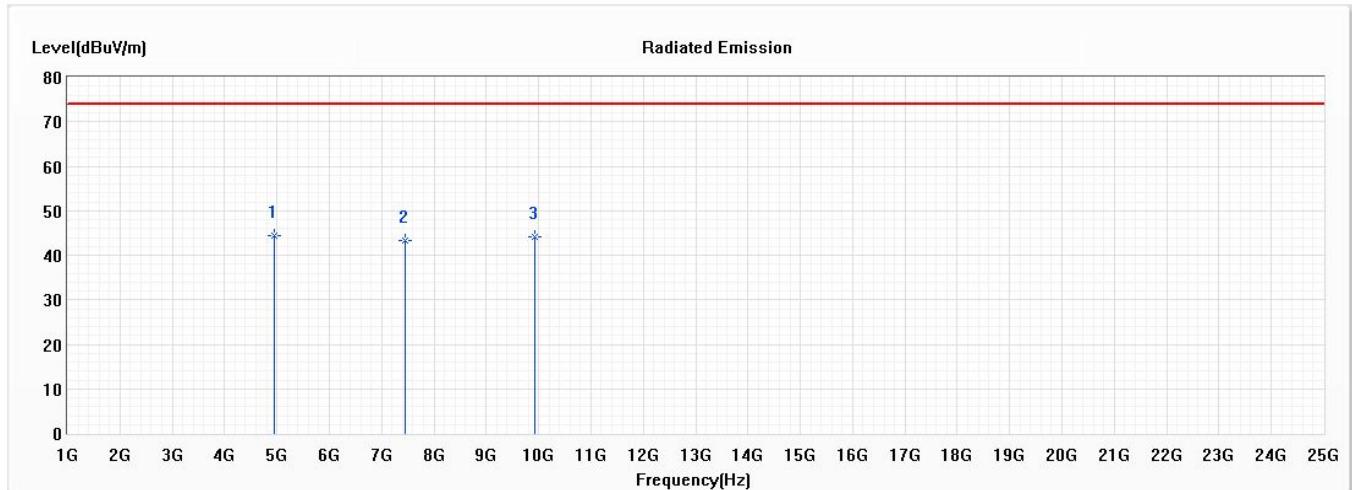

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	4960.000	44.48	74.00	-29.52	57.19	-12.71	PK
2	7440.000	43.25	74.00	-30.75	55.33	-12.08	PK
3	9920.000	44.15	74.00	-29.85	55.02	-10.87	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Average Measurement dB μ V/m	Margin dB	Peak Limit dB μ V/m	Average Limit dB μ V/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2480MHz)

Vertical

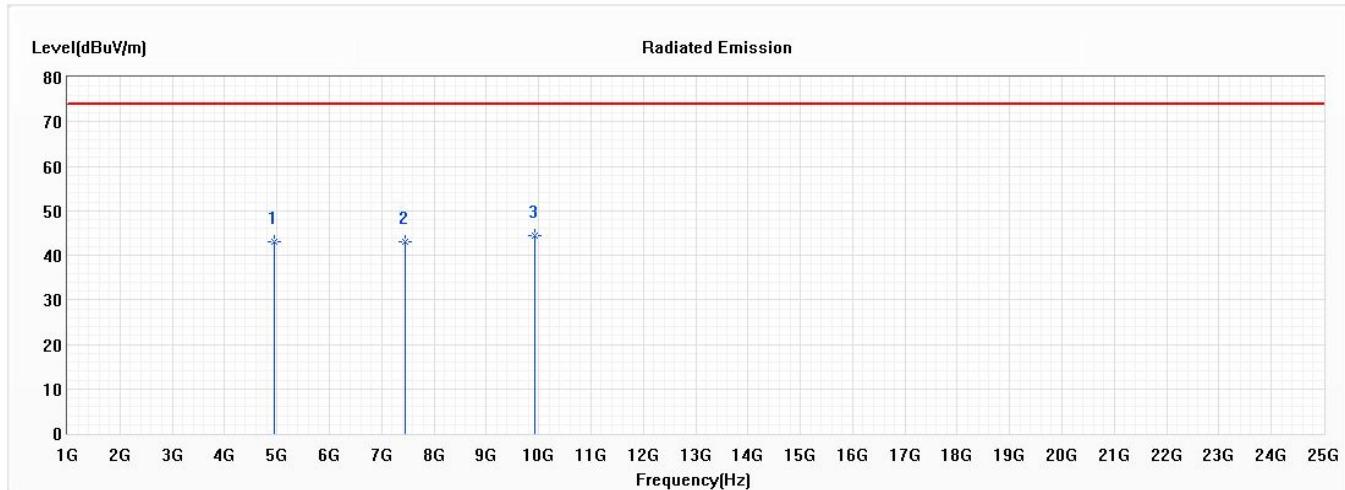

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	43.02	74.00	-30.98	55.73	-12.71	PK
2	7440.000	43.02	74.00	-30.98	55.10	-12.08	PK
* 3	9920.000	44.35	74.00	-29.65	55.22	-10.87	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Average Measurement dB μ V/m	Margin dB	Peak Limit dB μ V/m	Average Limit dB μ V/m
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : General Radiated Emission Data
 Test Date : 2021/01/07
 Test Mode : Mode 1: Transmit (2440MHz)

Horizontal

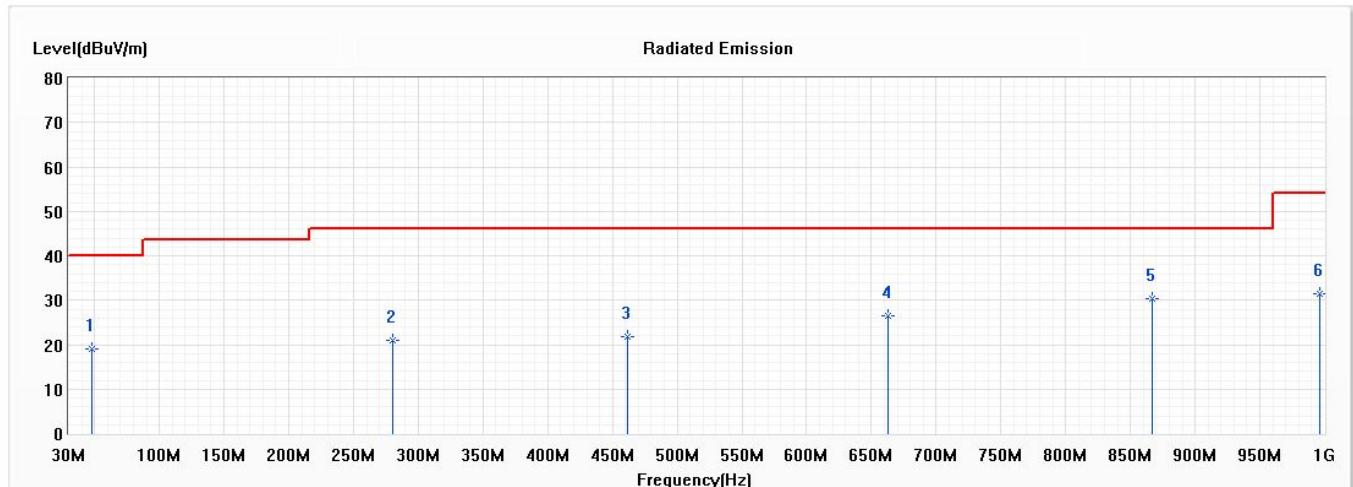


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	48.275	19.12	40.00	-20.88	29.73	-10.61	QP
2	280.232	20.83	46.00	-25.17	31.20	-10.37	QP
3	461.580	21.90	46.00	-24.10	27.92	-6.02	QP
4	662.609	26.49	46.00	-19.51	29.16	-2.67	QP
* 5	866.449	30.43	46.00	-15.57	30.17	0.26	QP
6	995.783	31.44	54.00	-22.56	29.64	1.80	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Optical Gaming Mouse Dock
 Test Item : General Radiated Emission Data
 Test Date : 2021/01/07
 Test Mode : Mode 1: Transmit (2440MHz)

Vertical

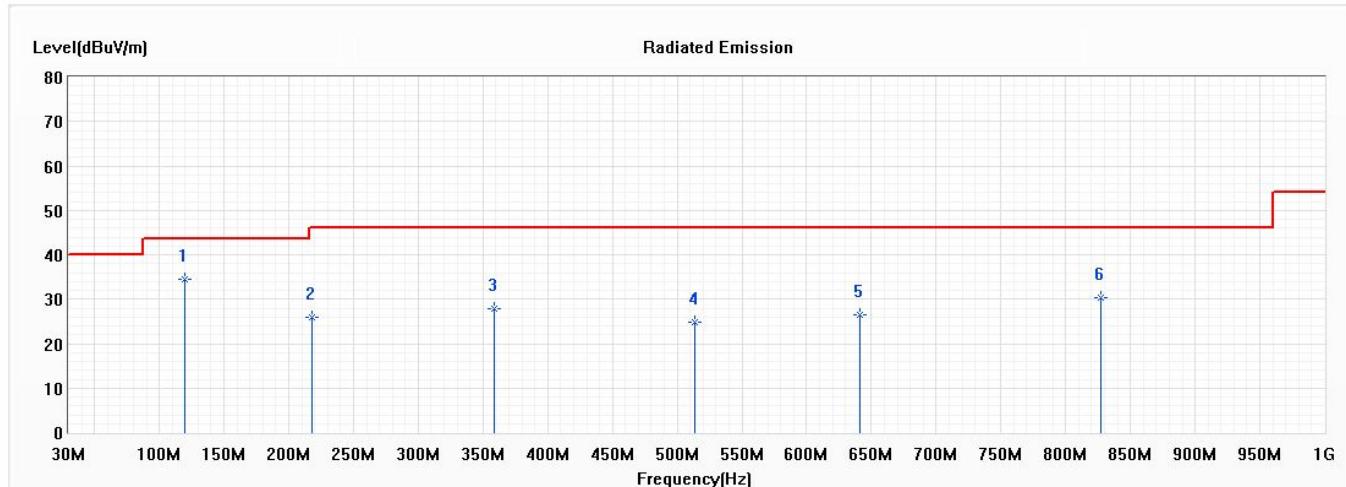

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	119.971	34.43	43.50	-9.07	47.63	-13.20	QP
2	218.377	26.03	46.00	-19.97	38.62	-12.59	QP
3	358.957	27.95	46.00	-18.05	36.38	-8.43	QP
4	513.594	24.88	46.00	-21.12	29.82	-4.94	QP
5	641.522	26.44	46.00	-19.56	29.38	-2.94	QP
6	827.087	30.43	46.00	-15.57	30.74	-0.31	QP


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Setup

RF Radiated Measurement:

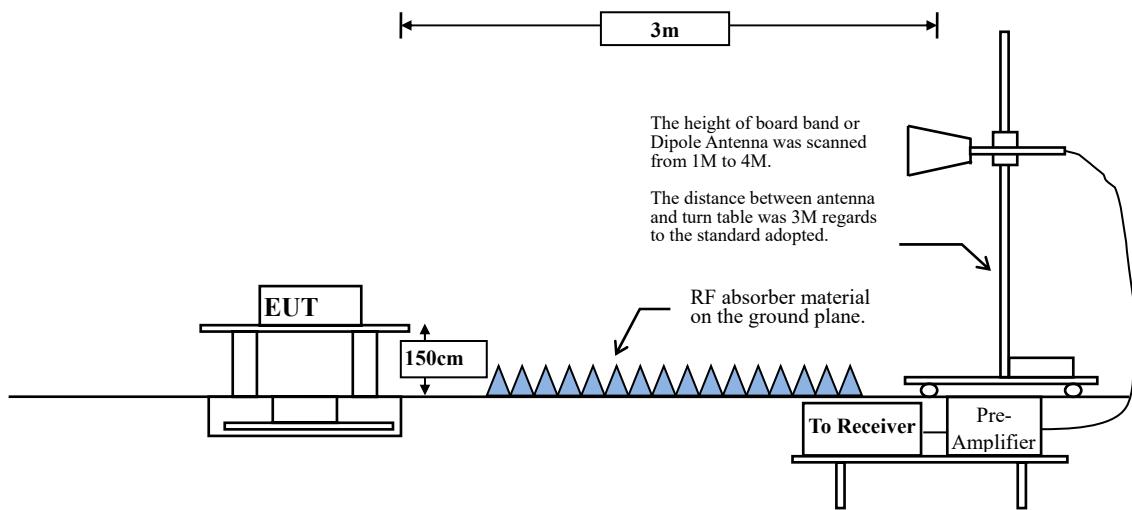

4.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dB μ V /m) = 20 log E field strength (uV/m)

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.4. Test Result of Band Edge

Product : Optical Gaming Mouse Dock
 Test Item : Band Edge Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2403MHz)

Horizontal

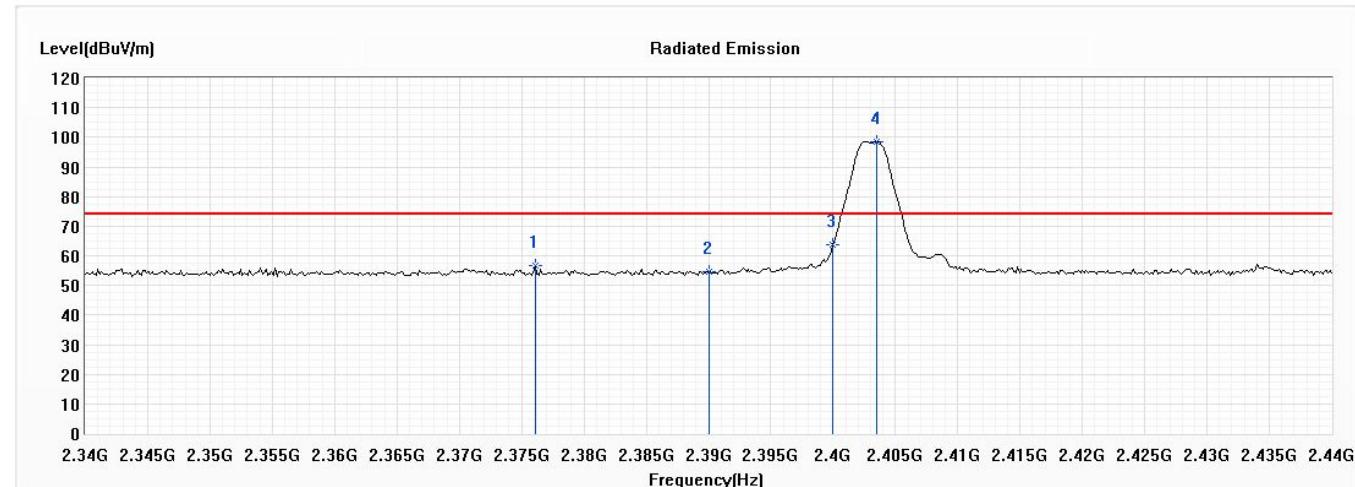

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2376.087	56.63	74.00	-17.37	44.79	11.84	PK
2	2390.000	54.58	74.00	-19.42	42.66	11.92	PK
3	2400.000	63.92	74.00	-10.08	51.96	11.96	PK
4	2403.478	98.51	--	--	86.52	11.99	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Margin (dB)	Average Limit (dB μ V/m)	Result
2376.087	56.63	-17.329	39.301	-14.699	54.000	Pass
2390	54.58	-17.329	37.251	-16.749	54.000	Pass
2400	63.92	-17.329	46.591	-7.409	54.000	Pass
2403.478	98.51	-17.329	81.181	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Band Edge Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2403MHz)

Vertical

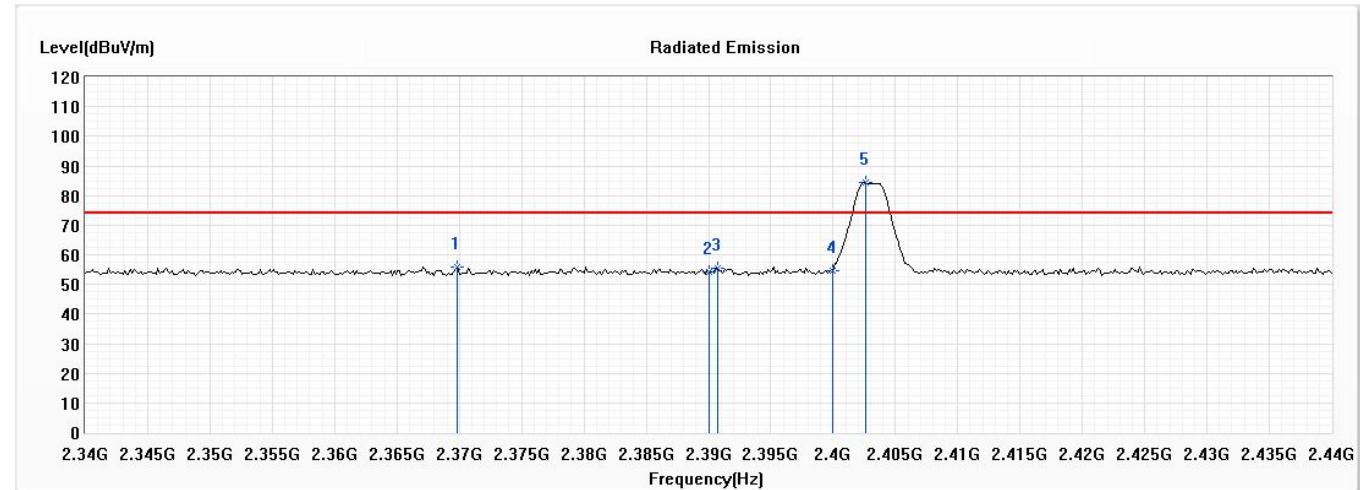

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2369.855	55.98	74.00	-18.02	44.17	11.81	PK
2	2390.000	54.41	74.00	-19.59	42.49	11.92	PK
3	2390.725	55.48	74.00	-18.52	43.55	11.93	PK
4	2400.000	54.64	74.00	-19.36	42.68	11.96	PK
5	2402.609	84.26	--	--	72.28	11.98	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Margin (dB)	Average Limit (dB μ V/m)	Result
2369.855	55.98	-17.329	38.651	-15.349	54.000	Pass
2390	54.41	-17.329	37.081	-16.919	54.000	Pass
2390.725	55.48	-17.329	38.151	-15.849	54.000	Pass
2400	54.64	-17.329	37.311	-16.689	54.000	Pass
2402.609	84.26	-17.329	66.931	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Band Edge Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2480MHz)

Horizontal

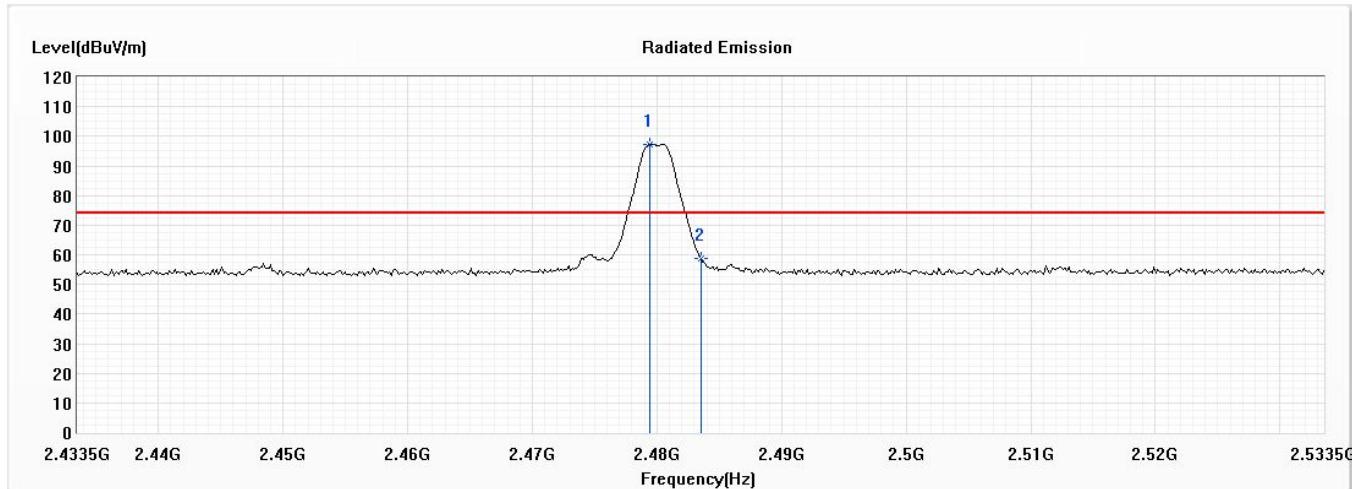

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2479.442	99.33	--	--	87.10	12.23	PK
2	2483.500	58.78	74.00	-15.22	46.54	12.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Margin (dB)	Average Limit (dB μ V/m)	Result
2479.442	99.33	-17.329	82.001	--	--	Pass
2483.5	58.78	-17.329	41.451	-12.549	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Optical Gaming Mouse Dock
 Test Item : Band Edge Data
 Test Date : 2021/01/06
 Test Mode : Mode 1: Transmit (2480MHz)

Vertical

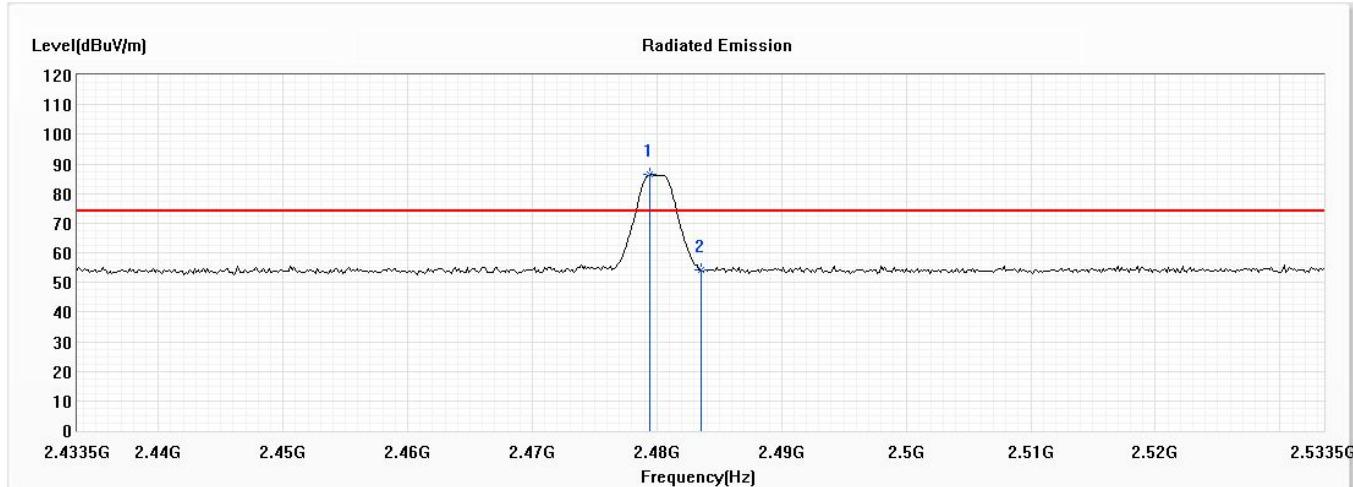

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2479.442	88.42	--	--	76.19	12.23	PK
2	2483.500	54.21	74.00	-19.79	41.97	12.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Margin (dB)	Average Limit (dB μ V/m)	Result
2479.442	88.42	-17.329	71.091	--	--	Pass
2483.5	54.21	-17.329	36.881	-17.119	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

5. Duty Cycle

5.1. Test Setup


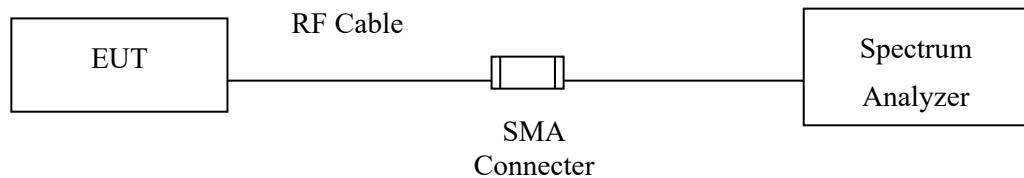


5.2. Test Result of Duty Cycle

Product : Optical Gaming Mouse Dock

Test Item : Duty Cycle Data

Test Mode : Mode 2: Normal mode

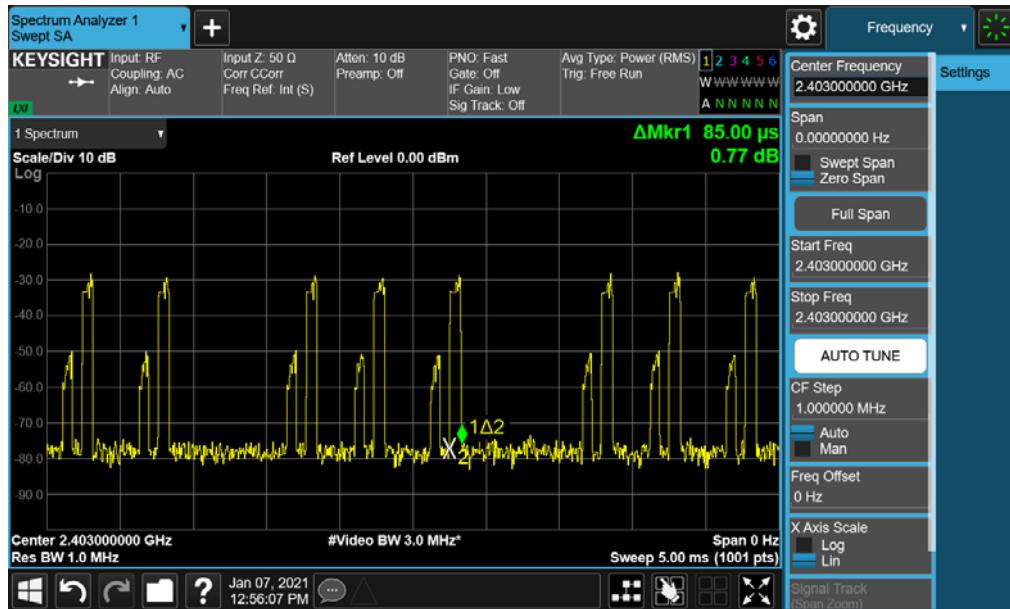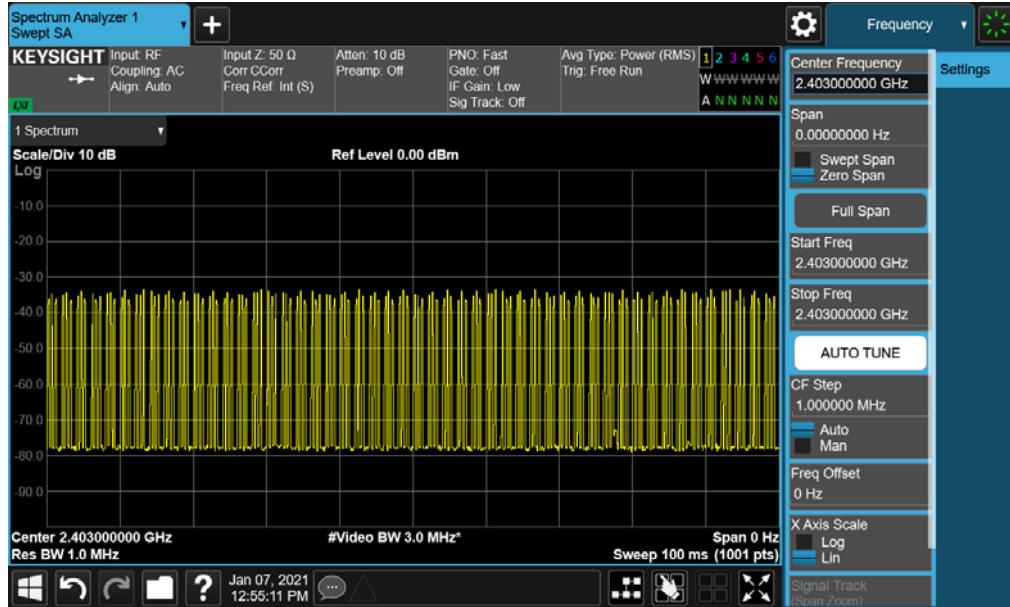

Time on of 100ms= $85\text{us} \times 160 = 13.6\text{ms}$

Duty Cycle= $13.6\text{ms} / 100\text{ms} = 0.136$

Duty Cycle correction factor= $20 \log 0.136 = -17.329 \text{ dB}$

Duty Cycle correction factor	-17.329 dB
-------------------------------------	-------------------

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.