



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR
352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM

FCC PART 22, 24, and 27 TEST REPORT

Applicant	Harris Corp.
Address	1025 West NASA Boulevard Melbourne FL 32919-0001 USA
FCC ID	NK73100176
Model Number	
Product Description	NK73100176 WITH 300KGXW & 1M25F9W
Date Sample Received	10/16/2009
Date Tested	10/28/2009
Tested By	Nam Nguyen
Approved By	Mario de Aranzeta
Timco Report No.	Y:\H\Harris\2511AUT9\2511AUT9TestReport.doc
Test Results	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT
THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



TABLE OF CONTENTS

STATEMENT OF COMPLIANCE.....	3
GENERAL INFORMATION.....	4
EMC EQUIPMENT LIST	5
TEST PROCEDURE	6
RF POWER OUTPUT.....	7
VOICE MODULATION CHARACTERISTICS.....	8
AUDIO LOW PASS FILTER.....	8
OCCUPIED BANDWIDTH.....	9
SPURIOUS EMISSIONS AT ANTENNA TERMINALS	20
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	22
FREQUENCY STABILITY.....	25

Document version: 62806 mdea

APPLICANT: HARRIS CORP.

FCC ID: NK73100176

REPORT: 2511AUT9\2511AUT9TestReport.doc

Page 2 of 26



STATEMENT OF COMPLIANCE

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards.

I attest that the necessary measurements were made by me or under my supervision, at Timco Engineering, Inc. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.

Authorized by: Mario de Aranzeta



Signature:

Function: Engineer

Date: 12/02/2009

Tested by: Nam Nguyen

Document version: 62806 mdea

APPLICANT: HARRIS CORP.

FCC ID: NK73100176

REPORT: 2511AUT9\2511AUT9TestReport.doc

Page 3 of 26

GENERAL INFORMATION

DUT Specification

The test results relate only to the items tested.	
FCC Rule Part(s)	§ 22H, § 24E , and 27
DUT Description	NK73100176 WITH 300KGXW & 1M25F9W
Model Name	NK73100176
Tx Frequency Max. Power Rating	' SS?; LK / ' %A & : - K. ' fl * - ! - (EA < nž fl6 ' %d % - SLEA < n %A & : - K. ' fl8%\$! &%0 (EA < n'fk]h ' &%\$S '7cbj YfhMFL \$" & K
	300KGXW
Emission Designators	300KGXW & 1M25F9W
Modulation(s)	
User Power Control	Yes No
	<input type="checkbox"/> 110-120Vac/50- 60Hz <input checked="" type="checkbox"/>
DUT Power Source	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype Pre-Production Production
Type of Equipment	<input type="checkbox"/> Fixed <input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable
	<input checked="" type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>

Test Facility: The test sites used by Timco Engineering Inc. for radiated and conducted emission data are located at 849 NW State Road 45 Newberry, FL 32669 USA.

Test Condition: The DUT was tested in the laboratory in an environment with normal temperature and humidity.

The temperature was 26°C with a relative humidity of 50%.

Modification to the DUT: No modification was made to the DUT during testing.

Test Exercise (e.g. software description, test signal, etc.): The DUT was placed in continuous transmit mode of operation.

Document version: 62806 mdea

APPLICANT: HARRIS CORP.

FCC ID: NK73100176

REPORT: 2511AUT9\2511AUT9TestReport.doc

Page 4 of 26



EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 2/5/09	2/5/12
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
Analyzer Open-Frame Tower Preamplifier	HP	8449B	3008A01075	CAL 7/22/09	7/22/11
Analyzer Open-Frame Tower Quasi-Peak Adapter	HP	85650A	2043A00305	CAL 7/22/09	7/22/11
Analyzer Open-Frame Tower RF Preselector	HP	85685A	3107A01282	CAL 7/22/09	7/22/11
Analyzer Open-Frame Tower Spectrum Analyzer	HP	8566B/85662A	2627A03154/2 648A14276	CAL 7/22/09	7/22/11
Antenna: Biconnical	Eaton	94455-1	1057	CAL 1/15/08	1/15/10
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 10/1/09	10/1/11
Antenna: Log-Periodic	Eaton	96005	1243	CAL 12/13/07	12/13/09
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/1/09	10/1/11
LISN	Electro-Metrics	EM-7820	2682	CAL 9/24/09	0/24/11
Signal Generator	HP	8640B	2308A21464	CAL 8/4/09	8/4/11

Document version: 62806 mdea

APPLICANT: HARRIS CORP.

FCC ID: NK73100176

REPORT: 2511AUT9\2511AUT9TestReport.doc



TEST PROCEDURE

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz, the VBW = 3 MHz, and the span 50 MHz.


Radiation Interference: The test procedure used was ANSI C63.4-2003 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

RF POWER OUTPUT

Rules Part No.: Part 2.1046(a)

Requirements:

Method of Measuring: This test was conducted per ANSI/TIA 603-C:2004 using a RF power as measured by connecting a 50 ohm, resistive wattmeter to the RF output connector.

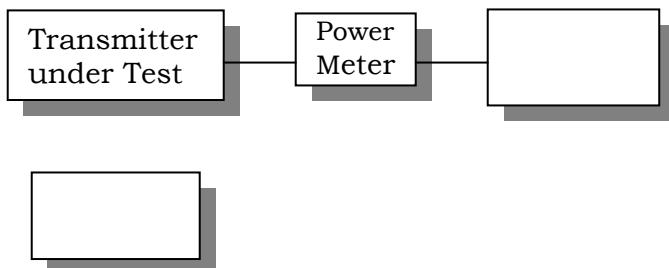

Test Data: 300KGXW & 1M25F9W

300KGXW		300KGXW	
Channel (MHz)	Output Power (dBm)	Channel (MHz)	Output Power (dBm)
869.20	25.4	1930.20	20.9
881.60	24.4	1960.00	21.4
893.80	24.4	1989.80	21.5

1M25F9W		1M25F9W	
Channel (MHz)	Output Power (dBm)	Channel (MHz)	Output Power (dBm)
870.03	22.4	1931.25	15.7
881.50	21.7	1960.00	16.8
893.30	19.8	1988.75	17.5

1M25F9W			
Channel (MHz)	Output Power (dBm)	Channel (MHz)	Output Power (dBm)
2111.25	7.5		
2132.50	6.6		
2153.75	9.1		

Document version: 62806 mdea

APPLICANT: HARRIS CORP.

FCC ID: NK73100176

REPORT: 2511AUT9\2511AUT9TestReport.doc



VOICE MODULATION CHARACTERISTICS

Rules Part No.: Part 2.1047(a)

Requirements:

Method of Measurement:

Test Data: Not applicable, F9 or G9 type of emission.

AUDIO LOW PASS FILTER

Rules Part No.: Part 2.1047

Requirements:

Method of Measurement:

Test Data: This DUT does not have a low pass filter.



OCCUPIED BANDWIDTH

Rules Part No.: §2.1049, §22.917a, §22.917b, §24.238, and §27.53

Requirements:

Out of band emissions: The mean power of emissions must be attenuated below the mean power of the un-modulated carrier (P) on any frequency twice or more than twice the fundamental frequency by: At least $43 + 10\log(P_o) = \text{dB}$.


Please refer to the plots below.


Band-edges compliance: Measurement were performed in accordance with Part 22.917 (b) and 27.53(g)


Please refer to the plots below.


300KGXW

Channel Frequency (MHz)	Band-edge Frequency Emission (MHz)	Amplitude at the band-edge (dBm)	Limit (dBm)
869.2	868.99	-20.78	-13
893.8	894.01	-20.35	-13
1930.2	1929.96	-25.37	-13
1989.8	1990.02	-24.65	-13

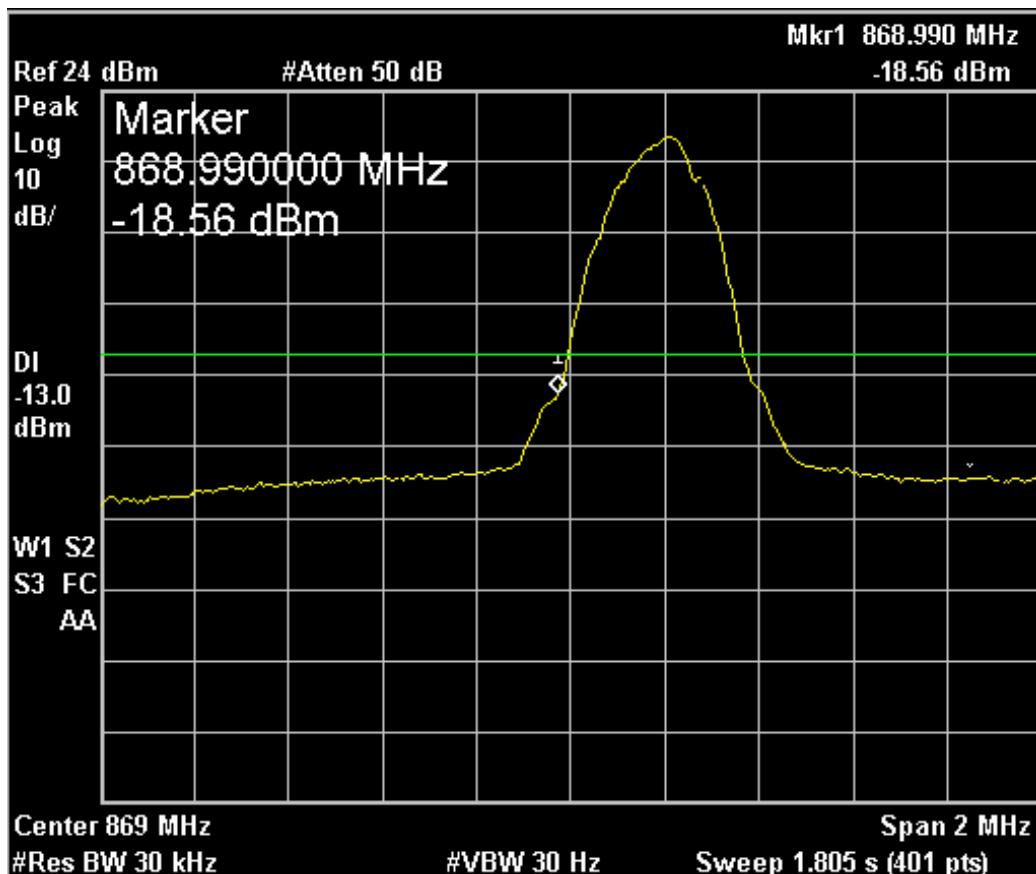

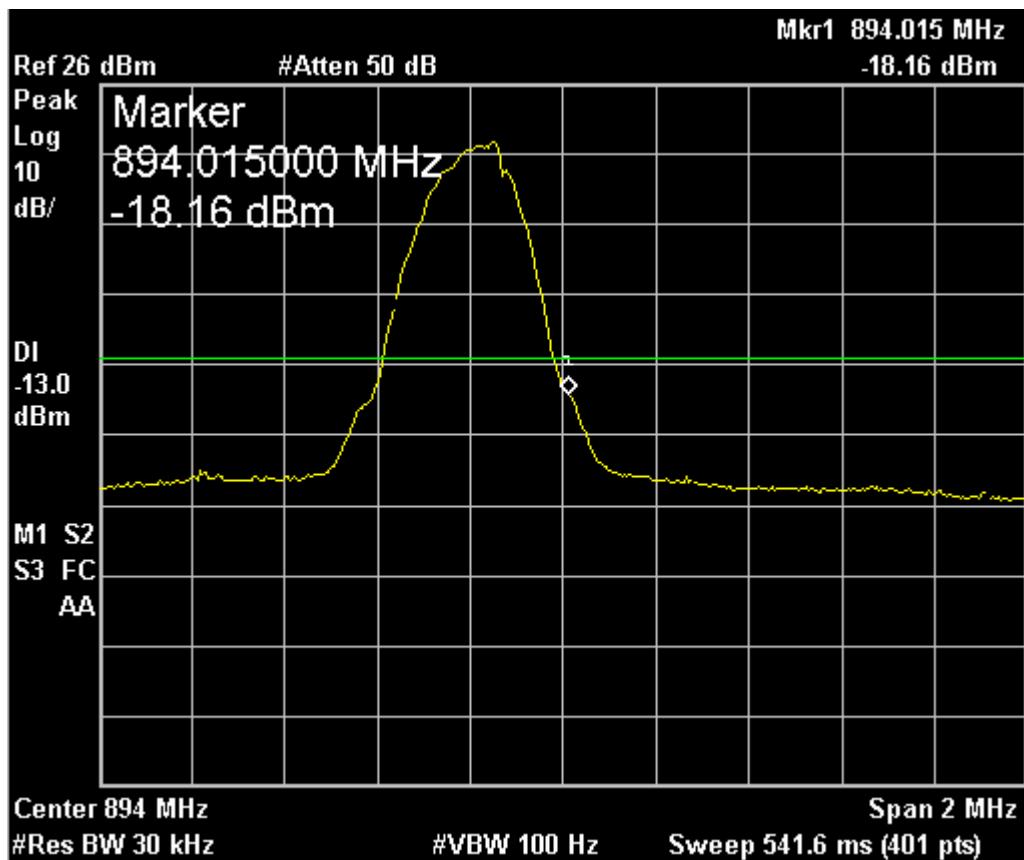


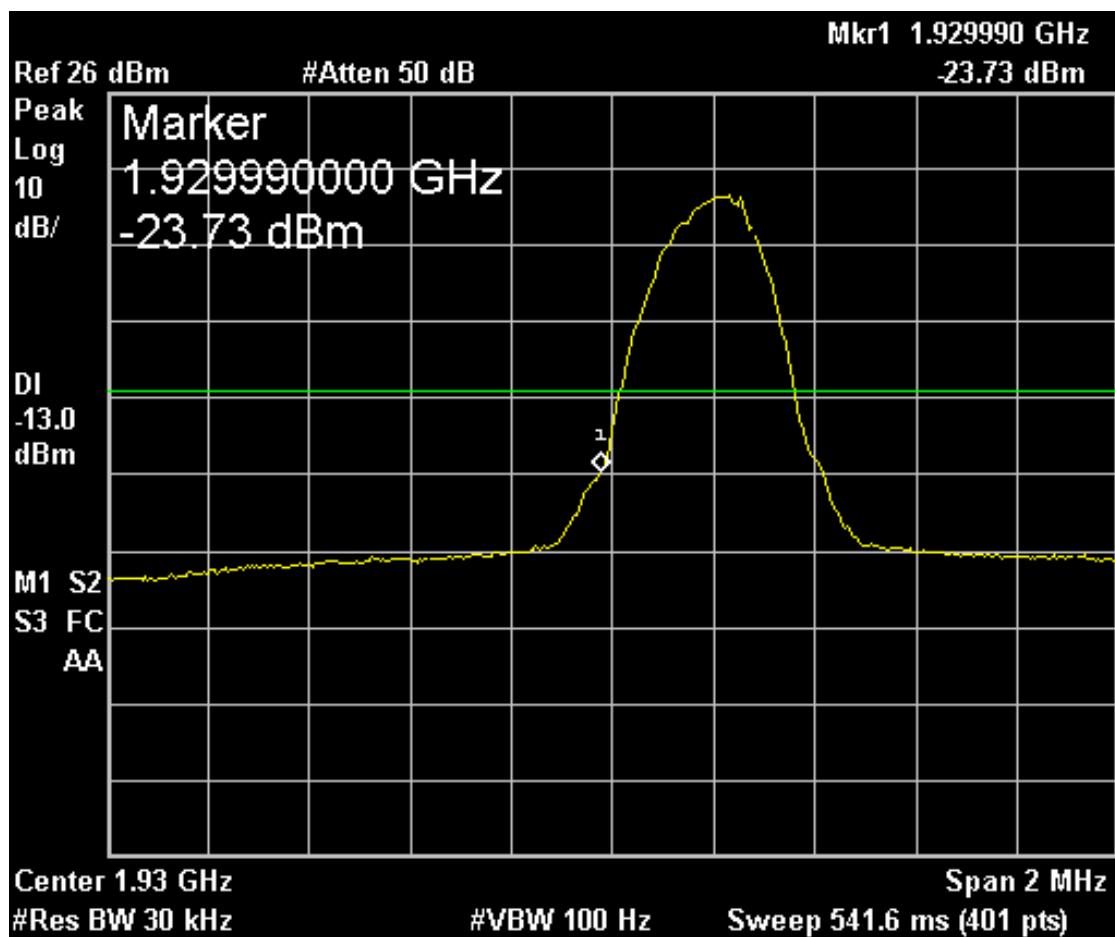


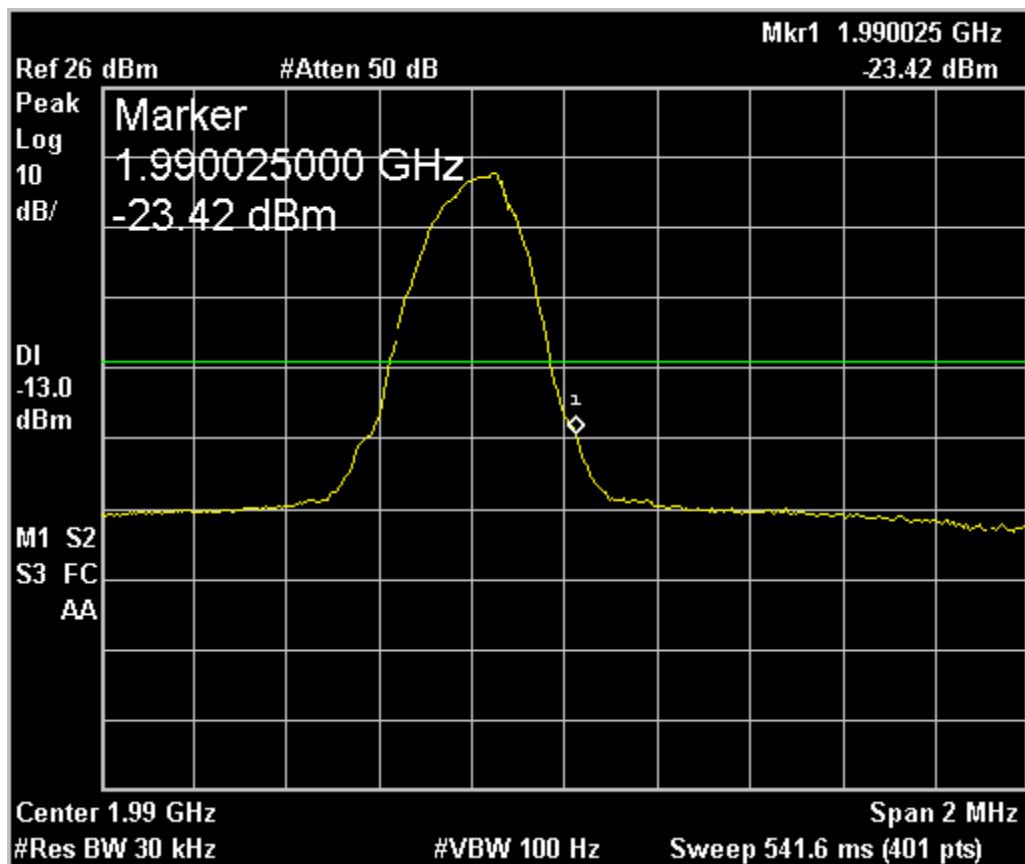



1M25F9W


Channel Frequency (MHz)	Band-edge Frequency Emission (MHz)	Amplitude at the band-edge (dBm)	Limit (dBm)
870.03	868.86	-29.73	-13
893.31	894.26	-27.53	-13
1931.25	1929.67	-47.77	-13
1988.75	1990.45	-45.37	-13
2111.25	2109.97	-51.06	-13
2153.75	2155.13	-54.15	-13

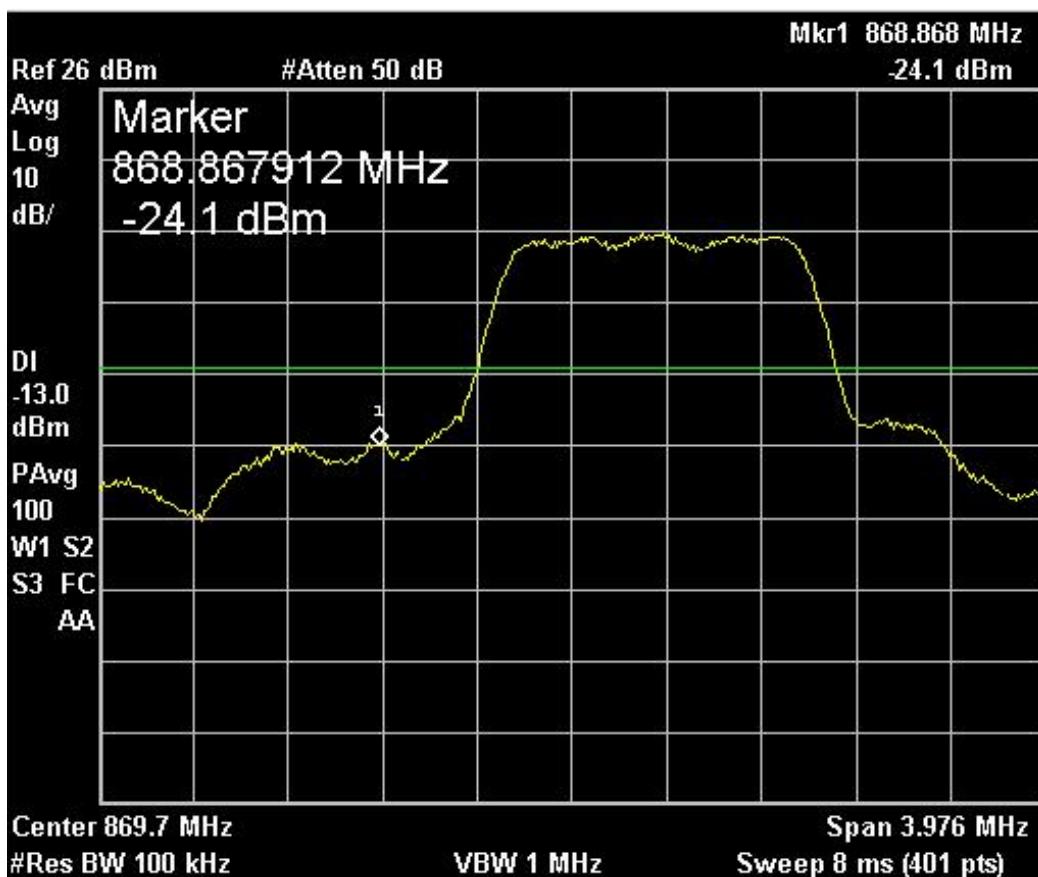


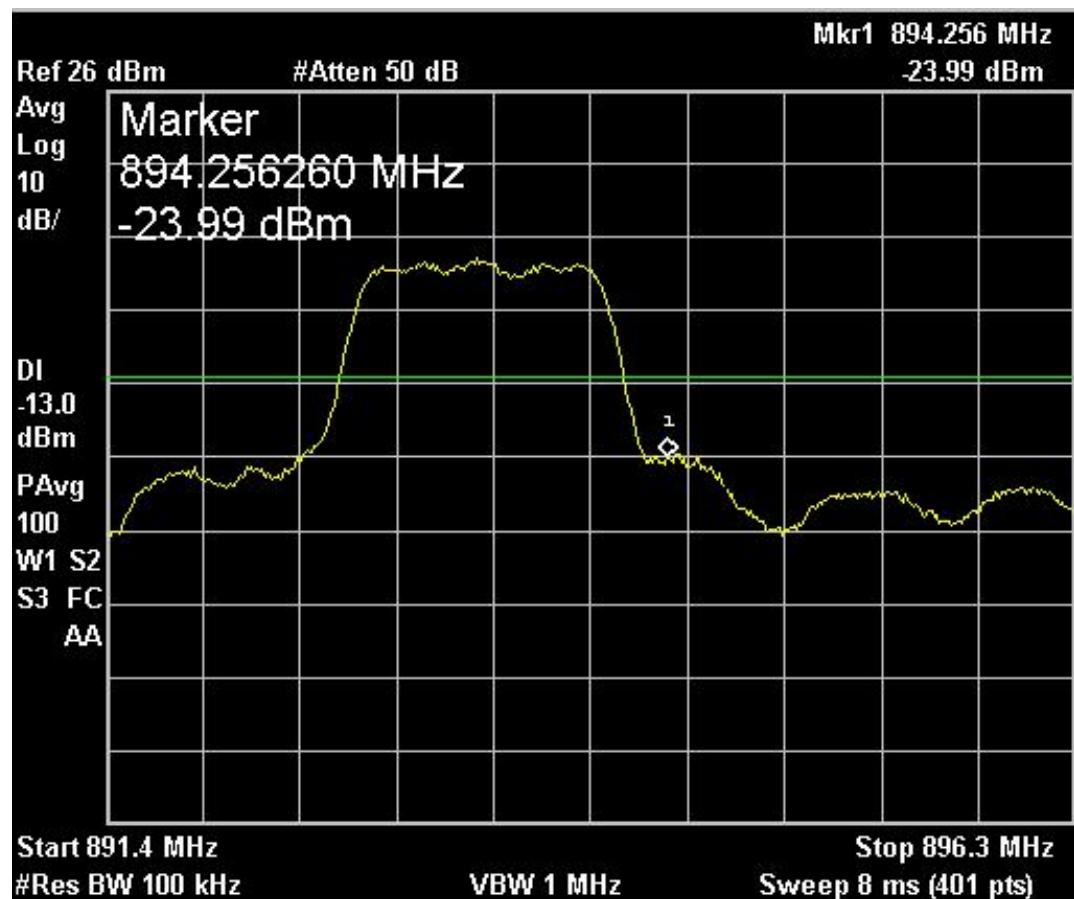

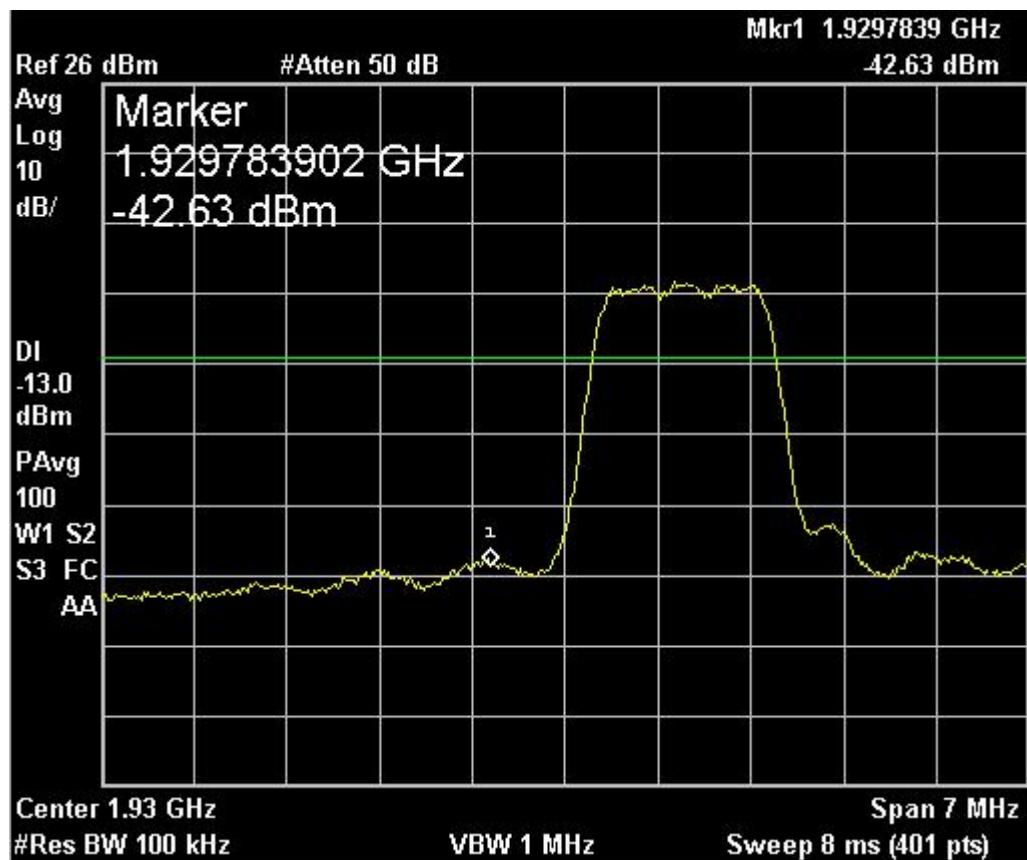

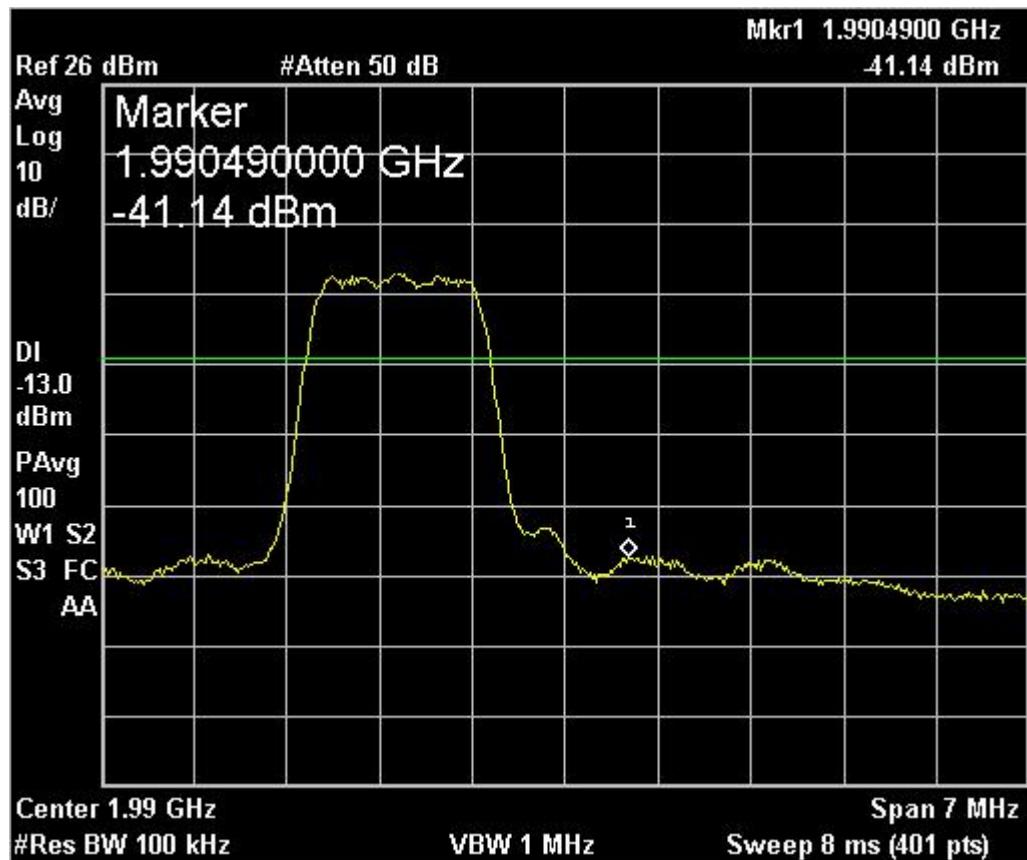

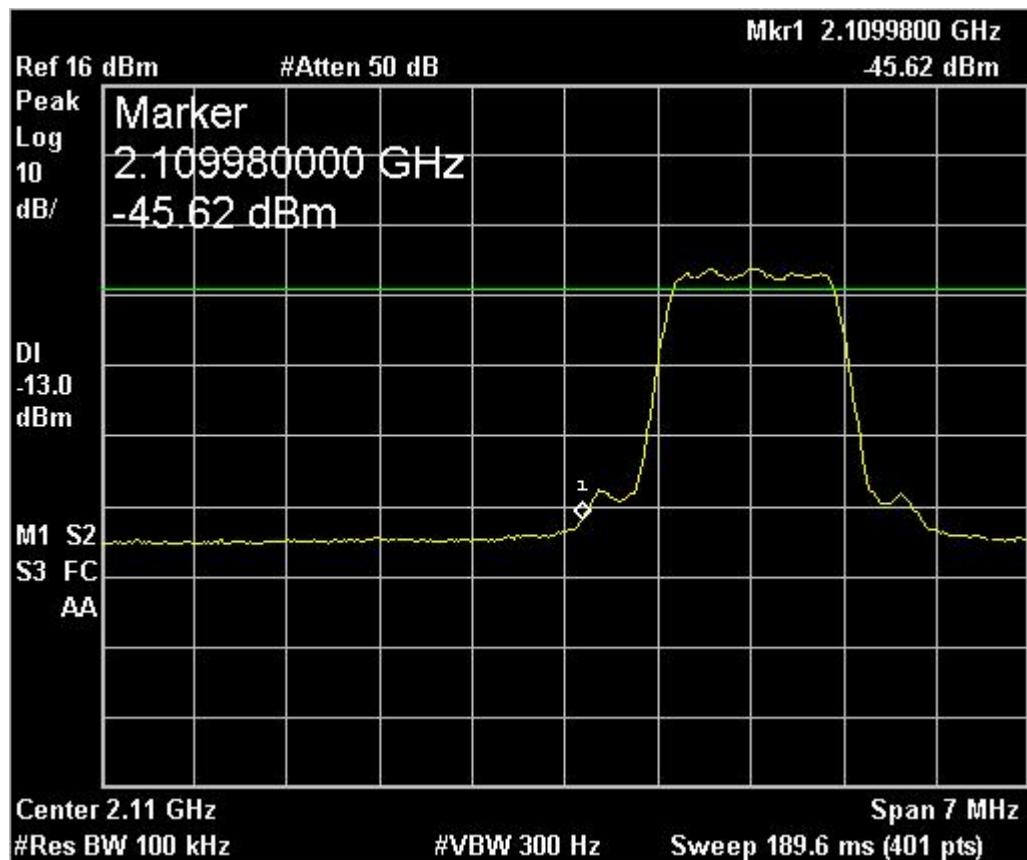

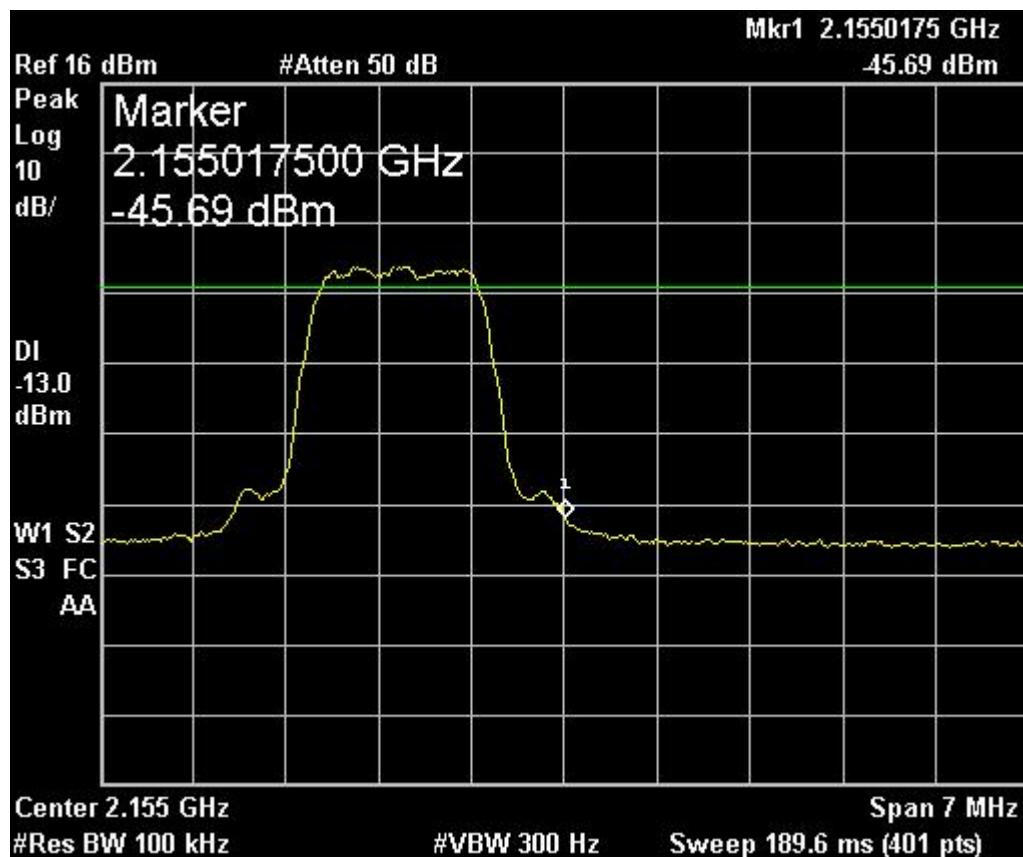

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Rules Part No.: §2.1051

Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.:

$$43 + 10\log(0.25) = 37.0 \text{ dB}$$

Method of Measurement: For analog modulation, the carrier was modulated 100% using a 2500 Hz tone. For digital modulation, the carrier is modulated to its maximum extent. The spectrum was scanned from 9 kHz or the lowest frequency used to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA-603-C:2004.

300KGXW

TF MHz	Emission MHz	dBc
869.20	1738.40	85.5
	2607.60	75.4
	3476.80	85.8
	4346.00	85.1
	5215.20	NF
	6084.40	NF
	6953.60	NF
	7822.80	NF
	8692.00	NF

TF MHz	Emission MHz	dBc
881.60	1763.20	82.9
	2644.80	75.7
	3526.40	84.8
	4408.00	84.1
	5289.60	NF
	6171.20	NF
	7052.80	NF
	7934.40	NF
	8816.00	NF

TF MHz	Emission MHz	dBc
893.80	1787.60	80.4
	2681.40	79.0
	3575.20	NF
	4469.00	84.3
	5362.80	NF
	6256.60	NF
	7150.40	NF
	8044.20	NF
	8938.00	NF

TF MHz	Emission MHz	dBc
1930.20	3860.40	51.9
	5790.60	62.1
	7720.80	NF
	9651.00	NF
	11581.20	NF
	13511.40	NF
	15441.60	NF
	17371.80	NF
	19302.00	NF

TF MHz	Emission MHz	dBc
1960.00	3920.00	77.8
	5880.00	81.7
	7840.00	NF
	9800.00	NF
	11760.00	NF
	13720.00	NF
	15680.00	NF
	17640.00	NF
	19600.00	NF

TF MHz	Emission MHz	dBc
1989.80	3979.60	81.8
	5969.40	76.6
	7959.20	67.6
	9949.00	NF
	11938.80	NF
	13928.60	NF
	15918.40	NF
	17908.20	NF
	19898.00	NF

NF is noise floor

Note: 1: Emissions were tested to the tenth harmonic.

1M25F9W

TF MHz	Emission MHz	dBc
870.06	1740.12	94.5
	2610.18	89.5
	3480.24	NF
	4350.30	NF
	5220.36	NF
	6090.42	NF
	6960.48	NF
	7830.54	NF
	8700.60	NF

TF MHz	Emission MHz	dBc
881.52	1763.04	85.1
	2644.56	85.6
	3526.08	NF
	4407.60	NF
	5289.12	NF
	6170.64	NF
	7052.16	NF
	7933.68	NF
	8815.20	NF

TF MHz	Emission MHz	dBc
893.31	1786.62	85.7
	2679.93	73.6
	3573.24	NF
	4466.55	NF
	5359.86	NF
	6253.17	NF
	7146.48	NF
	8039.79	NF
	8933.10	NF

TF MHz	Emission MHz	dBc
1931.25	3862.50	65.0
	5793.75	82.5
	7725.00	NF
	9656.25	NF
	11587.50	NF
	13518.75	NF
	15450.00	NF
	17381.25	NF
	19312.50	NF

TF MHz	Emission MHz	dBc
1960.00	3920.00	87.0
	5880.00	84.2
	7840.00	NF
	9800.00	NF
	11760.00	NF
	13720.00	NF
	15680.00	NF
	17640.00	NF
	19600.00	NF

TF MHz	Emission MHz	dBc
1988.75	3977.50	87.1
	5966.25	87.5
	7955.00	NF
	9943.75	NF
	11932.50	NF
	13921.25	NF
	15910.00	NF
	17898.75	NF
	19887.50	NF

TF MHz	Emission MHz	dBc
2111.25	4222.50	68.9
	6333.75	68.2
	8445.00	NF
	10556.25	NF
	12667.50	NF
	14778.75	NF
	16890.00	NF
	19001.25	NF
	21112.50	NF

TF MHz	Emission MHz	dBc
2132.50	4265.00	67.8
	6397.50	65.6
	8530.00	NF
	10662.50	NF
	12795.00	NF
	14927.50	NF
	17060.00	NF
	19192.50	NF
	21325.00	NF

TF MHz	Emission MHz	dBc
2153.75	4307.50	70.5
	6461.25	66.2
	8615.00	NF
	10768.75	NF
	12922.50	NF
	15076.25	NF
	17230.00	NF
	19383.75	NF
	21537.50	NF

NF is noise floor

Note: 1: Emissions were tested to the tenth harmonic.


FIELD STRENGTH OF SPURIOUS EMISSIONS

Rules Part No.: Part 2.1053

Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

Method of Measurements: The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C using the substitution method. Equipment placed 80 cm above ground on a rotating table platform. Tuned, calibrated antenna which may be raised from 1m to 4m above ground and changed in polarization.

Test Setup Diagram:

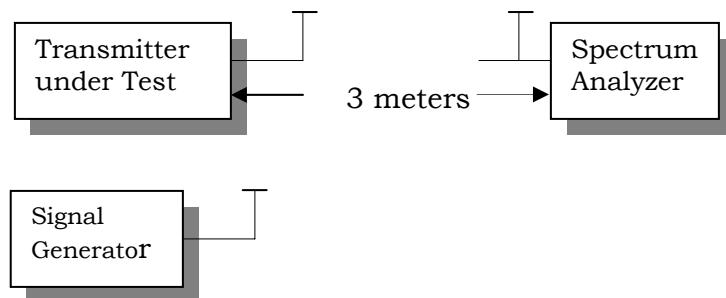

Test Data:
300KGXW:

TF (MHz)	Emission Frequency MHz	Ant. Polarity	dBc
869.2	1,738.40	V	75.1
	2,607.60	V	70.3
	3,476.80	H	77.3
	4,346.00	H	77.7
	5,215.20	H	73.1
	6,084.40	V	72.9
	6,953.60	H	75
881.6	1,763.20	V	70.6
	2,644.80	V	76
	3,526.40	V	74
	4,408.00	H	76.6
	5,289.60	V	75.2
	6,171.20	H	70
	7,052.80	H	76.3
893.8	1,787.60	V	72.9
	2,681.40	V	76.3
	3,575.20	V	69.5
	4,469.00	H	75.9
	5,362.80	H	72.7
	6,256.60	H	73.9
	7,150.40	H	73.8

Document version: 62806 mdea

APPLICANT: HARRIS CORP.

FCC ID: NK73100176

REPORT: 2511AUT9\2511AUT9TestReport.doc

Page 23 of 26

1M25F9W:

TF (MHz)	Emission Frequency MHz	Ant. Polarity	dBc
1931.3	3,862.50	H	66
	5,793.75	H	77
1960	3,920.00	H	71.6
	5,880.00	H	74.4
1988.8	3,977.50	H	74.1
	5,966.25	H	75.1
2111.3	4,222.50	V	68.9
	6,333.75	V	76.5
	8,445.00	H	74.8
2132.5	4,265.00	V	68.4
	6,397.50	H	76
	8,530.00	H	74.2
2153.8	4,307.50	V	70.1
	6,461.25	H	76.4
	8,615.00	H	73.6
	10,768.75	H	73.5

Note: 1: The worst case channels were tested.
Emissions were tested to the tenth harmonic.



FREQUENCY STABILITY

Rules Part No.: Part 2.1055, Part 22.355, Part 24.235, part 27.54

Requirements: Temperature and voltage tests were performed to verify that the frequency remains within the .00025%, 2.5ppm specification limit for.

Part 27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands.

Method of Measurement: The measurement technique is in accordance with ANSI/TIA 603-C:2004. The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Test Data:

Reference Frequency	881.607472
---------------------	------------

TEMPERATURE °C	FREQUENCY MHz	PPM
0°C	881.607725	0.29
10°C	881.607618	0.17
20°C	881.607593	0.14
30°C	881.607445	-0.03
40°C	881.607401	-0.08
50°C	881.607318	-0.17

Battery (V)	FREQUENCY MHz	PPM
-15%	881.607472	0.00
15%	881.607472	0.00

Device under test ceases to function below 0 °C

Document version: 62806 mdea

APPLICANT: HARRIS CORP.

FCC ID: NK73100176

REPORT: 2511AUT9\2511AUT9TestReport.doc

Page 25 of 26

Reference Frequency	1960.020000
----------------------------	-------------

TEMPERATURE °C	FREQUENCY MHz	PPM
0°C	1960.020933	0.48
10°C	1960.020736	0.38
20°C	1960.020287	0.15
30°C	1960.019838	-0.08
40°C	1960.019439	-0.29
50°C	1960.019149	-0.43

Battery (V)	FREQUENCY MHz	PPM
-15%	1960.020000	0.00
15%	1960.020000	0.00

Reference Frequency	2132.496000
----------------------------	-------------

TEMPERATURE °C	FREQUENCY MHz	PPM
0°C	2132.497121	0.53
10°C	2132.496725	0.34
20°C	2132.496265	0.12
30°C	2132.495615	-0.18
40°C	2132.495126	-0.41
50°C	2132.494918	-0.51

Battery (V)	FREQUENCY MHz	PPM
-15%	2132.496000	0.00
15%	2132.496000	0.00