



849 NW State Road 45
Newberry, FL 32669 USA
Phone: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15 B CLASS A

TEST REPORT

Applicant	Harris Corp.
Address	1025 West NASA Boulevard Melbourne FL 32919-0001 USA
Model Number	NK73166210
Product Description	NK73166210 WITH 300KGXW & 1M25F9W
Date Sample Received	3/11/2010
Date Tested	3/11/2010
Tested By	Nam Nguyen
Approved By	Mario R. de Aranzeta
Report Number	549UT10TestReport.doc
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



TABLE OF CONTENTS

GENERAL REMARKS	3
REPORT SUMMARY	4
TEST ENVIRONMENT	4
TEST SETUP SUMMARY	4
SUPPORTING PERIPHERAL EQUIPMENT	4
DUT SPECIFICATION	5
TEST EQUIPMENT LIST	7
TEST PROCEDURES	8
RADIATED SPURIOUS EMISSIONS	9
POWER LINE CONDUCTED INTERFERENCE	10
RADIATED EMISSIONS TEST SETUP PHOTO	13
POWERLINE CONDUCTED EMISSIONS TEST SET UP PHOTO	14
CERTIFICATE OF COMPLIANCE	15

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 3/11/2010

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc



REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	Pt 15.109, Pt 15.107, ANSI C63.4: 2003

TEST ENVIRONMENT

Test Facility	Timco Engineering, Inc. 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition in the laboratory	Temperature: 26°C Relative humidity: 50%

TEST SETUP SUMMARY

Test Setup Diagram/ Description	The DUT was placed on the turntable per setup per ANSI C63.4: 2003. A test set up photo is provided for clarification.
Deviation from the standard/procedure	No deviation
Modification of DUT	No modification

SUPPORTING PERIPHERAL EQUIPMENT

Descrip.	Manuf.	M/N	S/N	Cable Length (m)	Cable Shielded/Unshielded
Desktop	Dell	PP01L			

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

DUT SPECIFICATION

DUT Description	NK73166210 WITH 300KGXW & 1M25F9W	
Model Number	NK73166210	
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz	
	<input checked="" type="checkbox"/> DC Power	
	<input type="checkbox"/> Battery Operated Exclusively	
Test Item	<input type="checkbox"/> Prototype	
	<input checked="" type="checkbox"/> Pre-Production	
	<input type="checkbox"/> Production	
Type of Equipment	<input checked="" type="checkbox"/> Fixed	
	<input type="checkbox"/> Mobile	
	<input type="checkbox"/> Portable	
Laboratory Test Conditions	Temperature: 26°C Humidity: 55%	
Modifications to DUT:	<input checked="" type="checkbox"/> No	<input type="checkbox"/> Yes (explanation below)

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc



DUT EXTERNAL PHOTOS

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/11
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/11
Frequency Counter	HP	5385A	3242A07460	CAL 5/26/09	5/26/11
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/18/09	5/18/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

TEST PROCEDURES

Power line conducted Emission: The test procedure used was ANSI C63.4-2003. The spectrum was scanned from 0.15 to 30 MHz.

Radiation Interference: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The video bandwidth was always greater than or equal to the RBW.

The frequency was scanned from 30 MHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The DUT was measured in three (3) orthogonal planes when necessary.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB μ V/m @ 3m

ANSI C63.4-2003 Measurement Procedures: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

RADIATED SPURIOUS EMISSIONS

Rules Part No.: 15.109 – CLASS A

Requirements:

Frequency MHz	Limits
30 – 88	49.0 dB μ V/m measured @ 3 meters
80 – 216	53.5 dB μ V/m measured @ 3 meters
216 – 960	56.4 dB μ V/m measured @ 3 meters
Above 960	59.5 dB μ V/m measured @ 3 meters

Test Data:

Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m	Margin dB
36.5	30.1	V	0.43	12.61	43.14	5.86
54.3	35	V	0.51	9.6	45.11	3.89
59.2	31.6	V	0.53	7.72	39.85	9.15
60.1	30	V	0.53	7.37	37.9	11.1
60.3	34.4	V	0.53	7.31	42.24	6.76
71.8	22.9	V	0.57	6.14	29.61	19.39
89.5	26.4	H	0.62	10.23	37.25	16.25
125.4	24.4	V	0.68	12.3	37.38	16.12
223.4	23.8	H	0.95	11.5	36.25	20.15
240.8	19.4	V	0.98	11.91	32.29	24.11
281.3	17.5	H	1.06	13.81	32.37	24.03
311.6	20.4	V	1.11	15	36.51	19.89
401.2	19.3	V	1.2	15.7	36.2	20.2
470.8	15.7	H	1.27	17.28	34.25	22.15
480.5	16.2	V	1.28	17.3	34.78	21.62

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.107

Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	79	66
0.5 – 30	73	60

Test Data: The following plots represent the emissions read for power line conducted. Both lines were observed.

APPLICANT: Harris Corp.

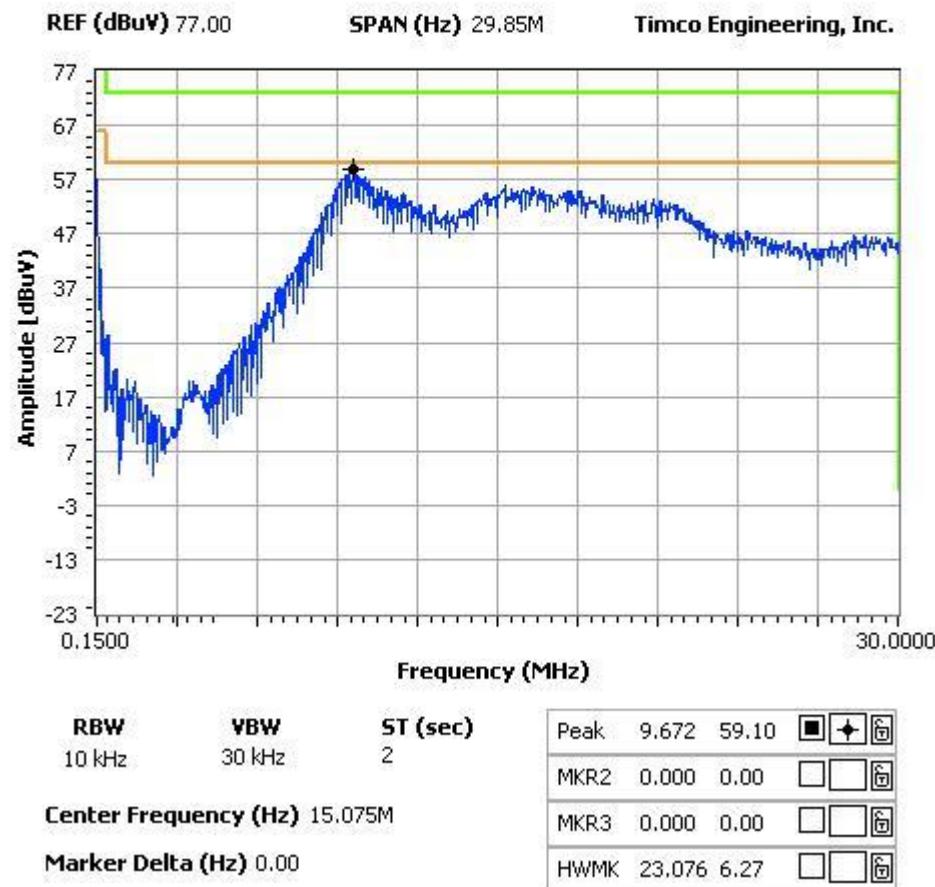
MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 1

NOTES:

 Harris Corp.
 POWER LINE CONDUCTED PLOT - LINE 1

FCC 15.107 Mask Class A


APPLICANT: Harris Corp.

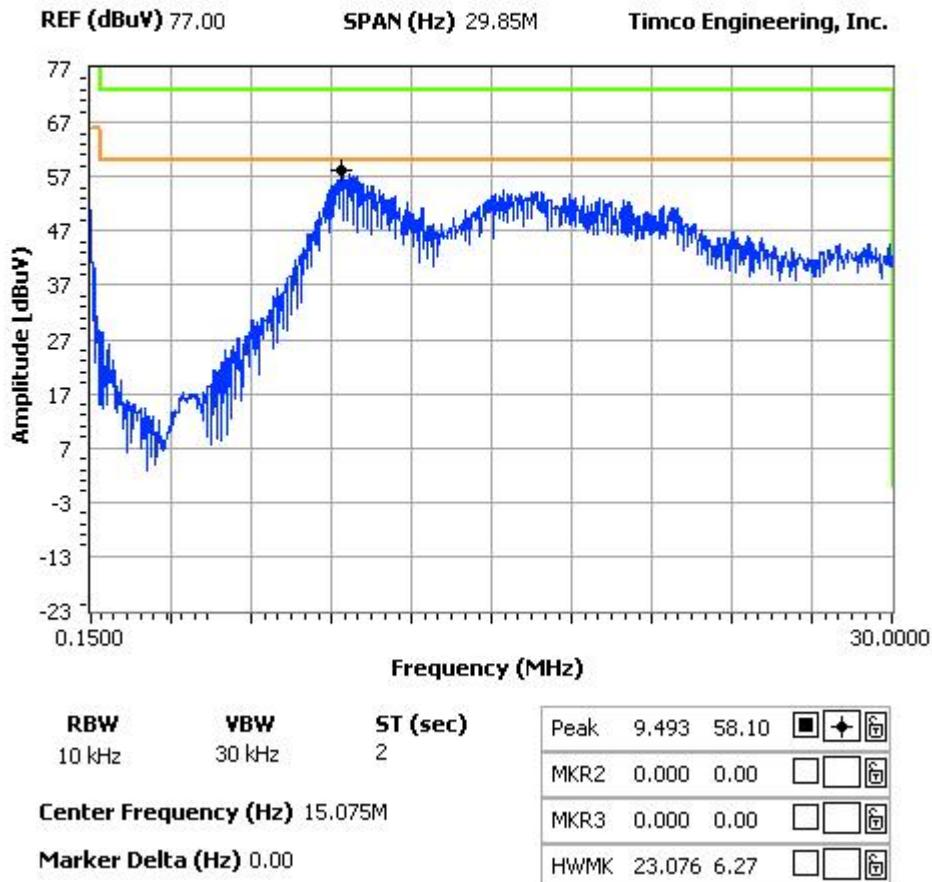
MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 2

NOTES:

Harris Corp.
 POWER LINE CONDUCTED PLOT - LINE 2

FCC 15.107 Mask Class A


APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc



RADIATED EMISSIONS TEST SETUP PHOTO

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc



POWERLINE CONDUCTED EMISSIONS TEST SET UP PHOTO

APPLICANT: Harris Corp.

MODEL: NK73166210

REPORT: H\Harris\549UT10\549UT10TestReport.doc

CERTIFICATE OF COMPLIANCE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Applicant:	Harris Corp.
Address:	1025 West NASA Boulevard Melbourne FL 32919-0001 USA
Tel:	
Fax:	
Printed Name/Title:	
Signature:	
Product Description	NK73166210 WITH 300KGXW & 1M25F9W
Model Name:	
Report Number:	549UT10TestReport.doc
Date:	3/11/2010