

# PEP Testing Laboratory

REPORT NO. : 990252

## RFI / EMI TEST REPORT

**APPLICANT** : MAXTRONIC INTERNATIONAL CO., LTD.


**E. U. T.** : DISK ARRAY SUBSYSTEM

**TRADE NAME** : N/A

**FCC ID** : NKF-ARENA LA

**REGULATION** : CFR 47 , Part 15 Subpart B , Class B

**TEST SITE** : PEP Testing Laboratory

**TEST ENGINEER** : 

**TEST DATE** : 6 / 10 / 1999

**ISSUED DATE** : JUN. / 24 / 1999

**REPORT No.** : 990252

# FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road  
Columbia, MD 21046  
Telephone: 301-725-1585 (ext-218)  
Facsimile: 301-344-2050

November 25, 1996

IN REPLY REFER TO  
31040/SIT  
1300F2

PEP Testing Laboratory  
12-3 Fl., No. 27-1, Lane 169  
Kang-Ning St., Hsi-chi Town  
Taipei Hsien, Taiwan, R.O.C.

Attention: M. Y. Tsui


Re: Measurement facility located at above address  
(3 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips  
Electronics Engineer  
Customer Service Branch

Enclosure:  
PAL PN

# PEP Testing Laboratory

REPORT NO. : 990252

## VERIFICATION

### **WE HEREBY VERIFY THAT:**

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass **FCC Class B** limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4 - 1992.

Any data in this RFI report is "reference" only.

**APPLICANT** : MAXTRONIC INTERNATIONAL CO., LTD.\*

**PRODUCT** : DISK ARRAY SUBSYSTEM\*

**FCC ID** : NKE-ARENALA\*

**MODEL** : Arena LA, Arena 99LA\*

*M. Y. Tsui*  
\_\_\_\_\_  
M. Y. TSUI / Manager

PEP Testing Laboratory  
12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,  
Hsi-Chih, Taipei Hsien, Taiwan, R. O. C.  
TEL : 886-2-26922097 FAX : 886-2-26956236

# PEP Testing Laboratory

REPORT NO. : 990252

## TABLE OF CONTENTS

<b><u>1. GENERAL</u></b>	4
1.1 General Information	
1.2 Place of Measurement	
1.3 Labeling Requirements	
1.4 Information to User	
<b><u>2. CONDUCTED EMISSIONS TEST</u></b>	7
2.1 Setup of the Test Facilities	
2.2 Test Procedures	
<b><u>3. RADIATED EMISSIONS TEST</u></b>	9
3.1 Setup of the Test Facilities	
3.2 Test Procedures	
<b><u>4. DESCRIPTION FOR EUT TESTING CONFIGURATION</u></b>	11
** Conducted Emission Test Photo. and Data	
** Radiated Emission Test Photo. and Data	
<b><u>5. SUPPORTING DEVICES TO TEST</u></b>	12
<b><u>6. TEST CONFIGURATION</u></b>	15
A. Photos of EUT Appearance	22
B. List of Test Equipment	23
<b><u>7. APPENDIX</u></b>	

# PEP Testing Laboratory

REPORT NO. : 990252

## 1. GENERAL

### **1.1 GENERAL INFORMATION:**

APPLICANT : MAXTRONIC INTERNATIONAL CO., LTD.

4FL., NO. 529, CHUNG CHENG RD.,  
HSIN TIEN CITY, TAIPEI HSIEN,  
TAIWAN, R. O. C.

MANUFACTURER : MAXTRONIC INTERNATIONAL CO., LTD.

4FL., NO. 529, CHUNG CHENG RD.,  
HSIN TIEN CITY, TAIPEI HSIEN,  
TAIWAN, R. O. C.

MEASUREMENT PROCEDURE : ANSI C63,4 - 1992

TESTED FOR COMPLIANCE WITH : Title 47 of CFR  
Part 15, Subpart B, Class B


### **1.2 PLACE OF MEASUREMENT** **PEP Testing Laboratory**

# PEP Testing Laboratory

REPORT NO. : 990252

## 1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment :

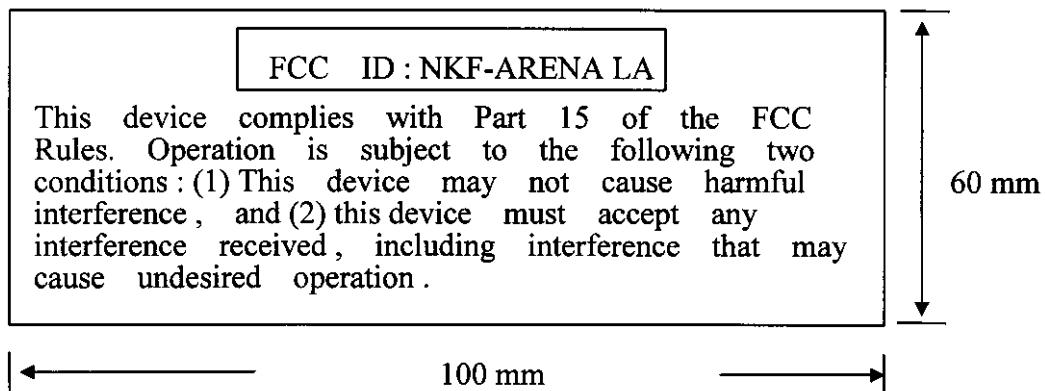

# PEP Testing Laboratory

REPORT NO. : 990252

## 1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

### Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.


You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

# PEP Testing Laboratory

REPORT NO. : 990252

## 2. CONDUCTION EMISSIONS TEST

### 2.1 GENERAL SETUP OF THE TEST FACILITIES

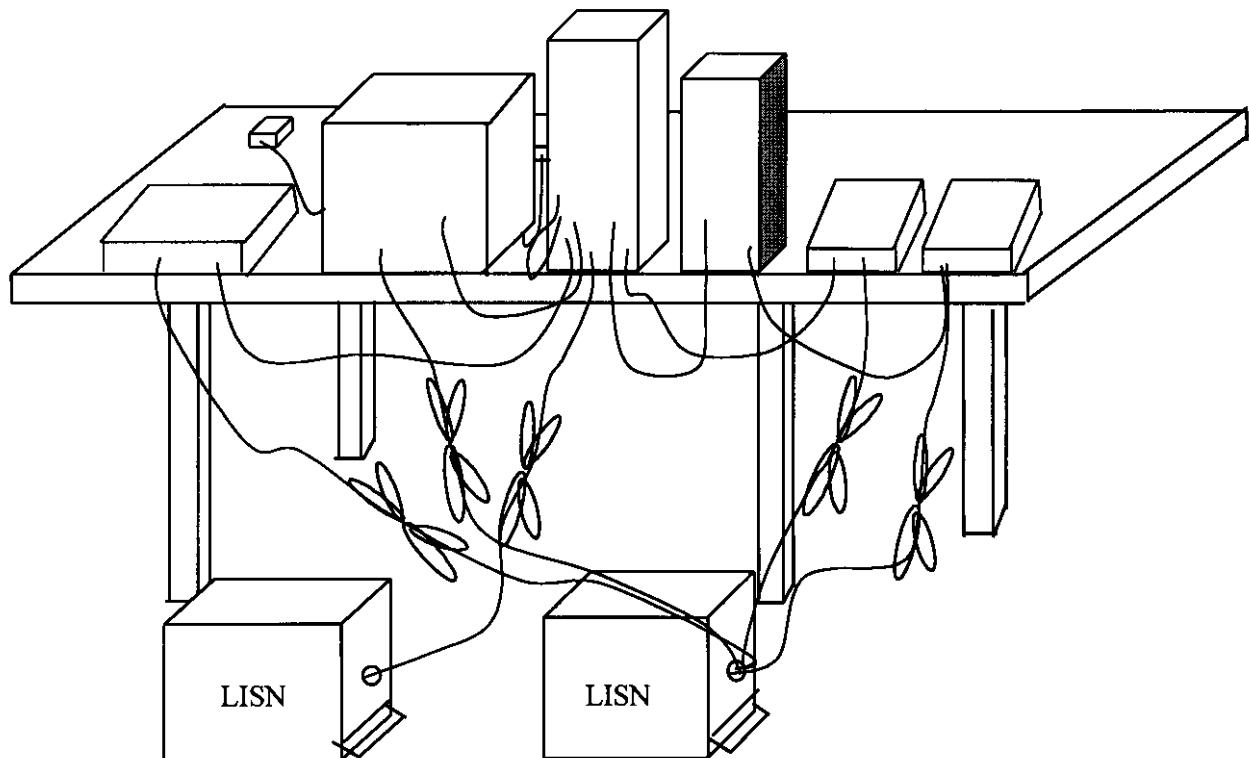

# PEP Testing Laboratory

REPORT NO. : 990252

## 2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software .

Both the line of power cord, hot and neutral, were run with the EMI tests software .

To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer .


The highest emissions were recorded in the RFI test report .

# PEP Testing Laboratory

REPORT NO. : 990252

## 3. RADIATED EMISSIONS TEST

### 3.1 GENERAL SETUP OF THE FACILITIES

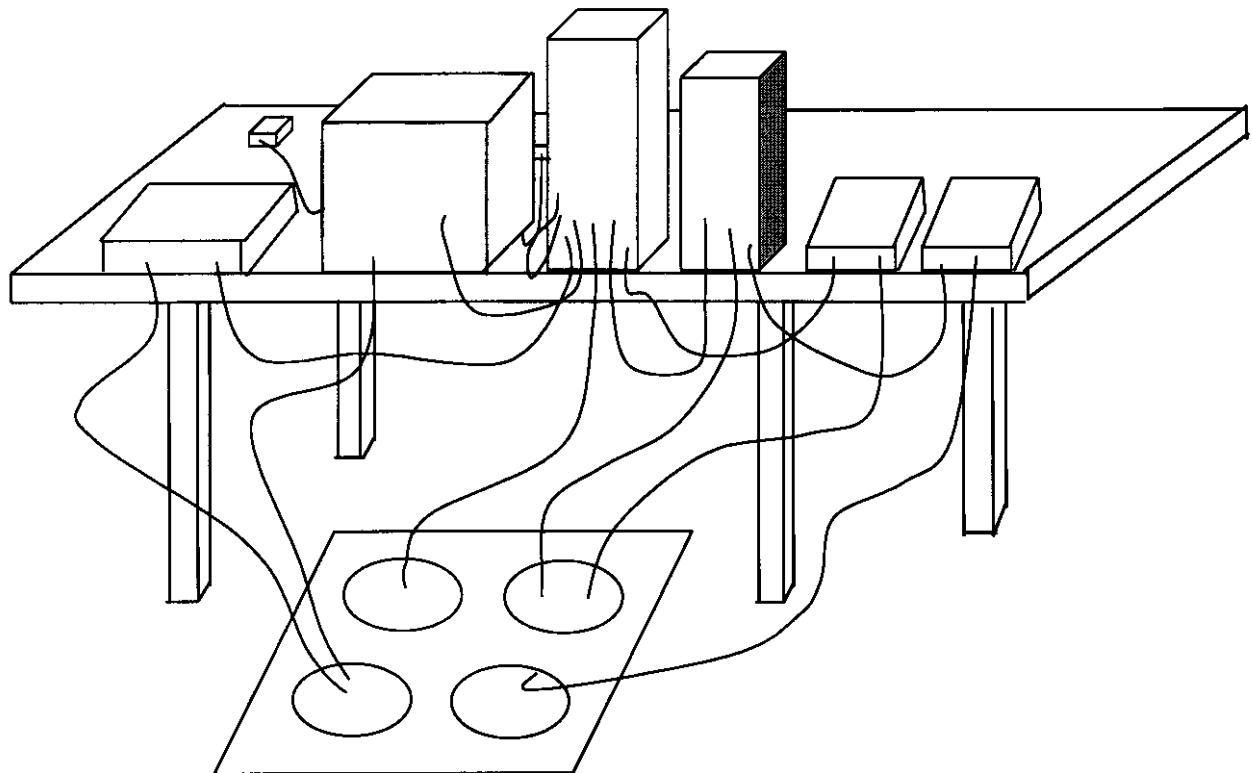

# PEP Testing Laboratory

REPORT NO. : 990252

## 3.2 TEST PROCEDURES

Radiated emissions test was carried out by **PEP Testing Laboratory** at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software .

- a. setting up the EUT under normally position , and scanning it from 30 MHz to 1000 MHz, then recording those narrow band noises which cannot be 6 dBuV below lower bound . Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height , and turntable rotate 360 degrees .
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height . We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters , then rotated the turntable simultaneously .
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position , and routine steps a. b. c.

The highest emissions were recorded in the RFI test report .

# PEP Testing Laboratory

REPORT NO. : 990252

## 4. DESCRIPTION FOR EUT TESTING CONFIGURATION

### **\*\* TEST PROCEDURE ----**

- (A) The EUT is cutting plotter , FCC ID : NKF-ARENA LA , which bear two models Arena LA & Arena 99LA , both models have identical electrical circuit design and layout but switch button with different color , for more detail information about the both models , please refer user's manual . The I/O ports on the EUT included one serial connector and two SCSI connectors .
- (B) Test method : The EUT with six HDDs inside , the serial port and the SCSI port 1 connected to the PC's COM. 1 and SCSI port respectively , the SCSI port 2 terminated by an external SCSI HDD during the test .  
The EUT was enabled by data reading from PC's HDD and data writing to external SCSI HDD ; then , vice versa the data exchanged sequence .  
When the EUT enabled the rest of supporting test equipment were under idle situation .
- (C) After the EUT was set up , we did the conducted emission test in the shielded room ; similarly , the radiated emission test was done at the open field site .
- (D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value , making sure it can under 6 dBuV at least .
- (E) In the RFI test report , we provided the worst conducted emission testing data and radiated emission test data.

# PEP Testing Laboratory

REPORT NO. : 990252

## 5. SUPPORTING DEVICES TO TEST

### **SUPPORT UNIT 1. ---- PERSONAL COMPUTER**

Manufacturer : ASUS Inc.  
Model Number : P2L97  
Power Supply Type : Switching  
Power Cord : Shielded, Detachable, 1.2m  
Data Cable : Shielded, Detachable, 1.2m  
FCC ID : Declaration of Conformity (DoC)

### **SUPPORT UNIT 2. ---- MONITOR**

Manufacturer : ACER  
Model Number : 1455  
Power Supply Type : Switching  
Power Cord : Shielded, Detachable, 1.2m  
Data Cable : Shielded, Undetachable, 1m  
FCC ID : Declaration of Conformity (DoC)

### **SUPPORT UNIT 3. ---- KEYBOARD**

Manufacturer : Acer Peripherals Inc.  
Model Number : 6311-KW  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, Undetachable, 1m  
FCC ID : JVPKBS-WIN

# PEP Testing Laboratory

REPORT NO. : 990252

## SUPPORT UNIT 4. ---- PRINTER

Manufacturer : Hewlett-Packard Singapore Pte Ltd.

Model Number : HP400

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1m. 2464

FCC ID : B94C2642X

## SUPPORT UNIT 5. ---- MODEM

Manufacturer : ACEEX

Model Number : 1414

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1m

FCC ID : IFAXDM1414

## SUPPORT UNIT 6. ---- MOUSE

Manufacturer : ACER

Model Number : M-S34

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Shielded, Undetachable, 1m

FCC ID : DZL211029

# PEP Testing Laboratory

REPORT NO. : 990252

## **SUPPORT UNIT 7. ---- 100MB ZIP DRIVE**

Manufacturer : SEIKO EPSON CORP.

Model Number : Z100S

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1m

Data Cable : Shielded, Detachable, 1m

FCC ID : DDXZ100S

## **EQUIPMENT UNDER TEST ---- DISK ARRAY SUBSYSTEM**

Manufacturer : MAXTRONIC INTERNATIONAL CO., LTD.

Model Number : Arena LA, Arena 99LA

Data Cable : Shielded, Detachable, 1.2m

FCC ID : NKF-ARENA LA

# PEP Testing Laboratory

REPORT NO. : 990252

## 6. TEST CONFIGURATION

**Radiated emission detector function :**

(1) 30MHZ~1GHZ : Quasi-Peak Value  
Resolution BW : 120KHZ Video BW : 300KHZ

(2) above 1GHZ : Quasi-Peak value and Average Value  
Resolution BW : 1MHZ Video BW : 1MHZ  
\* either Q. P. or average value will be recorded  
in the report

**Conducted emission detector function :**

(1) 450KHZ~30MHZ : Quasi-Peak Value  
Resolution BW : 9KHZ Video BW : 30KHZ

**The else descriptions :** N/A

**Conducted Emission Test Photo. : Page 16**

**Test Data : Hot 17**

**Neutral 18**

**Radiated Emission Test Photo. : Page 19**

**Test Data : Horizontal 20**

**Vertical 21**

# PEP Testing Laboratory

REPORT NO. : 990252

## CONDUCTED EMISSIONS TEST DATA

**Note : HOT LINE TEST**

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
0.77	33.83	-14.17	48.00	22.40	0.72	0.71	-10.00
2.43	31.57	-16.43	48.00	20.20	0.70	0.67	-10.00
5.32	31.93	-16.07	48.00	20.60	0.68	0.65	-10.00
12.09	34.67	-13.33	48.00	23.40	0.65	0.62	-10.00
13.15	36.47	-11.53	48.00	25.20	0.65	0.62	-10.00
13.92	36.26	-11.74	48.00	25.00	0.65	0.61	-10.00
19.39	33.64	-14.36	48.00	22.40	0.62	0.62	-10.00
19.89	35.84	-12.16	48.00	24.60	0.62	0.62	-10.00
25.15	33.84	-14.16	48.00	22.60	0.63	0.62	-10.00
28.84	31.38	-16.62	48.00	20.00	0.69	0.69	-10.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

# PEP Testing Laboratory

REPORT NO. : 990252

## CONDUCTED EMISSIONS TEST DATA

**Note : NEUTRAL LINE TEST**

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
0.450	33.66	-14.34	48.00	22.20	0.73	0.73	-10.00
2.814	30.16	-17.84	48.00	18.80	0.69	0.67	-10.00
5.473	31.31	-16.69	48.00	20.00	0.66	0.65	-10.00
10.231	30.46	-17.54	48.00	19.20	0.63	0.63	-10.00
15.048	33.02	-14.98	48.00	21.80	0.61	0.61	-10.00
20.071	35.64	-12.36	48.00	24.40	0.62	0.62	-10.00
22.790	32.03	-15.97	48.00	20.80	0.61	0.61	-10.00
25.154	33.83	-14.17	48.00	22.60	0.62	0.62	-10.00
26.750	32.90	-15.10	48.00	21.60	0.65	0.65	-10.00
29.882	31.42	-16.58	48.00	20.00	0.71	0.71	-10.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

# PEP Testing Laboratory

REPORT NO. : 990252

## RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
39.99	30.80	- 9.20	40.00	38.00	11.90	0.90	20.00
111.81	31.91	-11.59	43.50	39.00	11.39	1.52	20.00
199.02	29.12	-14.38	43.50	32.00	14.83	2.29	20.00
231.96	31.27	-14.73	46.00	31.00	17.72	2.56	20.00
240.33	28.95	-17.05	46.00	28.00	18.33	2.62	20.00
377.00	33.26	-12.74	46.00	33.74	16.16	3.35	20.00
575.80	31.86	-14.14	46.00	29.00	18.91	3.95	20.00
624.10	29.53	-16.47	46.00	26.00	19.48	4.05	20.00
673.10	30.15	-15.85	46.00	25.00	21.01	4.15	20.00
720.00	30.88	-15.12	46.00	25.00	21.54	4.34	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

# PEP Testing Laboratory

REPORT NO. : 990252

## RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
39.99	29.80	-10.20	40.00	37.00	11.90	0.90	20.00
99.93	33.10	-10.40	43.50	41.00	10.70	1.40	20.00
111.81	27.91	-15.59	43.50	35.00	11.39	1.52	20.00
172.02	31.44	-12.06	43.50	36.00	13.26	2.18	20.00
199.02	28.12	-15.38	43.50	31.00	14.83	2.29	20.00
377.00	29.64	-16.36	46.00	30.12	16.16	3.35	20.00
465.90	27.08	-18.92	46.00	26.00	17.42	3.66	20.00
514.90	28.77	-17.23	46.00	27.00	17.94	3.83	20.00
575.80	28.86	-17.14	46.00	26.00	18.91	3.95	20.00
733.30	29.96	-16.04	46.00	24.00	21.53	4.43	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

# PEP Testing Laboratory

REPORT NO. : 990252

## APPENDIX B. List of Test Equipment

Instrument	Model No.	Cal. Due Date	S/N
R&S Receiver	ESVS30(30M~1GHZ)	Apr. 15, 2000	863342/012
R&S Receiver	ESBI (20~5GHZ)	Apr. 15, 2000	845658/003
Spectrum Analyzer	HP8591A(9K~1.8GHZ)	Apr. 15, 2000	3225A03039
Spectrum Analyzer	R3261A (9K~2.6GHZ)	Apr. 15, 2000	91720076
EMCO L.I.S.N.	3825/2 (10K~30MHZ)	Apr. 15, 2000	9311-2150
Anritsu Pre-Amp.	MH648A(100K~1.4GHZ)	Sep. 20, 1999	M40076
COM-Power Horn Antenna	AH-118 (1G~18GHZ)		10056
EMCO Dipole Antenna	3121C (20M~1GHZ)	May. 22, 1999	9611-1230
EMCO Biconical Antenna	3110B (30M~300M)	Mar. 10, 2000	2932
EMCO Log-Periodic Antenna	3146A (300M~1GHZ)	Apr. 14, 2000	1384