

RFI / EMI TEST REPORT

APPLICANT : MAXTRONIC INTERNATIONAL CO., LTD.

E. U. T. : DISK ARRAY SYSTEM

TRADE NAME : N/A

FCC ID : NKF-EX-INDUSTRIAL

REGULATION : CFR 47 , Part 15 Subpart B , Class B

TEST SITE : PEP Testing Laboratory

TEST ENGINEER : *Jason Gong*
TEST DATE : 11 / 15 / 98

ISSUED DATE : DEC. / 02 / 1998

REPORT No. : 980660



VERIFICATION

WE HEREBY VERIFY THAT:

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass FCC Class B limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4 - 1992.

Any data in this RFI report is "reference" only.

APPLICANT : MAXTRONIC INTERNATIONAL CO., LTD.*
PRODUCT : DISK ARRAY SYSTEM*
FCC ID : NKF-EX-INDUSTRIAL*
MODEL : EX Industrial*

M. Y. TSUI
M. Y. TSUI
Manager

PEP Testing Laboratory
12-3FL, NO. 27-1, Lane 169, Kang-Ning St.,
Hsi-Chi, Taipei Hsien, Taiwan, R. O. C.
TEL : 886-2-6922097 FAX : 886-2-6956236

TABLE OF CONTENTS

1. GENERAL	4
1.1 General Information	
1.2 Place of Measurement	
1.3 Labeling Requirements	
1.4 Information to User	
2. CONDUCTED EMISSIONS TEST	7
2.1 Setup of the Test Facilities	
2.2 Test Procedures	
3. RADIATED EMISSIONS TEST	9
3.1 Setup of the Test Facilities	
3.2 Test Procedures	
4. DESCRIPTION FOR EUT TESTING CONFIGURATION	11
5. SUPPORTING DEVICES TO TEST	12
6. TEST CONFIGURATION	15
** Conducted Emission Test Photo. and Data	
** Radiated Emission Test Photo. and Data	
7. APPENDIX	
A. Photos of EUT Appearance	22
B. List of Test Equipment	23



1. GENERAL

1.1 GENERAL INFORMATION:

APPLICANT :

4FL., NO. 529, CHUNG CHENG RD.,
HSIN TIEN CITY, TAIPEI, TAIWAN
R. O. C.

MANUFACTURER :

4FL., NO. 529, CHUNG CHENG RD.,
HSIN TIEN CITY, TAIPEI, TAIWAN
R. O. C.

MEASUREMENT PROCEDURE : ANSI C63, 4 - 1992


TESTED FOR COMPLIANCE WITH : Title 47 of CFR

Part 15, Subpart B, Class B

1.2 PLACE OF MEASUREMENT
PEP Testing Laboratory

1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment :

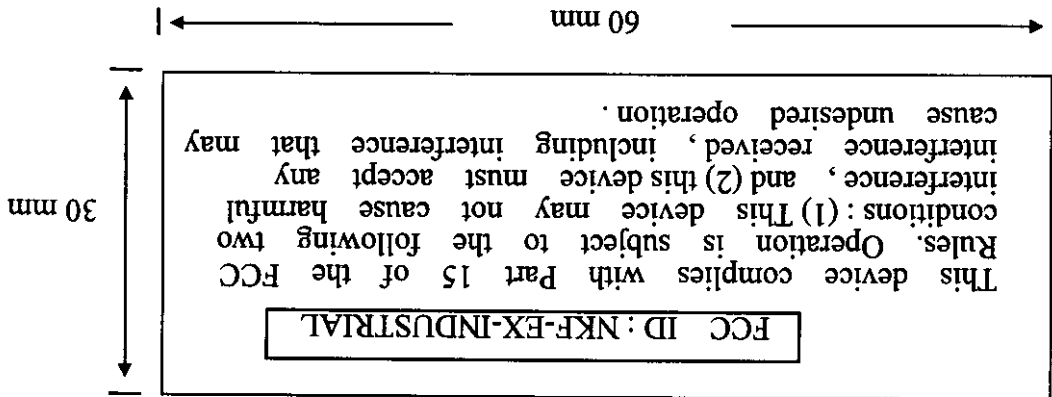

1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.


Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

2. CONDUCTION EMISSIONS TEST

2.1 GENERAL SETUP OF THE TEST FACILITIES

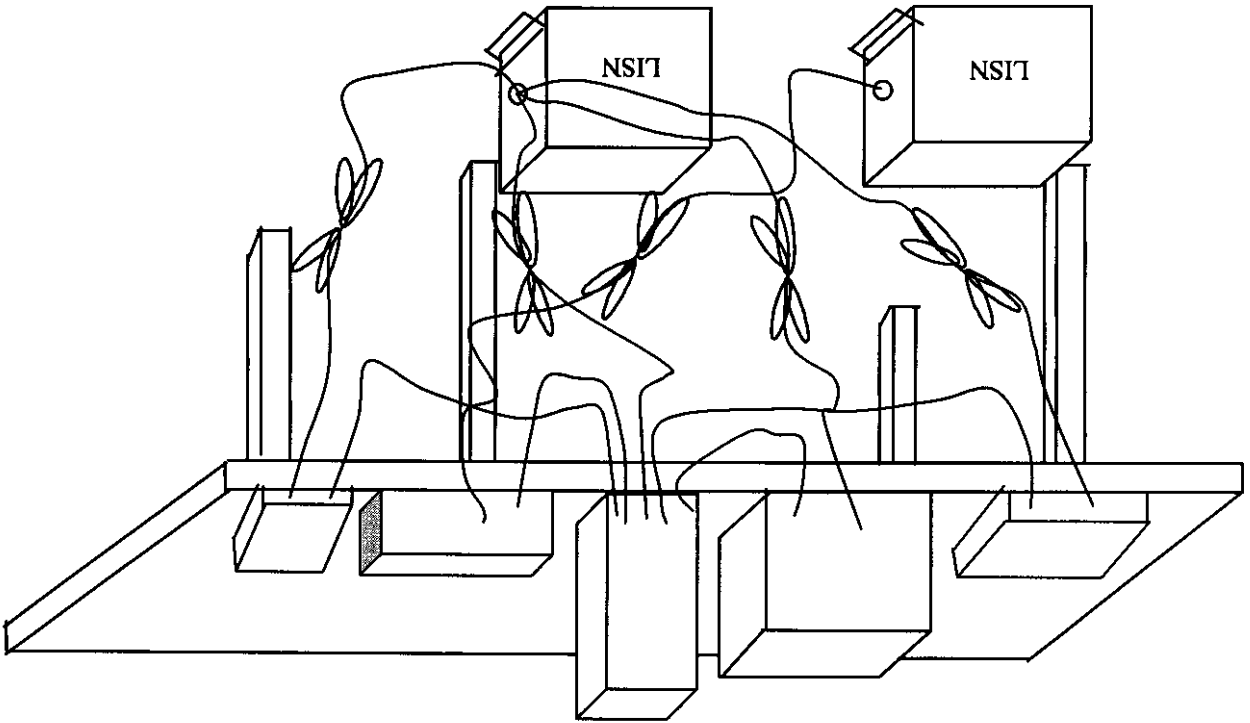


2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software. Both the line of power cord, hot and neutral, were run with the EMI tests software.

To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer. The highest emissions were recorded in the RFI test report.

3. RADIATED EMISSIONS TEST

3.1 GENERAL SETUP OF THE FACILITIES

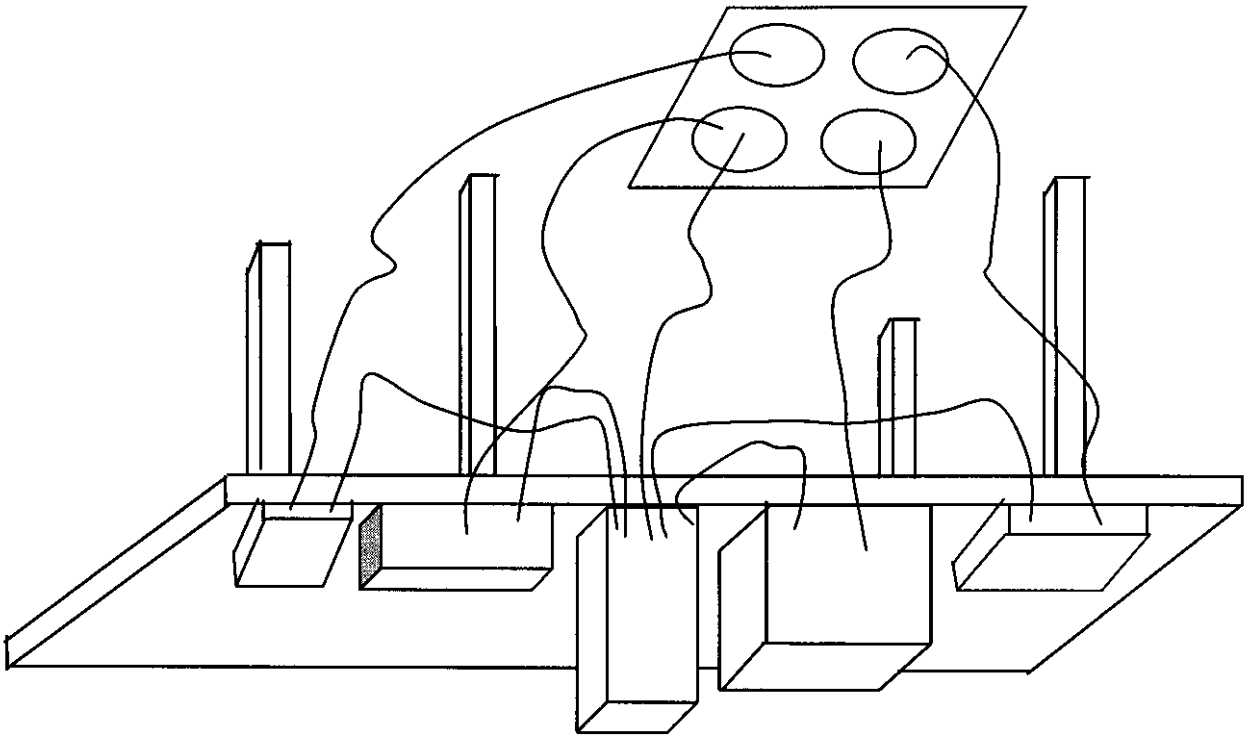

3.2 TEST PROCEDURES

Radiated emissions test was carried out by PEP Testing Laboratory at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software.

a. setting up the EUT under normally position, and scanning it from 30 MHz to 1000 MHz, then recording those narrow band noises which cannot be 6 dBuV below lower bound. Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height, and turntable rotate 360 degrees.

b. fixing the EUT rear face to antenna and antenna 1.0 meter height. We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters, then rotated the turntable simultaneously.

c. checking following step b. all points which were recorded in step a.

d. changing the peripherals position, and routine steps a. b. c.

The highest emissions were recorded in the RFI test report.

4. DESCRIPTION FOR EUT TESTING CONFIGURATION

** TEST PROCEDURE ----

- (A) The EUT was disk array system, FCC ID:NKF-EX-INDUSTRIAL, with six hard disk, for more detail information about the EUT, please refer user's manual.
- (B) The EUT executed disk copy program between HDD inside PC and EUT during the test.
- (C) After the EUT was set up, we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement; similarly, the radiated emission test was done at the open field site.
- (D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more, we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value, making sure it can under 6 dBuV at least.
- (E) In the RFI test report, we provided the worst conducted emission testing data and radiated emission test data.

5. SUPPORTING DEVICES TO TEST

SUPPORT UNIT 1. ---- PERSONAL COMPUTER

Manufacturer : ASUS Inc.
 Model Number : P2L97
 Power Supply Type : Switching
 Power Cord : Shielded, Detachable, 1.2m
 Data Cable : Shielded, Detachable, 1.2m
 FCC ID : N/A

SUPPORT UNIT 2. ---- MONITOR

Manufacturer : Acer Peripherals Inc.
 Model Number : 7134T
 Power Supply Type : Switching
 Power Cord : Shielded, Detachable, 1.2m
 Data Cable : Shielded, Undetachable, 1m
 FCC ID : JVP7134T

SUPPORT UNIT 3. ---- PRINTER

Manufacturer : Hewlett-Packard Singapore Pte Ltd.
 Model Number : C2642A
 Power Supply Type : Linear
 Power Cord : Non-Shielded, Detachable, 1.2m
 Data Cable : Shielded, Detachable, 1m, 2464
 FCC ID : N/A

SUPPORT UNIT 4. ---MODEM

Manufacturer : ACEEX
 Model Number : 1414
 Power Supply Type : Linear
 Power Cord : Non-Shielded, Detachable, 1.2m
 Data Cable : Shielded, Detachable, 1m
 FCC ID : IFAXDM1414

SUPPORT UNIT 5. ---KEYBOARD

Manufacturer : Acer Peripherals Inc.
 Model Number : 6311-KW
 Power Supply Type : N/A
 Power Cord : N/A
 Data Cable : Shielded, Undetachable, 1.2m
 FCC ID : JVPKBS-WIN

SUPPORT UNIT 6. ---MOUSE

Manufacturer : ACER
 Model Number : M-S34
 Power Supply Type : N/A
 Power Cord : N/A
 Data Cable : Shielded, Undetachable, 1m
 FCC ID : DZL211029



EQUIPMENT UNDER TEST ----DISK ARRAY SYSTEM
Manufacturer : MAXTRONIC INTERNATIONAL CO., LTD.
Model Number : EX Industrial
Data Cable : Shielded, Undetachable, 1.2m
FCC ID : NKF-EX-INDUSTRIAL

6. TEST CONFIGURATION

Radiated emission detector function :
(1) 30MHZ~1GHZ : Quasi-Peak Value
Resolution BW : 120KHZ Video BW : 300KHZ
(2) above 1GHZ : Quasi-Peak value and Average Value
Resolution BW : 1MHZ Video BW : 1MHZ
* either Q.P. or average value will be recorded
in the report
Conducted emission detector function :
(1) 450KHZ~30MHZ : Quasi-Peak Value
Resolution BW : 9KHZ Video BW : 30KHZ

The else descriptions :
Both SCSI I/O ports on the rear EUT were test and the RS232 port was connected to PC modem port, the worst case data was provided in this RFI report.

Conducted Emission Test Photo.	: Page 16
Test Data	: Hot 17
	Neutral 18
Radiated Emission Test Photo.	: Page 19
Test Data	: Horizontal 20
	Vertical 21

CONDUCTED EMISSIONS TEST DATA

Note : HOT LINE TEST

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
13.216	19.48	-28.52	48.00	16.99	0.64	1.85	0.00
15.048	21.25	-26.75	48.00	18.65	0.70	1.90	0.00
18.446	21.62	-26.38	48.00	18.88	0.77	1.96	0.00
19.332	22.31	-25.69	48.00	19.53	0.79	1.99	0.00
21.785	28.04	-19.96	48.00	25.14	0.84	2.06	0.00
22.790	31.79	-16.21	48.00	28.86	0.86	2.08	0.00
23.115	33.14	-14.86	48.00	30.20	0.86	2.08	0.00
23.913	29.96	-18.04	48.00	26.96	0.88	2.12	0.00
25.774	20.76	-27.24	48.00	17.57	1.02	2.17	0.00
29.025	23.89	-24.11	48.00	20.18	1.48	2.23	0.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

CONDUCTED EMISSIONS TEST DATA

Note : NEUTRAL LINE TEST

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
1.159	20.81	-27.19	48.00	18.95	0.10	1.76	0.00
11.502	19.14	-28.86	48.00	16.74	0.57	1.83	0.00
16.023	20.60	-27.40	48.00	17.97	0.73	1.90	0.00
18.535	21.29	-26.71	48.00	18.55	0.77	1.97	0.00
21.342	27.72	-20.28	48.00	24.84	0.83	2.05	0.00
21.992	29.32	-18.68	48.00	26.41	0.84	2.07	0.00
23.469	31.00	-17.00	48.00	28.03	0.87	2.09	0.00
24.208	25.68	-22.32	48.00	22.67	0.89	2.12	0.00
24.592	24.39	-23.61	48.00	21.36	0.89	2.14	0.00
28.493	22.81	-25.19	48.00	19.17	1.42	2.23	0.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL : Test distance : 3 m :

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
33.510	30.98	- 9.02	40.00	37.82	17.91	0.25	25.00
65.910	24.41	-15.59	40.00	42.19	7.32	-0.10	25.00
100.200	37.24	- 6.26	43.50	43.74	18.65	-0.15	25.00
165.000	31.72	-11.78	43.50	39.75	16.61	0.35	25.00
197.940	31.15	-12.35	43.50	43.64	10.19	2.32	25.00
351.800	33.99	-12.01	46.00	35.73	22.16	1.10	25.00
601.000	32.15	-13.85	46.00	33.07	22.00	2.07	25.00
792.800	33.67	-12.33	46.00	34.37	22.50	1.80	25.00
832.700	33.30	-12.70	46.00	33.50	22.67	2.12	25.00
859.300	32.01	-13.99	46.00	31.56	22.80	2.66	25.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL ; Test distance : 3 m. ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
33.510	32.14	- 7.86	40.00	38.99	17.91	0.25	25.00
100.200	37.59	- 5.91	43.50	44.09	18.65	-0.15	25.00
119.100	26.62	-16.88	43.50	35.21	16.23	0.19	25.00
165.000	30.53	-12.97	43.50	38.56	16.61	0.35	25.00
199.830	33.38	-10.12	43.50	46.63	9.39	2.36	25.00
400.800	38.51	- 7.49	46.00	45.55	15.65	2.31	25.00
466.600	38.42	- 7.58	46.00	43.22	17.38	2.82	25.00
601.000	34.40	-11.60	46.00	36.32	21.00	2.07	25.00
701.100	33.94	-12.06	46.00	34.53	22.00	2.41	25.00
792.800	39.49	- 6.51	46.00	40.69	22.00	1.80	25.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

List of Test Equipment

Instrument	Model No.	Cal. Due Date	S/N
R&S Receiver	ESVS30(30M~1GHZ)	Apr. 21, 1999	863342/012
R&S Receiver	ESBI (20~5GHZ)	Feb. 12, 1999	845658/003
Spectrum Analyzer	HP8591A(9K~1.8GHZ)	Apr. 15, 1999	3225A03039
Spectrum Analyzer	R3261A (9K~2.6GHZ)	Dec. 03 1999	91720076
EMCO L.I.S.N.	3825/2 (10K~30MHZ)	Apr. 15, 1999	9311-2150
L.I.S.N.	KNW-242(10K~30MHZ)	Jan. 31, 1999	8-837-7
R & S L.I.S.N.	ESH3-Z5(9K~30MHZ)	Jul. 09, 1999	844982/039
Anritsu Pre-Amp.	MH648A(100K~1.4GHZ)	Sep. 20, 1999	M40076
R & S Pre-Amp.	ESMI-Z7(20M~7GHZ)	Feb. 12, 1999	6/2278/011
COM-Power Horn Antenna	AH-118 (1G~18GHZ)		10056
EMCO Dipole Antenna	3121C (20M~1GHZ)	May. 22, 1999	9611-1230
EMCO Biconical Antenna	3110B (30M~300M)	Mar. 10, 1999	2932
EMCO Log-Periodic Antenna	3146A (300M~1GHZ)	Apr. 14, 1999	1384