



# PEP Testing Laboratory

## RFI / EMI TEST REPORT

**APPLICANT** : MAXTRONIC INTERNATIONAL CO., LTD.

**E. U. T.** : DISK ARRAY SYSTEM

**TRADE NAME** : N/A

**FCC ID** : NKF-INDUSTRIAL

**REGULATION** : CFR 47, Part 15 Subpart B, Class B

**TEST SITE** : PEP Testing Laboratory

**TEST ENGINEER** : *Jason Gong*

**TEST DATE** : *9/1/1998*

**ISSUED DATE** : SEP. / 07 / 1998

**REPORT No.** : 980467

# FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road  
Columbia, MD 21046  
Telephone: 301-725-1585 (ext-218)  
Facsimile: 301-344-2050

November 25, 1996

IN REPLY REFER TO  
31040/SIT  
1300F2

PEP Testing Laboratory  
12-3 Fl., No. 27-1, Lane 169  
Kang-Ning St., Hsi-chi Town  
Taipei Hsien, Taiwan, R.O.C.

Attention: M. Y. Tsui


Re: Measurement facility located at above address  
(3 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips  
Electronics Engineer  
Customer Service Branch

Enclosure:  
PAL PN



# PEP Testing Laboratory

## VERIFICATION

### WE HEREBY VERIFY THAT:

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass **FCC Class B** limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4 - 1992.


Any data in this RFI report is "reference" only.

APPLICANT : MAXTRONIC INTERNATIONAL CO., LTD.\*

PRODUCT : DISK ARRAY SYSTEM\*

FCC ID : NKF-INDUSTRIAL\*

MODEL : Arena Industrial\*

  
\_\_\_\_\_  
M. Y. TSUI  
Manager

### PEP Testing Laboratory

12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,  
Hsi-Chi, Taipei Hsien, Taiwan, R. O. C.  
TEL : 886-2-6922097      FAX : 886-2-6956236



# PEP Testing Laboratory

## TABLE OF CONTENTS

### 1. GENERAL

1.1 General Information	1
1.2 Place of Measurement	1
1.3 Labeling Requirements	2
1.4 Information to User	3

### 2. CONDUCTED EMISSIONS TEST

2.1 Setup of the Test Facilities	4
2.2 Test Procedures	5

### 3. RADIATED EMISSIONS TEST

3.1 Setup of the Test Facilities	6
3.2 Test Procedures	7

### 4. DESCRIPTION FOR EUT TESTING CINFIGURATION

8

### 5. SUPPORTING DEVICES TO TEST

9

### 6. TEST CONFIGURATION

C

\*\* Conducted Emission Test Photo. and Data

\*\* Radiated Emission Test Photo. and Data

### 7. APPENDIX

A. Photos of EUT Appearance	10
-----------------------------	----



# PEP Testing Laboratory

## 1. GENERAL

### **1.1 GENERAL INFORMATION:**

APPLICANT : MAXTRONIC INTERNATIONAL CO., LTD.

4FL., NO. 529, CHUNG CHENG RD.,  
HSIN TIEN CITY, TAIPEI, TAIWAN  
R. O. C.

MANUFACTURER : MAXTRONIC INTERNATIONAL CO., LTD.

4FL., NO. 529, CHUNG CHENG RD.,  
HSIN TIEN CITY, TAIPEI, TAIWAN  
R. O. C.

MEASUREMENT PROCEDURE : ANSI C63,4 - 1992

TESTED FOR COMPLIANCE WITH : Title 47 of CFR  
Part 15, Subpart B, Class B

### **1.2 PLACE OF MEASUREMENT**


**PEP Testing Laboratory**



# PEP Testing Laboratory

## 1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment:

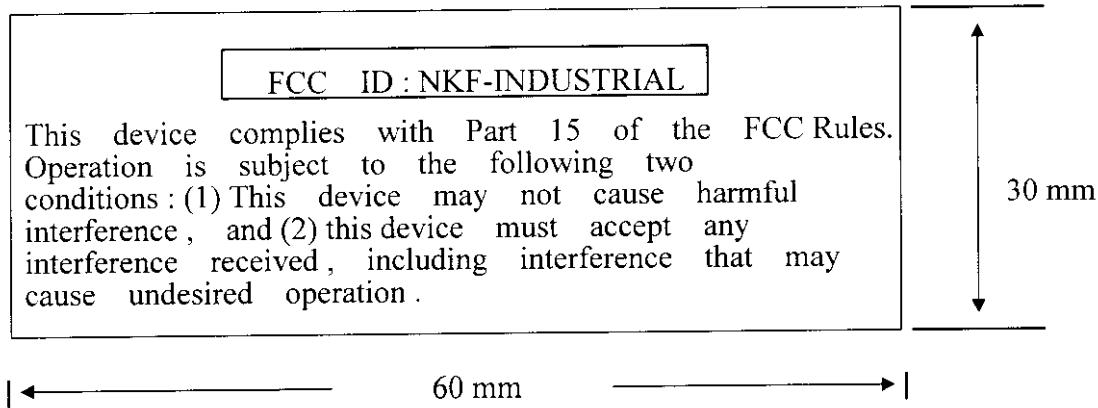



# PEP Testing Laboratory

## 1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

### Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.


You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.



# PEP Testing Laboratory

## 2. CONDUCTION EMISSIONS TEST

### 2.1 GENERAL SETUP OF THE TEST FACILITIES

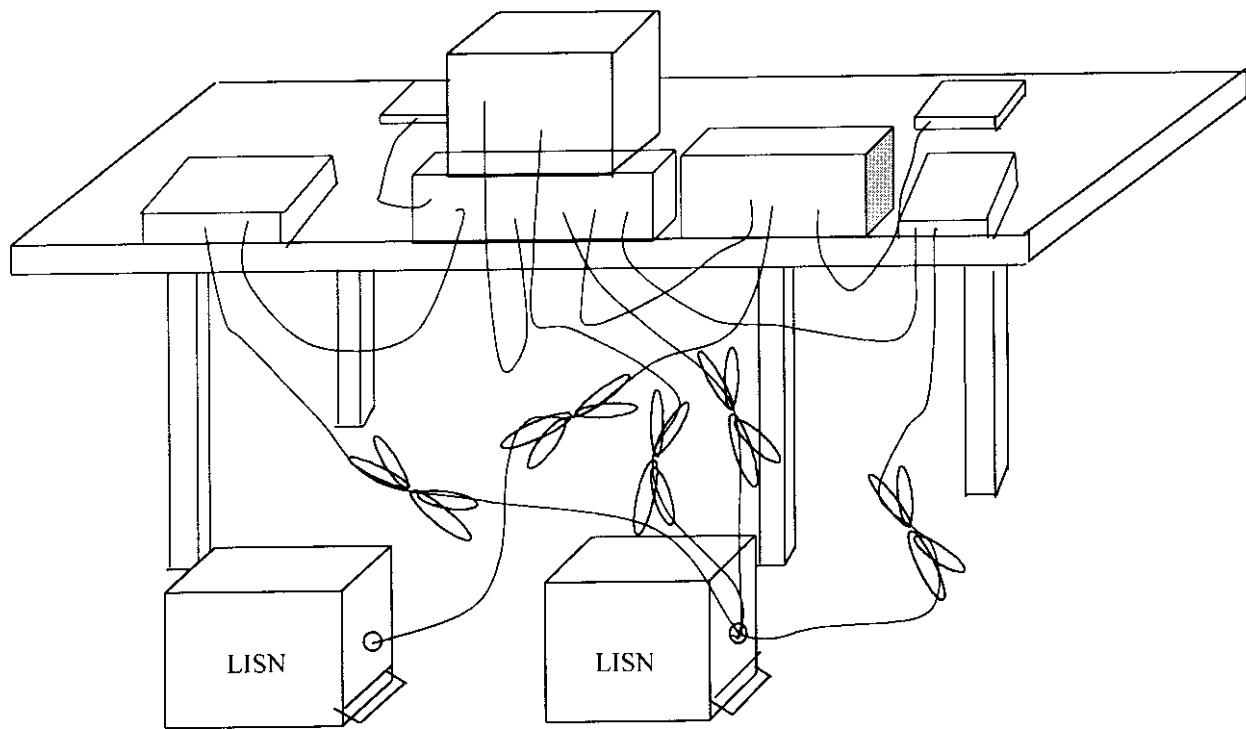



# PEP Testing Laboratory

## 2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software.

Both the line of power cord, hot and neutral, were run with the EMI tests software.


To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer.

The highest emissions were recorded in the RFI test report.



## 3. RADIATED EMISSIONS TEST

### 3.1 GENERAL SETUP OF THE FACILITIES

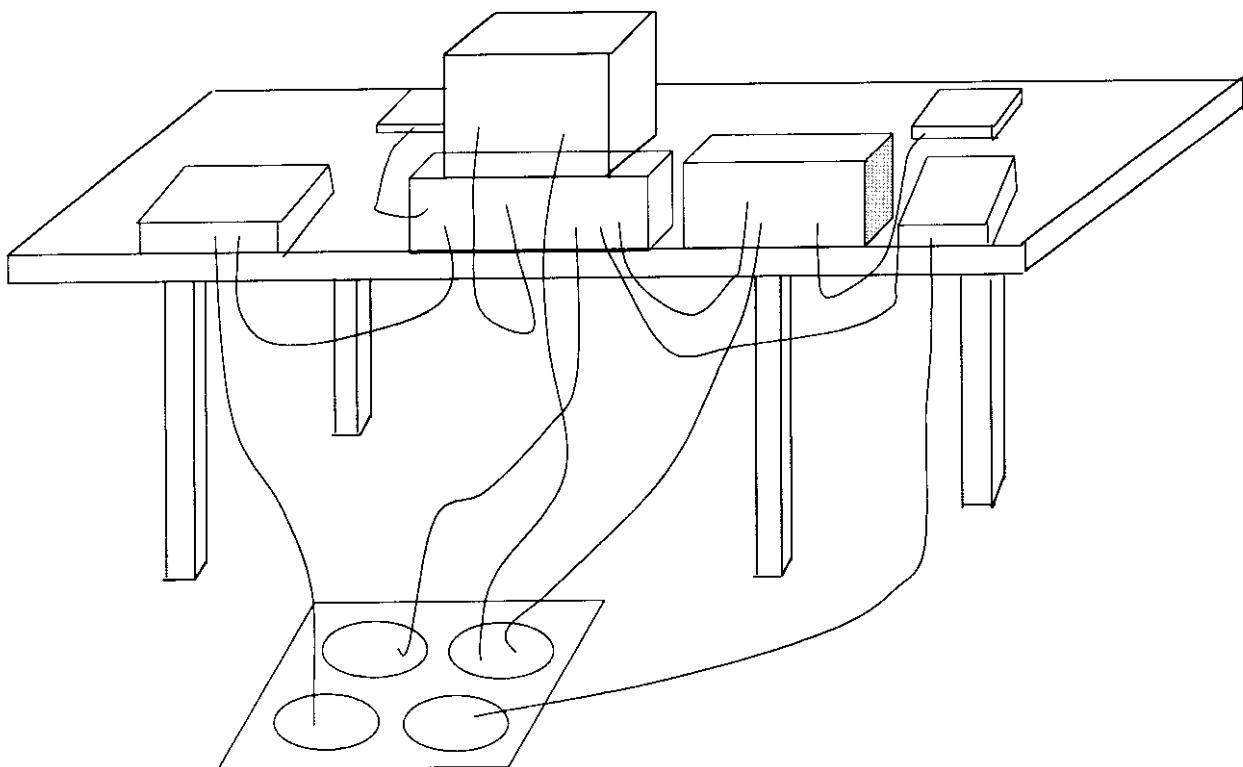



# PEP Testing Laboratory

## 3.2 TEST PROCEDURES

Radiated emissions test was carried out by **PEP Testing Laboratory** at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software .

- a. setting up the EUT under normally position , and scanning it from 30 MHz to 1000 MHz , then recording those narrow band noises which cannot be 6 dBuV below lower bound . Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height , and turntable rotate 360 degrees .
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height . We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters , then rotated the turntable simultaneously .
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position , and routine steps a. b. c.

The highest emissions were recorded in the RFI test report .



# PEP Testing Laboratory

## 4. DESCRIPTION FOR EUT TESTING CONFIGURATION

### **\*\* TEST PROCESURE ----**

- (A) The EUT was disk array system , FCC ID:NKF-INDUSTRIAL , with six hard disk , for more detail information about the EUT , please refer user's manual .
- (B) The EUT executed disk copy program between HDD inside PC and ZIP via EUT during the test .
- (C) After the EUT was set up , we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement ; similarly , the radiated emission test was done at the open field site .
- (D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value , making sure it can under 6 dBuV at least .
- (E) In the RFI test report , we provided the worst conducted emission testing data in page C-1.\*  
For the radiated emission test , the worst data recorded in the page R-1.\*

### **\*\* I/O DATA CABLES INFORMATIONS ---**

Please refer the page 9 .



# PEP Testing Laboratory

## 5. SUPPORTING DEVICES TO TEST

### **SUPPORT UNIT 1. ---- PERSONAL COMPUTER**

Manufacturer : Jm Computer Inc.  
Model Number : C486SDX-SDT  
Power Supply Type : Switching  
Power Cord : Shielded, Detachable, 1.2m  
Data Cable : Shielded, Detachable, 1.2m  
FCC ID : K25C486SDX-SDT

### **SUPPORT UNIT 2. ---- MONITOR**

Manufacturer : Acer Peripherals Inc.  
Model Number : 7134T  
Power Supply Type : Switching  
Power Cord : Shielded, Detachable, 1.2m  
Data Cable : Shielded, Undetachable, 1m  
FCC ID : JVP7134T

### **SUPPORT UNIT 3. ---- PRINTER**

Manufacturer : Hewlett-Packard Singapore Pte Ltd.  
Model Number : HP 2225C<sup>+</sup>  
Power Supply Type : Linear  
Power Cord : Non-Shielded, Detachable, 1.2m  
Data Cable : Shielded, Detachable, 1m. 2464  
FCC ID : DSI6XU2225



# PEP Testing Laboratory

## **SUPPORT UNIT 4. ----MODEM**

Manufacturer : ACEEX

Model Number : 1414

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1m

FCC ID : IFAXDM1414

## **SUPPORT UNIT 5. ---- KEYBOARD**

Manufacturer : Acer Inc.

Model Number : 6011

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Shielded, Undetachable, 1m

FCC ID : GQ86011A

## **SUPPORT UNIT 6. ---- ZIP (SCSI)**

Manufacturer : ZPSION

Model Number : ZP-100

Power Supply Type : N/A

Power Cord : N/A

Data Cable : N/A

FCC ID : N/A



# PEP Testing Laboratory

## **SUPPORT UNIT 7. ---- SCSI CARD**

Manufacturer : ADAPTEC

Model Number : AIC-7880P

Power Supply Type : N/A

Power Cord : N/A

Data Cable : N/A

FCC ID : N/A

## **SUPPORT UNIT 8. ---- HARD DISK**

Manufacturer : QUANTUM

Model Number : CY 2110 AT

Power Supply Type : N/A

Power Cord : N/A

Data Cable : N/A

FCC ID : N/A



# PEP Testing Laboratory

## **EQUIPMENT UNDER TEST ---- DISK ARRAY SYSTEM**

**Manufacturer : MAXTRONIC INTERNATIONAL CO., LTD.**

**Model Number : Arena Industrial**

**Data Cable : Shielded, Undetachable, 1.2m**

**FCC ID : NKF-INDUSTRIAL**



# PEP Testing Laboratory

## 6. TEST CONFIGURATION

Radiated emission detector function :

- (1) 30MHZ~1GHZ : Quasi-Peak Value  
Resolution BW : 120KHZ Video BW : 300KHZ
- (2) above 1GHZ : Quasi-Peak value and Average Value  
Resolution BW : 1MHZ Video BW : 1MHZ  
\* either Q. P. or average value will be recorded  
in the report

Conducted emission detector function :

- (1) 450KHZ~30MHZ : Quasi-Peak Value  
Resolution BW : 9KHZ Video BW : 30KHZ

The else descriptions : Both SCSI I/O cables will be sold along with the EUT  
and two ferrite cores mounted on each cable .

Conducted Emission Test Photo. : Page C-1

- Test Data : Hot C-1.1
- Neutral C-1.2

Radiated Emission Test Photo. : Page R-1

- Test Data : Horizontal R-1.1
- Vertical R-1.2



# PEP Testing Laboratory

## CONDUCTED EMISSIONS TEST DATA

### Note : HOT LINE TEST

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
11.590	24.01	-23.99	48.00	21.61	0.57	1.83	0.00
13.422	25.34	-22.66	48.00	22.84	0.64	1.86	0.00
13.807	26.40	-21.60	48.00	23.87	0.66	1.87	0.00
14.604	27.79	-20.21	48.00	25.21	0.69	1.89	0.00
16.525	27.95	-20.05	48.00	25.30	0.74	1.92	0.00
16.968	28.40	-19.60	48.00	25.73	0.74	1.93	0.00
20.071	29.71	-18.29	48.00	26.89	0.80	2.02	0.00
23.322	28.24	-19.76	48.00	25.27	0.87	2.09	0.00
24.149	30.50	-17.50	48.00	27.49	0.89	2.12	0.00
25.095	31.92	-16.08	48.00	28.83	0.93	2.16	0.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



# PEP Testing Laboratory

## CONDUCTED EMISSIONS TEST DATA

### Note : NEUTRAL LINE TEST

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
12.093	24.03	-23.97	48.00	21.60	0.60	1.83	0.00
13.422	25.75	-22.25	48.00	23.25	0.64	1.86	0.00
14.752	27.54	-20.46	48.00	24.95	0.69	1.89	0.00
16.023	27.89	-20.11	48.00	25.26	0.73	1.90	0.00
17.648	26.16	-21.84	48.00	23.46	0.76	1.94	0.00
20.071	29.57	-18.43	48.00	26.75	0.80	2.02	0.00
22.583	26.11	-21.89	48.00	23.18	0.86	2.07	0.00
23.174	27.75	-20.25	48.00	24.80	0.87	2.09	0.00
24.297	29.62	-18.38	48.00	26.60	0.89	2.13	0.00
26.095	33.40	-14.60	48.00	30.31	0.93	2.16	0.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



# PEP Testing Laboratory

## RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
66.890	21.14	-18.86	40.00	42.75	-2.98	1.37	20.00
80.490	19.67	-20.33	40.00	42.23	-4.15	1.59	20.00
102.080	15.25	-28.25	43.50	33.14	0.38	1.73	20.00
120.440	19.55	-23.95	43.50	35.95	1.65	1.95	20.00
134.040	20.00	-23.50	43.50	37.06	0.82	2.12	20.00
235.200	21.19	-24.81	46.00	36.59	1.62	2.98	20.00
301.600	21.23	-24.77	46.00	34.69	2.94	3.61	20.00
435.200	28.82	-17.18	46.00	39.34	5.36	4.13	20.00
467.200	23.19	-22.81	46.00	32.90	5.98	4.32	20.00
505.600	21.43	-24.52	46.00	30.32	6.63	4.53	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



# PEP Testing Laboratory

## RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
75.390	17.89	-22.11	40.00	40.40	-4.02	1.51	20.00
80.490	20.56	-19.44	40.00	43.12	-4.15	1.59	20.00
92.730	15.01	-28.49	43.50	34.28	-0.82	1.56	20.00
108.030	16.57	-26.93	43.50	32.89	1.88	1.80	20.00
120.440	19.43	-24.07	43.50	35.83	1.65	1.95	20.00
235.200	18.71	-27.29	46.00	31.11	4.62	2.98	20.00
287.200	18.69	-27.31	46.00	29.41	5.80	3.48	20.00
301.600	20.88	-25.12	46.00	31.42	5.85	3.61	20.00
435.200	27.55	-18.45	46.00	35.07	8.36	4.13	20.00
577.600	23.03	-22.97	46.00	28.50	9.64	4.89	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



# PEP Testing Laboratory

## List of Test Equipment

Instrument	Model No.	Cal. Due Date	S/N
R&S Receiver	ESVS30(30M~1GHZ)	Nov. 1, 1998	863342/012
R&S Receiver	ESBI (20~5GHZ)	Feb. 12, 1999	845658/003
Spectrum Analyzer	HP8591A(9K~1.8GHZ)	Jan. 31, 1999	3225A03039
Spectrum Analyzer	R3261A (9K~2.6GHZ)	Dec. 03 1998	91720076
EMCO L.I.S.N.	3825/2 (10K~30MHZ)	Oct. 31, 1998	9311-2150
L.I.S.N.	KNW-242(10K~30MHZ)	Jan. 31, 1999	8-837-7
R & S L.I.S.N.	ESH3-Z5(9K~30MHZ)	Feb. 12, 1999	844982/039
Anritsu Pre-Amp.	MH648A(100K~1.4GHZ)	Nov. 9, 1998	M40076
R & S Pre-Amp.	ESMI-Z7(20M~7GHZ)	Feb. 12, 1999	6/2278/011
Chase bi-Log Antenna	CBL6111B(30M~1GHZ)	Aug. 05, 1999	1968
COM-Power Horn Antenna	AH-118 (1G~18GHZ)		10056
EMCO Dipole Antenna	3121C (20M~1GHZ)	May. 22, 1999	9611-1230
EMCO Biconical Antenna	3110B (30M~300M)	Mar. 10, 1999	2932
EMCO Log-Periodic Antenna	3146A (300M~1GHZ)	Apr. 14, 1999	1384