

EMC TEST REPORT

**FCC 47 CFR Part 15B
Industry Canada ICES-003**

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1604-5553-EF0115B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : Marantec America Corp.

Address : 5705 Centerpoint Court
60031 Gurnee
USA

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
ICES-003, Issue 5:2012
ANSI C63.4:2014

Equipment under test (EUT):

Product description	Hand transmitter, 315 MHz, 4 channels, ASK, unidirectional	
Model No.	Digital 384	
Additional Models	Digital 382	
Hardware version	None	
Firmware / Software version	Test software	
Contains	FCC-ID: NKPD384315	IC: N/A
Test result	Passed	

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)


Testing:

Date of receipt of test item: 2016-04-22

Date (s) of performance of tests: 2016-05-10 - 2016-05-10

Compiled by : Matthias Handrik

Tested by (+ signature)..... : Matthias Handrik



Approved by (+ signature) : Jens Marquardt
Deputy Head of Lab



Date of issue : 2016-07-15

Total number of pages : 23

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Additional comments:

The different between the Digital 384 and Digital 382 are two buttons. The EUT with all four buttons was tested.

Version History

Version	Issue Date	Remarks	Revised by
V01	2016-07-15	Initial Release	

REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1 Photos – Equipment external	6
1.2 Photos – Equipment internal	8
1.3 Photos – Test setup	10
1.4 Supporting Equipment Used During Testing	11
1.5 Input / Output Ports	11
1.6 Operating Modes and Configurations	12
1.7 Test Equipment Used During Testing	13
1.8 Sample emission level calculation	14
2 RESULT SUMMARY	15
3 TEST CONDITIONS AND RESULTS	16
3.1 Test Conditions and Results – Radiated emissions	16

1 Equipment (Test item) Description



Description	Hand transmitter, 315 MHz, 4 channels, ASK, unidirectional
Model	Digital 384
Additional Models	Digital 382
Serial number	None
Hardware version	None
Software / Firmware version	Test software
Contains FCC-ID	NKPD384315
Contains IC	N/A
Power supply	3 VDC (battery)
AC/DC-Adaptor	None
Manufacturer	ELDAT GmbH Im Gewerbepark 14 15711 Königs Wusterhausen GERMANY
Highest emission frequency	108 MHz - 500 MHz (up to 2 GHz)
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1



1.1 Photos – Equipment external




Additional Model Top**Additional Model Bottom**

1.2 Photos – Equipment internal

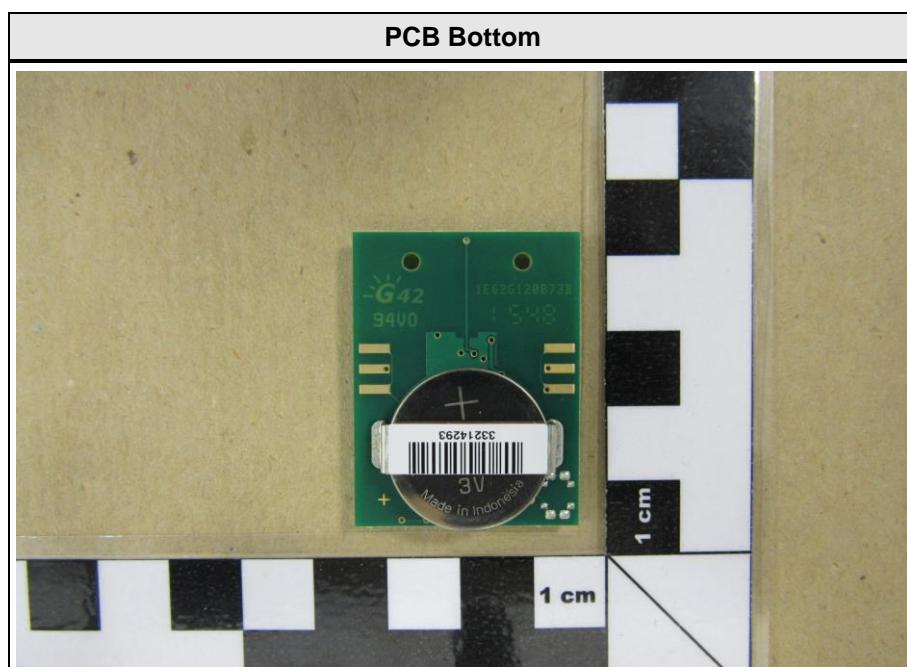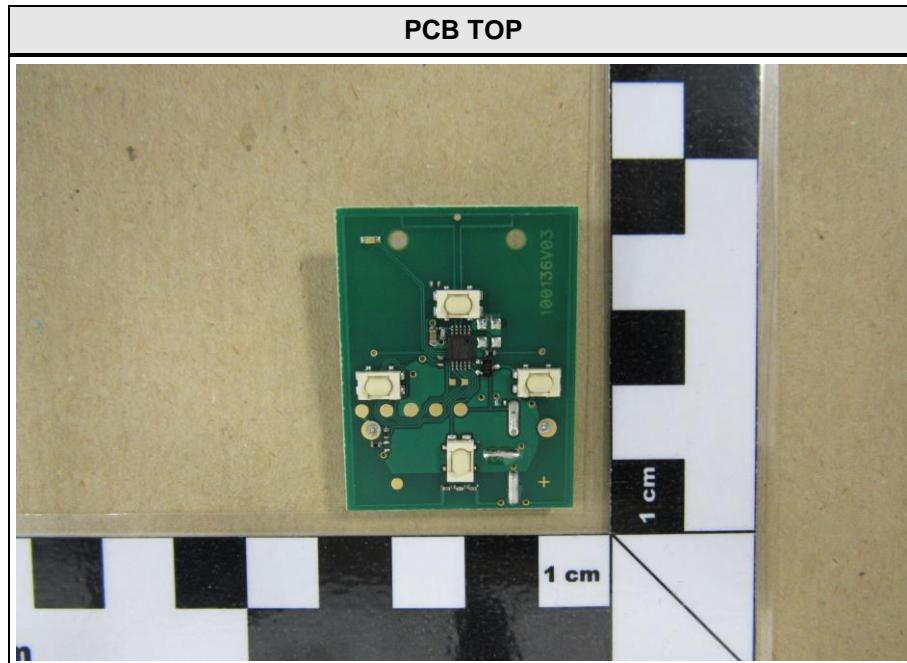

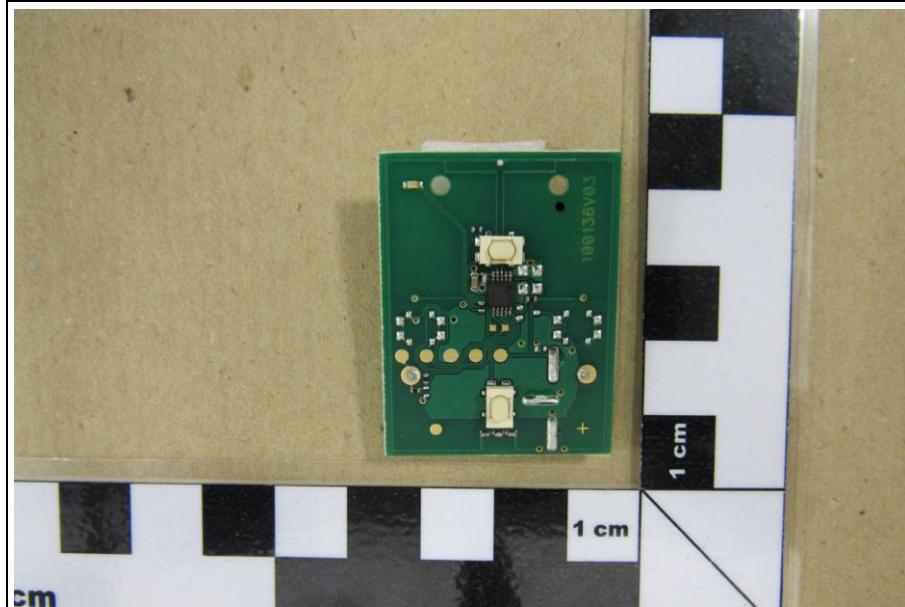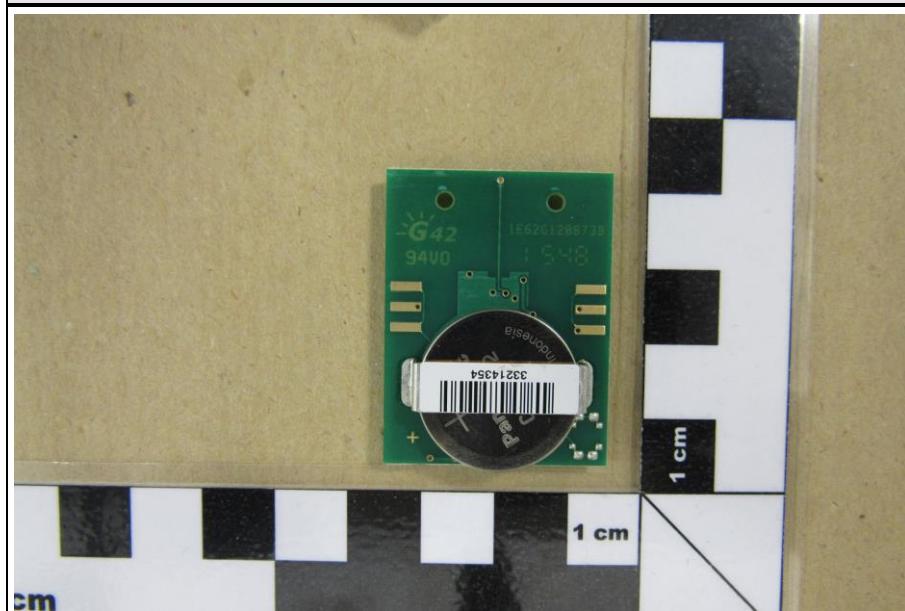Additional Model PCB Top**Additional Model PCB Bottom**

1.3 Photos – Test setup

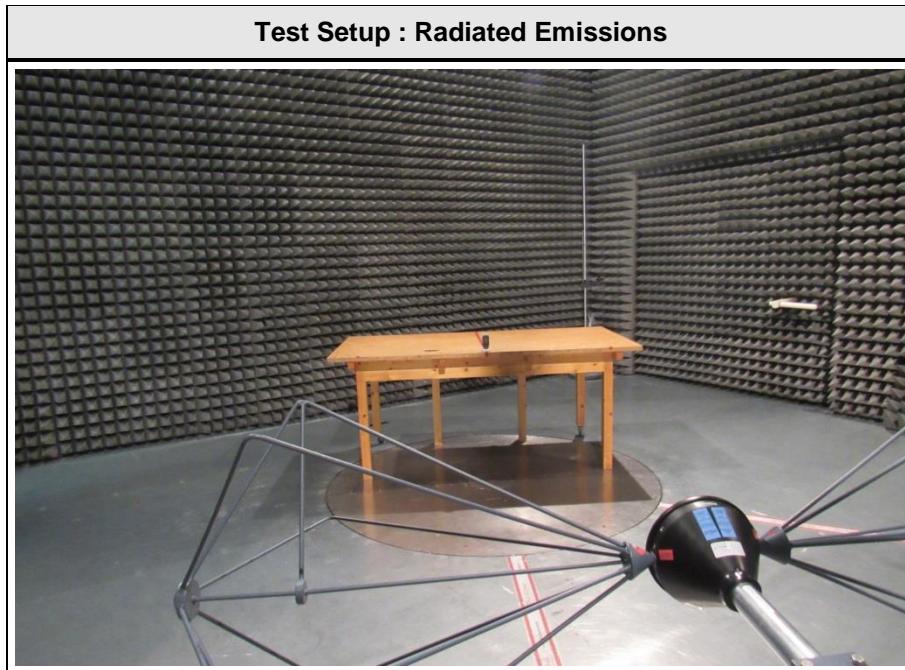

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
				None

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or
 SIM : Simulator (Not Subjected to Test)
 CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
1	-	-	-	-	-

***Note:** Use the following abbreviations:

AC : AC power port
 DC : DC power port
 N/E : Non electrical
 I/O : Signal input or output port
 TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	Active transmit on 315 MHz

Configuration #	EUT Configuration
1	Active transmit on 315 MHz

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2015.1.12

Radiated emissions – 3m Chamber					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical antenna	R&S	HK116	EF00030	2014-03	2017-03
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2016-01	2017-01
RF Cable			-	System Cal.	System Cal
RF Cable			-	System Cal.	System Cal

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{lll} \text{Reading} + \text{AF} = & \text{Net Reading} : & \text{Net reading} - \text{FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = & 47.5 \text{ dB}\mu\text{V/m} : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	N/A	Non rechargeable Battery
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003			Verdict: PASS			
Laboratory Parameters:	Required prior to the test	During the test				
Ambient Temperature	15 to 35 °C	24 °C				
Relative Humidity	30 to 60 %	31 %				
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	108 MHz - 500 MHz (up to 2 GHz)					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 2 GHz					
Operating mode	1					
Configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dB μ V/m]	Result	Average [dB μ V/m]	Result	Peak [dB μ V/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63.4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1604-5553

Applicant: ELDAT GmbH
EUT Name: Hand transmitter, 315 MHz, 4 channels, ASK, unidirectional
Model: Digital 384
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: T_{nom} : 22°C, U_{nom} : 3 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3m
Mode: active transmit 315 MHz
Test Date: 2016-05-10
Note:

Index 32

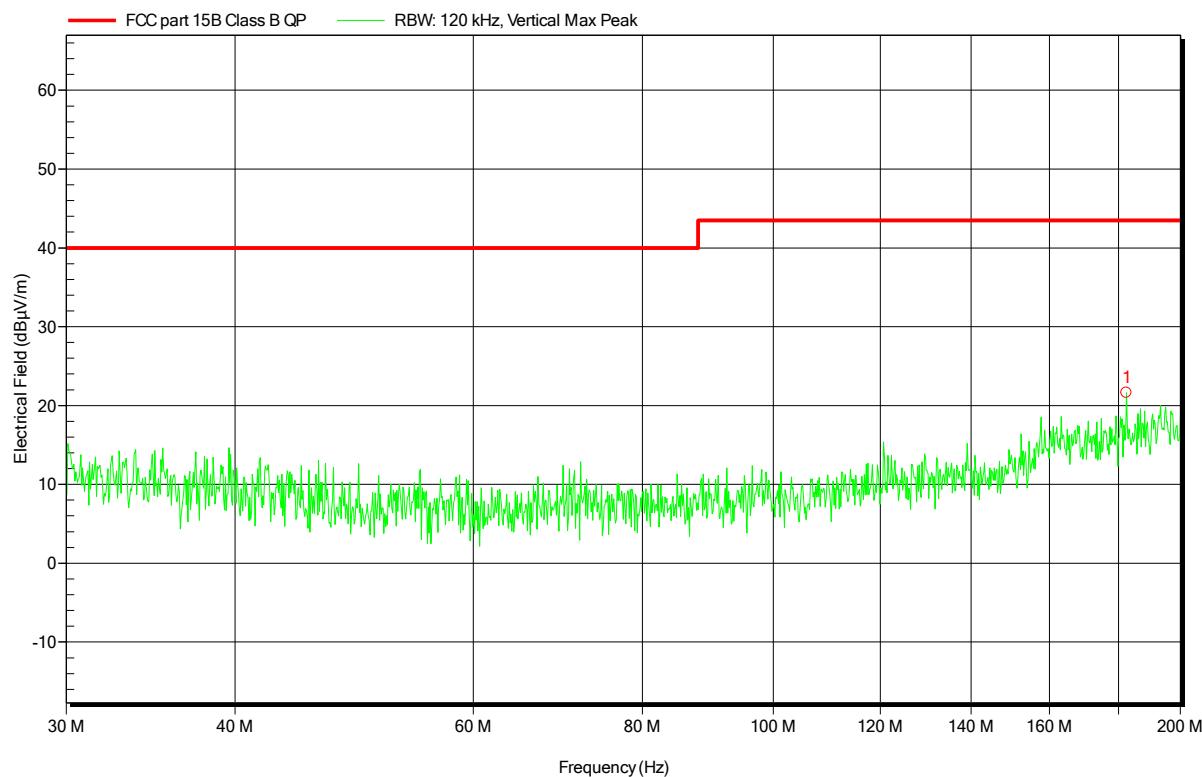


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1604-5553

Applicant: ELDAT GmbH
EUT Name: Hand transmitter, 315 MHz, 4 channels, ASK, unidirectional
Model: Digital 384
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: T_{nom} : 22°C, U_{nom} : 3 VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3m
Mode: active transmit 315 MHz
Test Date: 2016-05-10
Note:

Index 33

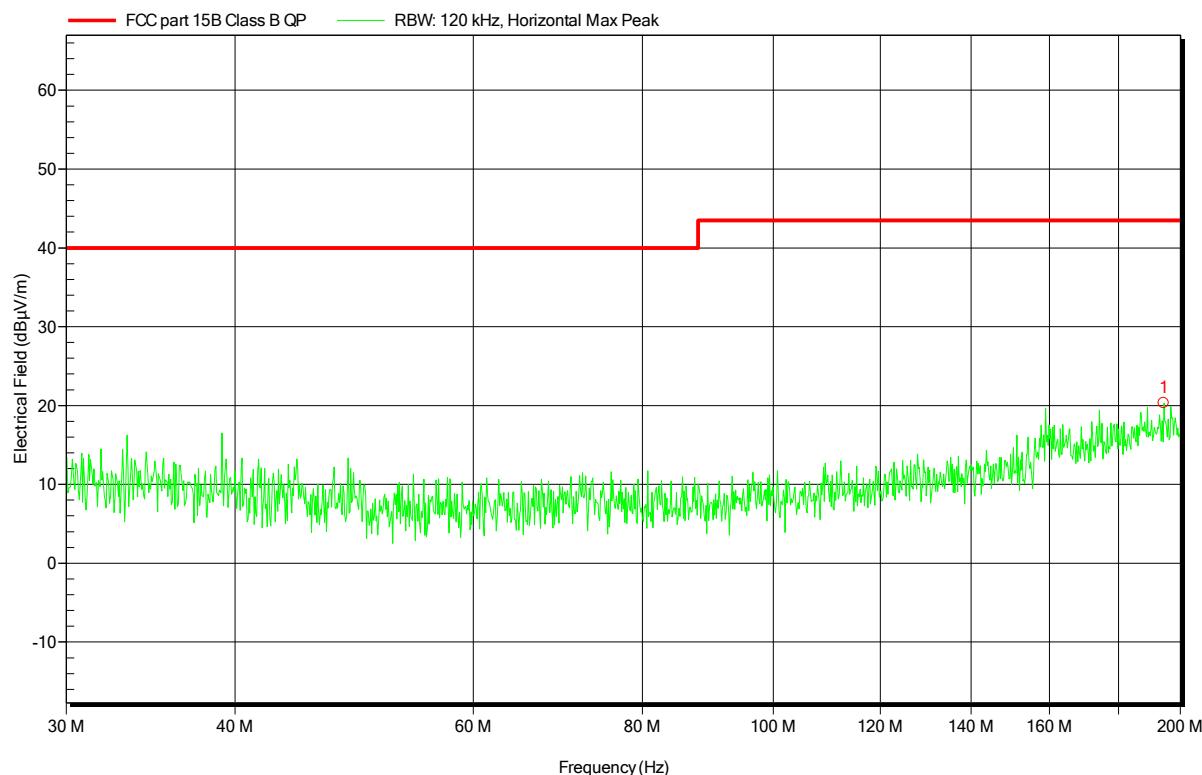

Test Report No.: G0M-1604-5553-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 19 of 23

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1604-5553

Applicant: ELDAT GmbH
 EUT Name: Hand transmitter, 315 MHz, 4 channels, ASK, unidirectional
 Model: Digital 384
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: active transmit 315 MHz
 Test Date: 2016-05-10
 Note: notch filter

Index 34

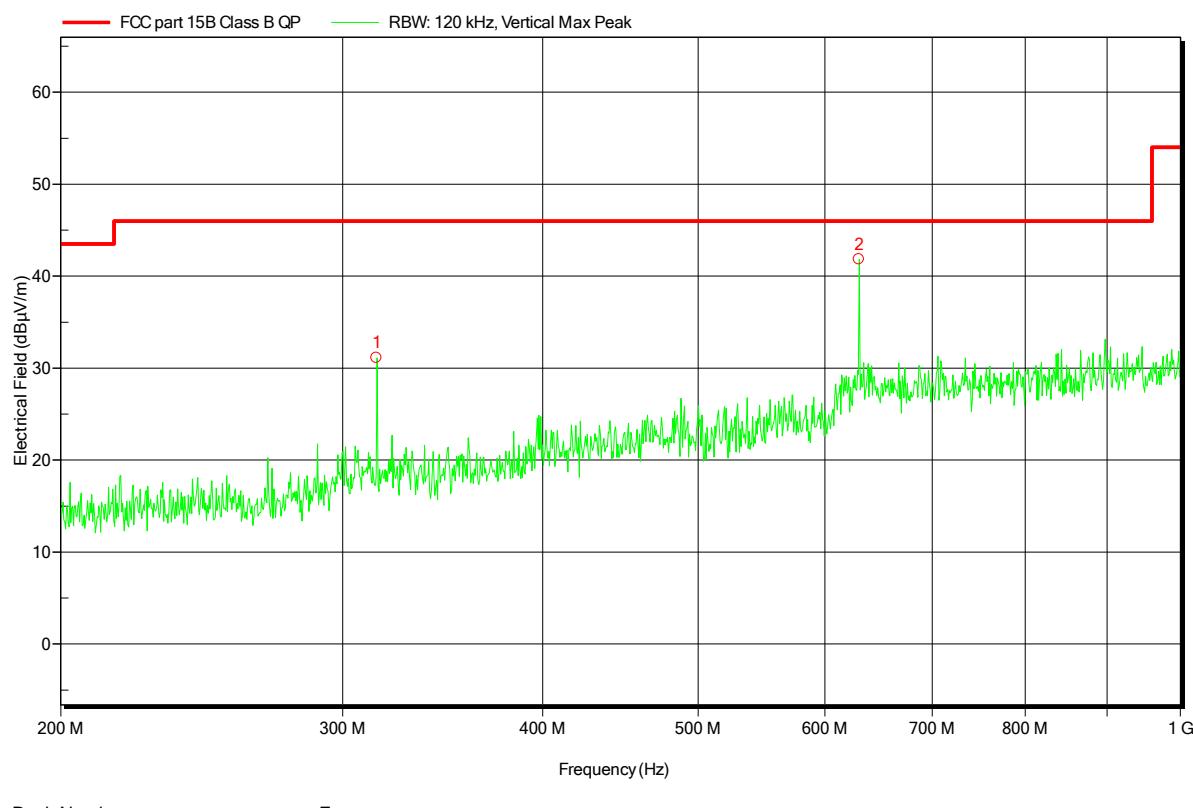

Test Report No.: G0M-1604-5553-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1604-5553

Applicant: ELDAT GmbH
 EUT Name: Hand transmitter, 315 MHz, 4 channels, ASK, unidirectional
 Model: Digital 384
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: active transmit 315 MHz
 Test Date: 2016-05-10
 Note: notch filter

Index 36

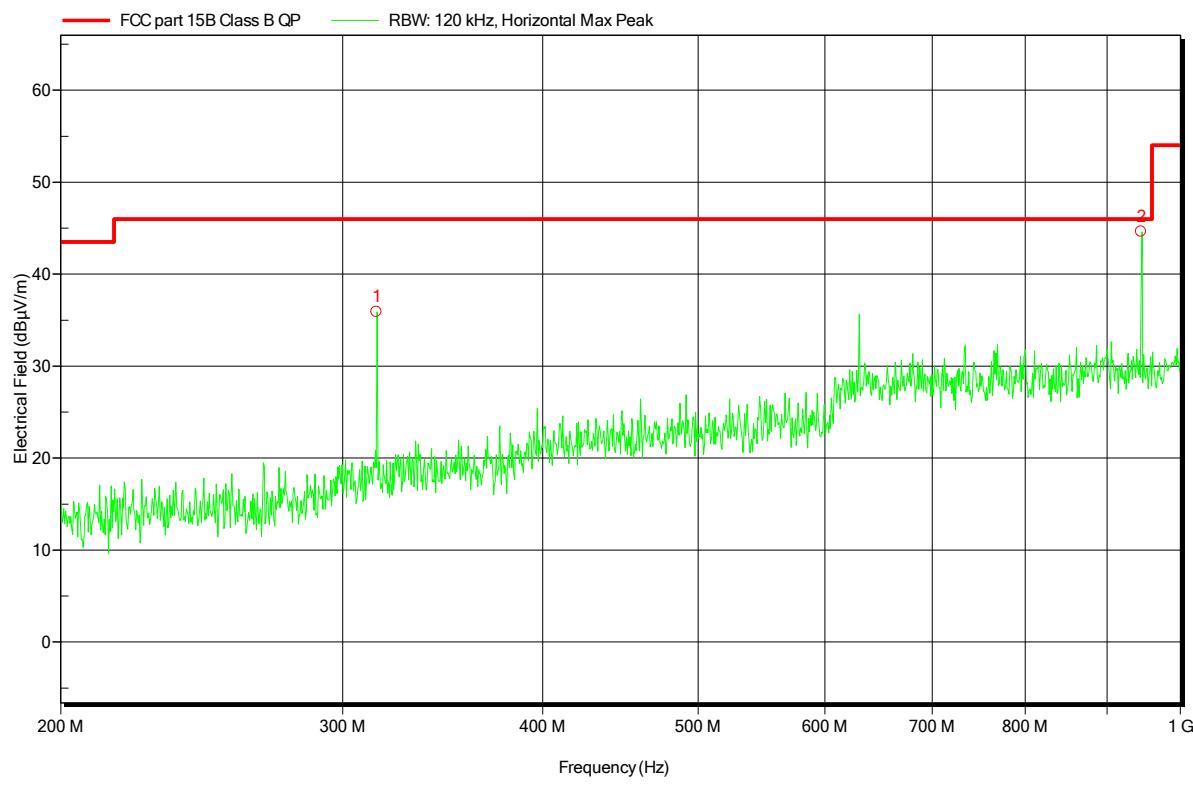

Test Report No.: G0M-1604-5553-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1604-5553

Applicant: ELDAT GmbH
 EUT Name: Hand transmitter, 315 MHz, 4 channels, ASK, unidirectional
 Model: Digital 384
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: T_{nom} : 22°C, U_{nom} : 3 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: active transmit 315 MHz
 Test Date: 2016-05-10
 Note:

Index 37

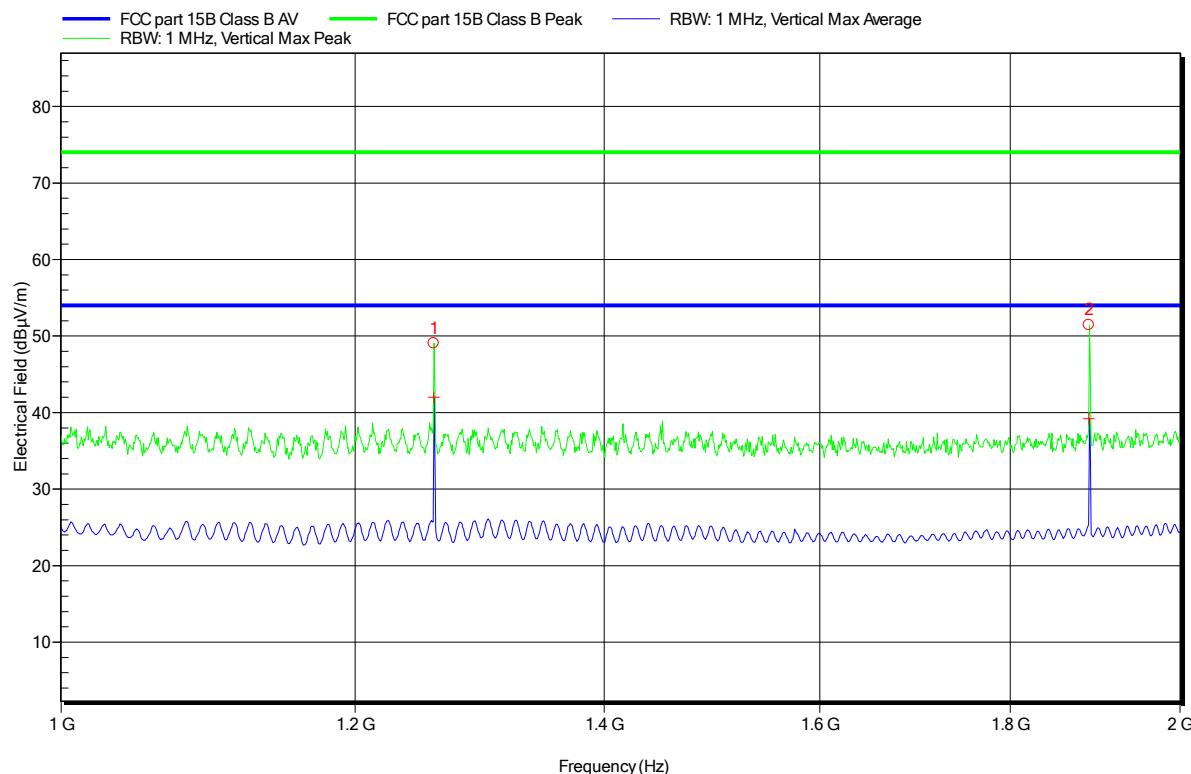

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1604-5553

Applicant: ELDAT GmbH
 EUT Name: Hand transmitter, 315 MHz, 4 channels, ASK, unidirectional
 Model: Digital 384
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 3 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3m
 Mode: active transmit 315 MHz
 Test Date: 2016-05-10
 Note:

Index 38

