



Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5240 MHz

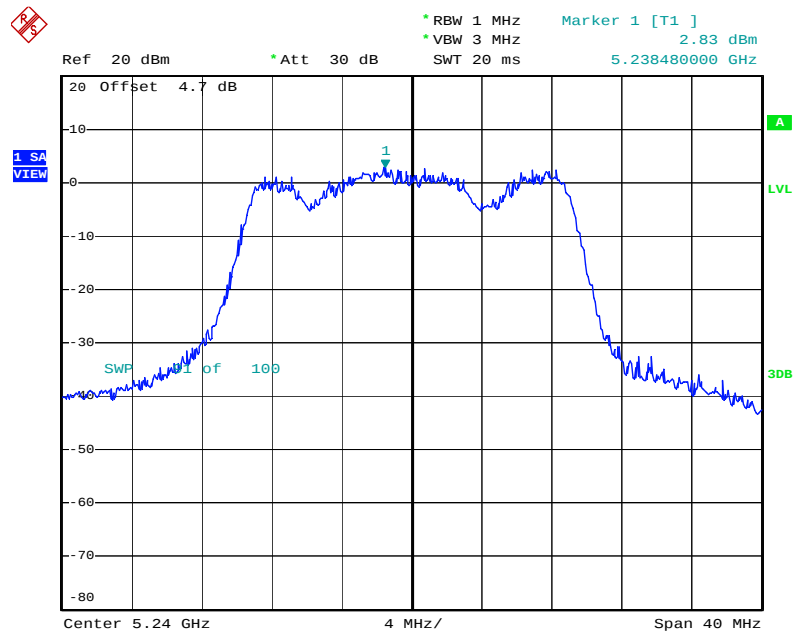


Date: 26.MAR.2009 13:23:02

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5260 MHz

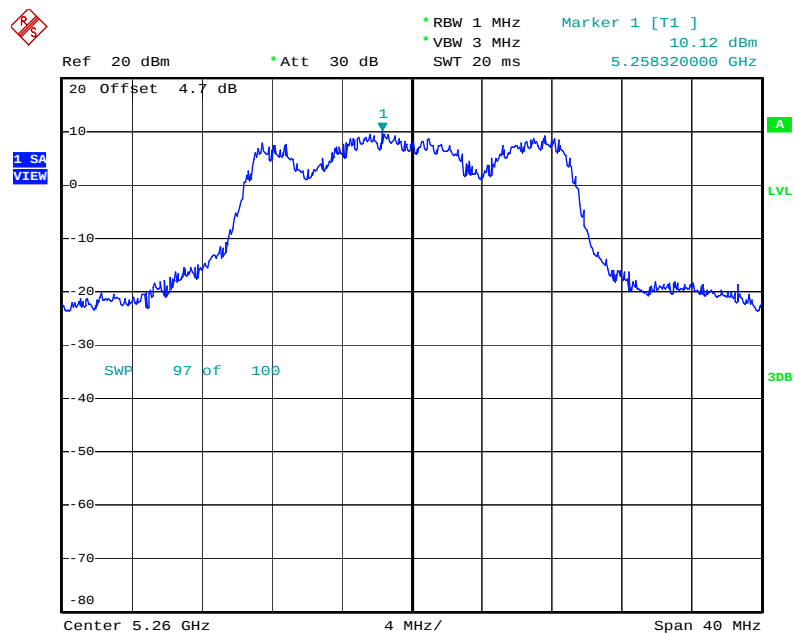


Date: 26.MAR.2009 13:22:13

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5300 MHz

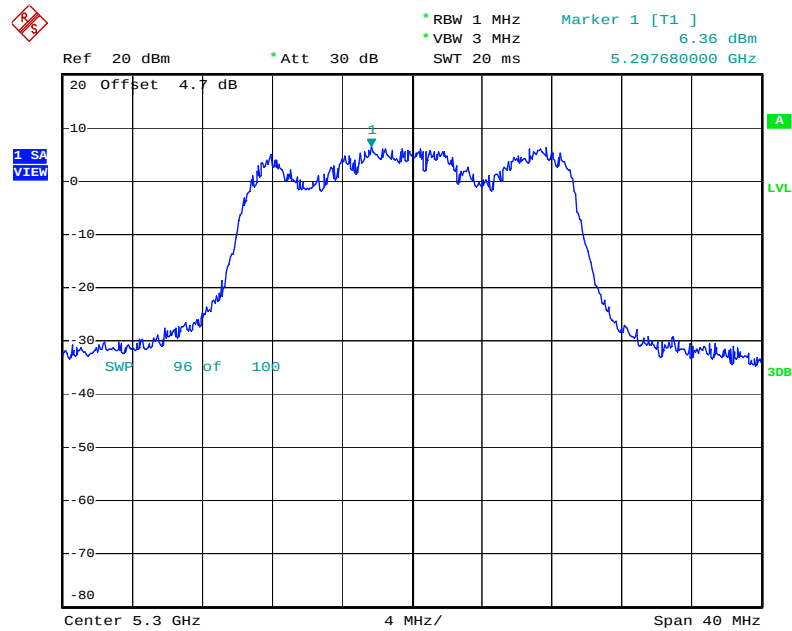


Date: 26.MAR.2009 13:21:23

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5320 MHz

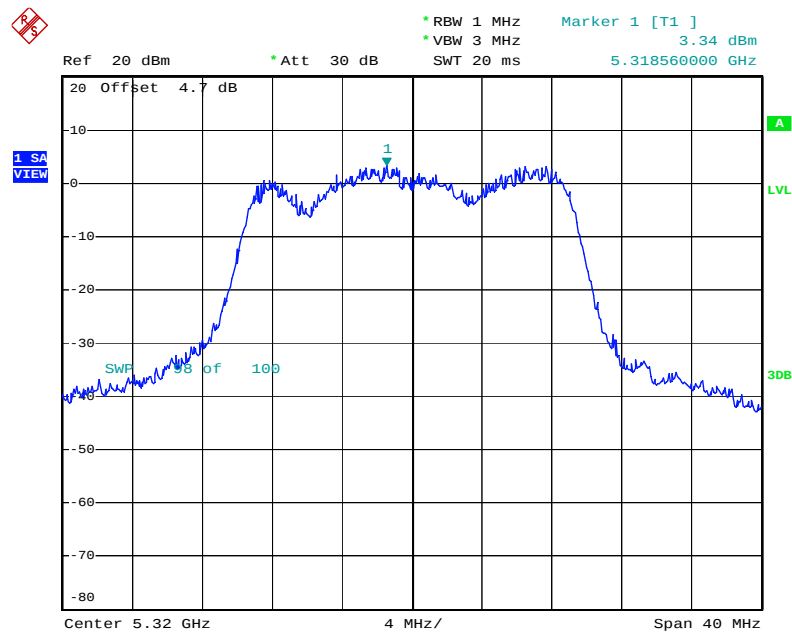


Date: 26.MAR.2009 13:20:38

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5500 MHz

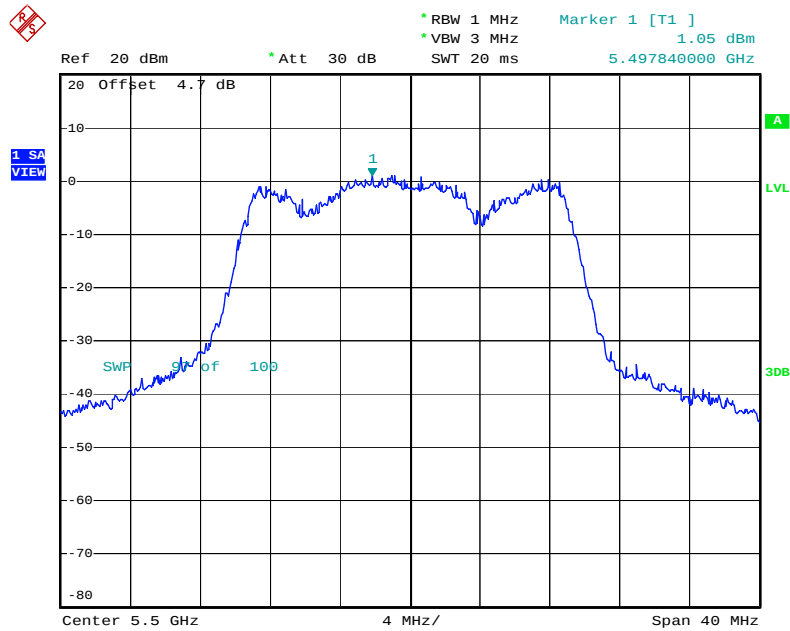


Date: 26.MAR.2009 13:19:27

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5580 MHz

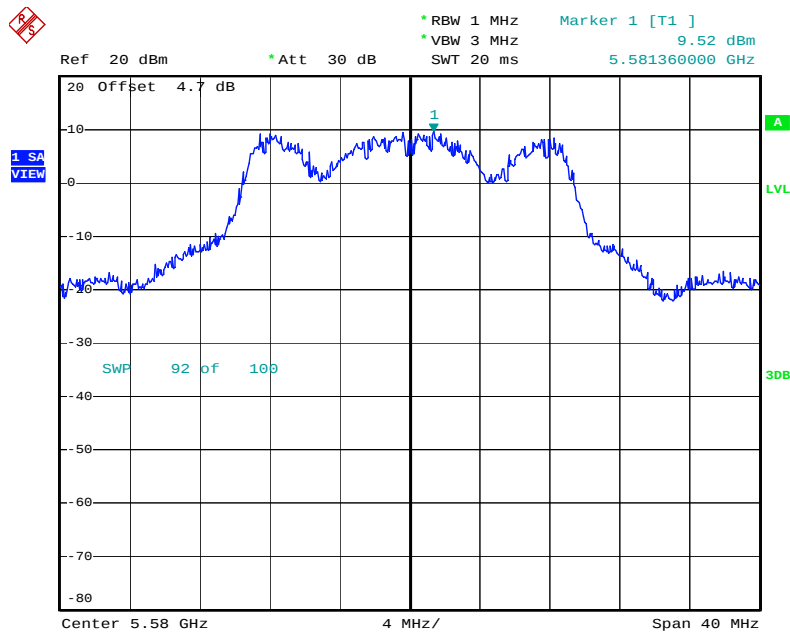


Date: 26.MAR.2009 13:18:32

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5700 MHz

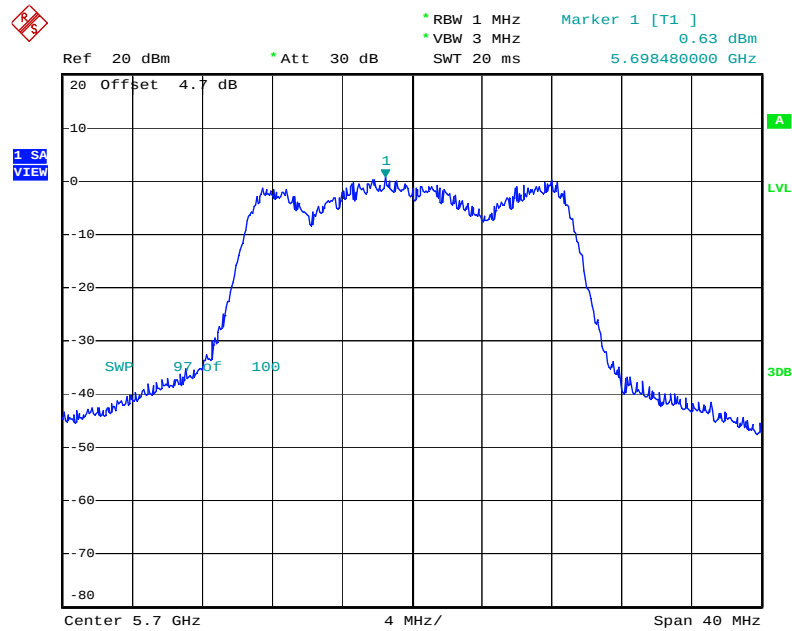


Date: 26.MAR.2009 14:56:36

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5190 MHz

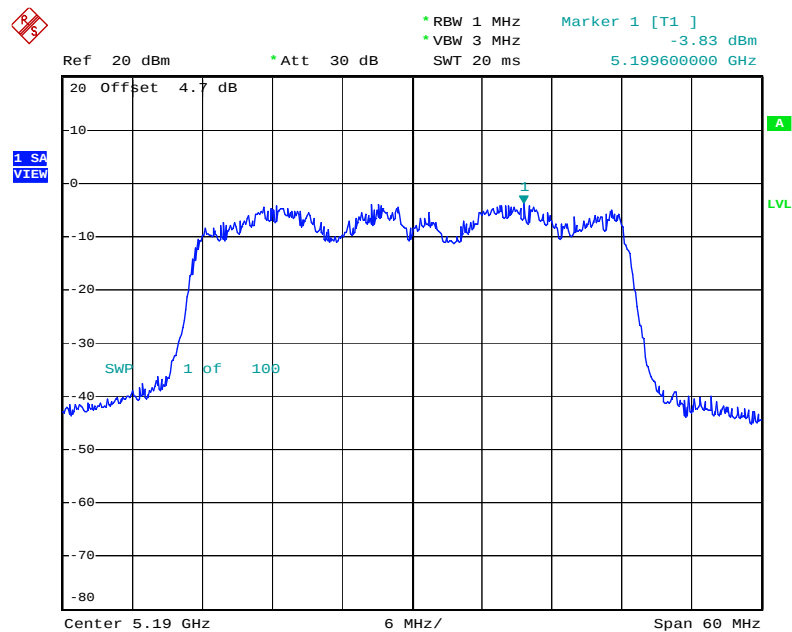


Date: 21.MAY.2009 11:40:56

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5230 MHz

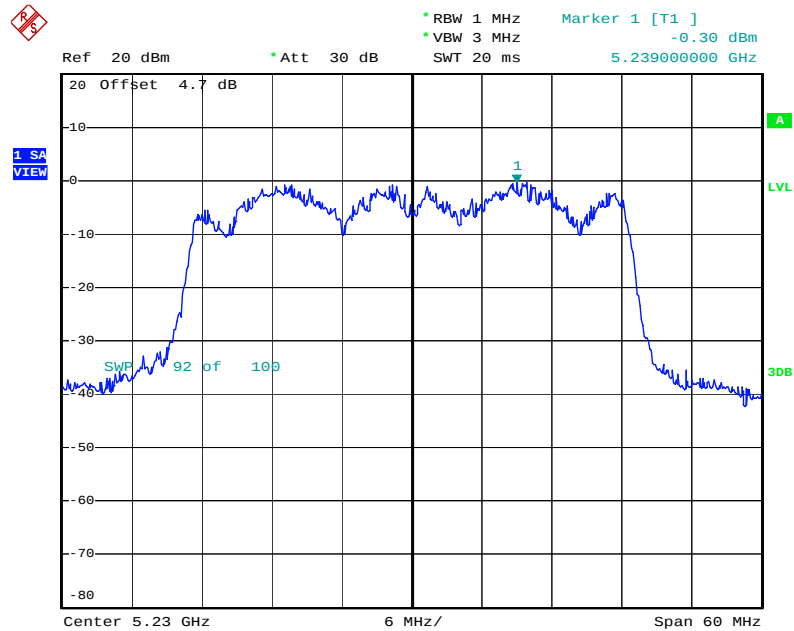


Date: 26.MAR.2009 13:30:18

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5270 MHz

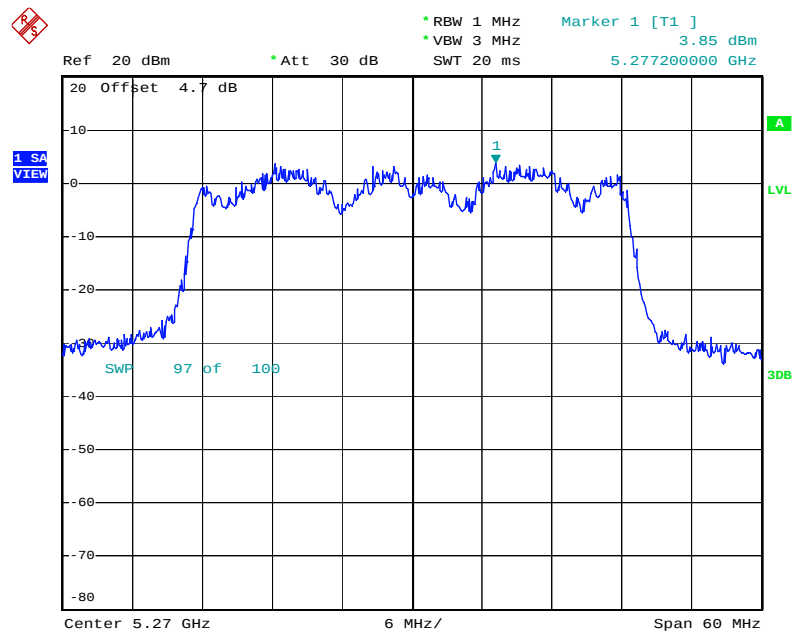


Date: 26.MAR.2009 13:31:14

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5310 MHz

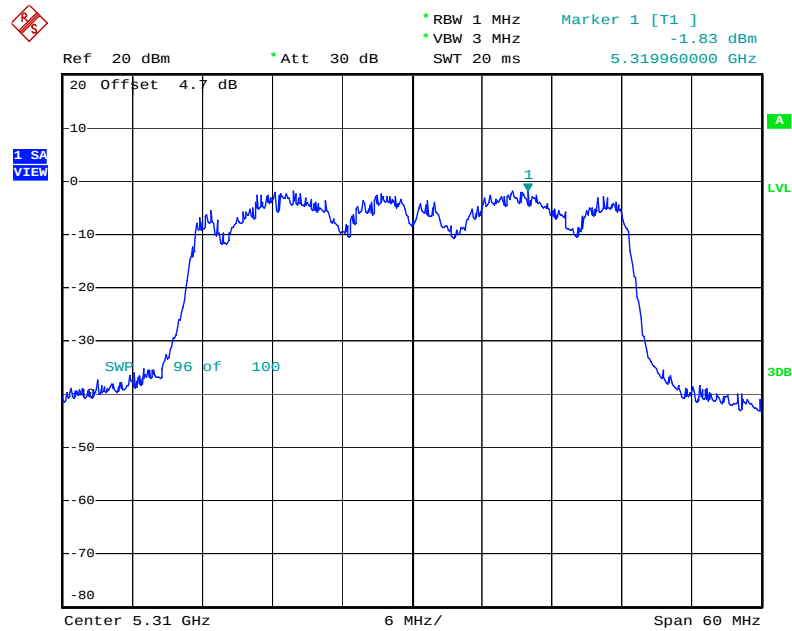


Date: 26.MAR.2009 13:32:19

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5510MHz

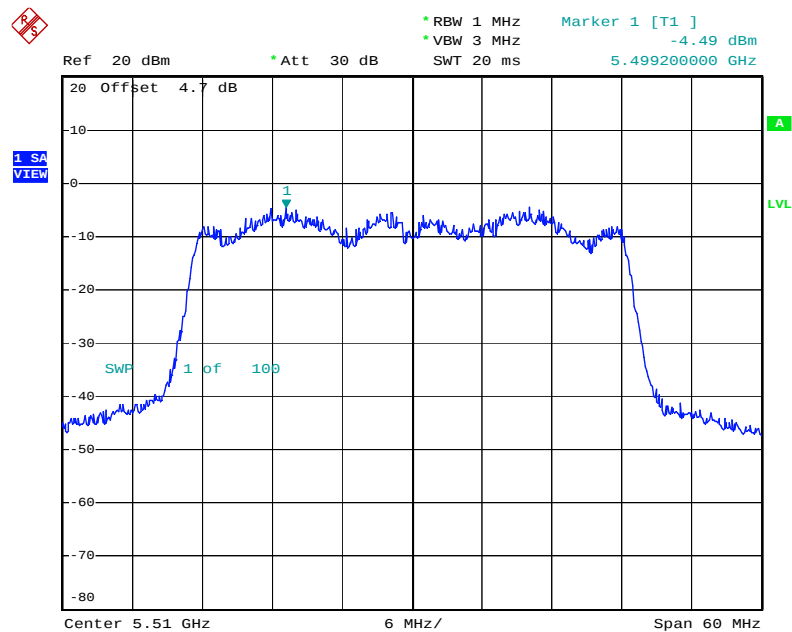


Date: 21.MAY.2009 11:39:34

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5550 MHz

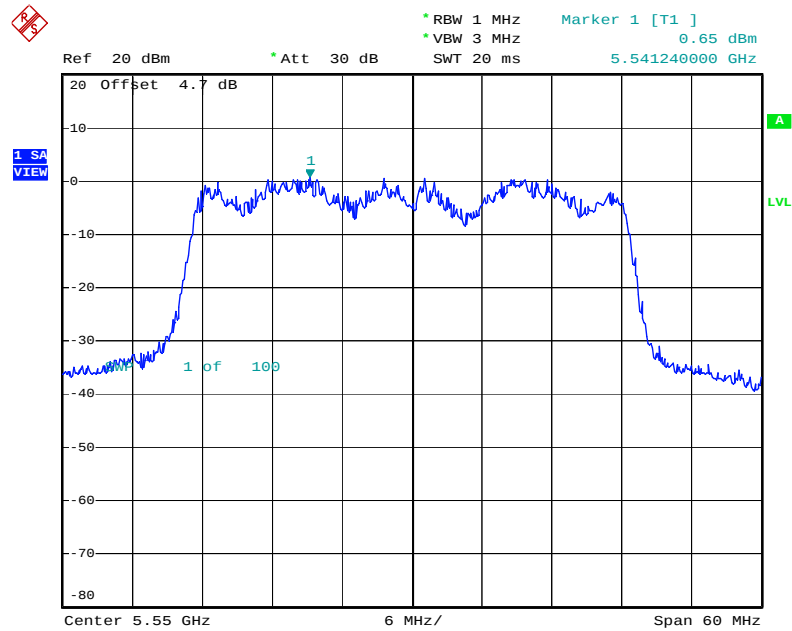


Date: 21.MAY.2009 11:42:20

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5670 MHz

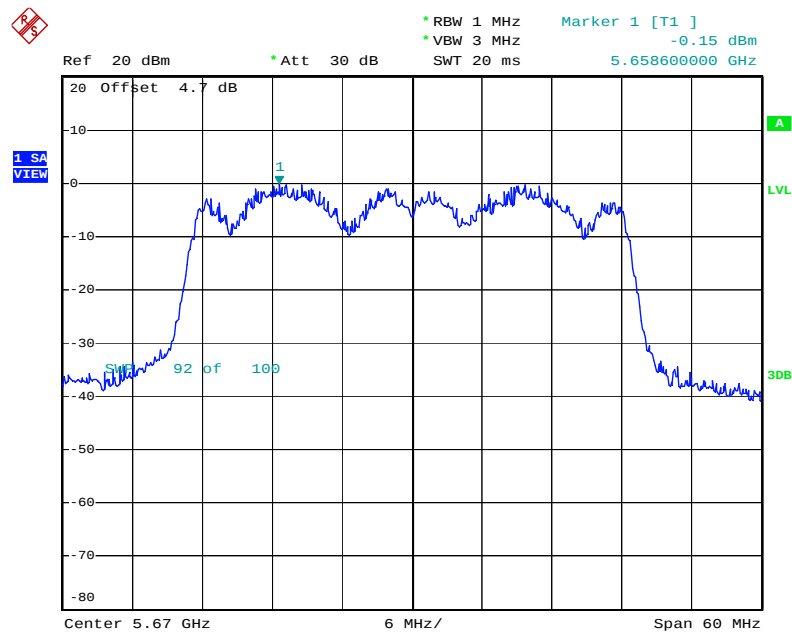


Date: 26.MAR.2009 13:35:52

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5180 MHz

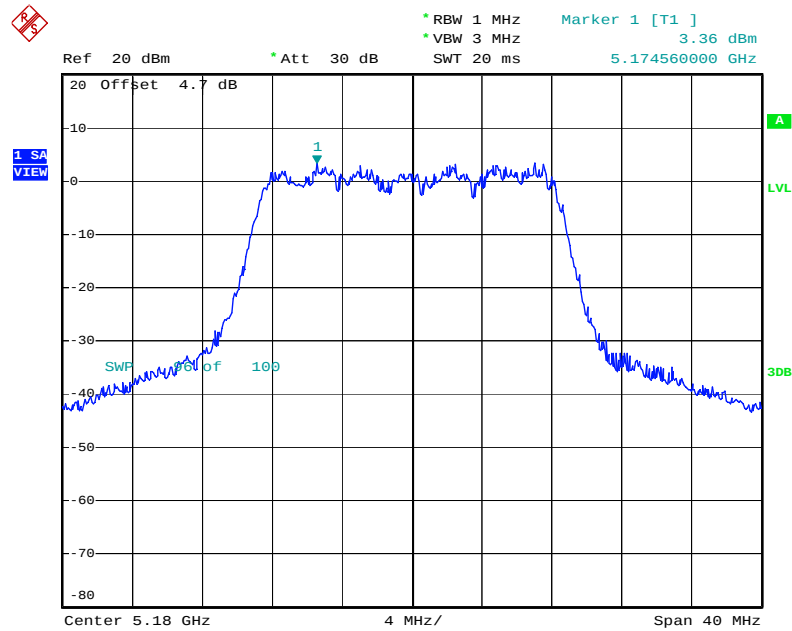


Date: 26.MAR.2009 13:04:11

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5200 MHz

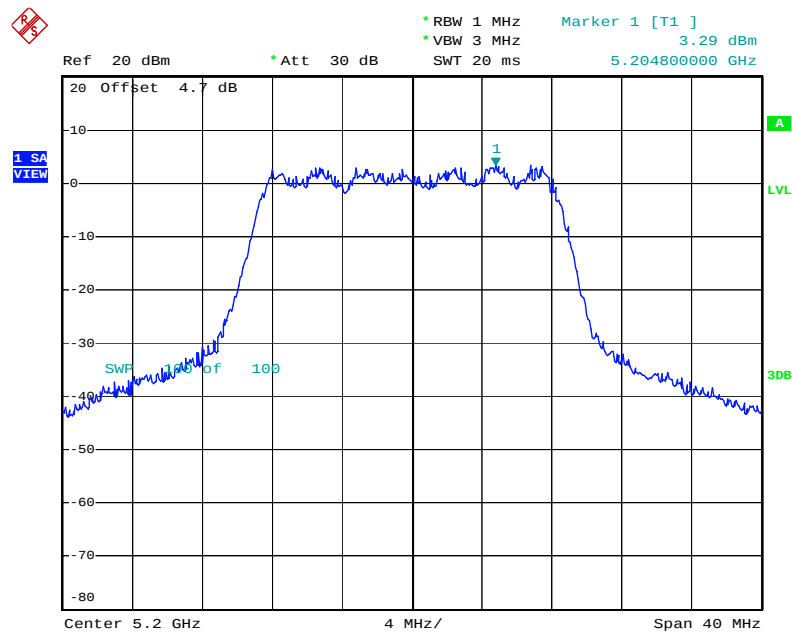


Date: 26.MAR.2009 13:05:51

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5240 MHz

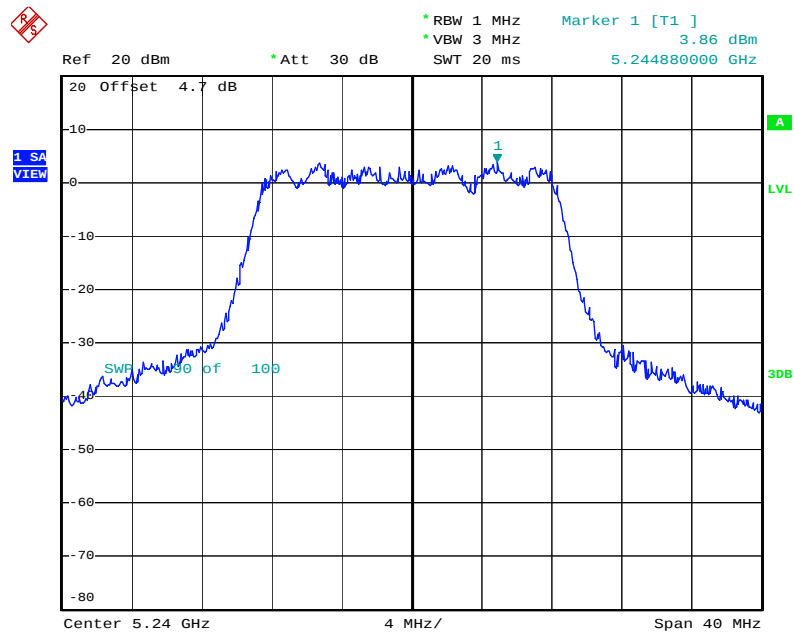


Date: 26.MAR.2009 13:10:15

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5260 MHz

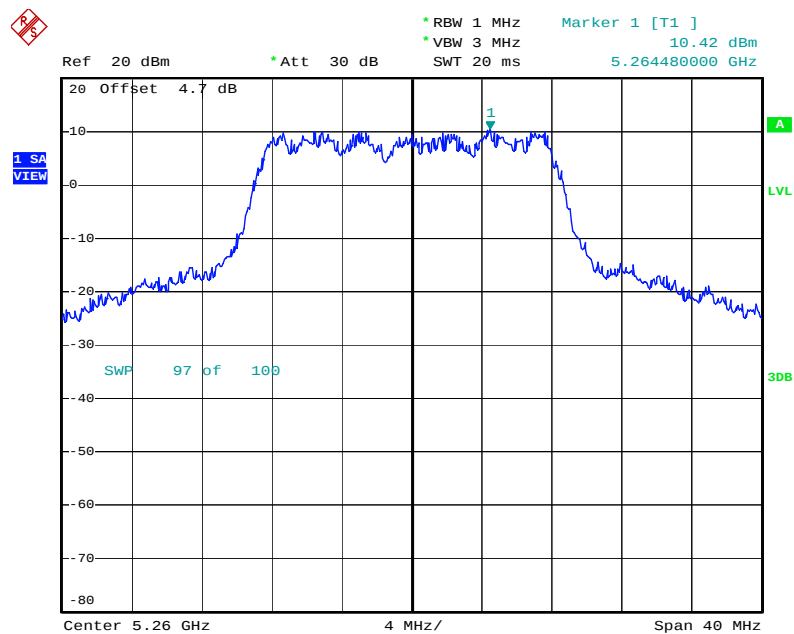


Date: 26.MAR.2009 13:08:25

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5300 MHz

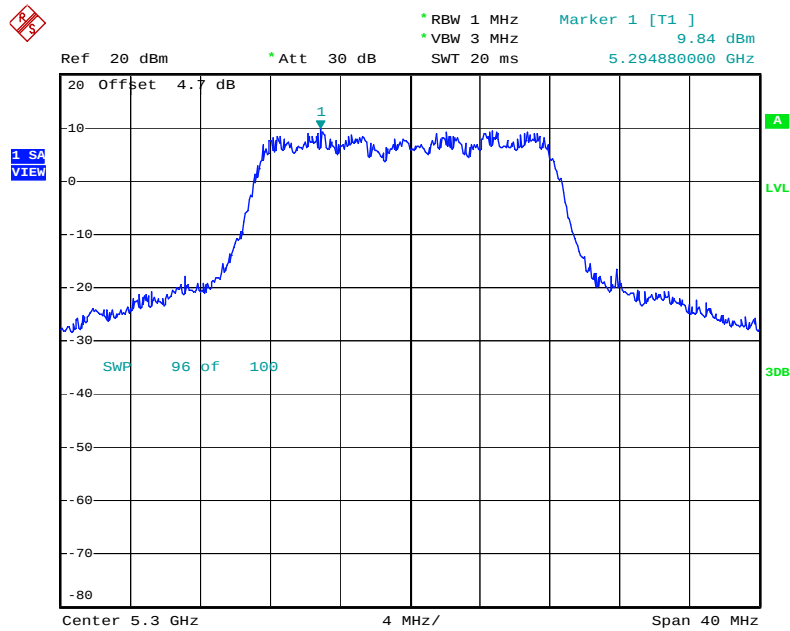


Date: 26.MAR.2009 13:11:36

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5320 MHz

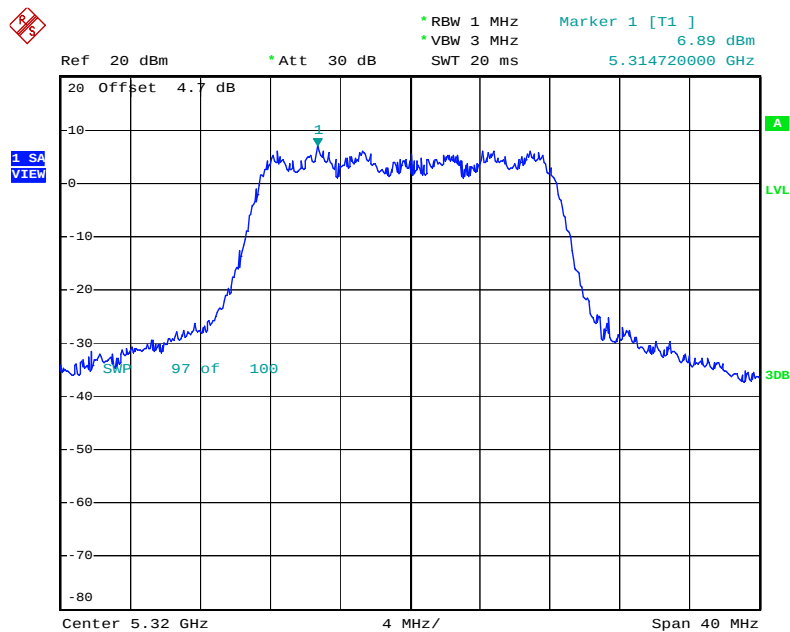


Date: 26.MAR.2009 13:13:00

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5500 MHz

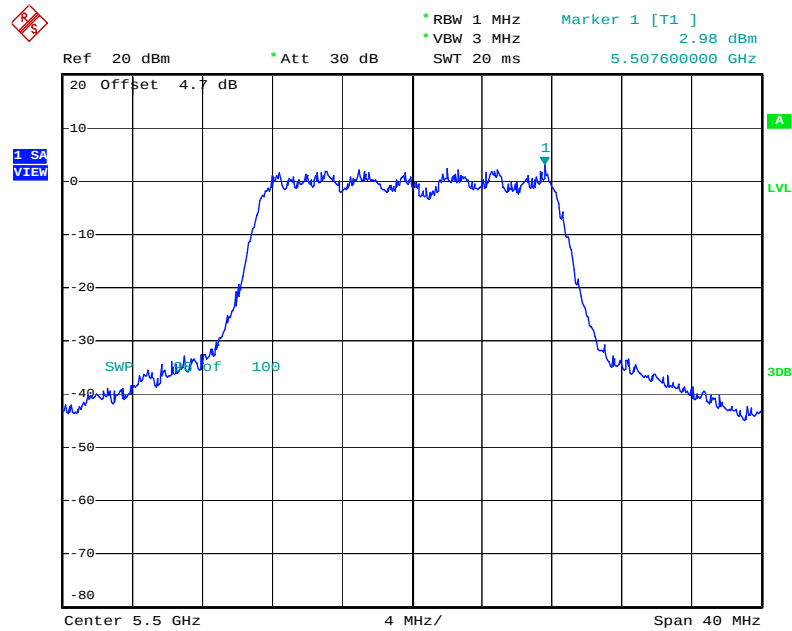


Date: 26.MAR.2009 13:14:18

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5580 MHz

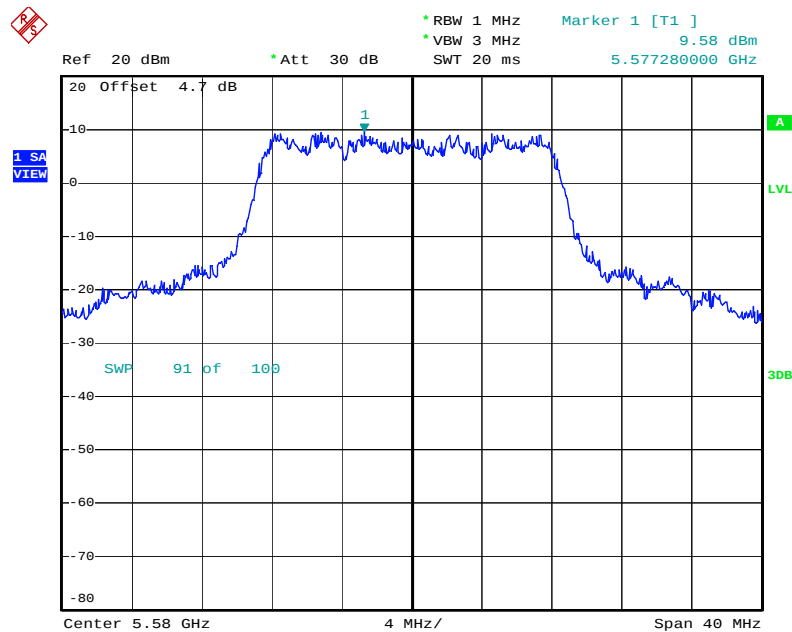

Date: 26.MAR.2009 13:15:24

Power Density Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5700 MHz

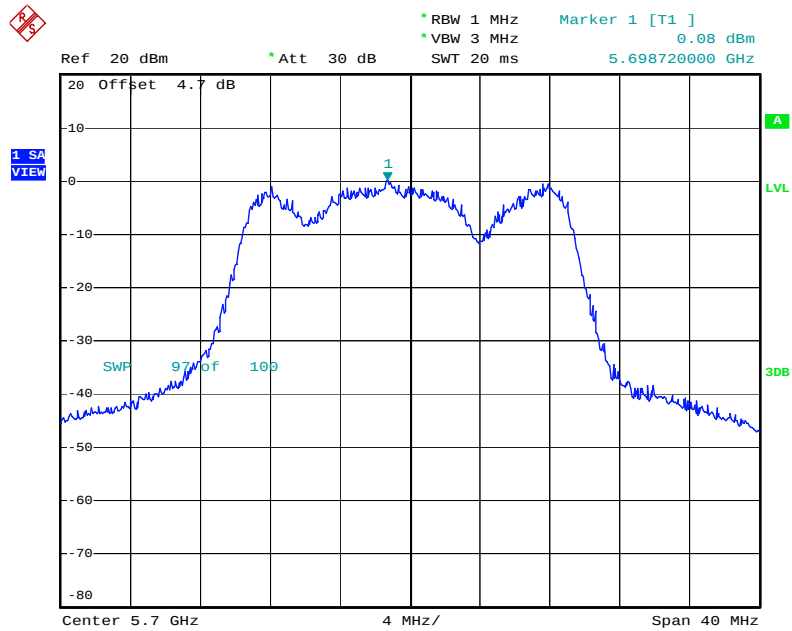

Date: 26.MAR.2009 13:17:39

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW $\geq 1/T$ (Draft n VBW = 300kHz $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.5.4. Test Setup Layout

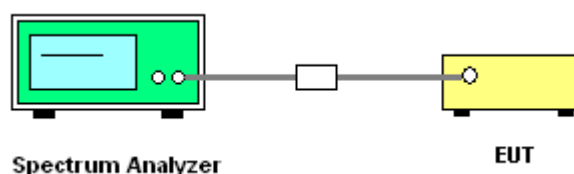

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	24°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	Draft n

Configuration Draft n MCS0 20MHz Ant. A1 + Ant. A2

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	5.53	13	Complies
40	5200 MHz	5.75	13	Complies
48	5240 MHz	6.30	13	Complies
52	5260 MHz	5.77	13	Complies
60	5300 MHz	5.83	13	Complies
64	5320 MHz	5.08	13	Complies
100	5500 MHz	5.47	13	Complies
116	5580 MHz	5.94	13	Complies
140	5700 MHz	5.68	13	Complies

Configuration Draft n MCS0 40MHz Ant. A1 + Ant. A2


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
38	5190 MHz	5.93	13	Complies
46	5230 MHz	5.67	13	Complies
54	5270 MHz	5.33	13	Complies
62	5310 MHz	5.56	13	Complies
102	5510MHz	6.70	13	Complies
110	5550 MHz	5.78	13	Complies
134	5670 MHz	5.41	13	Complies

Temperature	24°C	Humidity	56%
Test Engineer	Jacky Ho	Configurations	802.11a

Configuration IEEE 802.11a Ant. A1 + Ant. A2


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	4.71	13	Complies
40	5200 MHz	4.94	13	Complies
48	5240 MHz	5.31	13	Complies
52	5260 MHz	4.11	13	Complies
60	5300 MHz	5.37	13	Complies
64	5320 MHz	5.56	13	Complies
100	5500 MHz	4.98	13	Complies
116	5580 MHz	4.90	13	Complies
140	5700 MHz	5.27	13	Complies

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5180 MHz

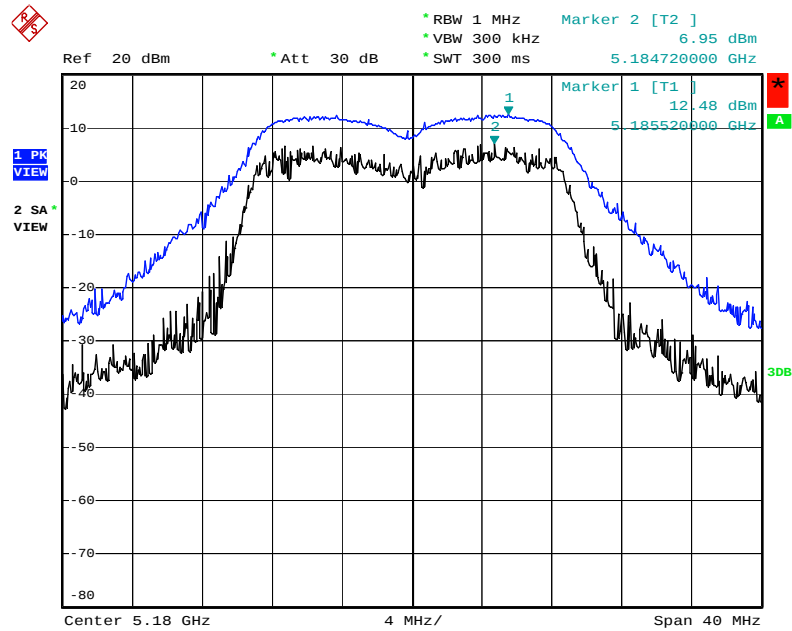


Date: 26.MAR.2009 13:24:43

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5200 MHz

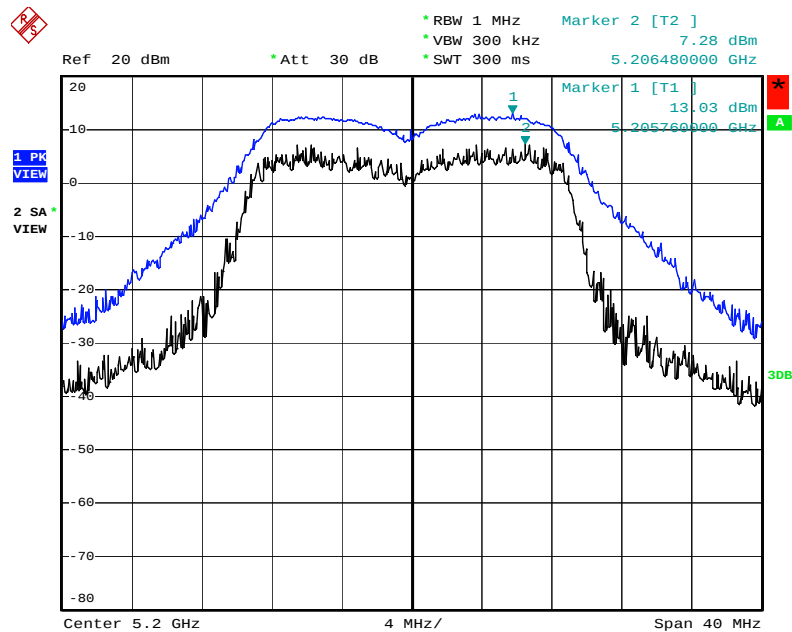


Date: 26.MAR.2009 13:24:00

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5240 MHz

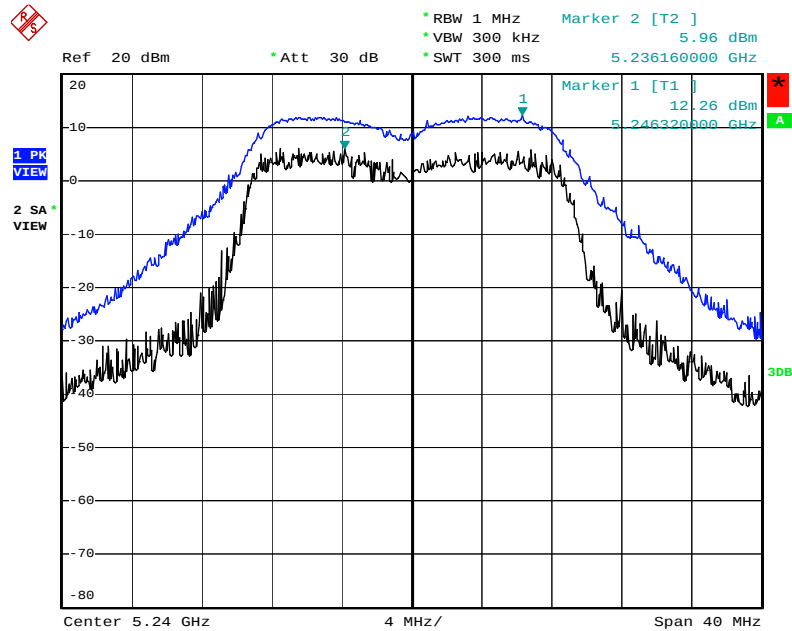


Date: 26.MAR.2009 13:23:14

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5260 MHz

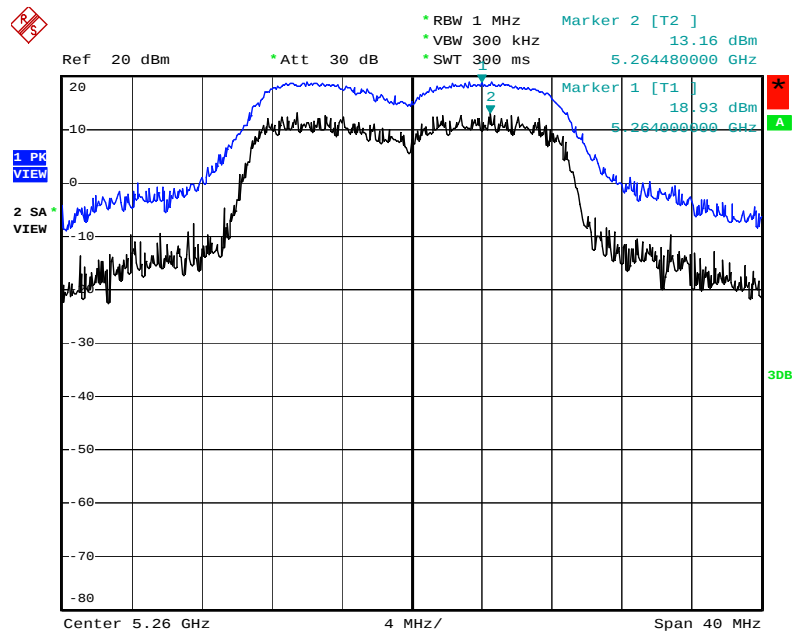


Date: 26.MAR.2009 13:22:25

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5300 MHz

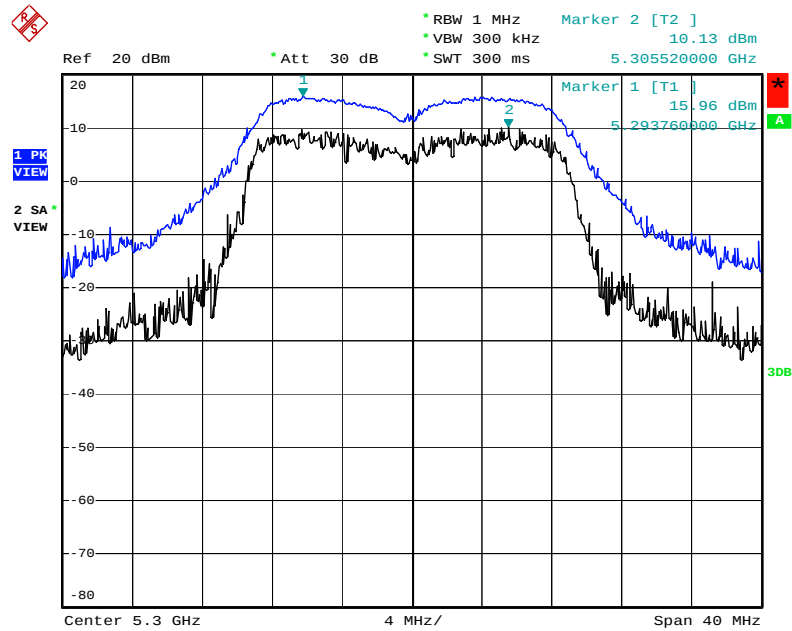


Date: 26.MAR.2009 13:21:35

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5320 MHz

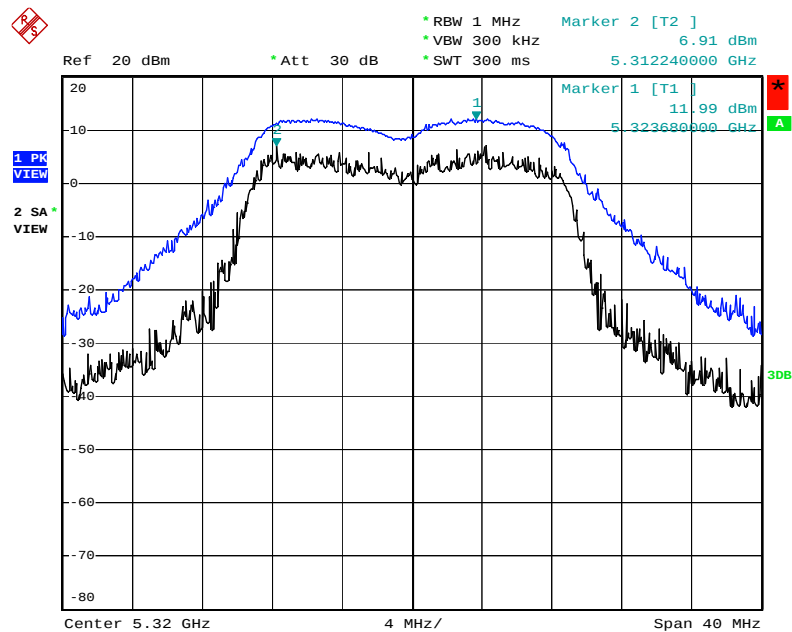


Date: 26.MAR.2009 13:20:50

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5500 MHz

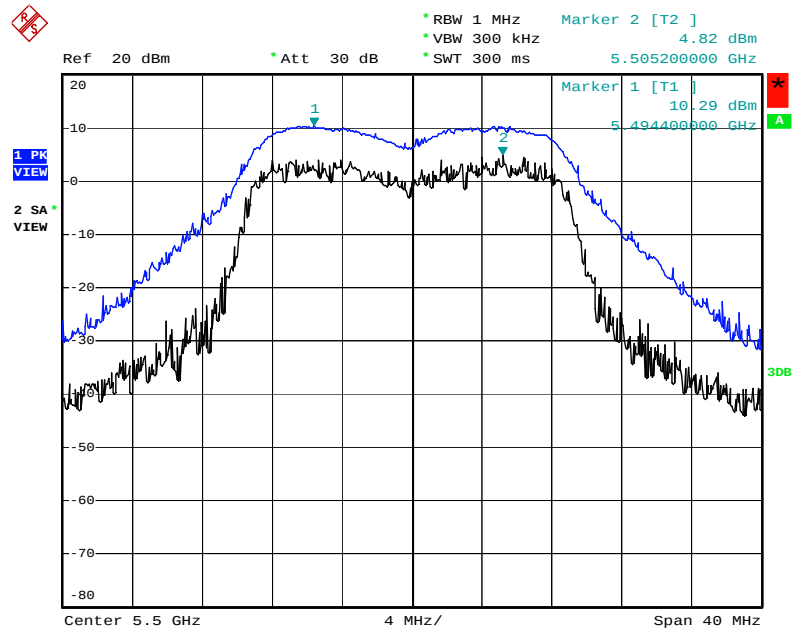


Date: 26.MAR.2009 13:19:40

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5580 MHz

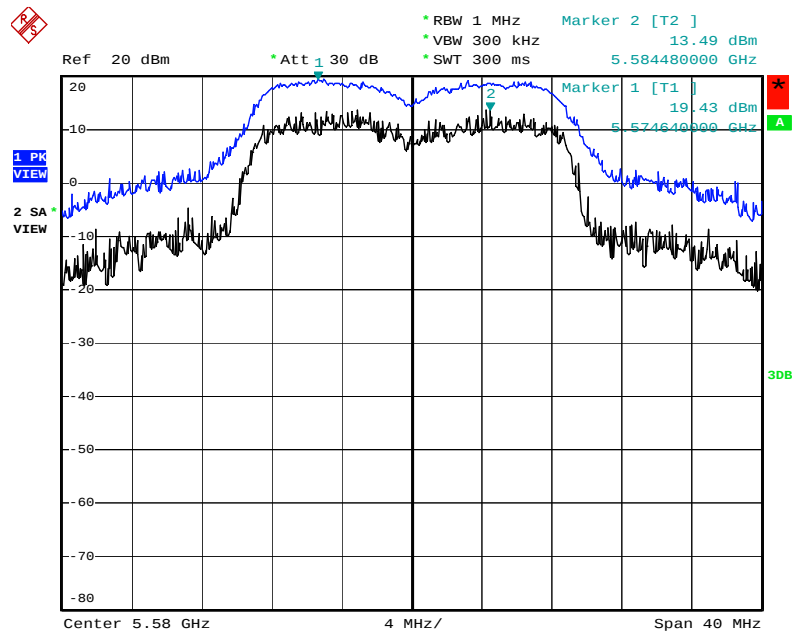


Date: 26.MAR.2009 13:18:45

Peak Excursion Plot on Configuration Drafft n MCS0 20MHz Ant. A1 + Ant. A2 / 5700 MHz

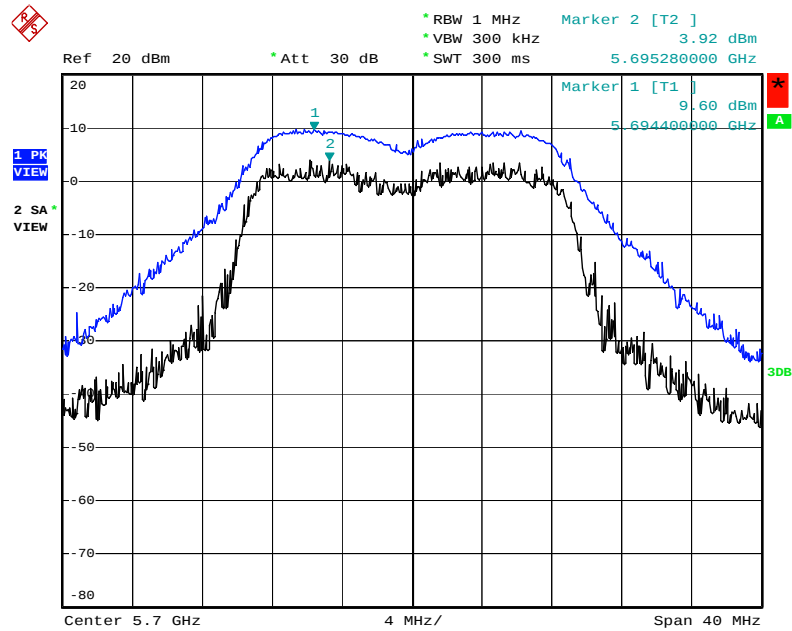


Date: 26.MAR.2009 14:56:49

Peak Excursion Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5190 MHz

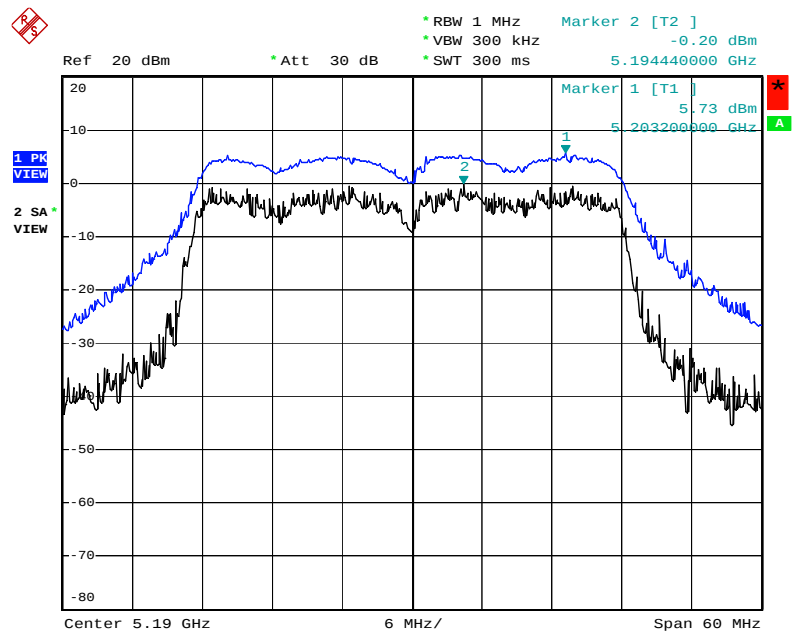


Date: 21.MAY.2009 11:41:08

Peak Excursion Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5230 MHz

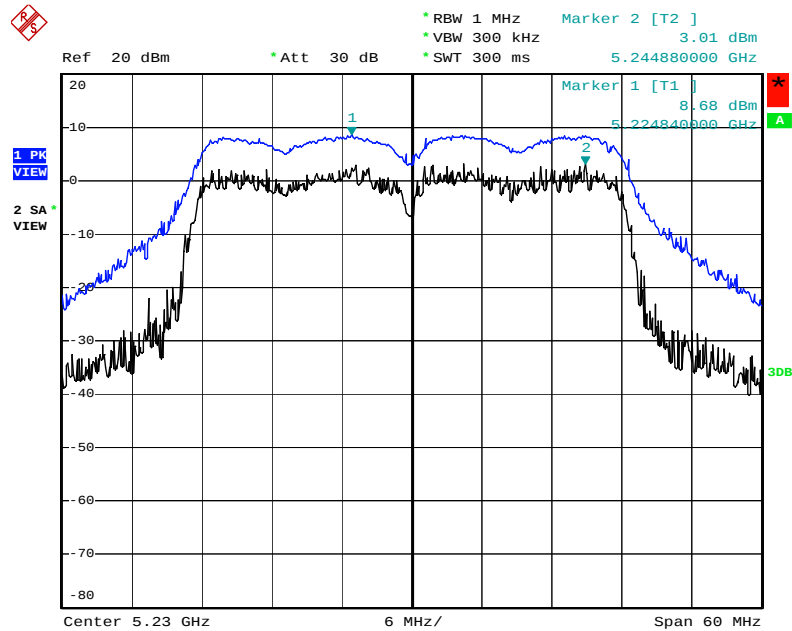


Date: 26.MAR.2009 13:30:30

Peak Excursion Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5270 MHz

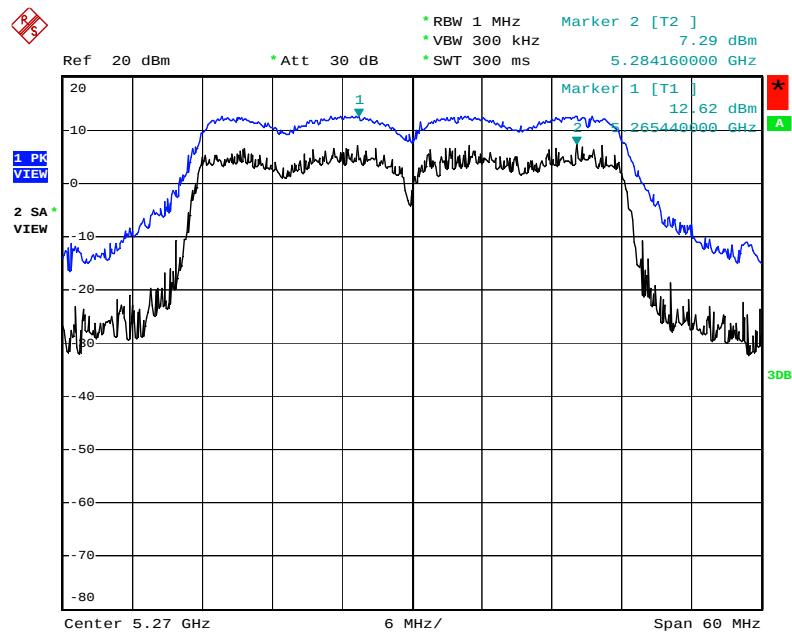


Date: 26.MAR.2009 13:31:26

Peak Excursion Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5310 MHz

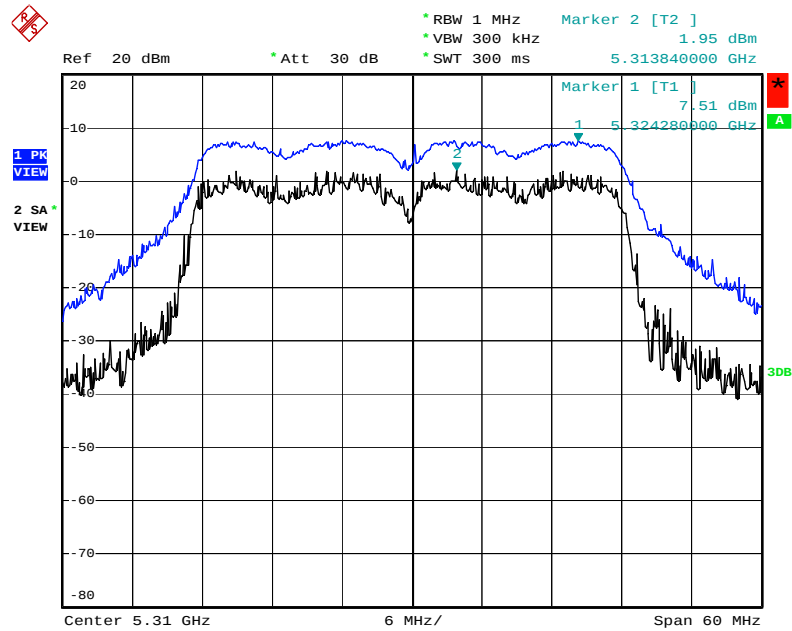


Date: 26.MAR.2009 13:32:31

Peak Excursion Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5510MHz

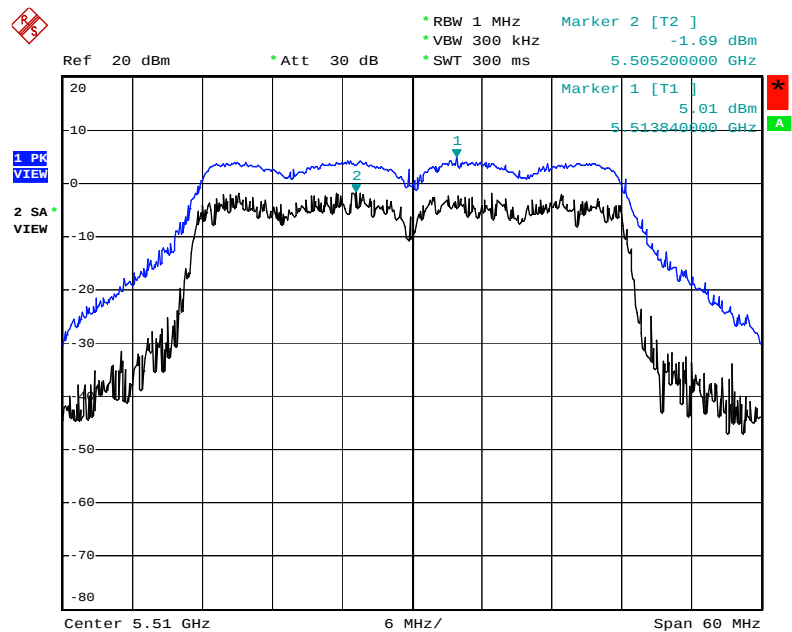


Date: 21.MAY.2009 11:39:46

Peak Excursion Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5550 MHz

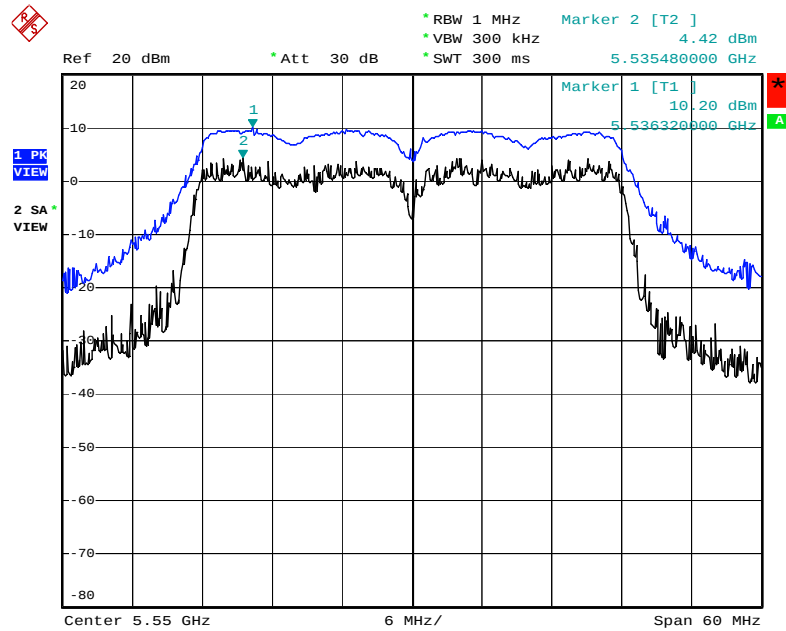


Date: 21.MAY.2009 11:42:32

Peak Excursion Plot on Configuration Drafft n MCS0 40MHz Ant. A1 + Ant. A2 / 5670 MHz

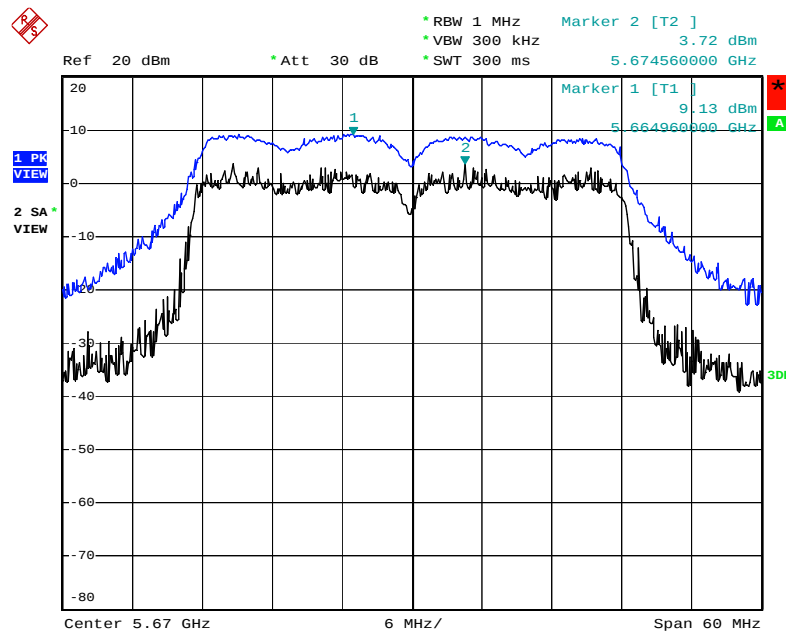


Date: 26.MAR.2009 13:36:04

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5180 MHz

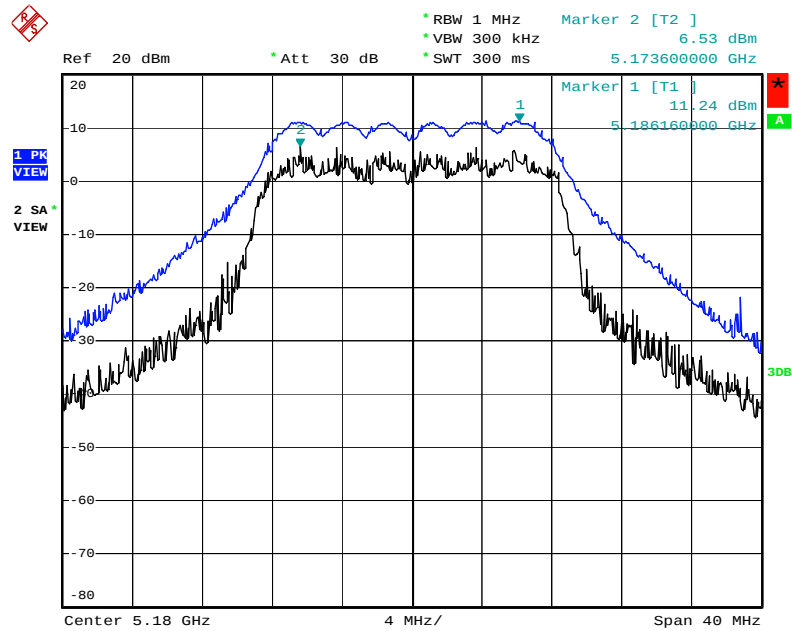


Date: 26.MAR.2009 13:04:23

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5200 MHz

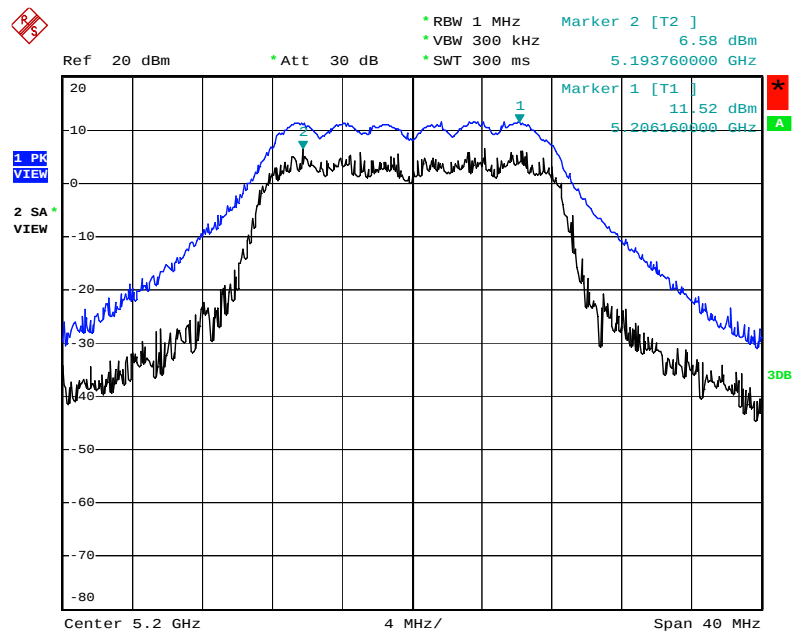


Date: 26.MAR.2009 13:06:03

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5240 MHz

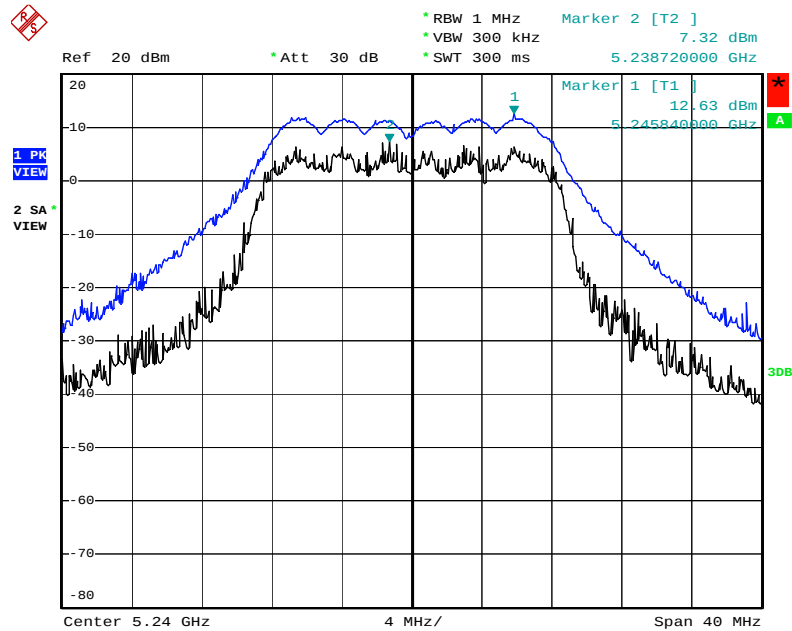


Date: 26.MAR.2009 13:10:27

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5260 MHz

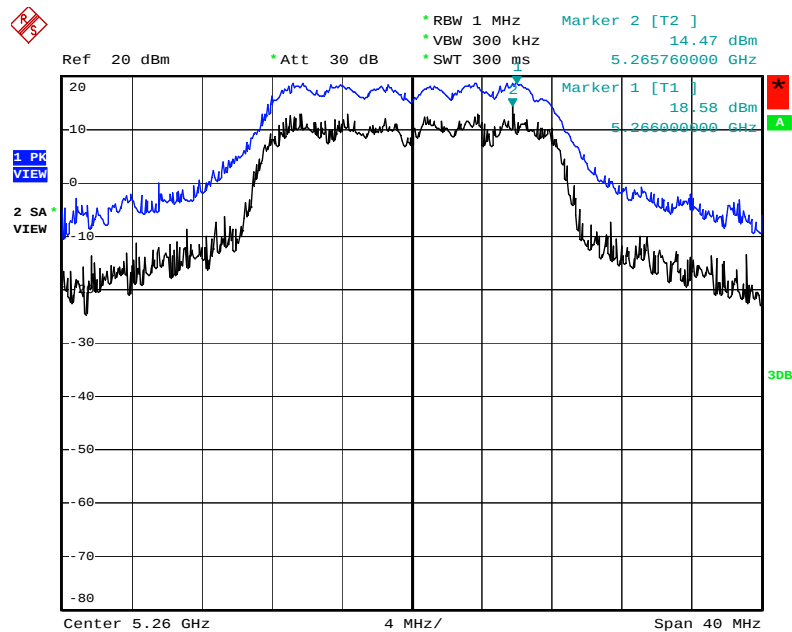


Date: 26.MAR.2009 13:08:37

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5300 MHz

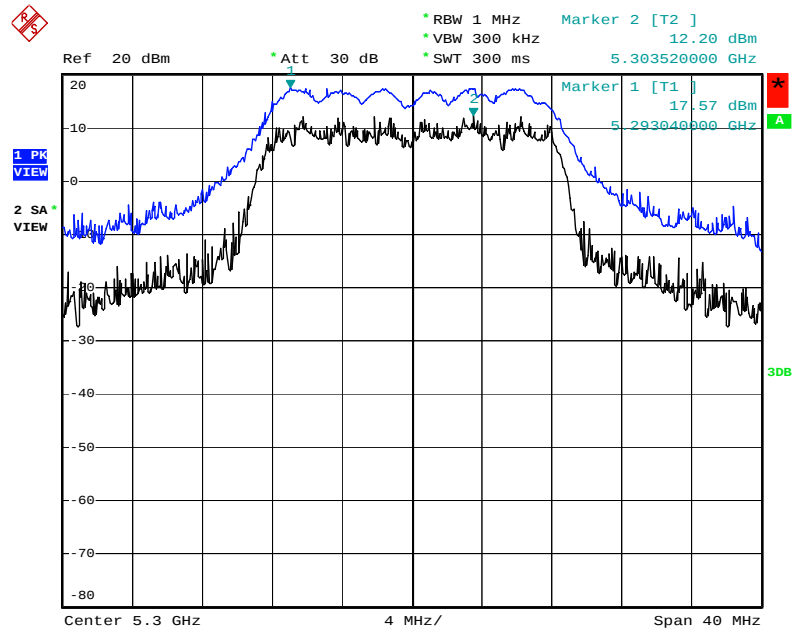


Date: 26.MAR.2009 13:11:48

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5320 MHz

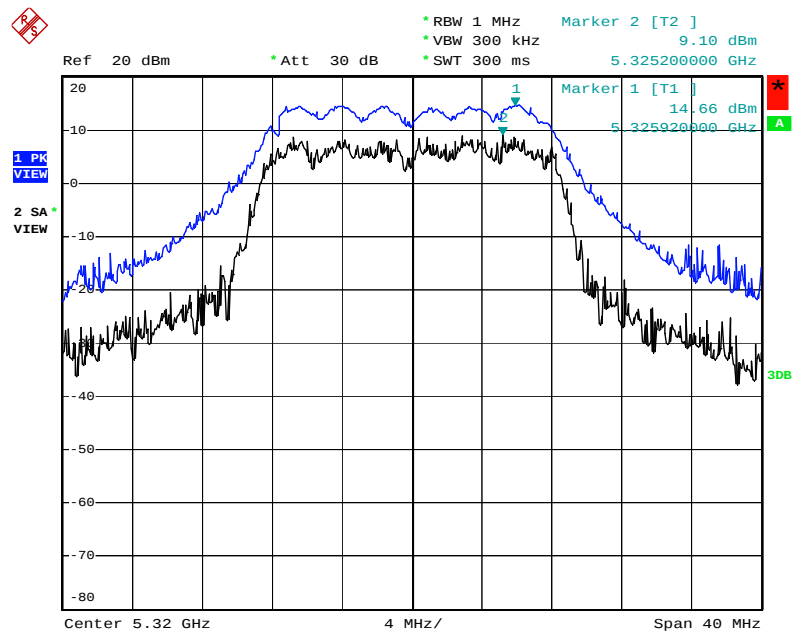


Date: 26.MAR.2009 13:13:12

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5500 MHz

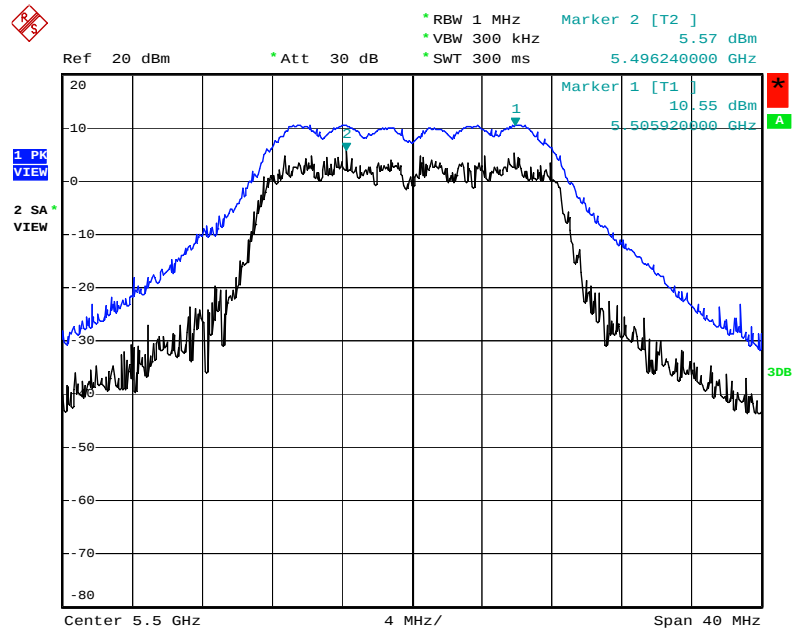


Date: 26.MAR.2009 13:14:31

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5580 MHz

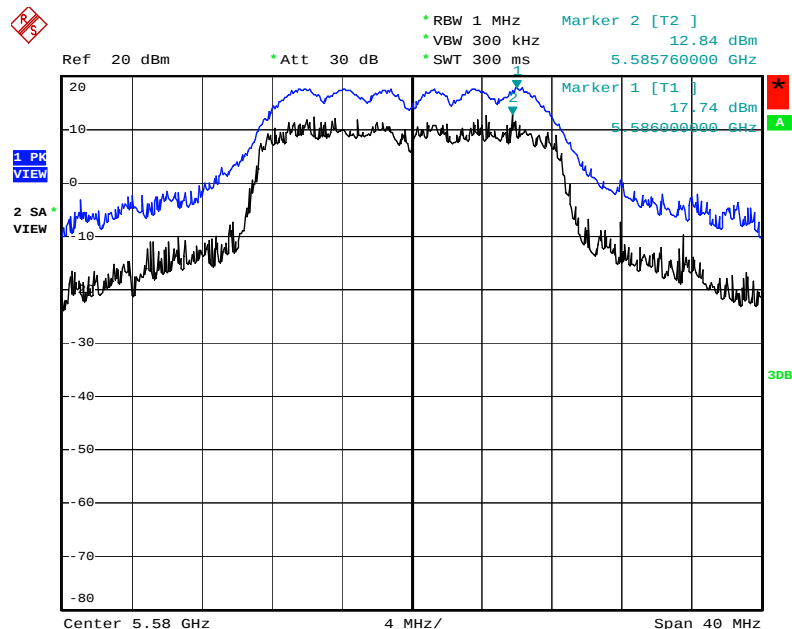

Date: 26.MAR.2009 13:15:37

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A1 + Ant. A2 / 5700 MHz

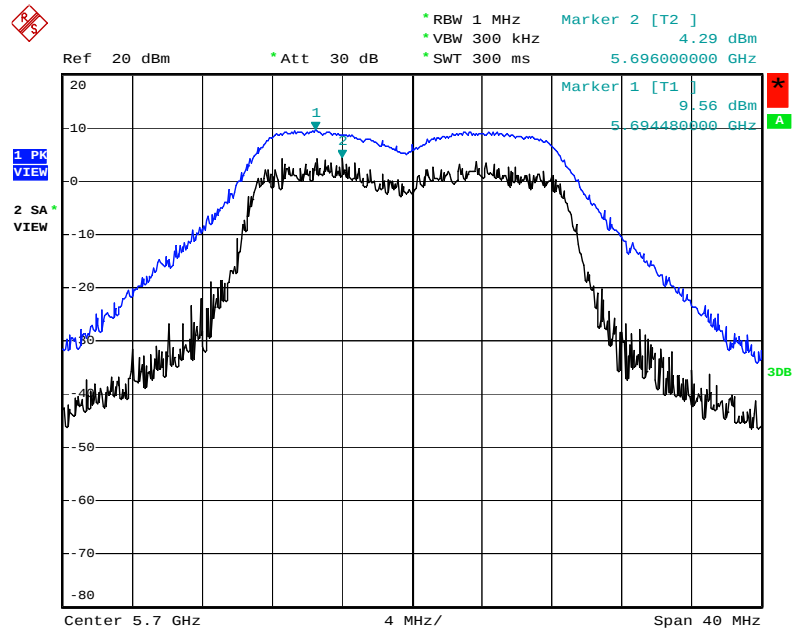

Date: 26.MAR.2009 13:17:52

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

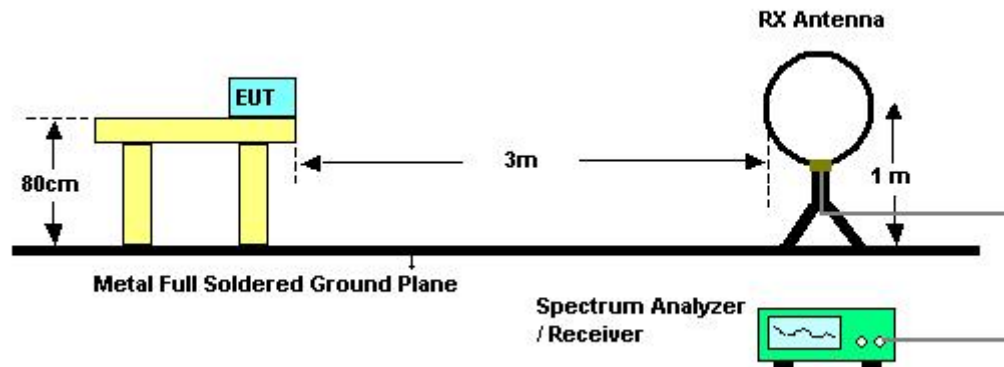

For radiated emissions above 30MHz

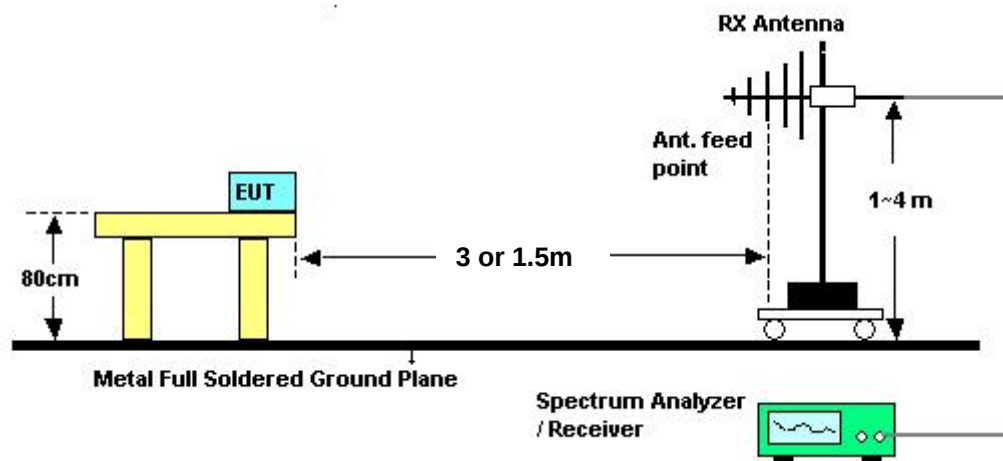

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Normal Link / Ant. A1 +Ant. A2

Horizontal

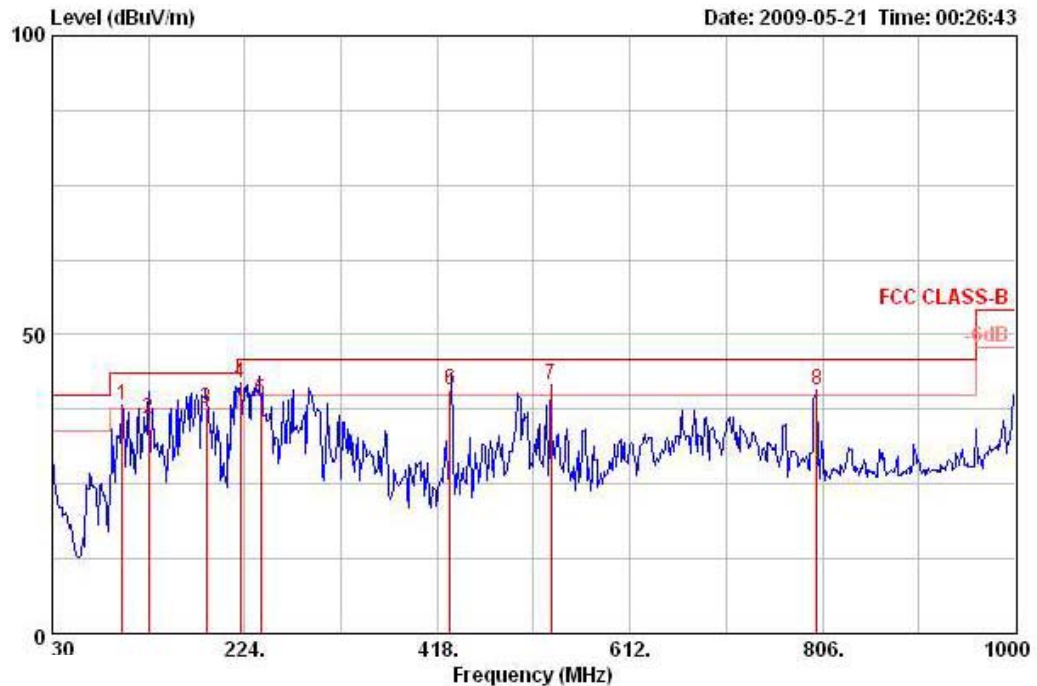

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 !	100.810	38.31	-5.19	43.50	53.65	11.06	27.60	1.20	Peak	HORIZONTAL	0	100
2	127.290	36.03	-7.47	43.50	50.00	12.23	27.47	1.27	QP	HORIZONTAL	215	100
3 !	185.120	37.67	-5.83	43.50	51.10	12.12	27.17	1.63	QP	HORIZONTAL	167	100
4 !	219.150	41.94	-4.06	46.00	56.75	10.48	27.06	1.78	Peak	HORIZONTAL	0	100
5	240.157	38.90	-7.10	46.00	52.00	12.05	27.02	1.86	QP	HORIZONTAL	351	100
6 !	430.970	40.88	-5.12	46.00	49.60	16.54	27.75	2.48	QP	HORIZONTAL	210	100
7 !	532.460	41.72	-4.28	46.00	49.06	18.00	28.10	2.76	Peak	HORIZONTAL	0	100
8 !	800.180	40.63	-5.37	46.00	45.16	19.77	27.60	3.30	Peak	HORIZONTAL	0	100

Vertical

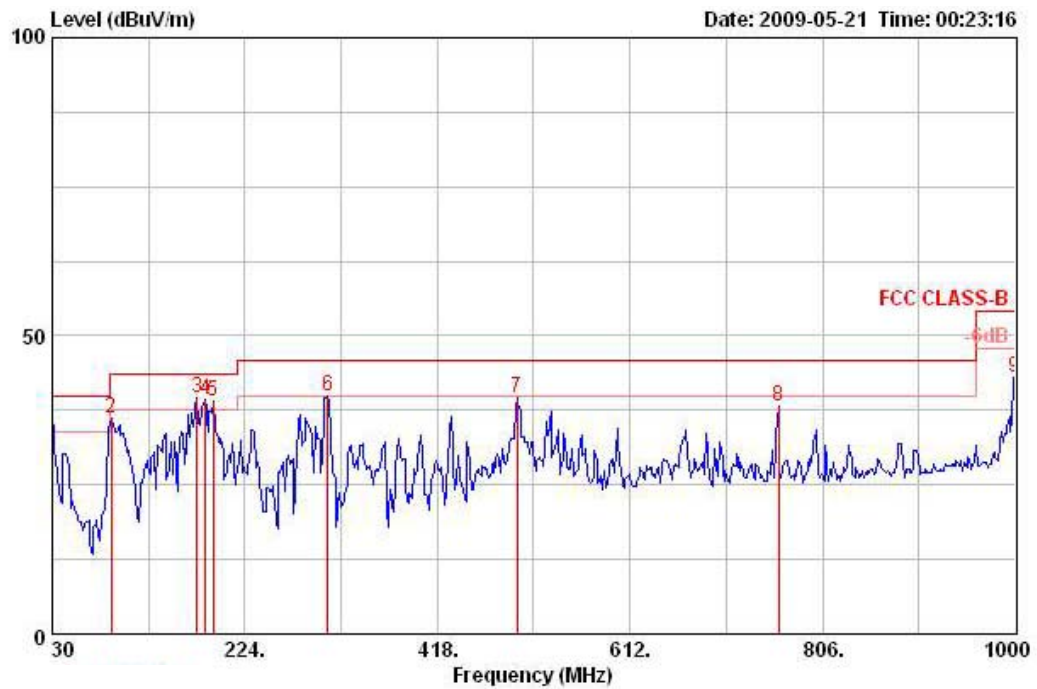

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	30.000	36.65	-3.35	40.00	45.19	18.76	27.80	0.50	Peak	VERTICAL	0	400
2	89.170	36.13	-7.37	43.50	53.87	8.80	27.65	1.10	Peak	VERTICAL	0	400
3	175.500	39.49	-4.01	43.50	52.02	13.12	27.22	1.58	Peak	VERTICAL	0	400
4	184.230	39.26	-4.24	43.50	52.50	12.32	27.18	1.62	Peak	VERTICAL	0	400
5	191.990	39.09	-4.41	43.50	53.88	10.69	27.14	1.66	Peak	VERTICAL	0	400
6	307.420	39.95	-6.05	46.00	51.21	13.57	26.95	2.12	Peak	VERTICAL	0	400
7	498.510	39.64	-6.36	46.00	47.44	17.60	28.09	2.70	Peak	VERTICAL	0	400
8	761.380	38.09	-7.91	46.00	42.88	19.51	27.75	3.45	Peak	VERTICAL	0	400
9	1000.000	43.01	-10.99	54.00	45.02	21.29	27.00	3.70	Peak	VERTICAL	0	400

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n MCS0 20MHz Ch 36 / Ant. A1 + Ant. A2

Horizontal

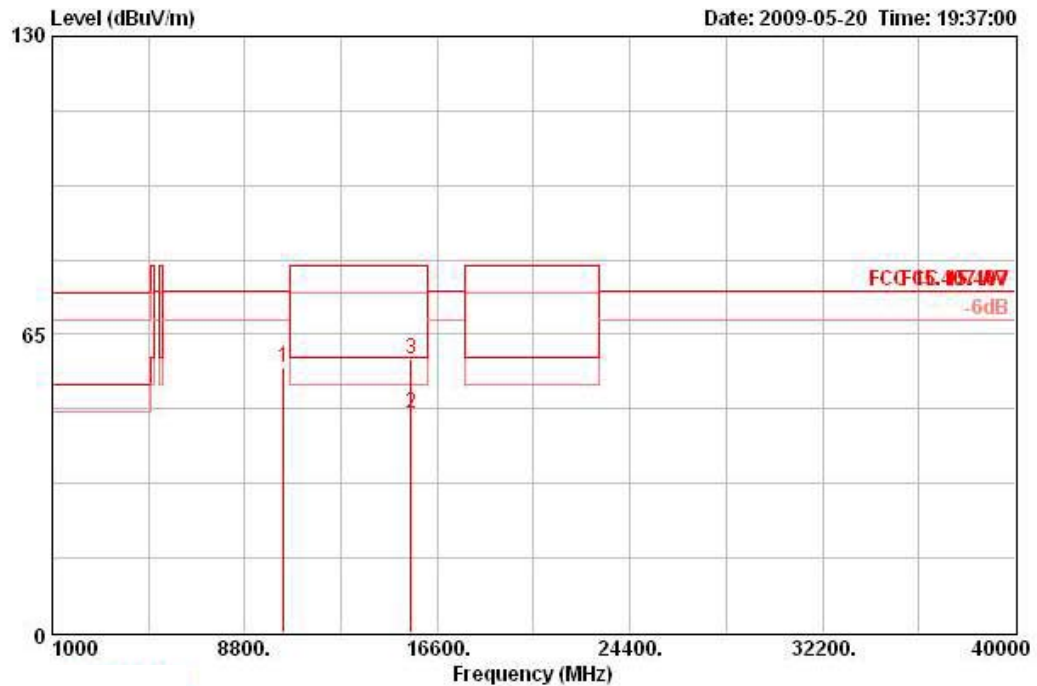

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10359.990	57.95	-16.35	74.30	43.28	39.76	35.31	10.22	PEAK	HORIZONTAL	360	100
2	15539.990	47.81	-12.19	60.00	33.57	38.14	35.59	11.69	AVERAGE	HORIZONTAL	0	100
3	15540.000	59.54	-20.46	80.00	45.30	38.14	35.59	11.69	PEAK	HORIZONTAL	0	100


Vertical

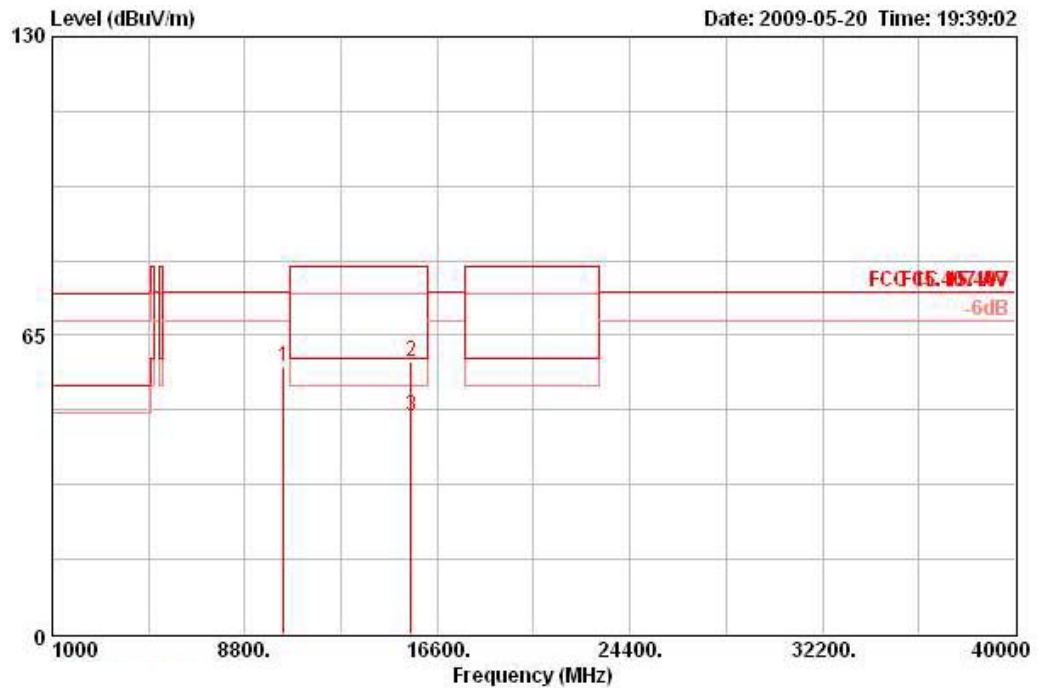

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10360.000	58.10	-16.20	74.30	43.43	39.76	35.31	10.22	PEAK	VERTICAL	0	100
2	15539.980	59.41	-20.59	80.00	45.17	38.14	35.59	11.69	PEAK	VERTICAL	360	100
3	15540.010	47.53	-12.47	60.00	33.28	38.14	35.59	11.69	AVERAGE	VERTICAL	360	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n MCS0 20MHz Ch 40 / Ant. A1 + Ant. A2

Horizontal

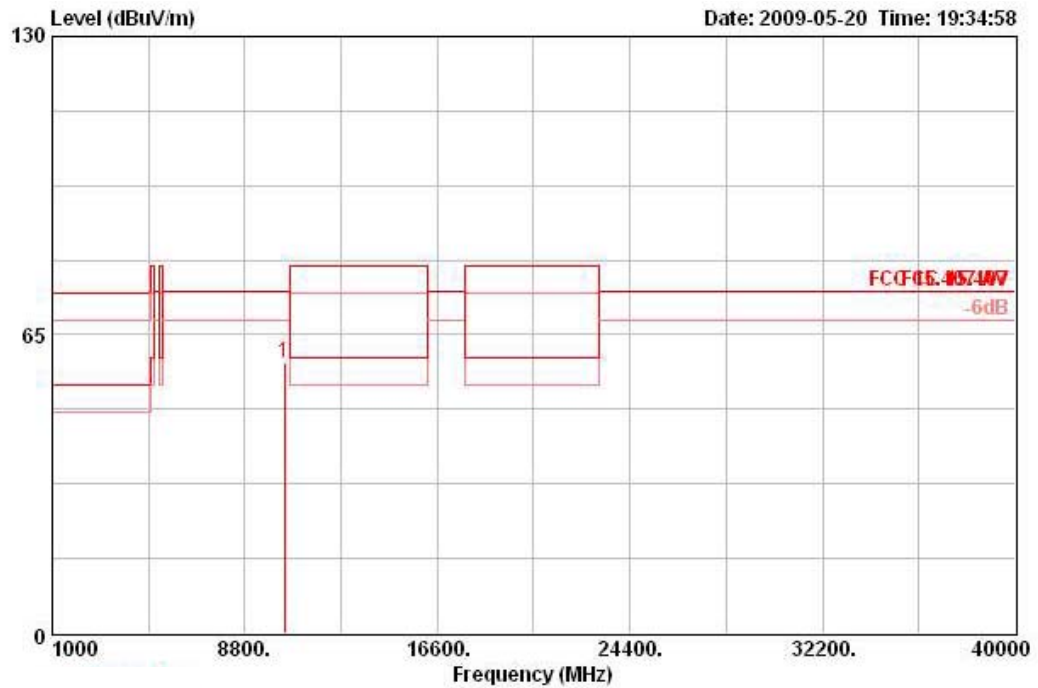

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Remark	Pol/Phase	Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss			Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10399.990	58.81	-15.49	74.30	44.00	39.82	35.28	10.27	PEAK	HORIZONTAL	0	100


Vertical

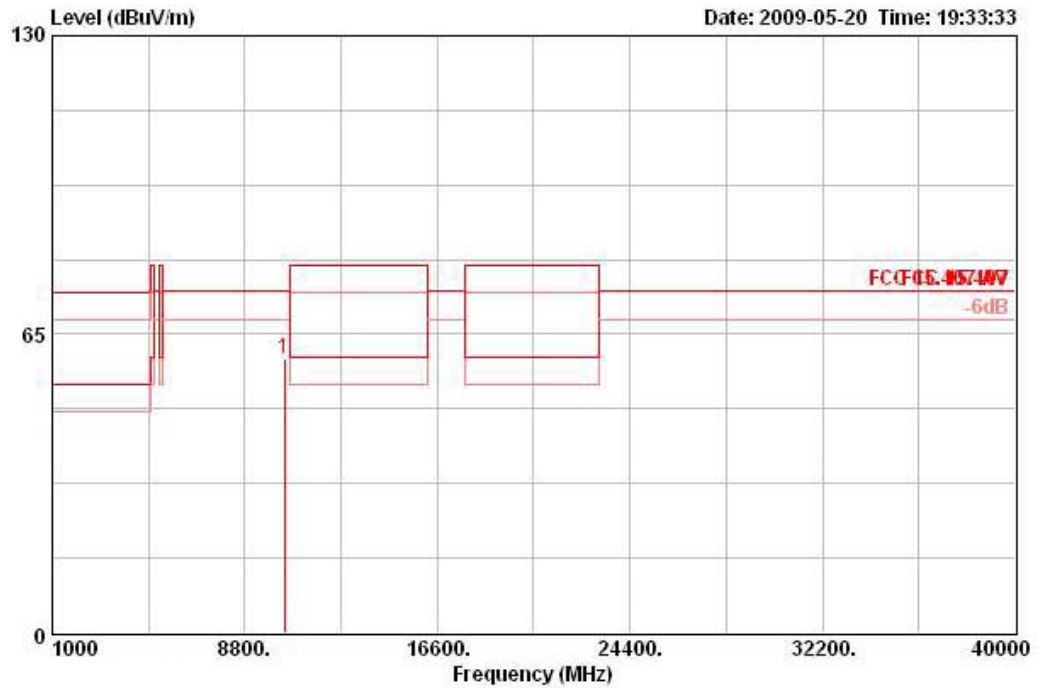

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	10400.000	59.54	-14.76	74.30	44.73	39.82	35.28	10.27 PEAK	VERTICAL	360	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n MCS0 20MHz Ch 48 / Ant. A1 + Ant. A2

Horizontal

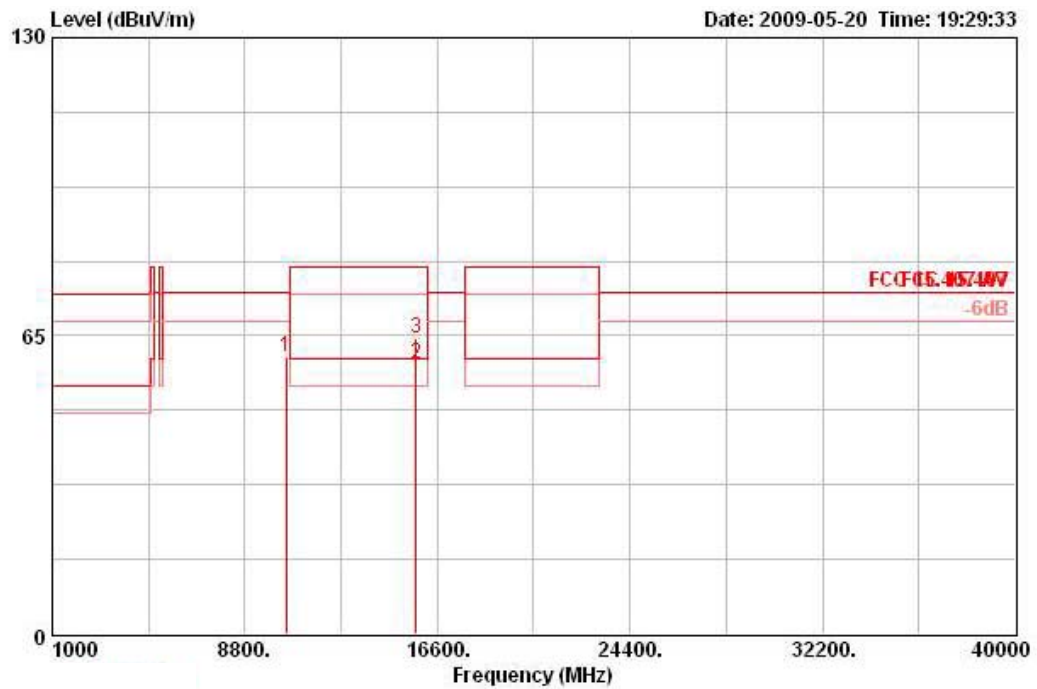

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10479.990	60.53	-13.77	74.30	45.43	39.97	35.21	10.35	PEAK	HORIZONTAL	360	100
2 @	15719.980	58.73	-1.27	60.00	44.61	37.84	35.56	11.83	AVERAGE	HORIZONTAL	0	40
3	15720.000	64.56	-15.44	80.00	50.45	37.84	35.56	11.83	PEAK	HORIZONTAL	0	100


Vertical

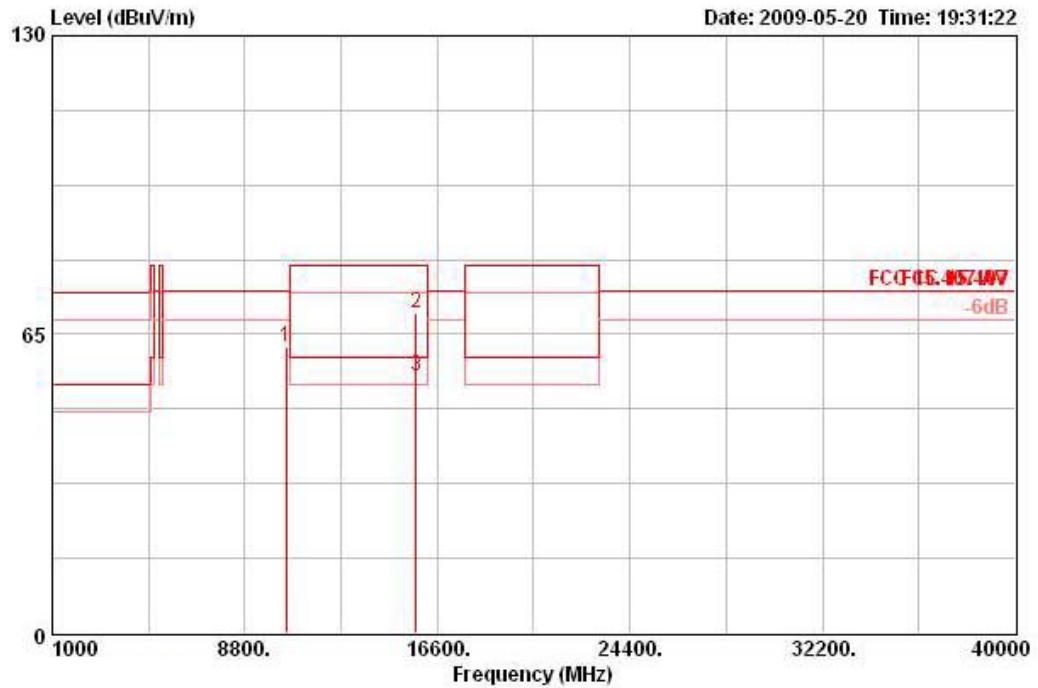

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10480.000	62.26	-12.04	74.30	47.16	39.97	35.21	10.35	PEAK	VERTICAL	0	100
2	15719.980	69.45	-10.55	80.00	55.33	37.84	35.56	11.83	PEAK	VERTICAL	159	100
3	15720.020	56.10	-3.90	60.00	41.98	37.84	35.56	11.83	AVERAGE	VERTICAL	159	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n MCS0 20MHz Ch 52 / Ant. A1 + Ant. A2

Horizontal

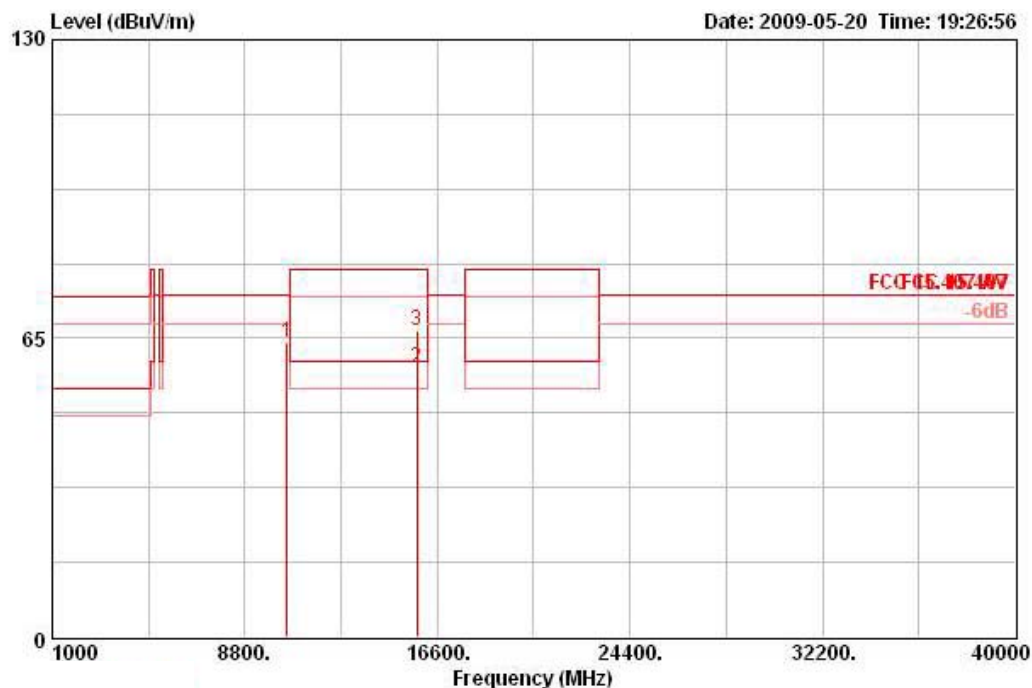

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10520.020	64.11	-10.19	74.30	48.94	39.98	35.19	10.37	PEAK	HORIZONTAL	0	100
2	15779.990	58.38	-1.62	60.00	44.27	37.76	35.54	11.89	AVERAGE	HORIZONTAL	360	100
3	15780.000	66.56	-13.44	80.00	52.46	37.76	35.54	11.89	PEAK	HORIZONTAL	360	100


Vertical

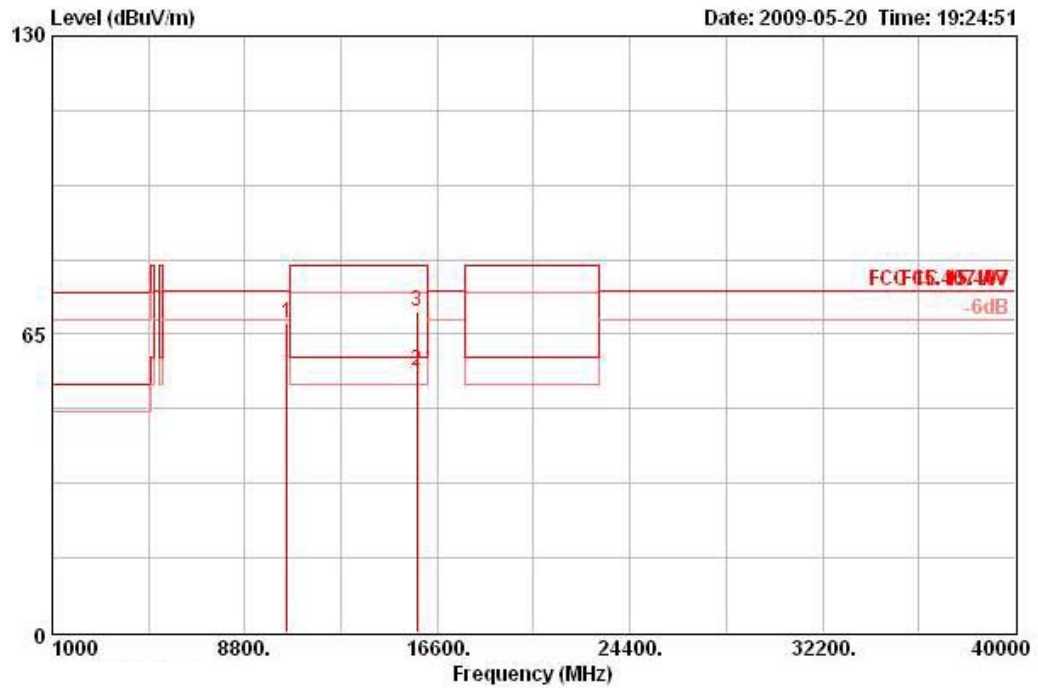

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 @	10520.010	67.55	-6.75	74.30	52.38	39.98	35.19	10.37	PEAK	VERTICAL	0	100
2 @	15779.980	57.10	-2.90	60.00	43.00	37.76	35.54	11.89	AVERAGE	VERTICAL	156	100
3 @	15780.010	70.06	-9.94	80.00	55.95	37.76	35.54	11.89	PEAK	VERTICAL	156	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n MCS0 20MHz Ch 60 / Ant. A1 + Ant. A2

Horizontal

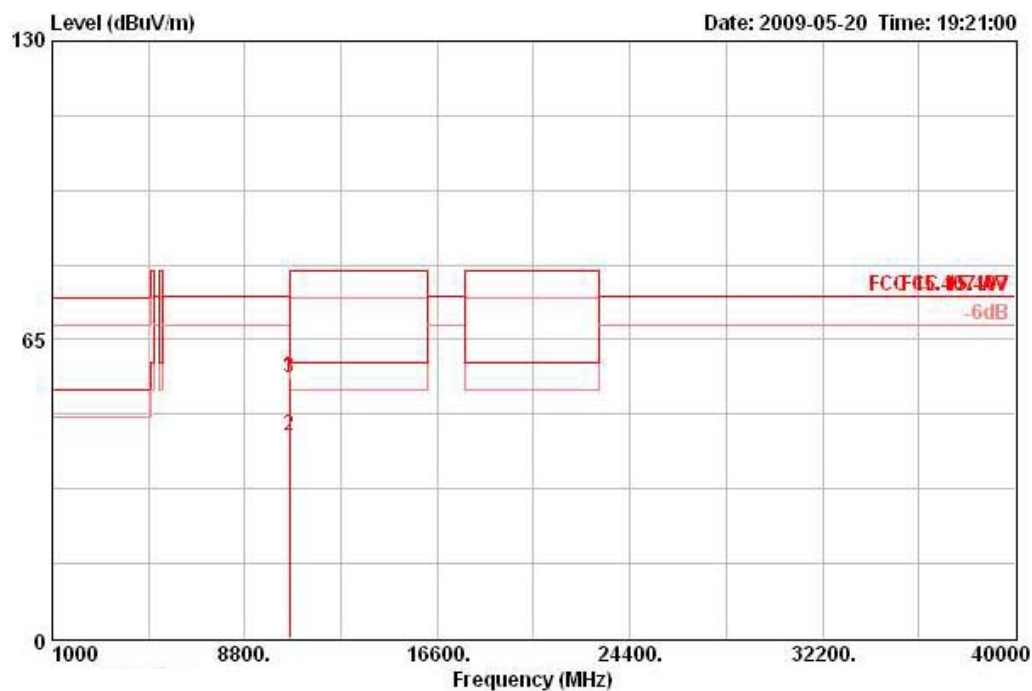

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10599.980	56.55	-17.75	74.30	41.42	39.90	35.12	10.36	PEAK	HORIZONTAL	0	100
2	10600.000	44.08	-15.92	60.00	28.94	39.90	35.12	10.36	AVERAGE	HORIZONTAL	0	100
3	10600.020	56.77	-23.23	80.00	41.64	39.90	35.12	10.36	PEAK	HORIZONTAL	0	100


Vertical

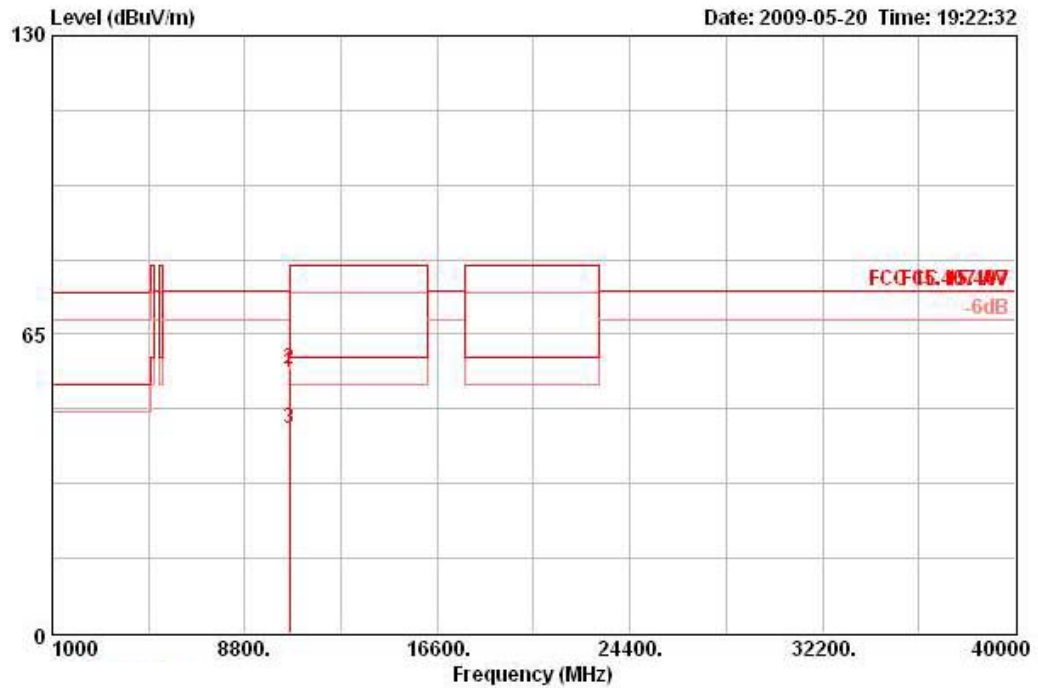

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	10599.980	56.59	-17.71	74.30	41.46	39.90	35.12	10.36 PEAK	VERTICAL	360	100
2	10600.010	57.26	-22.74	80.00	42.12	39.90	35.12	10.36 PEAK	VERTICAL	360	100
3	10600.020	44.41	-15.59	60.00	29.27	39.90	35.12	10.36 AVERAGE	VERTICAL	360	3105


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n MCS0 20MHz Ch 64 / Ant. A1 + Ant. A2

Horizontal

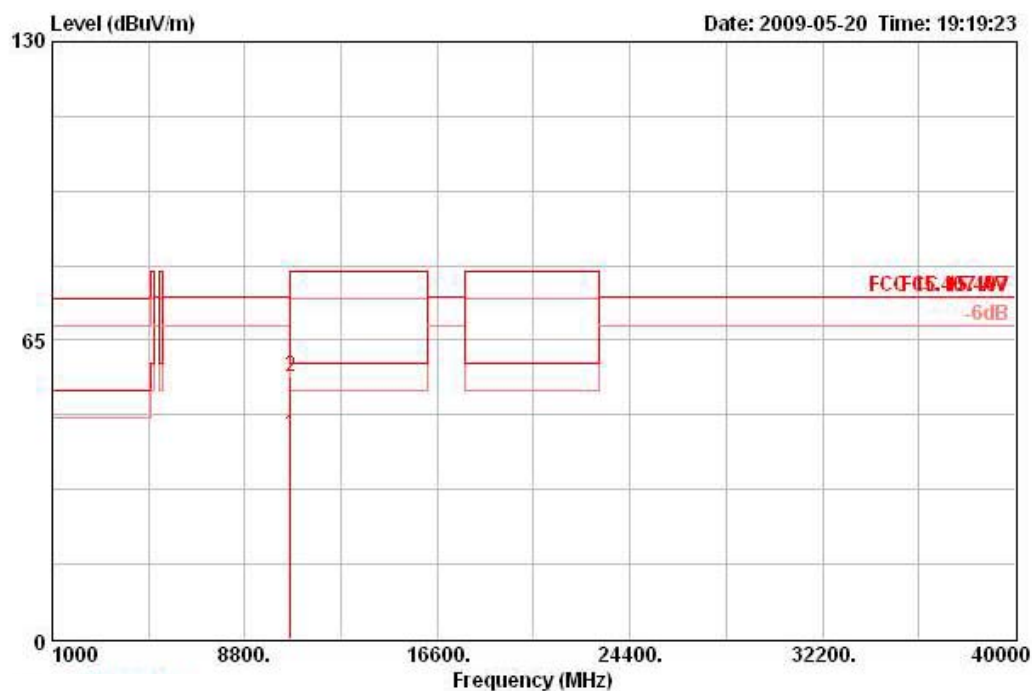

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10639.990	44.44	-15.56	60.00	29.32	39.86	35.09	10.35	AVERAGE	HORIZONTAL	360	100
2	10640.000	56.92	-23.08	80.00	41.80	39.86	35.09	10.35	PEAK	HORIZONTAL	360	100


Vertical

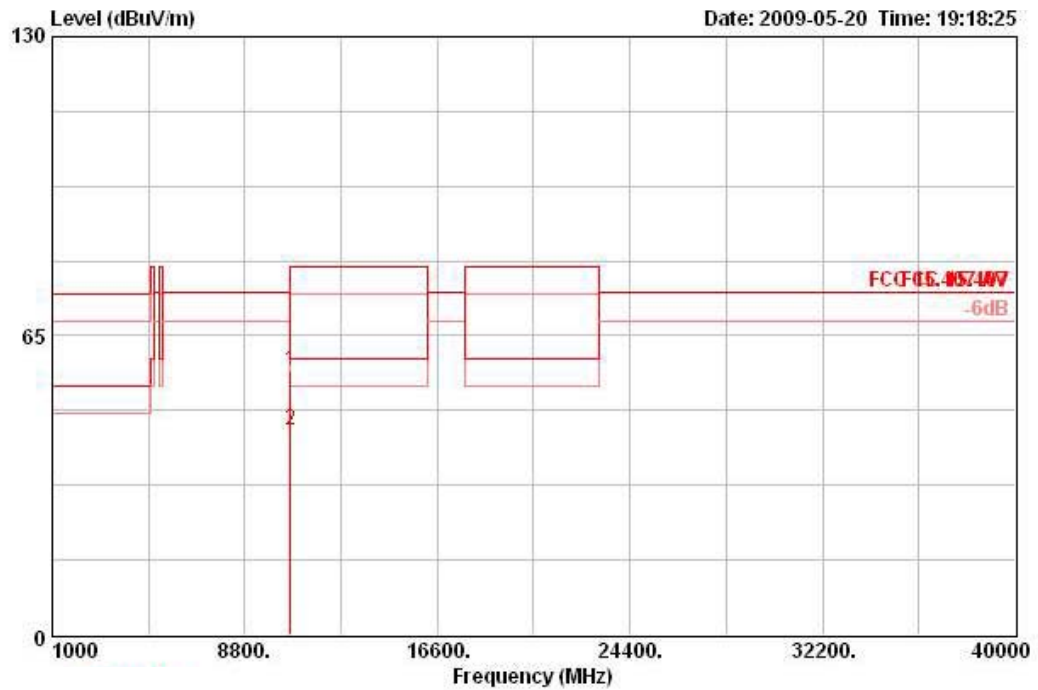

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1	10640.000	57.33	-22.67	80.00	42.21	39.86	35.09	10.35	PEAK	VERTICAL	0 100
2	10640.000	44.49	-15.51	60.00	29.37	39.86	35.09	10.35	AVERAGE	VERTICAL	0 100


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n MCS0 20MHz Ch 100 / Ant. A1 + Ant. A2

Horizontal

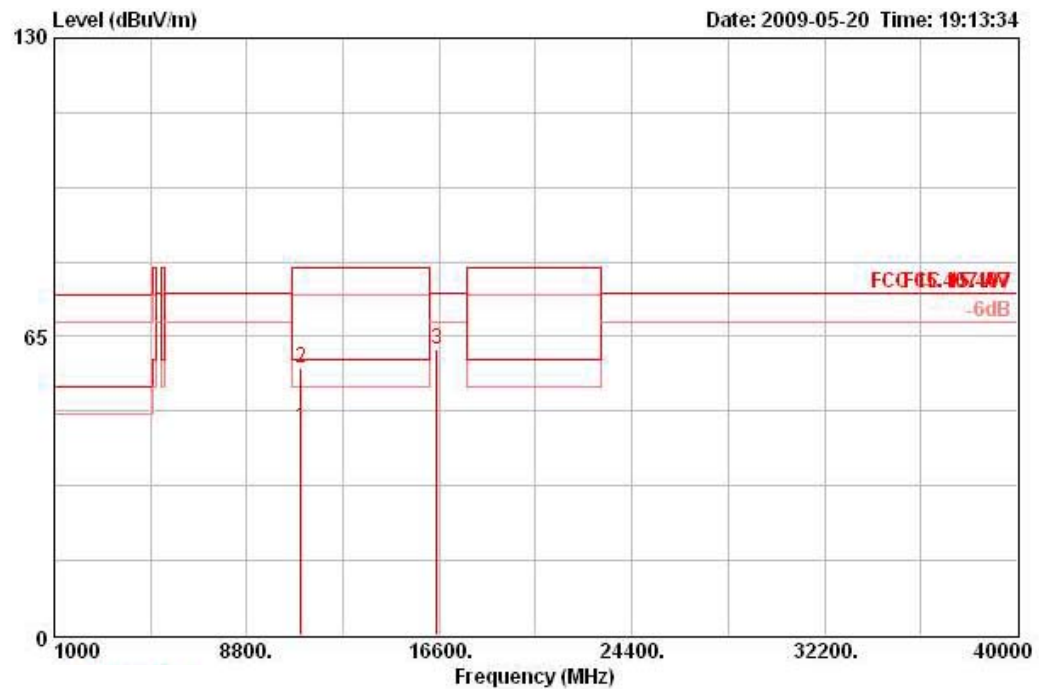

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10999.980	45.33	-14.67	60.00	30.35	39.50	34.80	10.28	AVERAGE	HORIZONTAL	0	100
2	10999.990	58.07	-21.93	80.00	43.09	39.50	34.80	10.28	PEAK	HORIZONTAL	0	100
3	16500.020	62.16	-12.14	74.30	46.56	38.20	35.20	12.60	PEAK	HORIZONTAL	360	100


Vertical

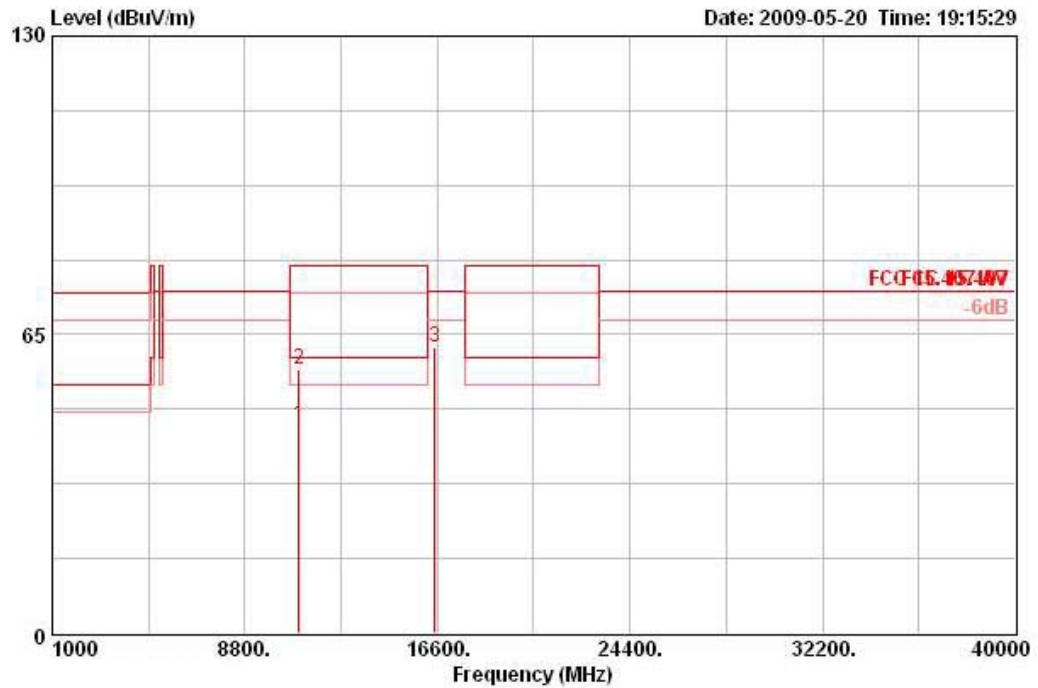

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10999.980	45.08	-14.92	60.00	30.10	39.50	34.80	10.28	AVERAGE	VERTICAL	360	100
2	10999.990	57.40	-22.60	80.00	42.42	39.50	34.80	10.28	PEAK	VERTICAL	360	100
3	16500.020	62.24	-12.06	74.30	46.64	38.20	35.20	12.60	PEAK	VERTICAL	0	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n MCS0 20MHz Ch 116 / Ant. A1 + Ant. A2

Horizontal

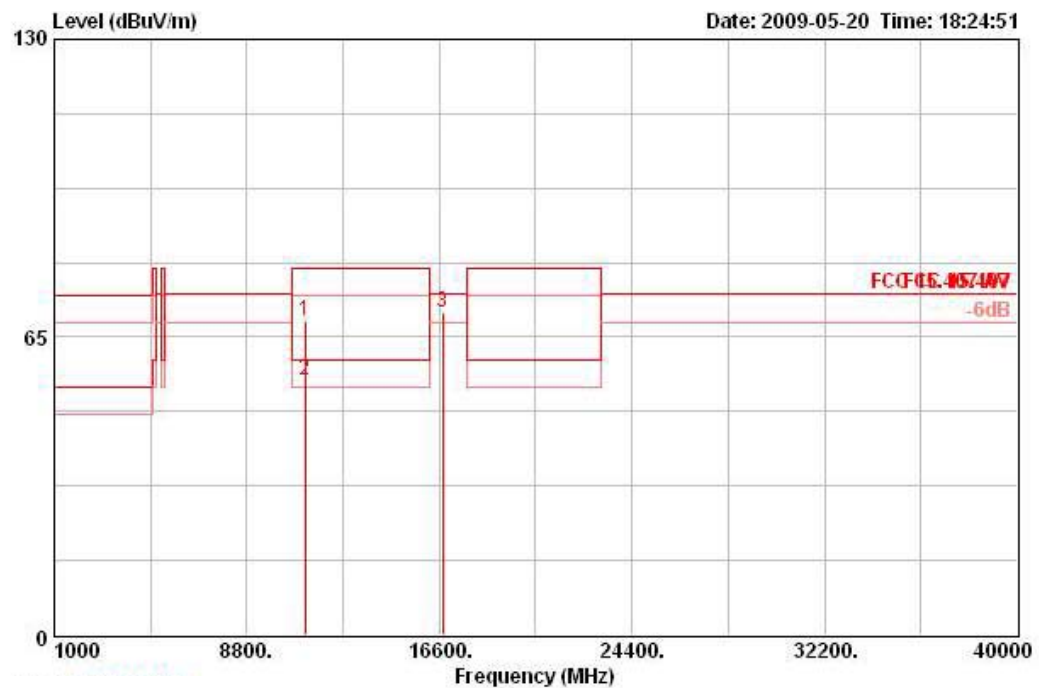

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11160.000	68.48	-11.52	80.00	53.41	39.50	34.90	10.48	PEAK	HORIZONTAL	257	100
2	11160.020	55.65	-4.35	60.00	40.58	39.50	34.90	10.48	AVERAGE	HORIZONTAL	257	100
3	16740.010	70.41	-3.89	74.30	53.93	39.02	35.01	12.47	PEAK	HORIZONTAL	360	100

Vertical

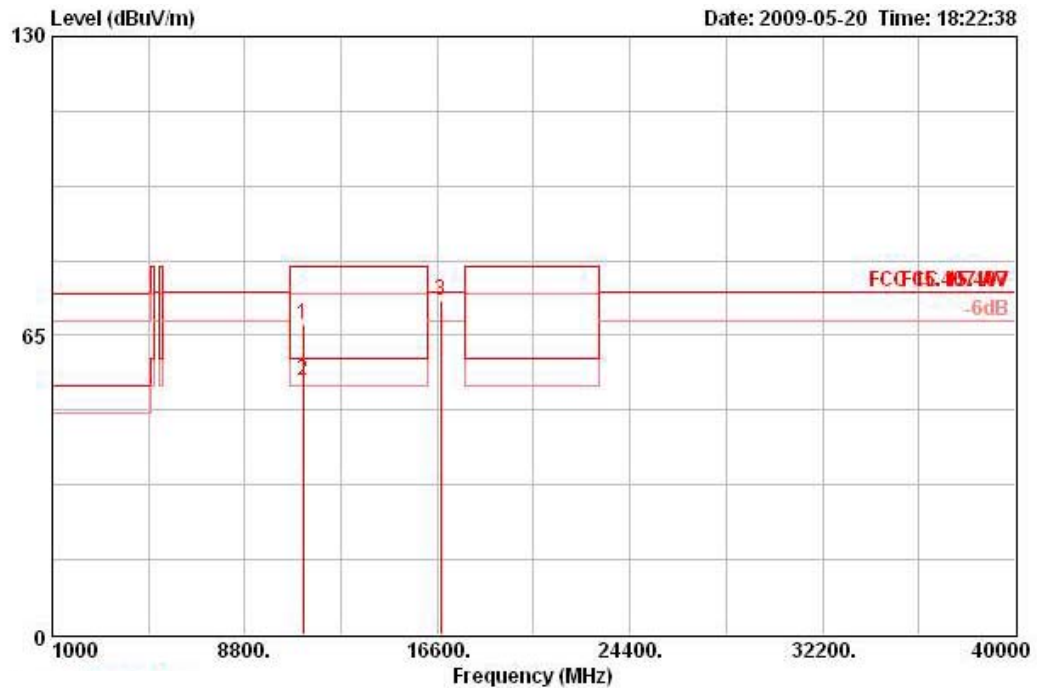

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	11160.000	67.25	-12.75	80.00	52.17	39.50	34.90	10.48 PEAK	VERTICAL	231	100
2	11160.000	55.17	-4.83	60.00	40.09	39.50	34.90	10.48 AVERAGE	VERTICAL	231	100
3	16740.010	72.64	-1.66	74.30	56.16	39.02	35.01	12.47 PEAK	VERTICAL	0	100