

DATE: 15 January 2001

I.T.L. (PRODUCT TESTING) LTD.
EMC Test
for
Nexus Data (1993) Ltd.

Equipment under test:

Gas Meter

Industrial

Approved by: _____
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Electrical (EMC)

Measurement/Technical Report for Nexus Data (1993) Ltd.

Gas Meter:

Industrial

FCC ID:NL3GA0005

15 January 2001

This report concerns: Original Grant Class II change

Class B verification Class A verification Class I change

Equipment type: Radio Telemetry Transmitter

Request Issue of Grant:

Immediately upon completion of review

Limits used:

CISPR 22 Part 15

Measurement procedure used is ANSI C63.4-1992.

Application for Certification

Applicant for this device:

prepared by:

(different from "prepared by")

Ishaishou Raz

Shimon Zigdon

ITL (Product Testing) Ltd.

Nexus Data (1993) Ltd.

Kfar Bin Nun

16 Hamelacha St.

D.N. Shimshon 99780

Rosh Haayin 48091

Israel

Israel

e-mail Sraz@itl.co.il

Tel: +972- 903-2288

Fax: +972- 903-32299

e-mail: shimonz@nexusdata.co.il

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	5
1.1 Product Description	5
1.2 Test Methodology	6
1.3 Test Facility	6
1.4 Measurement Uncertainty	6
2. PRODUCT LABELING -----	7
3. SYSTEM TEST CONFIGURATION -----	8
3.1 Justification.....	8
3.2 EUT Exercise Software	8
3.3 Special Accessories	8
3.4 Equipment Modifications	8
3.5 Configuration of Tested System	9
4. BLOCK DIAGRAM -----	10
4.1 Schematic Block/Connection Diagram	10
4.2 Theory of Operation.....	10
5. RADIATED MEASUREMENT PHOTOS-----	11
6. RADIATED EMISSION, BELOW 1 GHz-----	12
6.1 Test Specification	12
6.2 Test Procedure.....	12
6.3 Measured Data	13
6.4 Test Instrumentation Used, Radiated Measurements	26
6.5 Field Strength Calculation	27
7. RADIATED EMISSION ABOVE 1 GHz -----	28
7.1 Radiated Emission Above 1 GHz	28
7.2 Test Data	28
7.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz.....	53
8. MAXIMUM TRANSMITTED PEAK POWER OUTPUT-----	54
8.1 Test procedure	54
8.2 Results table.....	56
8.3 Test Equipment Used.....	57
9. PEAK POWER OUTPUT OUT OF 902-928 MHz BAND -----	58
9.1 9.1 Test procedure	58
9.2 Results table.....	60
9.3 Test Equipment Used.....	61
10. 6 DB MINIMUM BANDWIDTH -----	62
10.1 Test procedure	62
10.2 Results table.....	64
10.3 Test Equipment Used.....	65
11. BAND EDGE SPECTRUM -----	66
11.1 Test procedure	66
11.2 Results table.....	69
11.3 Test Equipment Used.....	70
12. TRANSMITTED POWER DENSITY -----	71
12.1 Test procedure	71
12.2 Results table.....	73
12.3 Test Equipment Used.....	74
13. PROCESSING GAIN -----	75
13.1 Test procedure	75
13.2 Test Equipment Used.....	80

14. ANTENNA GAIN -----	81
15. R.F EXPOSURE/SAFETY -----	82
16. PHOTOGRAPHS OF TESTED E.U.T. -----	83

1. General Information

1.1 *Product Description*

The device is a one-way messaging (burst) radio transmitter. It transmits 1 watt Direct Conversion, Direct sequence spread spectrum through a 0 dbi printed inverted-F antenna.

The transmitter frequency band is 903.8-926.2 MHz and channel spacing is 400 KHz; i.e. it has 58 channel. The transmitter local oscillator is synthesized using crystal oscillator reference of 15MHz. The modulation technique is SPSP Direct sequence BPSK with a chip rate of 1 Mchip/sec. The PN codes are 255 maximal length sequences.

This device measures the amount of gas that a consumer uses, and transmits the data to a workstation via base-station.

1.2 *Test Methodology*

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.3 *Test Facility*

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC letter No. 31040/SIT 1300F2, dated July 23, 1998).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01. The other tests in this report were performed at the Nexus Data facility, Rosh Ha'ayin, Israel.

1.4 *Measurement Uncertainty*

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-1992. In accordance with Paragraph 5.4.6.2 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. Product Labeling

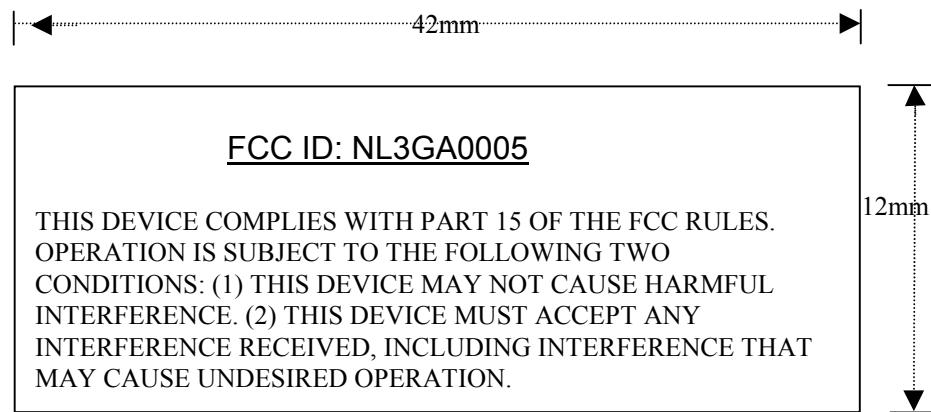


Figure 1. FCC Label

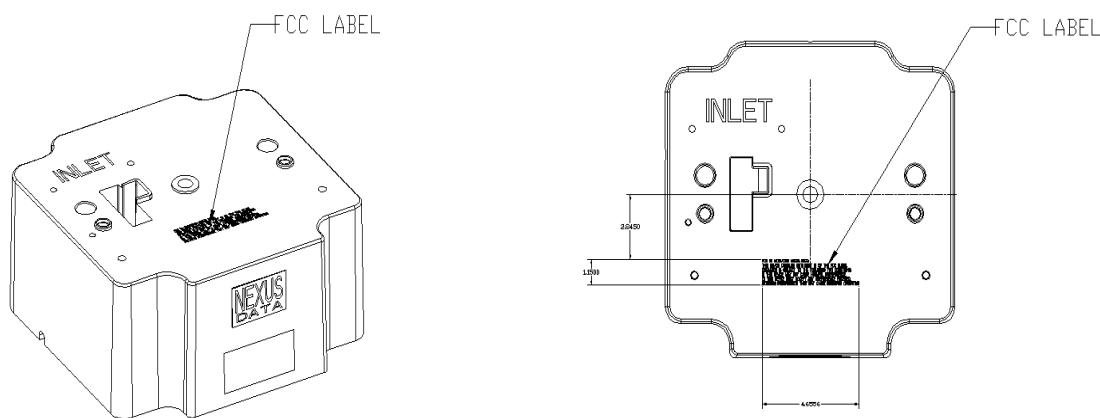


Figure 2. Location of Label on EUT

3. System Test Configuration

3.1 *Justification*

The E.U.T (end-unit transmitter) was configured to a frequent periodic transmission mode.

In this mode, all the sources of emissions were active. The E.U.T. output power is not programmable, and therefore it was tested when transmitting full 1 watt peak output power. The E.U.T. configuration enabled investigation of emission power down, operating (housekeeping) and transmits modes.

3.2 *EUT Exercise Software*

The E.U.T. exercise program used in the testing procedures was the product's standard microcontroller operational firmware. The program was configured to operate the E.U.T. in 3 typical operational modes at the same time:

1. Only the I/O interface is under normal operating condition. The rest of the transmitter is in sleep mode.
2. House keeping mode in which the microcontroller wakes up in order to scan the external inputs.
3. Periodic transmission, in which the main microcontroller wakes up the transmitter section up periodically in order to transmit a typical status message.

3.3 *Special Accessories*

No special accessories were needed to achieve compliance.

3.4 *Equipment Modifications*

No special accessories were needed to achieve compliance.

3.5 Configuration of Tested System

The configuration of the tested system is described below.

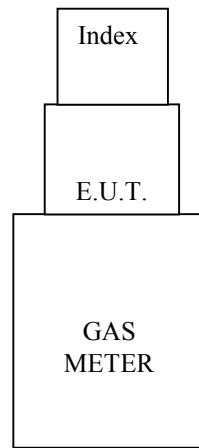
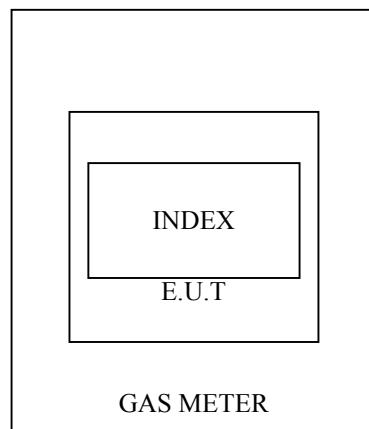


Figure 3. Configuration of Tested System

4. Block Diagram

4.1 Schematic Block/Connection Diagram

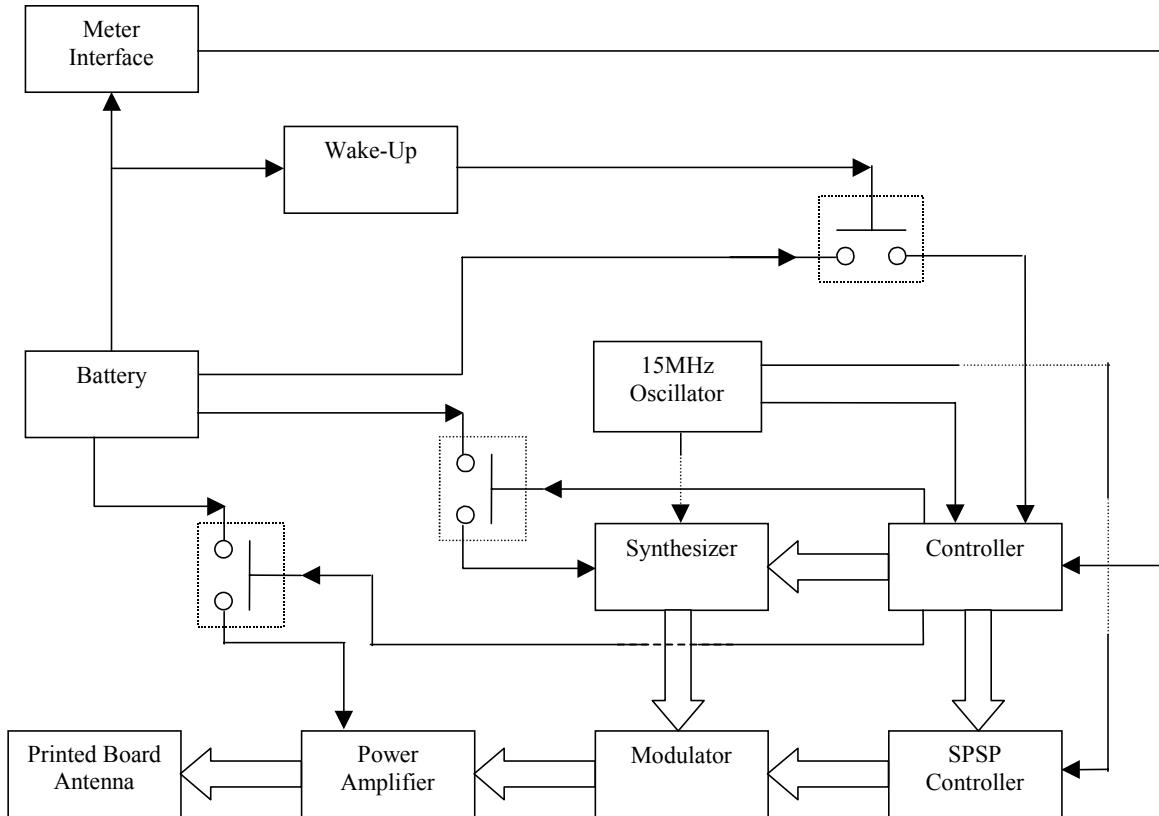


Figure 4. Block Diagram

4.2 Theory of Operation

The E.U.T receives outputs from the gas meter and converts them into Uplink messages. The E.U.T. transmits the Uplink messages to the base station by means of spread spectrum technology on ISM frequencies. The unit's operation is supervised and controlled by a microcontroller.

Components

IO (input/output modules)

Transmitter module which includes the following components:

Microcontroller

ASIC (Application Specific Integral Circuit)

Transmitter

External memory

5. Radiated Measurement Photos



Figure 5. Radiated Emission Test. Front



Figure 6. Radiated Emission Test. Side

6. Radiated Emission, Below 1 GHz

6.1 ***Test Specification***

30-1000 MHz, F.C.C., Part 15, Subpart C

6.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in Figure 3.1.

The frequency range 30-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emission levels for other frequencies were compared to the fundamental carrier level and the requirement of Section 15.249 (c).

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

Turning the E.U.T on and off.

Using a frequency span less than 10 MHz.

Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

6.3 Measured Data

JUDGEMENT: Passed by 1.1 dB μ V/m

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.
The worst cases were:


for 903.8 MHz, 5.5 dB at 902.00 MHz frequency, vertical polarization.

for 915.0 MHz, 17.0 dB at 150.00 MHz frequency, vertical polarization

for 926.2 MHz, 1.1 dB at 928.00 MHz frequency, horizontal polarization

The details of the highest emissions are given in Figure 7 to Figure 18.

TEST PERSONNEL:

Tester Signature: 

Date: 12.02.01

Typed/Printed Name: I. Raz

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
Operating Frequency: 903.8 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB)
75.00	21.0	14.0	10.3	40.0	-25.2
120.00	22.6	17.5	13.6	43.5	-26.0
135.00	22.2	15.3	14.2	43.5	-28.2
150.00	29.2	26.4	15.0	43.5	-17.1
165.00	24.0	16.6	15.4	43.5	-26.9
270.00	34.9	24.3	21.5	46.0	-21.7

**Figure 7. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 300 MHz to 1 GHz
Test Distance: 3 meters Detector: Peak, Quasi-peak
Operating Frequency: 903.8 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
405.00	26.8	20.0	18.4	46.0 *	-26.0
902.00	83.2	87.3	27.2	87.0 **	-5.7
903.80	107.0	-	27.2	N/A ***	-
928.00	41.8	36.2	27.7	87.0 **	-50.8
960.00	37.2	30.9	28.4	54.0 *	-23.1
975.00	37.7	31.0	28.7	54.0 *	-23.0

**Figure 8. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

*Note: It is the specified limit for QP detector at 3m distance for Frequency Restricted Band according to FCC Part15, Subpart C.

**Note: The specified limit for field strength outside of Frequency Restricted Band is at least 20 dB below the field strength at the operating frequency 903.8 MHz. The limit is 87.0 dB μ V/m.

***Note: The standard has no field limit for the operating frequency.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
Operating Frequency: 903.8 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB)
75.00	24.4	18.1	10.3	40.0	-21.9
120.00	22.8	16.6	13.6	43.4	-26.8
135.00	24.3	14.9	14.2	43.5	-28.6
150.00	43.3	15.4	15.0	43.5	-28.1
165.00	33.3	26.1	15.4	43.5	-17.4
270.00	31.2	23.8	21.5	46.0	-22.2

**Figure 9. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 300 MHz to 1 GHz
Test Distance: 3 meters Detector: Peak, Quasi-peak
Operating Frequency: 903.8 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
405.00	28.3	25.1	18.4	46.0 *	-20.9
902.00	82.3	80.3	27.2	85.8 **	-5.5
903.80	105.8	-	27.2	N/A ***	-
928.00	38.7	32.5	27.7	85.8 **	-53.3
960.00	37.2	30.8	28.4	54.0 *	-23.2
975.00	37.1	31.0	28.7	54.0 *	-23.0

**Figure 10. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

*Note: It is the specified limit for QP detector at 3m distance for Frequency Restricted Band according to FCC Part15, Subpart C.

**Note: The specified limit for field strength outside of Frequency Restricted Band is at least 20 dB below the field strength at the operating frequency 903.8 MHz. The limit is 85.8 dB μ V/m.

***Note: The standard has no field limit for the operating frequency.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
Operating Frequency: 915 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB)
75.00	20.9	14.1	10.3	40.0	-25.9
120.00	23.1	16.1	13.6	43.5	-27.4
135.00	27.6	16.2	14.2	43.5	-27.3
150.00	24.5	19.4	15.0	43.5	-24.1
165.00	23.9	16.5	15.4	43.5	-27.0
285.00	31.9	23.7	22.2	46.0	-22.3

**Figure 11. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 300 MHz to 1 GHz
Test Distance: 3 meters Detector: Peak, Quasi-peak
Operating Frequency: 915 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
405.00	28.9	29.0	18.4	46.0 *	-17.0
902.00	50.7	47.1	27.2	89.5 **	-42.4
915.00	112.0	109.5	27.4	N/A ***	-
928.00	51.0	47.4	27.7	89.5 **	-42.1
960.00	37.8	31.5	28.4	54.0 *	-22.5
975.00	38.6	31.4	28.7	54.0 *	-22.6

**Figure 12. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

*Note: It is the specified limit for QP detector at 3m distance for Frequency Restricted Band according to FCC Part15, Subpart C.

**Note: The specified limit for field strength outside of Frequency Restricted Band is at least 20 dB below the field strength at operating frequency 915.0 MHz. The limit is 89.5 dB μ V/m.

***Note: The standard has no field limit for the operating frequency.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
Operating Frequency: 915 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB)
75.00	23.4	18.2	10.3	40.0	-21.8
120.00	21.3	15.5	13.6	43.5	-28.0
135.00	29.4	15.1	14.2	43.5	-28.4
150.00	27.6	26.5	15.0	43.5	-17.0
165.00	24.9	17.2	15.4	43.5	-26.3
270.00	29.7	23.3	21.5	46.0	-22.7
285.00	30.5	23.4	22.2	46.0	-22.6

**Figure 13. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 300 MHz to 1 GHz
Test Distance: 3 meters Detector: Peak, Quasi-peak
Operating Frequency: 915 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
405.00	27.3	22.2	18.4	46.0 *	-23.8
902.00	48.1	40.9	27.2	81.7 **	-40.8
915.00	104.2	101.7	27.4	N/A ***	-
928.00	43.0	37.8	27.7	81.7 **	-43.9
960.00	37.3	30.7	28.4	54.0	-23.3
975.00	37.3	31.0	28.7	54.0	-23.0

**Figure 14. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

*Note: It is the specified limit of field strength for QP detector at frequency restricted band at 3m distance according to FCC Part15, Subpart C.

**Note: The specified limit for field strength outside of Frequency Restricted Band is at least 20 dB below the field strength at operating frequency 915 MHz. The limit is 81.7 dB μ V/m.

***Note: The standard has no field limit for the operating frequency.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
Operating Frequency: 926.2 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB)
75.00	19.7	13.5	10.3	40.0	-26.5
120.00	21.8	15.1	13.6	43.5	-28.5
135.00	21.7	15.1	14.2	43.5	-28.5
150.00	32.1	23.0	15.0	43.5	-20.5
270.00	30.3	24.4	21.5	46.0	-21.6
285.00	30.5	23.5	22.2	46.0	-22.5

**Figure 15. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 300 MHz to 1 GHz
Test Distance: 3 meters Detector: Peak, Quasi-peak
Operating Frequency: 926.2 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
405.00	27.2	20.4	18.4	46.0 *	-25.6
902.00	40.0	33.7	27.2	83.0*	-49.3
926.20	104.9	103.0	27.7	N/A ***	-
928.00	83.2	80.9	27.7	83.0**	-1.1
960.00	39.0	31.6	28.4	54.0 *	-22.4
975.00	37.8	31.5	28.7	54.0 *	-22.5

**Figure 16. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

*Note: It is the specified limit for QP detector at 3m distance for Frequency Restricted Band according to FCC Part15, Subpart C.

**Note: The specified limit of field strength outside of Frequency Restricted Band is at least 20 dB below the field strength at operating frequency 926.2 MHz. The limit is 83.0 dB μ V/m.

***Note: The standard has no field limit for the operating frequency.

Radiated Emission

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 30 MHz to 300 MHz
Test Distance: 3 meters Detector: Quasi-peak
Operating Frequency: 926.2 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB)
75.00	21.9	17.4	10.3	40.0	-22.6
120.00	33.7	13.8	13.6	43.5	-29.7
135.00	22.2	15.2	14.2	43.5	-28.3
165.00	23.8	16.5	15.4	43.5	-27.0
270.00	29.5	23.1	21.5	46.0	-22.9
285.00	29.9	23.5	22.2	46.0	-22.5

Figure 17. Radiated Emission. Antenna Polarization: VERTICAL. Detector: Quasi-peak

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 300 MHz to 1 GHz
Test Distance: 3 meters Detector: Peak, Quasi-peak
Operating Frequency: 926.2 MHz

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB μ V/m)
405.00	27.2	20.4	18.4	46.0 *	-25.6
902.00	40.0	33.7	27.2	84.9 *	-51.2
926.20	106.9	104.9	27.7	N/A ***	-
928.00	83.2	80.9	27.7	84.9 **	-4.0
960.00	39.0	31.6	28.4	54.0 *	-22.4
975.00	38.0	31.5	28.7	53.0 *	-22.5

**Figure 18. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

*Note: It is the specified limit for QP detector at 3m distance for Frequency Restricted Band according to FCC Part15, Subpart C.

**Note: The specified limit for field strength outside of Frequency Restricted Band is at least 20 dB below the field strength at operating frequency 926.2 MHz. The limit is 84.9 dB μ V/m.

***Note: The standard has no field limit for the operating frequency.

6.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	November 30,2000	1 year
RF Section	HP	85420E	3427A00103	November 30,2000	1 year
Spectrum analyzer	HP	8591E	3414001226	August 8,2000	1 year
Antenna Bioconical HP	ARA	BCD 235/B	1041	April 10, 2000	1 year
Antenna -Log Periodic	ARA	LPD-2010/A	1037	April 9, 2000	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A

6.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

7. Radiated Emission Above 1 GHz

7.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emission levels for other frequencies were compared to the fundamental carrier level and the requirement of Section 15.249 (c).

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements and a High Pass Filter were used. The test distance was 3 meters.

In the frequency range 2.9-9.3 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

7.2 Test Data

JUDGEMENT: Passed by 4.5 dB μ V/m

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The worst cases were:


for 903.8 MHz, 4.5 dB at 9038.00 MHz frequency, horizontal polarization.

for 915.0 MHz, 5.9 dB at 1830.00 MHz frequency, vertical polarization

for 926.2 MHz, 6.6 dB at 9262.00 MHz frequency, vertical polarization

The details of the highest emissions are given in Figure 19 to Figure 42.

TEST PERSONNEL:

Tester Signature: 

Date: 12.02.01

Typed/Printed Name: I. Raz

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Average
Operating Frequency: 903.8 MHz

Freq. (MHz)	Avg. Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Avg. Det. Spec. (dB μ V/m)	Final Result FR(A) (dB μ V/m) See Note *	Avg. Margin (dB)
1807.60	45.9	1.6	38.7	54.0	47.5	-6.5
2711.40	46.8	1.7	44.0	54.0	48.5	-5.5

**Figure 19. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1 GHz to 2.9 GHz, the final result of field strength was calculated directly by the EMI Receiver HP85420E software by using disks for antenna and cable correction factors, and using the following equation:

$$FR(A) = AVG + HPF$$

Where:

FR(A) (dB μ V/m) is the final result of field strength for average detector,

AVG (dB μ V/m) is the average detector measurement,

HPF (dB) is the high pass filter attenuation.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Peak Detector
Operating Frequency: 903.8 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Peak Det. Spec. (dB μ V/m)	Final Result FR(P) (dB μ V/m) See Note *	Peak. Margin (dB)
1807.60	54.0	1.6	38.7	74.0	55.6	-18.4
2711.40	58.2	1.7	44.0	74.0	59.9	-14.1

**Figure 20. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note *: In the frequency range from 1.0 GHz to 2.9 GHz, the final result of field strength is calculated by the EMI Receiver HP 85420E software, using disks for antenna and cable corrections factors and the following equation:

$$FR(P) \text{ (dB}\mu\text{V/m)} = \text{Peak} + \text{HPF}$$

Where:

FR(P) is the final result of peak detector field strength.,

Peak (dB μ V/m) is the peak detector measurement,

HPF is the high pass filter attenuation.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 2.9 GHz to 9.3 GHz
Test Distance: 3 meters Detector: Peak Detector
Operating Frequency: 903.8 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction Factors			Peak. Specification **	Peak Final Result FR (P)* (dB μ V/m See Note *)	Peak Margin (dB)
		Antenna AF	Cable CF	Preamp PF			
3615.00	39.1	34.0	4.4	30.0	74.0	47.5	-26.5
4519.00	39.3	35.2	5.0	30.0	74.0	49.5	-25.5
5422.00	36.6	36.7	5.4	30.0	74.0	48.7	-25.3
8134.00	39.4	40.0	7.5	29.0	74.0	57.9	-16.1
9038.00	39.7	40.9	9.2	28.0	74.0	60.8	-13.2

**Figure 21. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note *: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(P) = Peak + AF + CF - PF$$

Where: FR (P) is final peak detector result.

Peak is peak detector measurement.

AF is antenna factor.

CF is cable factor.

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description: Gas Meter
 Type: Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal
 Test Distance: 3 meters
 Operating Frequency: 903.8 MHz

Frequency range: 2.9 GHz to 9.3 GHz
 Detector: Average Detector

Freq. (MHz)	Avg Amp (dB μ V/m)	Correction Factors			AVG Specification (dB μ V/m)	AVG Final Result FR (A) (dB μ V/m) See Note *	AVG Margin (dB)
		Antenna AF (dB)	Cable CF (dB)	Preamp PF (dB)			
3615.00	27.7	34.0	4.4	30	54.0	35.1	-18.9
4519.00	28.3	35.2	5.0	30.	54.0	38.5	-15.5
5422.00	23.5	36.7	5.4	30	54.0	37.8	-16.2
8134.00	26.7	40.0	7.5	29	54.0	45.2	-8.8
9038.00	27.2	40.9	9.2	28	54.0	49.5	-4.5

**Figure 22. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(A) = AVG + AF + CF - PF$$

Where:

FR(A) is final average detector result.

AVG is average detector measurement.

AF is antenna factor.

CF is cable factor.

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Average
Operating Frequency: 903.8 MHz

Freq. (MHz)	Avg. Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Avg. Det. Spec. (dB μ V/m)	Final Result FR(A) (dB μ V/m) See Note *	Avg. Margin (dB)
1807.60	46.2	1.6	38.7	54.0	47.8	-6.2
2711.40	46.5	1.7	44.0	54.0	48.2	-5.8

**Figure 23. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1 GHz to 2.9 GHz, the final result of field strength was calculated directly by the EMI Receiver HP85420E software by using disks for antenna and cable correction factors, and the following equation:

$$FR(A) = AVG + HPF$$

Where :

FR(A) (dB μ V/m) is the final result of field strength for average detector

AVG (dB μ V/m) is the average detector measurement

HPF (dB) is the high pass filter attenuation

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Peak Detector
Operating Frequency: 903.8 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Peak. Det. Spec. (dB μ V/m)	Final Result FR(P) (dB μ V/m) See Note *	Peak. Margin (dB)
1807.60	53.8	1.6	38.7	74.0	52.2	-21.8
2711.40	58.4	1.7	44.0	74.0	60.1	-13.9

**Figure 24. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1.0 GHz to 2.9 GHz, the final result of field strength is calculated by the EMI Receiver HP 85420E software by using disks for antenna and cable correction factors, and the following equation:

$$FR(P) \text{ (dB}\mu\text{V/m)} = \text{Peak} + \text{HPF}$$

Where:

FR(P) is the final result of peak detection field strength,

Peak (dB μ V/m) is the peak detector measurement,

HPF is the high pass filter attenuation.

Radiated Emission Above 1 GHz

E.U.T Description: Gas Meter
 Type: Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical

Frequency range: 2.9 GHz to 9.3 GHz

Test Distance: 3 meters

Detector: Peak Detector

Operating Frequency: 903.8 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction Factors			Peak. Specification (dB μ V/m)	Peak Final Result FR (P) (dB μ V/m) See Note *	Peak. Margin (dB)
		Antenna AF (dB)	Cable CF (dB)	Preamp PF (dB)			
3615.00	38.6	34.0	4.4	30.0	74.0	47.0	-27.0
4519.00	38.3	35.2	5.0	30.0	74.0	48.5	-25.5
5422.00	35.0	36.7	5.4	30.0	74.0	47.1	-26.4
8134.00	39.3	40.0	7.5	29.0	74.0	57.8	-16.2
9038.00	39.6	40.9	9.2	28.0	74.0	61.7	-12.3

**Figure 25. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(P) = Peak + AF + CF - PF$$

Where:

FR (P) is final peak detector result,

Peak is peak detector measurement,

AF is antenna factor,

CF is cable factor,

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description: Gas Meter
 Type: Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical
 Test Distance: 3 meters
 Operating Frequency: 903.8 MHz

Frequency range: 2.9 GHz to 9.3 GHz
 Detector: Average Detector

Freq. (MHz)	Avg Amp (dB μ V/m)	Correction Factors			Preamp PF	AVG Specification **	AVG Final Result FR (A)* (dB μ V/m) See Note *	AVG Margin (dB)
		Antenna AF	Cable CF	Preamp PF				
3615.00	27.2	34.0	4.4	30	54.0	54.0	35.6	-18.4
4519.00	28.8	35.2	5.0	30	54.0	54.0	39.0	-15.0
5422.00	22.5	36.7	5.4	30	54.0	54.0	34.6	-19.4
8134.00	27.2	40.0	7.5	29	54.0	54.0	45.7	-8.3
9038.00	26.4	40.9	9.2	28	54.0	54.0	48.5	-5.5

**Figure 26. Radiated Emission. Antenna Polarization: VERTICAL
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(A) = AVG + AF + CF - PF$$

Where:

FR(A) is average detector result,
 AVG is average detector measurement,
 AF is antenna factor,
 CF is cable factor,
 PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Average
Operating Frequency: 915 MHz

Freq. (MHz)	Avg. Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Avg. Det. Spec. (dB μ V/m)	Final Result FR(A) (dB μ V/m) See Note *	Avg. Margin (dB)
1807.00	45.1	1.6	39.0	54.0	46.7	-7.3
2745.00	46.0	1.7	44.3	54.0	47.7	-6.3

**Figure 27. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1 GHz to 2.9 GHz, the final result of field strength was calculated directly by the EMI Receiver HP85420E software, using disks for antenna and cable correction factors , and the following equation:

$$FR(A) = AVG + HPF$$

Where:

FR(A) is the final result for average detector

AVG (dB μ V/m) is the average detector measurement

HPF (dB) is the high pass filter attenuation

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal

Frequency range: 1 GHz to 2.9 GHz

Test Distance: 3 meters

Detector: Peak Detector

Operating Frequency: 915 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Peak Det. Spec. (dB μ V/m)	Final Result FR(P) (dB μ V/m) See Note *	Peak. Margin (dB)
1830.00	57.8	1.6	39.0	74.0	59.4	-14.6
2745.00	53.9	1.7	44.3	74.0	55.6	-18.4

**Figure 28. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1.0 GHz to 2.9 GHz, the final result of field strength is calculated by the software of the EMI Receiver HP 85420E, and using the disks for antenna and cable correction factors, and the following equation:

$$FR(P) = Peak + HPF$$

Where:

FR(P) is the final result of peak detector field strength,

Peak is the peak detector measurement,

HPF is the high pass filter attenuation.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
 Type Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 2.9 GHz to 9.3 GHz
 Test Distance: 3 meters Detector: Peak Detector
 Operating Frequency: 915 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction Factor			Peak. Specification (dB μ V/m)	Peak Final Result FR (P) (dB μ V/m See Note *.)	Peak. Margin (dB)
		Antenna AF	Cable CF	Preamp PF			
3660.00	37.3	4.5	4.5	30	74.0	45.6	-28.4
4575.00	34.7	5.0	5.0	30	74.0	44.0	-20.0
5490.00	34.2	5.4	5.4	29	74.0	48.8	-25.2
6405.00	38.4	5.8	5.8	29	74.0	53.3	-20.7
7320.00	38.9	6.2	6.2	29	74.0	56.2	-17.7
9150.00	39.9	9.2	9.2	29	74.0	60.9	-13.1

**Figure 29. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(P) = Peak + AF + CF - PF$$

Where: FR (P) is final peak detector result,

Peak is peak detector measurement,

AF is antenna factor,

CF is cable factor,

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 2.9 GHz to 9.3 GHz
Test Distance: 3 meters Detector: Average Detector
Operating Frequency: 915 MHz

Freq. (MHz)	Avg Amp (dB μ V/m)	Correction Factors			AVG Specification (dB μ V/m)	AVG Final Result FR (A) (dB μ V/m) See Note *.	AVG Margin (dB)
		Antenna AF	Cable CF	Preamp PF			
3660.00	28.0	33.8	4.5	30	54.0	36.3	-17.7
4575.00	26.2	35.2	5.0	30	54.0	36.4	-17.6
5420.00	24.8	37.2	5.4	29	54.0	38.4	-15.6
6405.00	25.2	38.1	5.8	29	54.0	40.0	-14.0
7320.00	25.6	39.1	6.2	29	54.0	41.9	-12.1
9150.00	25.8	40.8	9.2	29	54.0	46.8	-7.2

**Figure 30. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(A) = AVG + AF + CF - PF$$

Where: FR(A) is final average detector result,

AVG is average detector measurement,

AF is antenna factor,

CF is cable factor,

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Average
Operating Frequency: 915 MHz

Freq. (MHz)	Avg. Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Avg. Det. Spec. (dB μ V/m)	Final Result FR(A) (dB μ V/m) See Note *.	Avg. Margin (dB)
1830.00	46.6	1.5	39.0	54.0	48.1	-5.9
2745.00	44.3	1.7	44.3	54.0	46.0	-8.0

**Figure 31. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1 GHz to 2.9 GHz, the final result of field strength was calculated directly by the EMI Receiver HP85420E software, using the disks for antenna and cable correction factors and the following equation:

$$FR(A) = AVG + HPF$$

Where :

FR(A) is the final result for average detector

AVG (dB μ V/m) is the average detector measurement

HPF (dB) is the high pass filter attenuation

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Peak Detector
Operating Frequency: 915 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Peak Det. Spec. (dB μ V/m)	Final Result FR(P) (dB μ V/m) See Note*.	Peak. Margin (dB)
1830.00	53.8	1.5	39.0	74.0	54.4	-19.6
2745.00	58.7	1.7	44.3	74.0	60.4	-13.6

**Figure 32. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1.0 GHz to 2.9 GHz, the final result of field strength is calculated directly by the EMI Receiver HP 85420E software and using disks for antenna and cables correction factors and the following equation:

$$FR(P) = Peak + HPF$$

Where:

FR(P) is the final result of peak detector field strength,

Peak (dB μ V/m) is the peak detector measurement,

HPF is the high pass filter attenuation

Radiated Emission Above 1 GHz

E.U.T Description: Gas Meter
 Type: Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical

Frequency range: 2.9 GHz to 9.3 GHz

Test Distance: 3 meters

Detector: Peak Detector

Operating Frequency: 915 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction Factor			Peak Specification **	Peak Final Result FR (P) (dB μ V/m) See Note *.	Peak Margin (dB)
		Antenna AF	Cable CF	Preamp PF			
3660.00	37.2	33.8	4.5	30	74.0	45.5	-24.5
4575.00	34.3	35.2	5.0	30	74.0	44.5	-25.5
5490.00	34.6	37.2	5.4	29	74.0	48.2	-25.8
6405.00	39.0	38.1	5.8	29	74.0	53.9	-20.1
7320.00	39.0	39.1	6.2	29	74.0	55.3	-18.7
9150.00	39.5	40.8	9.2	29	74.0	60.5	-13.54

**Figure 33. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength is manually calculated by using the following equation:

$$FR(P) = Peak + AF + CF - PF$$

Where: FR (P) is final peak detector result,

Peak is peak detector measurement,

AF is antenna factor,

CF is cable factor,

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description: Gas Meter
 Type: Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical
 Test Distance: 3 meters
 Operating Frequency: 915 MHz

Frequency range: 2.9 GHz to 9.3 GHz
 Detector: Average Detector

Freq. (MHz)	AVG Amp (dB μ V/m)	Correction Factors			AVG Specification **	AVG Final Result FR (A) (dB μ V/m) See Note*.	AVG Margin (dB)
		Antenna AF (dB)	Cable CF (dB)	Preamp PF (dB)			
3660.00	28.0	33.8	4.5	30	54.0	36.3	-17.7
4575.00	26.8	35.2	5.0	30	54.0	38.0	-16.0
5490.00	27.0	37.2	5.4	29	54.0	40.3	-13.7
6405.00	25.0	38.1	5.8	29	54.0	39.9	-14.1
7320.00	25.6	39.1	6.2	29	54.0	41.9	-12.1
9150.00	25.5	40.8	9.2	29	54.0	46.0	-8.0

**Figure 34. Radiated Emission. Antenna Polarization: VERTICAL
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(A) = AVG + AF + CF - PF$$

Where: FR(A) is average detector result,

AVG is average detector measurement,

AF is antenna factor,

CF is cable factor,

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Average
Operating Frequency: 926.2 MHz

Freq. (MHz)	Avg. Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Avg. Det. Spec. (dB μ V/m)	Final Result FR(A) (dB μ V/m) See Note *.	Avg. Margin (dB)
1852.40	38.7	1.6	39.2	54.0	40.3	-13.7
2778.60	44.7	1.7	44.5	54.0	46.4	-7.6

**Figure 35. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1 GHz to 2.9 GHz, the final result of field strength was calculated directly by the EMI Receiver HP85420E software, using disks for antenna and cable correction factors and the following equation:

$$FR(A) = AVG + HPF$$

Where:

FR(A) is the final result for average detector,
AVG (dB μ V/m) is the average detector measurement,
HPF (dB) is the high pass filter attenuation.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Peak Detector
Operating Frequency: 926.2 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Peak Det. Spec. (dB μ V/m)	Final Result FR(P) (dB μ V/m) See Note *.	Peak. Margin (dB)
1852.00	51.7	1.6	39.2	74.0	53.3	-20.7
2778.00	58.4	1.7	44.5	74.0	60.1	-13.9

Figure 36. Radiated Emission. Antenna Polarization: HORIZONTAL. Detector: Peak

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1.0 GHz to 2.9 GHz, the final result of field strength is calculated directly by the EMI Receiver HP 85420E software using disks for antenna and cable correction factors and the following equation:

$$FR(P) (dB\mu V/m) = Peak + HPF$$

Where:

FR(P) is the final result of peak detector field strength,

Peak (dB μ V/m) is the peak detector measurement,

HPF is the high pass filter attenuation.

Radiated Emission Above 1 GHz

E.U.T Description: Gas Meter
 Type: Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 2.9 GHz to 9.3 GHz
 Test Distance: 3 meters Detector: Peak Detector
 Operating Frequency: 926.2 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction Factors			Peak. Specification (dB μ V/m)	Peak Final Result FR (P)* (dB μ V/m) See Note *.	Peak. Margin (dB)
		Antenna AF	Cable CF	Preamp PF			
3704.00	39.6	34.0	4.4	30	74.0	48.0	-26.0
4631.00	34.1	35.3	5.1	30	74.0	44.5	-29.5
5557.00	34.4	37.4	5.5	29	74.0	51.3	-22.7
6483.00	39.4	38.2	5.9	29	74.0	54.5	-19.5
8335.00	39.3	40.2	7.6	29	74.0	58.1	-15.9
9262.00	41.3	40.9	9.3	29	74.0	61.5	-12.5

**Figure 37. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(P) = Peak + AF + CF - PF$$

Where: FR (P) is final peak detector result,

Peak is peak detector measurement,

AF is antenna factor,

CF is cable factor,

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description: Gas Meter
 Type: Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Horizontal
 Test Distance: 3 meters
 Operating Frequency: 926.2 MHz

Frequency range: 2.9 GHz to 9.3 GHz
 Detector: Average Detector

Freq. (MHz)	AVG Amp (dB μ V/m)	Correction Factors			AVG Specification (dB μ V/m)	AVG Final Result FR (A) (dB μ V/m) See Note *.	AVG Margin (dB)
		Antenna AF (dB)	Cable CF (dB)	Preamp PF (dB)			
3704.00	31.8	34.0	4.4	30	54.0	40.2	-13.8
4631.00	23.6	35.3	5.1	30	54.0	34.0	-20.0
5557.00	25.1	37.4	5.5	29	54.0	39.0	-15.0
6483.00	26.6	38.2	5.9	29	54.0	41.7	-12.1
7409.00	26.1	39.3	6.3	29	54.0	42.7	-11.4
9262.00	25.7	40.9	9.3	29	54.0	46.9	-7.1

Figure 38. Radiated Emission. Antenna Polarization: AVERAGE. Detector: Peak

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(A) = AVG + AF + CF - PF$$

Where: FR(A) is final average detector result,

AVG is average detector measurement,

AF is antenna factor,

CF is cable factor.

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Average
Operating Frequency: 926.2 MHz

Freq. (MHz)	Avg. Amp (dB μ V/ m)	Correction HPF (dB)	Correction	Avg. Det. Spec. (dB μ V/m)	Final Result FR(A) (dB μ V/m) See Note*.	Avg. Margin (dB)
			Antenna and Cable (dB)			
1852.40	39.3	1.6	39.2	54.0	40.9	-13.1
2778.60	45.0	1.7	44.5	54.0	46.7	-7.3

**Figure 39. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1 GHz to 2.9 GHz, the final result of field strength was calculated directly by the EMI Receiver HP85420E software, and using disks for antenna and cable correction factors and the following equation:

$$FR(A) = AVG + HPF$$

Where :

FR(A) (dB μ V/m) is the final result for average detector,

AVG (dB μ V/m) is the average detector measurement,

HPF (dB) is the high pass filter attenuation.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
Type Industrial
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1 GHz to 2.9 GHz
Test Distance: 3 meters Detector: Peak Detector
Operating Frequency: 926.2 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction HPF (dB)	Correction Antenna and Cable (dB)	Peak Spec. (dB μ V/m)	Final Result FR(P) (dB μ V/m) See Note *.	Peak. Margin (dB)
1852.00	51.7	1.6	39.2	74.0	53.3	-20.7
2778.00	58.0	1.7	44.5	74.0	59.7	-14.3

**Figure 40. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range from 1.0 GHz to 2.9 GHz, the final result of field strength is calculated by the EMI Receiver HP 85420E software using disks for antenna and cable correction factors and the following equation:

$$FR(P) \text{ (dB}\mu\text{V/m)} = \text{Peak} + \text{HPF}$$

Where:

FR(P) is the final result of peak detection field strength,

Peak (dB μ V/m) is the peak detector measurement,

HPF is the high pass filter attenuation.

Radiated Emission Above 1 GHz

E.U.T Description Gas Meter
 Type Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical

Frequency range: 2.9 GHz to 9.3 GHz

Test Distance: 3 meters

Detector: Peak Detector

Operating Frequency: 926.2 MHz

Freq. (MHz)	Peak Amp (dB μ V/m)	Correction Factors			Peak. Specification (dB μ V/m)	Peak Final Result FR (P) (dB μ V/m) See Note *.	Peak. Margin (dB)
		Antenna AF	Cable CF	Preamp PF			
3704.00	38.4	34.0	4.4	30	74.0	46.8	-27.2
4631.00	37.7	35.3	5.1	30	74.0	48.2	-25.8
5557.00	37.1	37.4	5.5	29	74.0	51.0	-23.0
6483.00	37.6	38.2	5.9	29	74.0	52.7	-21.3
7409.00	38.8	39.3	6.3	29	74.0	55.2	-18.8
9262.00	39.4	40.9	9.3	29	74.0	60.7	-13.3

**Figure 41. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(P) = Peak + AF + CF - PF$$

Where: FR (P) is final peak detector result,

Peak is peak detector measurement,

AF is antenna factor,

CF is cable factor,

PF is preamplifier factor.

Radiated Emission Above 1 GHz

E.U.T Description: Gas Meter
 Type: Industrial
 Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C

Antenna Polarization: Vertical
 Test Distance: 3 meters
 Operating Frequency: 926.2 MHz

Frequency range: 2.9 GHz to 9.3 GHz
 Detector: Average Detector

Freq. (MHz)	AVG Amp (dB μ V/m)	Correction Factors			AVG Specification (dB μ V/m)	AVG Final Result FR (A) (dB μ V/m See Note*.)	AVG Margin (dB)
		Antenna AF (dB)	Cable CF (dB)	Preamp PF (dB)			
3704.00	25.8	39.1	4.4	30	54.0	39.3	-14.7
4631.00	27.0	37.75	5.1	30	54.0	39.9	-14.1
5557.00	27.3	38.27	5.5	29	54.0	42.1	-11.9
6483.00	26.3	35.6	5.9	29	54.0	38.8	-15.2
7409.00	26.4	39.7	6.3	29	54.0	43.4	-10.6
9262.00	26.6	40.5	9.3	29	54.0	47.4	-6.6

**Figure 42. Radiated Emission. Antenna Polarization: VERTICAL
Detector: Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Note*: In the frequency range above 2.9 GHz, the field strength was manually calculated by using the following equation:

$$FR(A) = AVG + AF + CF - PF$$

Where: FR(A) is average detector result,

AVG is average detector measurement,

AF is antenna factor,

CF is cable factor,

PF is preamplifier factor.

7.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3411A00102	November 30, 2000	1 year
RF Section	HP	85420E	3427A00103	November 30, 2000	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001.0	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet2225	2738508357.0	N/A	N/A
Antenna-Log Periodic	A.H.System	SA5-200/511	253.0	January 27,2000	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	002	June 18, 2000	1 year
1 GHz High Pass Filter	Technion Haifa	915-HPF	01	March 31, 2000	1 year
Spectrum Analyzer	HP	8592L	3745A08184	August 27, 2000	1 year

8. Maximum Transmitted Peak Power Output

8.1 Test procedure

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through appropriate coaxial cable. Special attention was taken to prevent overload of the Spectrum Analyzer RF input. The Spectrum Analyzer was set to 3 MHz resolution BW. Peak power level was measured at selected operation frequencies

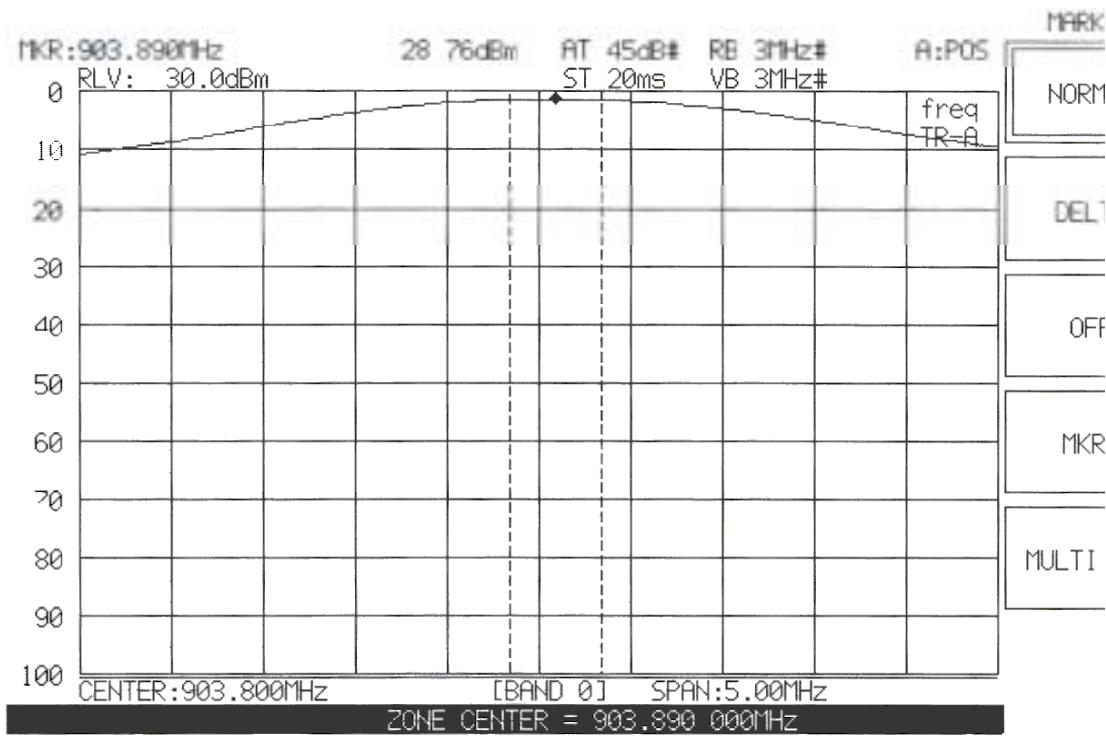


Figure 43.



Figure 44.

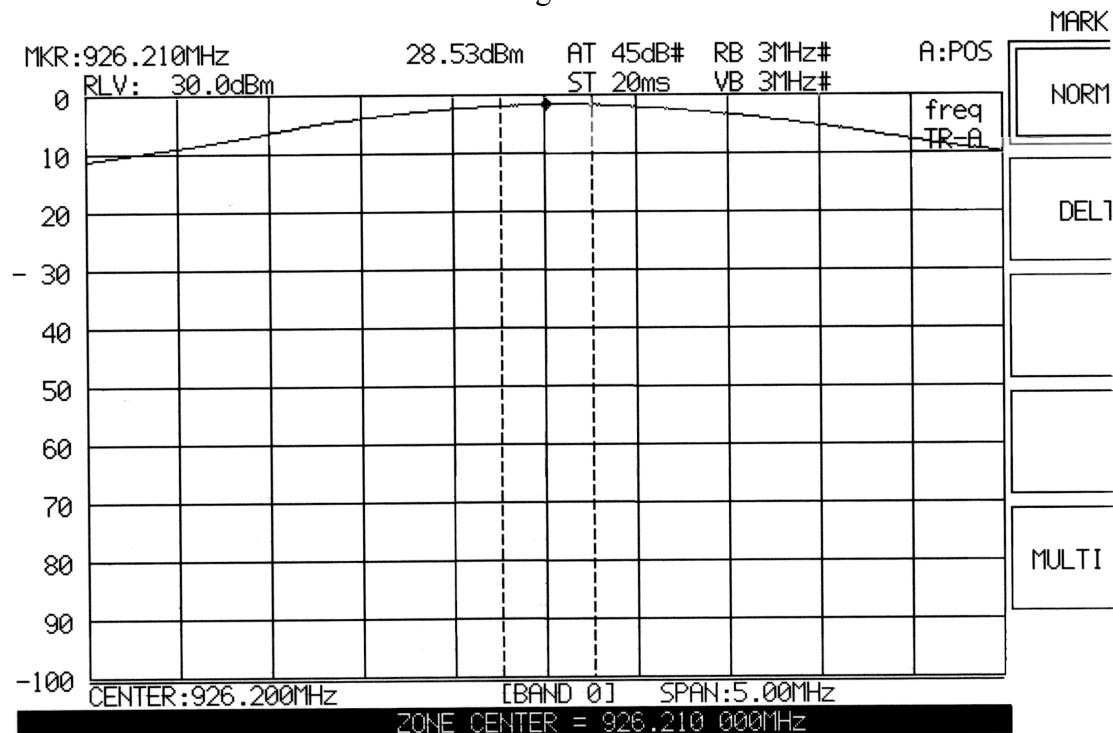


Figure 45.

8.2 Results table

E.U.T. Description: Gas Meter
TYPE: Industrial
Serial Number: Not Designated
Specification: F.C.C. Part 15, Subpart C

Operation Frequency	Reading	Final Result	Specification	Margin	Cable Attenuation
(MHz)	(dBm)	(dBm)	(dBm)	(dB)	(dB)
903.8	28.76	29.26	30	0.74	0.5
915.0	28.73	29.23	30	0.77	0.5
926.2	28.53	29.03	30	0.97	0.5

Figure 46 Maximum Power Output

JUDGEMENT: Passed by 0.74 dB

TEST PERSONNEL:

Tester Signature: S. Zigdon Date: 15.02.01

Typed/Printed Name: S. Zigdon

8.3 8.3 Test Equipment Used.

Peak Power Output

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	Anritzu	MS 2602A	MT12370	2.5.2000	1 year
Cable	Huber Suhner	RG142	None	2.5.2000	1 year

Figure 47 Test Equipment Used

9. Peak Power Output Out of 902-928 MHz Band

9.1 9.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through the appropriate coaxial cable. The spectrum analyzer was set to 100 KHz resolution BW. Frequency range from 10 KHz to 8.5 GHz was scanned. Level of spectrum components out of the 902-928 MHz was measured at the selected operation frequencies.



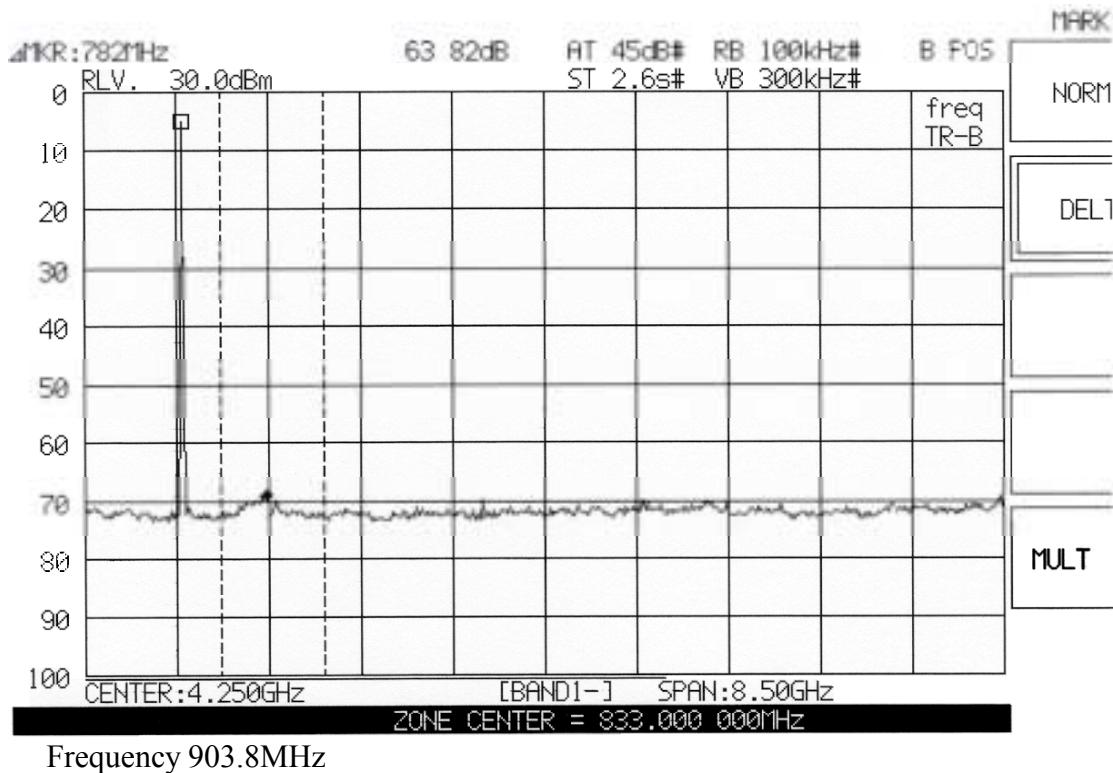


Figure 48.

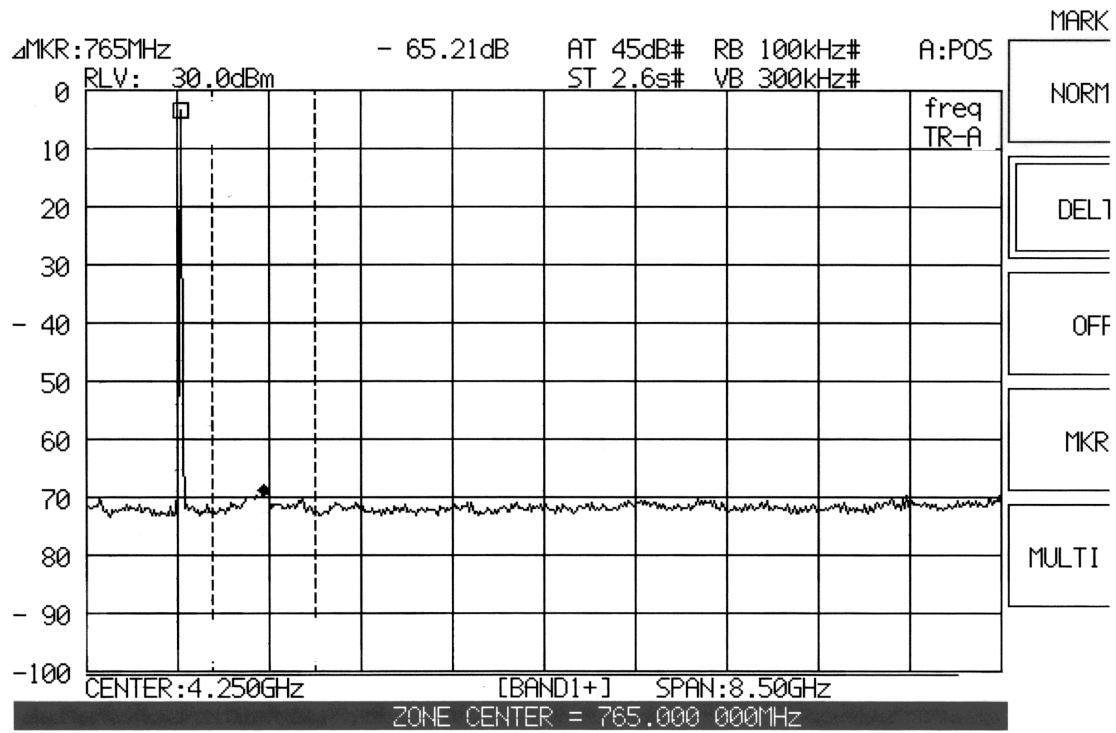

Frequency 915MHz

Figure 49.

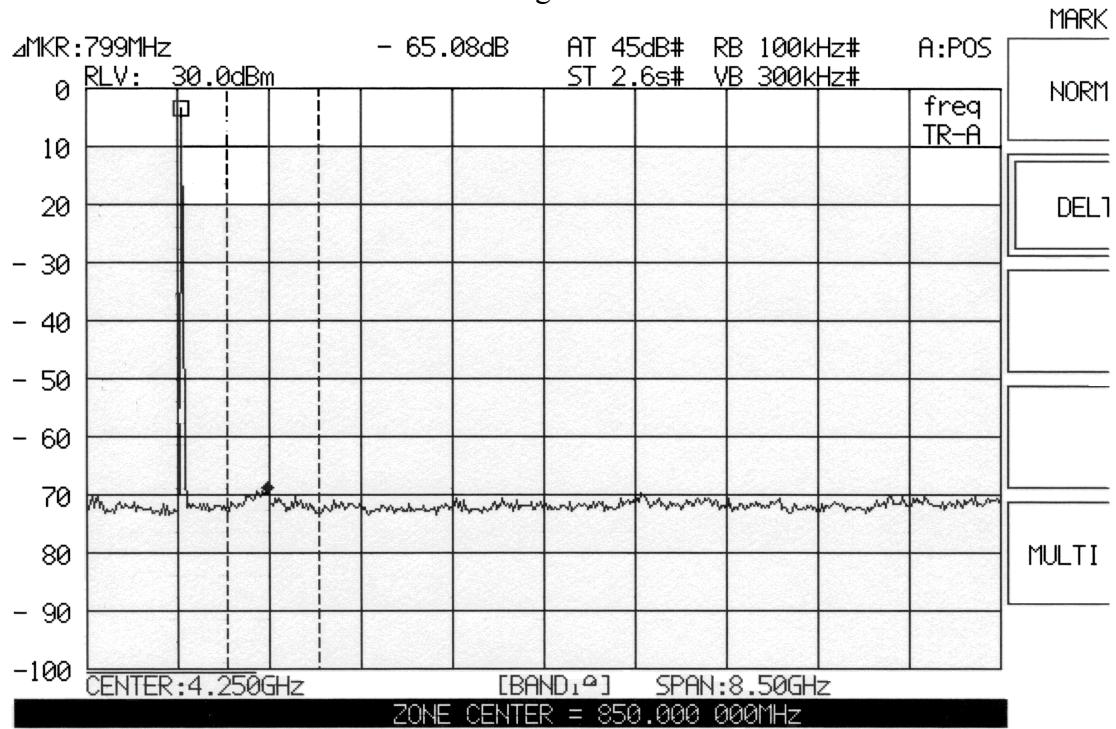

Frequency 926.2MHz

Figure 50.

9.2 **Results table**

E.U.T description: Gas Meter

TYPE: Industrial

Serial Number: Not Designated

Specification: F.C.C. Part 15, Subpart C

Operation Frequency	Reading	Specification	Margin
(MHz)	(dBm)	(dBm)	(dB)
903.8	63.82	20	43.82
915.0	65.21	20	45.21
926.2	65.08	20	45.08

Figure 51 Peak Power Output of 902-928 MHz Band

JUDGEMENT: Passed by 43.82 dB

TEST PERSONNEL:

Tester Signature: Shimmon Zigdon Date: 15.02.01

Typed/Printed Name: S. Zigdon

9.3 Test Equipment Used.

Peak Power Output of 902-928 MHz Band

Instrument	Manufacture	Model	Serial Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	Anritzu	MS 2602A	MT12370	2.5.2000	1 year
Cable	Huber Suhner	RG142	None	2.5.2000	1 year

Figure 52 Test Equipment Used

10. 6 dB Minimum Bandwidth

10.1 Test procedure

The E.U.T. was set to the applicable test frequency. The E.U.T. antenna terminal was connected to the spectrum analyzer through an appropriate coaxial cable section. The spectrum analyzer was set to 100 KHz resolution BW. The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded.

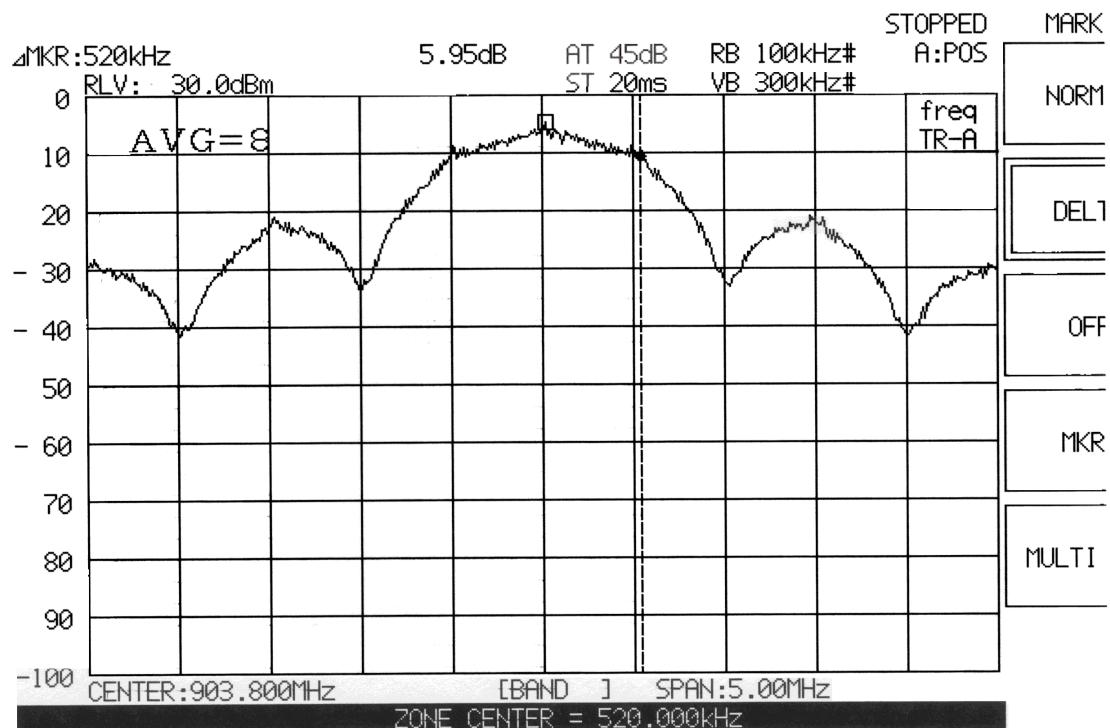


Figure 53.

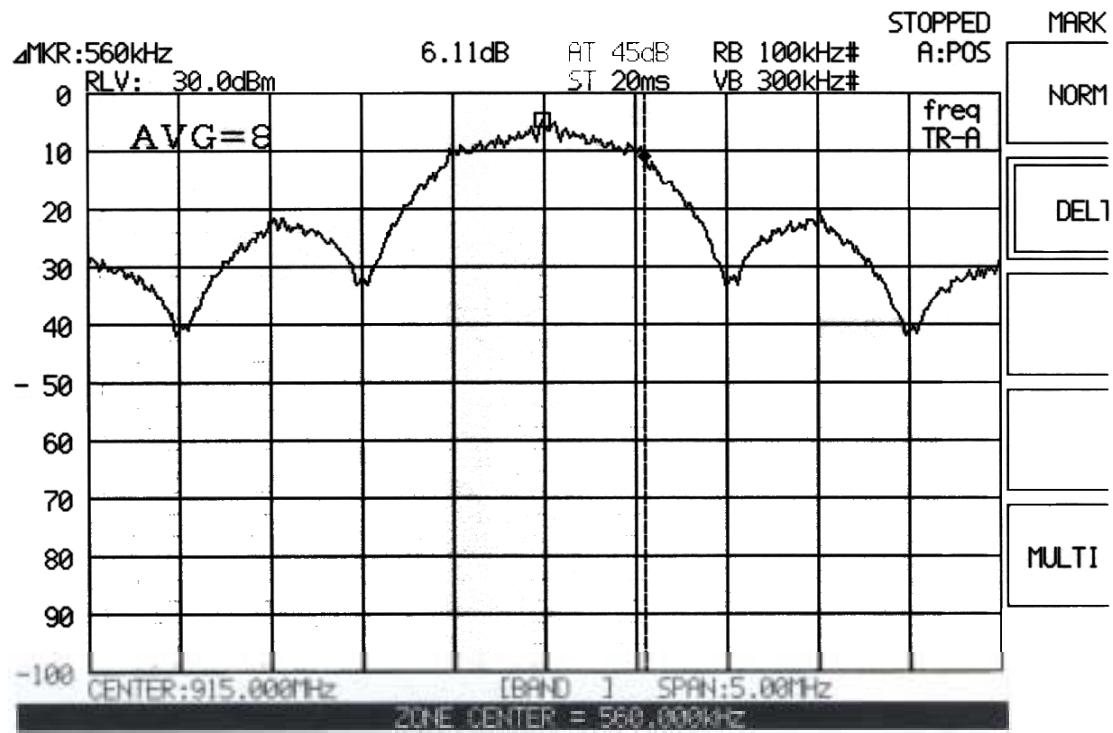


Figure 54.

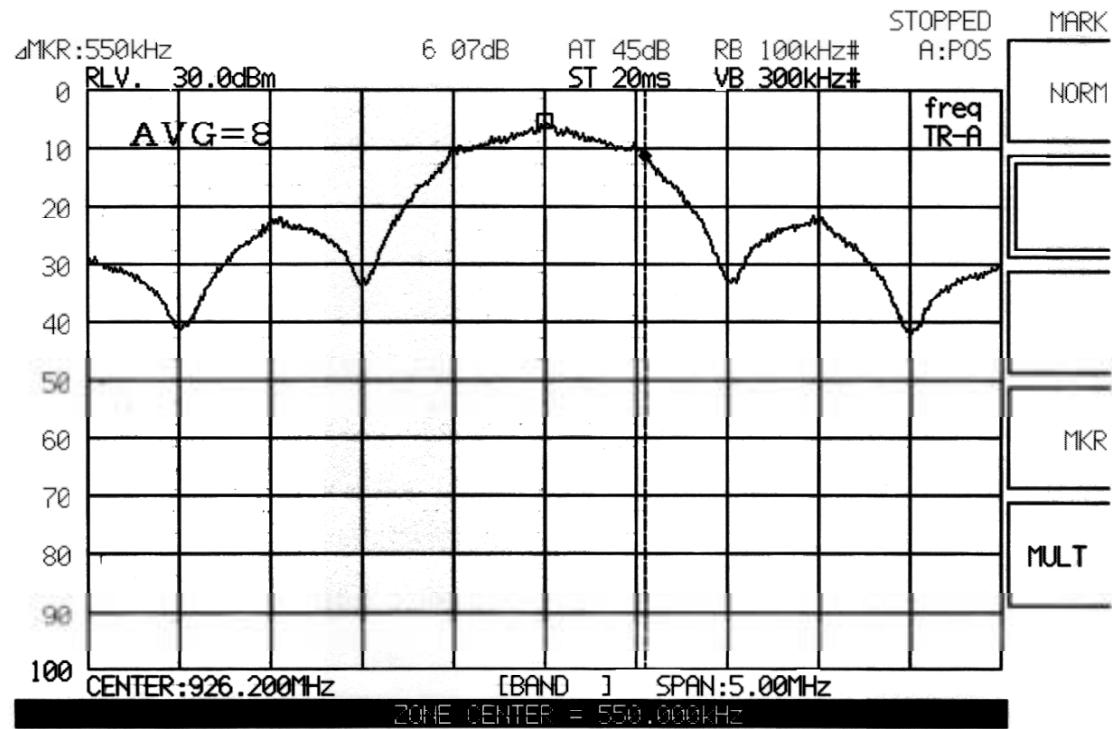


Figure 55.

10.2 Results table

E.U.T description: Gas Meter

TYPE: Industrial

Serial Number: Not Designated

Specification: F.C.C. Part 15, Subpart C: (15.247-a2)

Operation Frequency	Reading	Specification	Margin
(MHz)	(MHz)	(MHz)	(MHz)
903.8	1.04	0.5	0.54
915.0	1.12	0.5	0.62
926.2	1.10	0.5	0.60

Figure 56 6 dB Minimum Bandwidth

JUDGEMENT: Passed by 0.54 MHz

TEST PERSONNEL:

Tester Signature: Simon Zigdon Date: 15.02.01

Typed/Printed Name: S. Zigdon

10.3 Test Equipment Used.

6 dB Minimum Bandwidth

Instrument	Manufacture	Model	Serial Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	Anritzu	MS 2602A	MT12370	2.5.2000	1 year
Cable	Huber Suhner	RG142	None	2.5.2000	1 year

Figure 57 Test Equipment Used

11. Band Edge Spectrum

[In Accordance with section 15.247(c)]

11.1 Test procedure

Enclosed are spectrum analyzer plots for the lowest operation frequency (903.8 MHz) and the highest operation frequency (926.2 MHz) in which the E.U.T. is planned to be used.

The E.U.T. antenna terminal was connected to the spectrum analyzer through an appropriate coaxial cable. The spectrum analyzer was set to 100 KHz resolution BW. Maximum power level below 902 MHz and above 928 MHz was measured relative to power level at 903.8 MHz and 926.2 MHz correspondingly.

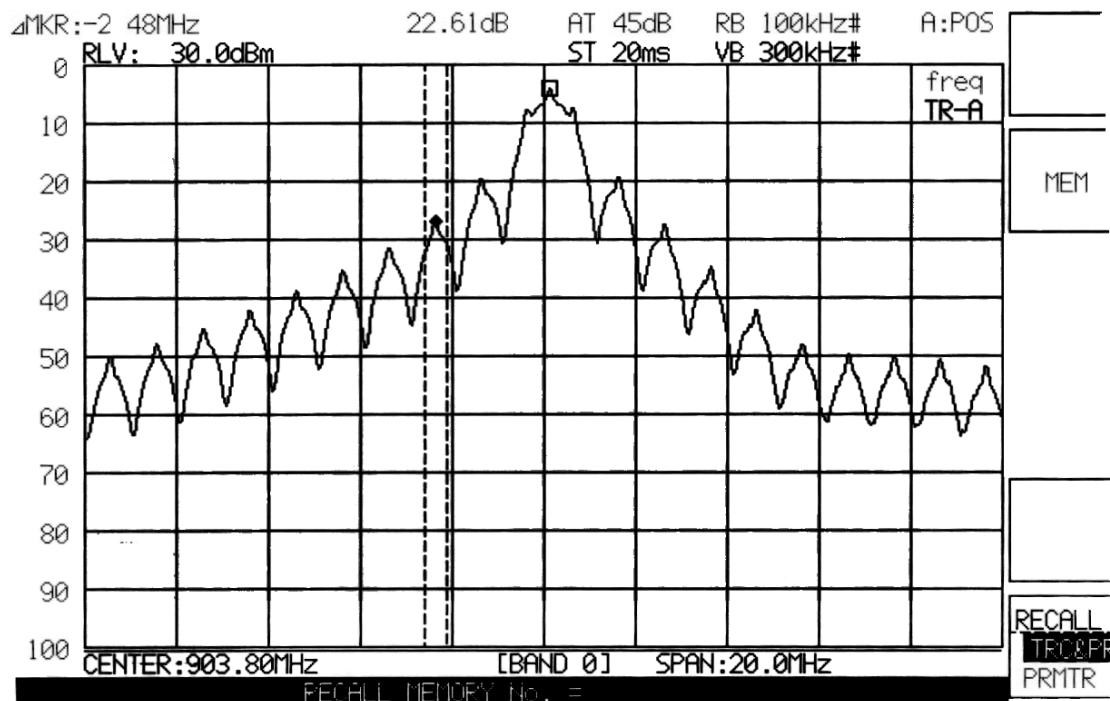


Figure 58.

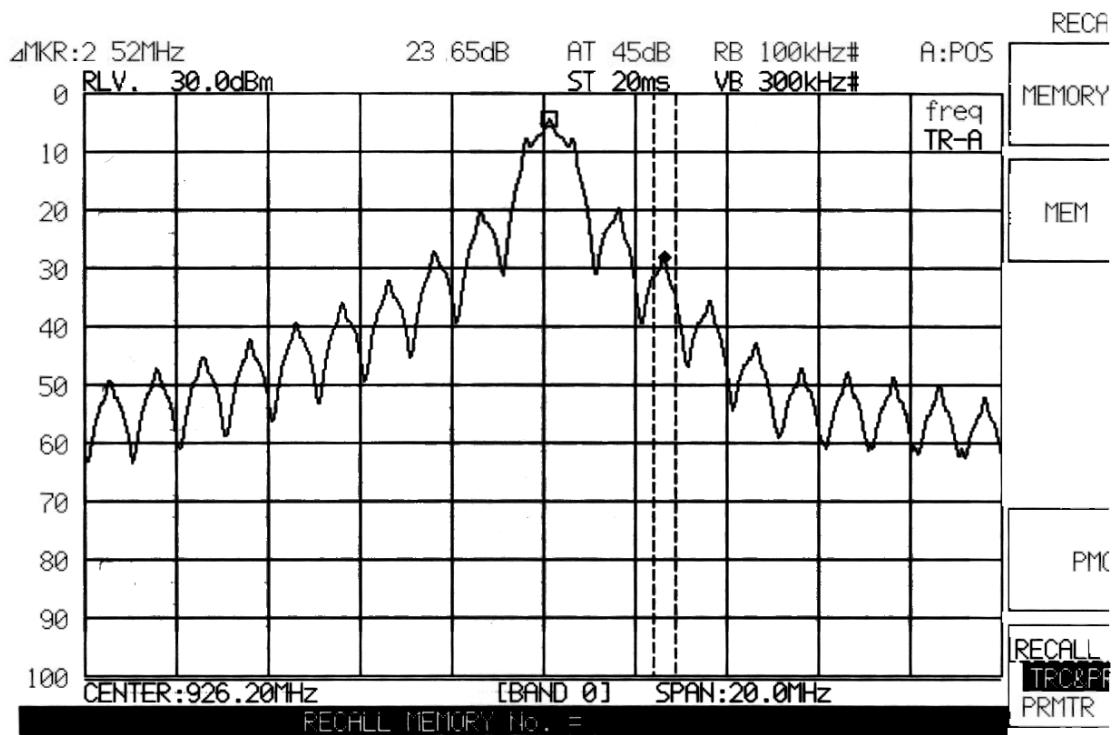


Figure 59.

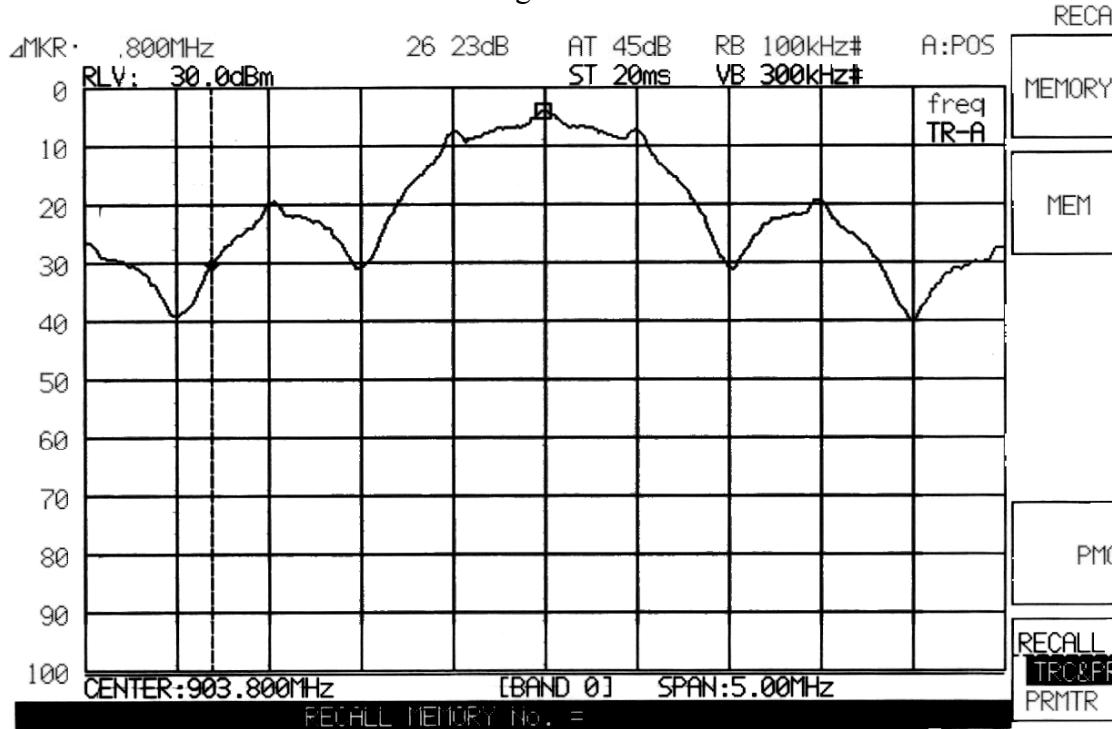


Figure 60.

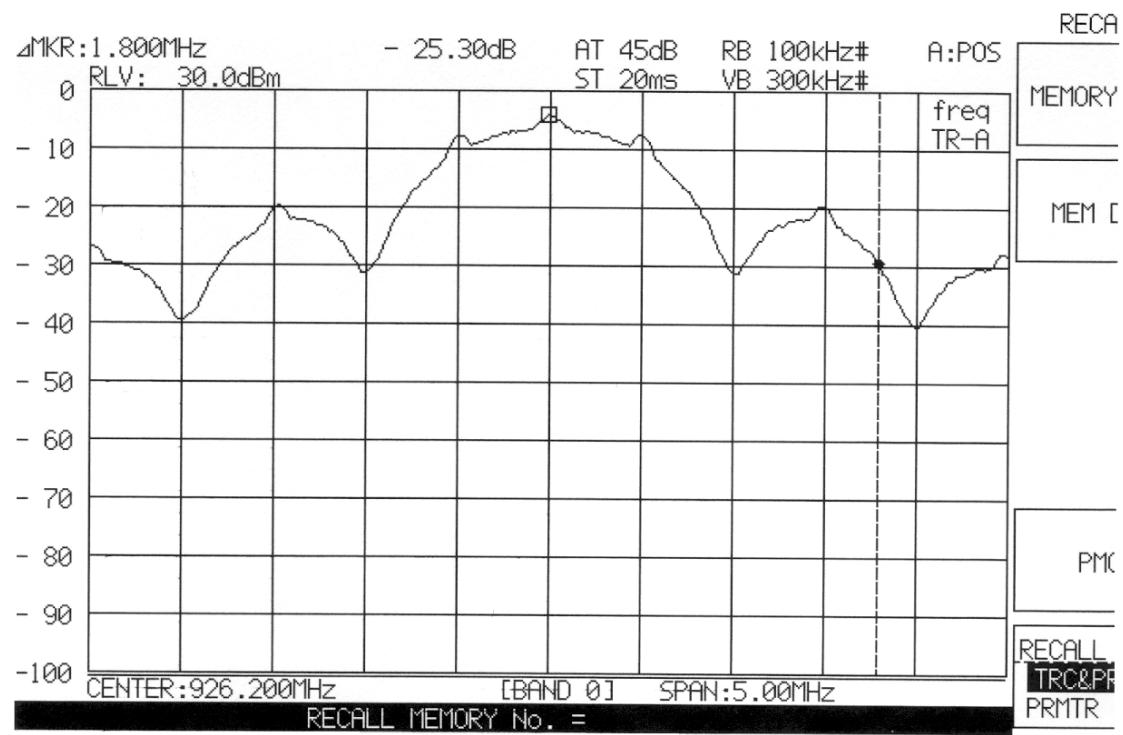


Figure 61.

11.2 **Results table**

E.U.T. description: Gas Meter
TYPE: Industrial
Serial Number: Not Designated
Specification: F.C.C. Part 15, Subpart C (15.247)

Operation Frequency	Band Edge Frequency	Spectrum Level	Specification	Margin
(MHz)	(MHz)	(dBc)	(dBc)	(dB)
903.8	902	22.61	20	2.61
926.2	928	23.65	20	3.65

Figure 62 Band Edge Spectrum

JUDGEMENT: Passed by 2.61 dB

TEST PERSONNEL:

Tester Signature: S. Zigdon Date: 15.02.01

Typed/Printed Name: S. Zigdon

11.3 Test Equipment Used.

Band edge Spectrum

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	Anritzu	MS 2602A	MT12370	2.5.2000	1 year
Cable	Huber Suhner	RG142	None	2.5.2000	1 year

Figure 63 Test Equipment Used

12. Transmitted Power Density

[In accordance with section 15.247(d)]

12.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an appropriate coaxial cable. The spectrum analyzer was set to 3 KHz resolution BW. 10 KHz video BW and sweep time of 1 second for each 3 KHz "window". The spectrum peaks were located at each of the 3 operating frequencies.

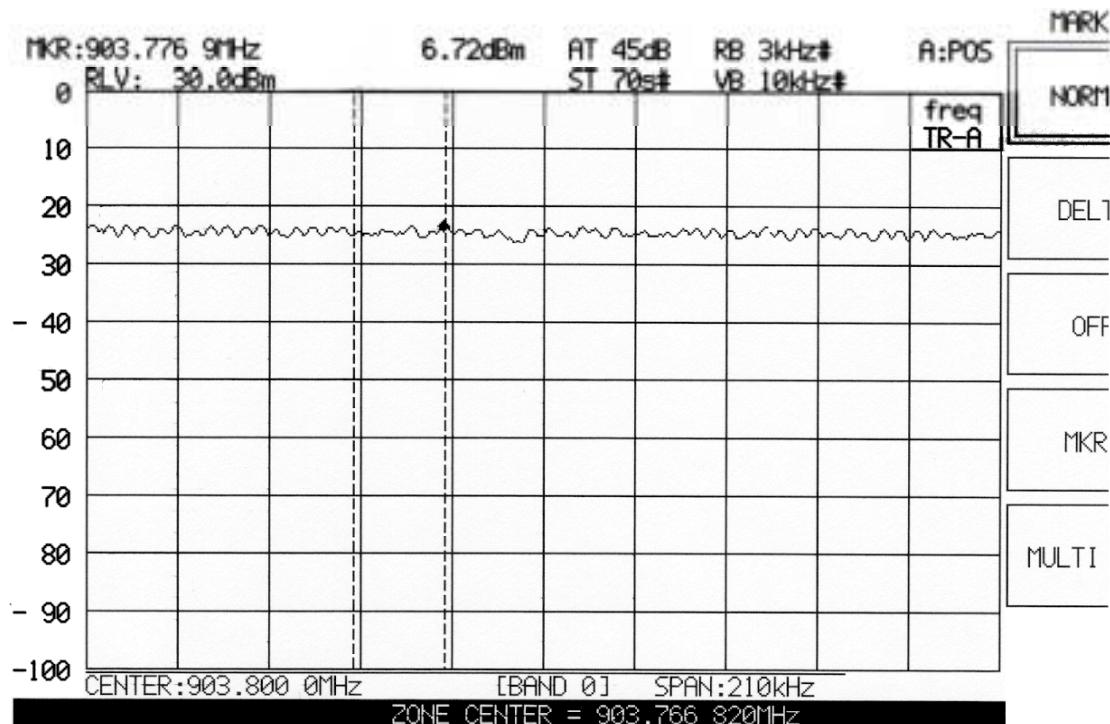


Figure 64.

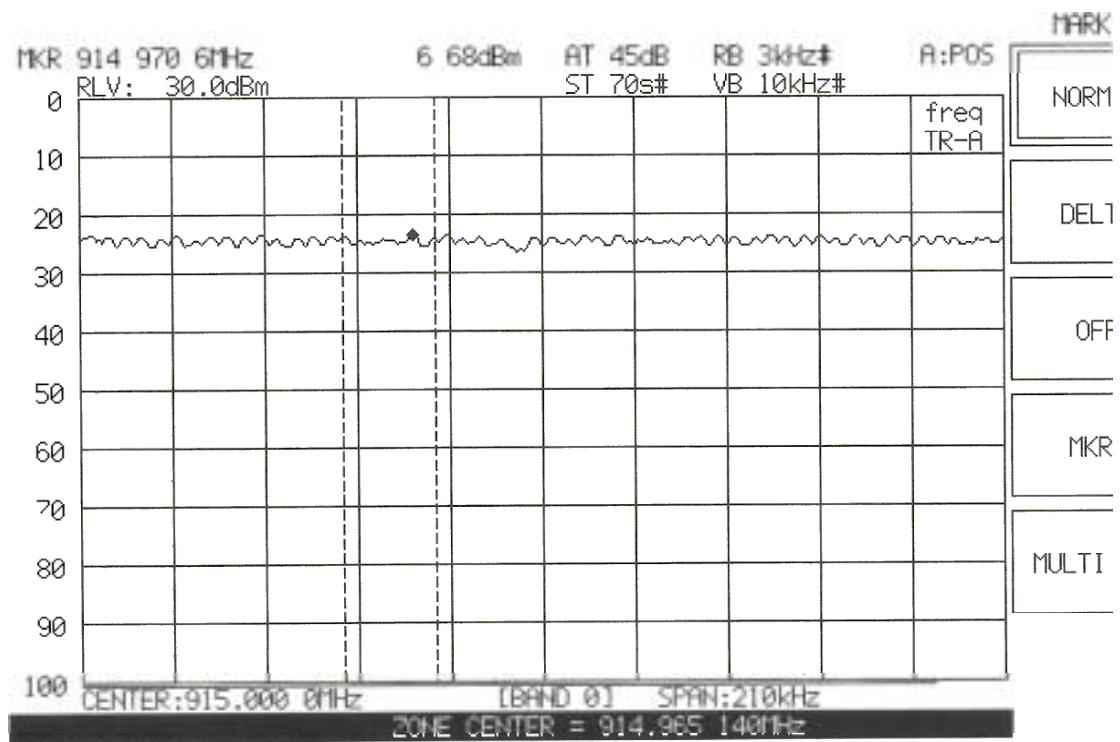


Figure 65.

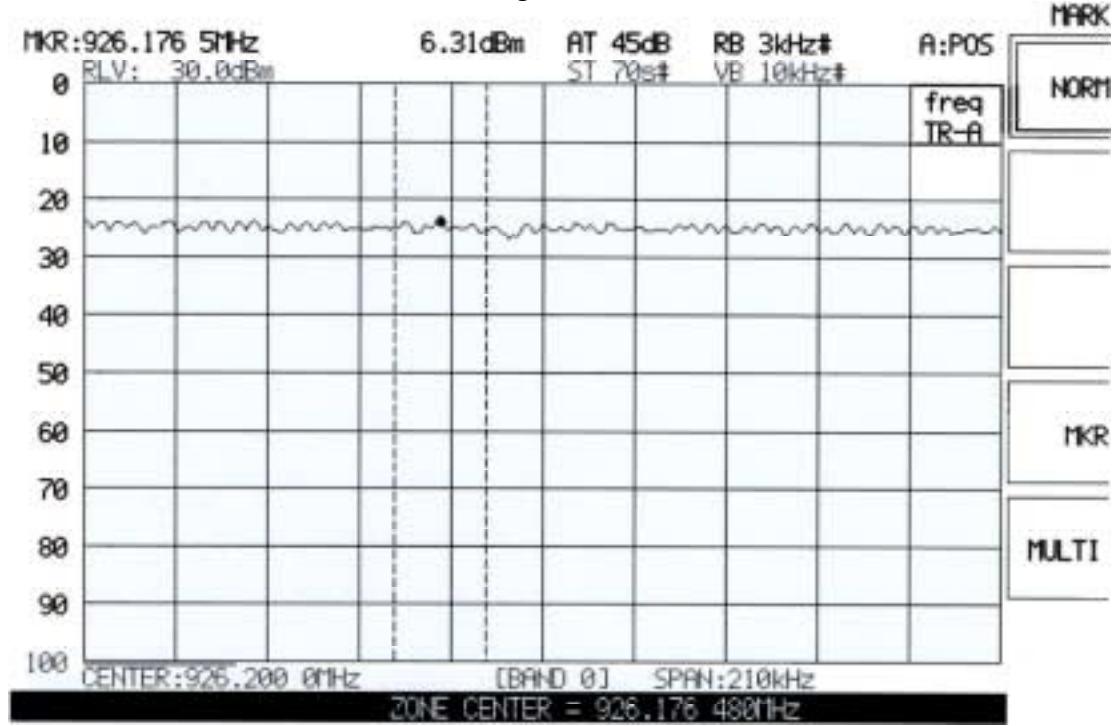


Figure 66.

12.2 **Results table**

E.U.T. description: Gas Meter

TYPE: Industrial

Serial Number: Not Designated

Specification: F.C.C. Part 15, Subpart D (15.247)

Operation Frequency	Reading	Final Result	Specification	Margin	Cable Attenuation
(MHz)	(dBm)	(dBm)	(dBm)	(dB)	(dB)
903.8	6.72	7.22	8	0.78	0.5
915.0	6.68	7.18	8	0.82	0.5
926.2	6.31	6.81	8	1.19	0.5

Figure 67 Test Equipment Used

JUDGEMENT: Passed by 0.78 dB

TEST PERSONNEL:

Tester Signature: S. Zigdon Date: 15.02.01

Typed/Printed Name: S. Zigdon

12.3 Test Equipment Used.

Transmitted Power Density

Instrument	Manufacture	Model	Serial Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	Anritzu	MS 2602A	MT12370	2.5.2000	1 year
Cable	Huber Suhner	RG142	None	2.5.2000	1 year

Figure 68 Test Equipment Used

13. Processing Gain

[In accordance with section 15.247(e)]

13.1 *Test procedure*

The processing gain was measured according to the guideline in section 15.247(e). The transmitter was enclosed in a small RF chamber and configured to transmit periodically typical length burst messages. The jammer was simulated by HP8647A signal generator. The composed signal (transmitter and jammer) was fed to the SPSP receiver and the demodulated was fed to a PC with decoding and analyzing program. Instead of pointing out a require BER, the criteria that was used is 80% success rate in detecting and decoding burst messages (error free decoding messages). This criteria, which is related to probability of detection rather than to "required BER", is more suitable in measuring the performance in our system because of its' burst nature. By simulating, we can show that for criteria of 80% success rate, the required S/N ratio is 13db. This number does not take into account any implementation losses, and it is purely theoretical. The test consists of stepping the signal generator in 50 KHz increments across the passband. The measurement was taken in 3 different frequencies- near the lower edge of the band in 903.8 MHz, in the center frequency 915MHz and near the upper edge of the band 926.2MHz. The measurement was taken when the system was configured to work with 255 PN maximal length codes.

Test Setup

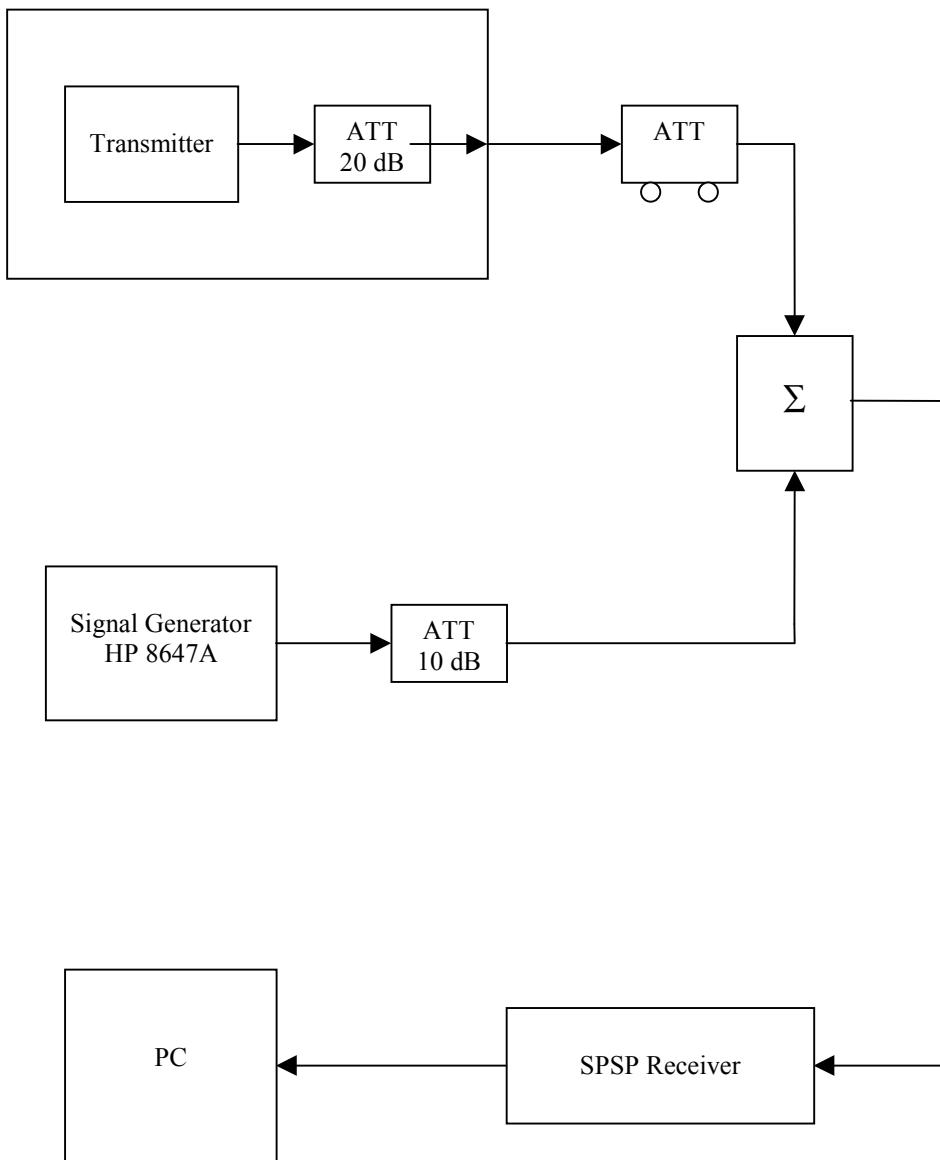


Figure 69 Processing Gain, Block Scheme

Frequency 903.8 MHz

DeltaF, MHZ	J/S, dB
0	8 Discard
0.05	8
0.1	8
0.15	8
0.2	8
0.25	9
0.3	9
0.35	9
0.4	9
0.45	10
0.5	10
0.55	11
0.6	12
-0.05	7 Discard
-0.1	8
-0.15	8
-0.2	8
-0.25	8
-0.3	9
-0.35	9
-0.4	10
-0.45	11
-0.5	12
-0.55	13
-0.6	13

Figure 70 Processing Gain: 13+8=21

Frequency 915 MHz

DeltaF, MHZ	J/S, dB
0	7 Discard
0.05	7 Discard
0.1	8
0.15	8
0.2	8
0.25	9
0.3	9
0.35	10
0.4	11
0.45	11
0.5	12
0.55	12
0.6	13
-0.05	8
-0.1	8
-0.15	8
-0.2	8
-0.25	8
-0.3	9
-0.35	9
-0.4	10
-0.45	10
-0.5	11
-0.55	12
-0.6	13

Figure 71 Processing Gain: 13+8=21

Frequency 926.2 MHz

DeltaF, MHZ	J/S, dB
0	7 Discard
0.05	8
0.1	8
0.15	9
0.2	9
0.25	9
0.3	9
0.35	9
0.4	10
0.45	10
0.5	11
0.55	12
0.6	13
-0.05	7 Discard
-0.1	8
-0.15	8
-0.2	8
-0.25	8
-0.3	9
-0.35	9
-0.4	9
-0.45	10
-0.5	11
-0.55	12
-0.6	12

Figure 72 Processing Gain: 13+8=21

JUDGEMENT: Passed by dB μ V/m

TEST PERSONNEL:

Tester Signature: S. Zigdon Date: 15.02.01

Typed/Printed Name: S. Zigdon

13.2 Test Equipment Used.

Transmitted Power Density

Instrument	Manufacture	Model	Serial Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	Anritzu	MS 2602A	MT12370	2.5.2000	1 year
Cable	Huber Suhner	RG142	None	2.5.2000	1 year
Signal Generator	HP	8648A	364u00639	2.5.2000	1 year
Power Splitter	Mini Circuits	ZAPD21	09716	2.5.2000	1 year
Variable Attenuator	HP	8496A	3308A14531	2.5.2000	1 year
20 dB Attenuator	Mini Circuits	SAT 20	8992612	2.5.2000	1 year
10 dB Attenuator	Mini Circuits	SAT10	942312	2.5.2000	1 year
PC					
Receiver	NEXUS DATA	AP-BX	None	1.7.2000	1 year

Figure 73 Test Equipment Used

14. Antenna Gain

The antenna implemented in the device is a small, wire antenna. The length of the antenna is less than a quarter wavelength. A theoretical upper limit of the gain of small wire antenna, is the gain of theoretical dipole antenna (2.5dBi). Then considering the inferiority of the implemented antenna vs. the theoretical dipole and the sub optimal efficiency of the antenna, the gain of the antenna is estimated to be 0dBi.

15. R.F Exposure/Safety

The E.U.T. is installed in fixed locations for application of transmitting data of gas consumption to central data collection offices. The distance between the E.U.T. and the general population is at least several meters.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1307(b)(1) Requirements

(a) FCC limits at 915 MHz

$$S = \frac{f}{300} = \frac{915}{1500} = 3.05 \frac{mw}{cm^2}$$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t- Transmitted Power 1000mw (Peak)

G_T- Antenna Gain, 1(0dB)

R- Distance from Transmitter using 100cm worst case

(c) The peak power density is :

$$S_p = \frac{10^3 \times 1}{4\pi(100)^2} = 7.96 \frac{mw}{cm^2}$$

(d) The duty cycle of transmission in actual case is 4 X 160 msec pulses per 24 hours.

The average power over 30 minutes is:

$$P_{AV} = \frac{1000.64}{30 \times 60} = 0.35mw$$

(e) The averaged power density (over 30 minutes) of the E.U.T. is:

$$S_{AV} = \frac{0.35 \times 1}{4\pi(100)^2} = 2.8 \times 10^{-6} \frac{mw}{cm^2}$$

(f) This is significantly below the FCC limit.

16. Photographs of Tested E.U.T.



Figure 74 Front View



Figure 75 Rear View



Figure 76 Printed Circuit Side 1



Figure 77 Printed Circuit Side 2



Figure 78 Printed Circuit Mounted in Housing



Figure 79 Housing External View