



## FCC RADIO TEST REPORT

|                        |                                     |
|------------------------|-------------------------------------|
| Applicant's company    | <b>BILLIONTON SYSTEMS INC.</b>      |
| Applicant Address      | NO. 21 SUI-LIH ROAD HSIN-CHU TAIWAN |
| FCC ID                 | <b>NLFGUBTCR42M</b>                 |
| Manufacturer's company | <b>BILLIONTON SYSTEMS INC.</b>      |
| Manufacturer Address   | NO. 21 SUI-LIH ROAD HSIN-CHU TAIWAN |

|                   |   |
|-------------------|---|
| Product Name      | Bluetooth module                        |
| Brand Name        | BILLIONTON                              |
| Model Name        | GUBTCR42M, GUBTCR42M-A,<br>GUBTCR42M-NS |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart C § 15.247   |
| Test Freq. Range  | 2400 ~ 2483.5MHz                        |
| Receive Date      | Sep. 12, 2005                           |
| Test Date         | Nov. 10, 2005                           |
| Submission Type   | Original Equipment                      |



### Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

## Table of Contents

|  |                |
|--|----------------|
| <b>1. CERTIFICATE OF COMPLIANCE .....</b>                | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>               | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                      | <b>3</b>       |
| 3.1. Product Details.....                                | 3              |
| 3.2. Table for Filed Antenna.....                        | 3              |
| 3.3. Table for Carrier Frequencies .....                 | 3              |
| 3.4. Table for Test Modes.....                           | 4              |
| 3.5. Table for Testing Locations.....                    | 4              |
| 3.6. Table for Supporting Units .....                    | 4              |
| 3.7. Table for Parameters of Test Software Setting ..... | 4              |
| 3.8. Test Configurations .....                           | 5              |
| <b>4. TEST RESULT .....</b>                              | <b>7</b>       |
| 4.1. AC Power Line Conducted Emissions Measurement.....  | 7              |
| 4.2. Maximum Peak Output Power Measurement .....         | 11             |
| 4.3. Hopping Channel Separation Measurement .....        | 13             |
| 4.4. Number of Hopping Frequency Measurement.....        | 18             |
| 4.5. Dwell Time Measurement.....                         | 20             |
| 4.6. Radiated Emissions Measurement .....                | 27             |
| 4.7. Band Edge Emissions Measurement .....               | 51             |
| 4.8. Antenna Requirements .....                          | 55             |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>             | <b>56</b>      |
| <b>6. SPORTON COMPANY PROFILE .....</b>                  | <b>57</b>      |
| 6.1. Test Location.....                                  | 57             |
| <b>7. CERTIFICATE OF NVLAP ACCREDITATION .....</b>       | <b>58</b>      |
| <b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>               | <b>A1 ~ A4</b> |
| <b>APPENDIX B. TEST PHOTOS.....</b>                      | <b>B1 ~ B3</b> |
| <b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>     | <b>C1 ~ C3</b> |



## History of This Test Report

Original Issue Date: Nov. 21, 2005


Report No.: FR590710

- No additional attachment.
- Additional attachment were issued as following record:

## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : Bluetooth module  
**Brand Name** : BILLIONTON  
**Model Name** : GUBTCR42M, GUBTCR42M-A, GUBTCR42M-NS  
**Applicant** : BILLIONTON SYSTEMS INC.  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 12, 2005 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



**Wayne Hsu / Supervisor**  
Sportun International Inc.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C |              |                                     |          |             |
|--|--------------|-------------------------------------|----------|-------------|
| Part   | Rule Section | Description of Test                 | Result   | Under Limit |
| 4.1  | 15.207       | AC Power Line Conducted Emissions   | Complies | 10.98 dB    |
| 4.2  | 15.247(b)(1) | Maximum Peak Conducted Output Power | Complies | 27.65 dB    |
| 4.3  | 15.247(a)(1) | Hopping Channel Separation          | Complies | -           |
| 4.4  | 15.247(b)(1) | Number of Hopping Frequency         | Complies | -           |
| 4.5  | 15.247(a)(1) | Dwell Time                          | Complies | -           |
| 4.6  | 15.247(d)    | Radiated Emissions                  | Complies | 3.56 dB     |
| 4.7  | 15.247(d)    | Band Edge Emissions                 | Complies | 1.25 dB     |
| 4.8  | 15.203       | Antenna Requirements                | Complies | -           |

| Test Items                               | Uncertainty | Remark                   |
|--|-------------|--------------------------|
| AC Power Line Conducted Emissions        | ±2.26dB     | Confidence levels of 95% |
| Maximum Peak Conducted Output Power      | ±0.5dB      | Confidence levels of 95% |
| Hopping Channel Separation / Dwell Time  | ±6.25×10-7  | Confidence levels of 95% |
| Radiated Emissions / Band Edge Emissions | ±3.72dB     | Confidence levels of 95% |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

EUT IS a Bluetooth module with Bluetooth functions. Only the radio detail of Bluetooth is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

| Items                    | Description                 |
|--------------------------|-----------------------------|
| Radio Type               | Intentional Transceiver     |
| Power Type               | 3.3V DC from host           |
| Interface Type           | NA                          |
| Modulation               | FHSS (GFSK)                 |
| Data Rate (Mbps)         | 1                           |
| Frequency Range          | 2400 ~ 2483.5MHz            |
| Channel Number           | 79                          |
| Channel Band Width (99%) | 852 kHz                     |
| Conducted Output Power   | 2.35 dBm                    |
| Carrier Frequencies      | Please refer to section 3.3 |
| Antenna                  | Please refer to section 3.2 |

#### 3.2. Table for Filed Antenna

| Ant. | Antenna Type | Connector | Gain (dBi) |
|------|--------------|-----------|------------|
| 1    | PIFA Antenna | NA        | 3.00       |
| 2    | Chip Antenna | NA        | 2.00       |

#### 3.3. Table for Carrier Frequencies

| Frequency Band | Channel No. | Frequency |
|----------------|-------------|-----------|
| 2400~2483.5MHz | 0           | 2402 MHz  |
|                | 1           | 2403 MHz  |
|                | :           | :         |
|                | 38          | 2440 MHz  |
|                | 39          | 2441 MHz  |
|                | 40          | 2442 MHz  |
|                | :           | :         |
|                | 77          | 2479 MHz  |
|                | 78          | 2480 MHz  |

### 3.4. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                    | Mode        | Data Rate | Channel         | Antenna |
|-------------------------------|-------------|-----------|-----------------|---------|
| AC Power Conducted Emissions  | Normal Link | 1 Mbps    | Hopping 0~78    | 1       |
| Max. Conducted Output Power   | GFSK        | 1 Mbps    | 0/39/78         | NA      |
| Hopping Channel Separation    | GFSK        | 1 Mbps    | 0~1/39~40/77~78 | NA      |
| Number of Hopping Frequency   | GFSK        | 1 Mbps    | 0~78            | NA      |
| Dwell Time                    | DH1/DH3/DH5 | 1 Mbps    | 0/39/78         | NA      |
| Radiated Emissions Below 1GHz | GFSK        | 1 Mbps    | 39              | 1       |
| Radiated Emissions Above 1GHz | GFSK        | 1 Mbps    | 0/39/78         | 1/2     |
| Band Edge Emissions           |             |           |                 |         |

### 3.5. Table for Testing Locations

| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
|---------------|---------------|----------|--------------|-------------|--------------|
| 03CH03-HY     | SAC           | Hwa Ya   | 101377       | IC 4088     | -            |
| CO04-HY       | Conduction    | Hwa Ya   | 101377       | IC 4088     | -            |
| TH01-HY       | OVEN Room     | Hwa Ya   | -            | -           | -            |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.6. Table for Supporting Units

| Support Unit | Brand | Model      | FCC ID     |
|--------------|-------|------------|------------|
| Notebook     | DELL  | PPT (D400) | DoC        |
| Modem        | ACEEX | DM-1414    | IFAXDM1414 |
| Flash        | -     | -          | -          |

### 3.7. Table for Parameters of Test Software Setting


During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11b/g


| Test Software Version | ART      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 2402 MHz | 2441 MHz | 2480 MHz |
| Power Parameters      | 12       | 12       | 12       |

### 3.8. Test Configurations

#### 3.8.1. Radiation Emissions Test Configuration

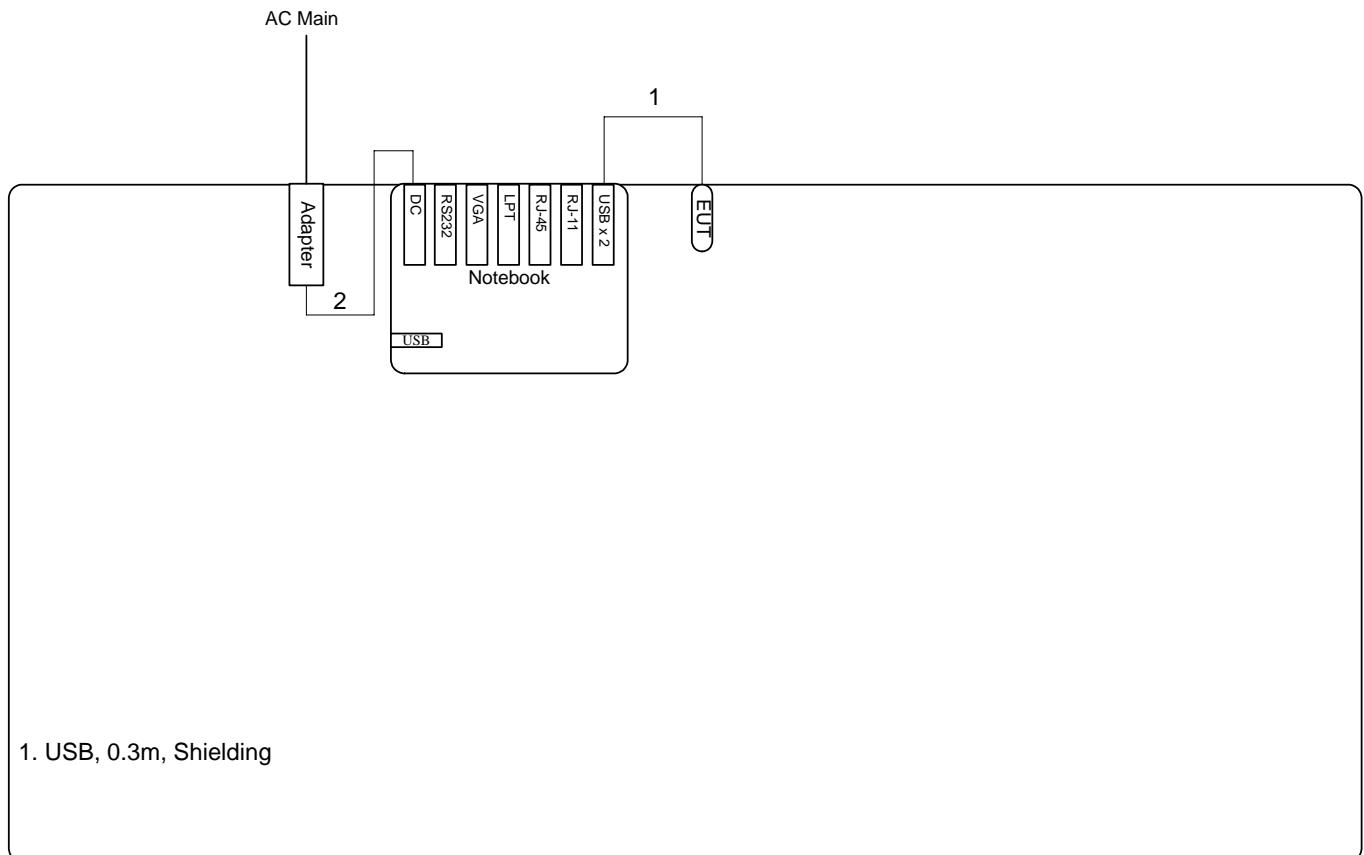

### 3.8.2. AC Power Line Conduction Emissions Test Configuration

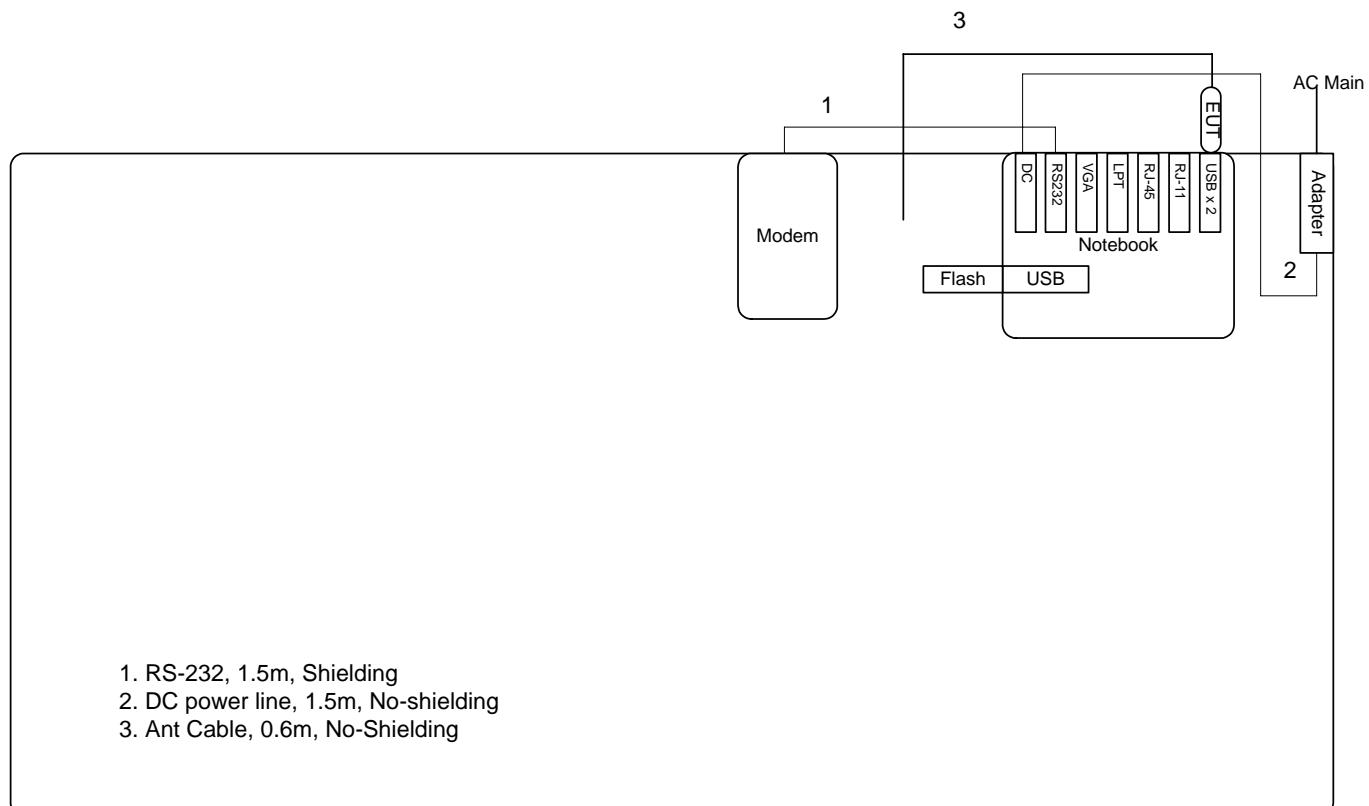

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 KHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

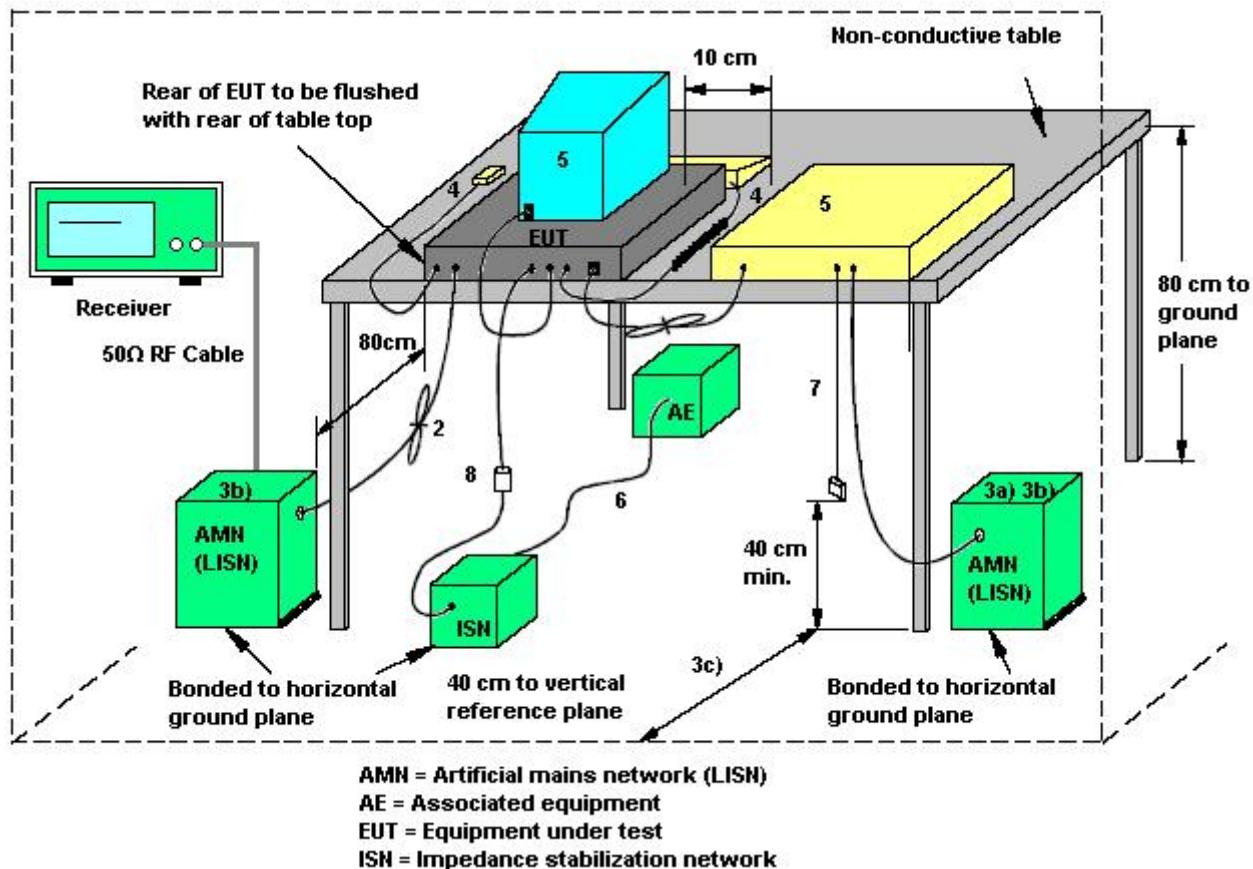

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
4. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
5. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
6. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
7. Cables of hand operated devices, such as keyboards, mouses, etc. shall be placed as for normal usage.
8. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
9. I/O signal cable intended for external connection.
10. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
11. If used, the current probe shall be placed at 0,1 m from the ISN.

#### 4.1.5. Test Deviation


There are no deviations with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

|               |            |          |      |
|---------------|------------|----------|------|
| Temperature   | 25°C       | Humidity | 47%  |
| Test Engineer | Ted Chiu   | Phase    | Line |
| Configuration | Normal Use |          |      |

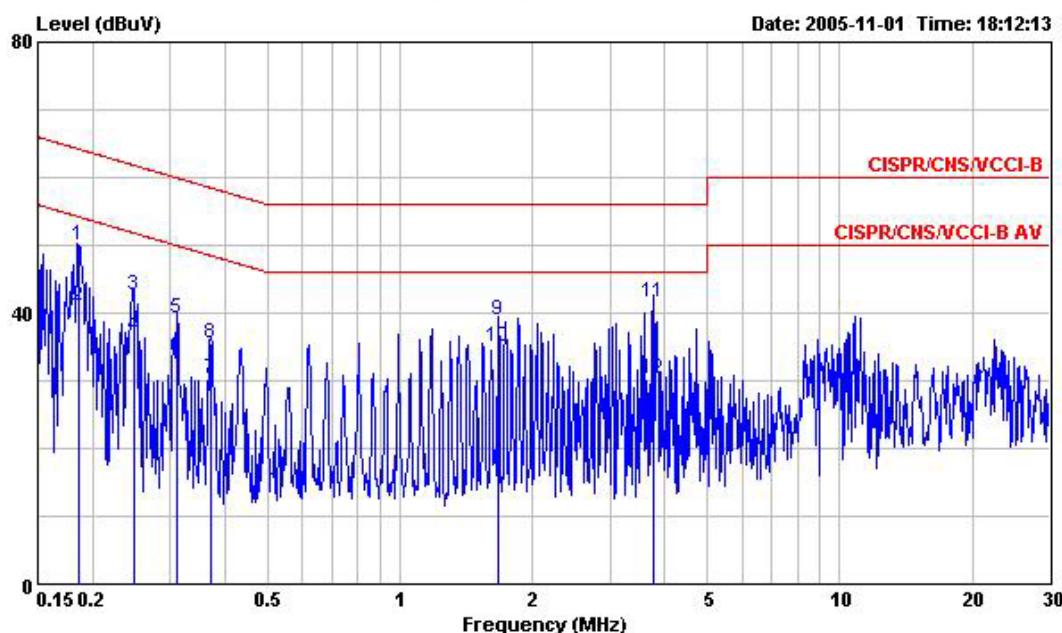

| Freq        | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable |         |
|-------------|-------|------------|------------|------------|-------------|-------|---------|
|             |       |            |            |            |             | dBuV  | dB      |
| 1 0.1857100 | 49.94 | -14.29     | 64.23      | 49.55      | 0.10        | 0.29  | QP      |
| 2 0.1857100 | 40.94 | -13.29     | 54.23      | 40.55      | 0.10        | 0.29  | Average |
| 3 0.2476260 | 42.68 | -19.16     | 61.84      | 42.32      | 0.10        | 0.26  | QP      |
| 4 0.2476260 | 36.48 | -15.36     | 51.84      | 36.12      | 0.10        | 0.26  | Average |
| 5 0.3103460 | 39.19 | -20.77     | 59.96      | 38.77      | 0.10        | 0.32  | QP      |
| 6 0.3103460 | 33.43 | -16.53     | 49.96      | 33.01      | 0.10        | 0.32  | Average |
| 7 0.3711650 | 30.33 | -18.14     | 48.47      | 29.94      | 0.10        | 0.29  | Average |
| 8 0.3711650 | 35.47 | -23.00     | 58.47      | 35.08      | 0.10        | 0.29  | QP      |
| 9 1.671     | 38.92 | -17.08     | 56.00      | 38.49      | 0.10        | 0.33  | QP      |
| 10 1.671    | 35.02 | -10.98     | 46.00      | 34.59      | 0.10        | 0.33  | Average |
| 11 3.774    | 41.68 | -14.32     | 56.00      | 41.29      | 0.10        | 0.29  | QP      |
| 12 3.774    | 30.18 | -15.82     | 46.00      | 29.79      | 0.10        | 0.29  | Average |

|               |            |          |         |
|---------------|------------|----------|---------|
| Temperature   | 25°C       | Humidity | 47%     |
| Test Engineer | Ted Chiu   | Phase    | Neutral |
| Configuration | Normal Use |          |         |

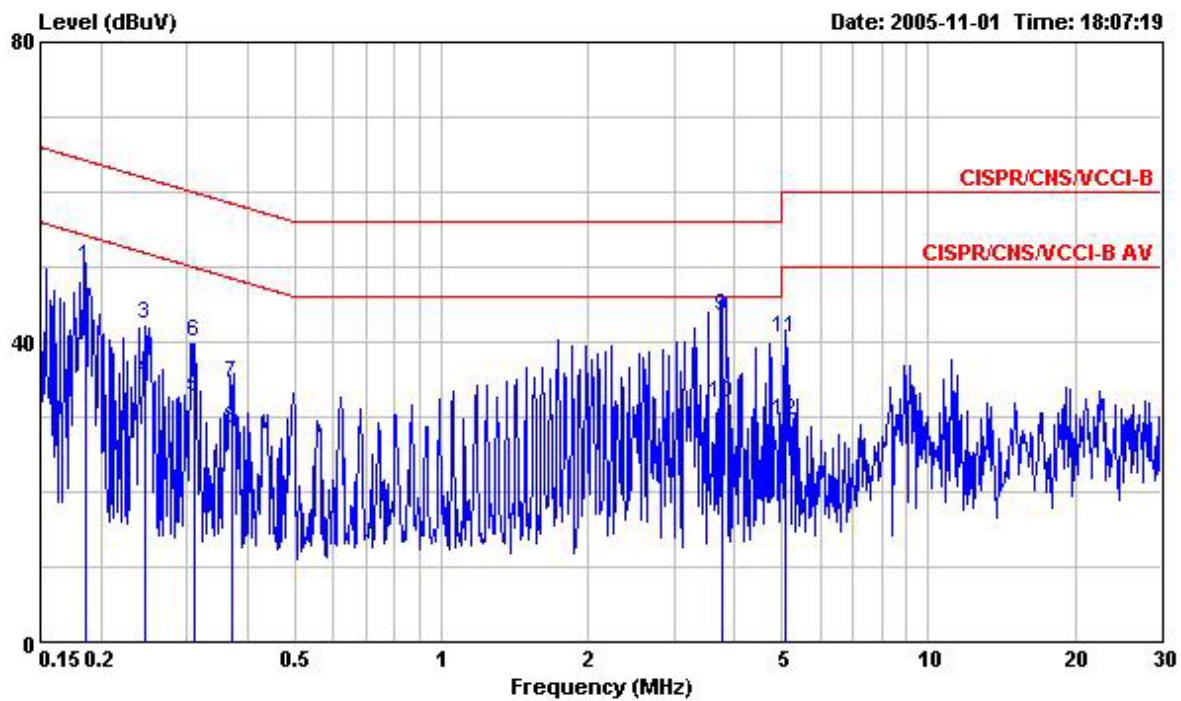

| Freq      | Level | Over Limit | Limit Line | Read  | LISN   | Cable | Remark  |
|-----------|-------|------------|------------|-------|--------|-------|---------|
|           |       |            |            | Level | Factor | Loss  |         |
| 0.1857100 | 49.96 | -14.27     | 64.23      | 49.57 | 0.10   | 0.29  | QP      |
| 0.1857100 | 40.21 | -14.02     | 54.23      | 39.82 | 0.10   | 0.29  | Average |
| 0.2469760 | 42.44 | -19.42     | 61.86      | 42.08 | 0.10   | 0.26  | QP      |
| 0.2469760 | 35.06 | -16.80     | 51.86      | 34.70 | 0.10   | 0.26  | Average |
| 0.3100010 | 32.71 | -17.26     | 49.97      | 32.29 | 0.10   | 0.32  | Average |
| 0.3100010 | 40.07 | -19.90     | 59.97      | 39.65 | 0.10   | 0.32  | QP      |
| 0.3712790 | 34.41 | -24.06     | 58.47      | 34.02 | 0.10   | 0.29  | QP      |
| 0.3712790 | 28.30 | -20.17     | 48.47      | 27.91 | 0.10   | 0.29  | Average |
| 3.772     | 43.43 | -12.57     | 56.00      | 43.04 | 0.10   | 0.29  | QP      |
| 3.772     | 31.78 | -14.22     | 46.00      | 31.39 | 0.10   | 0.29  | Average |
| 5.073     | 40.40 | -19.60     | 60.00      | 40.01 | 0.13   | 0.26  | QP      |
| 5.073     | 29.51 | -20.49     | 50.00      | 29.12 | 0.13   | 0.26  | Average |

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Peak Output Power Measurement

### 4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting            |
|-----------------------|--------------------|
| Filter No.            | Auto               |
| Measurement time      | 0.135 s ~ 26 s     |
| Used Peak Sensor      | NRV-Z32 (model 04) |

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

### 4.2.4. Test Setup Layout

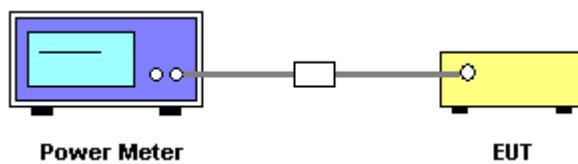

### 4.2.5. Test Deviation

There are no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Peak Output Power

|               |         |                |             |
|---------------|---------|----------------|-------------|
| Temperature   | 28°C    | Humidity       | 58%         |
| Test Engineer | Sam Lee | Configurations | FHSS (GFSK) |

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 0       | 2402 MHz  | 1.10                  | 30.00            | Complies |
| 39      | 2441 MHz  | 2.35                  | 30.00            | Complies |
| 78      | 2480 MHz  | 1.28                  | 30.00            | Complies |

### 4.3. Hopping Channel Separation Measurement

#### 4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

| Spectrum Parameter | Setting   |
|--------------------|---|
| Attenuation        | Auto  |
| Span Frequency     | > Measurement Bandwidth or Channel Separation           |
| RB                 | 30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)  |
| VB                 | 100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation) |
| Detector           | Peak  |
| Trace              | Max Hold  |
| Sweep Time         | Auto  |

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

#### 4.3.4. Test Setup Layout

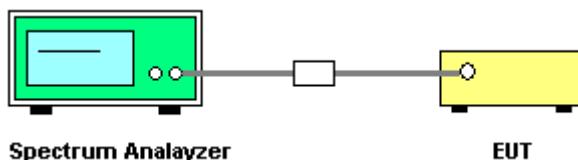

#### 4.3.5. Test Deviation

There are no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


#### 4.3.7. Test Result of Hopping Channel Separation

|               |         |                |             |
|---------------|---------|----------------|-------------|
| Temperature   | 28°C    | Humidity       | 58%         |
| Test Engineer | Sam Lee | Configurations | FHSS (GFSK) |

| Frequency | Ch. Separation (MHz) | 20dB Bandwidth (kHz) | 99% Occupied Bandwidth (kHz) | Result   |
|-----------|----------------------|----------------------|------------------------------|----------|
| 2402 MHz  | 1.00                 | 832.00               | 852.00                       | Complies |
| 2441 MHz  | 1.00                 | 828.00               | 852.00                       | Complies |
| 2480 MHz  | 1.00                 | 836.00               | 852.00                       | Complies |


Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

### 20 dB Bandwidth Plot on Channel 0 / 2402 MHz

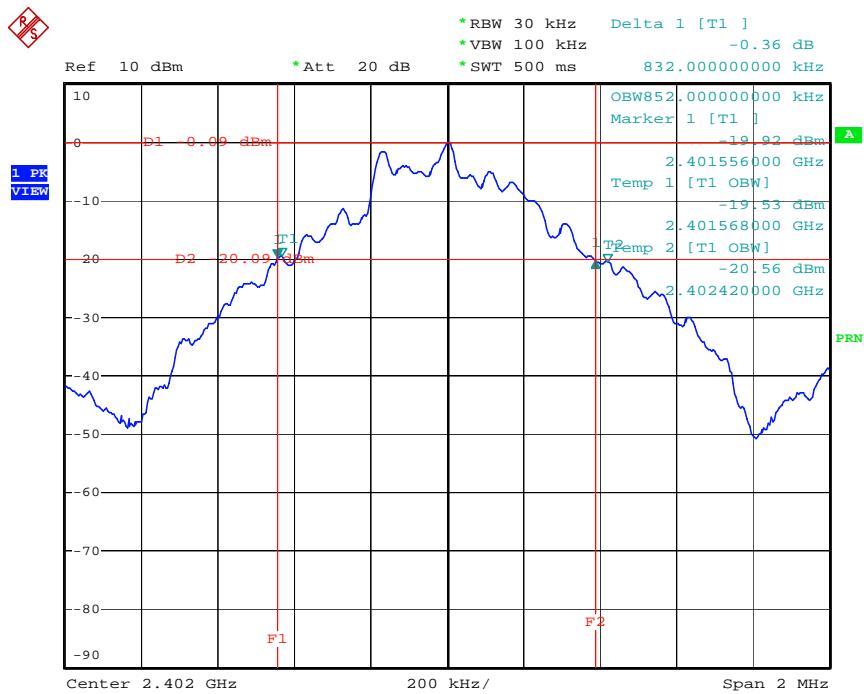


Date: 1.OCT.2005 10:31:31

### 20 dB Bandwidth Plot on Channel 39 / 2441 MHz

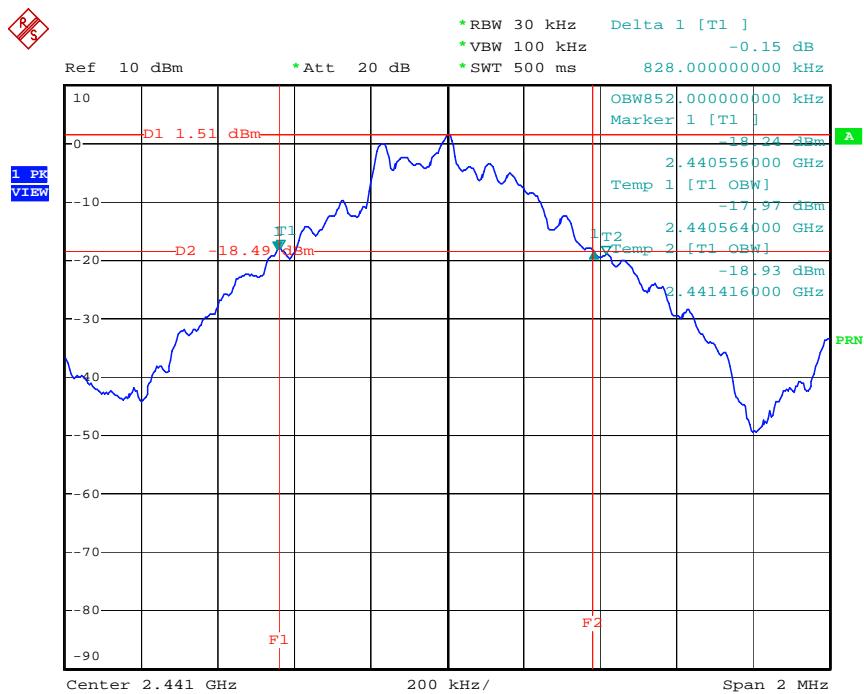


Date: 1.OCT.2005 10:32:48

### 20 dB Bandwidth Plot on Channel 78 / 2480 MHz

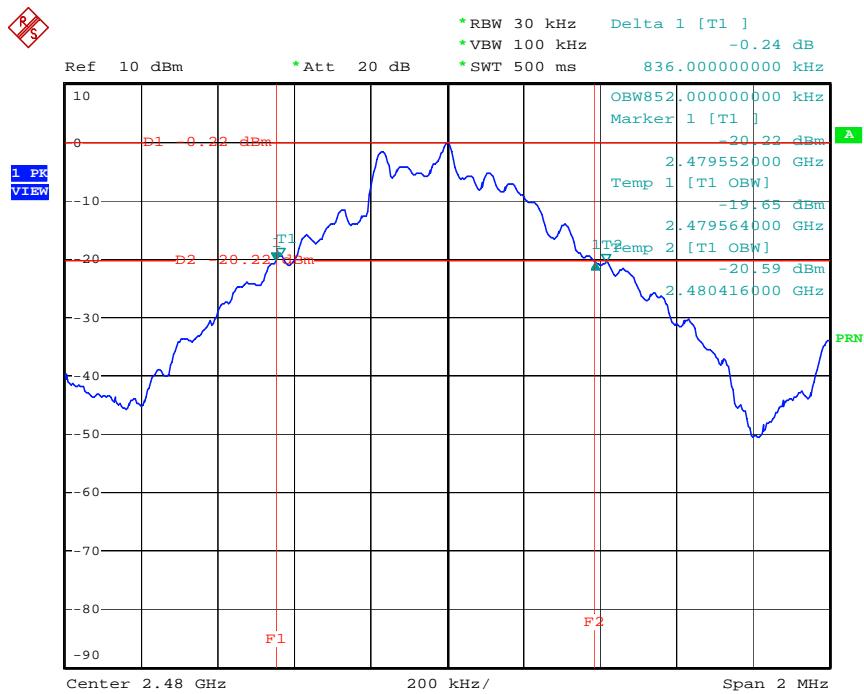


Date: 1.OCT.2005 10:34:10

### Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

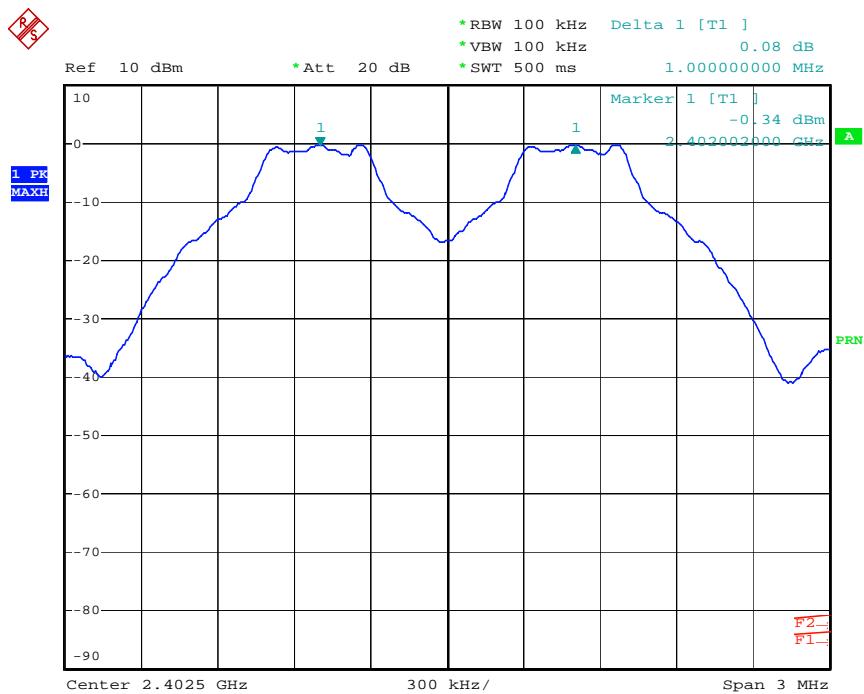


Date: 1.OCT.2005 10:45:47

### Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

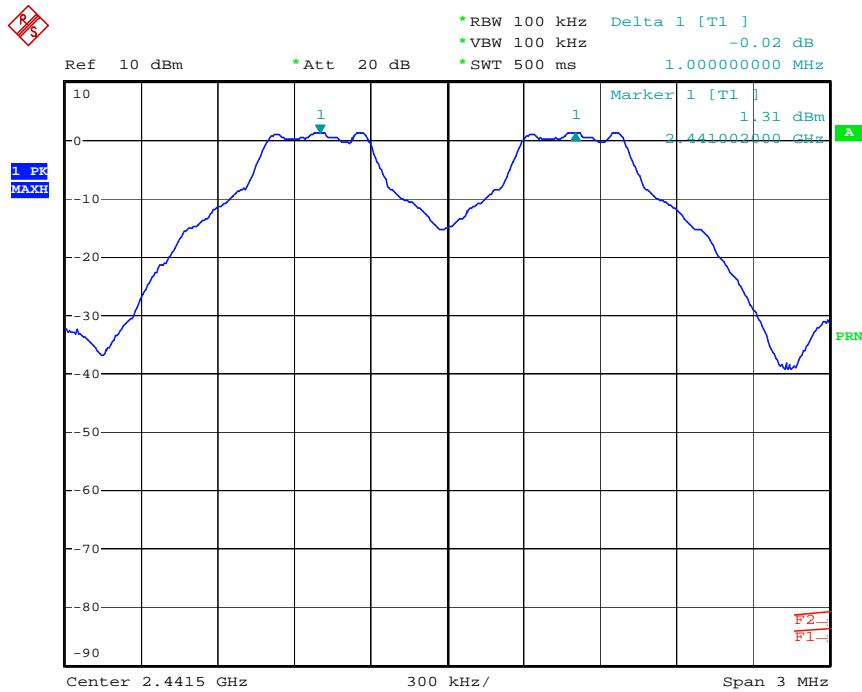

Date: 1.OCT.2005 10:46:23

### Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

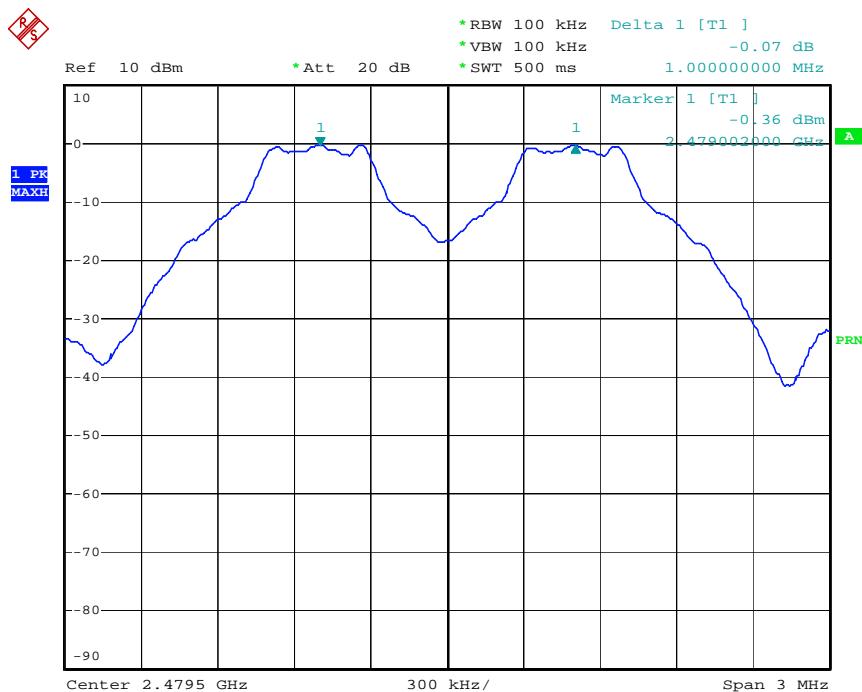

Date: 1.OCT.2005 10:47:16

## 4.4. Number of Hopping Frequency Measurement

### 4.4.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameters | Setting                     |
|---------------------|-----------------------------|
| Attenuation         | Auto                        |
| Span Frequency      | > Operating Frequency Range |
| RB                  | 100 kHz                     |
| VB                  | 100 kHz                     |
| Detector            | Peak                        |
| Trace               | Max Hold                    |
| Sweep Time          | Auto                        |

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

### 4.4.4. Test Setup Layout

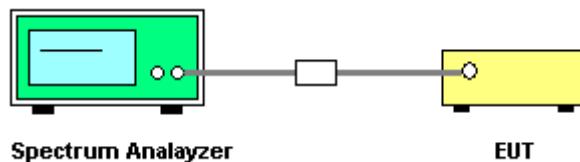

#### 4.4.5. Test Deviation

There are no deviations with the original standard.

#### 4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Number of Hopping Frequency

|               |         |                |             |
|---------------|---------|----------------|-------------|
| Temperature   | 28°C    | Humidity       | 58%         |
| Test Engineer | Sam Lee | Configurations | FHSS (GFSK) |

| Modulation Type | Channel No. | Frequency (MHz) | Hopping Ch. (Channels) | Min. Limit (Channels) | Test Result |
|-----------------|-------------|-----------------|------------------------|-----------------------|-------------|
| GFSK            | 0 ~ 78      | 2402 ~ 2480     | 79                     | 75                    | Complies    |

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

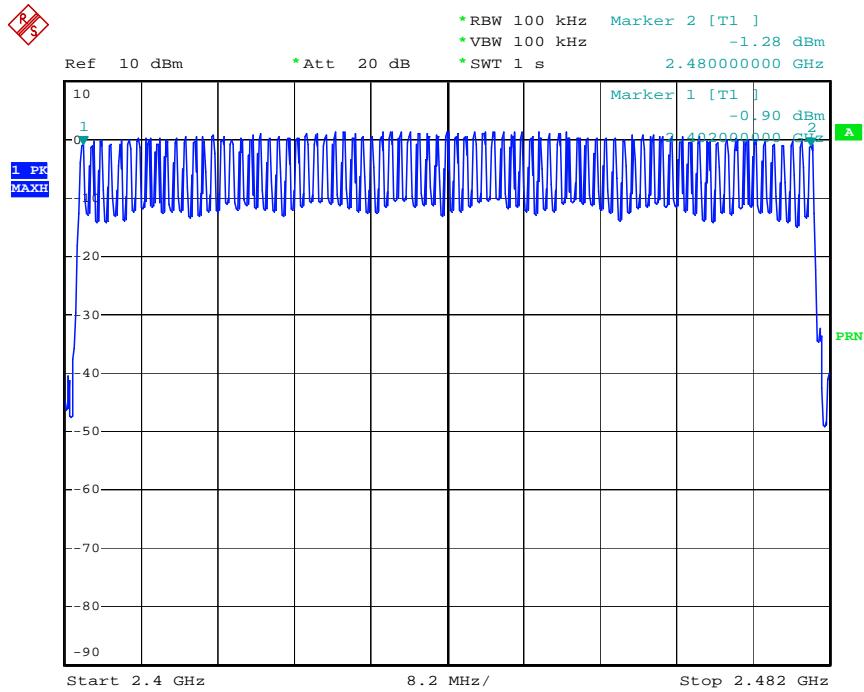

Date: 1.OCT.2005 10:58:05

## 4.5. Dwell Time Measurement

### 4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

| Spectrum Parameter | Setting        |
|--------------------|----------------|
| Attenuation        | Auto           |
| Span Frequency     | 0 MHz          |
| RB                 | 1000 kHz       |
| VB                 | 1000 kHz       |
| Detector           | Peak           |
| Trace              | Single Trigger |

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH5, DH3 and DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.
9. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds
10. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
11. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

#### 4.5.4. Test Setup Layout

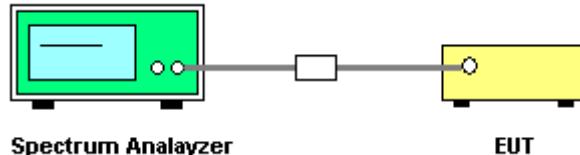

#### 4.5.5. Test Deviation

There are no deviation with the original standard.


#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


#### 4.5.7. Test Result of Dwell Time

|               |         |                |             |
|---------------|---------|----------------|-------------|
| Temperature   | 28°C    | Humidity       | 58%         |
| Test Engineer | Sam Lee | Configurations | FHSS (GFSK) |


| Data Packet | Frequency | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Result |
|-------------|-----------|---------------------|----------------|------------|-------------|
| DH5         | 2402 MHz  | 3.1200              | 0.3328         | 0.4000     | Complies    |
| DH3         | 2402 MHz  | 1.8400              | 0.2944         | 0.4000     | Complies    |
| DH1         | 2402 MHz  | 0.5800              | 0.1856         | 0.4000     | Complies    |
| DH5         | 2441 MHz  | 3.1200              | 0.3328         | 0.4000     | Complies    |
| DH3         | 2441 MHz  | 1.8400              | 0.2944         | 0.4000     | Complies    |
| DH1         | 2441 MHz  | 0.5800              | 0.1856         | 0.4000     | Complies    |
| DH5         | 2480 MHz  | 3.1200              | 0.3328         | 0.4000     | Complies    |
| DH3         | 2480 MHz  | 1.8400              | 0.2944         | 0.4000     | Complies    |
| DH1         | 2480 MHz  | 0.5800              | 0.1856         | 0.4000     | Complies    |

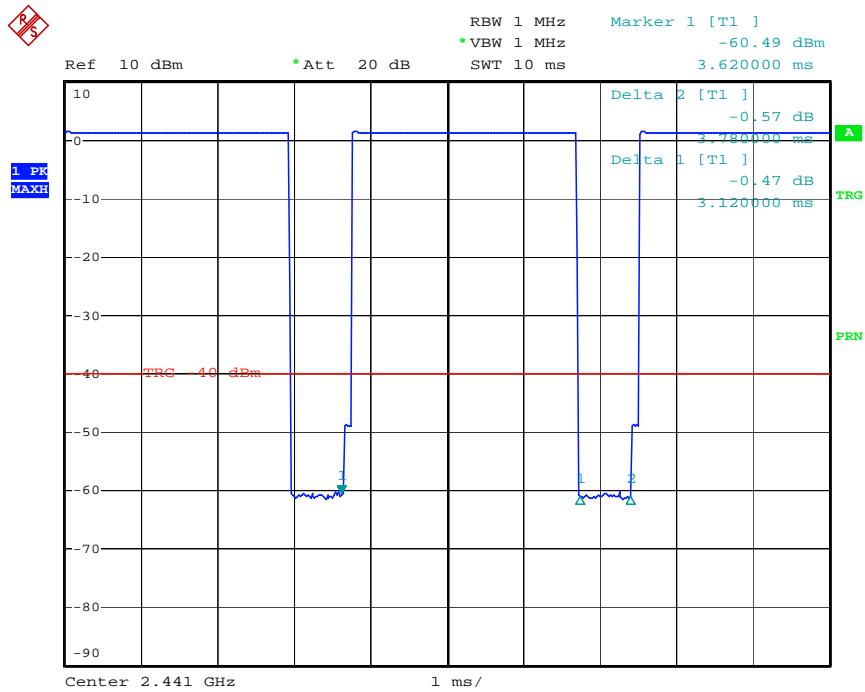**DH5 Dwell Time Plot on Channel 0 / 2402 MHz**


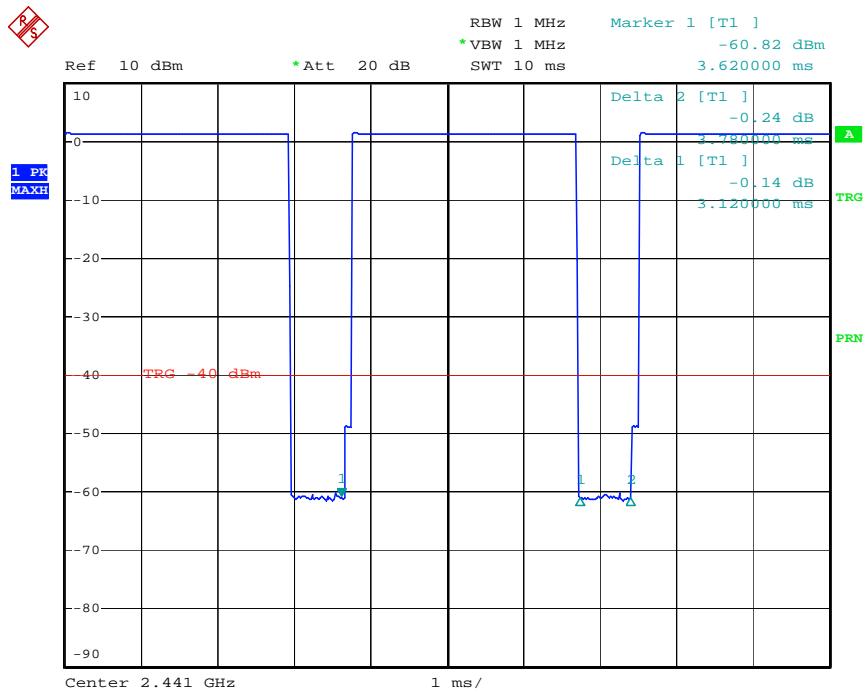
Date: 1.OCT.2005 10:41:04

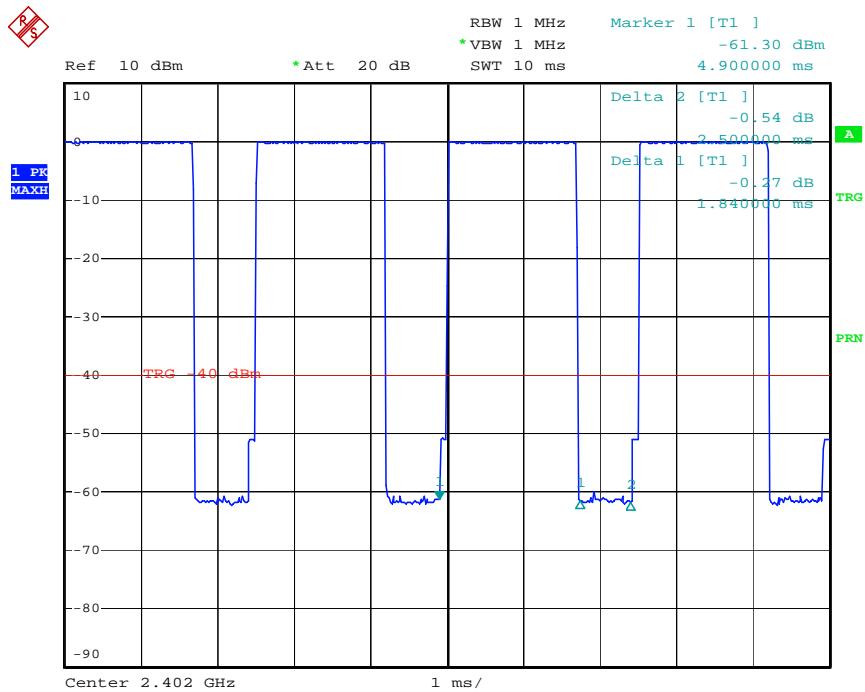**DH3 Dwell Time Plot on Channel 0 / 2402 MHz**


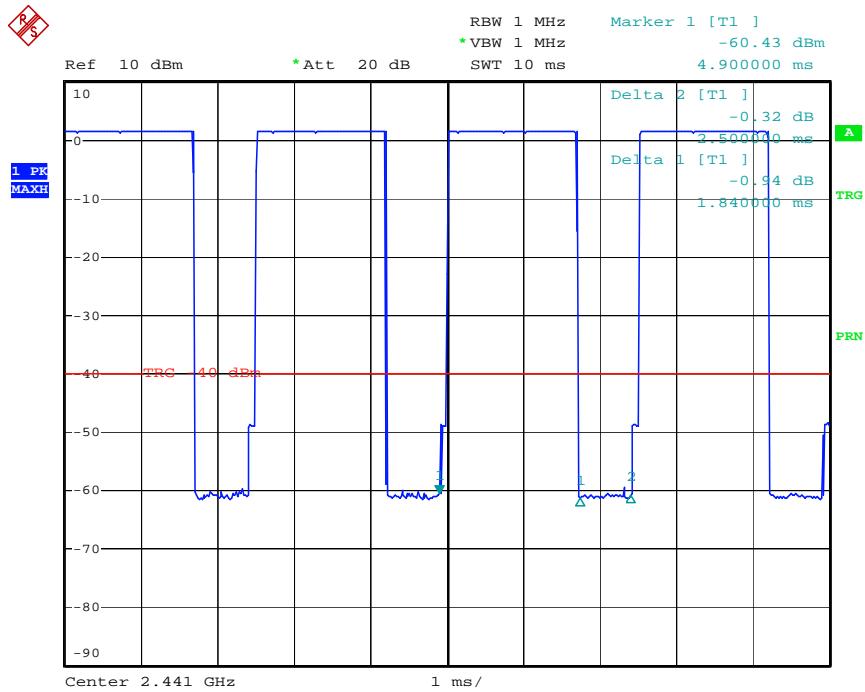
Date: 1.OCT.2005 10:39:10

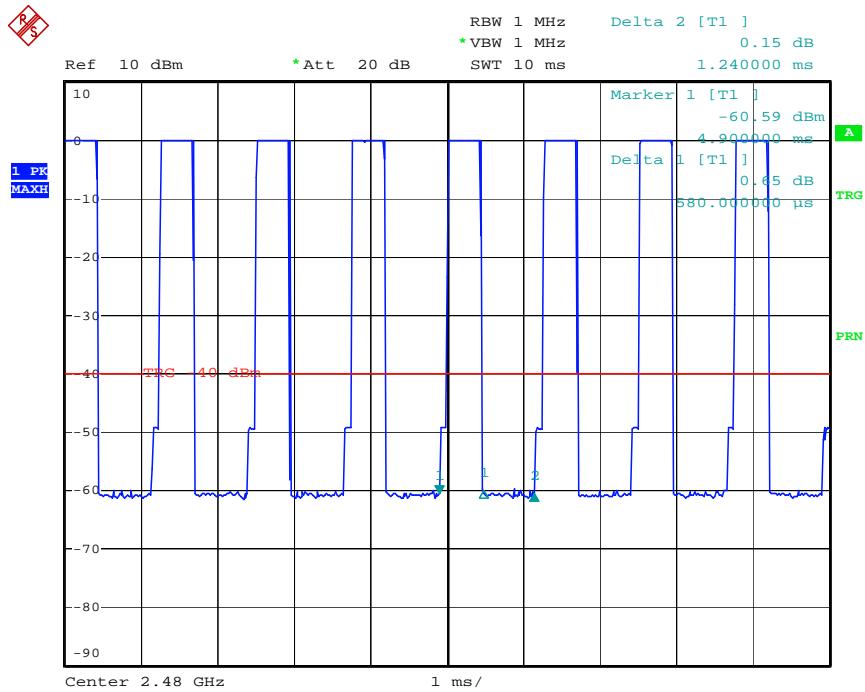**DH1 Dwell Time Plot on Channel 0 / 2402 MHz**


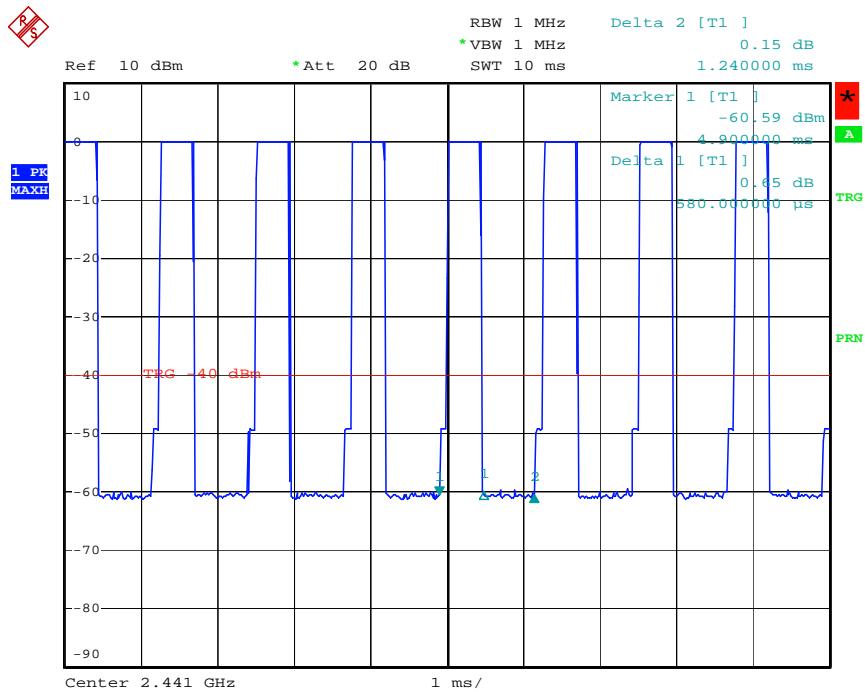
Date: 1.OCT.2005 10:36:08

**DH5 Dwell Time Plot on Channel 39 / 2441 MHz**


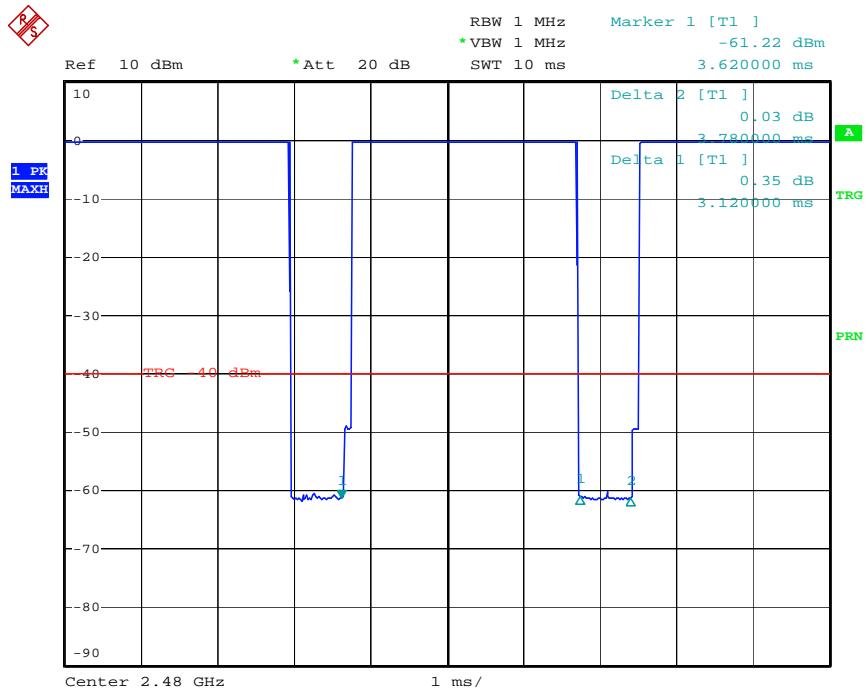
Date: 1.OCT.2005 10:40:47

**DH3 Dwell Time Plot on Channel 39 / 2441 MHz**


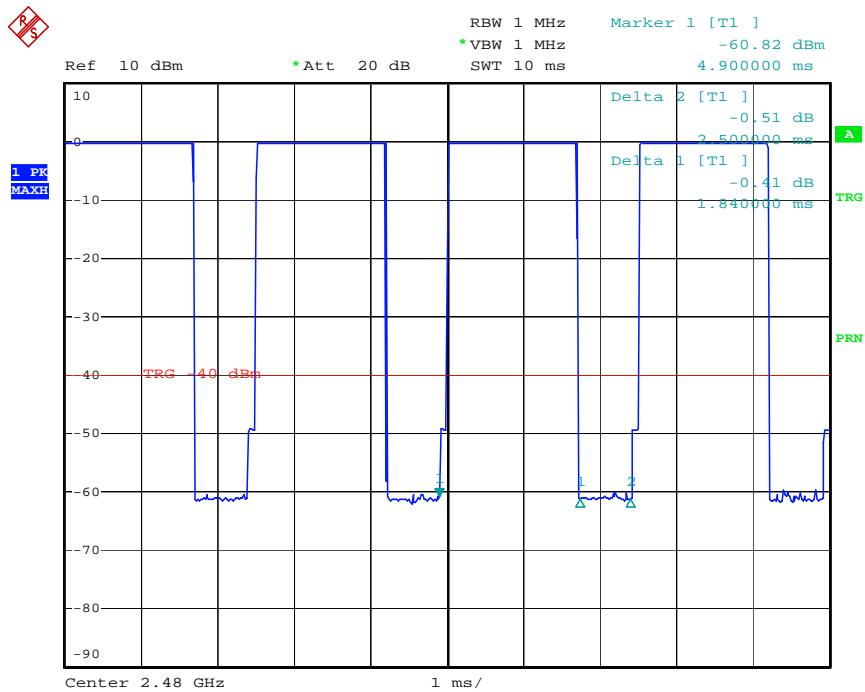
Date: 1.OCT.2005 10:39:33

**DH1 Dwell Time Plot on Channel 39 / 2441 MHz**


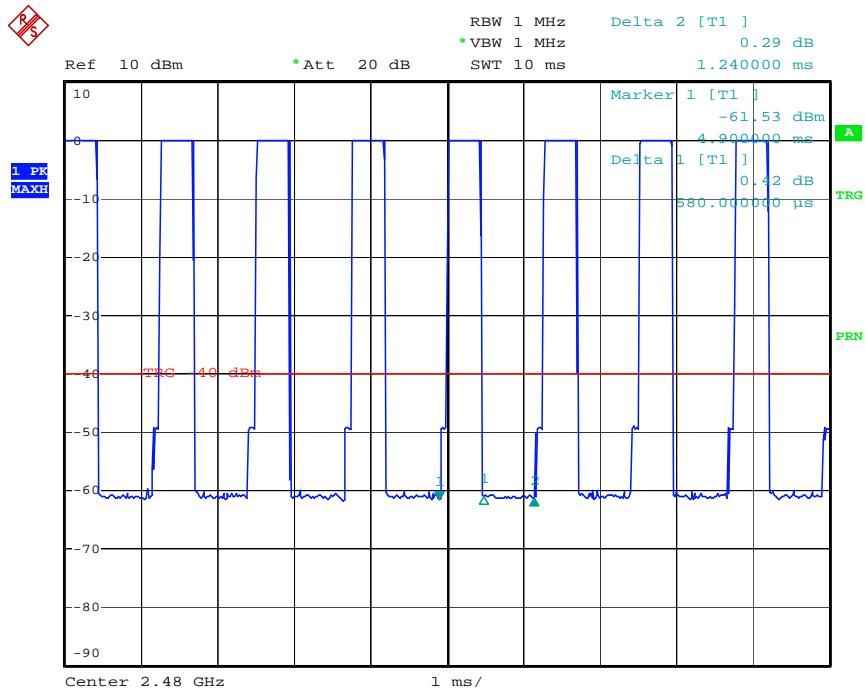
Date: 1.OCT.2005 10:36:38

**DH5 Dwell Time Plot on Channel 78 / 2480 MHz**


Date: 1.OCT.2005 10:40:24

**DH3 Dwell Time Plot on Channel 78 / 2480 MHz**


Date: 1.OCT.2005 10:39:52

**DH1 Dwell Time Plot on Channel 78 / 2480 MHz**


Date: 1.OCT.2005 10:37:10

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                    | Setting  |
|---------------------------------------|--|
| Attenuation                           | Auto   |
| Start Frequency                       | 1000 MHz                                       |
| Stop Frequency                        | 10th carrier harmonic                          |
| RB / VB (emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (other emission)              | 100KHz / 100KHz for peak                       |


| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 30MHz

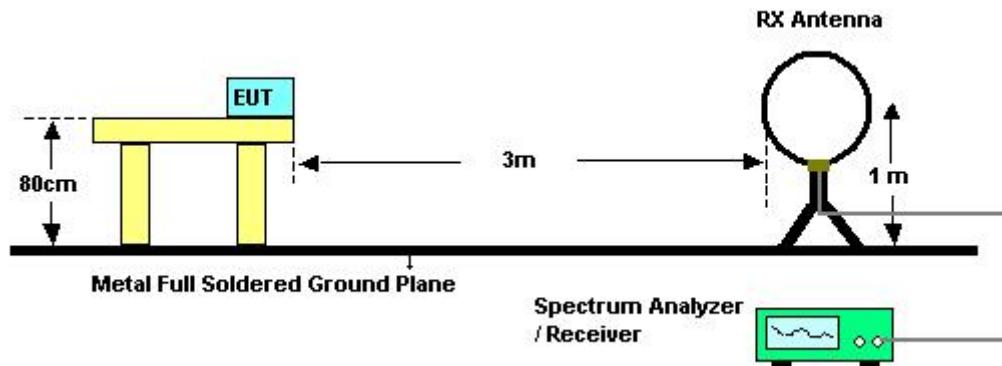

For radiated emissions above 30MHz

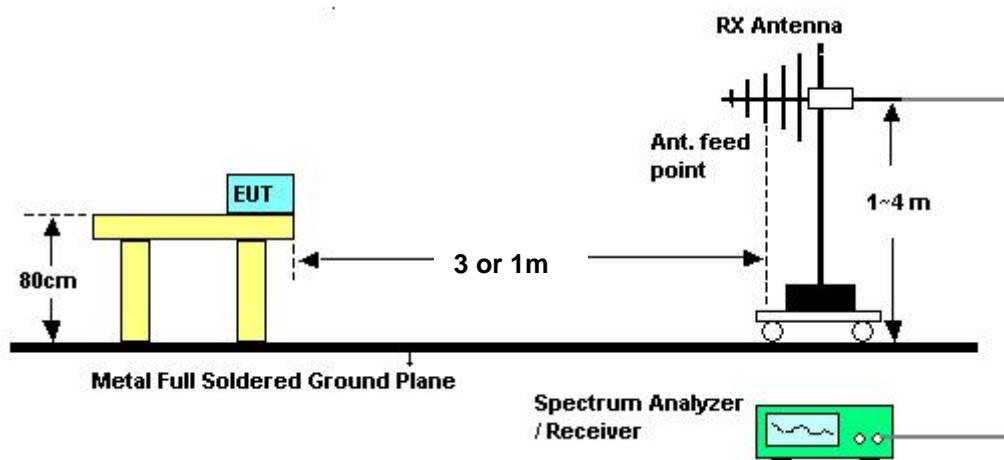

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distanc [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

#### 4.6.5. Test Deviation

There are no deviations with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

|               |          |                |            |
|---------------|----------|----------------|------------|
| Temperature   | 28°C     | Humidity       | 57%        |
| Test Engineer | Ted Chiu | Configurations | Channel 39 |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Limit Line<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.6.8. Results of Radiated Emissions (30MHz~1GHz)

|               |          |                |                   |
|---------------|----------|----------------|-------------------|
| Temperature   | 28°C     | Humidity       | 57%               |
| Test Engineer | Ted Chiu | Configurations | Channel 39 (PIFA) |


*Horizontal*

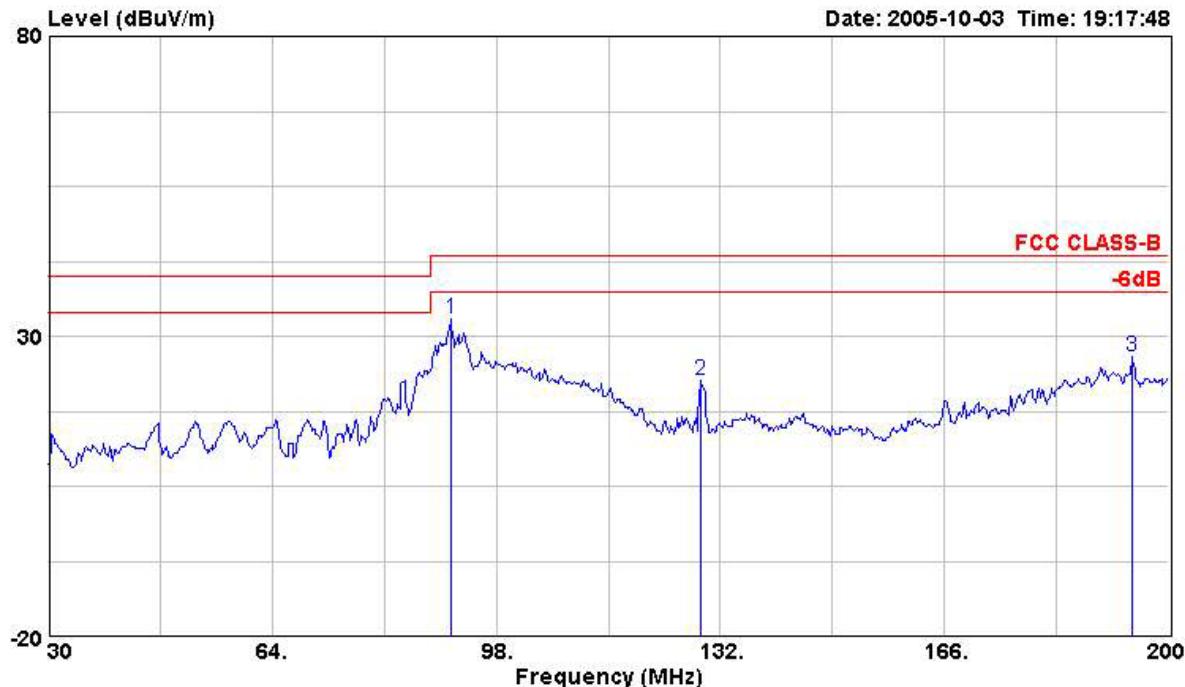


| Freq | Level   | Over  |        |        | Read  | Limit  | Cable |       |        | Antenna | Preamp | Table | Ant |
|------|---------|-------|--------|--------|-------|--------|-------|-------|--------|---------|--------|-------|-----|
|      |         | Line  | Limit  | Level  |       |        | Line  | Loss  | Factor |         |        | Pos   | Pos |
| MHz  | dBuV/m  | dB    | dBuV   | dBuV/m | dB    | dBuV/m | dB    | dB/m  | dB     |         |        | deg   | cm  |
| 1 0  | 91.030  | 32.99 | -10.51 | 53.02  | 43.50 | 0.91   | 8.55  | 29.49 | Peak   |         |        | ---   | --- |
| 2    | 128.940 | 22.53 | -20.97 | 39.75  | 43.50 | 1.13   | 12.30 | 30.65 | Peak   |         |        | ---   | --- |
| 3    | 194.390 | 26.56 | -16.94 | 40.47  | 43.50 | 1.30   | 15.35 | 30.56 | Peak   |         |        | ---   | --- |

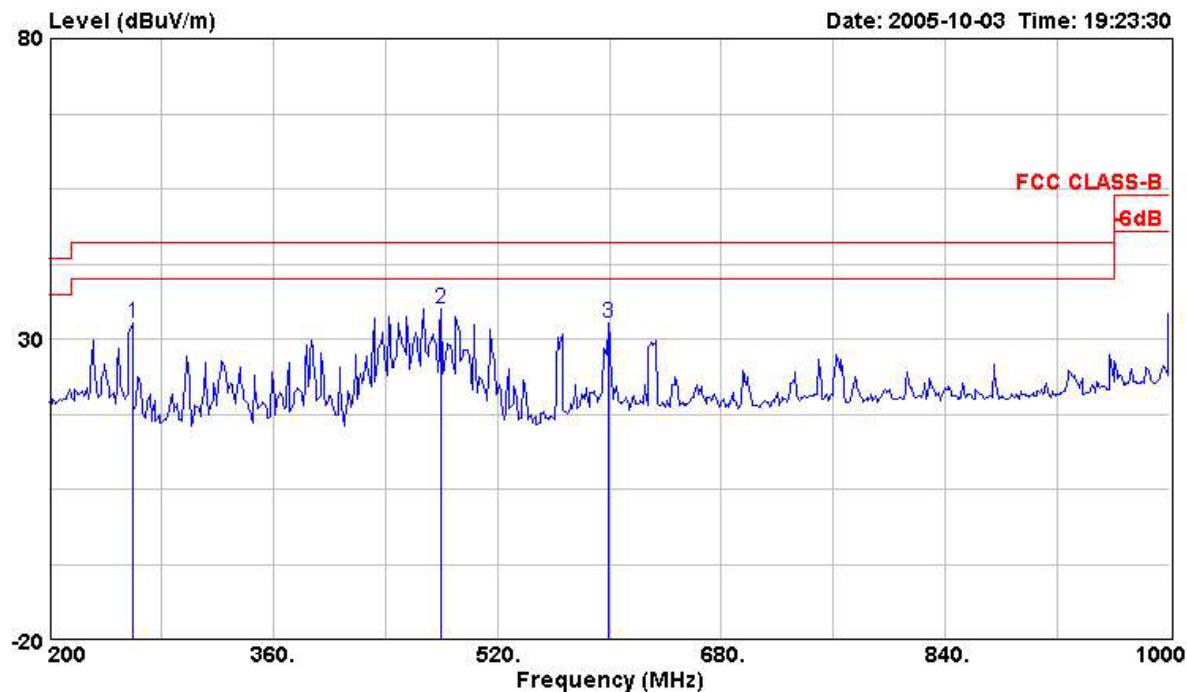

| Freq | Level   | Over  | Read   | Limit  | Cable | Antenna | Preamp | Table | Ant  |
|------|---------|-------|--------|--------|-------|---------|--------|-------|------|
|      |         | Limit | Level  | Line   | Loss  | Factor  | Factor |       |      |
| MHz  | dBuV/m  | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     | deg   | cm   |
| 1    | 259.200 | 32.59 | -13.41 | 48.59  | 46.00 | 1.60    | 12.60  | 30.19 | Peak |
| 2    | 480.000 | 35.08 | -10.92 | 48.12  | 46.00 | 2.12    | 16.16  | 31.32 | Peak |
| 3    | 599.200 | 32.67 | -13.33 | 41.00  | 46.00 | 2.40    | 20.36  | 31.09 | Peak |

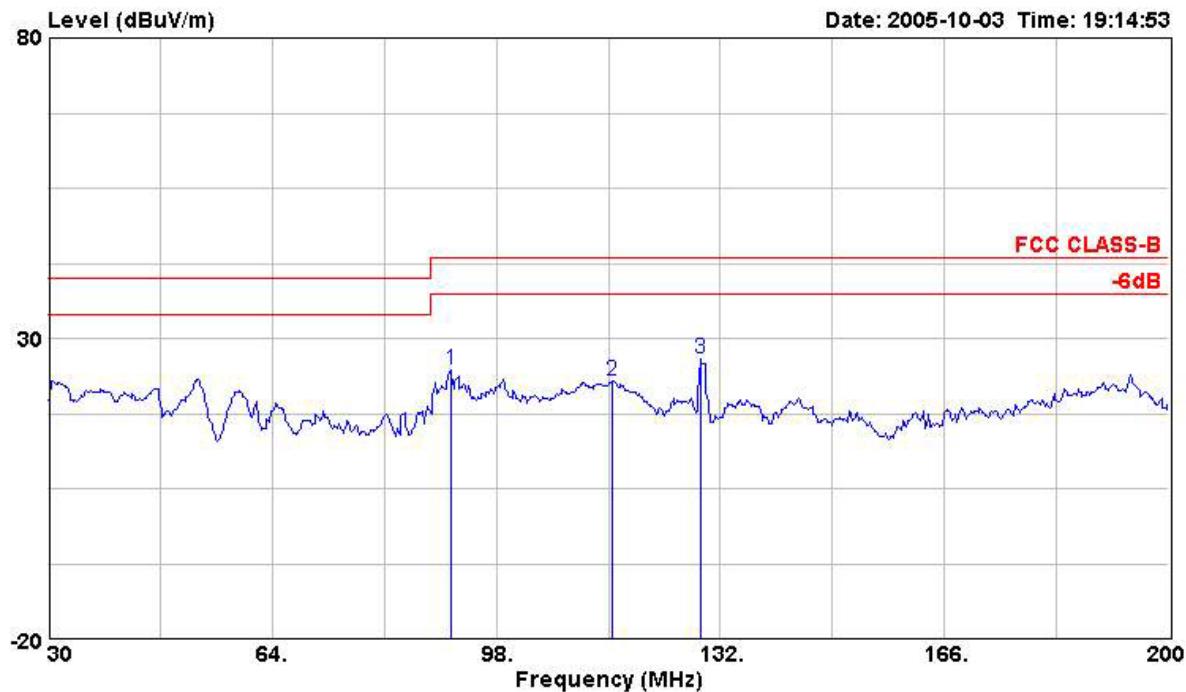**Vertical**


| Freq | Level   | Over  | Read   | Limit  | Cable | Antenna | Preamp | Remark     | Table | Ant |
|------|---------|-------|--------|--------|-------|---------|--------|------------|-------|-----|
|      |         | Limit | Level  | Line   | Loss  | Factor  | Factor |            | Pos   | Pos |
| MHz  | dBuV/m  | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     |            | deg   | cm  |
| 1    | 91.030  | 24.80 | -18.70 | 44.83  | 43.50 | 0.91    | 8.55   | 29.49 Peak | ---   | --- |
| 2    | 115.510 | 22.98 | -20.52 | 40.97  | 43.50 | 1.06    | 11.24  | 30.28 Peak | ---   | --- |
| 3    | 128.940 | 26.71 | -16.79 | 43.93  | 43.50 | 1.13    | 12.30  | 30.65 Peak | ---   | --- |

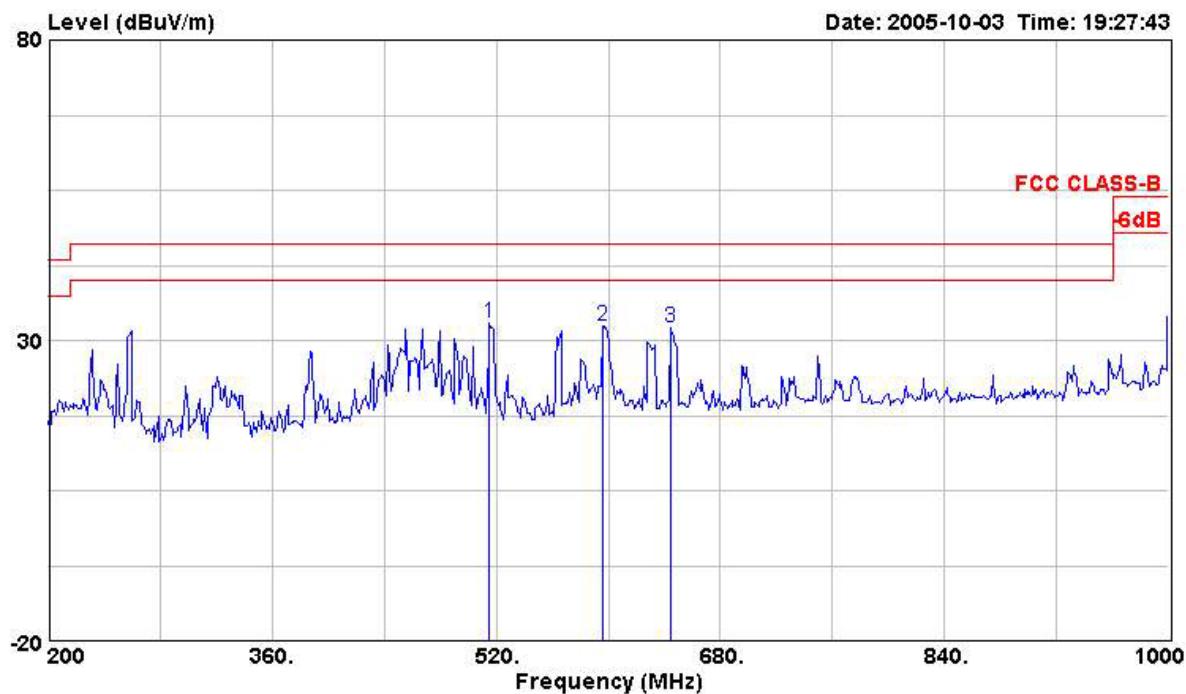

| Freq | Level   | Over  |        |       | Limit | Read | Limit | Cable |        | Antenna | Preamp | Remark | Table | Ant |
|------|---------|-------|--------|-------|-------|------|-------|-------|--------|---------|--------|--------|-------|-----|
|      |         | MHz   | dBuV/m | dB    |       |      |       | dBuV  | dBuV/m | dB      | dB/m   | dB     |       |     |
| 1    | 515.200 | 32.94 | -13.06 | 44.89 | 46.00 | 2.20 | 16.69 | 30.83 | Peak   | ---     | ---    | ---    | ---   | --- |
| 2    | 596.000 | 32.48 | -13.52 | 40.97 | 46.00 | 2.39 | 20.22 | 31.10 | Peak   | ---     | ---    | ---    | ---   | --- |
| 3    | 644.000 | 32.05 | -13.95 | 39.60 | 46.00 | 2.48 | 20.53 | 30.56 | Peak   | ---     | ---    | ---    | ---   | --- |

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.


|               |          |                |                   |
|---------------|----------|----------------|-------------------|
| Temperature   | 28°C     | Humidity       | 57%               |
| Test Engineer | Ted Chiu | Configurations | Channel 39 (Chip) |

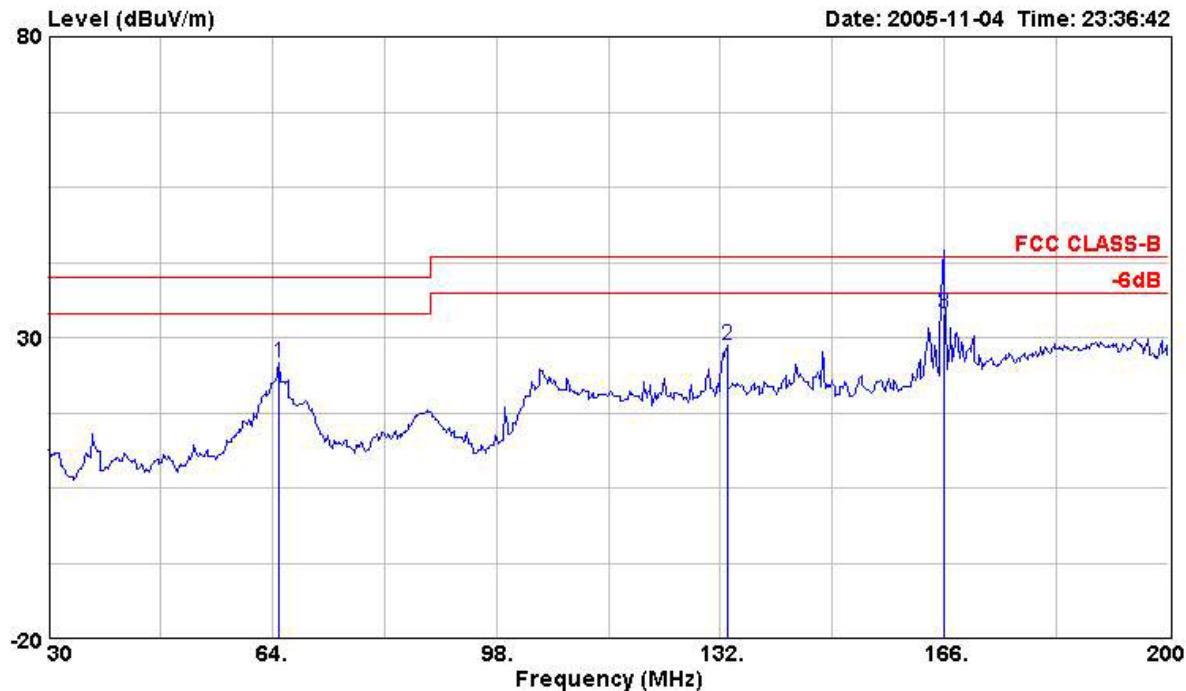**Horizontal**


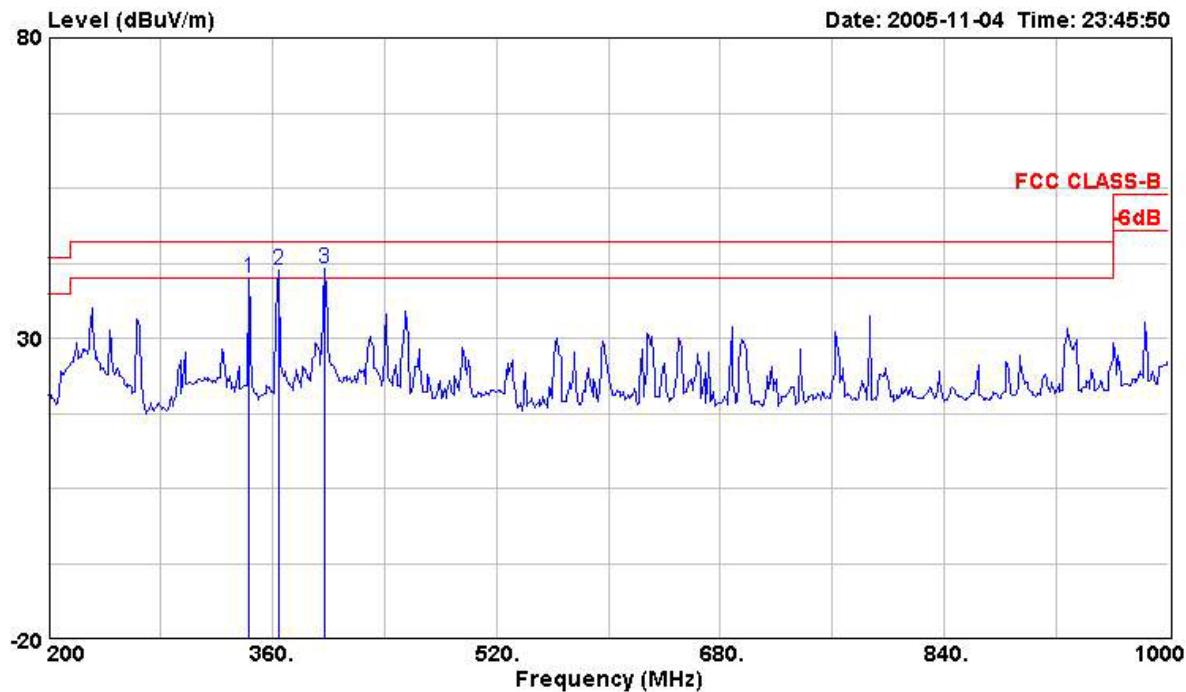
| Freq | Level   | Over  | Read   | Limit  | Cable | Antenna | Preamp | Remark     | Table | Ant |
|------|---------|-------|--------|--------|-------|---------|--------|------------|-------|-----|
|      |         | Limit | Level  | Line   | Loss  | Factor  | Factor |            | Pos   | Pos |
| MHz  | dBuV/m  | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     |            | deg   | cm  |
| 1    | 65.020  | 25.81 | -14.19 | 45.43  | 40.00 | 0.82    | 10.14  | 30.58 Peak | ---   | --- |
| 2    | 133.020 | 28.79 | -14.71 | 45.94  | 43.50 | 1.15    | 12.41  | 30.72 Peak | ---   | --- |
| 3    | 165.830 | 33.93 | -9.57  | 49.58  | 43.50 | 1.28    | 13.23  | 30.16 QP   | ---   | --- |

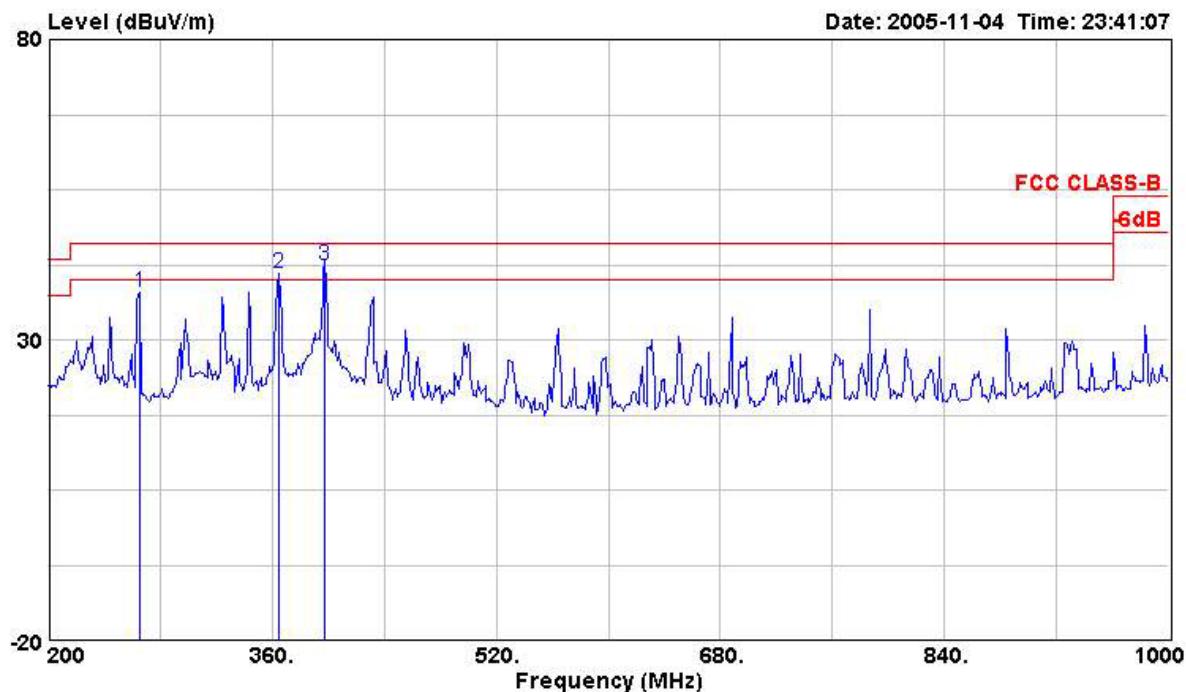

| Freq | Level   | Over   | Read  | Limit | Cable  | Antenna | Preamp | Remark | Table | Ant |
|------|---------|--------|-------|-------|--------|---------|--------|--------|-------|-----|
|      |         | Limit  | Level | Line  | Loss   | Factor  | Factor |        | Pos   | Pos |
|      | MHz     | dBuV/m | dB    | dBuV  | dBuV/m | dB      | dB/m   | dB     | deg   | cm  |
| 1    | 265.600 | 37.86  | -8.14 | 54.26 | 46.00  | 1.62    | 12.77  | 30.79  | Peak  | --- |
| 2    | 364.800 | 41.07  | -4.93 | 54.31 | 46.00  | 1.83    | 15.74  | 30.82  | Peak  | --- |
| 3    | 397.600 | 42.44  | -3.56 | 54.92 | 46.00  | 1.97    | 16.73  | 31.17  | Peak  | --- |

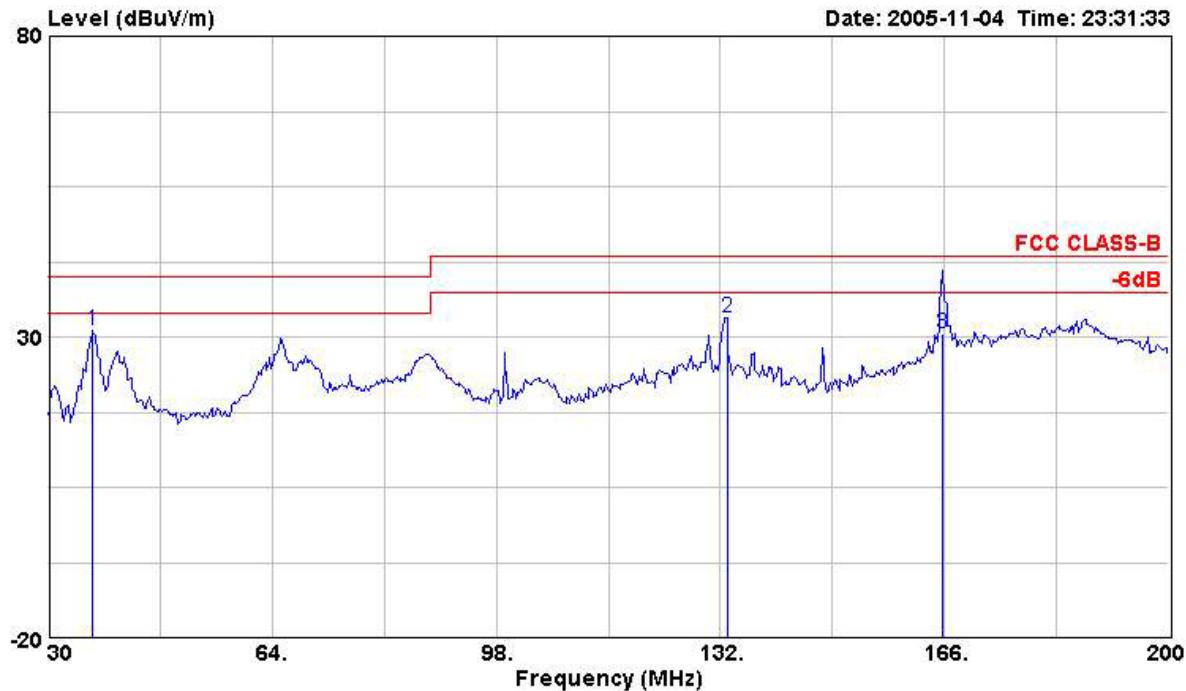**Vertical**


| Freq | Level   | Over  | Read   | Limit  | Cable | Antenna | Preamp | Table      | Ant |     |
|------|---------|-------|--------|--------|-------|---------|--------|------------|-----|-----|
|      |         | Limit | Level  | Line   | Loss  | Factor  | Factor |            |     |     |
| MHz  | dBuV/m  | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     | deg        | cm  |     |
| 1    | 36.630  | 30.96 | -9.04  | 48.75  | 40.00 | 0.58    | 12.12  | 30.49 Peak | --- | --- |
| 2    | 133.020 | 33.17 | -10.33 | 50.32  | 43.50 | 1.15    | 12.41  | 30.72 Peak | --- | --- |
| 3    | 165.660 | 30.66 | -12.84 | 46.33  | 43.50 | 1.28    | 13.21  | 30.16 QP   | --- | --- |



| Freq | Level   | Over  |        | Read  | Limit | Cable |       | Antenna | Preamp | Remark | Table | Ant |
|------|---------|-------|--------|-------|-------|-------|-------|---------|--------|--------|-------|-----|
|      |         | MHz   | dBuV/m | dB    | dBuV  | Line  | Loss  | Factor  | Factor | deg    | cm    |     |
| 1    | 343.200 | 39.97 | -6.03  | 54.02 | 46.00 | 1.78  | 15.10 | 30.94   | Peak   | ---    | ---   |     |
| 2    | 364.800 | 41.26 | -4.74  | 54.50 | 46.00 | 1.83  | 15.74 | 30.82   | Peak   | ---    | ---   |     |
| 3    | 397.600 | 41.53 | -4.47  | 54.01 | 46.00 | 1.97  | 16.73 | 31.17   | Peak   | ---    | ---   |     |

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.


4.6.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

|               |          |                |                  |
|---------------|----------|----------------|------------------|
| Temperature   | 28°C     | Humidity       | 57%              |
| Test Engineer | Ted Chiu | Configurations | Channel 0 (PIFA) |

## Horizontal

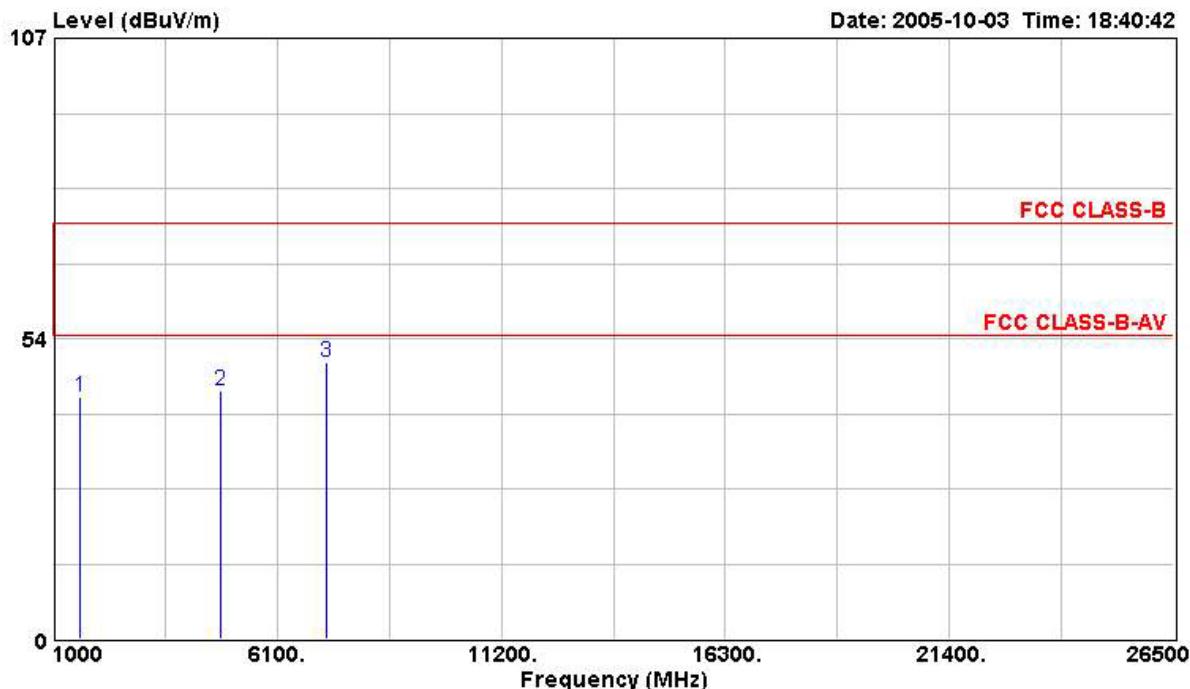


| Freq | Level | Over     |        |        | Read  | Limit | Cable |        |       | Antenna | Preamp | Remark | Table | Ant |
|------|-------|----------|--------|--------|-------|-------|-------|--------|-------|---------|--------|--------|-------|-----|
|      |       | Line     | Limit  | dB     |       |       | dBuV  | dBuV/m | dB    |         |        |        |       |     |
|      |       | MHz      | dBuV/m | dB     |       |       |       |        | dB    |         |        |        | deg   | cm  |
| 1    |       | 1600.000 | 42.99  | -31.01 | 48.55 | 74.00 | 1.66  | 25.74  | 32.96 | PEAK    |        |        | ---   | --- |
| 2    |       | 4804.000 | 44.32  | -29.68 | 40.67 | 74.00 | 3.10  | 33.10  | 32.54 | PEAK    |        |        | ---   | --- |
| 3    |       | 7208.000 | 49.32  | -24.68 | 41.67 | 74.00 | 4.10  | 35.90  | 32.35 | PEAK    |        |        | ---   | --- |

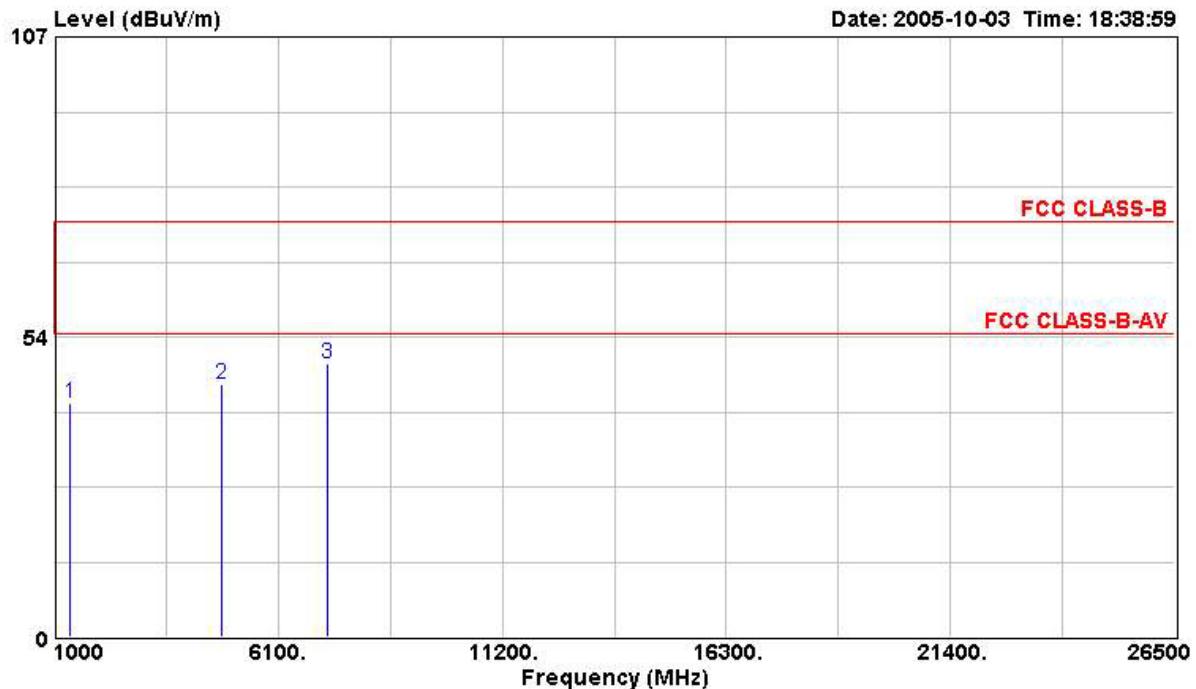**Vertical**


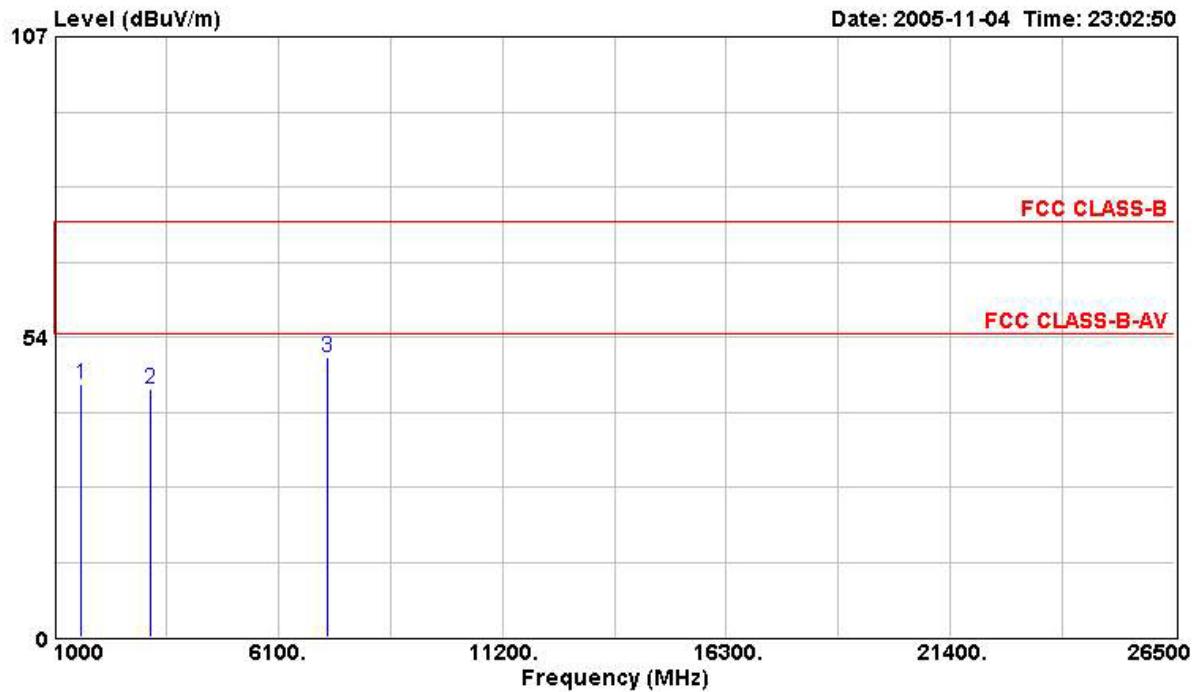
| Freq | Level    | Over  | Read   | Limit  | Cable | Antenna | Preamp | Remark     | Table | Ant |
|------|----------|-------|--------|--------|-------|---------|--------|------------|-------|-----|
|      |          | Limit | Level  | Line   | Loss  | Factor  | Factor |            | Pos   | Pos |
| MHz  | dBuV/m   | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     |            | deg   | cm  |
| 1    | 1356.000 | 41.59 | -32.41 | 48.56  | 74.00 | 1.37    | 25.02  | 33.36 Peak | 100   | 100 |
| 2    | 4804.000 | 44.93 | -29.07 | 41.27  | 74.00 | 3.10    | 33.10  | 32.54 PEAK | ---   | --- |
| 3    | 7208.000 | 48.64 | -25.36 | 41.00  | 74.00 | 4.10    | 35.90  | 32.35 PEAK | ---   | --- |

|               |          |                |                  |
|---------------|----------|----------------|------------------|
| Temperature   | 28°C     | Humidity       | 57%              |
| Test Engineer | Ted Chiu | Configurations | Channel 0 (Chip) |

## Horizontal

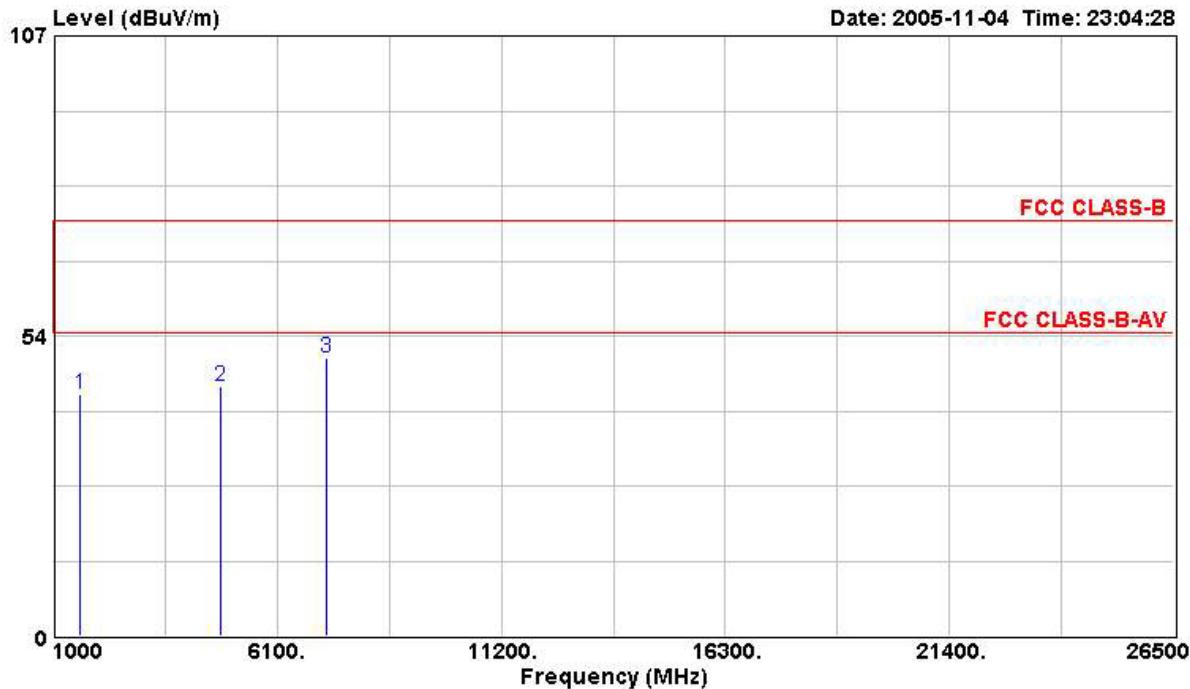


| Freq | Level    | Over  | Read   | Limit  | Cable | Antenna | Preamp | Table | Ant  |
|------|----------|-------|--------|--------|-------|---------|--------|-------|------|
|      |          | Limit | Level  | Line   | Loss  | Factor  | Factor |       |      |
| MHz  | dBuV/m   | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     | deg   | cm   |
| 1    | 1598.000 | 42.96 | -31.04 | 48.54  | 74.00 | 1.66    | 25.74  | 32.98 | Peak |
| 2    | 4804.000 | 44.56 | -29.44 | 40.91  | 74.00 | 3.10    | 33.10  | 32.54 | PEAK |
| 3    | 7206.000 | 49.66 | -24.34 | 42.02  | 74.00 | 4.10    | 35.90  | 32.35 | PEAK |


**Vertical**


| Freq | Level    | Over  |        |        | Read  | Limit  | Cable |        |        | Antenna | Preamp | Remark | Table | Ant |
|------|----------|-------|--------|--------|-------|--------|-------|--------|--------|---------|--------|--------|-------|-----|
|      |          | Limit | Level  | Line   |       |        | Loss  | Factor | Factor |         |        |        |       |     |
| MHz  | dBuV/m   | dB    | dBuV   | dBuV/m | dB    | dBuV/m | dB    | dB/m   | dB     |         |        |        | deg   | cm  |
| 1    | 1596.000 | 45.07 | -28.93 | 50.69  | 74.00 | 1.62   | 25.74 | 32.98  | Peak   |         |        |        | ---   | --- |
| 2    | 3192.000 | 44.19 | -29.81 | 43.66  | 74.00 | 2.70   | 30.52 | 32.69  | PEAK   |         |        |        | ---   | --- |
| 3    | 7206.000 | 49.83 | -24.17 | 42.19  | 74.00 | 4.10   | 35.90 | 32.35  | PEAK   |         |        |        | ---   | --- |

|               |          |                |                   |
|---------------|----------|----------------|-------------------|
| Temperature   | 28°C     | Humidity       | 57%               |
| Test Engineer | Ted Chiu | Configurations | Channel 39 (PIFA) |

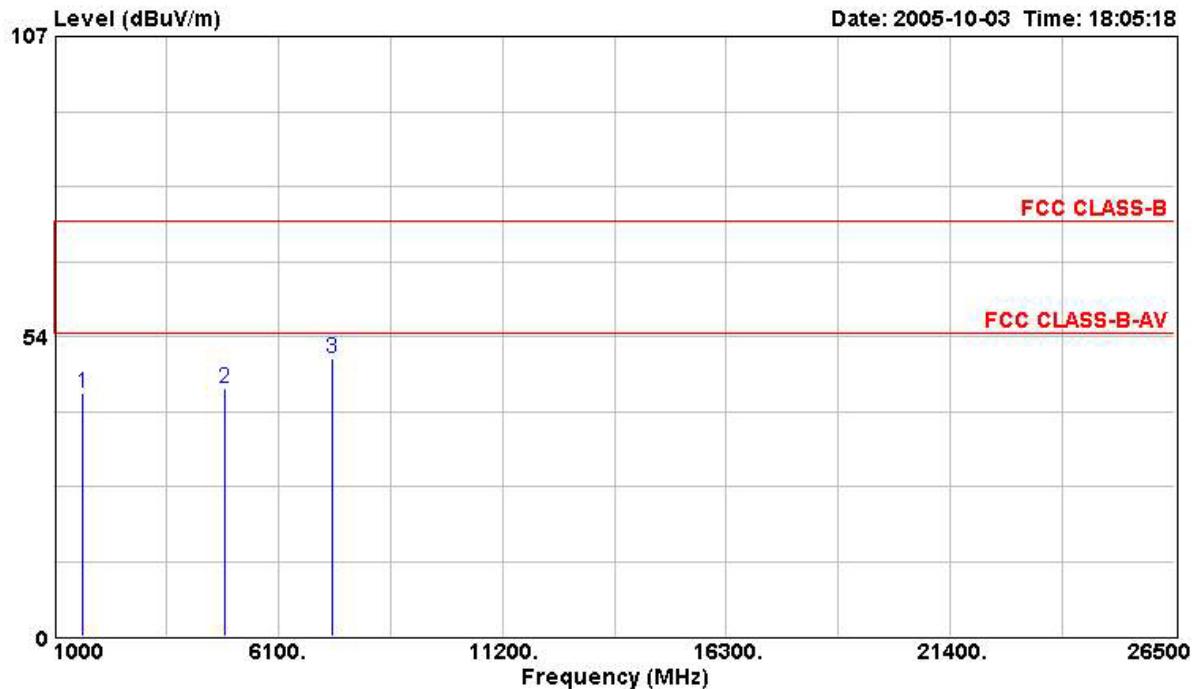**Horizontal**


| Freq | Level    | Over Read Limit CableAntenna Preamp |            |            |            |            |               | Table Pos | Ant Pos |     |     |
|------|----------|-------------------------------------|------------|------------|------------|------------|---------------|-----------|---------|-----|-----|
|      |          | Over Limit                          | Read Level | Limit Line | Cable Loss | Ant Factor | Preamp Factor |           |         |     |     |
|      |          | MHz                                 | dBuV/m     | dB         | dBuV       | dBuV/m     | dB            | dB/m      | dB      | deg | cm  |
| 1    | 1628.000 | 43.48                               | -30.52     | 48.87      | 74.00      | 1.66       | 25.89         | 32.95     | PEAK    | --- | --- |
| 2    | 4882.000 | 44.28                               | -29.72     | 40.51      | 74.00      | 3.11       | 33.21         | 32.55     | PEAK    | --- | --- |
| 3    | 7324.000 | 49.56                               | -24.44     | 41.92      | 74.00      | 4.06       | 36.19         | 32.61     | PEAK    | --- | --- |

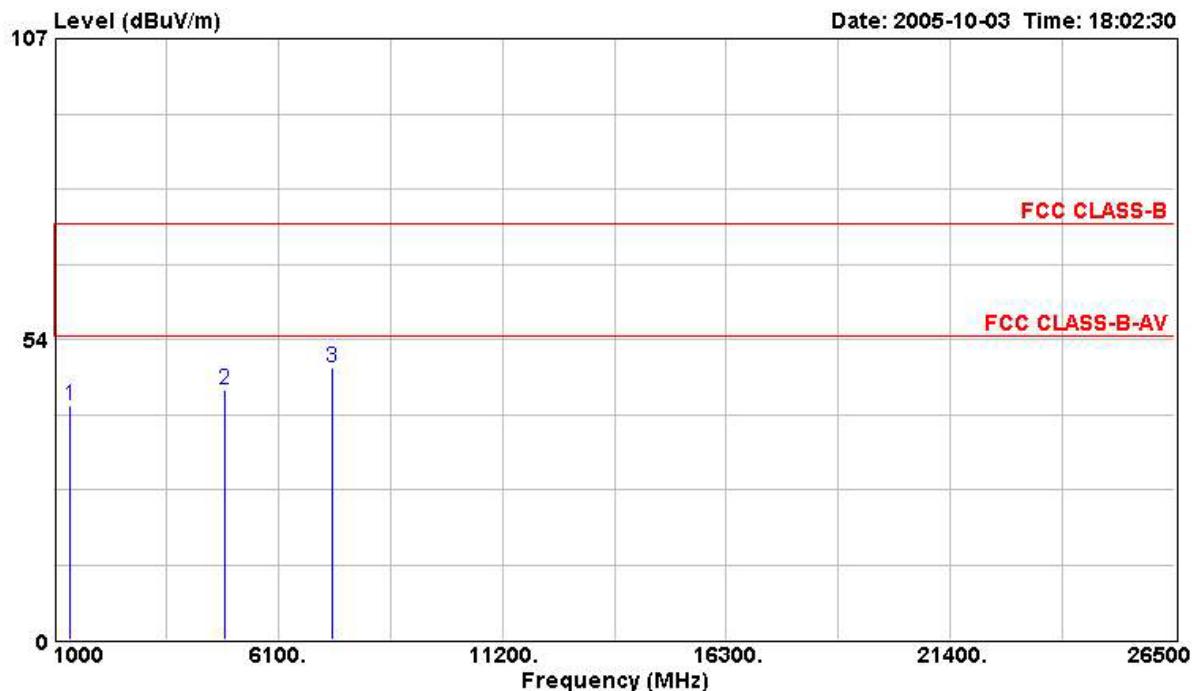
**Vertical**


| Freq | Level    | Over Limit |        | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Table Pos | Ant Pos |
|------|----------|------------|--------|------------|------------|------------|----------------|---------------|--------|-----------|---------|
|      |          | MHz        | dBuV/m | dB         | dBuV       | dBuV/m     | dB             | dB/m          | dB     |           |         |
| 1    | 1352.000 | 41.81      | -32.19 | 48.78      | 74.00      | 1.37       | 25.02          | 33.36         | PEAK   | ---       | ---     |
| 2    | 4884.000 | 44.61      | -29.39 | 40.83      | 74.00      | 3.11       | 33.21          | 32.55         | PEAK   | ---       | ---     |
| 3    | 7324.000 | 48.52      | -25.48 | 40.89      | 74.00      | 4.06       | 36.19          | 32.61         | PEAK   | ---       | ---     |




|               |          |                |                   |
|---------------|----------|----------------|-------------------|
| Temperature   | 28°C     | Humidity       | 57%               |
| Test Engineer | Ted Chiu | Configurations | Channel 39 (Chip) |

## Horizontal

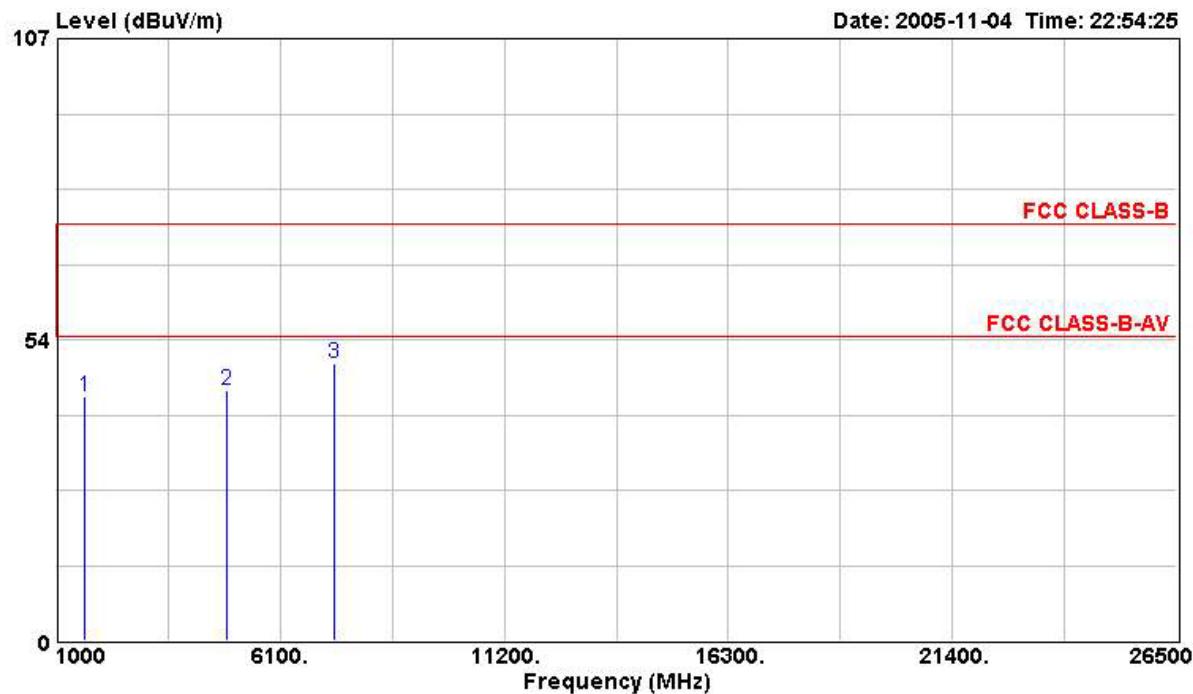


|   | Freq     | Level  | Over   | Read  | Limit  | Cable | Antenna | Preamp | Table | Ant |
|---|----------|--------|--------|-------|--------|-------|---------|--------|-------|-----|
|   |          |        | Limit  | Level | Line   | Loss  | Factor  | Factor |       |     |
|   | MHz      | dBuV/m | dB     | dBuV  | dBuV/m | dB    | dB/m    | dB     | deg   | cm  |
| 1 | 1628.000 | 43.32  | -30.68 | 48.72 | 74.00  | 1.66  | 25.89   | 32.95  | Peak  | --- |
| 2 | 4882.000 | 44.61  | -29.39 | 40.83 | 74.00  | 3.11  | 33.21   | 32.55  | PEAK  | --- |
| 3 | 7323.000 | 49.32  | -24.68 | 41.68 | 74.00  | 4.06  | 36.19   | 32.61  | PEAK  | --- |

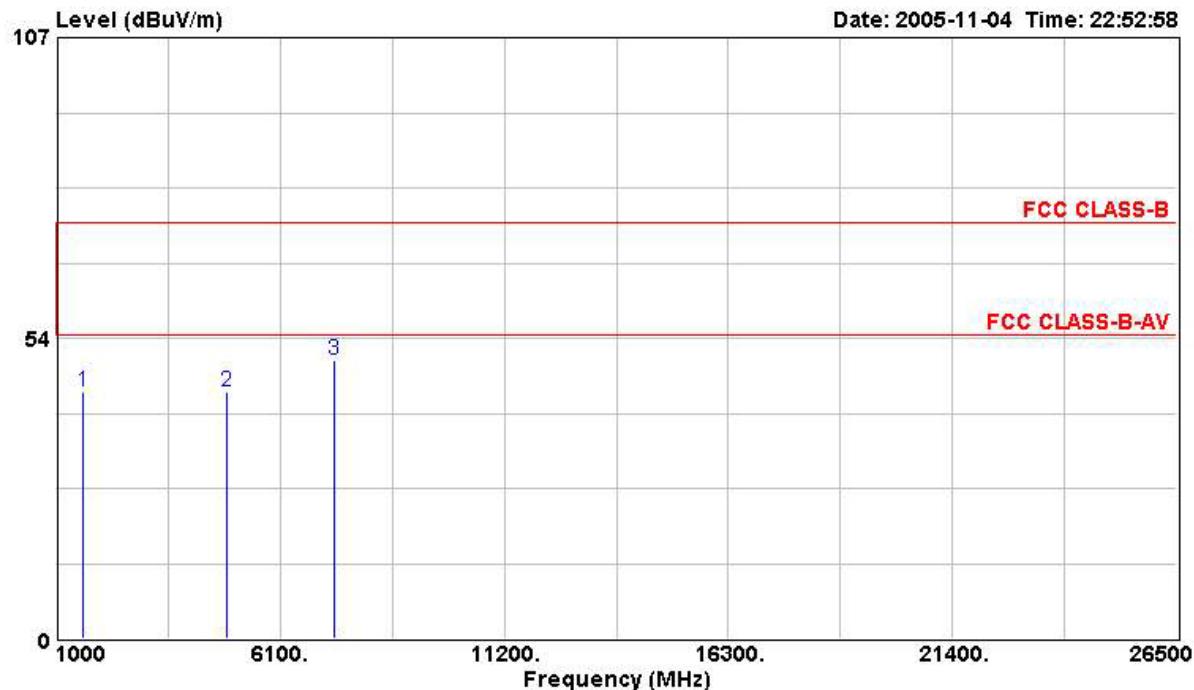**Vertical**


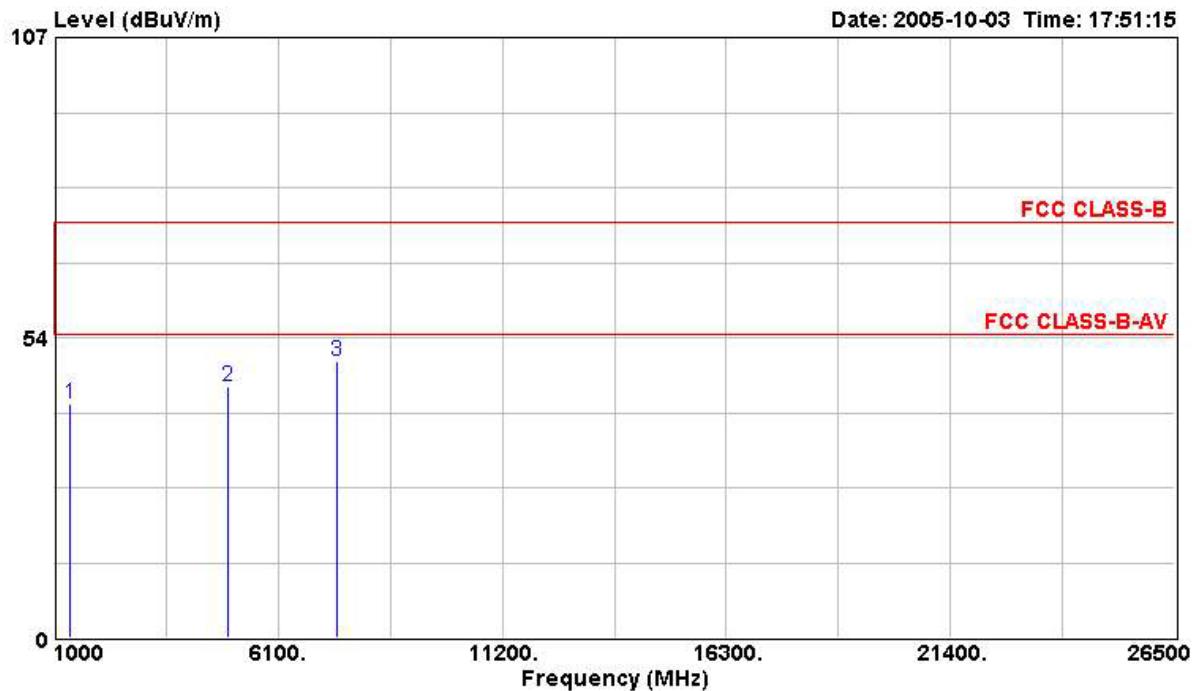
| Freq | Level    | Over  | Read   | Limit  | Cable | Antenna | Preamp | Remark     | Table | Ant |
|------|----------|-------|--------|--------|-------|---------|--------|------------|-------|-----|
|      |          | Limit | Level  | Line   | Loss  | Factor  | Factor |            | Pos   | Pos |
| MHz  | dBuV/m   | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     |            | deg   | cm  |
| 1    | 1596.000 | 43.80 | -30.20 | 49.42  | 74.00 | 1.62    | 25.74  | 32.98 Peak | ---   | --- |
| 2    | 4882.000 | 43.84 | -30.16 | 40.07  | 74.00 | 3.11    | 33.21  | 32.55 PEAK | ---   | --- |
| 3    | 7323.000 | 49.70 | -24.30 | 42.07  | 74.00 | 4.06    | 36.19  | 32.61 PEAK | ---   | --- |

|               |          |                |                   |
|---------------|----------|----------------|-------------------|
| Temperature   | 28°C     | Humidity       | 57%               |
| Test Engineer | Ted Chiu | Configurations | Channel 78 (PIFA) |

## Horizontal

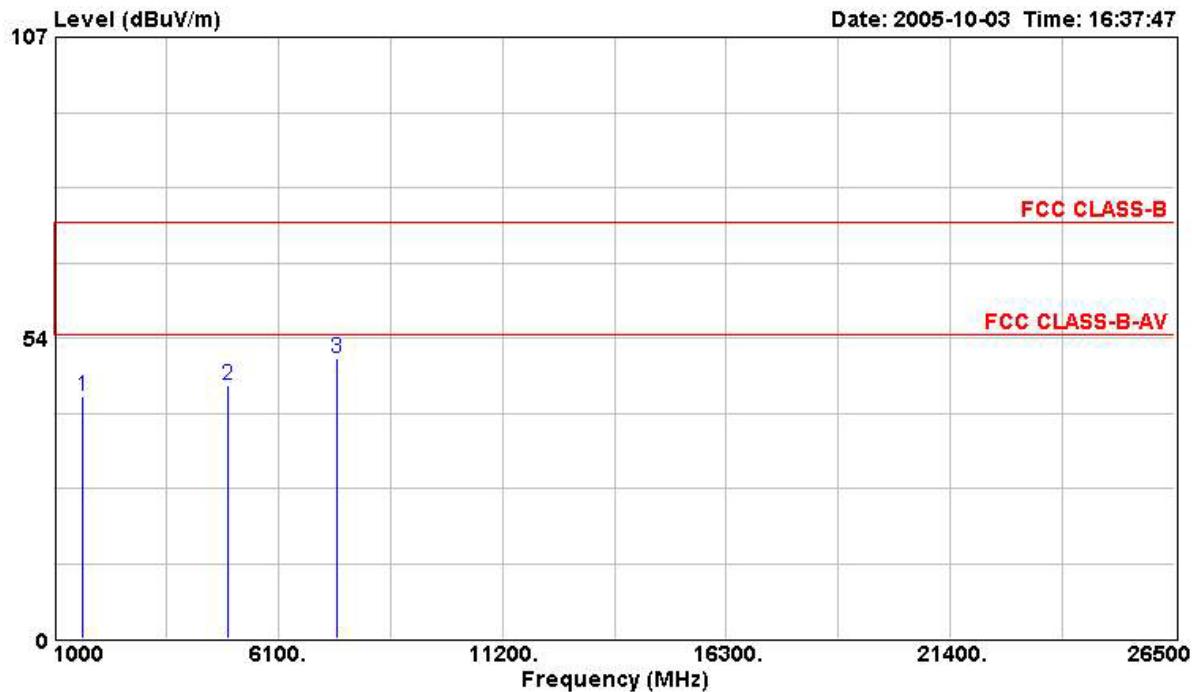


| Freq | Level    | Over  | Read   | Limit  | Cable | Antenna | Preamp | Table | Ant  |
|------|----------|-------|--------|--------|-------|---------|--------|-------|------|
|      |          | Limit | Level  | Line   | Loss  | Factor  | Factor |       |      |
| MHz  | dBuV/m   | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     | deg   | cm   |
| 1    | 1652.000 | 43.10 | -30.90 | 48.36  | 74.00 | 1.70    | 25.96  | 32.93 | PEAK |
| 2    | 4960.000 | 44.97 | -29.03 | 41.05  | 74.00 | 3.13    | 33.34  | 32.56 | PEAK |
| 3    | 7440.000 | 49.84 | -24.16 | 42.21  | 74.00 | 4.02    | 36.48  | 32.87 | PEAK |


**Vertical**


| Freq | Level    | Over  | Read   | Limit  | Cable | Antenna | Preamp | Remark     | Table | Ant |
|------|----------|-------|--------|--------|-------|---------|--------|------------|-------|-----|
|      |          | Limit | Level  | Line   | Loss  | Factor  | Factor |            | Pos   | Pos |
| MHz  | dBuV/m   | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     |            | deg   | cm  |
| 1    | 1360.000 | 41.67 | -32.33 | 48.64  | 74.00 | 1.37    | 25.02  | 33.36 PEAK | ---   | --- |
| 2    | 4960.000 | 44.90 | -29.10 | 40.98  | 74.00 | 3.13    | 33.34  | 32.56 PEAK | ---   | --- |
| 3    | 7440.000 | 49.32 | -24.68 | 41.69  | 74.00 | 4.02    | 36.48  | 32.87 PEAK | ---   | --- |

|               |          |                |                   |
|---------------|----------|----------------|-------------------|
| Temperature   | 28°C     | Humidity       | 57%               |
| Test Engineer | Ted Chiu | Configurations | Channel 78 (Chip) |

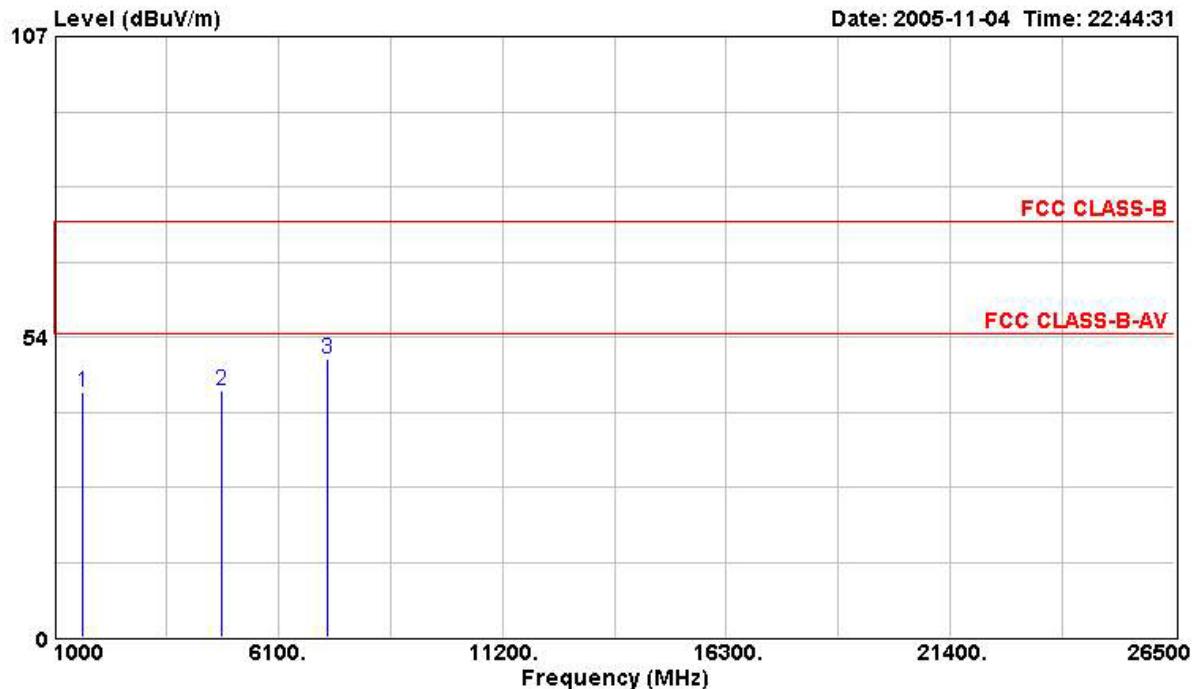**Horizontal**


| Freq | Over Read Limit Cable Antenna Preamp |        |        |       |             |        | Table Pos | Ant Pos |      |     |
|------|--------------------------------------|--------|--------|-------|-------------|--------|-----------|---------|------|-----|
|      | Level                                | Limit  | Level  | Line  | Loss Factor | Factor |           |         |      |     |
|      | MHz                                  | dBuV/m | dB     | dBuV  | dBuV/m      | dB     | dB/m      | dB      | deg  | cm  |
| 1    | 1652.000                             | 43.71  | -30.29 | 48.98 | 74.00       | 1.70   | 25.96     | 32.93   | Peak | --- |
| 2    | 4804.000                             | 43.91  | -30.09 | 40.25 | 74.00       | 3.10   | 33.10     | 32.54   | PEAK | --- |
| 3    | 7206.000                             | 49.64  | -24.36 | 41.99 | 74.00       | 4.10   | 35.90     | 32.35   | PEAK | --- |

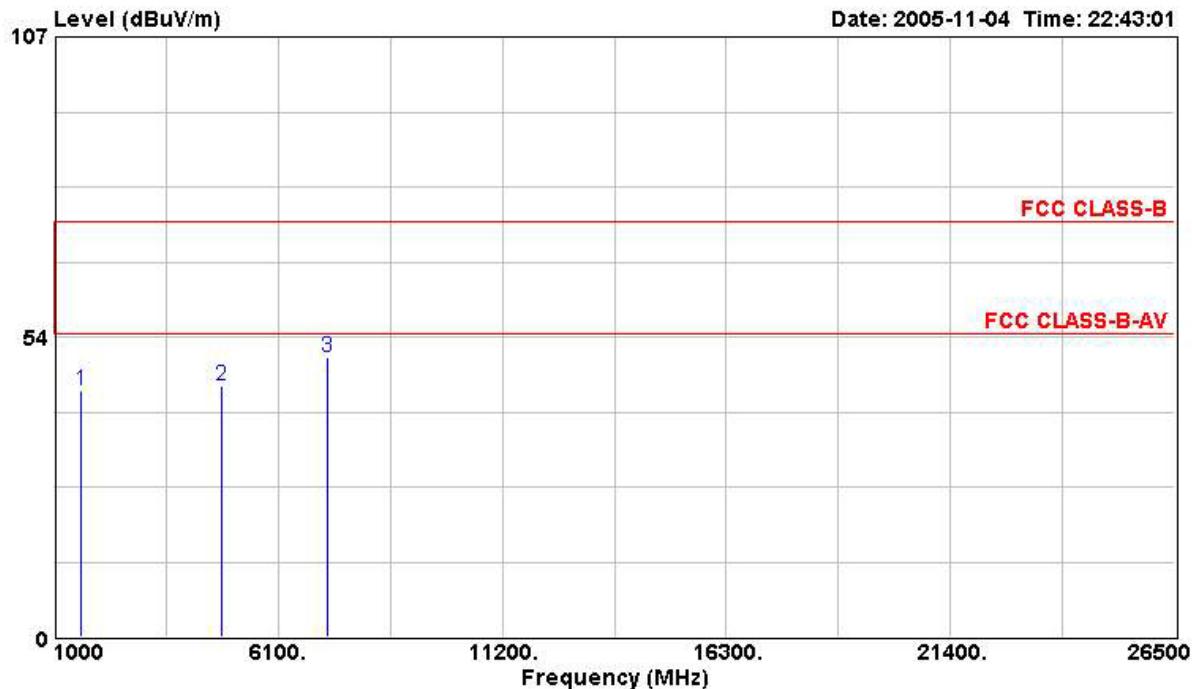**Vertical**


| Freq | Level    | Over  | Read   | Limit  | Cable | Antenna | Preamp | Table | Ant  |
|------|----------|-------|--------|--------|-------|---------|--------|-------|------|
|      |          | Limit | Level  | Line   | Loss  | Factor  | Factor |       |      |
| MHz  | dBuV/m   | dB    | dBuV   | dBuV/m | dB    | dB/m    | dB     | deg   | cm   |
| 1    | 1596.000 | 43.82 | -30.18 | 49.44  | 74.00 | 1.62    | 25.74  | 32.98 | Peak |
| 2    | 4804.000 | 44.74 | -29.26 | 41.08  | 74.00 | 3.10    | 33.10  | 32.54 | PEAK |
| 3    | 7206.000 | 49.75 | -24.25 | 42.10  | 74.00 | 4.10    | 35.90  | 32.35 | PEAK |

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                    | Setting  |
|---------------------------------------|--|
| Attenuation                           | Auto   |
| Span Frequency                        | 100 MHz  |
| RB / VB (emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (other emission)              | 100 KHz /100 KHz for Peak                      |

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge Emissions

##### For Emission in Restricted Band

|                      |          |                       |                      |
|----------------------|----------|-----------------------|----------------------|
| <b>Temperature</b>   | 28°C     | <b>Humidity</b>       | 57%                  |
| <b>Test Engineer</b> | Ted Chiu | <b>Configurations</b> | Channel 0, 78 (PIFA) |

##### Channel 0

|     | Freq     | Level | Over   | Read   | Limit | Cable | Antenna | Preamp | Table<br>Pos | Ant<br>Pos |
|-----|----------|-------|--------|--------|-------|-------|---------|--------|--------------|------------|
|     |          |       | Limit  | Level  | Line  | Loss  | Factor  | Factor |              |            |
|     |          |       | MHz    | dBuV/m | dB    | dBuV  | dBuV/m  | dB     | deg          | cm         |
| 1   | 2390.000 | 53.96 | -20.04 | 23.47  | 74.00 | 2.28  | 28.21   | 0.00   | Peak         | ---        |
| 1 0 | 2390.000 | 45.95 | -8.05  | 15.46  | 54.00 | 2.28  | 28.21   | 0.00   | Average      | ---        |

##### Channel 78

|     | Freq     | Level | Over   | Read   | Limit | Cable | Antenna | Preamp | Table<br>Pos | Ant<br>Pos |
|-----|----------|-------|--------|--------|-------|-------|---------|--------|--------------|------------|
|     |          |       | Limit  | Level  | Line  | Loss  | Factor  | Factor |              |            |
|     |          |       | MHz    | dBuV/m | dB    | dBuV  | dBuV/m  | dB     | deg          | cm         |
| 2   | 2483.500 | 60.78 | -13.22 | 30.07  | 74.00 | 2.34  | 28.37   | 0.00   | Peak         | 100        |
| 2 0 | 2483.500 | 52.75 | -1.25  | 22.04  | 54.00 | 2.34  | 28.37   | 0.00   | Average      | 200        |

|                      |          |                       |                      |
|----------------------|----------|-----------------------|----------------------|
| <b>Temperature</b>   | 28°C     | <b>Humidity</b>       | 57%                  |
| <b>Test Engineer</b> | Ted Chiu | <b>Configurations</b> | Channel 0, 78 (Chip) |

**Channel 0**

|   | Freq     | Level  | Over   | Read  | Limit  | Cable | Antenna | Preamp | Table   | Ant |
|---|----------|--------|--------|-------|--------|-------|---------|--------|---------|-----|
|   |          |        | Limit  | Level | Line   | Loss  | Factor  | Factor |         |     |
|   | MHz      | dBuV/m | dB     | dBuV  | dBuV/m | dB    | dB/m    | dB     | deg     | cm  |
| 1 | 2390.000 | 54.94  | -19.06 | 24.45 | 74.00  | 2.28  | 28.21   | 0.00   | Peak    | --- |
| 1 | 2390.000 | 46.56  | -7.44  | 16.07 | 54.00  | 2.28  | 28.21   | 0.00   | Average | --- |

**Channel 78**

|   | Freq     | Level  | Over   | Read  | Limit  | Cable | Antenna | Preamp | Table   | Ant |
|---|----------|--------|--------|-------|--------|-------|---------|--------|---------|-----|
|   |          |        | Limit  | Level | Line   | Loss  | Factor  | Factor |         |     |
|   | MHz      | dBuV/m | dB     | dBuV  | dBuV/m | dB    | dB/m    | dB     | deg     | cm  |
| 2 | 2483.500 | 59.85  | -14.15 | 29.14 | 74.00  | 2.34  | 28.37   | 0.00   | Peak    | --- |
| 2 | 2483.500 | 46.79  | -7.21  | 16.08 | 54.00  | 2.34  | 28.37   | 0.00   | Average | --- |

**Note:**


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Receiving maximum band edge emissions are Vertical Polarization /Horizontal Polarization.


### For Emission not in Restricted Band

## Low Band Edge Plot on Channel 0 / 2402 MHz

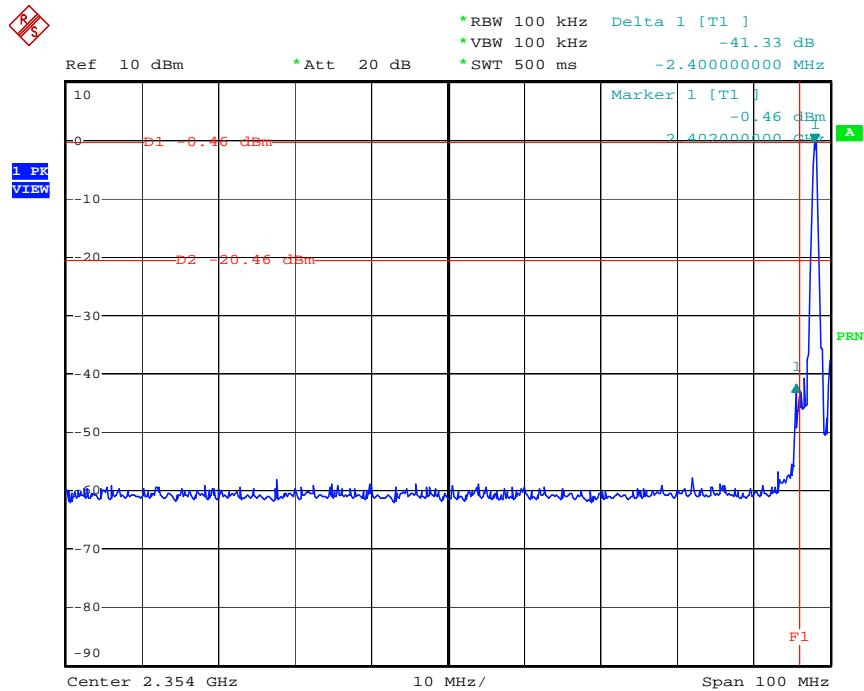

Date: 1.OCT.2005 10:49:24

## High Band Edge Plot on Channel 78 / 2480 MHz

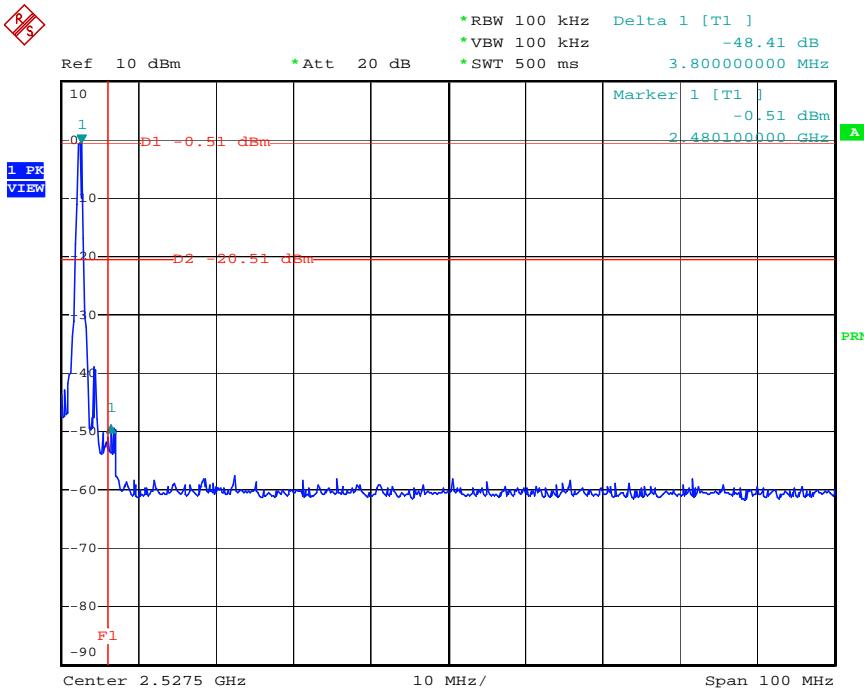

Date: 1.OCT.2005 10:48:23

## 4.8. Antenna Requirements

### 4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### 4.8.2. Antenna Connector Construction

Please refer to section 3.2 in this test report, all antenna connectors comply with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

| Instrument                 | Manufacturer   | Model No.    | Serial No.  | Characteristics    | Calibration Date | Remark                |
|----------------------------|----------------|--------------|-------------|--------------------|------------------|-----------------------|
| EMC Receiver               | R&S            | ESCS 30      | 100174      | 9kHz – 2.75GHz     | Feb. 16, 2005    | Conduction (CO04-HY)  |
| LISN                       | MessTec        | NNB-2/16Z    | 2001/004    | 9kHz – 30MHz       | Apr. 20, 2005    | Conduction (CO04-HY)  |
| LISN (Support Unit)        | MessTec        | NNB-2/16Z    | 99041       | 9kHz – 30MHz       | May. 05, 2005    | Conduction (CO04-HY)  |
| RF Cable-CON               | UTIFLEX        | 3102-26886-4 | CB049       | 9kHz – 30MHz       | Apr. 20, 2005    | Conduction (CO04-HY)  |
| EMI Filter                 | LINDGREN       | LRE-2030     | 2651        | < 450 Hz           | N/A              | Conduction (CO04-HY)  |
| 3m Semi Anechoic Chamber   | SIDT FRANKONIA | SAC-3M       | 03CH03-HY   | 30MHz ~ 1GHz<br>3m | Jun. 16, 2005    | Radiation (03CH03-HY) |
| Spectrum Analyzer          | R&S            | FSP40        | 100019      | 9KHZ-40GHz         | Jul. 21, 2005    | Radiation (03CH03-HY) |
| Amplifier                  | SCHAFFNER      | CPA9231A     | 18667       | 9KHz ~ 2GHz        | Jan. 10, 2005    | Radiation (03CH03-HY) |
| Amplifier                  | Agilent        | 8449B        | 3008A02120  | 1GHz ~ 26.5GHz     | May. 31, 2005    | Radiation (03CH03-HY) |
| Biconical Antenna          | SCHWARZBECK    | VHBB 9124    | 301         | 30MHz ~ 200MHz     | Jul. 22, 2005    | Radiation (03CH03-HY) |
| Log Antenna                | SCHWARZBECK    | VUSLP 9111   | 221         | 200MHz ~ 1GHz      | Jul. 22, 2005    | Radiation (03CH03-HY) |
| Horn Antenna               | EMCO           | 3115         | 6741        | 1GHz ~ 18GHz       | Apr. 22, 2005    | Radiation (03CH03-HY) |
| RF Cable-R03m              | Jye Bao        | RG142        | CB021       | 30MHz ~ 1GHz       | Feb. 22, 2005    | Radiation (03CH03-HY) |
| RF Cable-HIGH              | SUHNER         | SUCOFLEX 106 | 03CH03-HY   | 1GHz ~ 40GHz       | Dec.01, 2004     | Radiation (03CH03-HY) |
| Turn Table                 | HD             | DS 420       | 420/650/00  | 0 ~ 360 degree     | N/A              | Radiation (03CH03-HY) |
| Antenna Mast               | HD             | MA 240       | 240/560/00  | 1 m - 4 m          | N/A              | Radiation (03CH03-HY) |
| Spectrum analyzer          | R&S            | FSP40        | 100116      | 9kHz ~ 40GHz       | Jan. 28, 2005    | Conducted (TH01-HY)   |
| Power meter                | R&S            | NRVS         | 100444      | DC ~ 40GHz         | Jul. 06, 2005    | Conducted (TH01-HY)   |
| Power sensor               | R&S            | NRV-Z55      | 100049      | DC ~ 40GHz         | Jul. 06, 2005    | Conducted (TH01-HY)   |
| Power Sensor               | R&S            | NRV-Z32      | 100057      | 30MHz ~ 6GHz       | Apr. 28, 2005    | Conducted (TH01-HY)   |
| AC power source            | HPC            | HPA-500W     | HPA-9100024 | AC 0 ~ 300V        | Apr. 21, 2005    | Conducted (TH01-HY)   |
| DC power source            | G.W.           | GPC-6030D    | C671845     | DC 1V ~ 60V        | Nov. 28, 2004    | Conducted (TH01-HY)   |
| Temp. and Humidity Chamber | KSON           | THS-C3L      | 612         | N/A                | Oct. 01, 2005    | Conducted (TH01-HY)   |
| RF CABLE-1m                | Jye Bao        | RG142        | CB034-1m    | 20MHz ~ 7GHz       | Jan. 01, 2005    | Conducted (TH01-HY)   |
| RF CABLE-2m                | Jye Bao        | RG142        | CB035-2m    | 20MHz ~ 1GHz       | Jan. 01, 2005    | Conducted (TH01-HY)   |
| Oscilloscope               | Tektronix      | TDS1012      | CO38515     | 100MHz / 1GS/s     | Apr. 15, 2005    | Conducted (TH01-HY)   |
| Signal Generator           | R&S            | SMR40        | 100116      | 10MHz ~ 40GHz      | Dec. 31, 2004    | Conducted (TH01-HY)   |

Note: Calibration Interval of instruments listed above is one year.

| Instrument     | Manufacturer | Model No.     | Serial No.  | Characteristics | Calibration Date | Remark                |
|----------------|--------------|---------------|-------------|-----------------|------------------|-----------------------|
| Amplifier      | MITEQ        | AMF-6F-260400 | 923364      | 26.5GHz ~ 40GHz | Jan. 05, 2004*   | Radiation (03CH03-HY) |
| Loop Antenna   | R&S          | HFH2-Z2       | 860004/001  | 9kHz ~ 30MHz    | May 24, 2004*    | Radiation (03CH03-HY) |
| Horn Antenna   | SCHWARZBECK  | BBHA9170      | BBHA9170154 | 15GHz ~ 40GHz   | Jun. 09, 2004*   | Radiation (03CH03-HY) |
| Data Generator | Tektronix    | DG2030        | 063-2920-50 | 0.1Hz~400MHz    | Jun. 02, 2005    | Conducted (TH01-HY)   |

Note: Calibration Interval of instruments listed above is two year.

## 6. SPORTON COMPANY PROFILE

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test familial apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufacturers. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

### 6.1. Test Location

|        |  |
|--------|--|
| SHIJR  | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C.<br>TEL : 02-2696-2468<br>FAX : 02-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 03-327-3456<br>FAX : 03-318-0055         |
| LINKOU | ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C<br>TEL : 02-2601-1640<br>FAX : 02-2601-1695               |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C.<br>TEL : 02-2631-4739<br>FAX : 02-2631-9740            |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C.<br>TEL : 02-8227-2020<br>FAX : 02-8227-2626           |
| NEIHU  | ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C.<br>TEL : 02-2794-8886<br>FAX : 02-2794-9777         |
| JHUBEI | ADD : No.8, Lane 728, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.<br>TEL : 03-656-9065<br>FAX : 03-656-9085       |

## 7. CERTIFICATE OF NVLAP ACCREDITATION

|   |   |
|---|---|
| <p>United States Department of Commerce<br/>National Institute of Standards and Technology</p> <p><b>NVLAP</b><sup>®</sup></p> <p>ISO/IEC 17025:1999<br/>ISO 9002:1994</p> <p><b>Certificate of Accreditation</b></p> <p></p>  |   |
| <p><b>SPORTON INTERNATIONAL, INC.</b><br/>TAIPEI HSIEN 221<br/>TAIWAN</p> <p><i>is recognized by the National Voluntary Laboratory Accreditation Program<br/>for satisfactory compliance with criteria set forth in NIST Handbook 150:2001,<br/>all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994.<br/>Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:</i></p> <p><b>ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS</b></p> |   |
| <p>December 31, 2005</p> <p><i>Effective through</i></p>  | <p></p> <p><i>For the National Institute of Standards and Technology</i><br/>NVLAP Lab Code: 200079-0</p> |

NVLAP-01C (06-01)