

TEST REPORT

Part 15 Subpart C 15.247

Equipment under test SMARTCAM

Model name SNH-P6412BN

Derivative model SNH-C6410/SD

FCC ID NLMSNHP6412BN

Applicant Hanwha Techwin Co., Ltd.

Manufacturer Tianjin Samsung Techwin Opto-Electronic Co., Ltd.

Date of test(s) 2016.06.01 ~ 2016.12.12

Date of issue 2016.12.14

Issued to

Hanwha Techwin Co., Ltd.

1204, Changwon-daero, Seongsan-gu, Chang-won-si,
Gyeongsangnam-do, Korea

Tel: +82-70-7147-8361 / Fax: +82-31-8108-3717

Issued by
KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, Korea

473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Hyeon-su Jang Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0113-R2
Page (2) of (54)

Revision history

Revision	Date of issue	Test report No.	Description
-	2016.12.07	KES-RF-16T0113	Initial
1	2016.12.13	KES-RF-16T0113-R1	Retest radiated emissions & AC conducted emissions
2	2016.12.14	KES-RF-16T0113-R2	Added derivative model

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test configuration	5
1.3.	Device modifications	5
1.4.	Derivation model information	5
1.5.	Frequency/channel operations	6
1.6.	Worst case data rate	6
1.7.	Using antenna information	6
2.	Summary of tests	7
3.	Test results	8
3.1.	Radiated restricted band and emissions	8
3.2.	AC conducted emissions	51
	Appendix A. Measurement equipment	53
	Appendix B. Test setup photos	54

1. General information

Applicant: Hanwha Techwin Co., Ltd.
Applicant address: 1204, Changwon-daero, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea
Test site: KES Co., Ltd.
Test site address: C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
FCC rule part(s): 15.247
FCC ID: NLMSNHP6412BN
Test device serial No.: Production Pre-production Engineering

1.1. EUT description

Equipment under test SMARTCAM
Frequency range 2 412 MHz ~ 2 462 MHz(802.11b/g/n_HT20)
5 745 MHz ~ 5 825 MHz(802.11a/n_HT20),
5 755 MHz ~ 5 795 MHz(802.11n_HT40)
5 180 MHz ~ 5 240 MHz(802.11a/n_HT20),
5 190 MHz ~ 5 230 MHz(802.11n_HT40)
5 260 MHz ~ 5 320 MHz(802.11a/n_HT20),
5 270 MHz ~ 5 310 MHz(802.11n_HT40)
5 500 MHz ~ 5 700 MHz(802.11a/n_HT20),
5 510 MHz ~ 5 670 MHz(802.11n_HT40)
Model: SNH-P6412BN
Derivative model SNH-C6410/SD
Modulation technique DSSS, OFDM
Number of channels 2 412 MHz ~ 2 462 MHz(802.11 b/g/n_HT20) : 11ch
5 745 MHz ~ 5 825 MHz(802.11a/n_HT20) : 5ch
5 755 MHz ~ 5 795 MHz(802.11n_HT40) : 2ch
5 180 MHz ~ 5 240 MHz(802.11a/n_HT20) : 4ch
5 190 MHz ~ 5 230 MHz(802.11n_HT40) : 2ch
5 260 MHz ~ 5 320 MHz(802.11a/n_HT20) : 4ch
5 270 MHz ~ 5 310 MHz(802.11n_HT40) : 2ch
5 500 MHz ~ 5 700 MHz(802.11a/n_HT20) : 11ch
5 510 MHz ~ 5 670 MHz(802.11n_HT40) : 5ch
Antenna specification Antenna type: PIFA Antenna
Power source AC 120V Adapter (Output : DC 5V / 2 A)



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0113-R2
Page (5) of (54)

Note:

1. Certificated module is mounted in the EUT as following
 - Applicant: Hanwha Techwin Co., Ltd.
 - Contains FCC ID : NLMSWLQ93T
 - Model: SWL-Q93T
2. The installed module is completed identical as original.

1.2. Test configuration

The Hanwha Techwin Co., Ltd. FCC ID: NLMSNHP6412BN was tested per the guidance of KDB 558074 D01 v03r05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

1.3. Device modifications

N/A

1.4. Derivation model information

The circuit diagram and software of the basic model and derivative are fundamentally the same.
It is for model management purpose.

1.5. Frequency/channel operations

Ch.	Frequency (MHz)	Mode
01	2412	802.11b/g/n_HT20
:	:	:
06	2437	802.11b/g/n_HT20
:	:	:
11	2462	802.11b/g/n_HT20

1.6. Worst case data rate

1. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
2. Worst-case data rates were:
 802.11b: **1 Mbps**
 802.11g: **6 Mbps**
 802.11n_HT20: **MCS0 (SISO), MCS8 (MIMO)**

1.7. Using antenna information

Mode	Bandwidth (MHz)	Antenna 0	Antenna 1	Antenna 0+1
802.11b	20	✓	✓	✗
802.11g	20	✓	✓	✗
802.11n	20	✓	✓	✓

Antenna 0 gain(dBi)	Antenna 1 gain(dBi)	Total gain(dBi) ^{Note1}
-2.69	-2.22	0.56

Note.

1. Ant Gain = $10\log[(10^{G1/20}+10^{G2/20}+\dots+10^{GN/20})^2/N_{ANT}]$



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0113-R2
Page (7) of (54)

2. Summary of tests

Reference	Parameter	Test results
15.205	Radiated spurious emission	Pass
15.209		
15.207	AC conducted emissions	Pass


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

3. Test results


3.1. Radiated restricted band and emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

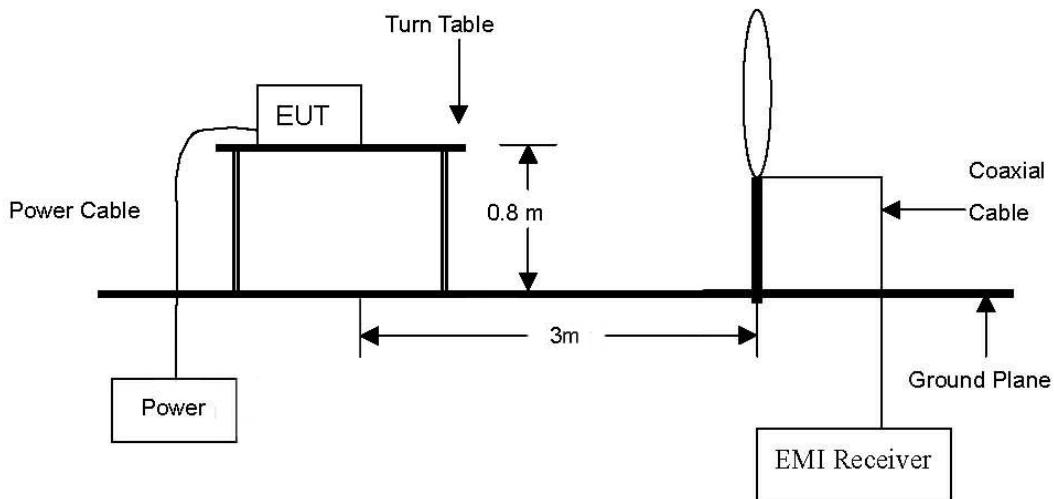

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

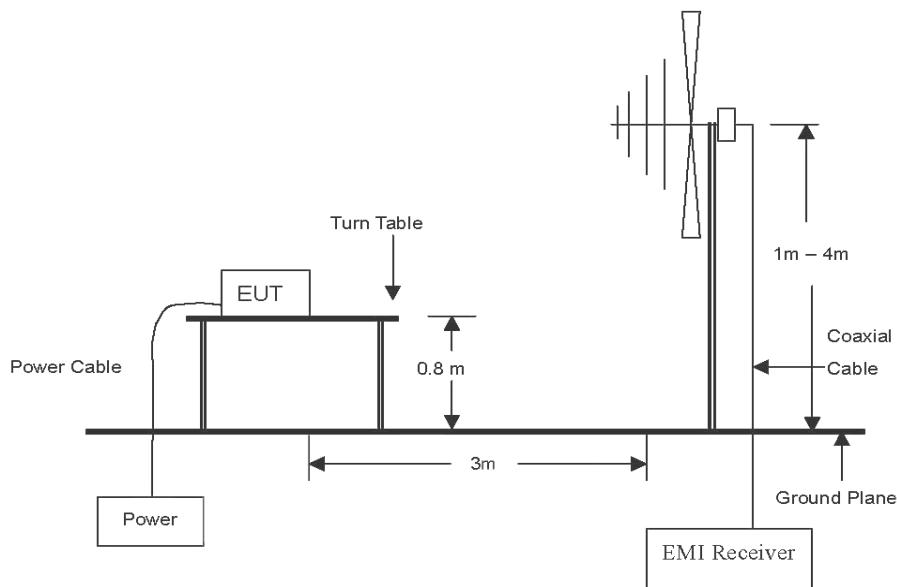

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

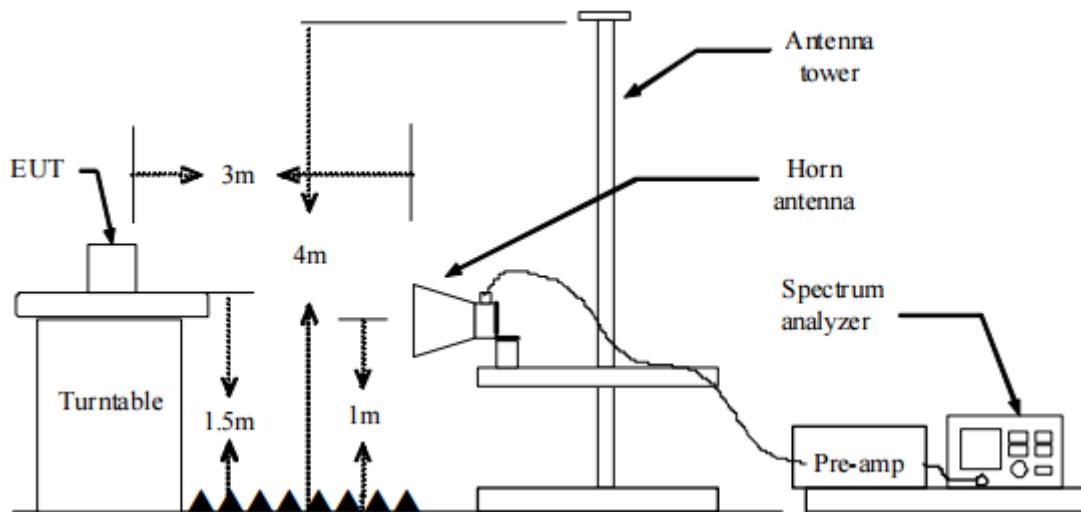

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. Spectrum analyzer settings for $f < 1$ GHz:
 - ① Span = wide enough to fully capture the emission being measured
 - ② RBW = 100 kHz
 - ③ VBW \geq RBW
 - ④ Detector = quasi peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
2. Spectrum analyzer settings for $f \geq 1$ GHz: Peak
 - ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
 - ② RBW = 1 MHz
 - ③ VBW \geq 3 MHz
 - ④ Detector = peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
 - ⑦ Trace was allowed to stabilize

3. Spectrum analyzer settings for $f \geq 1$ GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW $\geq 3 \times$ RBW
- ④ Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Note.

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
 Where:
 - F_d = Distance factor in dB
 - D_m = Measurement distance in meters
 - D_s = Specification distance in meters
3. CF(Correction factors(dB)) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. Field strength(dB μ V/m) = Level(dB μ V) + CF (dB) + or DCF(dB)
5. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
6. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.
8. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0113-R2
Page (11) of (54)

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

Duty cycle

Regarding to KDB 558074 D01_v03r05, 6.0, the maximum duty cycles of all modes were investigated and set the spectrum analyzer as below.


Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100.

Test mode	T _{on} time (ms)	Period (ms)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
802.11b	10.00	10.00	1	100	0
802.11g	10.00	10.00	1	100	0
802.11n(HT20)	10.00	10.00	1	100	0


Duty cycle (Linear) = T_{on} time/Period

DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)


802.11b // Middle channel

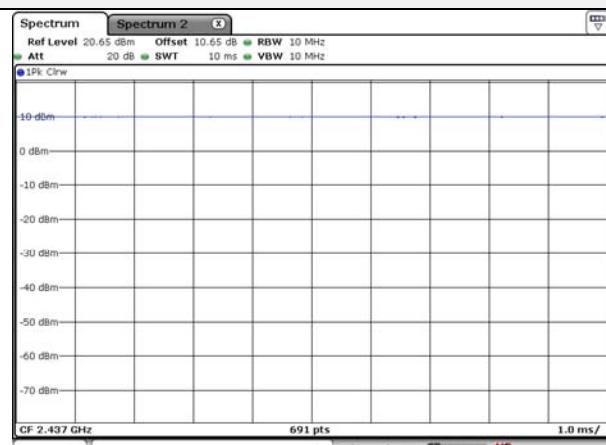

802.11g // Middle channel

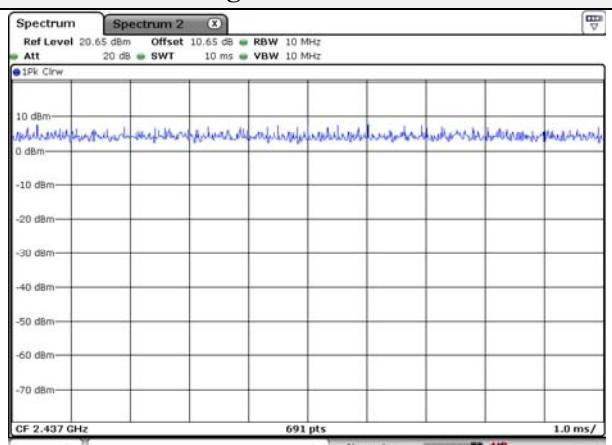

802.11n(HT20) // Middle channel

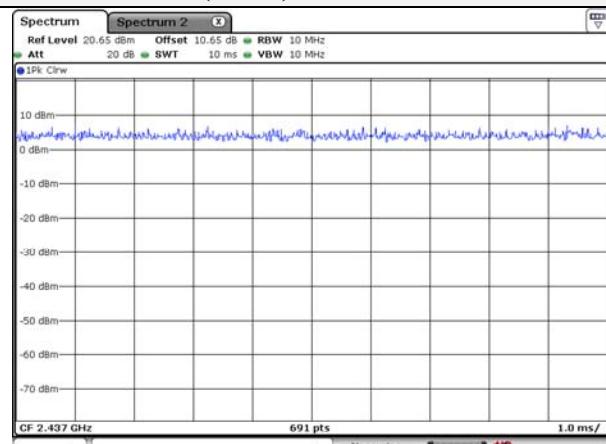


Test results (Below 30 MHz) – Worst case

 Mode: 802.11n_HT20(MIMO)

 Distance of measurement: 3 meter

 Channel: 1


Frequency (MHz)	Level (dB μ V)	Ant. Pol. (H/V)	CF (dB)	F _d (dB)	Field strength (dB μ V/m)	Limit (dB μ N/m)	Margin (dB)
No spurious emissions were detected within 20 dB of the limit							

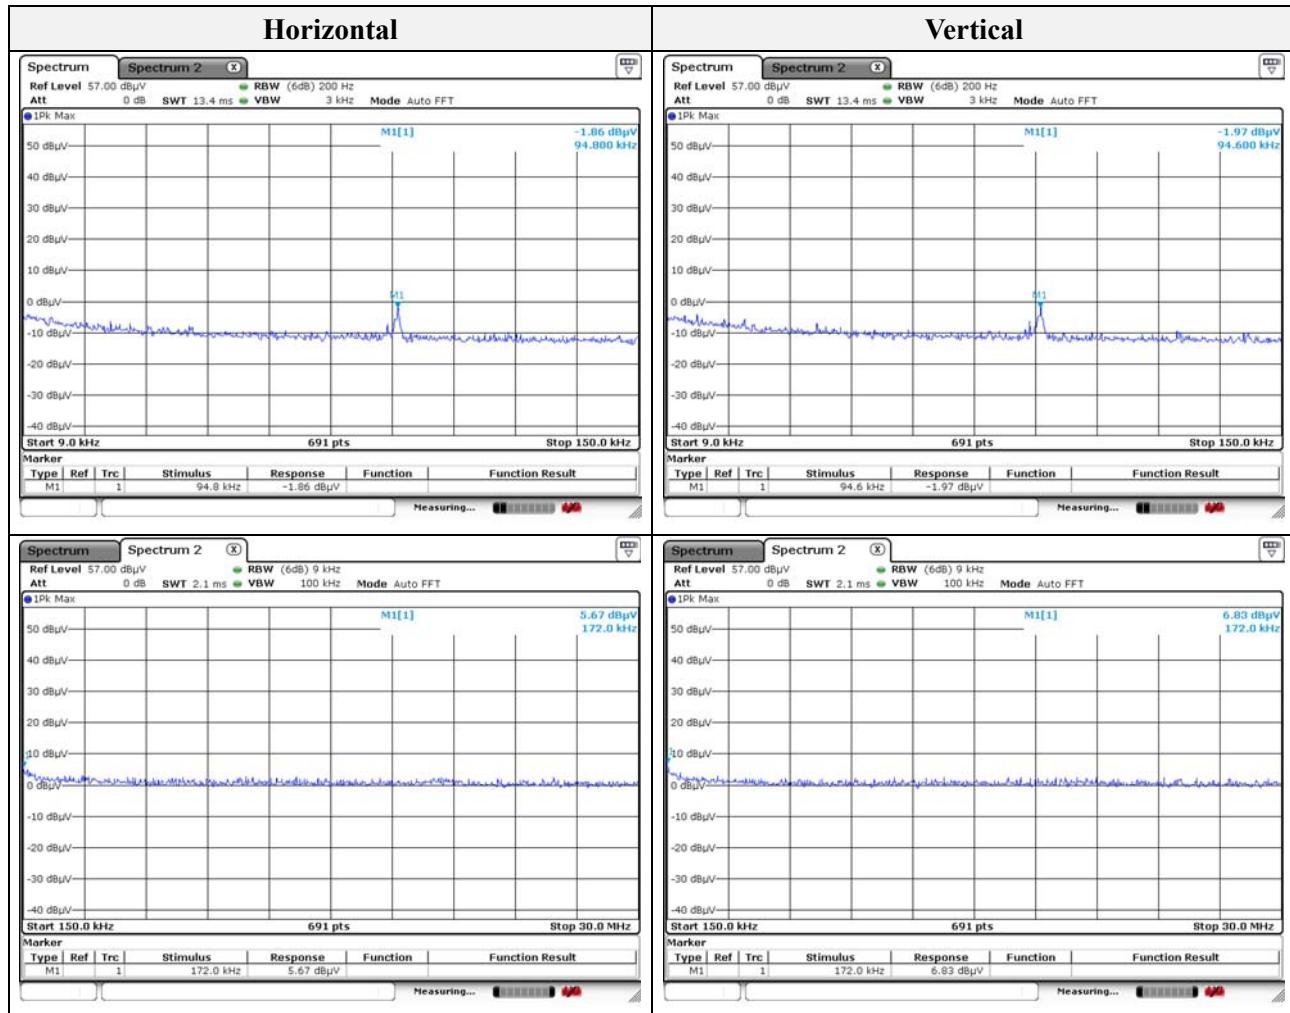

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Test results (Below 1 000 MHz) – Worst case

Mode: 802.11n_HT20(MIMO)
 Distance of measurement: 3 meter
 Channel: 6

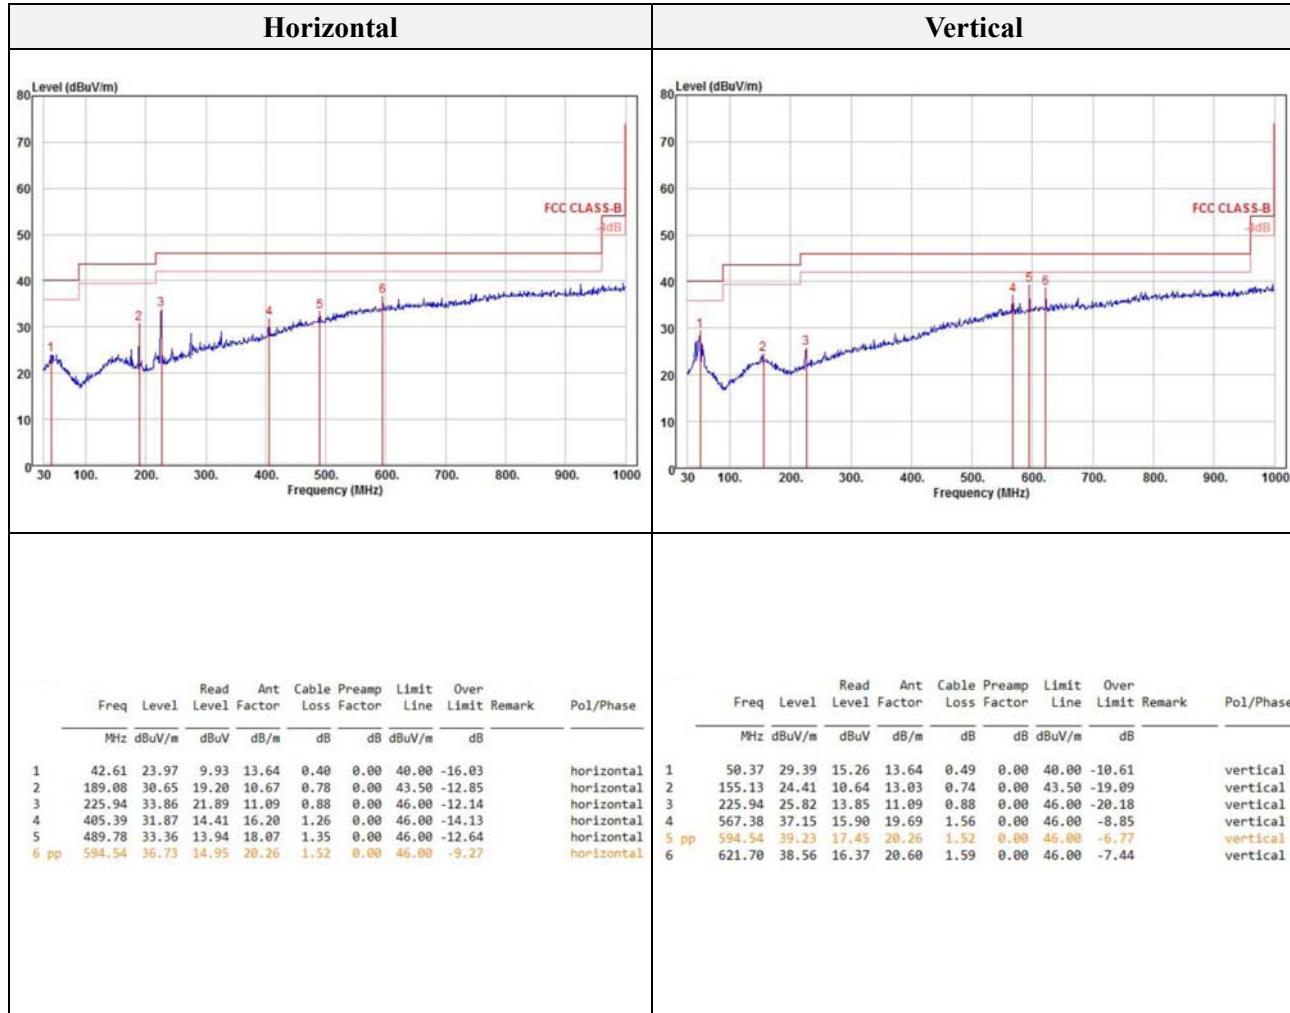

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.


Test results (Above 1 000 MHz)
Ant 1

Mode: 802.11b

Distance of measurement: 3 meter


Channel: 01

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2341.42	46.34	Peak	H	-9.92	-	36.42	74.00	37.58
2362.08	48.39	Peak	V	-9.85	-	38.54	74.00	35.46

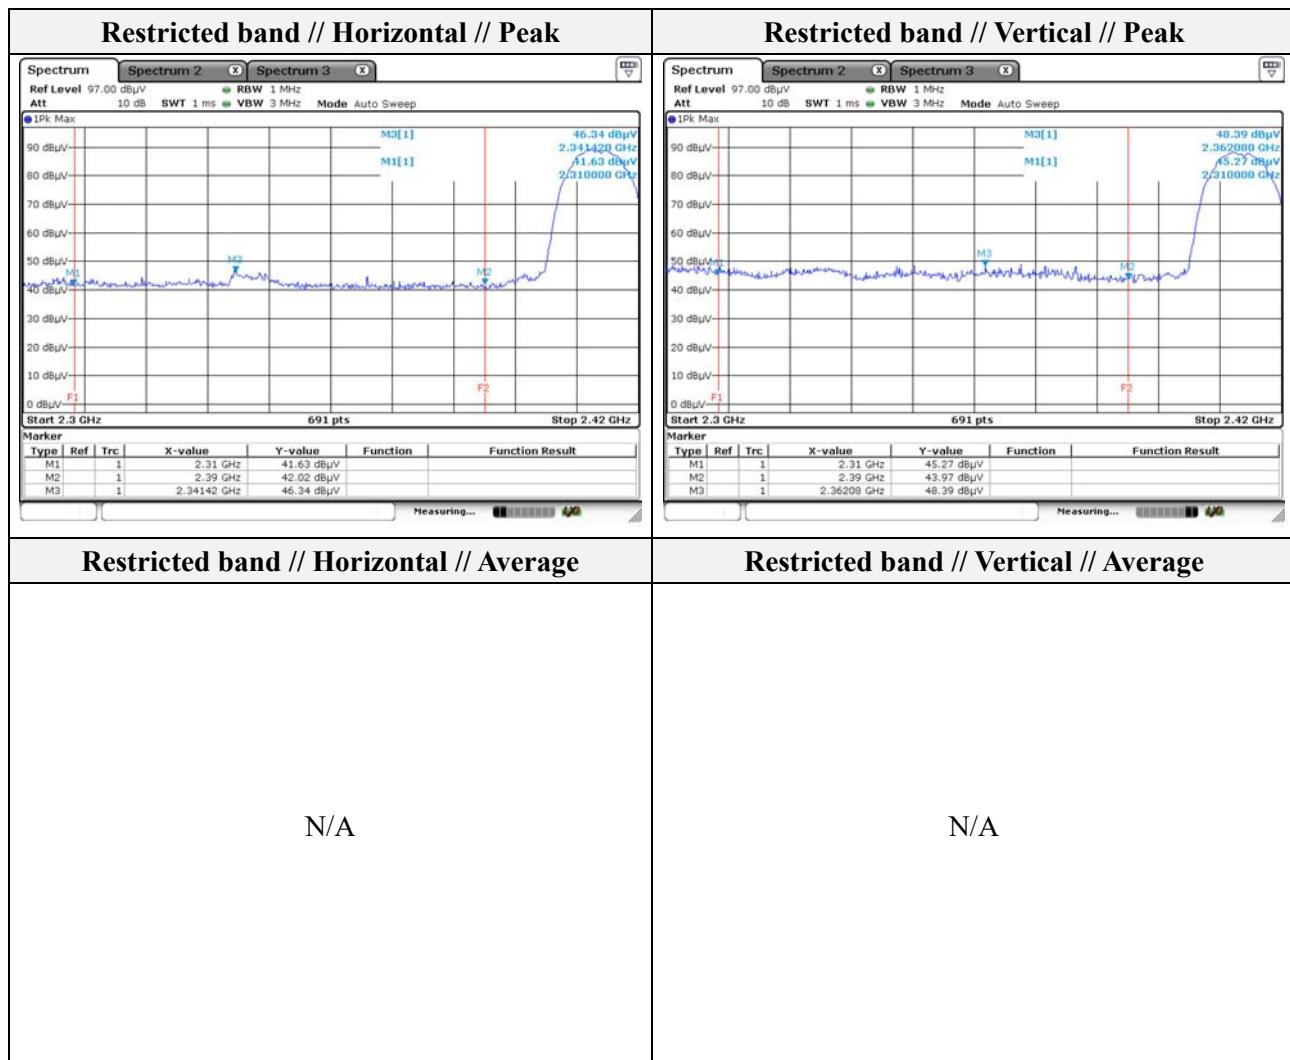

Note.

1. Average test was not performed because peak result is lower than the average limit.

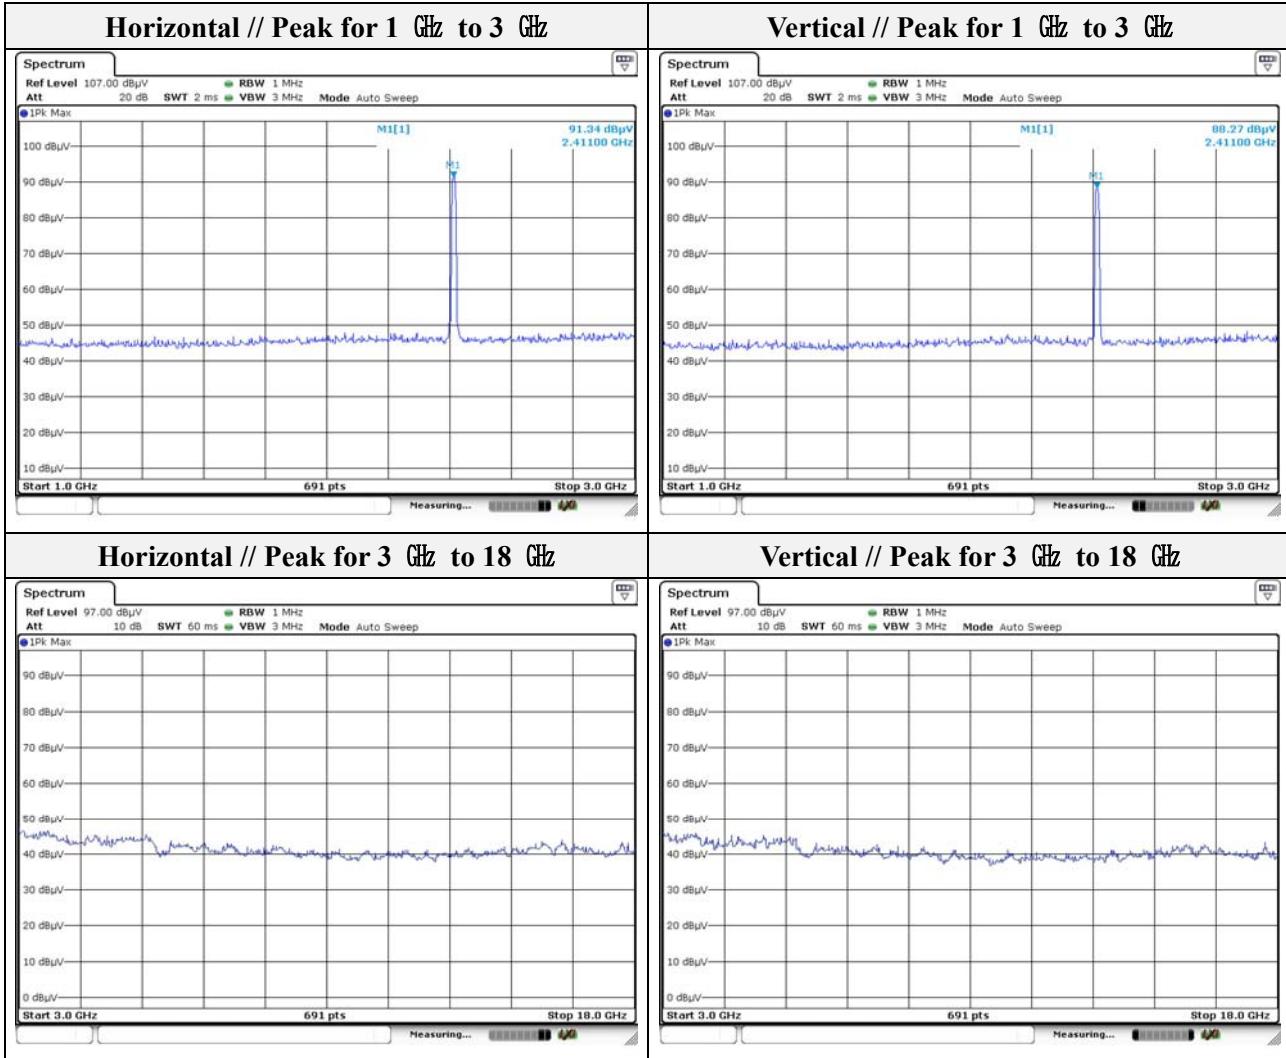


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11b

Distance of measurement: 3 meter

Channel: 06

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
No spurious emission were detected above 3 GHz.								

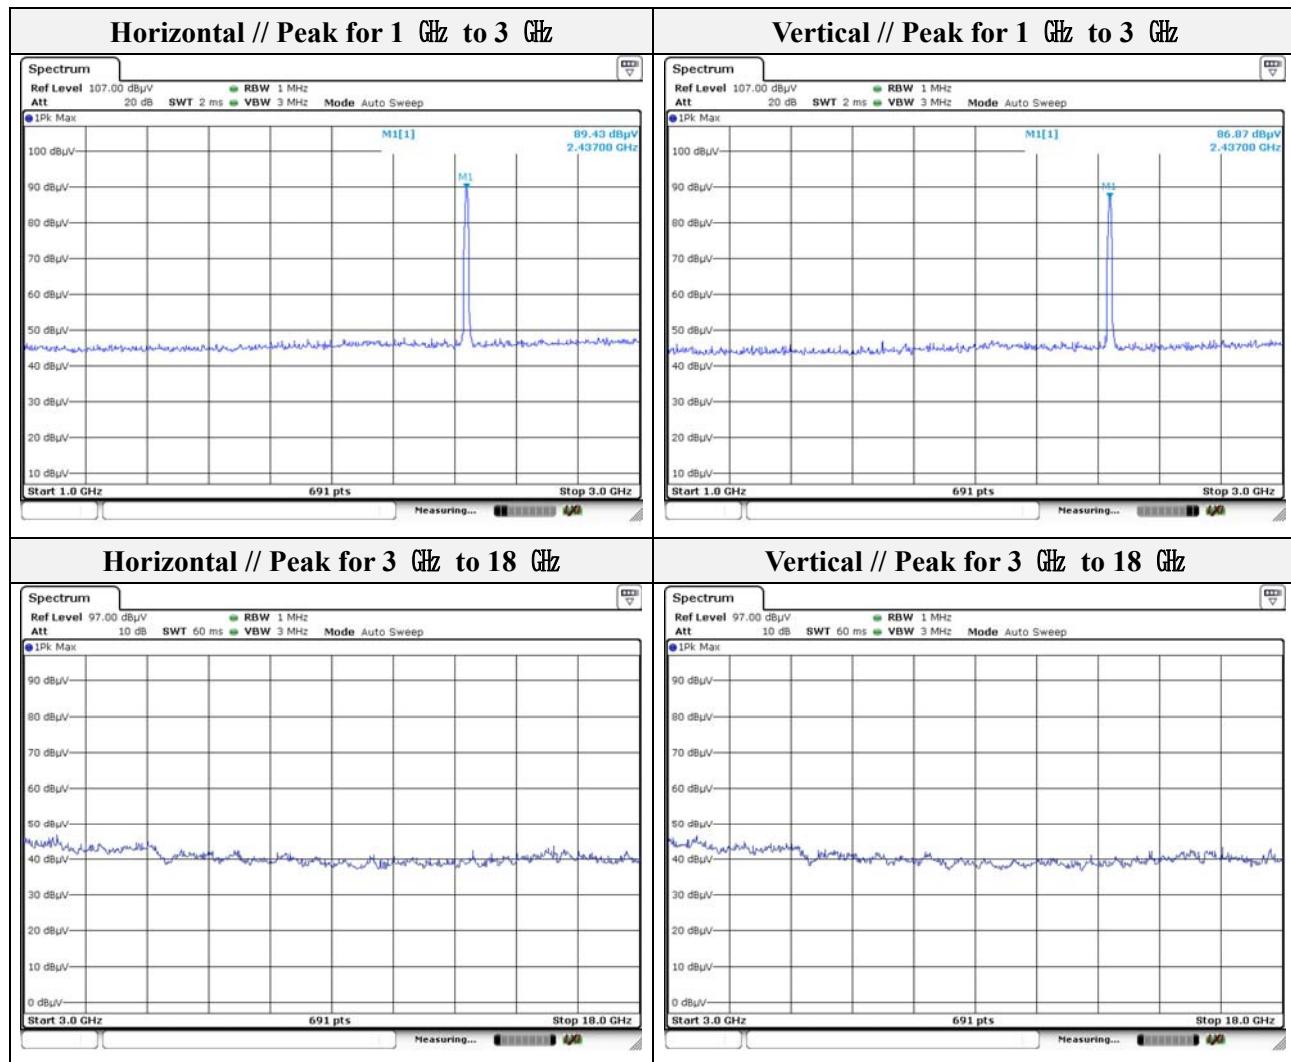


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11b

Distance of measurement: 3 meter


Channel: 11

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2489.41	42.18	Peak	H	-9.38	-	32.80	74.00	41.20
2491.00	43.43	Peak	V	-9.38	-	34.05	74.00	39.95

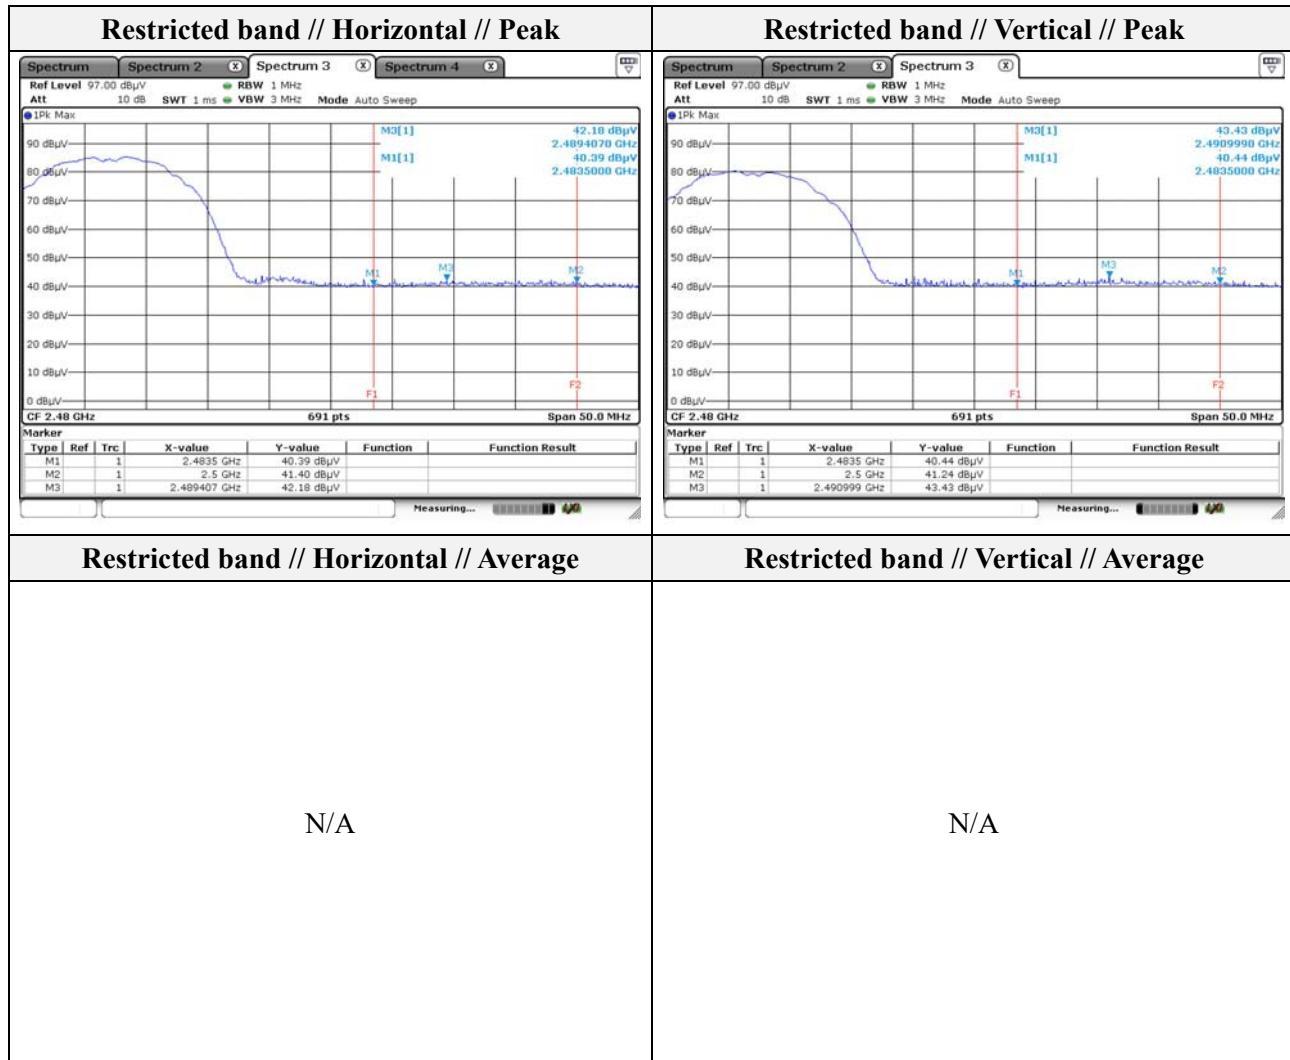

Note.

1. Average test was not performed because peak result is lower than the average limit.

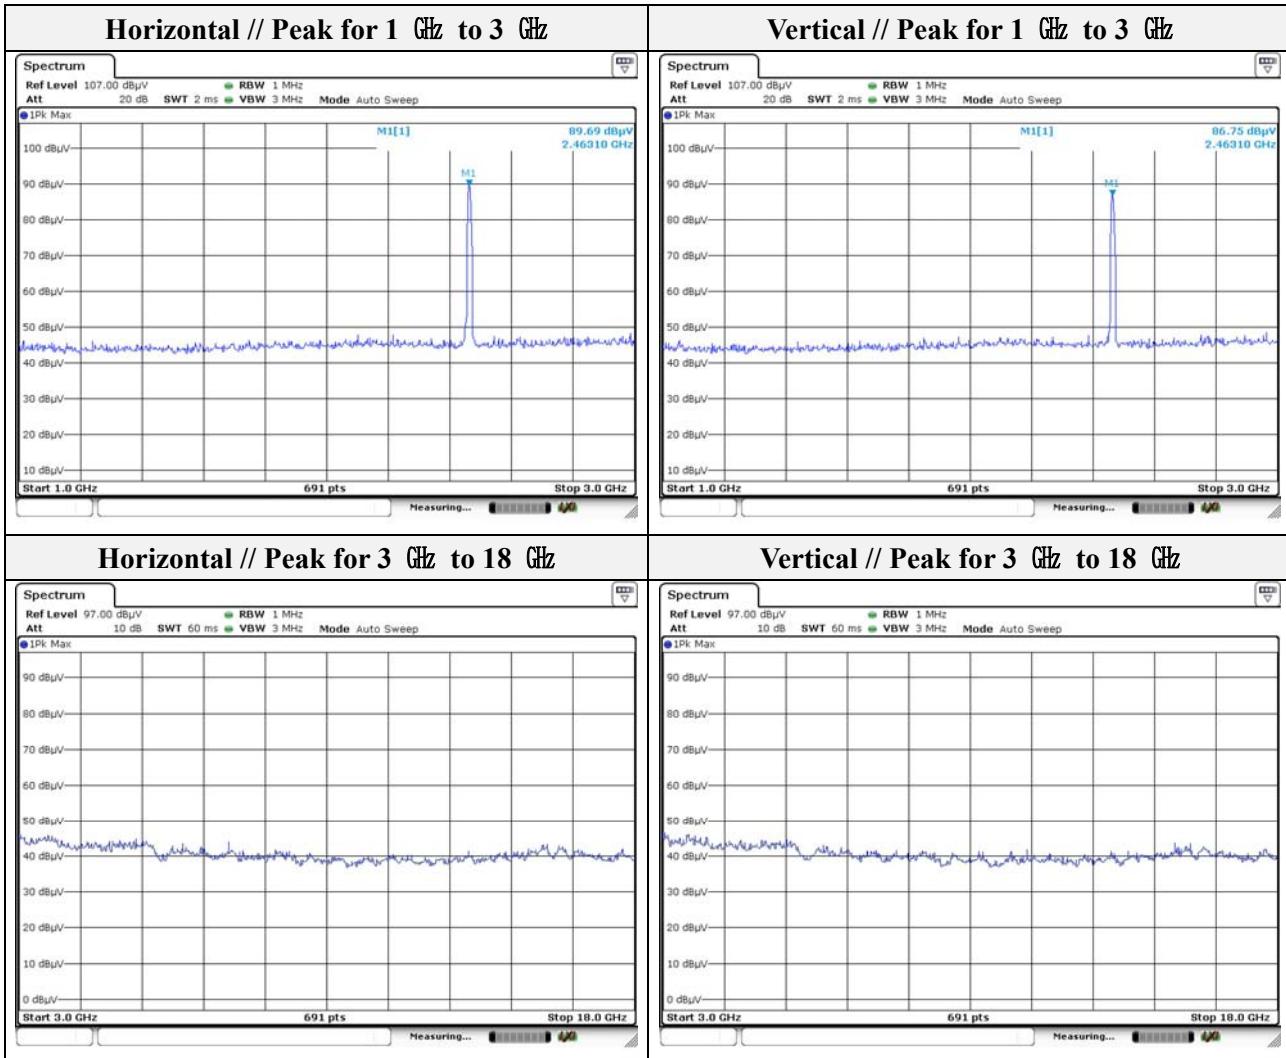

Note.


1. No spurious emission were detected above 3 GHz.

Mode: 802.11g

Distance of measurement: 3 meter


Channel: 01

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2342.63	44.24	Peak	H	-9.91	-	34.33	74.00	39.67
2324.57	48.53	Peak	V	-9.97	-	38.56	74.00	35.44

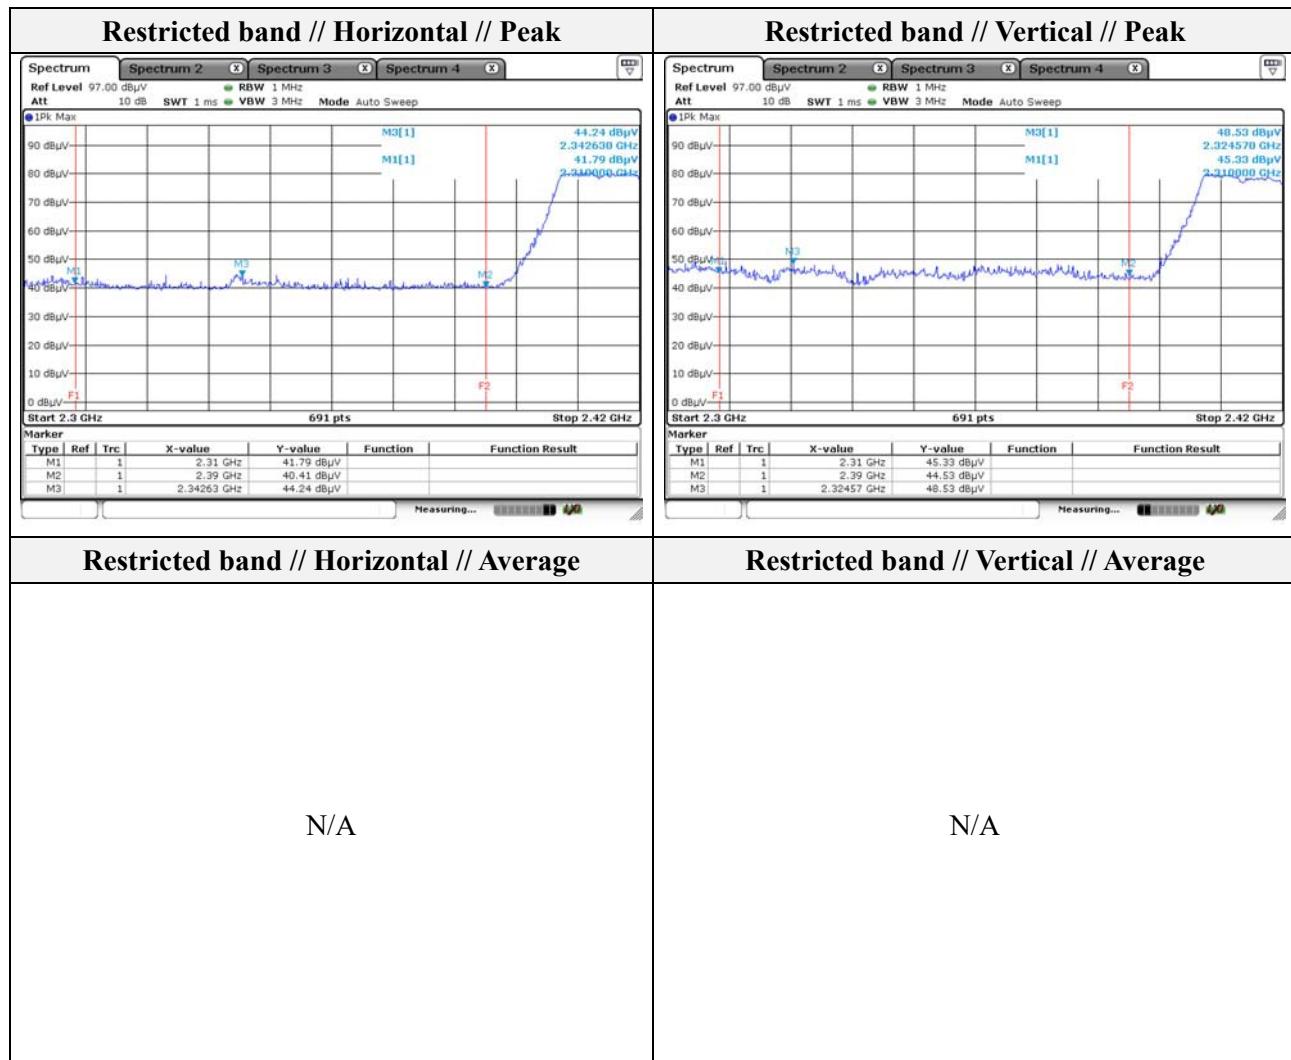

Note.

1. Average test was not performed because peak result is lower than the average limit.

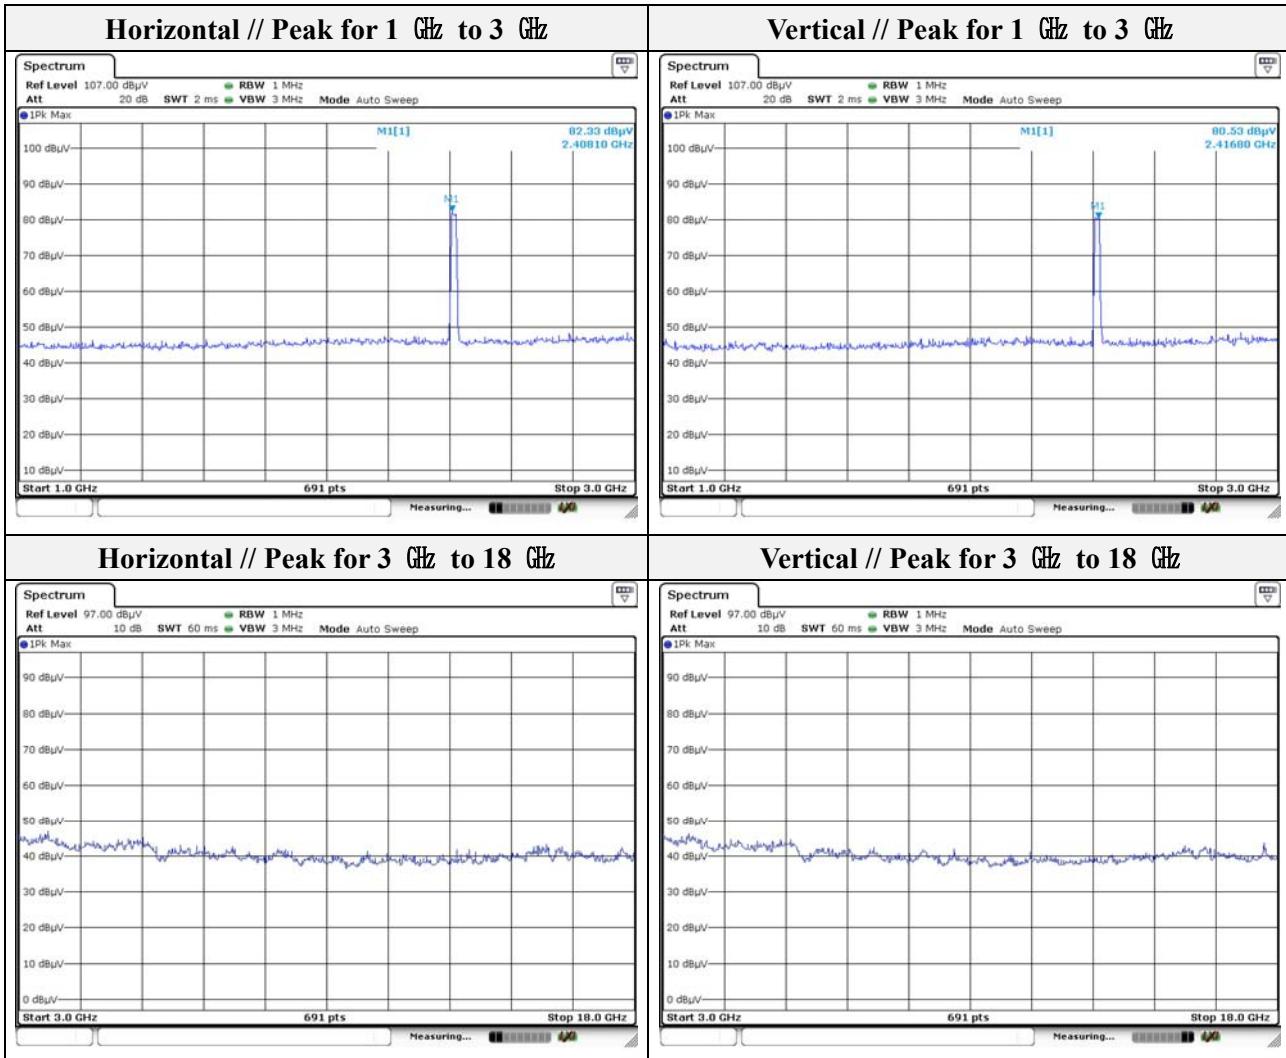

Note.


1. No spurious emission were detected above 3 GHz.

Mode: 802.11g

Distance of measurement: 3 meter

Channel: 06

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
No spurious emission were detected above 3 GHz.								

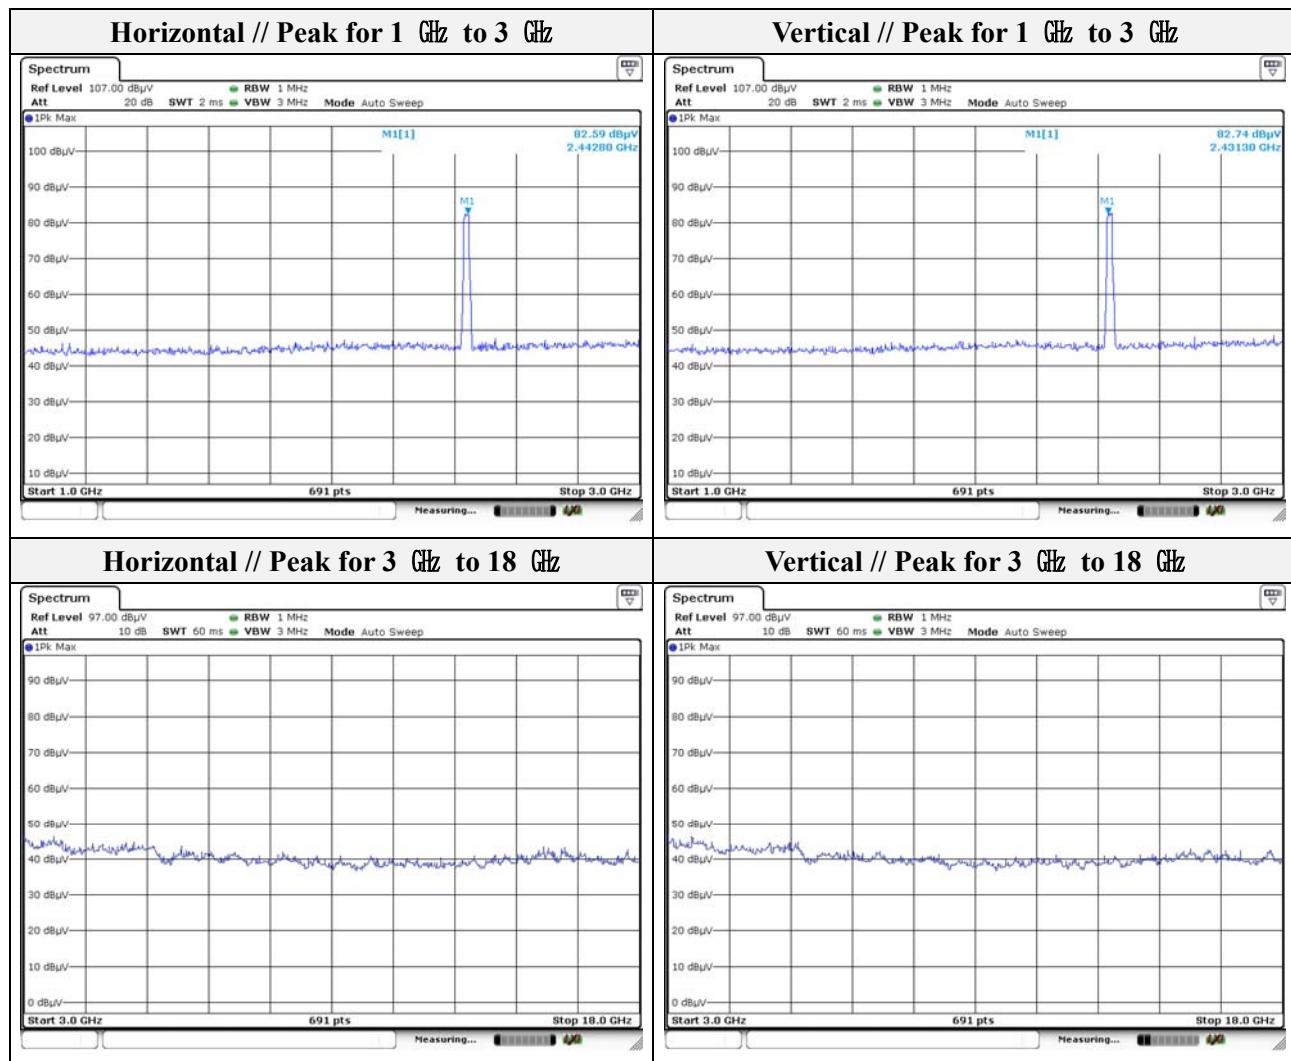


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11g

Distance of measurement: 3 meter


Channel: 11

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2497.00	42.14	Peak	H	-9.35	-	32.79	74.00	41.21
2496.28	43.13	Peak	V	-9.35	-	33.78	74.00	40.22

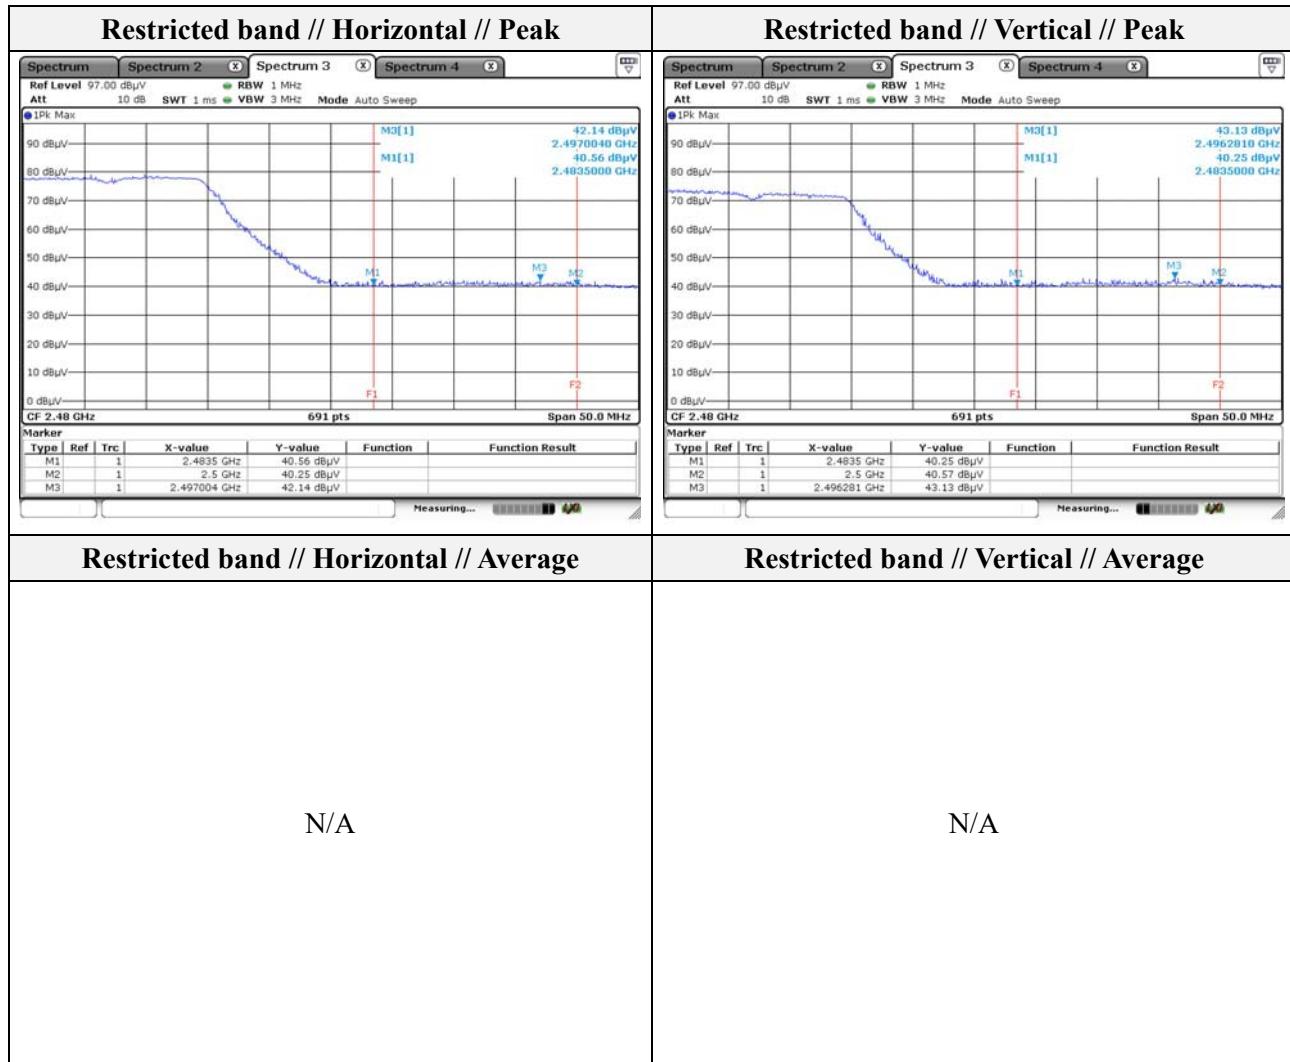

Note.

1. Average test was not performed because peak result is lower than the average limit.

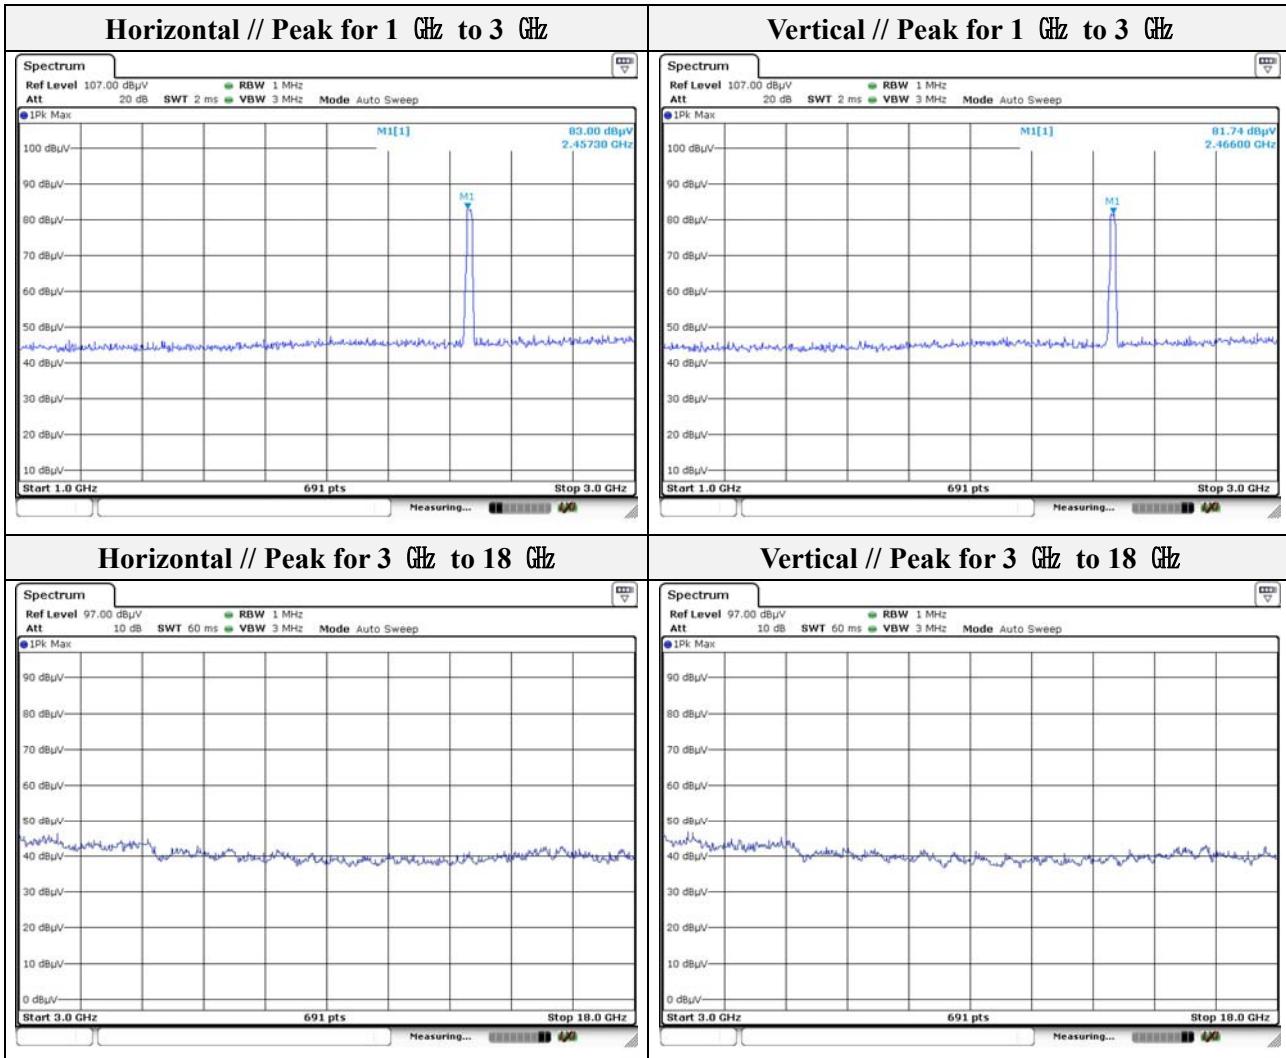

Note.


1. No spurious emission were detected above 3 GHz.

Mode: 802.11n(HT20)

Distance of measurement: 3 meter


Channel: 01

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2341.24	46.25	Peak	H	-9.92	-	36.33	74.00	37.67
2374.59	47.95	Peak	V	-9.81	-	38.14	74.00	35.86

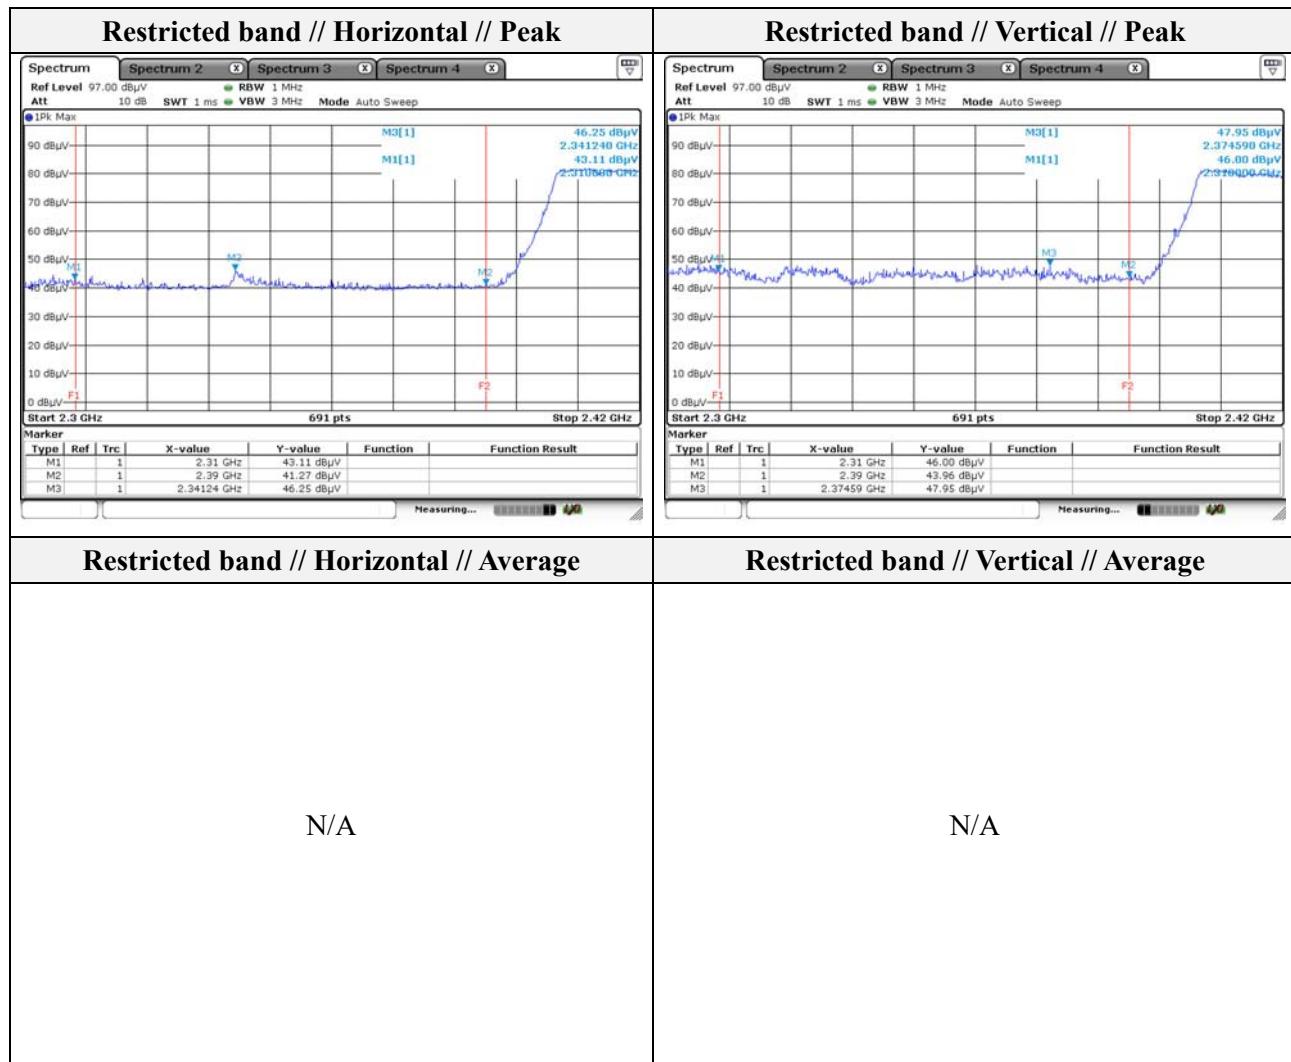

Note.

1. Average test was not performed because peak result is lower than the average limit.

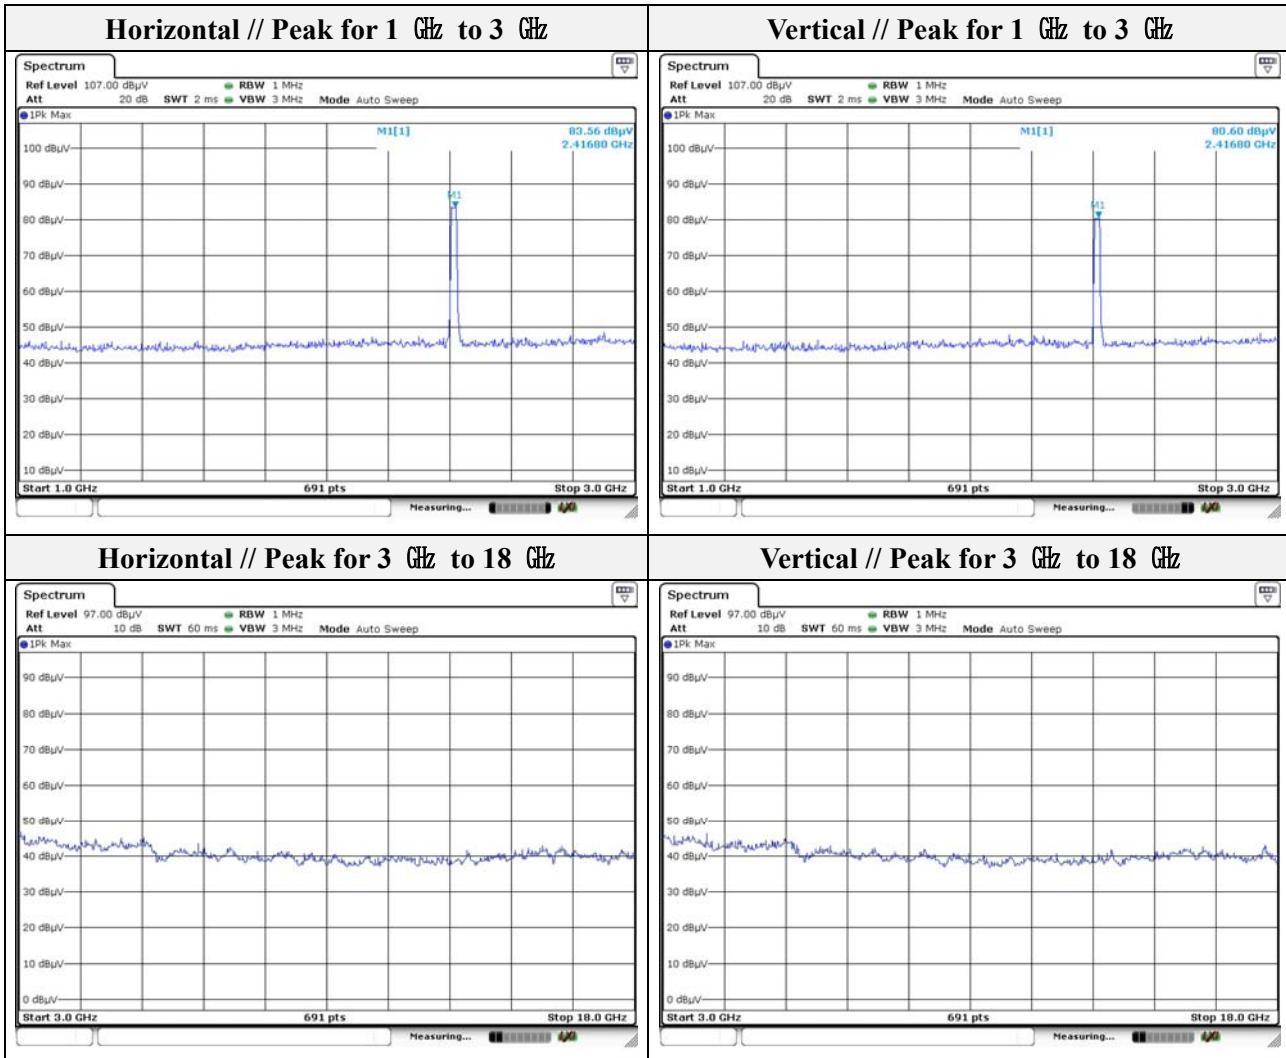

Note.


1. No spurious emission were detected above 3 GHz.

Mode: 802.11n(HT20)

Distance of measurement: 3 meter

Channel: 06

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
No spurious emission were detected above 3 GHz.								

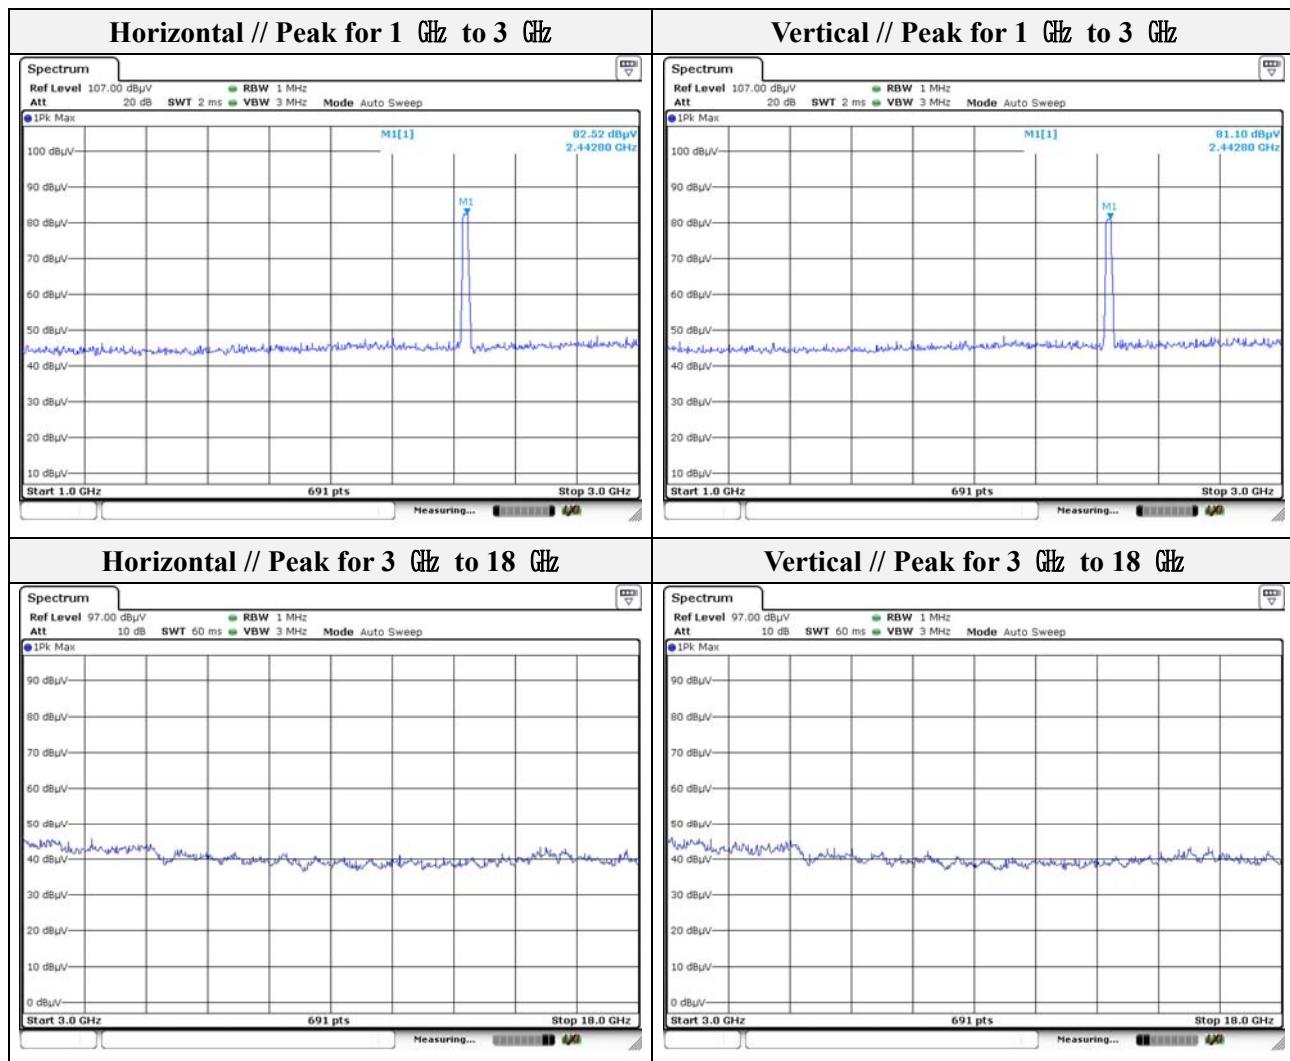


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11n(HT20)

Distance of measurement: 3 meter


Channel: 11

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2492.66	42.14	Peak	H	-9.37	-	32.77	74.00	41.23
2490.78	42.65	Peak	V	-9.38	-	33.27	74.00	40.73

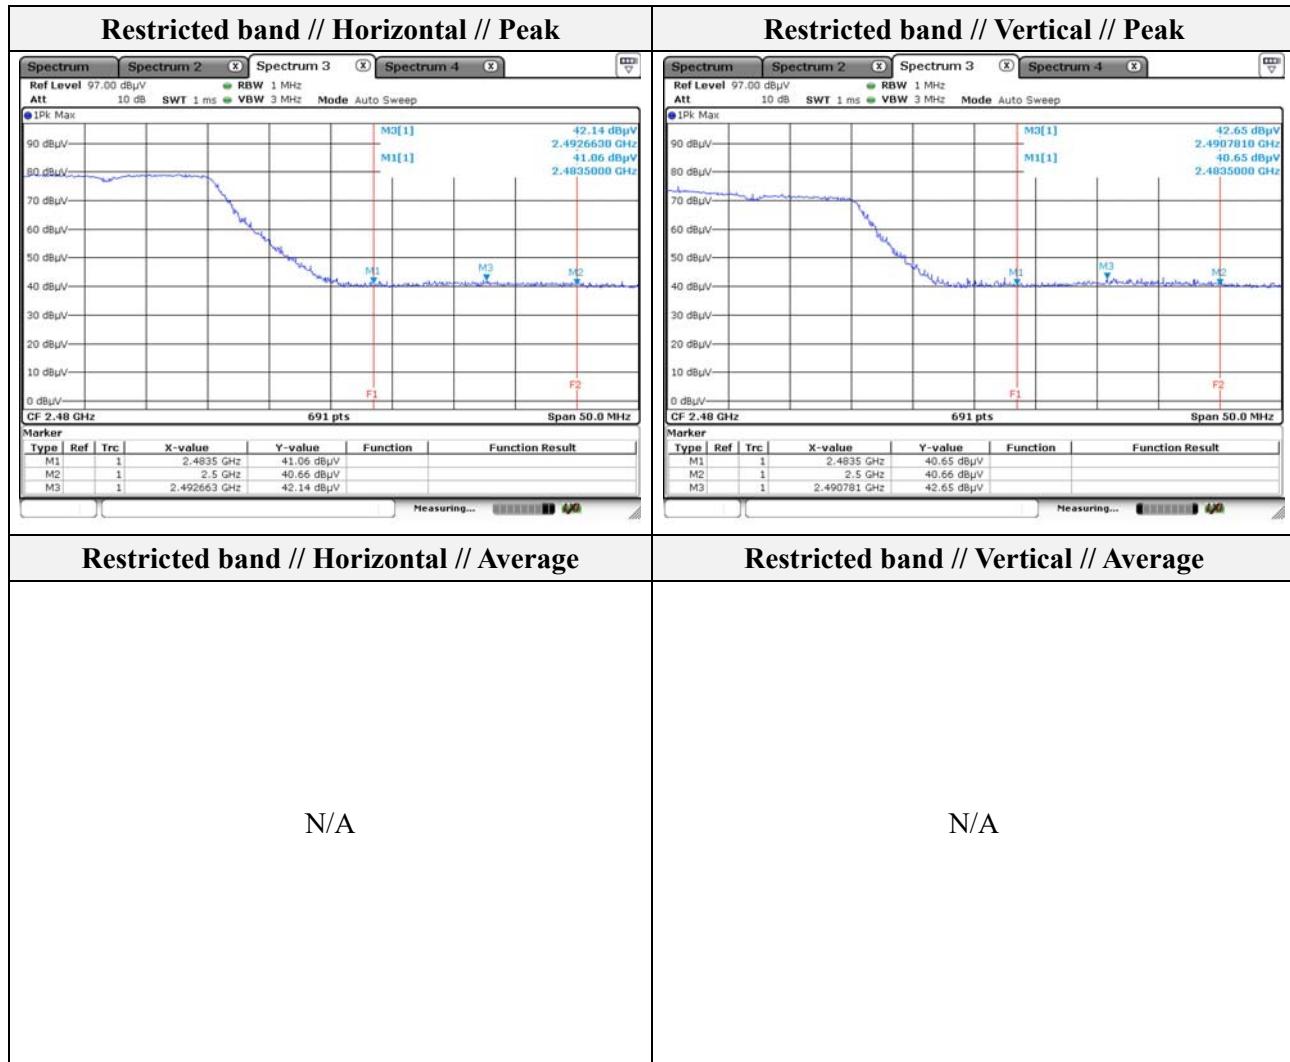

Note.

1. Average test was not performed because peak result is lower than the average limit.

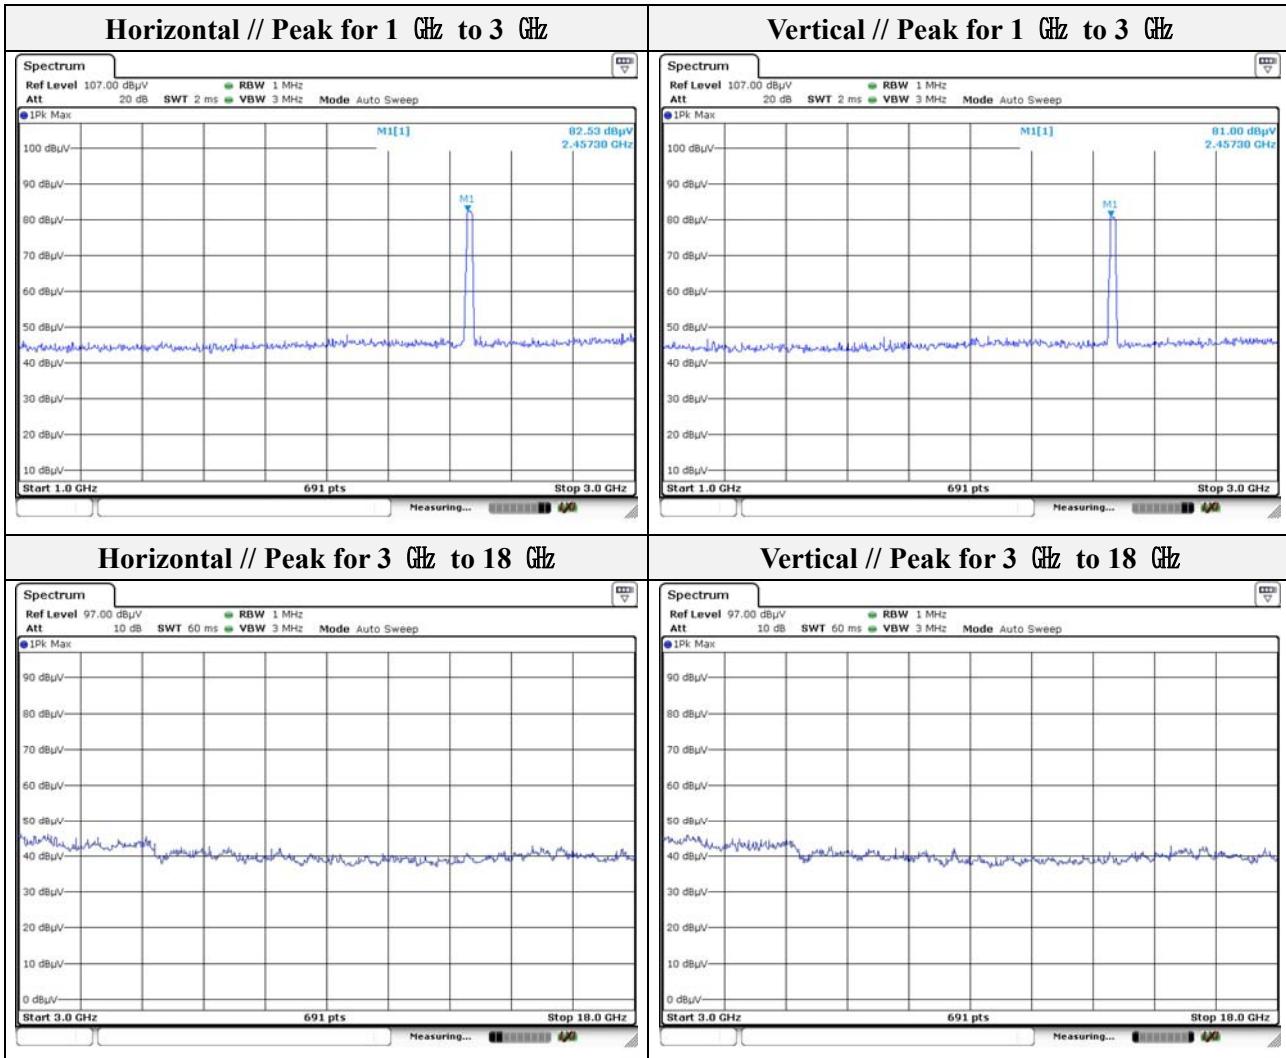

Note.

1. No spurious emission were detected above 3 GHz.


Ant 2

Mode: 802.11b

Distance of measurement: 3 meter


Channel: 01

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2341.94	44.28	Peak	H	-9.91	-	34.37	74.00	39.63
2332.91	48.13	Peak	V	-9.94	-	38.19	74.00	35.81

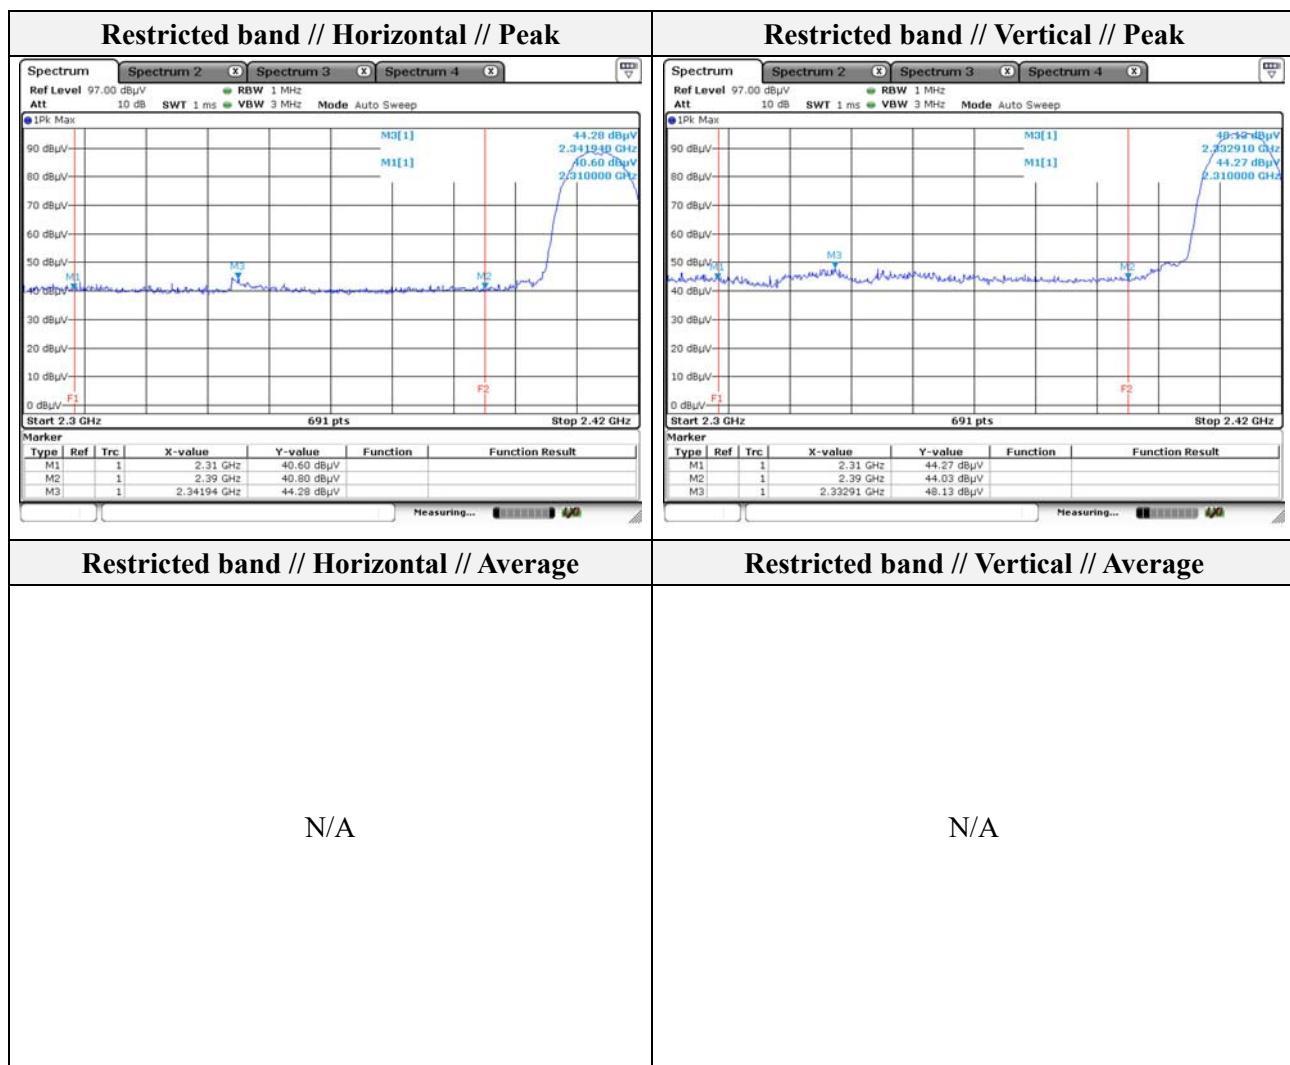

Note.

 1. Average test was not performed because peak result is lower than the average limit.

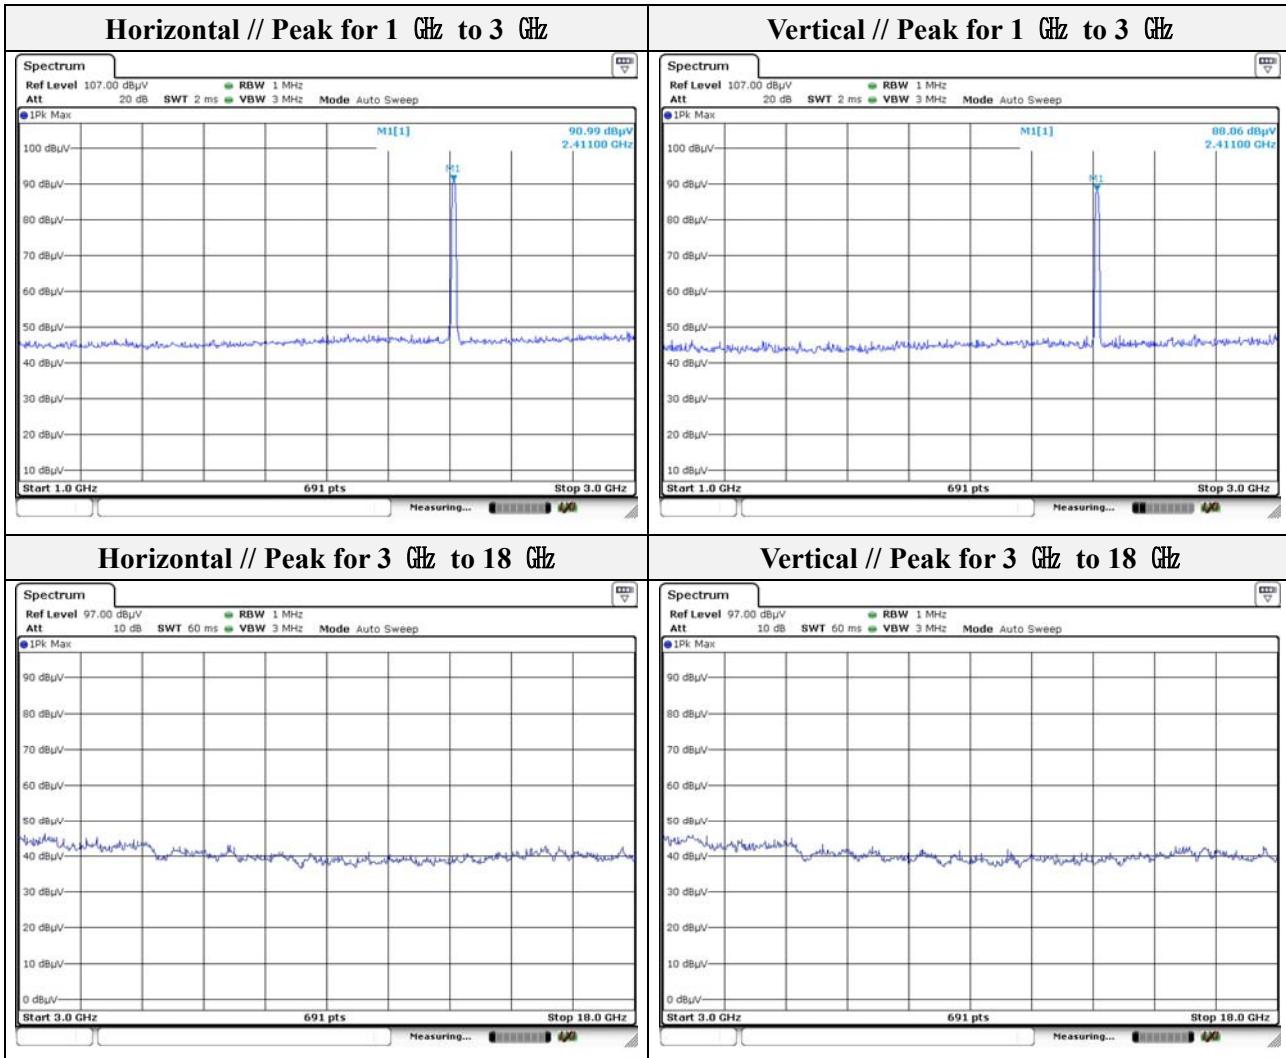


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11b

Distance of measurement: 3 meter

Channel: 06

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
No spurious emission were detected above 3 GHz.								

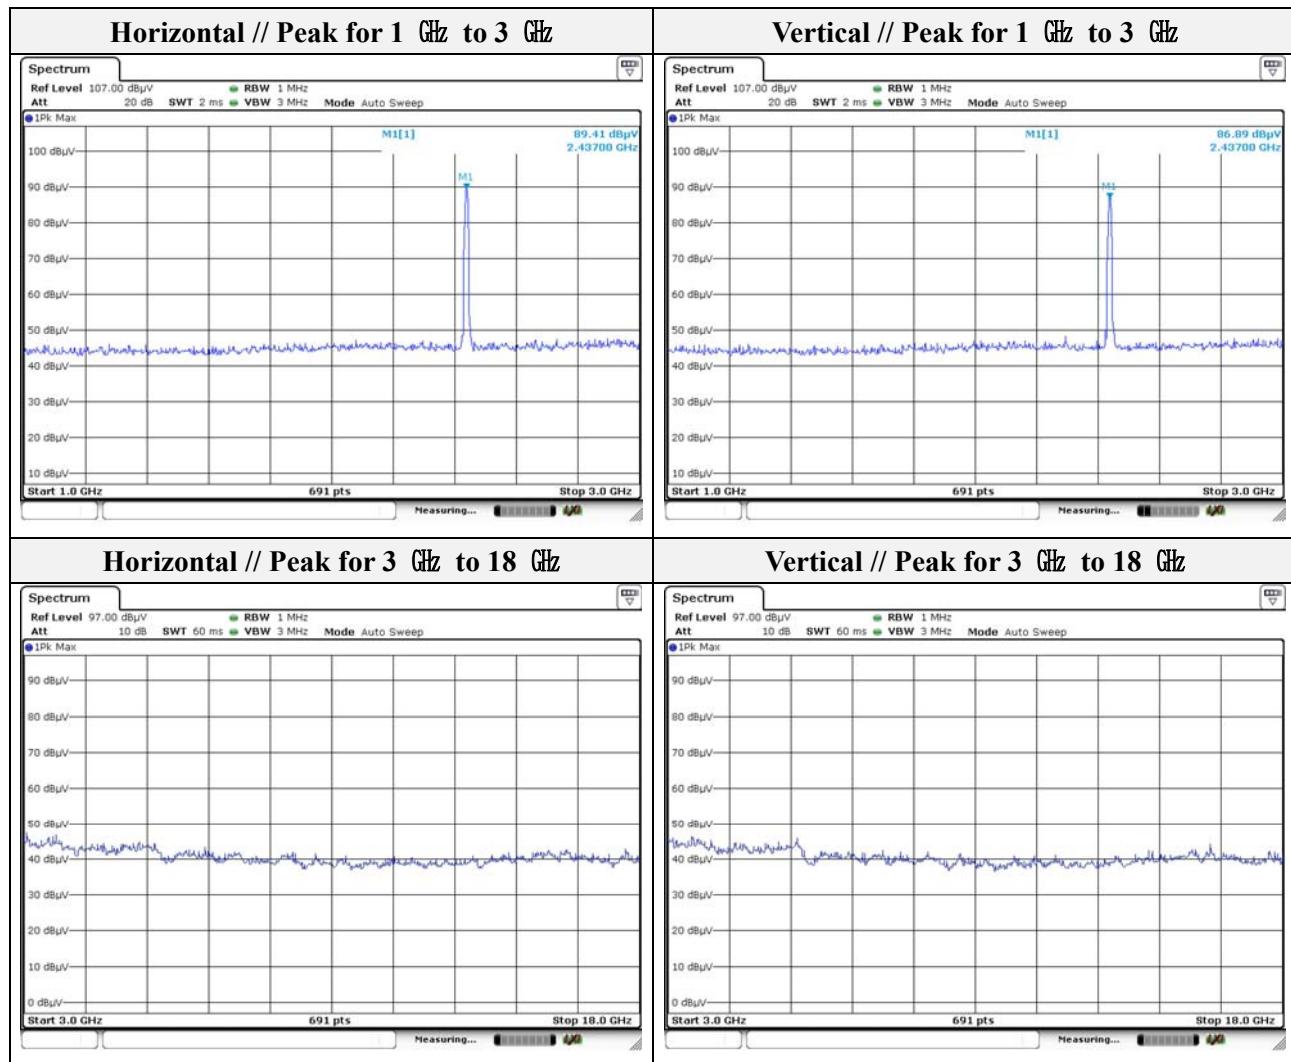


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11b

Distance of measurement: 3 meter


Channel: 11

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2493.24	43.00	Peak	H	-9.37	-	33.63	74.00	40.37
2498.23	43.33	Peak	V	-9.35	-	33.98	74.00	40.02

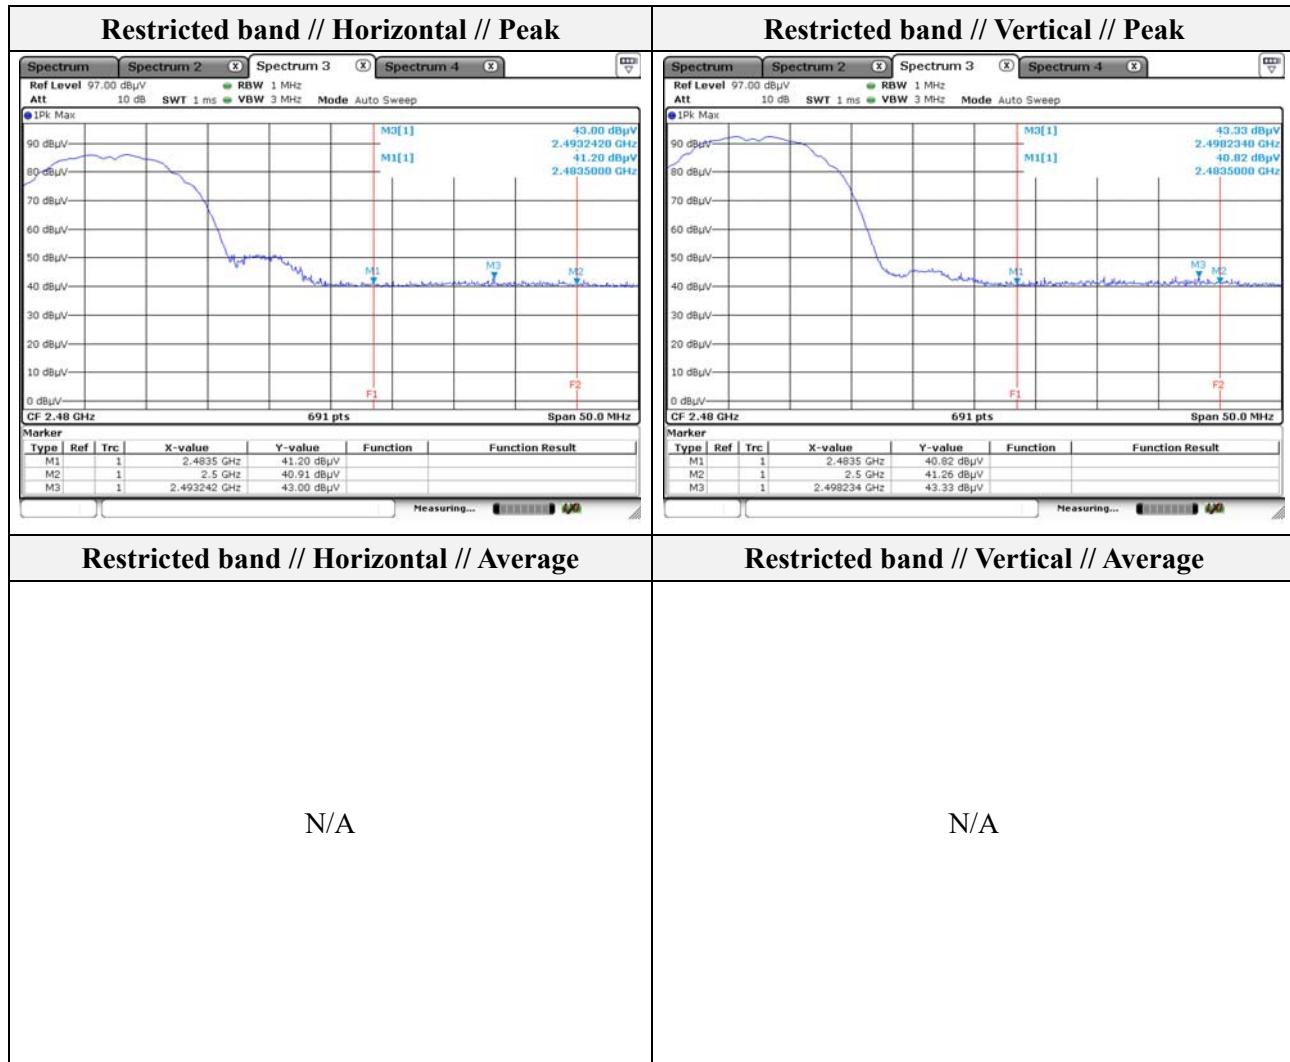

Note.

1. Average test was not performed because peak result is lower than the average limit.

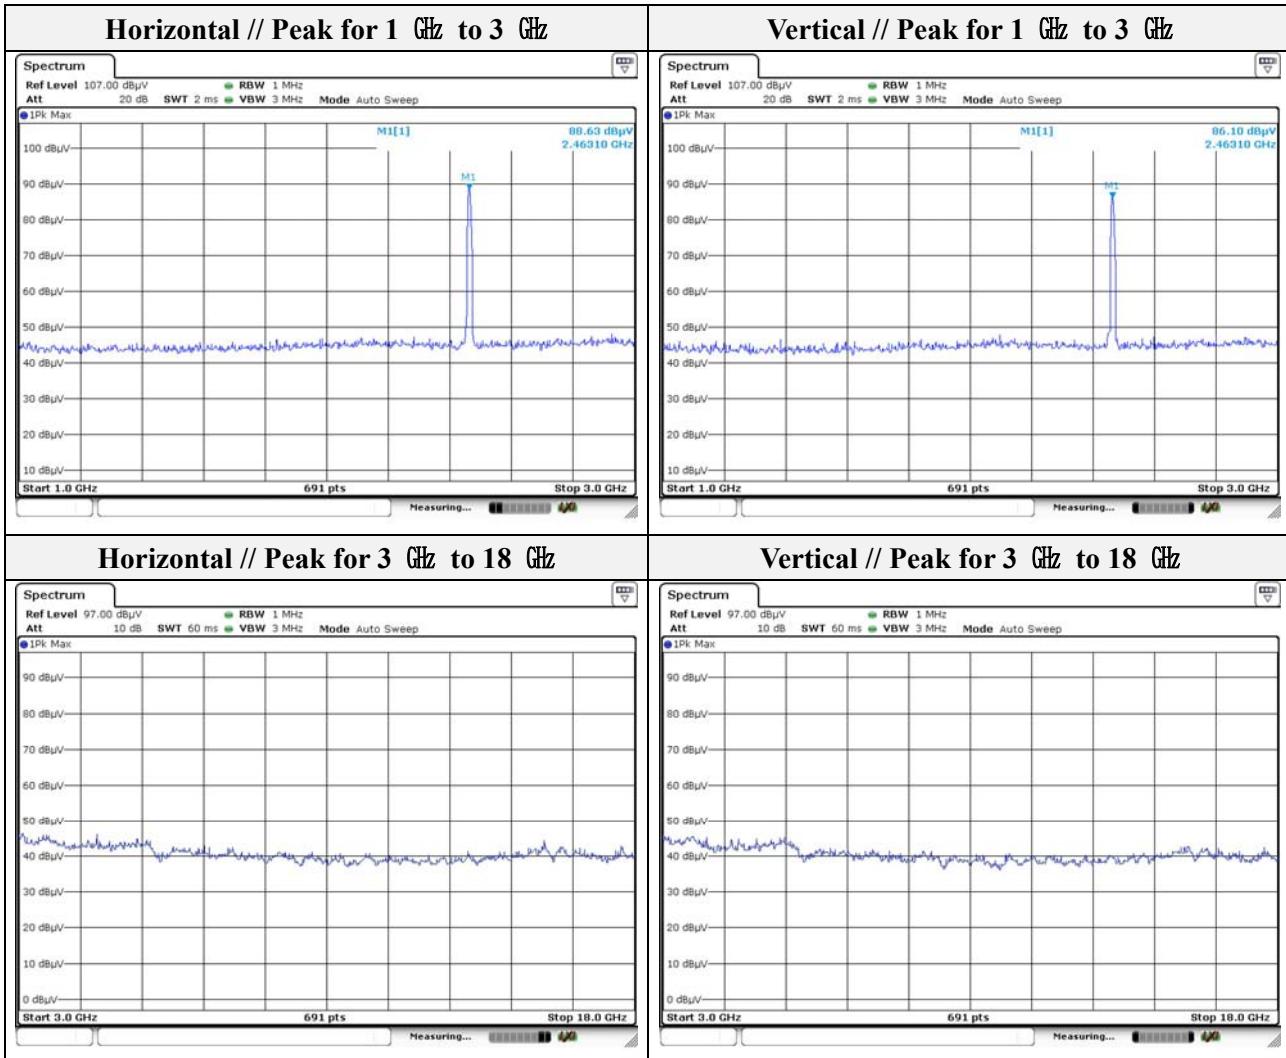

Note.


1. No spurious emission were detected above 3 GHz.

Mode: 802.11g

Distance of measurement: 3 meter


Channel: 01

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2341.42	45.16	Peak	H	-9.92	-	35.24	74.00	38.76
2323.70	47.59	Peak	V	-9.97	-	37.62	74.00	36.38

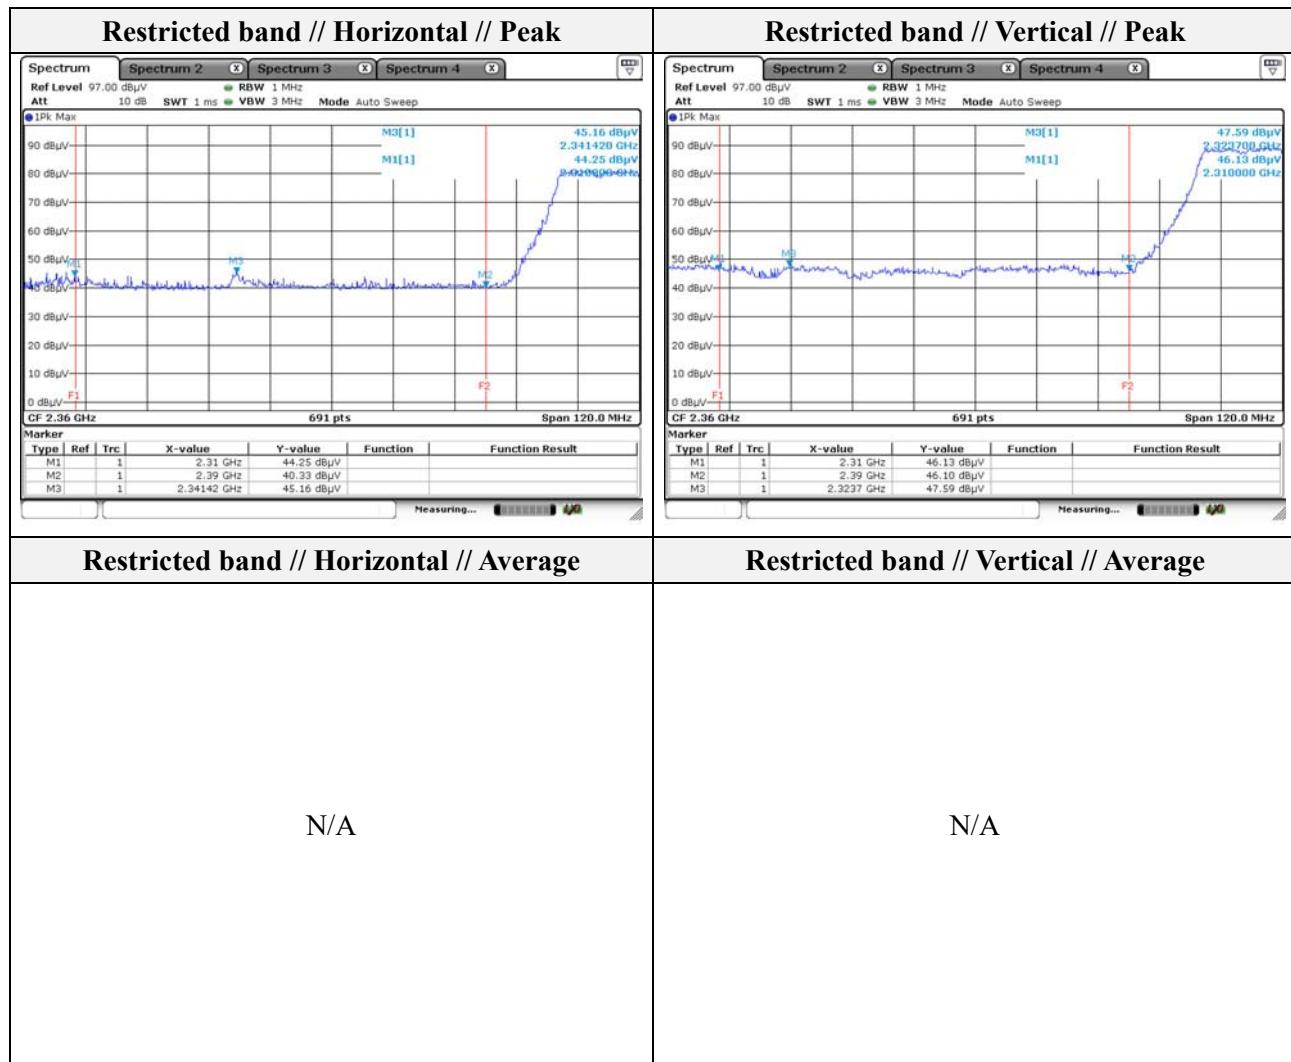

Note.

1. Average test was not performed because peak result is lower than the average limit.

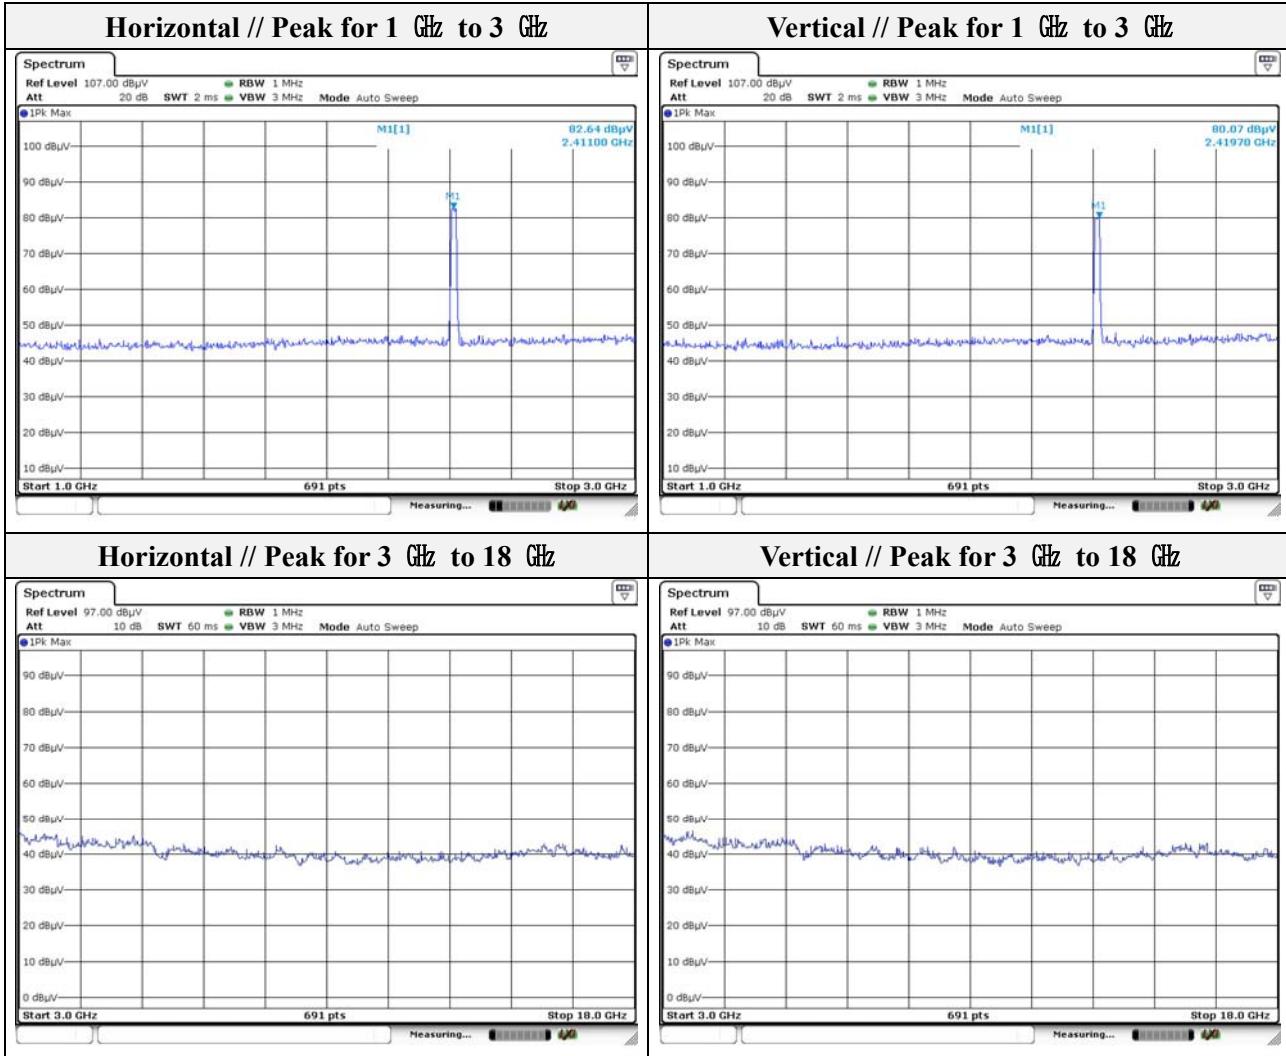

Note.


1. No spurious emission were detected above 3 GHz.

Mode: 802.11g

Distance of measurement: 3 meter

Channel: 06

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
No spurious emission were detected above 3 GHz.								

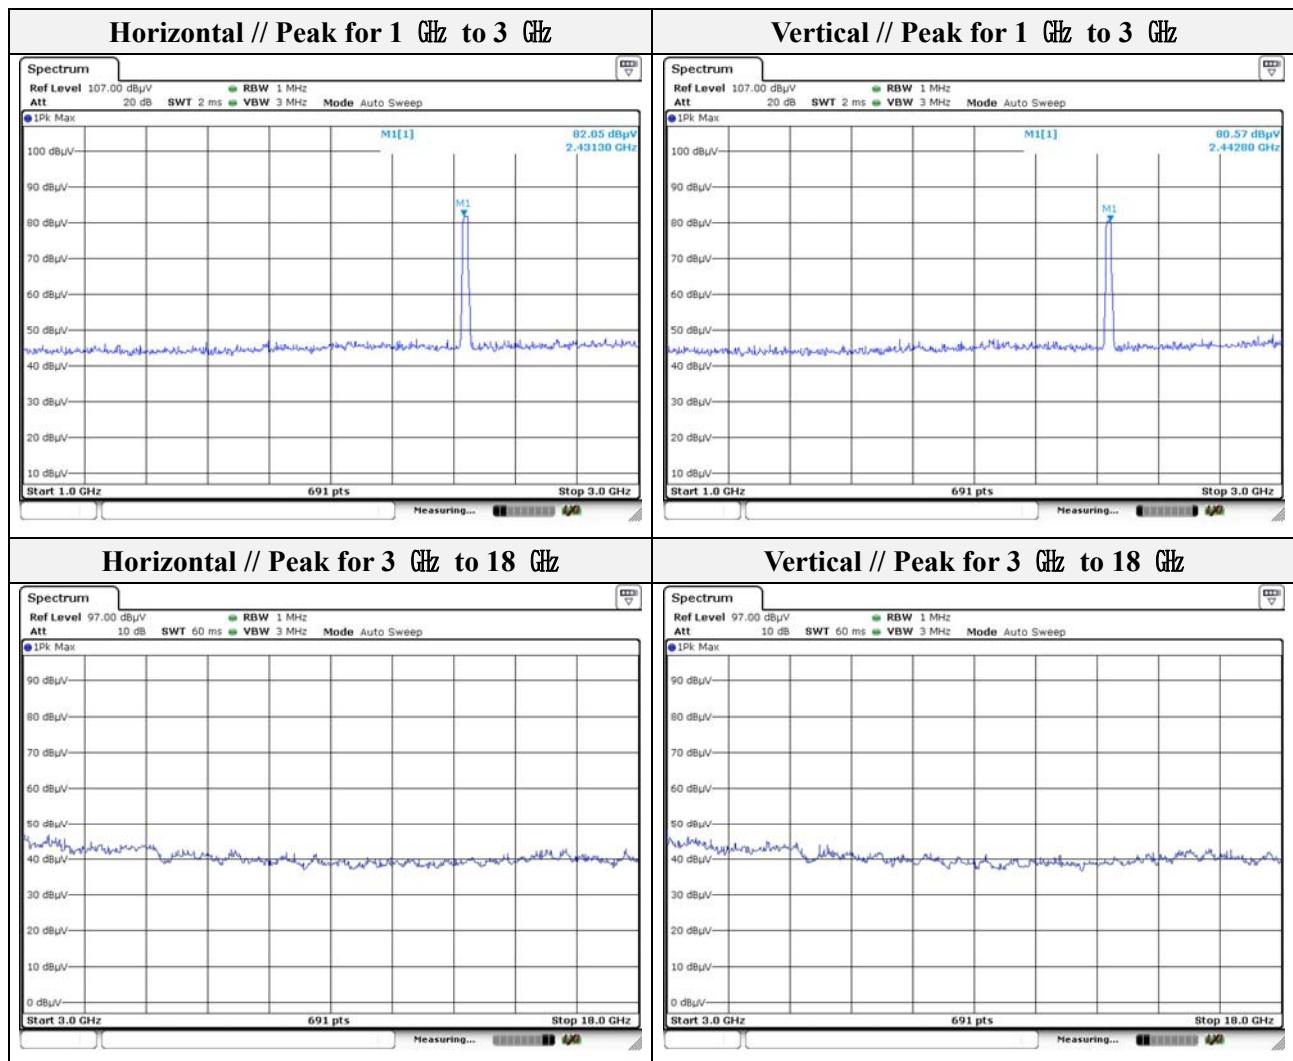


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11g

Distance of measurement: 3 meter


Channel: 11

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2494.26	42.18	Peak	H	-9.36	-	32.82	74.00	41.18
2496.64	43.57	Peak	V	-9.35	-	34.22	74.00	39.78

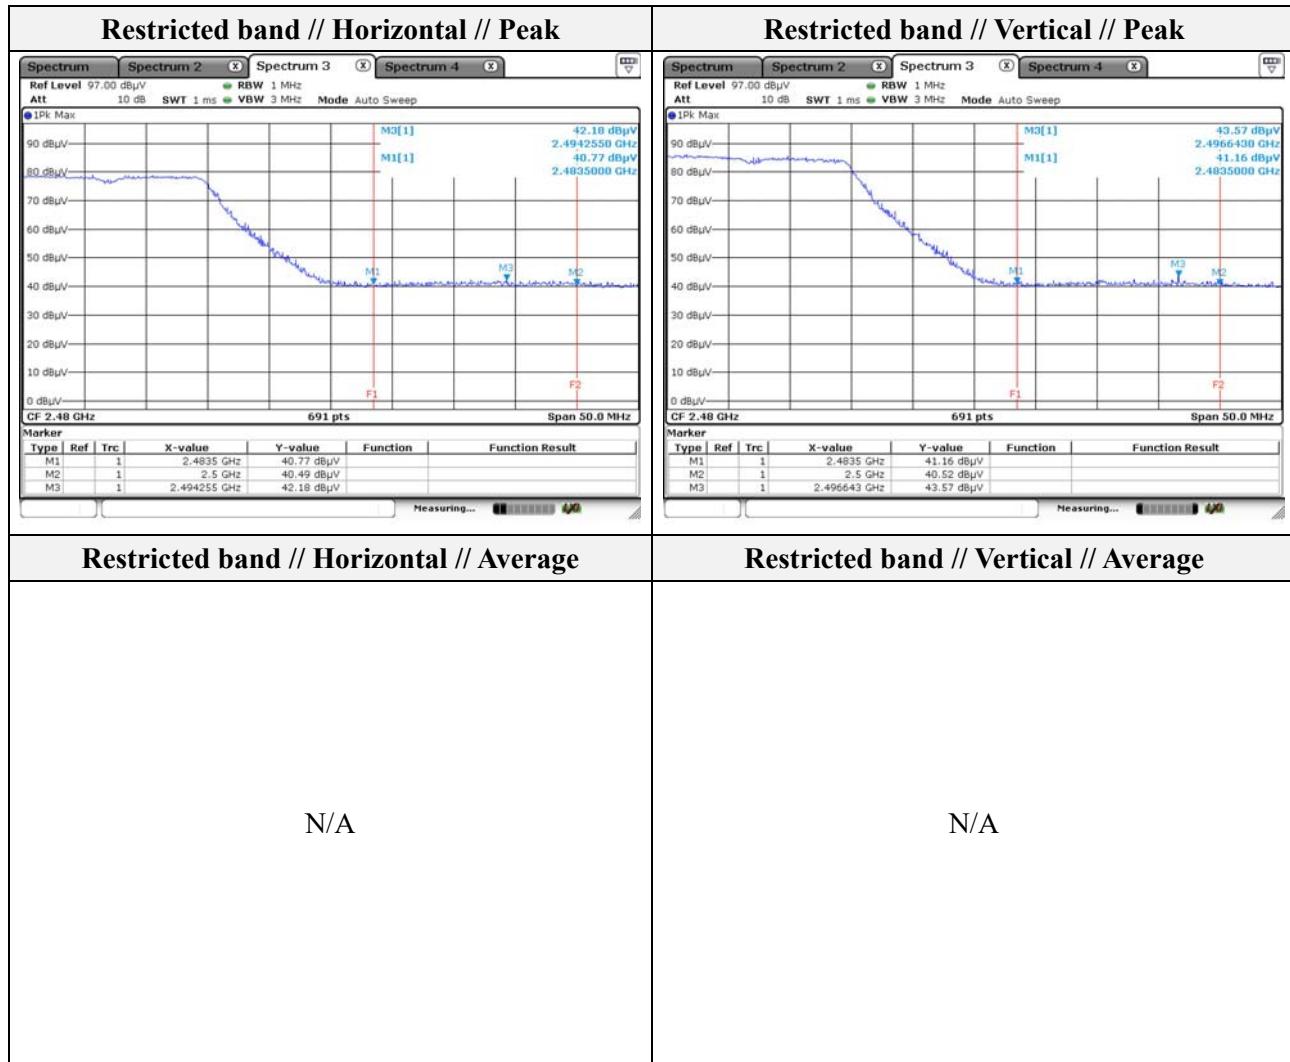

Note.

1. Average test was not performed because peak result is lower than the average limit.

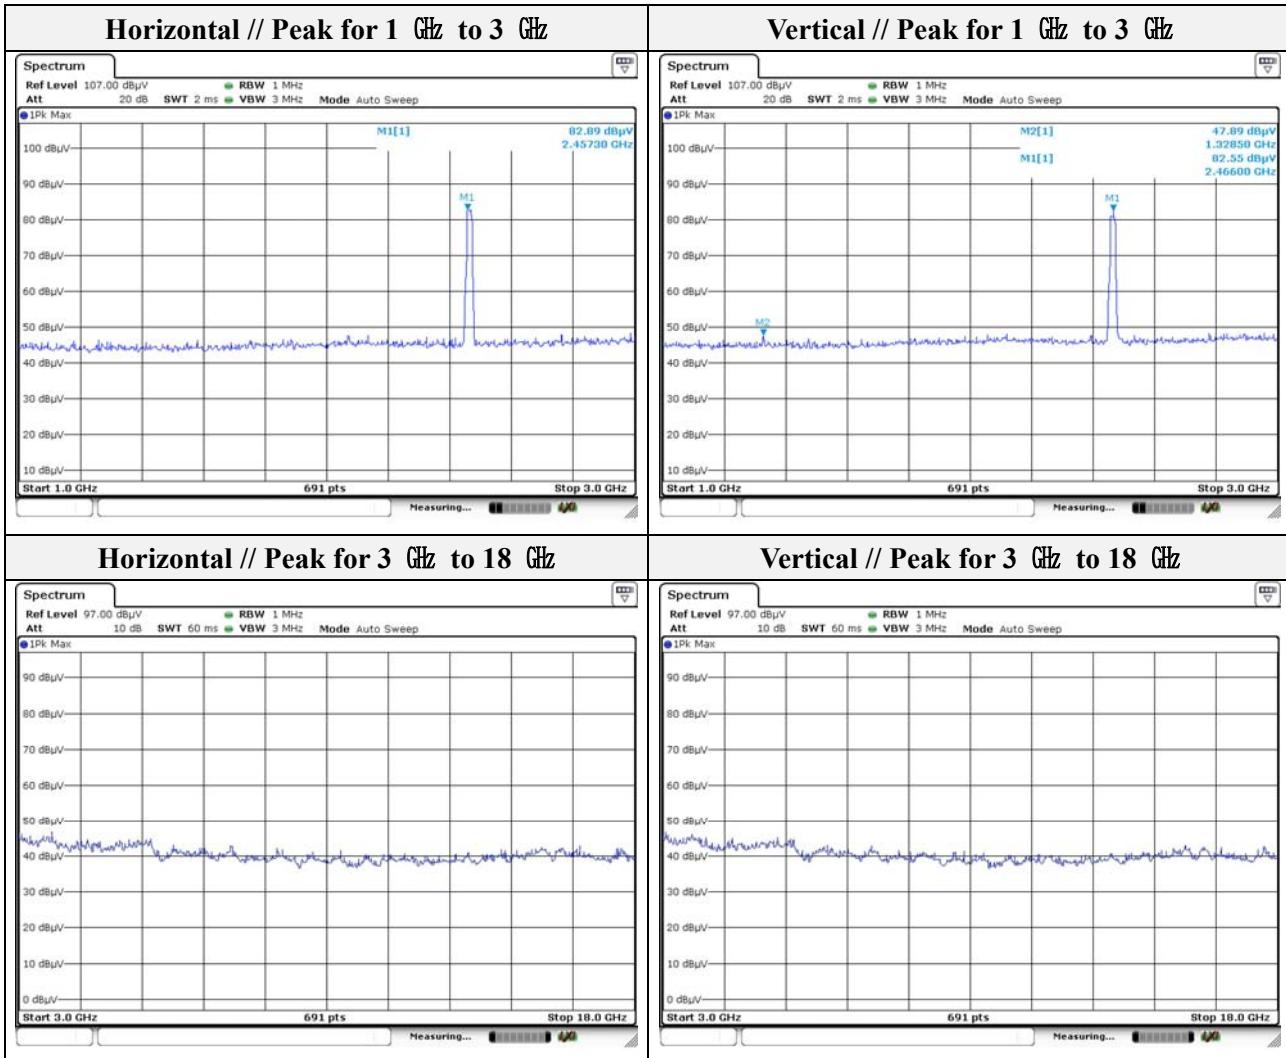

Note.


1. No spurious emission were detected above 3 GHz.

Mode: 802.11n(HT20)

Distance of measurement: 3 meter


Channel: 01

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2342.11	44.78	Peak	H	-9.91	-	34.87	74.00	39.13
2312.94	48.17	Peak	V	-10.00	-	38.17	74.00	35.83

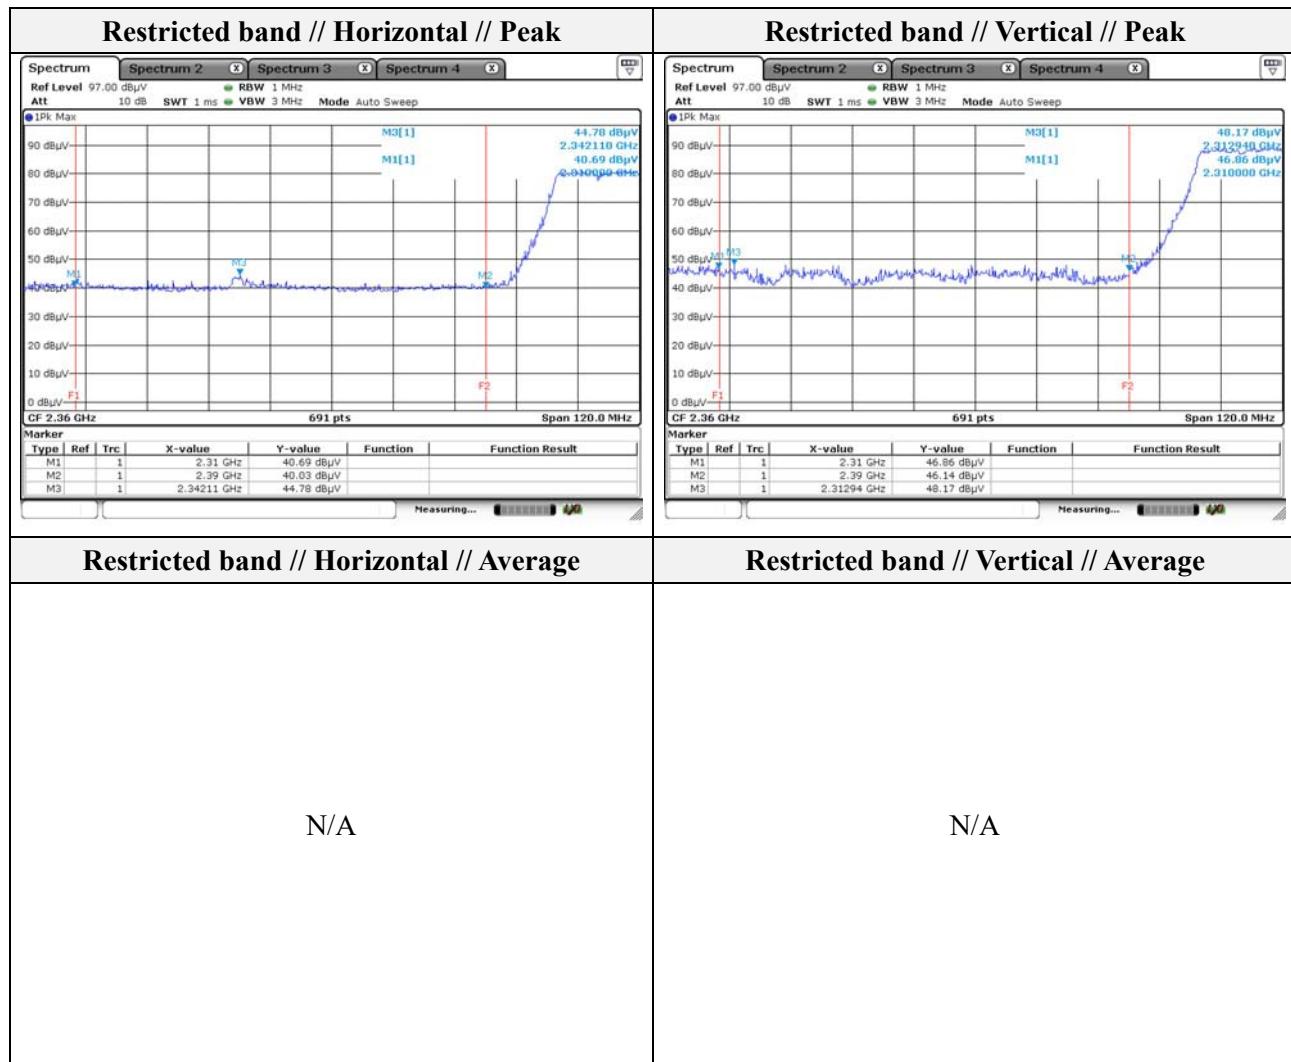

Note.

1. Average test was not performed because peak result is lower than the average limit.

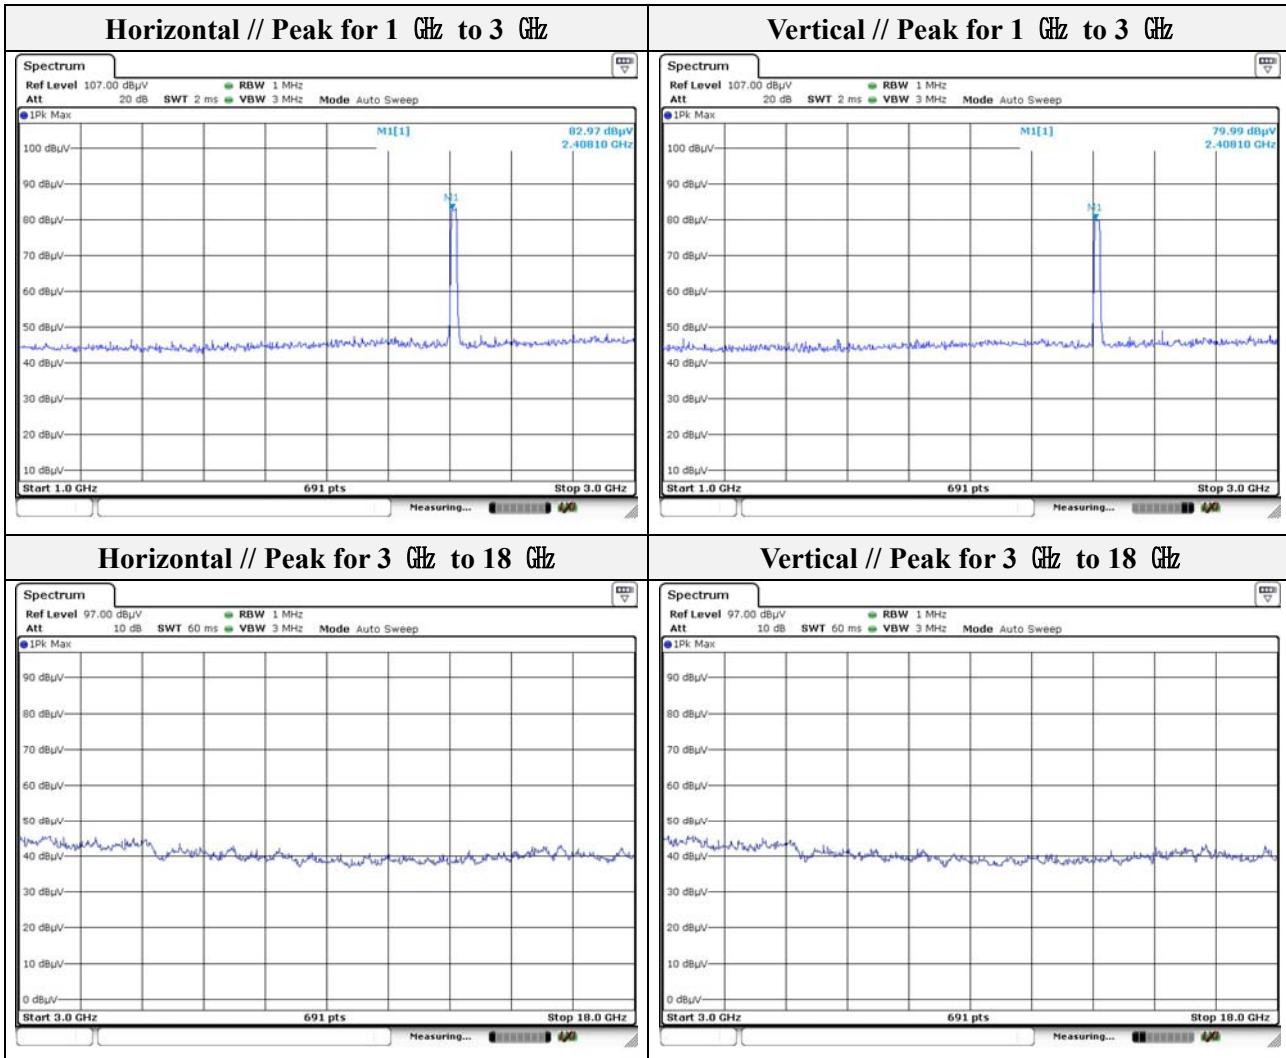

Note.


1. No spurious emission were detected above 3 GHz.

Mode: 802.11n(HT20)

Distance of measurement: 3 meter

Channel: 06

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
No spurious emission were detected above 3 GHz.								

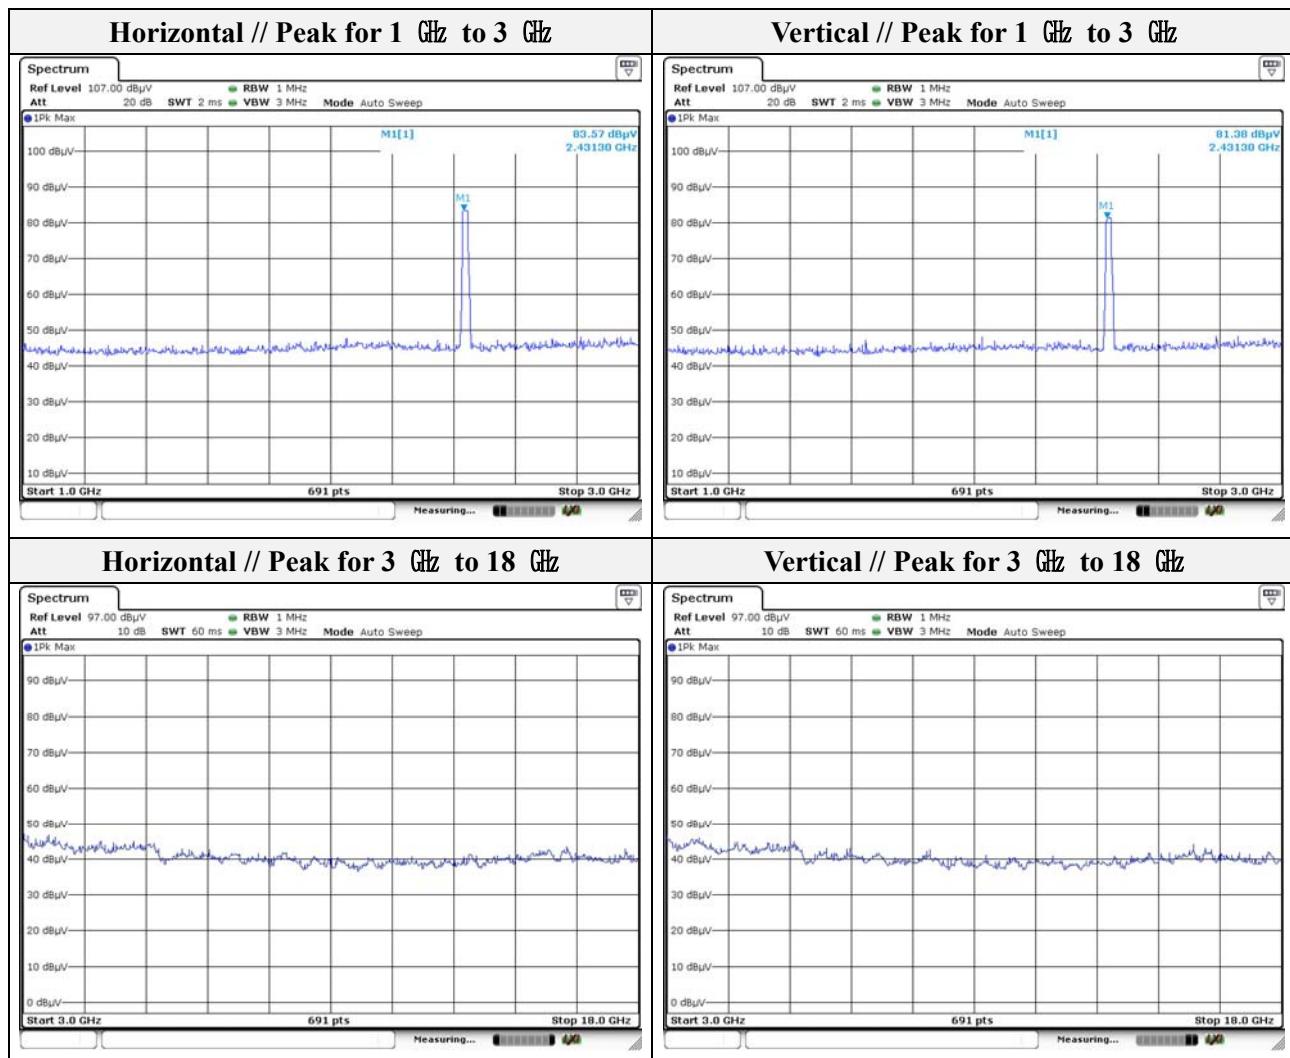


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11n(HT20)

Distance of measurement: 3 meter


Channel: 11

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2486.95	41.68	Peak	H	-9.39	-	32.29	74.00	41.71
2486.01	42.22	Peak	V	-9.40	-	32.82	74.00	41.18

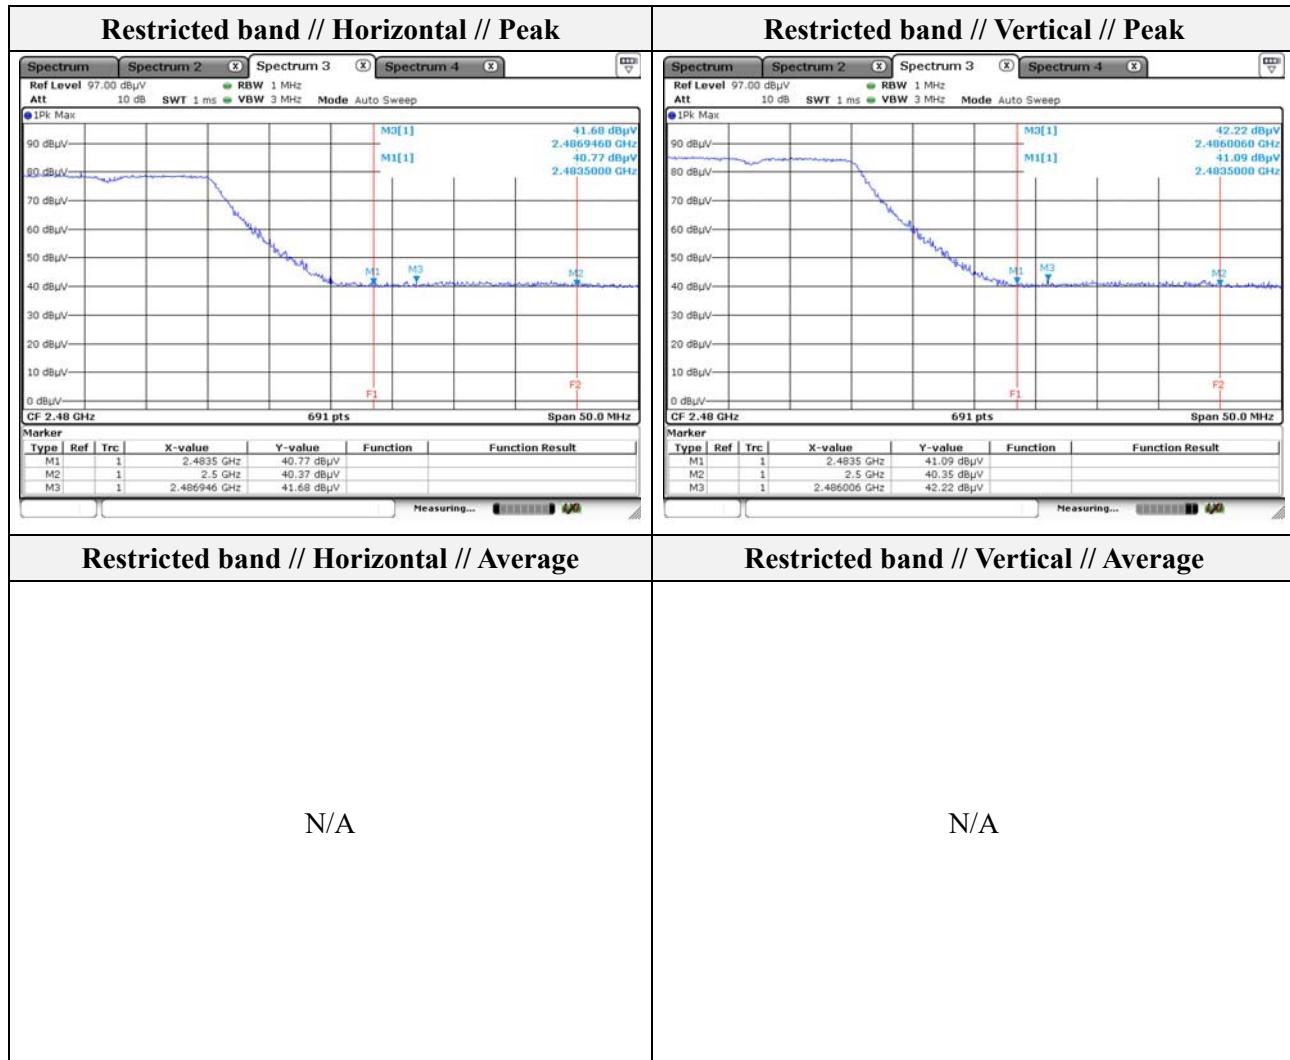

Note.

1. Average test was not performed because peak result is lower than the average limit.

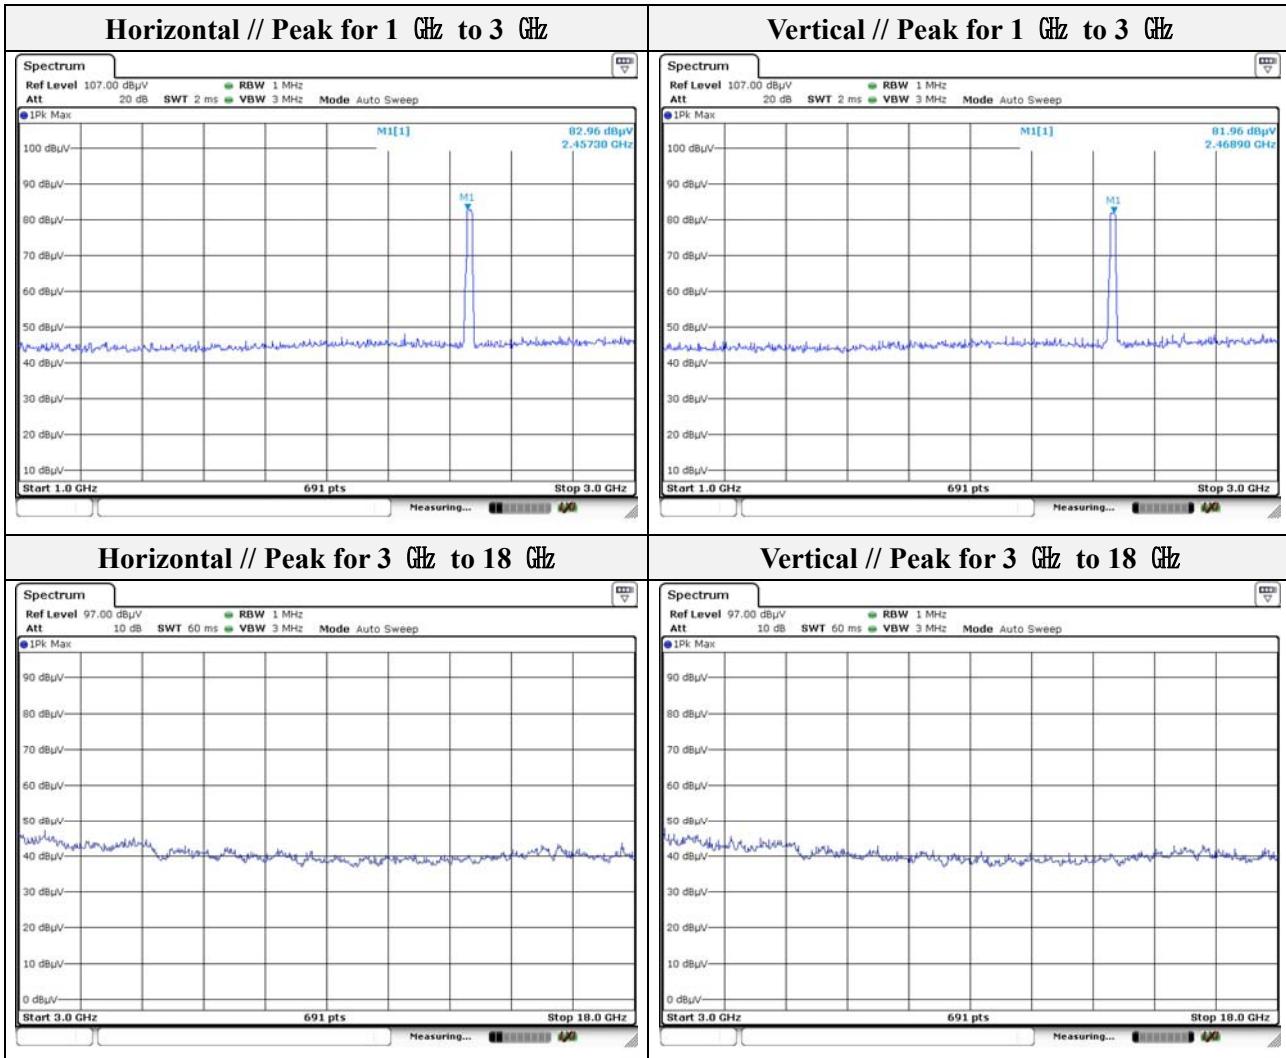

Note.

1. No spurious emission were detected above 3 GHz.


MIMO

Mode: 802.11n(HT20)

Distance of measurement: 3 meter


Channel: 01

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2341.77	44.32	Peak	H	-9.91	-	34.41	74.00	39.59
2361.91	48.61	Peak	V	-9.85	-	38.76	74.00	35.24

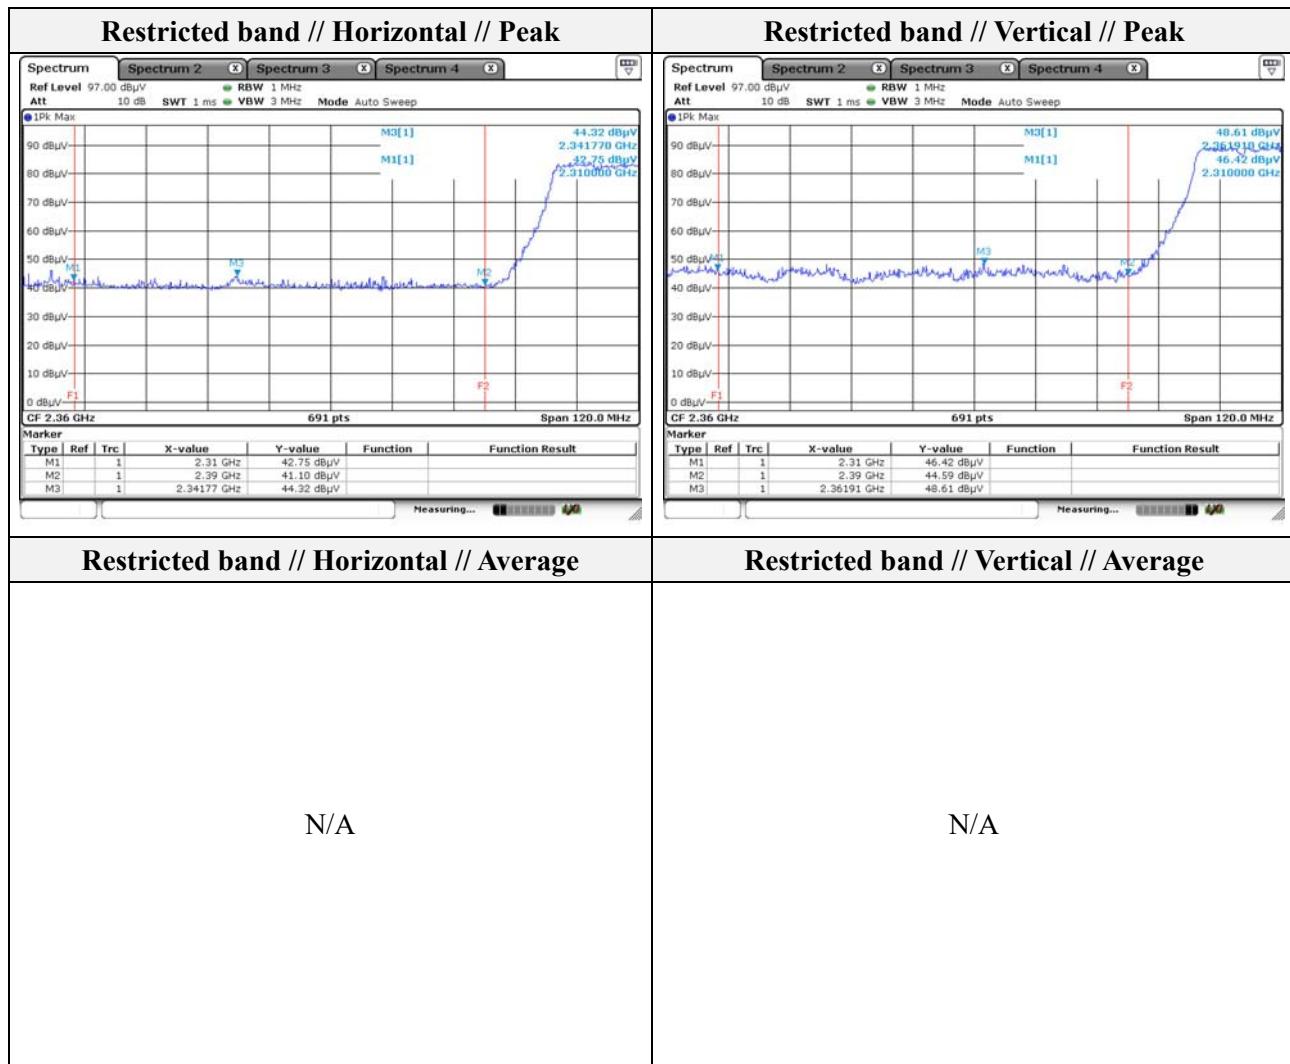

Note.

1. Average test was not performed because peak result is lower than the average limit.

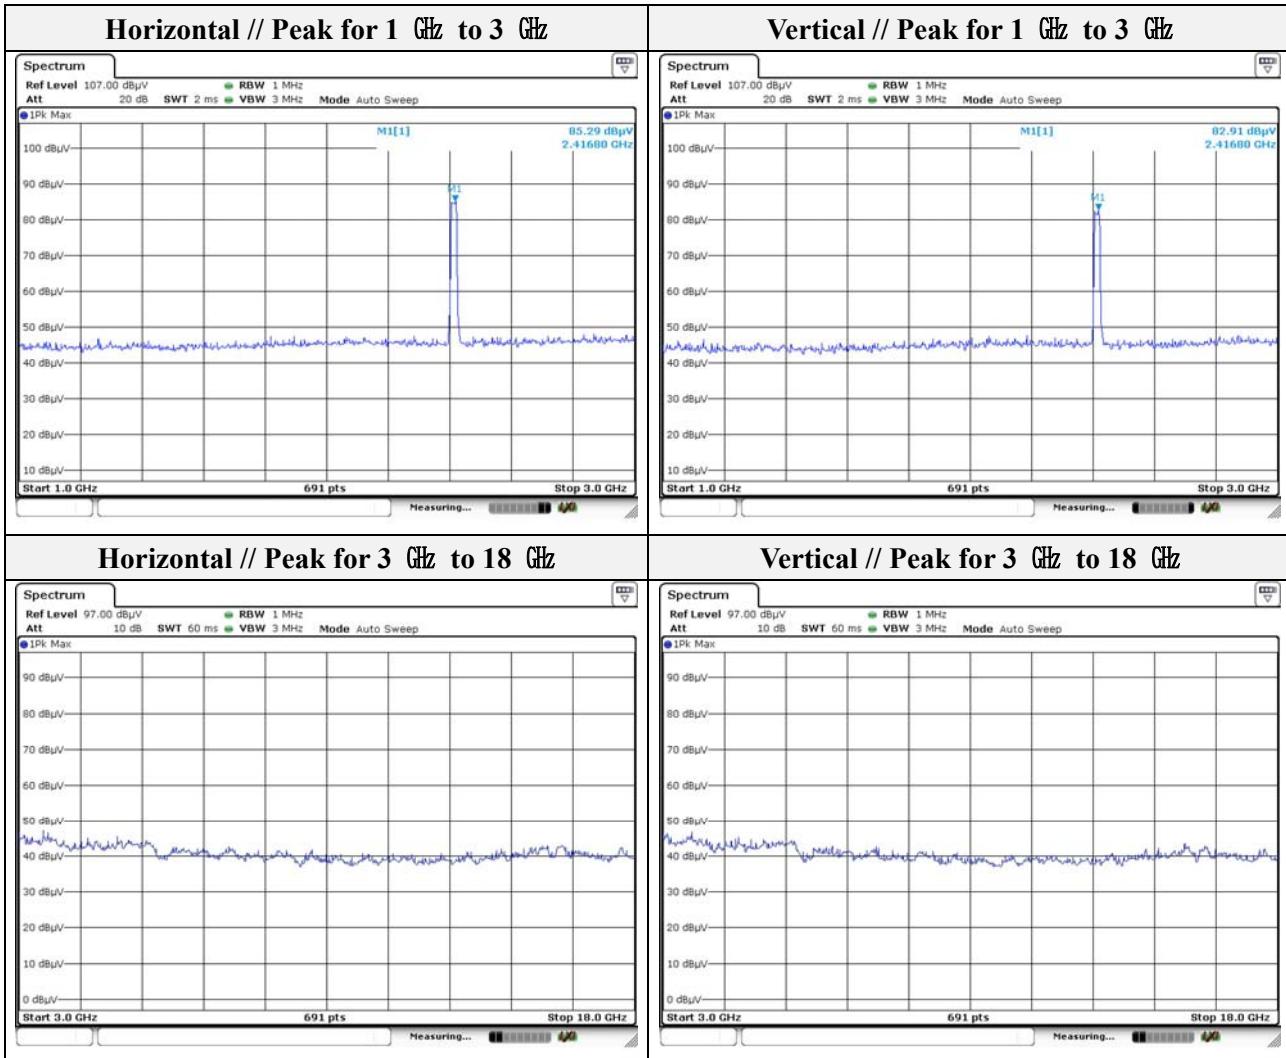

Note.


1. No spurious emission were detected above 3 GHz.

802.11n(HT20) MIMO 802.11n(HT20)

Distance of measurement: 3 meter

Channel: 06

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
No spurious emission were detected above 3 GHz.								

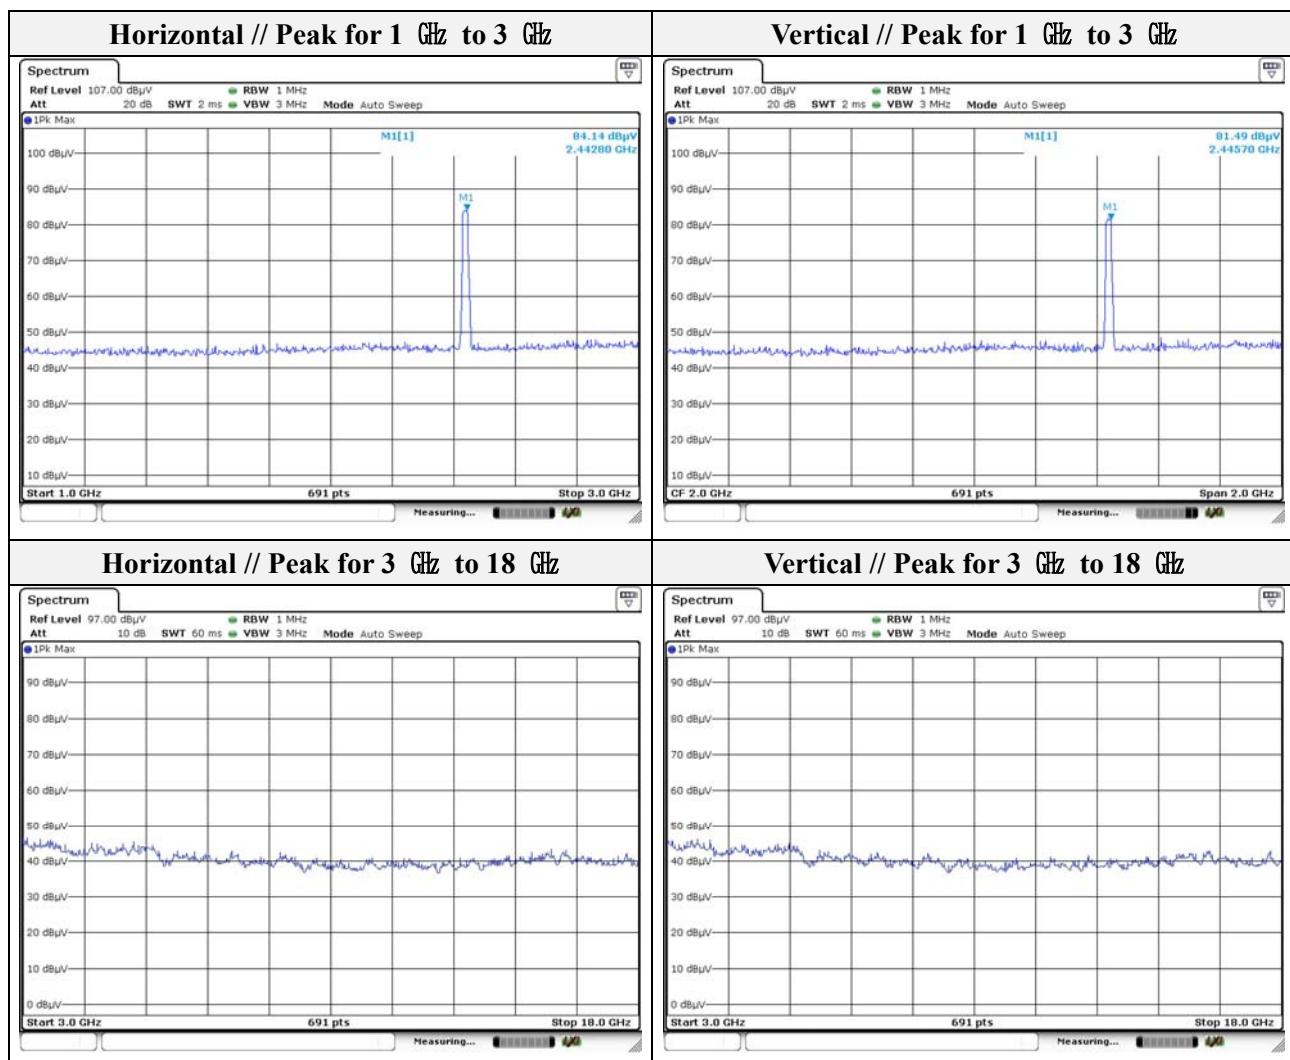


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Mode: 802.11n(HT20)

Distance of measurement: 3 meter


Channel: 11

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2491.87	41.56	Peak	H	-9.37	-	32.19	74.00	41.81
2497.00	42.93	Peak	V	-9.35	-	33.58	74.00	40.42

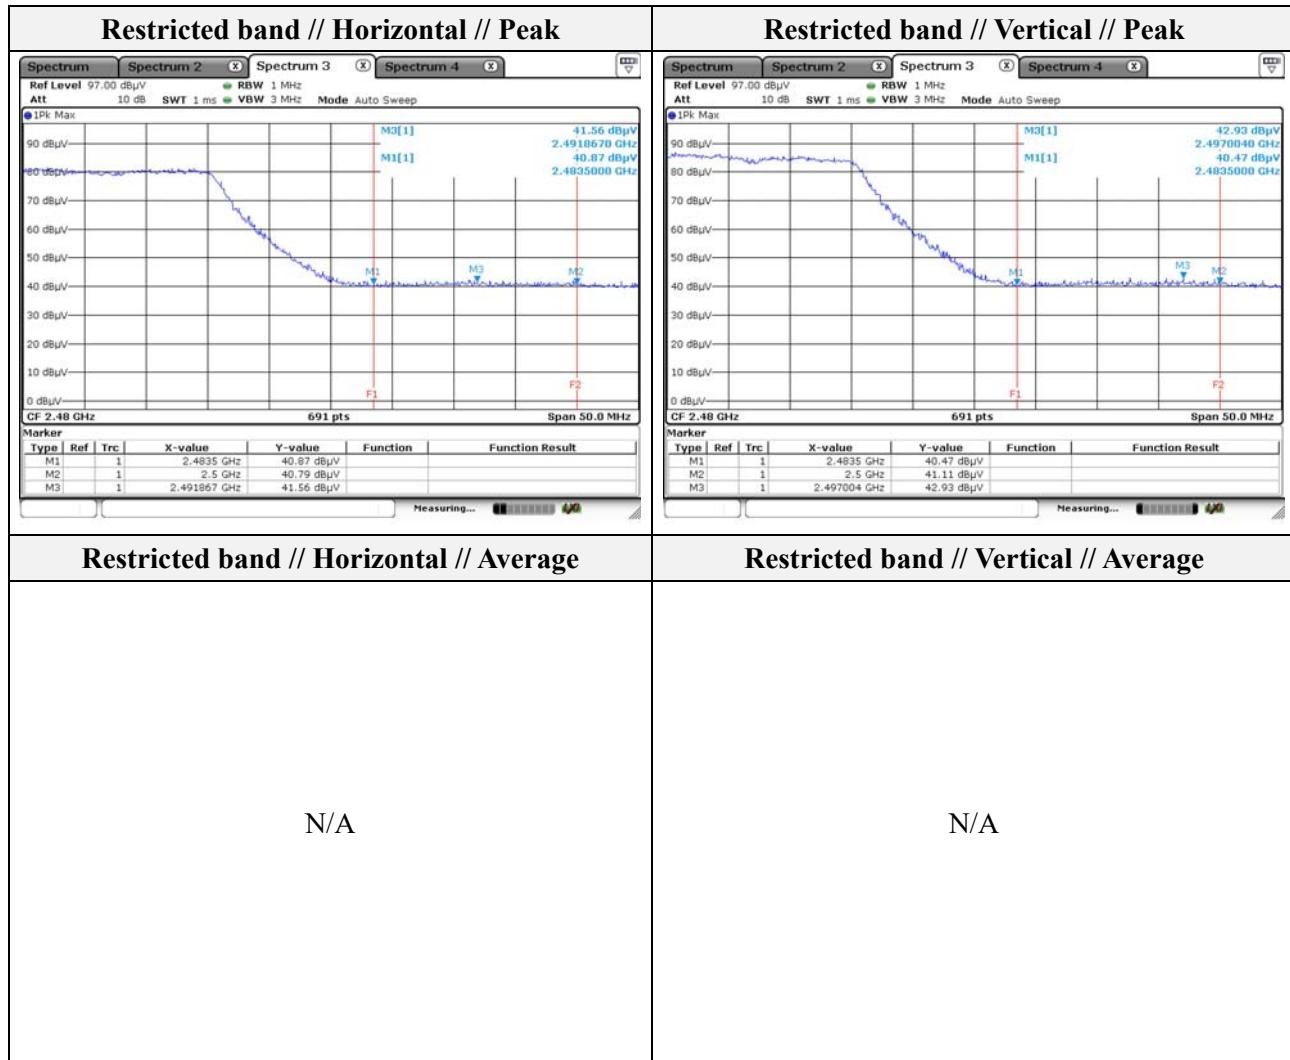

Note.

1. Average test was not performed because peak result is lower than the average limit.

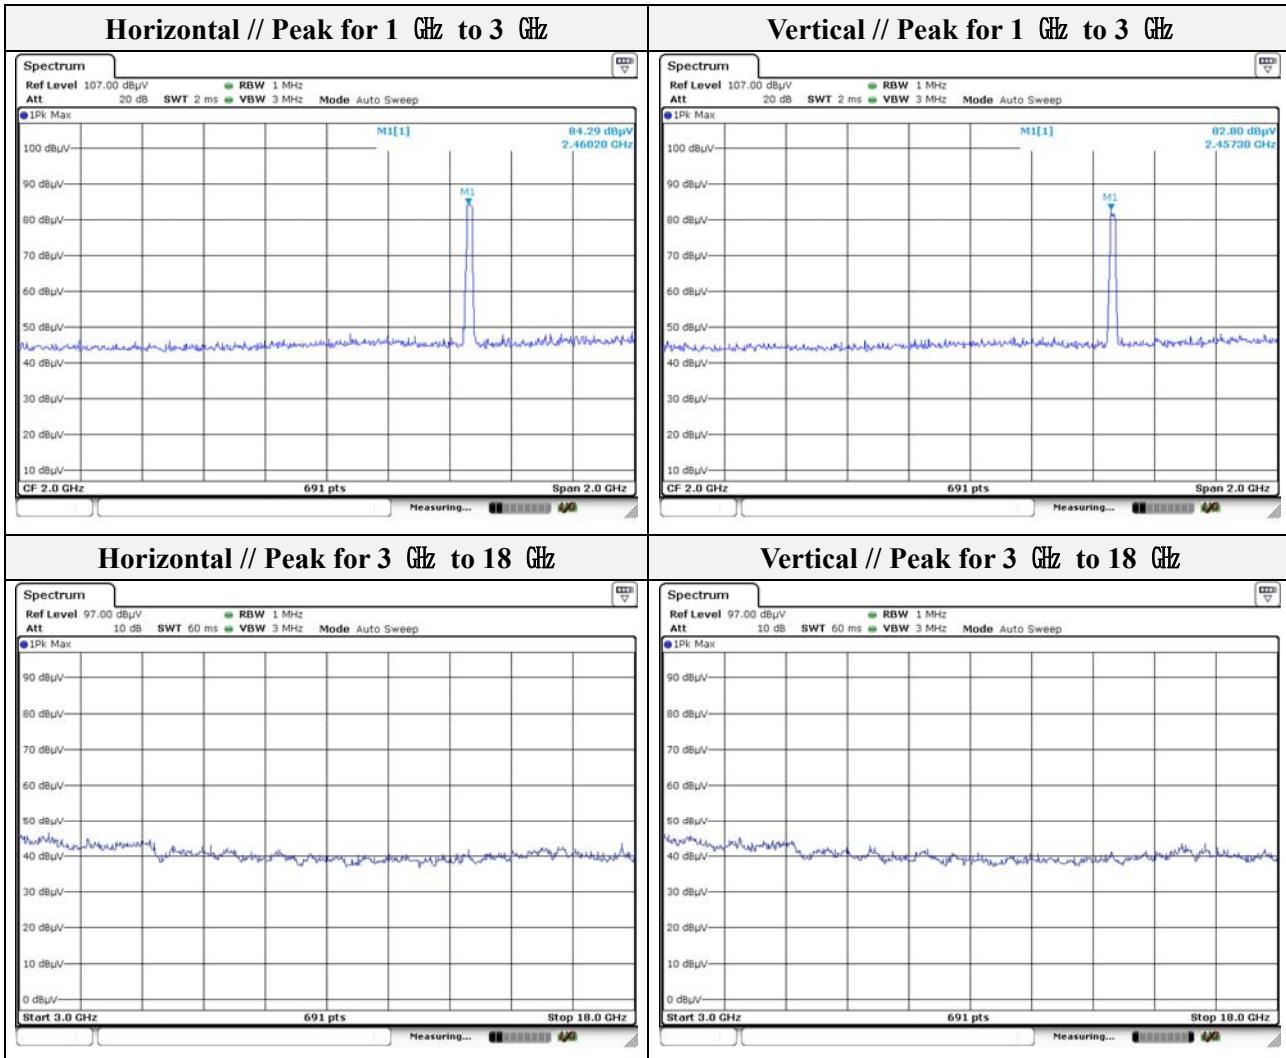


Note.

1. No spurious emission were detected above 3 GHz.

Test results (18 GHz to 30 GHz) – Worst case

Mode: 802.11n_HT20(MIMO)
 Distance of measurement: 3 meter
 Channel: 1

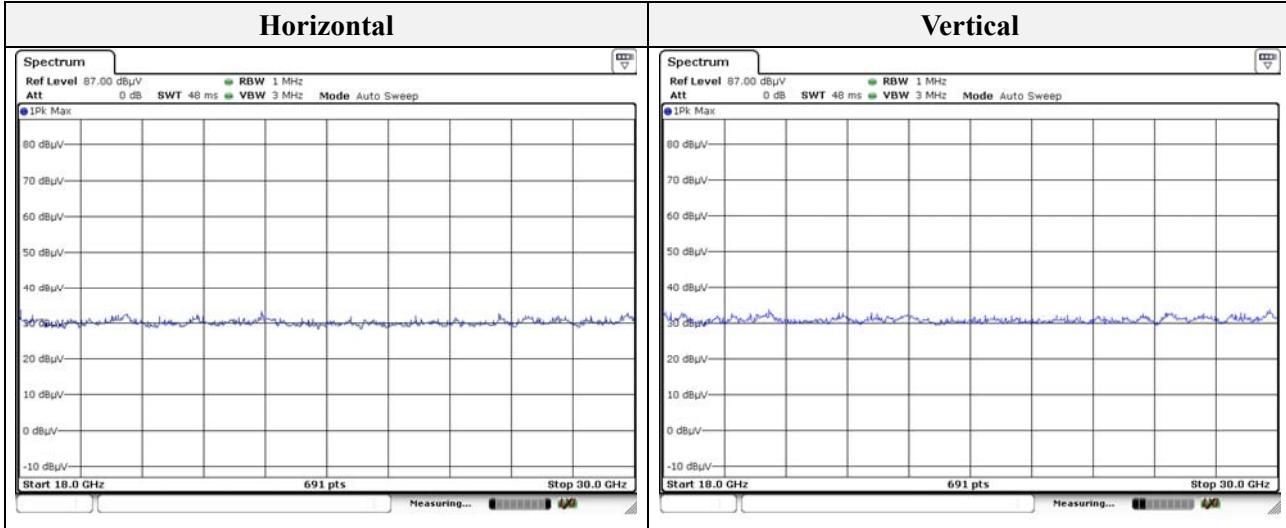

Note.

1. No spurious emission were detected above 18 GHz.

3.2. AC conducted emissions

Limit



According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Note.

1. All AC line conducted spurious emission are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and the appropriate frequencies. All data rates and modes were investigated for conducted spurious emission. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.
3. Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

Test results

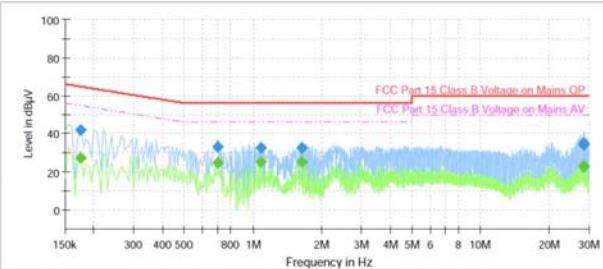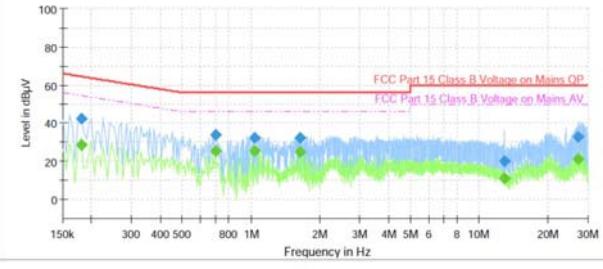Hot Line																																																																																																																														
					Final Result																																																																																																																									
					<table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>QuasiPeak (dBµV)</th><th>CAverage (dBµV)</th><th>Limit (dBµV)</th><th>Margin (dB)</th><th>Meas. Time (ms)</th><th>Bandwidth (kHz)</th><th>Line</th><th>Corr. (dB)</th></tr> </thead> <tbody> <tr><td>0.175000</td><td>---</td><td>27.50</td><td>54.72</td><td>27.22</td><td>1000.0</td><td>9.000</td><td>L1</td><td>9.7</td></tr> <tr><td>0.175000</td><td>41.75</td><td>---</td><td>64.72</td><td>22.97</td><td>1000.0</td><td>9.000</td><td>L1</td><td>9.7</td></tr> <tr><td>0.700000</td><td>---</td><td>25.04</td><td>46.00</td><td>20.96</td><td>1000.0</td><td>9.000</td><td>L1</td><td>9.9</td></tr> <tr><td>0.700000</td><td>33.35</td><td>---</td><td>56.00</td><td>22.65</td><td>1000.0</td><td>9.000</td><td>L1</td><td>9.9</td></tr> <tr><td>1.080000</td><td>---</td><td>25.25</td><td>46.00</td><td>20.75</td><td>1000.0</td><td>9.000</td><td>L1</td><td>9.9</td></tr> <tr><td>1.080000</td><td>32.89</td><td>---</td><td>56.00</td><td>23.11</td><td>1000.0</td><td>9.000</td><td>L1</td><td>9.9</td></tr> <tr><td>1.645000</td><td>---</td><td>25.47</td><td>46.00</td><td>20.53</td><td>1000.0</td><td>9.000</td><td>L1</td><td>10.0</td></tr> <tr><td>1.645000</td><td>32.84</td><td>---</td><td>56.00</td><td>23.16</td><td>1000.0</td><td>9.000</td><td>L1</td><td>10.0</td></tr> <tr><td>28.400000</td><td>---</td><td>22.88</td><td>50.00</td><td>27.12</td><td>1000.0</td><td>9.000</td><td>L1</td><td>10.3</td></tr> <tr><td>28.400000</td><td>34.46</td><td>---</td><td>60.00</td><td>25.54</td><td>1000.0</td><td>9.000</td><td>L1</td><td>10.3</td></tr> <tr><td>28.525000</td><td>---</td><td>23.12</td><td>50.00</td><td>26.88</td><td>1000.0</td><td>9.000</td><td>L1</td><td>10.3</td></tr> <tr><td>28.525000</td><td>34.81</td><td>---</td><td>60.00</td><td>25.19</td><td>1000.0</td><td>9.000</td><td>L1</td><td>10.3</td></tr> </tbody> </table>					Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	0.175000	---	27.50	54.72	27.22	1000.0	9.000	L1	9.7	0.175000	41.75	---	64.72	22.97	1000.0	9.000	L1	9.7	0.700000	---	25.04	46.00	20.96	1000.0	9.000	L1	9.9	0.700000	33.35	---	56.00	22.65	1000.0	9.000	L1	9.9	1.080000	---	25.25	46.00	20.75	1000.0	9.000	L1	9.9	1.080000	32.89	---	56.00	23.11	1000.0	9.000	L1	9.9	1.645000	---	25.47	46.00	20.53	1000.0	9.000	L1	10.0	1.645000	32.84	---	56.00	23.16	1000.0	9.000	L1	10.0	28.400000	---	22.88	50.00	27.12	1000.0	9.000	L1	10.3	28.400000	34.46	---	60.00	25.54	1000.0	9.000	L1	10.3	28.525000	---	23.12	50.00	26.88	1000.0	9.000	L1	10.3	28.525000	34.81	---	60.00	25.19	1000.0	9.000	L1	10.3
Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)																																																																																																																						
0.175000	---	27.50	54.72	27.22	1000.0	9.000	L1	9.7																																																																																																																						
0.175000	41.75	---	64.72	22.97	1000.0	9.000	L1	9.7																																																																																																																						
0.700000	---	25.04	46.00	20.96	1000.0	9.000	L1	9.9																																																																																																																						
0.700000	33.35	---	56.00	22.65	1000.0	9.000	L1	9.9																																																																																																																						
1.080000	---	25.25	46.00	20.75	1000.0	9.000	L1	9.9																																																																																																																						
1.080000	32.89	---	56.00	23.11	1000.0	9.000	L1	9.9																																																																																																																						
1.645000	---	25.47	46.00	20.53	1000.0	9.000	L1	10.0																																																																																																																						
1.645000	32.84	---	56.00	23.16	1000.0	9.000	L1	10.0																																																																																																																						
28.400000	---	22.88	50.00	27.12	1000.0	9.000	L1	10.3																																																																																																																						
28.400000	34.46	---	60.00	25.54	1000.0	9.000	L1	10.3																																																																																																																						
28.525000	---	23.12	50.00	26.88	1000.0	9.000	L1	10.3																																																																																																																						
28.525000	34.81	---	60.00	25.19	1000.0	9.000	L1	10.3																																																																																																																						
Neutral Line																																																																																																																														
					<table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>QuasiPeak (dBµV)</th><th>CAverage (dBµV)</th><th>Limit (dBµV)</th><th>Margin (dB)</th><th>Meas. Time (ms)</th><th>Bandwidth (kHz)</th><th>Line</th><th>Corr. (dB)</th></tr> </thead> <tbody> <tr><td>0.180000</td><td>---</td><td>28.79</td><td>54.49</td><td>25.70</td><td>1000.0</td><td>9.000</td><td>N</td><td>9.7</td></tr> <tr><td>0.180000</td><td>42.15</td><td>---</td><td>64.49</td><td>22.34</td><td>1000.0</td><td>9.000</td><td>N</td><td>9.7</td></tr> <tr><td>0.700000</td><td>---</td><td>25.19</td><td>46.00</td><td>20.81</td><td>1000.0</td><td>9.000</td><td>N</td><td>9.8</td></tr> <tr><td>0.700000</td><td>33.66</td><td>---</td><td>56.00</td><td>22.34</td><td>1000.0</td><td>9.000</td><td>N</td><td>9.8</td></tr> <tr><td>1.035000</td><td>---</td><td>25.32</td><td>46.00</td><td>20.68</td><td>1000.0</td><td>9.000</td><td>N</td><td>9.9</td></tr> <tr><td>1.035000</td><td>32.57</td><td>---</td><td>56.00</td><td>23.43</td><td>1000.0</td><td>9.000</td><td>N</td><td>9.9</td></tr> <tr><td>1.645000</td><td>---</td><td>25.14</td><td>46.00</td><td>20.86</td><td>1000.0</td><td>9.000</td><td>N</td><td>10.0</td></tr> <tr><td>1.645000</td><td>32.57</td><td>---</td><td>56.00</td><td>23.43</td><td>1000.0</td><td>9.000</td><td>N</td><td>10.0</td></tr> <tr><td>13.000000</td><td>---</td><td>11.06</td><td>50.00</td><td>38.94</td><td>1000.0</td><td>9.000</td><td>N</td><td>9.9</td></tr> <tr><td>13.000000</td><td>20.24</td><td>---</td><td>60.00</td><td>39.76</td><td>1000.0</td><td>9.000</td><td>N</td><td>9.9</td></tr> <tr><td>27.185000</td><td>---</td><td>21.23</td><td>50.00</td><td>28.77</td><td>1000.0</td><td>9.000</td><td>N</td><td>10.3</td></tr> <tr><td>27.185000</td><td>32.69</td><td>---</td><td>60.00</td><td>27.31</td><td>1000.0</td><td>9.000</td><td>N</td><td>10.3</td></tr> </tbody> </table>					Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	0.180000	---	28.79	54.49	25.70	1000.0	9.000	N	9.7	0.180000	42.15	---	64.49	22.34	1000.0	9.000	N	9.7	0.700000	---	25.19	46.00	20.81	1000.0	9.000	N	9.8	0.700000	33.66	---	56.00	22.34	1000.0	9.000	N	9.8	1.035000	---	25.32	46.00	20.68	1000.0	9.000	N	9.9	1.035000	32.57	---	56.00	23.43	1000.0	9.000	N	9.9	1.645000	---	25.14	46.00	20.86	1000.0	9.000	N	10.0	1.645000	32.57	---	56.00	23.43	1000.0	9.000	N	10.0	13.000000	---	11.06	50.00	38.94	1000.0	9.000	N	9.9	13.000000	20.24	---	60.00	39.76	1000.0	9.000	N	9.9	27.185000	---	21.23	50.00	28.77	1000.0	9.000	N	10.3	27.185000	32.69	---	60.00	27.31	1000.0	9.000	N	10.3
Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)																																																																																																																						
0.180000	---	28.79	54.49	25.70	1000.0	9.000	N	9.7																																																																																																																						
0.180000	42.15	---	64.49	22.34	1000.0	9.000	N	9.7																																																																																																																						
0.700000	---	25.19	46.00	20.81	1000.0	9.000	N	9.8																																																																																																																						
0.700000	33.66	---	56.00	22.34	1000.0	9.000	N	9.8																																																																																																																						
1.035000	---	25.32	46.00	20.68	1000.0	9.000	N	9.9																																																																																																																						
1.035000	32.57	---	56.00	23.43	1000.0	9.000	N	9.9																																																																																																																						
1.645000	---	25.14	46.00	20.86	1000.0	9.000	N	10.0																																																																																																																						
1.645000	32.57	---	56.00	23.43	1000.0	9.000	N	10.0																																																																																																																						
13.000000	---	11.06	50.00	38.94	1000.0	9.000	N	9.9																																																																																																																						
13.000000	20.24	---	60.00	39.76	1000.0	9.000	N	9.9																																																																																																																						
27.185000	---	21.23	50.00	28.77	1000.0	9.000	N	10.3																																																																																																																						
27.185000	32.69	---	60.00	27.31	1000.0	9.000	N	10.3																																																																																																																						

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV40	101002	1 year	2016.07.25
					2017.07.06
Spectrum Analyzer	R&S	FSV30	100736	1 year	2016.07.25
					2017.07.06
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2017.01.25
PSG Analog Signal Generator	AGILENT	E8257C	US42340237	1 year	2017.07.05
Power Meter	Anritsu	ML2495A	1438001	1 year	2017.01.25
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2017.01.25
Loop Antenna	R&S	HFH2-Z2.335.4711.52	826532	2 years	2017.03.03
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-713	2 years	2017.05.15
Horn Antenna	A.H.	SAS-571	781	2 years	2017.05.07
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170550	2 years	2017.04.30
High Pass Filter	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2016.07.24
					2017.07.04
High Pass Filter	WAINWRIGHT INSTRUMENT	WHKX6.0/26.5G-6SS	1	1 year	2016.07.24
					2017.07.05
Low Pass Filter	WEINSCHEL	WLK1.0/18G-10TT	1	1 year	2016.07.24
					2017.07.04
Attenuator	KEYSIGHT	8493C	82509	1 year	2017.01.25
Preamplifier	SCHWARZBECK	BBV-9718	9718-246	1 year	2016.10.23
					2017.10.14
Broadband Amplifier	SCHWARZBECK	BBV-9721	PS9721-003	1 year	2017.01.25
EMI Test Receiver	R&S	ESR3	101781	1 year	2017.05.03
EMI Test Receiver	R&S	ESU26	100552	1 year	2017.04.24
EMI Test Receiver	R&S	ESR3	101783	1 year	2017.05.03
LISN	R&S	ENV216	101137	1 year	2017.02.04

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	Samsung Electronics Co., Ltd.	NT-R530	ZWC493BZC00014H
Test Board	N/A	N/A	N/A
AC Adapter	SOLU M	SLU10	H37H3XPGK01SE3
Speaker	Britz	BR-1000A	N/A