

TEST REPORT

Part 15 C & RSS-247 (Issue 2)

Equipment under test SMARTCAM D1

Model name SNH-V6435DN

FCC ID NLMSNHV6435DN

IC 21482- SNHV6435DN

Applicant Hanwha Techwin Co., Ltd.

Manufacturer Hanwha Techwin(Tianjin) Co., Ltd

Date of test(s) 2017.05.18 ~ 2017.05.31

Date of issue 2017.06.07

Issued to

Hanwha Techwin Co., Ltd.

1204, Changwon-daero, Seongsan-gu Changwon-si,
Gyeongsangnam-do, South Korea


Tel: +82-70-7147-8361/ Fax: +82-31-8108-3717

Issued by
KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, Korea

473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Hyeon-su Jang Test engineer	Kwang-yeol Choo Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-17T0057
Page (2) of (65)

Revision history

Revision	Date of issue	Test report No.	Description
-	2017.06.07	KES-RF-17T0057	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test configuration	5
1.3.	Device modifications	5
1.4.	Information about derivative model	5
1.5.	Accessory information	5
1.6.	Frequency/channel operations	6
1.7.	Worst case data rate	6
2.	Summary of tests	7
3.	Test results	8
3.1.	99% Occupied Bandwidth	8
3.2.	6 dB bandwidth	11
3.3.	Output power	15
3.4.	Power spectral density	18
3.5.	Radiated restricted band and emissions	22
3.6.	Conducted spurious emissions & band edge	57
3.7.	AC conducted emissions	62
Appendix A.	Measurement equipment	64
Appendix B.	Test setup photos	65



1. General information

Applicant: Hanwha Techwin Co., Ltd.
Applicant address: 1204, Changwon-daero, Seongsan-gu, Changwon-si
Gyeongsangnam-do, South Korea
Test site: KES Co., Ltd.
Test site address: C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
FCC / IC rule part(s): 15.247 / RSS-247
FCC ID: NLMSNV6435DN
IC Certification: 21482- SNHV6435DN
Test device serial No.: Production Pre-production Engineering

1.1. EUT description

Equipment under test SMARTCAM D1
Model: SNH-V6430BN
Frequency range 2 412 MHz ~ 2 462 MHz (11b/g/n_HT20)
2 422 MHz ~ 2 452 MHz (11n_HT40)
UNII-1 5 180 MHz ~ 5 240 MHz (11a/n_HT20, 11ac_VHT20)
5 190 MHz ~ 5 230 MHz (11n_HT40, 11ac_VHT40)
5 210 MHz (11ac_VHT80)
UNII-2A 5 260 MHz ~ 5 320 MHz (11a/n_HT20, 11ac_VHT20)
5 270 MHz ~ 5 310 MHz (11n_HT40, 11ac_VHT40)
5 290 MHz (11ac_VHT80)
UNII-2C 5 500 MHz ~ 5 720 MHz (11a/n_HT20, 11ac_VHT20)
5 510 MHz ~ 5 710 MHz (11n_HT40, 11ac_VHT40)
5 530 MHz ~ 5 690 MHz (11ac_VHT80)
UNII-3 5 745 MHz ~ 5 825 MHz (11a/n_HT20, 11ac_VHT20)
5 755 MHz ~ 5 795 MHz (11n_HT40, 11ac_VHT40)
5 775 MHz (11ac_VHT80)

Modulation technique DSSS, OFDM
Number of channels 11 ch : 2 412 MHz ~ 2 462 MHz, 7 ch : 2 422 MHz ~ 2 452 MHz
4 ch : 5 180 MHz ~ 5 240 MHz, 2 ch : 5 190 MHz ~ 5 230 MHz, 1 ch : 5 210 MHz
4 ch : 5 260 MHz ~ 5 320 MHz, 2 ch : 5 270 MHz ~ 5 310 MHz, 1 ch : 5 290 MHz
12 ch : 5 500 MHz ~ 5 720 MHz, 6 ch : 5 510 MHz ~ 5 710 MHz,
3 ch : 5 530 MHz ~ 5 690 MHz
5 ch : 5 745 MHz ~ 5 825 MHz, 2 ch : 5 755 MHz ~ 5 795 MHz, 1 ch : 5 775 MHz



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-17T0057
Page (5) of (65)

Antenna specification	11b/g/n _ HT20/40	: Chip antenna & 2.92 dB
	UNII-1	: Chip antenna & 5.08 dB
	UNII-2A	: Chip antenna & 4.85 dB
	UNII-2C	: Chip antenna & 6.89 dB
	UNII-3	: Chip antenna & 6.89 dB

Power source AC 16V ~ 24V

1.2. Test configuration

The Hanwha Techwin Co., Ltd. SMARTCAM D1 FCC ID: NLMSNHV6435DN IC: 21482-SNHV6435DN was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247

IC RSS-247 Issue 2 and RSS-Gen Issue 4

KDB-558074 D01 v04

ANSI C63.10-2013

1.3. Device modifications

N/A

1.4. Information about derivative model

N/A

1.5. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
-	-	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

1.6. Frequency/channel operations

Ch.	Frequency (MHz)	Mode
01	2412	802.11b/g/n_HT20
.	.	.
06	2437	802.11b/g/n_HT20
.	.	.
11	2462	802.11b/g/n_HT20

Ch.	Frequency (MHz)	Mode
03	2422	802.11n_HT40
.	.	.
06	2437	802.11n_HT40
.	.	.
09	2452	802.11n_HT40

1.7. Worst case data rate

1. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
2. Worst-case data rates were:
 - 802.11b: **1 Mbps**
 - 802.11g: **6 Mbps**
 - 802.11n_HT20: **MCS0**
 - 802.11n_HT40: **MCS0**



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-17T0057
Page (7) of (65)

2. Summary of tests

Section in FCC Part 15	Section in RSS-247 & Gen	Parameter	Test results
-	RSS-Gen 6.6	99% occupied bandwidth	Pass
15.247(a)(2)	RSS-247 5.2 (a)	6 dB bandwidth	Pass
15.247(b)(3)	RSS-247 5.4 (d)	Peak output power	Pass
15.247(e)	RSS-247 5.2 (b)	Power spectral density	Pass
15.205 15.209	RSS-247 5.5 RSS-Gen 8.9, 8.10	Radiated restricted band and emission	Pass
15.247(d)	RSS-247 5.5	Conducted spurious emission and band edge	Pass
15.207(a)	RSS-Gen 8.8	AC conducted emissions	Pass

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

3. Test results

3.1. 99% Occupied Bandwidth

Test procedure

ANSI C63.10-2013


Limit

None; for reporting purpose only.


Test results

99 % bandwidth of 20 MHz bandwidth				
Measured 99 % bandwidth(MHz)			Limit(MHz)	
Frequency(MHz)	802.11b	802.11g	802.11n	
2412	15.195	16.860	17.873	-
2437	15.195	16.787	17.873	
2462	15.195	16.860	17.873	

99 % bandwidth of 40 MHz bandwidth		
Measured 99 % bandwidth(MHz)		
Frequency(MHz)	802.11n	Limit(MHz)
2422	36.353	-
2437	36.353	
2452	36.353	

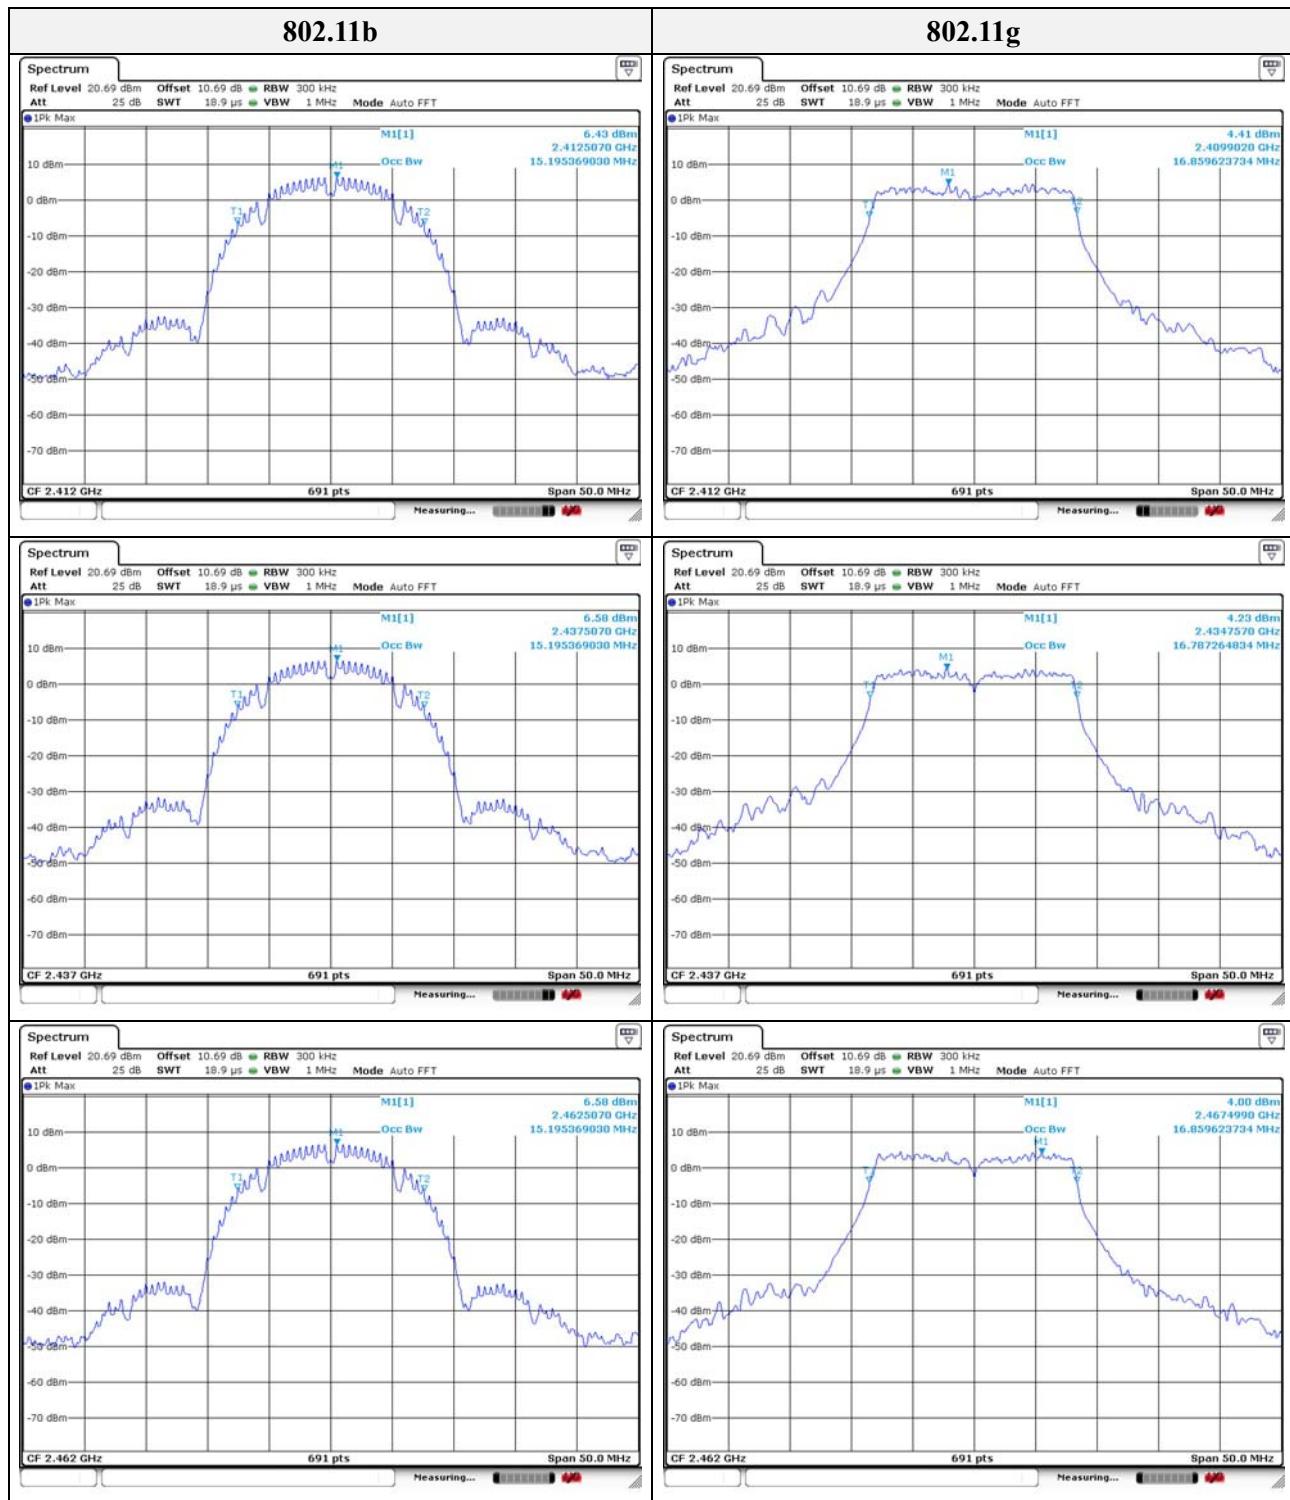Test plots


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

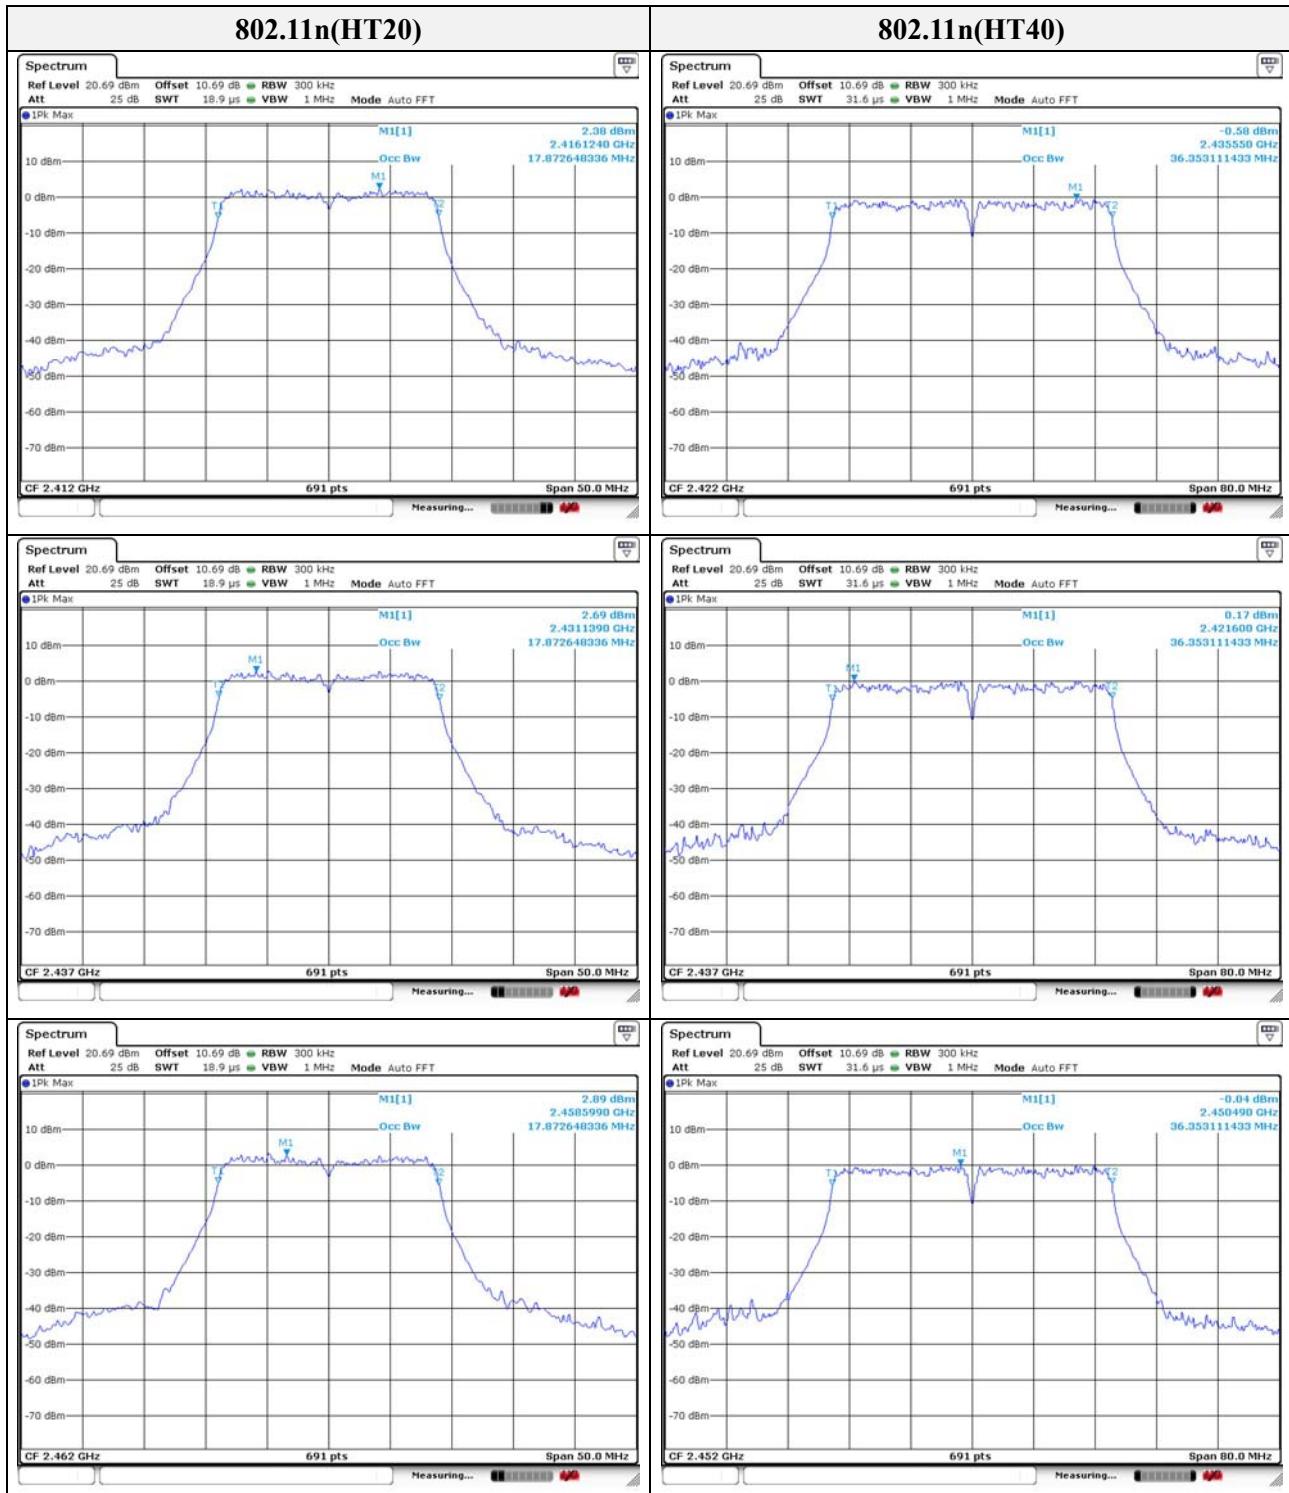

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.2. 6 dB bandwidth

Test procedure

KDB 558074 D01 v04 – Section 8.1 or 8.2

Used test method is section 8.1.

Section 8.1

1. RBW = 100 kHz.
2. VBW $\geq 3 \times$ RBW.
3. Detector = peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Section 8.2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Limit


According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 5.2 (a), the minimum 6 dB bandwidth shall be 500 kHz.


Test results

6 dB bandwidth of 20 MHz bandwidth			
Measured 6 dB bandwidth(MHz)			Limit(MHz)
Frequency(MHz)	802.11b	802.11g	
2412	10.130	16.498	17.728
2437	10.130	16.498	17.656
2462	10.130	16.570	17.656

6 dB bandwidth of 40 MHz bandwidth		
Measured 6 dB bandwidth(MHz)		Limit(MHz)
Frequency(MHz)	802.11n	
2422	36.580	0.5
2437	36.580	
2452	36.580	

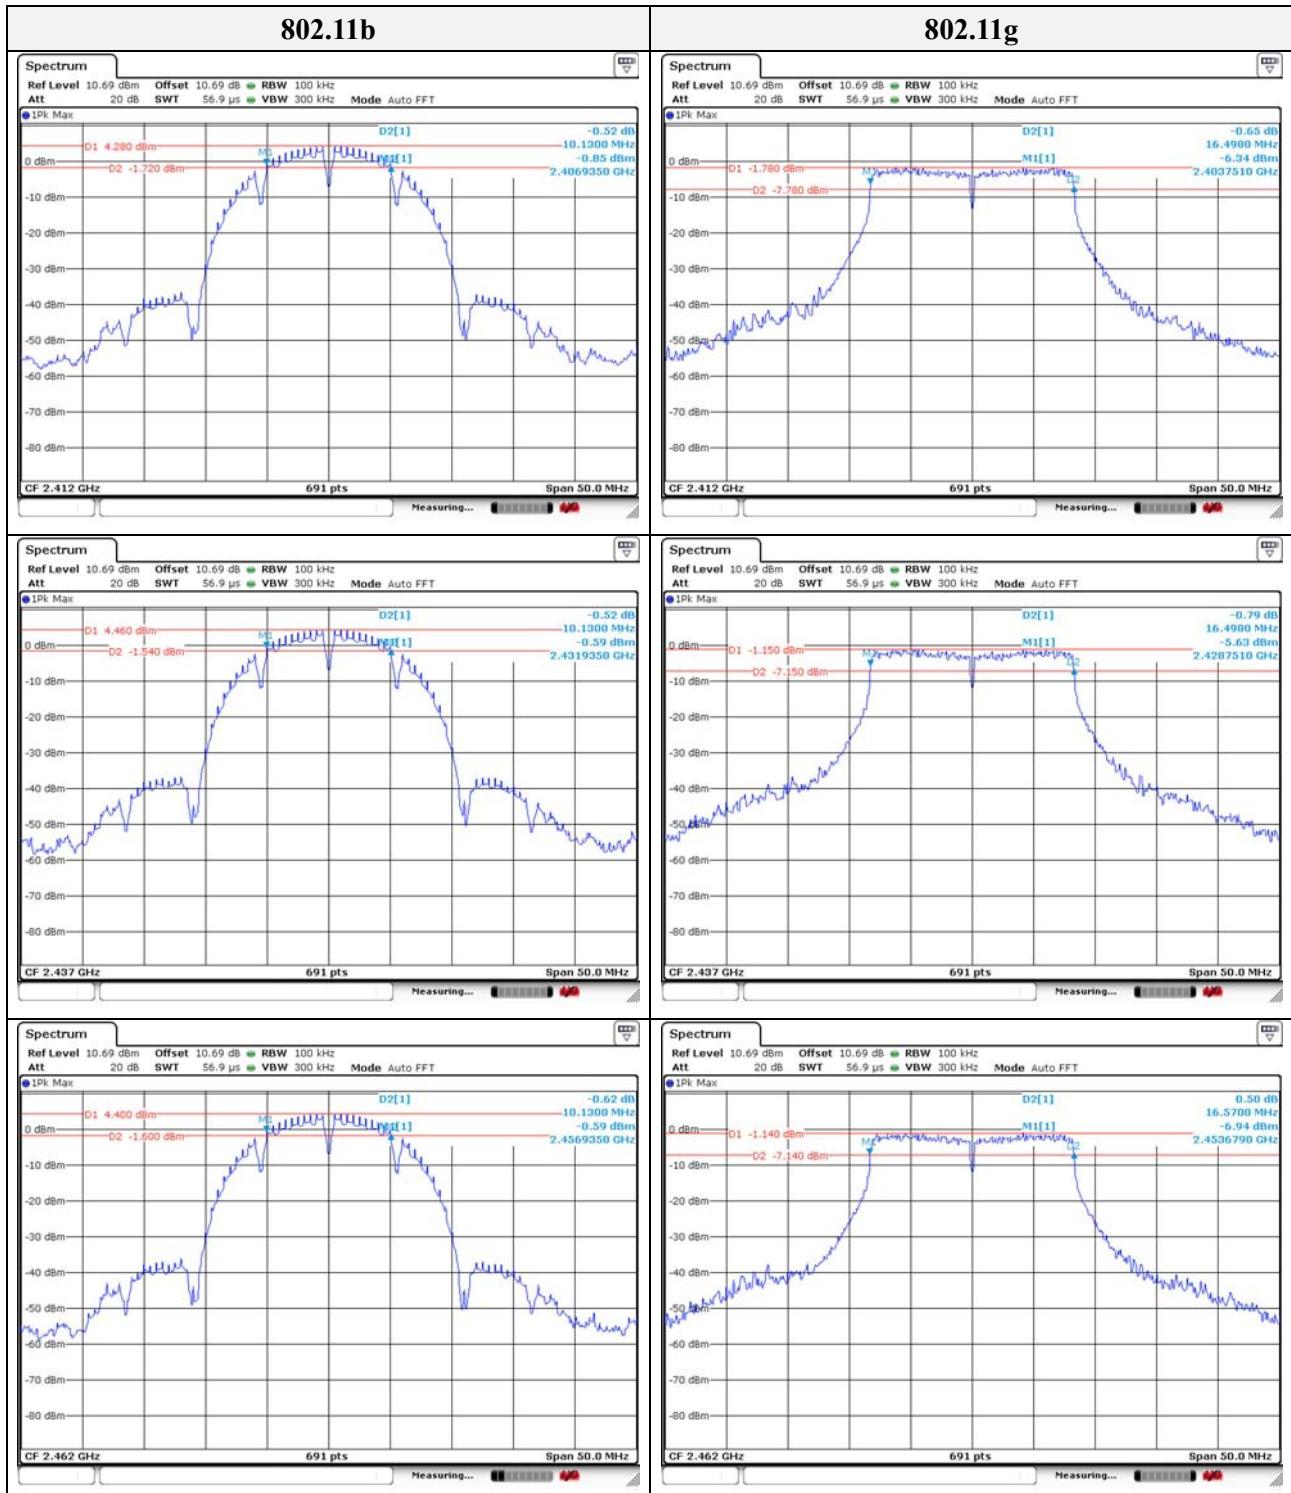

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

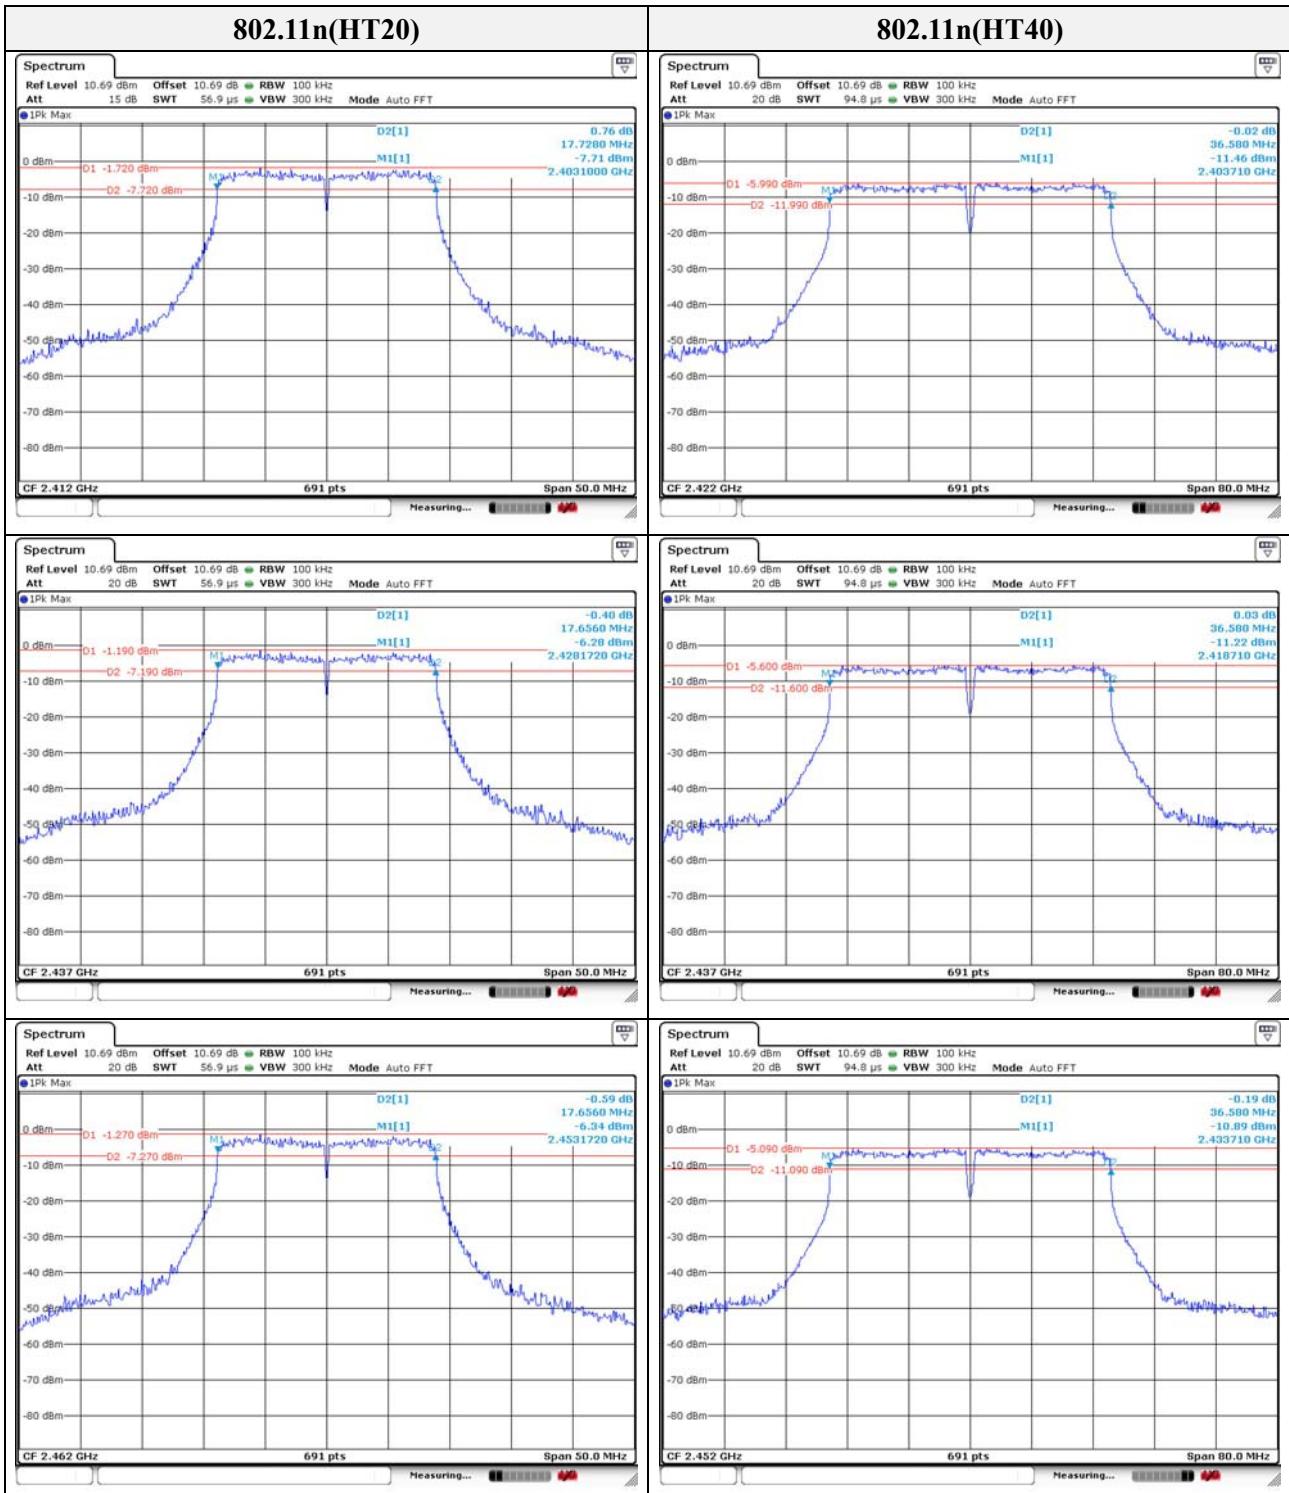

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.3. Output power

Test procedure

KDB 558074 D01 v04 – section 9.1.1, 9.1.2 or 9.1.3

Used test method is section 9.1.3.

Section 9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW \geq DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple
5. Detector = peak
6. Trace mode = max hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level

Section 9.1.2

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 9.2. The peak integrated band power method of 11.9.1 in ANSI C63.10-2013 is not applicable.

Section 9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-17T0057
Page (16) of (65)

According to RSS-247 5.4 (d), For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in Section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test results

Measured output power (dBm)						
Mode	2412 MHz		2437 MHz		2462 MHz	
	Peak	Average	Peak	Average	Peak	Average
11b	18.44	15.84	18.92	15.96	18.83	15.92
11g	22.73	13.85	23.50	14.44	23.47	14.34
11n_HT 20	22.85	12.87	23.08	13.33	22.78	13.20
Mode	2422 MHz		2437 MHz		2452 MHz	
	Peak	Average	Peak	Average	Peak	Average
11n_HT 40	21.92	12.65	22.03	13.13	22.08	13.15

3.4. Power spectral density

Test procedure

KDB 558074 D01 v04- section 10.2

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW(no less than 3 kHz) and repeat.

Limit

According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 5.2 (b), The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:
KES-RF-17T0057
Page (19) of (65)

Test results


PSD of 20 MHz bandwidth			
Measured PDS(dBm)			Limit(dBm)
Frequency(MHz)	802.11b	802.11g	802.11n
2412	-16.10	-16.26	-15.49
2437	-15.98	-15.73	-15.15
2462	-15.93	-15.11	-15.26

PSD of 40 MHz bandwidth		
Measured PDS(dBm)		Limit(dBm)
Frequency(MHz)	802.11n	Limit(dBm)
2422	-17.42	8
2437	-18.12	
2452	-16.47	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

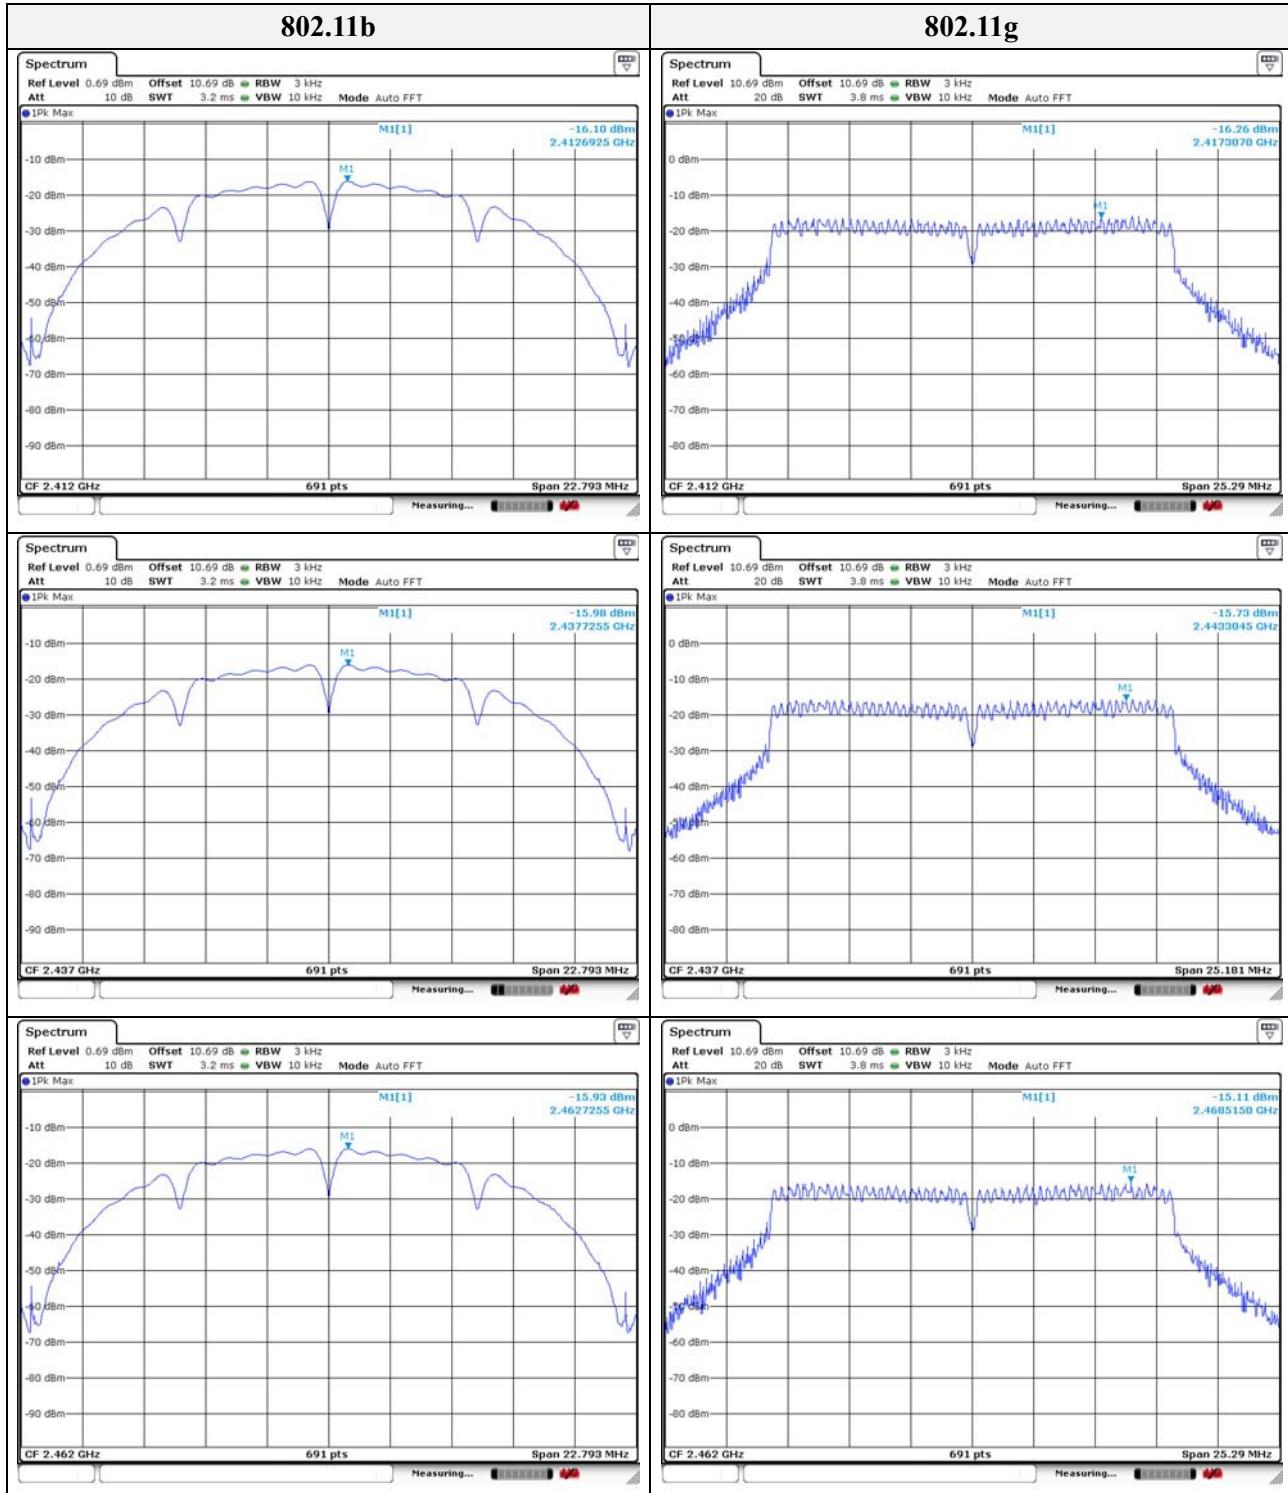

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

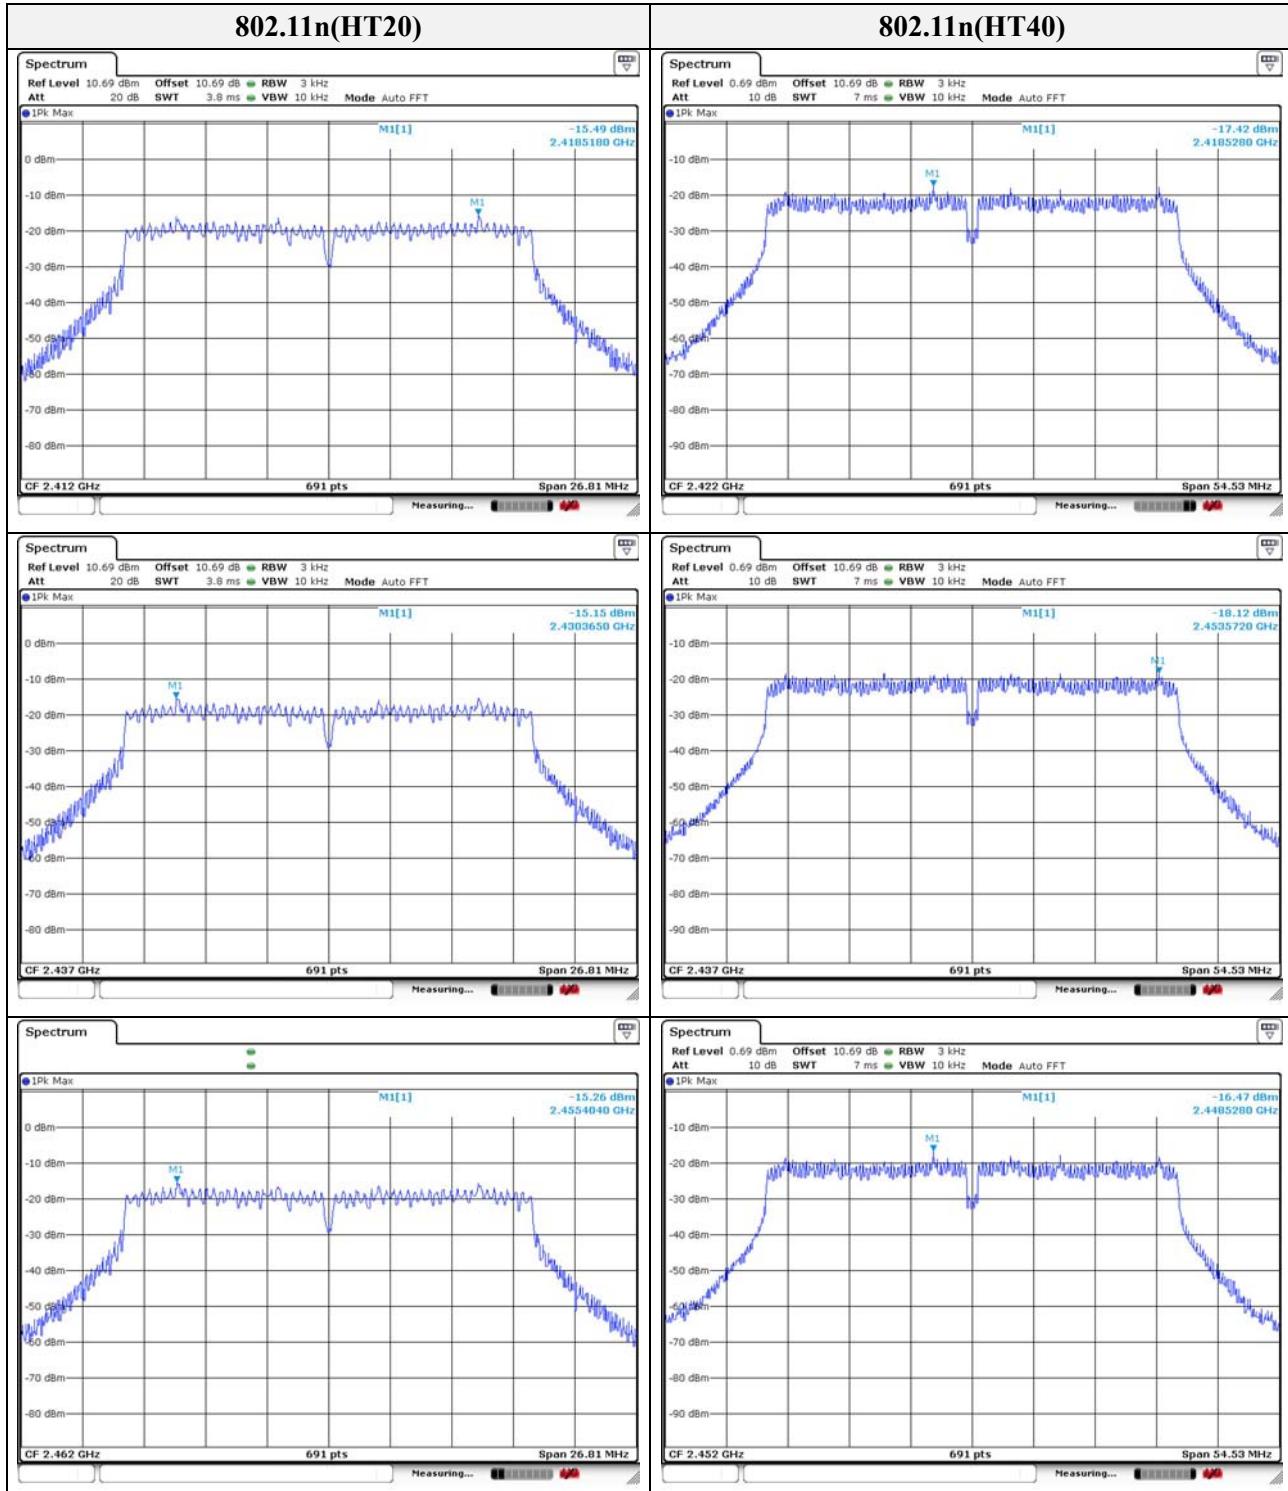


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.


3.5. Radiated restricted band and emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

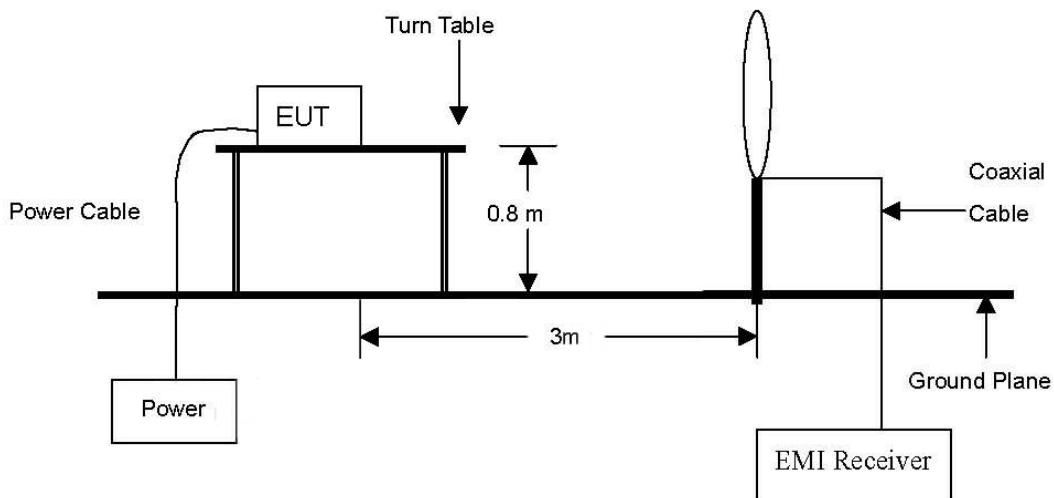

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

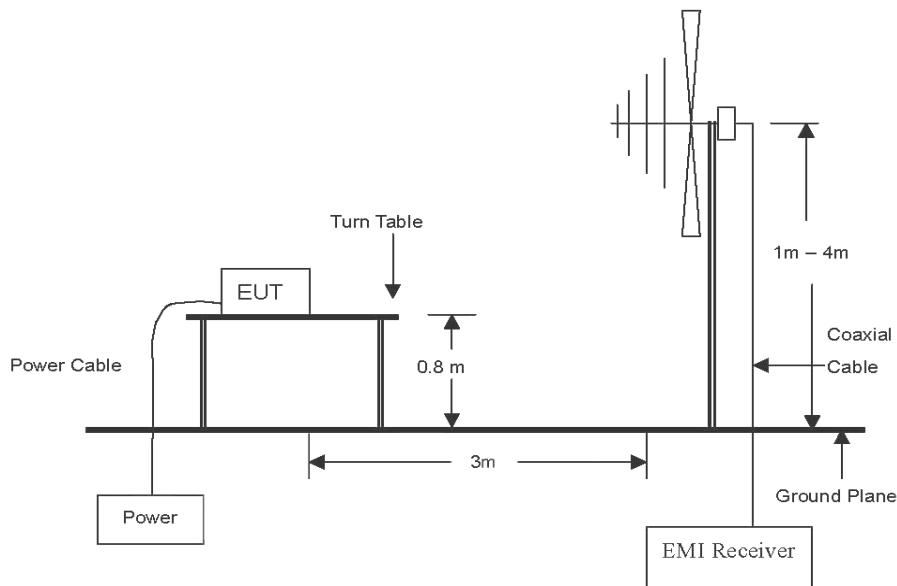

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

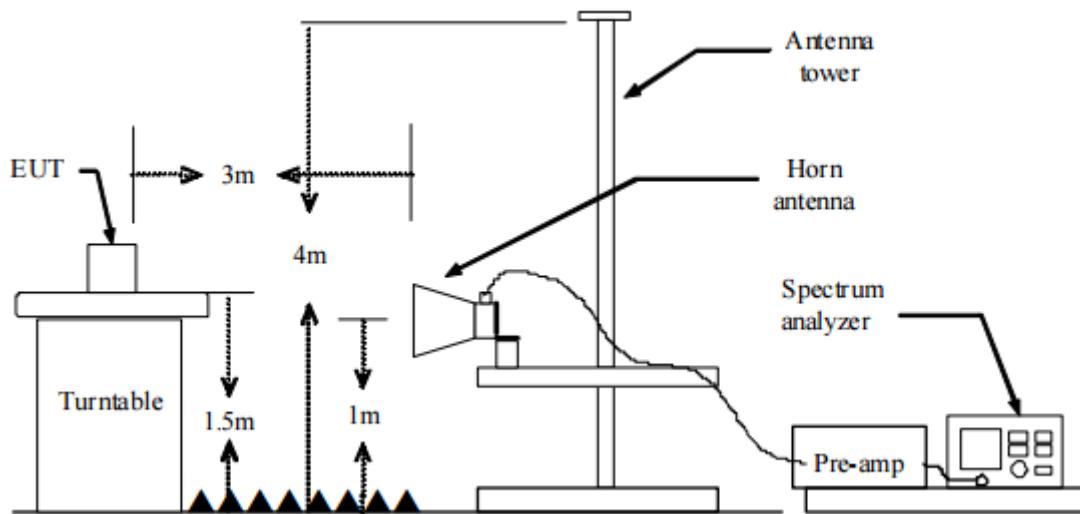

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. Spectrum analyzer settings for $f < 1$ GHz:
 - ① Span = wide enough to fully capture the emission being measured
 - ② RBW = 100 kHz
 - ③ VBW \geq RBW
 - ④ Detector = quasi peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
2. Spectrum analyzer settings for $f \geq 1$ GHz: Peak
 - ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
 - ② RBW = 1 MHz
 - ③ VBW \geq 3 MHz
 - ④ Detector = peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
 - ⑦ Trace was allowed to stabilize

3. Spectrum analyzer settings for $f \geq 1$ GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW $\geq 3 \times$ RBW
- ④ Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Note.

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
 Where:
 - F_d = Distance factor in dB
 - D_m = Measurement distance in meters
 - D_s = Specification distance in meters
3. CF(Correction factors(dB)) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. Field strength(dB μ V/m) = Level(dB μ V) + CF (dB) + or DCF(dB)
5. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
6. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **Z orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **Z orientation**.
8. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
9. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to RSS-Gen, Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960*	3	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

Duty cycle


Regarding to KDB 558074 D01_v04, 6.0, the maximum duty cycles of all modes were investigated and set the spectrum analyzer as below.

Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100.

Test mode	T _{on} time (ms)	Period (ms)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
802.11b	10.00	10.00	1	100	0
802.11g	10.00	10.00	1	100	0
802.11n(HT20)	10.00	10.00	1	100	0
802.11n(HT40)	10.00	10.00	1	100	0

Duty cycle (Linear) = T_{on} time/Period

DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)

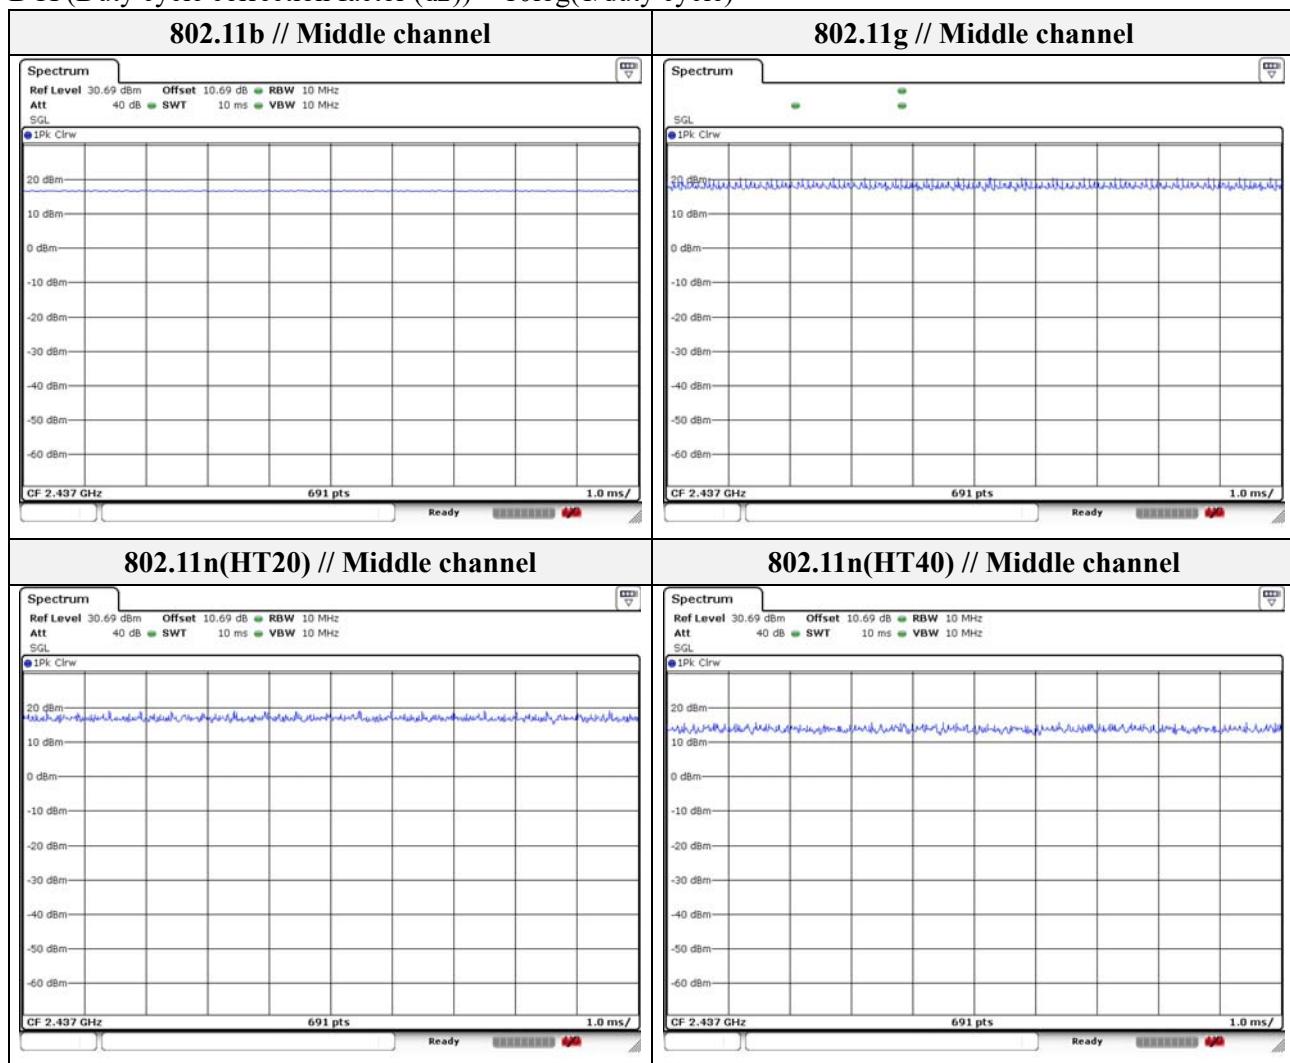


Test results (Below 30 MHz)

Mode: 802.11b

Distance of measurement: 3 meter

Channel: 06 (Worst case)

Frequency (MHz)	Level (dB μ V)	Ant. Pol. (H/V)	CF (dB)	F _d (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No spurious emissions were detected within 20 dB of the limit							

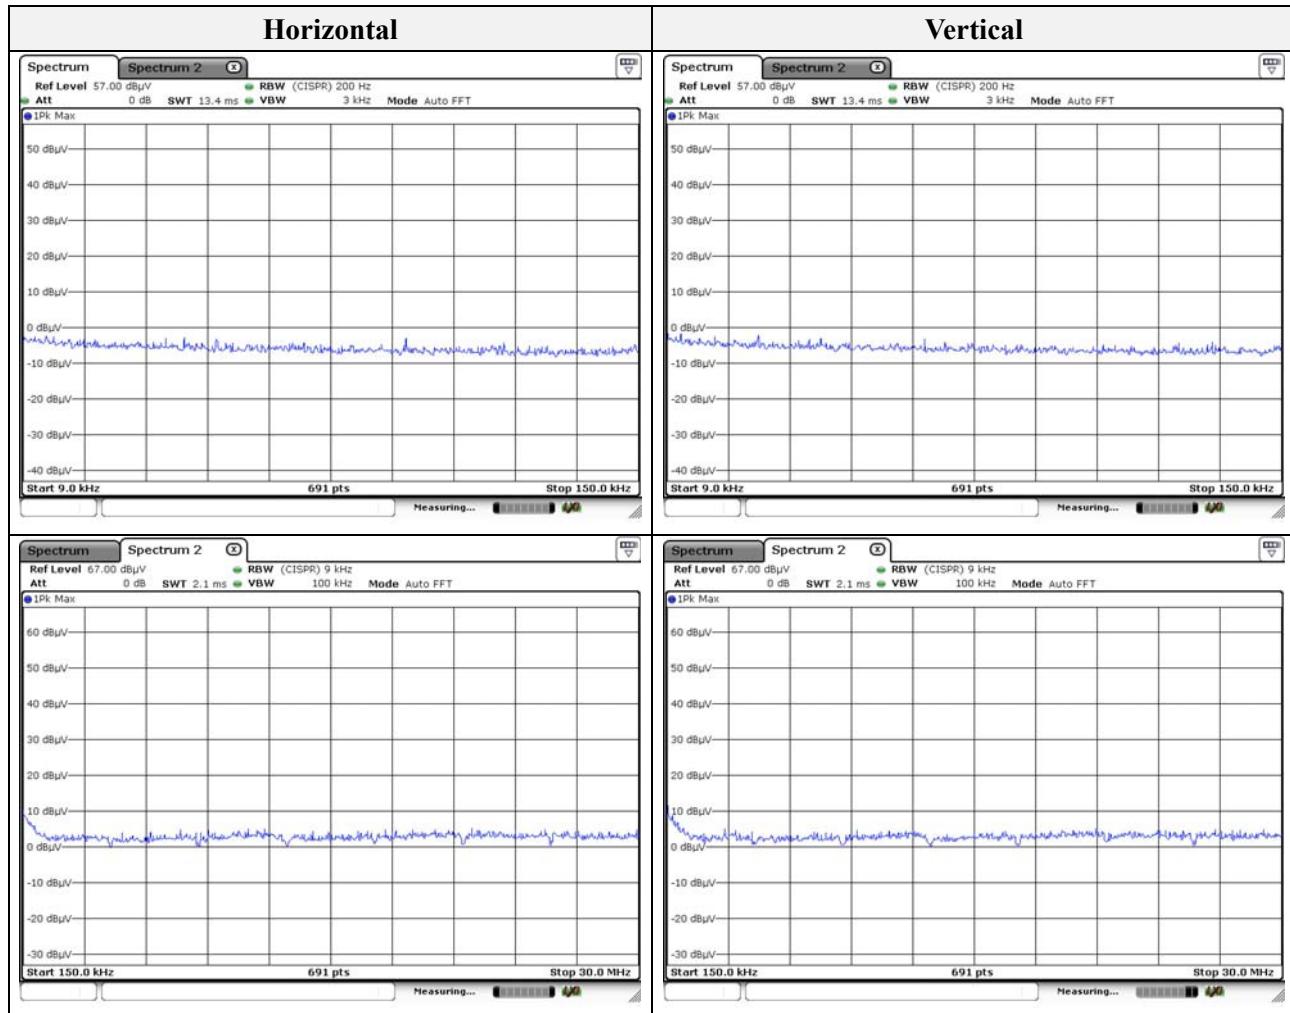


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Test results (Below 1 000 MHz) – Worst case

 Mode: 802.11b

 Distance of measurement: 3 meter

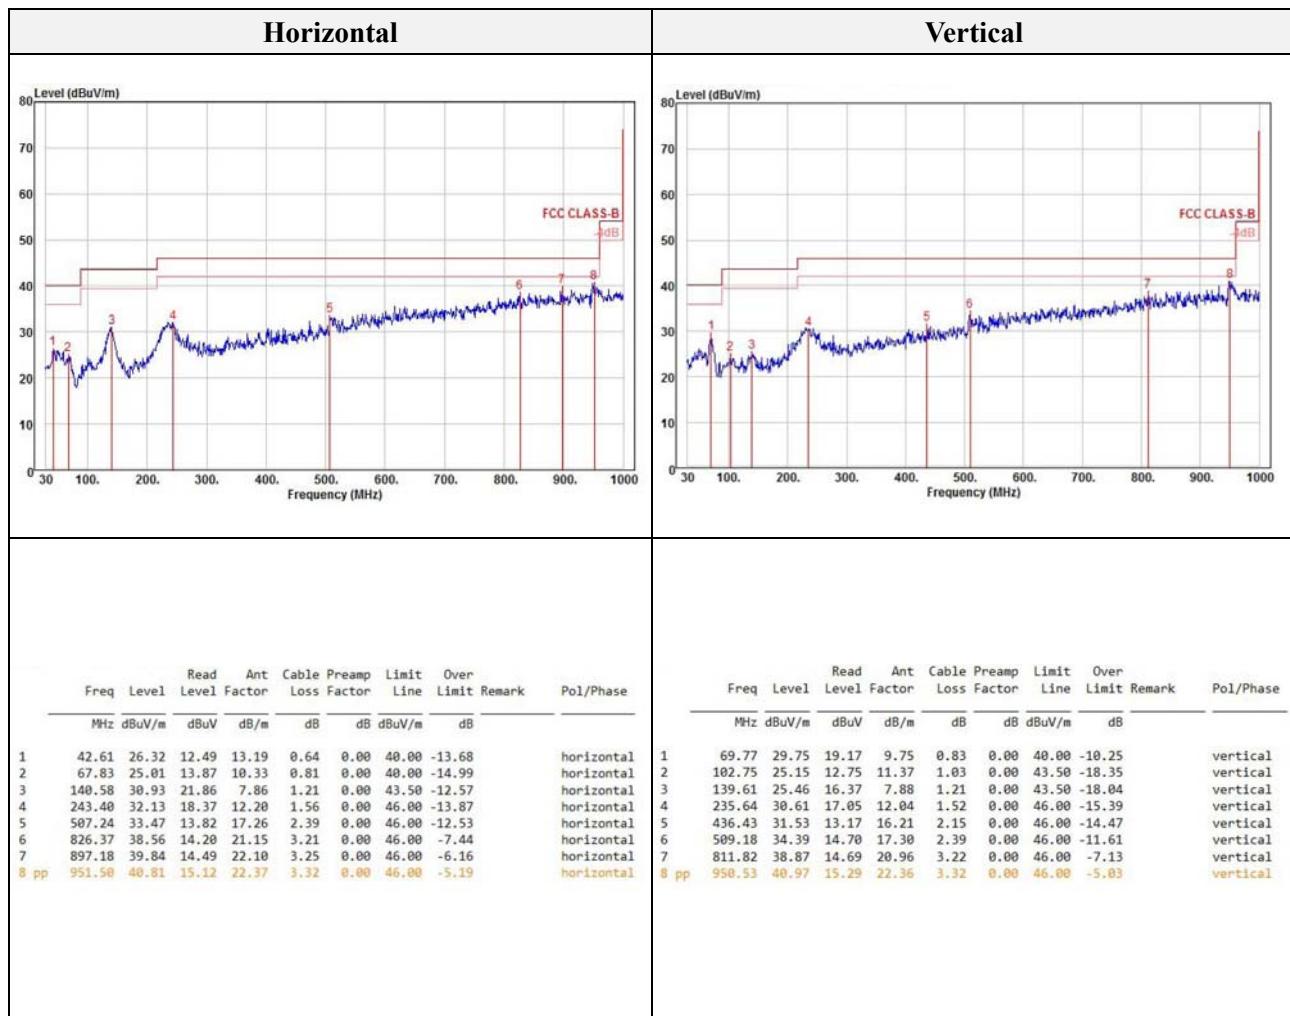 Channel: 06 (Worst case)


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

Test results (Above 1 000 MHz)

Mode: 802.11b

Distance of measurement: 3 meter


Channel: 01

- Spurious


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2665.70	50.80	Peak	H	0.59	-	51.39	74.00	22.61
2668.60	49.94	Peak	V	0.60	-	50.54	74.00	23.46

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2386.74	52.15	Peak	H	-0.23	-	51.92	74.00	22.08
2386.22	52.74	Peak	V	-0.23	-	52.51	74.00	21.49

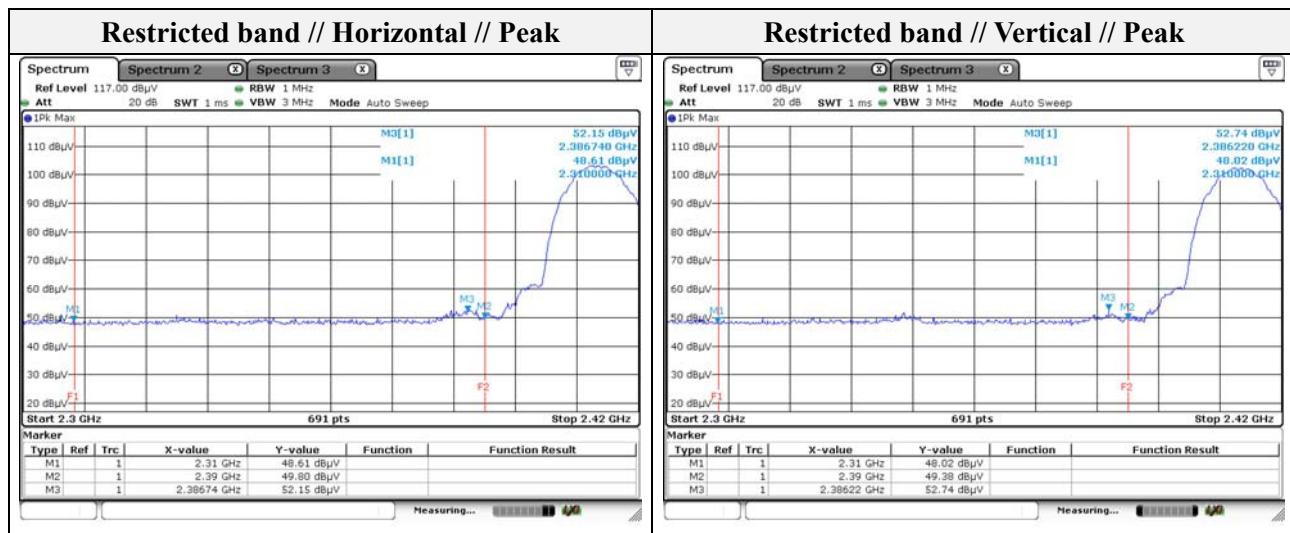

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

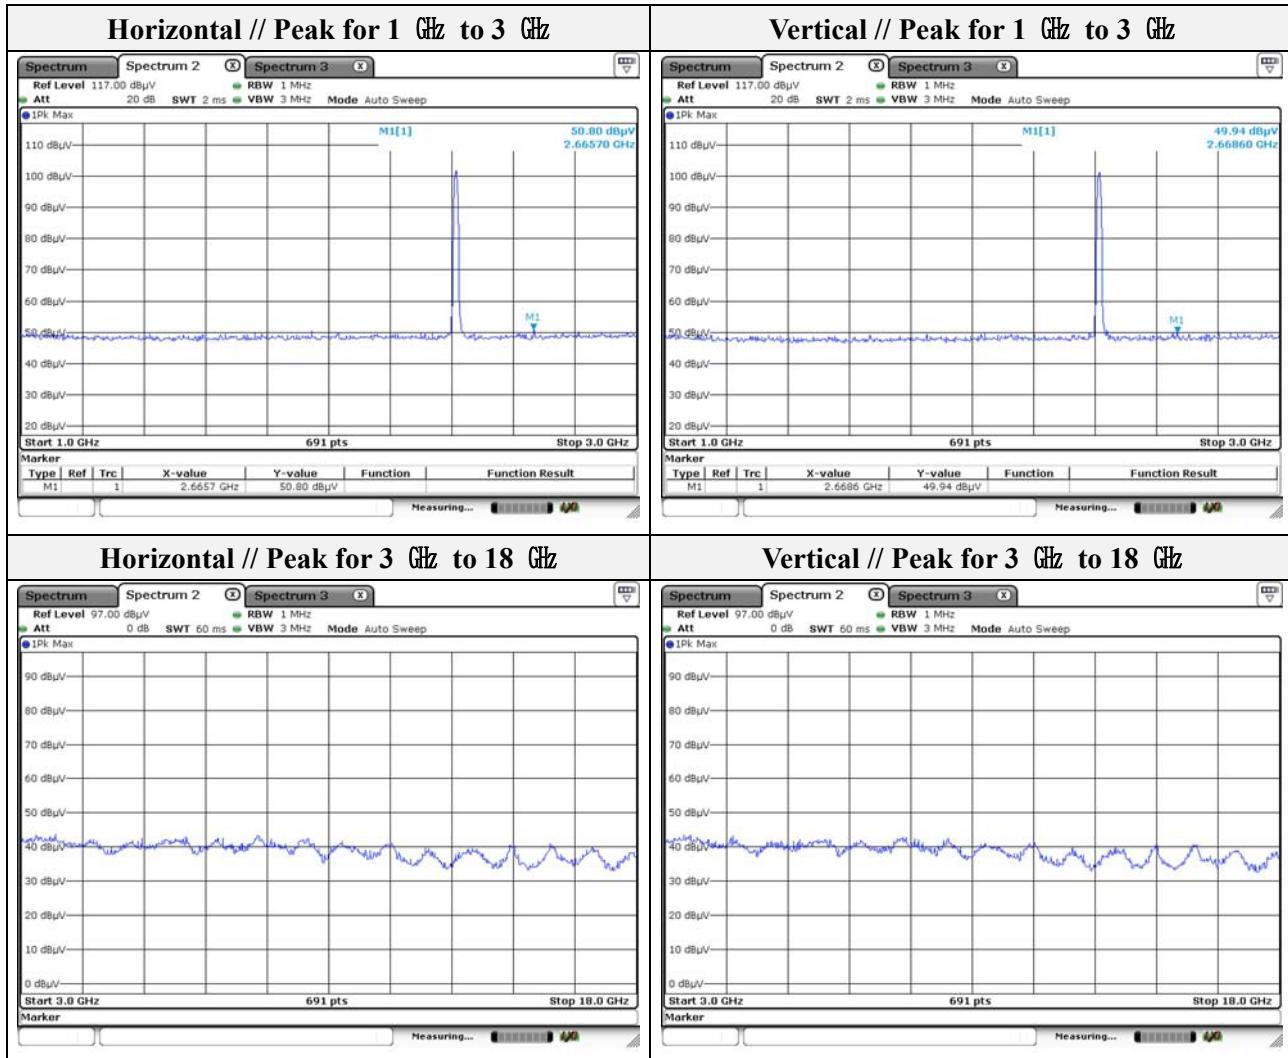

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11b

Distance of measurement: 3 meter

Channel: 06

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2665.70	50.95	Peak	H	0.59	-	51.54	74.00	22.46
2347.30	51.20	Peak	V	-0.30	-	50.90	74.00	23.10

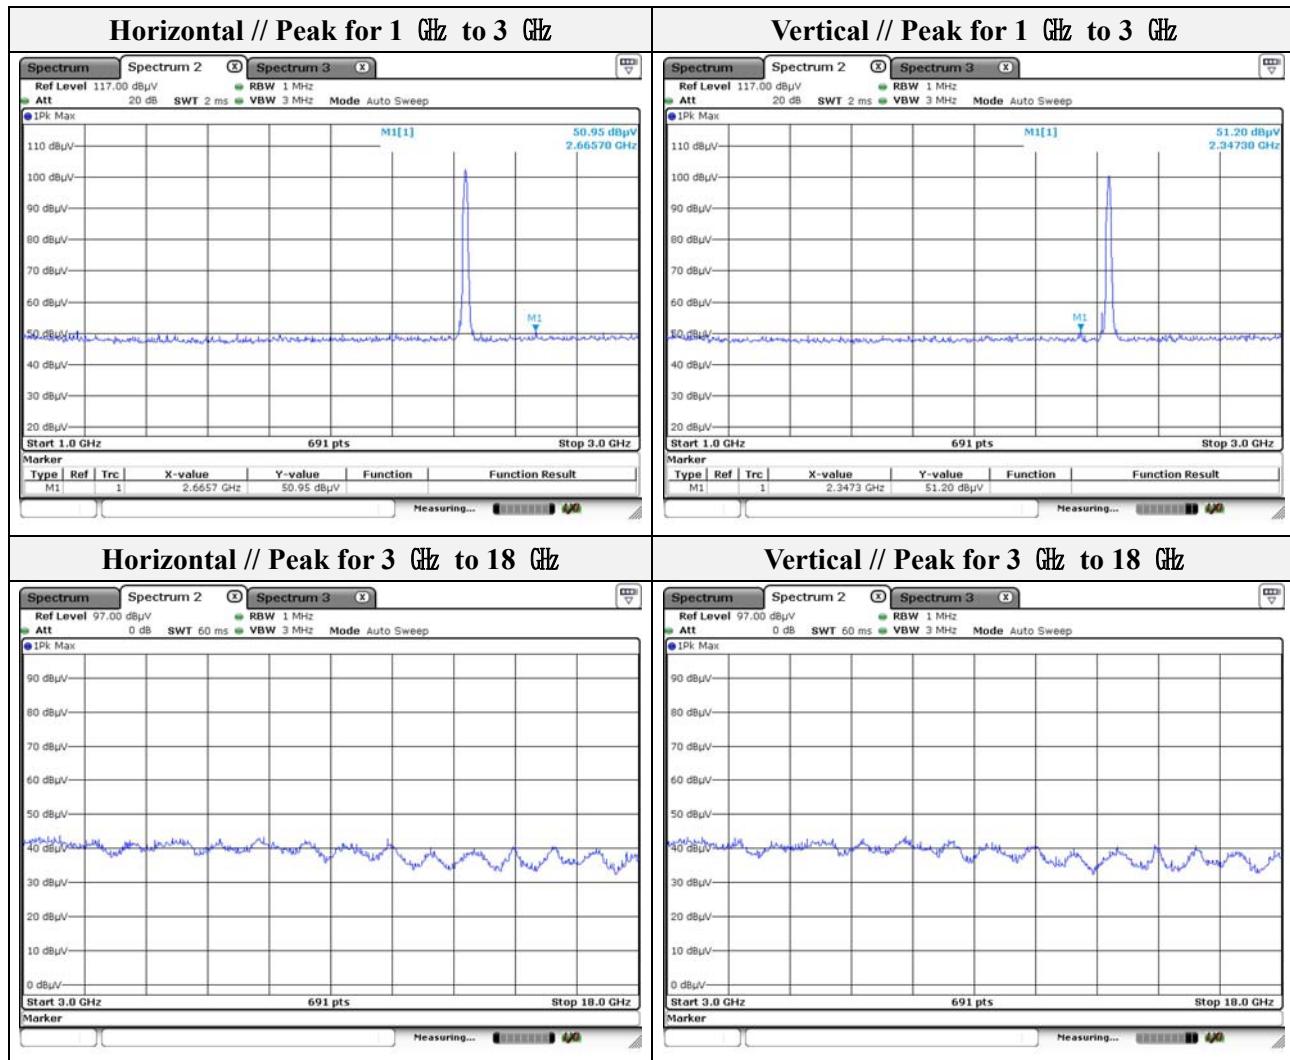

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11b

Distance of measurement: 3 meter


Channel: 11

- Spurious


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1163.50	51.07	Peak	H	-8.09	-	42.98	74.00	31.02
2347.30	51.34	Peak	V	-0.30	-	51.04	74.00	22.96

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2486.80	53.19	Peak	H	-0.04	-	53.15	74.00	20.85
2486.87	51.94	Peak	V	-0.04	-	51.90	74.00	22.10

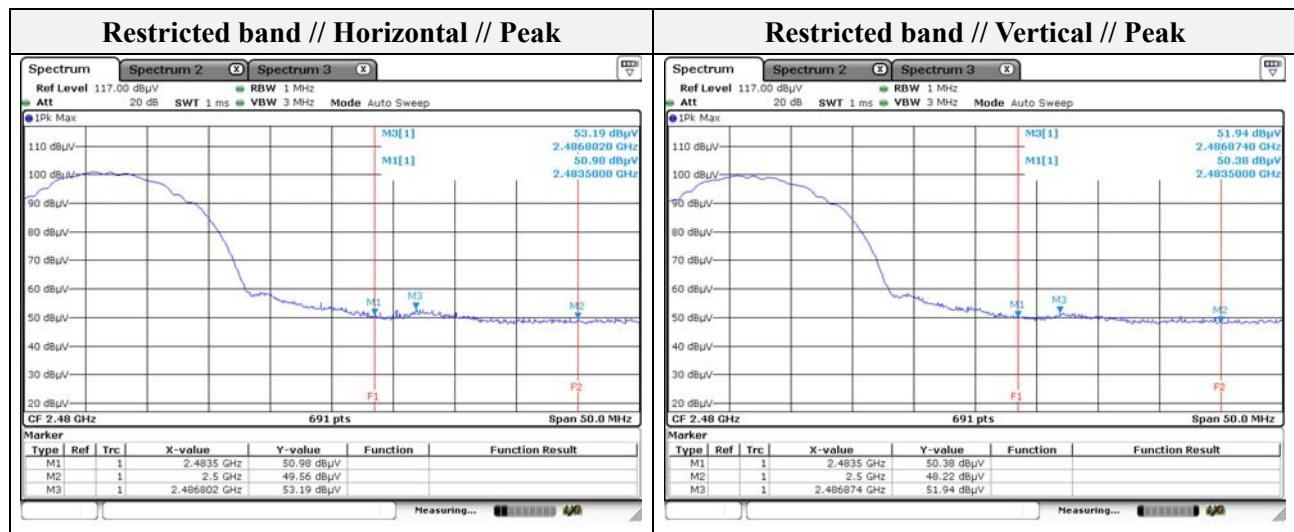

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

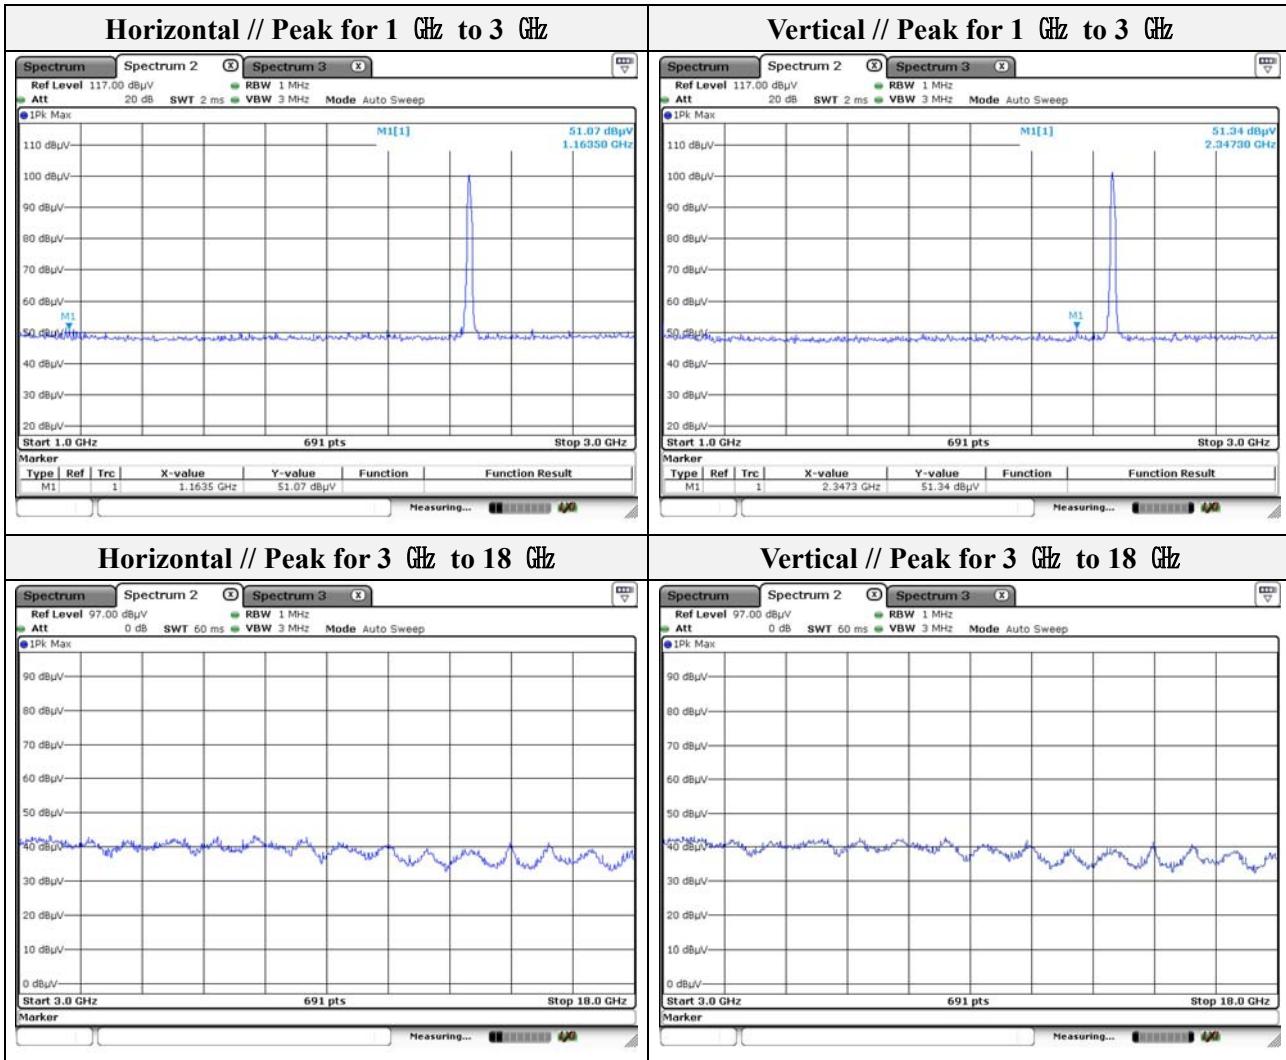

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-17T0057
Page (34) of (65)

Mode: 802.11g
Distance of measurement: 3 meter
Channel: 01


- Spurious

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2810.40	51.27	Peak	H	1.12	-	52.39	74.00	21.61
2347.30	52.14	Peak	V	-0.30	-	51.84	74.00	22.16
1968.20	50.37	Peak	V	-1.31	-	49.06	74.00	24.94


- Band edge

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2390.00	55.95	Peak	H	-0.22	-	55.73	74.00	18.27
2390.00	41.29	Average	H	-0.22	-	41.07	54.00	12.93
2389.18	55.67	Peak	V	-0.22	-	55.45	74.00	18.55
2389.18	40.77	Average	V	-0.22	-	40.55	54.00	13.45

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

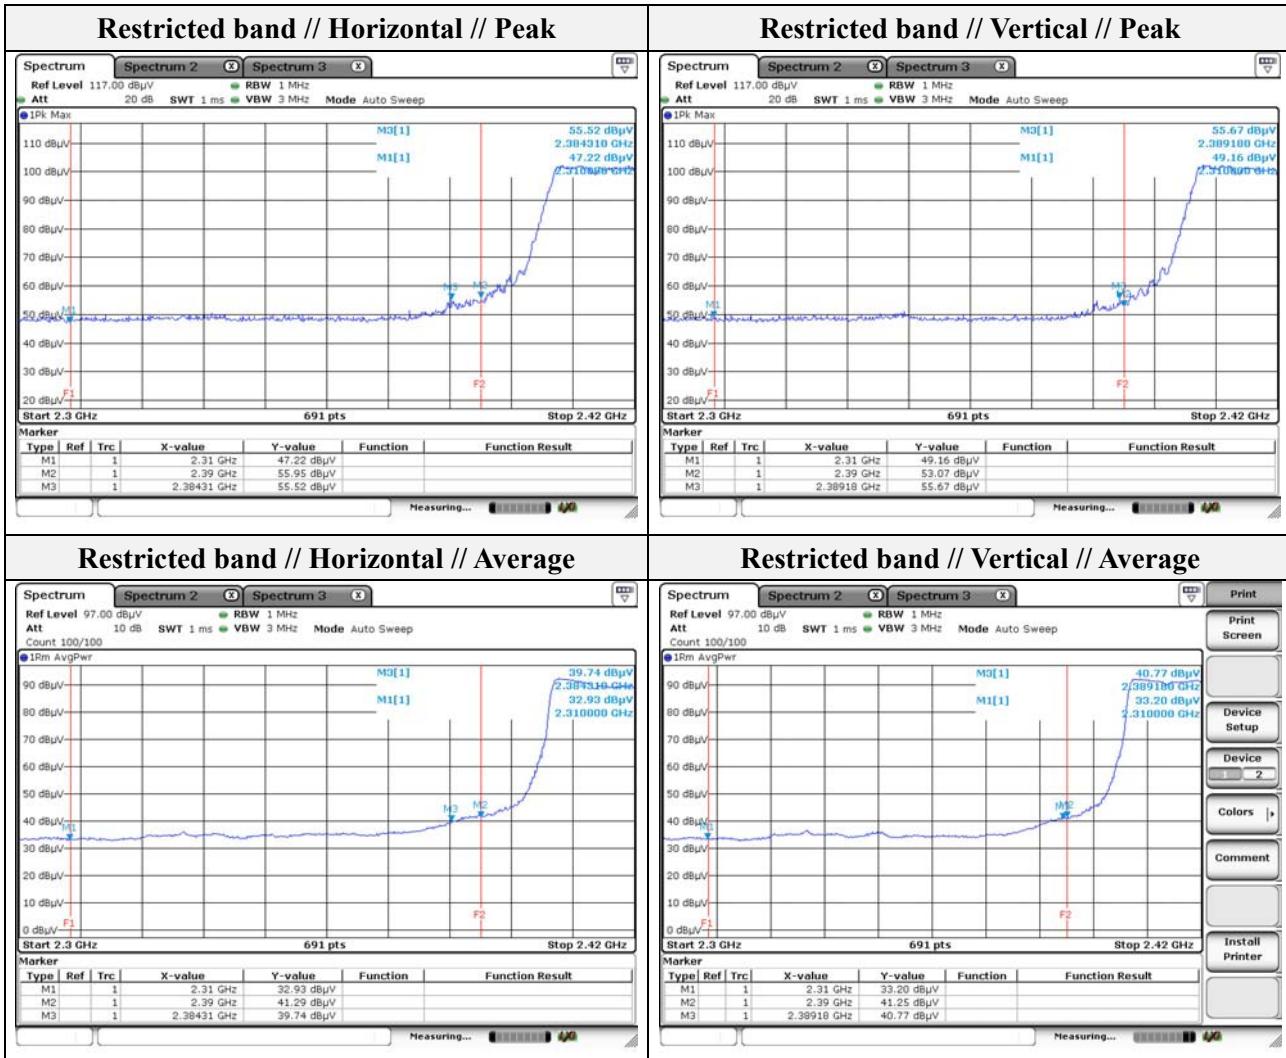

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

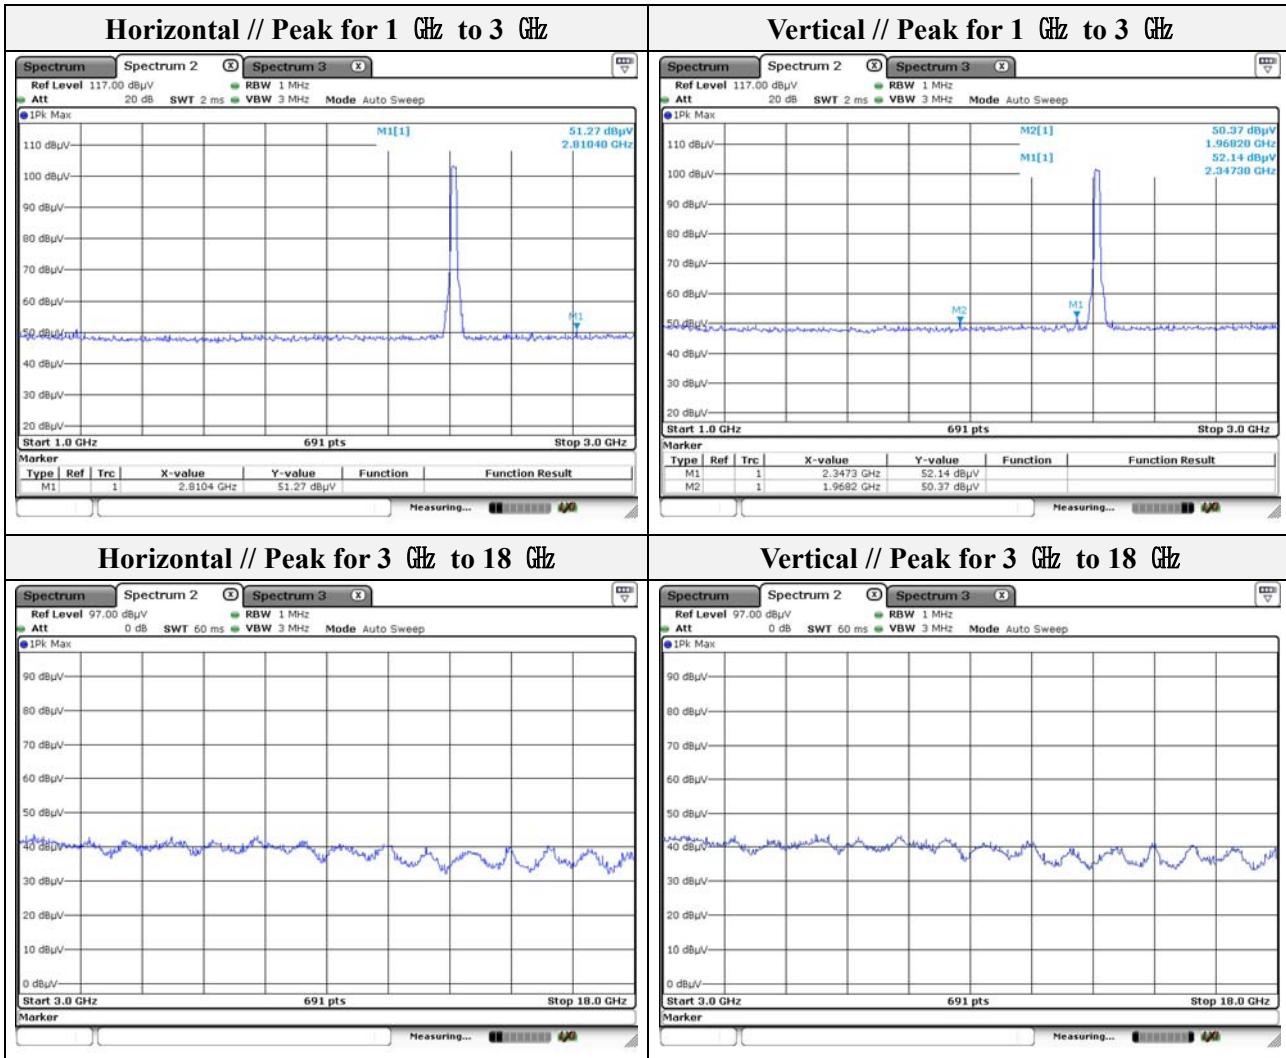

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11g

Distance of measurement: 3 meter

Channel: 06

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2668.60	50.59	Peak	H	0.60	-	51.19	74.00	22.81
2347.30	50.95	Peak	V	-0.30	-	50.65	74.00	23.35

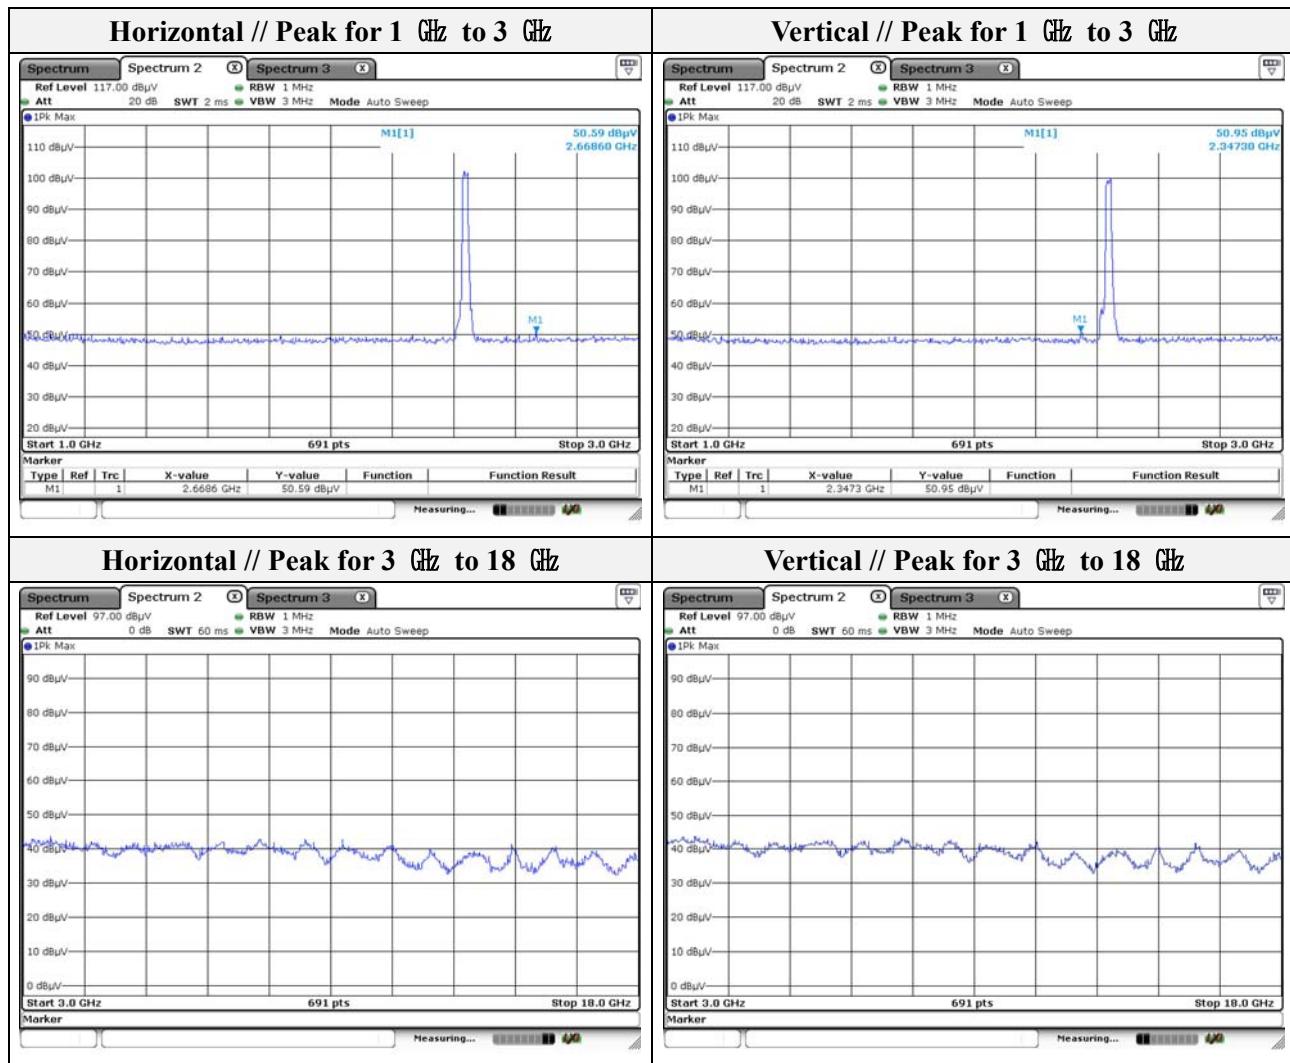

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11g

Distance of measurement: 3 meter


Channel: 11

- Spurious


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2665.70	51.56	Peak	H	0.59	-	52.15	74.00	21.85
2347.30	51.55	Peak	V	-0.30	-	51.25	74.00	22.75

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2486.37	58.69	Peak	H	-0.04	-	58.65	74.00	15.35
2486.37	39.95	Average	H	-0.04	-	39.91	54.00	14.09
2486.30	56.69	Peak	V	-0.04	-	56.65	74.00	17.35
2486.30	40.87	Average	V	-0.04	-	40.83	54.00	13.17

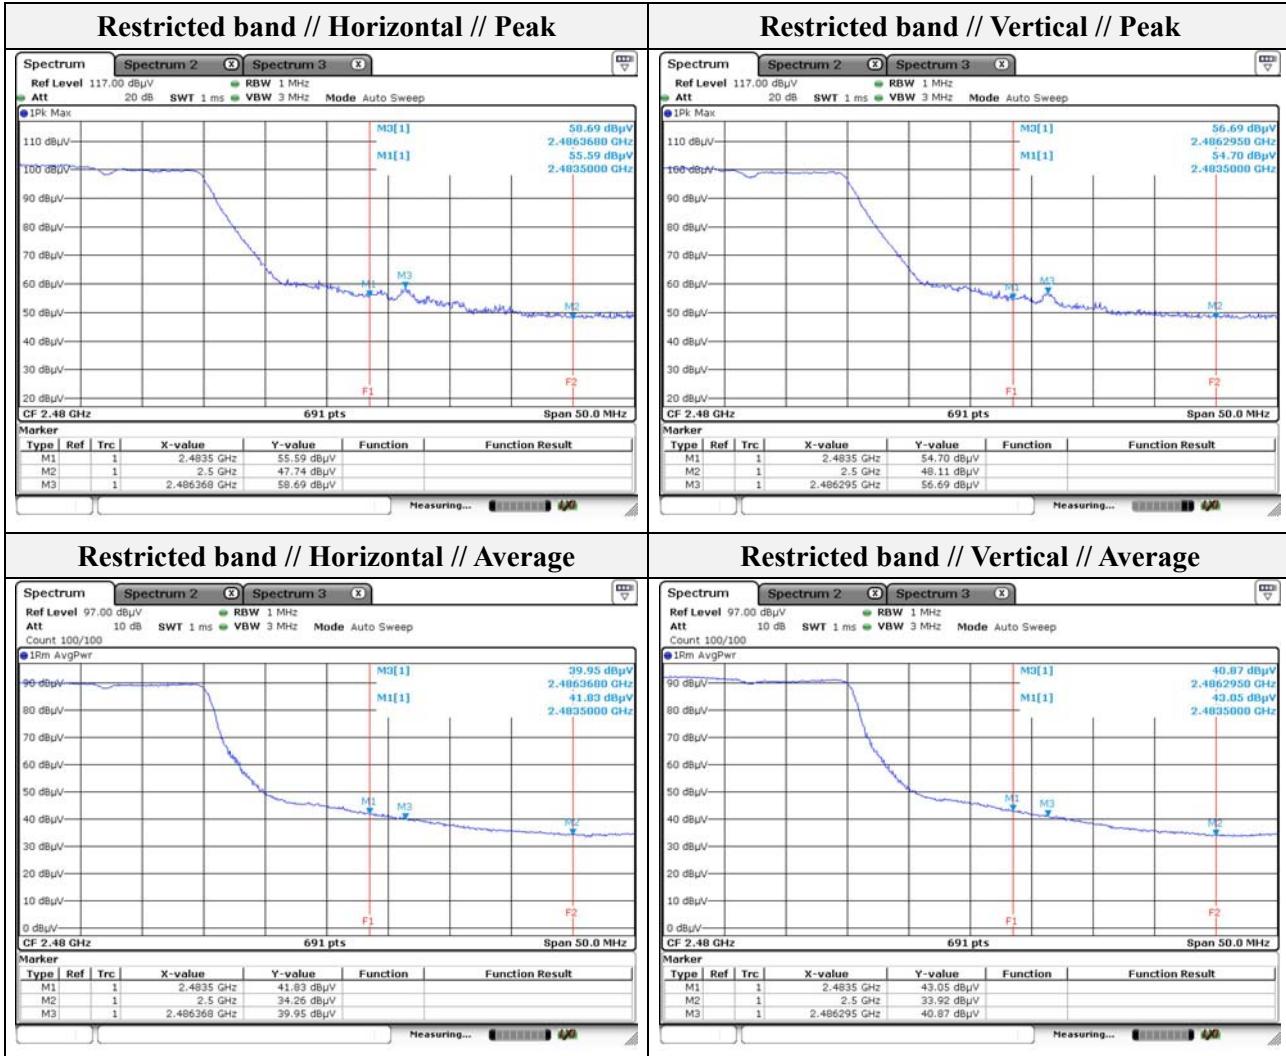

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

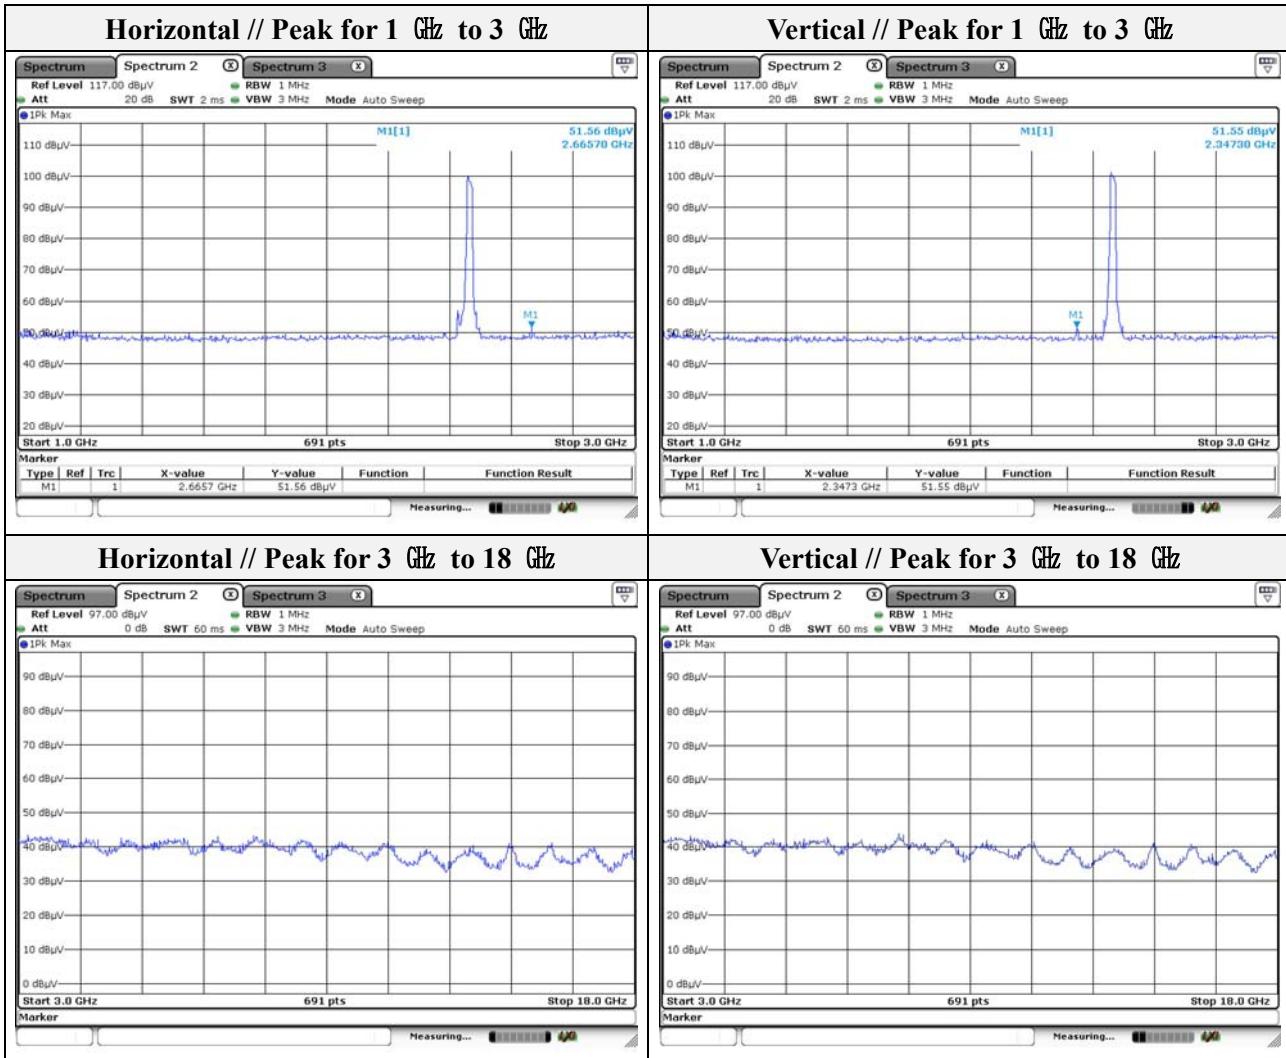

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-17T0057
Page (41) of (65)

Mode: 802.11n(HT20)
Distance of measurement: 3 meter
Channel: 01


- Spurious

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1771.30	50.61	Peak	H	-3.35	-	47.26	74.00	26.74
2668.60	50.34	Peak	H	0.60	-	50.94	74.00	23.06
2347.30	53.30	Peak	V	-0.30	-	53.00	74.00	21.00


- Band edge

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2390.00	55.14	Peak	H	-0.22	-	54.92	74.00	19.08
2390.00	40.48	Average	H	-0.22	-	40.26	54.00	13.74
2388.83	53.57	Peak	V	-0.22	-	53.35	74.00	20.65
2388.83	39.23	Average	V	-0.22	-	39.01	54.00	14.99

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

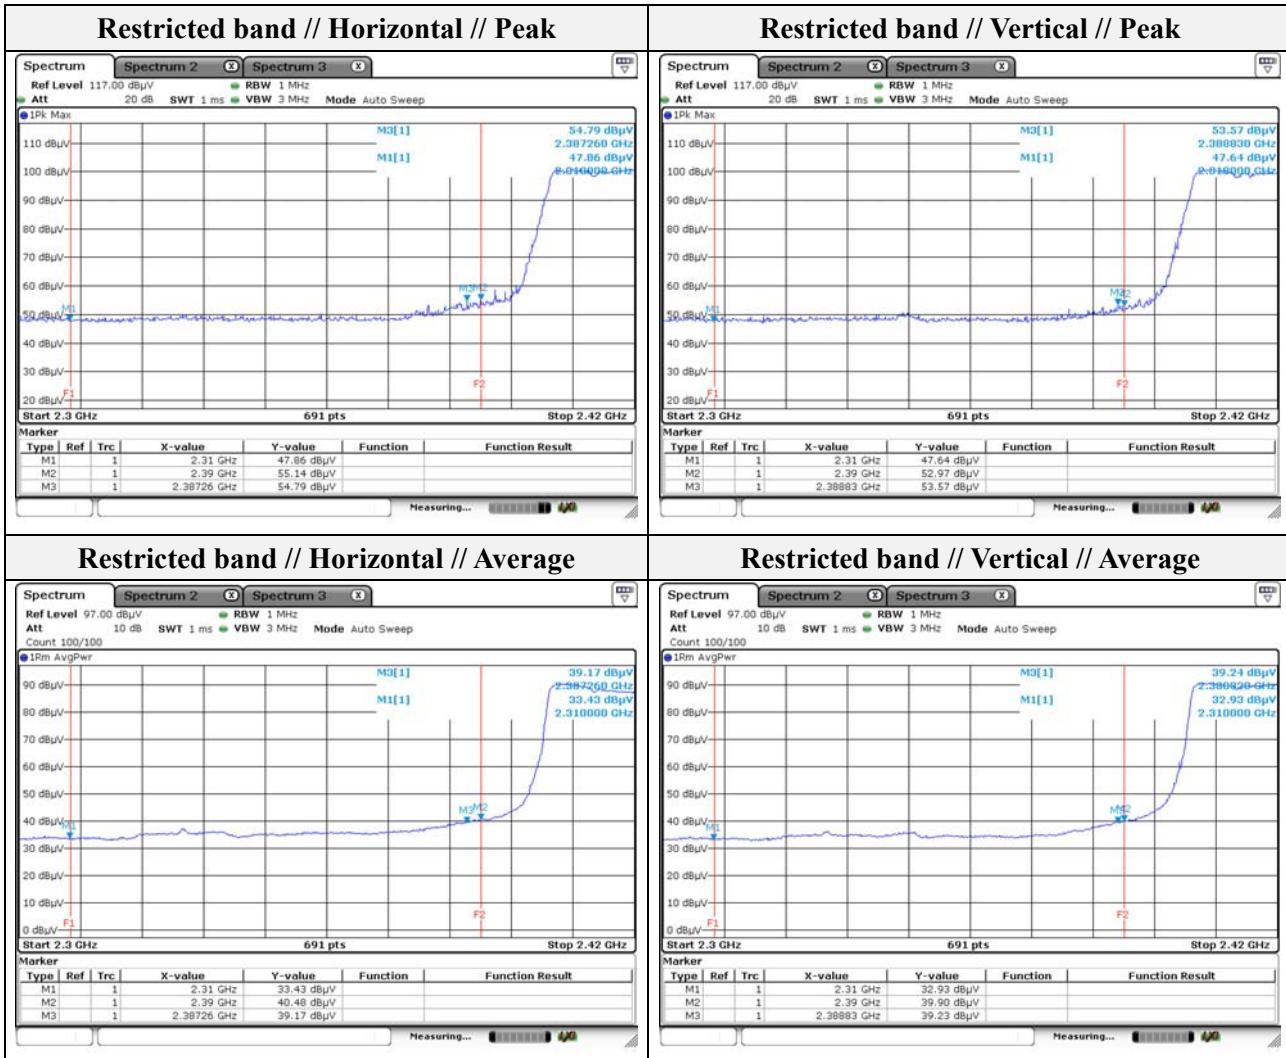

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

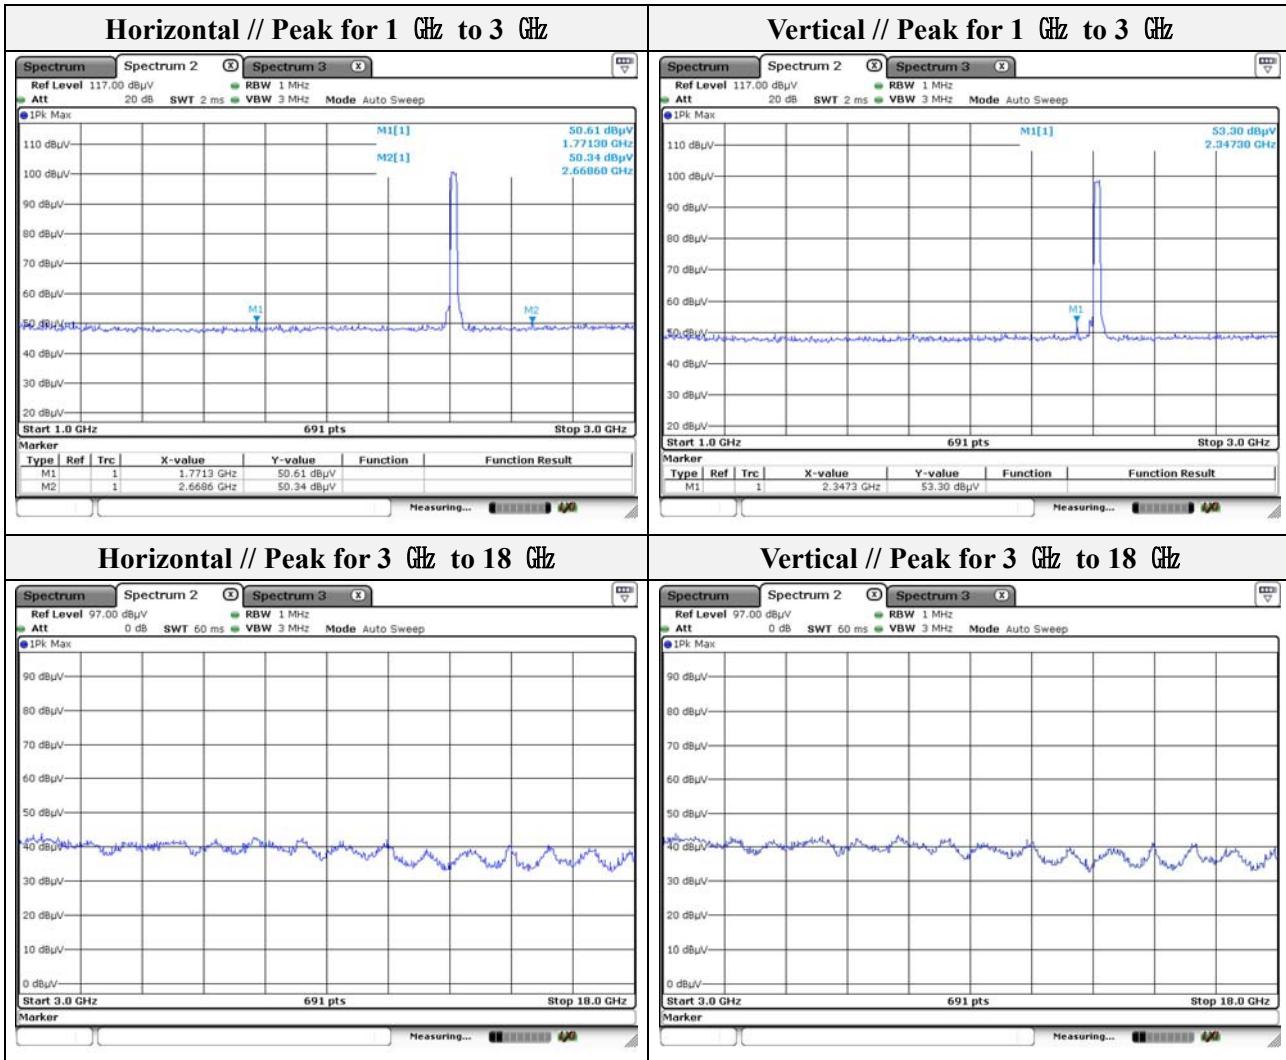

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:
KES-RF-17T0057
Page (44) of (65)

Mode: 802.11n(HT20)
Distance of measurement: 3 meter
Channel: 06

- Spurious

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1010.10	52.28	Peak	H	-9.08	-	43.20	74.00	30.80
1175.10	51.59	Peak	H	-8.02	-	43.57	74.00	30.43
2665.70	51.21	Peak	H	0.59	-	51.80	74.00	22.20
2347.30	51.02	Peak	V	-0.30	-	50.72	74.00	23.28

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

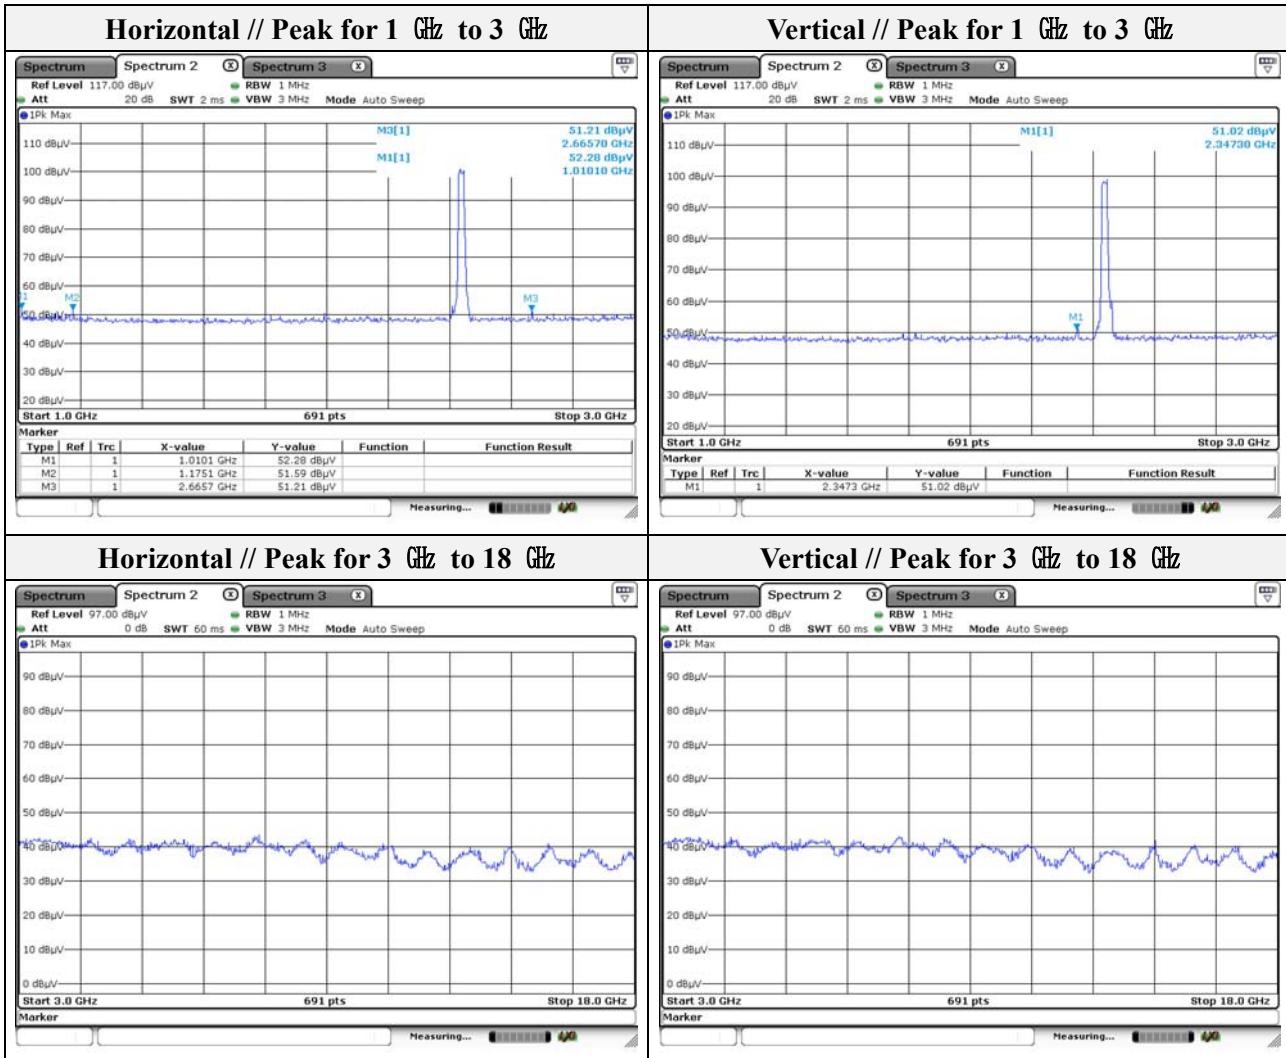

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11n(HT20)

Distance of measurement: 3 meter


Channel: 11

- Spurious


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1178.00	50.55	Peak	H	-8.00	-	42.55	74.00	31.45
2665.70	50.47	Peak	H	0.59	-	51.06	74.00	22.94
2347.30	50.46	Peak	V	-0.30	-	50.16	74.00	23.84

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2485.50	57.59	Peak	H	-0.04	-	57.55	74.00	16.45
2485.50	41.56	Average	H	-0.04	-	41.52	54.00	12.48
2484.41	56.11	Peak	V	-0.04	-	56.07	74.00	17.93
2484.41	42.30	Average	V	-0.04	-	42.26	54.00	11.74

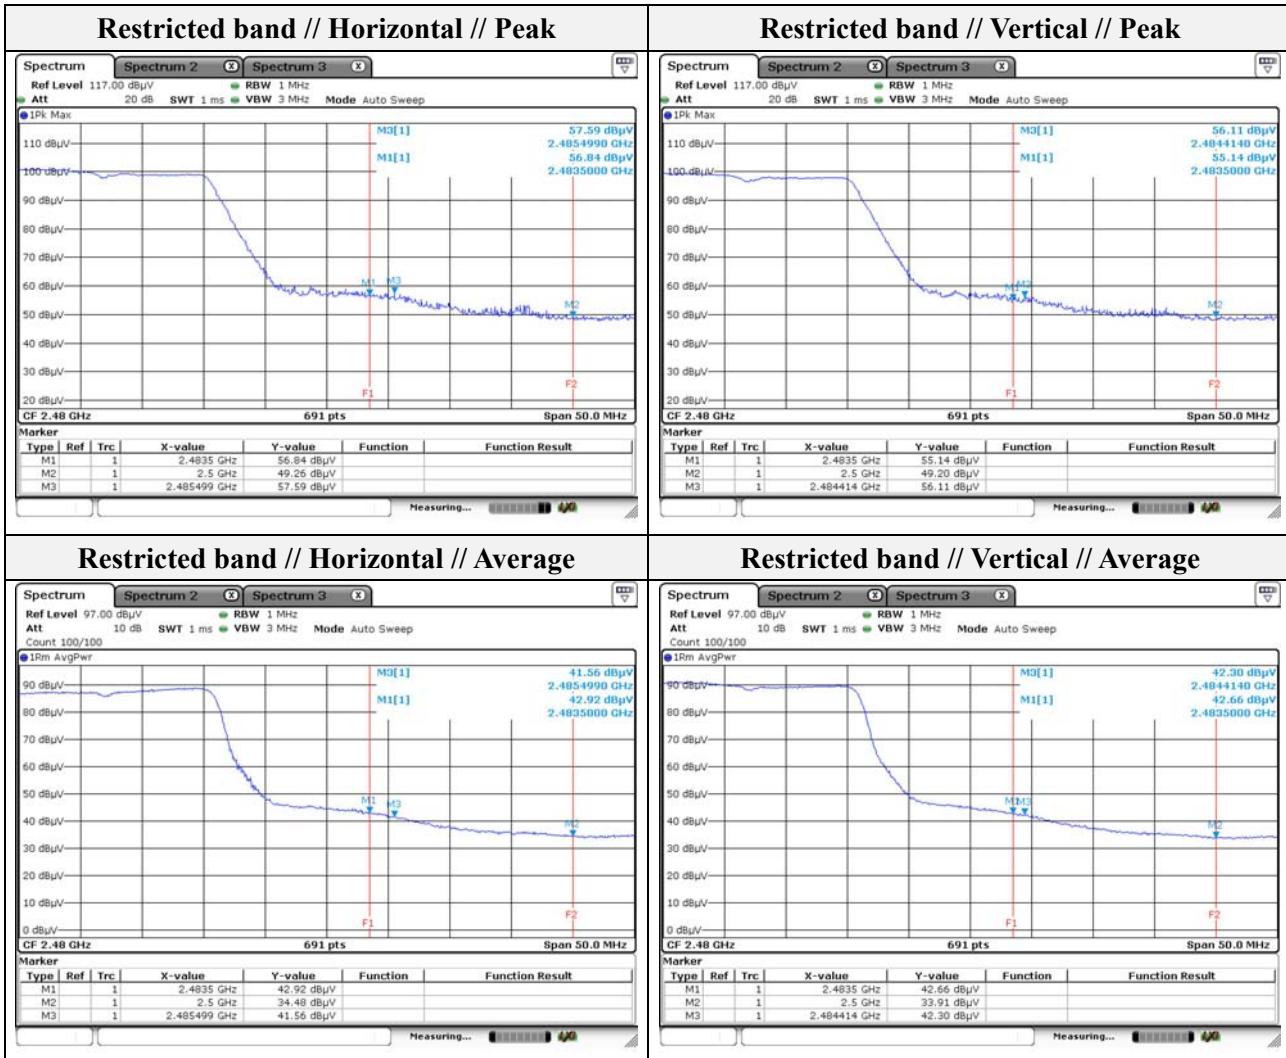

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

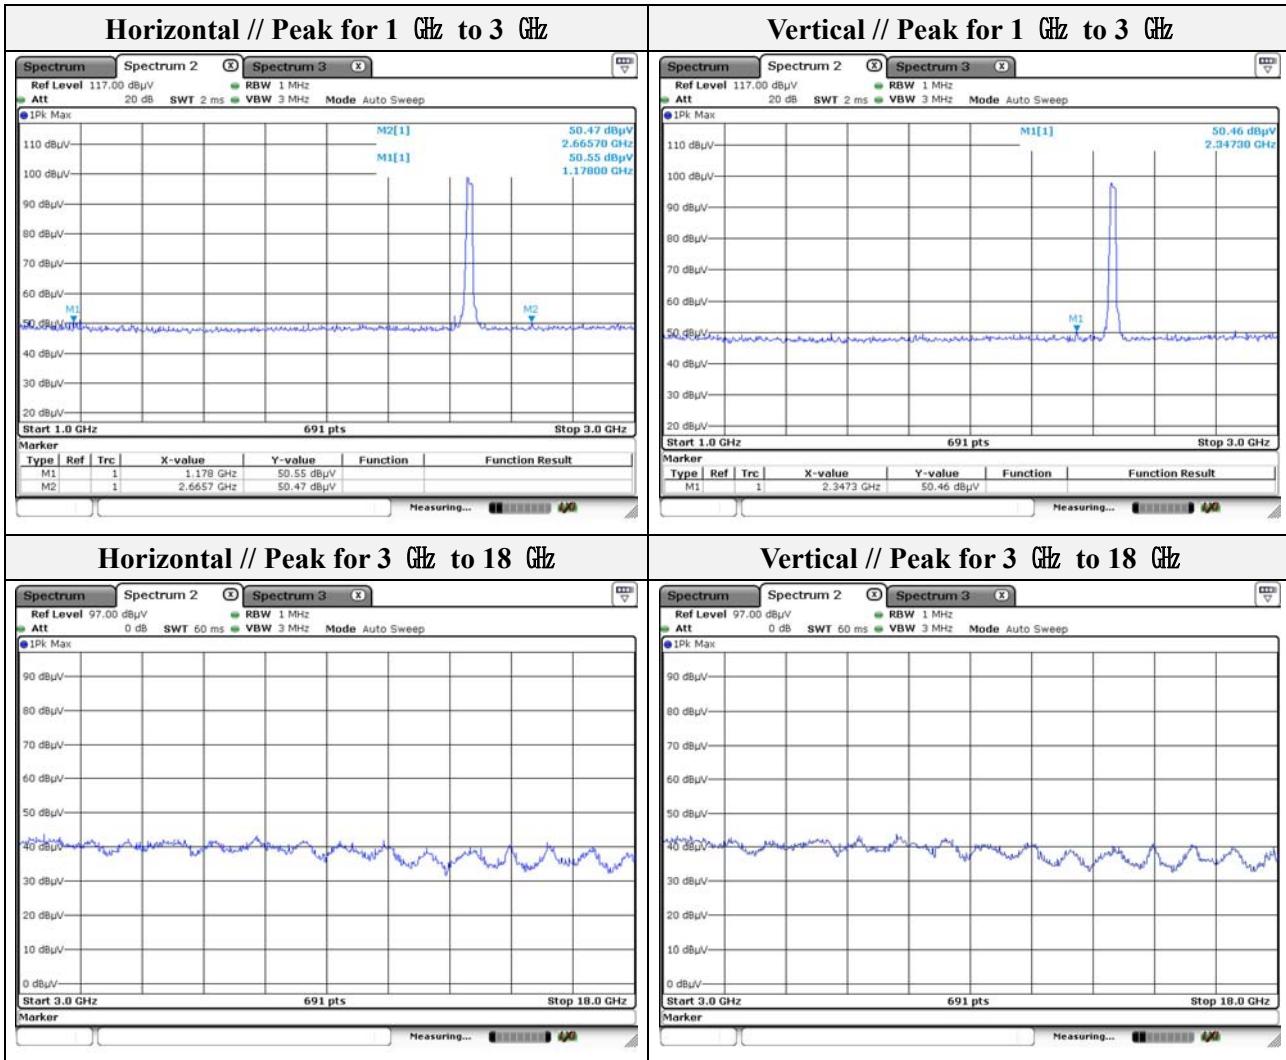

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11n(HT40)

Distance of measurement: 3 meter


Channel: 03

- Spurious


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2665.70	50.33	Peak	H	0.59	-	50.92	74.00	23.08
2350.20	50.92	Peak	V	-0.30	-	50.62	74.00	23.38

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2386.40	55.82	Peak	H	-0.23	-	55.59	74.00	18.41
2386.40	44.05	Average	H	-0.23	-	43.82	54.00	10.18
2386.05	54.68	Peak	V	-0.23	-	54.45	74.00	19.55
2386.05	41.38	Average	V	-0.23	-	41.15	54.00	12.85

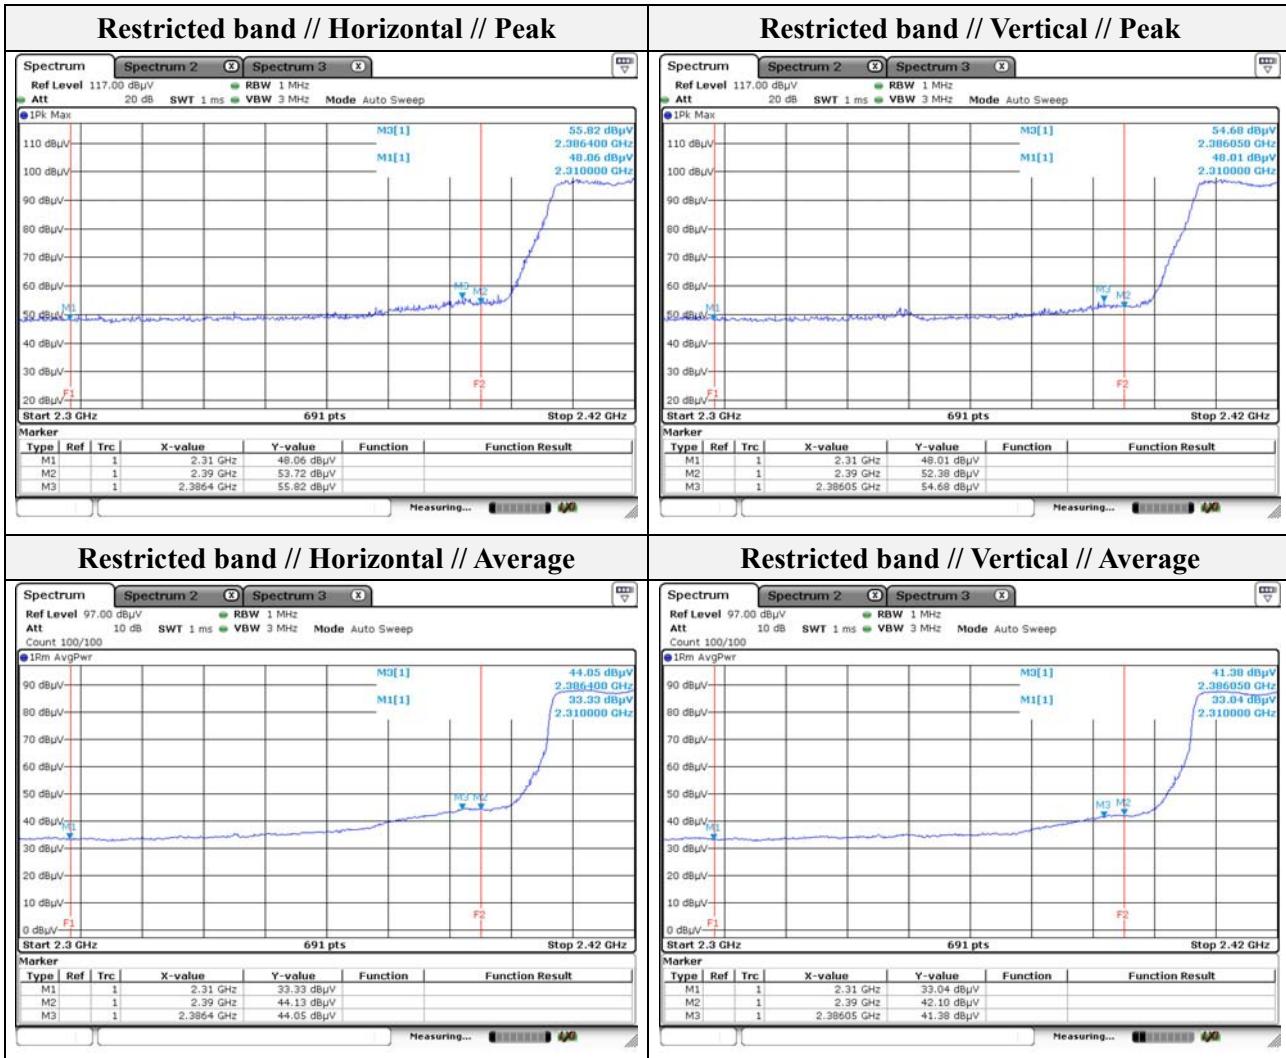

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

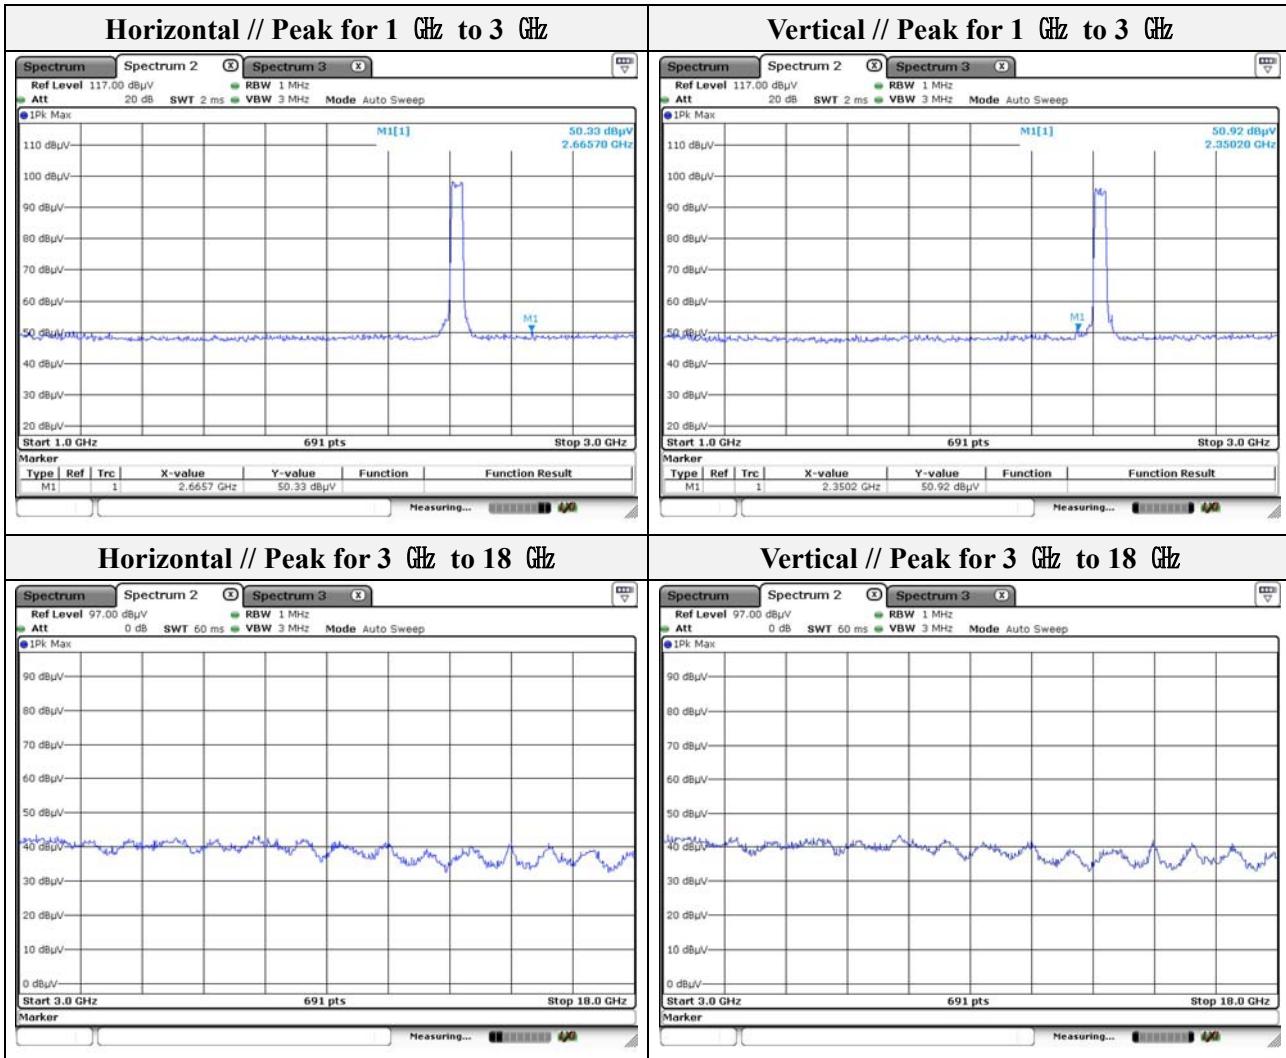

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11n(HT40)

Distance of measurement: 3 meter

Channel: 06

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2668.60	50.72	Peak	H	0.60	-	51.32	74.00	22.68
2347.30	52.14	Peak	V	-0.30	-	51.84	74.00	22.16
2975.40	50.76	Peak	V	1.71	-	52.47	74.00	21.53

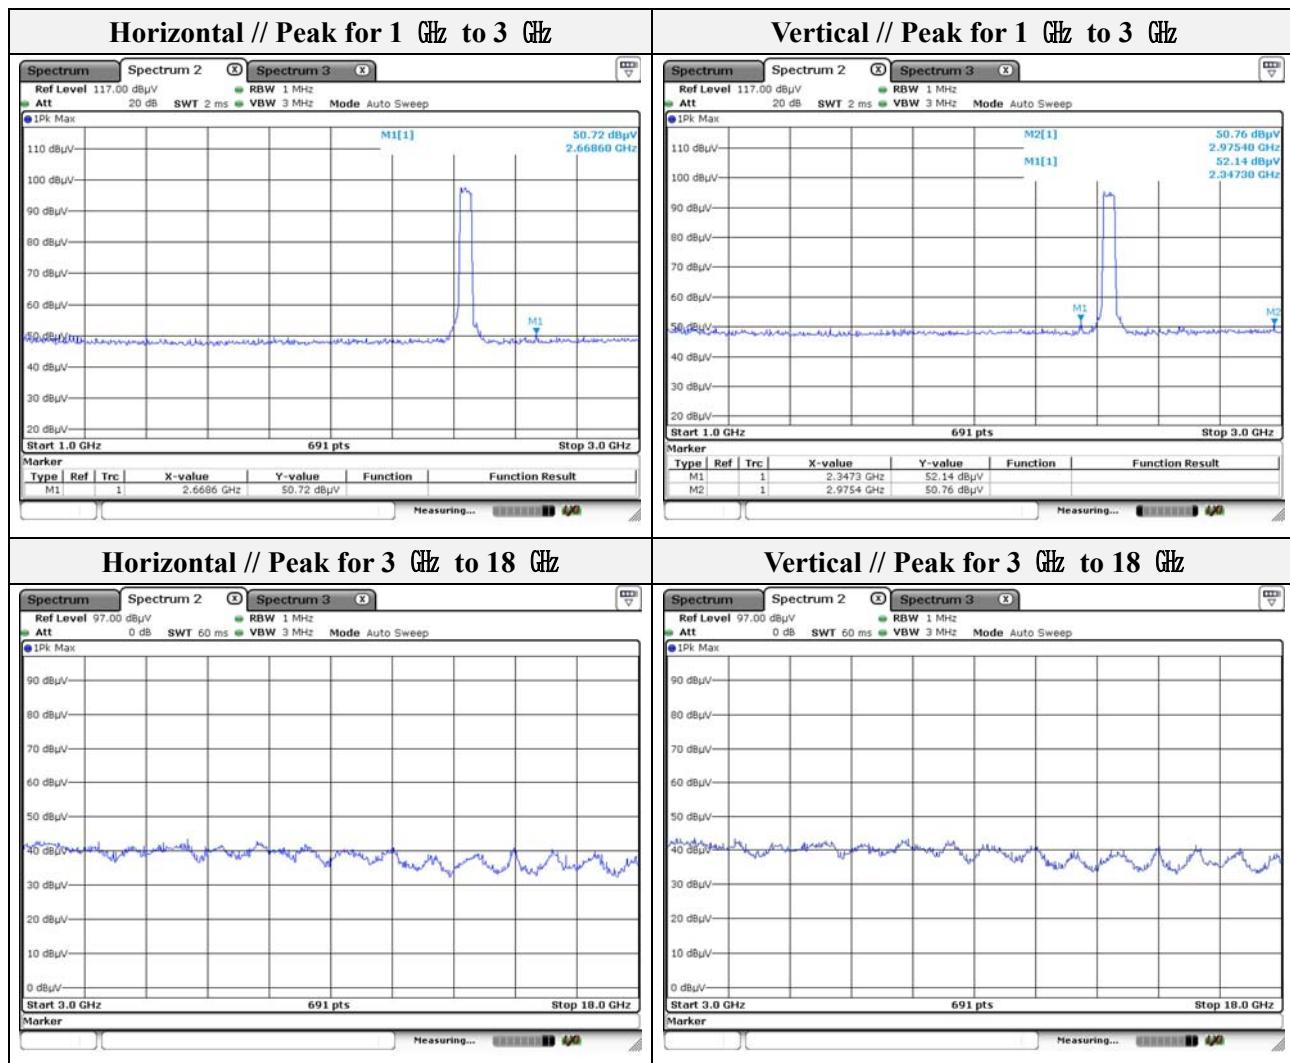

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11n(HT40)

Distance of measurement: 3 meter


Channel: 09

- Spurious


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1719.20	50.35	Peak	H	-3.85	-	46.50	74.00	27.50
2347.30	51.00	Peak	V	-0.30	-	50.70	74.00	23.30

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2484.70	57.91	Peak	H	-0.04	-	57.87	74.00	16.13
2484.70	44.11	Average	H	-0.04	-	44.07	54.00	9.93
2485.07	56.89	Peak	V	-0.04	-	56.85	74.00	17.15
2485.07	44.21	Average	V	-0.04	-	44.17	54.00	9.83

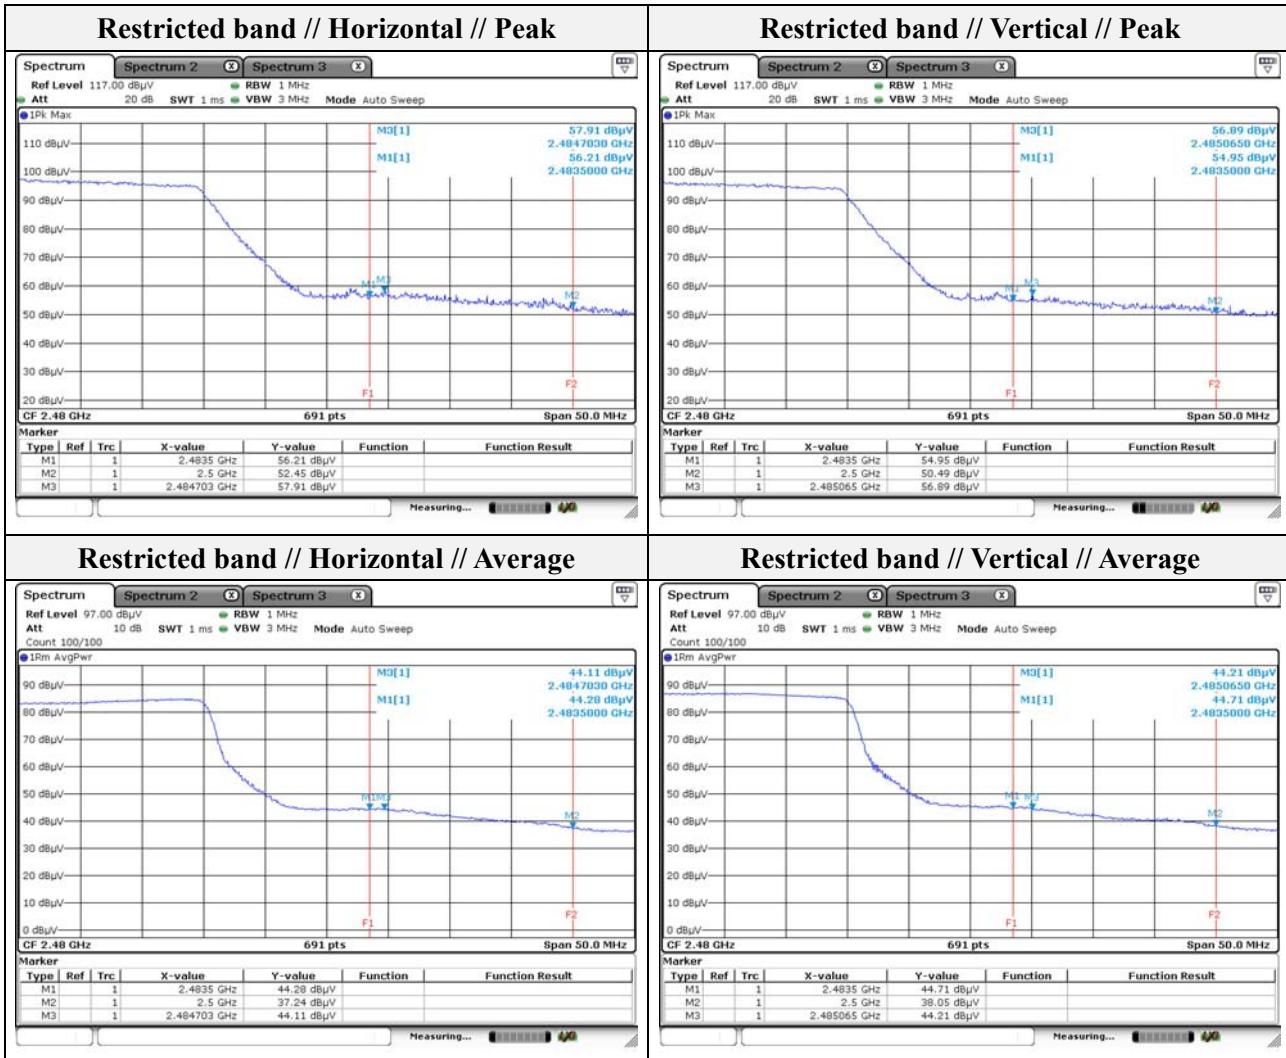

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

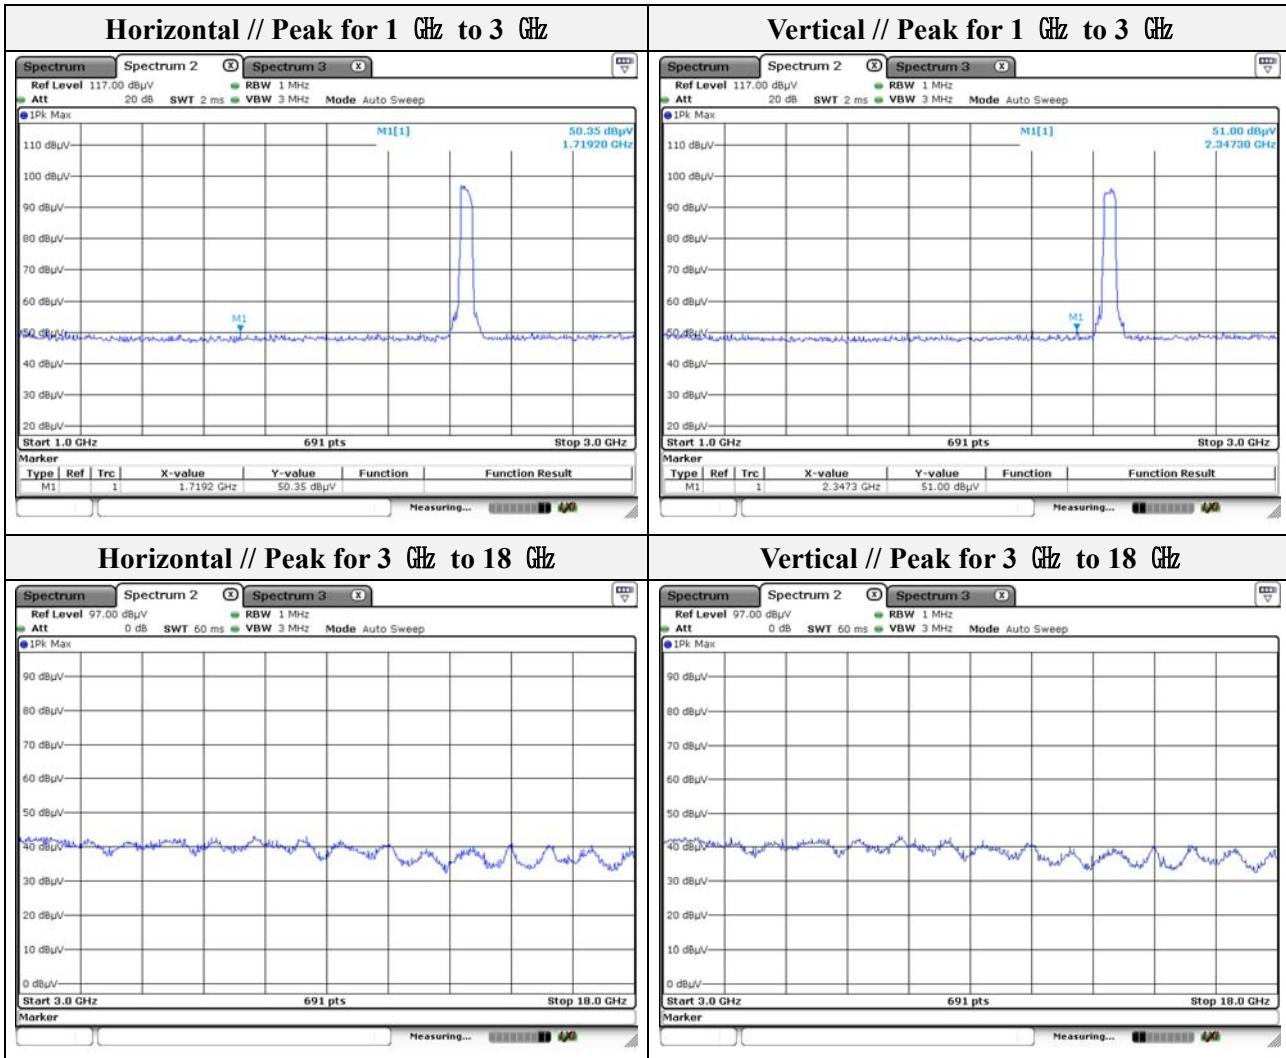

Note.


1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Test results (18 GHz to 30 GHz) – Worst case

Mode: 802.11b

Distance of measurement: 3 meter

Channel: 06 (Worst case)

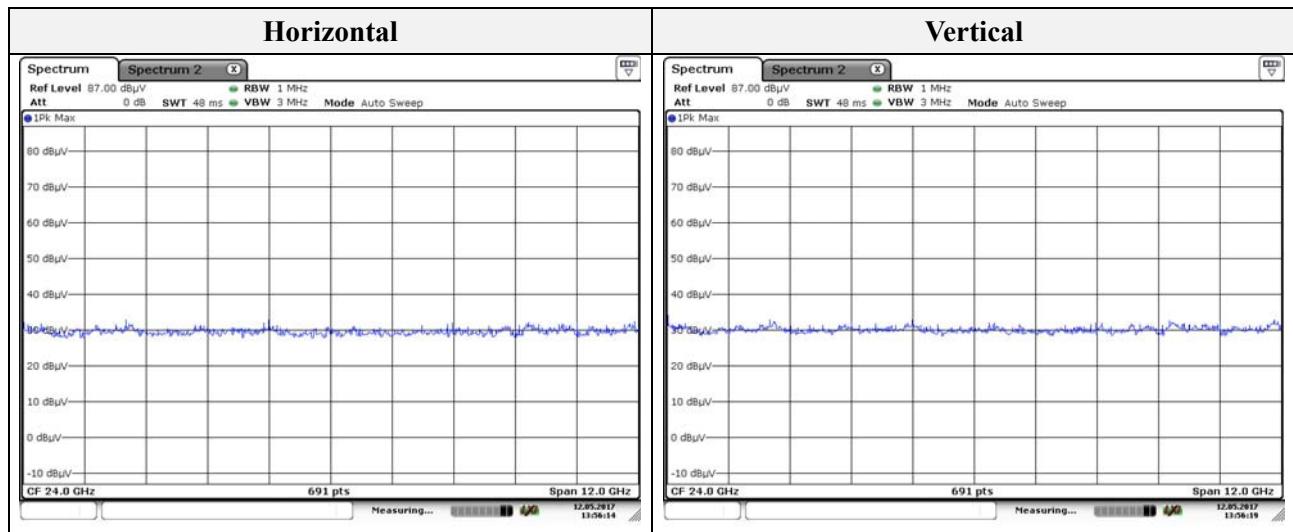

Note.

1. No spurious emission were detected above 18 GHz.

3.6. Conducted spurious emissions & band edge

Test procedure

Band edge

KDB 558074 D01 v04 – Section 11.3

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100 kHz
4. VBW = 300 kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Out of band emissions


KDB 558074 D01 v04 – Section 11.3

1. Start frequency was set to 30 MHz and stop frequency was set to 25 GHz for 2.4 GHz frequencies and 40 GHz for 5 GHz frequencies
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize


Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as defined in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))


According to RSS-247 5.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

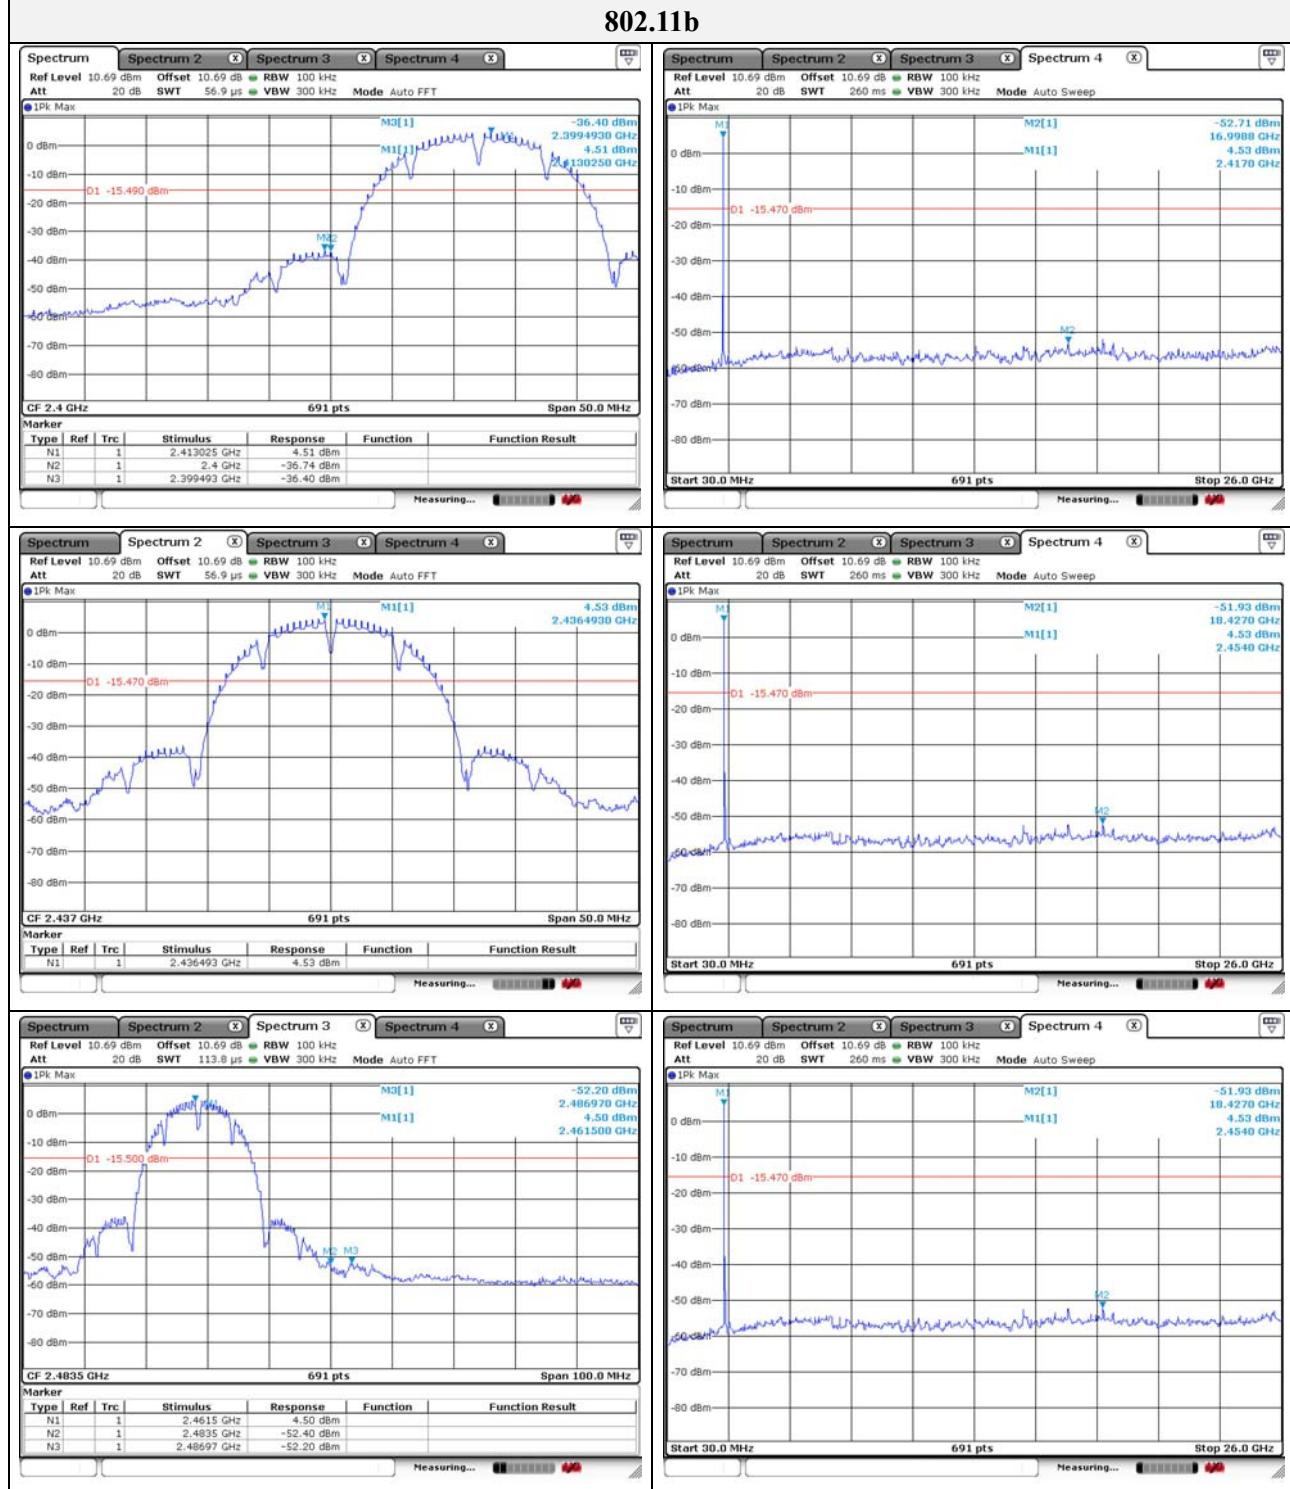Test results
802.11b


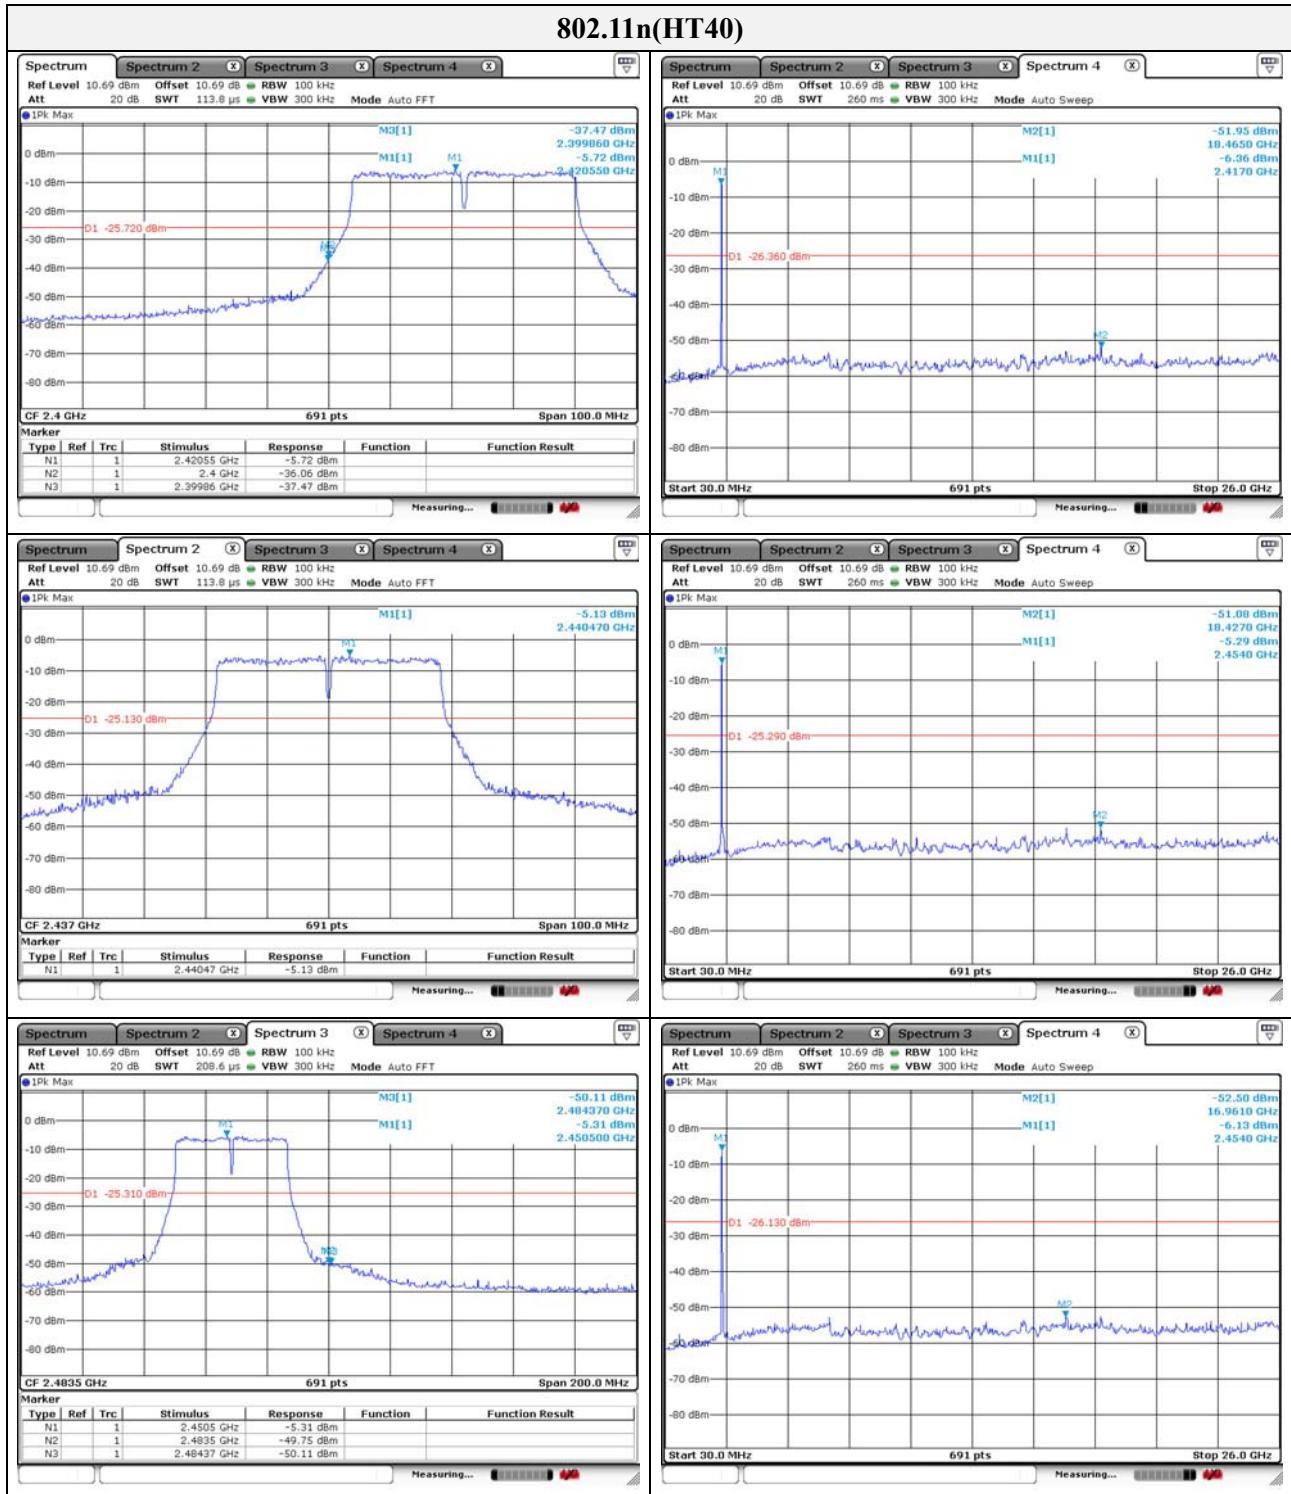
This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

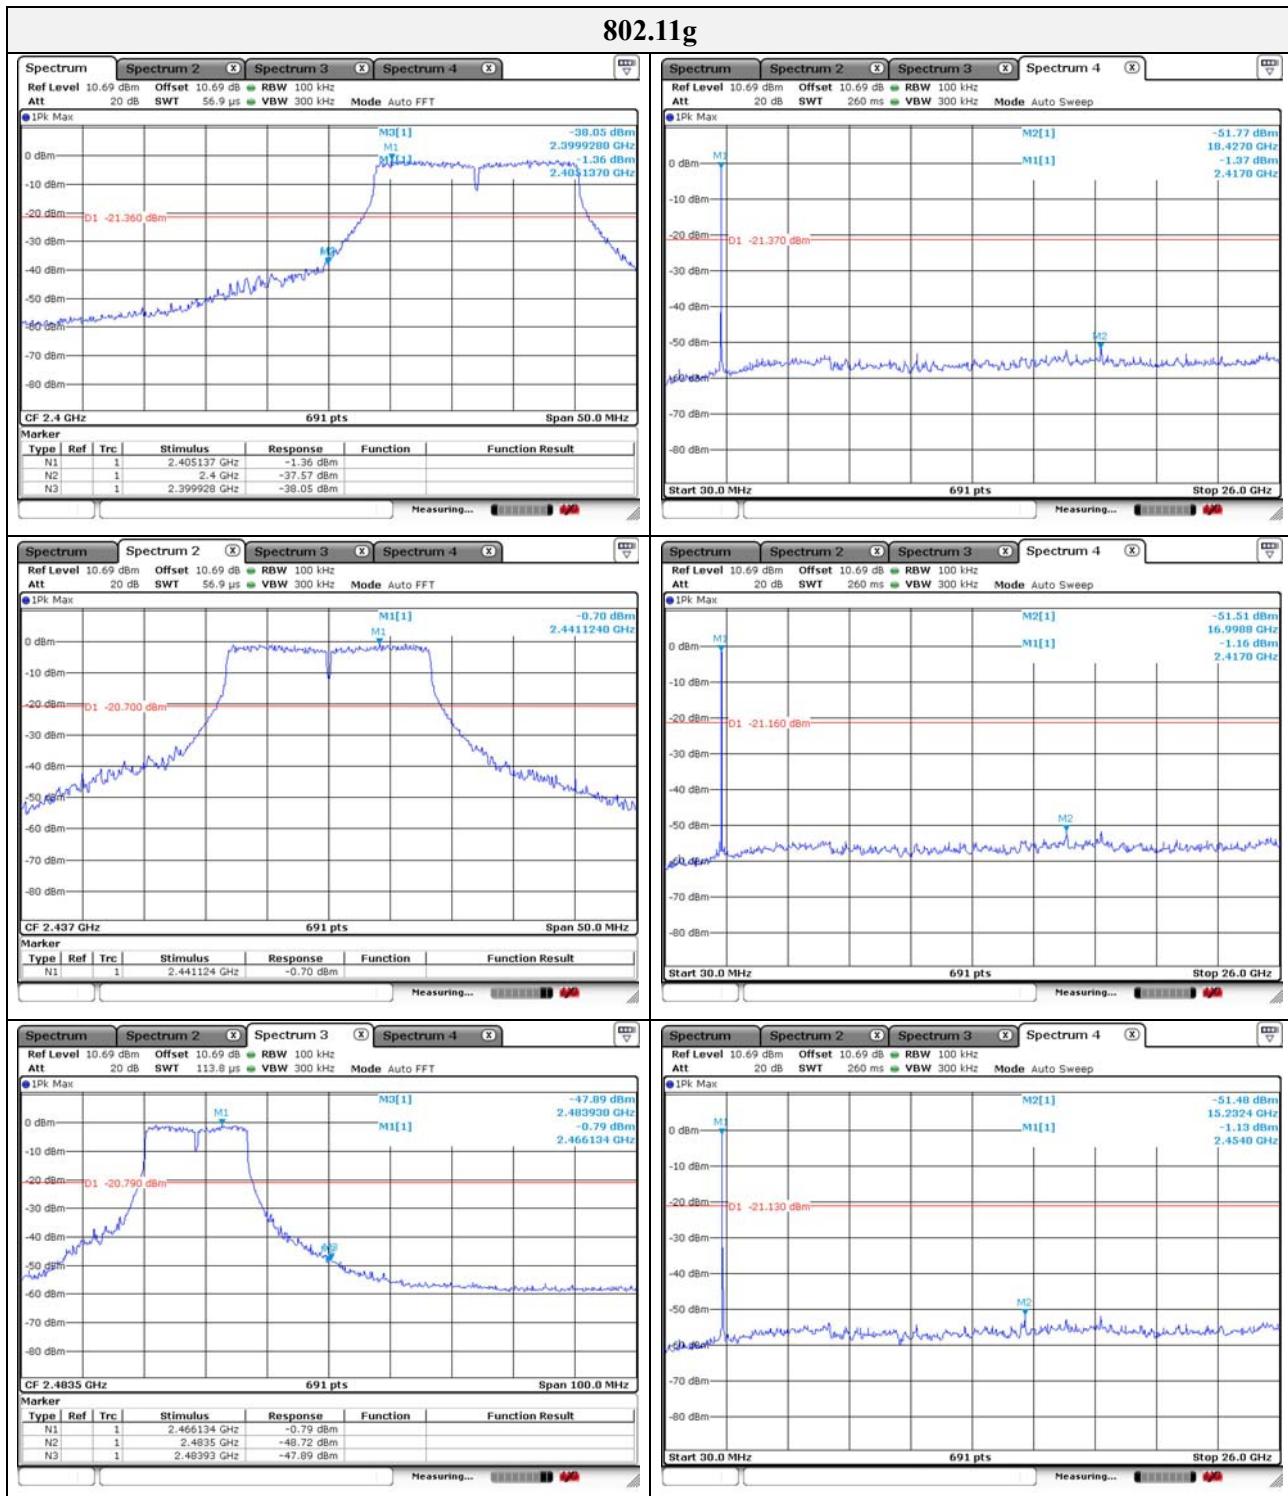

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

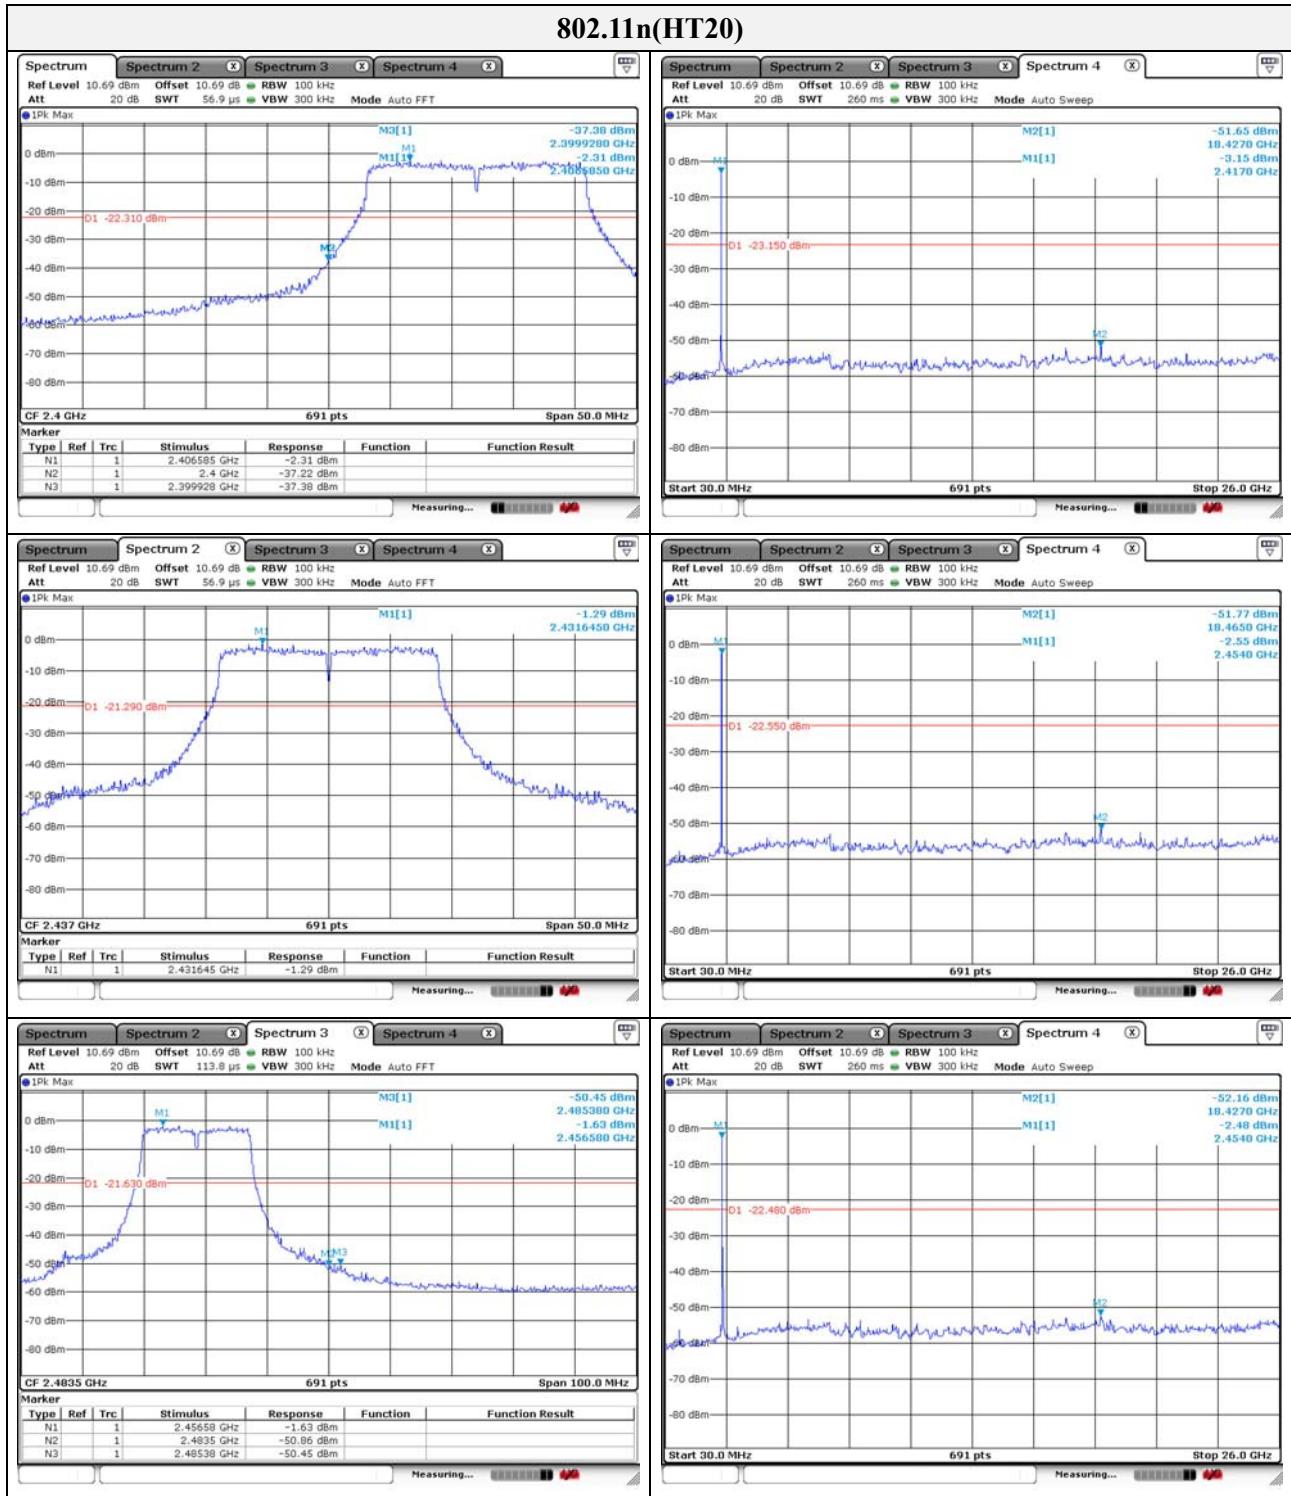

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.7. AC conducted emissions

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

According to RSS-Gen 8.8, a radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in Table 3.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 3 below. The more stringent limit applies at the frequency range boundaries.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50



* The level decreases linearly with the logarithm of the frequency.

* A linear average detector is required.

Note:

1. All AC line conducted spurious emission are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and the appropriate frequencies. All data rates and modes were investigated for conducted spurious emission. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.
2. Both Cable loss and LISN factor are included in measurement level (QP Level or AV Level).

Test results

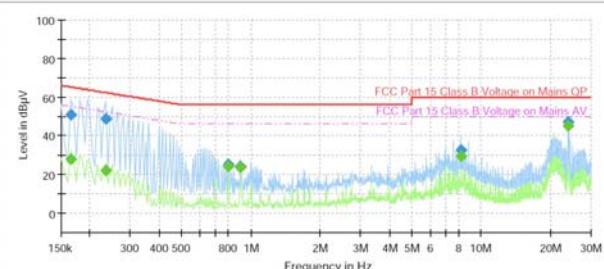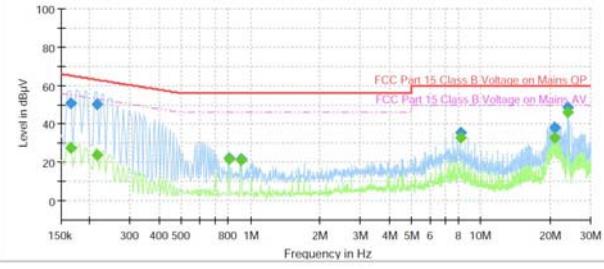Hot Line																																																																																																																																																	
										Final Result																																																																																																																																							
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>QuasiPeak (dBµV)</th><th>CAverage (dBµV)</th><th>Limit (dBµV)</th><th>Margin (dB)</th><th>Meas. Time (ms)</th><th>Bandwidth (kHz)</th><th>Line</th><th>Corr. (dB)</th></tr> </thead> <tbody> <tr><td>0.165000</td><td>51.08</td><td>---</td><td>65.21</td><td>14.13</td><td>1000.0</td><td>9.000</td><td>L1</td><td>21.0</td></tr> <tr><td>0.165000</td><td>---</td><td>28.14</td><td>55.21</td><td>27.07</td><td>1000.0</td><td>9.000</td><td>L1</td><td>21.0</td></tr> <tr><td>0.235000</td><td>---</td><td>22.24</td><td>52.27</td><td>30.03</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.8</td></tr> <tr><td>0.235000</td><td>48.94</td><td>---</td><td>62.27</td><td>13.33</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.8</td></tr> <tr><td>0.800000</td><td>---</td><td>24.40</td><td>46.00</td><td>21.60</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.3</td></tr> <tr><td>0.800000</td><td>25.20</td><td>---</td><td>56.00</td><td>30.80</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.3</td></tr> <tr><td>0.900000</td><td>24.48</td><td>---</td><td>56.00</td><td>31.52</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.2</td></tr> <tr><td>0.900000</td><td>---</td><td>23.70</td><td>46.00</td><td>22.30</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.2</td></tr> <tr><td>8.195000</td><td>32.82</td><td>---</td><td>60.00</td><td>27.18</td><td>1000.0</td><td>9.000</td><td>L1</td><td>19.8</td></tr> <tr><td>8.195000</td><td>---</td><td>29.42</td><td>50.00</td><td>20.58</td><td>1000.0</td><td>9.000</td><td>L1</td><td>19.8</td></tr> <tr><td>23.975000</td><td>47.24</td><td>---</td><td>60.00</td><td>12.76</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.3</td></tr> <tr><td>23.975000</td><td>---</td><td>45.08</td><td>50.00</td><td>4.92</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.3</td></tr> </tbody> </table>										Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	0.165000	51.08	---	65.21	14.13	1000.0	9.000	L1	21.0	0.165000	---	28.14	55.21	27.07	1000.0	9.000	L1	21.0	0.235000	---	22.24	52.27	30.03	1000.0	9.000	L1	20.8	0.235000	48.94	---	62.27	13.33	1000.0	9.000	L1	20.8	0.800000	---	24.40	46.00	21.60	1000.0	9.000	L1	20.3	0.800000	25.20	---	56.00	30.80	1000.0	9.000	L1	20.3	0.900000	24.48	---	56.00	31.52	1000.0	9.000	L1	20.2	0.900000	---	23.70	46.00	22.30	1000.0	9.000	L1	20.2	8.195000	32.82	---	60.00	27.18	1000.0	9.000	L1	19.8	8.195000	---	29.42	50.00	20.58	1000.0	9.000	L1	19.8	23.975000	47.24	---	60.00	12.76	1000.0	9.000	L1	20.3	23.975000	---	45.08	50.00	4.92	1000.0	9.000	L1	20.3	Final Result																		
Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)																																																																																																																																									
0.165000	51.08	---	65.21	14.13	1000.0	9.000	L1	21.0																																																																																																																																									
0.165000	---	28.14	55.21	27.07	1000.0	9.000	L1	21.0																																																																																																																																									
0.235000	---	22.24	52.27	30.03	1000.0	9.000	L1	20.8																																																																																																																																									
0.235000	48.94	---	62.27	13.33	1000.0	9.000	L1	20.8																																																																																																																																									
0.800000	---	24.40	46.00	21.60	1000.0	9.000	L1	20.3																																																																																																																																									
0.800000	25.20	---	56.00	30.80	1000.0	9.000	L1	20.3																																																																																																																																									
0.900000	24.48	---	56.00	31.52	1000.0	9.000	L1	20.2																																																																																																																																									
0.900000	---	23.70	46.00	22.30	1000.0	9.000	L1	20.2																																																																																																																																									
8.195000	32.82	---	60.00	27.18	1000.0	9.000	L1	19.8																																																																																																																																									
8.195000	---	29.42	50.00	20.58	1000.0	9.000	L1	19.8																																																																																																																																									
23.975000	47.24	---	60.00	12.76	1000.0	9.000	L1	20.3																																																																																																																																									
23.975000	---	45.08	50.00	4.92	1000.0	9.000	L1	20.3																																																																																																																																									
										Final Result																																																																																																																																							
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>QuasiPeak (dBµV)</th><th>CAverage (dBµV)</th><th>Limit (dBµV)</th><th>Margin (dB)</th><th>Meas. Time (ms)</th><th>Bandwidth (kHz)</th><th>Line</th><th>Corr. (dB)</th></tr> </thead> <tbody> <tr><td>0.165000</td><td>50.87</td><td>---</td><td>65.21</td><td>14.34</td><td>1000.0</td><td>9.000</td><td>N</td><td>21.0</td></tr> <tr><td>0.165000</td><td>---</td><td>27.31</td><td>55.21</td><td>27.90</td><td>1000.0</td><td>9.000</td><td>N</td><td>21.0</td></tr> <tr><td>0.215000</td><td>50.31</td><td>---</td><td>63.01</td><td>12.70</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.8</td></tr> <tr><td>0.215000</td><td>---</td><td>24.08</td><td>53.01</td><td>28.93</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.8</td></tr> <tr><td>0.805000</td><td>22.29</td><td>---</td><td>56.00</td><td>33.71</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.3</td></tr> <tr><td>0.805000</td><td>---</td><td>21.65</td><td>46.00</td><td>24.35</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.3</td></tr> <tr><td>0.905000</td><td>21.70</td><td>---</td><td>56.00</td><td>34.30</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.2</td></tr> <tr><td>0.905000</td><td>---</td><td>21.10</td><td>46.00</td><td>24.90</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.2</td></tr> <tr><td>8.205000</td><td>35.37</td><td>---</td><td>60.00</td><td>24.63</td><td>1000.0</td><td>9.000</td><td>N</td><td>19.8</td></tr> <tr><td>8.205000</td><td>---</td><td>32.66</td><td>50.00</td><td>17.34</td><td>1000.0</td><td>9.000</td><td>N</td><td>19.8</td></tr> <tr><td>20.925000</td><td>37.97</td><td>---</td><td>60.00</td><td>22.03</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.2</td></tr> <tr><td>20.925000</td><td>---</td><td>32.61</td><td>50.00</td><td>17.39</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.2</td></tr> <tr><td>23.975000</td><td>46.22</td><td>---</td><td>60.00</td><td>3.78</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.2</td></tr> <tr><td>23.975000</td><td>48.66</td><td>---</td><td>60.00</td><td>11.34</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.2</td></tr> </tbody> </table>										Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	0.165000	50.87	---	65.21	14.34	1000.0	9.000	N	21.0	0.165000	---	27.31	55.21	27.90	1000.0	9.000	N	21.0	0.215000	50.31	---	63.01	12.70	1000.0	9.000	N	20.8	0.215000	---	24.08	53.01	28.93	1000.0	9.000	N	20.8	0.805000	22.29	---	56.00	33.71	1000.0	9.000	N	20.3	0.805000	---	21.65	46.00	24.35	1000.0	9.000	N	20.3	0.905000	21.70	---	56.00	34.30	1000.0	9.000	N	20.2	0.905000	---	21.10	46.00	24.90	1000.0	9.000	N	20.2	8.205000	35.37	---	60.00	24.63	1000.0	9.000	N	19.8	8.205000	---	32.66	50.00	17.34	1000.0	9.000	N	19.8	20.925000	37.97	---	60.00	22.03	1000.0	9.000	N	20.2	20.925000	---	32.61	50.00	17.39	1000.0	9.000	N	20.2	23.975000	46.22	---	60.00	3.78	1000.0	9.000	N	20.2	23.975000	48.66	---	60.00	11.34	1000.0	9.000	N	20.2	Final Result
Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)																																																																																																																																									
0.165000	50.87	---	65.21	14.34	1000.0	9.000	N	21.0																																																																																																																																									
0.165000	---	27.31	55.21	27.90	1000.0	9.000	N	21.0																																																																																																																																									
0.215000	50.31	---	63.01	12.70	1000.0	9.000	N	20.8																																																																																																																																									
0.215000	---	24.08	53.01	28.93	1000.0	9.000	N	20.8																																																																																																																																									
0.805000	22.29	---	56.00	33.71	1000.0	9.000	N	20.3																																																																																																																																									
0.805000	---	21.65	46.00	24.35	1000.0	9.000	N	20.3																																																																																																																																									
0.905000	21.70	---	56.00	34.30	1000.0	9.000	N	20.2																																																																																																																																									
0.905000	---	21.10	46.00	24.90	1000.0	9.000	N	20.2																																																																																																																																									
8.205000	35.37	---	60.00	24.63	1000.0	9.000	N	19.8																																																																																																																																									
8.205000	---	32.66	50.00	17.34	1000.0	9.000	N	19.8																																																																																																																																									
20.925000	37.97	---	60.00	22.03	1000.0	9.000	N	20.2																																																																																																																																									
20.925000	---	32.61	50.00	17.39	1000.0	9.000	N	20.2																																																																																																																																									
23.975000	46.22	---	60.00	3.78	1000.0	9.000	N	20.2																																																																																																																																									
23.975000	48.66	---	60.00	11.34	1000.0	9.000	N	20.2																																																																																																																																									

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-17T0057
Page (64) of (65)

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV30	100736	1 year	2017.07.06
Spectrum Analyzer	R&S	FSV40	101002	1 year	2017.07.06
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2018.01.23
Power Meter	Anritsu	ML2495A	1438001	1 year	2018.01.23
Pluse Power Sensor	Anritsu	MA2411B	1339205	1 year	2018.01.23
AC Power Supply	HP	6813A	3729A00754	1 year	2018.01.19
Attenuator	Agilent	8493C	82506	1 year	2018.01.23
Loop Antenna	ETS-LINDGRREN	6502	00148046	2 years	2019.01.05
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-714	2 years	2018.11.28
Horn Antenna	A.H	SAS-571	414	2 years	2019.02.15
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170550	2 years	2019.02.15
High Pass Filter	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2017.07.04
Low Pass Filter	WEINSCHEL	WLK1.0/18G-10TT	1	1 year	2017.07.04
Preamplifier	HP	8449B	3008A00538	1 year	2017.07.05
Preamplifier	SCHWARZBECK	BBV-9718	9718-246	1 year	2017.10.14
EMI Test Receiver	R&S	ESR3	101781	1 year	2018.04.27
EMI Test Receiver	R&S	ESU26	100552	1 year	2018.04.19
LISN	R&S	ENV216	101137	1 year	2018.02.03

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	Samsung Electronics Co., Ltd.	NT-RV518-AD6S	HTK99NC600207R
Test Board	N/A	N/A	N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.