



FCC RADIO TEST REPORT

FCC ID : NM82Q6U100
Equipment : Smart Hub
Model name : 2Q6U100
Applicant : HTC Corporation
No. 88, Sec. 3, Zhongxing Rd., Xindian
Dist., New Taipei City 231, Taiwan (R.O.C.)
Manufacturer : HTC Corporation
No. 88, Sec. 3, Zhongxing Rd., Xindian
Dist., New Taipei City 231, Taiwan (R.O.C.)
Standard : FCC Part 15 Subpart E §15.407

The product was received on Dec. 20, 2018 and testing was started from Dec. 27, 2018 and completed on Mar. 09, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 5

 1.3 Testing Location 5

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode 8

 2.3 Connection Diagram of Test System 9

 2.4 Support Unit used in test configuration and system 9

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 Test Result 11

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 11

 3.2 Maximum Conducted Output Power Measurement 14

 3.3 Power Spectral Density Measurement 15

 3.4 Unwanted Emissions Measurement 18

 3.5 AC Conducted Emission Measurement..... 23

 3.6 Automatically Discontinue Transmission 25

 3.7 Antenna Requirements 26

4 List of Measuring Equipment..... 27

5 Uncertainty of Evaluation 29

Appendix A. Conducted Test Results

Appendix B. AC Conducted Emission Test Result

Appendix C. Radiated Spurious Emission

Appendix D. Radiated Spurious Emission Plots

Appendix E. Duty Cycle Plots

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407 (a)	Maximum Conducted Output Power	Pass	-
3.3	15.407 (a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 9.92 dB at 5650.400 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 12.86 dB at 0.418 MHz
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Yimin Ho



1 General Description

1.1 Product Feature of Equipment Under Test

LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, WiGig, and 5G NR.

Product Specification subjective to this standard	
Antenna Type	WWAN: <Ant. 1>: Fixed Internal PIFA Antenna <Ant. 2>: Fixed Internal Dipole Antenna <Ant. 3>: Fixed Internal PCB Antenna WLAN: <Ant. 1>: Fixed Internal PCB Antenna <Ant. 2>: Fixed Internal PIFA Antenna Bluetooth: Fixed Internal PCB Antenna WiGig: Fixed Internal Array Antenna 5G NR: Fixed Internal PCB Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH15-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No. TW1190 and TW0007



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y Plane for Ant. 2 and Z plane for Ant. 1 and Ant.1+2) were recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
- 2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Single Mode

Modulation	Data Rate
802.11a	6 Mbps


MIMO Mode

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : LTE Band 5 Idle + Bluetooth Link + WLAN (5GHz) Link + WiGig On + H-Pattern + LAN Link + Adapter + USB Data Link with Notebook
Remark: Data Link with Notebook means data application transferred mode between EUT and Notebook.	

Ch. #	Band IV : 5725-5850 MHz			
	802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L Low	149	149	151	-
M Middle	157	157	-	155
H High	165	165	159	-

2.3 Connection Diagram of Test System

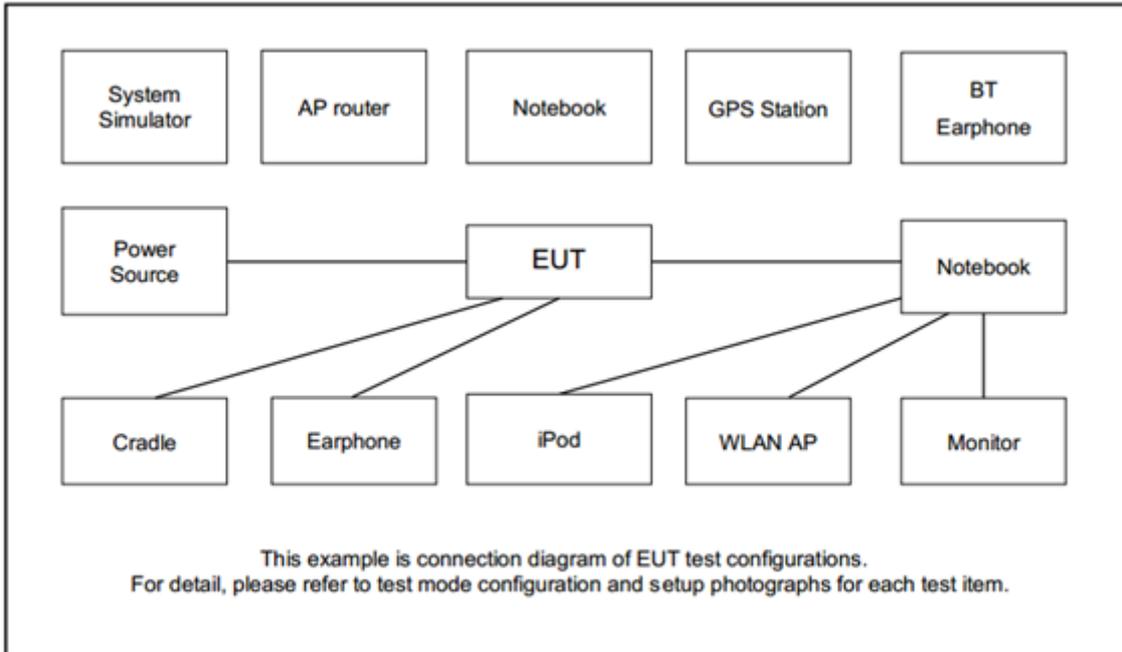

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Notebook	DELL	P20G	FCC DoC/ Contains FCC ID: QDS-BRCM1051	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	Notebook	Lenovo	L570	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

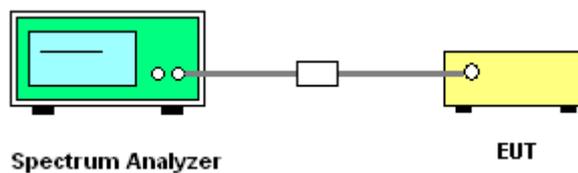

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

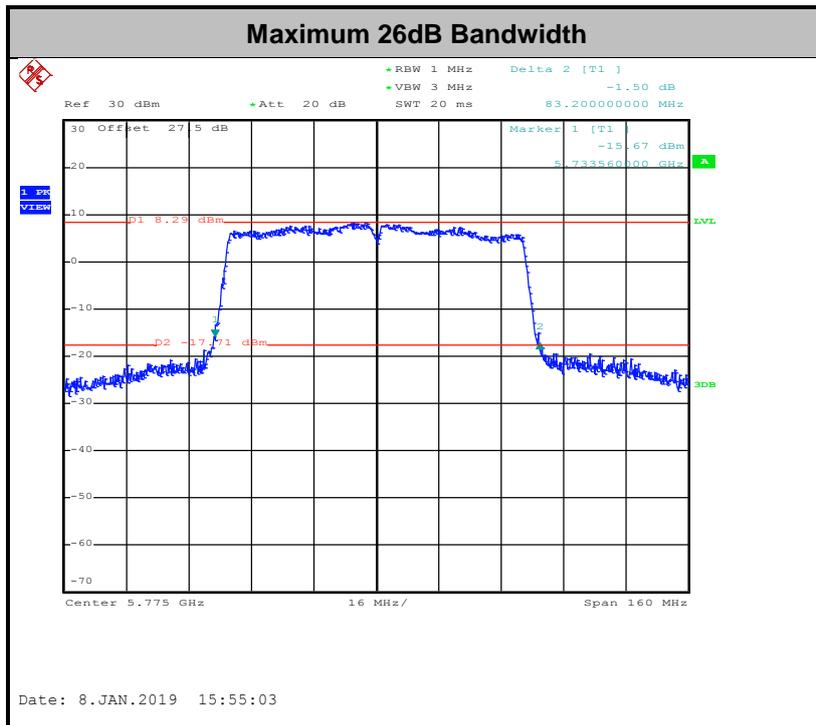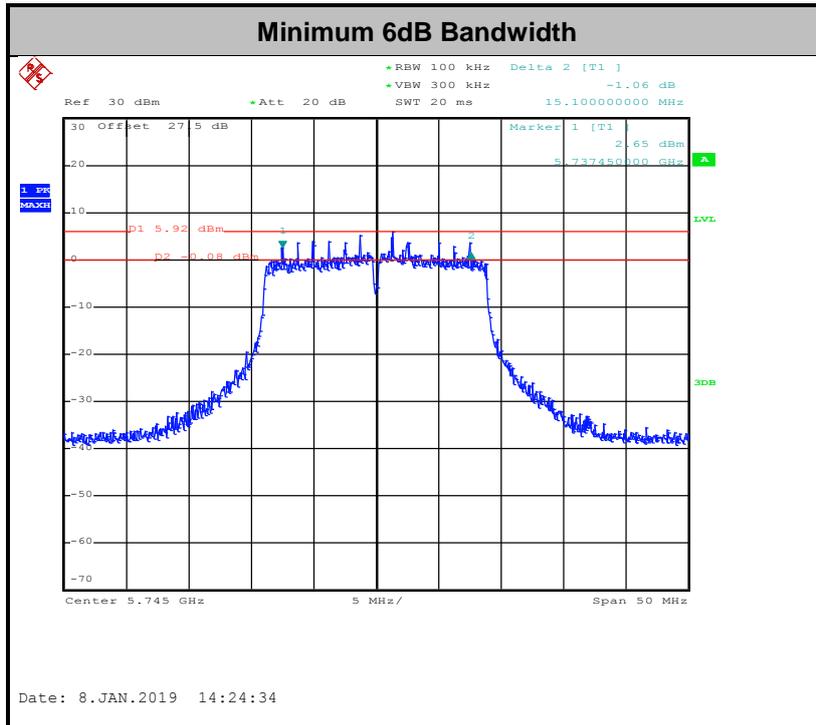

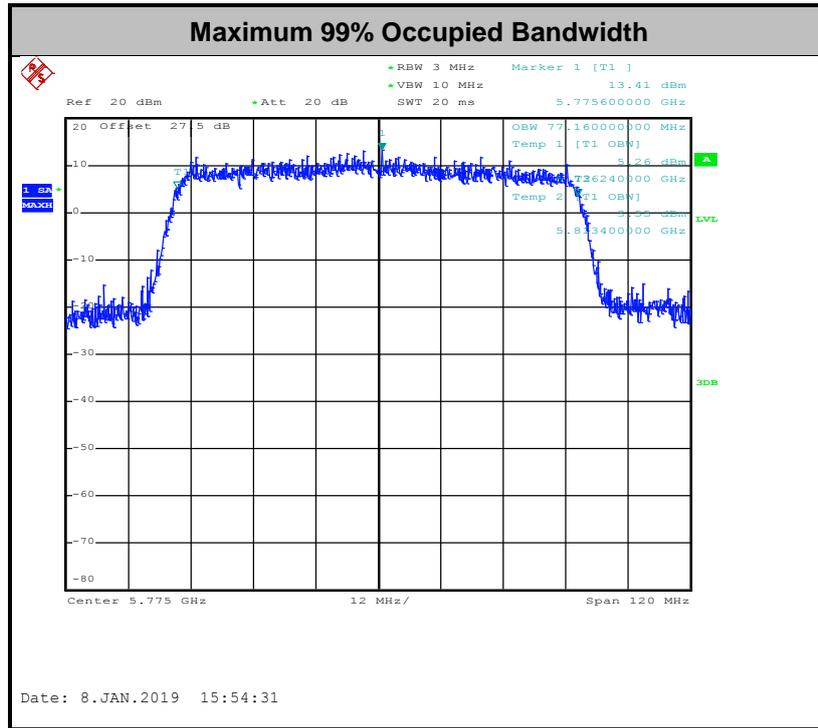

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

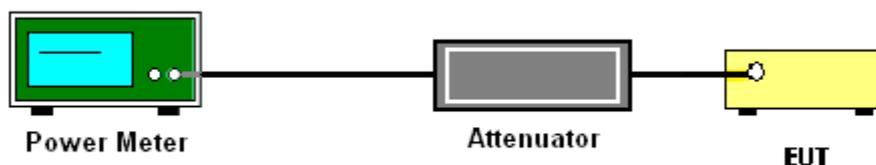

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{th}$ of the PSD limit.



3.3.4 Test Setup

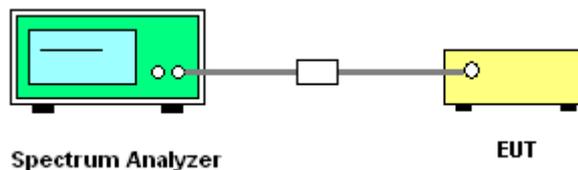



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

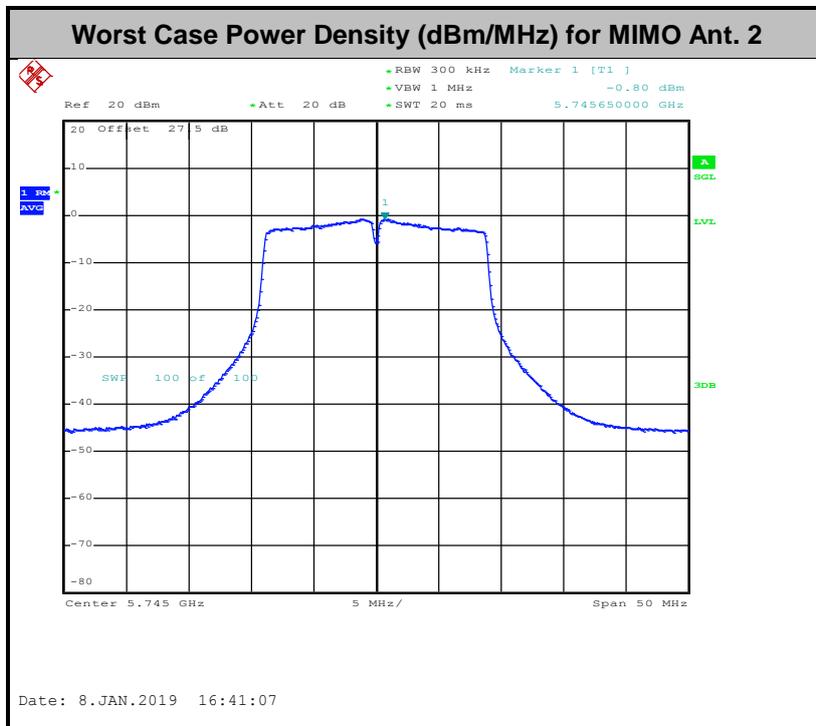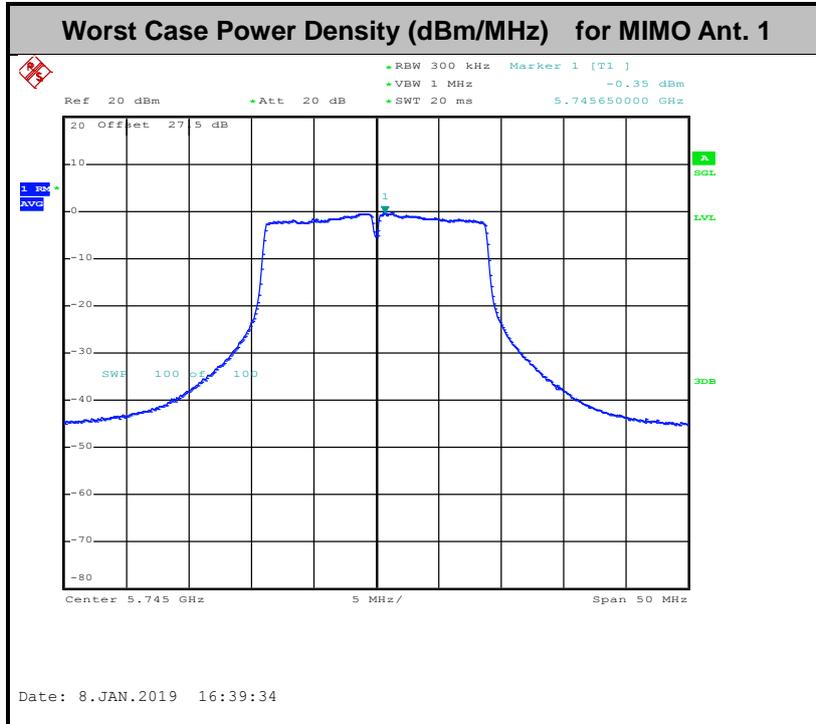



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3



(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

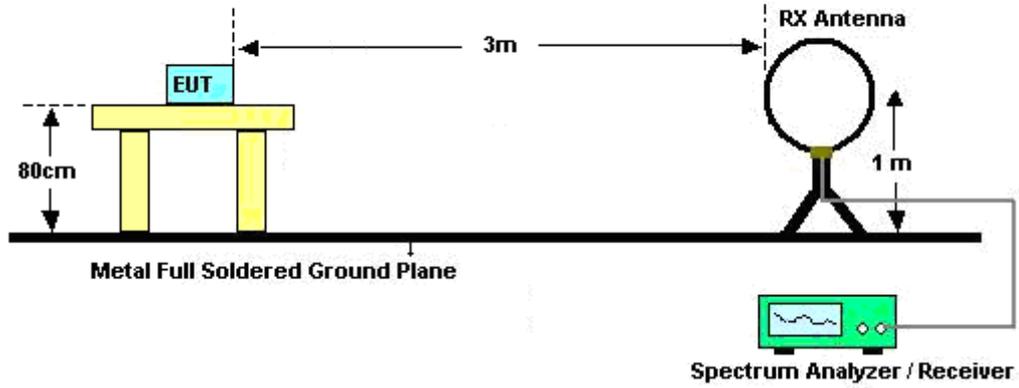

For radiated emissions from 30MHz to 1GHz

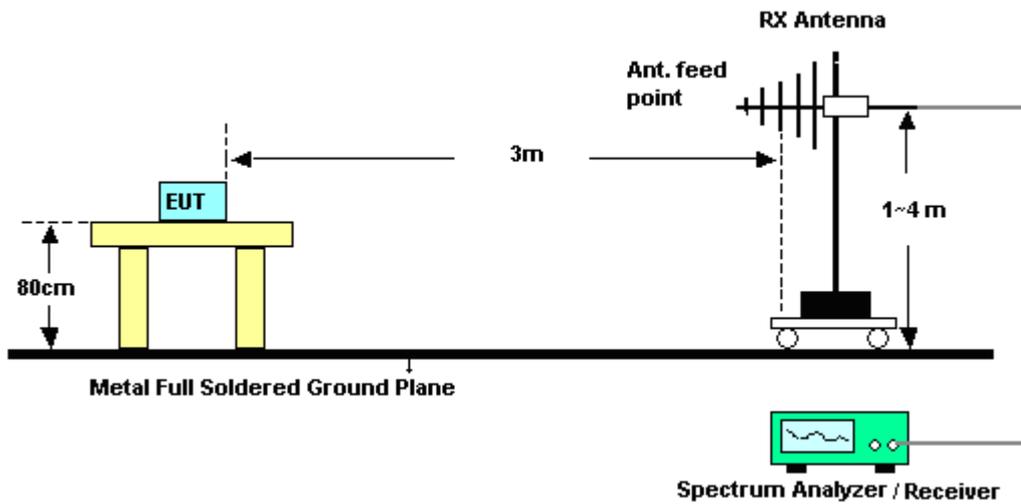

For radiated emissions above 1GHz

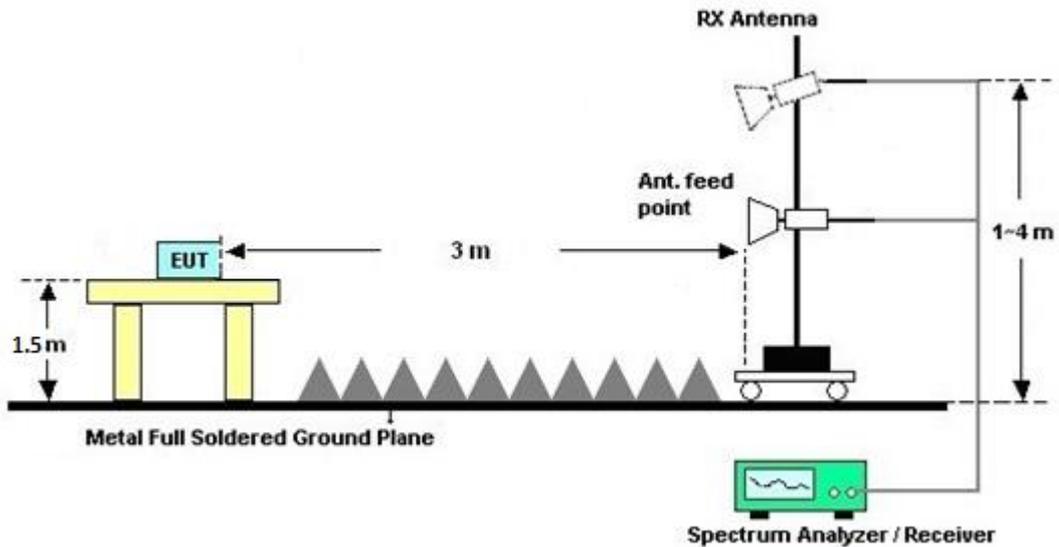

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

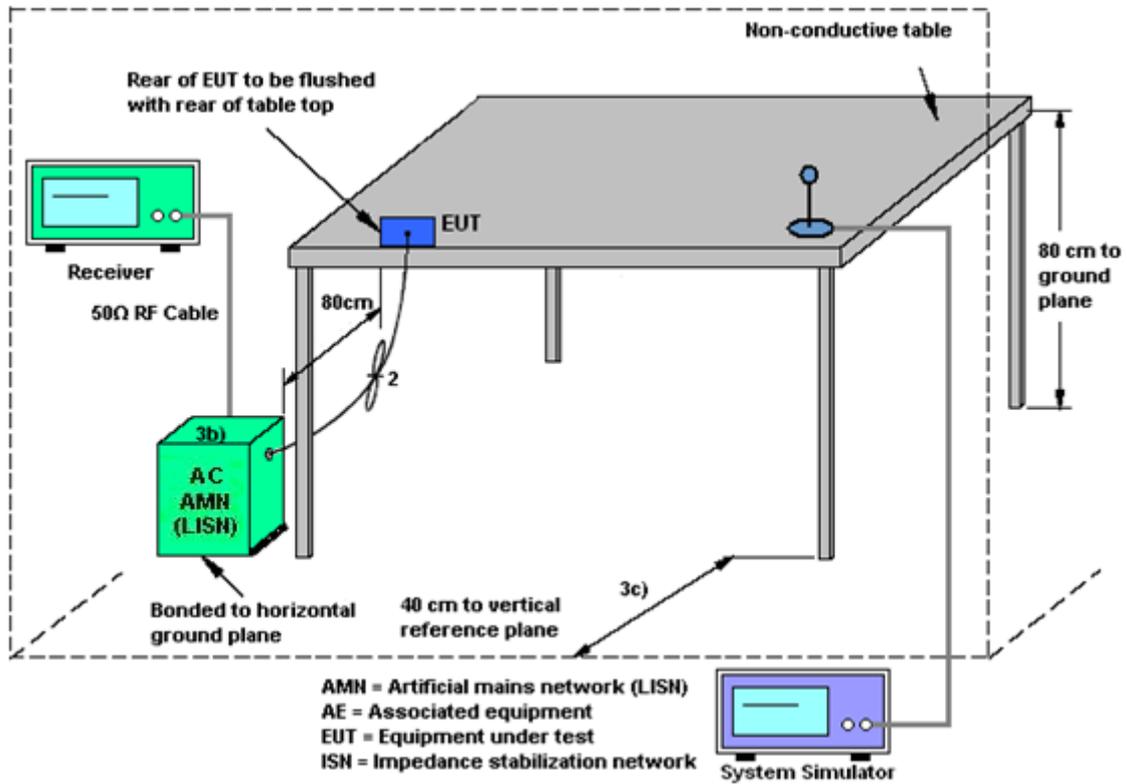

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 1	Ant. 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	1.50	0.00	1.50	3.79	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Mar. 29, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Mar. 28, 2019	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Dec. 05, 2019	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&00802N1D01N-06	47020&06	30MHz to 1GHz	Oct. 13, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Oct. 12, 2019	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1620	1G~18GHz	Oct. 17, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Oct. 16, 2019	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	May 08, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	May 07, 2019	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Dec. 27, 2019	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-303	17100018000550006	1GHz~18GHz	Jul. 10, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Jul. 09, 2019	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JAP00101800-30-10P	160118550004	1GHz~18GHz	Apr. 17, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Apr. 16, 2019	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 23, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Aug. 22, 2019	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY54130085	20Hz ~ 8.4GHz	Nov. 01, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Oct. 31, 2019	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	Apr. 25, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Apr. 24, 2019	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 06, 2019 ~ Mar. 08, 2019	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 06, 2019 ~ Mar. 08, 2019	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24	RK-000451	N/A	N/A	Jan. 06, 2019 ~ Mar. 08, 2019	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/4	30M-18G	Apr. 16, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Apr. 15, 2019	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9838/4	30M-18G	Apr. 16, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Apr. 15, 2019	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	MTJ	000000-MT18A-100D3210	30M-18G	Apr. 16, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Apr. 15, 2019	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 14, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Mar. 13, 2019	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 14, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Mar. 13, 2019	Radiation (03CH15-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN3	6.75 GHz Highpass	Sep. 16, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Sep. 15, 2019	Radiation (03CH15-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1G Low Pass	Sep. 16, 2018	Jan. 06, 2019 ~ Mar. 08, 2019	Sep. 15, 2019	Radiation (03CH15-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1218006	N/A	Oct. 08, 2018	Dec. 27, 2018~ Mar. 09, 2019	Oct. 07, 2019	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207363	300MHz~ 40GHz	Oct. 08, 2018	Dec. 27, 2018~ Mar. 09, 2019	Oct. 07, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2018	Dec. 27, 2018~ Mar. 09, 2019	Nov. 20, 2019	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	GEO82176 3	N/A	Oct. 08, 2018	Dec. 27, 2018~ Mar. 09, 2019	Oct. 07, 2020	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 16, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Nov. 12, 2018	Jan. 16, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Jan. 16, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Jan. 16, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 16, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Jan. 16, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Jan. 16, 2019	Dec. 30, 2019	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	AnAn Wu	Temperature:	21~25	°C
Test Date:	2018/12/27~2019/03/09	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	16.65	16.55	23.30	23.70	15.60	16.30	0.5	Pass
11a	6Mbps	1	157	5785	16.65	16.60	23.70	23.40	15.90	16.30	0.5	Pass
11a	6Mbps	1	165	5825	16.60	16.60	23.70	23.90	16.30	15.60	0.5	Pass
HT20	MCS0	2	149	5745	17.80	17.80	24.50	24.65	15.10	17.10	0.5	Pass
HT20	MCS0	2	157	5785	17.85	17.80	24.80	24.50	16.80	15.40	0.5	Pass
HT20	MCS0	2	165	5825	17.85	17.80	26.50	24.30	15.25	16.90	0.5	Pass
HT40	MCS0	2	151	5755	36.60	36.60	41.94	41.40	34.20	34.92	0.5	Pass
HT40	MCS0	2	159	5795	36.60	36.60	41.94	41.76	35.10	35.28	0.5	Pass
VHT80	MCS0	2	155	5775	77.16	76.92	83.20	82.56	74.56	74.24	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.10	0.13	17.24	17.19		30.00	30.00	1.50	0.00	Pass
11a	6Mbps	1	157	5785	0.10	0.13	17.04	17.10		30.00	30.00	1.50	0.00	Pass
11a	6Mbps	1	165	5825	0.10	0.13	17.15	17.47		30.00	30.00	1.50	0.00	Pass
HT20	MCS0	1	149	5745	0.12	0.12	17.49	17.43		30.00	30.00	1.50	0.00	Pass
HT20	MCS0	1	157	5785	0.12	0.12	17.42	17.41		30.00	30.00	1.50	0.00	Pass
HT20	MCS0	1	165	5825	0.12	0.12	17.42	17.43		30.00	30.00	1.50	0.00	Pass
HT40	MCS0	1	151	5755	0.10	0.10	17.48	17.27		30.00	30.00	1.50	0.00	Pass
HT40	MCS0	1	159	5795	0.10	0.10	17.11	17.23		30.00	30.00	1.50	0.00	Pass
VHT20	MCS0	1	149	5745	0.12	0.12	17.44	17.40		30.00	30.00	1.50	0.00	Pass
VHT20	MCS0	1	157	5785	0.12	0.12	17.40	17.39		30.00	30.00	1.50	0.00	Pass
VHT20	MCS0	1	165	5825	0.12	0.12	17.37	17.34		30.00	30.00	1.50	0.00	Pass
VHT40	MCS0	1	151	5755	0.10	0.10	17.44	17.17		30.00	30.00	1.50	0.00	Pass
VHT40	MCS0	1	159	5795	0.10	0.10	17.06	17.14		30.00	30.00	1.50	0.00	Pass
VHT80	MCS0	1	155	5775	0.35	0.36	17.35	17.31		30.00	30.00	1.50	0.00	Pass
HT20	MCS0	2	149	5745	0.12	0.12	17.40	16.93	20.18	30.00		1.50		Pass
HT20	MCS0	2	157	5785	0.12	0.12	17.18	17.12	20.16	30.00		1.50		Pass
HT20	MCS0	2	165	5825	0.12	0.12	17.30	17.41	20.36	30.00		1.50		Pass
HT40	MCS0	2	151	5755	0.12	0.12	17.33	16.72	20.04	30.00		1.50		Pass
HT40	MCS0	2	159	5795	0.12	0.12	17.52	17.28	20.41	30.00		1.50		Pass
VHT20	MCS0	2	149	5745	0.12	0.12	17.31	16.98	20.15	30.00		1.50		Pass
VHT20	MCS0	2	157	5785	0.12	0.12	17.17	16.89	20.04	30.00		1.50		Pass
VHT20	MCS0	2	165	5825	0.12	0.12	17.03	17.40	20.23	30.00		1.50		Pass
VHT40	MCS0	2	151	5755	0.10	0.12	17.30	16.70	20.02	30.00		1.50		Pass
VHT40	MCS0	2	159	5795	0.10	0.12	17.50	17.18	20.35	30.00		1.50		Pass
VHT80	MCS0	2	155	5775	0.35	0.36	17.87	16.78	20.37	30.00		1.50		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.10	0.13	2.22	2.22	2.18	1.63		30.00	30.00	1.50	0.00	Pass
11a	6Mbps	1	157	5785	0.10	0.13	2.22	2.22	0.55	1.42		30.00	30.00	1.50	0.00	Pass
11a	6Mbps	1	165	5825	0.10	0.13	2.22	2.22	0.94	-0.53		30.00	30.00	1.50	0.00	Pass
HT20	MCS0	2	149	5745	0.12	0.12	2.22		1.99	1.54	5.00	30.00		3.79		Pass
HT20	MCS0	2	157	5785	0.12	0.12	2.22		1.75	1.47	4.76	30.00		3.79		Pass
HT20	MCS0	2	165	5825	0.12	0.12	2.22		1.51	1.75	4.76	30.00		3.79		Pass
HT40	MCS0	2	151	5755	0.12	0.12	2.22		-0.52	-0.78	2.49	30.00		3.79		Pass
HT40	MCS0	2	159	5795	0.12	0.12	2.22		-0.79	-1.43	2.22	30.00		3.79		Pass
VHT80	MCS0	2	155	5775	0.35	0.36	2.22		-3.39	-4.17	-0.38	30.00		3.79		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Rick Lin	Temperature :	22~23°C
		Relative Humidity :	60~62%

EUT Information

Report NO : 8D2018
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz

Full Spectrum

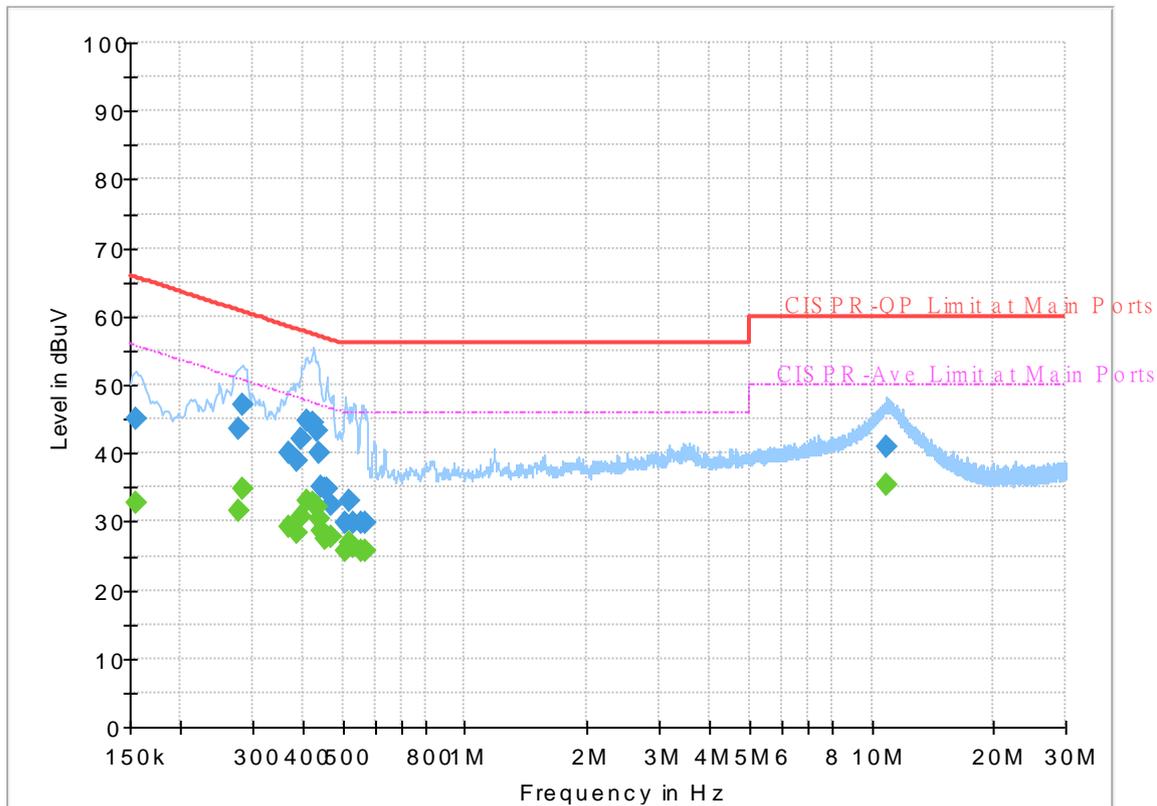

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	32.64	55.75	23.11	L1	OFF	19.5
0.154500	45.00	---	65.75	20.75	L1	OFF	19.5
0.276000	---	31.57	50.94	19.37	L1	OFF	19.5
0.276000	43.70	---	60.94	17.24	L1	OFF	19.5
0.285000	---	34.79	50.67	15.88	L1	OFF	19.5
0.285000	47.08	---	60.67	13.59	L1	OFF	19.5
0.368250	---	29.19	48.54	19.35	L1	OFF	19.5
0.368250	39.95	---	58.54	18.59	L1	OFF	19.5
0.386250	---	28.24	48.14	19.90	L1	OFF	19.5
0.386250	38.98	---	58.14	19.16	L1	OFF	19.5
0.395250	---	30.70	47.95	17.25	L1	OFF	19.5
0.395250	42.24	---	57.95	15.71	L1	OFF	19.5
0.408750	---	33.03	47.67	14.64	L1	OFF	19.5
0.408750	44.77	---	57.67	12.90	L1	OFF	19.5
0.424500	---	32.67	47.36	14.69	L1	OFF	19.5
0.424500	44.31	---	57.36	13.05	L1	OFF	19.5
0.433500	---	32.20	47.19	14.99	L1	OFF	19.5
0.433500	43.35	---	57.19	13.84	L1	OFF	19.5
0.440250	---	30.29	47.06	16.77	L1	OFF	19.5
0.440250	40.11	---	57.06	16.95	L1	OFF	19.5
0.444750	---	28.63	46.97	18.34	L1	OFF	19.5

0.444750	35.11	---	56.97	21.86	L1	OFF	19.5
0.453750	---	27.53	46.81	19.28	L1	OFF	19.5
0.453750	34.81	---	56.81	22.00	L1	OFF	19.5
0.458250	---	27.85	46.72	18.87	L1	OFF	19.5
0.458250	34.84	---	56.72	21.88	L1	OFF	19.5
0.469500	---	27.74	46.52	18.78	L1	OFF	19.5
0.469500	32.39	---	56.52	24.13	L1	OFF	19.5
0.507750	---	25.62	46.00	20.38	L1	OFF	19.5
0.507750	29.89	---	56.00	26.11	L1	OFF	19.5
0.521250	---	26.80	46.00	19.20	L1	OFF	19.5
0.521250	33.11	---	56.00	22.89	L1	OFF	19.5
0.532500	---	26.24	46.00	19.76	L1	OFF	19.5
0.532500	29.86	---	56.00	26.14	L1	OFF	19.5
0.557250	---	25.87	46.00	20.13	L1	OFF	19.5
0.557250	29.81	---	56.00	26.19	L1	OFF	19.5
0.568500	---	25.76	46.00	20.24	L1	OFF	19.5
0.568500	29.78	---	56.00	26.22	L1	OFF	19.5
10.896000	---	35.47	50.00	14.53	L1	OFF	19.9
10.896000	40.98	---	60.00	19.02	L1	OFF	19.9

EUT Information

Report NO : 8D2018
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz

Full Spectrum

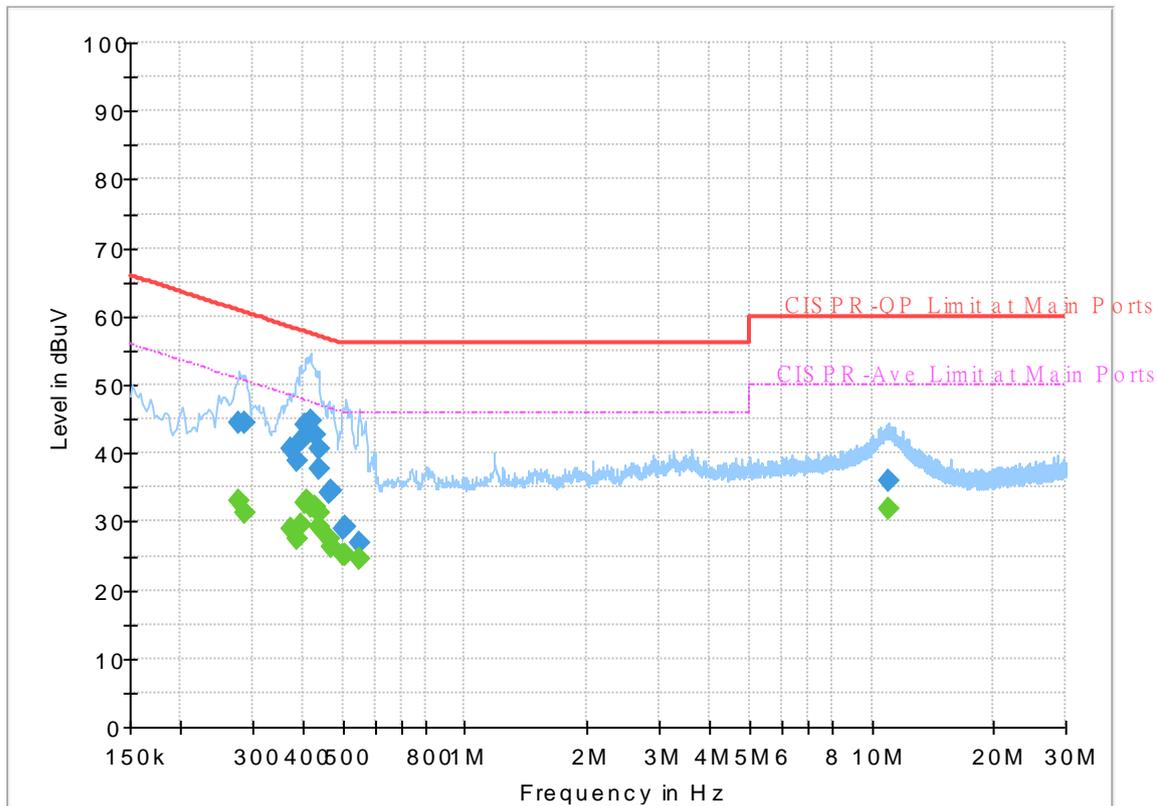

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.278250	---	33.17	50.87	17.70	N	OFF	19.5
0.278250	44.33	---	60.87	16.54	N	OFF	19.5
0.287250	---	31.28	50.60	19.32	N	OFF	19.5
0.287250	44.53	---	60.60	16.07	N	OFF	19.5
0.372750	---	28.93	48.44	19.51	N	OFF	19.5
0.372750	40.56	---	58.44	17.88	N	OFF	19.5
0.386250	---	27.34	48.14	20.80	N	OFF	19.5
0.386250	38.86	---	58.14	19.28	N	OFF	19.5
0.393000	---	29.50	48.00	18.50	N	OFF	19.5
0.393000	41.94	---	58.00	16.06	N	OFF	19.5
0.402000	---	32.67	47.81	15.14	N	OFF	19.5
0.402000	44.22	---	57.81	13.59	N	OFF	19.5
0.408750	---	33.00	47.67	14.67	N	OFF	19.5
0.408750	44.23	---	57.67	13.44	N	OFF	19.5
0.417750	---	32.23	47.49	15.26	N	OFF	19.5
0.417750	44.63	---	57.49	12.86	N	OFF	19.5
0.426750	---	32.22	47.32	15.10	N	OFF	19.5
0.426750	42.62	---	57.32	14.70	N	OFF	19.5
0.435750	---	31.16	47.14	15.98	N	OFF	19.5
0.435750	40.53	---	57.14	16.61	N	OFF	19.5
0.440250	---	29.16	47.06	17.90	N	OFF	19.5

0.440250	37.82	---	57.06	19.24	N	OFF	19.5
0.462750	---	27.49	46.64	19.15	N	OFF	19.5
0.462750	34.08	---	56.64	22.56	N	OFF	19.5
0.469500	---	26.44	46.52	20.08	N	OFF	19.5
0.469500	34.45	---	56.52	22.07	N	OFF	19.5
0.501000	---	25.12	46.00	20.88	N	OFF	19.5
0.501000	28.83	---	56.00	27.17	N	OFF	19.5
0.510000	---	25.28	46.00	20.72	N	OFF	19.5
0.510000	29.34	---	56.00	26.66	N	OFF	19.5
0.550500	---	24.64	46.00	21.36	N	OFF	19.5
0.550500	26.98	---	56.00	29.02	N	OFF	19.5
10.977000	---	31.77	50.00	18.23	N	OFF	20.0
10.977000	36.11	---	60.00	23.89	N	OFF	20.0



Appendix C. Radiated Spurious Emission

Test Engineer :	Watt Tseng, Karl Hou, and Bigshow Wang	Temperature :	24~26°C
		Relative Humidity :	47~58%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11a CH 149 5745MHz		5647.8	52.59	-15.61	68.2	41.84	31.73	9.24	30.22	189	348	P	H	
		5683.6	57.81	-35.29	93.1	46.96	31.8	9.3	30.25	189	348	P	H	
		5715.4	61.79	-47.72	109.51	50.82	31.87	9.36	30.26	189	348	P	H	
		5723.4	60.09	-58.46	118.55	49.04	31.93	9.38	30.26	189	348	P	H	
	*	5745	106.01	-	-	94.86	32	9.42	30.27	189	348	P	H	
	*	5745	98.66	-	-	87.51	32	9.42	30.27	189	348	A	H	
														H
														H
			5636.8	56.76	-11.44	68.2	46.03	31.73	9.22	30.22	194	309	P	V
			5697.2	63.13	-40.01	103.14	52.25	31.8	9.33	30.25	194	309	P	V
			5716	67.33	-42.35	109.68	56.36	31.87	9.36	30.26	194	309	P	V
			5722.6	65.77	-50.96	116.73	54.72	31.93	9.38	30.26	194	309	P	V
	*		5745	110.41	-	-	99.26	32	9.42	30.27	194	309	P	V
	*		5745	103.18	-	-	92.03	32	9.42	30.27	194	309	A	V
													V	
													V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5610.6	51.64	-16.56	68.2	40.88	31.8	9.17	30.21	153	355	P	H
		5700	54.48	-50.72	105.2	43.59	31.8	9.34	30.25	153	355	P	H
		5718.4	56.7	-53.65	110.35	45.66	31.93	9.37	30.26	153	355	P	H
		5724	57.14	-62.78	119.92	46.09	31.93	9.38	30.26	153	355	P	H
	*	5785	106.18	-	-	94.86	32.13	9.49	30.3	153	355	P	H
	*	5785	98.93	-	-	87.61	32.13	9.49	30.3	153	355	A	H
		5850.8	52.68	-67.7	120.38	41.23	32.2	9.58	30.33	153	355	P	H
		5858	56.7	-53.26	109.96	45.22	32.23	9.59	30.34	153	355	P	H
		5877.6	54.97	-48.3	103.27	43.43	32.27	9.61	30.34	153	355	P	H
		5928.6	51.4	-16.8	68.2	39.73	32.37	9.67	30.37	153	355	P	H
													H
													H
802.11a													
CH 157													
5785MHz		5629	51.05	-17.15	68.2	40.3	31.77	9.2	30.22	201	306	P	V
		5699.2	56.98	-47.63	104.61	46.1	31.8	9.33	30.25	201	306	P	V
		5714.8	59.54	-49.81	109.35	48.57	31.87	9.36	30.26	201	306	P	V
		5722.6	59.23	-57.5	116.73	48.18	31.93	9.38	30.26	201	306	P	V
	*	5785	109.71	-	-	98.39	32.13	9.49	30.3	201	306	P	V
	*	5785	102.54	-	-	91.22	32.13	9.49	30.3	201	306	A	V
		5850	61.39	-60.81	122.2	49.94	32.2	9.58	30.33	201	306	P	V
		5857.2	60.39	-49.79	110.18	48.9	32.23	9.59	30.33	201	306	P	V
		5879.8	58.56	-43.07	101.63	47.02	32.27	9.61	30.34	201	306	P	V
		5931.4	52.14	-16.06	68.2	40.47	32.37	9.67	30.37	201	306	P	V
													V
													V



WiFi Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	105.59	-	-	94.16	32.2	9.55	30.32	150	321	P	H	
	*	5825	98.41	-	-	86.98	32.2	9.55	30.32	150	321	A	H	
		5853	60.41	-54.95	115.36	48.96	32.2	9.58	30.33	150	321	P	H	
		5857.8	59.19	-50.82	110.01	47.71	32.23	9.59	30.34	150	321	P	H	
		5880	55.08	-46.41	101.49	43.54	32.27	9.61	30.34	150	321	P	H	
		5928	51.36	-16.84	68.2	39.69	32.37	9.67	30.37	150	321	P	H	
														H
														H
	*	5825	109.43	-	-	98	32.2	9.55	30.32	206	303	P	V	
	*	5825	102.03	-	-	90.6	32.2	9.55	30.32	206	303	A	V	
		5851	63.08	-56.84	119.92	51.63	32.2	9.58	30.33	206	303	P	V	
		5857.4	61.02	-49.11	110.13	49.53	32.23	9.59	30.33	206	303	P	V	
		5880.4	56.67	-44.52	101.19	45.13	32.27	9.61	30.34	206	303	P	V	
		5925.4	53.96	-14.24	68.2	42.3	32.37	9.66	30.37	206	303	P	V	
														V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	46.99	-27.01	74	53.92	40.17	13.92	61.02	100	0	P	H
		17235	50.7	-17.5	68.2	51.64	40.7	17.88	59.52	100	0	P	H
													H
													H
		11490	46.32	-27.68	74	53.25	40.17	13.92	61.02	100	0	P	V
		17235	50.7	-17.5	68.2	51.64	40.7	17.88	59.52	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	46.97	-27.03	74	53.96	40	13.95	60.94	100	0	P	H
		17355	49.98	-18.22	68.2	49.89	41.4	18.06	59.37	100	0	P	H
													H
													H
		11570	46.26	-27.74	74	53.25	40	13.95	60.94	100	0	P	V
		17355	50.67	-17.53	68.2	50.58	41.4	18.06	59.37	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	46.97	-27.03	74	54.21	39.66	13.98	60.88	100	0	P	H
		17475	51.22	-16.98	68.2	49.83	42.43	18.19	59.23	100	0	P	H
													H
													H
		11650	46.43	-27.57	74	53.67	39.66	13.98	60.88	100	0	P	V
		17475	50.9	-17.3	68.2	49.51	42.43	18.19	59.23	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11a LF		30.97	23.59	-16.41	40	30.72	24.81	0.68	32.62	-	-	P	H	
		100.81	18.81	-24.69	43.5	33.94	16.08	1.22	32.51	-	-	P	H	
		262.8	21.98	-24.02	46	32.38	20	1.94	32.52	-	-	P	H	
		411.21	24.74	-21.26	46	32.52	22.25	2.44	32.55	-	-	P	H	
		678.93	29.38	-16.62	46	32.02	26.6	3.07	32.44	-	-	P	H	
		897.18	34.05	-11.95	46	33.15	28.84	3.52	31.67	100	0	P	H	
														H
														H
														H
														H
														H
														H
														H
			30.97	23.59	-16.41	40	30.72	24.81	0.68	32.62	-	-	P	V
			100.81	18.81	-24.69	43.5	33.94	16.08	1.22	32.51	-	-	P	V
			262.8	21.98	-24.02	46	32.38	20	1.94	32.52	-	-	P	V
			411.21	24.74	-21.26	46	32.52	22.25	2.44	32.55	-	-	P	V
			678.93	29.38	-16.62	46	32.02	26.6	3.07	32.44	-	-	P	V
			897.18	34.05	-11.95	46	33.15	28.84	3.52	31.67	100	0	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11a CH 149 5745MHz		5637.4	53.65	-14.55	68.2	42.92	31.73	9.22	30.22	100	29	P	H	
		5697.6	61.59	-41.84	103.43	50.71	31.8	9.33	30.25	100	29	P	H	
		5715.8	64.36	-45.27	109.63	53.39	31.87	9.36	30.26	100	29	P	H	
		5722.4	65.12	-51.15	116.27	54.07	31.93	9.38	30.26	100	29	P	H	
	*	5745	106.42	-	-	95.27	32	9.42	30.27	100	29	P	H	
	*	5745	99.08	-	-	87.93	32	9.42	30.27	100	29	A	H	
														H
														H
			5649.8	56.43	-11.77	68.2	45.71	31.7	9.24	30.22	301	82	P	V
			5699	62.22	-42.24	104.46	51.34	31.8	9.33	30.25	301	82	P	V
			5716.4	64.8	-44.99	109.79	53.82	31.87	9.37	30.26	301	82	P	V
			5724.6	65.97	-55.32	121.29	54.92	31.93	9.38	30.26	301	82	P	V
	*		5745	106.64	-	-	95.49	32	9.42	30.27	301	82	P	V
	*		5745	99.23	-	-	88.08	32	9.42	30.27	301	82	A	V
														V
													V	



WIFI Ant. 2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 157 5785MHz		5616.4	50.79	-17.41	68.2	40.05	31.77	9.18	30.21	100	29	P	H	
		5700	58.19	-47.01	105.2	47.3	31.8	9.34	30.25	100	29	P	H	
		5720	59.76	-51.04	110.8	48.72	31.93	9.37	30.26	100	29	P	H	
		5724.2	61.45	-58.93	120.38	50.4	31.93	9.38	30.26	100	29	P	H	
	*	5785	106.16	-	-	94.76	32.2	9.5	30.3	100	29	P	H	
	*	5785	98.92	-	-	87.52	32.2	9.5	30.3	100	29	A	H	
		5851.2	61.76	-57.7	119.46	50.31	32.2	9.58	30.33	100	29	P	H	
		5858.4	61.03	-48.82	109.85	49.55	32.23	9.59	30.34	100	29	P	H	
		5877.2	58.72	-44.85	103.57	47.18	32.27	9.61	30.34	100	29	P	H	
		5945.6	52.56	-15.64	68.2	40.85	32.4	9.69	30.38	100	29	P	H	
														H
														H
			5604.4	51.16	-17.04	68.2	40.41	31.8	9.16	30.21	297	99	P	V
			5700	56.58	-48.62	105.2	45.69	31.8	9.34	30.25	297	99	P	V
			5720	58.95	-51.85	110.8	47.91	31.93	9.37	30.26	297	99	P	V
			5723.8	61.24	-58.22	119.46	50.19	31.93	9.38	30.26	297	99	P	V
	*		5785	106.12	-	-	94.8	32.13	9.49	30.3	297	99	P	V
	*		5785	98.73	-	-	87.41	32.13	9.49	30.3	297	99	A	V
			5854	59.72	-53.36	113.08	48.24	32.23	9.58	30.33	297	99	P	V
			5857.2	60.72	-49.46	110.18	49.23	32.23	9.59	30.33	297	99	P	V
		5877.6	57.89	-45.38	103.27	46.35	32.27	9.61	30.34	297	99	P	V	
		5930.2	51.77	-16.43	68.2	40.1	32.37	9.67	30.37	297	99	P	V	
													V	
													V	



WiFi Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	106.89	-	-	95.46	32.2	9.55	30.32	100	29	P	H	
	*	5825	99.64	-	-	88.21	32.2	9.55	30.32	100	29	A	H	
		5854.2	66.08	-46.54	112.62	54.6	32.23	9.58	30.33	100	29	P	H	
		5859	66.62	-43.06	109.68	55.14	32.23	9.59	30.34	100	29	P	H	
		5877	64.04	-39.67	103.71	52.5	32.27	9.61	30.34	100	29	P	H	
		5934	56.39	-11.81	68.2	44.72	32.37	9.67	30.37	100	29	P	H	
														H
														H
	*	5825	106.09	-	-	94.66	32.2	9.55	30.32	308	72	P	V	
	*	5825	98.75	-	-	87.32	32.2	9.55	30.32	308	72	A	V	
		5852.2	65.99	-51.19	117.18	54.54	32.2	9.58	30.33	308	72	P	V	
		5855.4	66.98	-43.71	110.69	55.5	32.23	9.58	30.33	308	72	P	V	
		5875	62.85	-42.35	105.2	51.31	32.27	9.61	30.34	308	72	P	V	
		5926.2	57.87	-10.33	68.2	46.2	32.37	9.67	30.37	308	72	P	V	
														V
														V
													V	
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	46.11	-27.89	74	53.04	40.17	13.92	61.02	100	0	P	H
		17235	48.43	-19.77	68.2	49.37	40.7	17.88	59.52	100	0	P	H
													H
													H
		11490	47.27	-26.73	74	54.2	40.17	13.92	61.02	100	0	P	V
		17235	48.39	-19.81	68.2	49.33	40.7	17.88	59.52	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	46.27	-27.73	74	53.26	40	13.95	60.94	100	0	P	H
		17355	49.14	-19.06	68.2	49.05	41.4	18.06	59.37	100	0	P	H
													H
													H
		11570	46.26	-27.74	74	53.25	40	13.95	60.94	100	0	P	V
		17355	49.96	-18.24	68.2	49.87	41.4	18.06	59.37	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	46.07	-27.93	74	53.31	39.66	13.98	60.88	100	0	P	H
		17475	49.63	-18.57	68.2	48.24	42.43	18.19	59.23	100	0	P	H
													H
													H
		11650	45.84	-28.16	74	53.08	39.66	13.98	60.88	100	0	P	V
		17475	50.38	-17.82	68.2	48.99	42.43	18.19	59.23	100	0	P	V
													V
													V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11a LF		30	23.25	-16.75	40	30	25.2	0.67	32.62	-	-	P	H	
		101.78	19.41	-24.09	43.5	34.35	16.26	1.23	32.51	-	-	P	H	
		309.36	24.05	-21.95	46	35.08	19.3	2.1	32.54	-	-	P	H	
		497.54	24.87	-21.13	46	30.75	23.95	2.63	32.57	-	-	P	H	
		572.23	27.62	-18.38	46	31	26.21	2.83	32.59	-	-	P	H	
		772.05	31.44	-14.56	46	31.9	28.4	3.26	32.26	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			31.94	22.87	-17.13	40	30.66	24.14	0.69	32.62	-	-	P	V
			212.36	17.2	-26.3	43.5	32.75	15.06	1.75	32.5	-	-	P	V
			260.86	26.87	-19.13	46	37.28	20	1.93	32.52	-	-	P	V
			309.36	23.17	-22.83	46	34.2	19.3	2.1	32.54	-	-	P	V
			508.21	24.9	-21.1	46	30.59	24.1	2.66	32.57	-	-	P	V
			765.26	32.18	-13.82	46	32.58	28.49	3.24	32.27	100	0	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	3. No other spurious found. 4. All results are PASS against limit line.													



Band 4 - 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11n HT20 CH 149 5745MHz		5607.4	49.95	-18.25	68.2	39.2	31.8	9.16	30.21	100	308	P	H	
		5690	55.19	-42.64	97.83	44.32	31.8	9.32	30.25	100	308	P	H	
		5710.2	58.18	-49.88	108.06	47.22	31.87	9.35	30.26	100	308	P	H	
		5725	61.8	-60.4	122.2	50.75	31.93	9.38	30.26	100	308	P	H	
	*	5745	106.87	-	-	95.72	32	9.42	30.27	100	308	P	H	
	*	5745	99.24	-	-	88.09	32	9.42	30.27	100	308	A	H	
														H
														H
			5638.8	56.25	-11.95	68.2	45.52	31.73	9.22	30.22	300	33	P	V
			5689.2	61.93	-35.31	97.24	51.06	31.8	9.32	30.25	300	33	P	V
			5711.4	63.59	-44.8	108.39	52.62	31.87	9.36	30.26	300	33	P	V
			5724.8	69.33	-52.41	121.74	58.28	31.93	9.38	30.26	300	33	P	V
	*		5745	113.12	-	-	101.97	32	9.42	30.27	300	33	P	V
	*		5745	105.62	-	-	94.47	32	9.42	30.27	300	33	A	V
														V
													V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 157 5785MHz		5623	52.16	-16.04	68.2	41.41	31.77	9.19	30.21	100	308	P	H	
		5683.2	50.23	-42.57	92.8	39.43	31.75	9.3	30.25	100	308	P	H	
		5708	51.4	-56.04	107.44	40.44	31.87	9.35	30.26	100	308	P	H	
		5720.2	49.65	-61.61	111.26	38.61	31.93	9.37	30.26	100	308	P	H	
	*	5785	107.55	-	-	96.23	32.13	9.49	30.3	100	308	P	H	
	*	5785	99.92	-	-	88.6	32.13	9.49	30.3	100	308	A	H	
		5850.8	56.11	-64.27	120.38	44.66	32.2	9.58	30.33	100	308	P	H	
		5873.2	54.86	-50.84	105.7	43.33	32.27	9.6	30.34	100	308	P	H	
		5881.4	52.46	-47.99	100.45	40.92	32.27	9.61	30.34	100	308	P	H	
		5933.8	52.06	-16.14	68.2	40.39	32.37	9.67	30.37	100	308	P	H	
														H
														H
			5606.6	51.16	-17.04	68.2	40.41	31.8	9.16	30.21	271	33	P	V
			5694.8	58.24	-43.13	101.37	47.36	31.8	9.33	30.25	271	33	P	V
			5714.4	59.96	-49.27	109.23	48.99	31.87	9.36	30.26	271	33	P	V
			5721	62.28	-50.8	113.08	51.24	31.93	9.37	30.26	271	33	P	V
	*		5785	113.51	-	-	102.19	32.13	9.49	30.3	271	33	P	V
	*		5785	106.05	-	-	94.73	32.13	9.49	30.3	271	33	A	V
			5852.2	63.33	-53.85	117.18	51.88	32.2	9.58	30.33	271	33	P	V
			5857.6	62.97	-47.1	110.07	51.48	32.23	9.59	30.33	271	33	P	V
		5876	60.55	-43.91	104.46	49.01	32.27	9.61	30.34	271	33	P	V	
		5933.6	52.34	-15.86	68.2	40.67	32.37	9.67	30.37	271	33	P	V	
													V	
													V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 165 5825MHz	*	5825	106.99	-	-	95.56	32.2	9.55	30.32	100	53	P	H	
	*	5825	99.23	-	-	87.8	32.2	9.55	30.32	100	53	A	H	
		5854.2	55.48	-57.14	112.62	44	32.23	9.58	30.33	100	53	P	H	
		5865.8	54.38	-53.39	107.77	42.89	32.23	9.6	30.34	100	53	P	H	
		5877.2	56.19	-47.38	103.57	44.65	32.27	9.61	30.34	100	53	P	H	
		5942.8	51.52	-16.68	68.2	39.82	32.4	9.68	30.38	100	53	P	H	
														H
														H
	*	5825	112.28	-	-	100.85	32.2	9.55	30.32	284	31	P	V	
	*	5825	104.58	-	-	93.15	32.2	9.55	30.32	284	31	A	V	
		5853	61.68	-53.68	115.36	50.23	32.2	9.58	30.33	284	31	P	V	
		5855.8	59.55	-51.03	110.58	48.07	32.23	9.58	30.33	284	31	P	V	
		5876.6	54.87	-49.14	104.01	43.33	32.27	9.61	30.34	284	31	P	V	
		5937.8	52.48	-15.72	68.2	40.81	32.37	9.68	30.38	284	31	P	V	
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 149 5745MHz		11490	46.57	-27.43	74	53.5	40.17	13.92	61.02	100	0	P	H	
		17235	50.86	-17.34	68.2	51.8	40.7	17.88	59.52	100	0	P	H	
													H	
													H	
			11490	47.3	-26.7	74	54.23	40.17	13.92	61.02	100	0	P	V
			17235	49.61	-18.59	68.2	50.55	40.7	17.88	59.52	100	0	P	V
														V
802.11n HT20 CH 157 5785MHz		11570	46.35	-27.65	74	53.34	40	13.95	60.94	100	0	P	H	
		17355	51.13	-17.07	68.2	51.04	41.4	18.06	59.37	100	0	P	H	
													H	
													H	
			11570	46.99	-27.01	74	53.98	40	13.95	60.94	100	0	P	V
			17355	49.11	-19.09	68.2	49.02	41.4	18.06	59.37	100	0	P	V
														V
802.11n HT20 CH 165 5825MHz		11650	47.35	-26.65	74	54.59	39.66	13.98	60.88	100	0	P	H	
		17475	52.29	-15.91	68.2	50.9	42.43	18.19	59.23	100	0	P	H	
													H	
													H	
			11650	48.52	-25.48	74	55.76	39.66	13.98	60.88	100	0	P	V
			17475	50.69	-17.51	68.2	49.3	42.43	18.19	59.23	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5650	51.33	-16.87	68.2	40.61	31.7	9.24	30.22	106	21	P	H
		5692	59.47	-39.83	99.3	48.6	31.8	9.32	30.25	106	21	P	H
		5720	62.38	-48.42	110.8	51.34	31.93	9.37	30.26	106	21	P	H
		5723.6	63.29	-55.72	119.01	52.24	31.93	9.38	30.26	106	21	P	H
	*	5755	105.71	-	-	94.47	32.07	9.44	30.27	106	21	P	H
	*	5755	98.19	-	-	86.95	32.07	9.44	30.27	106	21	A	H
		5854	52.37	-60.71	113.08	40.89	32.23	9.58	30.33	106	21	P	H
		5860	54.37	-55.03	109.4	42.89	32.23	9.59	30.34	106	21	P	H
		5898.2	51.6	-36.39	87.99	40.03	32.3	9.63	30.36	106	21	P	H
		5930.4	51.23	-16.97	68.2	39.56	32.37	9.67	30.37	106	21	P	H
802.11n													H
HT40													H
CH 151		5649.2	57.74	-10.46	68.2	46.99	31.73	9.24	30.22	269	33	P	V
5755MHz		5650.4	58.58	-9.92	68.5	47.86	31.7	9.24	30.22	269	33	P	V
		5718.6	66.53	-43.88	110.41	55.49	31.93	9.37	30.26	269	33	P	V
		5723	67	-50.64	117.64	55.95	31.93	9.38	30.26	269	33	P	V
	*	5755	110.04	-	-	98.8	32.07	9.44	30.27	269	33	P	V
	*	5755	102.82	-	-	91.58	32.07	9.44	30.27	269	33	A	V
		5851.6	53.29	-65.26	118.55	41.84	32.2	9.58	30.33	269	33	P	V
		5857.8	56.11	-53.9	110.01	44.63	32.23	9.59	30.34	269	33	P	V
		5889.4	53.07	-41.44	94.51	41.51	32.3	9.62	30.36	269	33	P	V
		5932	51.37	-16.83	68.2	39.7	32.37	9.67	30.37	269	33	P	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT40 CH 159 5795MHz		5612.4	51.06	-17.14	68.2	40.3	31.8	9.17	30.21	100	295	P	H	
		5687.4	51.53	-44.38	95.91	40.67	31.8	9.31	30.25	100	295	P	H	
		5717.2	50.4	-59.62	110.02	39.42	31.87	9.37	30.26	100	295	P	H	
		5724.2	50.91	-69.47	120.38	39.86	31.93	9.38	30.26	100	295	P	H	
	*	5795	105.28	-	-	93.87	32.2	9.51	30.3	100	295	P	H	
	*	5795	97.77	-	-	86.36	32.2	9.51	30.3	100	295	A	H	
		5853.6	61.96	-52.03	113.99	50.48	32.23	9.58	30.33	100	295	P	H	
		5860.4	61.33	-47.96	109.29	49.85	32.23	9.59	30.34	100	295	P	H	
		5884.6	55.33	-42.74	98.07	43.8	32.27	9.62	30.36	100	295	P	H	
		5929	51.39	-16.81	68.2	39.72	32.37	9.67	30.37	100	295	P	H	
														H
														H
			5606.6	50.45	-17.75	68.2	39.7	31.8	9.16	30.21	295	32	P	V
			5699.8	57.95	-47.1	105.05	47.07	31.8	9.33	30.25	295	32	P	V
			5719.8	61.73	-49.01	110.74	50.69	31.93	9.37	30.26	295	32	P	V
			5724.2	62.65	-57.73	120.38	51.6	31.93	9.38	30.26	295	32	P	V
	*		5795	111.42	-	-	100.01	32.2	9.51	30.3	295	32	P	V
	*		5795	103.8	-	-	92.39	32.2	9.51	30.3	295	32	A	V
			5852	68.66	-48.98	117.64	57.21	32.2	9.58	30.33	295	32	P	V
			5856	68.04	-42.48	110.52	56.56	32.23	9.58	30.33	295	32	P	V
		5875.2	64.67	-40.38	105.05	53.13	32.27	9.61	30.34	295	32	P	V	
		5933	53.02	-15.18	68.2	41.35	32.37	9.67	30.37	295	32	P	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	46.85	-27.15	74	53.71	40.2	13.93	60.99	100	0	P	H
		17265	48.87	-19.33	68.2	49.62	40.8	17.93	59.48	100	0	P	H
													H
													H
		11510	47.33	-26.67	74	54.19	40.2	13.93	60.99	100	0	P	V
		17265	50.31	-17.89	68.2	51.06	40.8	17.93	59.48	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	47.34	-26.66	74	54.36	39.95	13.96	60.93	100	0	P	H
		17385	49.68	-18.52	68.2	49.21	41.73	18.08	59.34	100	0	P	H
													H
													H
		11590	46.37	-27.63	74	53.39	39.95	13.96	60.93	100	0	P	V
		17385	49.78	-18.42	68.2	49.31	41.73	18.08	59.34	100	0	P	V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
		5647.8	51.92	-16.28	68.2	41.17	31.73	9.24	30.22	116	28	P	H	
		5691.4	62.73	-36.13	98.86	51.86	31.8	9.32	30.25	116	28	P	H	
		5717.2	68.75	-41.27	110.02	57.77	31.87	9.37	30.26	116	28	P	H	
		5723.4	70.61	-47.94	118.55	59.56	31.93	9.38	30.26	116	28	P	H	
	*	5775	102.62	-	-	91.31	32.13	9.47	30.29	116	28	P	H	
	*	5775	95.37	-	-	84.06	32.13	9.47	30.29	116	28	A	H	
		5850.4	66.27	-55.02	121.29	54.82	32.2	9.58	30.33	116	28	P	H	
		5863.4	67.42	-41.03	108.45	55.94	32.23	9.59	30.34	116	28	P	H	
		5881.8	59.78	-40.37	100.15	48.24	32.27	9.61	30.34	116	28	P	H	
		5941	51.18	-17.02	68.2	39.48	32.4	9.68	30.38	116	28	P	H	
802.11ac VHT80 CH 155 5775MHz													H	
													H	
			5649.8	54.45	-13.75	68.2	43.73	31.7	9.24	30.22	269	32	P	V
			5700	71.07	-34.13	105.2	60.18	31.8	9.34	30.25	269	32	P	V
			5720	75.84	-34.96	110.8	64.8	31.93	9.37	30.26	269	32	P	V
			5720.4	77.03	-34.68	111.71	65.99	31.93	9.37	30.26	269	32	P	V
		*	5775	108.01	-	-	96.7	32.13	9.47	30.29	269	32	P	V
		*	5775	100.98	-	-	89.67	32.13	9.47	30.29	269	32	A	V
			5853	72.49	-42.87	115.36	61.04	32.2	9.58	30.33	269	32	P	V
			5856.4	72.46	-37.95	110.41	60.98	32.23	9.58	30.33	269	32	P	V
			5875	66.19	-39.01	105.2	54.65	32.27	9.61	30.34	269	32	P	V
			5925	52.72	-15.48	68.2	41.06	32.37	9.66	30.37	269	32	P	V
														V
														V
	Remark	1. No other spurious found.												
		2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 155 5775MHz		11550	47.62	-26.38	74	54.58	40.05	13.95	60.96	100	0	P	H	
		17325	50.93	-17.27	68.2	51.25	41.07	18.02	59.41	100	0	P	H	
													H	
													H	
			11550	48.53	-25.47	74	55.49	40.05	13.95	60.96	100	0	P	V
			17325	48.86	-19.34	68.2	49.18	41.07	18.02	59.41	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Watt Tseng, Karl Hou, and Bigshow Wang	Temperature :	24~26°C
		Relative Humidity :	47~58%

Note symbol

-L	Low channel location
-R	High channel location

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 16 Setting : 16.5</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 16 Setting : 16.5</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	<p>Date: 2019-01-07 PEAK: 115.21</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 16 Setting : 16.5</p>	<p>Date: 2019-01-07 PEAK: 115.21</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 16 Setting : 16.5</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 17 Setting : 16.5</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 17 Setting : 16.5</p>
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 17 Setting : 16.5</p>	Left blank

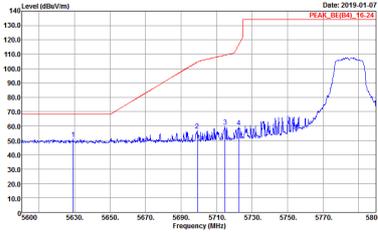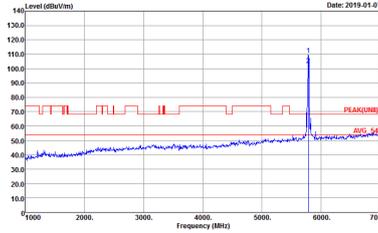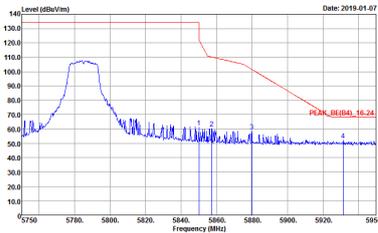

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
<p>Peak</p>	 <p>Date: 2019-01-07 PEAK_BE(84)_15-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 17 Setting : 16.5</p>	 <p>Date: 2019-01-07 PEAK(84)_15-24</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 17 Setting : 16.5</p>
<p>Peak</p>	 <p>Date: 2019-01-07 PEAK_BE(84)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 17 Setting : 16.5</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<p> Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 18 Setting : 17 </p>	<p> Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 18 Setting : 17 </p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 18 Setting : 17</p>	<p>Site : 03CH15-HY Condition : PEAK(FUNB) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 18 Setting : 17</p>



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.		

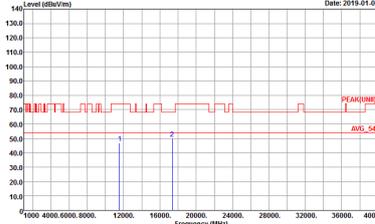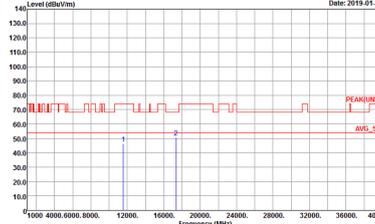

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Date: 2019-01-09</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 17</p>	 <p>Date: 2019-01-09</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : 17</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : Z2</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : Z2</p>



Emission below 1GHz
5GHz WIFI 802.11a (LF)



WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH15-HY Condition : QP 3m B1LOG_15_41912 HORIZONTAL Detector : Peak Project : 802018 Mode : 19</p>	<p>Site : 03CH15-HY Condition : QP 3m B1LOG_15_41912 VERTICAL Detector : Peak Project : 802018 Mode : 19</p>



Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
2	Horizontal	Fundamental
Peak	<p> Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 802018 Mode : 20 Setting : 17 </p>	<p> Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 802018 Mode : 20 Setting : 17 </p>

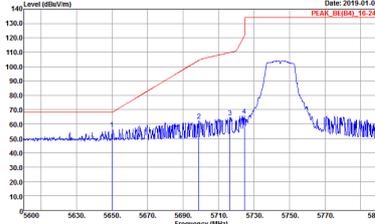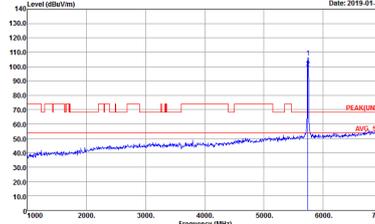

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
2	Vertical	Fundamental
Peak	 <p>Date: 2019-01-07 PEAK_BE(49)_15(2)</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 20 Setting : 17</p>	 <p>Date: 2019-01-07 PEAK(UNB) 802_11</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 20 Setting : 17</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
2	Horizontal	Fundamental
<p>Peak</p>	<p>Date: 2019-01-07 PEAK_BE(84)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 21 Setting : 17</p>	<p>Date: 2019-01-07 PEAK(UNII)_3m 91200_15_1620 HORIZONTAL</p> <p>Site : 03CH15-HY Condition : PEAK(UNII)_3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 21 Setting : 17</p>
<p>Peak</p>	<p>Date: 2019-01-07 PEAK_BE(84)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 21 Setting : 17</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
2	Vertical	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 21 Setting : 17</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII)_3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 21 Setting : 17</p>
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 21 Setting : 17</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 22 Setting : 17.5</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 22 Setting : 17.5</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
2	Vertical	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 22 Setting : 17.5</p>	<p>Site : 03CH15-HY Condition : PEAK(UB) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 22 Setting : 17.5</p>



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH15-FY Condition : PEAK(UNII) 3m 9120D_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 20</p>	<p>Site : 03CH15-FY Condition : PEAK(UNII) 3m 9120D_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : 20</p>

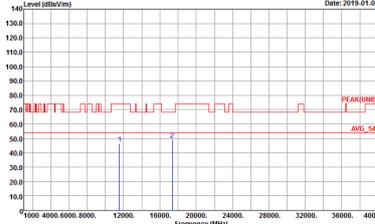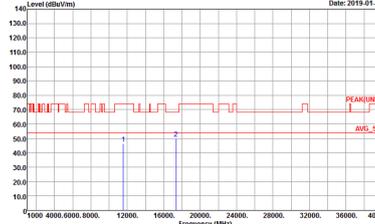



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
2	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : Z1</p>	 <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : Z1</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 802018 Mode : Z2</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 802018 Mode : Z2</p>



Emission below 1GHz
5GHz WIFI 802.11a (LF)

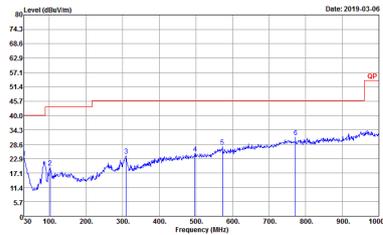
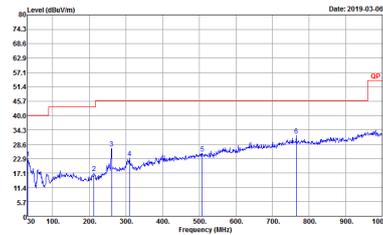
WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
2	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH15-HY Condition : QP 3m 81LOG_15_41912 HORIZONTAL Detector : Peak Project : 802018 Mode : Z3</p>	 <p>Site : 03CH15-HY Condition : QP 3m 81LOG_15_41912 VERTICAL Detector : Peak Project : 802018 Mode : Z3</p>



Band 4 - 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	<p> Site : 03CH15-FY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 802018 Mode : 24 </p>	<p> Site : 03CH15-FY Condition : PEAK(UNII)_3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 802018 Mode : 24 </p>

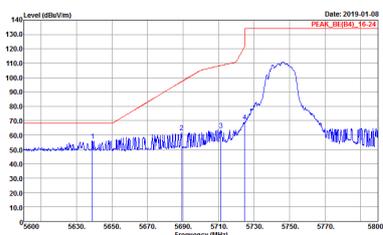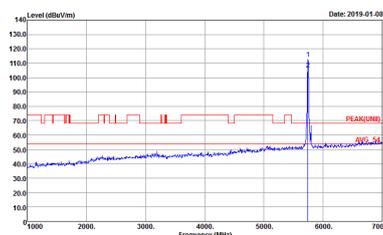

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	 <p>Date: 2019-01-08 PEAK: 85.043, 75.231</p> <p>Site : 03CH15-HY Condition : PEAK_8E(84)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 24</p>	 <p>Date: 2019-01-08 PEAK: 85.043, 75.231</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 24</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	<p>Date: 2019-01-08 PEAK_BE(84)_15-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 25</p>	<p>Date: 2019-01-08 PEAK(84)_15-24</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 25</p>
<p>Peak</p>	<p>Date: 2019-01-08 PEAK_BE(84)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 25</p>	<p>Left blank</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : 25</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : 25</p>
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : 25</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : Z6</p>	<p>Site : 03CH15-HY Condition : PEAK(U)B 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : Z6</p>

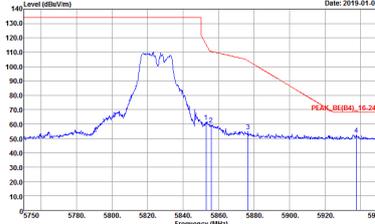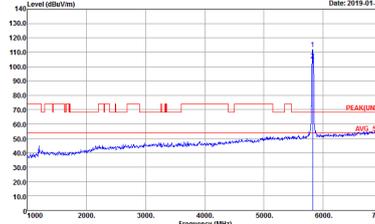

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	 <p> Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : Z6 </p>	 <p> Site : 03CH15-HY Condition : PEAK(UWB) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : Z6 </p>



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 27</p>	<p>Site : 03CH15-HY Condition : PEAK(UNIT) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 27</p>
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 27</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Vertical	Fundamental
Peak	<p>Date: 2019-01-08 PEAK_BE(04)_15-21</p> <p>Site : 03CH15-HY Condition : PEAK_BE(04)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 27</p>	<p>Date: 2019-01-08 PEAK(04)_15-21</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 27</p>
Peak	<p>Date: 2019-01-08 PEAK_BE(04)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(04)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 27</p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	<p>Date: 2019-01-08 PEAK_BE(84)_15-21</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 28</p>	<p>Date: 2019-01-08 PEAK(84)_15-21</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 28</p>
<p>Peak</p>	<p>Date: 2019-01-08 PEAK_BE(84)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 28</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Vertical	Fundamental
Peak	<p>Date: 2019-01-08 PEAK_BE(84)_15-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 28</p>	<p>Date: 2019-01-08 PEAK(UNII)_3m 91200_15_1620 VERTICAL</p> <p>Site : 03CH15-HY Condition : PEAK(UNII)_3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 28</p>
Peak	<p>Date: 2019-01-08 PEAK_BE(84)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 28</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

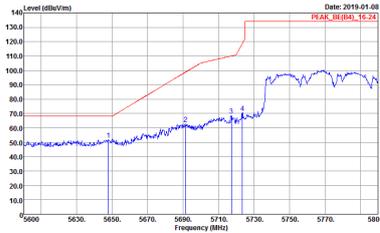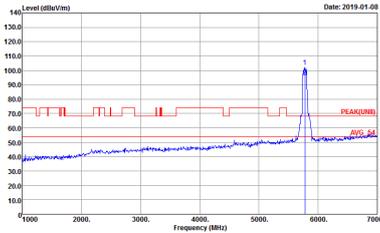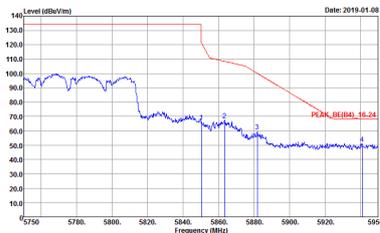WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Fundamental
<p align="center">Peak</p>	 <p>Date: 2019-01-08 PEAK_BE(84)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 8D2018 Mode : Z9</p>	 <p>Date: 2019-01-08 PEAK(UNIT) 3m 91200_15_1620 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 8D2018 Mode : Z9</p>
<p align="center">Peak</p>	 <p>Date: 2019-01-08 PEAK_BE(84)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(84)_16-24 3m 91200_15_1620 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 8D2018 Mode : Z9</p>	<p align="center">Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
Peak	<p>Date: 2019-01-08 PEAK_BE(04)_15-21</p> <p>Site : 03CH15-HY Condition : PEAK_BE(04)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 29</p>	<p>Date: 2019-01-08 PEAK(04)_15-21</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 29</p>
Peak	<p>Date: 2019-01-08 PEAK_BE(04)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(04)_16-24 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8D2018 Mode : 29</p>	Left blank



Band 4 - 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 3 columns: WIFI, ANT, and 1+2. It contains two spectral plots: Horizontal and Vertical. Each plot shows Level (dBuV/m) vs Frequency (MHz) with peak and average values indicated. Metadata for both plots includes Site, Condition, Detector, Project, and Mode.



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : ZS</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : ZS</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 802018 Mode : 20</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 802018 Mode : 20</p>



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 2 columns: WIFI (Band 4 5725~5850MHz Harmonic @ 3m), ANT (802.11n HT40 CH151 5755MHz). It contains two sub-tables for 'Horizontal' and 'Vertical' measurements, each with a spectrum plot and associated metadata like 'Site', 'Condition', 'Detector', 'Project', and 'Mode'.



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 2B</p>	<p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : 2B</p>



**Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH15-HY Condition : PEAK(LINE) 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 8D2018 Mode : 29</p>	<p>Site : 03CH15-HY Condition : PEAK(LINE) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 8D2018 Mode : 29</p>



Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot of Level (dBuV/m) vs Frequency (MHz) from 50 to 1000 MHz. The plots show a blue signal line and a red limit line. Metadata includes Site: 03CH15-HY, Condition: QP 3m BIL06_15_41912 HORIZONTAL, Detector: Peak, Project: 8D2018, Mode: 30.

QP / Peak




Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor (dB)
1	802.11a	97.73	2066.00	0.48	1kHz	0.10
2	802.11a	96.99	2060.00	0.49	1kHz	0.13
1+2	5GHz 802.11n HT20 for Ant. 1	97.36	2062.00	0.48	1kHz	0.12
1+2	5GHz 802.11n HT20 for Ant. 2	97.36	2066.00	0.48	1kHz	0.12
1+2	5GHz 802.11n HT40 for Ant. 1	97.36	2064.00	0.48	1kHz	0.12
1+2	5GHz 802.11n HT40 for Ant. 2	97.36	2066.00	0.48	1kHz	0.12
1+2	5GHz 802.11ac VHT80 for Ant. 1	92.18	460.00	2.17	3kHz	0.35
1+2	5GHz 802.11ac VHT80 for Ant. 2	92.00	460.00	2.17	3kHz	0.36



<Ant. 1>


802.11a

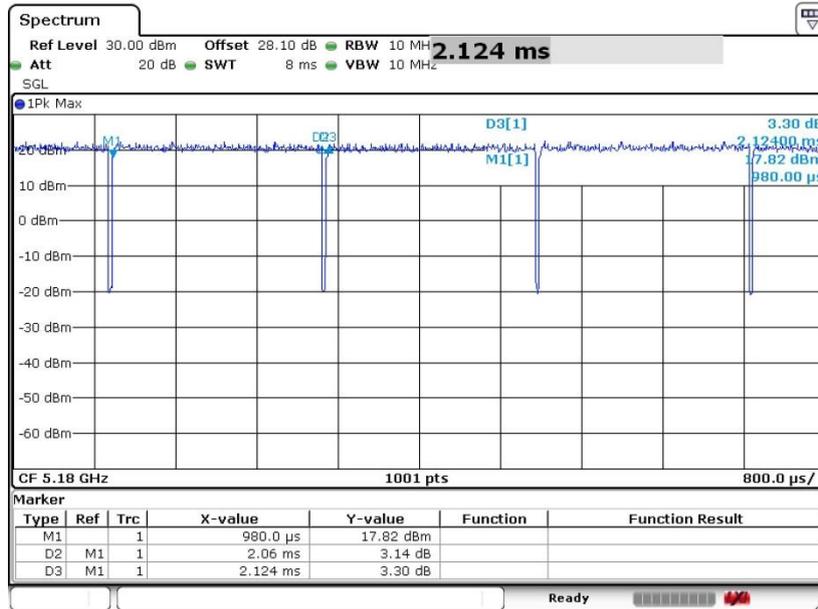

Date: 2.JAN.2019 16:01:21

<Ant. 2>

802.11a

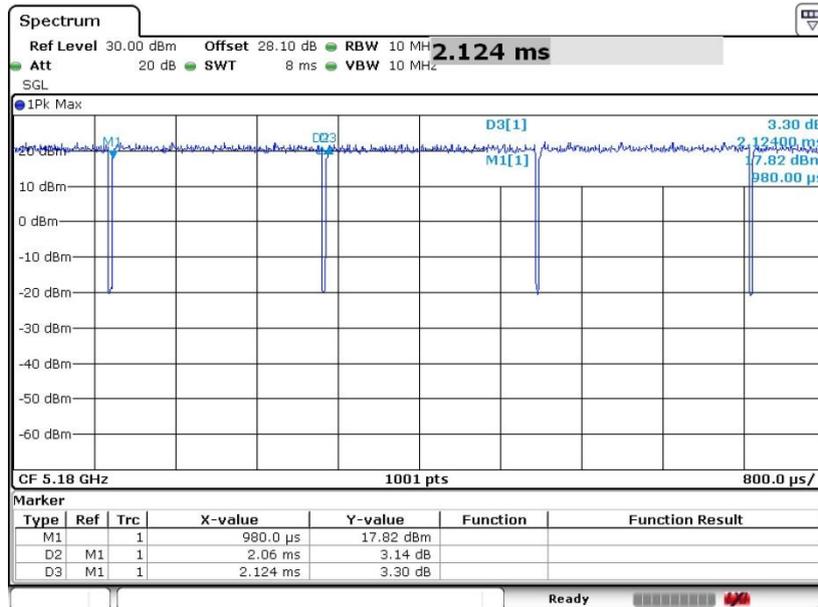


Date: 2.JAN.2019 16:01:21




MIMO <Ant. 1>

802.11n HT20

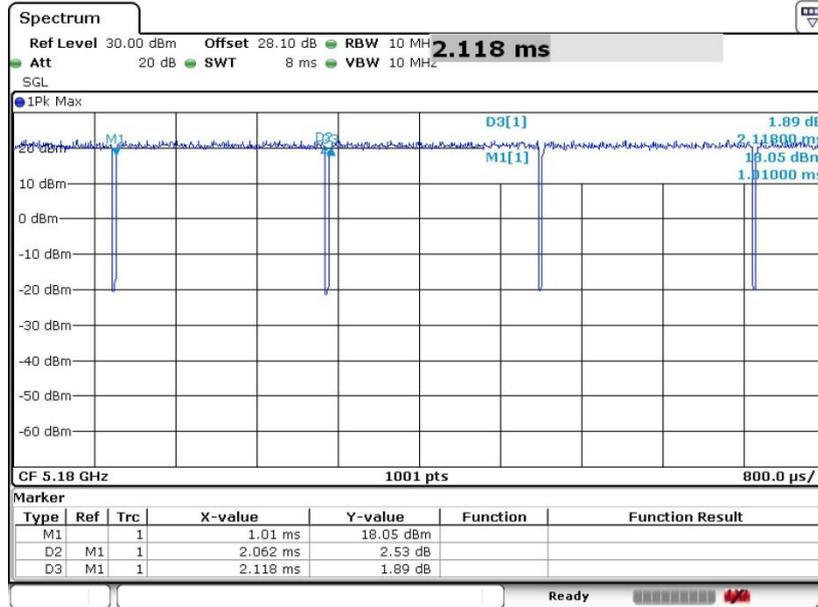

Date: 2.JAN.2019 16:44:48


802.11n HT40

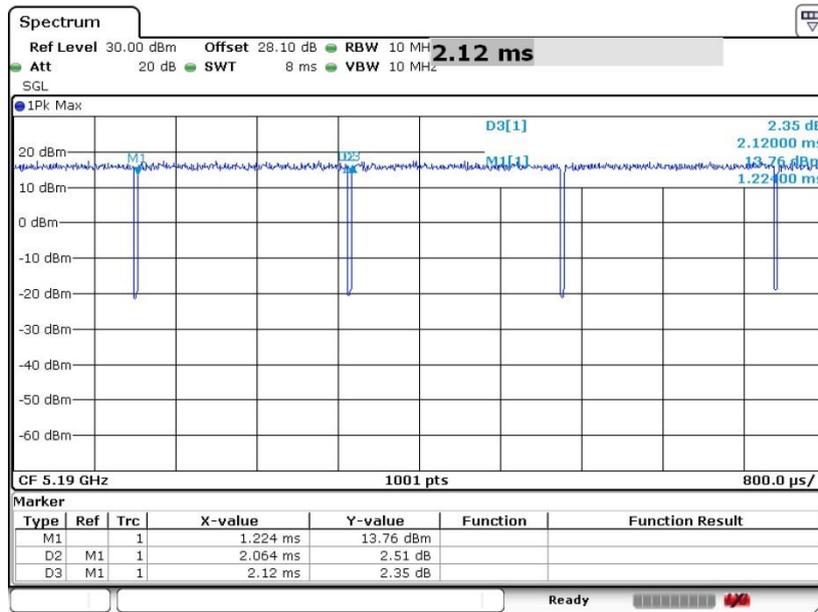

Date: 2.JAN.2019 17:18:08




802.11ac VHT80

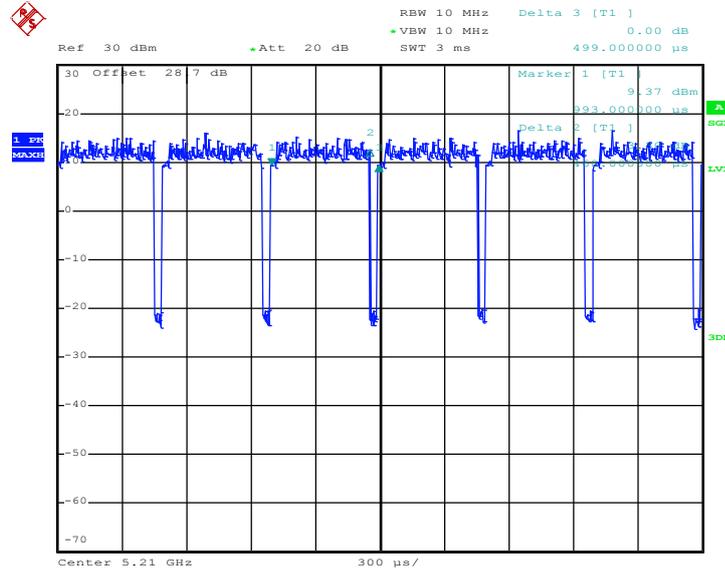

Date: 27.DEC.2018 22:09:23

MIMO <Ant. 2>


802.11n HT20

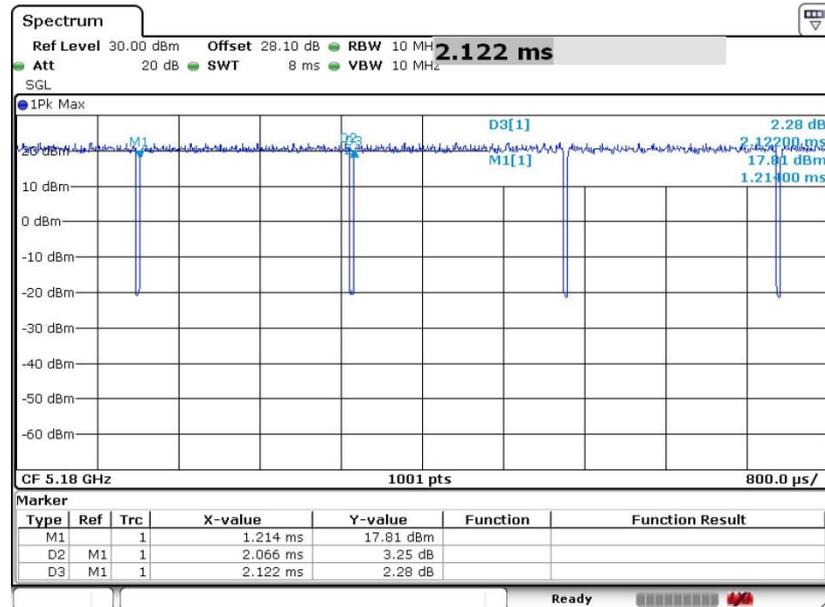

Date: 2.JAN.2019 16:46:35




802.11n HT40

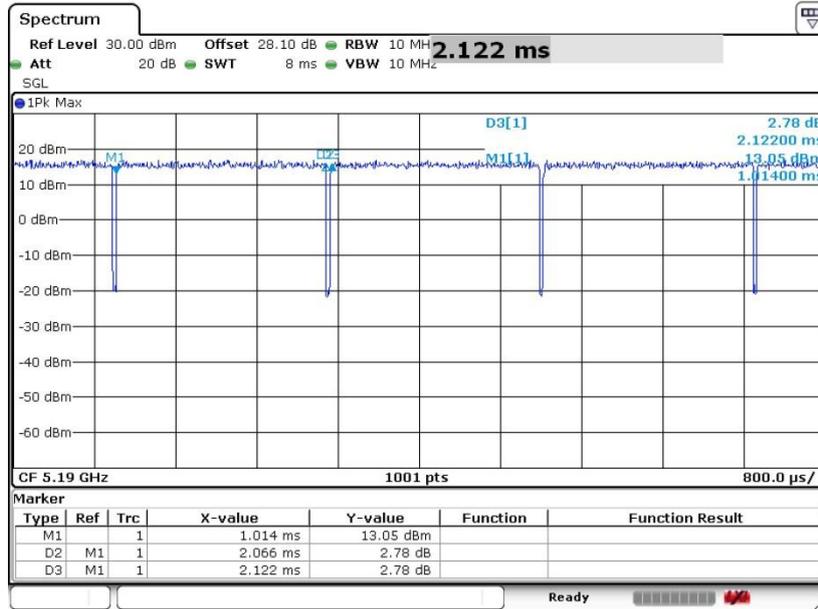

Date: 2.JAN.2019 17:19:32

802.11ac VHT80

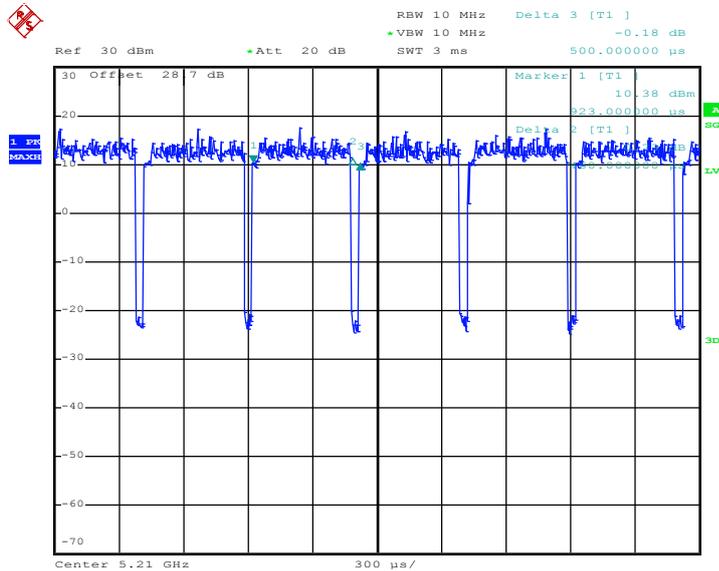

Date: 27.DEC.2018 22:10:55

—————THE END—————