


FCC EMI TEST REPORT

FCC ID : NM82Q6U100
Equipment : Smart Hub
Model Name : 2Q6U100
Applicant : HTC Corporation
No.88, Sec. 3, Zhongxing Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)
Manufacturer : HTC Corporation
No.88, Sec. 3, Zhongxing Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)
Standard : FCC 47 CFR FCC Part 15 Subpart B

The product was received on Dec. 20, 2018 and testing was started from Jan. 15, 2019 and completed on Jan. 16, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1. Product Feature of Equipment Under Test	5
1.2. Modification of EUT	5
1.3. Test Location	5
1.4. Applicable Standards	5
2. Test Configuration of Equipment Under Test	6
2.1. Test Mode	6
2.2. Connection Diagram of Test System	6
2.3. Support Unit used in test configuration and system	7
2.4. EUT Operation Test Setup	7
3. Test Result	8
3.1. Test of AC Conducted Emission Measurement	8
3.2. Test of Radiated Emission Measurement	10
4. List of Measuring Equipment.....	12
5. Uncertainty of Evaluation	13
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Emission Test Result	



History of this test report

Report No.	Version	Description	Issued Date
FC8D2018	01	Initial issue of report	Mar. 13, 2019

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.107	AC Conducted Emission	Pass	Under limit 8.72 dB at 0.418 MHz
3.2	15.109	Radiated Emission	Pass	Under limit 5.90 dB at 40.760 MHz for Quasi-Peak

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Louis Wu

Report Producer: Polly Tsai

1. General Description

1.1. Product Feature of Equipment Under Test

LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, WiGig, and 5G NR.

Product Specification subjective to this standard	
Antenna Type	WWAN: <Ant. 1>: Fixed Internal PIFA Antenna <Ant. 2>: Fixed Internal Dipole Antenna <Ant. 3>: Fixed Internal PCB Antenna WLAN: <Ant. 1>: Fixed Internal PCB Antenna <Ant. 2>: Fixed Internal PIFA Antenna Bluetooth: Fixed Internal PCB Antenna WiGig: Fixed Internal Array Antenna 5G NR: Fixed Internal PCB Antenna

1.2. Modification of EUT

No modifications are made to the EUT during all test items.

1.3. Test Location

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	CO05-HY	03CH06-HY

FCC Designation No. TW1093

1.4. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle + WiGig on + H-Pattern + Adapter + LAN Link + USB Data Link with Notebook
	Mode 2: LTE Band 71 Idle + Bluetooth Idle + WLAN Idle + WiGig on + MPEG4 + Adapter + LAN Link + USB Data Link with Notebook
Radiated Emissions	Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle + WiGig on + H-Pattern + Adapter + LAN Link + USB Data Link with Notebook
	Mode 2: LTE Band 71 Idle + Bluetooth Idle + WLAN Idle + WiGig on + MPEG4 + Adapter + LAN Link + USB Data Link with Notebook
Remark: 1. The worst case of AC is mode 1; only the test data of this mode was reported. 2. The worst case of RE is mode 1; only the test data of this mode was reported. 3. Data Link with Notebook means data application transferred mode between EUT and Notebook.	

2.2. Connection Diagram of Test System

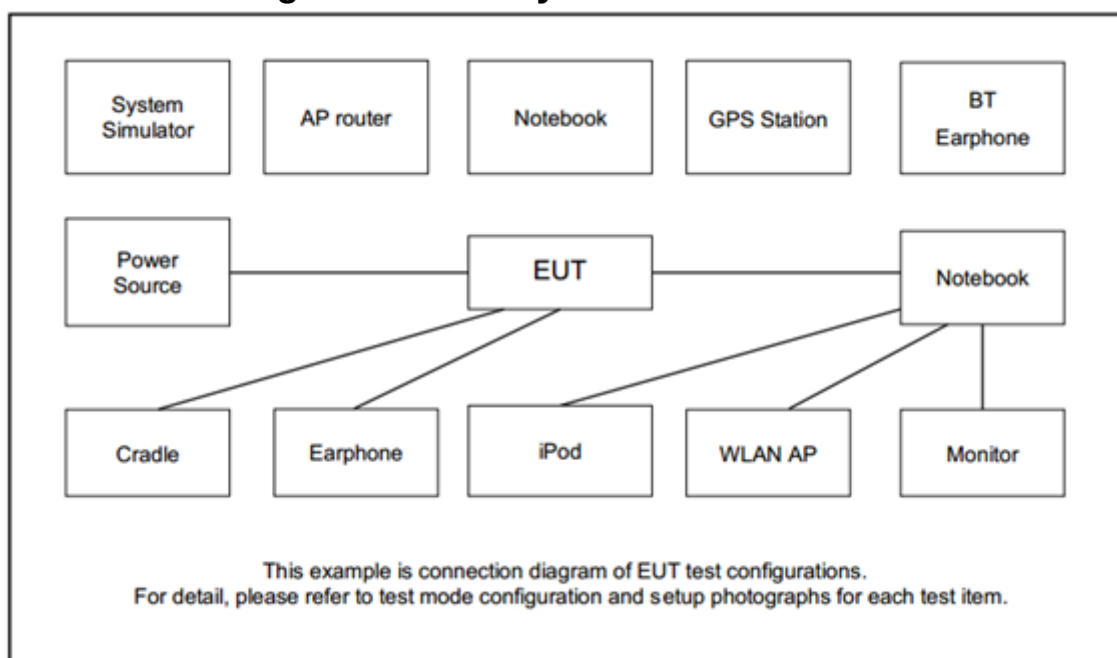

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Notebook	DELL	P20G	FCC DoC/ Contains FCC ID: QDS-BRCM1051	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	Notebook	ASUS	P2430U	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone, and turned on hotspot mode to link with notebook via WLAN, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Laptop and EUT via USB cable.
2. Execute "Video Player" to play MPEG4 files.
3. Execute "H Pattern" to show "H" patterns via HDMI Cable on the Monitor.
4. Turn on WiGig function.
5. EUT links with Notebook via RJ-45 and executes ping.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

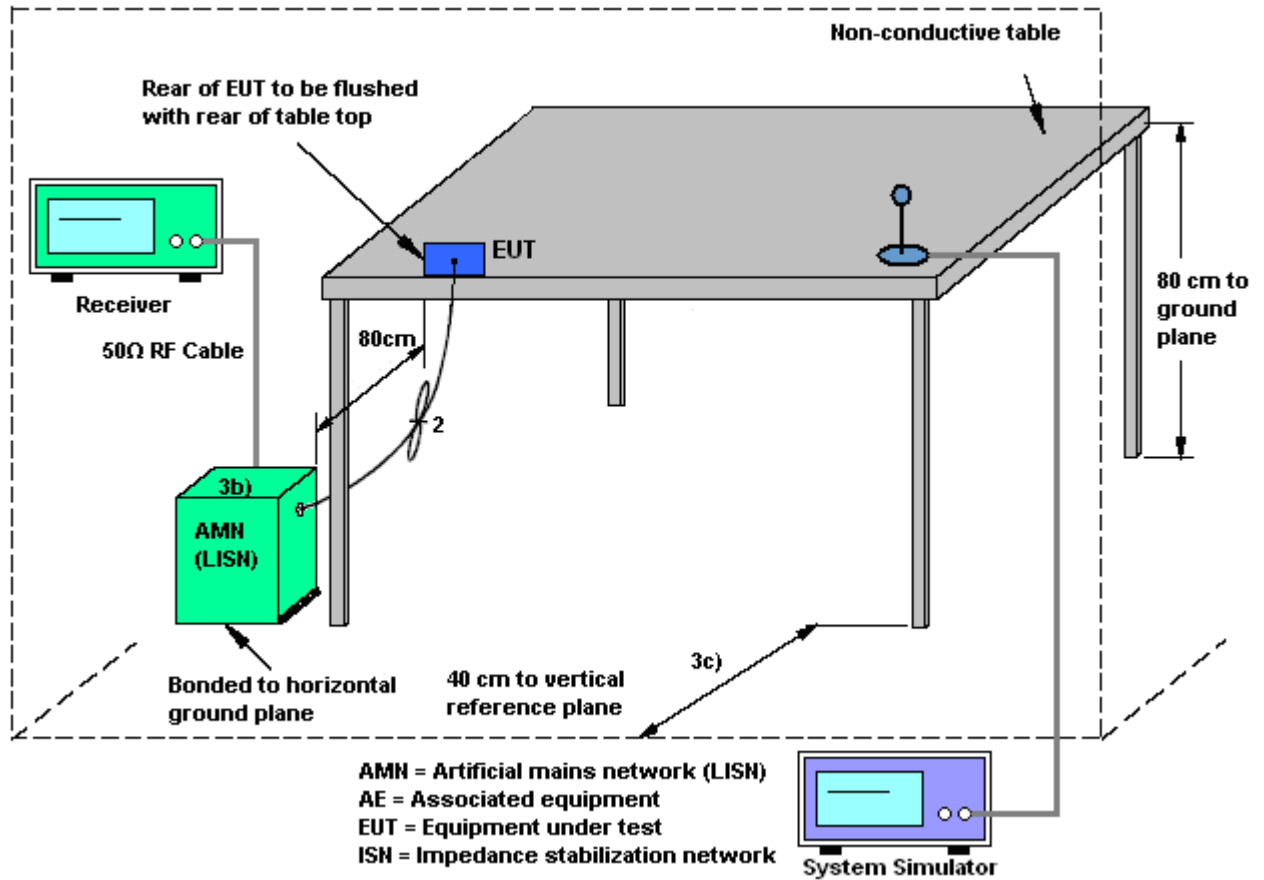

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

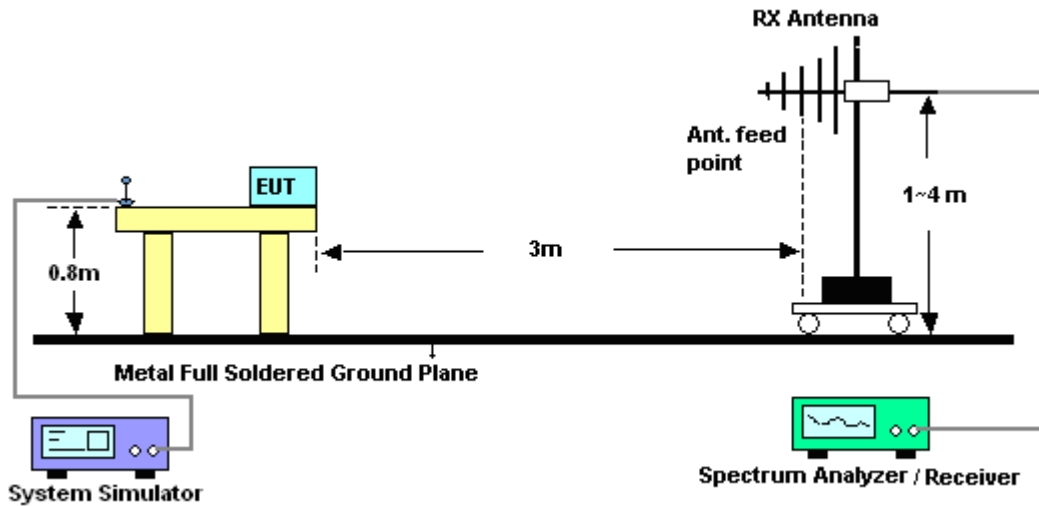

For radiated emissions above 1GHz

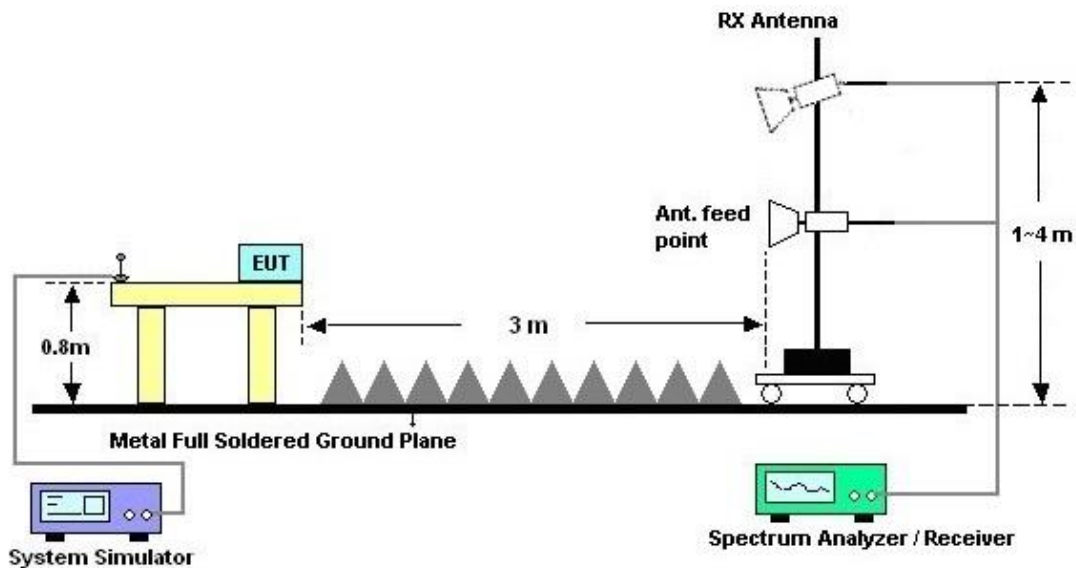

3.2.5. Test Result of Radiated Emission

Please refer to Appendix B.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 16, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Nov. 12, 2018	Jan. 16, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Jan. 16, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Jan. 16, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 16, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Jan. 16, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Jan. 16, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Bilog Antenna	Schaffner	CBL6111C&N-6-06	2725&AT-N0601	30MHz~1GHz	Oct. 13, 2018	Jan. 15, 2019 ~ Jan. 16, 2019	Oct. 12, 2019	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Jan. 02, 2019	Jan. 15, 2019 ~ Jan. 16, 2019	Jan. 01, 2020	Radiation (03CH06-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1156	1GHz~18GHz	Aug. 24, 2018	Jan. 15, 2019 ~ Jan. 16, 2019	Aug. 23, 2019	Radiation (03CH06-HY)
Preamplifier	SONOMA	310N	186713	9kHz~1GHz	May 02, 2018	Jan. 15, 2019 ~ Jan. 16, 2019	May 01, 2019	Radiation (03CH06-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1850117	1GHz ~ 18GHz	May 24, 2018	Jan. 15, 2019 ~ Jan. 16, 2019	May 23, 2019	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208212	1m~4m	N/A	Jan. 15, 2019 ~ Jan. 16, 2019	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0-360 degree	N/A	Jan. 15, 2019 ~ Jan. 16, 2019	N/A	Radiation (03CH06-HY)
Test Software	AUDIX	e3	6.2009-8-24(k5)	N/A	N/A	Jan. 15, 2019 ~ Jan. 16, 2019	N/A	Radiation (03CH06-HY)
RF Cable	HUBER+SUHNER/WOKEN/HARBOUR INDUSTRIES	SUCOFLEX 104 /STORM/LL14 2	MY24966/4/00100A10 2A178T/CA3601-3601-1000	30MHz-26GHz	Nov. 22, 2018	Jan. 15, 2019 ~ Jan. 16, 2019	Nov. 21, 2019	Radiation (03CH06-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Nov. 02, 2018	Jan. 15, 2019 ~ Jan. 16, 2019	Nov. 01, 2019	Radiation (03CH06-HY)
Filter	Wainwright	WLKS1200-8SS	SN3	1.2G Low Pass	Nov. 02, 2018	Jan. 15, 2019 ~ Jan. 16, 2019	Nov. 01, 2019	Radiation (03CH06-HY)

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
--	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
--	-----




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Rick Lin	Temperature :	22~23℃
		Relative Humidity :	60~62%

EUT Information

Report NO : 8D2018
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

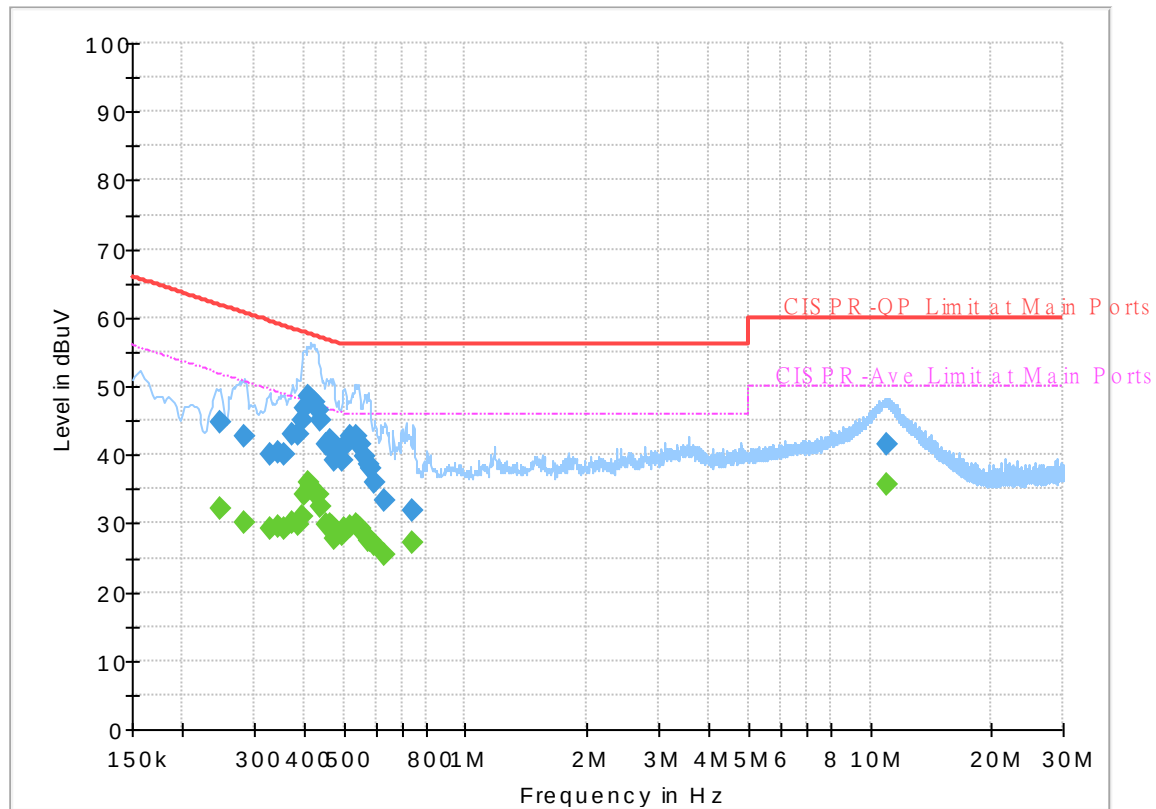

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.246750	---	32.25	51.87	19.62	L1	OFF	19.5
0.246750	44.79	---	61.87	17.08	L1	OFF	19.5
0.285000	---	30.12	50.67	20.55	L1	OFF	19.5
0.285000	42.79	---	60.67	17.88	L1	OFF	19.5
0.327750	---	29.14	49.51	20.37	L1	OFF	19.5
0.327750	40.10	---	59.51	19.41	L1	OFF	19.5
0.345750	---	29.40	49.06	19.66	L1	OFF	19.5
0.345750	40.23	---	59.06	18.83	L1	OFF	19.5
0.354750	---	29.32	48.85	19.53	L1	OFF	19.5
0.354750	40.03	---	58.85	18.82	L1	OFF	19.5
0.375000	---	30.18	48.39	18.21	L1	OFF	19.5
0.375000	42.97	---	58.39	15.42	L1	OFF	19.5
0.386250	---	29.97	48.14	18.17	L1	OFF	19.5
0.386250	42.86	---	58.14	15.28	L1	OFF	19.5
0.393000	---	31.03	48.00	16.97	L1	OFF	19.5
0.393000	45.04	---	58.00	12.96	L1	OFF	19.5
0.399750	---	34.26	47.86	13.60	L1	OFF	19.5
0.399750	46.68	---	57.86	11.18	L1	OFF	19.5
0.408750	---	36.04	47.67	11.63	L1	OFF	19.5
0.408750	48.59	---	57.67	9.08	L1	OFF	19.5
0.415500	---	35.26	47.54	12.28	L1	OFF	19.5

0.415500	48.10	---	57.54	9.44	L1	OFF	19.5
0.424500	---	34.42	47.36	12.94	L1	OFF	19.5
0.424500	47.77	---	57.36	9.59	L1	OFF	19.5
0.433500	---	34.29	47.19	12.90	L1	OFF	19.5
0.433500	46.57	---	57.19	10.62	L1	OFF	19.5
0.440250	---	32.56	47.06	14.50	L1	OFF	19.5
0.440250	45.06	---	57.06	12.00	L1	OFF	19.5
0.453750	---	29.72	46.81	17.09	L1	OFF	19.5
0.453750	41.63	---	56.81	15.18	L1	OFF	19.5
0.462750	---	29.90	46.64	16.74	L1	OFF	19.5
0.462750	42.00	---	56.64	14.64	L1	OFF	19.5
0.469500	---	29.48	46.52	17.04	L1	OFF	19.5
0.469500	40.78	---	56.52	15.74	L1	OFF	19.5
0.476250	---	27.88	46.40	18.52	L1	OFF	19.5
0.476250	39.12	---	56.40	17.28	L1	OFF	19.5
0.494250	---	28.25	46.10	17.85	L1	OFF	19.5
0.494250	39.14	---	56.10	16.96	L1	OFF	19.5
0.501000	---	29.36	46.00	16.64	L1	OFF	19.5
0.501000	41.22	---	56.00	14.78	L1	OFF	19.5
0.519000	---	29.47	46.00	16.53	L1	OFF	19.5
0.519000	42.76	---	56.00	13.24	L1	OFF	19.5
0.534750	---	29.83	46.00	16.17	L1	OFF	19.5
0.534750	42.61	---	56.00	13.39	L1	OFF	19.5
0.546000	---	29.41	46.00	16.59	L1	OFF	19.5
0.546000	41.44	---	56.00	14.56	L1	OFF	19.5
0.548250	---	29.21	46.00	16.79	L1	OFF	19.5
0.548250	41.41	---	56.00	14.59	L1	OFF	19.5
0.561750	---	28.47	46.00	17.53	L1	OFF	19.5
0.561750	39.65	---	56.00	16.35	L1	OFF	19.5
0.573000	---	27.51	46.00	18.49	L1	OFF	19.5
0.573000	38.61	---	56.00	17.39	L1	OFF	19.5
0.579750	---	27.37	46.00	18.63	L1	OFF	19.5
0.579750	37.91	---	56.00	18.09	L1	OFF	19.5
0.595500	---	26.81	46.00	19.19	L1	OFF	19.5
0.595500	35.93	---	56.00	20.07	L1	OFF	19.5
0.633750	---	25.42	46.00	20.58	L1	OFF	19.6
0.633750	33.21	---	56.00	22.79	L1	OFF	19.6
0.741750	---	27.07	46.00	18.93	L1	OFF	19.6
0.741750	31.92	---	56.00	24.08	L1	OFF	19.6
10.997250	---	35.68	50.00	14.32	L1	OFF	19.9
10.997250	41.63	---	60.00	18.37	L1	OFF	19.9

EUT Information

Report NO : 8D2018
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

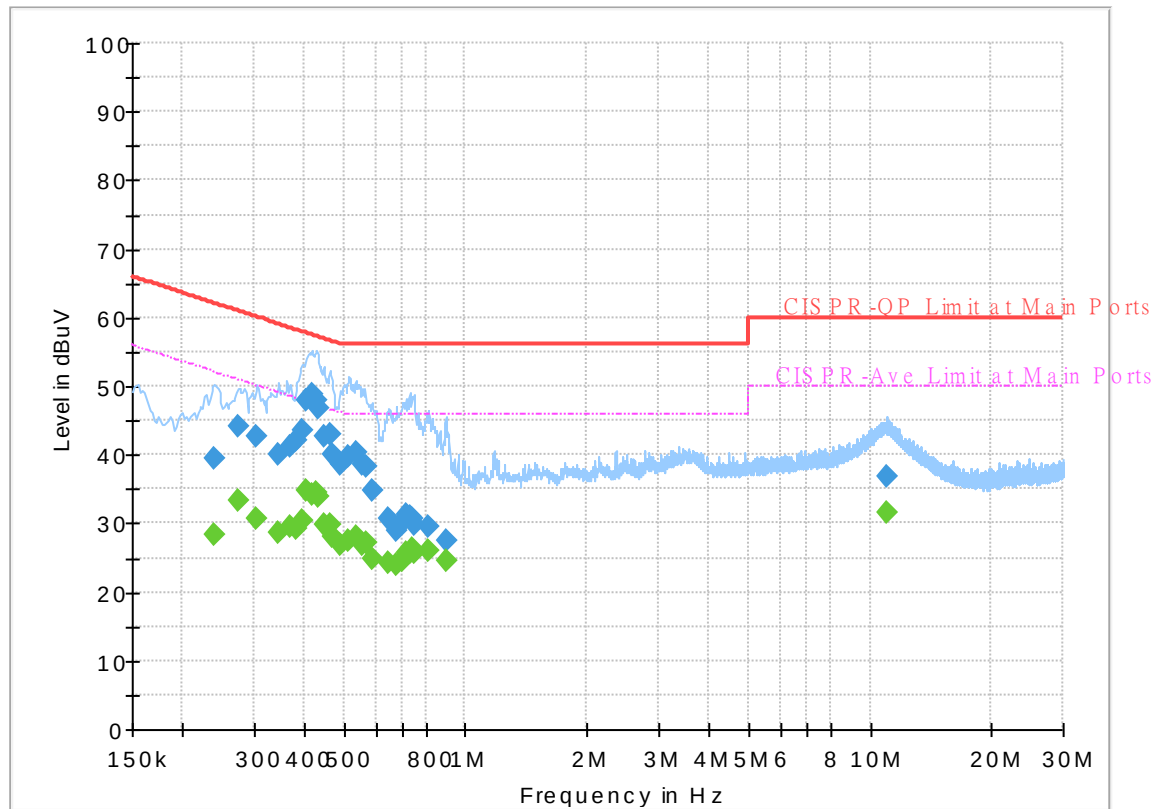


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.240000	---	28.36	52.10	23.74	N	OFF	19.5
0.240000	39.40	---	62.10	22.70	N	OFF	19.5
0.273750	---	33.22	51.00	17.78	N	OFF	19.5
0.273750	44.29	---	61.00	16.71	N	OFF	19.5
0.305250	---	30.56	50.10	19.54	N	OFF	19.5
0.305250	42.57	---	60.10	17.53	N	OFF	19.5
0.343500	---	28.57	49.12	20.55	N	OFF	19.5
0.343500	40.08	---	59.12	19.04	N	OFF	19.5
0.370500	---	29.67	48.49	18.82	N	OFF	19.5
0.370500	41.22	---	58.49	17.27	N	OFF	19.5
0.384000	---	29.31	48.19	18.88	N	OFF	19.5
0.384000	42.06	---	58.19	16.13	N	OFF	19.5
0.393000	---	30.48	48.00	17.52	N	OFF	19.5
0.393000	43.53	---	58.00	14.47	N	OFF	19.5
0.404250	---	34.90	47.77	12.87	N	OFF	19.5
0.404250	47.84	---	57.77	9.93	N	OFF	19.5
0.417750	---	34.30	47.49	13.19	N	OFF	19.5
0.417750	48.77	---	57.49	8.72	N	OFF	19.5
0.429000	---	34.41	47.27	12.86	N	OFF	19.5
0.429000	47.90	---	57.27	9.37	N	OFF	19.5
0.433500	---	33.87	47.19	13.32	N	OFF	19.5

0.433500	46.77	---	57.19	10.42	N	OFF	19.5
0.447000	---	29.74	46.93	17.19	N	OFF	19.5
0.447000	42.69	---	56.93	14.24	N	OFF	19.5
0.462750	---	29.91	46.64	16.73	N	OFF	19.5
0.462750	42.87	---	56.64	13.77	N	OFF	19.5
0.469500	---	27.96	46.52	18.56	N	OFF	19.5
0.469500	40.09	---	56.52	16.43	N	OFF	19.5
0.492000	---	27.01	46.13	19.12	N	OFF	19.5
0.492000	38.62	---	56.13	17.51	N	OFF	19.5
0.514500	---	27.38	46.00	18.62	N	OFF	19.5
0.514500	39.67	---	56.00	16.33	N	OFF	19.5
0.534750	---	27.96	46.00	18.04	N	OFF	19.5
0.534750	40.31	---	56.00	15.69	N	OFF	19.5
0.557250	---	26.98	46.00	19.02	N	OFF	19.5
0.557250	38.60	---	56.00	17.40	N	OFF	19.5
0.570750	---	27.11	46.00	18.89	N	OFF	19.5
0.570750	38.17	---	56.00	17.83	N	OFF	19.5
0.586500	---	24.97	46.00	21.03	N	OFF	19.5
0.586500	34.84	---	56.00	21.16	N	OFF	19.5
0.647250	---	24.16	46.00	21.84	N	OFF	19.6
0.647250	30.60	---	56.00	25.40	N	OFF	19.6
0.674250	---	23.90	46.00	22.10	N	OFF	19.6
0.674250	28.84	---	56.00	27.16	N	OFF	19.6
0.696750	---	24.63	46.00	21.37	N	OFF	19.6
0.696750	30.15	---	56.00	25.85	N	OFF	19.6
0.712500	---	25.70	46.00	20.30	N	OFF	19.6
0.712500	31.35	---	56.00	24.65	N	OFF	19.6
0.728250	---	25.76	46.00	20.24	N	OFF	19.6
0.728250	30.98	---	56.00	25.02	N	OFF	19.6
0.737250	---	26.31	46.00	19.69	N	OFF	19.6
0.737250	30.71	---	56.00	25.29	N	OFF	19.6
0.746250	---	25.76	46.00	20.24	N	OFF	19.6
0.746250	29.74	---	56.00	26.26	N	OFF	19.6
0.813750	---	26.01	46.00	19.99	N	OFF	19.6
0.813750	29.48	---	56.00	26.52	N	OFF	19.6
0.892500	---	24.48	46.00	21.52	N	OFF	19.6
0.892500	27.39	---	56.00	28.61	N	OFF	19.6
10.963500	---	31.67	50.00	18.33	N	OFF	20.0
10.963500	36.70	---	60.00	23.30	N	OFF	20.0




Appendix B. Radiated Emission Test Result

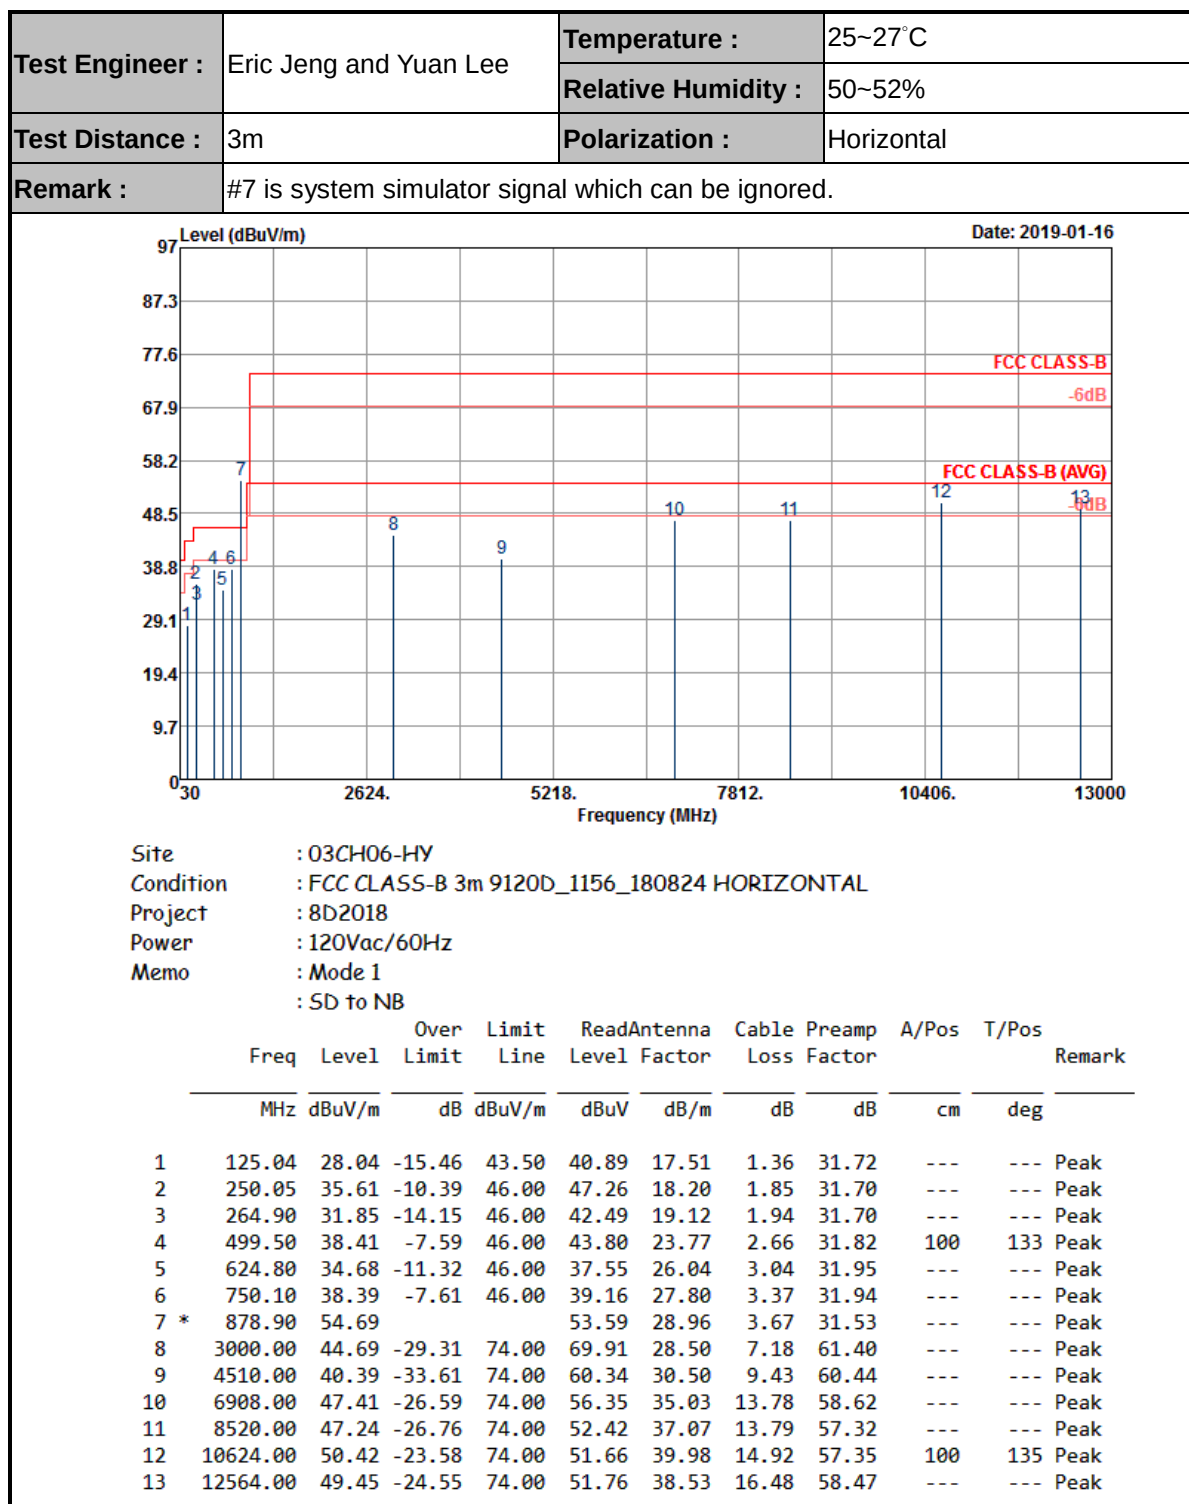



Test Engineer :	Eric Jeng and Yuan Lee	Temperature :	25~27°C
		Relative Humidity :	50~52%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

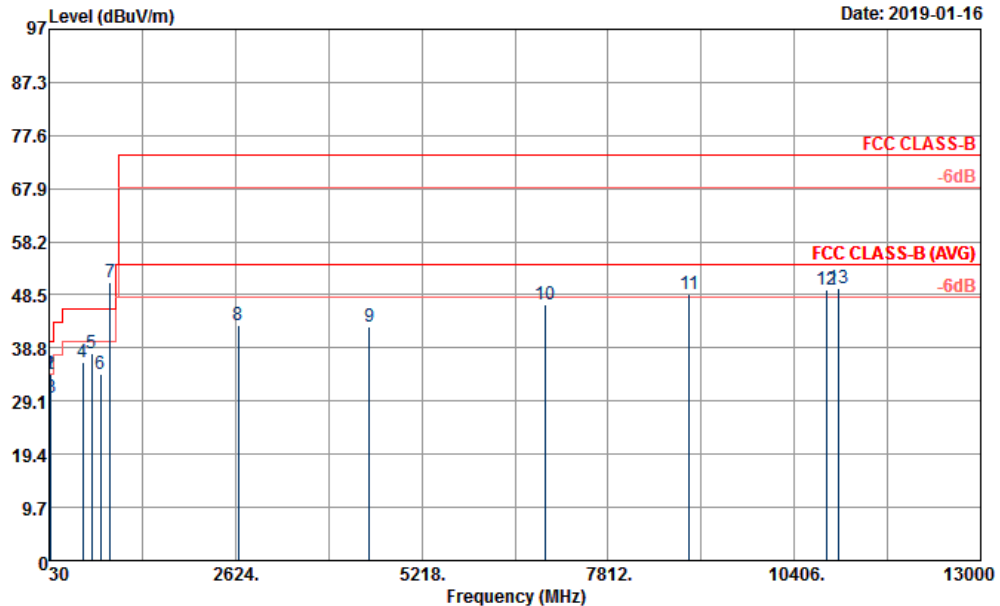

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.27	34.11	-5.89	40.00	41.07	24.19	0.62	31.77	---	---	Peak
2	40.76	34.10	-5.90	40.00	46.90	18.34	0.62	31.76	100	257	QP
3	58.08	29.71	-10.29	40.00	48.85	11.78	0.84	31.76	---	---	Peak
4	500.20	36.17	-9.83	46.00	41.54	23.79	2.66	31.82	---	---	Peak
5	624.80	37.95	-8.05	46.00	40.82	26.04	3.04	31.95	---	---	Peak
6	750.10	33.96	-12.04	46.00	34.73	27.80	3.37	31.94	---	---	Peak
7 *	879.60	50.74			49.65	28.95	3.67	31.53	---	---	Peak
8	2664.00	43.05	-30.95	74.00	69.26	27.83	6.76	61.20	---	---	Peak
9	4494.00	42.76	-31.24	74.00	62.75	30.50	9.46	60.50	---	---	Peak
10	6928.00	46.69	-27.31	74.00	55.69	35.07	13.72	58.62	---	---	Peak
11	8938.00	48.55	-25.45	74.00	53.42	37.57	13.93	57.83	---	---	Peak
12	10858.00	49.58	-24.42	74.00	49.75	40.37	15.07	56.81	---	---	Peak
13	11024.00	49.72	-24.28	74.00	49.47	40.37	15.17	56.48	100	110	Peak

—————THE END—————