



Appendix D - Product Photos

PDA Phone 1 :

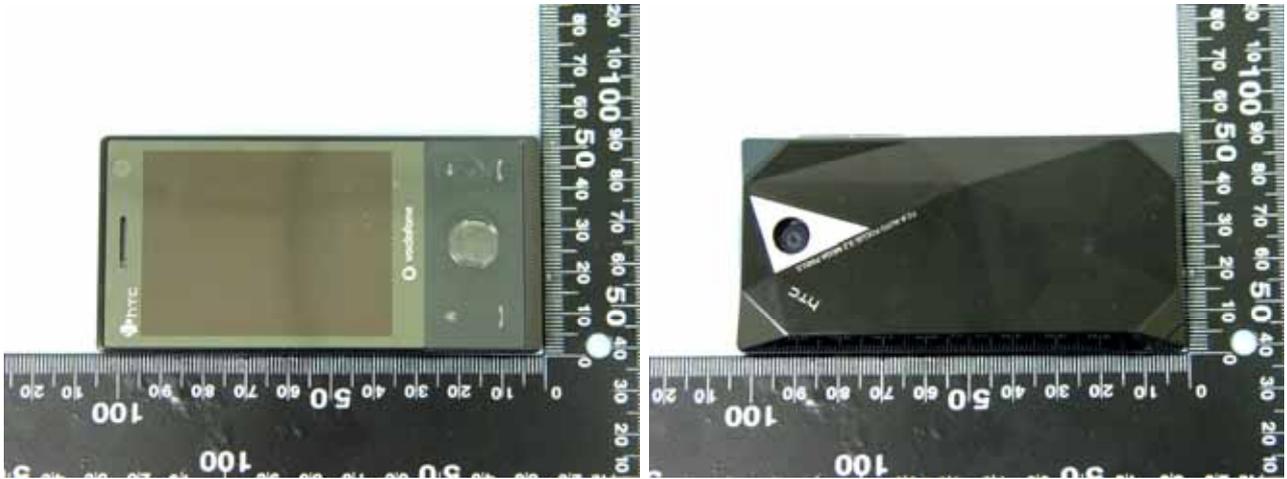

PDA Phone 2 :

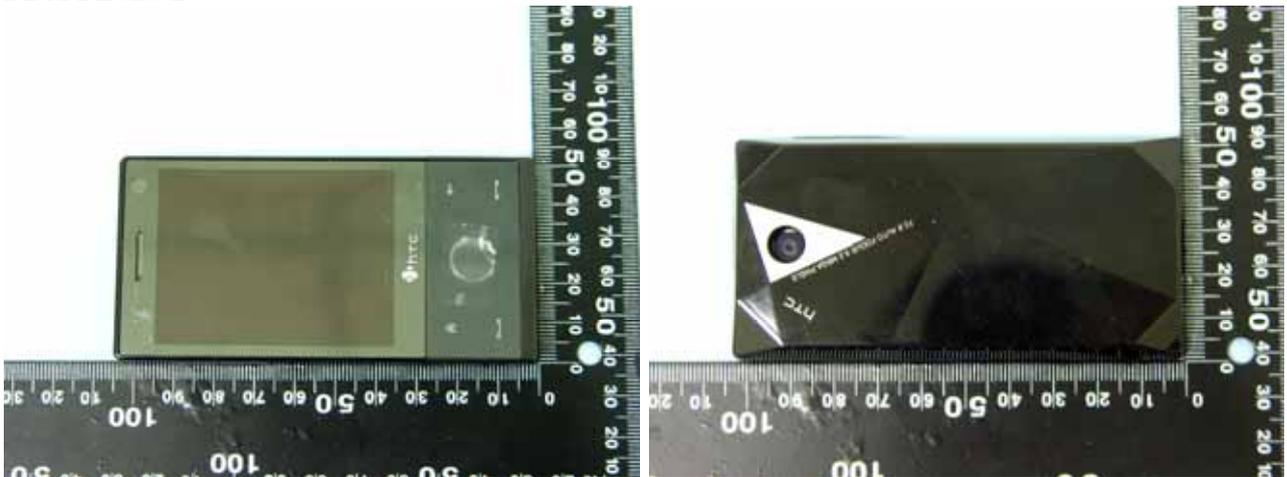


Battery 1 :





Battery 2 :



Battery 3 :

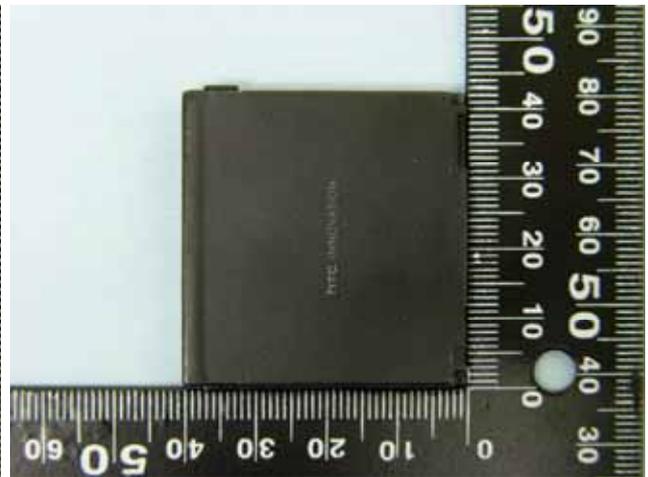

Battery 4 :

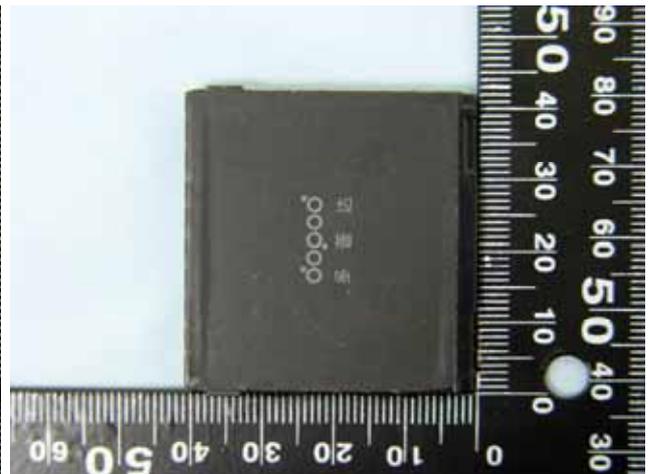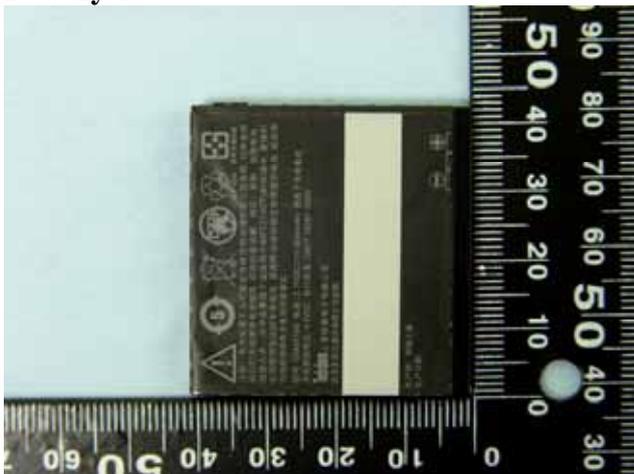

Earphone 2 :



Earphone 3 :



Earphone 4 :




Earphone 5 :



Earphone 6 :



Antenna Distance :

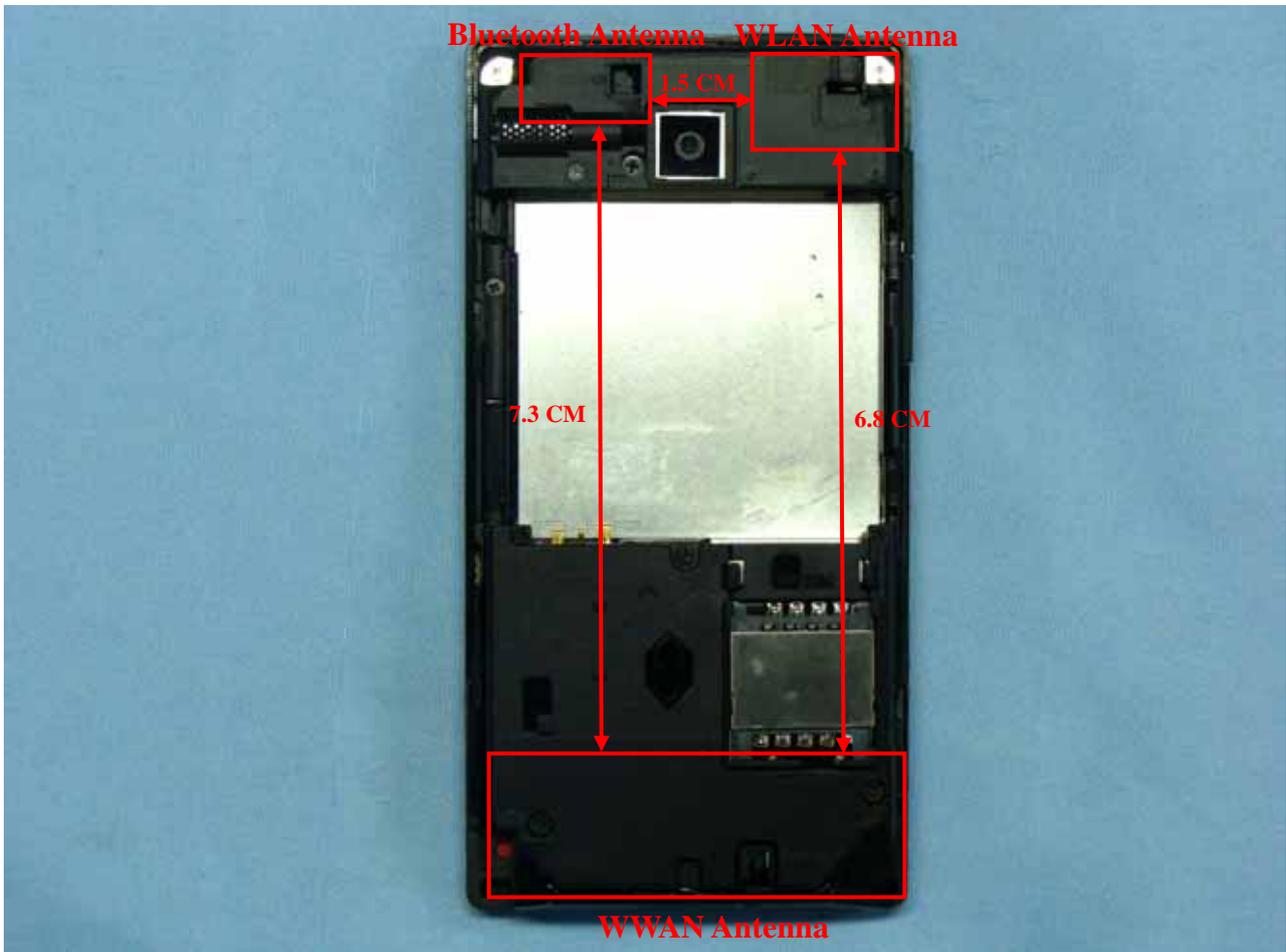



2nd component Source List

Component Model		
AC Adapter 1	Brand Name	DELTA
	Model Name	ADP-5FH X (X=A, B, C, D, or E)
	Power Rating	I/P: 100-240Vac, 50-60Hz, 0.2A; O/P: 5Vdc, 1A
	AC Power Cord Type	1.8 meter shielded cable without ferrite core
AC Adapter 2	Brand Name	PHIHONG
	Model Name	PSAA05X-050 (X=A, C, E, K, or S)
	Power Rating	I/P: 100-240Vac, 50-60Hz, 200mA; O/P: 5Vdc, 1A
	AC Power Cord Type	1.8 meter shielded cable without ferrite core
AC Adapter 3	Manufacturer	DELTA
	Brand Name	hTC
	Model Name	TC P300
	Power Rating	I/P: 100-240Vac, 50-60Hz, 0.2A; O/P: 5Vdc, 1A
AC Adapter 4	Manufacturer	Foxlink
	Brand Name	hTC
	Model Name	TC P300
	Power Rating	I/P: 100-240Vac, 50-60Hz, 0.2A; O/P: 5Vdc, 1A
Car Charger	Brand Name	Phihong
	Model Name	CLA05D-050A
	P/N	CC L120
	Power Rating	I/P: 10-30V, 0.65A; O/P: 5Vdc, 1A
	Power Cord Type	1.8 meter shielded cable without ferrite core
Battery 1	Manufacturer	Total Wireless Solutions (Macao Commercial Offshore) Limited (TWS)
	Brand Name	hTC
	Model Name	DIAM160
	Power Rating	3.7Vdc, 900mA
	Type	Li-ion
Battery 2	Manufacturer	DESAY CORPORATION (Desay)
	Brand Name	hTC
	Model Name	DIAM160
	Power Rating	3.7Vdc, 900mA
	Type	Li-ion
Battery 3	Manufacturer	SAMSUNG SDI CO., LTD.
	Brand Name	hTC
	Model Name	DIAM160
	Power Rating	3.7Vdc, 900mA
	Type	Li-ion
Battery 4	Manufacturer	SIMPLO TECHNOLOGY CO., LTD.
	Brand Name	hTC
	Model Name	DIAM171
	Power Rating	3.7Vdc, 1340mA
	Type	Li-ion



Battery 5	Manufacturer	Total Wireless Solutions (Macao Commercial Offshore) Limited (TWS)
	Brand Name	hTC
	Model Name	DIAM171
	Power Rating	3.7Vdc, 1340mA
Battery 6	Type	Li-ion
	Manufacturer	WellDone Company
	Brand Name	hTC
	Model Name	DIAM160
Earphone 1	Power Rating	3.7Vdc, 900mA
	Type	Li-ion
	Signal Line Type	1.7 meter shielded cable without ferrite core
Earphone 2	Brand Name	COTRON
	Model Name	RC E100
	Signal Line Type	1.7 meter shielded cable without ferrite core
Earphone 3	Brand Name	COTRON
	Model Name	HS S200
	Signal Line Type	1.6 meter shielded cable without ferrite core
Earphone 4	Brand Name	COTRON
	Model Name	HS S300
	Signal Line Type	1.6 meter shielded cable without ferrite core
Earphone 5	Manufacturer	MEC
	Model Name	HS S300
	Signal Line Type	1.7 meter non-shielded cable without ferrite core
Earphone 6	Manufacturer	Kingstate
	Model Name	HS S300
	Signal Line Type	1.7 meter non-shielded cable without ferrite core
USB Cable 1	Manufacturer	Merry
	Model Name	HS S300
	Signal Line Type	1.7 meter non-shielded cable without ferrite core
USB Cable 2	Brand Name	MEC
	Model Name	DC U300
	Signal Line Type	1.4 meter shielded cable with ferrite core
USB Cable 3	Brand Name	MEC
	Model Name	DC U100
	Signal Line Type	1.2 meter shielded cable with ferrite core
LCD Panel 1	Manufacturer	ACON
	Model Name	DC U300
	Signal Line Type	1.25 meter shielded cable without ferrite core
LCD Panel 2	Brand Name	Hitachi
	Model Name	DX07D05VM0AAA
LCD Panel 2	Brand Name	Sharp
	Model Name	LS028V7DX01



Photo Camera 1	Brand Name	Foxconn
	Model Name	CMHT-3A403D
Photo Camera 2	Brand Name	LiteOn
	Model Name	07PM12
Video Camera 1	Brand Name	Foxconn
	Model Name	CMHT-00M00D
Video Camera 2	Brand Name	LiteOn
	Model Name	07PC05
Pouch	Brand Name	XIGMA
	Model Name	PO S400

Remark:

1. ADP-5FH X (X=A, B, C, D or E) have the same circuit design. The difference between these models is plug, only ADP-5FH B was used for the test.
2. PSAA05X-050 (X=A, C, E, K or S) have the same circuit design. The difference between these models is plug, only PSAA05A-05 was used for the test.
3. TC P300 has some different plug such as US, EU, UK, AS and CN, only US used for testing.
4. The pouch is dust cover and its function is to protect the mobile phone. The pouch is without any clasps, so it can not be carried.
5. Above EUT's information was declared by manufacturer. Please refer to the specifications of manufacturer or User's Manual for more detailed features description.


Appendix E - Test Setup Photos



Right Cheek



Right Tilted

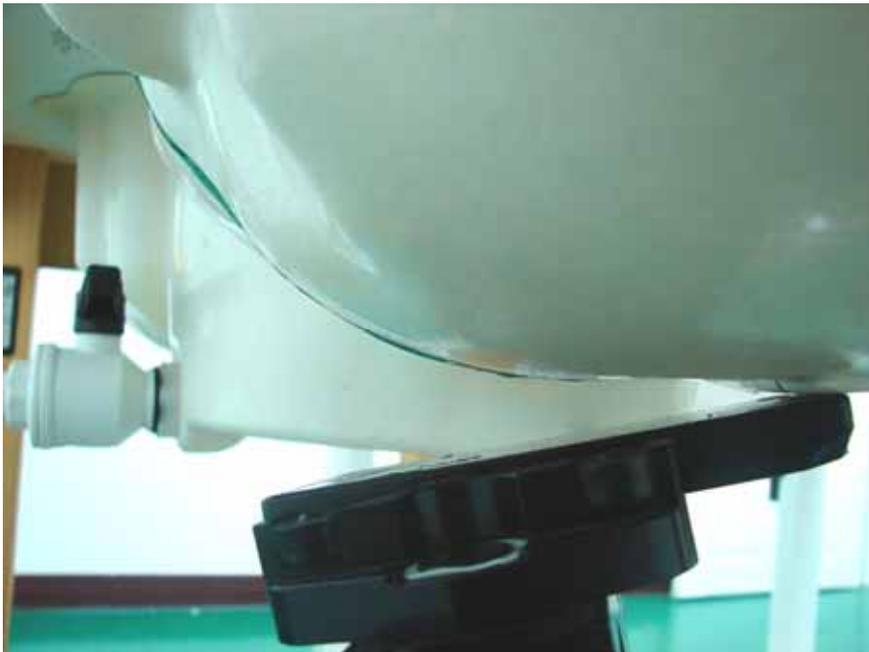**Left Cheek****Left Tilted**



Face with 1.5cm Gap



Bottom with 1.5cm Gap