Date/Time: 12/31/2006 8:43:15 PM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 close

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1880 MHz; σ = 1.41 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Tilted Middle CH661/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.739 mW/g

Right Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = -0.006 dB
Peak SAR (extrapolated) = 0.974 W/kg
SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.346 mW/g
Maximum value of SAR (measured) = 0.756 mW/g

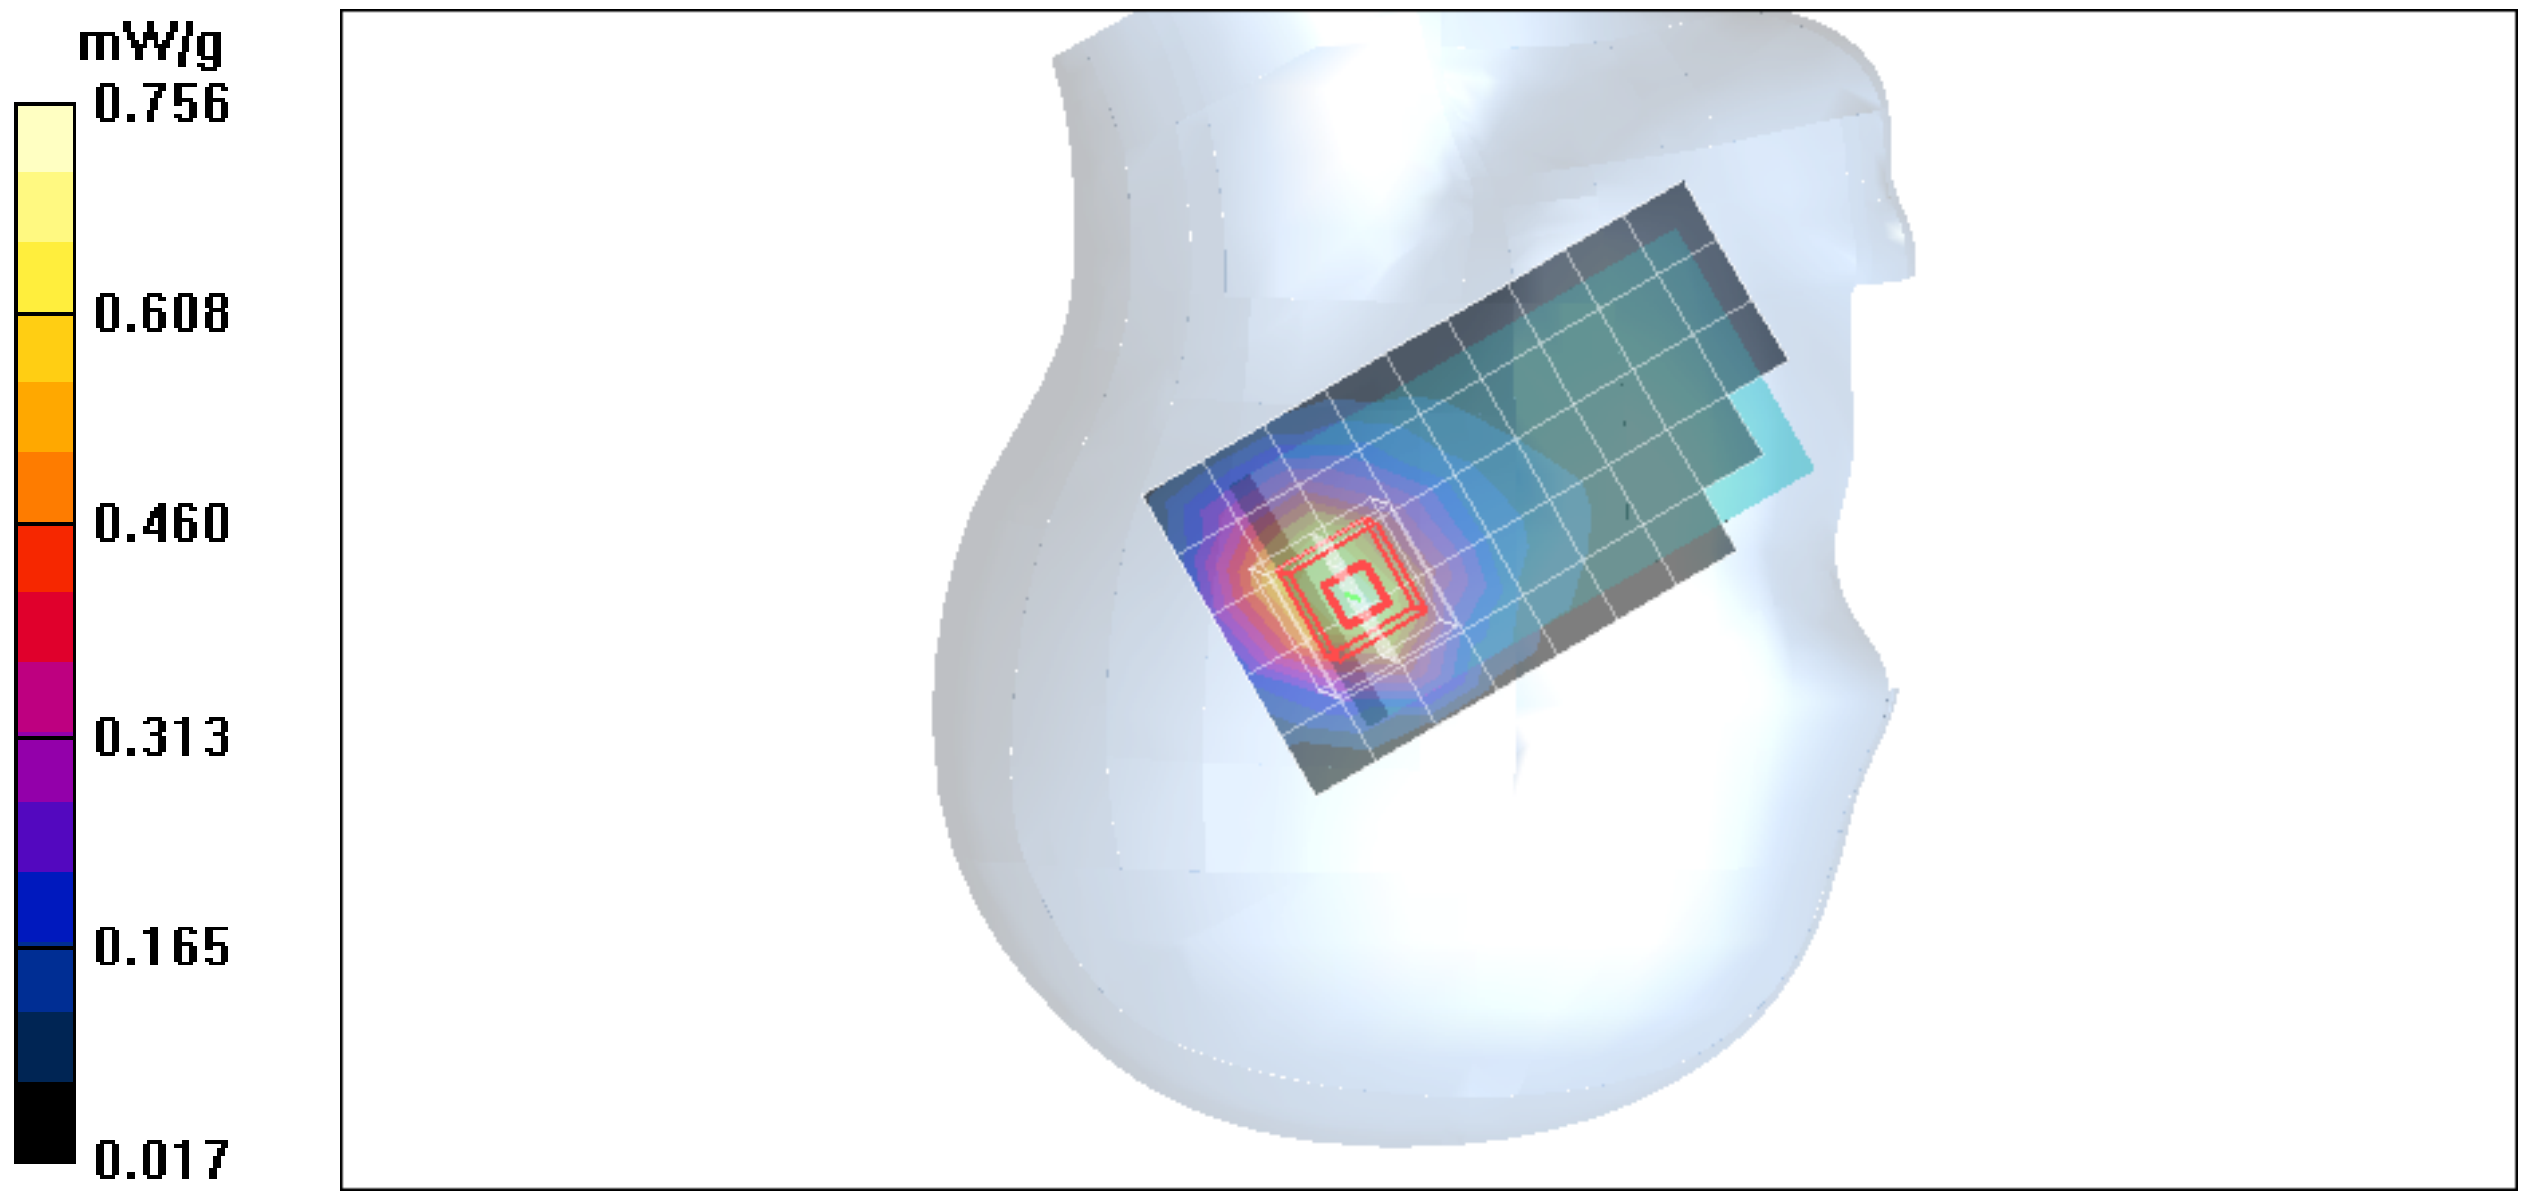

Date/Time: 12/31/2006 8:57:05 PM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 close

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8
Medium parameters used: f = 1910 MHz; σ = 1.44 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Tilted High CH810/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.522 mW/g

Right Tilted High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 19.4 V/m; Power Drift = -0.016 dB
Peak SAR (extrapolated) = 0.701 W/kg
SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.244 mW/g
Maximum value of SAR (measured) = 0.538 mW/g

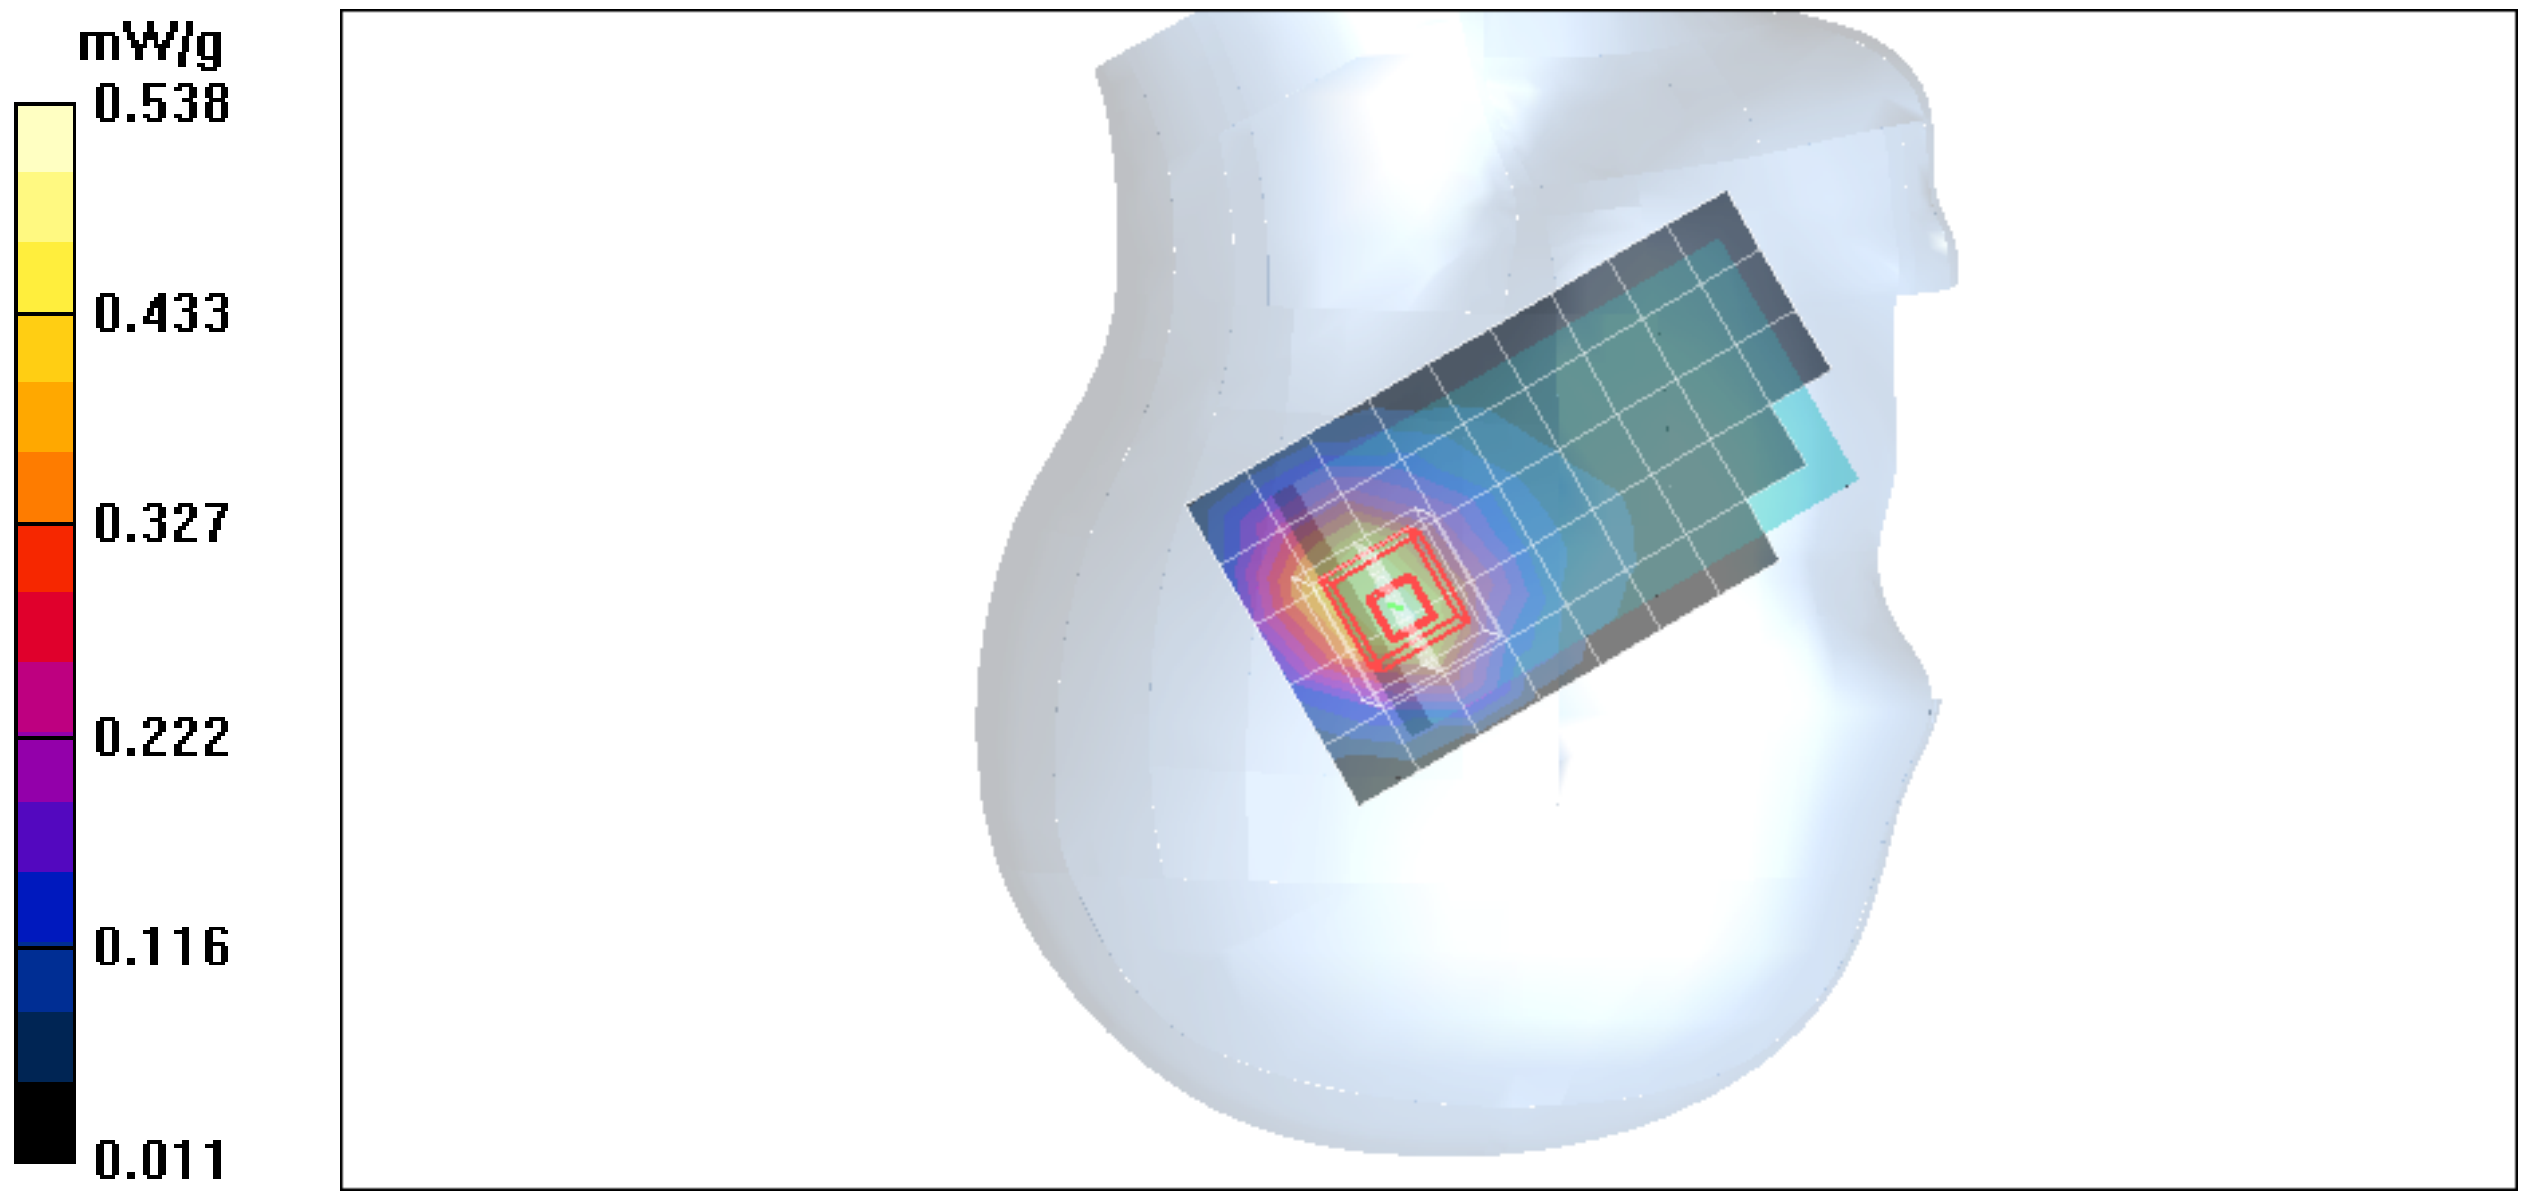

Date/Time: 1/1/2007 2:07:14 AM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 close

DUT: HERA100; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

co-Location 802.11b+Bt+PCS Right Tilted Low CH512/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.916 mW/g

co-Location 802.11b+Bt+PCS Right Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = -0.032 dB
Peak SAR (extrapolated) = 1.18 W/kg
SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.411 mW/g
Maximum value of SAR (measured) = 0.913 mW/g

co-Location 802.11b+Bt+PCS Right Tilted Low CH512/Z Scan (1x1x21):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.683 mW/g

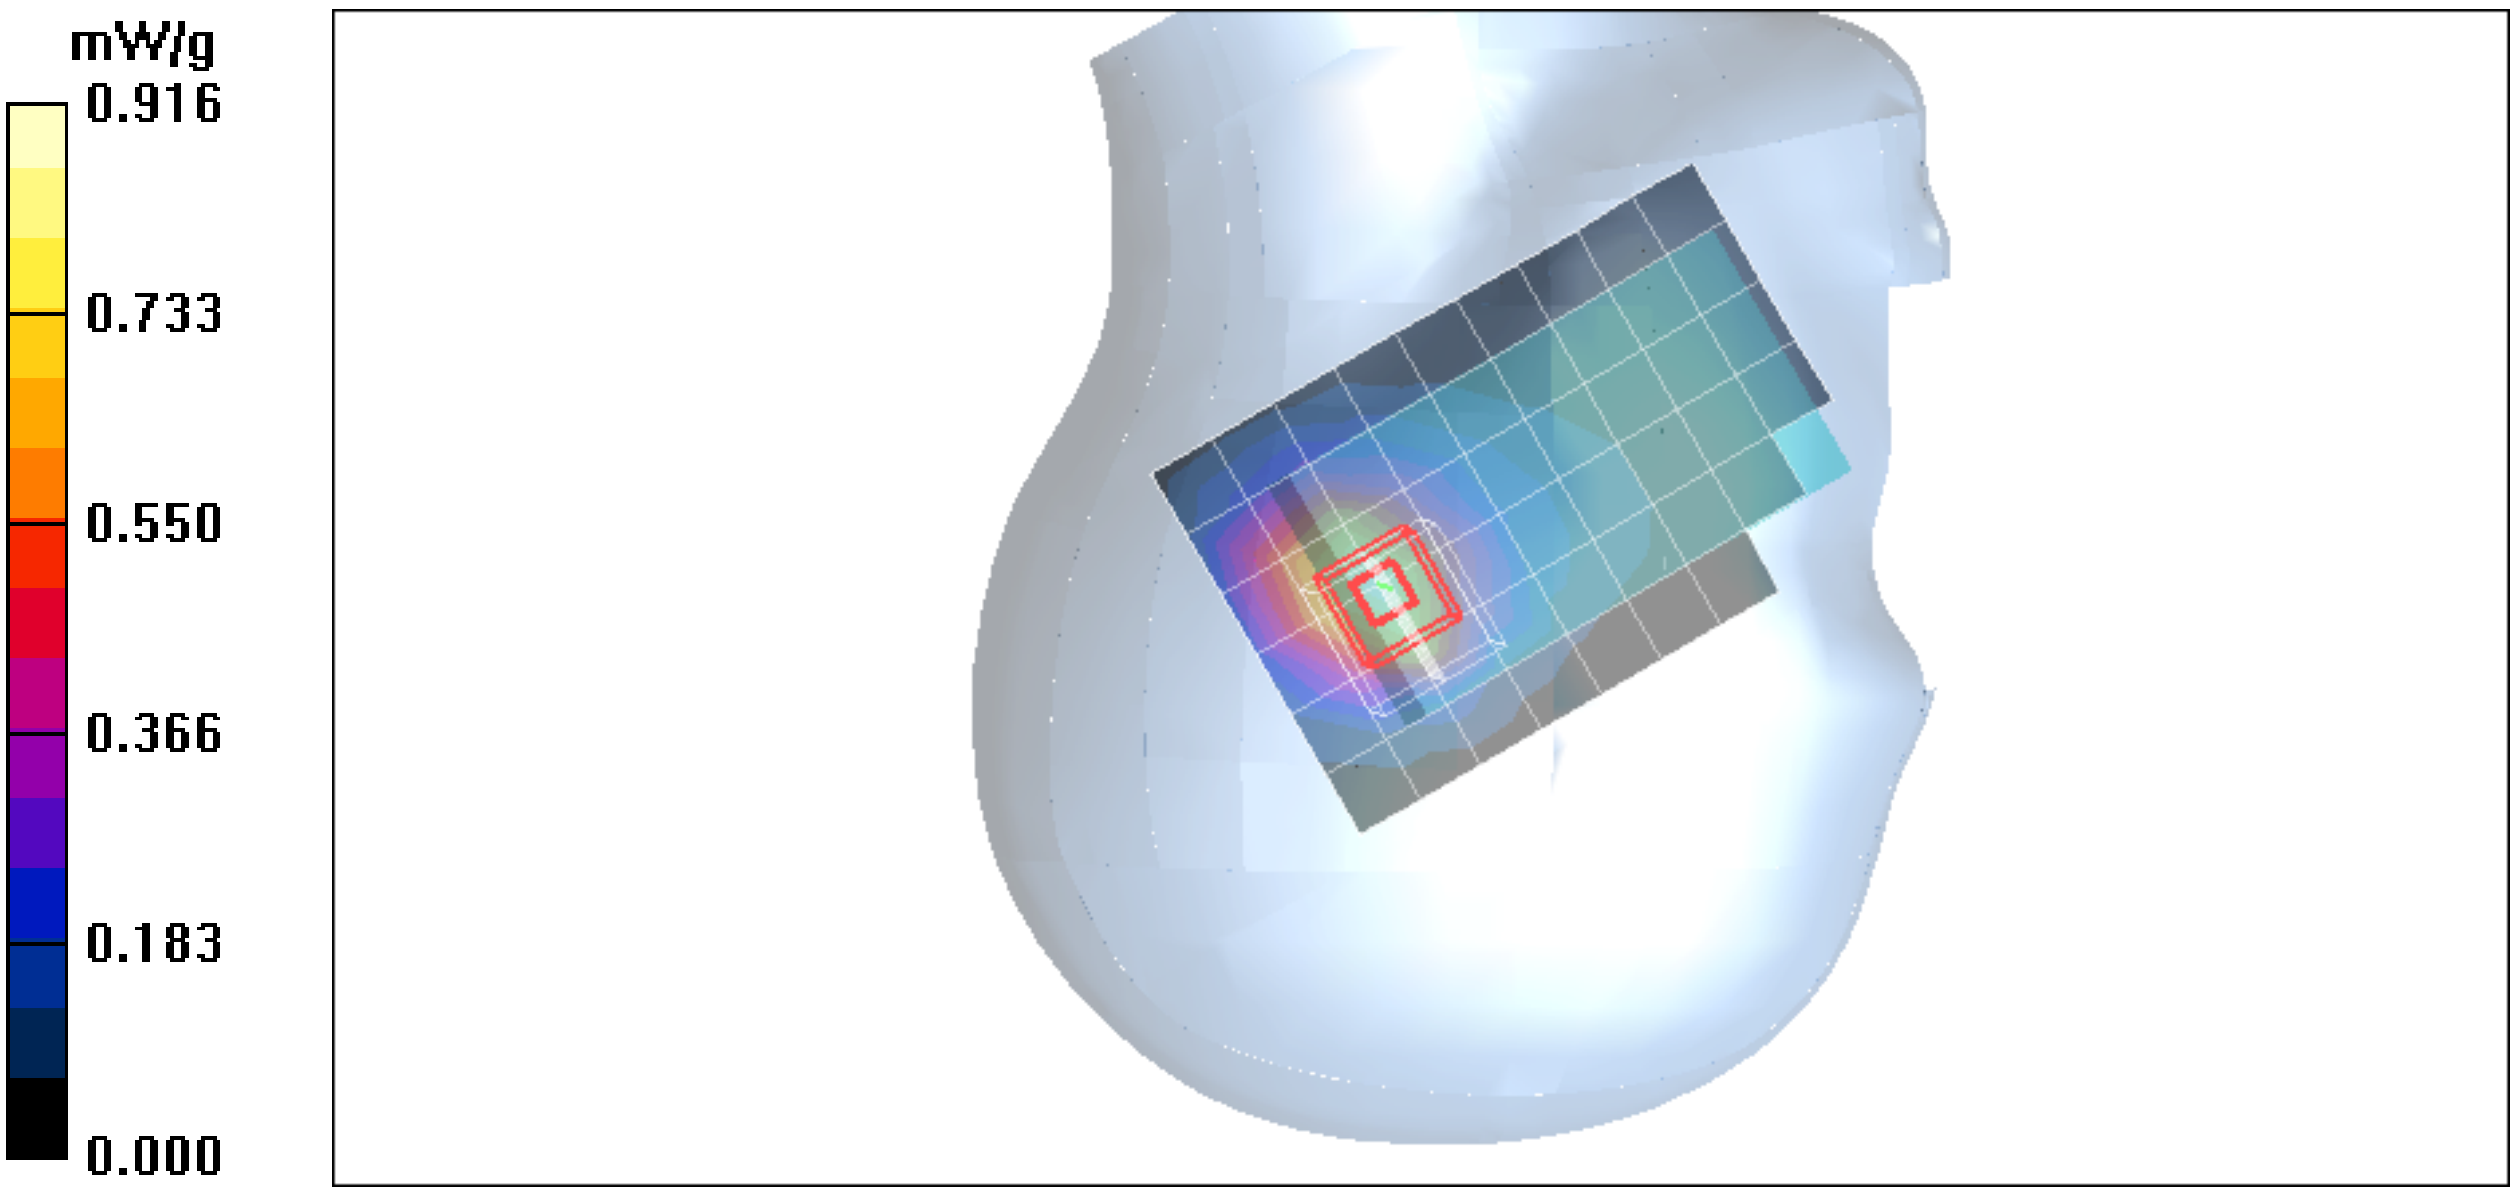
mW/g
0.916
0.733
0.550
0.366
0.183
0.000

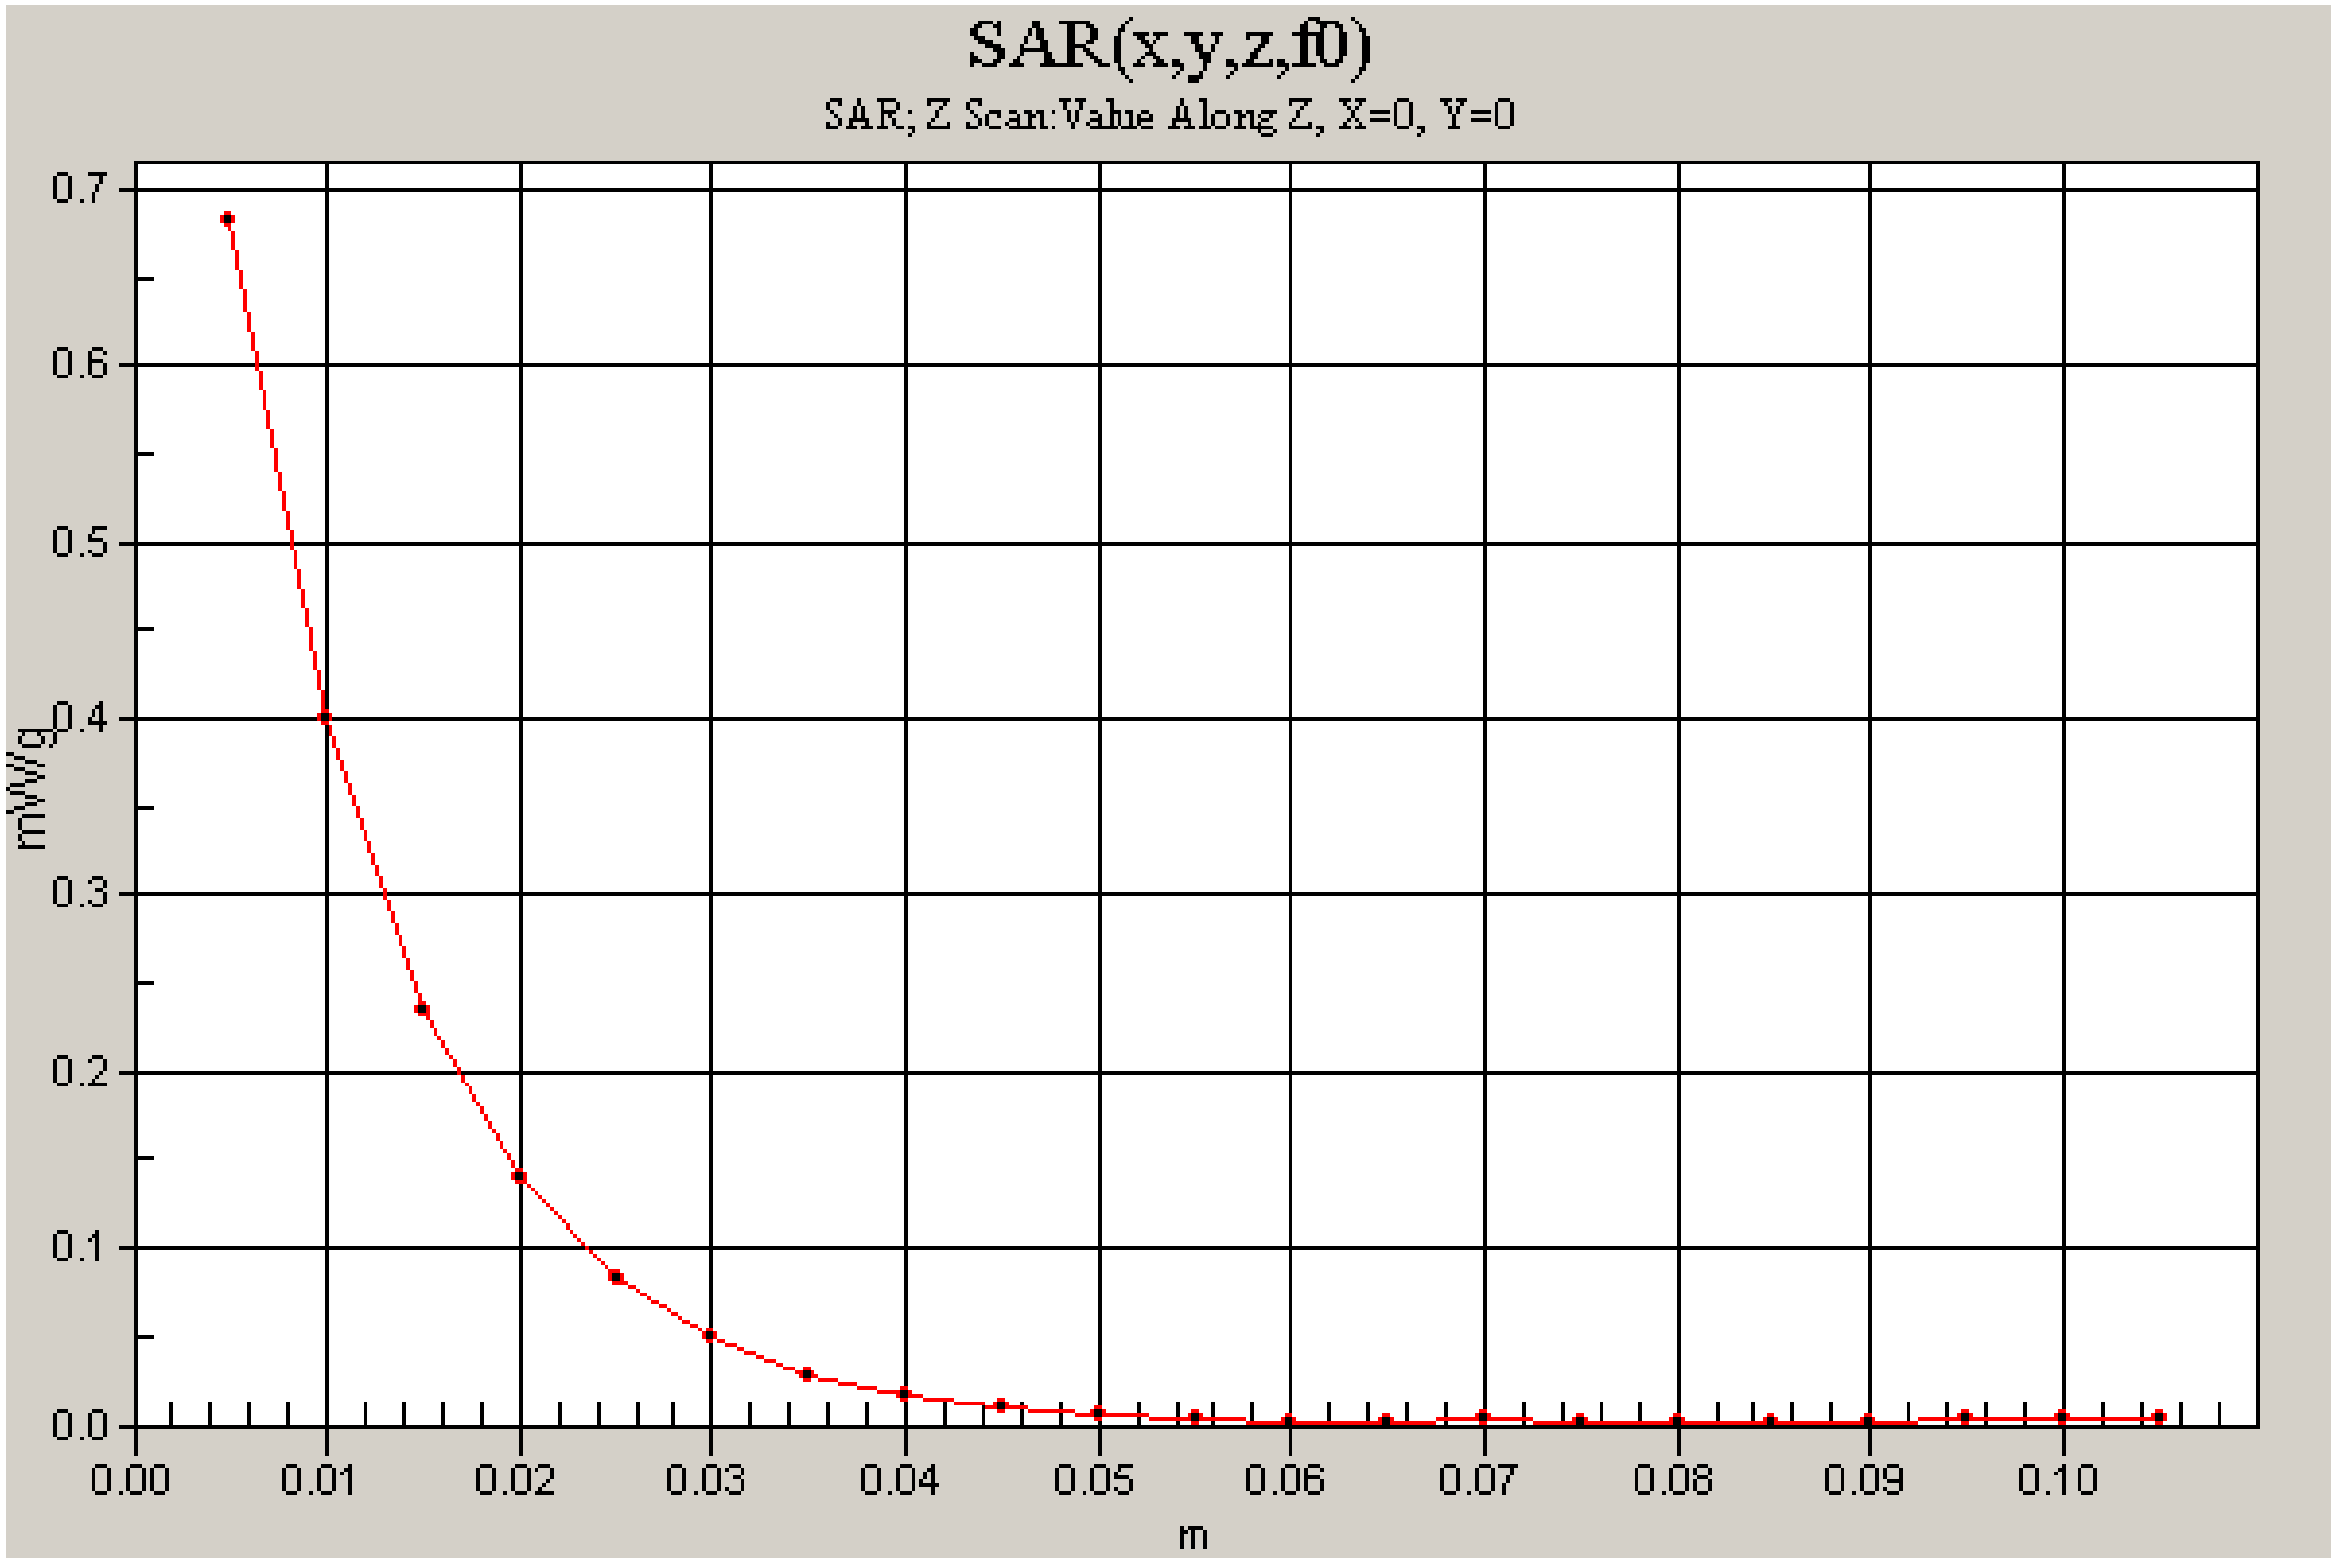
SAR(x,y,z,f0)
SAR; Z Scan:Value Along Z, X=0, Y=0
mW/g
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0.0
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0.08
0.09
0.10
m

Date/Time: 1/1/2007 2:27:03 AM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 close

DUT: HERA100; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

co-Location 802.11g+Bt+PCS Right Tilted Low CH512/Area Scan (7x10x1):
Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.865 mW/g

co-Location 802.11g+Bt+PCS Right Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 25.7 V/m; Power Drift = -0.004 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.398 mW/g
Maximum value of SAR (measured) = 0.853 mW/g

co-Location 802.11g+Bt+PCS Right Tilted Low CH512/Z Scan (1x1x21):
Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.666 mW/g

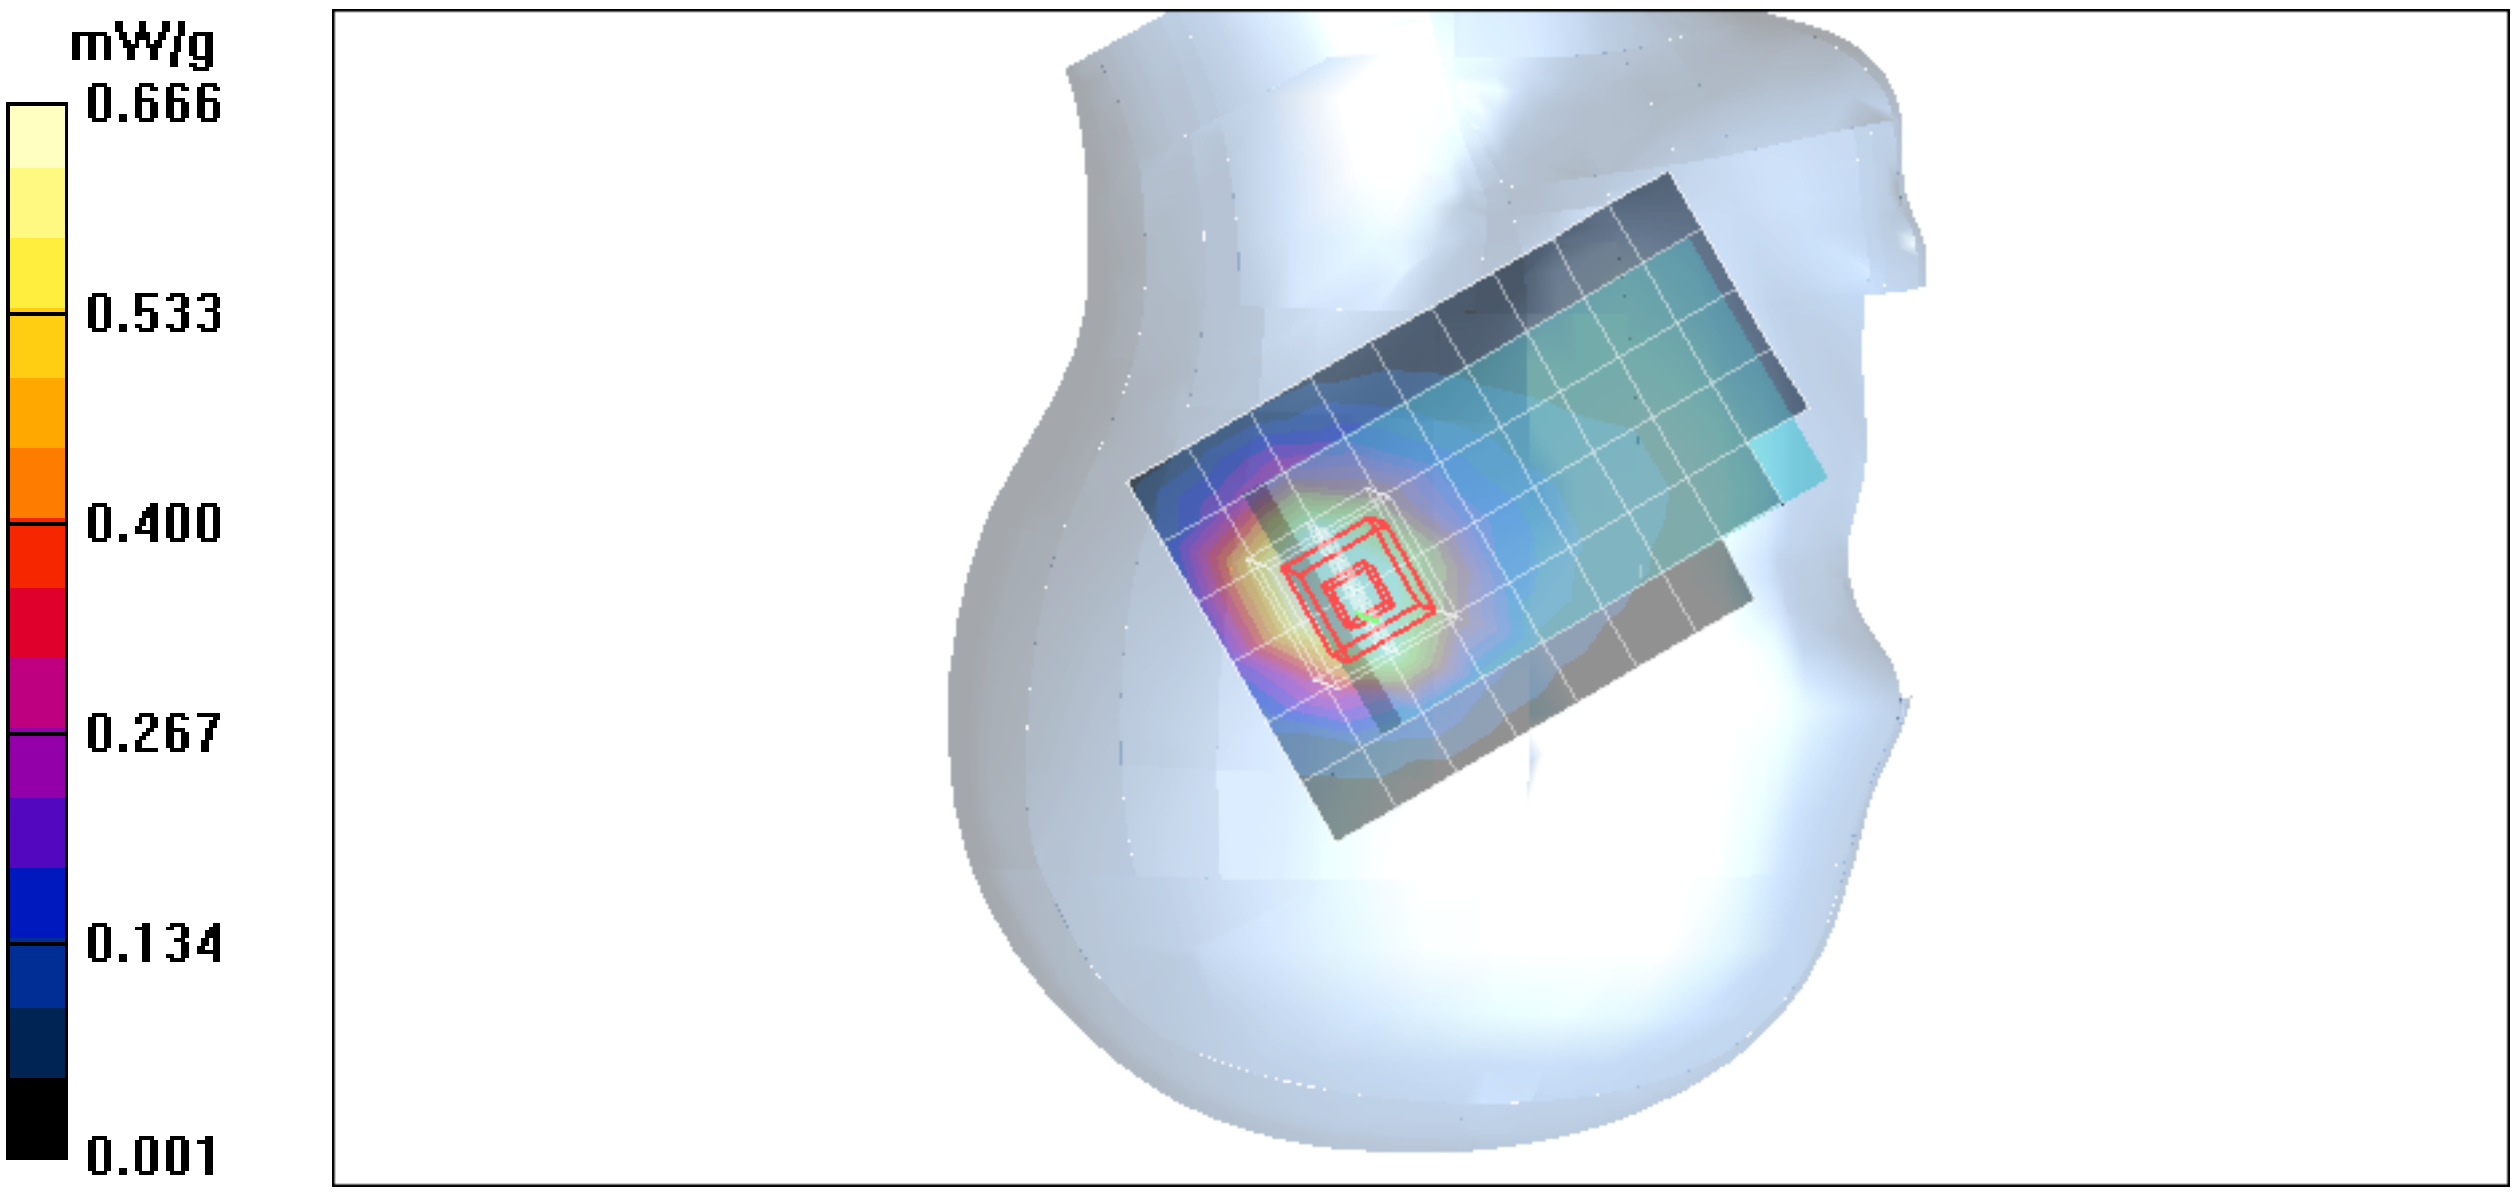
mW/g
0.666
0.533
0.400
0.267
0.134
0.001

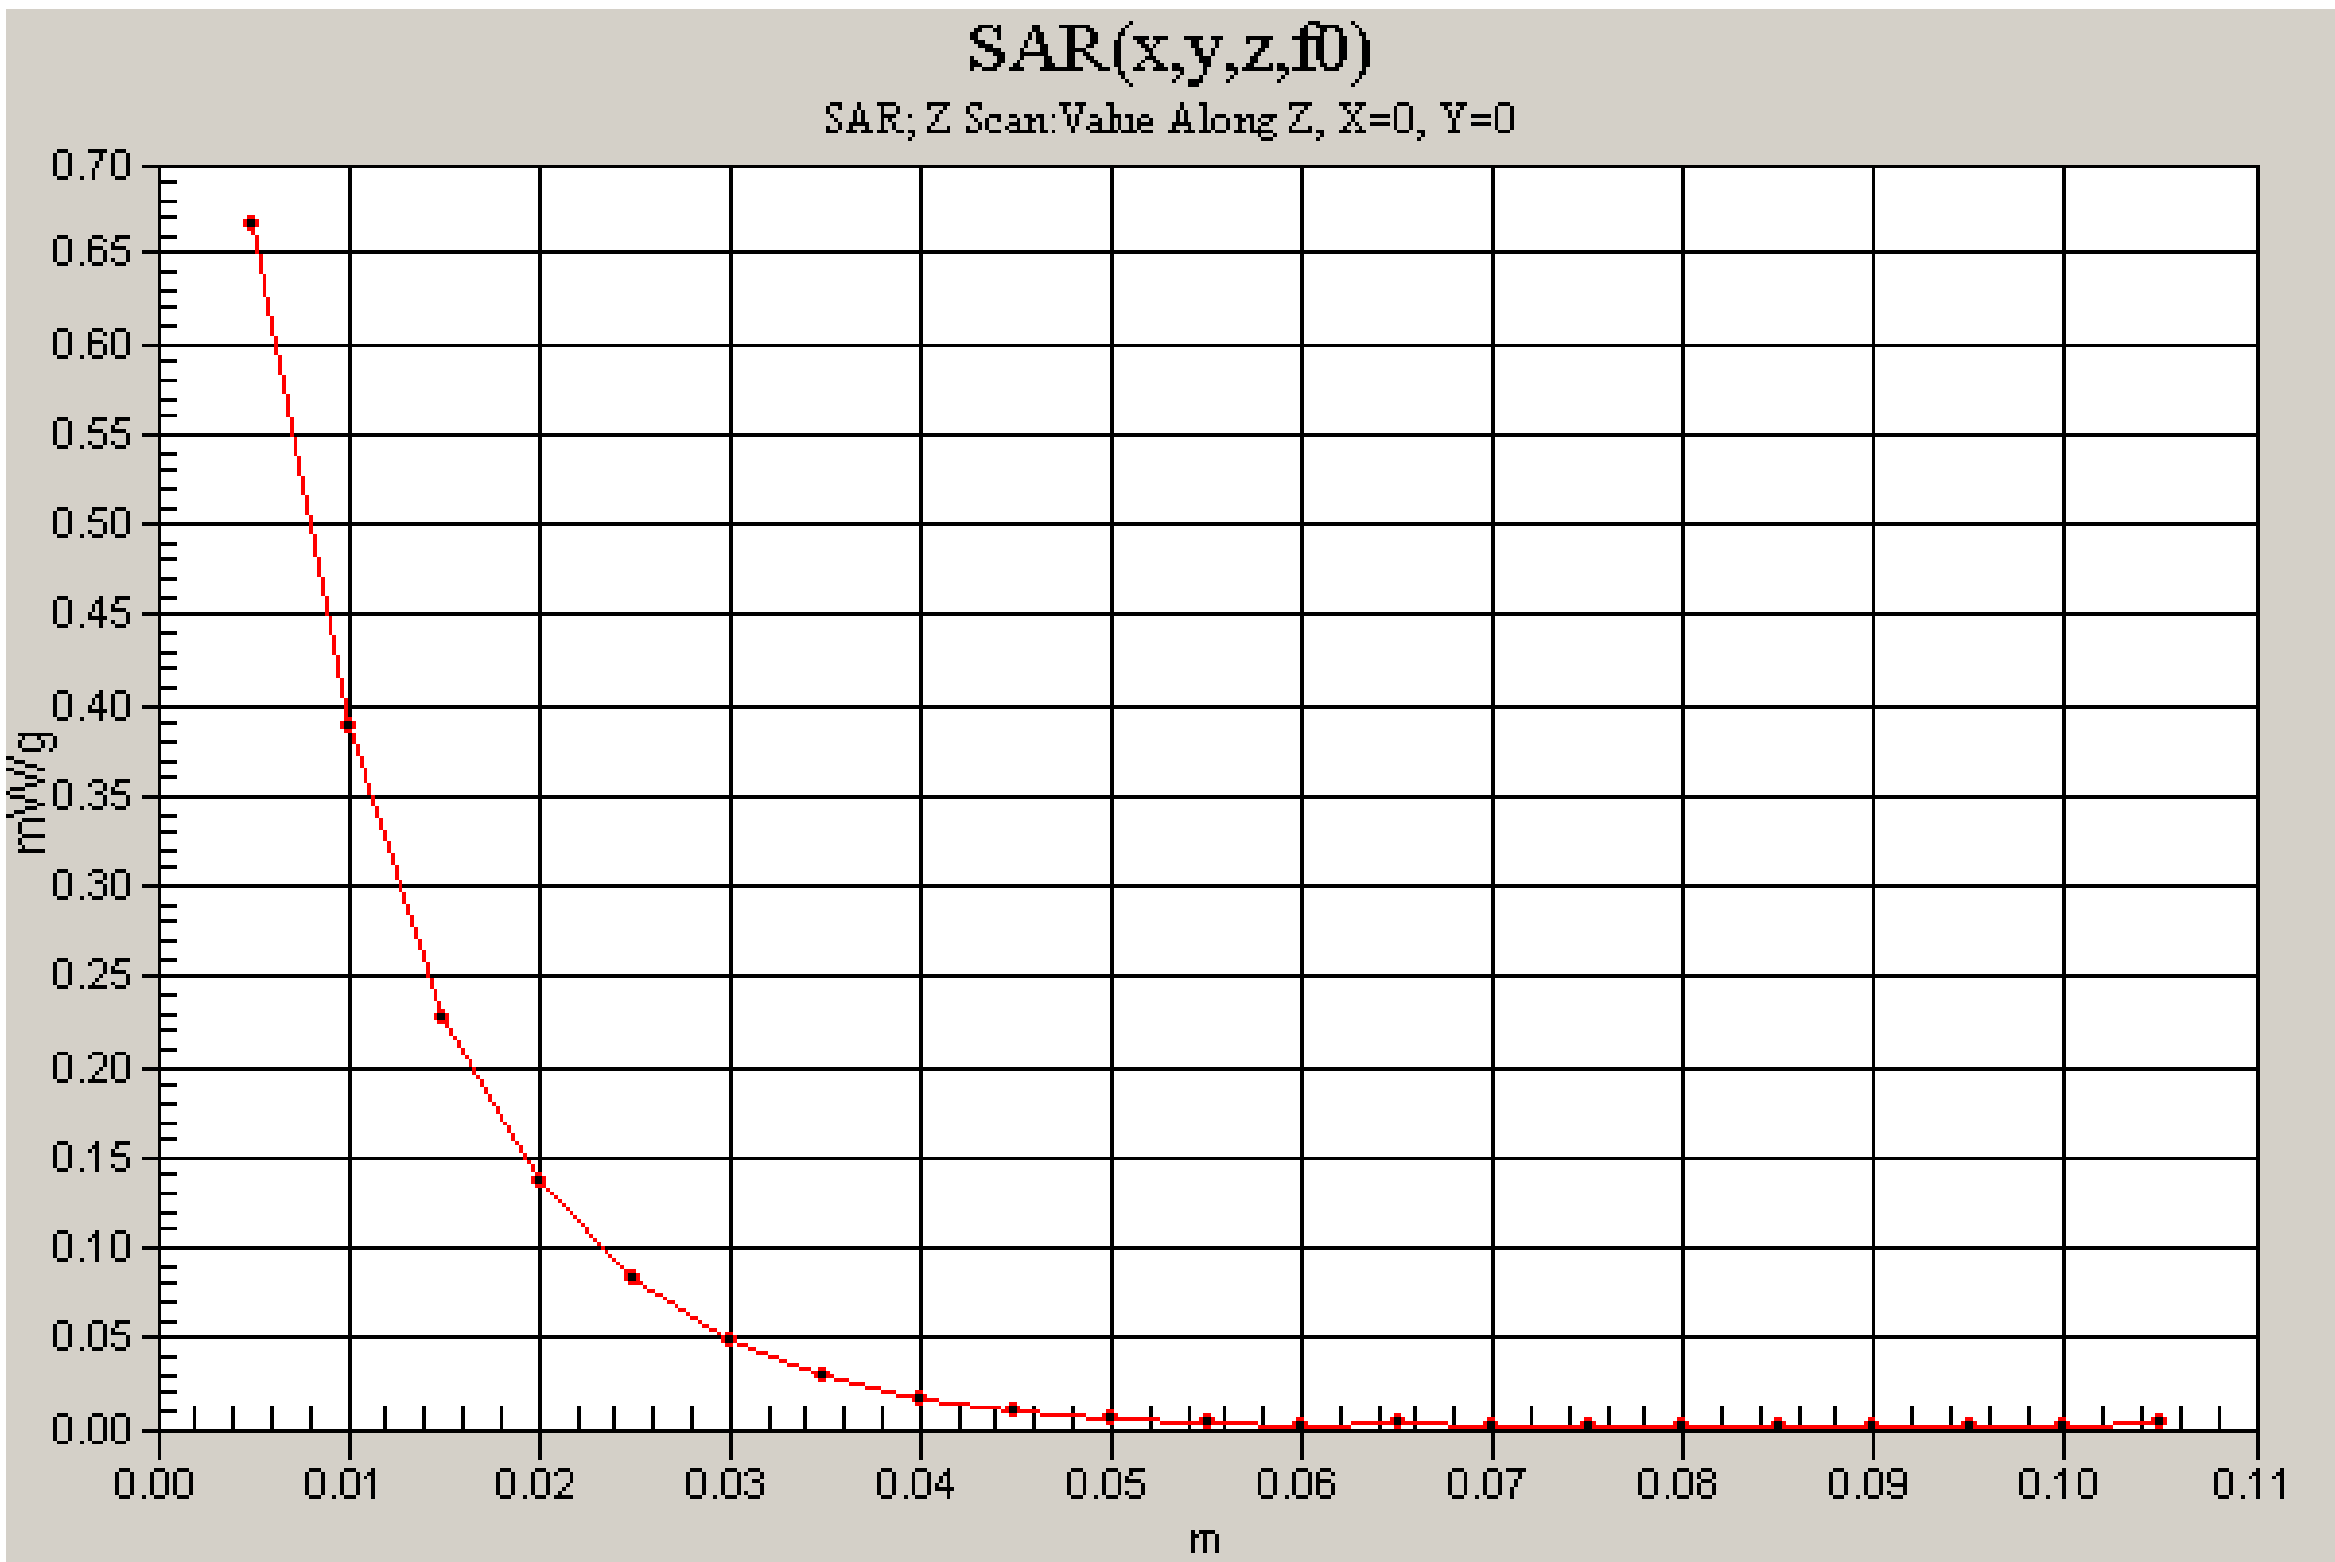
SAR(x,y,z,f0)
SAR; Z Scan:Value Along Z, X=0, Y=0
mW/g
m

Date/Time: 12/31/2006 3:50:13 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.871 mho/m; ε_r = 41.3; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Cheek Low CH128/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.617 mW/g

Left Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 21.4 V/m; Power Drift = -0.008 dB
Peak SAR (extrapolated) = 0.779 W/kg
SAR(1 g) = 0.557 mW/g; SAR(10 g) = 0.380 mW/g
Maximum value of SAR (measured) = 0.659 mW/g

Left Cheek Low CH128/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.290 mW/g

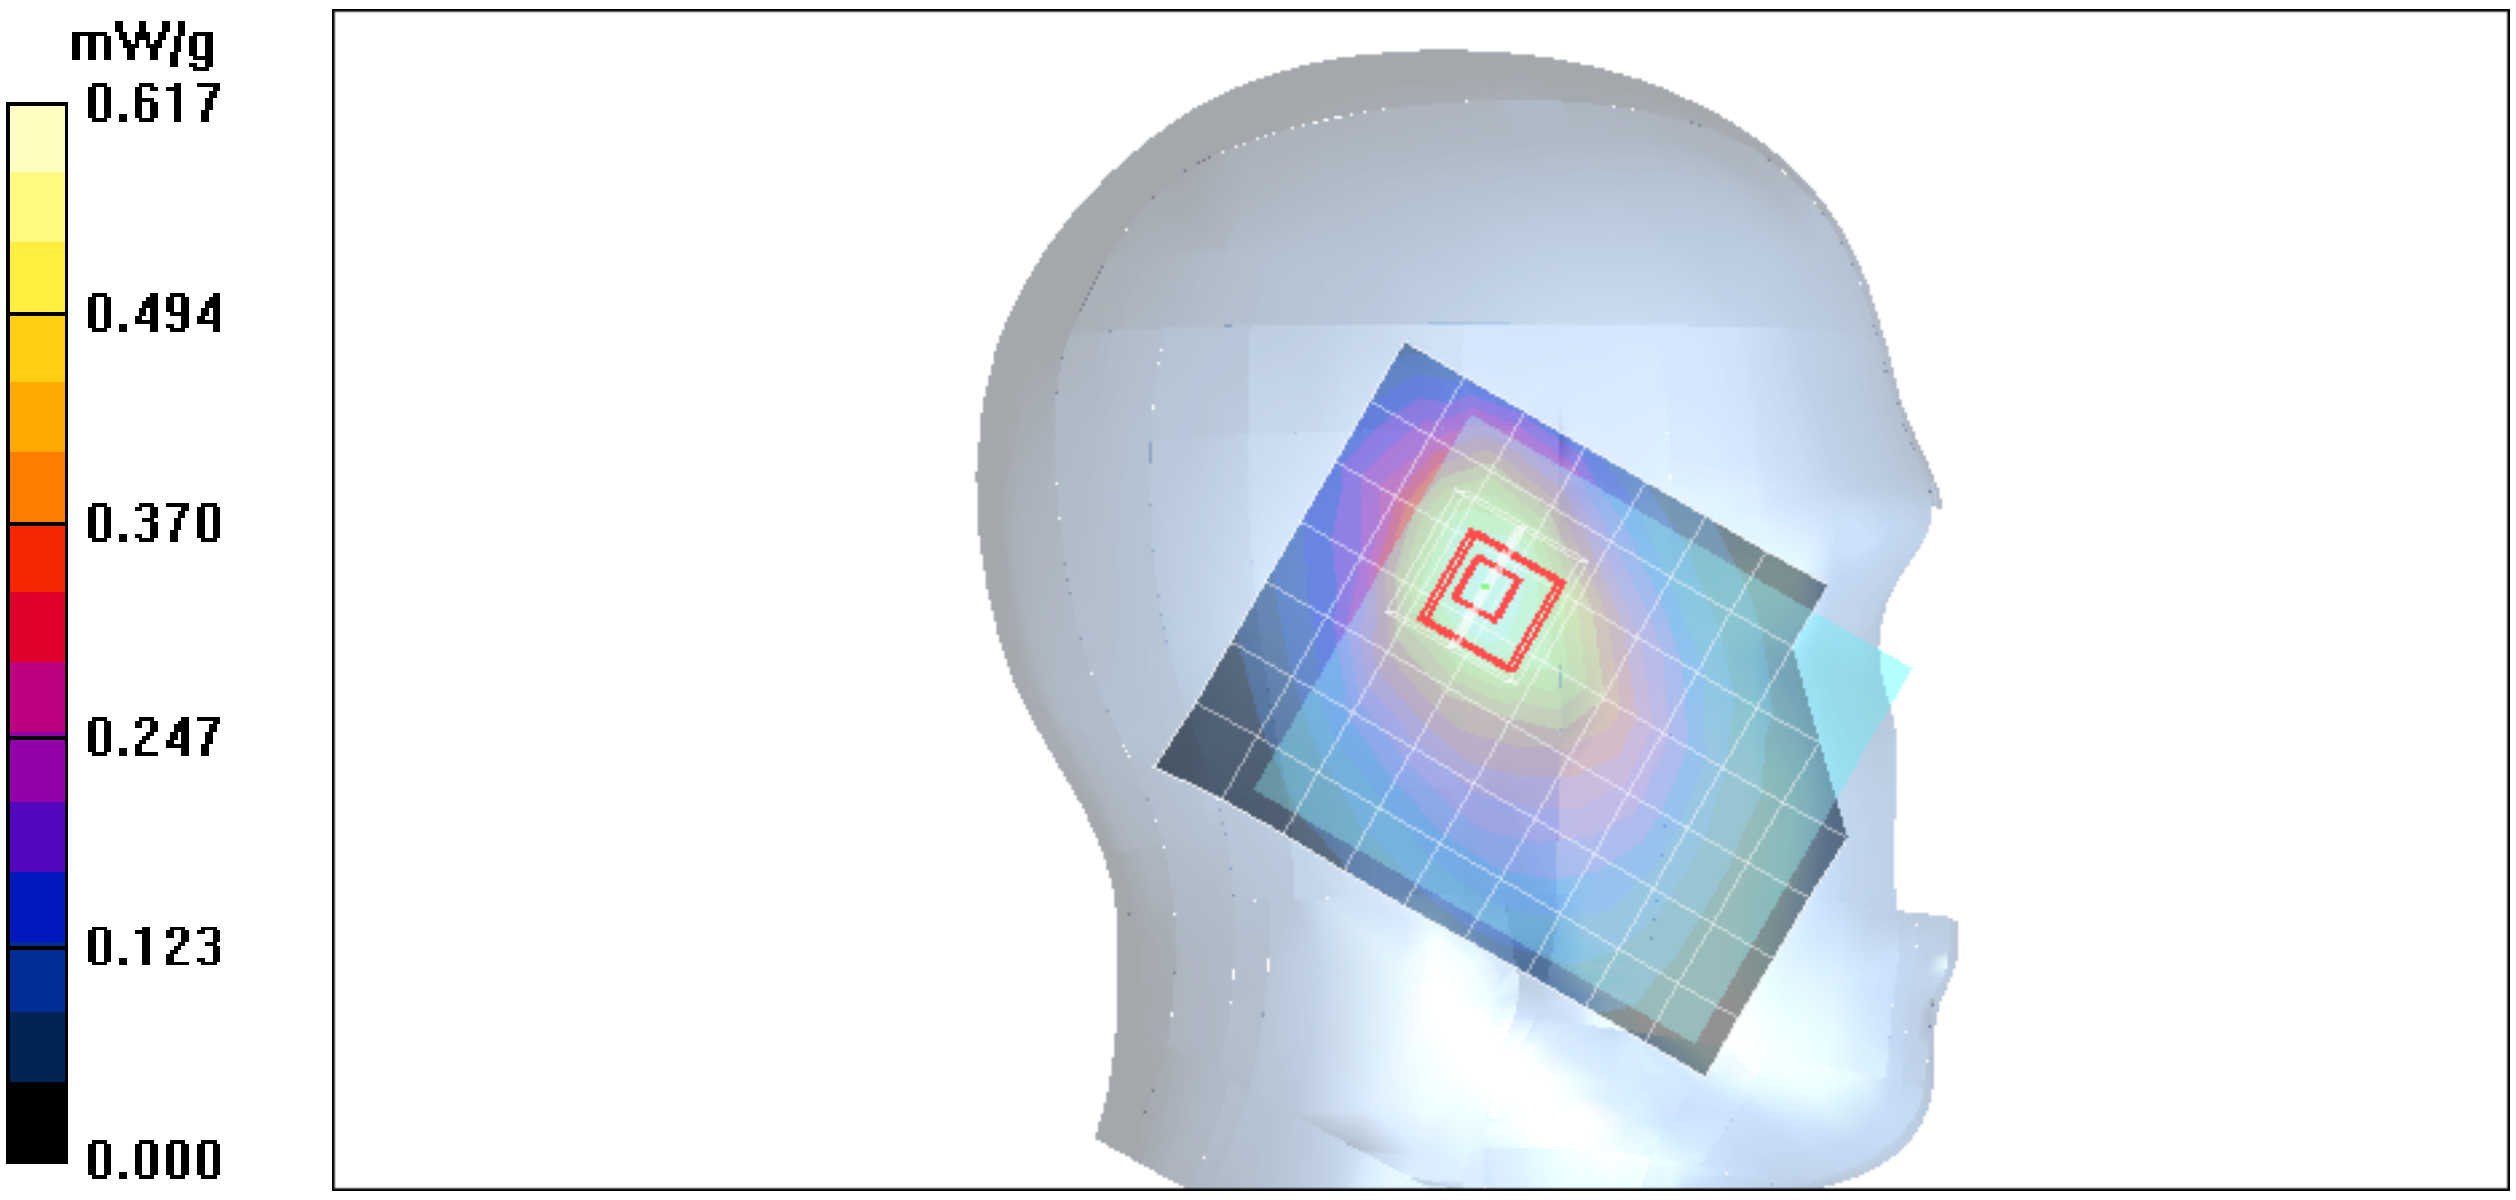
mW/g
0.617
0.494
0.370
0.247
0.123
0.000

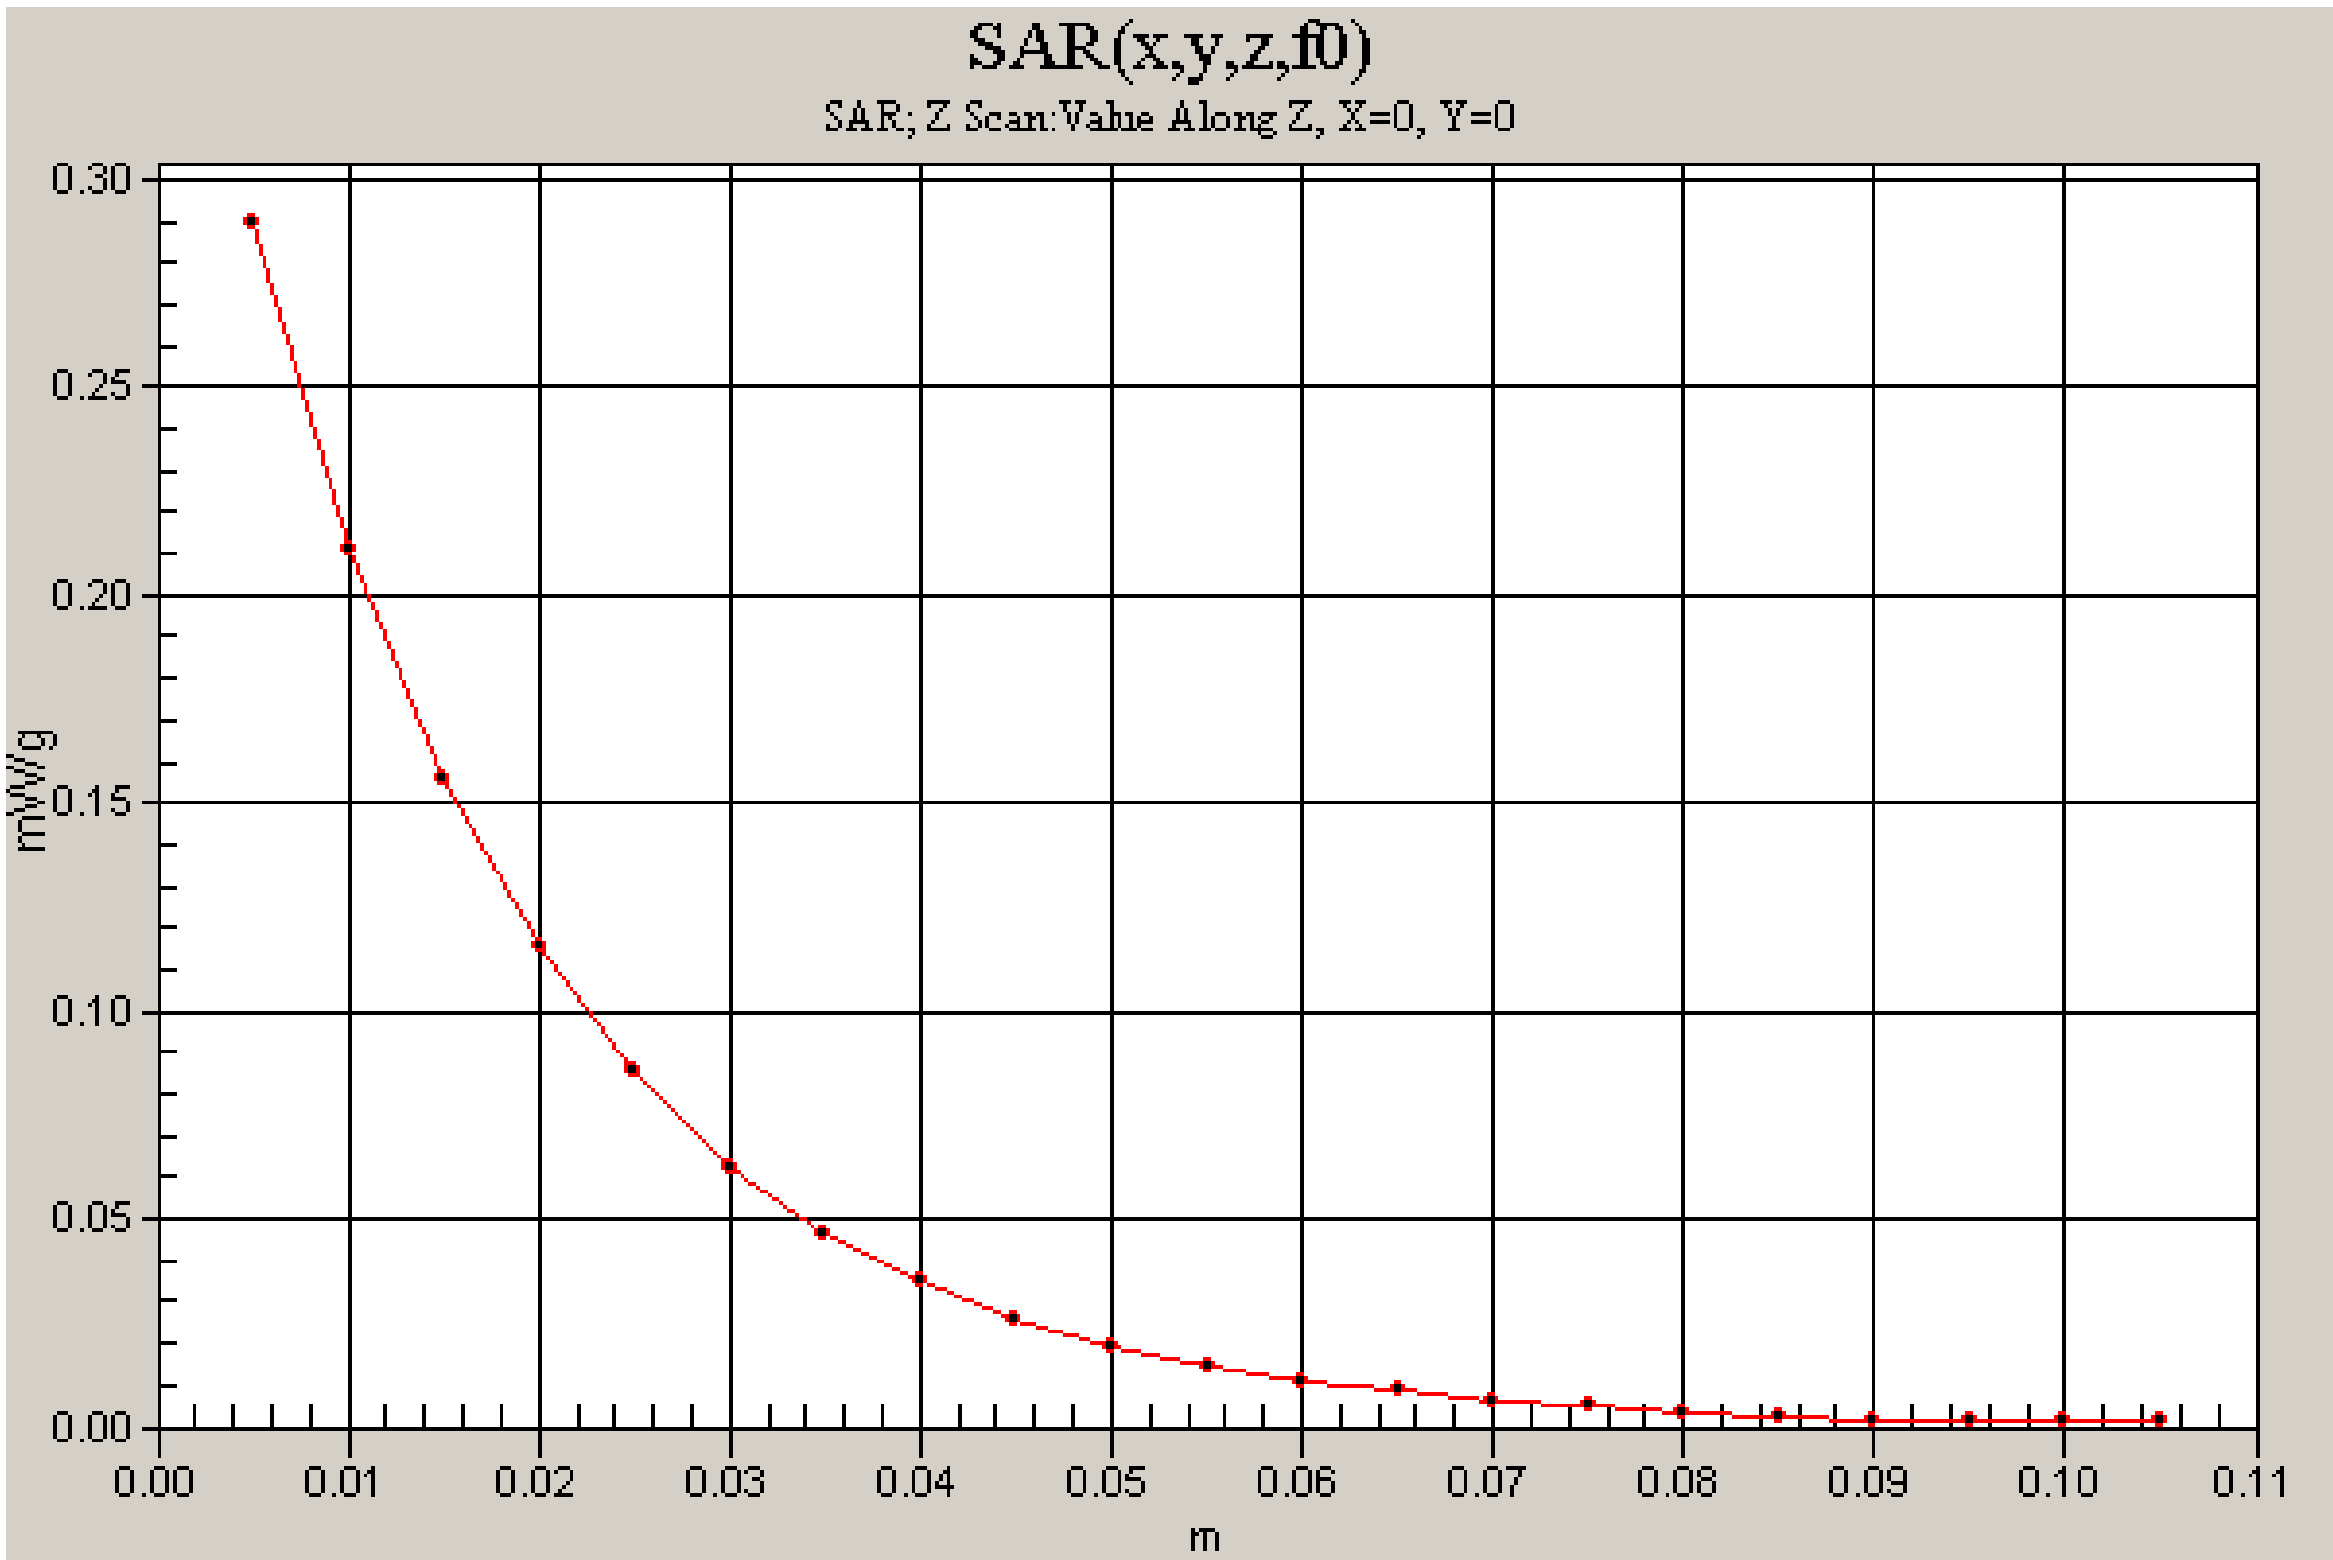
SAR(x,y,z,f0)
SAR; Z Scan:Value Along Z, X=0, Y=0
mW/g
0.30
0.25
0.20
0.15
0.10
0.05
0.00
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0.08
0.09
0.10
0.11
m

Date/Time: 12/31/2006 4:07:27 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.882 mho/m; ε_r = 41.1; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Cheek Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.504 mW/g

Left Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 19.0 V/m; Power Drift = -0.066 dB
Peak SAR (extrapolated) = 0.636 W/kg
SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.307 mW/g
Maximum value of SAR (measured) = 0.536 mW/g

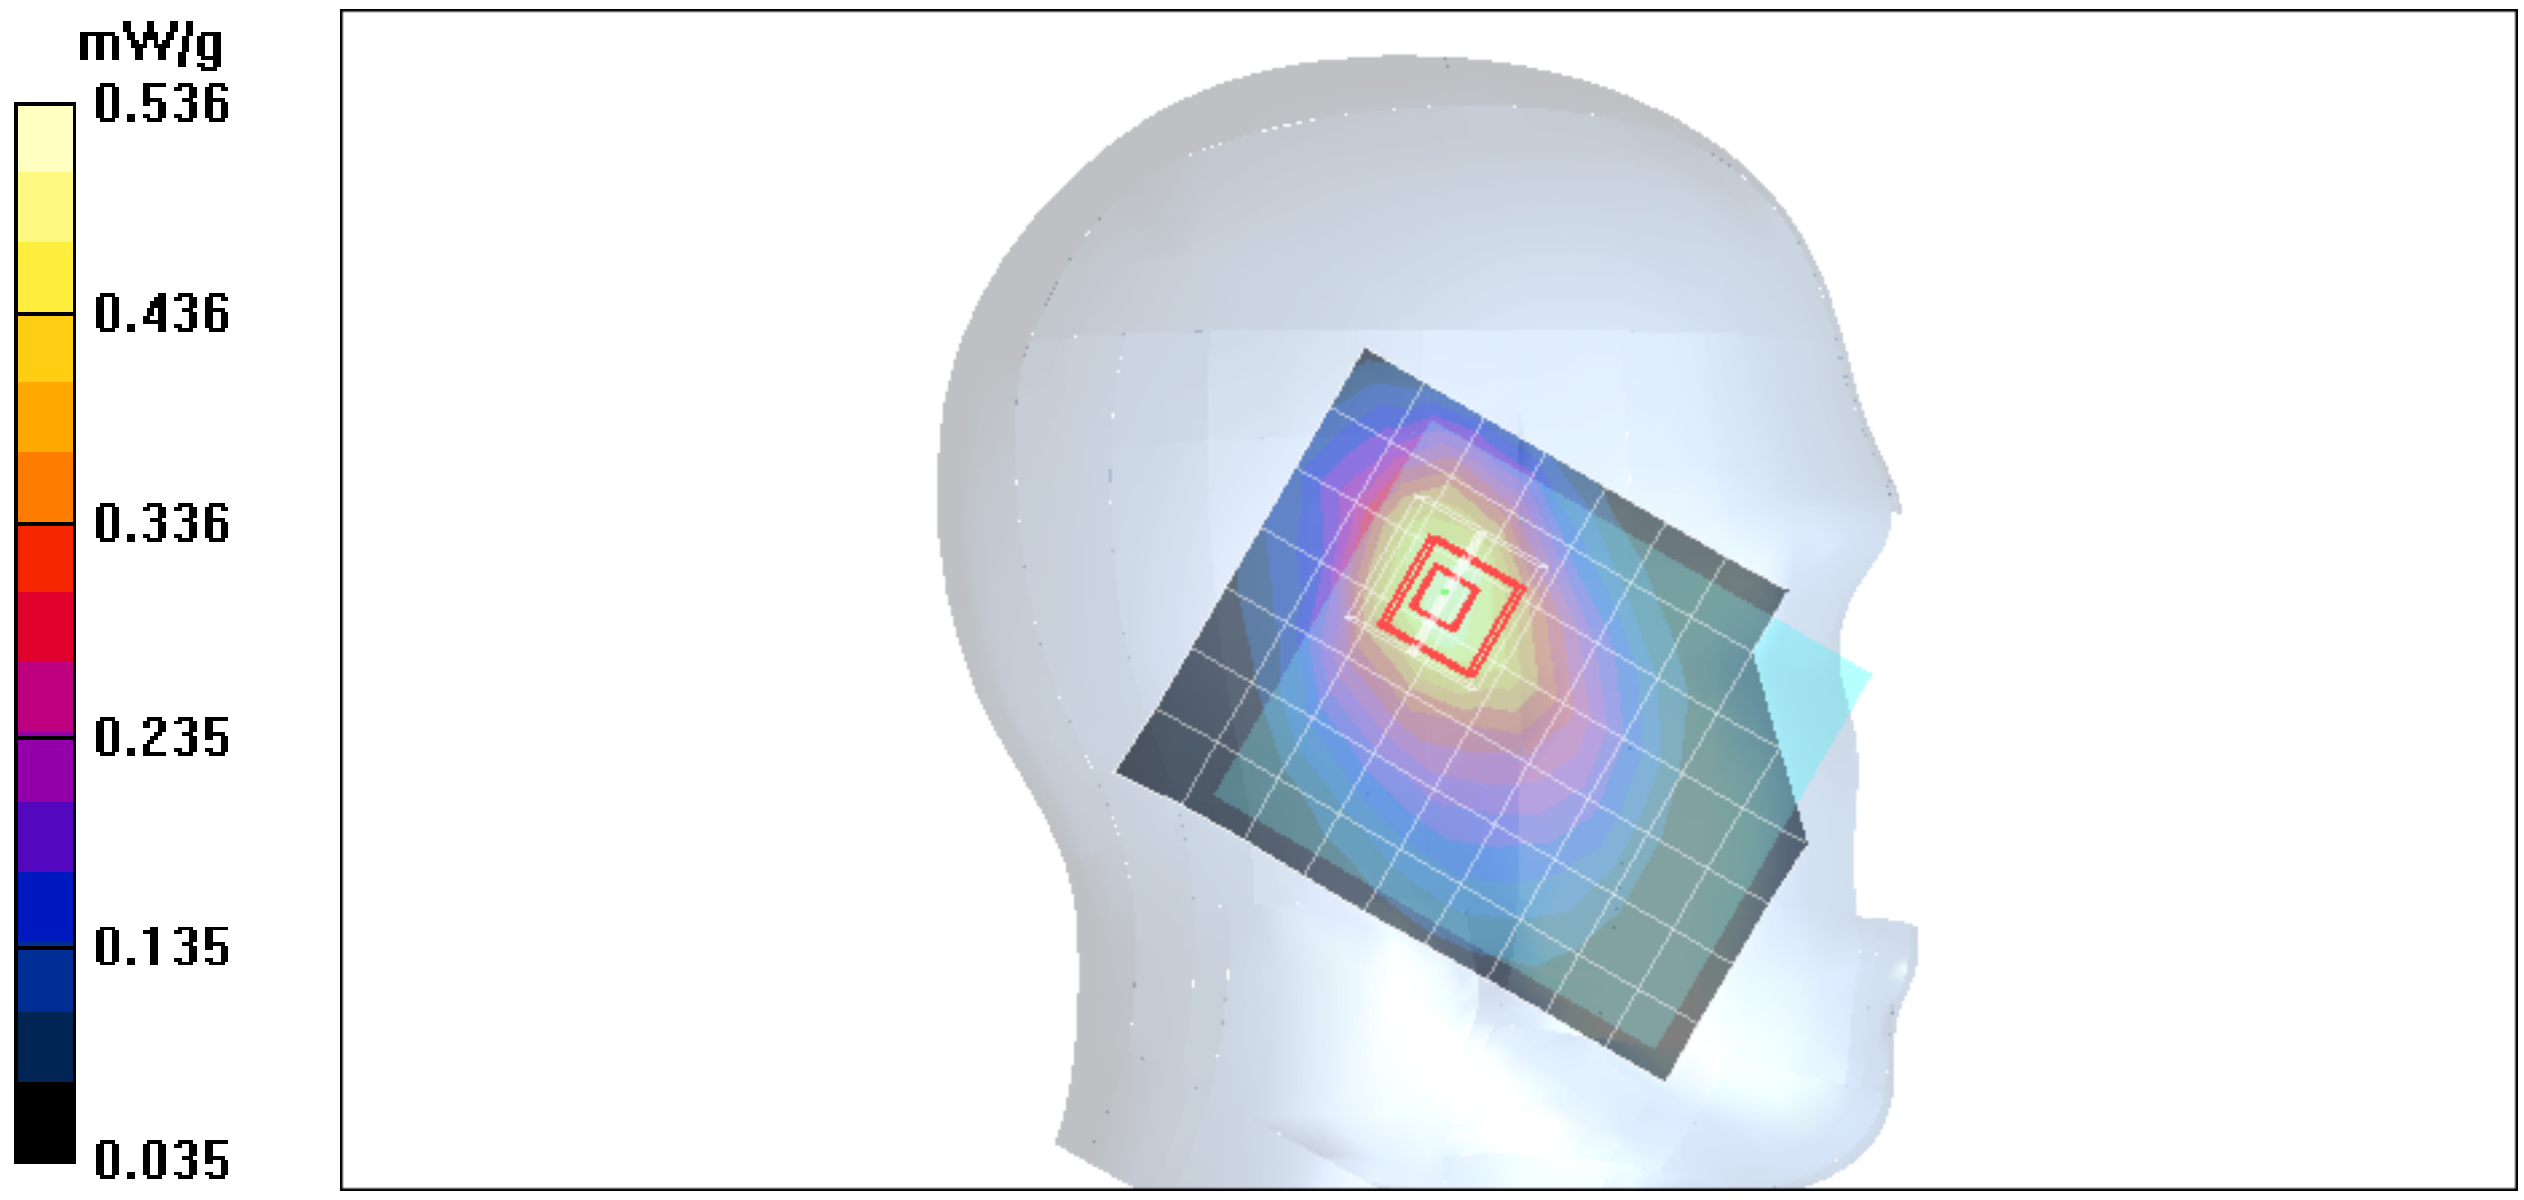

Date/Time: 12/31/2006 4:24:16 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.893 mho/m; ε_r = 41; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:
- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Cheek High CH251/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.359 mW/g

Left Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 15.9 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 0.448 W/kg
SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.216 mW/g
Maximum value of SAR (measured) = 0.377 mW/g

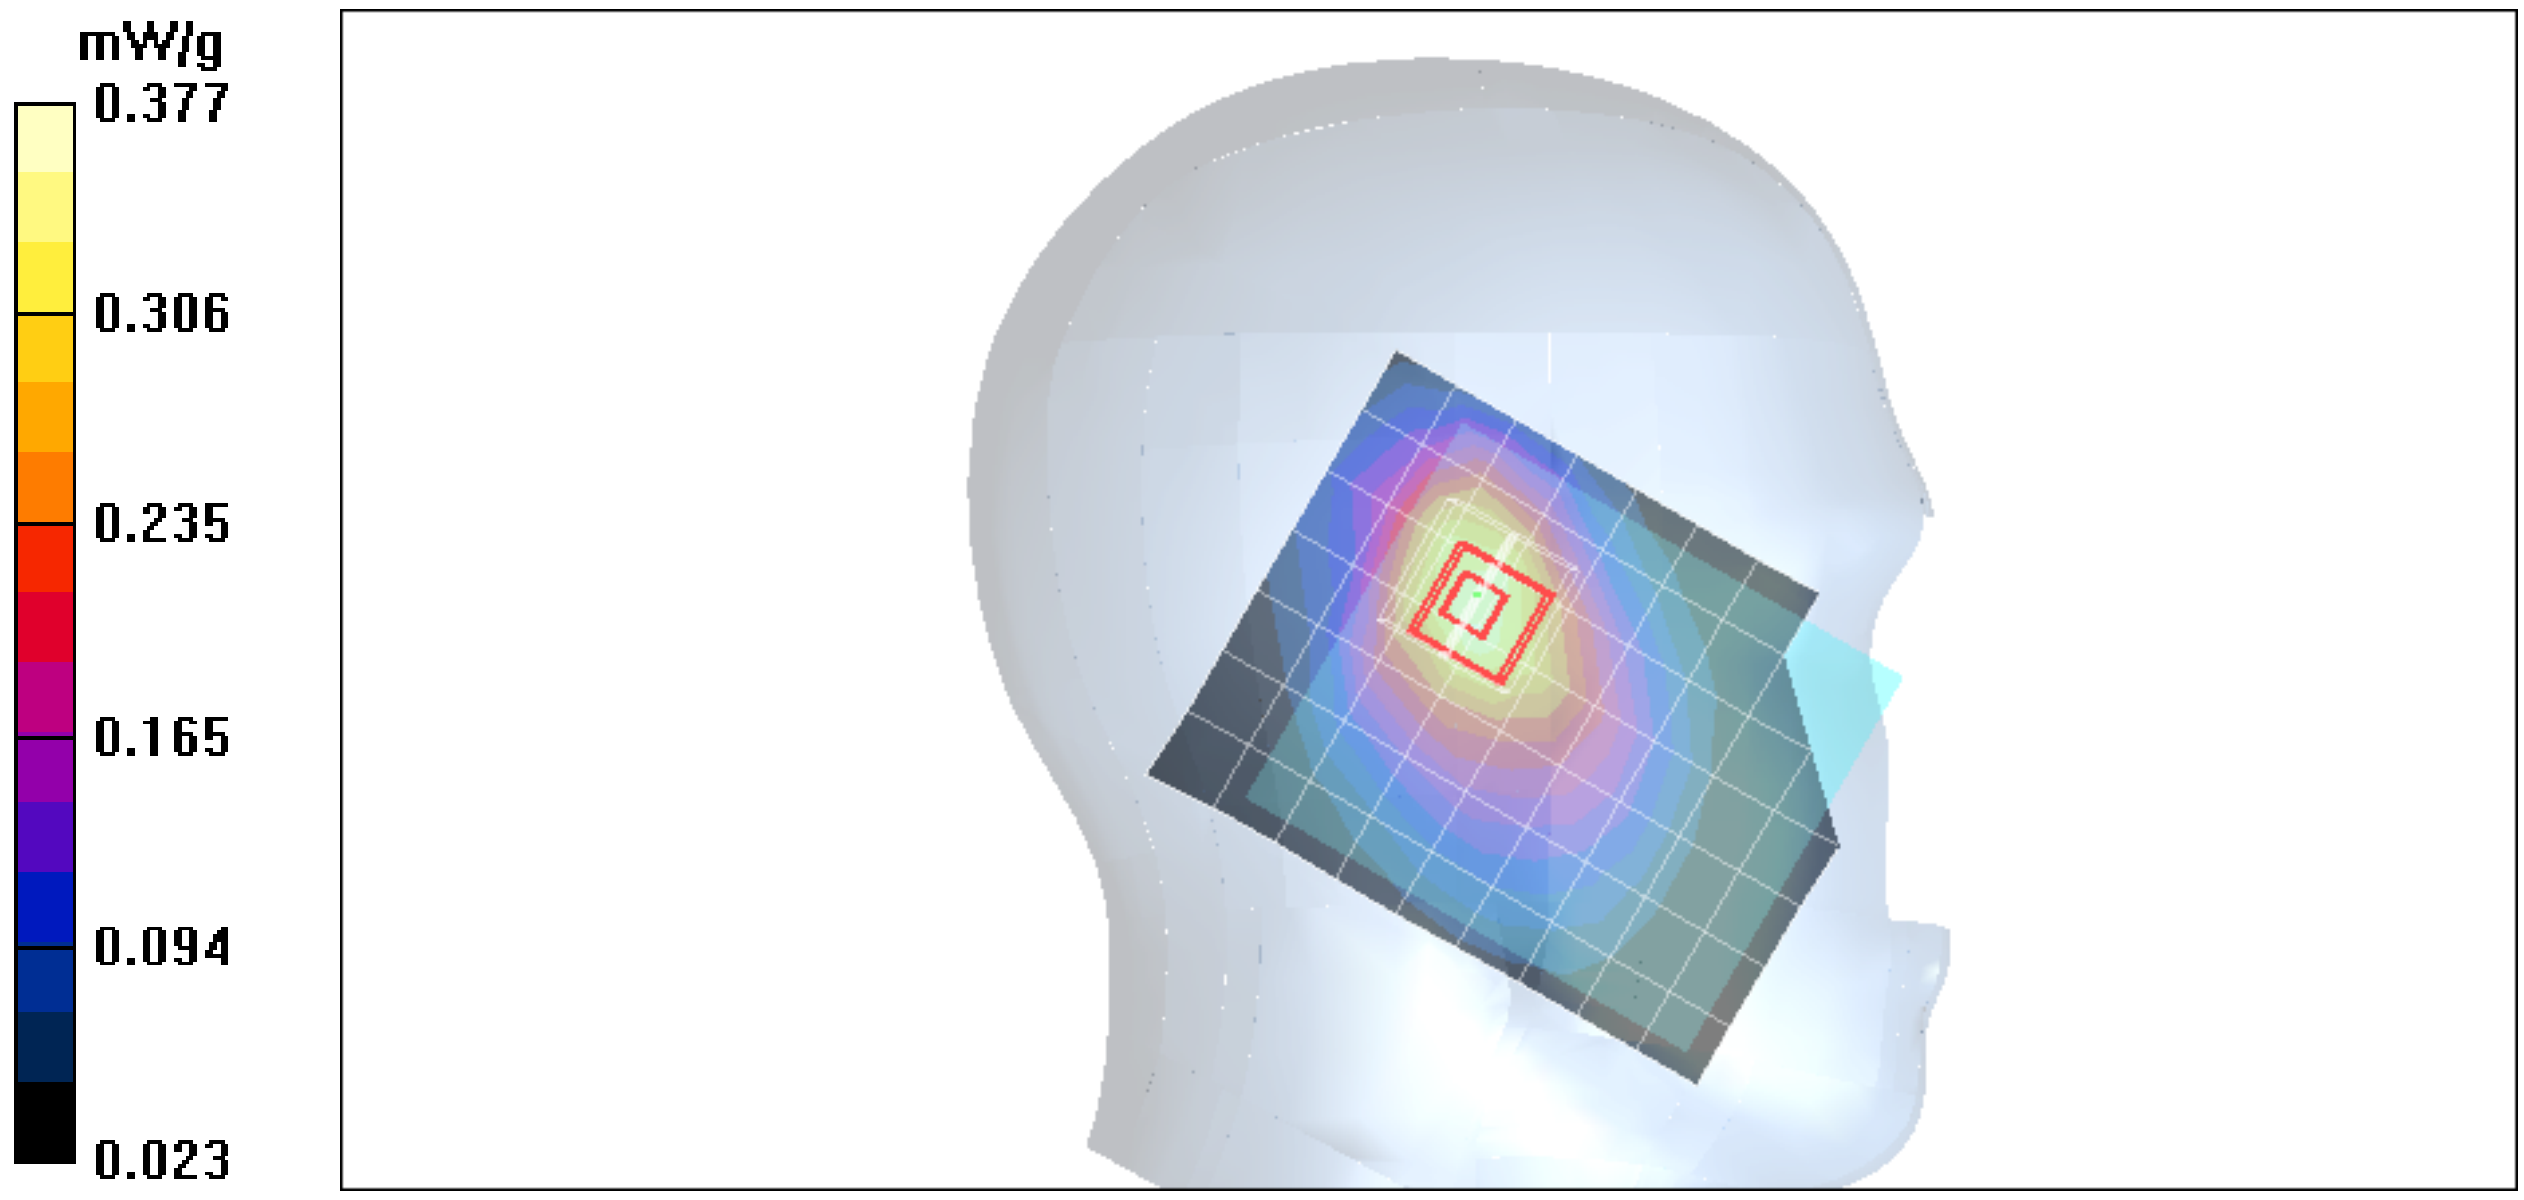

Date/Time: 12/31/2006 4:45:51 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.871 mho/m; ε_r = 41.3; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Tilted Low CH128/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.582 mW/g

Left Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 22.2 V/m; Power Drift = -0.037 dB
Peak SAR (extrapolated) = 0.764 W/kg
SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.357 mW/g
Maximum value of SAR (measured) = 0.637 mW/g

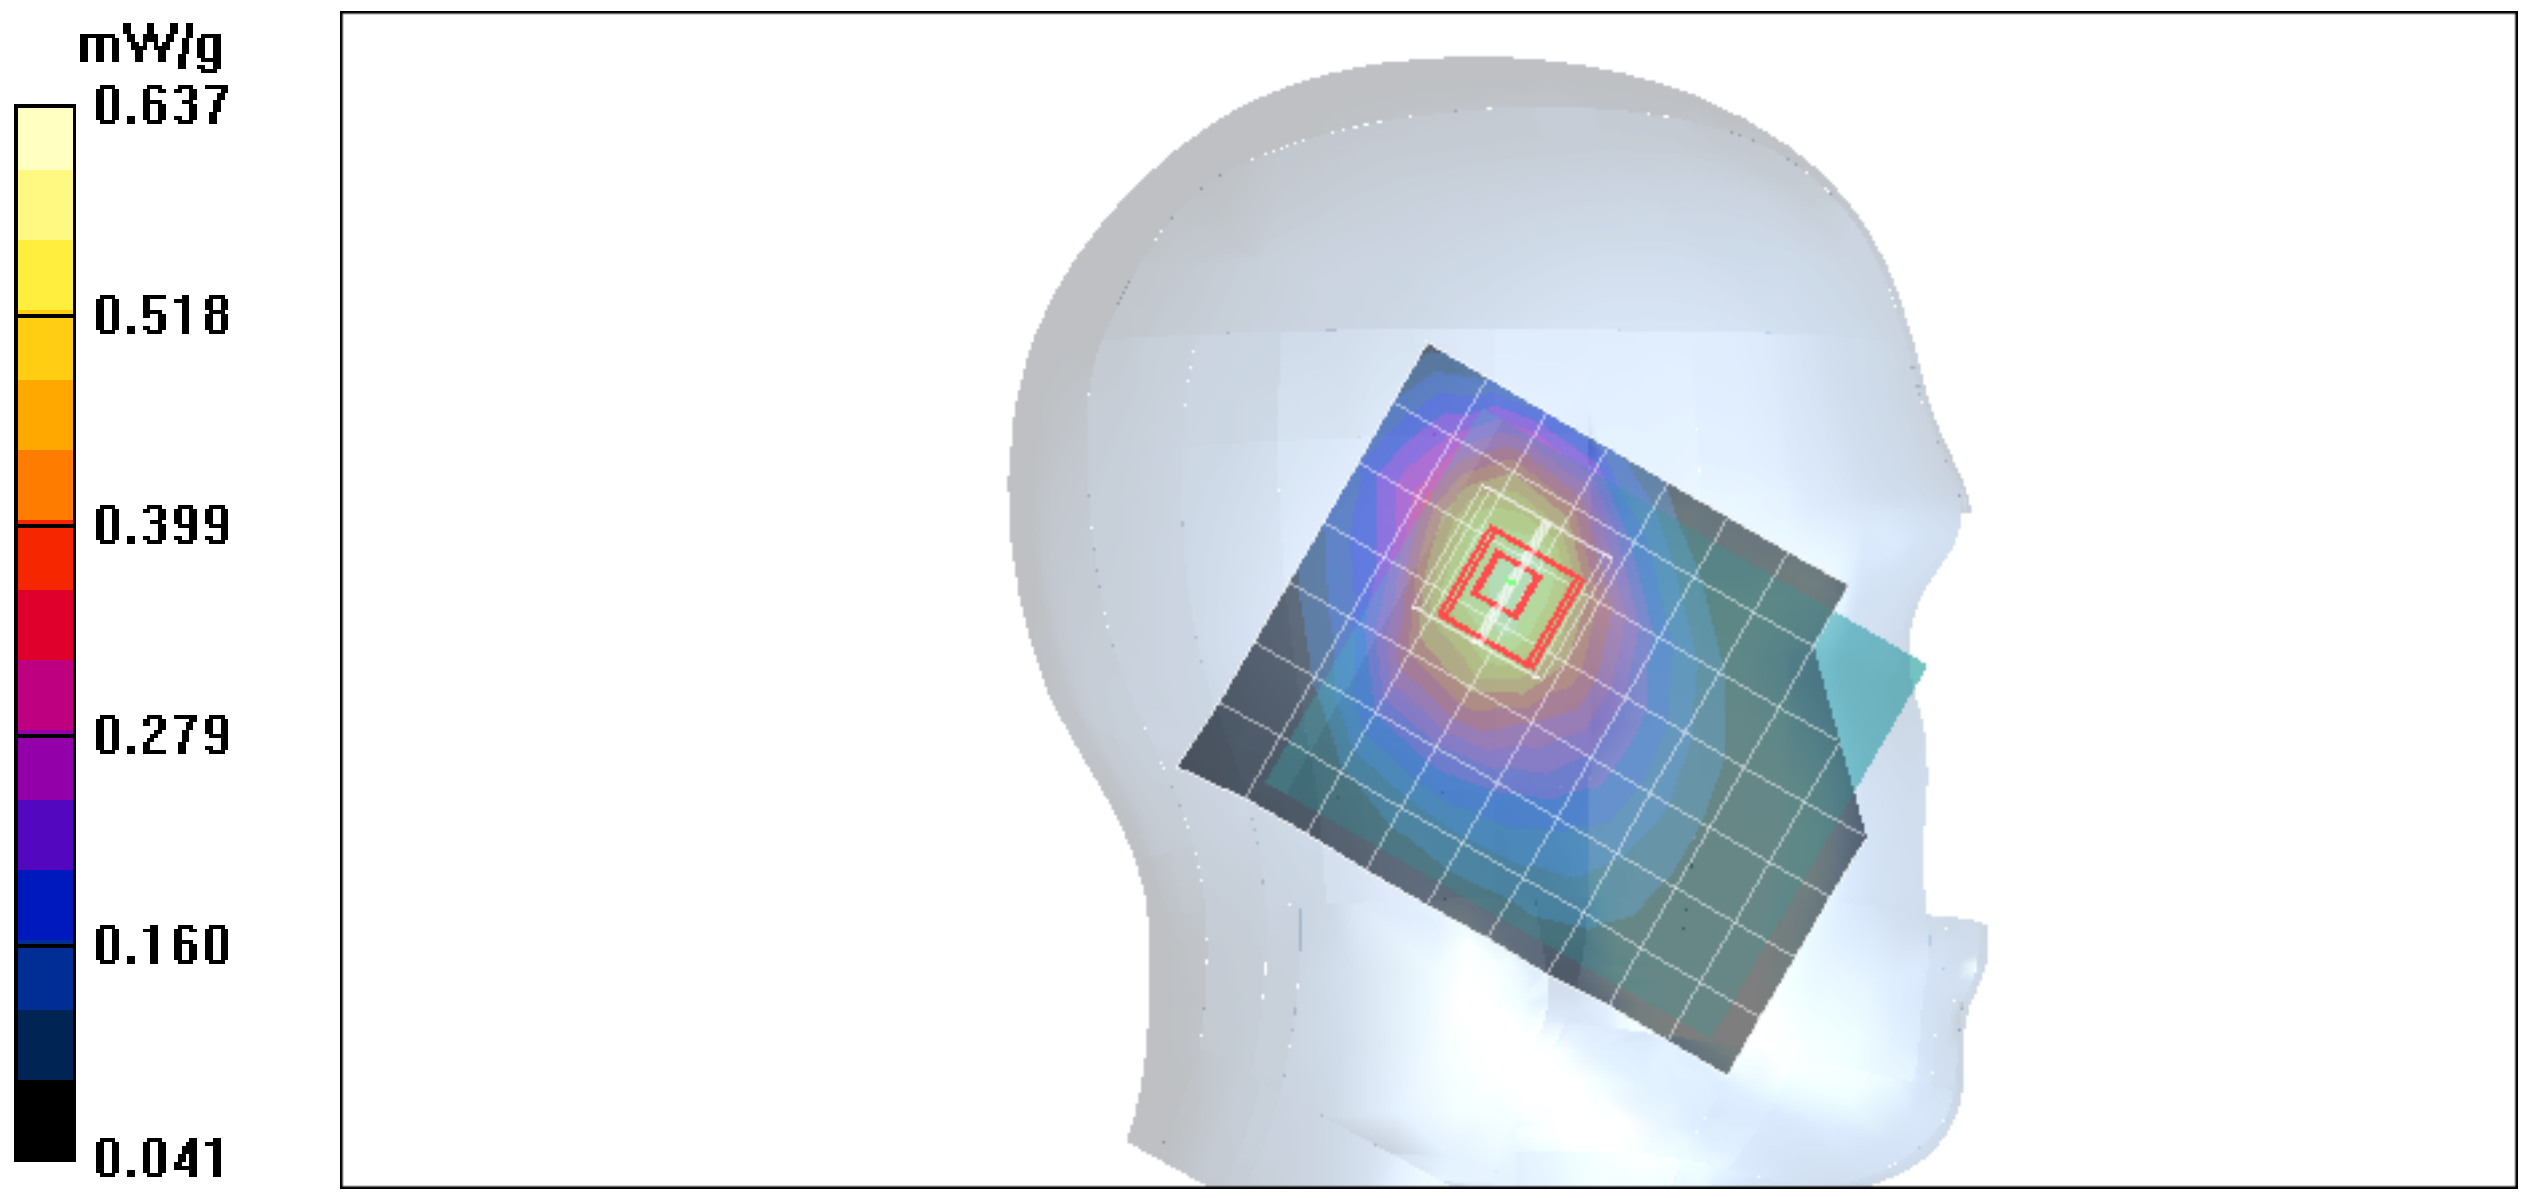

Date/Time: 12/31/2006 5:01:25 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.882 mho/m; ε_r = 41.1; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:
- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Tilted Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.457 mW/g

Left Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 20.0 V/m; Power Drift = -0.031 dB
Peak SAR (extrapolated) = 0.623 W/kg
SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.287 mW/g
Maximum value of SAR (measured) = 0.516 mW/g

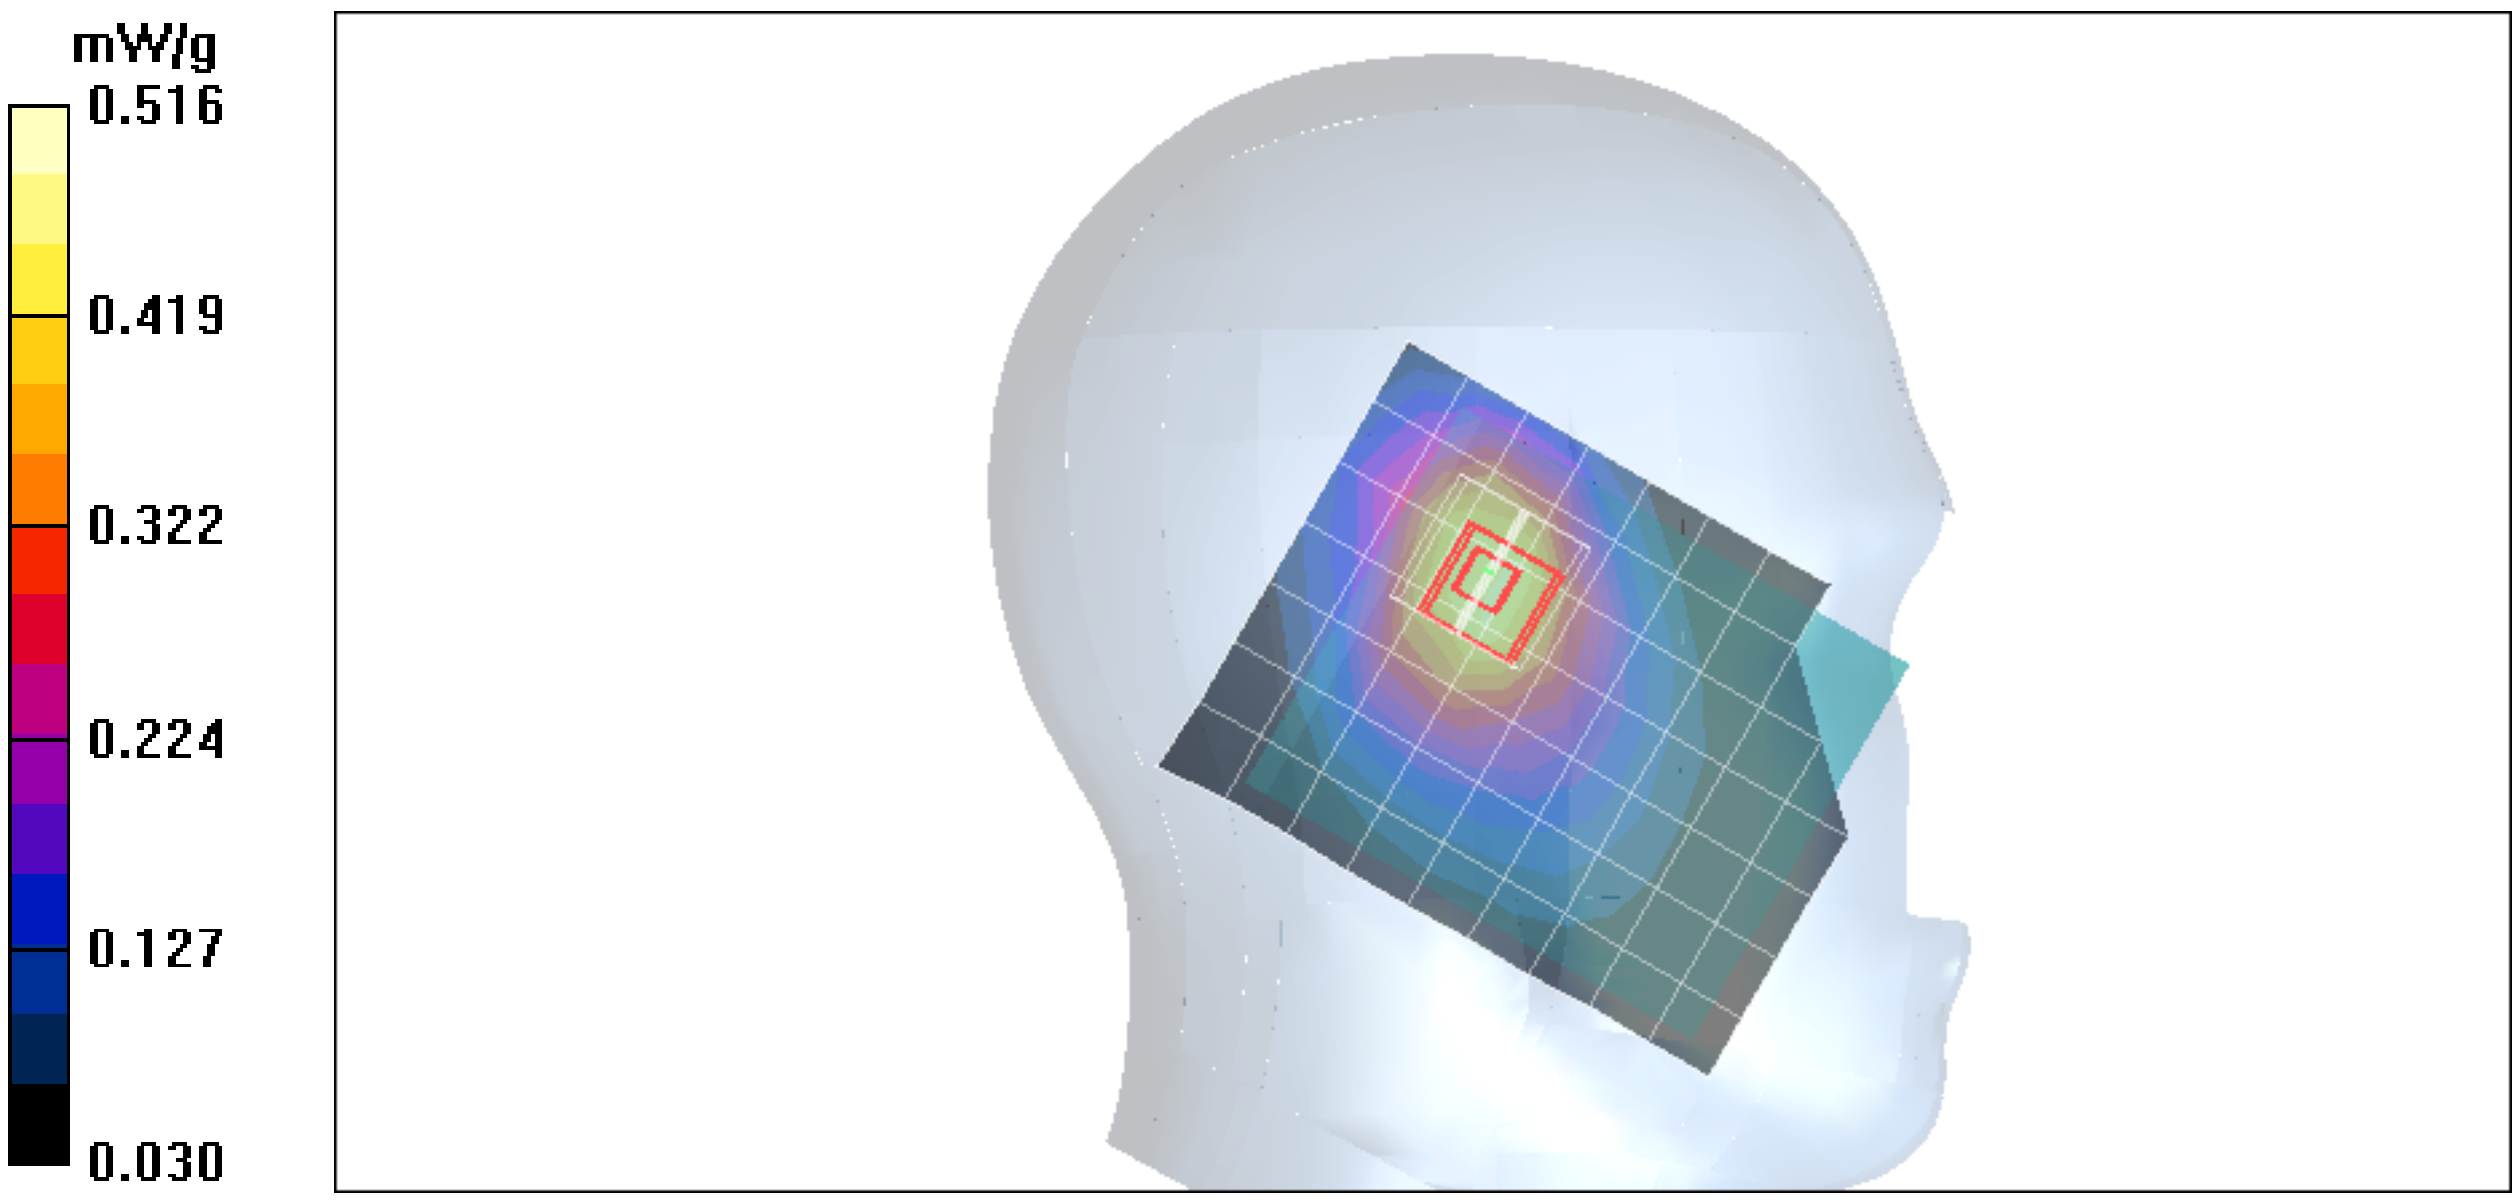

Date/Time: 12/31/2006 5:19:36 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.893 mho/m; ε_r = 41; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Tilted High CH251/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.323 mW/g

Left Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 16.6 V/m; Power Drift = -0.033 dB
Peak SAR (extrapolated) = 0.440 W/kg
SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.201 mW/g
Maximum value of SAR (measured) = 0.363 mW/g

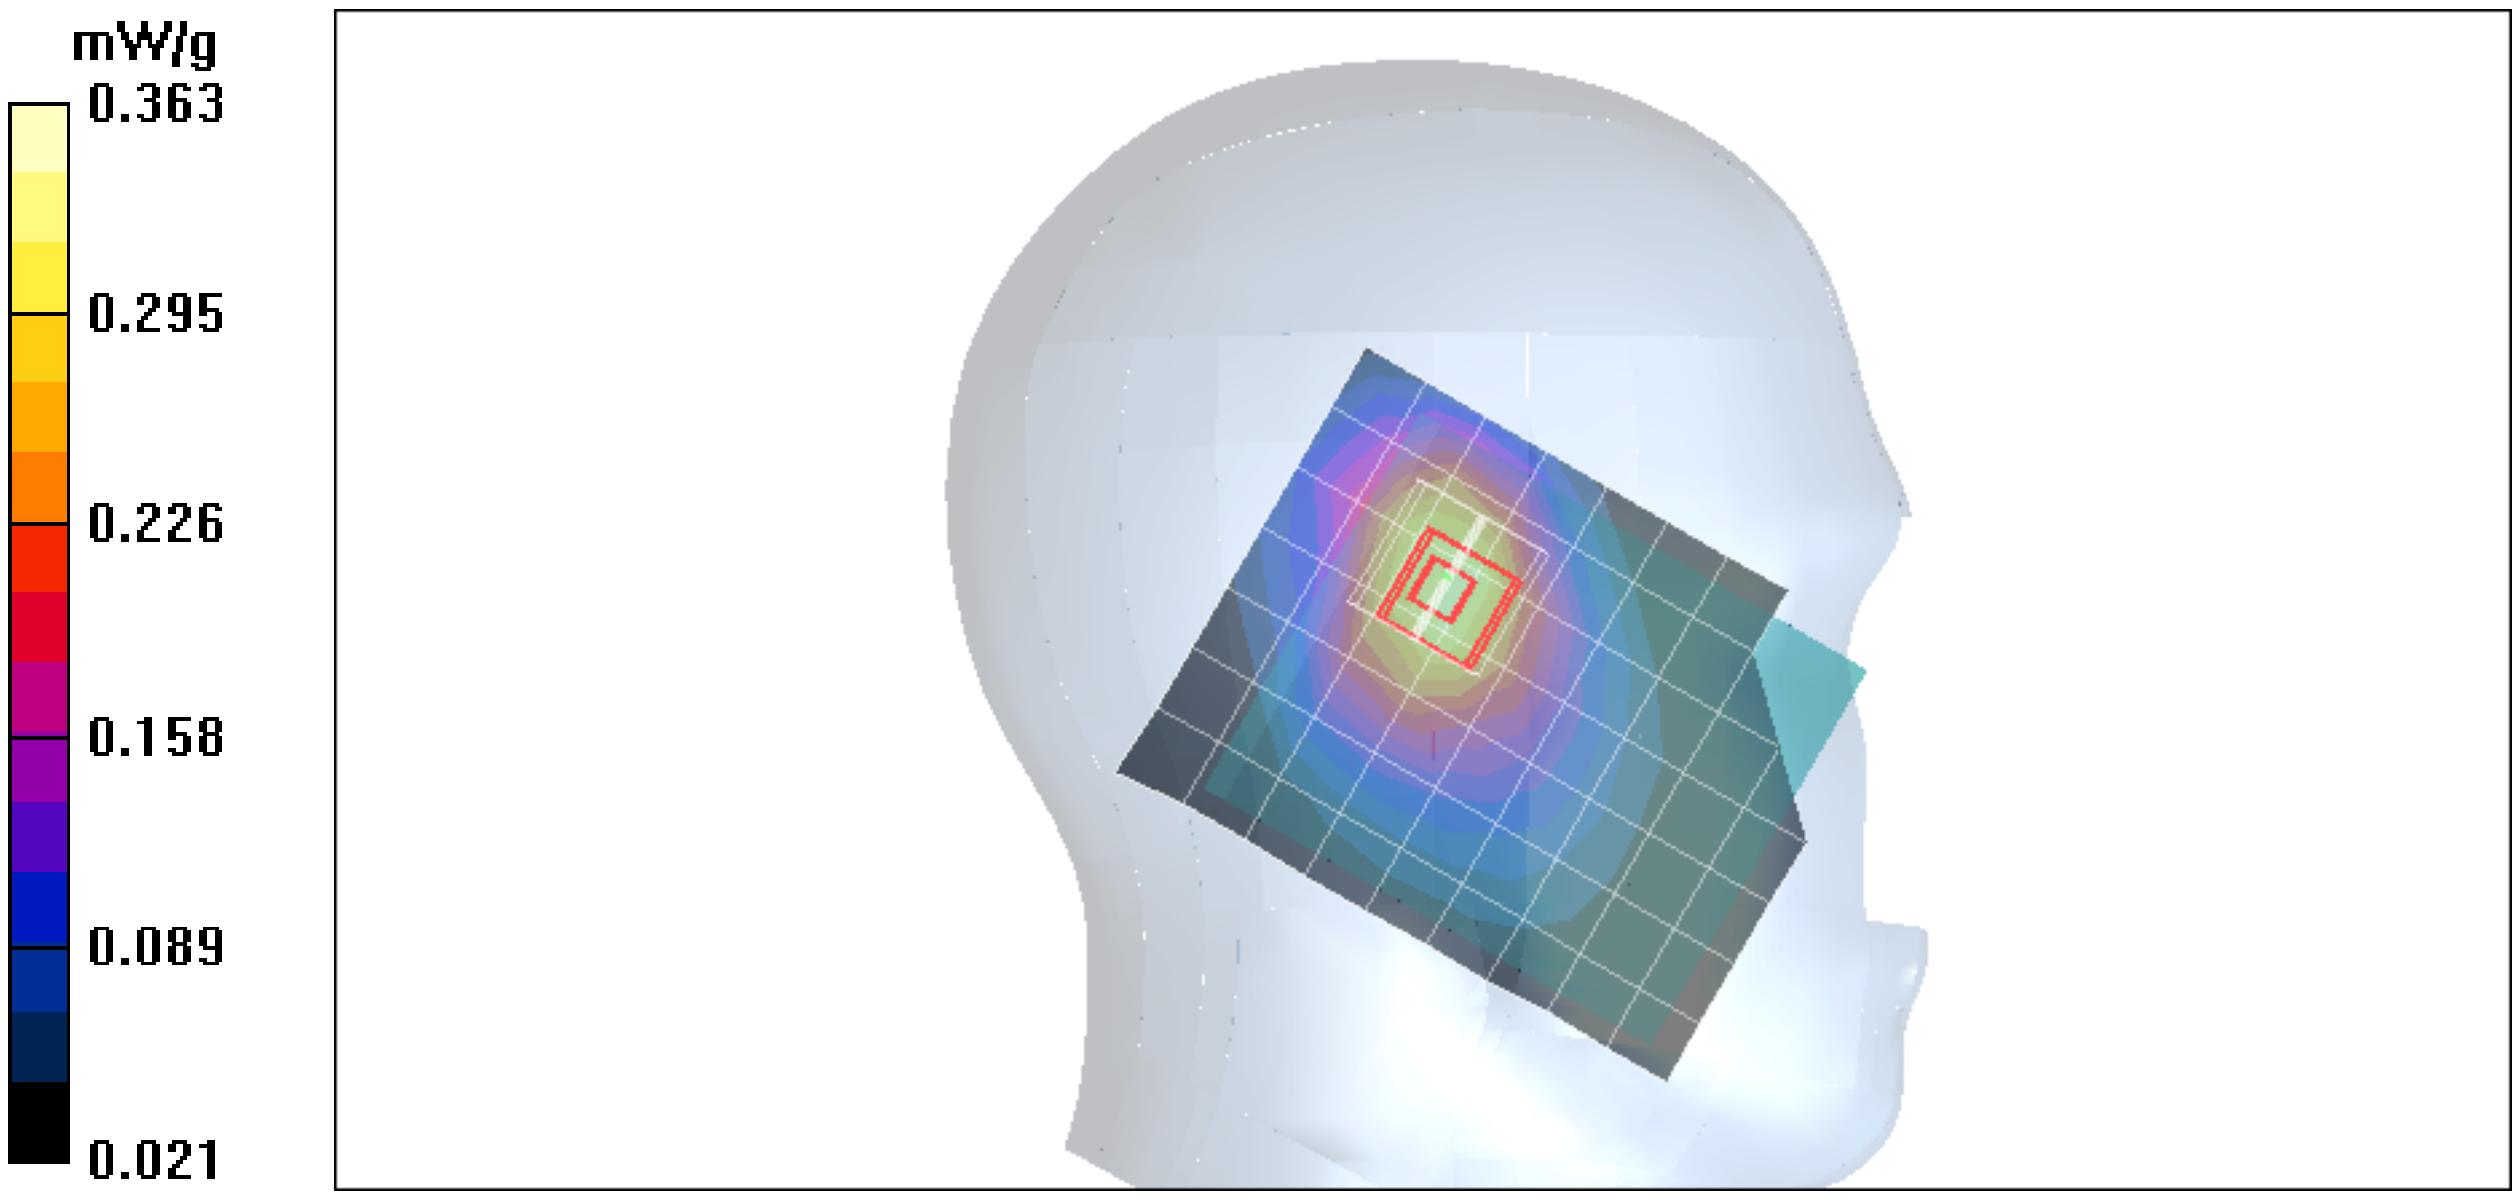

Date/Time: 12/31/2006 2:14:09 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.871 mho/m; ε_r = 41.3; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Cheek Low CH128/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.545 mW/g

Right Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 22.7 V/m; Power Drift = -0.041 dB
Peak SAR (extrapolated) = 0.657 W/kg
SAR(1 g) = 0.478 mW/g; SAR(10 g) = 0.335 mW/g
Maximum value of SAR (measured) = 0.562 mW/g

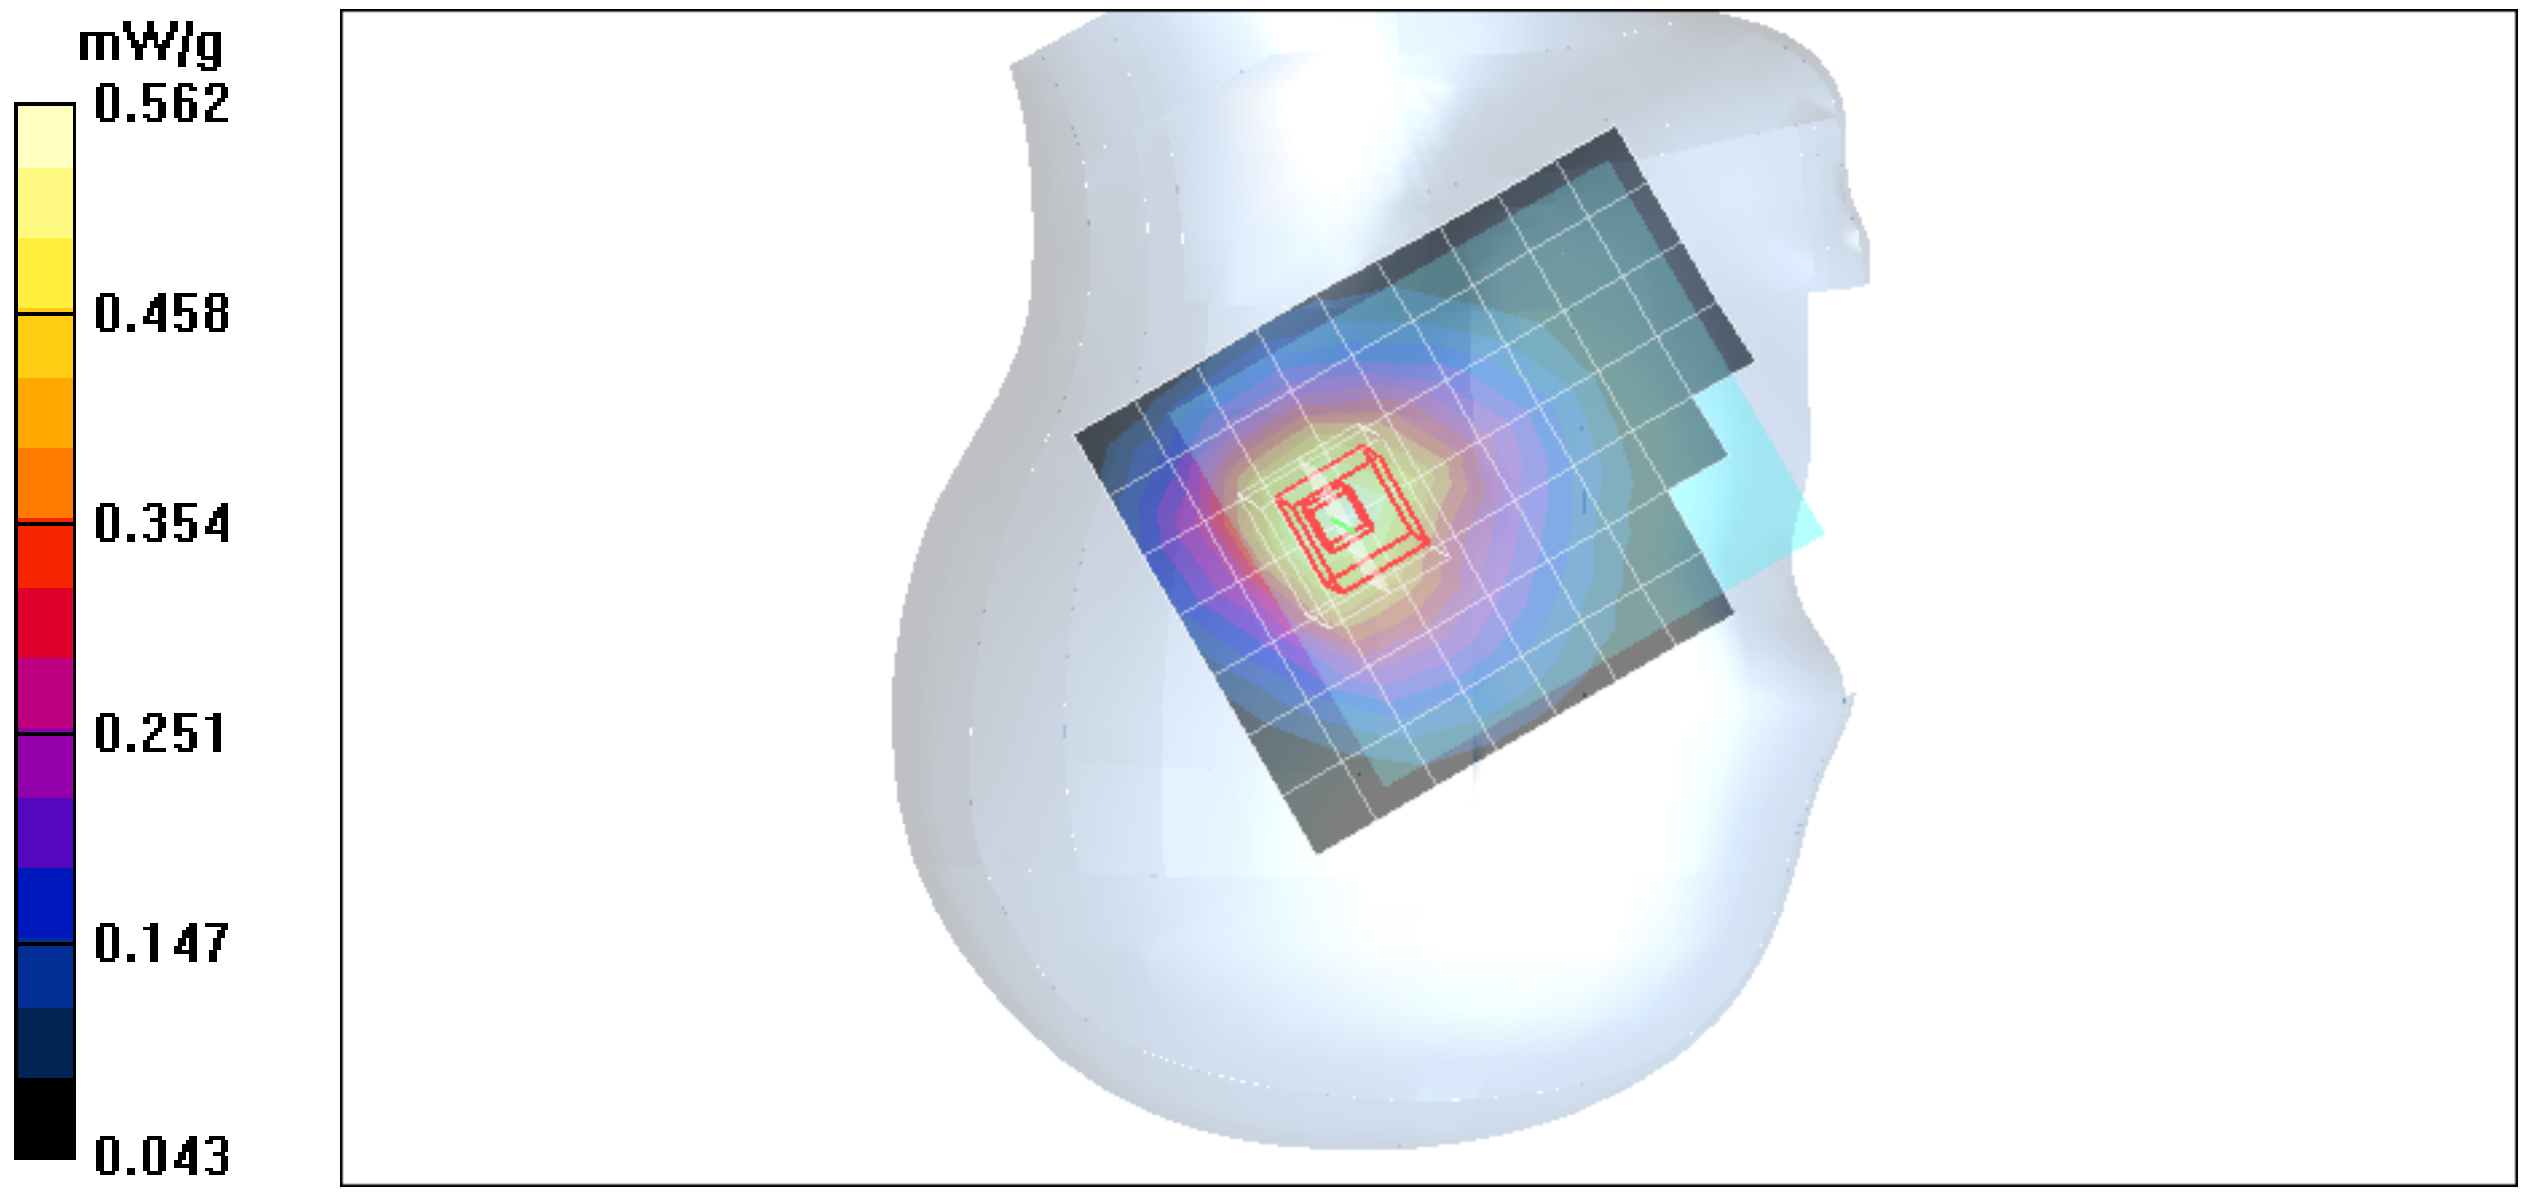

Date/Time: 12/31/2006 1:57:45 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.882 mho/m; ε_r = 41.1; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:
- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Cheek Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.419 mW/g

Right Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 19.9 V/m; Power Drift = -0.014 dB
Peak SAR (extrapolated) = 0.512 W/kg
SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.257 mW/g
Maximum value of SAR (measured) = 0.435 mW/g

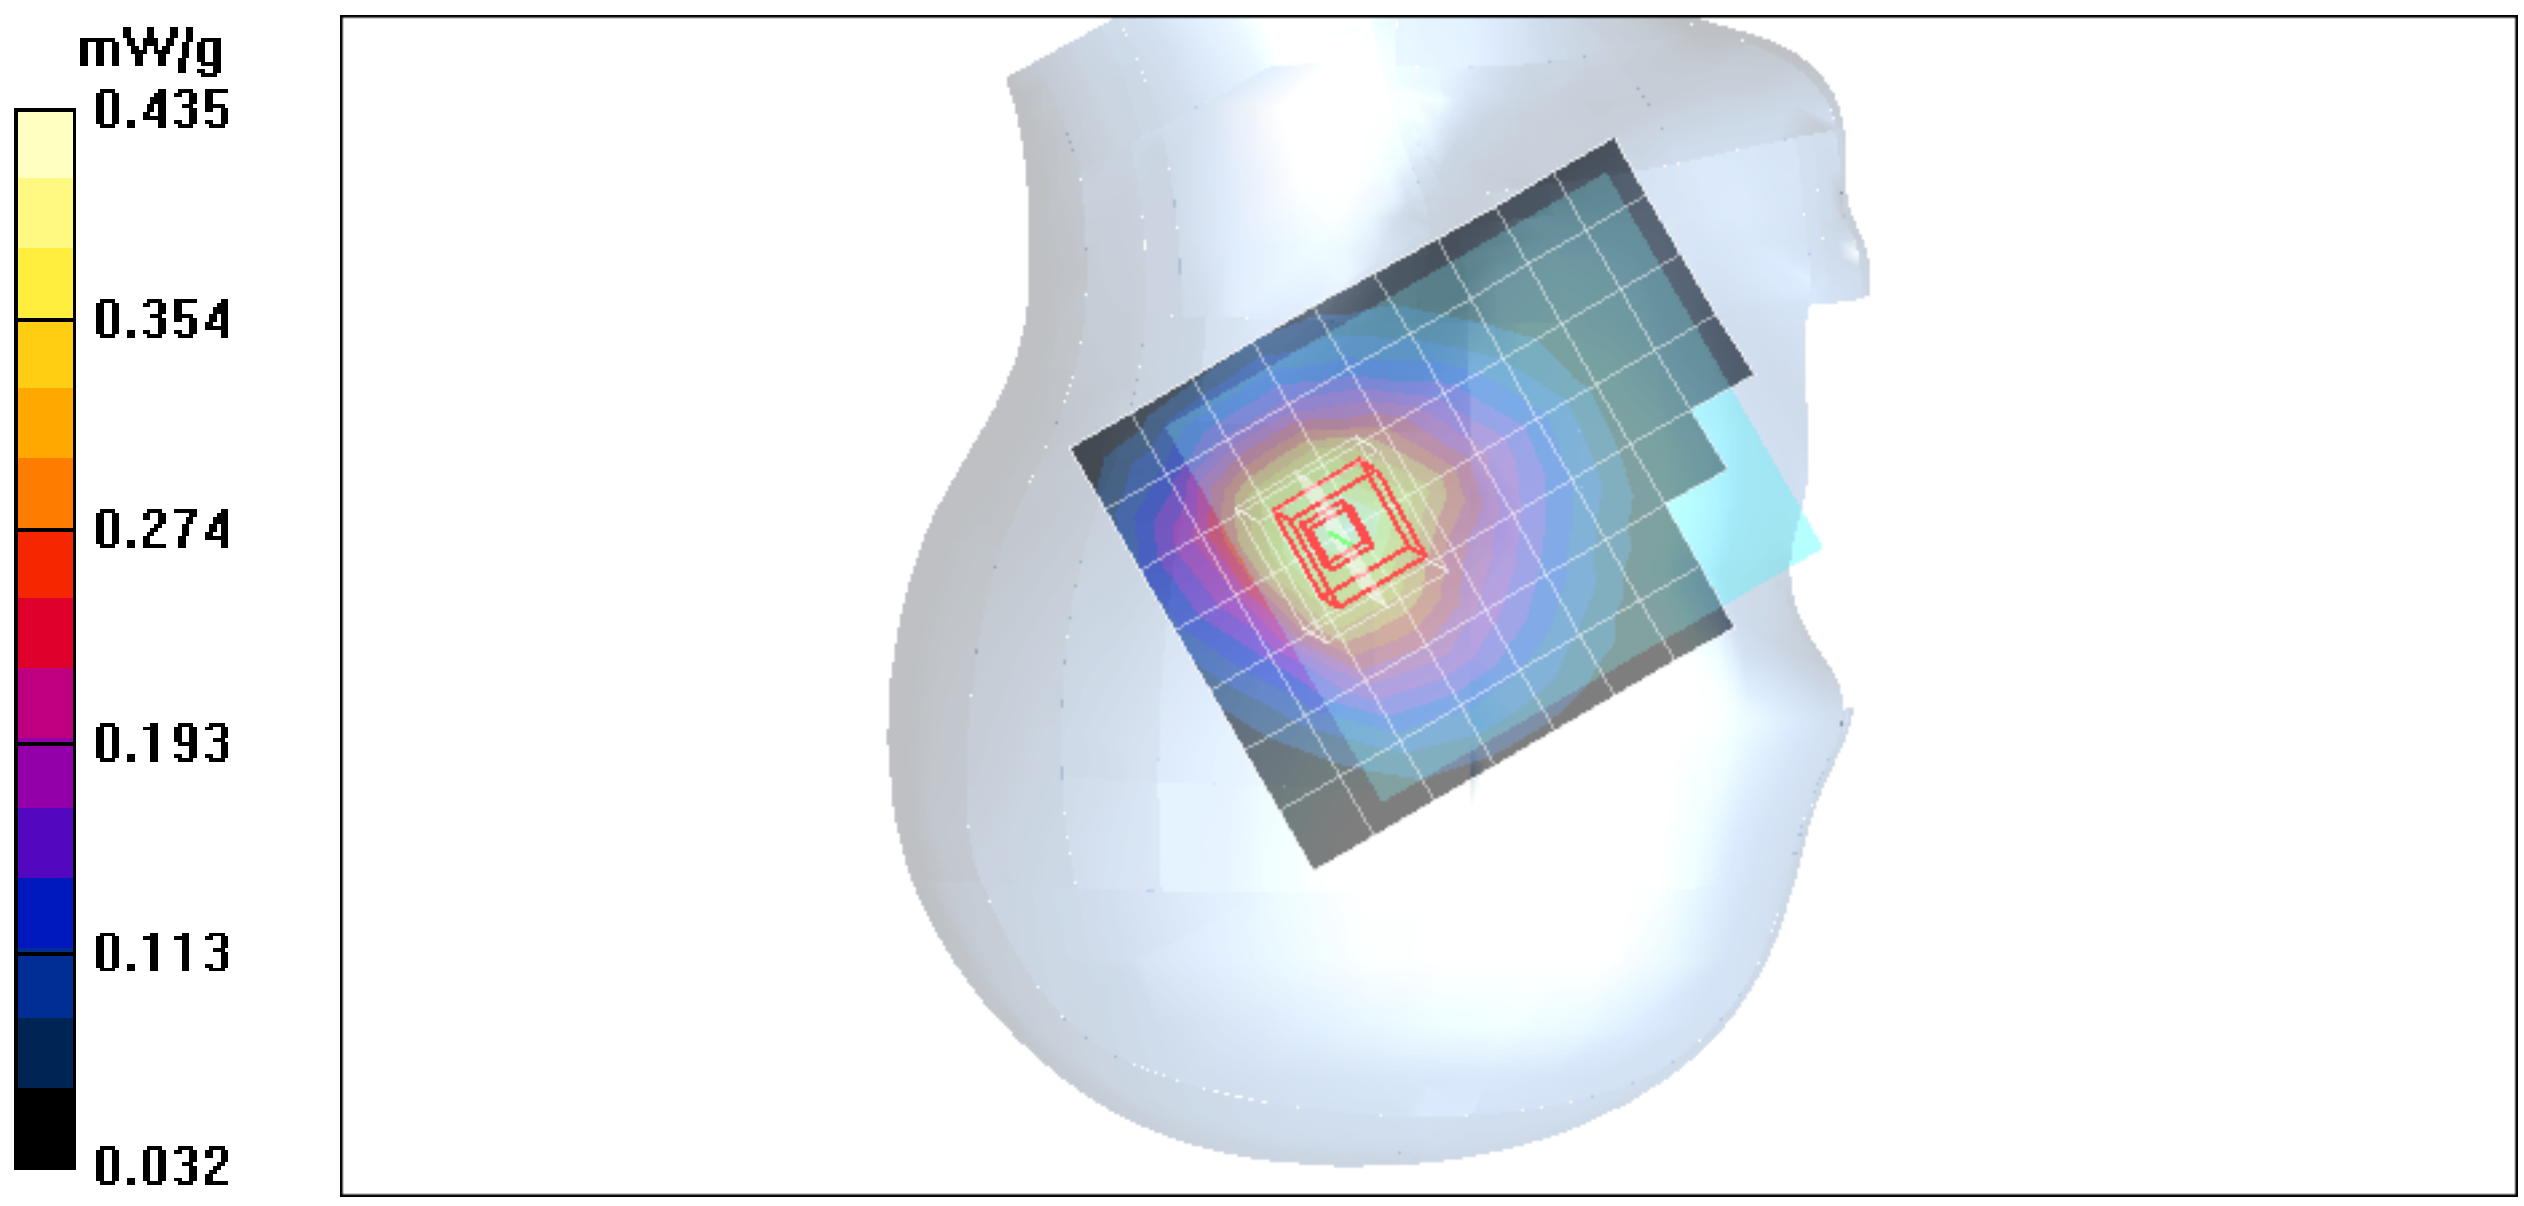

Date/Time: 12/31/2006 2:31:14 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.893 mho/m; ε_r = 41; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Cheek High CH251/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.294 mW/g

Right Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 16.5 V/m; Power Drift = -0.003 dB
Peak SAR (extrapolated) = 0.356 W/kg
SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.182 mW/g
Maximum value of SAR (measured) = 0.303 mW/g

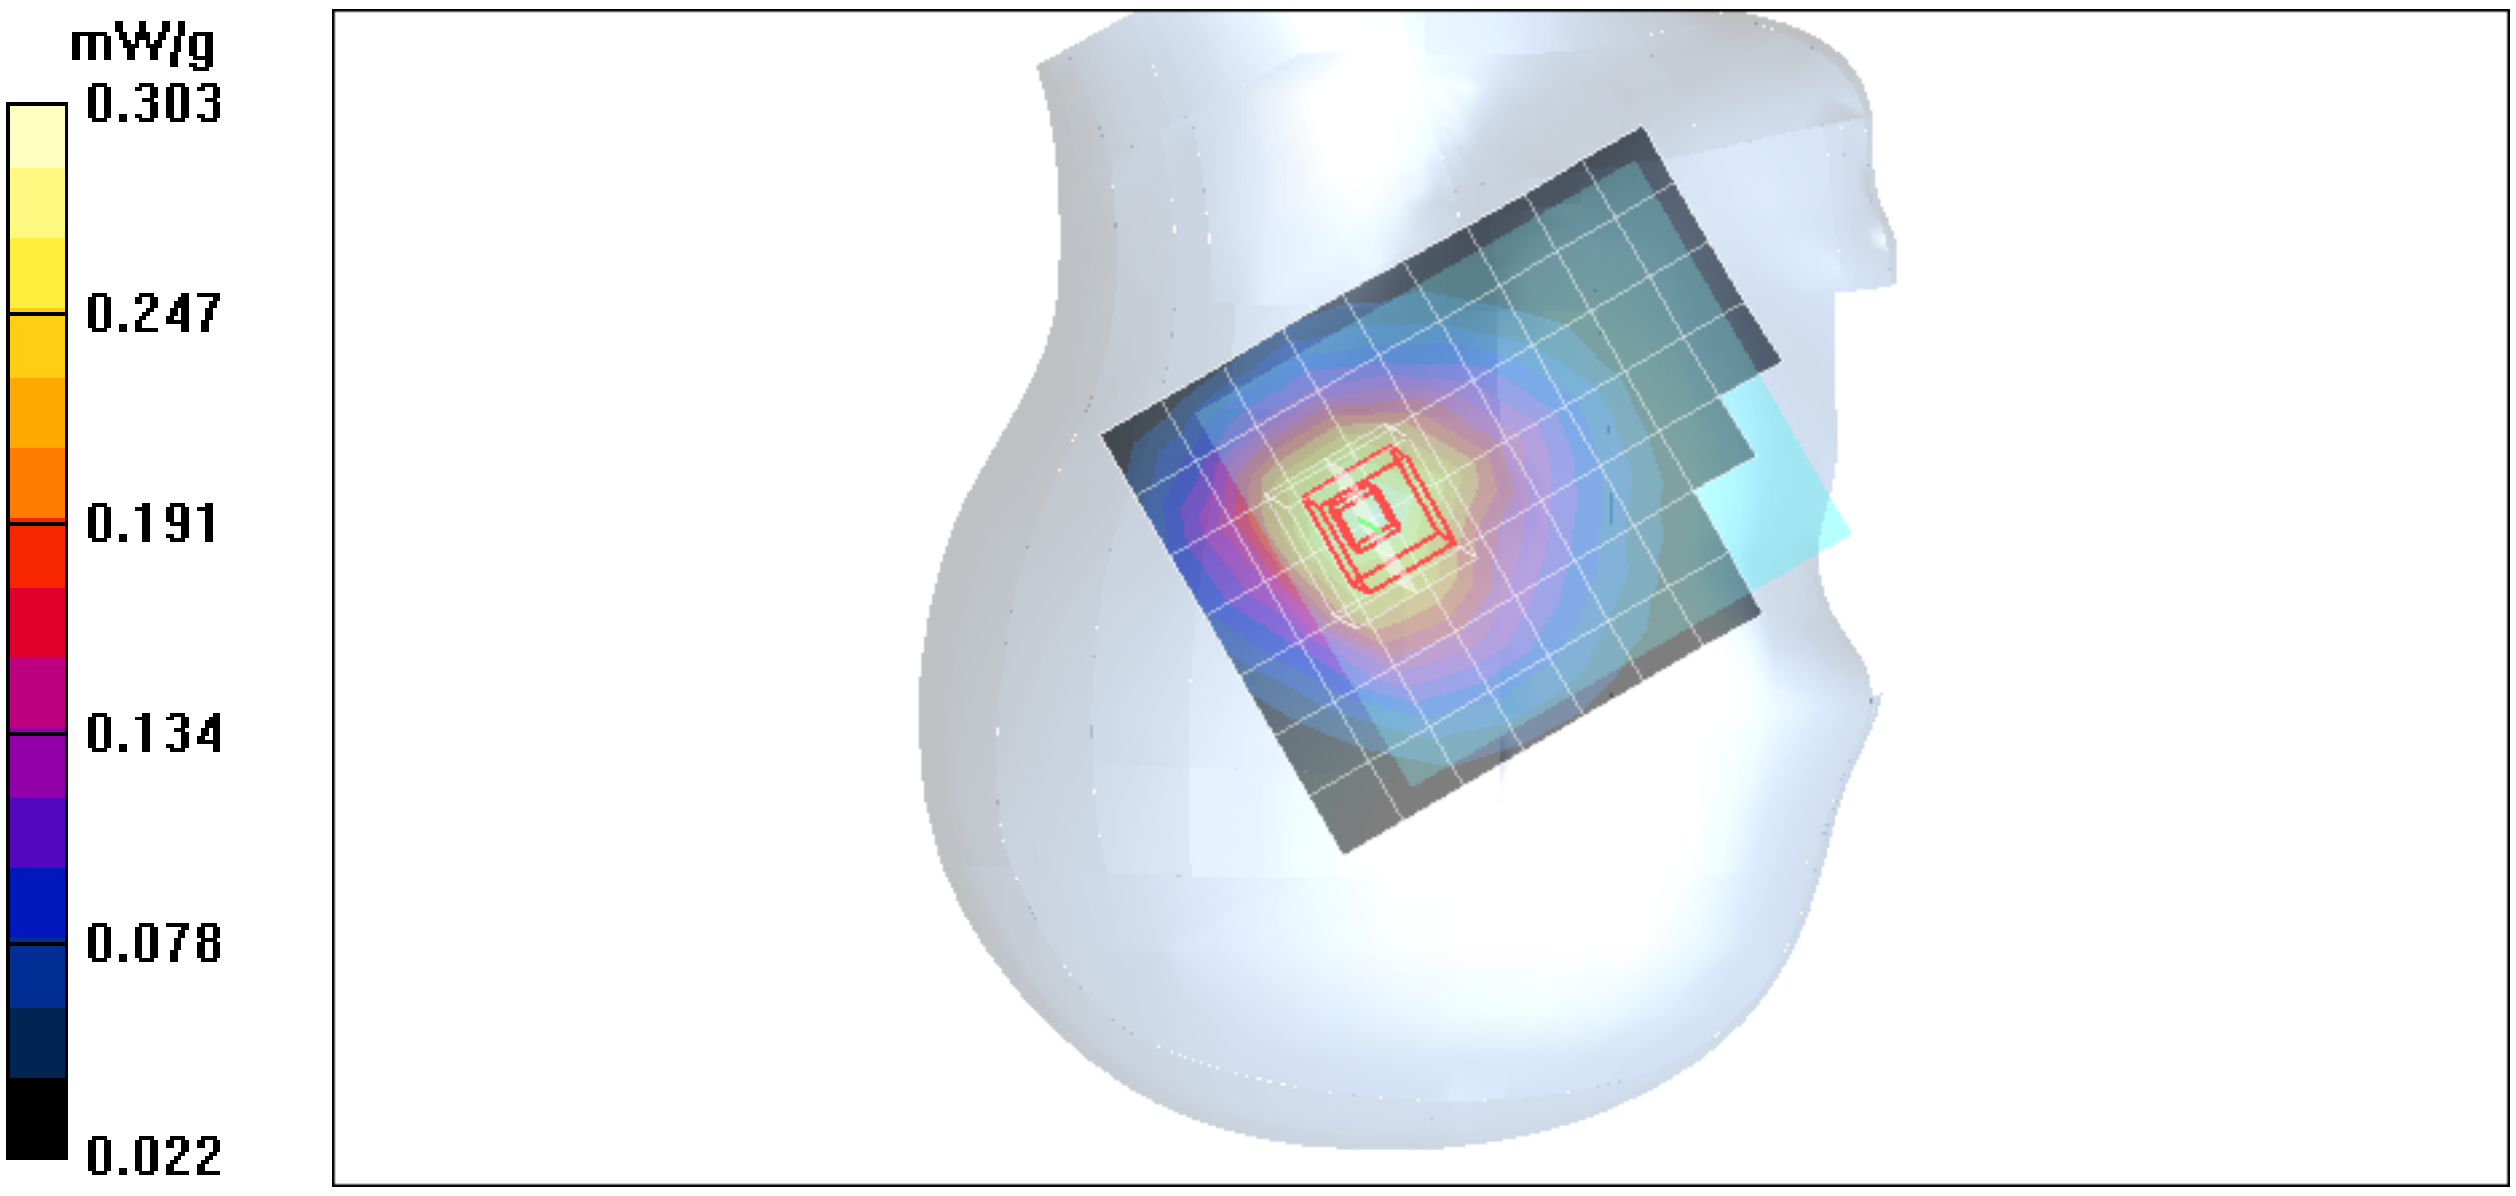

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.871 mho/m; ε_r = 41.3; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Tilted Low CH128/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.468 mW/g

Right Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 24.7 V/m; Power Drift = -0.015 dB
Peak SAR (extrapolated) = 0.551 W/kg
SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.276 mW/g
Maximum value of SAR (measured) = 0.462 mW/g

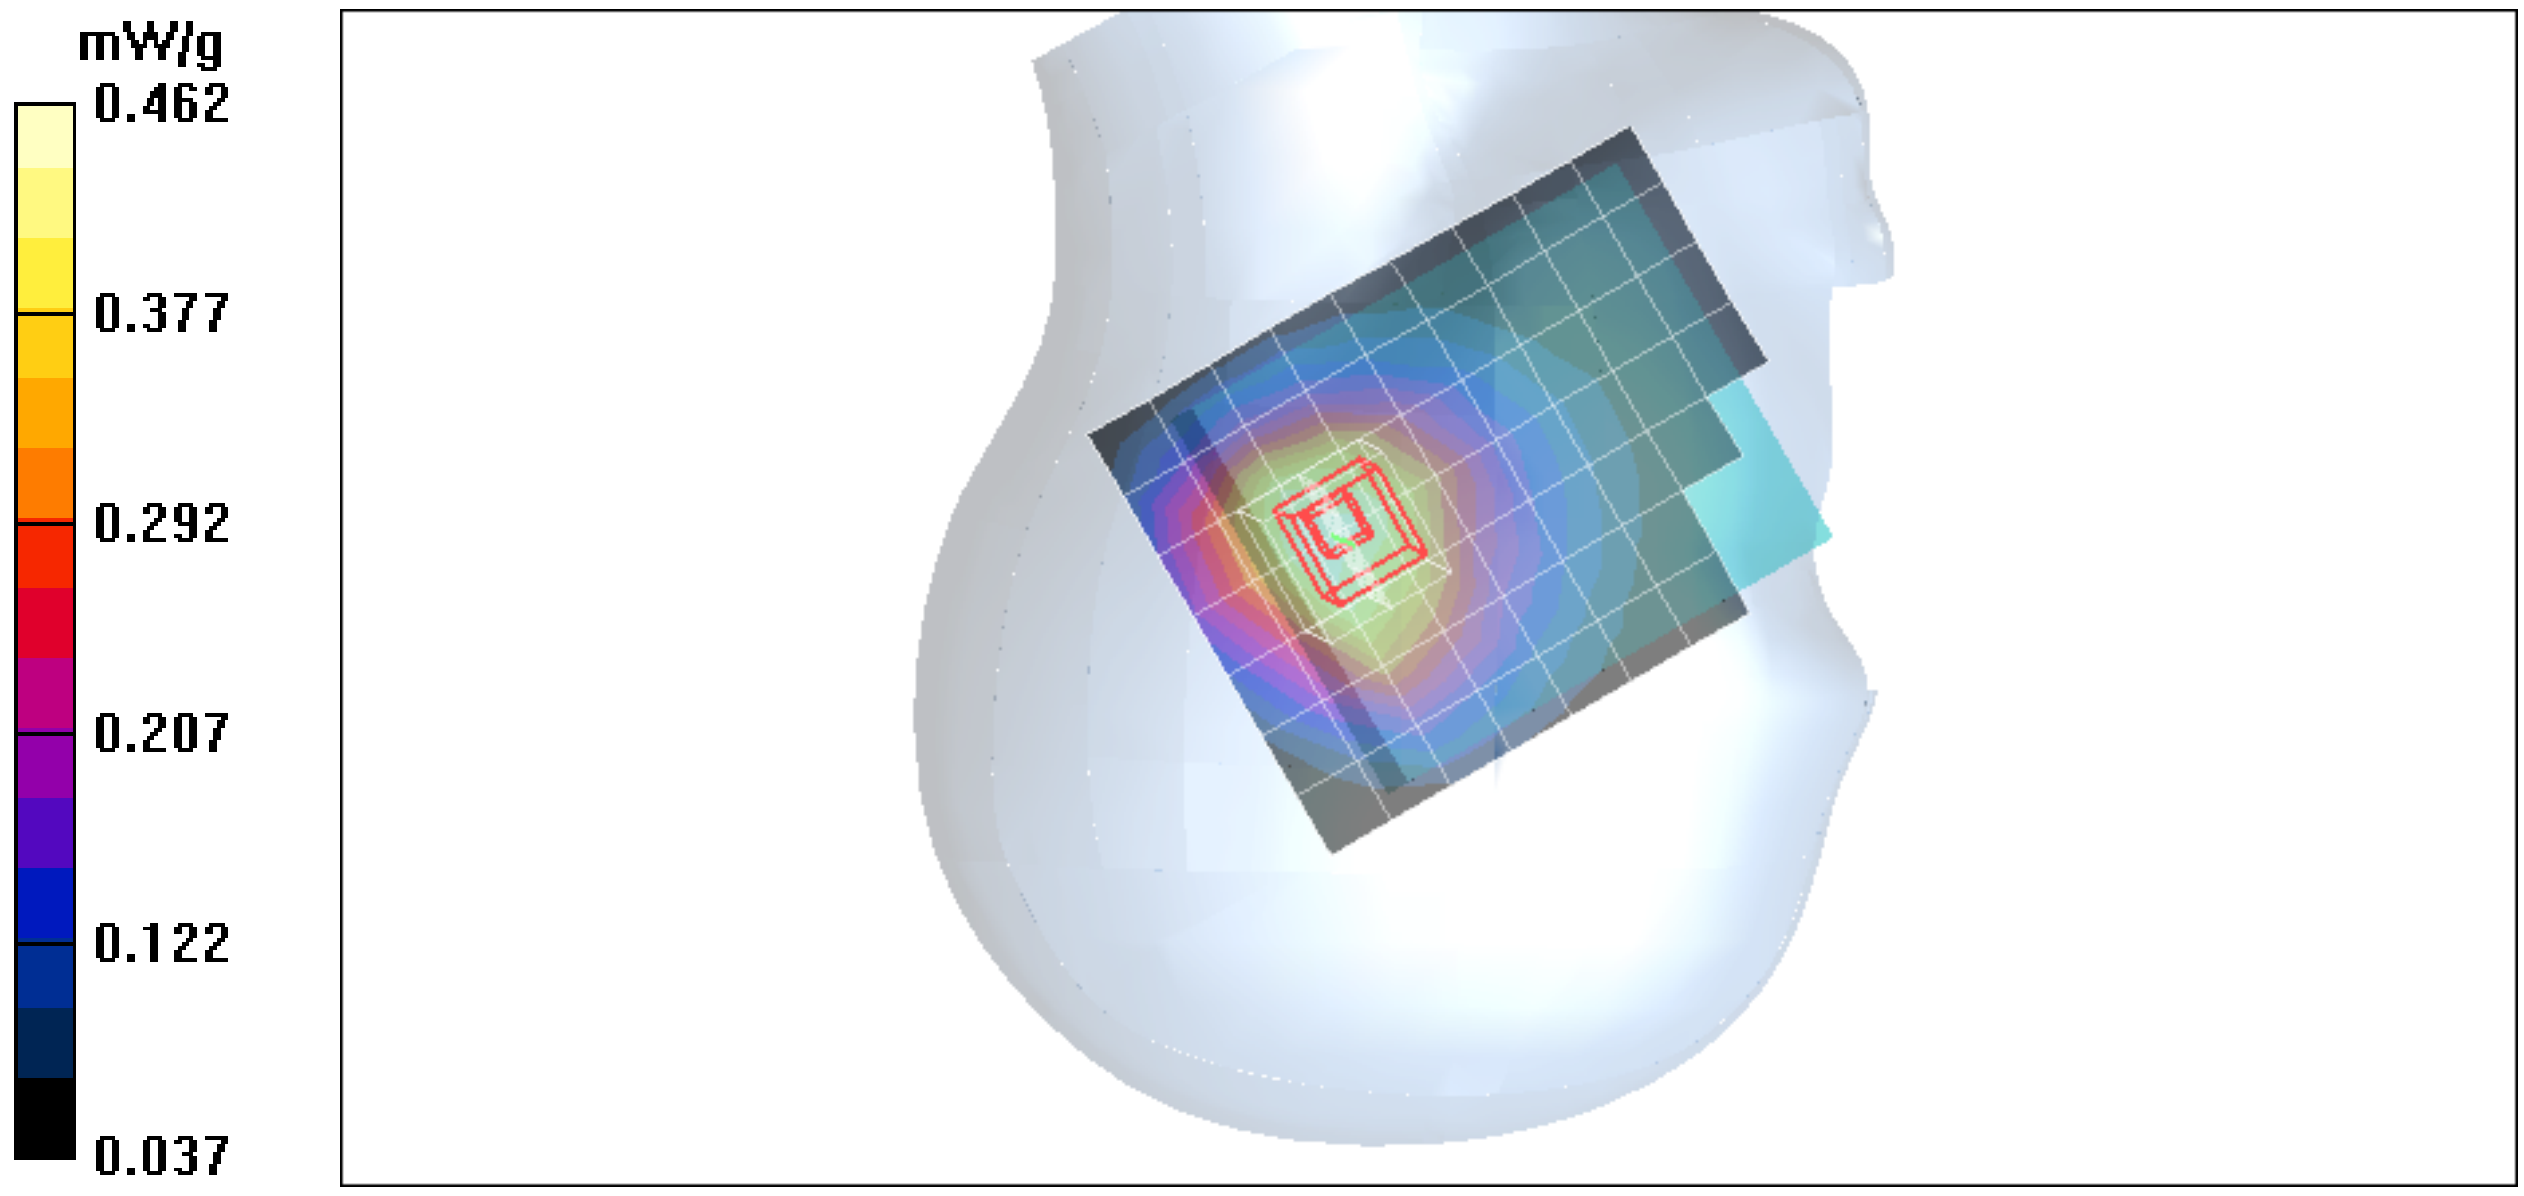

Date/Time: 12/31/2006 3:10:26 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.882 mho/m; ε_r = 41.1; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Tilted Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.319 mW/g

Right Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 17.7 V/m; Power Drift = -0.015 dB
Peak SAR (extrapolated) = 0.404 W/kg
SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.201 mW/g
Maximum value of SAR (measured) = 0.336 mW/g

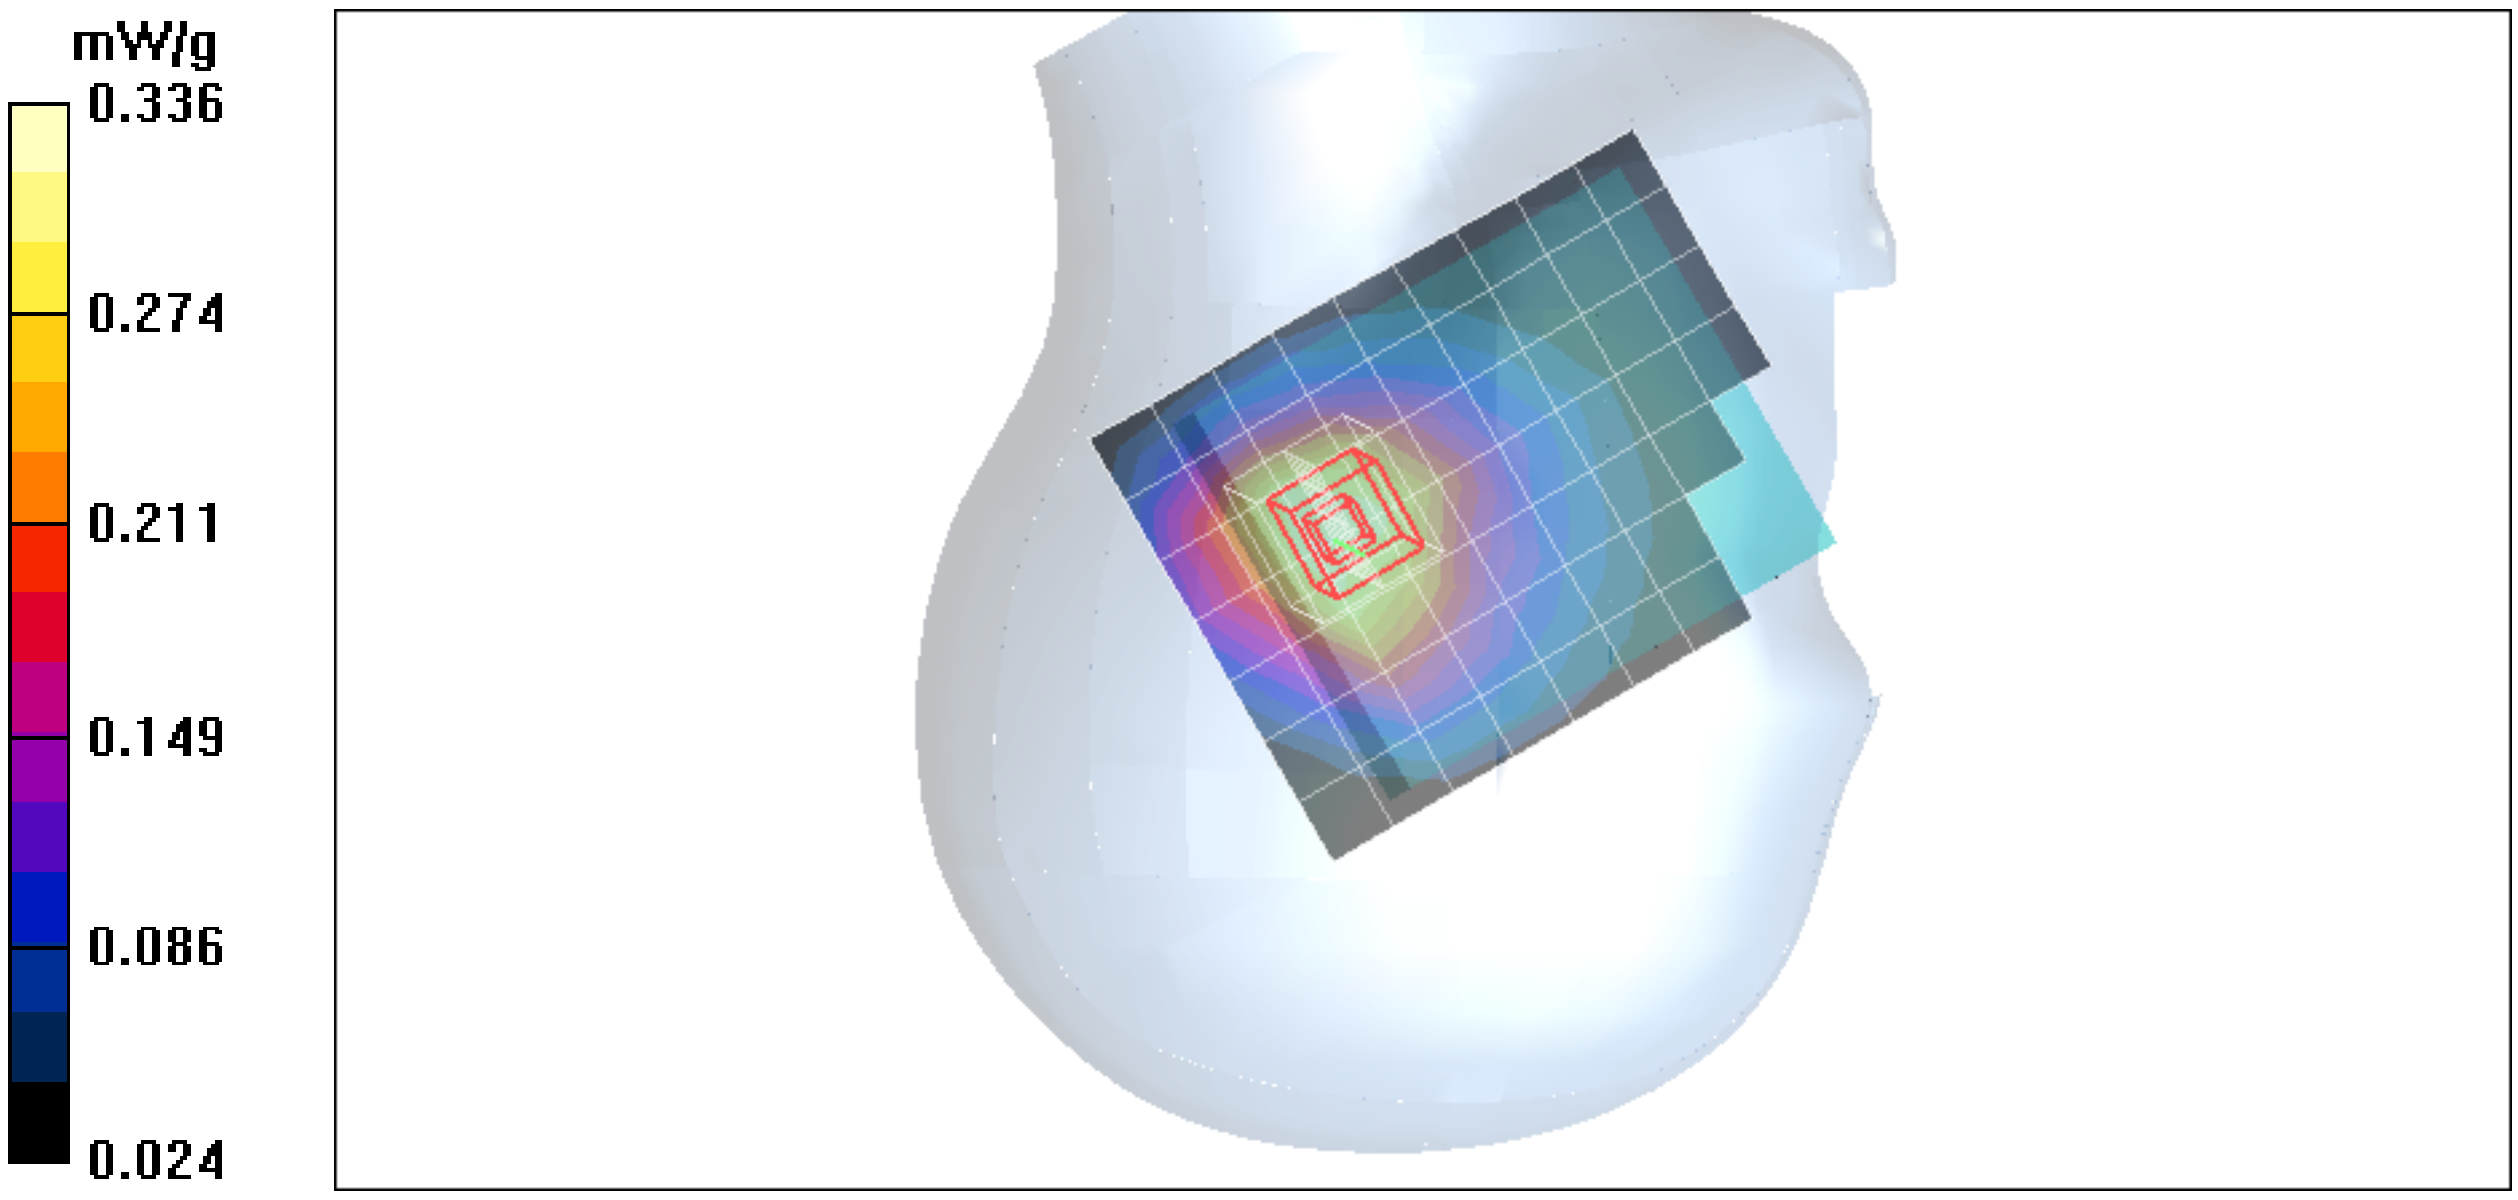

Date/Time: 12/31/2006 3:26:29 PM

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 848.8 MHz; $\sigma = 0.893$ mho/m; $\varepsilon_r = 41$; $\rho = 1000$ kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.9, 7.9, 7.9);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Tilted High CH251/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.245 mW/g

Right Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 16.3 V/m; Power Drift = -0.011 dB
Peak SAR (extrapolated) = 0.302 W/kg
SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.148 mW/g
Maximum value of SAR (measured) = 0.252 mW/g

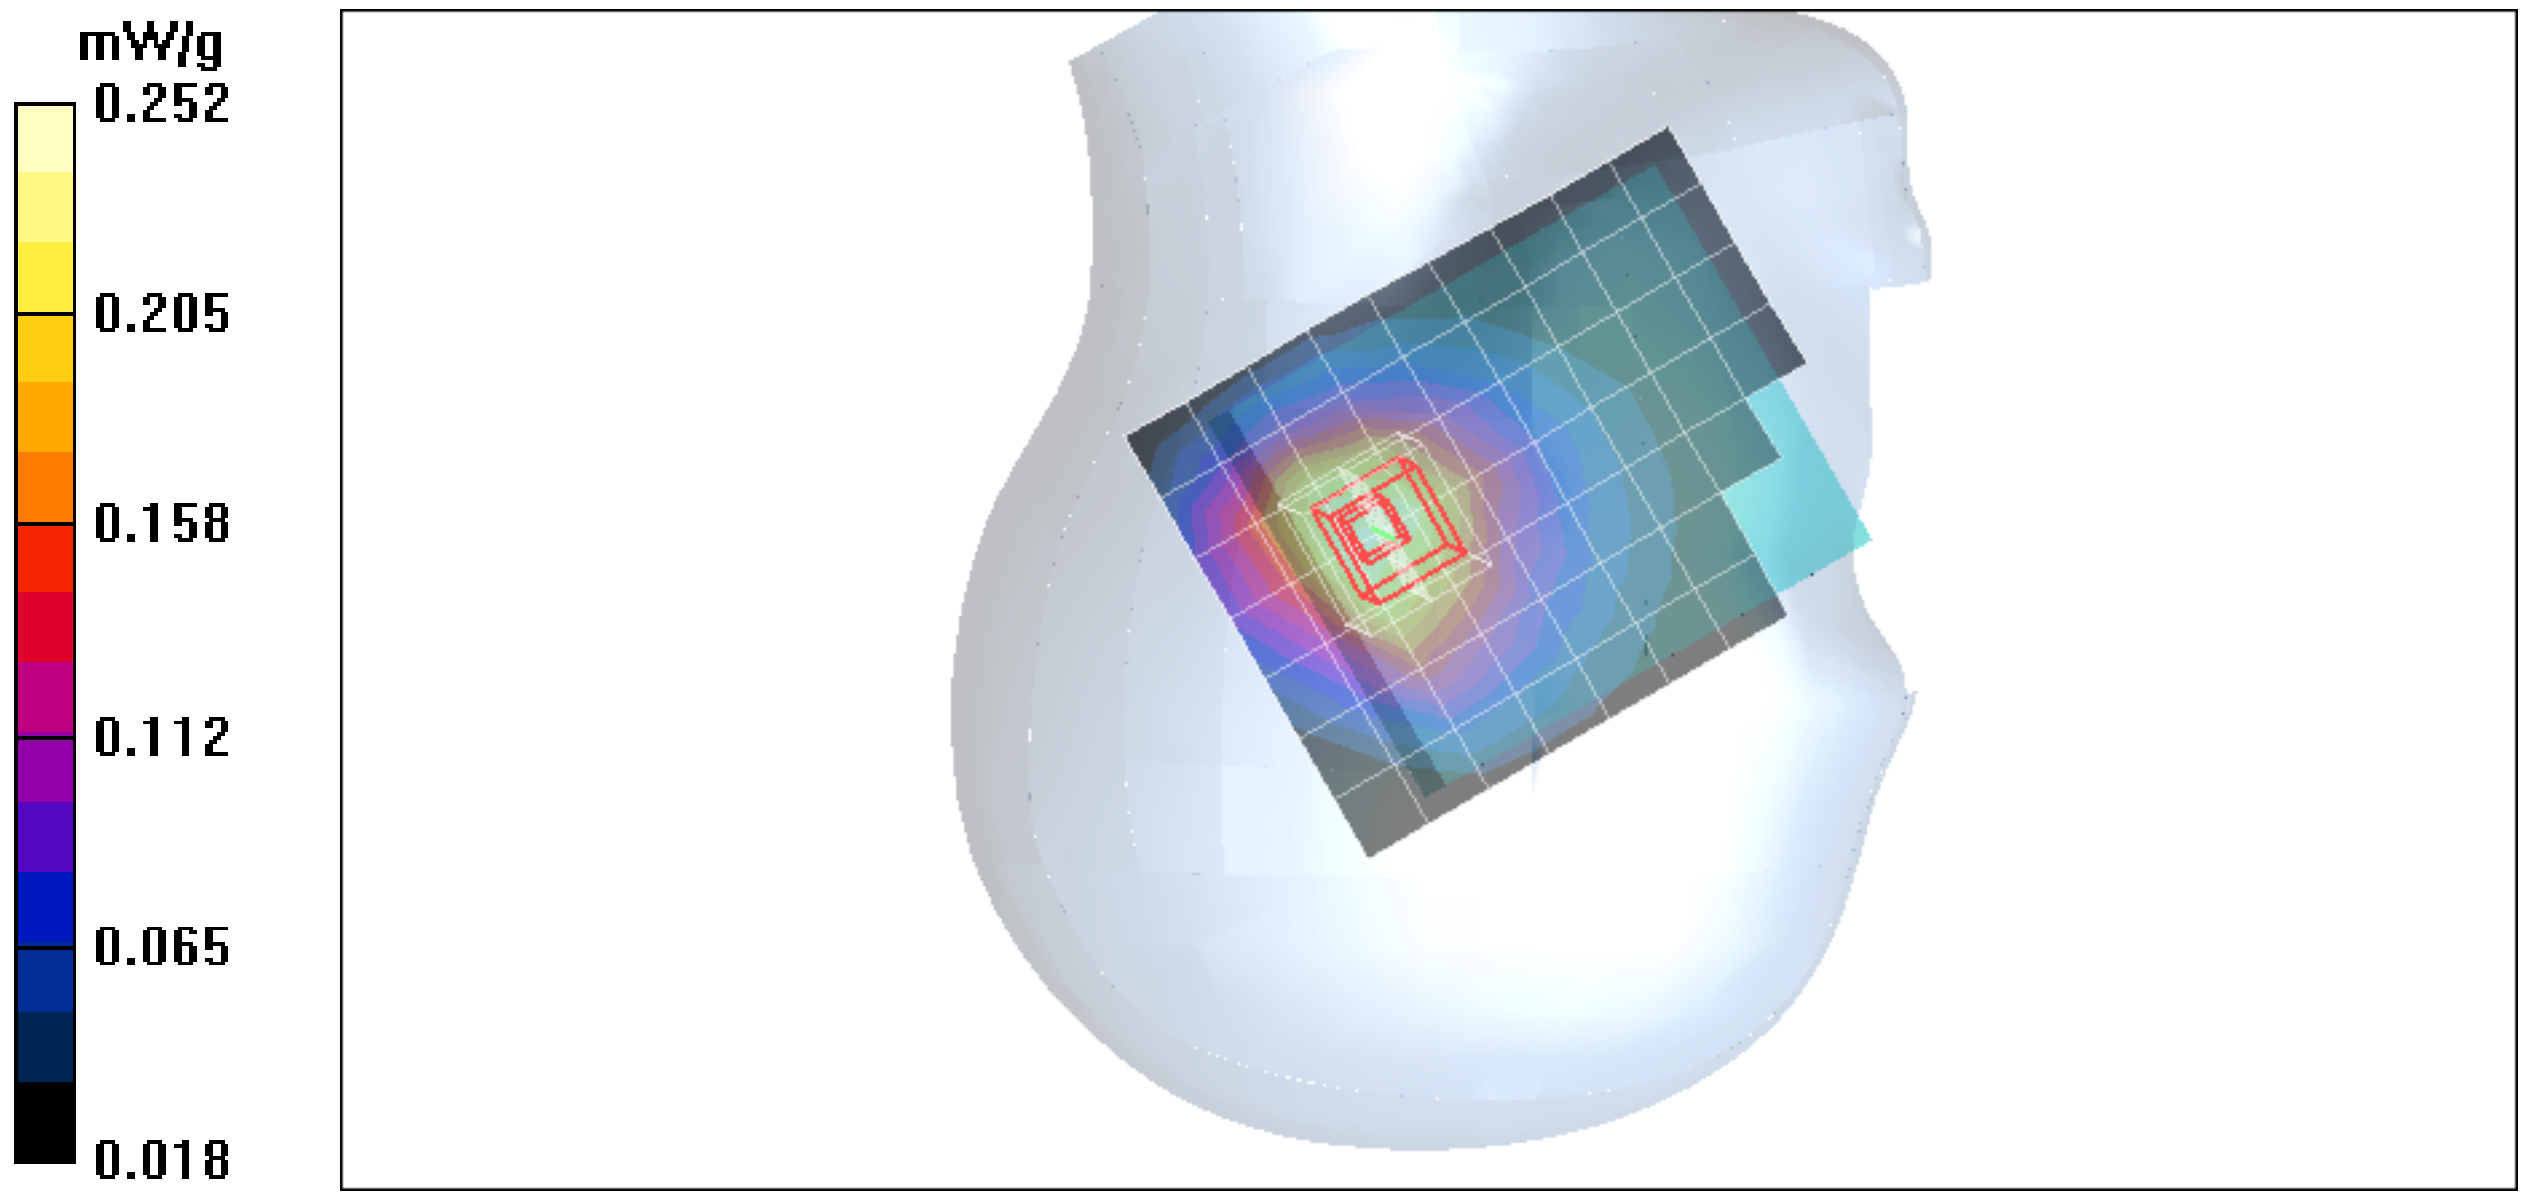

Date/Time: 12/31/2006 9:17:35 PM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Cheek Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.582 mW/g

Left Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 20.2 V/m; Power Drift = -0.018 dB
Peak SAR (extrapolated) = 0.782 W/kg
SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.305 mW/g
Maximum value of SAR (measured) = 0.606 mW/g

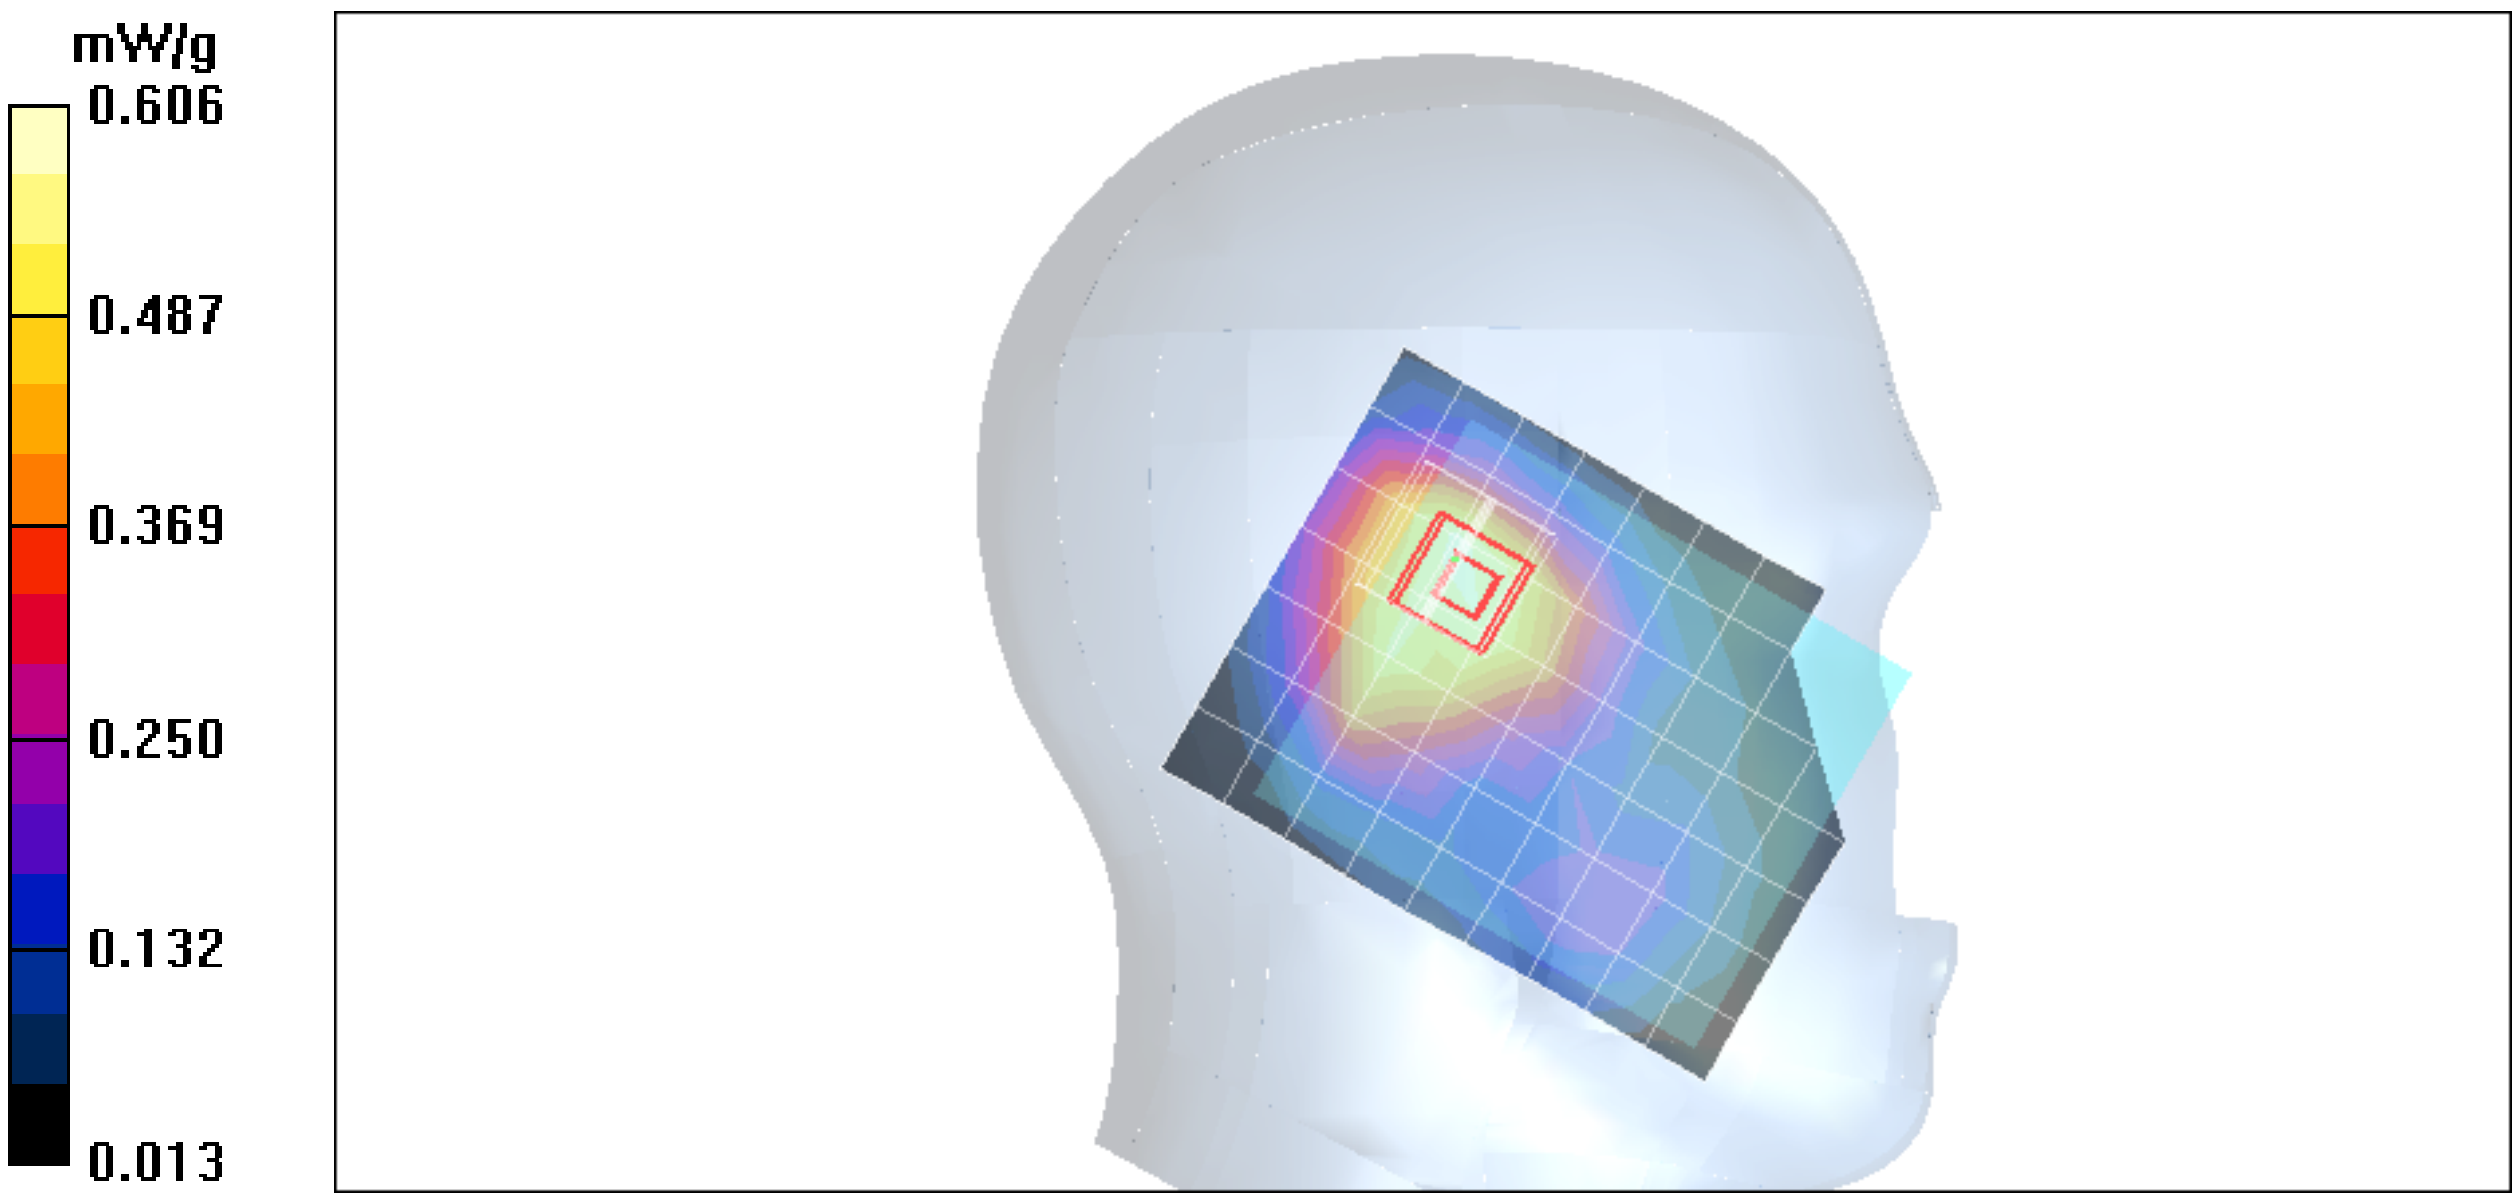

Date/Time: 12/31/2006 9:37:36 PM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1880 MHz; σ = 1.41 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Cheek Middle CH661/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.507 mW/g

Left Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 18.6 V/m; Power Drift = -0.033 dB
Peak SAR (extrapolated) = 0.678 W/kg
SAR(1 g) = 0.423 mW/g; SAR(10 g) = 0.261 mW/g
Maximum value of SAR (measured) = 0.522 mW/g

Left Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 18.6 V/m; Power Drift = -0.033 dB
Peak SAR (extrapolated) = 0.654 W/kg
SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.233 mW/g
Maximum value of SAR (measured) = 0.508 mW/g

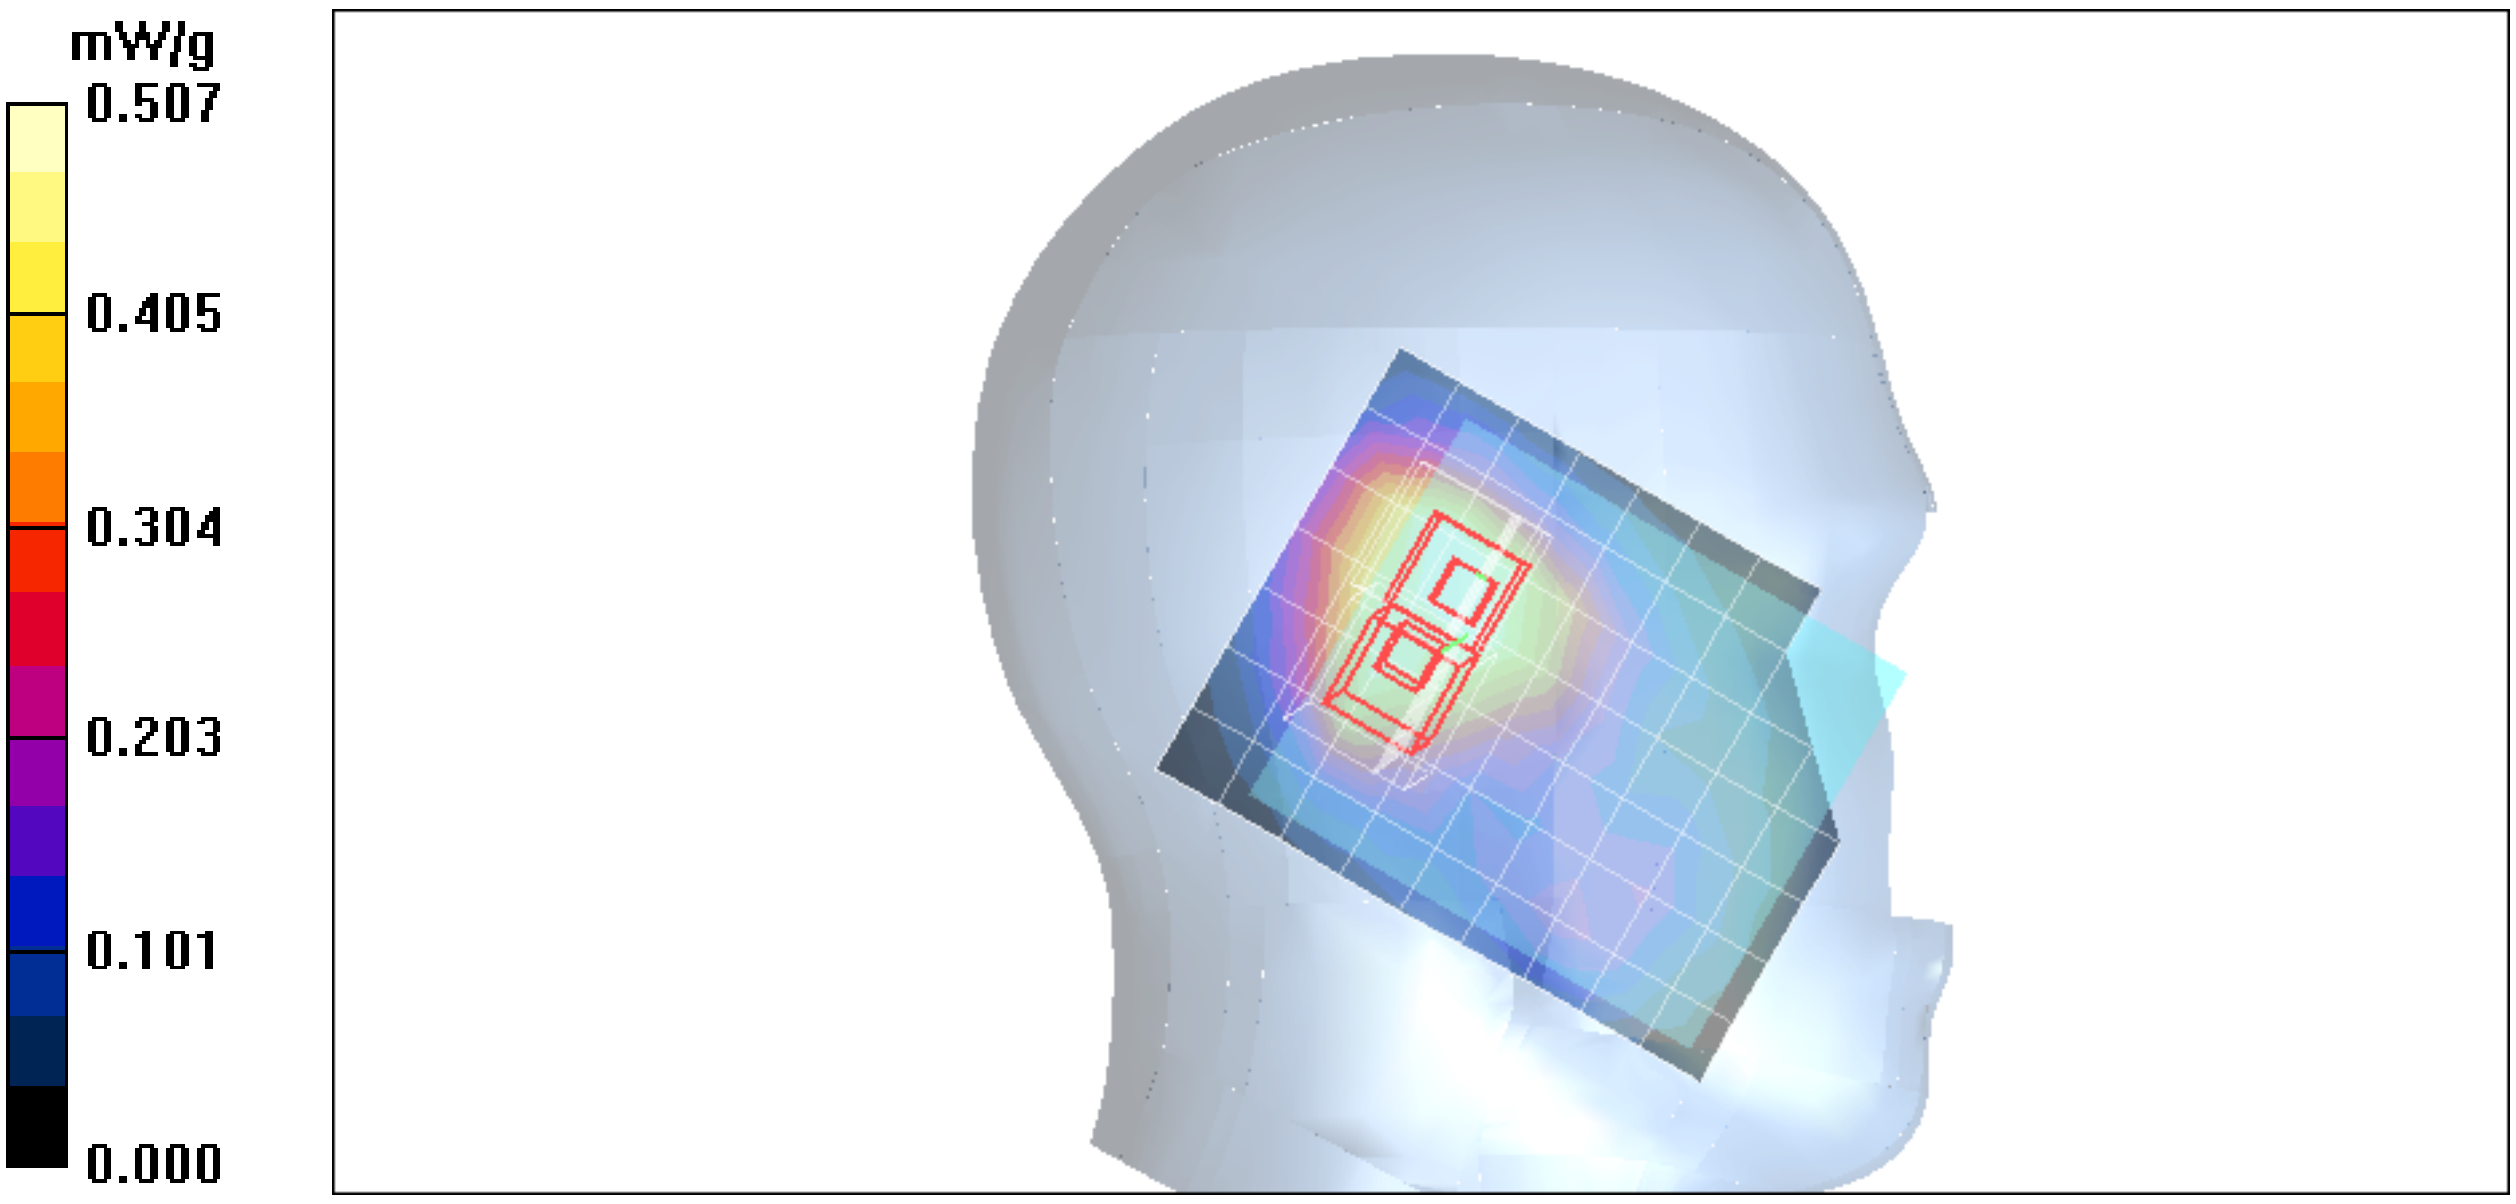
mW/g
0.507
0.405
0.304
0.203
0.101
0.000

Date/Time: 12/31/2006 9:57:49 PM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8
Medium parameters used: f = 1910 MHz; σ = 1.44 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Cheek High CH810/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.384 mW/g

Left Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 15.8 V/m; Power Drift = -0.066 dB
Peak SAR (extrapolated) = 0.519 W/kg
SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.196 mW/g
Maximum value of SAR (measured) = 0.402 mW/g

Left Cheek High CH810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 15.8 V/m; Power Drift = -0.066 dB
Peak SAR (extrapolated) = 0.503 W/kg
SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.193 mW/g
Maximum value of SAR (measured) = 0.392 mW/g

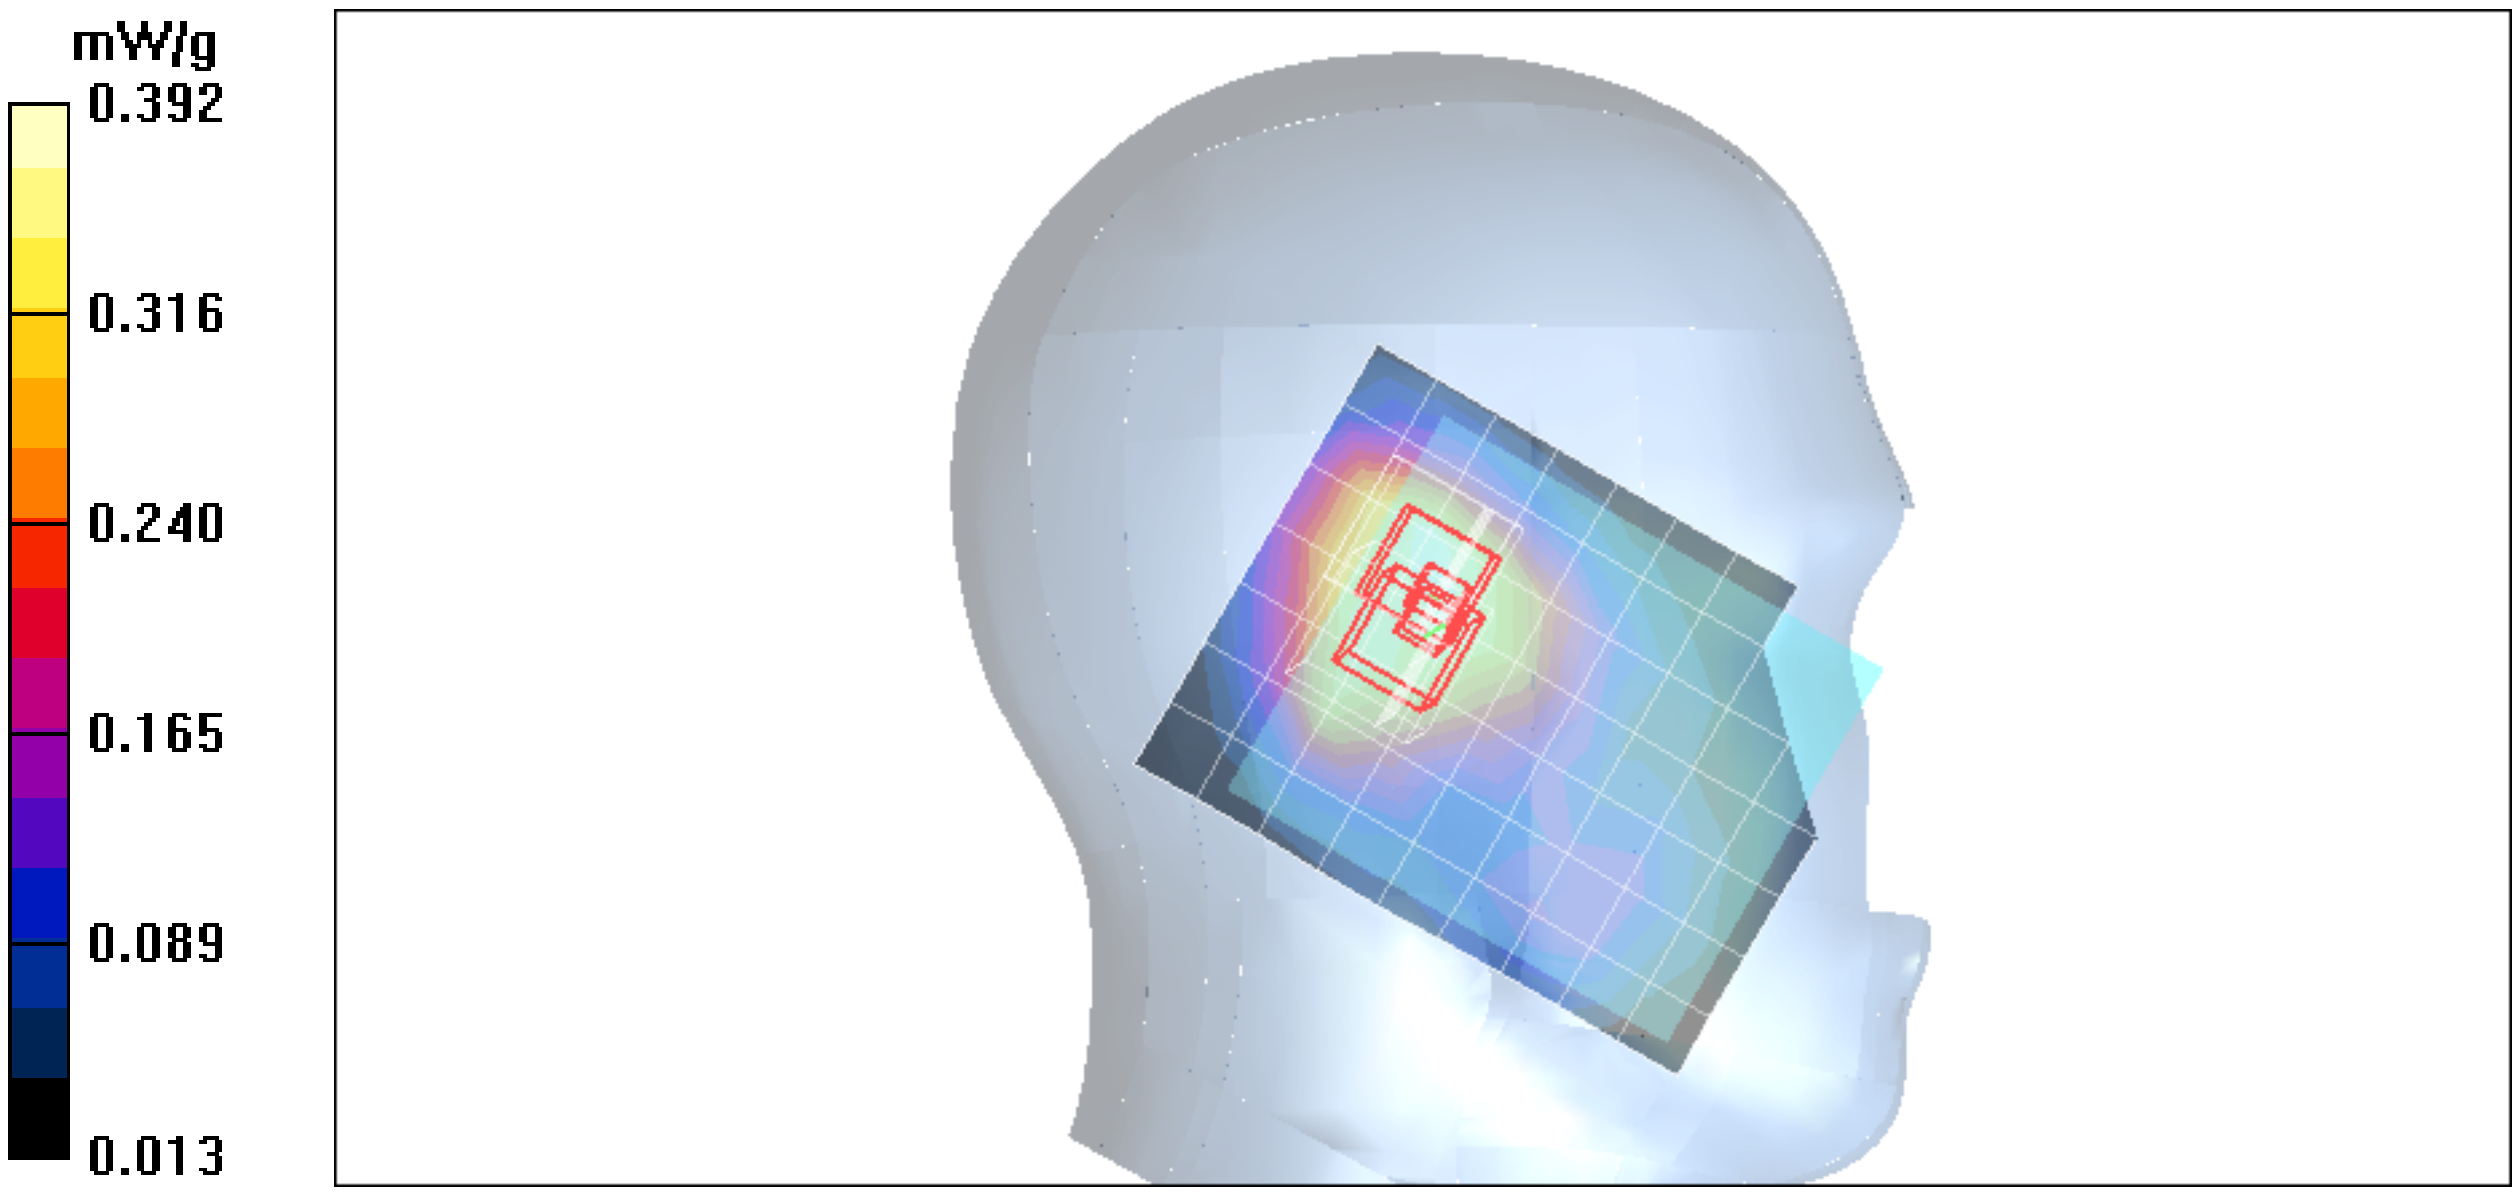
mW/g
0.392
0.316
0.240
0.165
0.089
0.013

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Tilted Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.659 mW/g

Left Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 21.0 V/m; Power Drift = -0.074 dB
Peak SAR (extrapolated) = 0.881 W/kg
SAR(1 g) = 0.541 mW/g; SAR(10 g) = 0.320 mW/g
Maximum value of SAR (measured) = 0.689 mW/g

Left Tilted Low CH512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 21.0 V/m; Power Drift = -0.074 dB
Peak SAR (extrapolated) = 0.789 W/kg
SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.297 mW/g
Maximum value of SAR (measured) = 0.617 mW/g

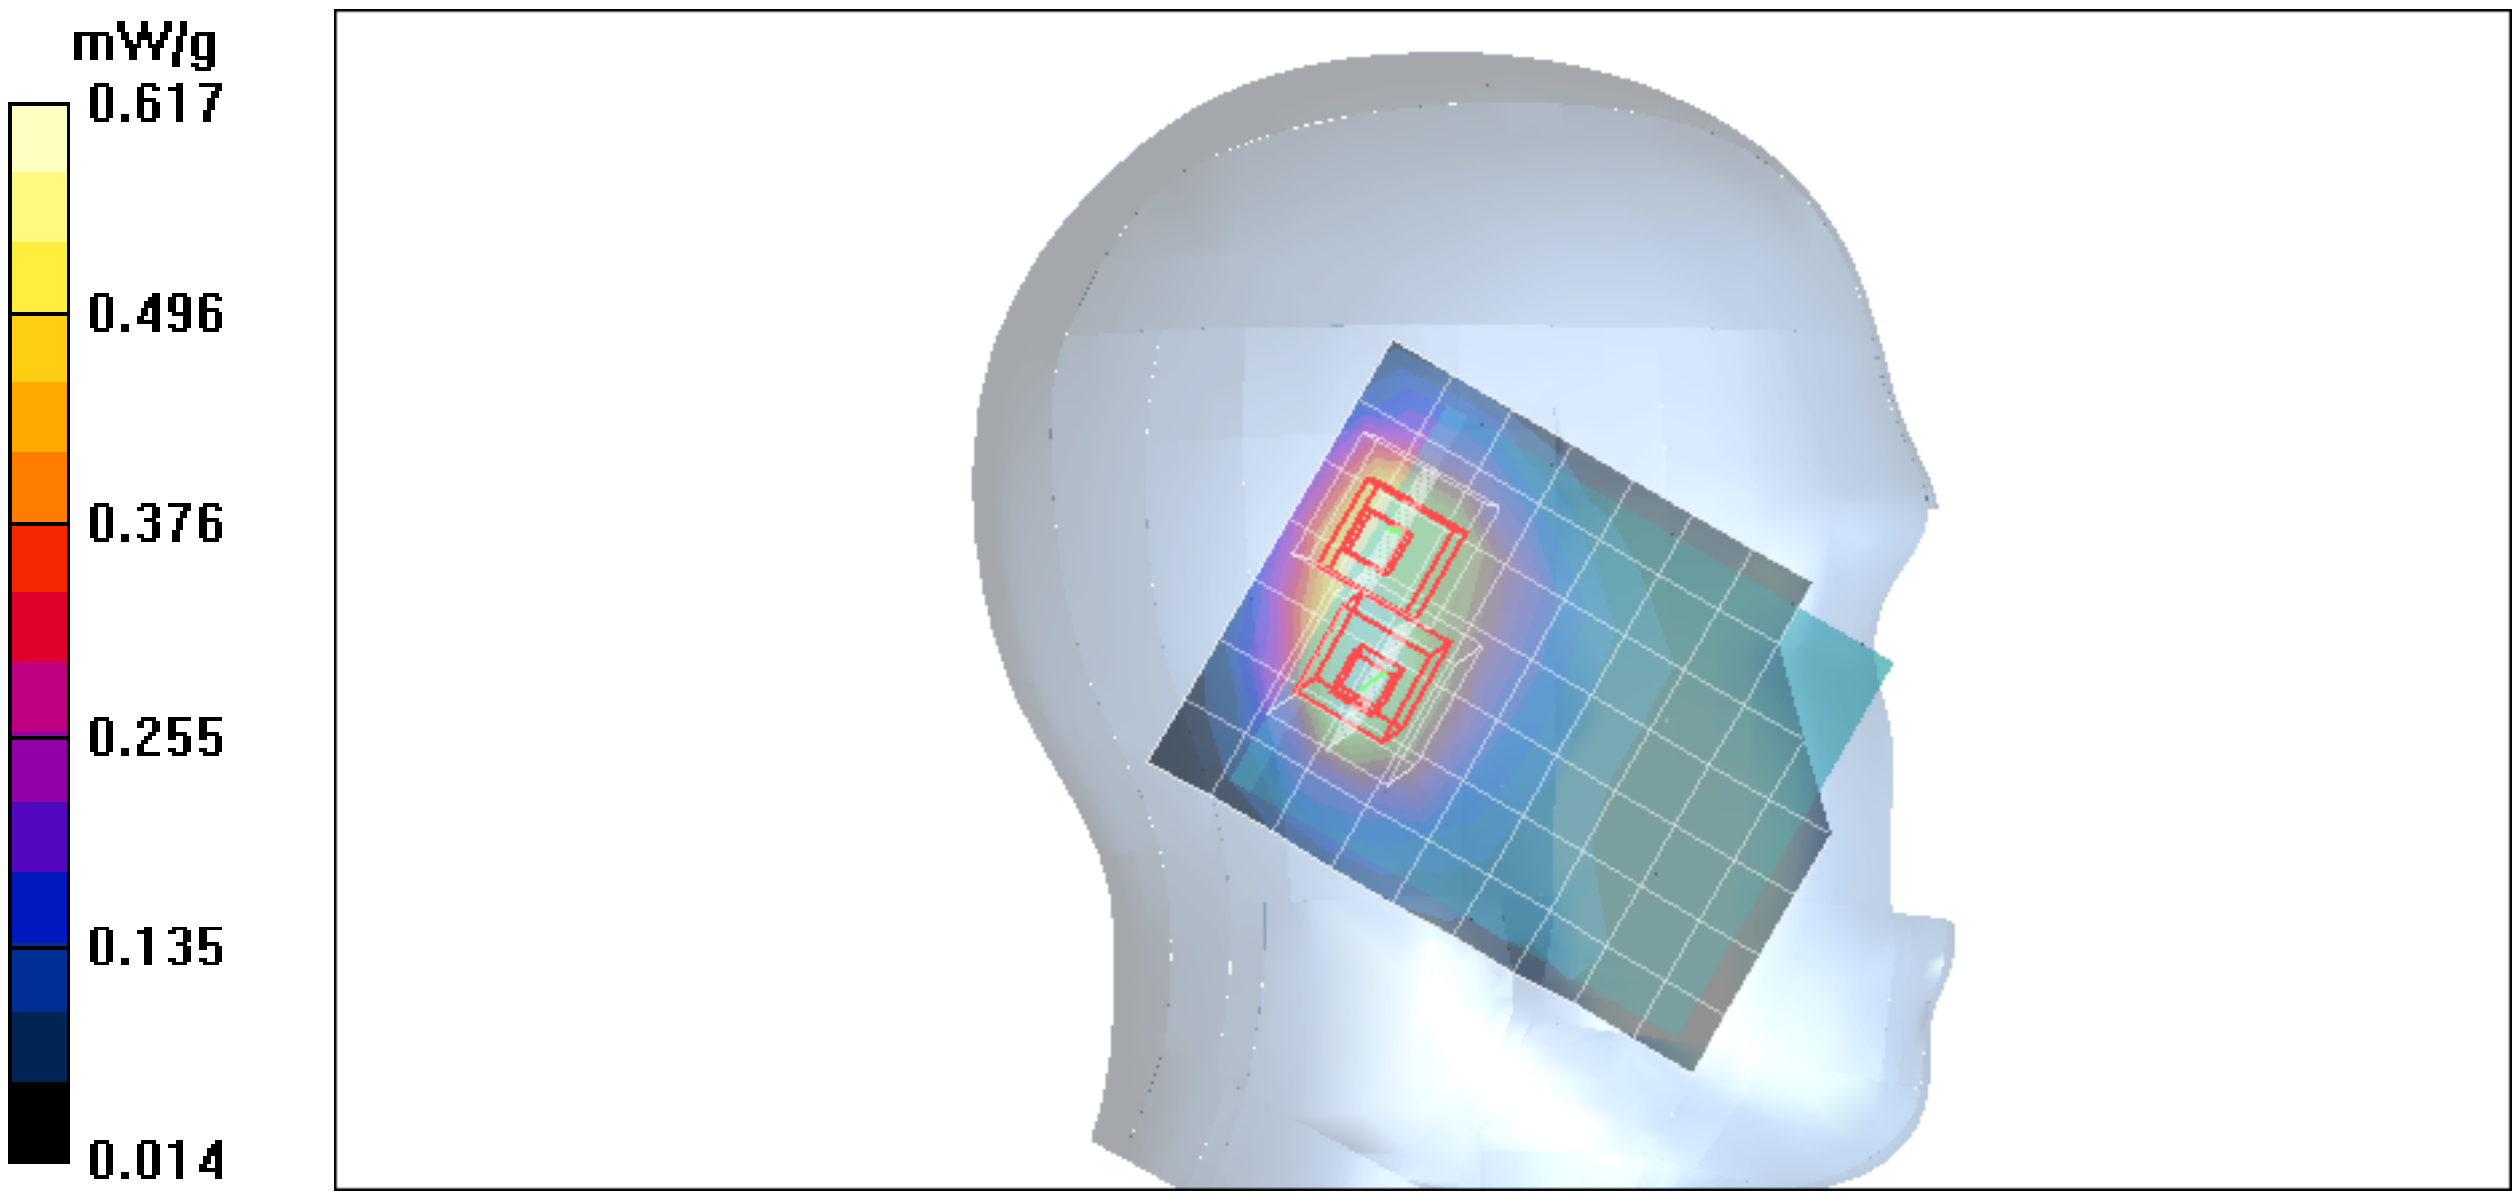
mW/g
0.617
0.496
0.376
0.255
0.135
0.014

Date/Time: 12/31/2006 10:41:55 PM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1880 MHz; σ = 1.41 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Tilted Middle CH661/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.588 mW/g

Left Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 19.5 V/m; Power Drift = -0.013 dB
Peak SAR (extrapolated) = 0.804 W/kg
SAR(1 g) = 0.495 mW/g; SAR(10 g) = 0.291 mW/g
Maximum value of SAR (measured) = 0.628 mW/g

Left Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 19.5 V/m; Power Drift = -0.013 dB
Peak SAR (extrapolated) = 0.767 W/kg
SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.278 mW/g
Maximum value of SAR (measured) = 0.593 mW/g

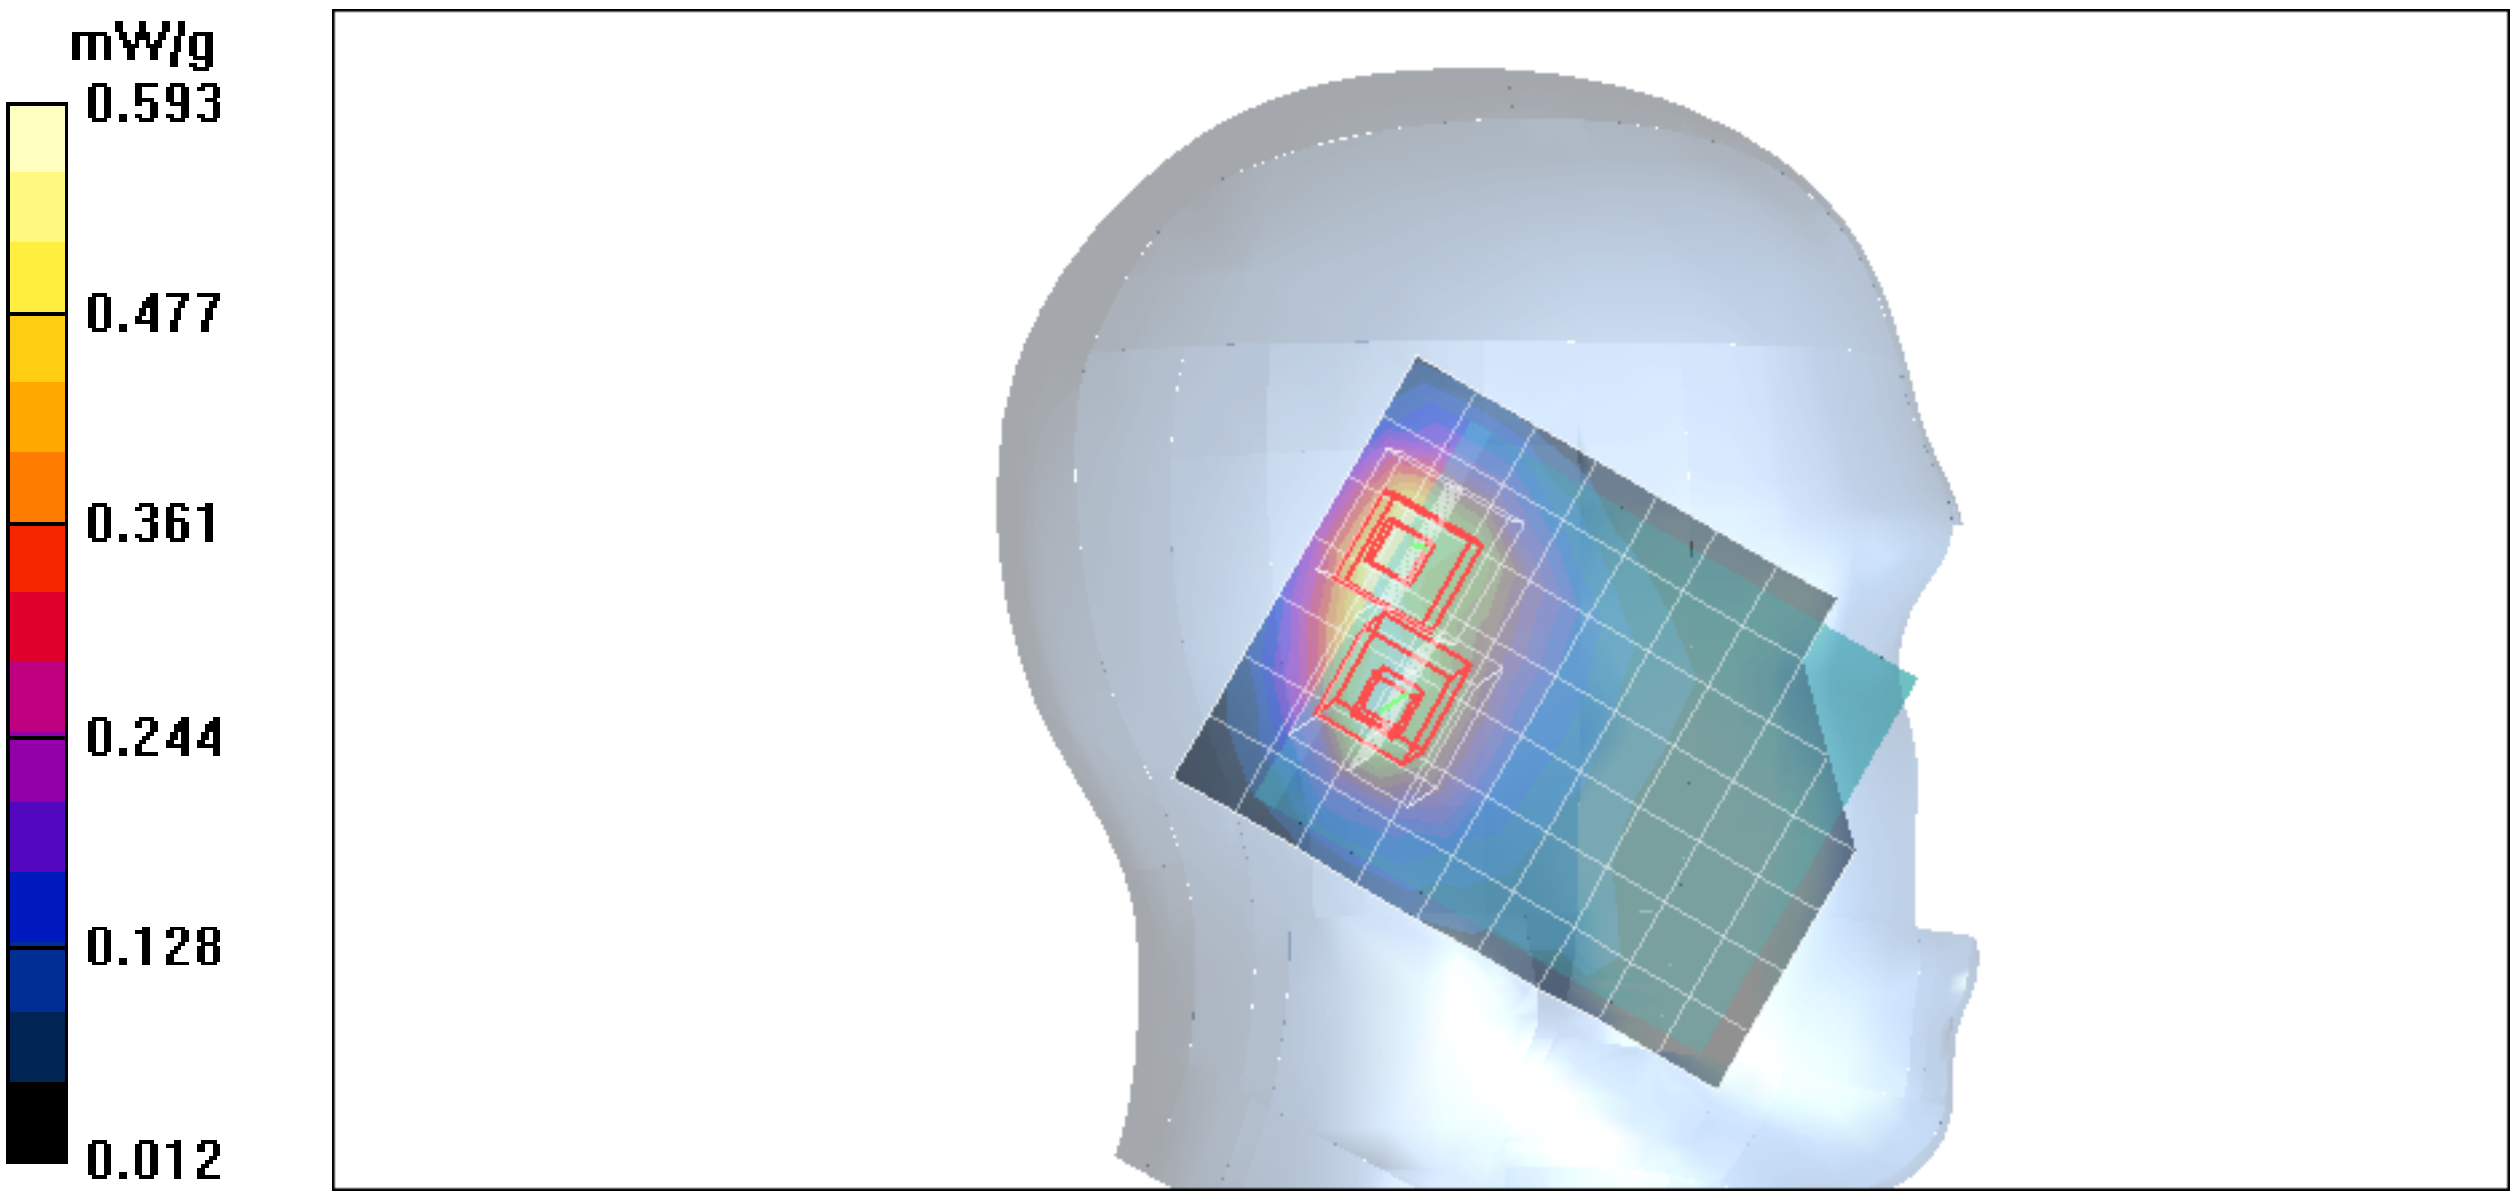
mW/g
0.593
0.477
0.361
0.244
0.128
0.012

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Left HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8
Medium parameters used: f = 1910 MHz; σ = 1.44 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3
Phantom section: Left Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Left Tilted High CH810/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.446 mW/g

Left Tilted High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 16.6 V/m; Power Drift = -0.005 dB
Peak SAR (extrapolated) = 0.617 W/kg
SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.221 mW/g
Maximum value of SAR (measured) = 0.481 mW/g

Left Tilted High CH810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 16.6 V/m; Power Drift = -0.005 dB
Peak SAR (extrapolated) = 0.618 W/kg
SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.213 mW/g
Maximum value of SAR (measured) = 0.470 mW/g

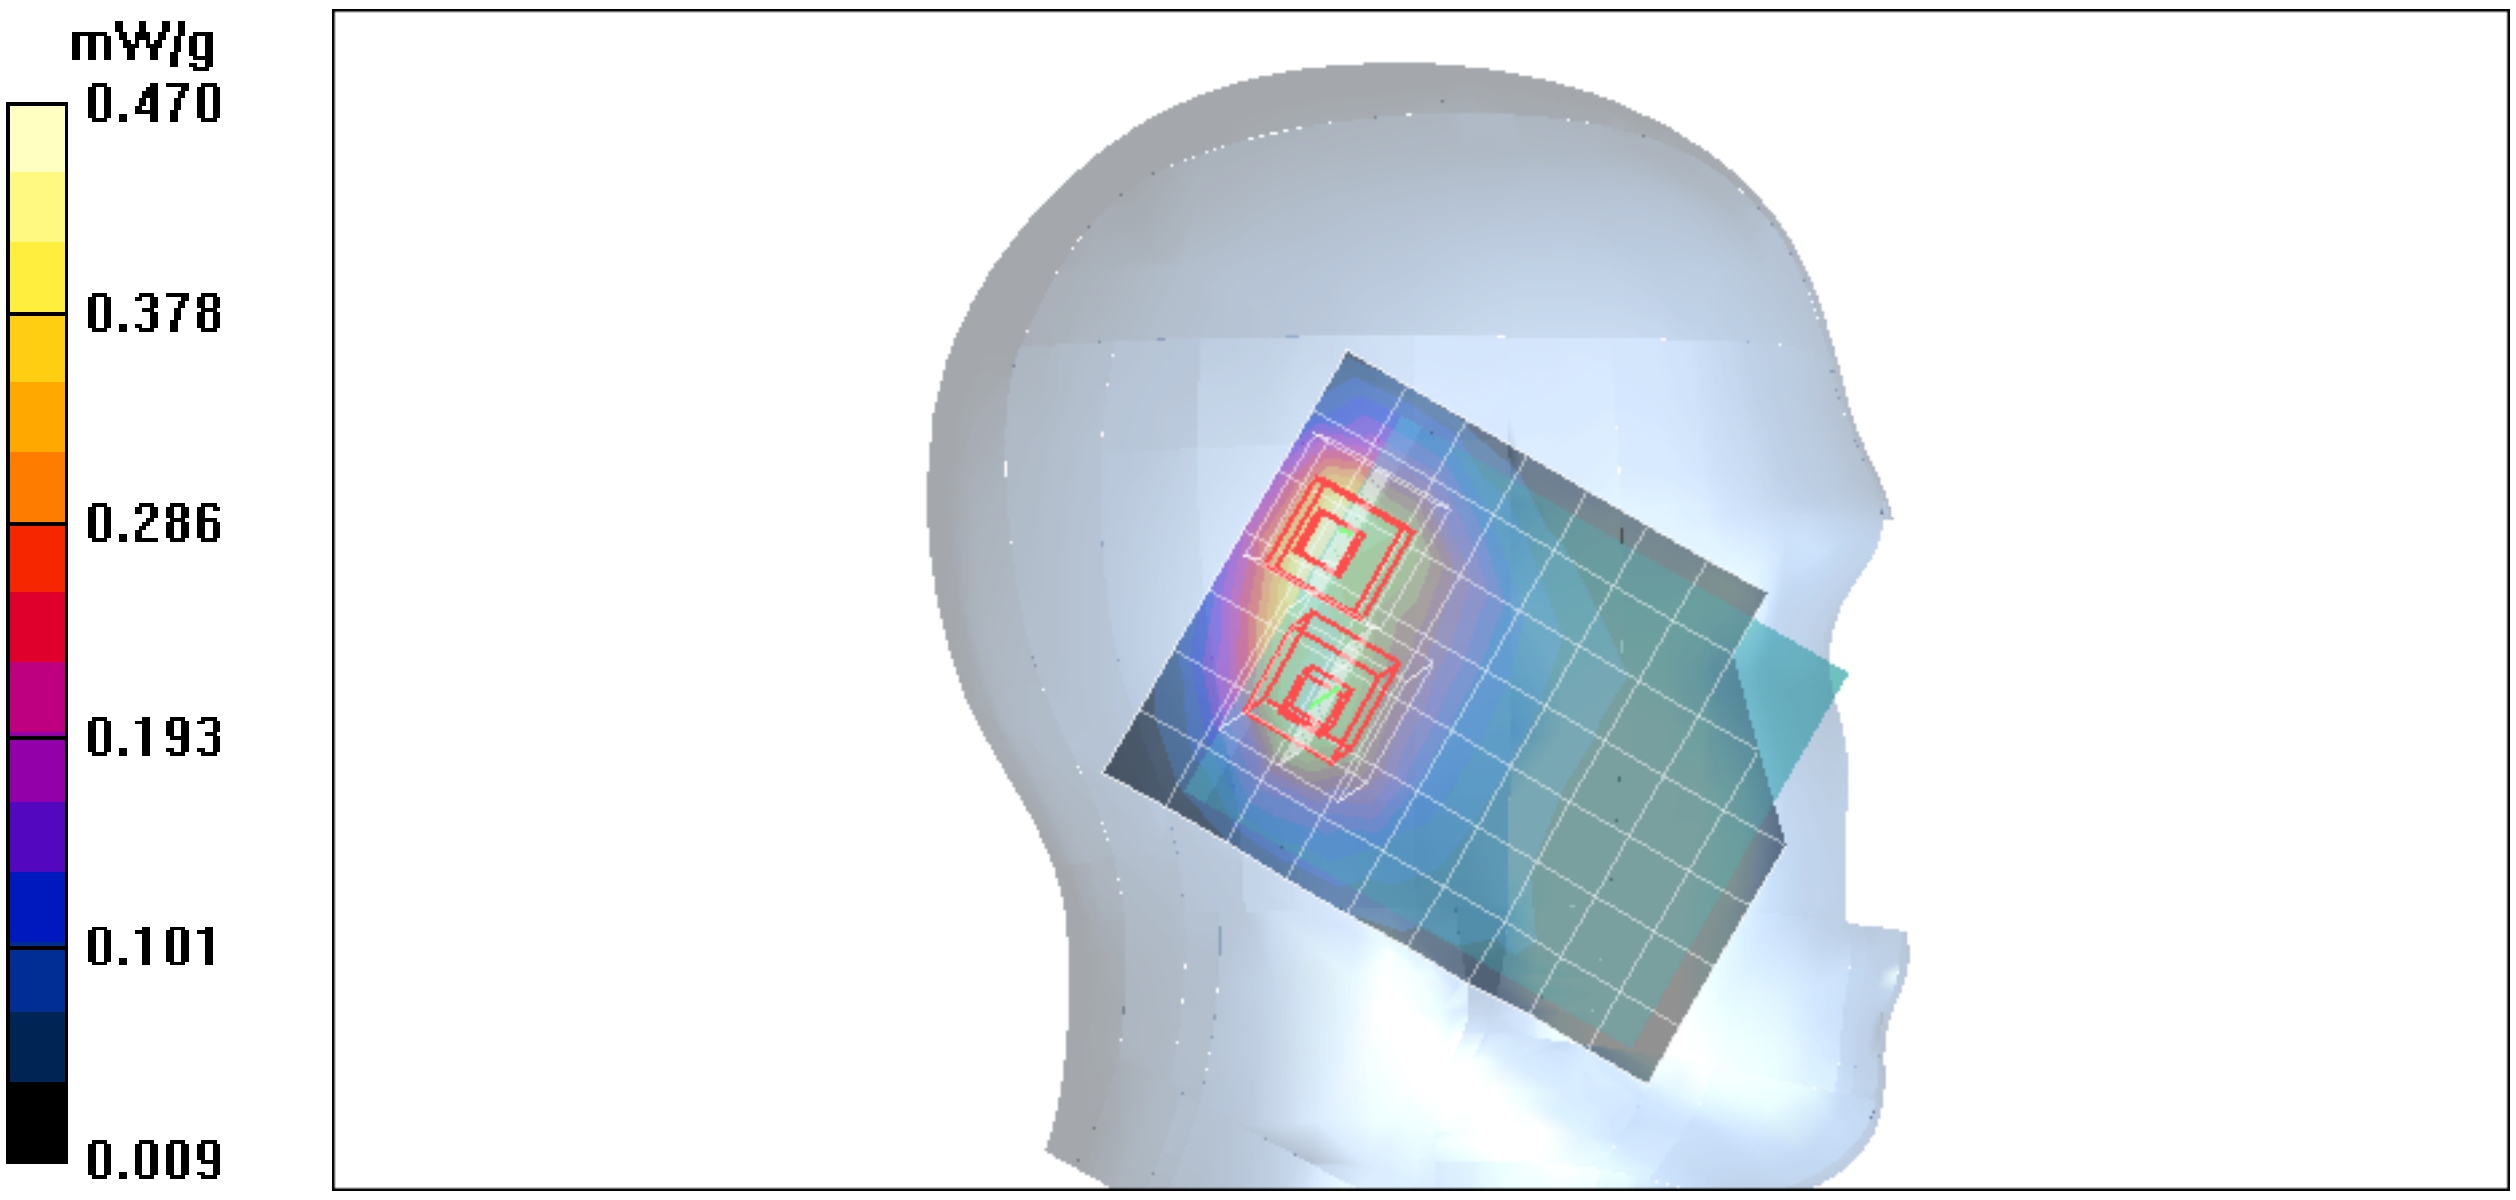

mW/g
0.470
0.378
0.286
0.193
0.101
0.009

Date/Time: 12/31/2006 11:26:44 PM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Cheek Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.633 mW/g

Right Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 21.3 V/m; Power Drift = -0.092 dB
Peak SAR (extrapolated) = 0.798 W/kg
SAR(1 g) = 0.505 mW/g; SAR(10 g) = 0.306 mW/g
Maximum value of SAR (measured) = 0.625 mW/g

Right Cheek Low CH512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 21.3 V/m; Power Drift = -0.092 dB
Peak SAR (extrapolated) = 0.738 W/kg
SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.270 mW/g
Maximum value of SAR (measured) = 0.576 mW/g

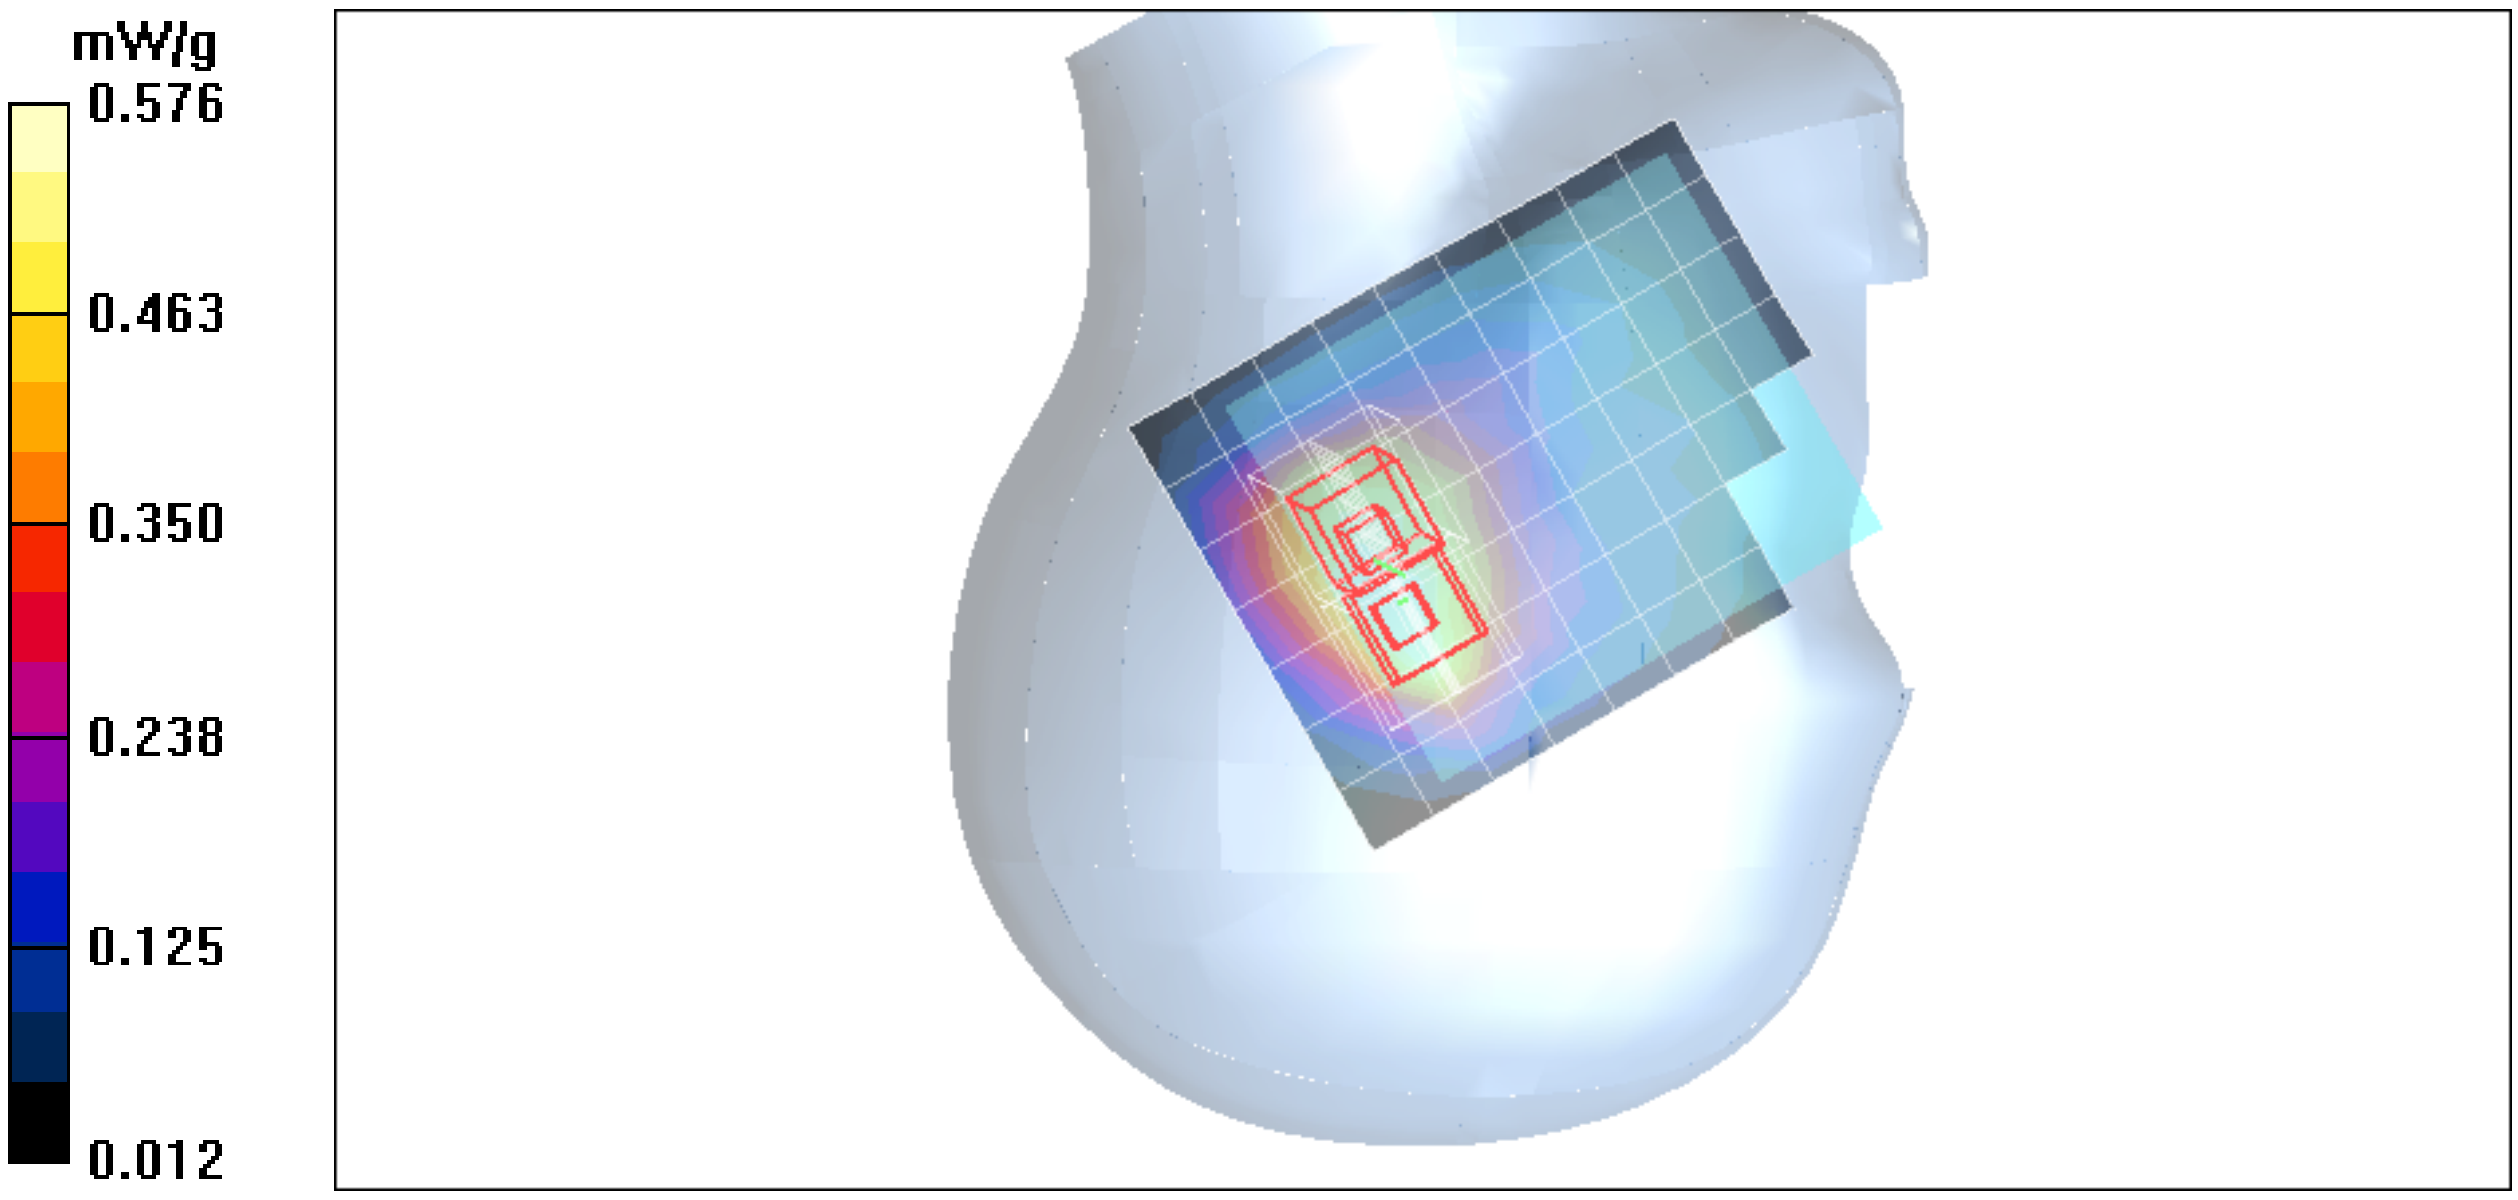
mW/g
0.576
0.463
0.350
0.238
0.125
0.012

Date/Time: 12/31/2006 11:48:12 PM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1880 MHz; σ = 1.41 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Cheek Middle CH661/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.566 mW/g

Right Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 19.6 V/m; Power Drift = -0.012 dB
Peak SAR (extrapolated) = 0.730 W/kg
SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.276 mW/g
Maximum value of SAR (measured) = 0.572 mW/g

Right Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 19.6 V/m; Power Drift = -0.012 dB
Peak SAR (extrapolated) = 0.665 W/kg
SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.238 mW/g
Maximum value of SAR (measured) = 0.513 mW/g

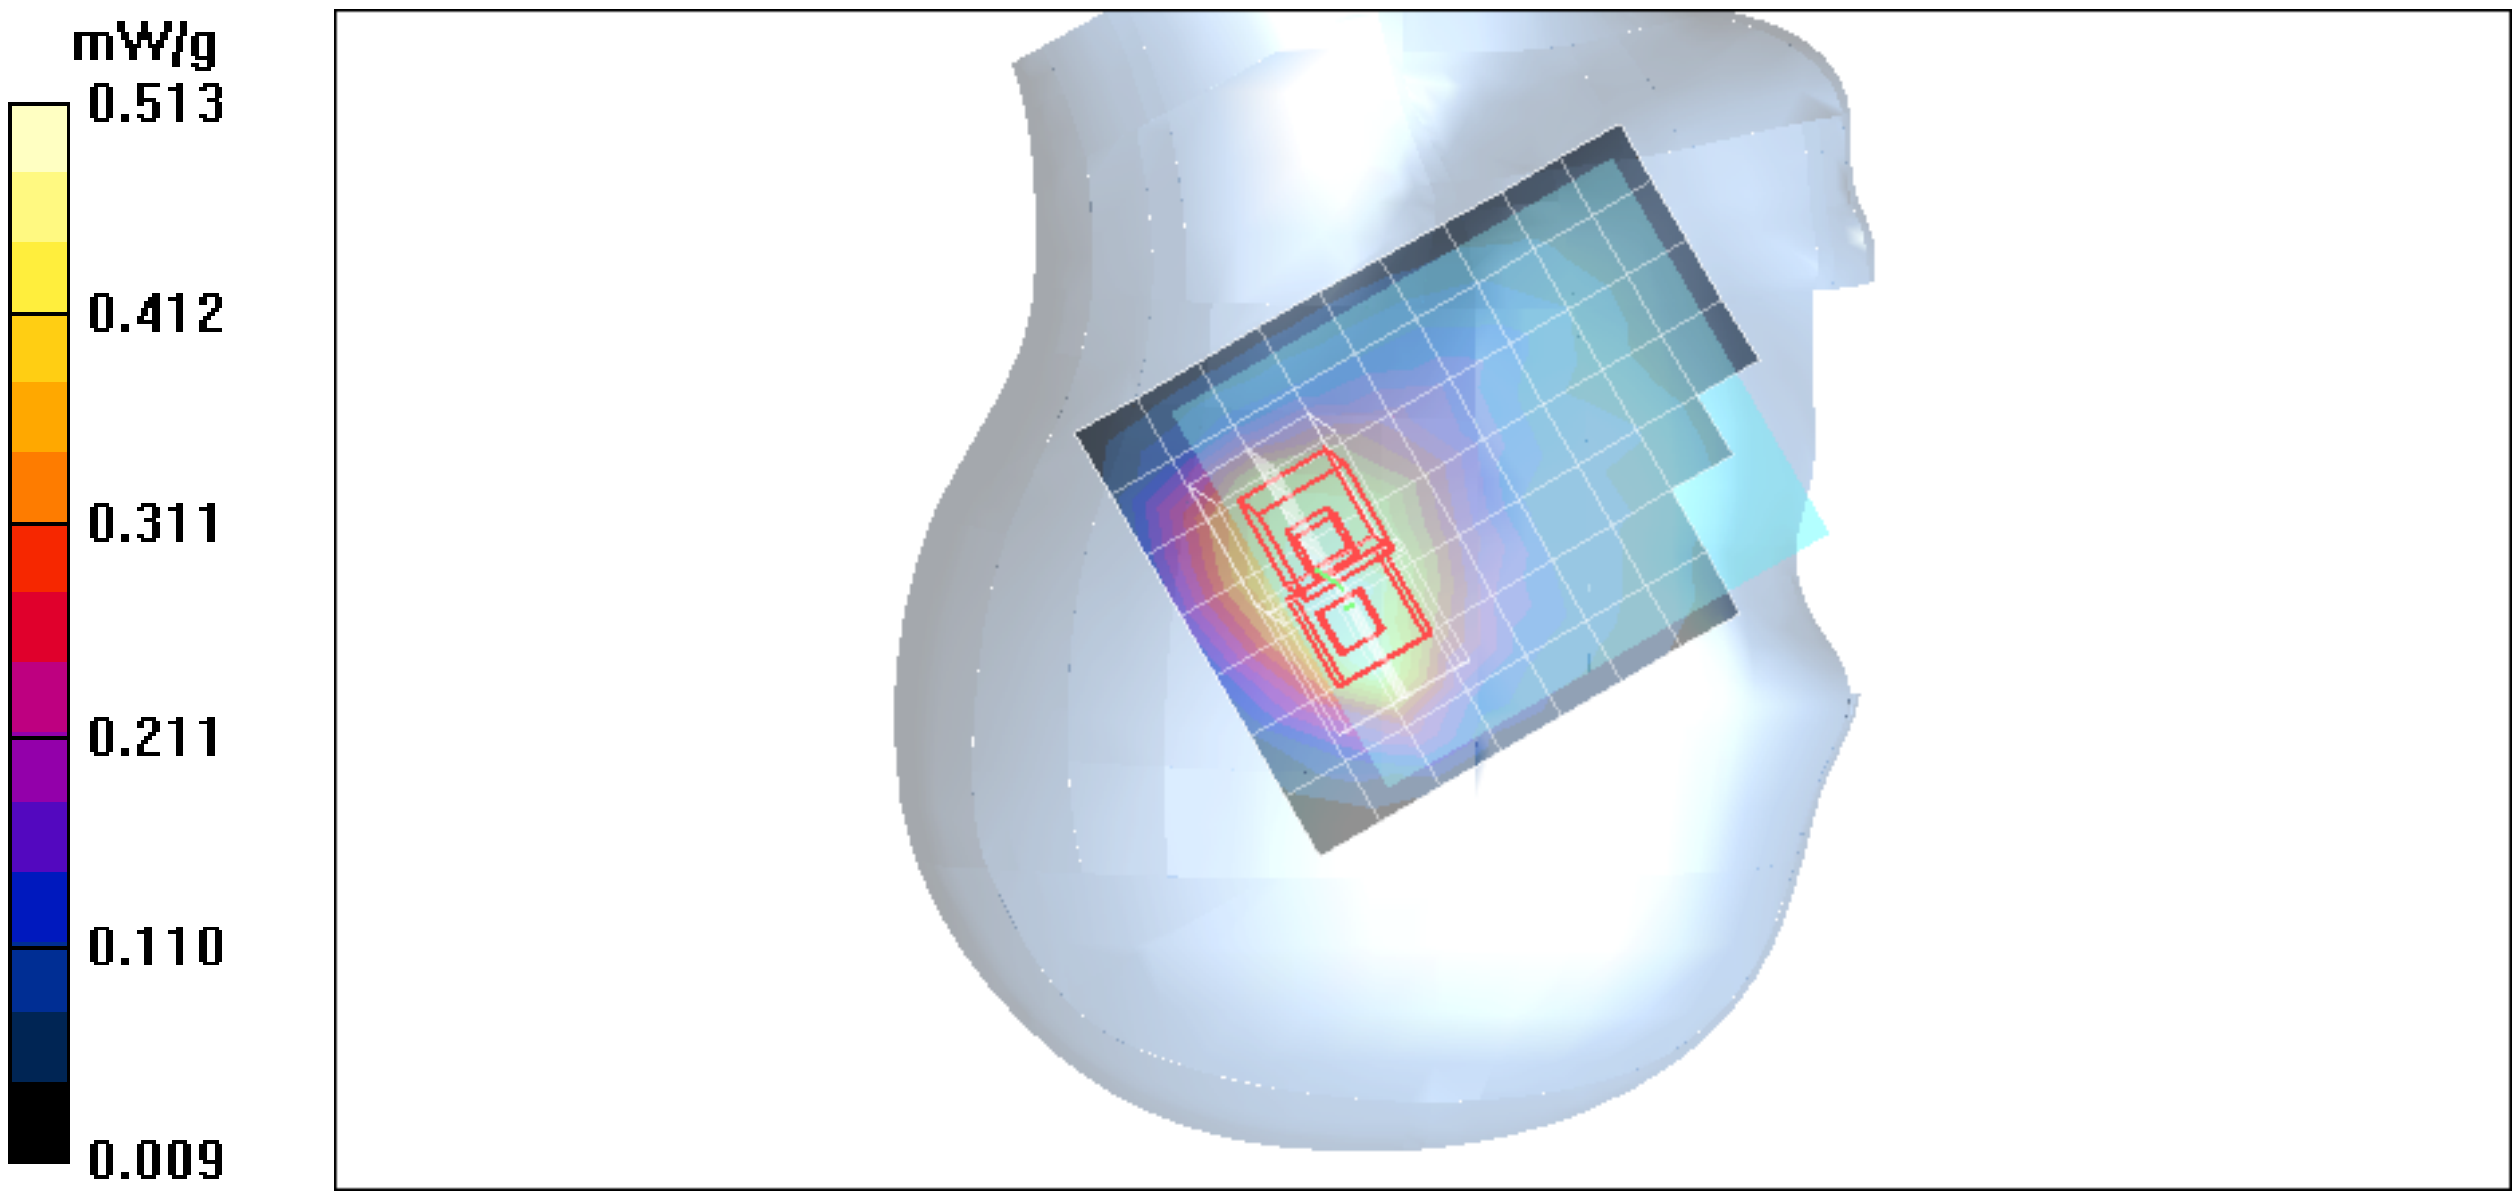
mW/g
0.513
0.412
0.311
0.211
0.110
0.009

Date/Time: 1/1/2007 12:10:38 AM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8
Medium parameters used: f = 1910 MHz; σ = 1.44 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Cheek High CH810/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.457 mW/g

Right Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 18.7 V/m; Power Drift = -0.003 dB
Peak SAR (extrapolated) = 0.590 W/kg
SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.219 mW/g
Maximum value of SAR (measured) = 0.460 mW/g

Right Cheek High CH810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 18.7 V/m; Power Drift = -0.003 dB
Peak SAR (extrapolated) = 0.539 W/kg
SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.186 mW/g
Maximum value of SAR (measured) = 0.411 mW/g

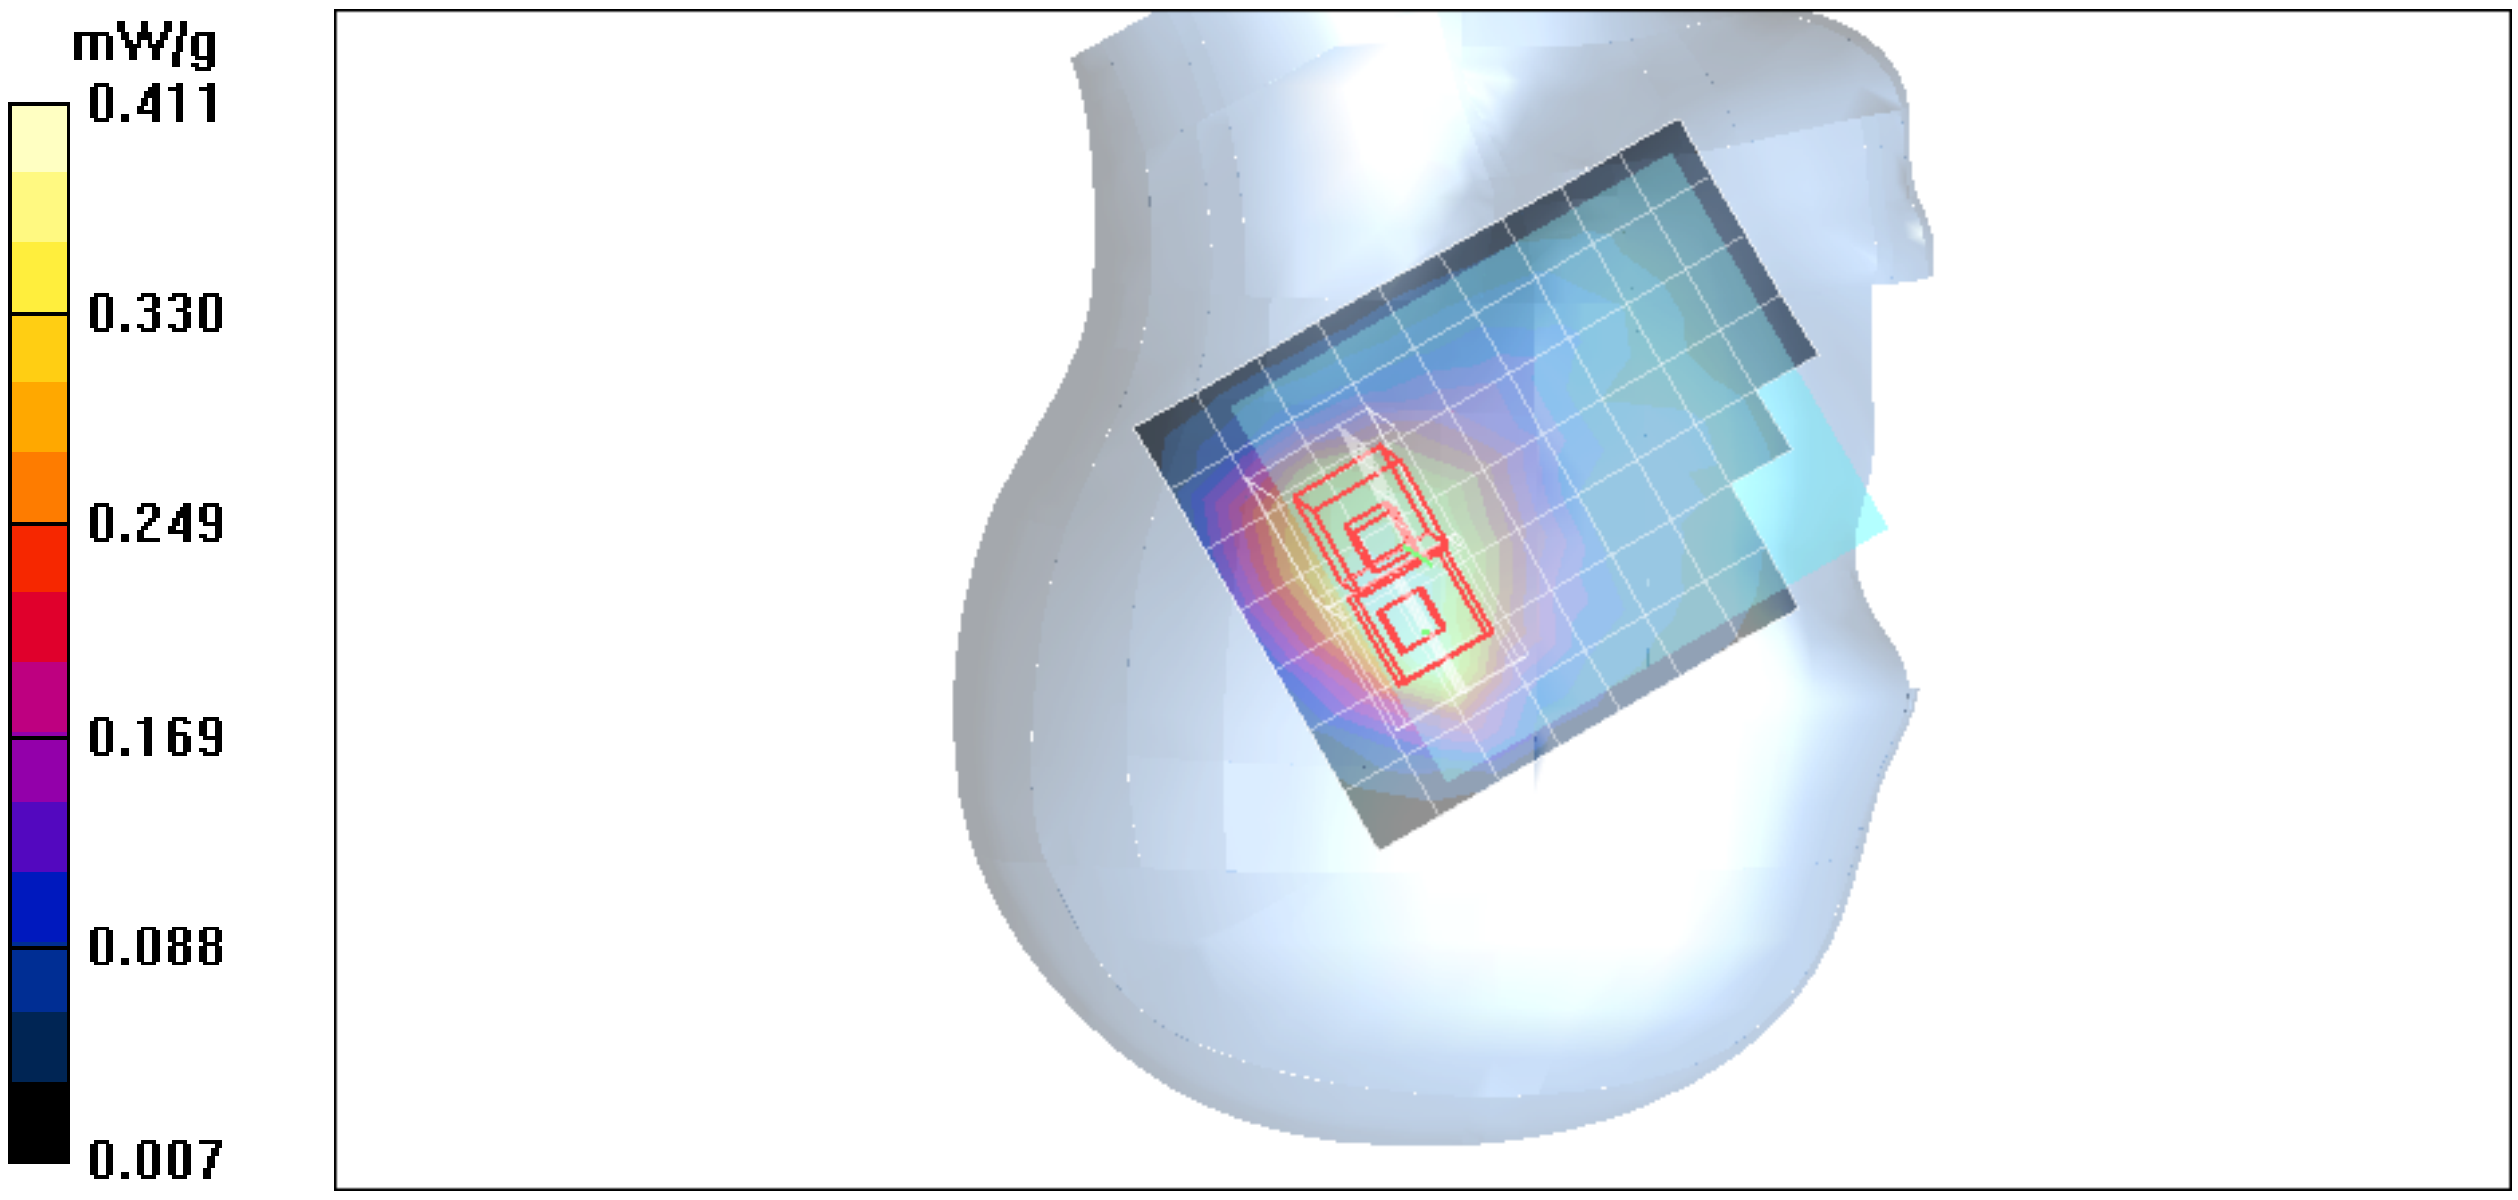
mW/g
0.411
0.330
0.249
0.169
0.088
0.007

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.38 mho/m; ε_r = 39.7; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:
- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Tilted Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.889 mW/g

Right Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 20.6 V/m; Power Drift = -0.021 dB
Peak SAR (extrapolated) = 1.14 W/kg
SAR(1 g) = 0.685 mW/g; SAR(10 g) = 0.390 mW/g
Maximum value of SAR (measured) = 0.860 mW/g

Right Tilted Low CH512/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.408 mW/g

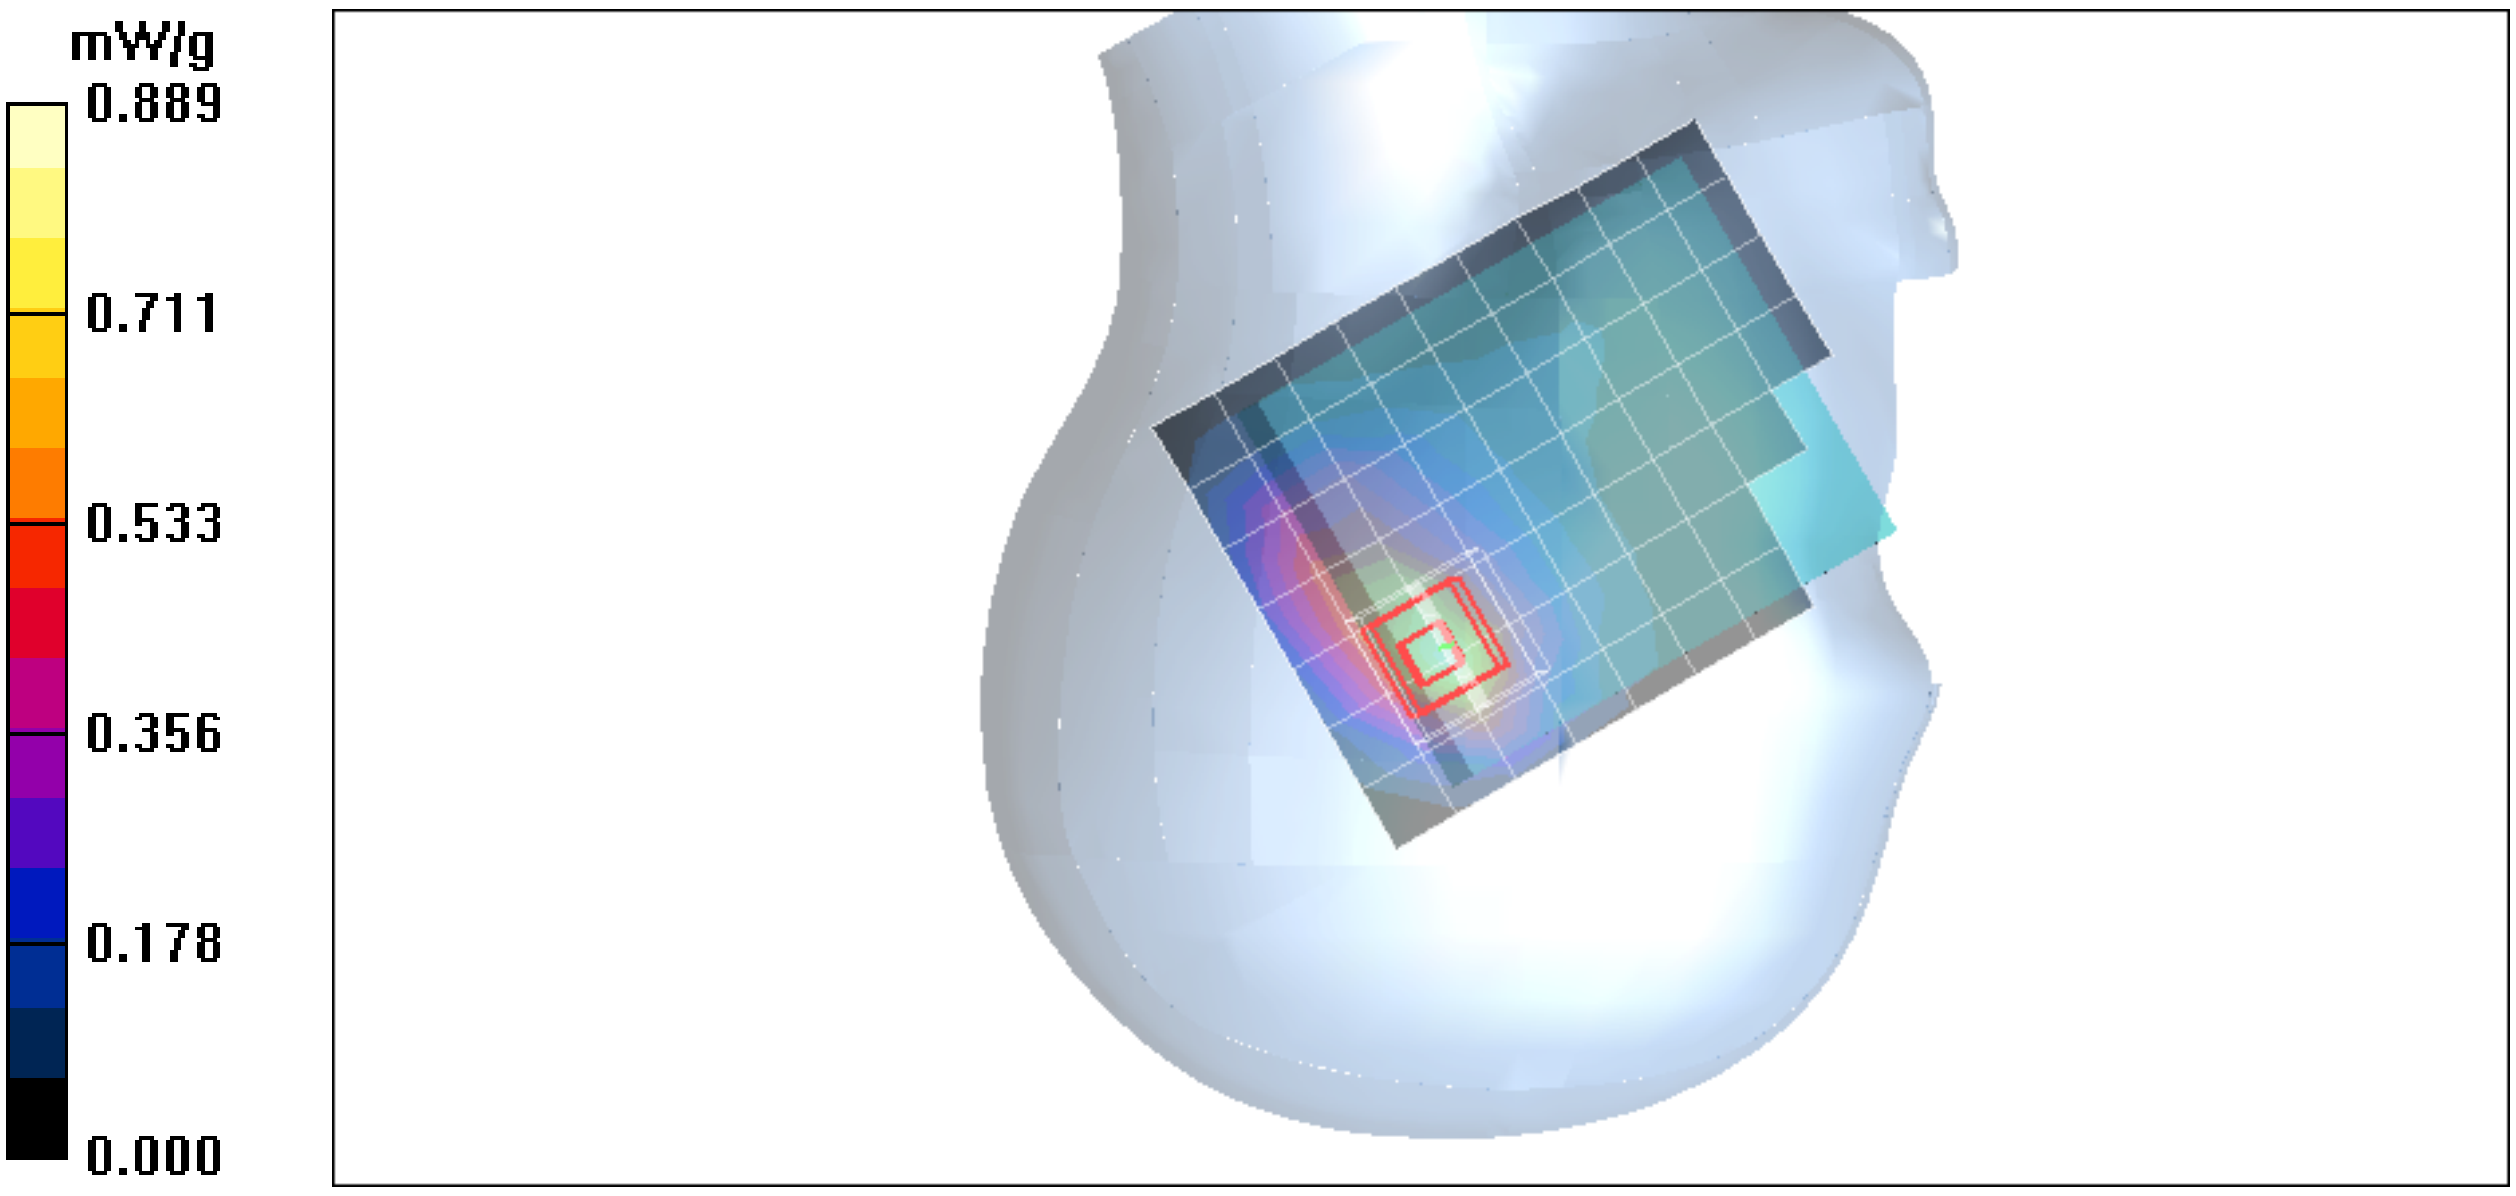
mW/g
0.889
0.711
0.533
0.356
0.178
0.000

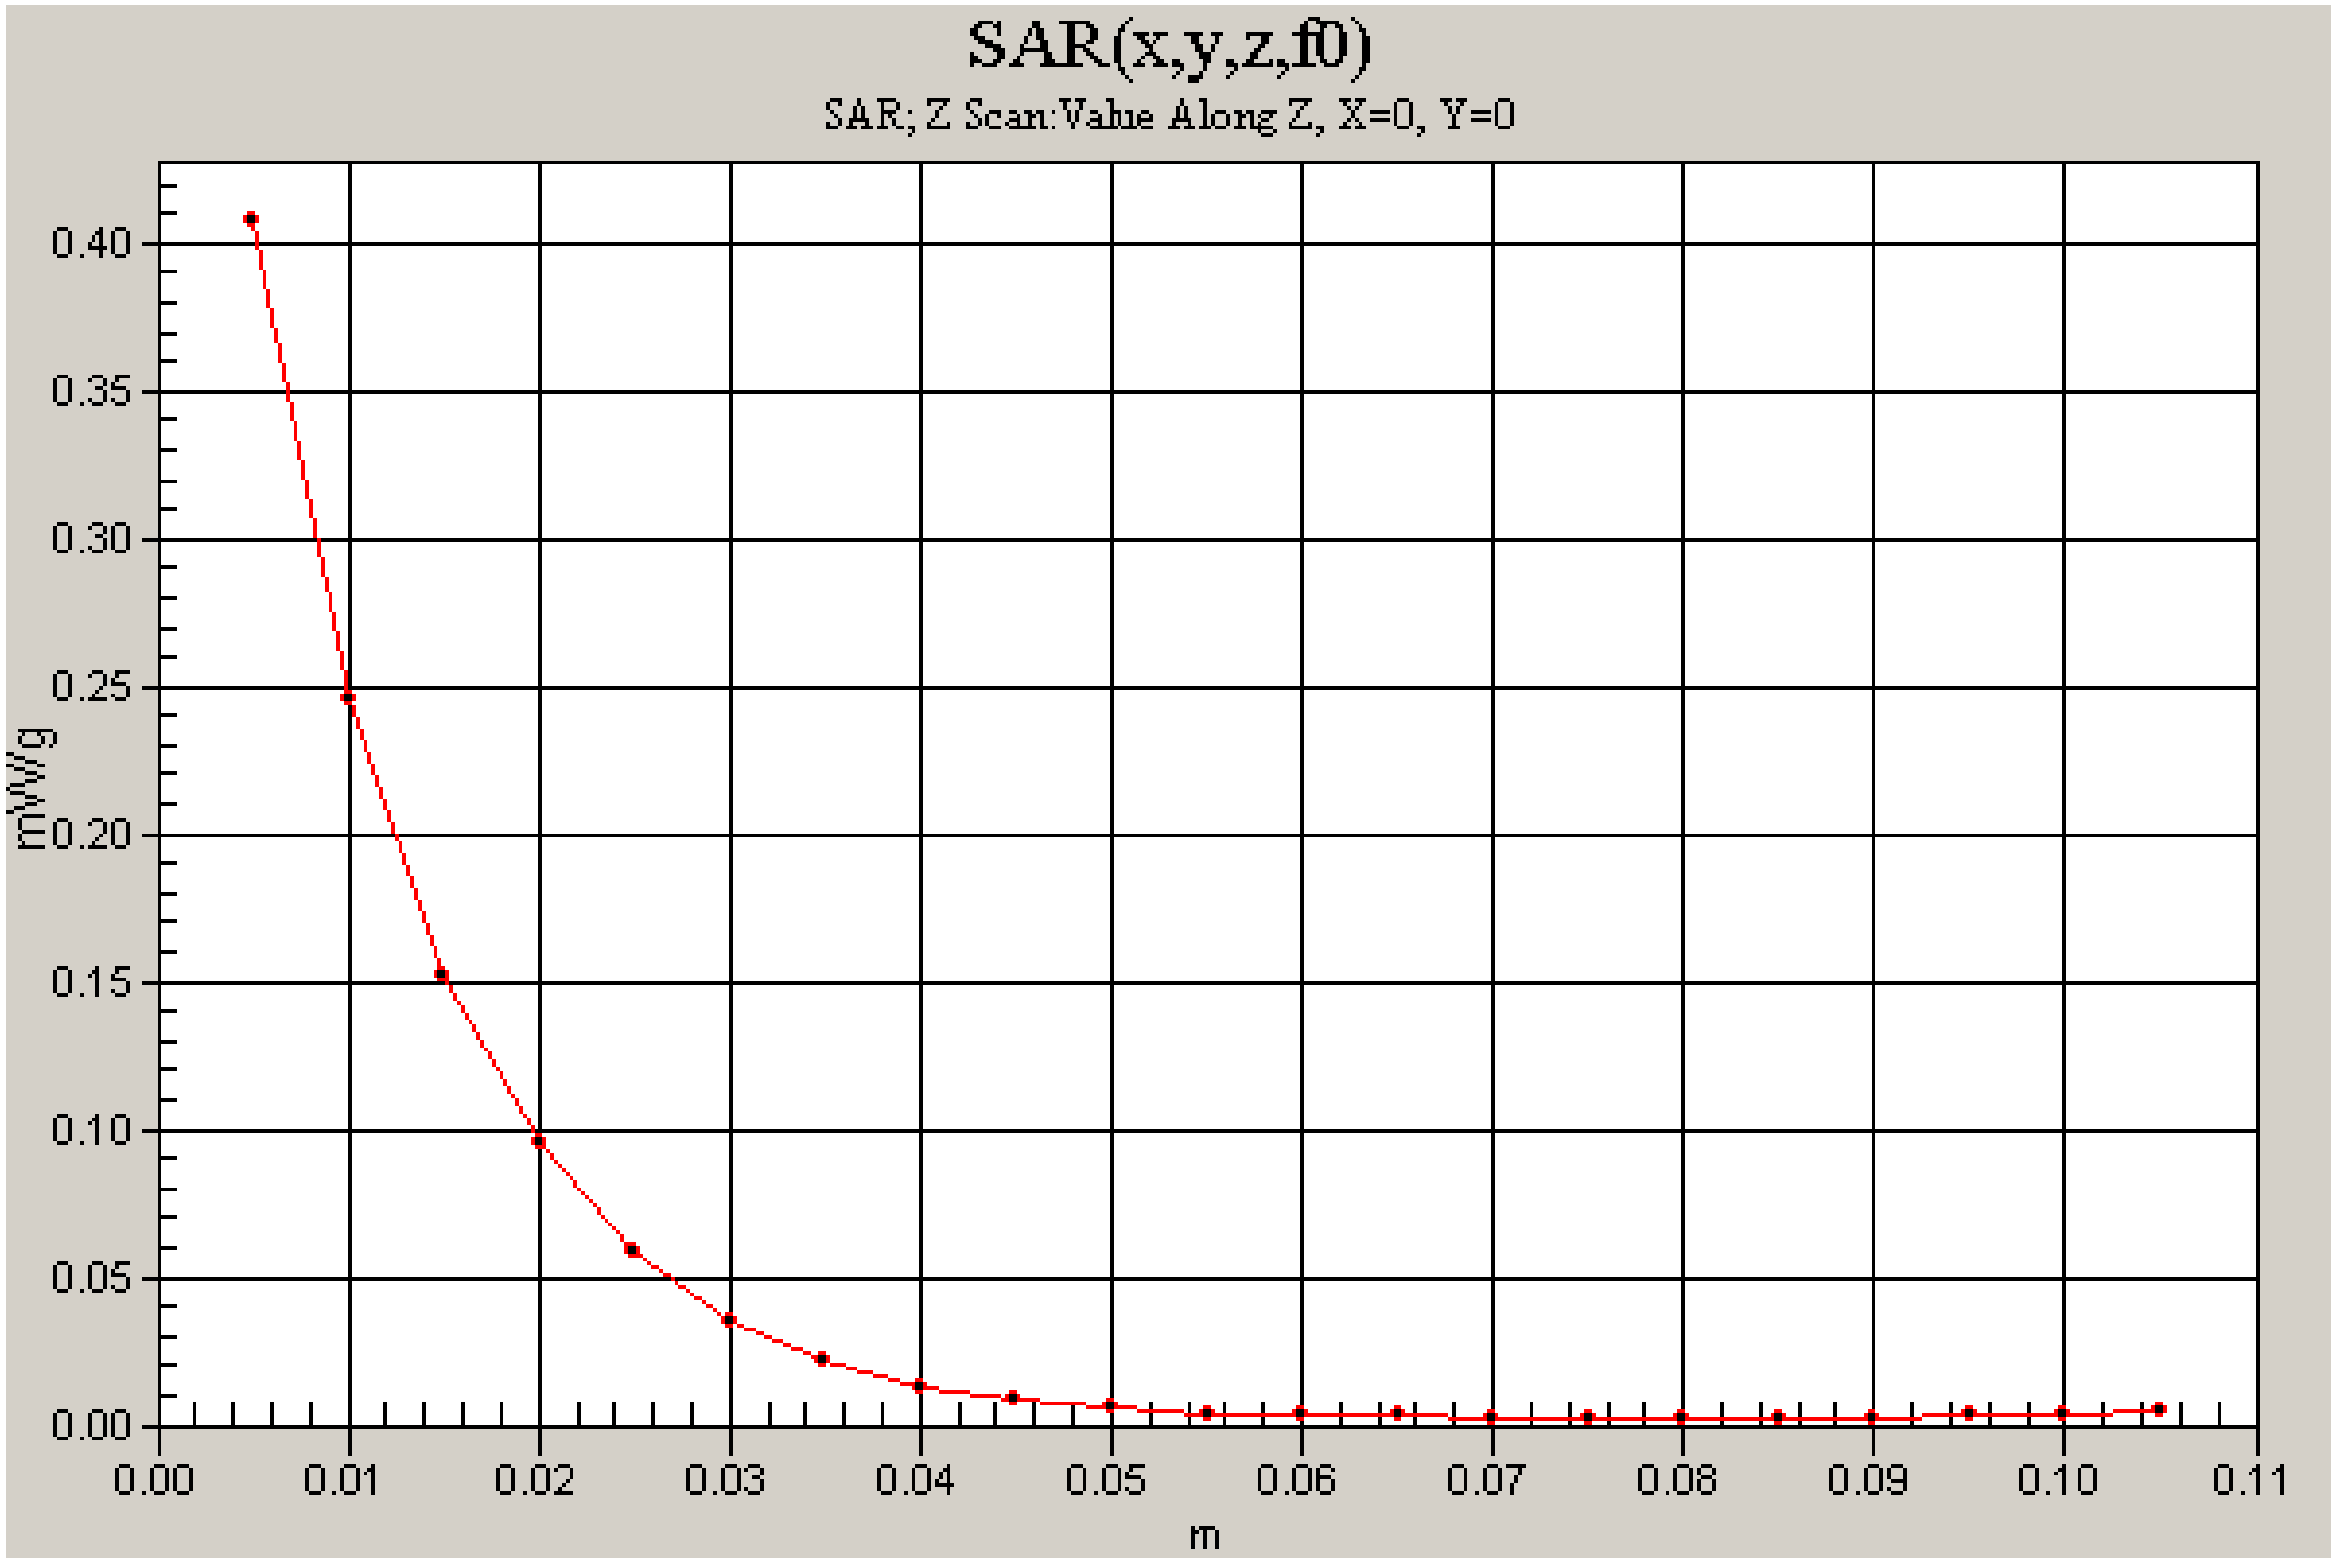
SAR(x,y,z,f0)
SAR; Z Scan:Value Along Z, X=0, Y=0
mW/g
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0.08
0.09
0.10
0.11
m

Date/Time: 1/1/2007 12:45:01 AM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8
Medium parameters used (interpolated): f = 1880 MHz; σ = 1.41 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Tilted Middle CH661/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.794 mW/g

Right Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 18.9 V/m; Power Drift = -0.014 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.355 mW/g
Maximum value of SAR (measured) = 0.810 mW/g

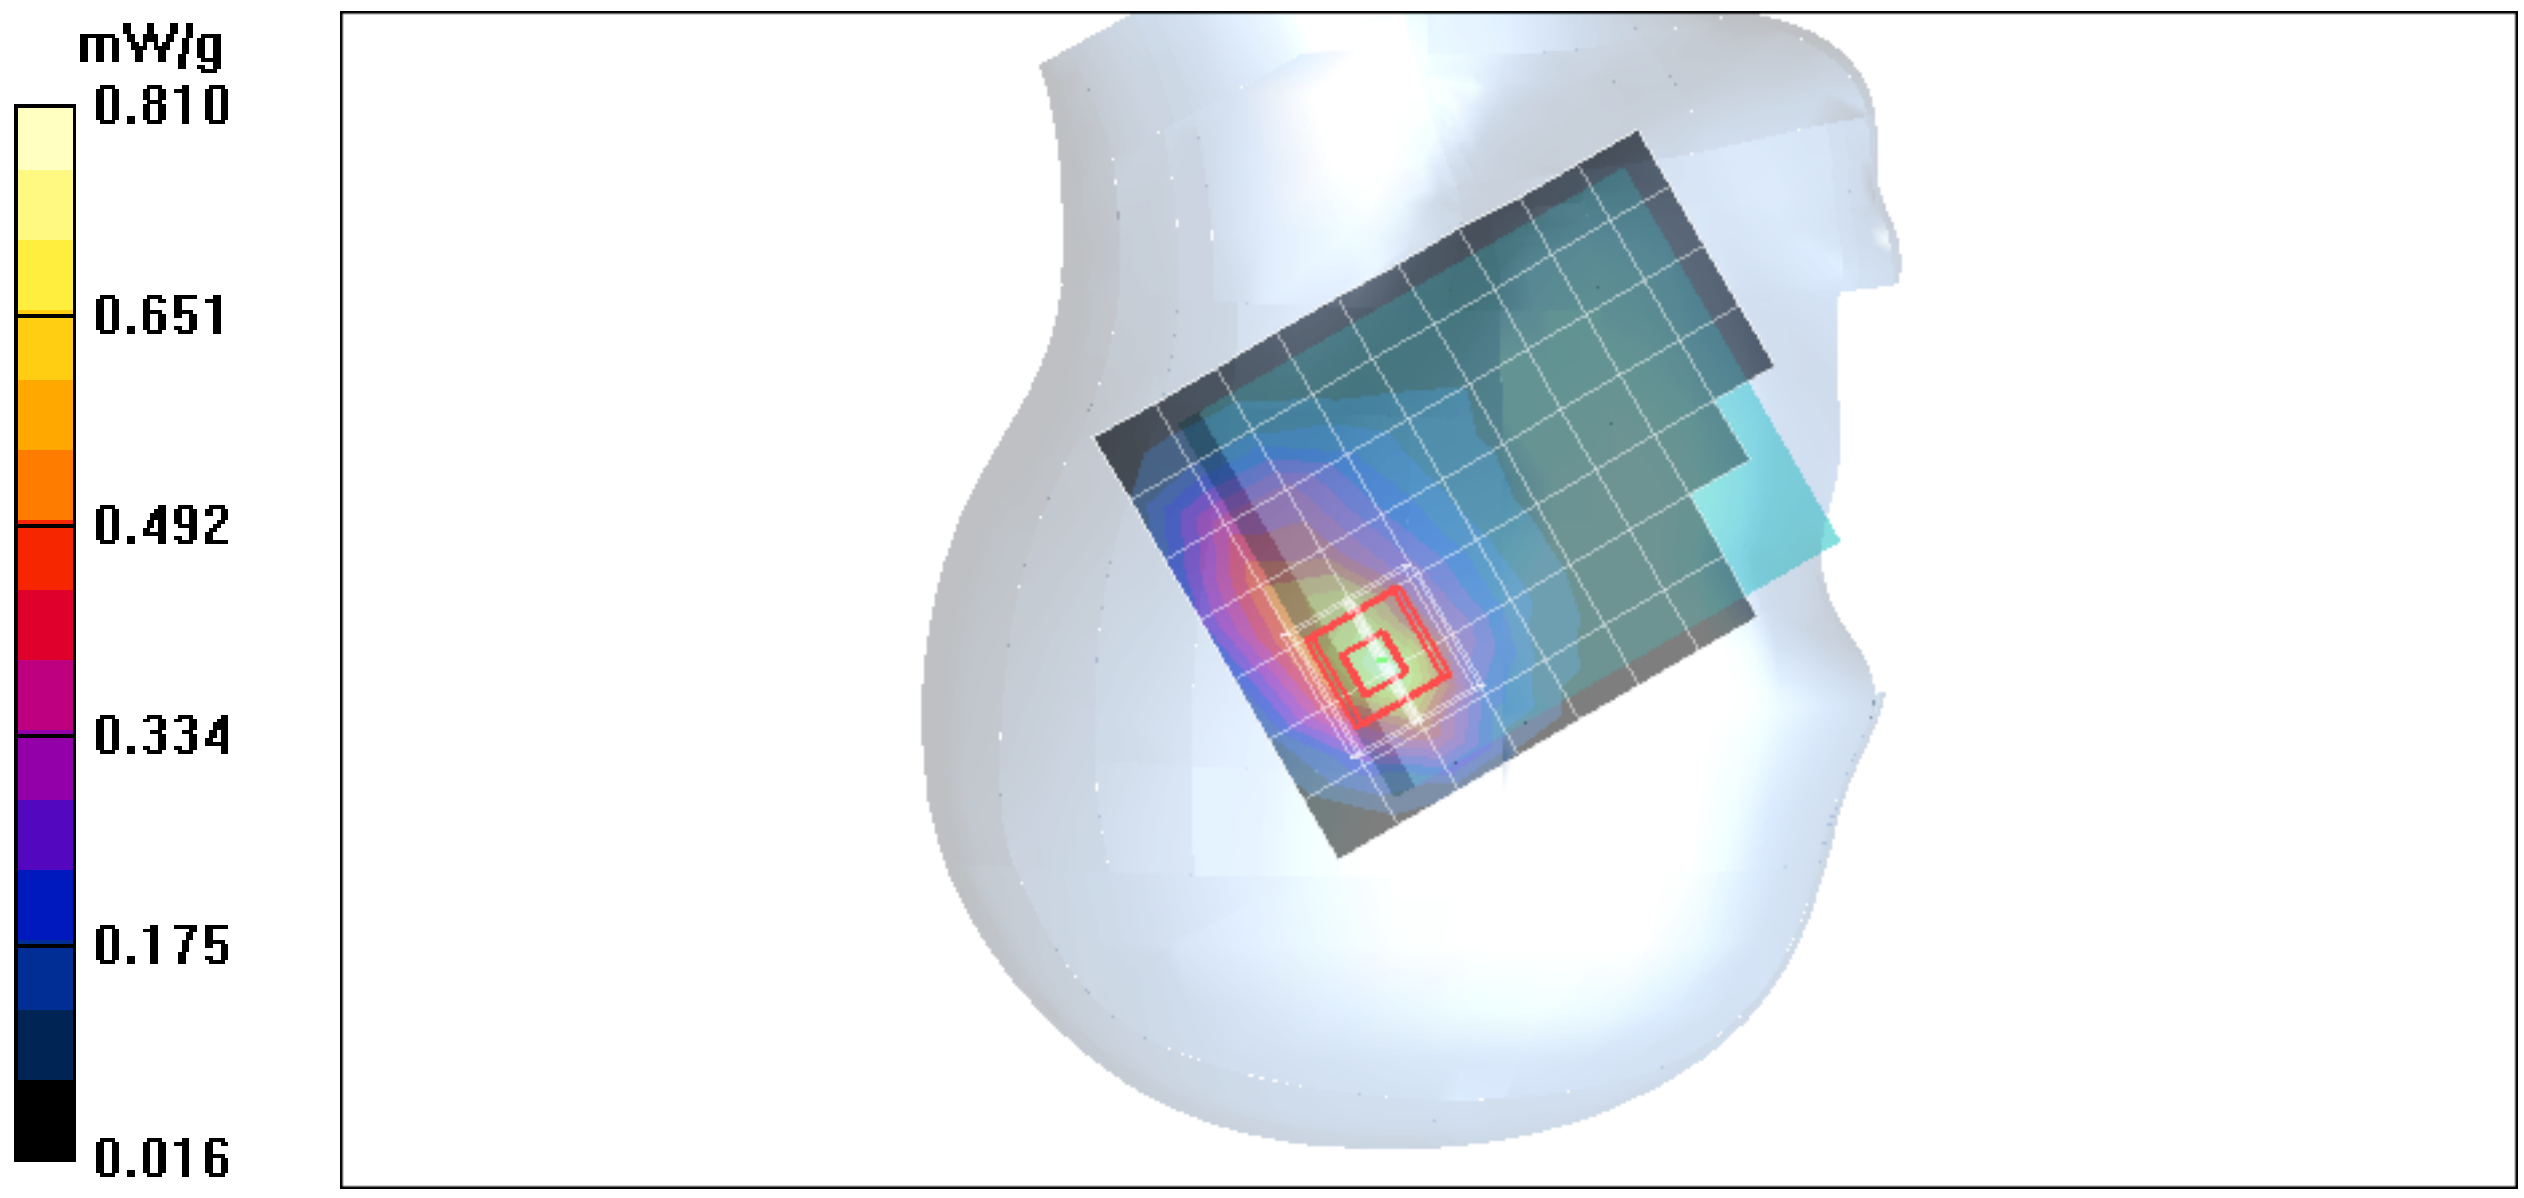

Date/Time: 1/1/2007 1:03:05 AM

Test Laboratory: Compliance Certification Services Inc.

PCS1900-Right HERA110 open

DUT: HERA110; Type: PDA phone; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8
Medium parameters used: f = 1910 MHz; σ = 1.44 mho/m; ε_r = 39.4; ρ = 1000 kg/m^3
Phantom section: Right Section
Air Temperature:24.1 deg C;Liquid Temperature:23.2 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.57, 6.57, 6.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Right Tilted High CH810/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.630 mW/g

Right Tilted High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 16.3 V/m; Power Drift = -0.055 dB
Peak SAR (extrapolated) = 0.831 W/kg
SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.275 mW/g
Maximum value of SAR (measured) = 0.636 mW/g