



FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : VIVE Controller
MODEL NAME : IHM100
FCC ID : NM8IHM100
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Feb. 12, 2018 and testing was completed on Apr. 11, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	20
3.5 Radiated Band Edges and Spurious Emission Measurement	25
3.6 Antenna Requirements	29
4 LIST OF MEASURING EQUIPMENT.....	30
5 UNCERTAINTY OF EVALUATION.....	31
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR821217	Rev. 01	Initial issue of report	Apr. 16, 2018

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.43 dB at 288.39 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	-
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-
Remark: Not required means after assessing, test items are not necessary to carry out.					



1 General Description

1.1 Applicant

HTC Corporation

1F, 6-3 Baoqiang Rd., Xindian District, New Taipei City, Taiwan 231

1.2 Manufacturer

Finch Technologies Ltd

33 Porter Road, P.O.Box 3169 PMB103, Road Town, Tortola, BVI

1.3 Product Feature of Equipment Under Test

Bluetooth

Product Specification subjective to this standard	
Antenna Type	Bluetooth: PIFA Antenna

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH10-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items utility, "nRFgo Studio" was installed in Notebook which make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

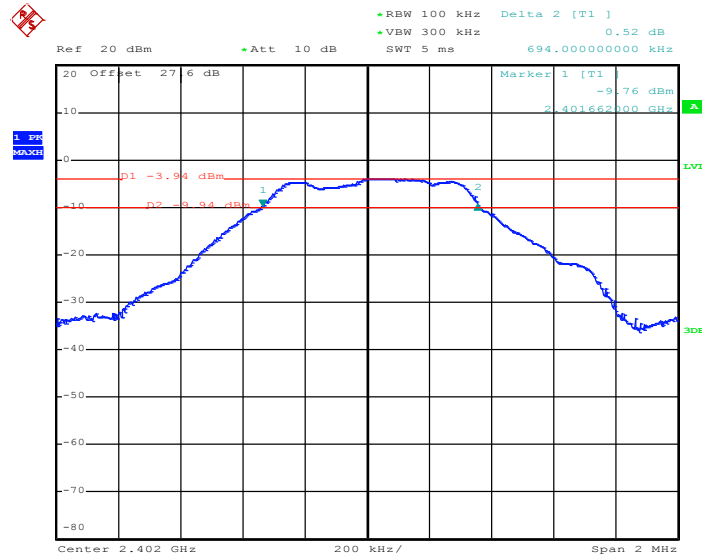

Date: 10.APR.2018 20:42:32


6 dB Bandwidth Plot on Channel 19

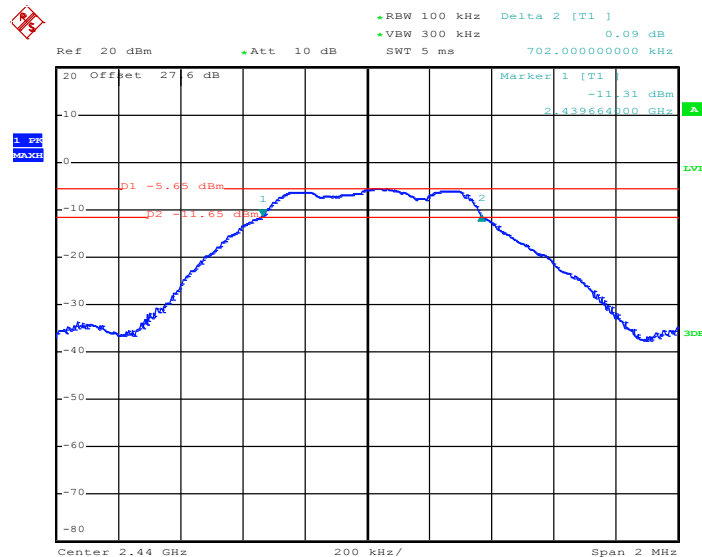

Date: 10.APR.2018 20:48:32



6 dB Bandwidth Plot on Channel 39

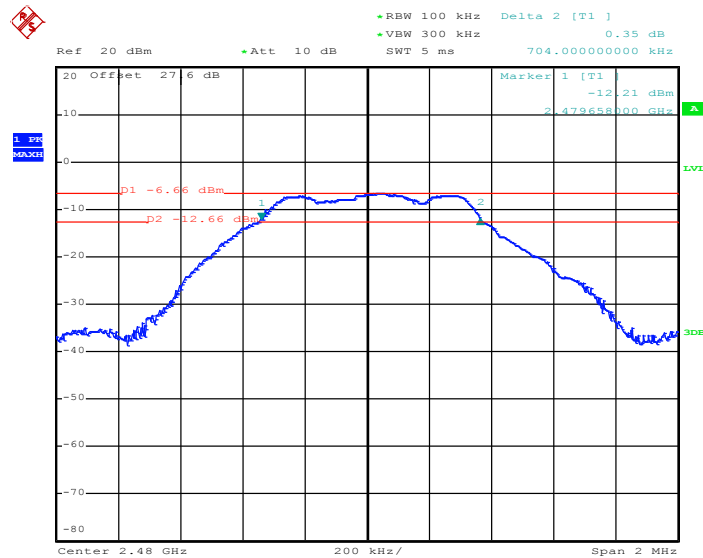


Date: 10.APR.2018 20:56:46


3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


99% Bandwidth Plot on Channel 00

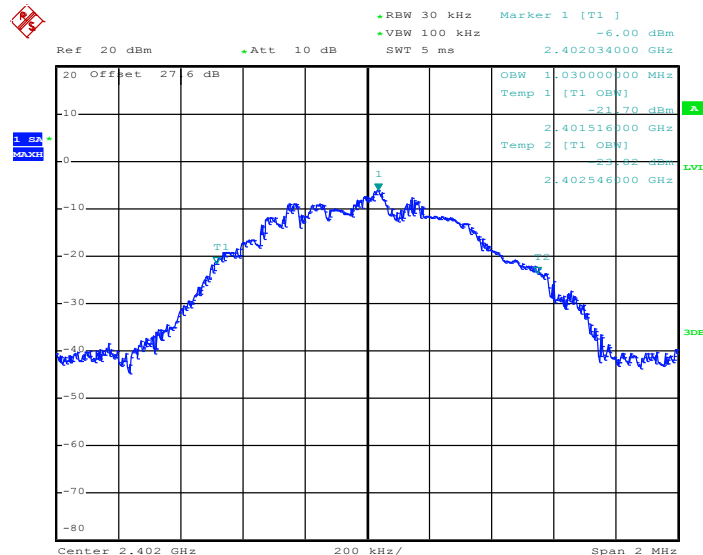

Date: 10.APR.2018 20:46:59

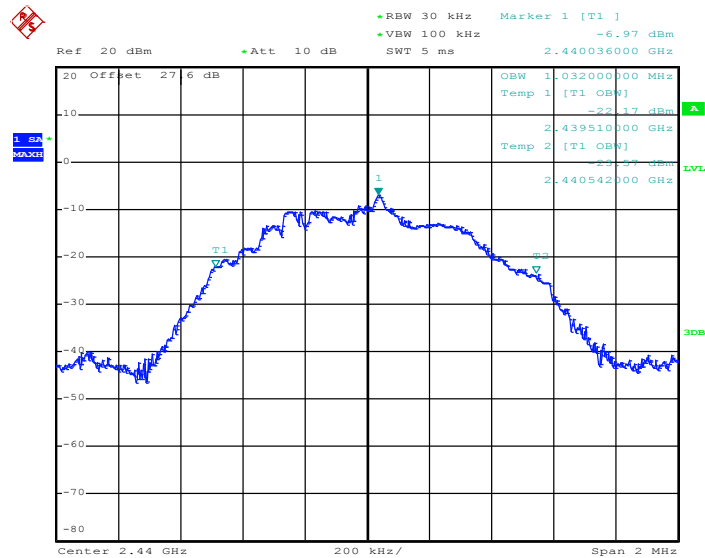99% Occupied Bandwidth Plot on Channel 19


Date: 10.APR.2018 20:51:52

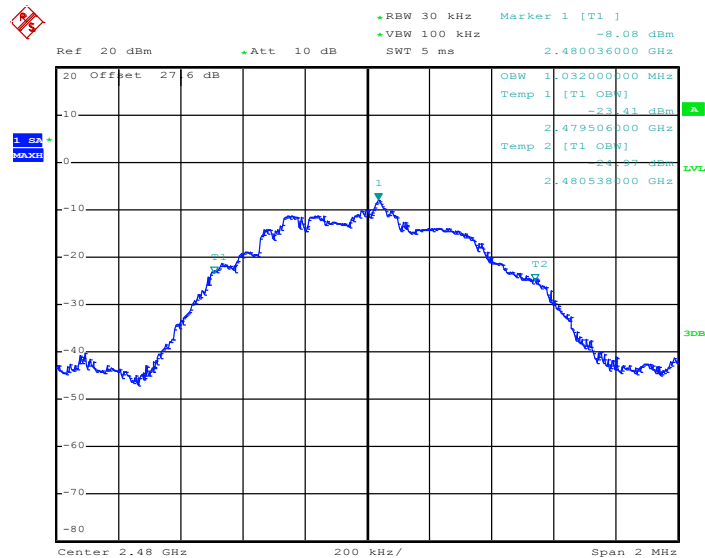99% Occupied Bandwidth Plot on Channel 39


Date: 10.APR.2018 21:04:06

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

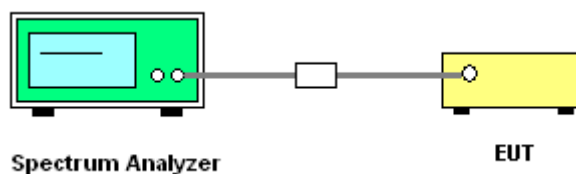


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

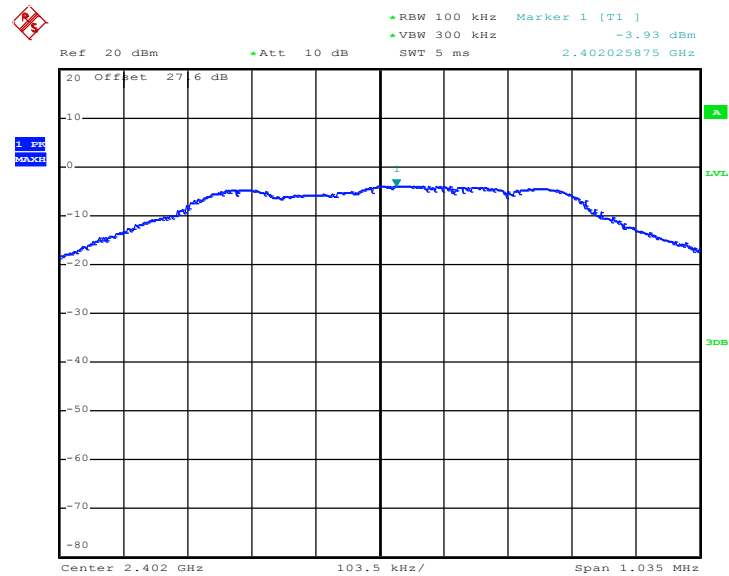

Date: 10.APR.2018 20:45:03


PSD 100kHz Plot on Channel 19

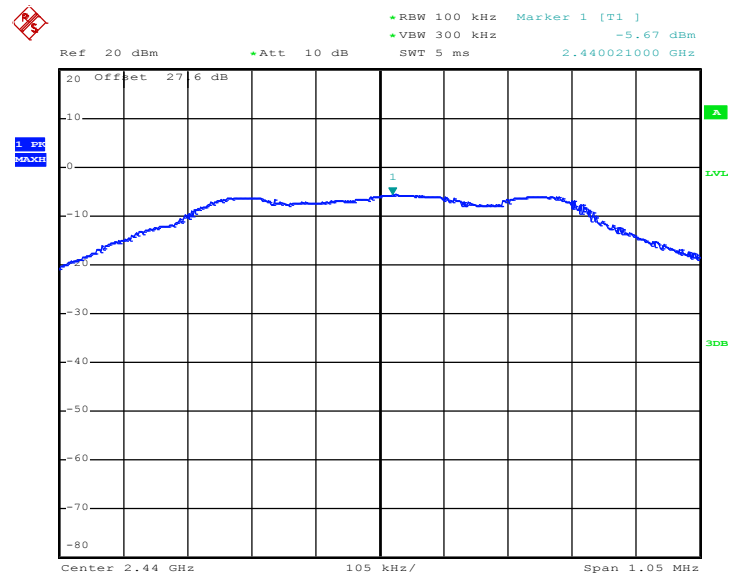

Date: 10.APR.2018 20:49:28




PSD 100kHz Plot on Channel 39

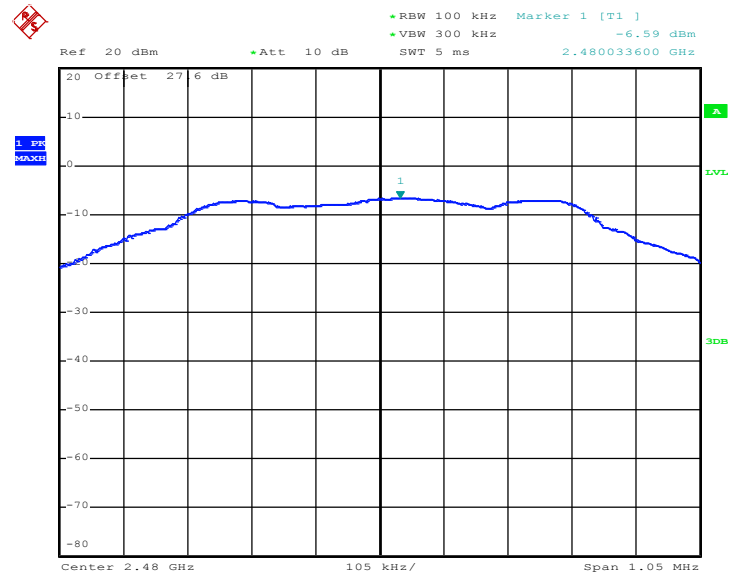

Date: 10.APR.2018 20:58:18

3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

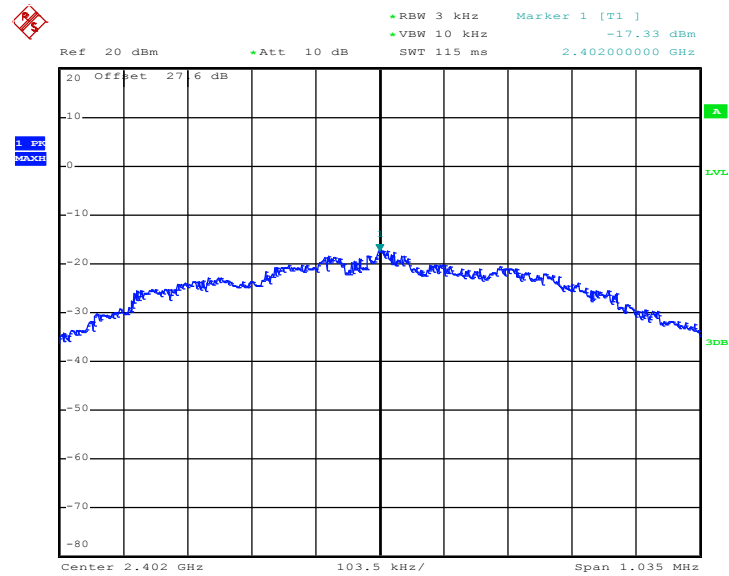

Date: 10.APR.2018 20:43:32




PSD 3kHz Plot on Channel 19

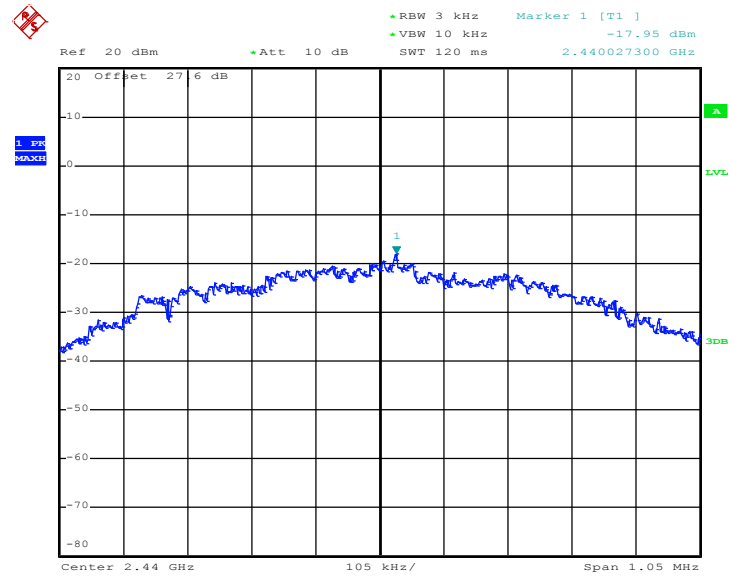

Date: 10.APR.2018 20:49:13

PSD 3kHz Plot on Channel 39

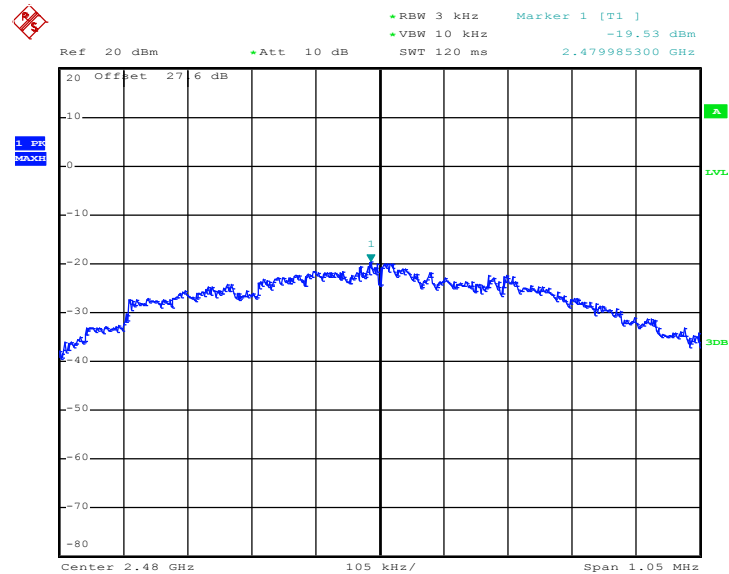

Date: 10.APR.2018 20:59:26

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

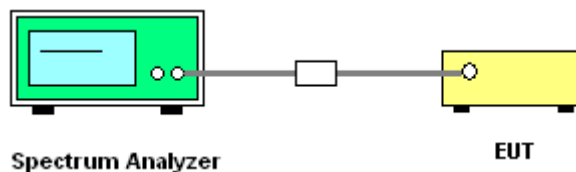


3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

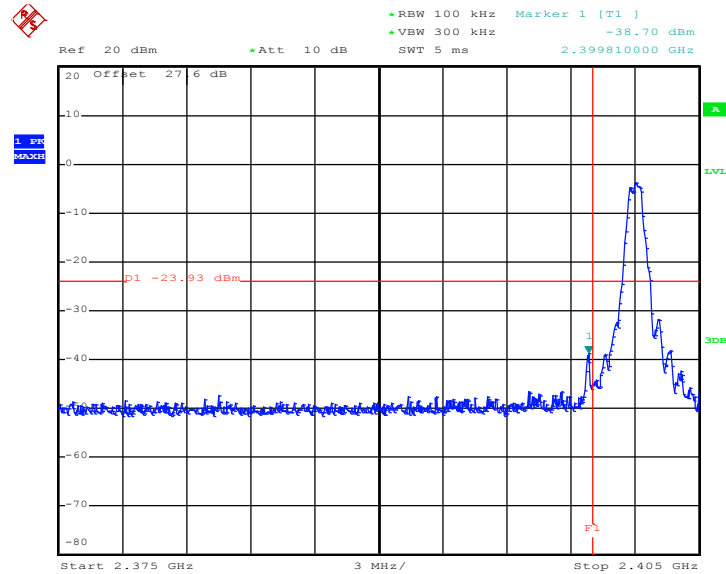

Date: 10.APR.2018 20:45:35

High Band Edge Plot on Channel 39

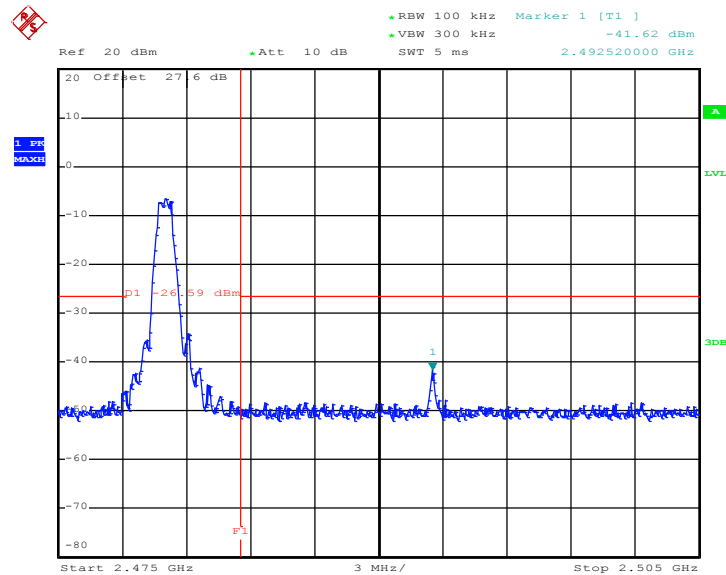


Date: 10.APR.2018 20:58:46




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

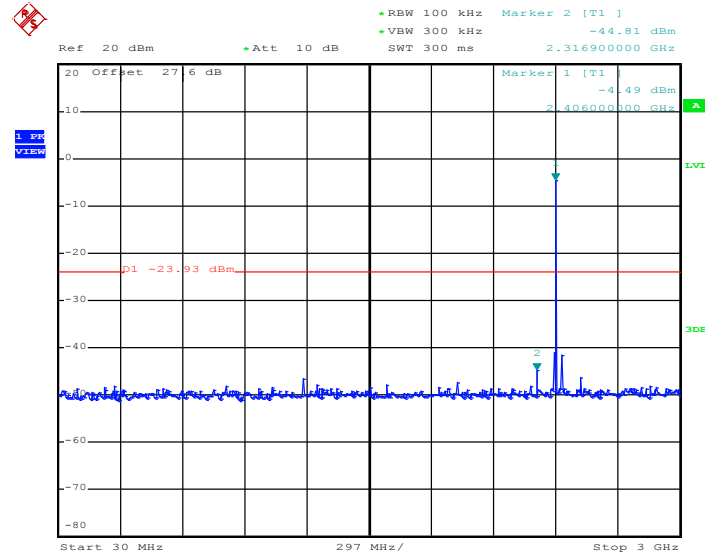


Date: 10.APR.2018 20:54:29

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

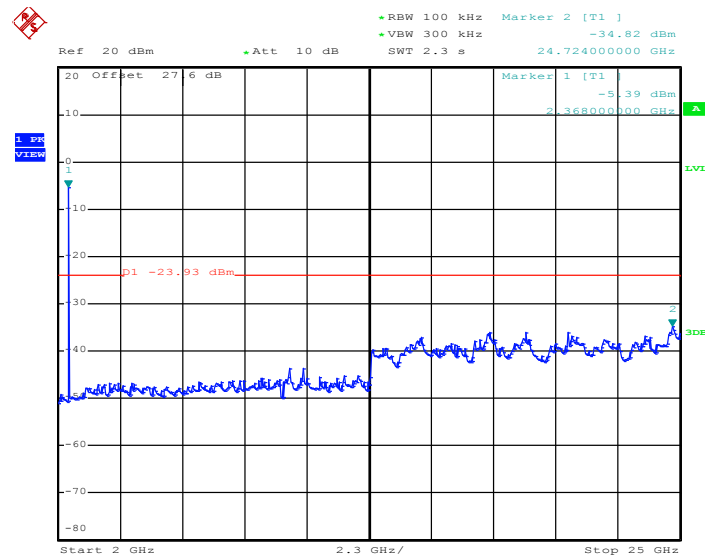


Date: 10.APR.2018 20:55:23

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

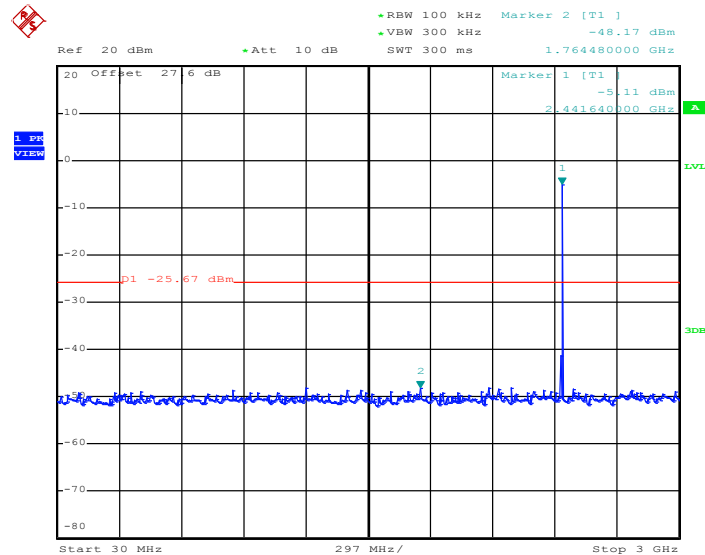

Date: 10.APR.2018 20:49:46


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

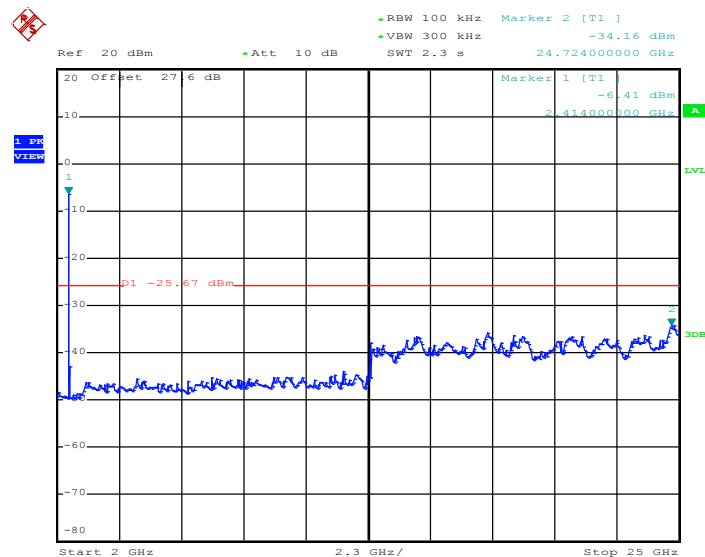

Date: 10.APR.2018 20:51:08




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

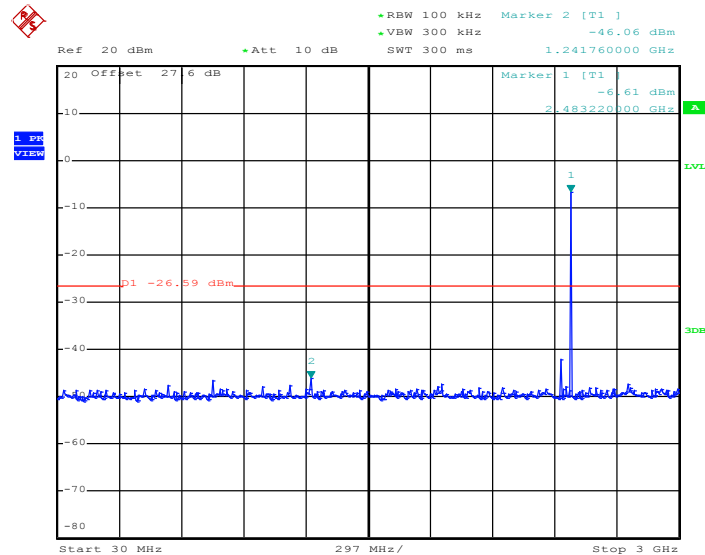

Date: 10.APR.2018 21:01:55

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

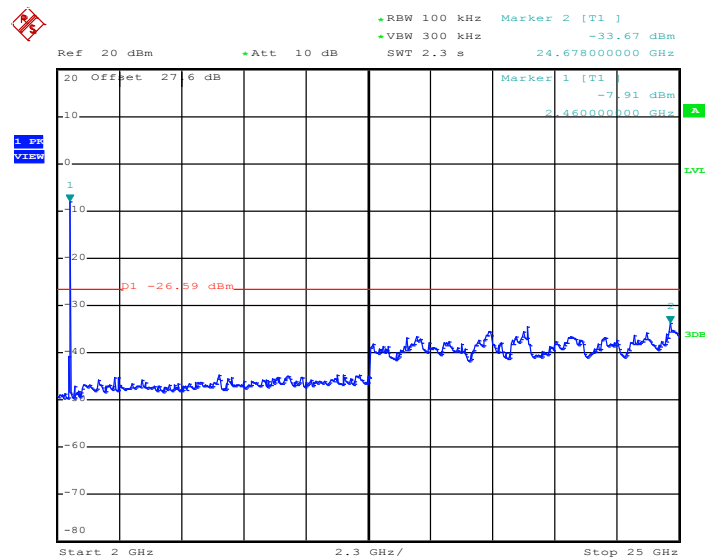

Date: 10.APR.2018 21:03:45

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

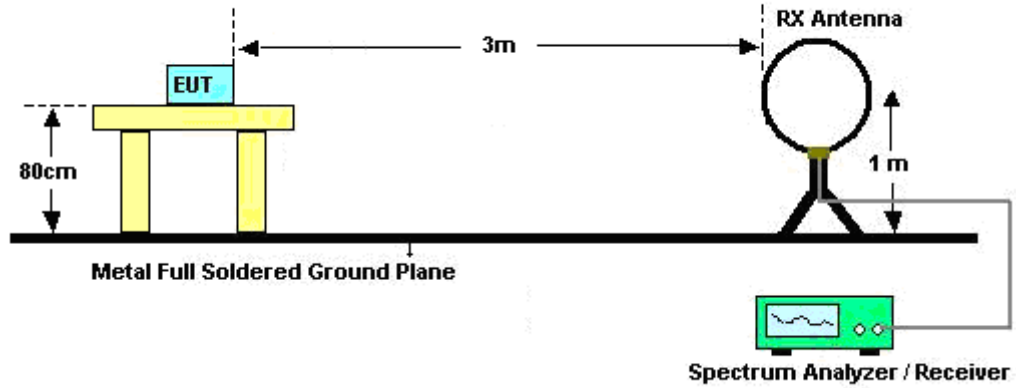

For radiated emissions from 30MHz to 1GHz

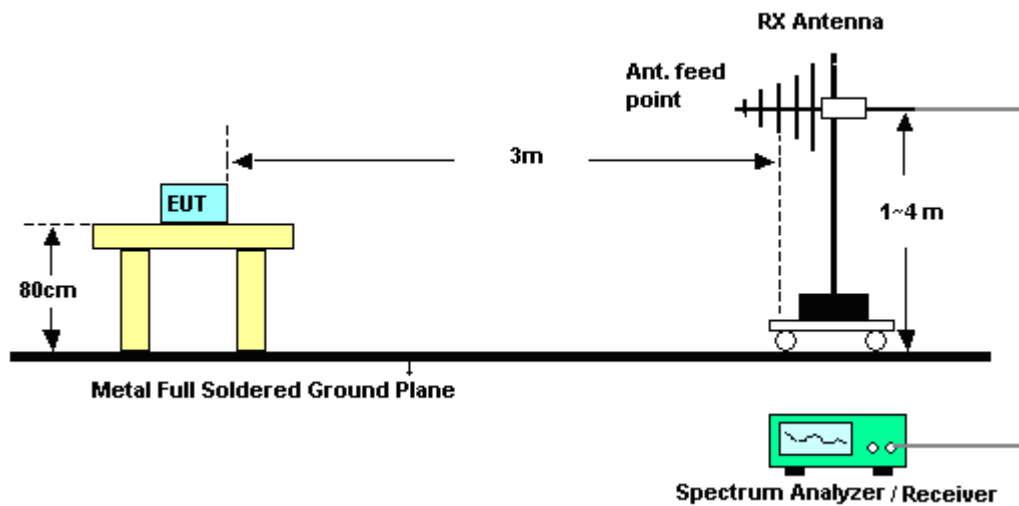

For radiated emissions above 1GHz

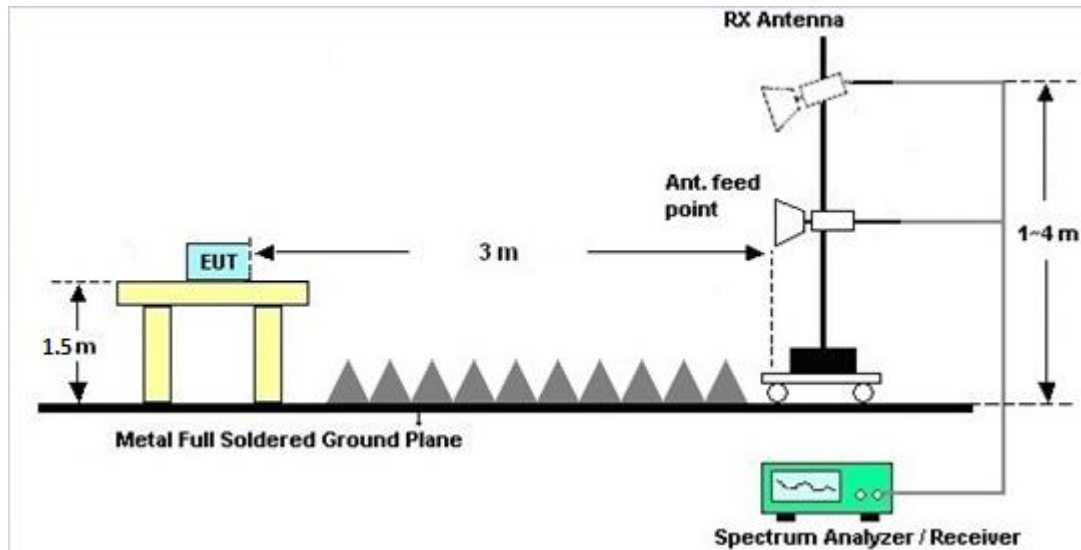

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 20, 2017	Apr. 10, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	Apr. 10, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Apr. 10, 2018	Jun. 19, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Mar. 01, 2018	Apr. 10, 2018	Feb. 28, 2019	Conducted (TH05-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 19, 2017	Apr. 11, 2018	Oct. 18, 2018	Radiation (03CH10-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Apr. 11, 2018	Jul. 17, 2018	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35413&02	30MHz~1GHz	Dec. 18, 2017	Apr. 11, 2018	Dec. 17, 2018	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 27, 2017	Apr. 11, 2018	Sep. 26, 2018	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Oct. 25, 2017	Apr. 11, 2018	Oct. 24, 2018	Radiation (03CH10-HY)
Preamplifier	Jet-Power	JAP00101800-30-10P	160118550004	1GHz~18GHz	Apr. 13, 2017	Apr. 11, 2018	Apr. 12, 2018	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHz	Oct. 31, 2017	Apr. 11, 2018	Oct. 30, 2018	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Apr. 11, 2018	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Apr. 11, 2018	N/A	Radiation (03CH10-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Apr. 11, 2018	N/A	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Jan. 16, 2018	Apr. 11, 2018	Jan. 15, 2019	Radiation (03CH10-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Apr. 11, 2018	Nov. 22, 2018	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 27, 2017	Apr. 11, 2018	Apr. 26, 2018	Radiation (03CH10-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz to 26.5GHz	Jan. 16, 2018	Apr. 11, 2018	Jan. 15, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4PE, MY11693/4PE, MY2855/2	30M-1G	Nov. 14, 2017	Apr. 11, 2018	Nov. 13, 2018	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4PE, MY11693/4PE, MY2855/2	1G-18G	Nov. 14, 2017	Apr. 11, 2018	Nov. 13, 2018	Radiation (03CH10-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.60
--	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.90
--	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
--	------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Rebecca Li	Temperature:	21~25	°C
Test Date:	2018/04/10	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.030	0.694	0.50	Pass
BLE	1Mbps	1	19	2440	1.032	0.702	0.50	Pass
BLE	1Mbps	1	39	2480	1.032	0.704	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-0.79	30.00	1.60	0.81	36.00	Pass
BLE	1Mbps	1	19	2440	-1.36	30.00	1.60	0.24	36.00	Pass
BLE	1Mbps	1	39	2480	-2.20	30.00	1.60	-0.60	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	1.82	-3.36
BLE	1Mbps	1	19	2440	1.82	-4.76
BLE	1Mbps	1	39	2480	1.82	-6.06

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-3.93	-17.33	1.60	8.00	Pass
BLE	1Mbps	1	19	2440	-5.67	-17.95	1.60	8.00	Pass
BLE	1Mbps	1	39	2480	-6.59	-19.53	1.60	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Daniel Lee and JC Liang	Temperature :	18~22°C
		Relative Humidity :	48~52%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2386.545	55.29	-18.71	74	45.97	27.11	5.39	33.16	337	42	P	H
		2386.335	44.87	-9.13	54	35.55	27.11	5.39	33.16	337	42	A	H
	*	2402	88.3	-	-	78.95	27.11	5.41	33.15	337	42	P	H
	*	2402	87.85	-	-	78.5	27.11	5.41	33.15	337	42	A	H
													H
													H
		2386.44	54.02	-19.98	74	44.7	27.11	5.39	33.16	343	86	P	V
		2386.335	44.59	-9.41	54	35.27	27.11	5.39	33.16	343	86	A	V
	*	2402	90.5	-	-	81.15	27.11	5.41	33.15	343	86	P	V
	*	2402	89.89	-	-	80.54	27.11	5.41	33.15	343	86	A	V
													V
													V
BLE CH 19 2440MHz		2349.48	52.18	-21.82	74	43.06	26.97	5.34	33.17	322	42	P	H
		2379.16	42.61	-11.39	54	33.34	27.06	5.39	33.16	322	42	A	H
	*	2440	90.57	-	-	81.02	27.26	5.45	33.14	322	42	P	H
	*	2440	90.04	-	-	80.49	27.26	5.45	33.14	322	42	A	H
		2487.12	52.25	-21.75	74	42.53	27.35	5.5	33.11	322	42	P	H
		2496.43	43	-11	54	33.22	27.4	5.5	33.1	322	42	A	H
		2383.08	51.25	-22.75	74	41.98	27.06	5.39	33.16	375	80	P	V
		2379.58	42.65	-11.35	54	33.38	27.06	5.39	33.16	375	80	A	V
	*	2440	91.84	-	-	82.29	27.26	5.45	33.14	375	80	P	V
	*	2440	91.27	-	-	81.72	27.26	5.45	33.14	375	80	A	V
		2483.76	51.82	-22.18	74	42.1	27.35	5.5	33.11	375	80	P	V
		2489.36	43.07	-10.93	54	33.3	27.4	5.5	33.11	375	80	A	V



BLE CH 39 2480MHz	*	2480	92.22	-	-	82.52	27.35	5.48	33.11	307	27	P	H
	*	2480	91.71	-	-	82.01	27.35	5.48	33.11	307	27	A	H
		2498.92	55.61	-18.39	74	45.83	27.4	5.5	33.1	307	27	P	H
		2499.44	43.26	-10.74	54	33.48	27.4	5.5	33.1	307	27	A	H
													H
													H
	*	2480	94.49	-	-	84.79	27.35	5.48	33.11	397	73	P	V
	*	2480	93.88	-	-	84.18	27.35	5.48	33.11	397	73	A	V
		2499.16	55.59	-18.41	74	45.81	27.4	5.5	33.1	397	73	P	V
		2493.36	43.25	-10.75	54	33.47	27.4	5.5	33.1	397	73	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	55.4	-18.6	74	79.67	31.16	8.42	64.35	370	5	P	H
		4804	52.92	-1.08	54	77.19	31.16	8.42	64.35	370	5	P	H
													H
													H
		4804	54.77	-19.23	74	79.04	31.16	8.42	64.35	100	352	P	V
		4804	52.26	-1.74	54	76.53	31.16	8.42	64.35	100	352	P	V
													V
													V
BLE CH 19 2440MHz		4880	53.42	-20.58	74	77.68	31.28	8.38	64.4	100	325	P	H
		4880	50.58	-3.42	54	74.84	31.28	8.38	64.4	100	325	A	H
		7320	47.17	-26.83	74	66.01	36.22	10.11	65.56	100	0	P	H
													H
		4880	53.6	-20.4	74	77.86	31.28	8.38	64.4	144	7	P	V
		4880	50.8	-3.2	54	75.06	31.28	8.38	64.4	144	7	A	V
		7320	44.4	-29.6	74	63.24	36.22	10.11	65.56	100	0	P	V
													V
BLE CH 39 2480MHz		4960	52.86	-21.14	74	77.08	31.44	8.35	64.47	110	297	P	H
		4960	50.68	-3.32	54	74.9	31.44	8.35	64.47	110	297	A	H
		7440	44.63	-29.37	74	63.41	36.49	10.04	65.66	100	0	P	H
													H
		4960	52.3	-21.7	74	76.52	31.44	8.35	64.47	152	12	P	V
		4960	50.7	-3.3	54	74.92	31.44	8.35	64.47	152	12	A	V
		7440	44.76	-29.24	74	63.54	36.49	10.04	65.66	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		96.15	32.03	-11.47	43.5	47.99	15.46	1.05	32.71	-	-	P	H
		192.27	36.07	-7.43	43.5	51.98	14.85	1.49	32.65	-	-	P	H
		288.39	42.77	-3.23	46	54.3	18.9	1.77	32.6	100	84	Q	H
		288.39	44.57	-1.43	46	56.1	18.9	1.77	32.6	100	84	P	H
		384.7	39.76	-6.24	46	48.7	21.19	2.06	32.6	-	-	P	H
		576.5	36.61	-9.39	46	40.68	25.62	2.51	32.78	-	-	P	H
		934.9	32.6	-13.4	46	30.28	29.97	3.26	31.69	-	-	P	H
													H
													H
													H
													H
													H
		96.15	29.99	-13.51	43.5	45.95	15.46	1.05	32.71	-	-	P	V
		166.35	33.11	-10.39	43.5	47.96	15.98	1.41	32.66	-	-	P	V
		192.27	31.98	-11.52	43.5	47.89	14.85	1.49	32.65	-	-	P	V
		384	32.92	-13.08	46	41.89	21.16	2.06	32.6	-	-	P	V
		480.6	31.15	-14.85	46	37.42	23.57	2.32	32.63	-	-	P	V
		576.5	35.71	-10.29	46	39.78	25.62	2.51	32.78	100	0	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Daniel Lee and JC Liang	Temperature :	18~22°C
		Relative Humidity :	48~52%





Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

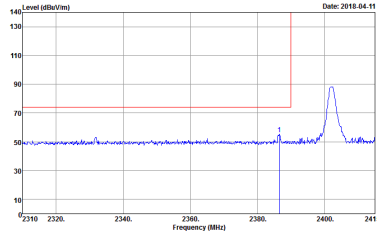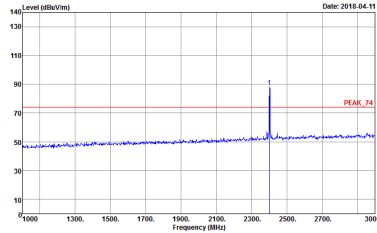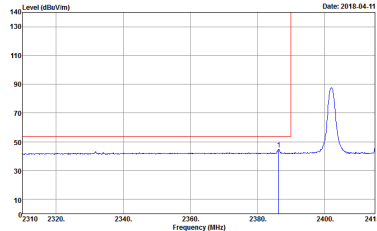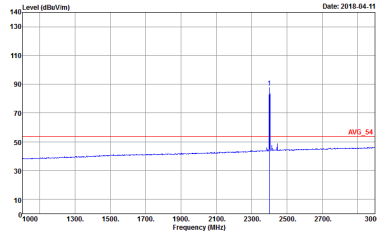BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 821217	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 821217
Avg.	 Site : 03CH10-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 821217	 Site : 03CH10-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 821217

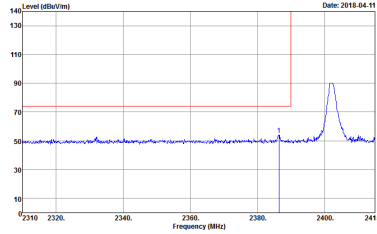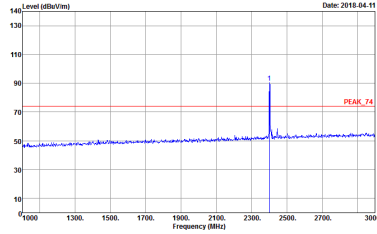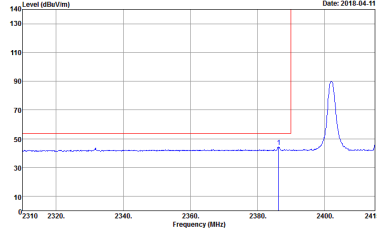
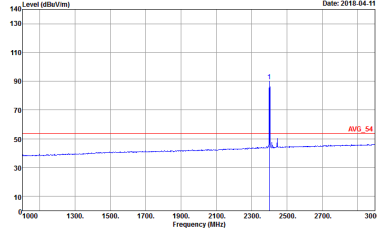


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217
Avg	 Site : 03CH10-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 821217

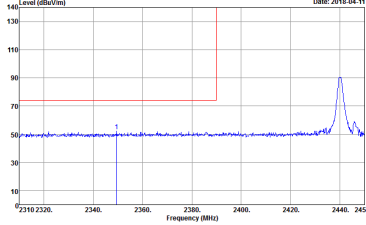
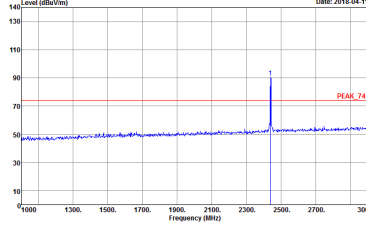
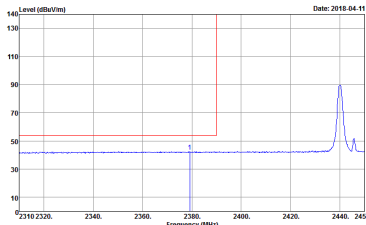
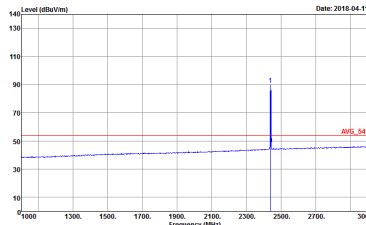


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Fundamental
Peak	 Level (dBuV/m) Frequency (MHz) Date: 2018-04-11 Site : 03CH10-HV Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 821217	 Level (dBuV/m) Frequency (MHz) Date: 2018-04-11 Site : 03CH10-HV Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 821217
Avg.	 Level (dBuV/m) Frequency (MHz) Date: 2018-04-11 Site : 03CH10-HV Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 821217	 Level (dBuV/m) Frequency (MHz) Date: 2018-04-11 Site : 03CH10-HV Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 821217

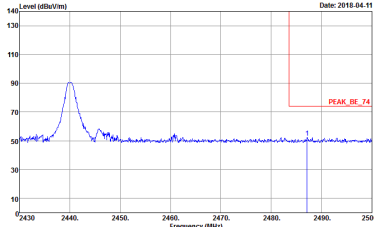
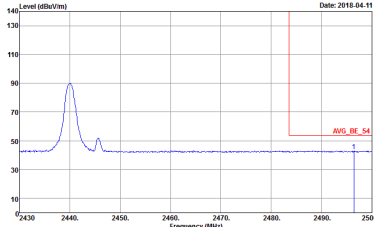


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217	Left blank
Avg.	 Site : 03CH10-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 821217	Left blank

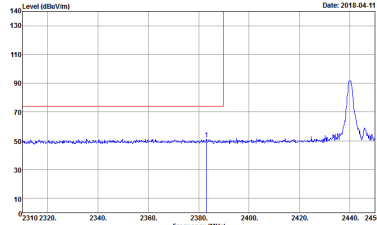
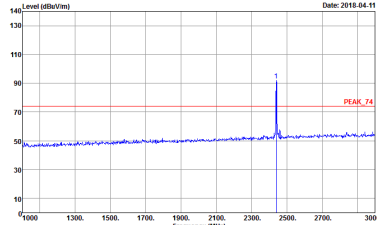
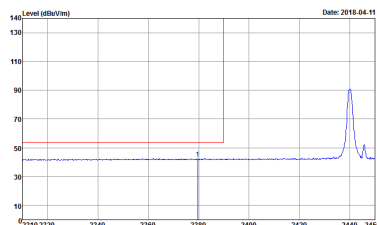
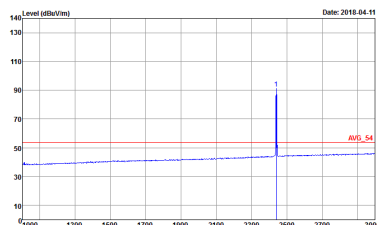


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217
Avg.	 Site : 03CH10-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 821217



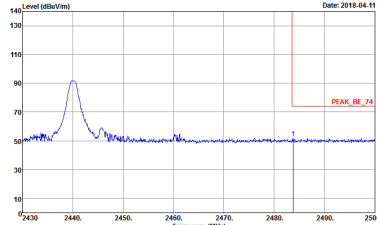
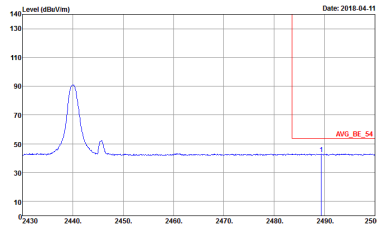


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217	Left blank
Avg.	 Site : 03CH10-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 821217	Left blank

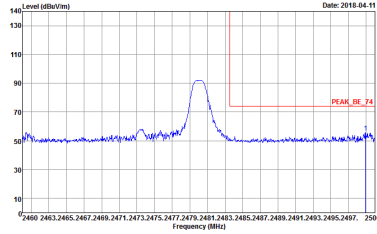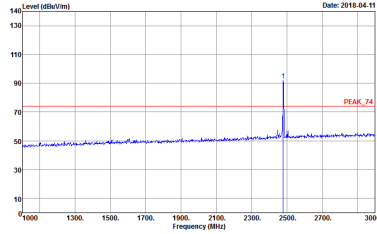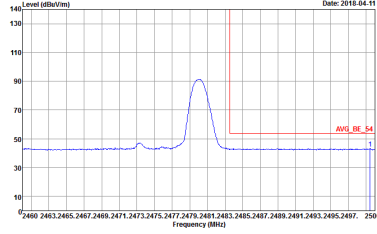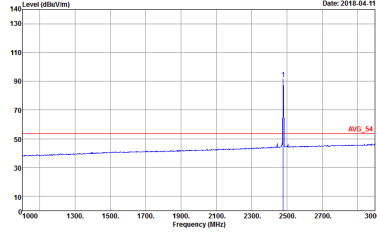

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217
Avg.	 Site : 03CH10-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217

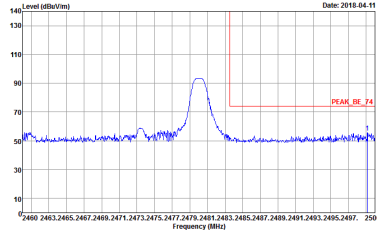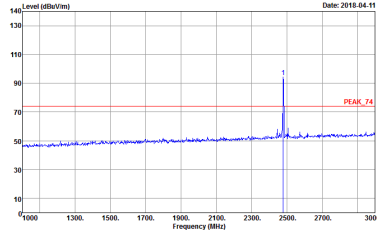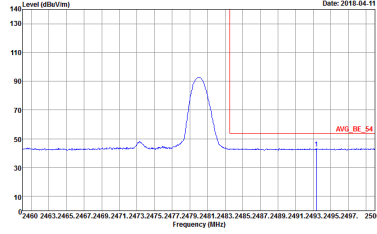
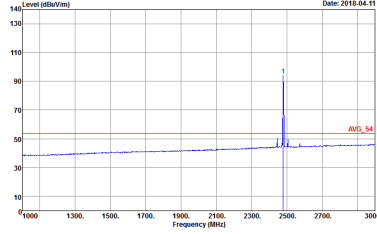


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH10-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821217
Avg.	 Site : 03CH10-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 821217





2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

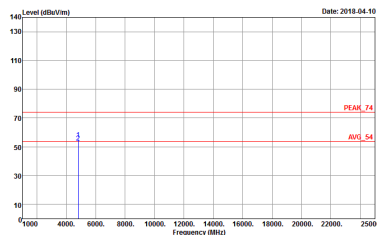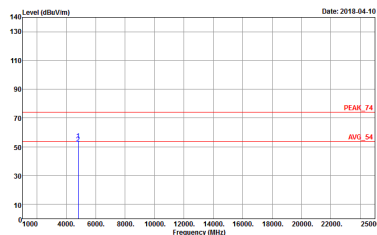BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 821217

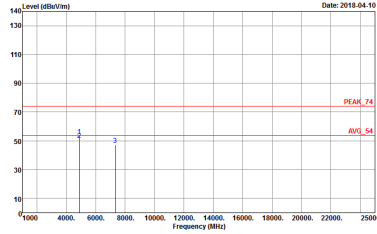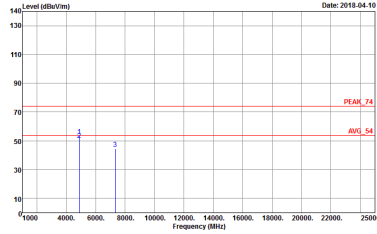

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 821217

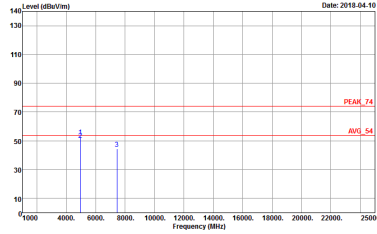
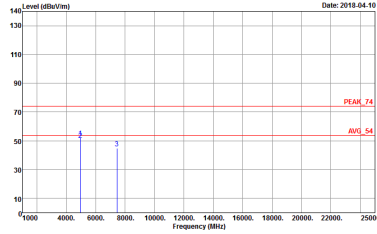


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 821217	 Site : 03CH10-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 821217



Emission below 1GHz


2.4GHz BLE (LF)

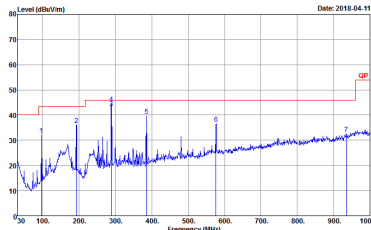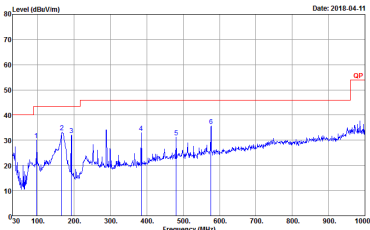BLE		2.4GHz 2400~2483.5MHz																																																																																																																																																																																																																							
ANT		BLE LF																																																																																																																																																																																																																							
1	Horizontal	Vertical																																																																																																																																																																																																																							
QP / Peak	 Site : 03CH10-HY Condition : QP 3m BI-LOG 6111D-LF HORIZONTAL Detector : Peak Project : 821217 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Level</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th></th><th></th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>96.15</td><td>32.83</td><td>-11.47</td><td>43.58</td><td>47.99</td><td>15.46</td><td>1.85</td><td>32.71</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>192.27</td><td>36.87</td><td>-7.43</td><td>43.58</td><td>51.98</td><td>14.85</td><td>1.49</td><td>32.65</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>288.39</td><td>42.77</td><td>-3.23</td><td>46.00</td><td>54.38</td><td>18.98</td><td>1.77</td><td>32.68</td><td>100</td><td>84 QP</td></tr><tr><td>4</td><td>288.39</td><td>44.57</td><td>-1.43</td><td>46.00</td><td>56.18</td><td>18.98</td><td>1.77</td><td>32.68</td><td>100</td><td>84 Peak</td></tr><tr><td>5</td><td>384.78</td><td>39.76</td><td>-6.24</td><td>46.00</td><td>48.78</td><td>21.19</td><td>2.06</td><td>32.68</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>576.58</td><td>36.61</td><td>-9.39</td><td>46.00</td><td>48.68</td><td>25.62</td><td>2.51</td><td>32.78</td><td>---</td><td>Peak</td></tr><tr><td>7</td><td>934.98</td><td>32.68</td><td>-13.48</td><td>46.00</td><td>38.28</td><td>29.97</td><td>3.26</td><td>31.69</td><td>---</td><td>Peak</td></tr></table>		Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Level	Level	Line	Level	Factor	Loss				Freq	Level	Limit	Line	Level	Factor	Loss			MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg	1	96.15	32.83	-11.47	43.58	47.99	15.46	1.85	32.71	---	Peak	2	192.27	36.87	-7.43	43.58	51.98	14.85	1.49	32.65	---	Peak	3	288.39	42.77	-3.23	46.00	54.38	18.98	1.77	32.68	100	84 QP	4	288.39	44.57	-1.43	46.00	56.18	18.98	1.77	32.68	100	84 Peak	5	384.78	39.76	-6.24	46.00	48.78	21.19	2.06	32.68	---	Peak	6	576.58	36.61	-9.39	46.00	48.68	25.62	2.51	32.78	---	Peak	7	934.98	32.68	-13.48	46.00	38.28	29.97	3.26	31.69	---	Peak	 Site : 03CH10-HY Condition : QP 3m BI-LOG 6111D-LF VERTICAL Detector : Peak Project : 821217 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Level</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th></th><th></th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>96.15</td><td>29.99</td><td>-13.51</td><td>43.58</td><td>45.95</td><td>15.46</td><td>1.85</td><td>32.71</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>166.35</td><td>33.11</td><td>-10.39</td><td>43.58</td><td>47.96</td><td>15.98</td><td>1.41</td><td>32.66</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>192.27</td><td>31.98</td><td>-11.52</td><td>43.58</td><td>47.89</td><td>14.85</td><td>1.49</td><td>32.65</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>384.88</td><td>32.92</td><td>-13.08</td><td>46.00</td><td>41.89</td><td>21.16</td><td>2.06</td><td>32.68</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>488.68</td><td>31.15</td><td>-14.85</td><td>46.00</td><td>37.42</td><td>23.57</td><td>2.32</td><td>32.63</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>576.58</td><td>35.71</td><td>-10.29</td><td>46.00</td><td>39.78</td><td>25.62</td><td>2.51</td><td>32.78</td><td>100</td><td>0 Peak</td></tr></table>		Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Level	Level	Line	Level	Factor	Loss				Freq	Level	Limit	Line	Level	Factor	Loss			MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg	1	96.15	29.99	-13.51	43.58	45.95	15.46	1.85	32.71	---	Peak	2	166.35	33.11	-10.39	43.58	47.96	15.98	1.41	32.66	---	Peak	3	192.27	31.98	-11.52	43.58	47.89	14.85	1.49	32.65	---	Peak	4	384.88	32.92	-13.08	46.00	41.89	21.16	2.06	32.68	---	Peak	5	488.68	31.15	-14.85	46.00	37.42	23.57	2.32	32.63	---	Peak	6	576.58	35.71	-10.29	46.00	39.78	25.62	2.51	32.78	100	0 Peak
		Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																																																
Level	Level	Line	Level	Factor	Loss																																																																																																																																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss																																																																																																																																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																	
1	96.15	32.83	-11.47	43.58	47.99	15.46	1.85	32.71	---	Peak																																																																																																																																																																																																															
2	192.27	36.87	-7.43	43.58	51.98	14.85	1.49	32.65	---	Peak																																																																																																																																																																																																															
3	288.39	42.77	-3.23	46.00	54.38	18.98	1.77	32.68	100	84 QP																																																																																																																																																																																																															
4	288.39	44.57	-1.43	46.00	56.18	18.98	1.77	32.68	100	84 Peak																																																																																																																																																																																																															
5	384.78	39.76	-6.24	46.00	48.78	21.19	2.06	32.68	---	Peak																																																																																																																																																																																																															
6	576.58	36.61	-9.39	46.00	48.68	25.62	2.51	32.78	---	Peak																																																																																																																																																																																																															
7	934.98	32.68	-13.48	46.00	38.28	29.97	3.26	31.69	---	Peak																																																																																																																																																																																																															
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																																																	
Level	Level	Line	Level	Factor	Loss																																																																																																																																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss																																																																																																																																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																	
1	96.15	29.99	-13.51	43.58	45.95	15.46	1.85	32.71	---	Peak																																																																																																																																																																																																															
2	166.35	33.11	-10.39	43.58	47.96	15.98	1.41	32.66	---	Peak																																																																																																																																																																																																															
3	192.27	31.98	-11.52	43.58	47.89	14.85	1.49	32.65	---	Peak																																																																																																																																																																																																															
4	384.88	32.92	-13.08	46.00	41.89	21.16	2.06	32.68	---	Peak																																																																																																																																																																																																															
5	488.68	31.15	-14.85	46.00	37.42	23.57	2.32	32.63	---	Peak																																																																																																																																																																																																															
6	576.58	35.71	-10.29	46.00	39.78	25.62	2.51	32.78	100	0 Peak																																																																																																																																																																																																															

Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor (dB)
Bluetooth -LE	65.71	414.00	2.42	3kHz	1.82

Bluetooth - LE

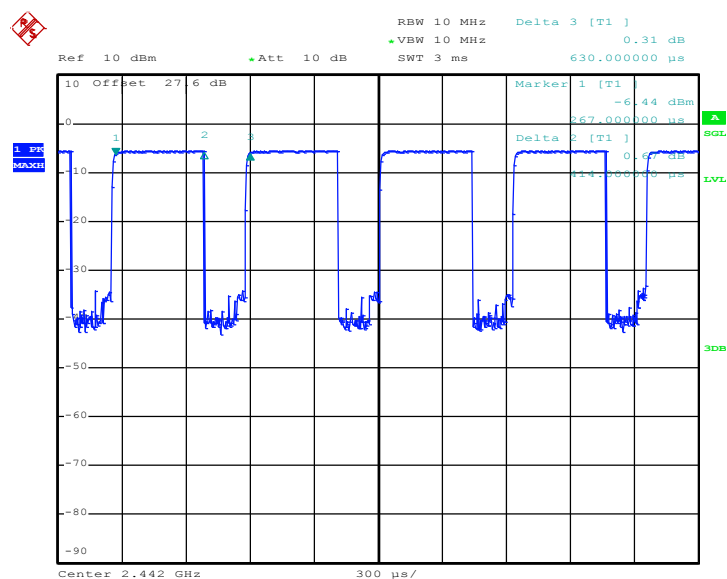

Date: 10.APR.2018 20:27:41