

FCC 47 CFR PART 22H and 24E

Product Type : Smartphone

Applicant : HTC Corporation

Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County
330, Taiwan

Trade name : HTC

Model No. : PB65100

Test Specification : FCC 47 CFR PART 22H: Oct, 2008
FCC 47 CFR PART 24E: Oct, 2008
ANSI/TIA-603-2007

Issue Date : Mar. 22, 2010

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan Country 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jan. 13, 2010	Initial Issue	
01	Mar. 19, 2010	Delete component list	Joyce Liao
02	Mar. 22, 2010	Remove hardware and software version. Revise applicant and manufacturer's address.	Linda Su

Verification

Issued Date: 2010/03/22

Product Type : Smartphone
Applicant : HTC Corporation
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,
Taiwan
Trade Name : HTC
Model No. : PB65100
EUT Rated Voltage : AC 100-240V, 50-60Hz, 0.2 A
Test Voltage : 120 Vac / 60 Hz
Applicable : FCC 47 CFR PART 22H: Oct, 2008
Standard : FCC 47 CFR PART 24E: Oct, 2008
ANSI/TIA-603-2007

Test Result : Complied

Performed Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City
Taoyuan Country 334, Taiwan R.O.C.

Tel : +886-3-2710188 / Fax : +886-3-2710190


Taiwan Accreditation Foundation accreditation number:
1330



<http://www.atl-lab.com.tw/e-index.htm>

The above equipment has been tested by A Test Lab Techno Corp., and found compliance with the requirements set forth in the Electromagnetic Compatibility Directive 2004/108/EC and technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved By

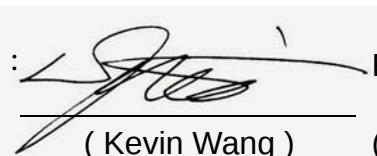

(Director)

(Kevin Wang)

Reviewed By



(Manager)

(Miller Lee)

TABLE OF CONTENTS

1 General Information.....	6
1.1. EUT Description	6
1.2. Mode of Operation	7
1.3. EUT Exercise Software	9
1.4. Configuration of Test System Details	9
1.5. Test Site Environment	9
1.6. Summary of Test Result	10
2 RF Output Power Test	11
2.1. Limit	11
2.2. Test Instruments	11
2.3. Test Setup	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result	12
3 Effective Radiated Power / Equivalent Isotropic Radiated Power Test.....	13
3.1. Limit	13
3.2. Test Instruments	13
3.3. Test Setup	14
3.4. Test Procedure	14
3.5. Uncertainty	17
3.6. Test Result	18
4 Occupied Bandwidth Test.....	19
4.1. Limit	19
4.2. Test Instruments	19
4.3. Setup	19
4.4. Test Procedure	20
4.5. Uncertainty	20
4.6. Test Result	21
5 Conducted Emission Test.....	31
5.1. Limit	31
5.2. Test Instruments	31
5.3. Setup	32
5.4. Test Procedure	33
5.5. Uncertainty	33
5.6. Test Result	33

6	Field Strength of Spurious Radiation Test	61
6.1.	Limit	61
6.2.	Test Instruments	61
6.3.	Setup	61
6.4.	Test Procedure	62
6.5.	Uncertainty	62
6.6.	Test Result	63
7	Frequency Stability (Temperature Variation) Test	75
7.1.	Limit	75
7.2.	Test Instruments	75
7.3.	Setup	75
7.4.	Test Procedure	76
7.5.	Uncertainty	76
7.6.	Test Result	77
8	Frequency Stability (Voltage Variation) Test	78
8.1.	Limit	78
8.2.	Test Instruments	78
8.3.	Setup	78
8.4.	Test Procedure	79
8.5.	Uncertainty	79
8.6.	Test Result	79
9	AC Power Conducted Emissions Test	80
9.1.	Limit	80
9.2.	Test Instruments	80
9.3.	Setup	80
9.4.	Test Procedure	81
9.5.	Uncertainty	81
9.6.	Test Result	81

1 General Information

1.1. EUT Description

Applicant		HTC Corporation			
Applicant Address		No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan			
Manufacturer		HTC Corporation			
Manufacturer Address		No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan			
Product Type		Smartphone			
Trade Name		HTC			
Model Number		PB65100			
Mode	GSM/GPRS/ EGPRS	Band	UL Frequency (MHz)	DL Frequency (MHz)	Modulation
		850	824.2 ~ 848.8	869.2 ~ 893.8	8PSK
		1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8	8PSK
Channel Control		Auto			
Type of Antenna		PIFA			
Antenna Gain (dBi)		GSM/GPRS/EGPRS 850: -0.39 dBi GPRS/EGPRS 1900: 2.43dBi			
Max. RF Output Power		GSM 850: 33.24 dBm / 2.109 W, EGPRS 850: 27.28 dBm / 0.535 W GSM 1900: 30.97 dBm / 1.250 W, EGPRS 1900: 26.44 dBm / 0.441 W			
Max. EIRP		GSM 850: 30.45 dBm / 1.108 W, EGPRS 850: 24.72 dBm / 0.296 W GSM 1900: 32.95 dBm / 1.972 W, EGPRS 1900: 28.52 dBm / 0.711 W			
Emission Designator		GSM 850: 244KGXW GSM 1900: 247KGXW EGPRS 850: 245KG7W EGPRS 1900: 245KG7W			

1.2. Mode of Operation

ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: GSM850 Link
Mode 2: GSM1900 Link

Note: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1.	Universal Radio Communication Tester	R&S	CMU200	109369	N/A

Preliminary tests were performed in different mode to find the worst case. The mode shown in the table below is the worst-case. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


Mode	Multi-Class	Frequency (MHz)	Conducted Power (dBm)	Worst Case
GSM850	----	824.2	33.16	☐
		836.4	33.17	☐
		848.8	33.24	☒
GPRS850	4Down1up	824.2	33.17	☐
		836.4	33.18	☐
		848.8	33.24	☐
GPRS850	3Down2up	824.2	32.71	☐
		836.4	32.71	☐
		848.8	32.77	☐
GPRS850	2Down3up	824.2	32.67	☐
		836.4	32.66	☐
		848.8	32.71	☐
GPRS850	1Down4up	824.2	31.63	☐
		836.4	31.63	☐
		848.8	31.67	☒
Note: The EGPRS only test RF output power, EIRP/ERP and occupied bandwidth.				

Mode	Multi-Class	Frequency (MHz)	Conducted Power (dBm)	Worst Case
EGPRS850	4Down1up	824.2	27.28	☐
		836.4	27.24	☐
		848.8	27.25	☐
EGPRS850	3Down2up	824.2	26.29	☐
		836.4	26.26	☐
		848.8	26.30	☐
EGPRS850	2Down3up	824.2	26.20	☐
		836.4	26.15	☐
		848.8	26.24	☐
EGPRS850	1Down4up	824.2	26.21	☐
		836.4	26.16	☐
		848.8	26.20	☐
PCS1900	----	1850.2	30.59	☐
		1880.0	30.93	☐
		1909.8	30.97	☒
GSRS1900	4Down1up	1850.2	30.58	☐
		1880.0	30.92	☐
		1909.8	30.96	☒
GSRS1900	3Down2up	1850.2	29.55	☐
		1880.0	29.84	☐
		1909.8	29.89	☐
GSRS1900	2Down3up	1850.2	29.52	☐
		1880.0	29.80	☐
		1909.8	29.83	☐
GSRS1900	1Down4up	1850.2	28.49	☐
		1880.0	28.74	☐
		1909.8	28.78	☐
EGSRS1900	4Down1up	1850.2	26.02	☐
		1880.0	26.32	☐
		1909.8	26.44	☐
EGSRS1900	3Down2up	1850.2	25.08	☐
		1880.0	25.30	☐
		1909.8	25.41	☐
EGSRS1900	2Down3up	1850.2	25.05	☐
		1880.0	25.27	☐
		1909.8	25.42	☐
EGSRS1900	1Down4up	1850.2	25.03	☐
		1880.0	25.26	☐
		1909.8	25.32	☐
Note: The EGPRS only test RF output power, EIRP/ERP and occupied bandwidth.				

1.3. EUT Exercise Software

1.	Setup the EUT and Base Station (CMU200) as shown on 3.3.
2.	Turn on the power of all equipment.
3.	EUT run test program can reads and writes data into and from USB storage.

1.4. Configuration of Test System Details

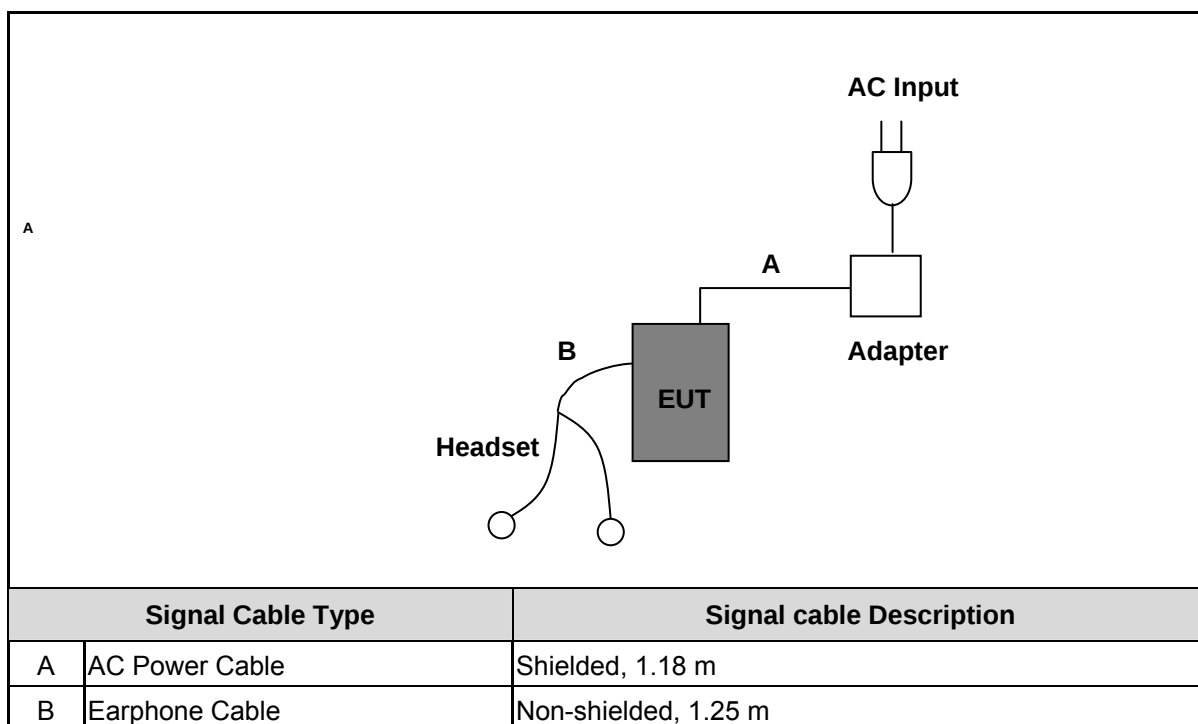

Devices Description				
Product	Manufacturer	Model No.	Serial No.	Power Cord
1.	--	--	--	--

1.5. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	25
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

1.6. Summary of Test Result

Description	FCC Rule	IC Rule	Limit	Result
Conducted Output Power	§2.1046	N/A	N/A	Pass
Effective Radiated Power	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	< 7 Watts for FCC (<6.3 Watts for IC)	Pass
Equivalent Isotropic Radiated Power	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	< 2 Watts	Pass
Occupied Bandwidth	§2.1049 §22.917(a) §24.238(a)	N/A	N/A	Pass
Band Edge Measurement	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1)RSS-133 (6.5.1)	< 43+10log ₁₀ (P[Watts])	Pass
Conducted Emission	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	< 43+10log ₁₀ (P[Watts])	Pass
Field Strength of Spurious Radiation	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	< 43+10log ₁₀ (P[Watts])	Pass
Frequency Stability for Temperature & Voltage	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	< 2.5 ppm	Pass

2 RF Output Power Test

2.1. Limit


N/A

2.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009
Test Site	ATL	TE02	TE02	N.C.R.

NOTE: N.C.R. = No Calibration Request.

2.3. Test Setup

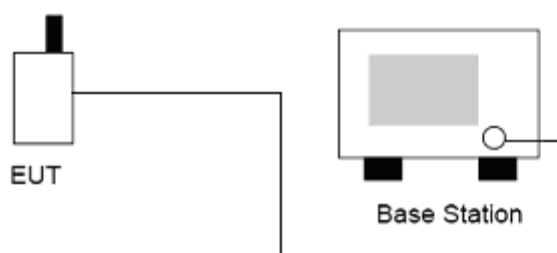

2.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

1. The transmitter output was connected to power meter and base station through power divider.
2. Set base station for EUT at GPRS/EGPRS: PCL=5 and GPRS/EGPRS 1900: PCL=0.
3. Set base station for EUT at WCDMA Band V and WCDMA Band II, power level was set to maximum.
4. Select lowest, middle, and highest channels for each band.

2.5. Uncertainty

The measurement uncertainty is defined as for RF output power measurement is 1.2 dB.

2.6. Test Result

Product	Smartphone		
Test Item	RF Output Power		
Date of Test	12/28/2009	Test Site	TE02

Bands	Frequency (MHz)	Conducted Power		Result
		(dBm)	(W)	
GSM 850	824.2	33.16	2.070	Pass
	836.4	33.17	2.075	Pass
	848.8	33.24	2.109	Pass

Bands	Frequency (MHz)	Conducted Power		Result
		(dBm)	(W)	
GSM 1900	1850.20	30.59	1.146	Pass
	1880.00	30.93	1.239	Pass
	1909.80	30.97	1.250	Pass

Bands	Frequency (MHz)	Conducted Power		Result
		(dBm)	(W)	
GPRS 850	824.2	33.17	2.075	Pass
	836.4	33.18	2.080	Pass
	848.8	33.24	2.109	Pass

Bands	Frequency (MHz)	Conducted Power		Result
		(dBm)	(W)	
GPRS 1900	1850.20	30.58	1.143	Pass
	1880.00	30.92	1.236	Pass
	1909.80	30.96	1.247	Pass

Bands	Frequency (MHz)	Conducted Power		Result
		(dBm)	(W)	
EGPRS 850	824.2	27.28	0.535	Pass
	836.4	27.24	0.530	Pass
	848.8	27.25	0.531	Pass

Bands	Frequency (MHz)	Conducted Power		Result
		(dBm)	(W)	
EGPRS 1900	1850.20	26.02	0.400	Pass
	1880.00	26.32	0.429	Pass
	1909.80	26.44	0.441	Pass

Note: The testing result was used peak detector.

3 Effective Radiated Power / Equivalent Isotropic Radiated Power Test

3.1. Limit

For FCC Part 22.913(a)(2): The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.


For FCC Part 24.232(b): The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

3.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/22/2008
Loop Dipole	ETS-Lindgren	3127-1880	00064239	02/05/2009
Loop Dipole	ETS-Lindgren	3127-836	00064352	02/19/2009
Sleeve Dipole	ETS-Lindgren	3126-1845	00083335	03/18/2009
Sleeve Dipole	ETS-Lindgren	3126-880	00052705	11/05/2009
Circularly Polarized Communication Antennas	EMCO	3102	00051714	NCR
Antenna Positioner Controller	EMCO	2090	00052447	NCR
MAPS Positioner	EMCO	2010/2015	NA	NCR
Pattern Measurement Software	ETS-Lindgren	EMQuest™ EMQ-100	NA	NCR
Desktop Computer with Windows XP	DELL	Dell Computers	NA	NCR
Anechoic Chamber	ETS-Lindgren	AMS 8500	102165	NCR

NOTE: N.C.R. = No Calibration Request.

3.3. Test Setup

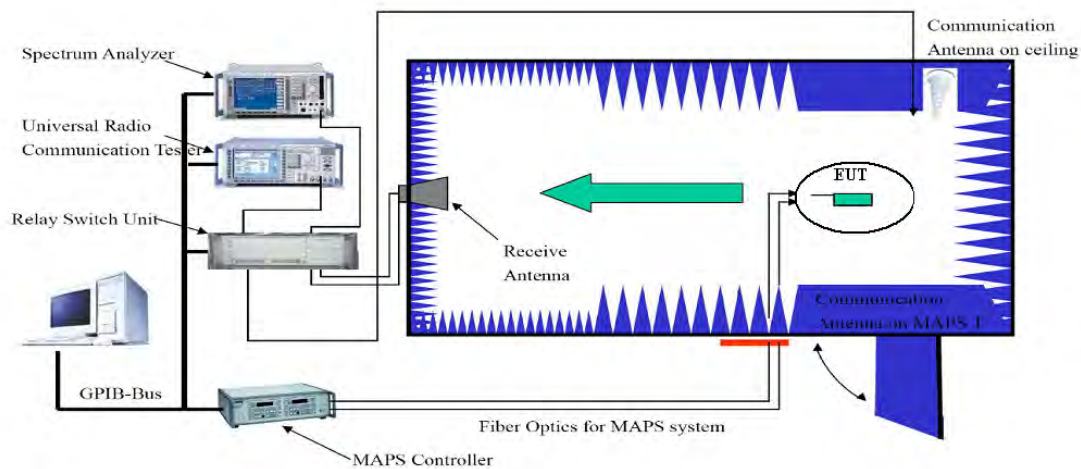

3.4. Test Procedure

The phone was tested in an anechoic chamber with a 3-axis position system that permits taking complete spherical scans of the EUT's 3-axis radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber. Tests were done for GPRS/EGPRS 850 three frequencies (824.2, 836.6 and 848.8 MHz) and GPRS/EGPRS 1900 three frequencies (1850.2, 1880.00, and 1909.80 MHz).

GSM measurements were made with the phone placed in a call using the CMU200 mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode.

The radiated power was measured using ETS-LINDGREN OTA Chamber in "Peak" mode. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data.

Each individual data point in a radiated power or sensitivity measurement is referred to as the effective isotropic radiated power or effective isotropic sensitivity. That is, the desired information is how the measured quantity relates to the same quantity from an isotropic radiator. Thus, the reference measurement must relate the power received or transmitted at the EUT test equipment (spectrum analyzer or communication tester) back to the power transmitted or received at a theoretical isotropic radiator. The total path loss then, is just the difference in dB between the power transmitted or received at the isotropic radiator and that seen at the test equipment (see follow Figure 1).

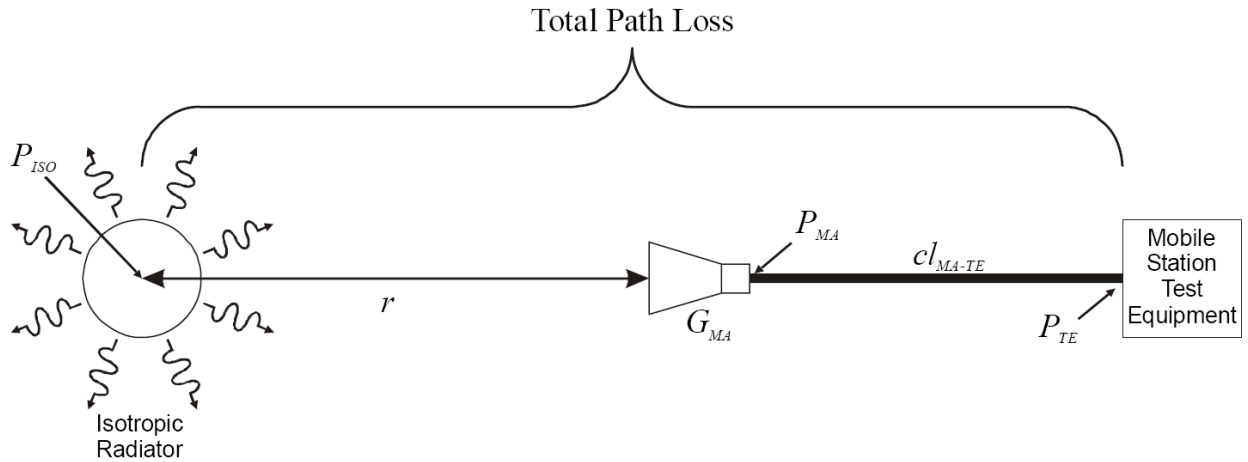


Figure 1. THEORETICAL CASE FOR DETERMINING PATH LOSS

In equation form, this becomes:

Equation 1

$$PL = P_{ISO} - P_{TE}$$

where PL is the total path loss, P_{ISO} is the power radiated by the theoretical isotropic radiator, and P_{TE} is the power received at the test equipment port. As can be seen in Figure 1, this quantity includes the range path loss due to the range length r , the gain of the measurement antenna, and any loss terms associated with the cabling, connections, amplifiers, splitters, etc. between the measurement antenna and the test equipment port.

Figure 2 shows a typical real world configuration for measuring the path loss. In this case, a reference antenna with known gain is used in place of the theoretical isotropic source. The path loss may then be determined from the power into the reference antenna by adding the gain of the reference antenna.

That is:

Equation 2

$$P_{ISO} = P_{RA} + G_{RA}$$

where P_{RA} is the power radiated by reference antenna, and G_{RA} is the gain of the reference antenna, so that:

Equation 3

$$PL = P_{RA} + G_{RA} - P_{TE}$$

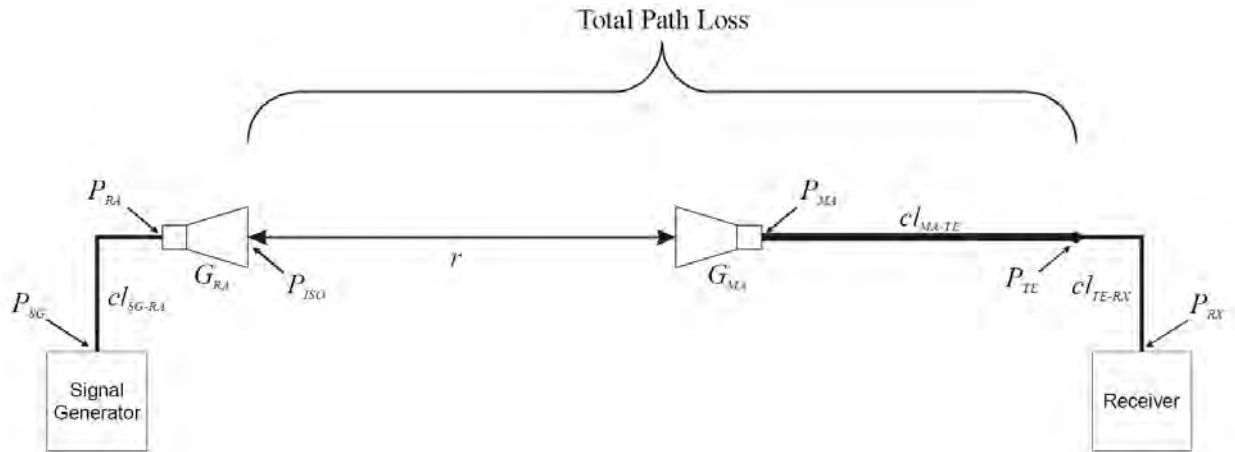


Figure 2. TYPICAL CONFIGURATION FOR MEASURING PATH LOSS

In order to determine P_{RA} , it is necessary to perform a cable reference measurement to remove the effects of the cable loss between signal generator and reference antenna, and between the test equipment port and the receiver. This establishes a reference point at the input to the reference antenna. Figure 3 illustrates the cable reference measurement configuration. Assuming the power level at the signal generator is fixed, it is easy to show that the difference between P_{RA} and P_{TE} in Figure 2 is given by:

Equation 4

$$P_{RA} - P_{TE} = P_{RX}' - P_{RX},$$

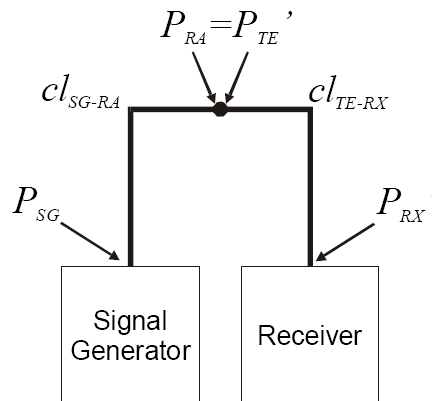


Figure 3. CABLE REFERENCE CALIBRATION CONFIGURATION

Where $P_{RX'}$ is the power measured at the receiver during the cable reference test, and P_{RX} is the power measured at the receiver during the range path loss measurement in Figure 2. Thus, the path loss is then just given by:

Equation 5

$$PL = G_{RA} + P_{RX'} - P_{RX}$$

$$EIRP = P_t + P_L$$

P_t = Often referred to as antenna output power

3.5. Uncertainty

The measurement uncertainty is defined as for Radiated Power measurement list below:

Band	Uncertainty
Cell	1.08 dB
PCS	1.42 dB
GPRS	1.44 dB

3.6. Test Result

Product	Smartphone		
Test Item	ERP/EIRP		
Date of Test	12/22/2009	Test Site	TC03

Bands	Frequency (MHz)	Read Level (dBm)	Correction factor (dBm)	ERP		Result
				(dBm)	(W)	
GSM 850	824.2	79.79	-49.50	30.29	1.068	Pass
	836.4	80.06	-49.70	30.36	1.087	Pass
	848.8	80.15	-49.70	30.45	1.108	Pass

Bands	Frequency (MHz)	Read Level (dBm)	Correction factor (dBm)	EIRP		Result
				(dBm)	(W)	
GSM 1900	1850.20	88.02	-55.40	32.62	1.828	Pass
	1880.00	88.47	-55.60	32.87	1.936	Pass
	1909.80	88.65	-55.70	32.95	1.972	Pass

Bands	Frequency (MHz)	Read Level (dBm)	Correction factor (dBm)	ERP		Result
				(dBm)	(W)	
EGPRS 850	824.2	74.22	-49.50	24.72	0.296	Pass
	836.4	73.98	-49.70	24.28	0.268	Pass
	848.8	74.41	-49.70	24.71	0.296	Pass

Bands	Frequency (MHz)	Read Level (dBm)	Correction factor (dBm)	EIRP		Result
				(dBm)	(W)	
EGPRS 1900	1850.20	83.43	-55.40	28.03	0.635	Pass
	1880.00	84.00	-55.60	28.40	0.692	Pass
	1909.80	84.22	-55.70	28.52	0.711	Pass

Note: 1. ERP/EIRP = Read Level + Correction factor.

2. For WCDMA signals, a peak detector is used with RBW = VBW = 5MHz.

3. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW= 1 MHz.

4 Occupied Bandwidth Test

4.1. Limit

The Occupied Bandwidth Limit:

N/A.


The Band Edge Limit:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

4.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009
Attenuator	RADIALL	R41572000	0603033073	N.C.R.
Power divider	Agilent	87302C	3239A00760	N.C.R.
Test Site	ATL	TE02	TE02	N.C.R.

4.3. Setup

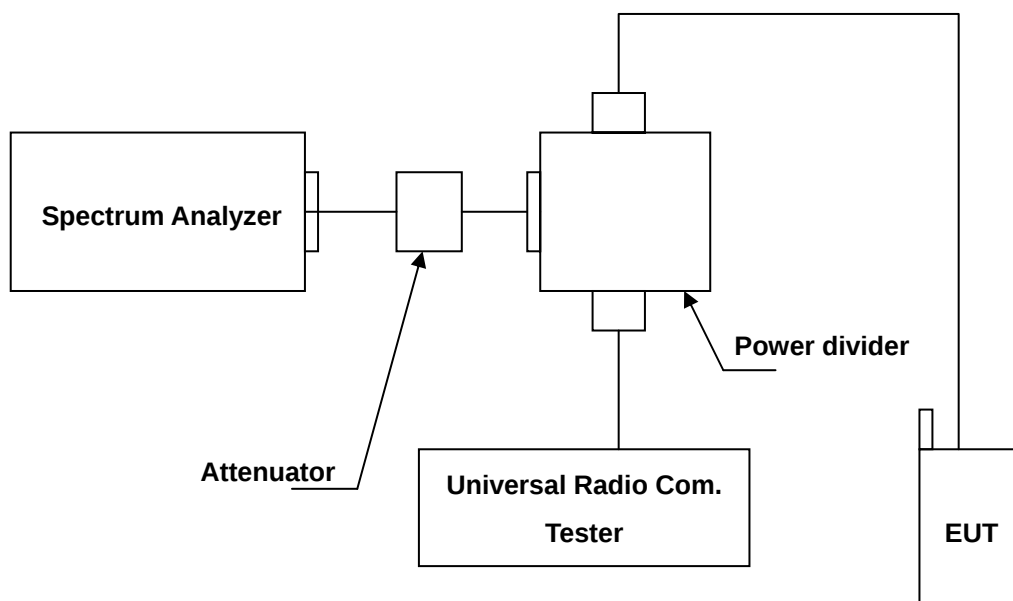

4.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers was measured.
3. The band edge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.
4. The band edge setting:
 - a. RB=3 kHz; VB=10 kHz for GPRS/EGPRS 850 and GPRS/EGPRS 1900.
 - b. RB=47 kHz; VB=150 kHz for WCDMA Band V and WCDMA Band II.

4.5. Uncertainty

The measurement uncertainty is defined as $\pm 10\text{Hz}$

4.6. Test Result

99% Occupied Bandwidth

Product	Smartphone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: GSM850 Link		
Date of Test	12/22/2009	Test Site	TE02

Channel No.	Frequency (MHz)	99 % Bandwidth (kHz)	Note
128	824.2	242.3256	RBW:3KHz , VBW:10KHz
190	836.4	242.1036	RBW:3KHz , VBW:10KHz
251	848.8	244.9879	RBW:3KHz , VBW:10KHz

Figure Channel 128

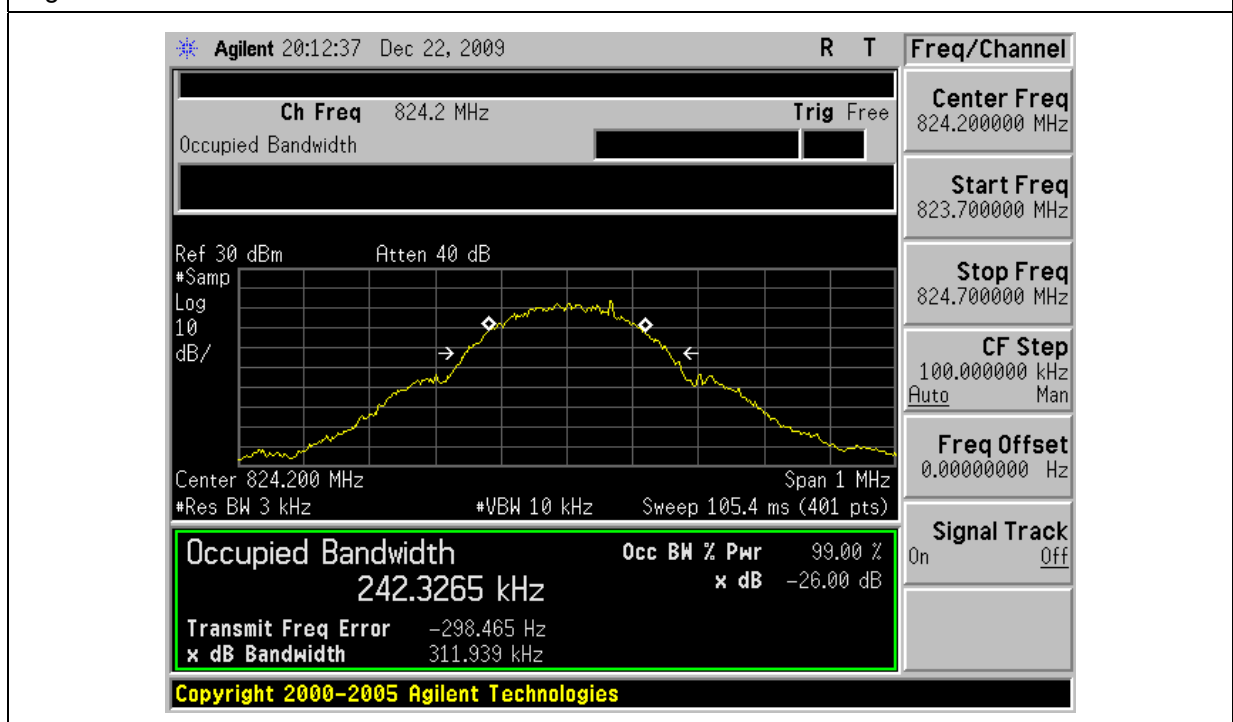


Figure Channel 190


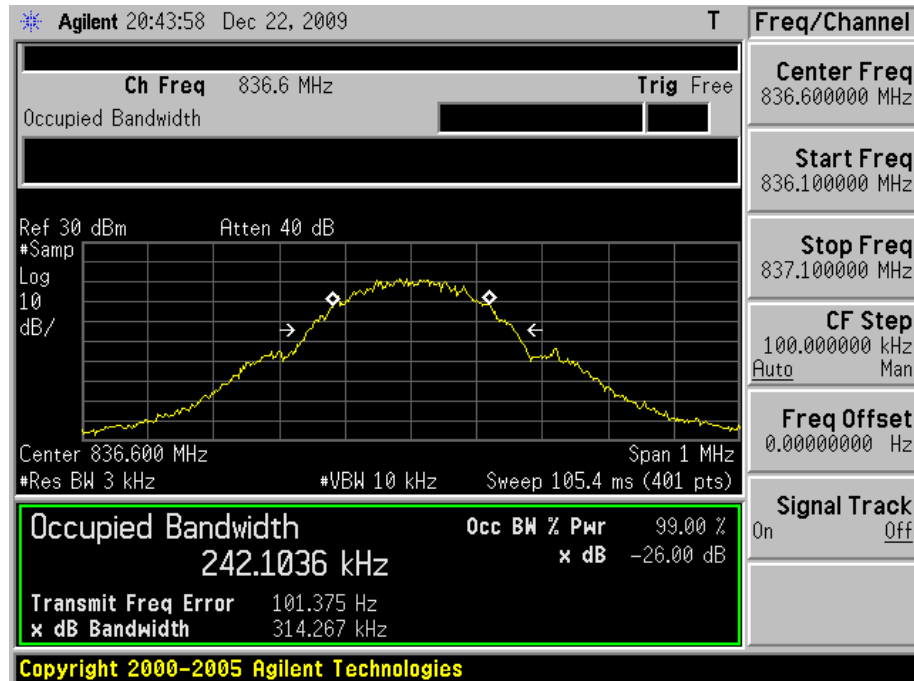


Figure Channel 251

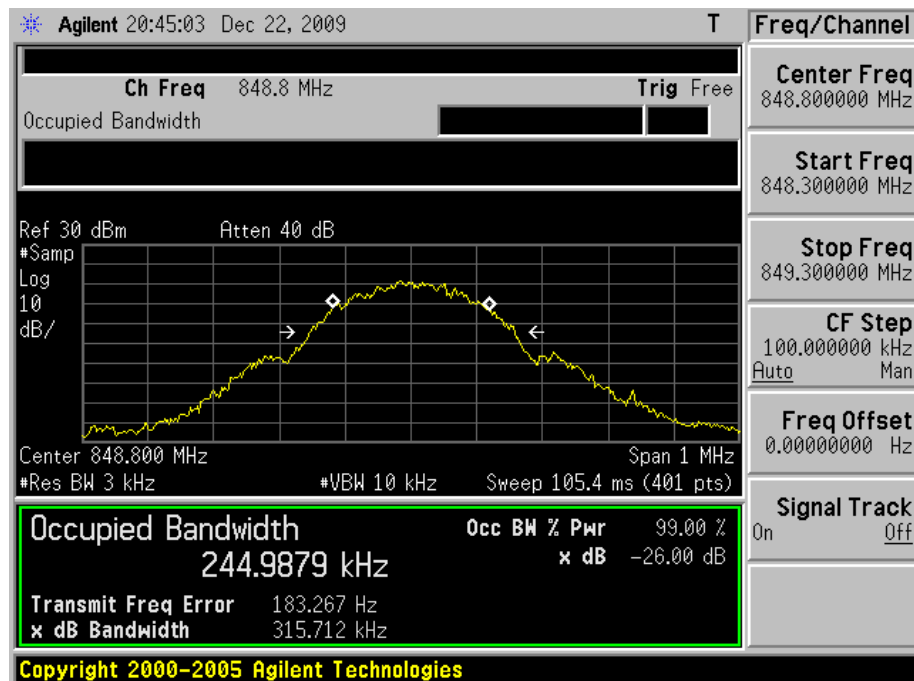

Product	Smartphone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 2: GSM1900 Link		
Date of Test	12/22/2009	Test Site	TE02

Channel No.	Frequency (MHz)	99 % Bandwidth (kHz)	Note
512	1850.20	247.1698	RBW:3KHz , VBW:10KHz
661	1880.00	244.1308	RBW:3KHz , VBW:10KHz
810	1909.80	244.2286	RBW:3KHz , VBW:10KHz

Figure Channel 512

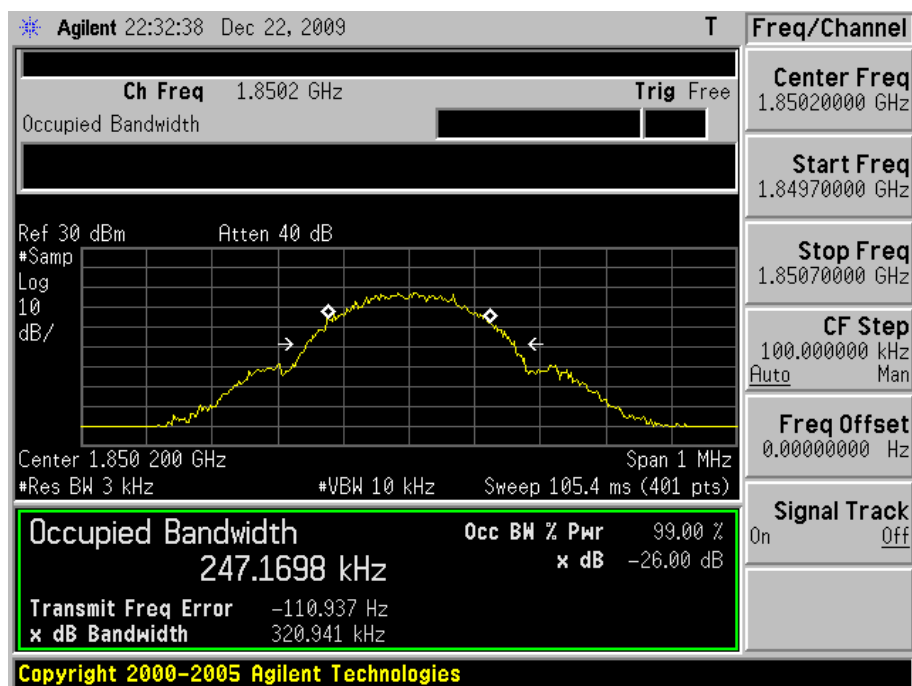


Figure Channel 661


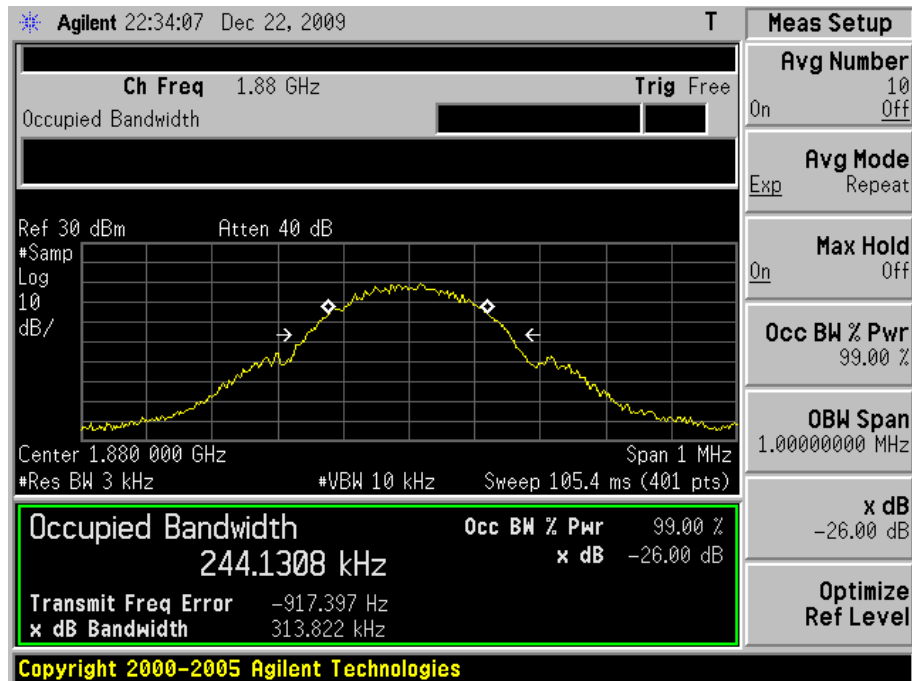


Figure Channel 810

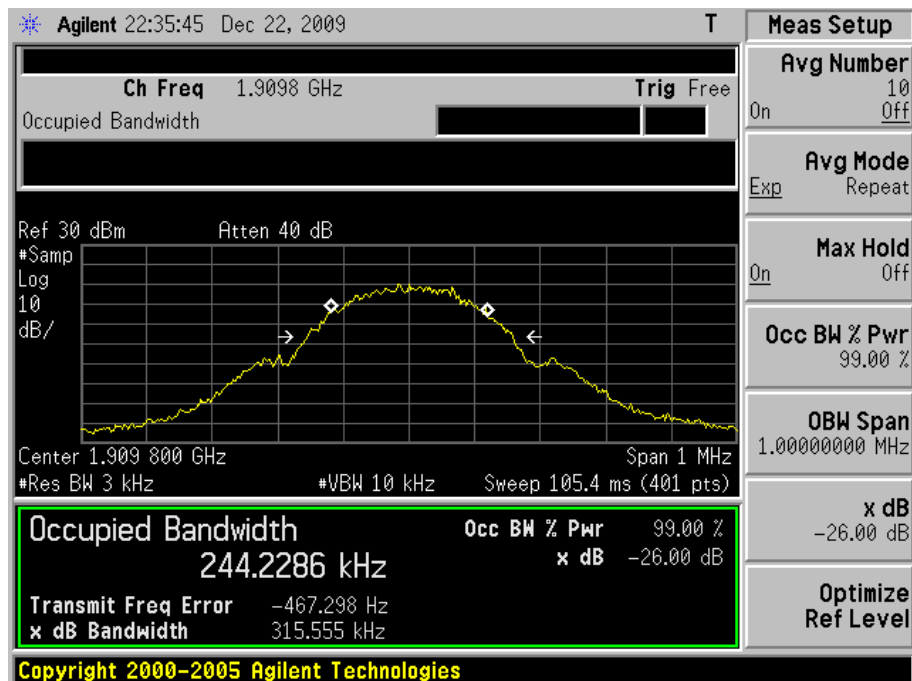

Product	Smartphone		
Test Item	Occupied Bandwidth(EDGE)		
Test Mode	Mode 3: GSM850 Link		
Date of Test	12/22/2009	Test Site	TE02

Channel No.	Frequency (MHz)	99 % Bandwidth (kHz)	Note
128	824.2	243.2107	RBW:3KHz , VBW:10KHz
190	836.4	243.4108	RBW:3KHz , VBW:10KHz
251	848.8	245.2672	RBW:3KHz , VBW:10KHz

Figure Channel 128

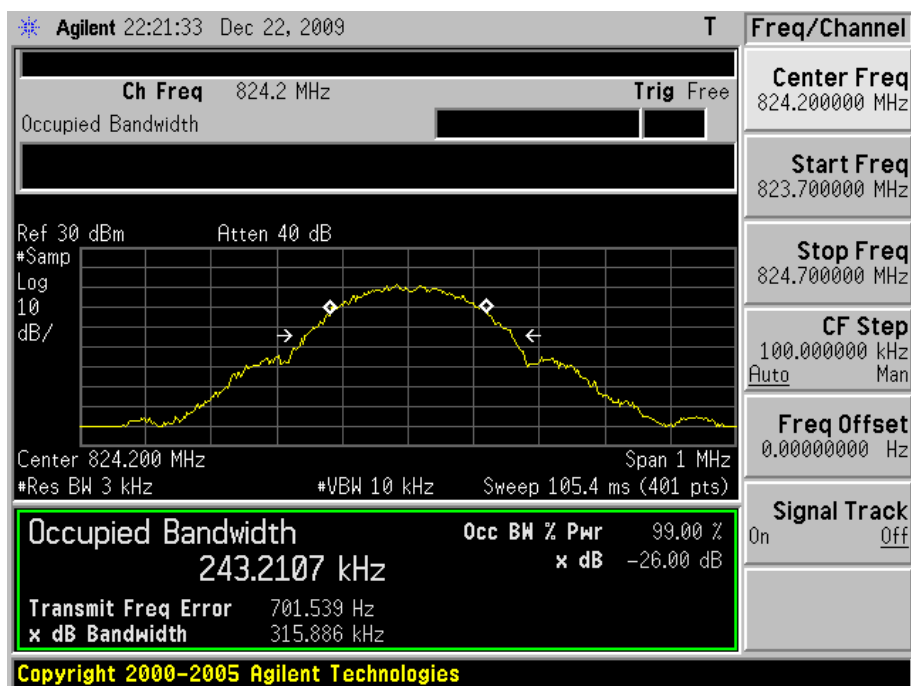


Figure Channel 190


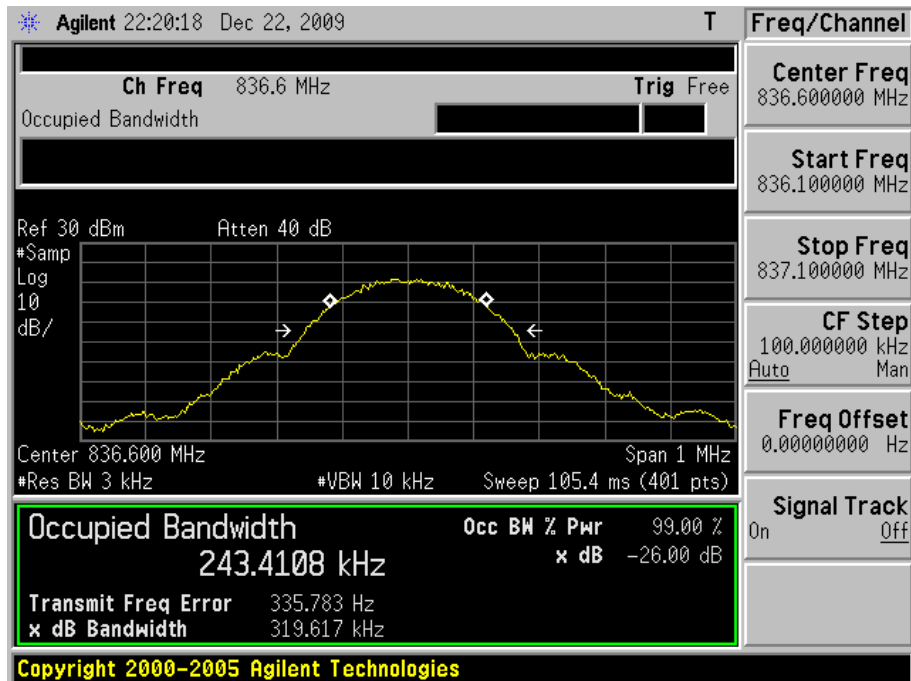


Figure Channel 251

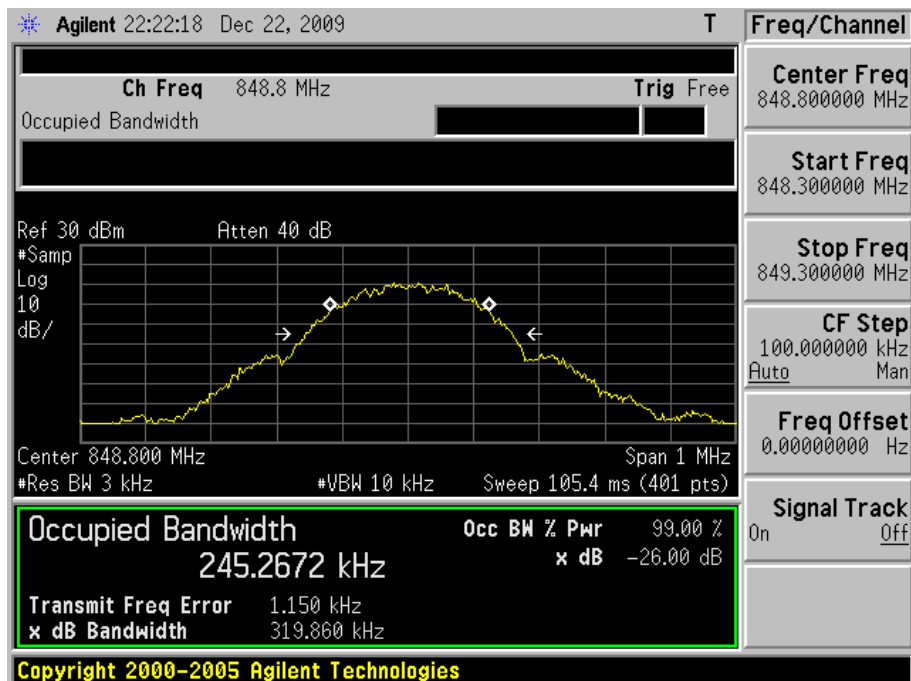

Product	Smartphone		
Test Item	Occupied Bandwidth(EDGE)		
Test Mode	Mode 4: PCS1900 Link		
Date of Test	12/22/2009	Test Site	TE02

Channel No.	Frequency (MHz)	99 % Bandwidth (kHz)	Note
512	1850.20	245.0638	RBW:3KHz , VBW:10KHz
661	1880.00	241.5425	RBW:3KHz , VBW:10KHz
810	1909.80	244.5241	RBW:3KHz , VBW:10KHz

Figure Channel 512

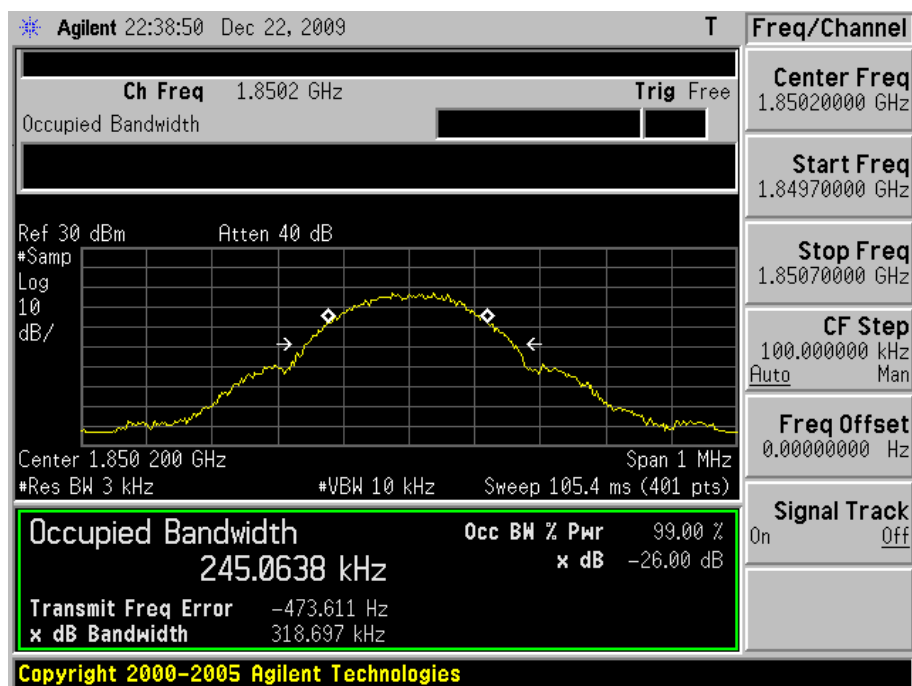


Figure Channel 661


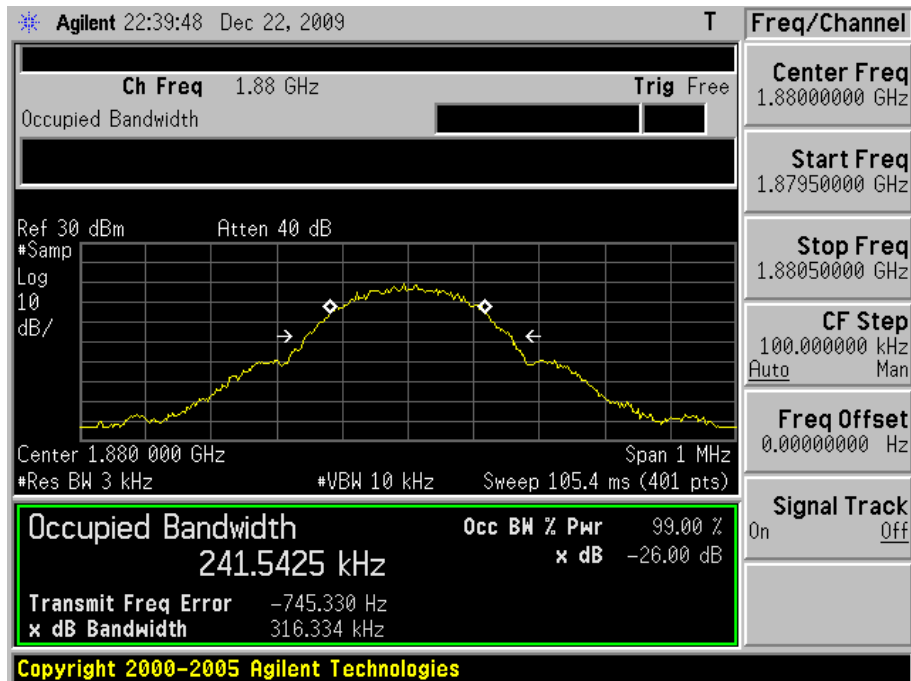


Figure Channel 810

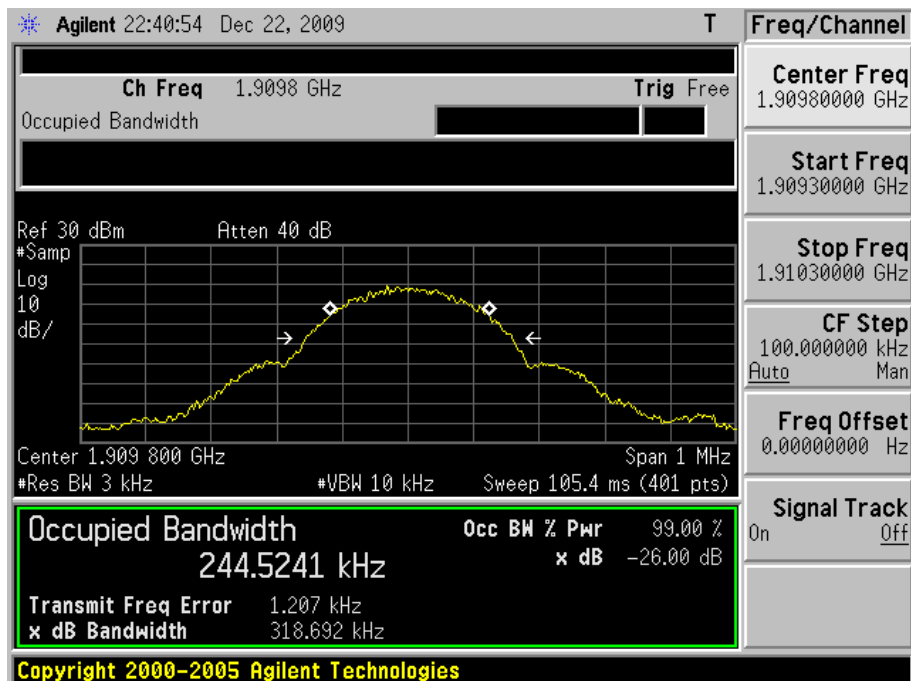


Band Edge


Product	Smartphone		
Test Item	Band Edge		
Test Mode	Mode 1: GSM850 Link		
Date of Test	12/22/2009	Test Site	TE02

Band	Channel	Frequency (MHz)	Band Edge (dBm)	Limit (dBm)	Result
Lower	128	824.0000	-13.83	-13	Pass
Higher	251	849.0000	-14.27	-13	Pass

Lower Band

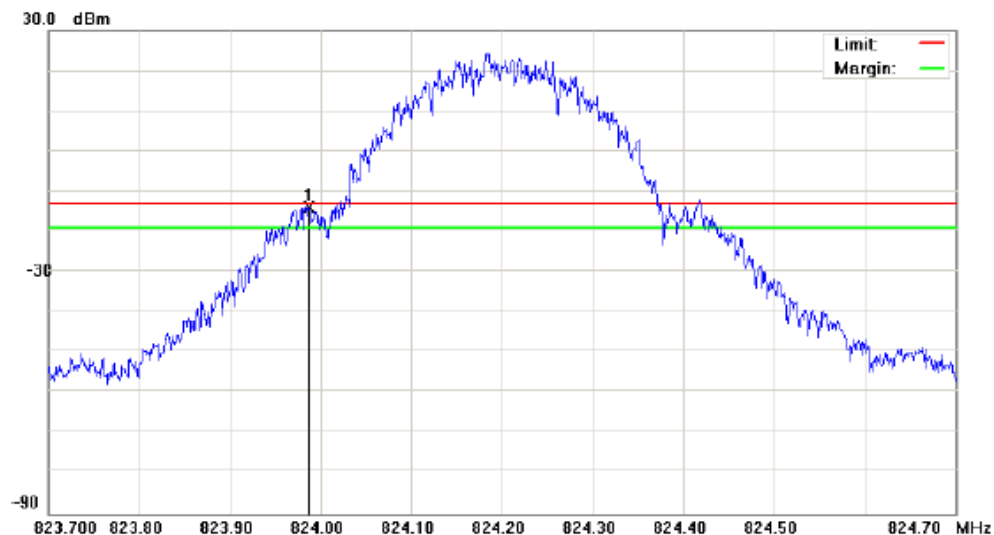


Higher Band

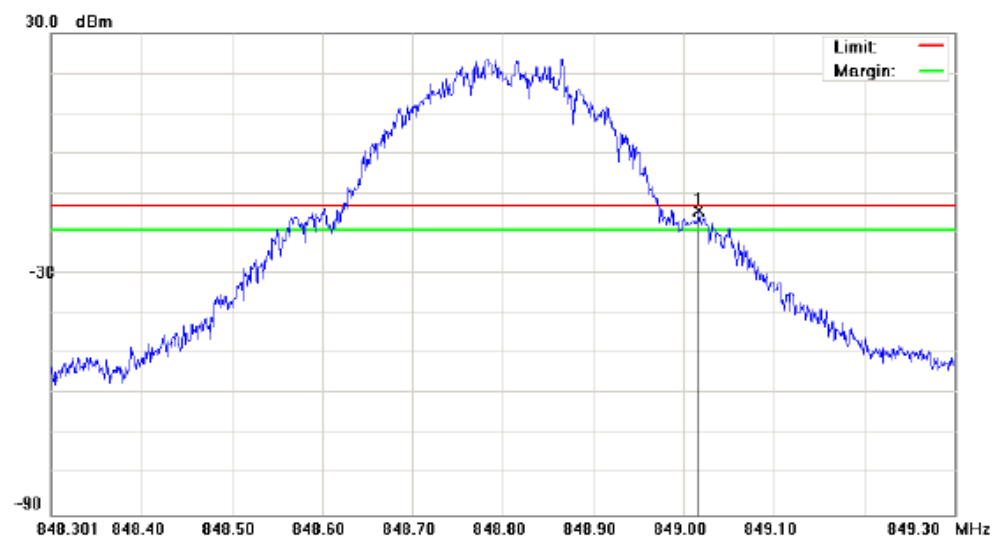


Product	Smartphone		
Test Item	Band Edge		
Test Mode	Mode 2: GSM1900 Link		
Date of Test	12/22/2009	Test Site	TE02

Band	Channel	Frequency (MHz)	Band Edge (dBm)	Limit (dBm)	Result
Lower	512	1850.000	-14.46	-13	Pass
Higher	810	1910.000	-13.98	-13	Pass

Lower Band

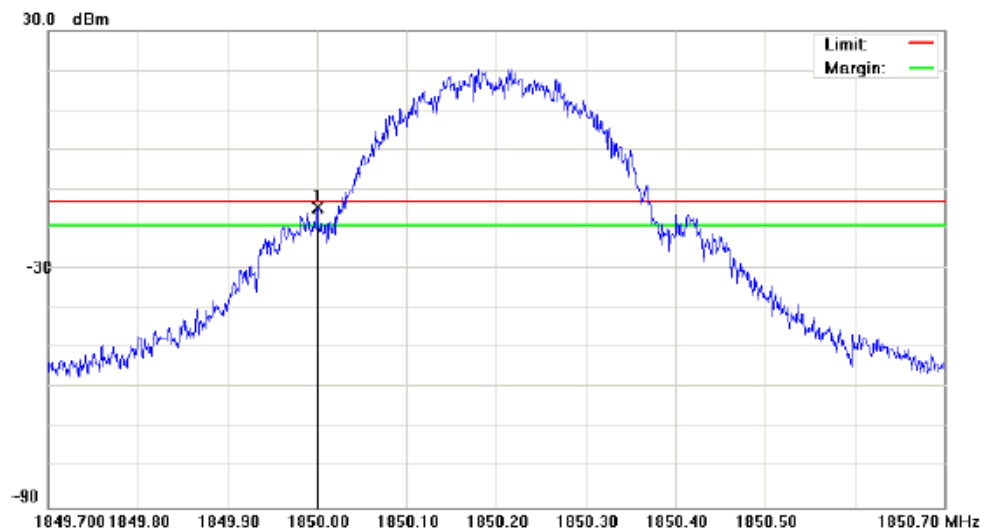

Higher Band

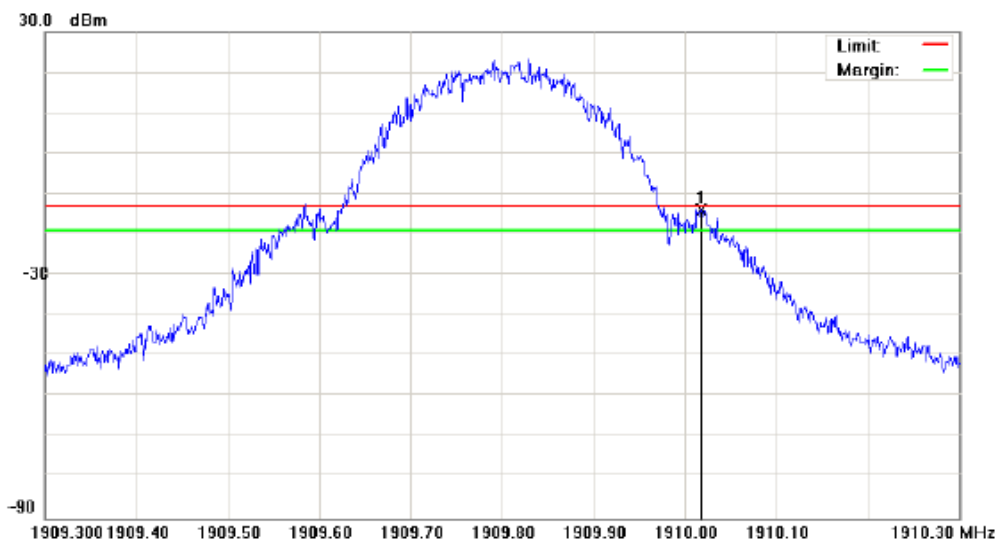

5 Conducted Emission Test

5.1. Limit


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

5.2. Test Instruments


Describe	Manufacturer	Model No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009
Attenuator	RADIALL	R41572000	0603033073	N.C.R.
Power divider	Agilent	87302C	3239A00760	N.C.R.
Test Site	ATL	TE02	TE02	N.C.R.

5.3. Setup

Below 2.8GHz

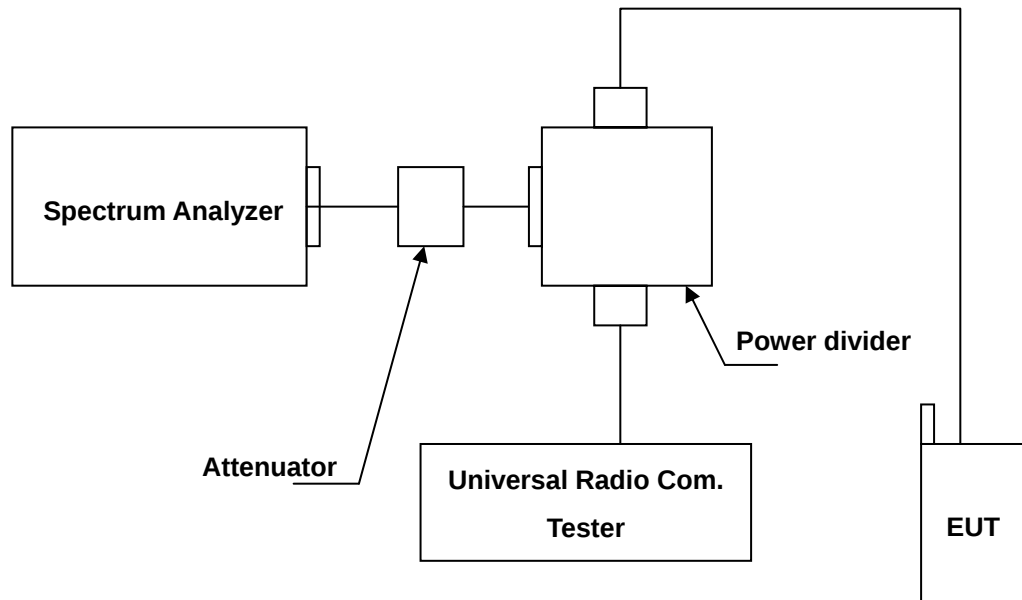

Above 2.8GHz

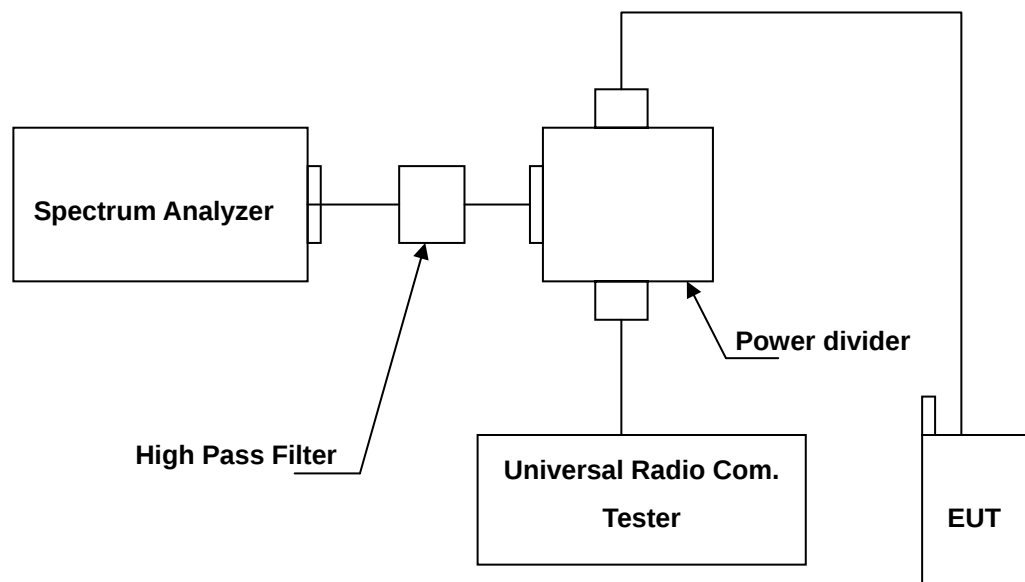

5.4. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.
4. Test setting at GPRS/EGPRS 850 RB>100 kHz, VB>100 kHz; GPRS/EGPRS 1900 RB>1MHz, VB>1MHz.

5.5. Uncertainty

The measurement uncertainty is evaluated as ± 2.24 dB.

5.6. Test Result

Product	Smartphone		
Test Item	Conducted Emission		
Mode	Mode 1: GSM850 Link Mode 2: GSM1900 Link		
Date of Test	11/22/2009	Test Site	TE02


File :CH128

Data :#1

Date: 2009/12/22

Time: PM 02:49:22

10.0 dBm

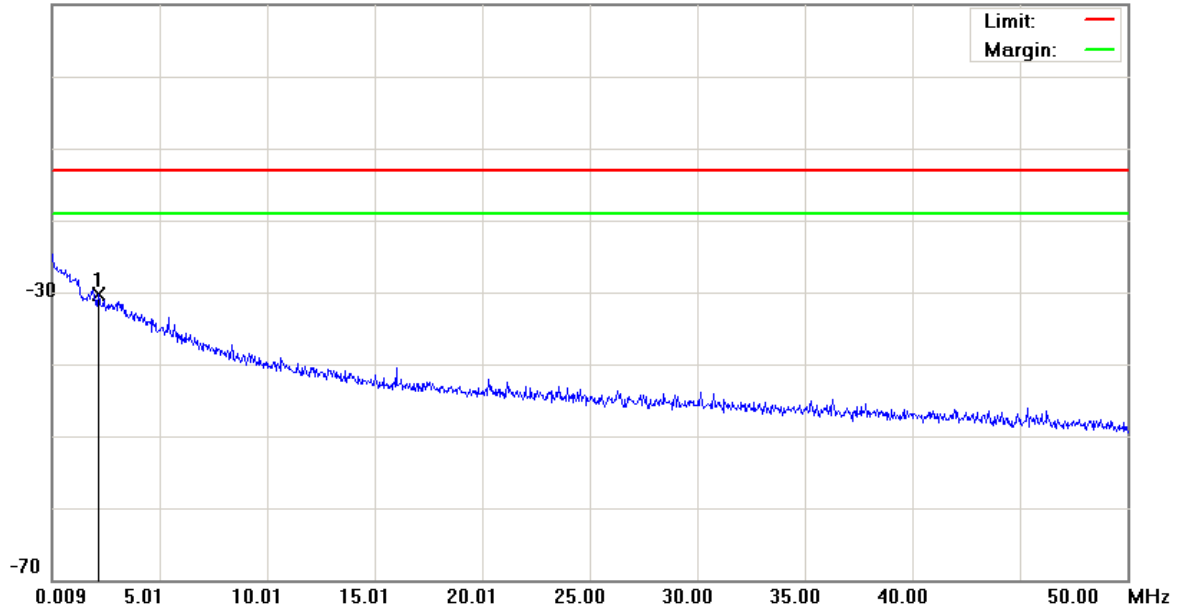

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH128(824.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2.1585	-61.70	31.41	-30.29	-13.00	-17.29	peak		

*:Maximum data x:Over limit !:over margin


File :CH128

Data :#2

Date: 2009/12/22

Time: PM 02:49:46

20.0 dBm

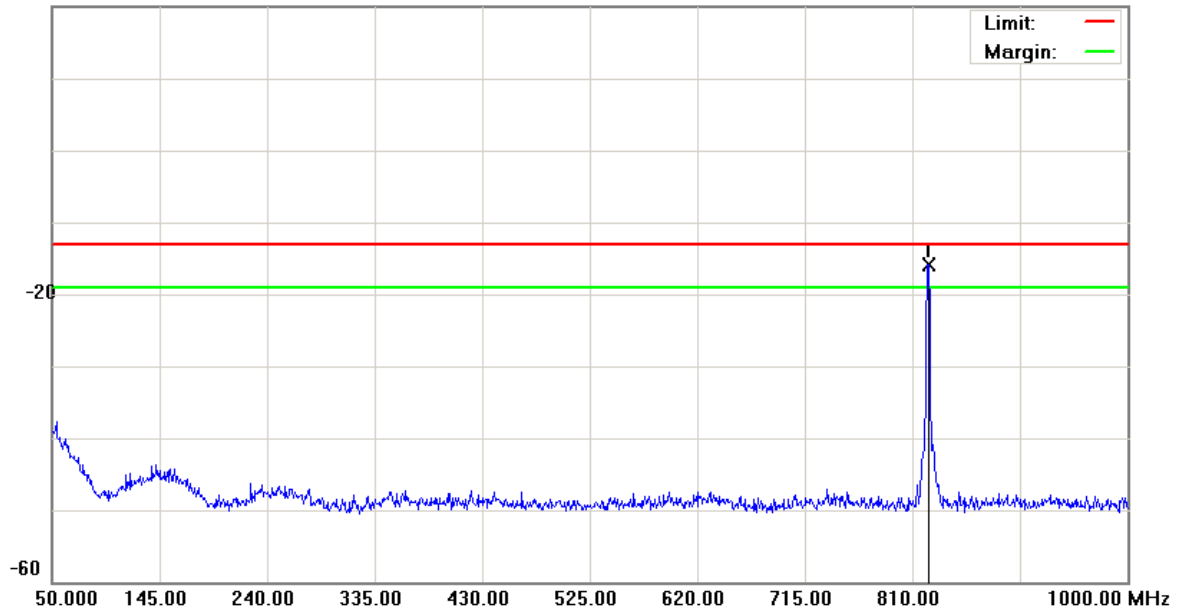

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH128(824.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	823.7750	-19.75	3.83	-15.92	-13.00	-2.92	peak		TX

*:Maximum data x:Over limit !:over margin


File :CH128

Data :#3

Date: 2009/12/22

Time: PM 04:07:24

20.0 dBm

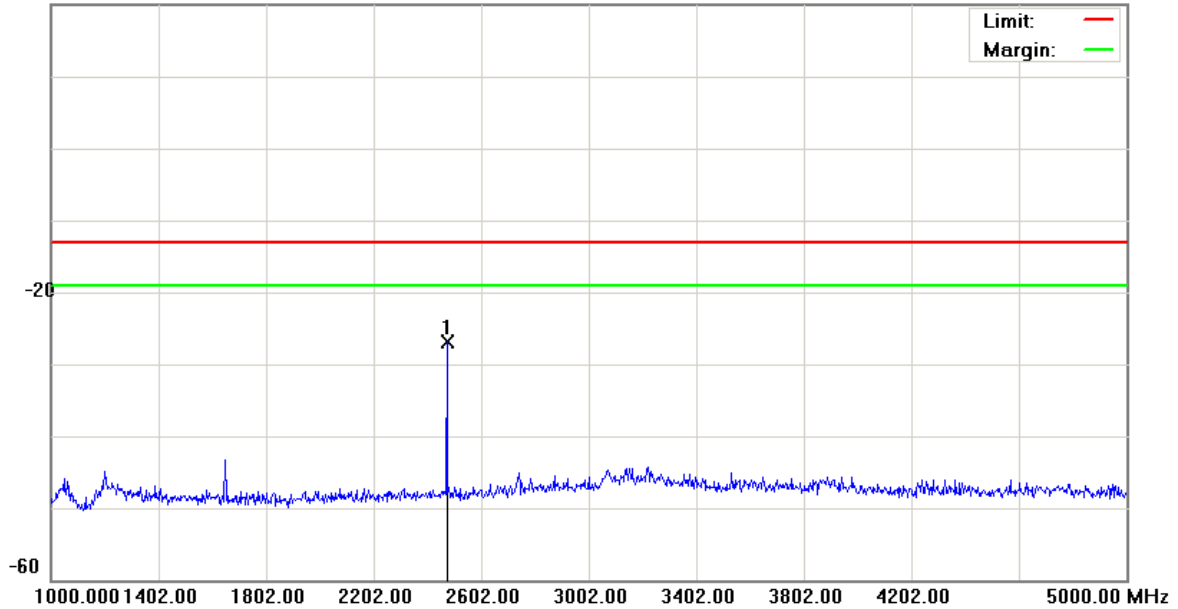

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH128(824.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2472.000	-31.39	4.45	-26.94	-13.00	-13.94	peak		

*:Maximum data x:Over limit !:over margin


File :CH128

Data :#4

Date: 2009/12/22

Time: PM 04:07:48

20.0 dBm

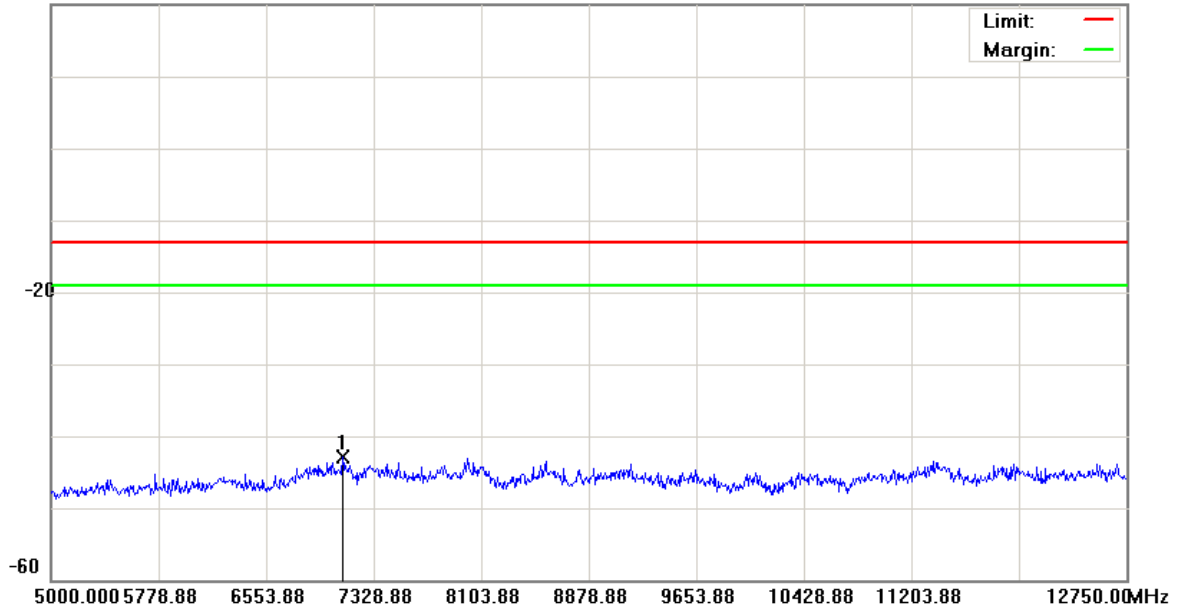

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH128(824.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	7100.250	-48.07	5.09	-42.98	-13.00	-29.98	peak		

*:Maximum data x:Over limit !:over margin


File :CH190

Data :#1

Date: 2009/12/22

Time: PM 02:47:14

10.0 dBm

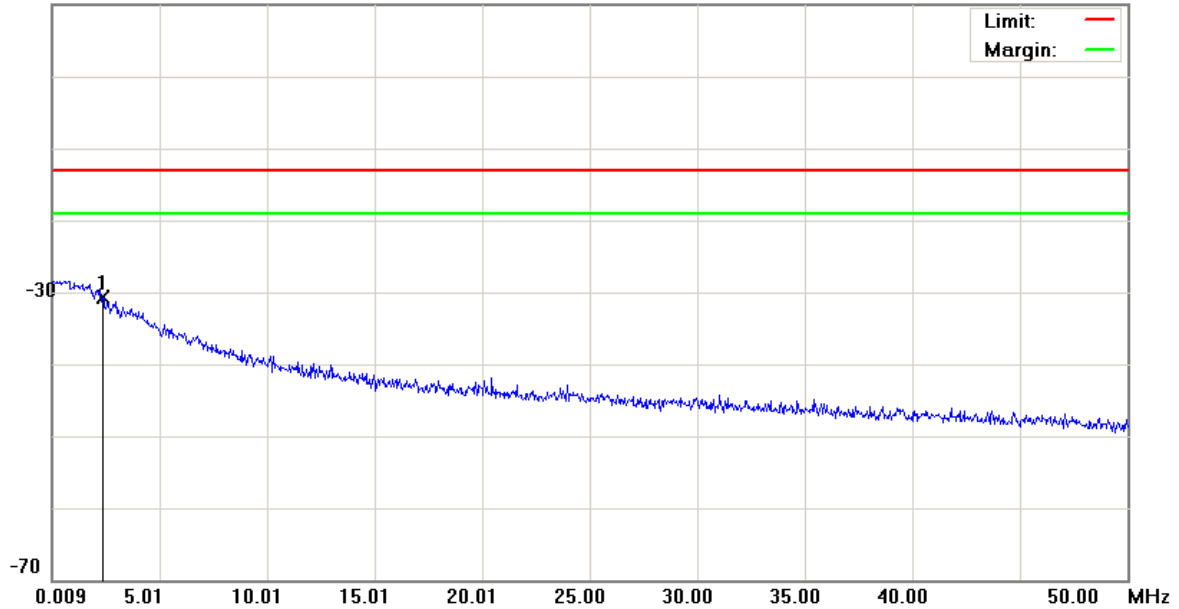

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH190(836.6MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2.3586	-61.52	30.92	-30.60	-13.00	-17.60	peak		

*:Maximum data x:Over limit !:over margin


File :CH190

Data :#2

Date: 2009/12/22

Time: PM 02:47:38

20.0 dBm

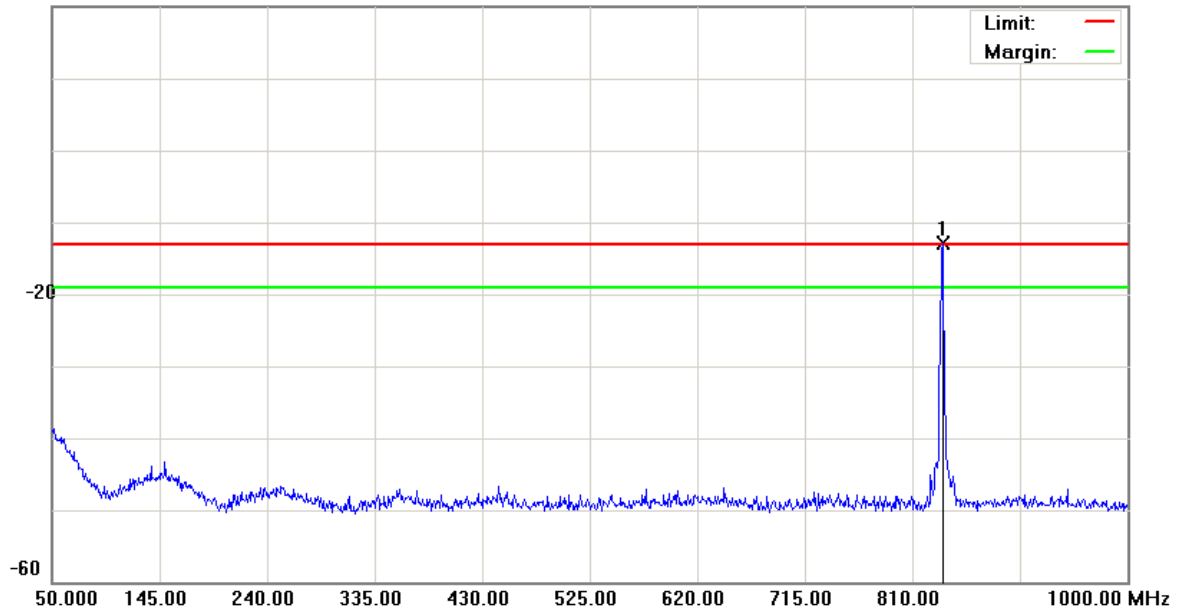

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH190(836.6MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	836.6000	-16.93	3.96	-12.97	-13.00	0.03	peak		TX

*:Maximum data x:Over limit !:over margin


File :CH190

Data :#3

Date: 2009/12/22

Time: PM 04:08:35

20.0 dBm

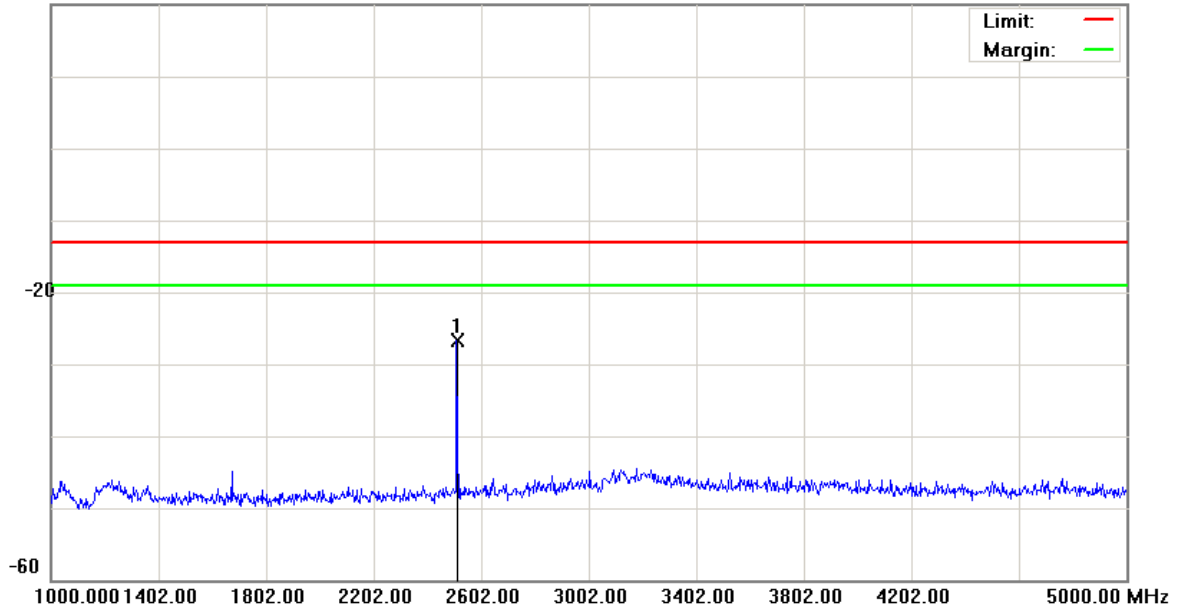

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH190(836.6MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2510.000	-31.04	4.36	-26.68	-13.00	-13.68	peak		

*:Maximum data x:Over limit !:over margin


File :CH190

Data :#4

Date: 2009/12/22

Time: PM 04:08:58

20.0 dBm

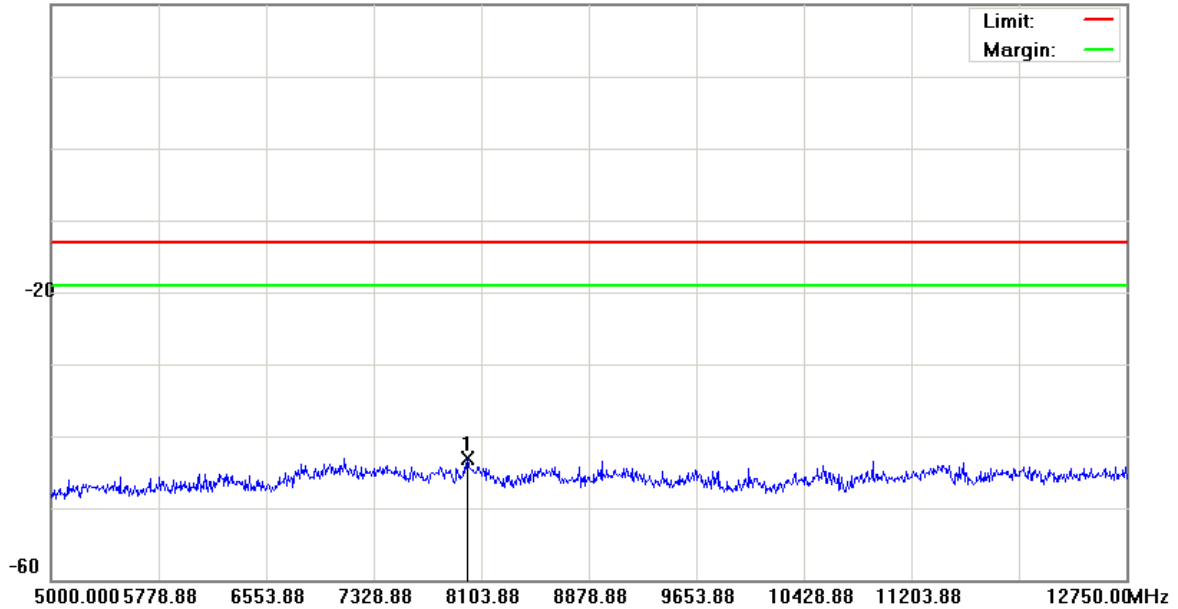

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH190(836.6MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	7999.250	-48.66	5.57	-43.09	-13.00	-30.09	peak		

*:Maximum data x:Over limit !:over margin


File :CH251

Data :#1

Date: 2009/12/22

Time: PM 02:44:15

10.0 dBm

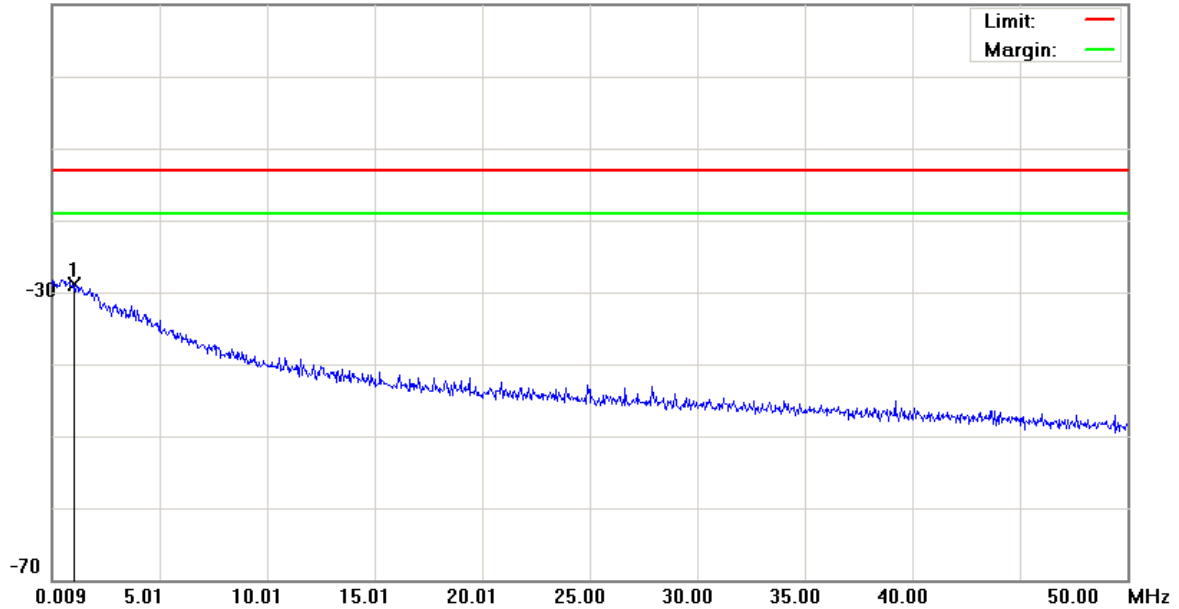

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH251(848.8MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1.0087	-60.97	31.98	-28.99	-13.00	-15.99	peak		

*:Maximum data x:Over limit !:over margin


File :CH251

Data :#2

Date: 2009/12/22

Time: PM 02:44:40

20.0 dBm

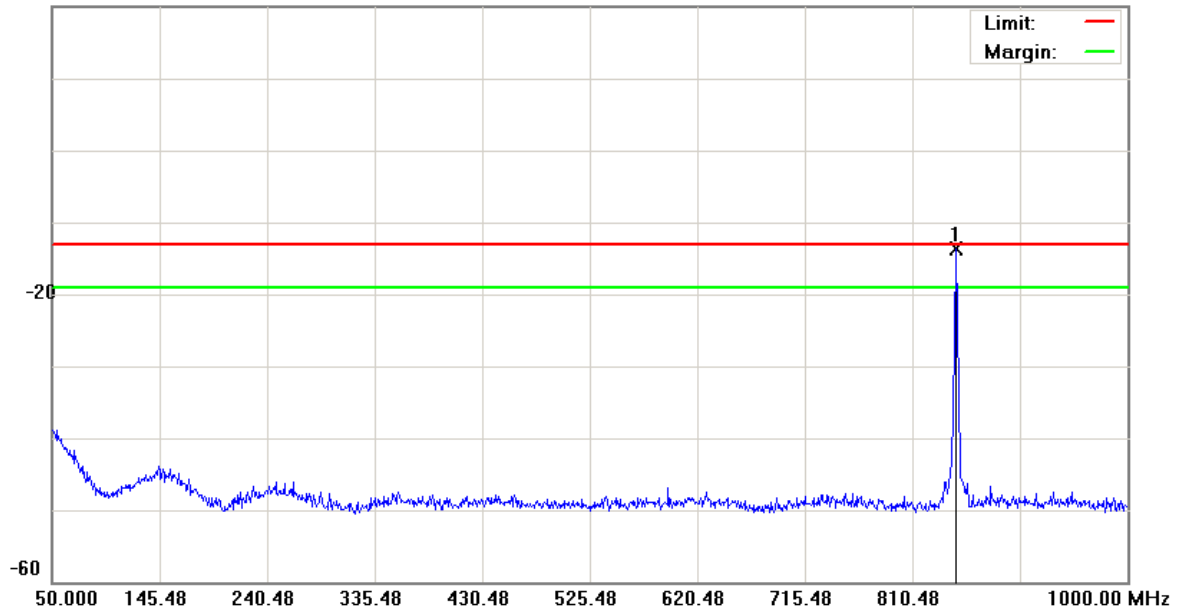

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH251(848.8MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	848.9500	-17.60	3.98	-13.62	-13.00	-0.62	peak		TX

*:Maximum data x:Over limit !:over margin


File :CH251

Data :#3

Date: 2009/12/22

Time: PM 04:09:55

20.0 dBm

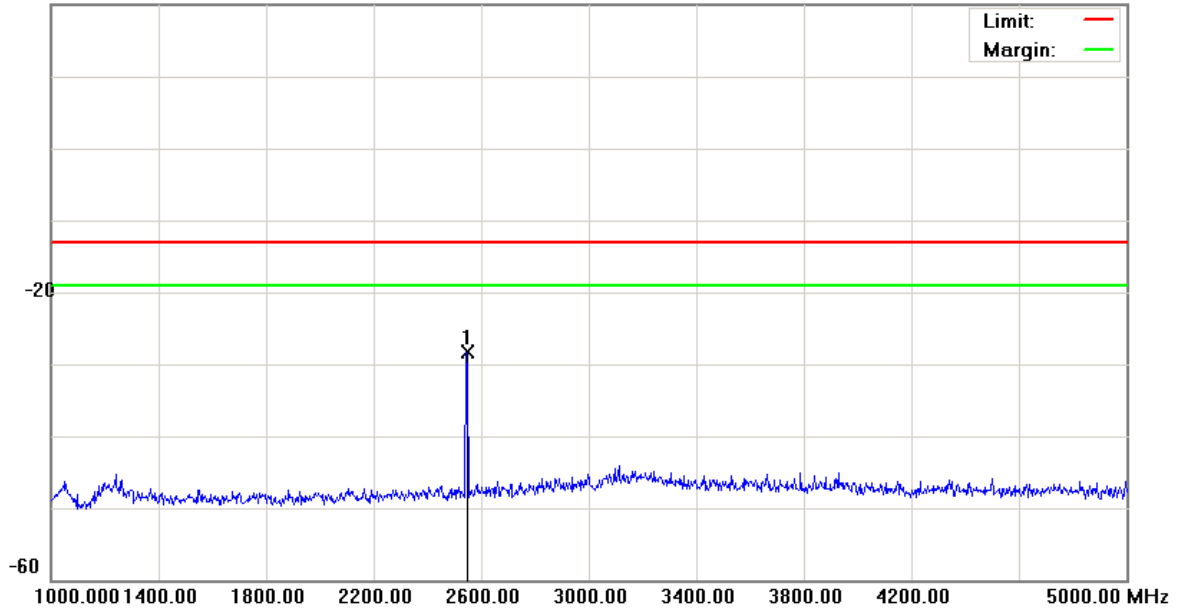

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH251(848.8MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2546.000	-32.77	4.45	-28.32	-13.00	-15.32	peak		

*:Maximum data x:Over limit !:over margin


File :CH251

Data :#4

Date: 2009/12/22

Time: PM 04:10:18

20.0 dBm

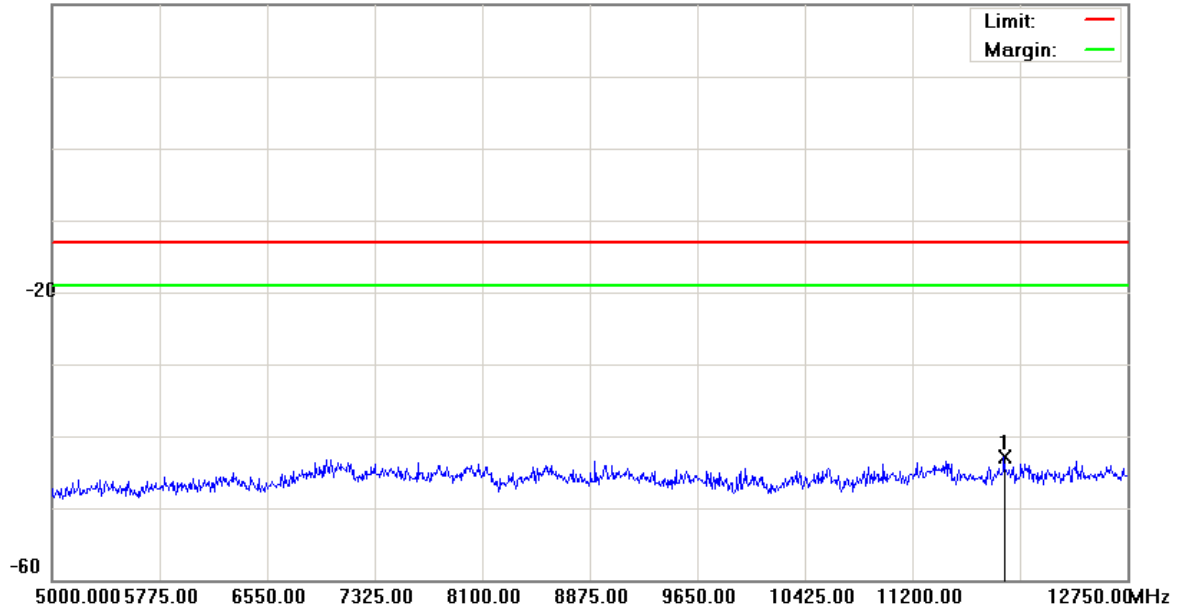

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: GSM850

Note: CH251(848.8MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	11862.625	-48.55	5.63	-42.92	-13.00	-29.92	peak		

*:Maximum data x:Over limit !:over margin


File :CH512

Data :#1

Date: 2009/12/22

Time: PM 03:00:55

10.0 dBm

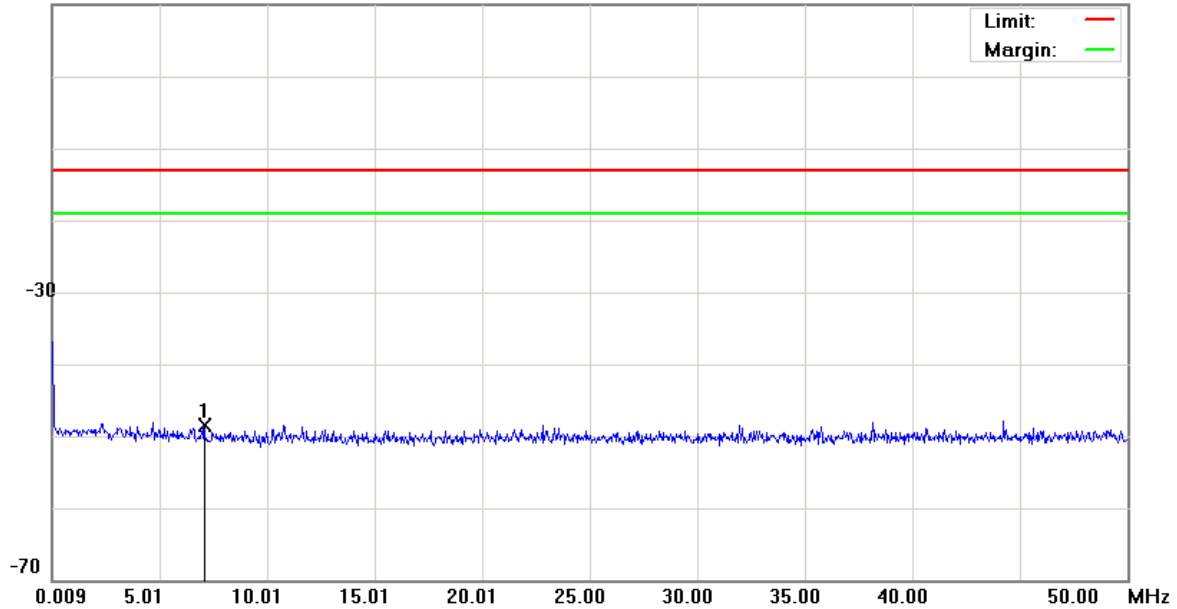

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH512(1850.2MHz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree
1	*	7.0826	-61.69	13.27	-48.42	-13.00	-35.42	peak		Comment

*:Maximum data x:Over limit !:over margin


File :CH512

Data :#2

Date: 2009/12/22

Time: PM 03:01:19

20.0 dBm

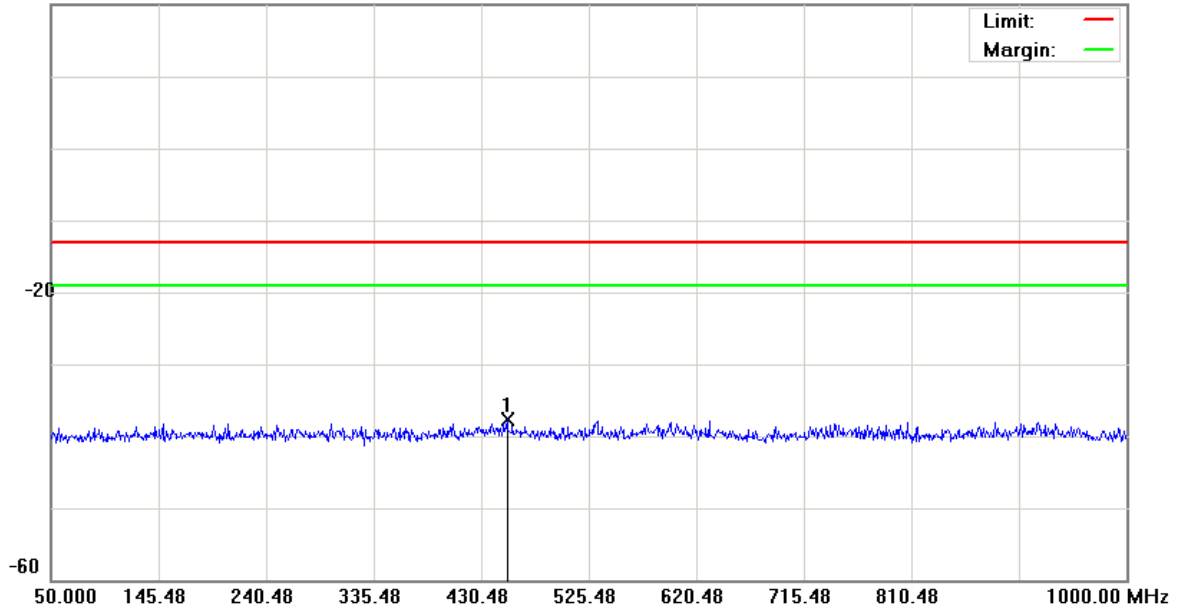

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH512(1850.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	453.2750	-50.93	13.22	-37.71	-13.00	-24.71	peak		

*:Maximum data x:Over limit !:over margin


File :CH512

Data :#3

Date: 2009/12/22

Time: PM 03:04:28

20.0 dBm

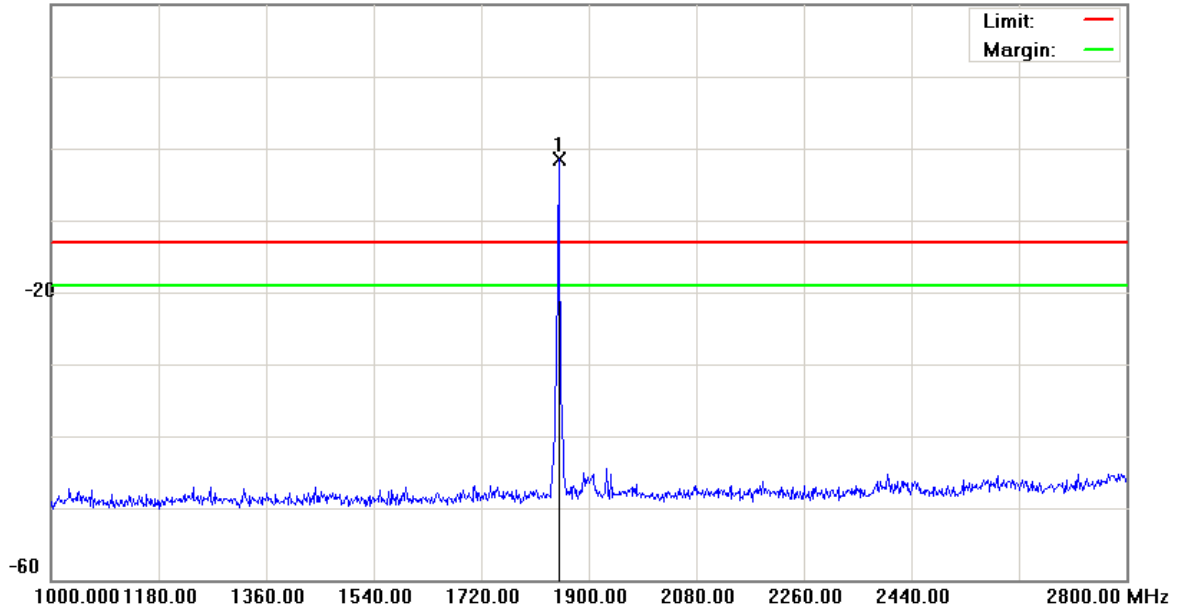

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH512(1850.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1850.500	-5.70	4.26	-1.44	-13.00	11.56	peak		TX

*:Maximum data x:Over limit !:over margin


File :CH512

Data :#4

Date: 2009/12/22

Time: PM 04:00:05

20.0 dBm

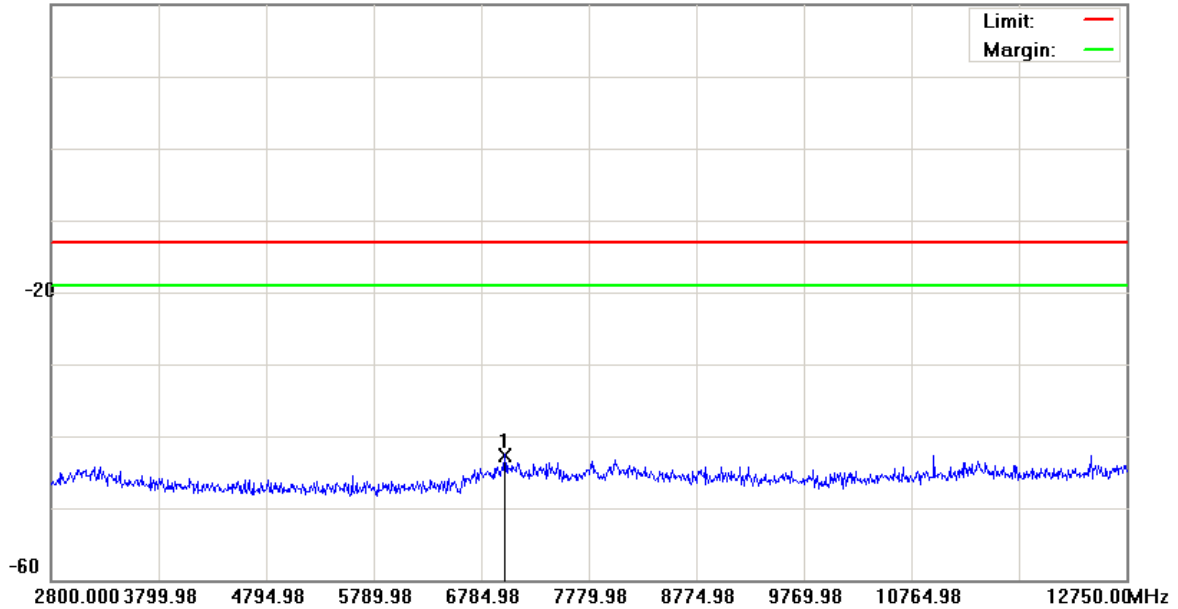

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH512(1850.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	6998.900	-47.90	5.30	-42.60	-13.00	-29.60	peak		

*:Maximum data x:Over limit !:over margin


File :CH512

Data :#5

Date: 2009/12/22

Time: PM 04:00:29

20.0 dBm

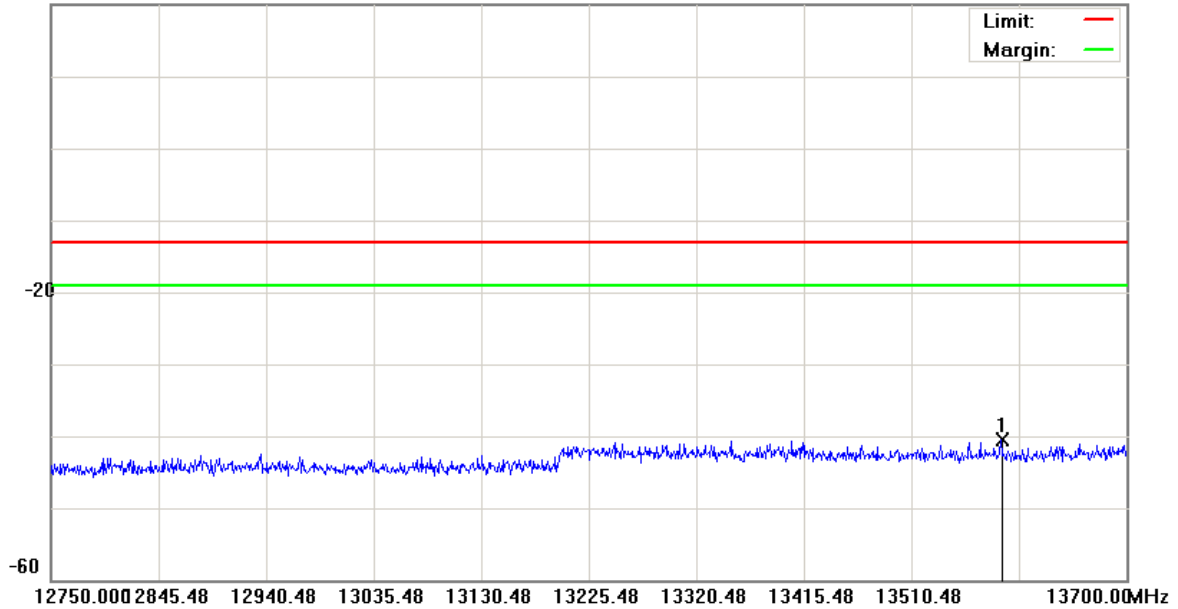

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH810(1909.8MHz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	13589.325	-46.15	5.61	-40.54	-13.00	-27.54	peak		

*:Maximum data x:Over limit !:over margin


File :CH661

Data :#1

Date: 2009/12/22

Time: PM 02:58:28

10.0 dBm

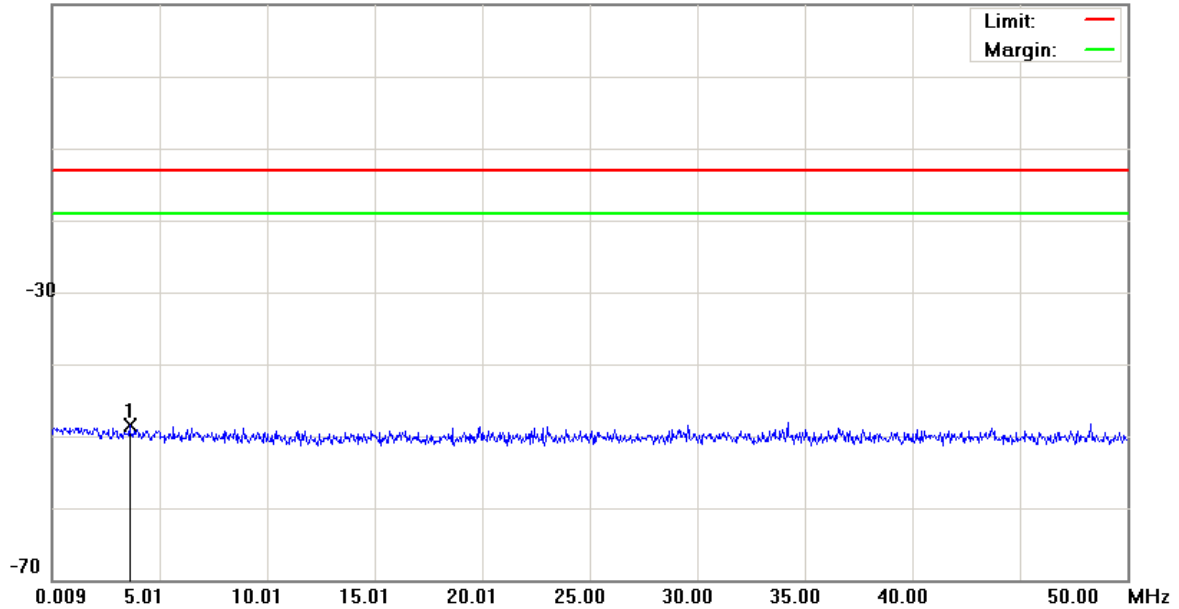

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH661(1880MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3.6084	-61.58	13.15	-48.43	-13.00	-35.43	peak		

*:Maximum data x:Over limit !:over margin


File :CH661

Data :#2

Date: 2009/12/22

Time: PM 02:58:52

20.0 dBm

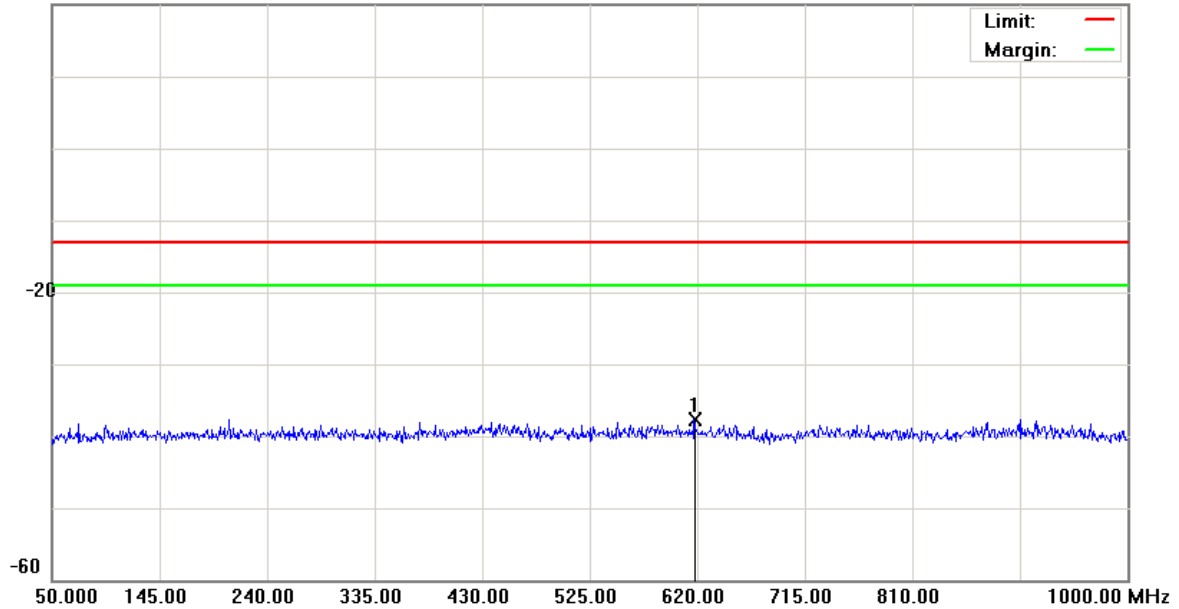

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH661(1880MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	617.6250	-50.84	13.13	-37.71	-13.00	-24.71	peak		

*:Maximum data x:Over limit !:over margin


File :CH661

Data :#3

Date: 2009/12/22

Time: PM 03:06:19

20.0 dBm

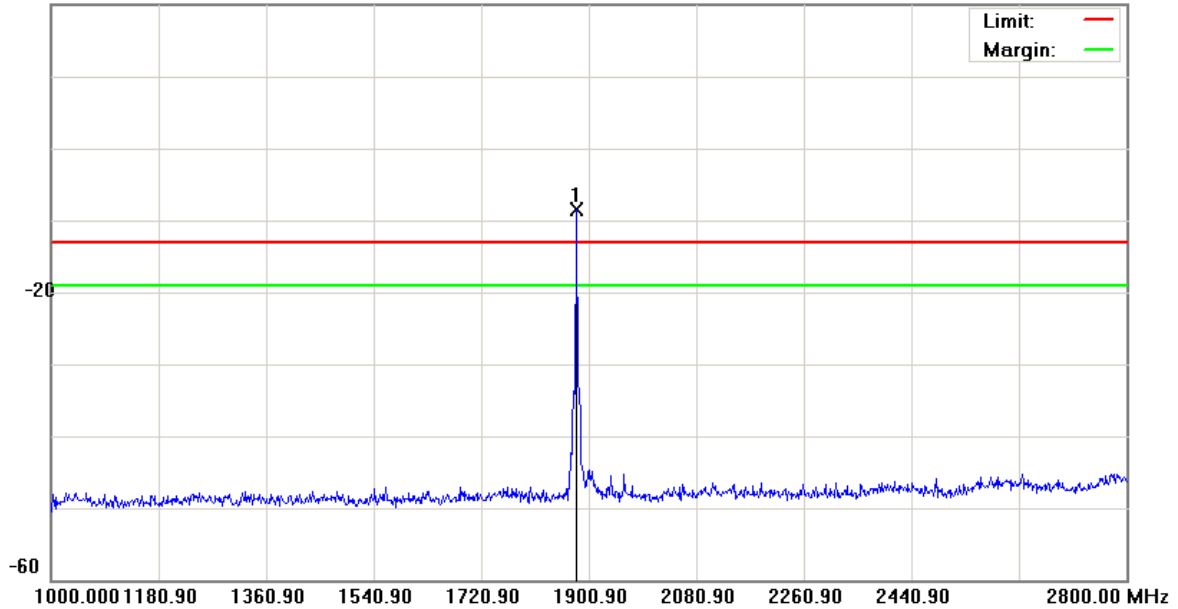

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH661(1880MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1880.200	-13.11	4.65	-8.46	-13.00	4.54	peak		TX

*:Maximum data x:Over limit !:over margin


File :CH661

Data :#4

Date: 2009/12/22

Time: PM 04:02:04

20.0 dBm

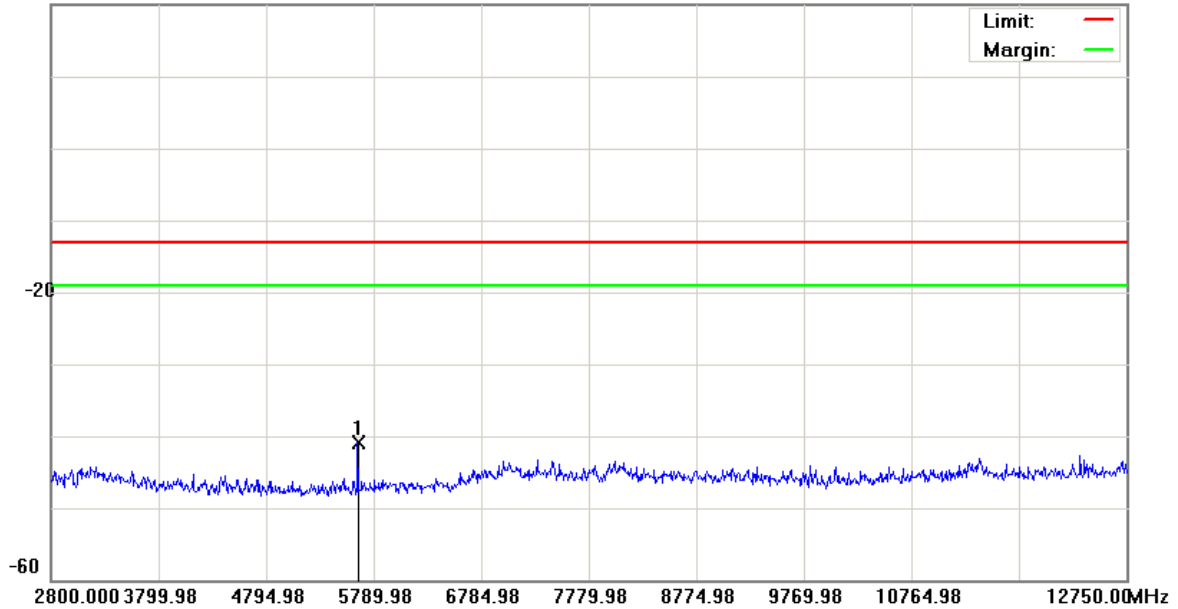

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH661(1880MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	5640.725	-45.79	4.85	-40.94	-13.00	-27.94	peak		

*:Maximum data x:Over limit !:over margin


File :CH661

Data :#5

Date: 2009/12/22

Time: PM 04:02:27

20.0 dBm

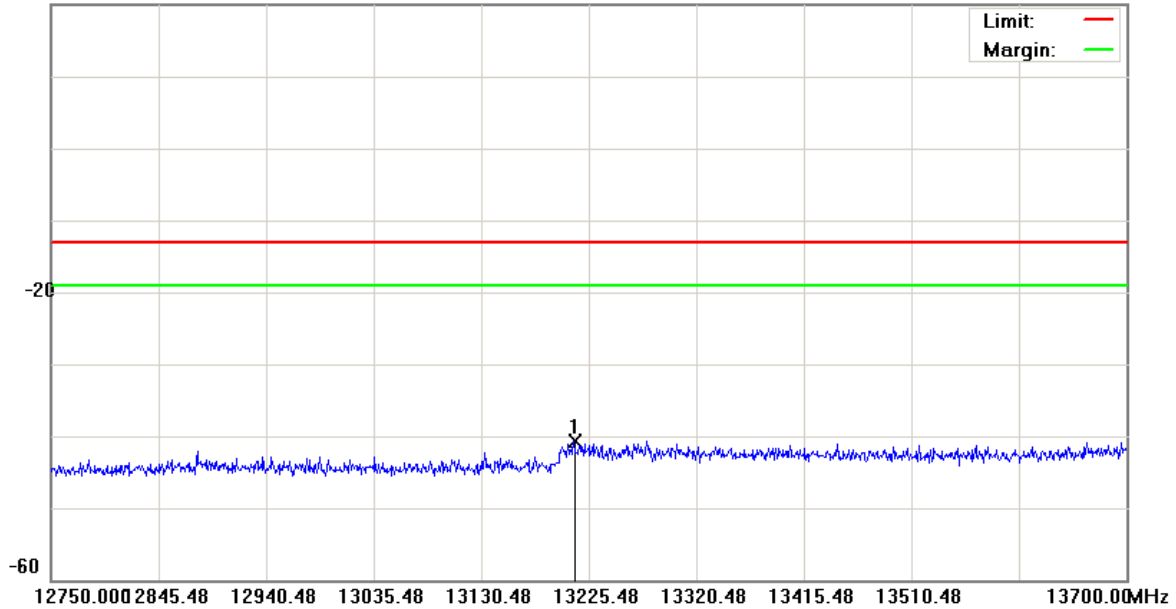

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH661(1880MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	13212.175	-46.22	5.50	-40.72	-13.00	-27.72	peak		

*:Maximum data x:Over limit !:over margin


File :CH810

Data :#1

Date: 2009/12/22

Time: PM 02:56:53

10.0 dBm

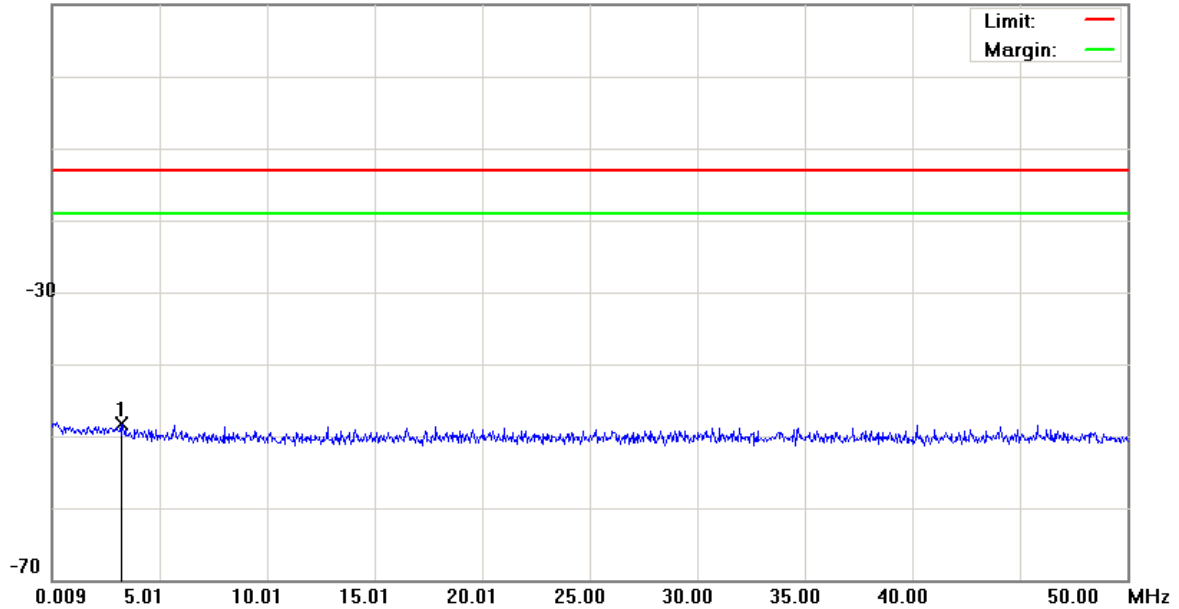

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH810(1909.8MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3.2084	-61.30	13.07	-48.23	-13.00	-35.23	peak		

*:Maximum data x:Over limit !:over margin


File :CH810

Data :#2

Date: 2009/12/22

Time: PM 02:57:17

20.0 dBm

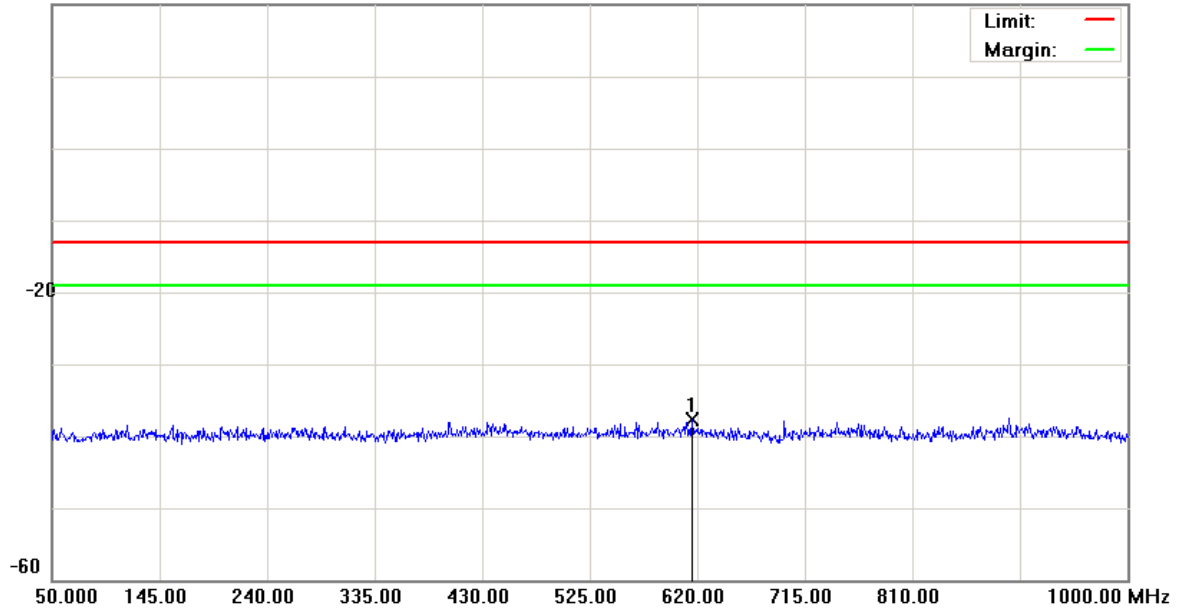

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH810(1909.8MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	615.2500	-50.74	13.11	-37.63	-13.00	-24.63	peak		

*:Maximum data x:Over limit !:over margin


File :CH810

Data :#3

Date: 2009/12/22

Time: PM 03:11:17

20.0 dBm

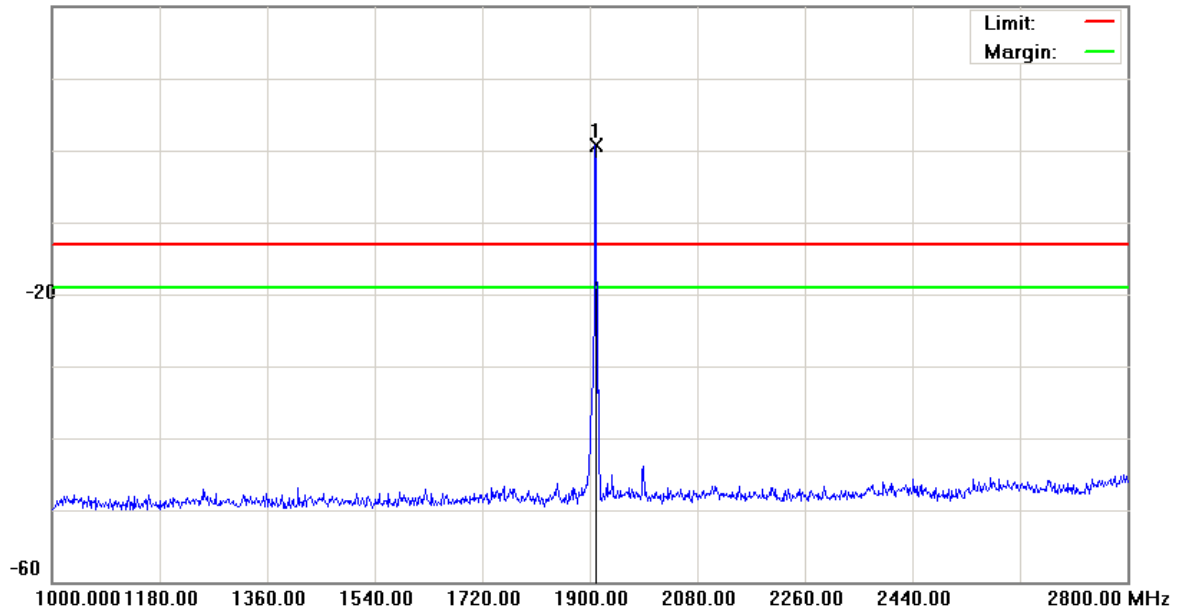

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH810(1909.8MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1909.900	-5.05	5.71	0.66	-13.00	13.66	peak		TX

*:Maximum data x:Over limit !:over margin


File :CH810

Data :#4

Date: 2009/12/22

Time: PM 04:03:49

20.0 dBm

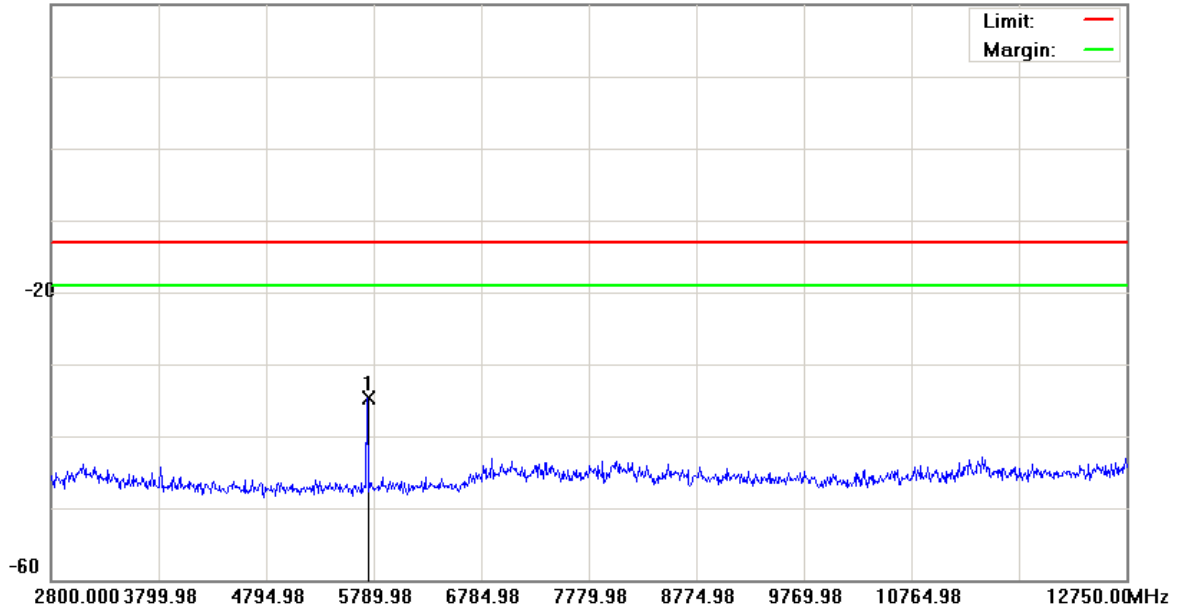

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH512(1850.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	5730.275	-39.54	4.89	-34.65	-13.00	-21.65	peak		

*:Maximum data x:Over limit !:over margin


File :CH810

Data :#5

Date: 2009/12/22

Time: PM 04:04:12

20.0 dBm

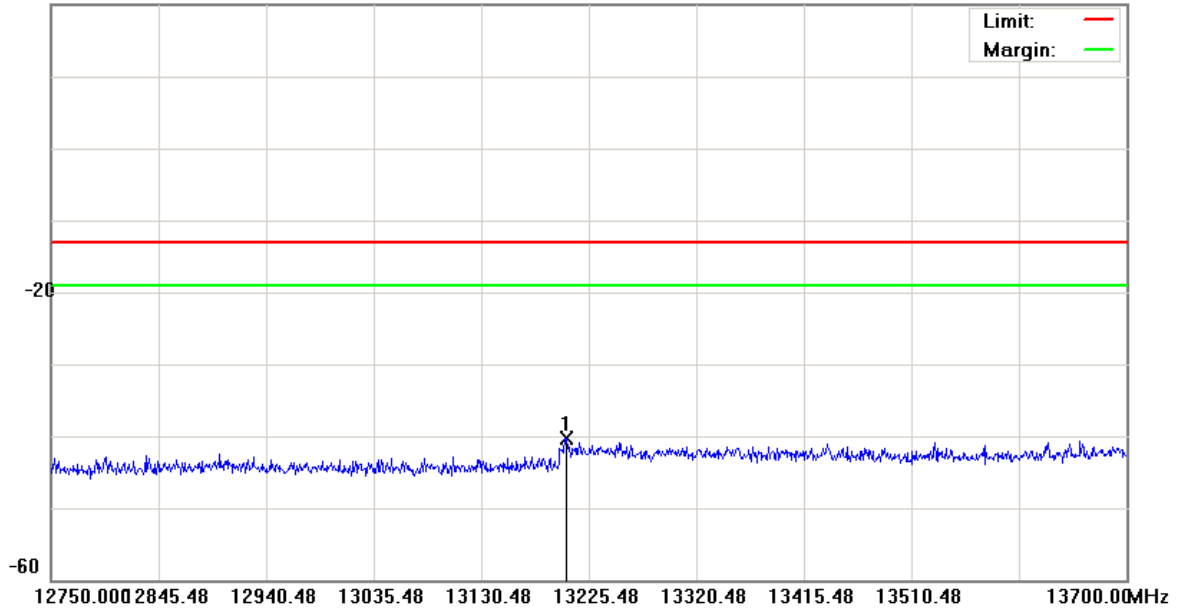

Site: : RF Conducted

Polarization: **Conducted po**

Temperature: 26 °C

Limit: FCC Part 24 conducted(9k-12.75G)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

Distance:

M/N: PB65100

Mode: PCS1900

Note: CH512(1850.2MHz)

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	13204.575	-45.79	5.50	-40.29	-13.00	-27.29	peak		

*:Maximum data x:Over limit !:over margin

6 Field Strength of Spurious Radiation Test

6.1. Limit


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

6.2. Test Instruments

3 Meter Chamber				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4408B	MY45107753	06/23/2009
Pre Amplifier	Agilent	8449B	3008A02237	07/01/2009
Pre Amplifier	Agilent	8447D	2944A10961	06/30/2009
Test Receiver	R&S	ESCI	100367	07/01/2009
Biconilog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	06/23/2009
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	07/01/2009
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/30/2009
Test Site	ATL	TE01	888001	08/06/2009

6.3. Setup

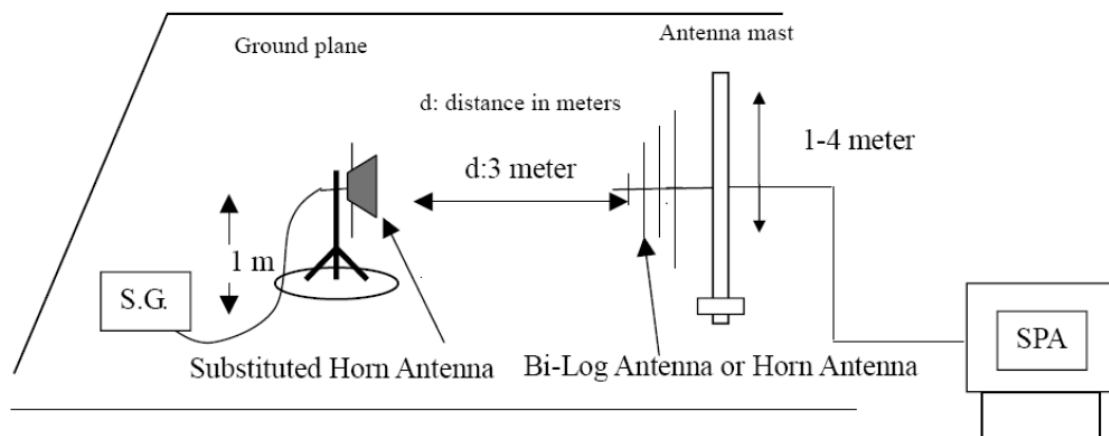

6.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Resolution Bandwidth	1 MHz
Video Bandwidth	Auto
Sweep Time	Auto


6.5. Uncertainty

The measurement uncertainty is defined as for Field Strength of Spurious Radiation measurement is ± 3.072 dB.

6.6. Test Result


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 1: GSM850 Link / CH128	Polarization	Horizontal
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	1648.8	H	-13	-53.61	10.72	0.56	-43.45
3rd	2473.2	H	-13	-55.99	10.66	0.62	-45.95
4th	3297.6	H	-13	-54.47	10.78	0.74	-44.43
5th	4122.0	H	-13	*	*	*	*
6th	4946.4	H	-13	*	*	*	*
7th	5770.8	H	-13	*	*	*	*
8th	6595.2	H	-13	*	*	*	*
9th	7419.6	H	-13	*	*	*	*
10th	8244.0	H	-13	*	*	*	*

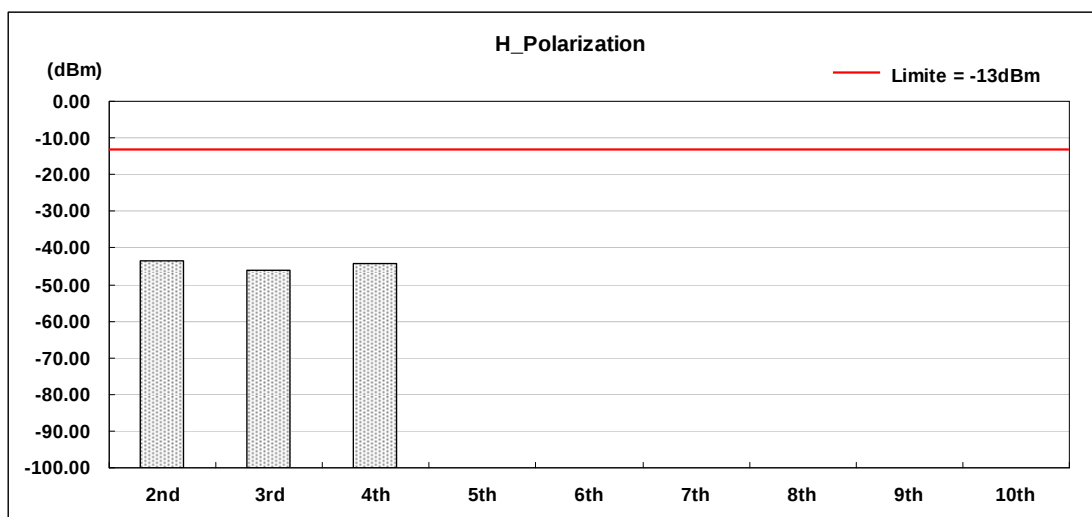


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 1: GSM850 Link / CH128	Polarization	Vertical
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	1648.8	V	-13	-57.85	10.72	0.56	-47.69
3rd	2473.2	V	-13	-56.29	10.66	0.62	-46.25
4th	3297.6	V	-13	-54.08	10.78	0.74	-44.04
5th	4122.0	V	-13	*	*	*	*
6th	4946.4	V	-13	*	*	*	*
7th	5770.8	V	-13	*	*	*	*
8th	6595.2	V	-13	*	*	*	*
9th	7419.6	V	-13	*	*	*	*
10th	8244.0	V	-13	*	*	*	*

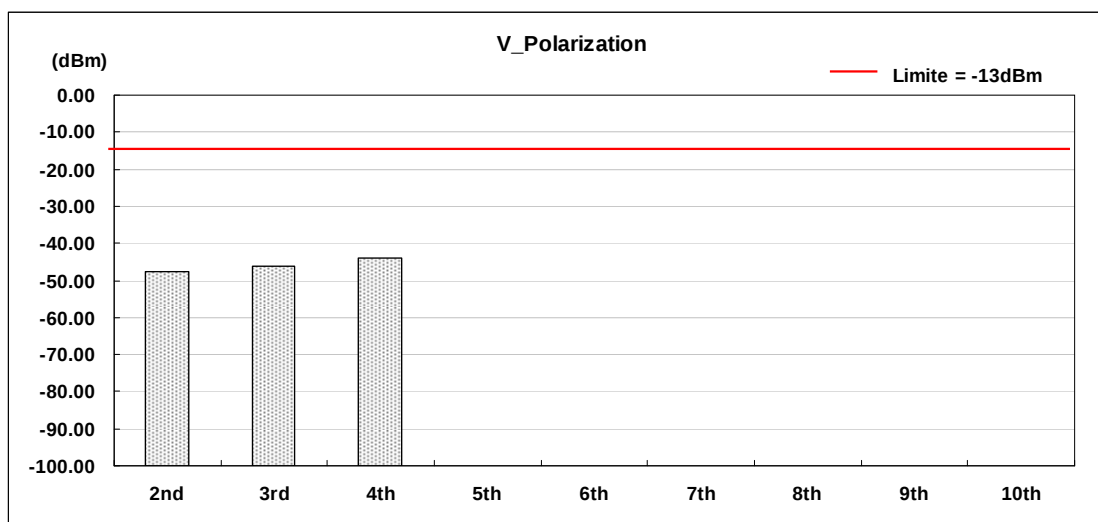


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 1: GSM850 Link / CH190	Polarization	Horizontal
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	1673.2	H	-13	-52.29	10.72	0.56	-42.13
3rd	2509.8	H	-13	-54.53	10.66	0.62	-44.49
4th	3346.4	H	-13	-54.43	10.78	0.74	-44.39
5th	4183.0	H	-13	*	*	*	*
6th	5019.6	H	-13	*	*	*	*
7th	5856.2	H	-13	*	*	*	*
8th	6692.8	H	-13	*	*	*	*
9th	7529.4	H	-13	*	*	*	*
10th	8366.0	H	-13	*	*	*	*

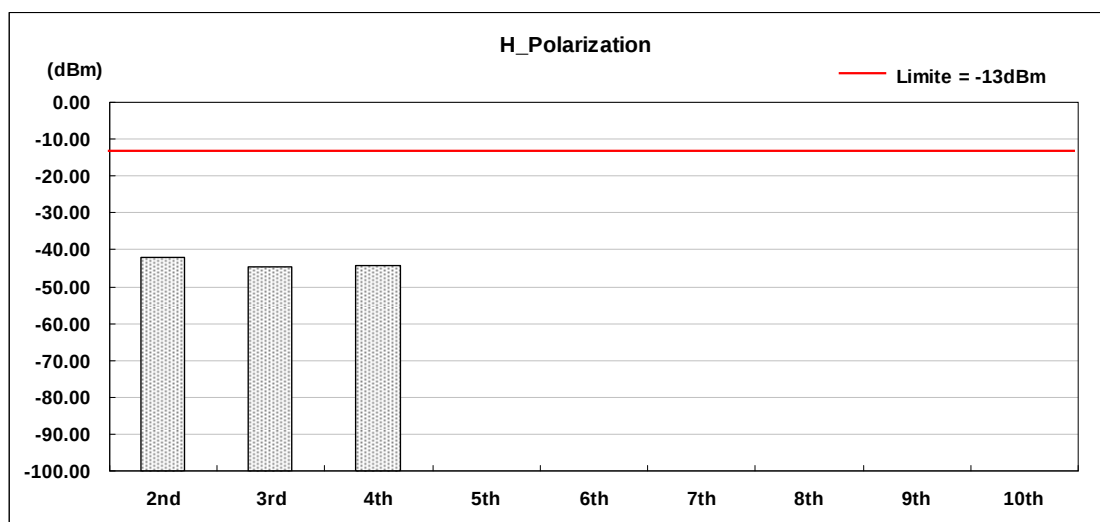


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 1: GSM850 Link / CH190	Polarization	Vertical
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	1673.2	V	-13	-54.06	10.72	0.56	-43.90
3rd	2509.8	V	-13	-54.31	10.66	0.62	-44.27
4th	3346.4	V	-13	-54.44	10.78	0.74	-44.40
5th	4183.0	V	-13	*	*	*	*
6th	5019.6	V	-13	*	*	*	*
7th	5856.2	V	-13	*	*	*	*
8th	6692.8	V	-13	*	*	*	*
9th	7529.4	V	-13	*	*	*	*
10th	8366.0	V	-13	*	*	*	*

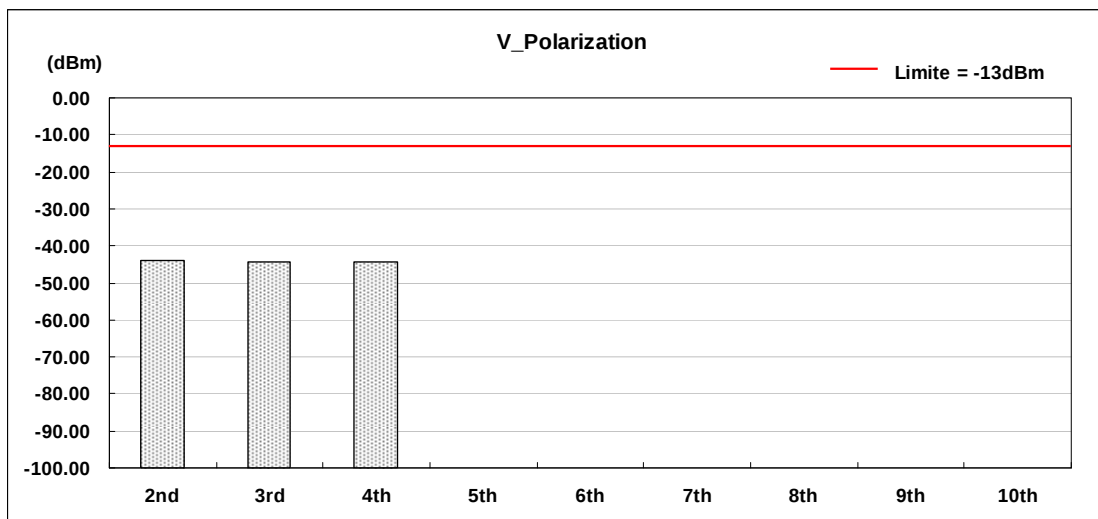


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 1: GSM850 Link / CH251	Polarization	Horizontal
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	1697.6	H	-13	-52.76	10.72	0.56	-42.60
3rd	2546.4	H	-13	-46.81	10.66	0.62	-36.77
4th	3395.2	H	-13	-54.37	10.78	0.74	-44.33
5th	4244.0	H	-13	*	*	*	*
6th	5092.8	H	-13	*	*	*	*
7th	5941.6	H	-13	*	*	*	*
8th	6790.4	H	-13	*	*	*	*
9th	7639.2	H	-13	*	*	*	*
10th	8488.0	H	-13	*	*	*	*

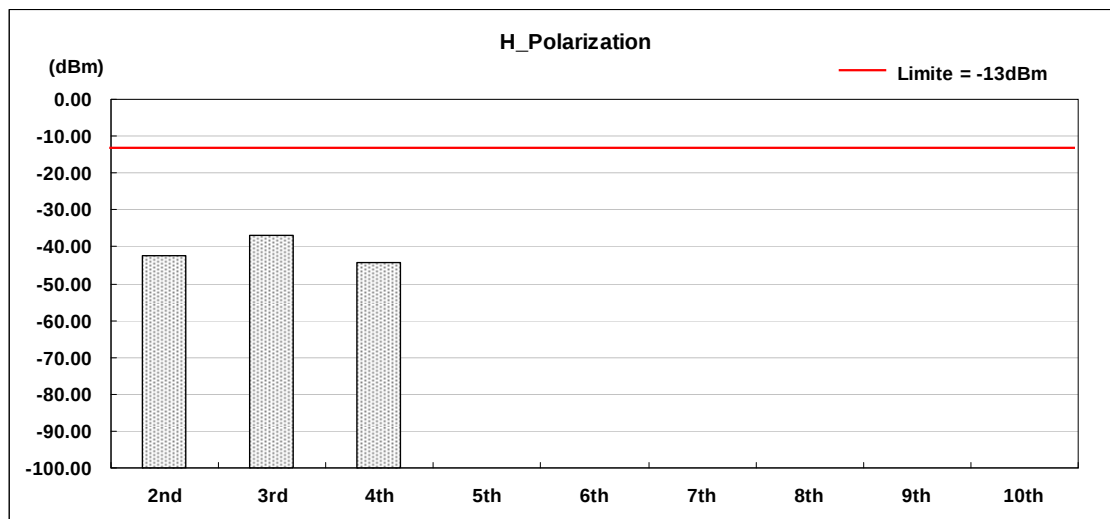


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 1: GPRS850 Link / CH251	Polarization	Vertical
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	1697.6	V	-13	-55.73	10.72	0.56	-45.57
3rd	2546.4	V	-13	-48.32	10.66	0.62	-38.28
4th	3395.2	V	-13	-54.67	10.78	0.74	-44.63
5th	4244.0	V	-13	*	*	*	*
6th	5092.8	V	-13	*	*	*	*
7th	5941.6	V	-13	*	*	*	*
8th	6790.4	V	-13	*	*	*	*
9th	7639.2	V	-13	*	*	*	*
10th	8488.0	V	-13	*	*	*	*

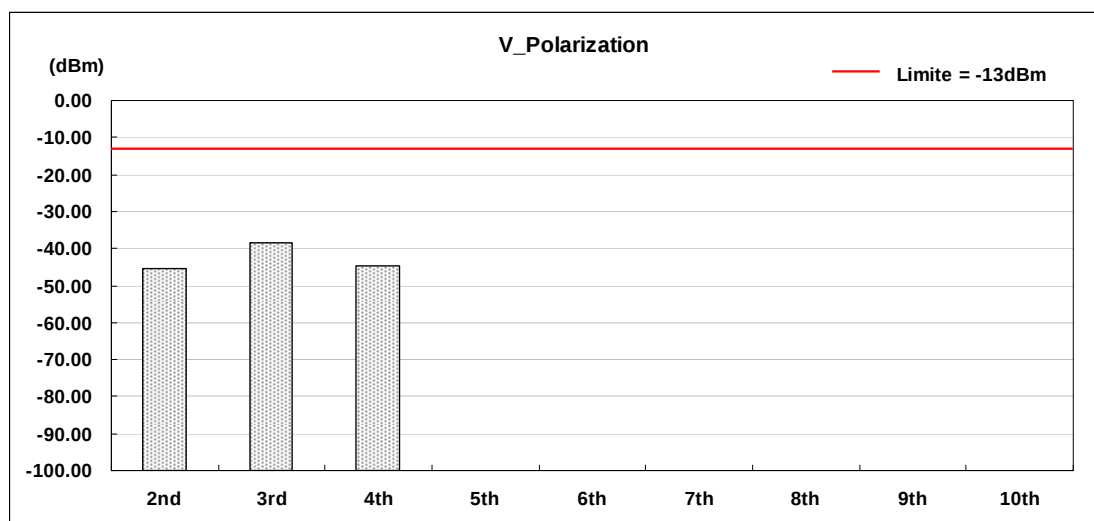


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 2: GSM1900 Link / CH512	Polarization	Horizontal
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	3700.4	H	-13	-53.53	10.72	0.56	-43.37
3rd	5550.6	H	-13	-48.86	10.66	0.62	-38.82
4th	7400.8	H	-13	-43.45	10.78	0.74	-33.41
5th	9251.0	H	-13	*	*	*	*
6th	11101.2	H	-13	*	*	*	*
7th	12951.4	H	-13	*	*	*	*
8th	14801.6	H	-13	*	*	*	*
9th	16651.8	H	-13	*	*	*	*
10th	18502.0	H	-13	*	*	*	*

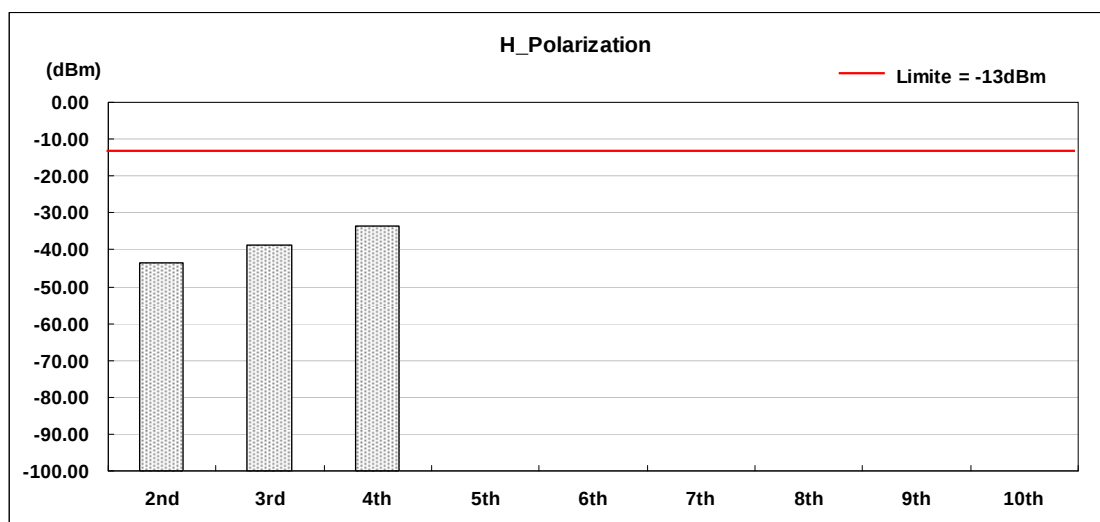


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 2: GSM1900 Link / CH512	Polarization	Vertical
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	3700.4	V	-13	-53.13	10.72	0.56	-42.97
3rd	5550.6	V	-13	-48.26	10.66	0.62	-38.22
4th	7400.8	V	-13	-42.51	10.78	0.74	-32.47
5th	9251.0	V	-13	*	*	*	*
6th	11101.2	V	-13	*	*	*	*
7th	12951.4	V	-13	*	*	*	*
8th	14801.6	V	-13	*	*	*	*
9th	16651.8	V	-13	*	*	*	*
10th	18502.0	V	-13	*	*	*	*

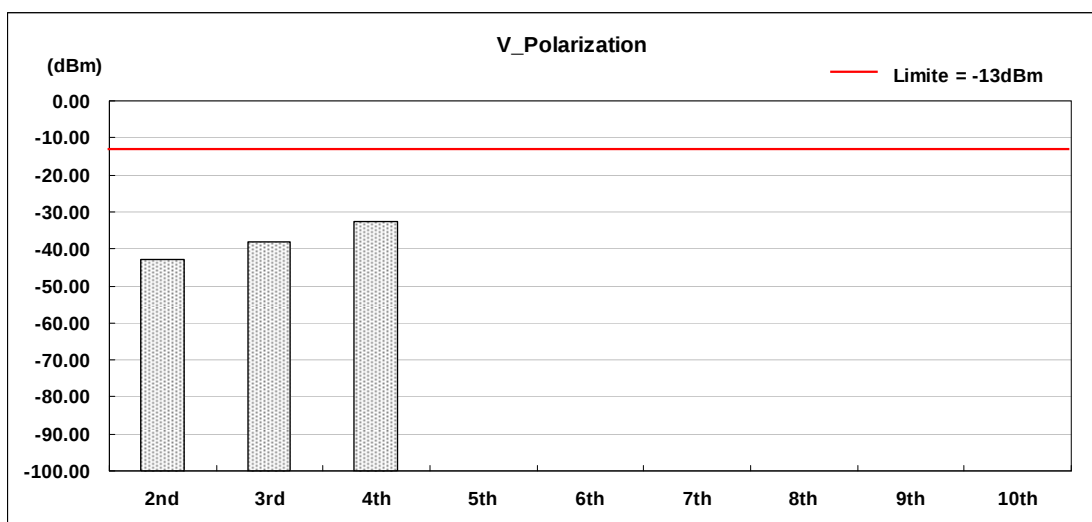


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 2: GSM1900 Link / CH661	Polarization	Horizontal
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	3760.0	H	-13	-53.20	10.72	0.56	-43.04
3rd	5640.0	H	-13	-46.85	10.66	0.62	-36.81
4th	7520.0	H	-13	-43.34	10.78	0.74	-33.30
5th	9400.0	H	-13	*	*	*	*
6th	11280.0	H	-13	*	*	*	*
7th	13160.0	H	-13	*	*	*	*
8th	15040.0	H	-13	*	*	*	*
9th	16920.0	H	-13	*	*	*	*
10th	18800.0	H	-13	*	*	*	*

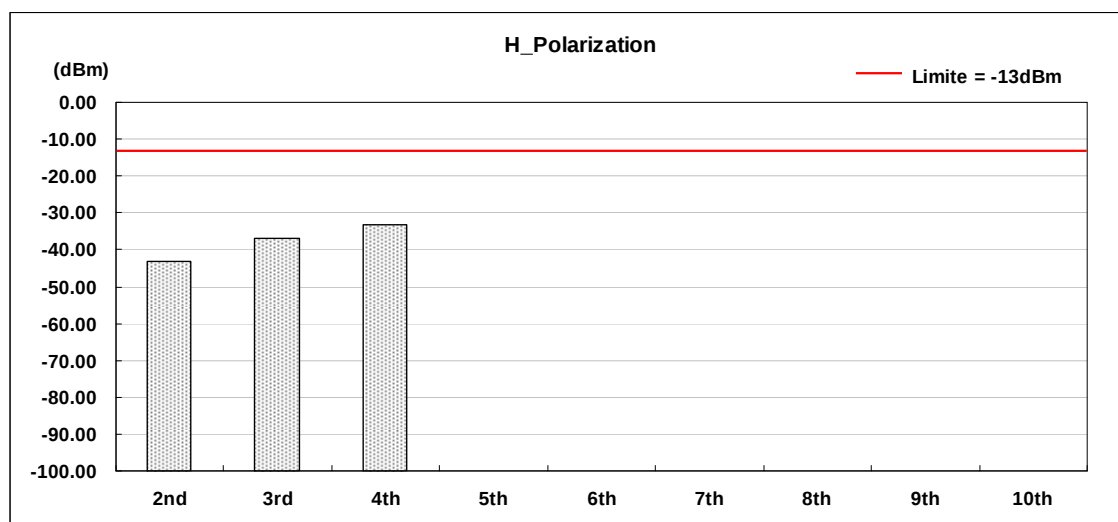


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 2: GSM1900 Link / CH661	Polarization	Vertical
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	3760.0	V	-13	-54.03	10.72	0.56	-43.87
3rd	5640.0	V	-13	-43.93	10.66	0.62	-33.89
4th	7520.0	V	-13	-43.41	10.78	0.74	-33.37
5th	9400.0	V	-13	*	*	*	*
6th	11280.0	V	-13	*	*	*	*
7th	13160.0	V	-13	*	*	*	*
8th	15040.0	V	-13	*	*	*	*
9th	16920.0	V	-13	*	*	*	*
10th	18800.0	V	-13	*	*	*	*

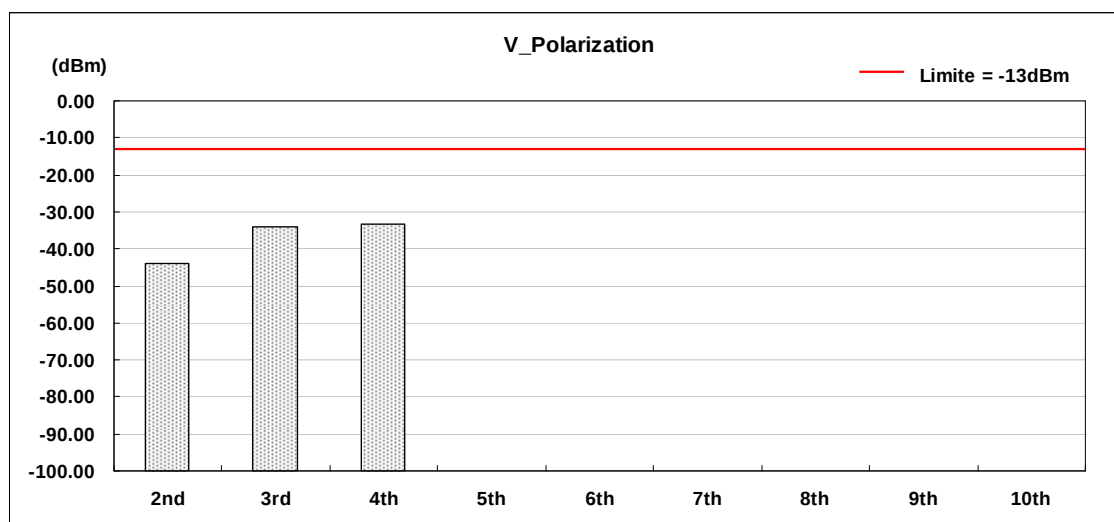


Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 2: GSM1900 Link / CH810	Polarization	Horizontal
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	3819.6	H	-13	-53.88	10.72	0.56	-43.72
3rd	5729.4	H	-13	-46.71	10.66	0.62	-36.67
4th	7639.2	H	-13	-42.90	10.78	0.74	-32.86
5th	9549.0	H	-13	*	*	*	*
6th	11458.8	H	-13	*	*	*	*
7th	13368.6	H	-13	*	*	*	*
8th	15278.4	H	-13	*	*	*	*
9th	17188.2	H	-13	*	*	*	*
10th	19098.0	H	-13	*	*	*	*

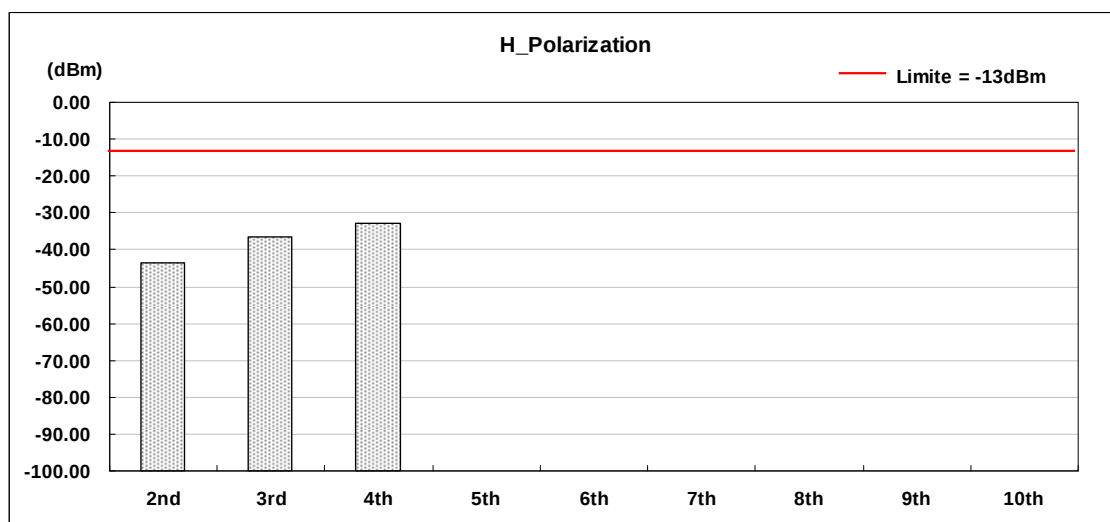

Product	Smartphone		
Test Item	Field Strength of Spurious Radiation		
Test Mode	Mode 2: GSM1900 Link / CH810	Polarization	Vertical
Date of Test	12/22/2009	Test Site	TE01

Harmonic	Frequency (MHz)	Polarization	FCC Max. Limit (dBm)	S.G Power (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power (dBm)
2nd	3819.6	V	-13	10.72	0.56	-42.43	10.72
3rd	5729.4	V	-13	10.66	0.62	-38.44	10.66
4th	7639.2	V	-13	10.78	0.74	-32.87	10.78
5th	9549.0	V	-13	*	*	*	*
6th	11458.8	V	-13	*	*	*	*
7th	13368.6	V	-13	*	*	*	*
8th	15278.4	V	-13	*	*	*	*
9th	17188.2	V	-13	*	*	*	*
10th	19098.0	V	-13	*	*	*	*

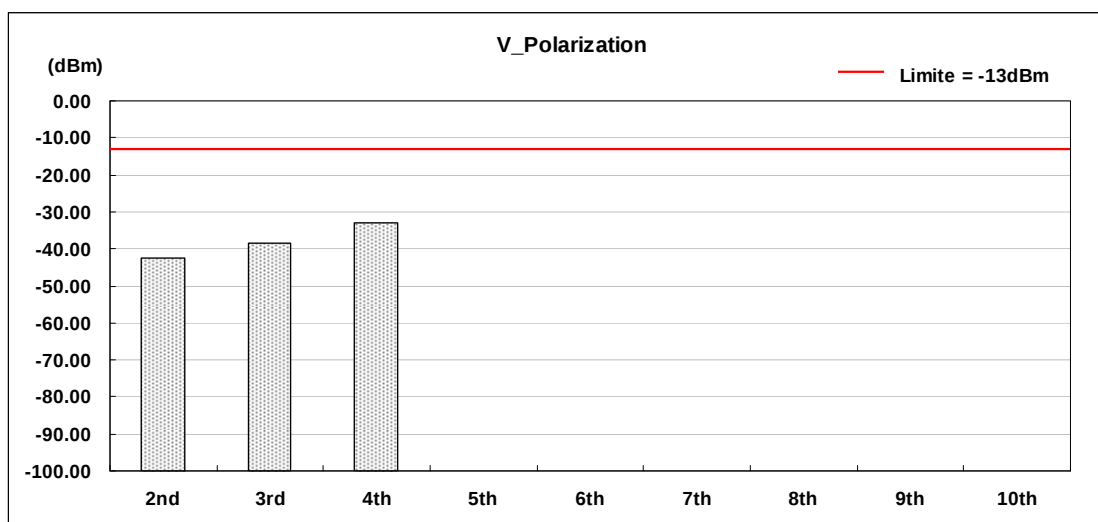

7 Frequency Stability (Temperature Variation) Test

7.1. Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.


The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

7.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009
Test Site	ATL	TE02	TE02	N.C.R.

NOTE: N.C.R. = No Calibration Request.

7.3. Setup

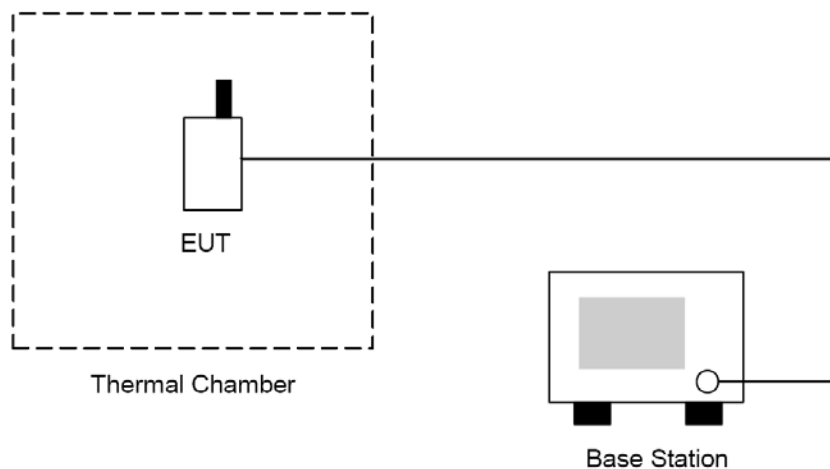

7.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was note within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Test data was recorded.

7.5. Uncertainty

The measurement uncertainty is defined as for Frequency Stability (Temperature Variation) measurement is $\pm 10\text{Hz}$.

7.6. Test Result

Product	Smartphone		
Test Item	Frequency Stability (Temperature Variation)		
Test Mode	Mode 1: GSM850 Link		
Date of Test	12/22/2009	Test Site	TE02

Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
-30	20.41	0.024	±2.5	Pass
-20	20.37	0.024	±2.5	Pass
-10	18.52	0.022	±2.5	Pass
0	19.67	0.024	±2.5	Pass
10	19.43	0.023	±2.5	Pass
20	20.21	0.024	±2.5	Pass
30	18.42	0.022	±2.5	Pass
40	23.37	0.028	±2.5	Pass
50	21.55	0.026	±2.5	Pass

Product	Smartphone		
Test Item	Frequency Stability (Temperature Variation)		
Test Mode	Mode 2: GSM1900 Link		
Date of Test	12/22/2009	Test Site	TE02

Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
-30	19.23	0.010	±2.5	Pass
-20	19.56	0.010	±2.5	Pass
-10	20.41	0.011	±2.5	Pass
0	20.37	0.011	±2.5	Pass
10	17.75	0.009	±2.5	Pass
20	17.31	0.009	±2.5	Pass
30	16.52	0.009	±2.5	Pass
40	16.42	0.009	±2.5	Pass
50	18.41	0.010	±2.5	Pass

8 Frequency Stability (Voltage Variation) Test

8.1. Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.


The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

8.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	07/29/2009
Test Site	ATL	TE02	TE02	N.C.R.

NOTE: N.C.R. = No Calibration Request.

8.3. Setup

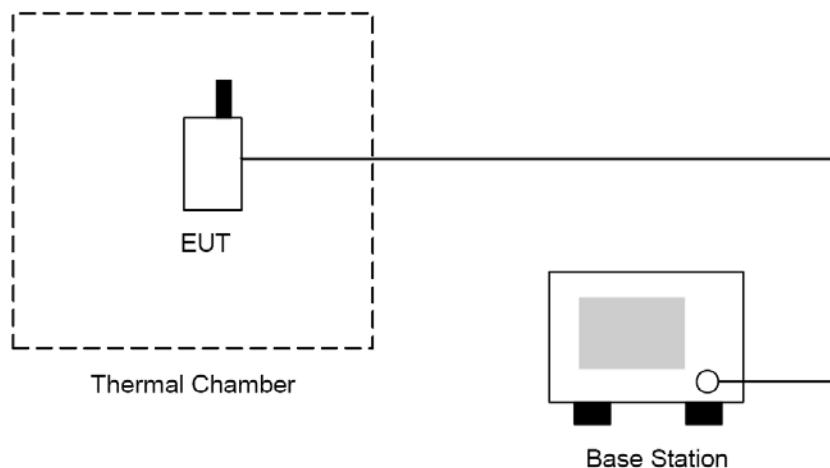

8.4. Test Procedure

1. The EUT was placed in a temperature chamber at 25 ± 5 °C and connected as the following section.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

8.5. Uncertainty

The measurement uncertainty is defined as for Frequency Stability (Voltage Variation) measurement is ± 10 Hz.

8.6. Test Result

Product	Smartphone				
Test Item	Frequency Stability (Voltage Variation)				
Test Mode	Mode 1: GSM850 Link				
Date of Test	12/22/2009		Test Site	TE02	
Level	Voltage [V]	Deviation [Hz]	Deviation [ppm]	Limit [ppm]	Result
Battery full point	4.20	22.50	0.027	± 2.5	Pass
Normal	3.70	24.10	0.029	± 2.5	Pass
Battery cut-off point	3.40	23.82	0.028	± 2.5	Pass

Product	Smartphone				
Test Item	Frequency Stability (Voltage Variation)				
Test Mode	Mode 2: GSM1900 Link				
Date of Test	12/22/2009		Test Site	TE02	
Level	Voltage [V]	Deviation [Hz]	Deviation [ppm]	Limit [ppm]	Result
Battery full point	4.20	21.48	0.011	± 2.5	Pass
Normal	3.70	24.67	0.013	± 2.5	Pass
Battery cut-off point	3.40	23.55	0.013	± 2.5	Pass

9 AC Power Conducted Emissions Test

9.1. Limit


Frequency range (MHz)	Limits (dBuV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

9.2. Test Instruments

Describe	Manufacturer	Model No.	Serial No.	Cal. Date
Test Receiver	R&S	ESCI	100367	06/05/2009
LISN	EMCO	3816/2 SH	00060110	06/05/2009
LISN	EMCO	3816/2 SH	00060111	06/29/2009
Transient Limiter	ELECTRO-METRICS	EM-7600	777	09/22/2009
Spectrum Analyzer	Advantest	R3132	160300103	03/10/2009
Test Site	ATL	TE02	TE02	N.C.R.

NOTE: N.C.R. = No Calibration Request.

9.3. Setup

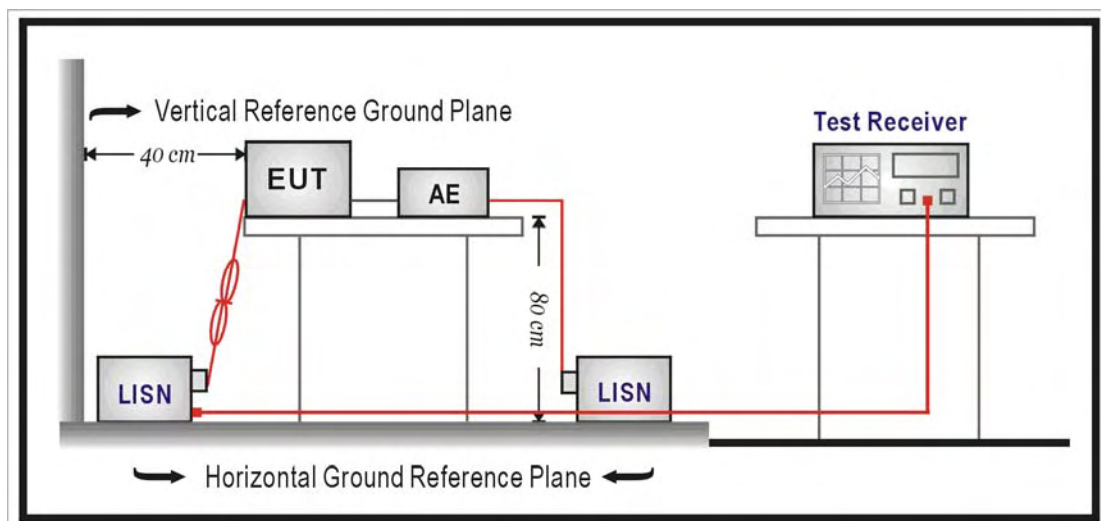

9.4. Test Procedure

The measurement is made according to FCC rules15.207:

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in section 10.6.

9.5. Uncertainty

The measurement uncertainty is defined as for AC power conducted emission measurement is ± 2.24 dB.

9.6. Test Result


Product	Smartphone		
Test Item	Frequency Stability		
Test Mode	Mode 1: GSM850 Link Mode 2: GSM1900 Link		
Date of Test	12/21~22/2009	Test Site	TE02

File :09-0355-SE(IDLE)MAIN

Data :#1

Date: 2009/12/21

80.0 dBuV

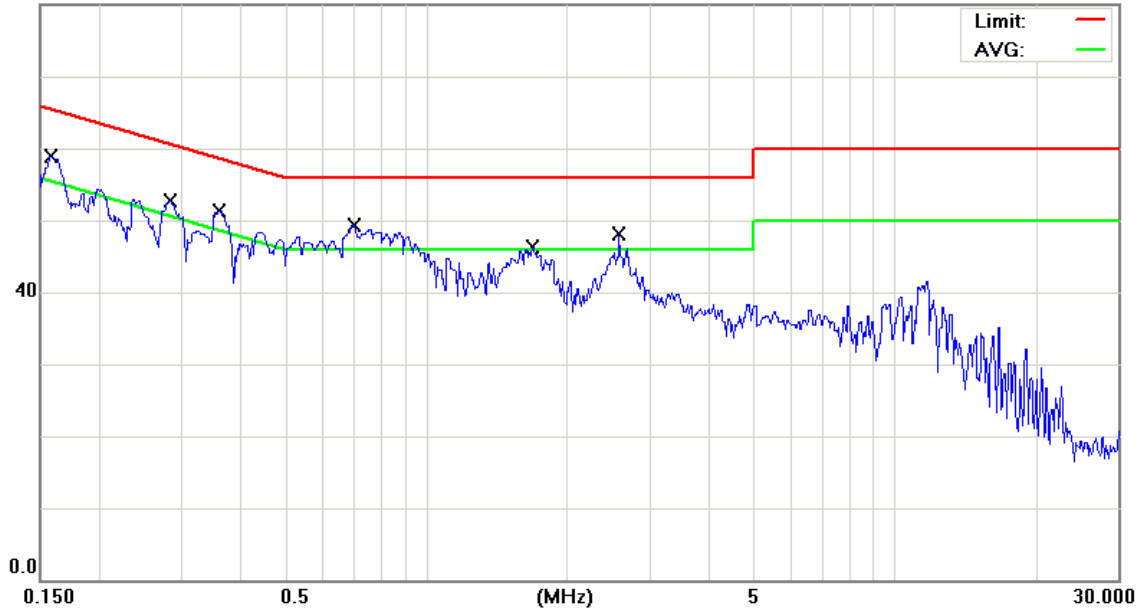

Site : Conducted

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: IDLE

Note: ADAPTER MODEL:TC P310 (Source1)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1577	33.48	9.73	43.21	65.58	-22.37	QP	
2		0.1577	18.39	9.73	28.12	55.58	-27.46	AVG	
3		0.2837	29.21	9.76	38.97	60.71	-21.74	QP	
4		0.2837	14.42	9.76	24.18	50.71	-26.53	AVG	
5		0.3600	27.77	9.78	37.55	58.73	-21.18	QP	
6		0.3600	13.98	9.78	23.76	48.73	-24.97	AVG	
7	*	0.6980	26.06	9.79	35.85	56.00	-20.15	QP	
8		0.6980	10.28	9.79	20.07	46.00	-25.93	AVG	
9		1.6880	22.72	9.83	32.55	56.00	-23.45	QP	
10		1.6880	9.28	9.83	19.11	46.00	-26.89	AVG	
11		2.5790	22.48	9.93	32.41	56.00	-23.59	QP	
12		2.5790	10.65	9.93	20.58	46.00	-25.42	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(IDLE)MAIN

Data :#2

Date: 2009/12/21

80.0 dBuV

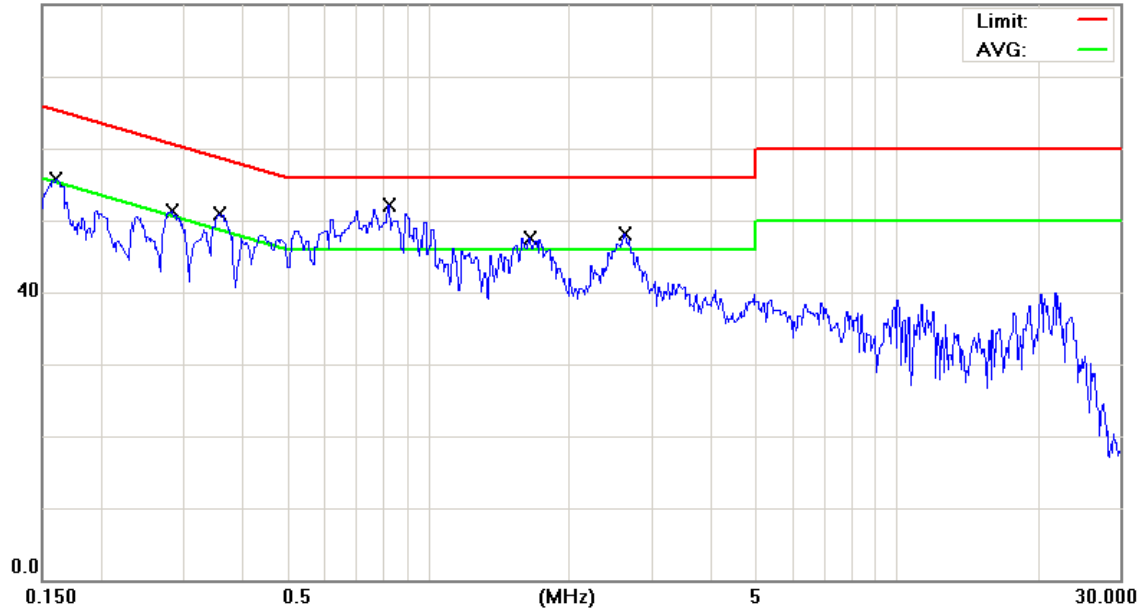

Site : Conducted

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: IDLE

Note: ADAPTER MODEL:TC P310 (Source1)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1604	31.77	9.73	41.50	65.44	-23.94	QP	
2		0.1604	17.73	9.73	27.46	55.44	-27.98	AVG	
3		0.2830	27.82	9.76	37.58	60.73	-23.15	QP	
4		0.2830	17.65	9.76	27.41	50.73	-23.32	AVG	
5		0.3580	27.46	9.78	37.24	58.77	-21.53	QP	
6		0.3580	16.56	9.78	26.34	48.77	-22.43	AVG	
7	*	0.8240	25.18	9.80	34.98	56.00	-21.02	QP	
8		0.8240	13.37	9.80	23.17	46.00	-22.83	AVG	
9		1.6430	23.88	9.83	33.71	56.00	-22.29	QP	
10		1.6430	13.58	9.83	23.41	46.00	-22.59	AVG	
11		2.6150	20.10	9.93	30.03	56.00	-25.97	QP	
12		2.6150	13.36	9.93	23.29	46.00	-22.71	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(IDLE)2ND

Data :#1

Date: 2009/12/21

80.0 dBuV

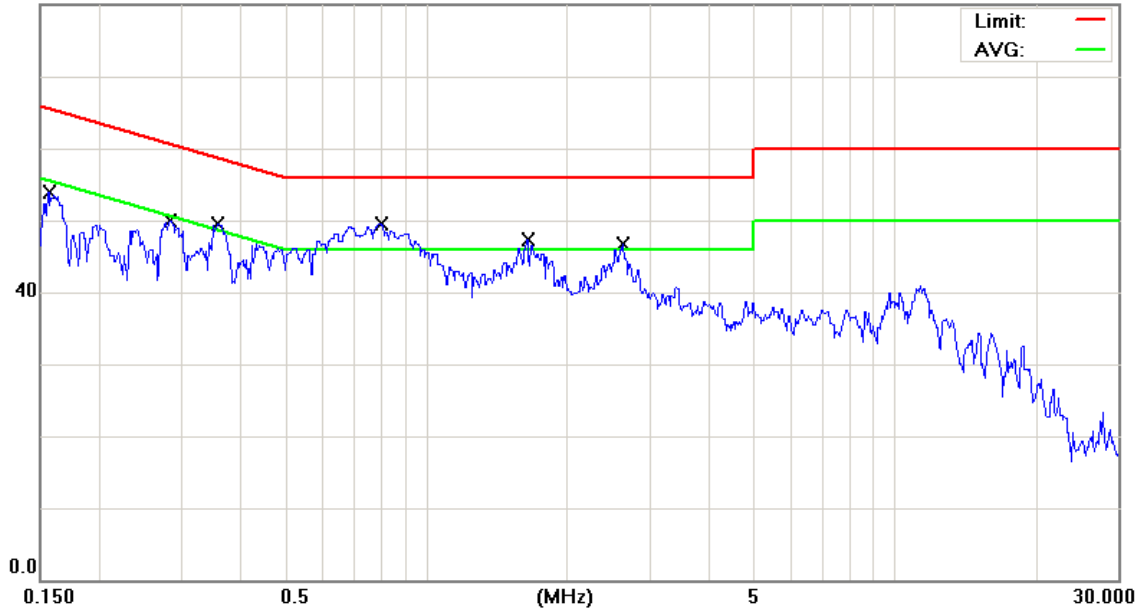

Site : Conducted

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: IDLE

Note: ADAPTER MODEL:TC P310 (Source2)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1563	28.44	9.73	38.17	65.66	-27.49	QP	
2		0.1563	14.86	9.73	24.59	55.66	-31.07	AVG	
3		0.2830	27.55	9.76	37.31	60.73	-23.42	QP	
4		0.2830	14.19	9.76	23.95	50.73	-26.78	AVG	
5		0.3580	25.96	9.78	35.74	58.77	-23.03	QP	
6		0.3580	14.09	9.78	23.87	48.77	-24.90	AVG	
7	*	0.7970	26.42	9.80	36.22	56.00	-19.78	QP	
8		0.7970	13.27	9.80	23.07	46.00	-22.93	AVG	
9		1.6430	23.11	9.83	32.94	56.00	-23.06	QP	
10		1.6430	11.56	9.83	21.39	46.00	-24.61	AVG	
11		2.6240	23.49	9.93	33.42	56.00	-22.58	QP	
12		2.6240	10.39	9.93	20.32	46.00	-25.68	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(IDLE)2ND

Data :#2

Date: 2009/12/21

80.0 dBuV

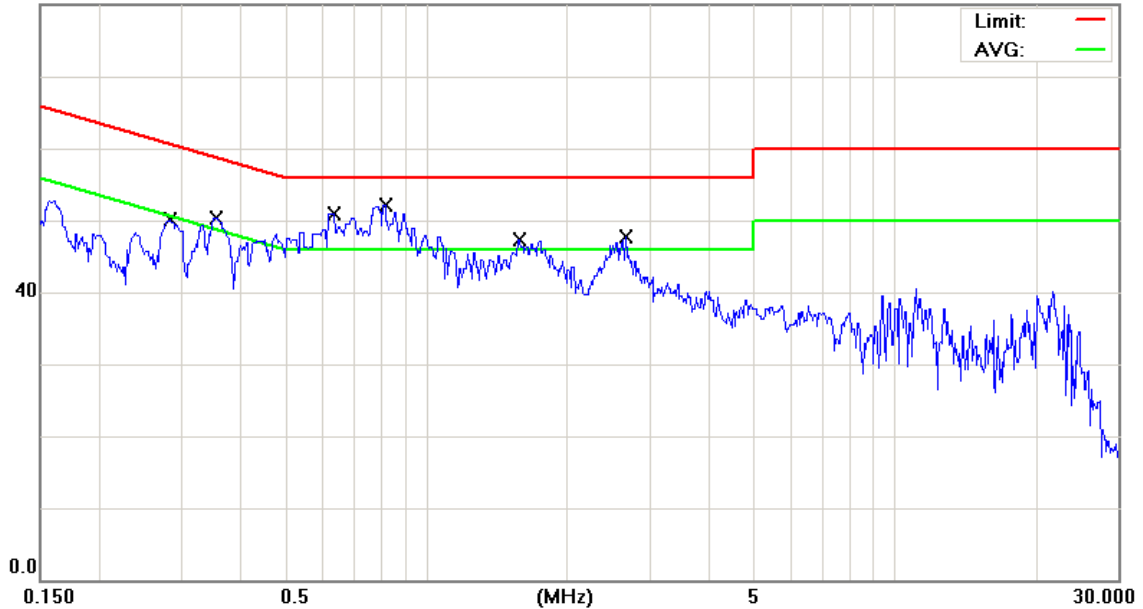

Site : Conducted

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: IDLE

Note: ADAPTER MODEL:TC P310 (Source2)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2844	27.10	9.76	36.86	60.69	-23.83	QP	
2		0.2844	17.66	9.76	27.42	50.69	-23.27	AVG	
3		0.3558	27.90	9.78	37.68	58.83	-21.15	QP	
4		0.3558	13.74	9.78	23.52	48.83	-25.31	AVG	
5	*	0.6350	27.74	9.79	37.53	56.00	-18.47	QP	
6		0.6350	13.93	9.79	23.72	46.00	-22.28	AVG	
7		0.8150	25.55	9.80	35.35	56.00	-20.65	QP	
8		0.8150	13.76	9.80	23.56	46.00	-22.44	AVG	
9		1.5710	22.46	9.81	32.27	56.00	-23.73	QP	
10		1.5710	14.54	9.81	24.35	46.00	-21.65	AVG	
11		2.6600	21.37	9.93	31.30	56.00	-24.70	QP	
12		2.6600	12.51	9.93	22.44	46.00	-23.56	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(GSM850)MAIN

Data :#1

Date: 2009/12/22

80.0 dBuV

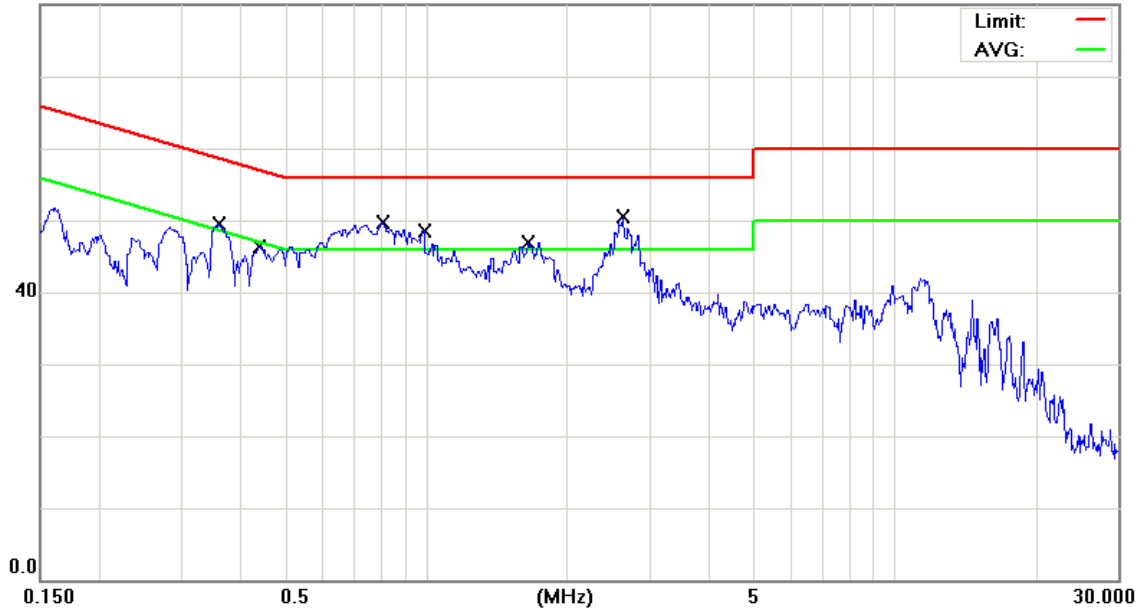

Site : Conducted

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: GSM850

Note: ADAPTER MODEL:TC P310 (Source1)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3600	26.22	9.78	36.00	58.73	-22.73	QP	
2		0.3600	14.85	9.78	24.63	48.73	-24.10	AVG	
3		0.4391	23.11	9.78	32.89	57.08	-24.19	QP	
4		0.4391	11.56	9.78	21.34	47.08	-25.74	AVG	
5	*	0.8060	27.68	9.80	37.48	56.00	-18.52	QP	
6		0.8060	14.95	9.80	24.75	46.00	-21.25	AVG	
7		0.9860	22.66	9.81	32.47	56.00	-23.53	QP	
8		0.9860	9.07	9.81	18.88	46.00	-27.12	AVG	
9		1.6520	23.37	9.83	33.20	56.00	-22.80	QP	
10		1.6520	12.08	9.83	21.91	46.00	-24.09	AVG	
11		2.6330	24.25	9.93	34.18	56.00	-21.82	QP	
12		2.6330	16.12	9.93	26.05	46.00	-19.95	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(GSM850)MAIN

Data :#2

Date: 2009/12/22

80.0 dBuV

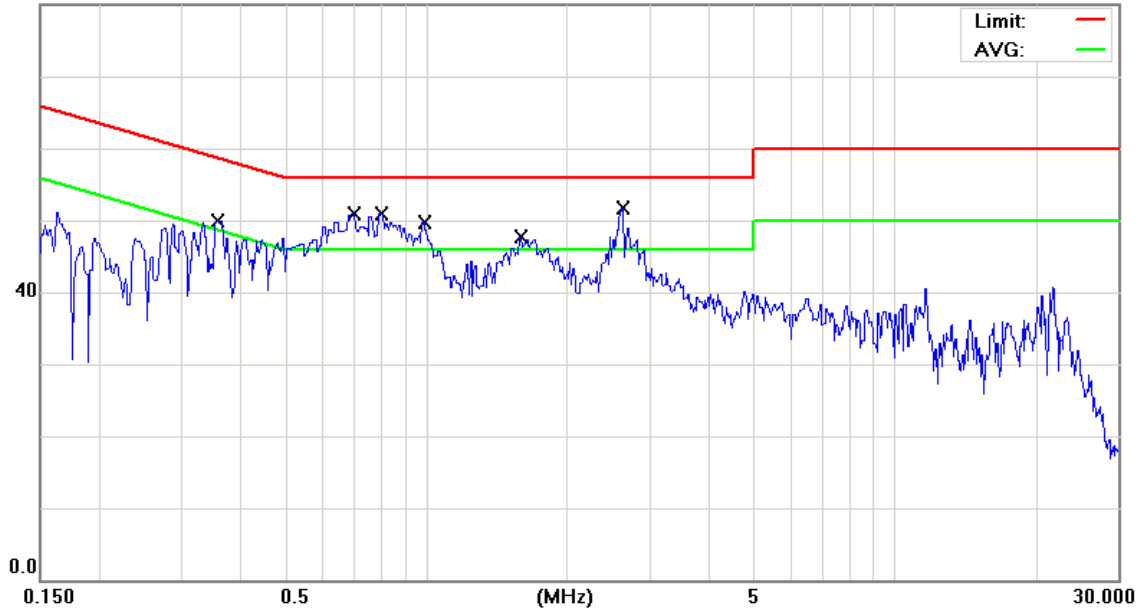

Site : Conducted

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: GSM850

Note: ADAPTER MODEL:TC P310 (Source1)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3571	25.67	9.78	35.45	58.80	-23.35	QP	
2		0.3571	13.35	9.78	23.13	48.80	-25.67	AVG	
3	*	0.6980	29.08	9.79	38.87	56.00	-17.13	QP	
4		0.6980	15.42	9.79	25.21	46.00	-20.79	AVG	
5		0.7970	27.20	9.80	37.00	56.00	-19.00	QP	
6		0.7970	15.12	9.80	24.92	46.00	-21.08	AVG	
7		0.9860	23.89	9.81	33.70	56.00	-22.30	QP	
8		0.9860	11.80	9.81	21.61	46.00	-24.39	AVG	
9		1.5890	23.02	9.82	32.84	56.00	-23.16	QP	
10		1.5890	14.24	9.82	24.06	46.00	-21.94	AVG	
11		2.6240	27.39	9.93	37.32	56.00	-18.68	QP	
12		2.6240	15.88	9.93	25.81	46.00	-20.19	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(GSM850)2ND

Data :#1

Date: 2009/12/22

80.0 dBuV

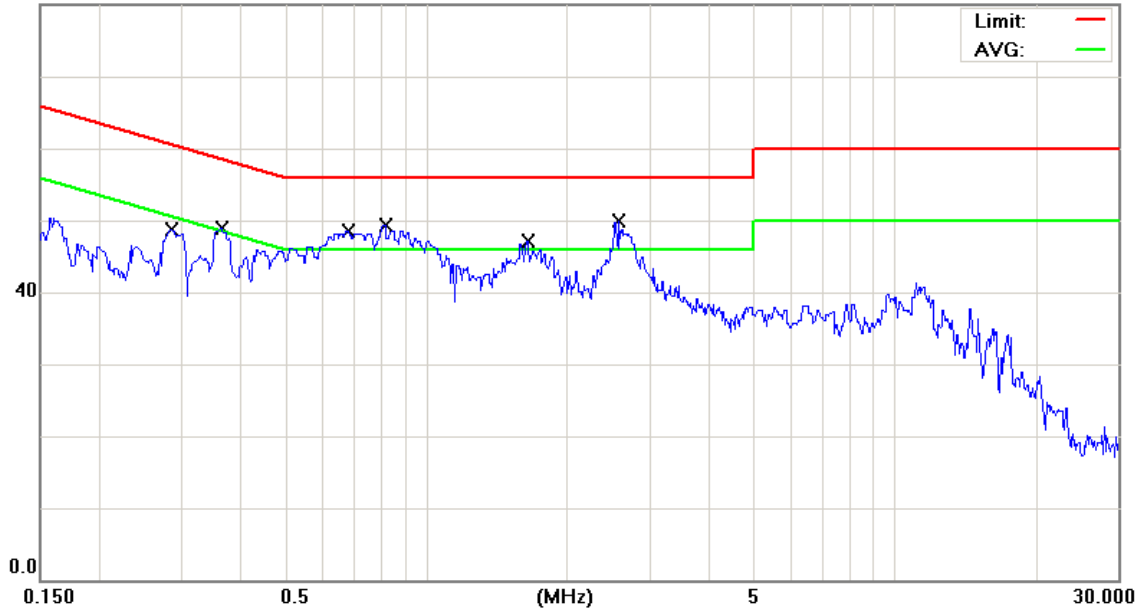

Site : Conducted

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: GSM850

Note: ADAPTER MODEL:TC P310 (Source2)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2858	25.83	9.76	35.59	60.65	-25.06	QP	
2		0.2858	13.29	9.76	23.05	50.65	-27.60	AVG	
3		0.3635	25.99	9.78	35.77	58.65	-22.88	QP	
4		0.3635	15.52	9.78	25.30	48.65	-23.35	AVG	
5		0.6800	24.88	9.79	34.67	56.00	-21.33	QP	
6		0.6800	10.11	9.79	19.90	46.00	-26.10	AVG	
7	*	0.8150	25.72	9.80	35.52	56.00	-20.48	QP	
8		0.8150	13.78	9.80	23.58	46.00	-22.42	AVG	
9		1.6430	21.23	9.83	31.06	56.00	-24.94	QP	
10		1.6430	9.56	9.83	19.39	46.00	-26.61	AVG	
11		2.5790	24.82	9.93	34.75	56.00	-21.25	QP	
12		2.5790	13.25	9.93	23.18	46.00	-22.82	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(GSM850)2ND

Data :#2

Date: 2009/12/22

80.0 dBuV

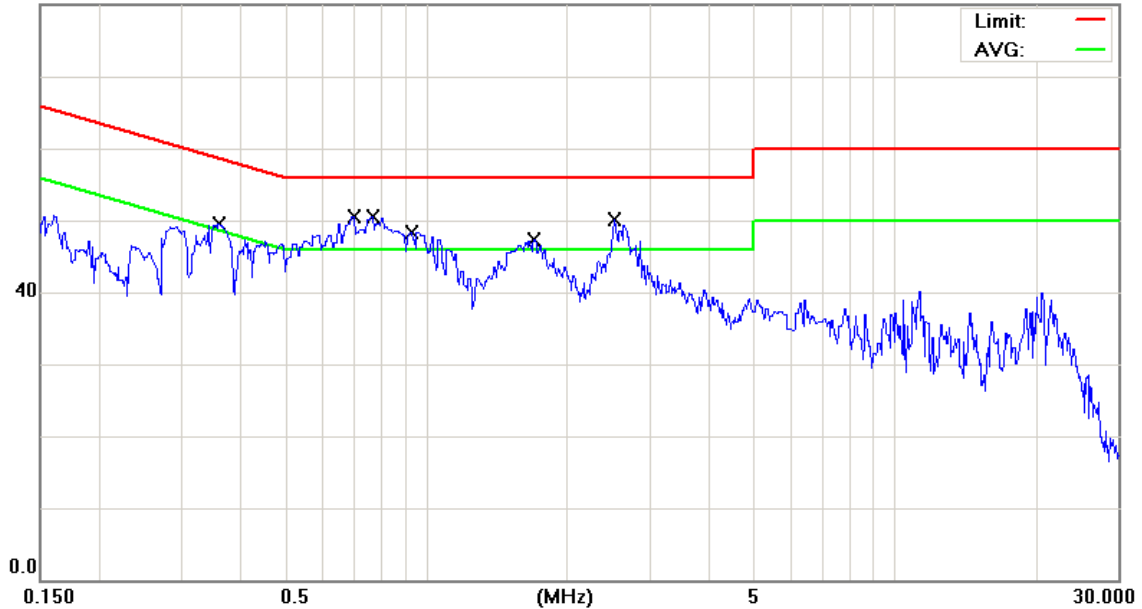

Site : Conducted

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: GSM850

Note: ADAPTER MODEL:TC P310 (Source2)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3600	25.08	9.78	34.86	58.73	-23.87	QP	
2		0.3600	13.42	9.78	23.20	48.73	-25.53	AVG	
3		0.6980	26.56	9.79	36.35	56.00	-19.65	QP	
4	*	0.6980	17.07	9.79	26.86	46.00	-19.14	AVG	
5		0.7700	26.26	9.80	36.06	56.00	-19.94	QP	
6		0.7700	16.02	9.80	25.82	46.00	-20.18	AVG	
7		0.9320	23.98	9.81	33.79	56.00	-22.21	QP	
8		0.9320	14.22	9.81	24.03	46.00	-21.97	AVG	
9		1.7060	24.56	9.82	34.38	56.00	-21.62	QP	
10		1.7060	14.91	9.82	24.73	46.00	-21.27	AVG	
11		2.5160	23.36	9.90	33.26	56.00	-22.74	QP	
12		2.5160	13.36	9.90	23.26	46.00	-22.74	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(PCS1900)MAIN

Data :#1

Date: 2009/12/22

80.0 dBuV

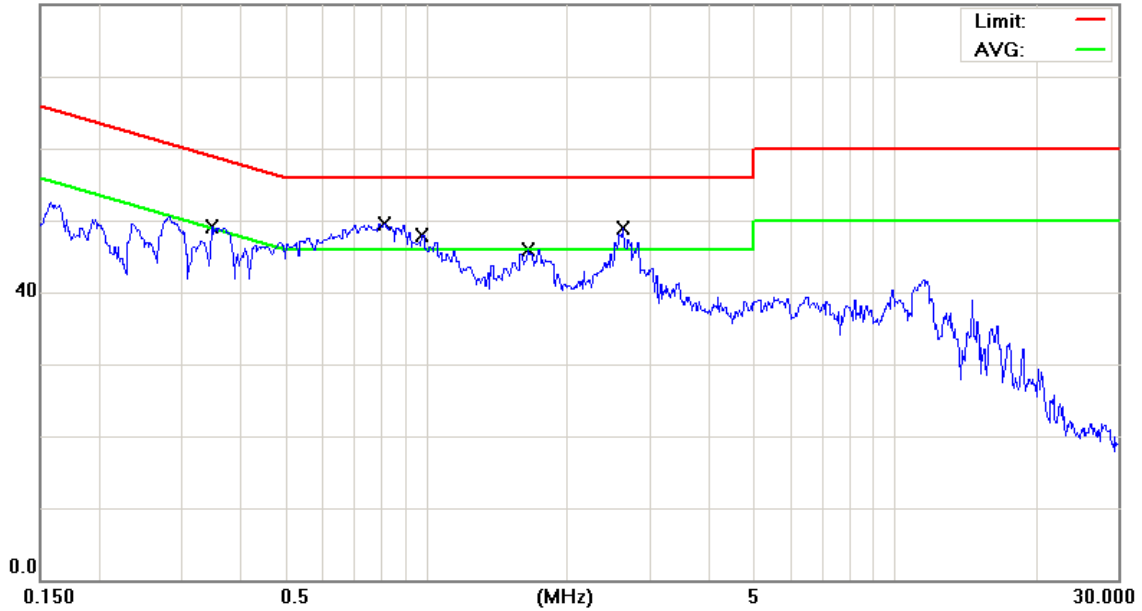

Site : Conducted

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: PCS1900

Note: ADAPTER MODEL:TC P310 (Source1)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3482	26.15	9.78	35.93	59.01	-23.08	QP	
2		0.3482	14.80	9.78	24.58	49.01	-24.43	AVG	
3	*	0.8131	27.55	9.80	37.35	56.00	-18.65	QP	
4		0.8131	14.88	9.80	24.68	46.00	-21.32	AVG	
5		0.9787	22.60	9.81	32.41	56.00	-23.59	QP	
6		0.9787	8.97	9.81	18.78	46.00	-27.22	AVG	
7		1.6450	23.32	9.83	33.15	56.00	-22.85	QP	
8		1.6450	11.95	9.83	21.78	46.00	-24.22	AVG	
9		2.6330	24.25	9.93	34.18	56.00	-21.82	QP	
10		2.6330	16.12	9.93	26.05	46.00	-19.95	AVG	
11		2.6360	24.19	9.93	34.12	56.00	-21.88	QP	
12		2.6360	16.22	9.93	26.15	46.00	-19.85	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(PCS1900)MAIN

Data :#2

Date: 2009/12/22

80.0 dBuV

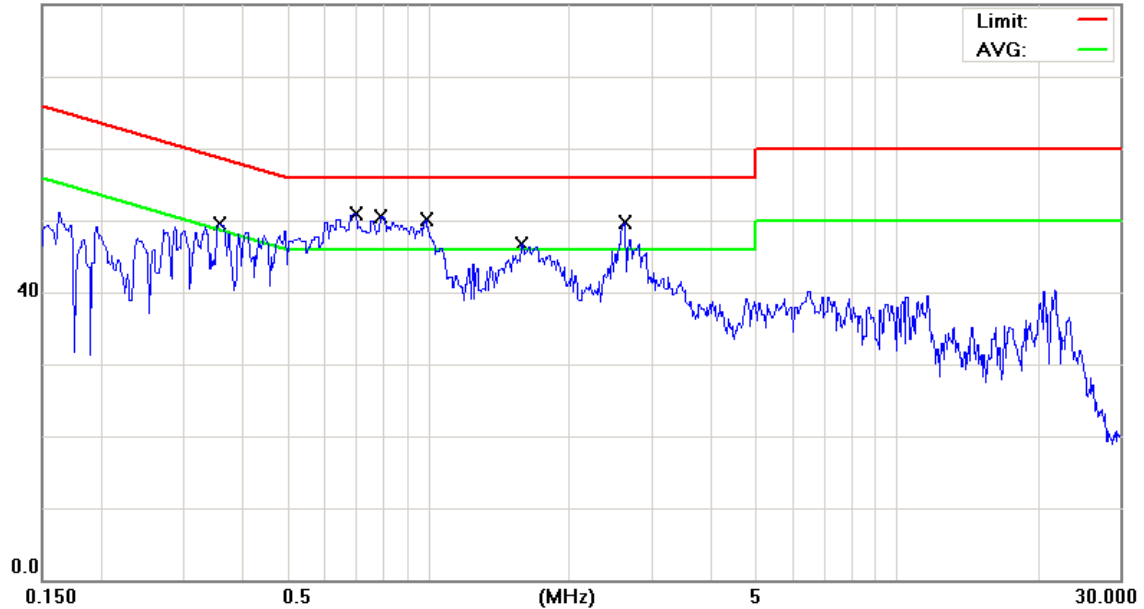

Site : Conducted

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: PCS1900

Note: ADAPTER MODEL:TC P310 (Source1)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3577	25.63	9.78	35.41	58.78	-23.37	QP	
2		0.3577	13.40	9.78	23.18	48.78	-25.60	AVG	
3	*	0.7006	28.92	9.79	38.71	56.00	-17.29	QP	
4		0.7006	15.30	9.79	25.09	46.00	-20.91	AVG	
5		0.7913	27.12	9.80	36.92	56.00	-19.08	QP	
6		0.7913	15.06	9.80	24.86	46.00	-21.14	AVG	
7		0.9890	23.84	9.81	33.65	56.00	-22.35	QP	
8		0.9890	11.77	9.81	21.58	46.00	-24.42	AVG	
9		1.5846	22.93	9.82	32.75	56.00	-23.25	QP	
10		1.5846	14.19	9.82	24.01	46.00	-21.99	AVG	
11		2.6221	27.28	9.93	37.21	56.00	-18.79	QP	
12		2.6221	15.76	9.93	25.69	46.00	-20.31	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(PCS1900)2ND

Data :#1

Date: 2009/12/22

80.0 dBuV

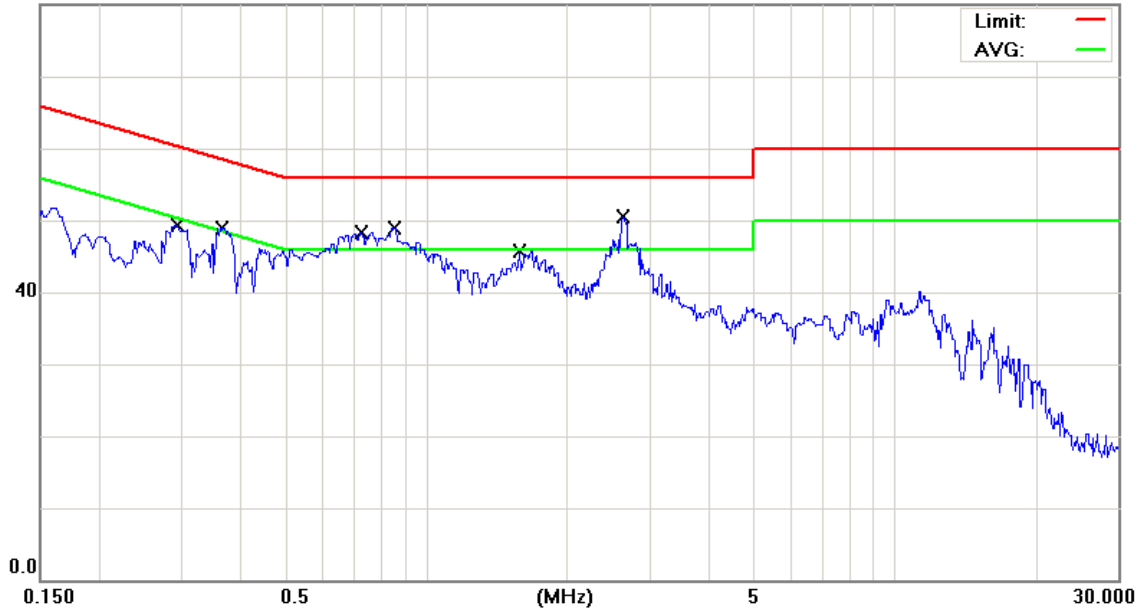

Site : Conducted

Phase: **L1**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: PCS1900

Note: ADAPTER MODEL:TC P310 (Source2)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2928	22.67	9.76	32.43	60.44	-28.01	QP	
2		0.2928	7.85	9.76	17.61	50.44	-32.83	AVG	
3		0.3663	23.15	9.78	32.93	58.58	-25.65	QP	
4		0.3663	5.63	9.78	15.41	48.58	-33.17	AVG	
5		0.7250	25.38	9.80	35.18	56.00	-20.82	QP	
6		0.7250	12.70	9.80	22.50	46.00	-23.50	AVG	
7		0.8510	23.47	9.80	33.27	56.00	-22.73	QP	
8		0.8510	9.55	9.80	19.35	46.00	-26.65	AVG	
9		1.5800	20.12	9.82	29.94	56.00	-26.06	QP	
10		1.5800	8.50	9.82	18.32	46.00	-27.68	AVG	
11	*	2.6240	26.48	9.93	36.41	56.00	-19.59	QP	
12		2.6240	14.37	9.93	24.30	46.00	-21.70	AVG	


*:Maximum data x:Over limit !:over margin

File :09-0355-SE(PCS1900)2ND

Data :#2

Date: 2009/12/22

80.0 dBuV

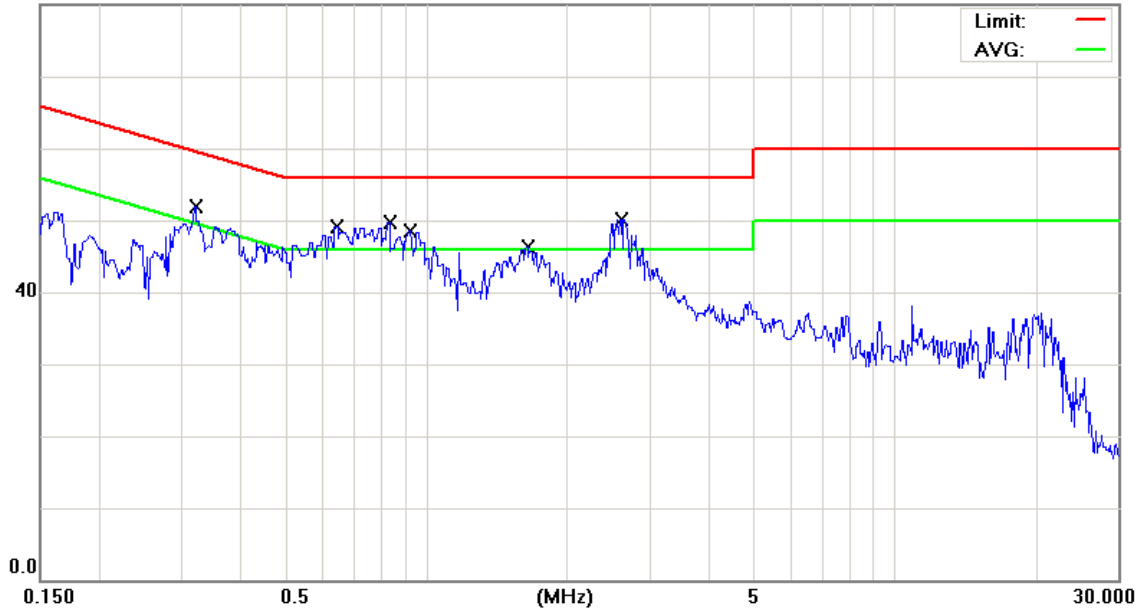

Site : Conducted

Phase: **L2**

Temperature: 26 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Smartphone

M/N: PB65100

Mode: PCS1900

Note: ADAPTER MODEL:TC P310 (Source2)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3201	27.41	9.77	37.18	59.70	-22.52	QP	
2		0.3201	19.55	9.77	29.32	49.70	-20.38	AVG	
3		0.6440	25.34	9.79	35.13	56.00	-20.87	QP	
4		0.6440	16.37	9.79	26.16	46.00	-19.84	AVG	
5		0.8330	21.47	9.80	31.27	56.00	-24.73	QP	
6		0.8330	10.35	9.80	20.15	46.00	-25.85	AVG	
7		0.9230	23.27	9.81	33.08	56.00	-22.92	QP	
8		0.9230	11.54	9.81	21.35	46.00	-24.65	AVG	
9		1.6430	20.89	9.83	30.72	56.00	-25.28	QP	
10		1.6430	11.39	9.83	21.22	46.00	-24.78	AVG	
11	*	2.5970	27.93	9.93	37.86	56.00	-18.14	QP	
12		2.5970	14.37	9.93	24.30	46.00	-21.70	AVG	

*:Maximum data x:Over limit !:over margin