

FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Pocket PC Phone
MODEL NAME : PB81120
FCC ID : NM8PB81120
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Nov. 20, 2009 and completely tested on Dec. 01, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Testing Site 6

 1.5 Applied Standards 6

 1.6 Ancillary Equipment List 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 RF Output Power 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 10

 2.4 RF Utility 10

3 TEST RESULT 11

 3.1 Number of Channel Measurement 11

 3.2 20dB Bandwidth Measurement 13

 3.3 Hopping Channel Separation Measurement 20

 3.4 Dwell Time Measurement..... 23

 3.5 Peak Output Power Measurement 25

 3.6 Band Edges Measurement 28

 3.7 Spurious Emission Measurement..... 39

 3.8 AC Conducted Emission Measurement..... 43

 3.9 Radiated Emission Measurement..... 47

 3.10 Antenna Requirements 58

4 LIST OF MEASURING EQUIPMENT..... 59

5 UNCERTAINTY OF EVALUATION..... 60

6 CERTIFICATION OF TAF ACCREDITATION 62

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1W	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 7.8 dB at 0.31 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.03 dB at 37.83 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

HTC Corporation

No. 23, Xinghua Rd., Taoyuan 330, Taiwan

1.2 Manufacturer

HTC Corporation

No. 23, Xinghua Rd., Taoyuan 330, Taiwan

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Pocket PC Phone
Model Name	PB81120
FCC ID	NM8PB81120
Pocket PC Phone 1	EUT with LCD Panel 1 + Camera 1
Pocket PC Phone 2	EUT with LCD Panel 2 + Camera 2
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : -0.22 dBm (0.95 mW) Bluetooth EDR (2Mbps) : 2.36 dBm (1.72 mW) Bluetooth EDR (3Mbps) : 0.13 dBm (1.03 mW)
Antenna Type	PIFA Antenna with gain 0.5 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH06-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 7

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.



1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	LCD Monitor	Lenovo	6135-AB1	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-100	PYA1YH	N/A	N/A
7.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
8.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	π /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	-0.22 dBm	2.33 dBm	0.13 dBm
Ch39	2441MHz	-0.78 dBm	1.83 dBm	-0.35 dBm
Ch78	2480MHz	-0.31 dBm	2.36 dBm	0.11 dBm

Remark:

1. The data rate was set in 2Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.



2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	Mode 1: CH00_2402 MHz for Pocket PC Phone 1 + Adapter 1 + Earphone 1 Mode 2: CH39_2441 MHz for Pocket PC Phone 1 + Adapter 1 + Earphone 1 Mode 3: CH78_2480 MHz for Pocket PC Phone 1 + Adapter 1 + Earphone 1 Mode 4: CH78_2480 MHz for Pocket PC Phone 2 + Adapter 1 + Earphone 1	N/A
AC Conducted Emission	Mode 1 :Pocket PC Phone 1 + GSM850 Idle + Bluetooth Link + WLAN Link + GPS Rx + Camera + Earphone 2 + USB Cable (Link with Notebook) Mode 2 :Pocket PC Phone 2 + GSM850 Idle + Bluetooth Link + WLAN Link + GPS Rx + Camera + Earphone 2 + USB Cable (Link with Notebook)		
Remark: 1. For radiated TCs, the data rate was set in 2Mbps due to the highest RF output power; only the data of these modes was reported. 2. For conducted emission, the worst case is mode 2; only the test data of this mode was reported.			

2.3 Connection Diagram of Test System

<Conducted Emission>

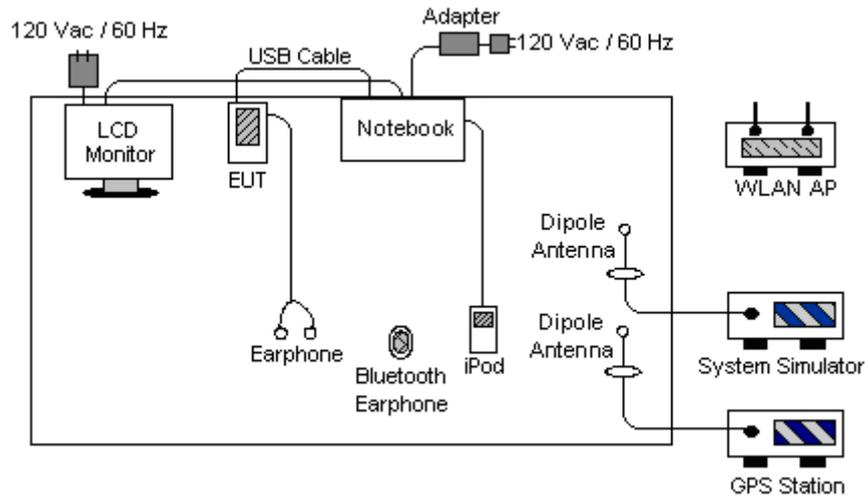

<Radiated Emission>

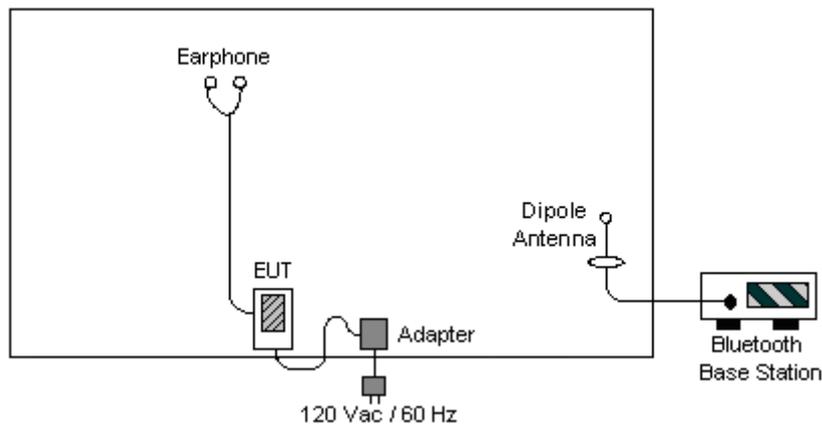

2.4 RF Utility

For Bluetooth function, the RF utility, "BRCMRFTTestUtil" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; $RBW \geq 1\%$ of the span; $VBW \geq RBW$; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

3.1.4 Test Setup

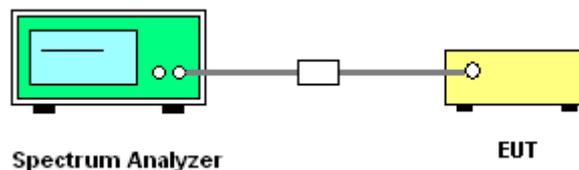




3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 4~6	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	44~46%
Number of Hopping Channels (Channel)		Limits (Channel)	
79		> 15	
		Pass/Fail	
		Pass	

Number of Hopping Channel Plot on Channel 00 - 78

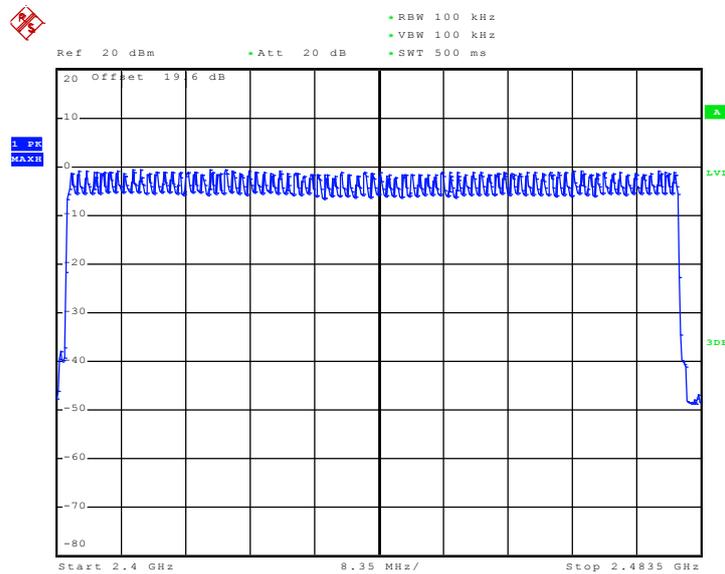

Date: 27.NOV.2009 07:58:08

3.2 20dB Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

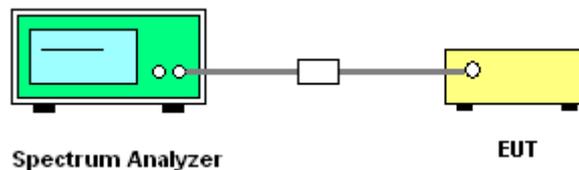




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	44~46%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.981
39	2441	0.990
78	2480	0.999


20 dB Bandwidth Plot on Channel 00

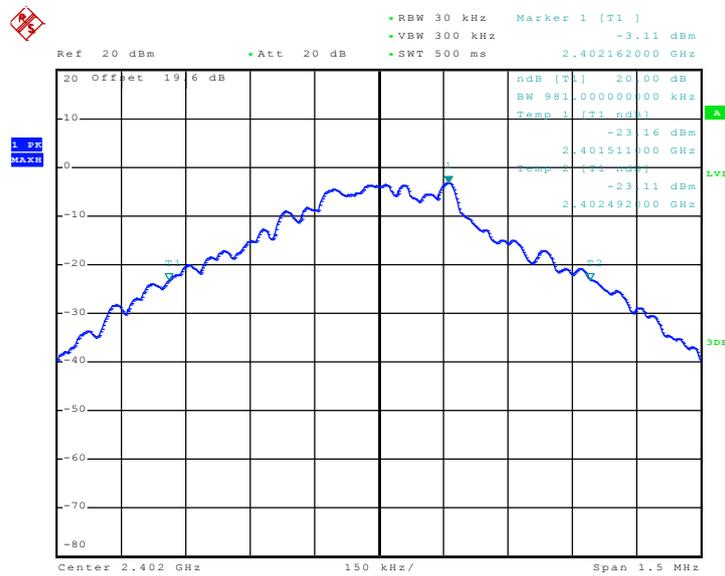

Date: 27.NOV.2009 07:01:08




20 dB Bandwidth Plot on Channel 39

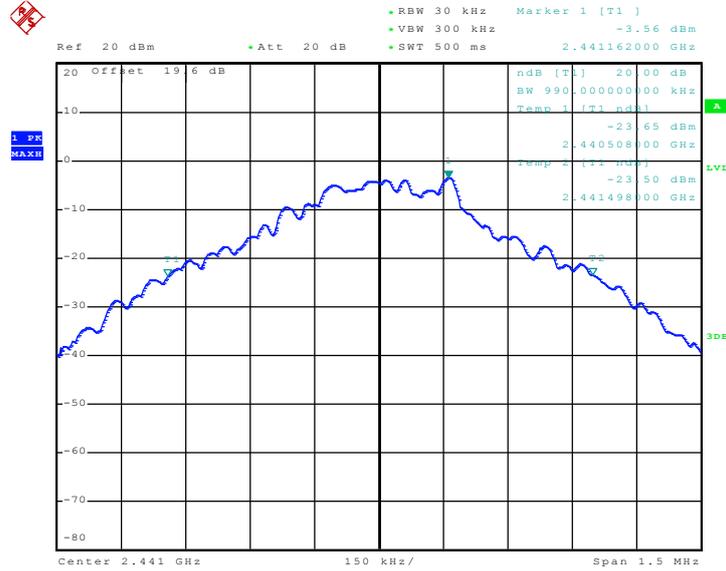

Date: 27.NOV.2009 07:01:30

20 dB Bandwidth Plot on Channel 78

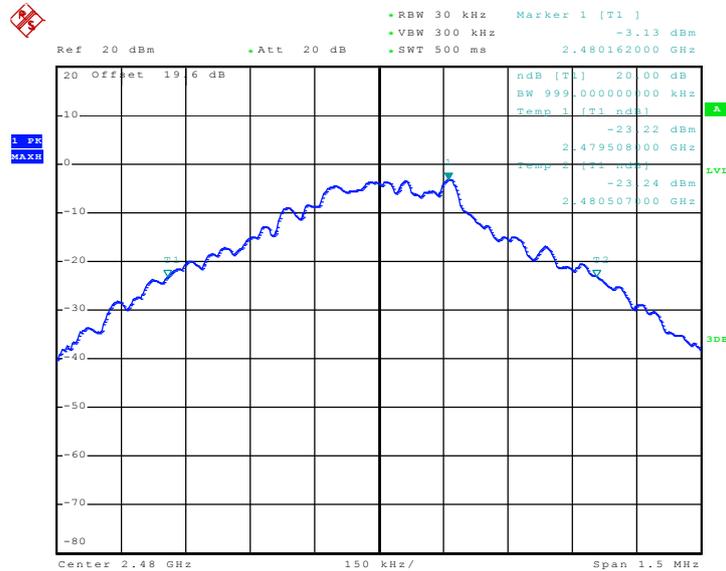


Date: 27.NOV.2009 07:02:06



Test Mode :	Mode 4, 5, 6	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	44~46%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.260
39	2441	1.316
78	2480	1.316

20 dB Bandwidth Plot on Channel 00

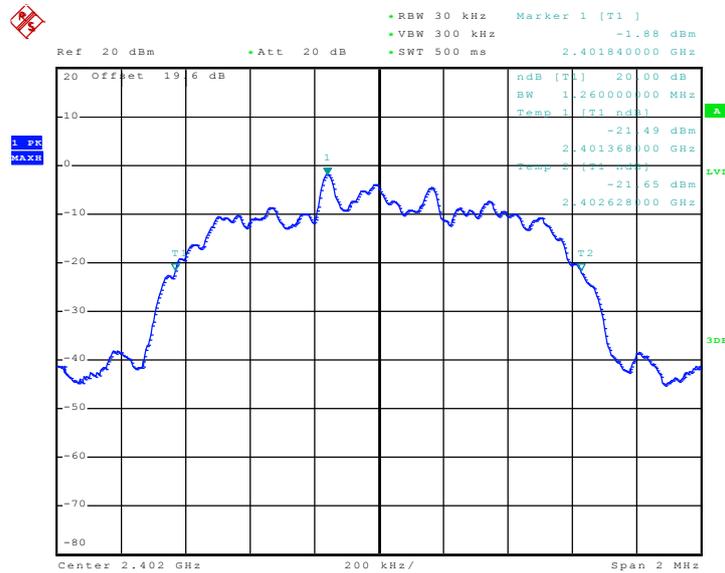

Date: 27.NOV.2009 07:02:55




20 dB Bandwidth Plot on Channel 39



Date: 27.NOV.2009 07:03:13

20 dB Bandwidth Plot on Channel 78

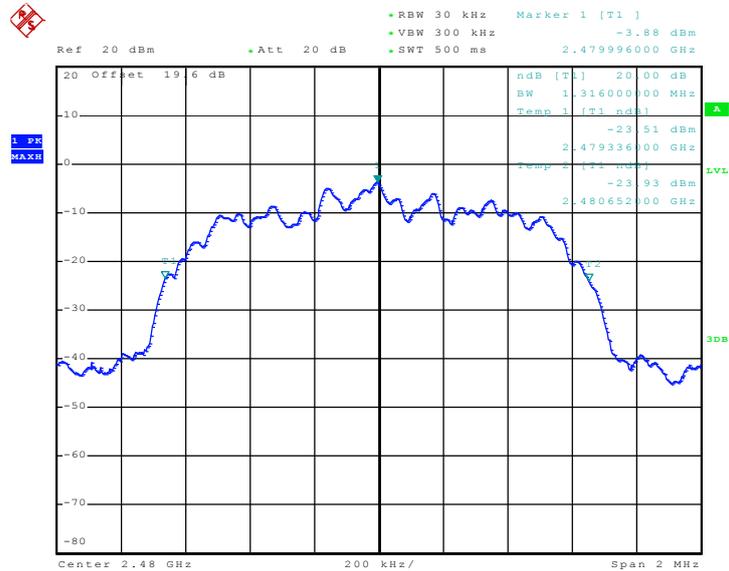


Date: 27.NOV.2009 07:03:36



Test Mode :	Mode 7, 8, 9	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	44~46%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.312
39	2441	1.316
78	2480	1.316

20 dB Bandwidth Plot on Channel 00

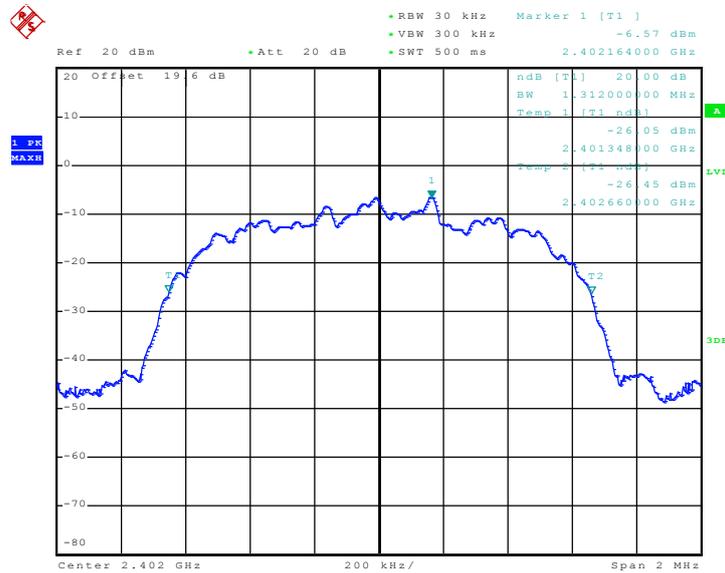

Date: 27.NOV.2009 07:04:16




20 dB Bandwidth Plot on Channel 39



Date: 27.NOV.2009 07:04:51

20 dB Bandwidth Plot on Channel 78

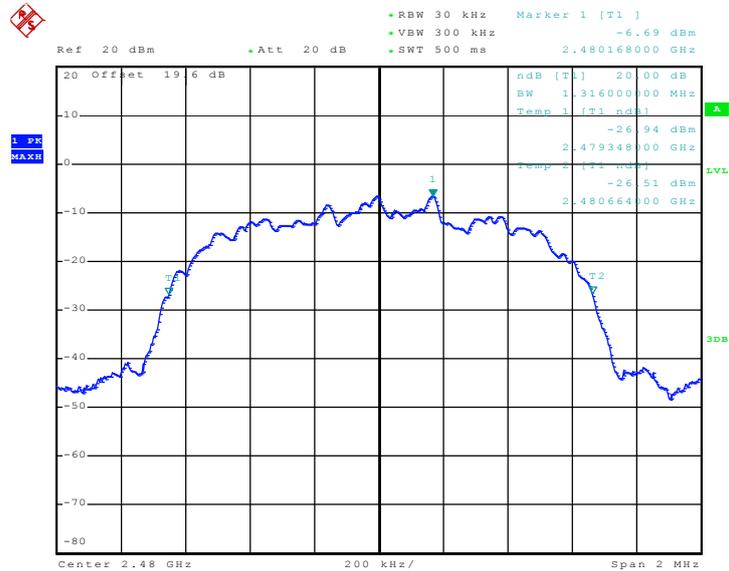

Date: 27.NOV.2009 07:05:30

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

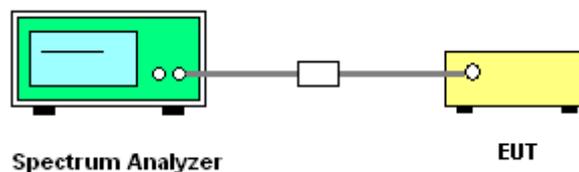




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 4, 5, 6	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	44~46%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.840	Pass
39	2441	1.008	0.877	Pass
78	2480	1.008	0.877	Pass


Channel Separation Plot on Channel 00 - 01

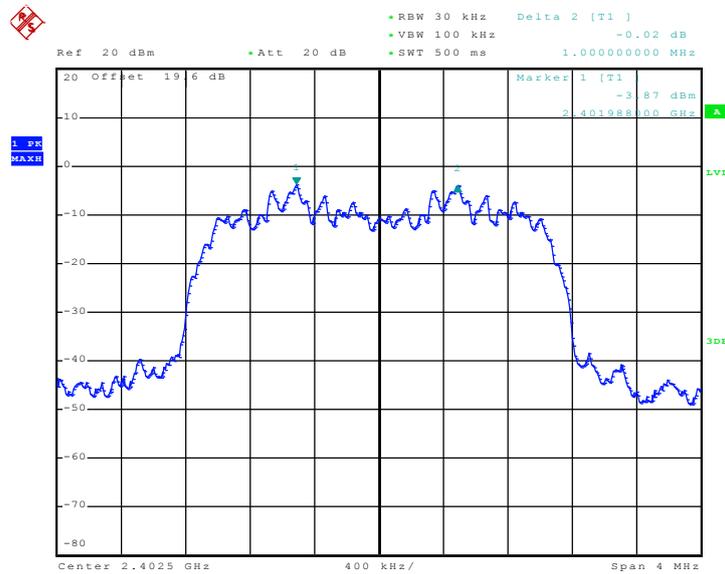

Date: 27.NOV.2009 07:25:31




Channel Separation Plot on Channel 39 - 40

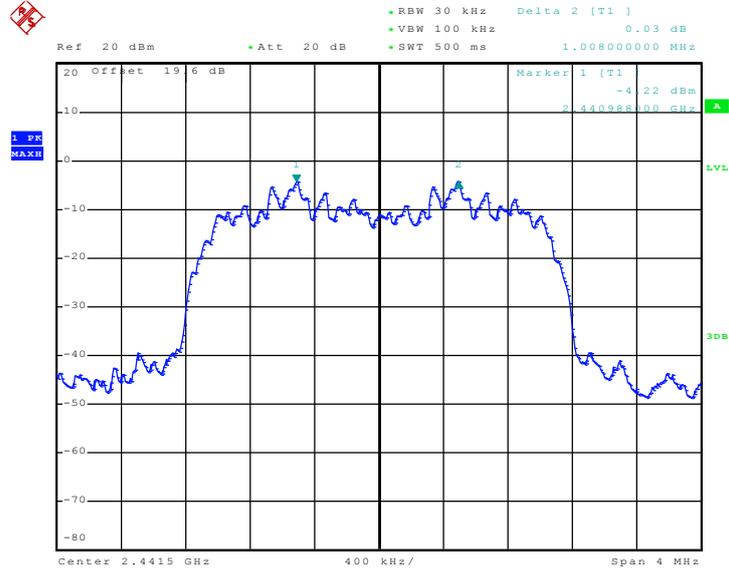

Date: 27.NOV.2009 07:26:37

Channel Separation Plot on Channel 77 - 78

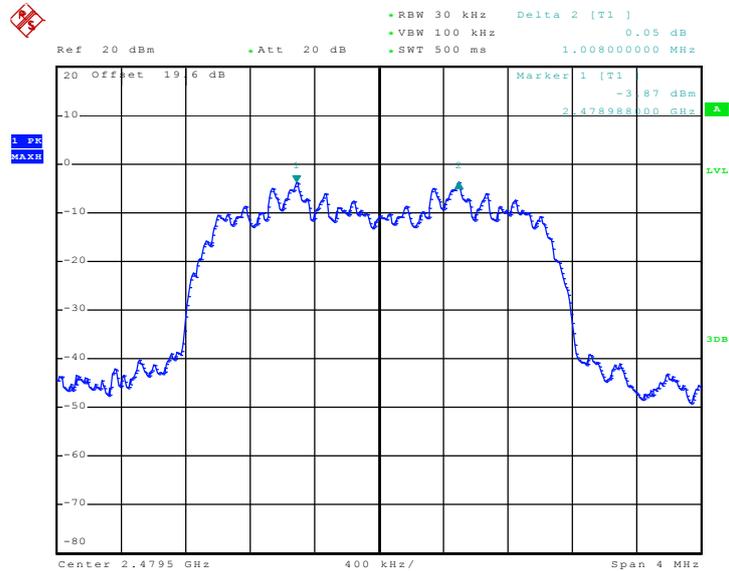

Date: 27.NOV.2009 07:28:00

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

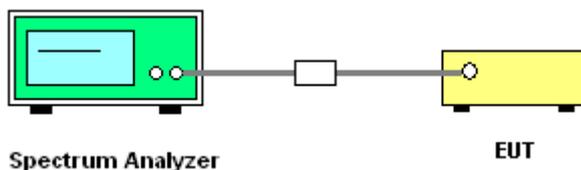

3.4.5 Test Result of Dwell Time


Test Mode :	Mode 5	Temperature :	26~28°C		
Test Engineer :	Ken Hsu	Relative Humidity :	44~46%		
Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	3.10	2960.00	0.29	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




2DH5 Dwell Time (One Pulse) Plot on Channel 39

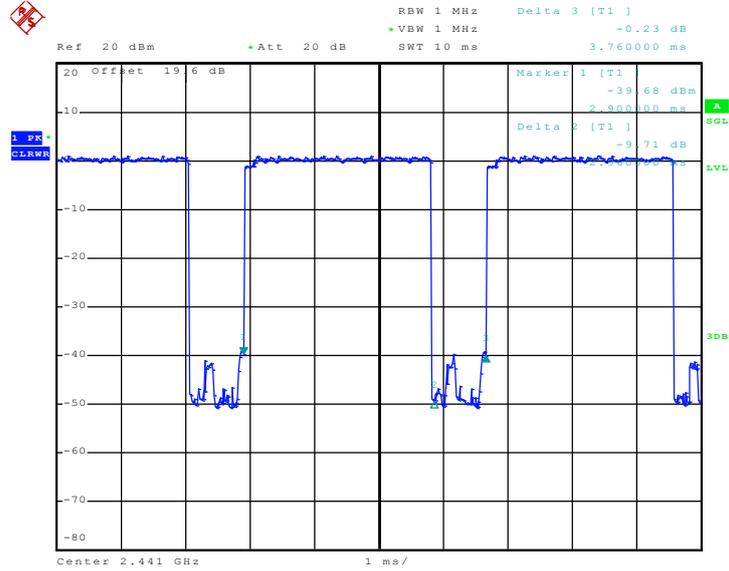

Date: 27.NOV.2009 08:41:52

2DH5 Dwell Time (Count Pulses) Plot on Channel 39

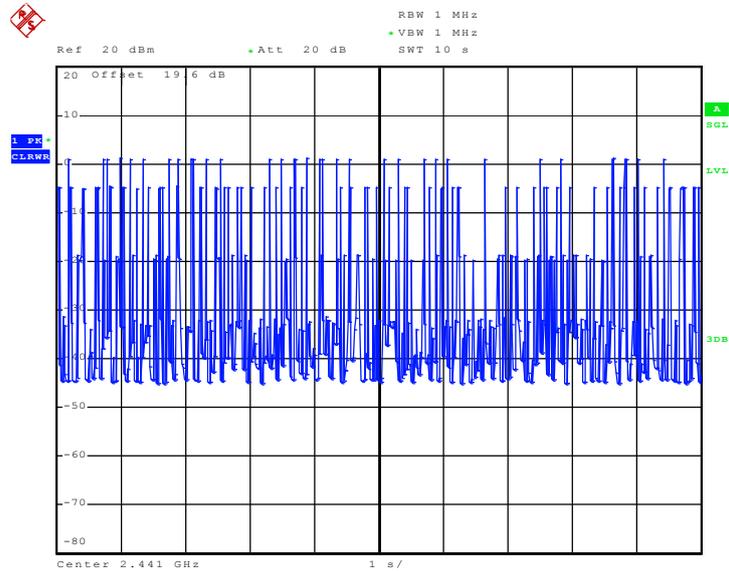

Date: 27.NOV.2009 07:47:16

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

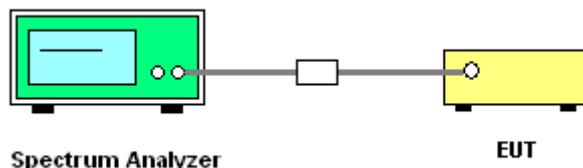


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 4, 5, 6	Temperature :	26~28°C
Test Engineer :	Ken Hsu	Relative Humidity :	44~46%

Channel	Frequency (MHz)	RF Power (dBm)		
		π /4-DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	2.33	30	Pass
39	2441	1.83	30	Pass
78	2480	2.36	30	Pass




Peak Output Power Plot on Channel 00

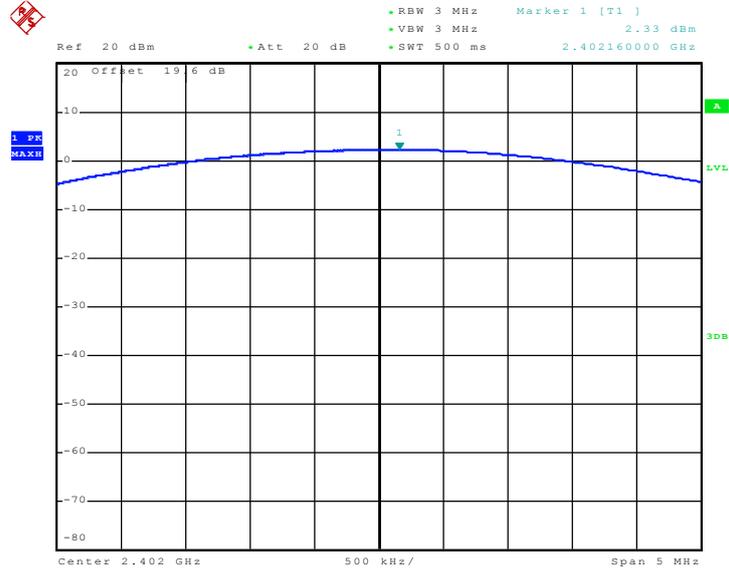

Date: 27.NOV.2009 04:30:22


Peak Output Power Plot on Channel 39

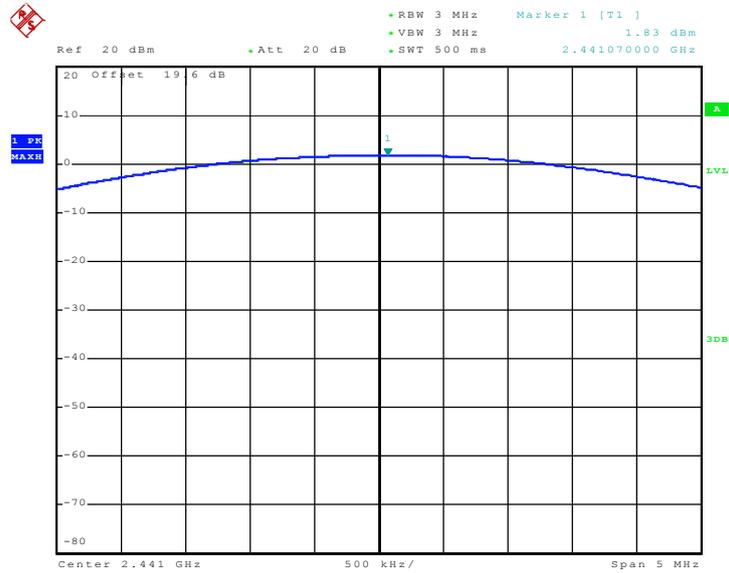

Date: 27.NOV.2009 04:31:48



Peak Output Power Plot on Channel 78

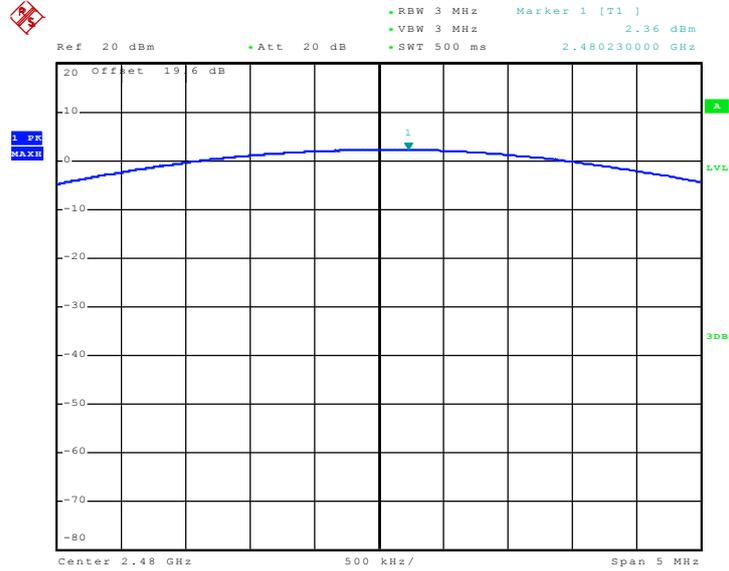

Date: 27.NOV.2009 04:34:36



3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW) \geq RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

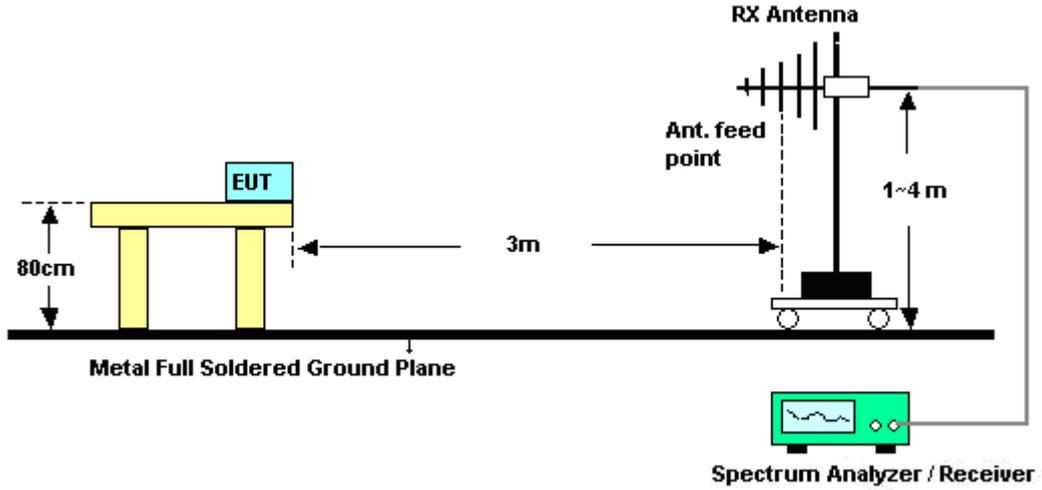

<Conducted Band Edges>

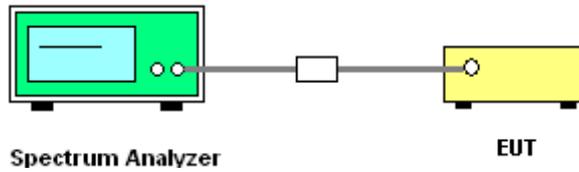



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	47~48%
		Test Engineer :	Mac Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2353.89	49.06	-24.94	74.00	49.47	31.81	3.86	36.07	131	360	Peak
2353.89	32.16	-21.84	54.00	32.57	31.81	3.86	36.07	131	360	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.42	45.51	-28.49	74.00	45.81	31.86	3.92	36.08	168	35	Peak
2389.42	31.50	-22.50	54.00	31.80	31.86	3.92	36.08	168	35	Average

Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	47~48%
		Test Engineer :	Mac Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	65.85	-8.15	74.00	65.92	31.98	4.05	36.10	154	354	Peak
2483.50	50.92	-3.08	54.00	50.99	31.98	4.05	36.10	154	354	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	61.59	-12.41	74.00	61.66	31.98	4.05	36.10	109	28	Peak
2483.50	48.05	-5.95	54.00	48.12	31.98	4.05	36.10	109	28	Average



Test Mode :	Mode 4	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	47~48%
		Test Engineer :	Mac Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	66.49	-7.51	74.00	66.56	31.98	4.05	36.10	155	352	Peak
2483.50	26.90	-27.10	54.00	26.97	31.98	4.05	36.10	155	352	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	83.48	57.77	25.71	54	-28.29	Pass
Hopping Mode	83.48	56.58	26.9	54	-27.1	Pass

Note : Average result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	61.66	-12.34	74.00	61.73	31.98	4.05	36.10	108	27	Peak
2483.50	24.62	-29.38	54.00	24.69	31.98	4.05	36.10	108	27	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	79.54	55.11	24.43	54	-29.57	Pass
Hopping Mode	79.54	54.92	24.62	54	-29.38	Pass

Note : Average result = Maximum field strength – Delta result



Test Mode :	Mode 4	Temperature :	23°C
Test Channel :	78	Relative Humidity :	42%
Test Engineer :	Mac Lin	Polarization :	Horizontal




Trace: (Discrete)
 Site : 03CH06-HY
 Condition : FCC CLASS-B 3m HF-ANT_000824 HORIZONTAL
 Project : FR 961306-05
 Temp. : 23 °C
 Humidity : 42 %

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	101.73	27.73	74.00	101.79	31.98	4.05	36.10	155	352	Peak
2 @	2480.00	83.48	29.48	54.00	83.55	31.98	4.05	36.10	155	352	Average

* Maximum field strength of the fundamental emission



Test Mode :	Mode 4	Temperature :	23°C
Test Channel :	78	Relative Humidity :	42%
Test Engineer :	Mac Lin	Polarization :	Horizontal

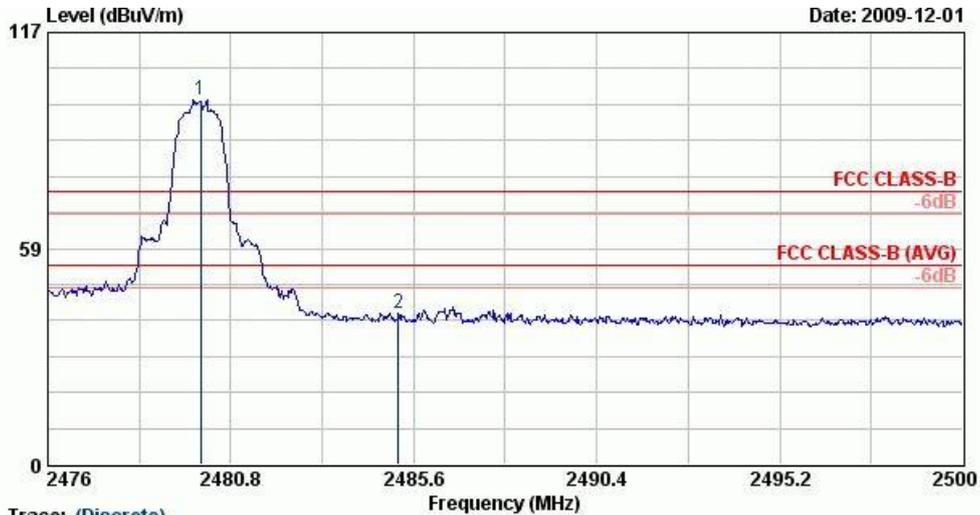


Trace: (Discrete)
 Site : 03CH06-HY
 Condition : FCC CLASS-B 3m HF-ANT_090824 HORIZONTAL
 Project : FR 961306-05
 Temp. : 23 °C
 Humidity : 42 %

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	98.72	24.72	74.00	98.79	31.98	4.05	36.10	155	352	Peak
2 @	2485.19	40.95	-33.05	74.00	41.02	31.98	4.05	36.10	155	352	Peak

* Marker-Delta Method (RBW/VBW=100KHz): 57.77 dB , single carrier Mode



Test Mode :	Mode 4	Temperature :	23°C
Test Channel :	78	Relative Humidity :	42%
Test Engineer :	Mac Lin	Polarization :	Horizontal

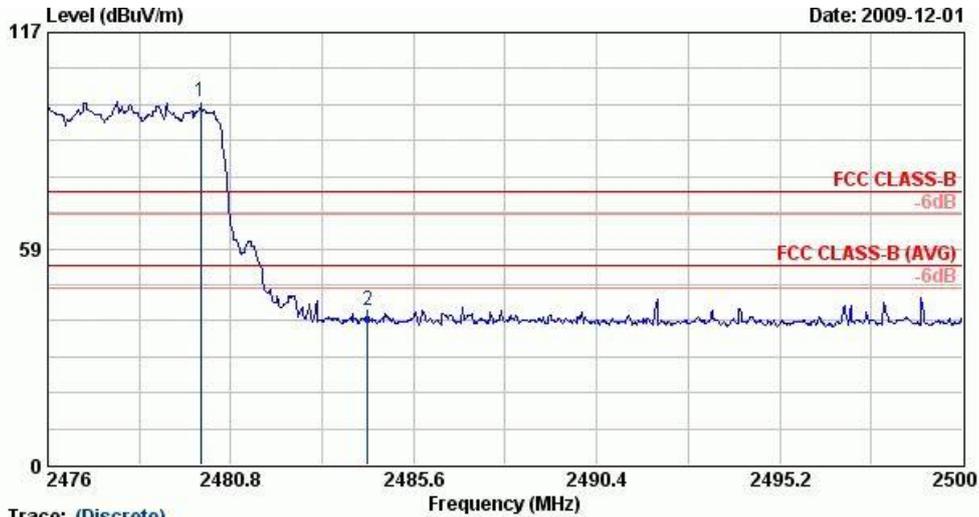

Trace: (Discrete)


Site : 03CH06-HY
 Condition : FCC CLASS-B 3m HF-ANT_090824 HORIZONTAL
 Project : FR 961306-05
 Temp. : 23 °C
 Humidity : 42 %

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	98.28	24.28	74.00	98.35	31.98	4.05	36.10	155	352	Peak
2 @	2484.40	41.70	-32.30	74.00	41.77	31.98	4.05	36.10	155	352	Peak

* Marker-Delta Method (RBW/VBW=100KHz): 56.58 dB , Hopping Mode



Test Mode :	Mode 4	Temperature :	23°C
Test Channel :	78	Relative Humidity :	42%
Test Engineer :	Mac Lin	Polarization :	Vertical

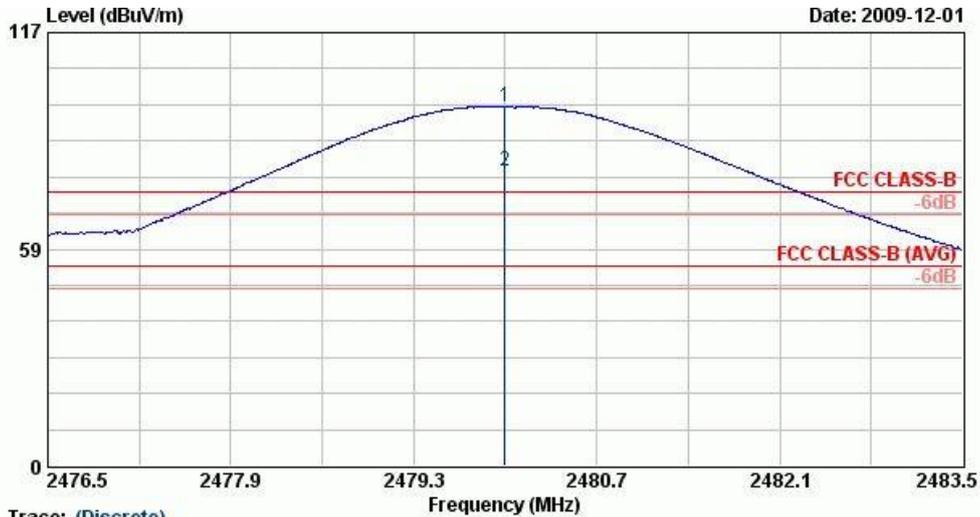

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m HF-ANT_000824 VERTICAL
 Project : FR 961306-05


Temp. : 23 °C
 Humidity : 42 %

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	96.97	22.97	74.00	97.04	31.98	4.05	36.10	108	27	Peak
2 @	2480.00	79.54	25.54	54.00	79.61	31.98	4.05	36.10	108	27	Average

* Maximum field strength of the fundamental emission



Test Mode :	Mode 4	Temperature :	23°C
Test Channel :	78	Relative Humidity :	42%
Test Engineer :	Mac Lin	Polarization :	Vertical

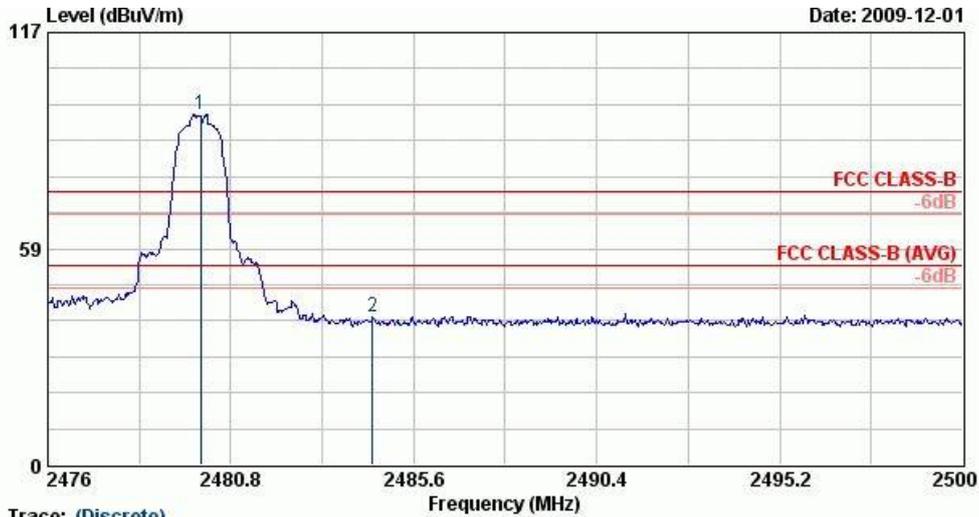

Trace: (Discrete)


Site : 03CH06-HY
 Condition : FCC CLASS-B 3m HF-ANT_000824 VERTICAL
 Project : FR 961306-05
 Temp. : 23 °C
 Humidity : 42 %

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg	
1 @	2480.00	94.91	20.91	74.00	94.98	31.98	4.05	36.10	108	27	Peak
2 @	2484.52	39.80	-34.20	74.00	39.87	31.98	4.05	36.10	108	27	Peak

* Marker-Delta Method (RBW/VBW=100KHz): 55.11 dB , single carrier Mode



Test Mode :	Mode 4	Temperature :	23°C
Test Channel :	78	Relative Humidity :	42%
Test Engineer :	Mac Lin	Polarization :	Vertical

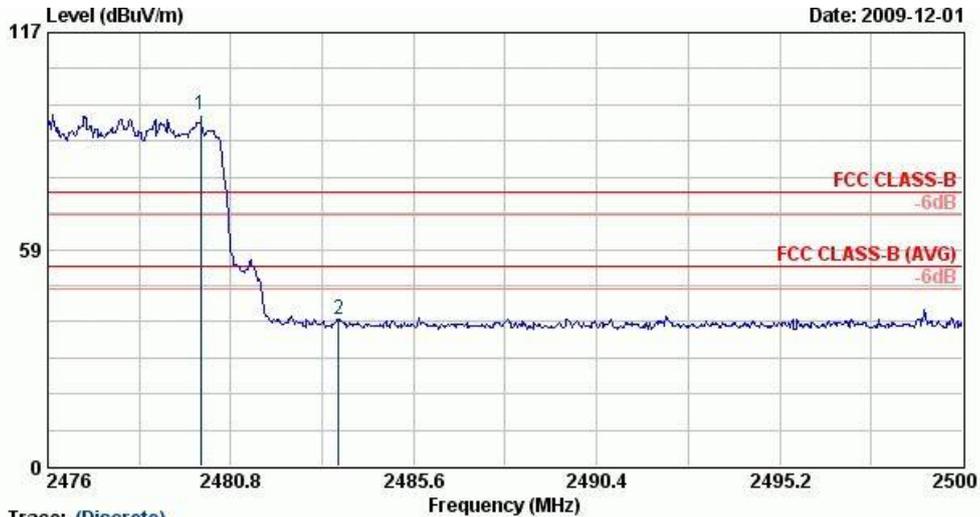

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m HF-ANT_090824 VERTICAL
 Project : FR 961306-05

Temp. : 23 °C
 Humidity : 42 %

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	94.68	20.68	74.00	94.75	31.98	4.05	36.10	108	27	Peak
2 @	2483.63	39.76	-34.24	74.00	39.82	31.98	4.05	36.10	108	27	Peak


* Marker-Delta Method (RBW/VBW=100KHz): 54.92 dB , Hopping Mode



3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	26~28°C
Test Channel :	00 and 78	Relative Humidity :	44~46%
		Test Engineer :	Ken Hsu

Low Band Edge Plot on Channel 00

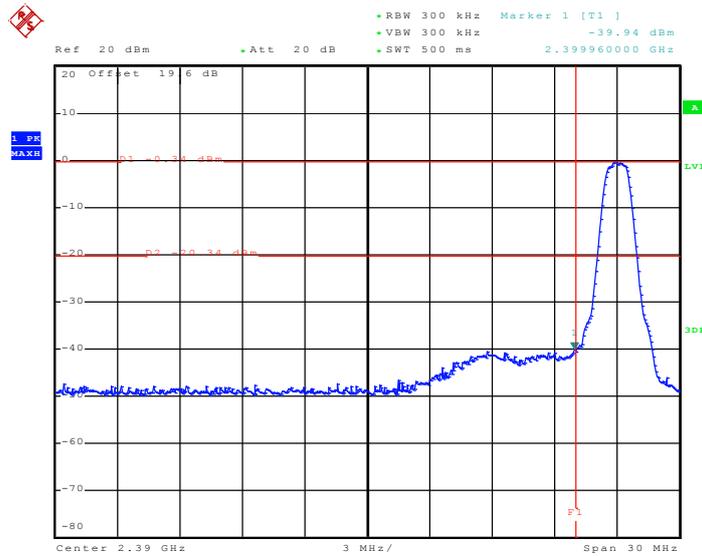

Date: 27.NOV.2009 07:16:57

High Band Edge Plot on Channel 78

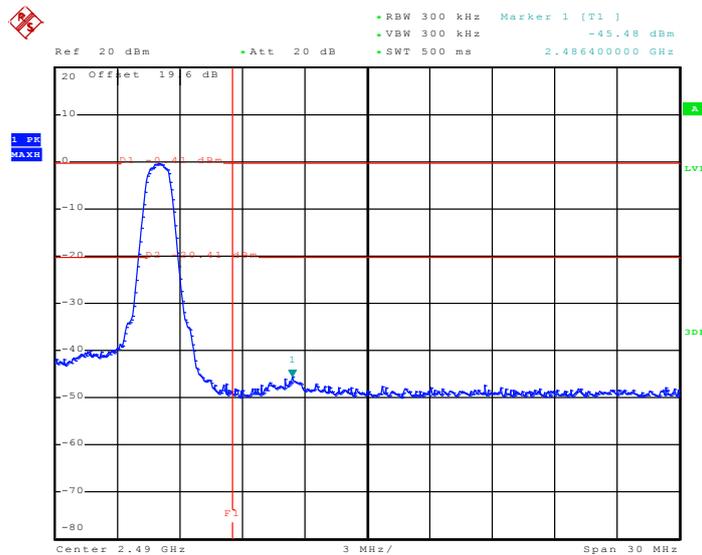

Date: 27.NOV.2009 07:20:01

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) \geq RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

3.7.4 Test Setup

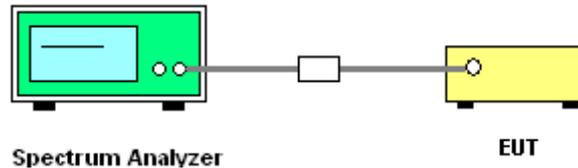




3.7.5 Test Result


Test Mode :	Mode 4	Temperature :	26~28°C
Test Channel :	00	Relative Humidity :	44~46%
		Test Engineer :	Ken Hsu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

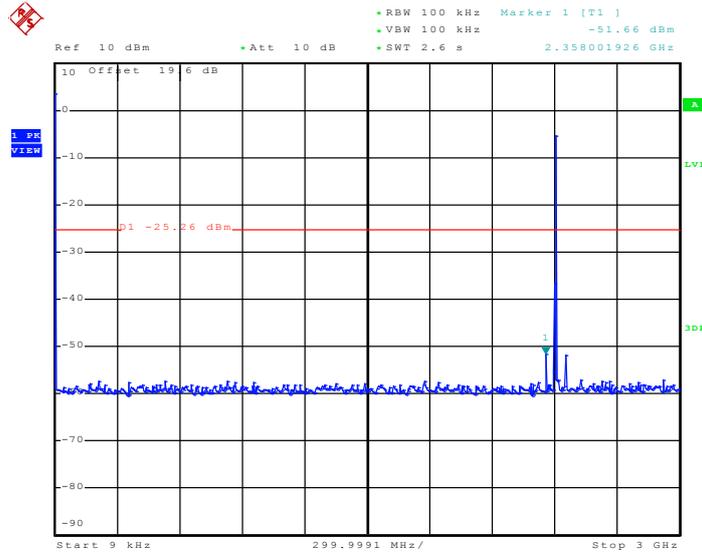

Date: 28.NOV.2009 00:26:05

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

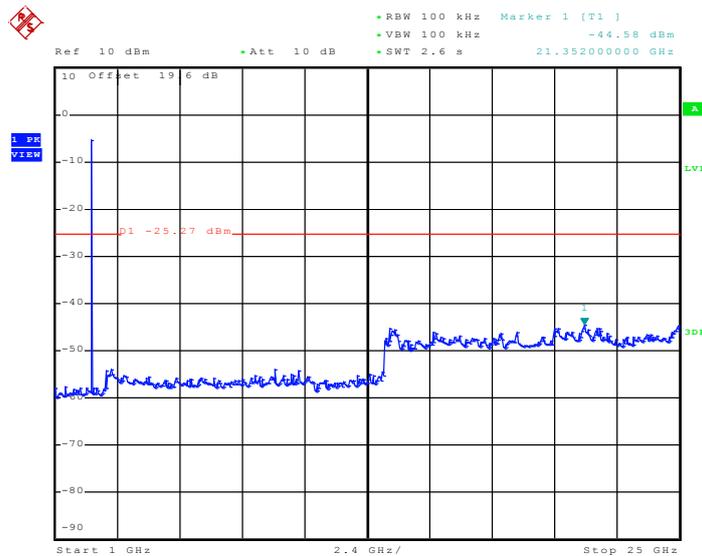


Date: 28.NOV.2009 00:26:23




Test Mode :	Mode 5	Temperature :	26~28°C
Test Channel :	39	Relative Humidity :	44~46%
		Test Engineer :	Ken Hsu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

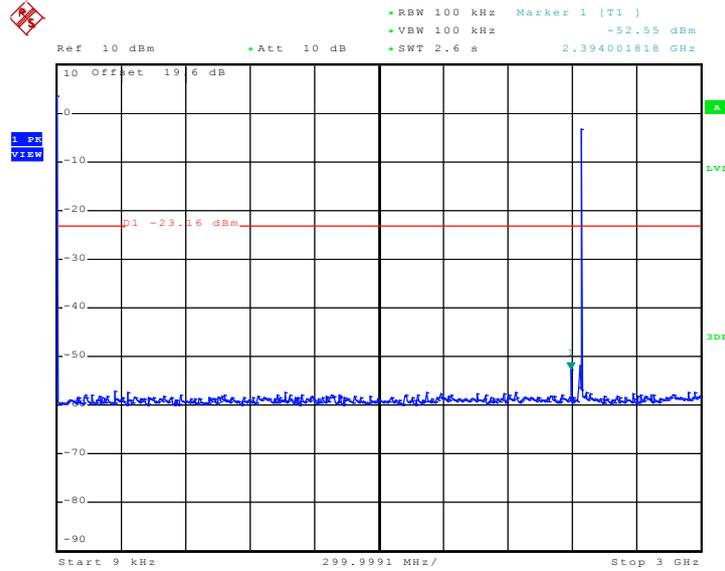

Date: 28.NOV.2009 00:26:54

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

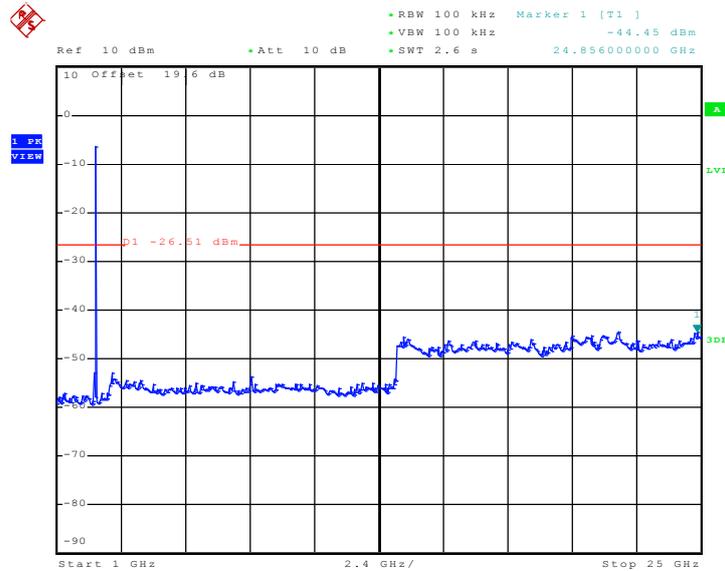


Date: 28.NOV.2009 00:27:31




Test Mode :	Mode 6	Temperature :	26~28°C
Test Channel :	78	Relative Humidity :	44~46%
		Test Engineer :	Ken Hsu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

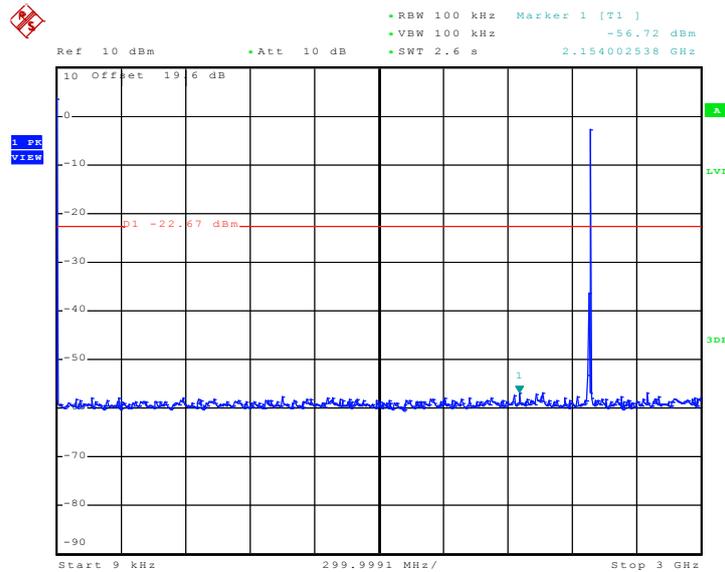

Date: 28.NOV.2009 00:28:08

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

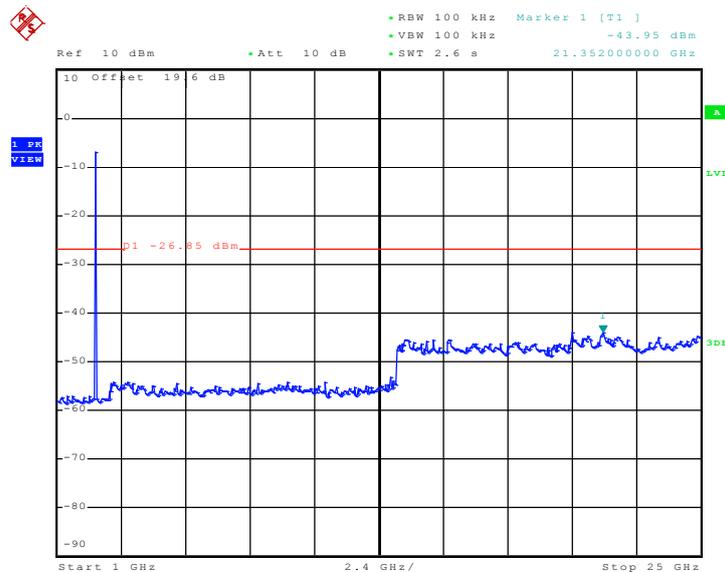

Date: 28.NOV.2009 00:29:39

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

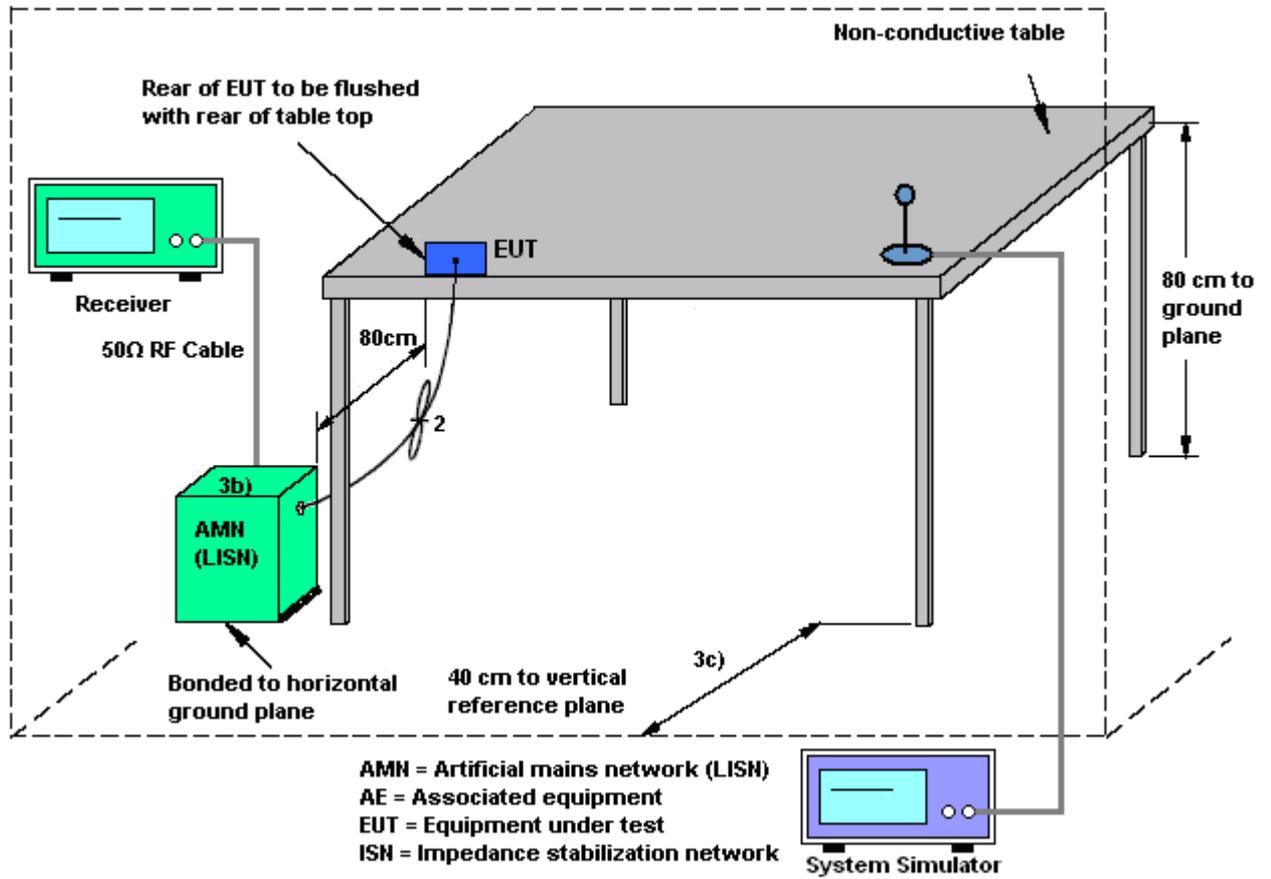

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Hayden Wu	Relative Humidity :	51~54%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Pocket PC Phone 2 + GSM850 Idle + Bluetooth Link + WLAN Link + GPS Rx + Camera + Earphone 2 + USB Cable (Link with Notebook)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

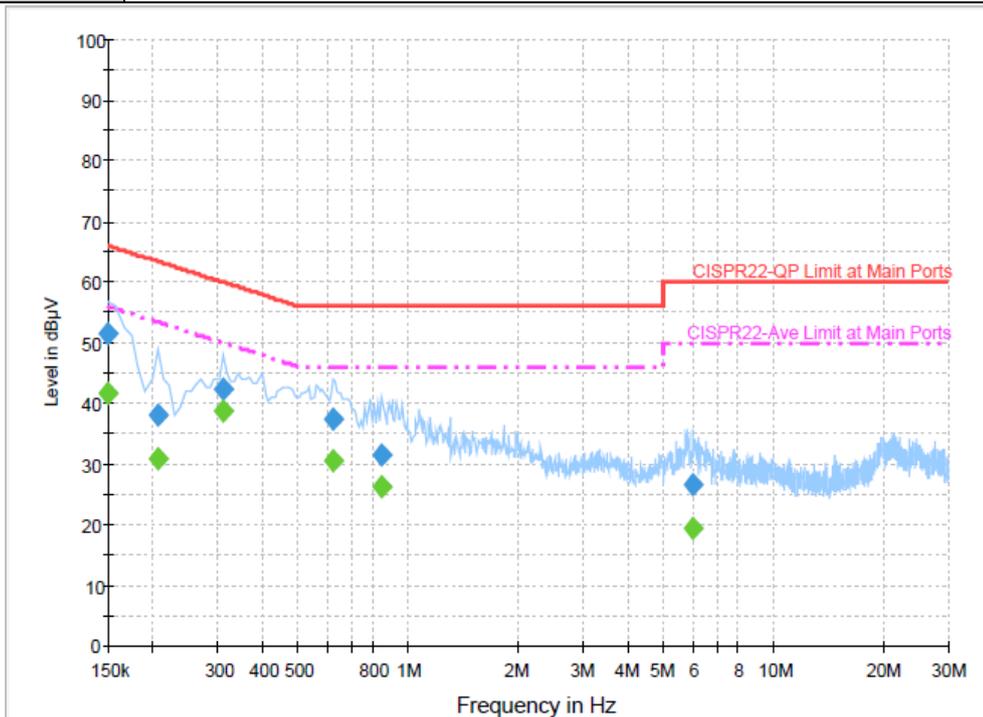

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	51.5	Off	L1	19.6	14.5	66.0
0.206000	37.9	Off	L1	19.6	25.5	63.4
0.310000	42.4	Off	L1	19.5	17.6	60.0
0.622000	37.3	Off	L1	19.5	18.7	56.0
0.846000	31.5	Off	L1	19.5	24.5	56.0
5.982000	26.6	Off	L1	19.5	33.4	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	41.7	Off	L1	19.6	14.3	56.0
0.206000	31.0	Off	L1	19.6	22.4	53.4
0.310000	38.7	Off	L1	19.5	11.3	50.0
0.622000	30.6	Off	L1	19.5	15.4	46.0
0.846000	26.3	Off	L1	19.5	19.7	46.0
5.982000	19.4	Off	L1	19.5	30.6	50.0



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Hayden Wu	Relative Humidity :	51~54%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Pocket PC Phone 2 + GSM850 Idle + Bluetooth Link + WLAN Link + GPS Rx + Camera + Earphone 2 + USB Cable (Link with Notebook)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

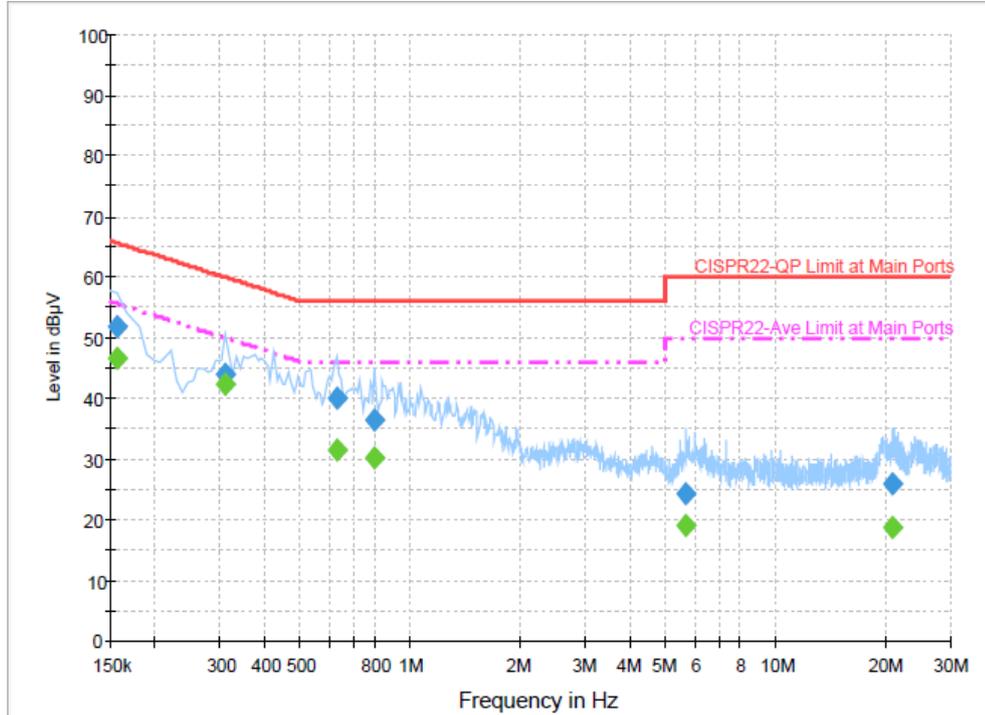

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	51.8	Off	N	19.6	13.8	65.6
0.310000	44.0	Off	N	19.5	16.0	60.0
0.630000	39.9	Off	N	19.5	16.1	56.0
0.798000	36.5	Off	N	19.5	19.5	56.0
5.654000	24.4	Off	N	19.5	35.6	60.0
20.790000	25.9	Off	N	19.8	34.1	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	46.7	Off	N	19.6	8.9	55.6
0.310000	42.2	Off	N	19.5	7.8	50.0
0.630000	31.5	Off	N	19.5	14.5	46.0
0.798000	30.3	Off	N	19.5	15.7	46.0
5.654000	18.9	Off	N	19.5	31.1	50.0
20.790000	18.7	Off	N	19.8	31.3	50.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
 Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.9.4 Test Setup

For radiated emissions below 30MHz

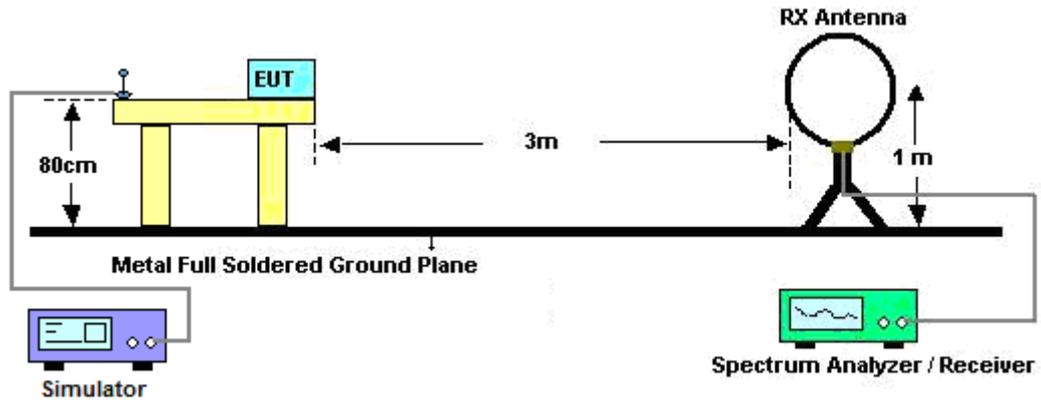

For radiated emissions above 30MHz

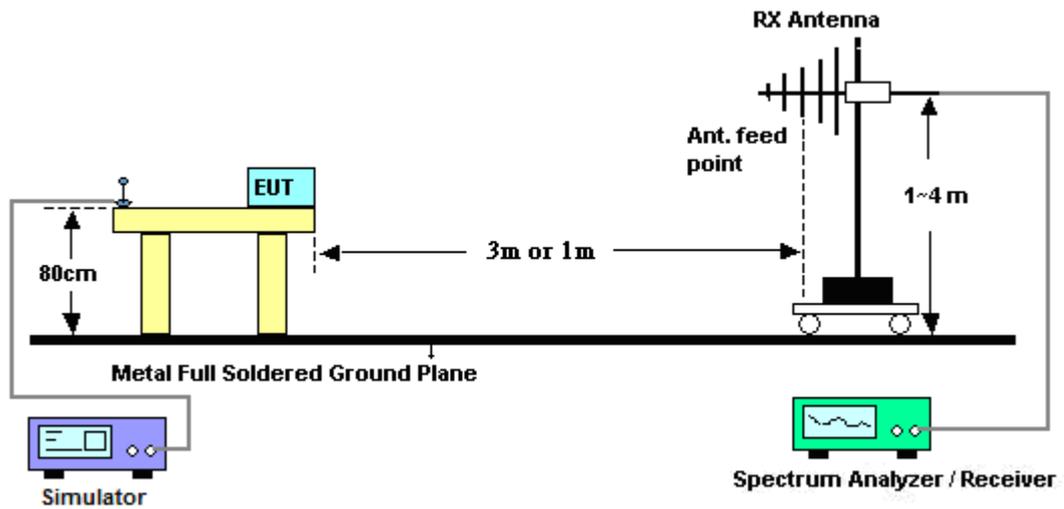



3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Mac Lin	Temperature :	24~25°C	
		Relative Humidity :	47~48%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	47~48%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		




Trace: (Discrete)
 Site : D3CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 Project : FR 961306-05

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	38.64	22.89	-17.11	40.00	40.22	13.42	0.96	31.72	100	272	Peak
2	162.84	23.80	-19.70	43.50	43.62	9.98	2.12	31.92	---	---	Peak
3	211.44	23.35	-20.15	43.50	44.44	8.64	2.46	32.19	---	---	Peak
4	864.90	25.40	-20.60	46.00	31.72	20.50	5.36	32.18	---	---	Peak
5	896.40	26.07	-19.93	46.00	31.64	20.70	5.45	31.73	---	---	Peak
6	957.30	26.44	-19.56	46.00	31.21	20.96	5.59	31.32	---	---	Peak
7	2353.89	32.16	-21.84	54.00	32.57	31.81	3.86	36.07	131	360	Average
8	2353.89	49.06	-24.94	74.00	49.47	31.81	3.86	36.07	131	360	Peak
9 @	2402.00	79.29			79.59	31.86	3.92	36.08	131	360	Average
10 X	2402.00	96.03			96.31	31.88	3.92	36.08	131	360	Peak
11	2484.00	42.77	-31.23	74.00	42.84	31.98	4.05	36.10	131	360	Peak
12	2484.00	31.09	-22.91	54.00	31.16	31.98	4.05	36.10	131	360	Average
13	8712.00	52.91	-21.09	74.00	46.37	35.87	7.45	36.78	100	114	Peak
14	8712.00	39.69	-14.31	54.00	33.15	35.87	7.45	36.78	100	114	Average



Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	47~48%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

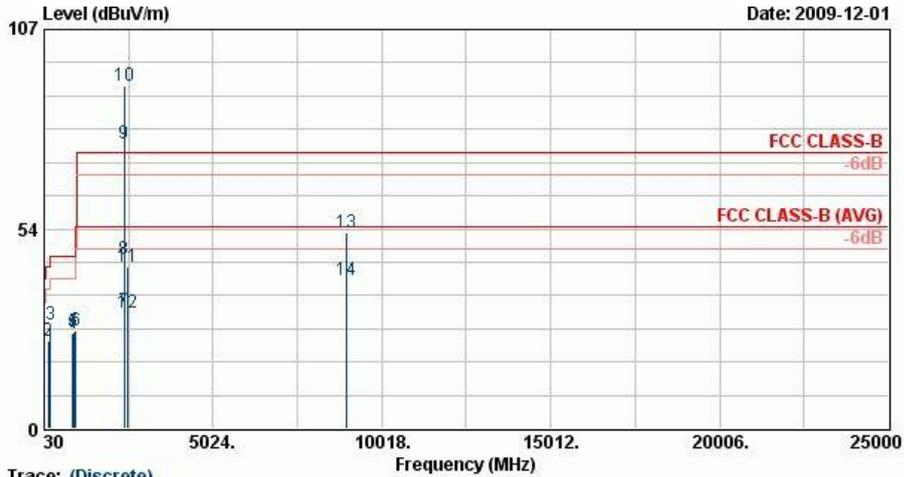


Trace: (Discrete)
 Site : D3CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 Project : FR 961306-05

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 !	37.83	36.79	-3.21	40.00	53.55	14.04	0.95	31.75	100	212	QP
2	157.44	23.34	-20.16	43.50	42.97	10.15	2.08	31.86	---	---	Peak
3	211.44	27.80	-15.70	43.50	48.89	8.64	2.46	32.19	---	---	Peak
4	871.90	25.49	-20.51	46.00	31.65	20.54	5.38	32.08	---	---	Peak
5	892.90	25.89	-20.11	46.00	31.54	20.69	5.44	31.77	---	---	Peak
6	957.30	26.20	-19.80	46.00	30.97	20.96	5.59	31.32	---	---	Peak
7	2389.42	31.50	-22.50	54.00	31.80	31.86	3.92	36.08	168	35	Average
8	2389.42	45.51	-28.49	74.00	45.81	31.86	3.92	36.08	168	35	Peak
9 @	2402.00	76.24			76.54	31.86	3.92	36.08	168	35	Average
10 X	2402.00	92.01			92.29	31.88	3.92	36.08	168	35	Peak
11	2500.00	43.32	-30.68	74.00	43.37	32.00	4.05	36.10	168	35	Peak
12	2500.00	30.89	-23.11	54.00	30.94	32.00	4.05	36.10	168	35	Average
13	8952.00	52.66	-21.34	74.00	45.73	36.06	7.74	36.88	100	254	Peak
14	8952.00	39.71	-14.29	54.00	32.79	36.06	7.74	36.88	100	254	Average



Test Mode :	Mode 2	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	47~48%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

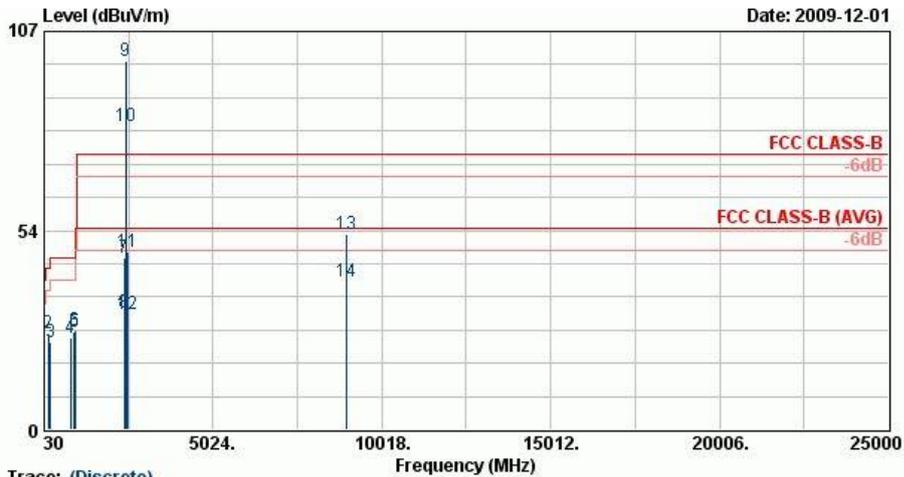


Trace: (Discrete)
 Site : D3CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 Project : FR 961306-05

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	37.83	22.02	-17.98	40.00	38.78	14.04	0.95	31.75	---	---	Peak
2	162.03	25.86	-17.64	43.50	45.66	10.01	2.12	31.92	100	112	Peak
3	209.28	23.50	-20.00	43.50	44.69	8.57	2.45	32.21	---	---	Peak
4	817.30	24.56	-21.44	46.00	31.45	20.19	5.18	32.26	---	---	Peak
5	911.80	26.28	-19.72	46.00	31.63	20.78	5.48	31.61	---	---	Peak
6	943.30	26.78	-19.22	46.00	31.78	20.91	5.55	31.46	---	---	Peak
7	2390.00	46.14	-27.86	74.00	46.44	31.86	3.92	36.08	159	360	Peak
8	2390.00	31.25	-22.75	54.00	31.55	31.86	3.92	36.08	159	360	Average
9 @	2441.00	99.19			99.37	31.93	3.99	36.09	159	360	Peak
10 @	2441.00	81.72			81.90	31.93	3.99	36.09	159	360	Average
11	2486.00	47.59	-26.41	74.00	47.66	31.98	4.05	36.10	159	360	Peak
12	2486.00	30.98	-23.02	54.00	31.05	31.98	4.05	36.10	159	360	Average
13	8991.00	52.70	-21.30	74.00	45.71	36.09	7.80	36.89	100	225	Peak
14	8991.00	39.86	-14.14	54.00	32.86	36.09	7.80	36.89	100	225	Average



Test Mode :	Mode 2	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	47~48%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

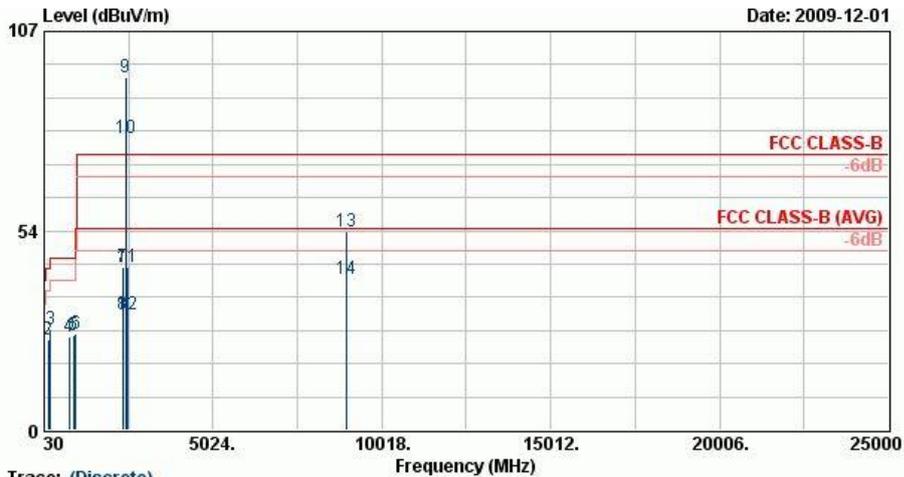


Trace: (Discrete)
 Site : D3CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 Project : FR 961306-05

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 !	36.48	35.04	-4.96	40.00	51.23	14.65	0.93	31.77	100	266	Peak
2	157.44	24.42	-19.08	43.50	44.05	10.15	2.08	31.86	---	---	Peak
3	209.28	27.23	-16.27	43.50	48.42	8.57	2.45	32.21	---	---	Peak
4	770.40	25.04	-20.96	46.00	32.32	19.82	5.01	32.11	---	---	Peak
5	897.80	25.59	-20.41	46.00	31.12	20.72	5.45	31.70	---	---	Peak
6	957.30	25.72	-20.28	46.00	30.49	20.96	5.59	31.32	---	---	Peak
7	2364.00	43.72	-30.28	74.00	44.09	31.81	3.89	36.07	108	25	Peak
8	2364.00	31.16	-22.84	54.00	31.54	31.81	3.89	36.07	108	25	Average
9 X	2441.00	94.61			94.78	31.93	3.99	36.09	108	25	Peak
10 @	2441.00	78.33			78.51	31.93	3.99	36.09	108	25	Average
11	2484.00	43.78	-30.22	74.00	43.85	31.98	4.05	36.10	108	25	Peak
12	2484.00	30.91	-23.09	54.00	30.98	31.98	4.05	36.10	108	25	Average
13	8976.00	53.11	-20.89	74.00	46.16	36.07	7.77	36.89	100	243	Peak
14	8976.00	40.51	-13.49	54.00	33.56	36.07	7.77	36.89	100	243	Average



Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	47~48%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

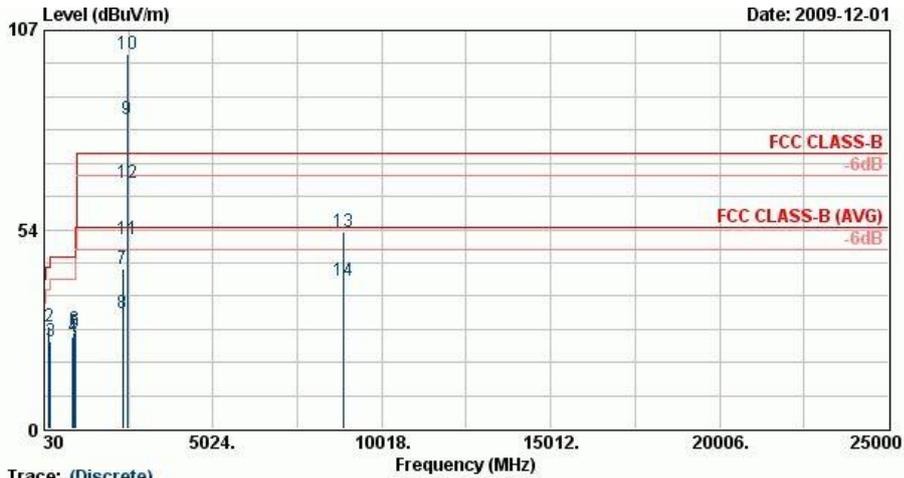


Trace: (Discrete)
 Site : 03CH06-RY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 Project : FR 961306-05

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	37.83	22.51	-17.49	40.00	39.27	14.04	0.95	31.75	---	---	Peak
2	162.84	27.25	-16.25	43.50	47.07	9.98	2.12	31.92	100	194	Peak
3	210.63	23.47	-20.03	43.50	44.63	8.60	2.45	32.22	---	---	Peak
4	867.70	24.65	-21.35	46.00	30.90	20.52	5.36	32.13	---	---	Peak
5	918.80	25.93	-20.07	46.00	31.21	20.81	5.50	31.58	---	---	Peak
6	938.40	26.84	-19.16	46.00	31.91	20.89	5.54	31.49	---	---	Peak
7	2348.00	43.06	-30.94	74.00	43.50	31.78	3.86	36.07	154	354	Peak
8	2348.00	31.06	-22.94	54.00	31.49	31.78	3.86	36.07	154	354	Average
9 @	2480.00	83.12			83.19	31.98	4.05	36.10	154	354	Average
10 @	2480.00	100.65			100.72	31.98	4.05	36.10	154	354	Peak
11 !	2483.50	50.92	-3.08	54.00	50.99	31.98	4.05	36.10	154	354	Average
12	2483.50	65.85	-8.15	74.00	65.92	31.98	4.05	36.10	154	354	Peak
13	8886.00	52.79	-21.21	74.00	45.95	36.01	7.68	36.85	100	105	Peak
14	8886.00	39.61	-14.39	54.00	32.77	36.01	7.68	36.85	100	105	Average



Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	47~48%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

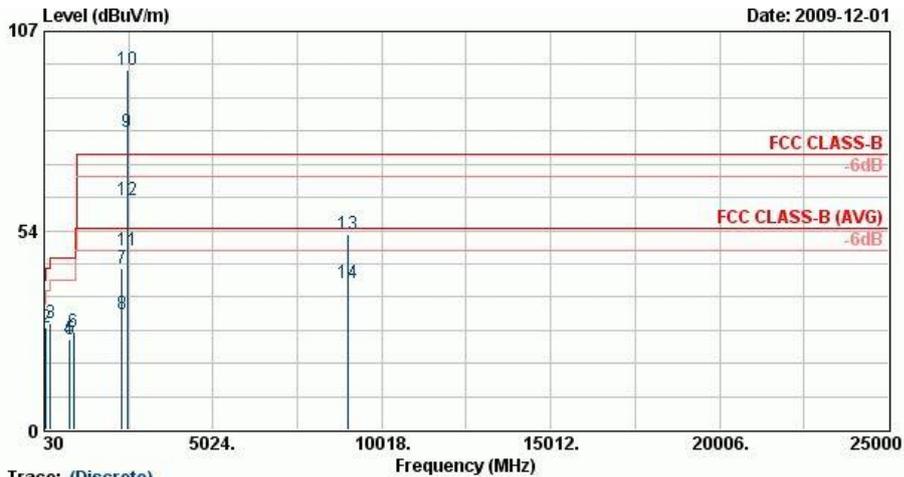


Trace: (Discrete)
 Site : D3CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 Project : FR 961306-05

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 !	37.83	36.97	-3.03	40.00	53.73	14.04	0.95	31.75	100	169	QP
2	91.29	27.35	-16.15	43.50	48.84	9.12	1.51	32.12	---	---	Peak
3	210.63	28.68	-14.82	43.50	49.84	8.60	2.45	32.22	---	---	Peak
4	773.90	24.16	-21.84	46.00	31.40	19.85	5.02	32.12	---	---	Peak
5	798.40	24.29	-21.71	46.00	31.31	20.05	5.10	32.18	---	---	Peak
6	899.90	26.14	-19.86	46.00	31.62	20.73	5.46	31.67	---	---	Peak
7	2326.00	43.49	-30.51	74.00	43.97	31.76	3.82	36.07	109	28	Peak
8	2326.00	31.07	-22.93	54.00	31.55	31.76	3.82	36.07	109	28	Average
9 @	2480.00	96.76			79.88	31.98	4.05	36.10	109	28	Average
10 X	2480.00	96.76			96.83	31.98	4.05	36.10	109	28	Peak
11 !	2483.50	48.05	-5.95	54.00	48.12	31.98	4.05	36.10	109	28	Average
12	2483.50	61.59	-12.41	74.00	61.66	31.98	4.05	36.10	109	28	Peak
13	9000.00	52.34	-21.66	74.00	45.34	36.10	7.80	36.90	100	222	Peak
14	9000.00	39.33	-14.67	54.00	32.33	36.10	7.80	36.90	100	222	Average



Test Mode :	Mode 4	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	47~48%
Test Engineer :	Mac Lin	Polarization :	Horizontal
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

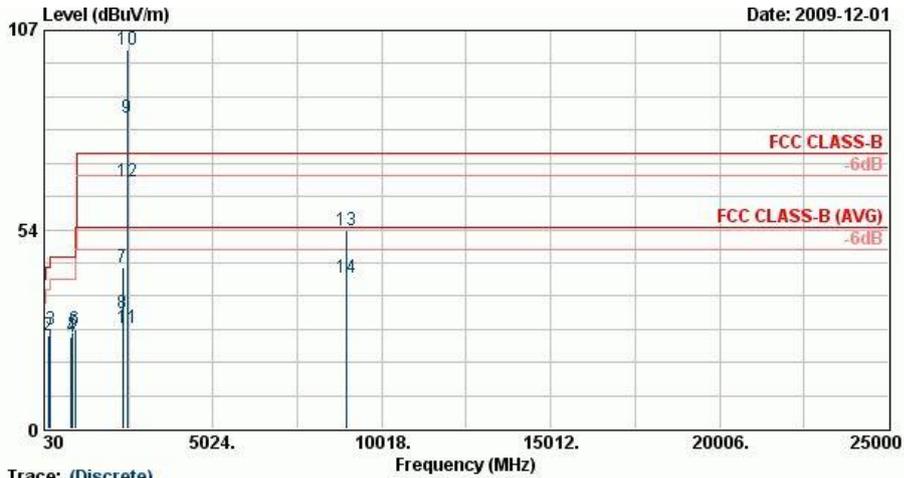


Trace: (Discrete)
 Site : 03CH06-RY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 Project : FR 961306-05

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	38.64	21.33	-18.67	40.00	38.67	13.42	0.96	31.72	---	---	Peak
2	156.63	25.02	-18.48	43.50	44.65	10.15	2.08	31.86	---	---	Peak
3	210.09	26.63	-16.87	43.50	47.79	8.60	2.45	32.22	100	208	Peak
4	836.90	24.51	-21.49	46.00	31.28	20.31	5.26	32.34	---	---	Peak
5	876.80	25.94	-20.06	46.00	31.98	20.58	5.39	32.01	---	---	Peak
6	939.80	26.59	-19.41	46.00	31.63	20.89	5.54	31.48	---	---	Peak
7	2350.00	43.39	-30.61	74.00	43.82	31.78	3.86	36.07	155	352	Peak
8	2350.00	31.03	-22.97	54.00	31.46	31.78	3.86	36.07	155	352	Average
9 @	2480.00	83.48			83.55	31.98	4.05	36.10	155	352	Average
10 @	2480.00	101.73			101.80	31.98	4.05	36.10	155	352	Peak
11	2483.50	26.90	-27.10	54.00	26.97	31.98	4.05	36.10	155	352	Average
12	2483.50	66.49	-7.51	74.00	66.56	31.98	4.05	36.10	155	352	Peak
13	8952.00	53.44	-20.56	74.00	46.52	36.06	7.74	36.88	100	52	Peak
14	8952.00	40.41	-13.59	54.00	33.49	36.06	7.74	36.88	100	52	Average



Test Mode :	Mode 4	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	47~48%
Test Engineer :	Mac Lin	Polarization :	Vertical
Remark :	#9 and #10 are Fundamental Signals which can be ignored.		

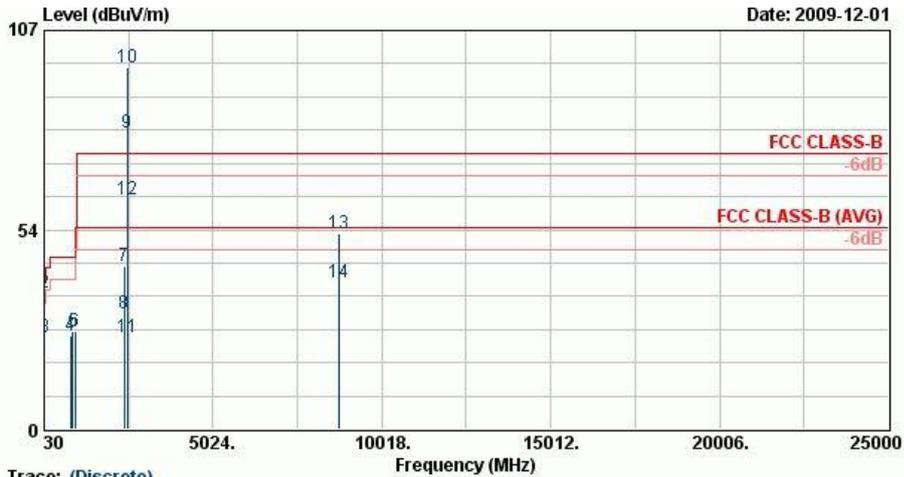

Trace: (Discrete)
 Site : D3CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 Project : FR 961306-05

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 !	30.00	34.98	-5.02	40.00	47.20	18.51	0.83	31.56	---	---	Peak
2 !	38.64	36.76	-3.24	40.00	54.10	13.42	0.96	31.72	100	155	Peak
3	49.98	24.82	-15.18	40.00	44.43	11.28	1.12	32.01	---	---	Peak
4	812.40	24.96	-21.04	46.00	31.88	20.15	5.16	32.24	---	---	Peak
5	871.90	26.08	-19.92	46.00	32.24	20.54	5.38	32.08	---	---	Peak
6	932.80	26.14	-19.86	46.00	31.26	20.87	5.53	31.51	---	---	Peak
7	2390.00	43.80	-30.20	74.00	44.10	31.86	3.92	36.08	108	27	Peak
8	2390.00	31.21	-22.79	54.00	31.51	31.86	3.92	36.08	108	27	Average
9 @	2480.00	79.54			79.61	31.98	4.05	36.10	108	27	Average
10 X	2480.00	96.97			97.04	31.98	4.05	36.10	108	27	Peak
11	2483.50	24.62	-29.38	54.00	24.69	31.98	4.05	36.10	108	27	Average
12	2483.50	61.66	-12.34	74.00	61.73	31.98	4.05	36.10	108	27	Peak
13	8766.00	52.50	-21.50	74.00	45.86	35.91	7.53	36.81	100	299	Peak
14	8766.00	39.40	-14.60	54.00	32.76	35.91	7.53	36.81	100	299	Average



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 23, 2009	Jun. 22, 2010	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 17, 2009	Sep. 16, 2010	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 10, 2009	Sep. 09, 2010	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 05, 2009	Aug. 04, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz~30MHz	Nov. 30, 2009	Nov. 29, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz~30MHz	Nov. 23, 2009	Nov. 22, 2010	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	105934	N/A	Nov. 11, 2008	Nov. 10, 2010	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Spectrum Analyzer	Agilent	E4408B	MY442110 30	9kHz~26.5GHz	Oct. 23, 2009	Oct. 22, 2010	Radiation (03CH06-HY)
Spectrum Analyzer	R&S	FSP40	100057	9kHz~40GHz	Oct. 20, 2009	Oct. 19, 2010	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/00 3	20MHz~1000MHz	Apr. 28, 2009	Apr. 27, 2010	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz~2GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz~18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Training Research	AH-0801	95119	8GHz~18GHz	Nov. 02, 2009	Nov. 01, 2010	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	15GHz~ 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A0191 7	1GHz~ 26.5GHz	Nov. 11, 2009	Nov. 10, 2010	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9kHz~1GHz	Apr. 20, 2009	Apr. 19, 2010	Radiation (03CH06-HY)
Loop Antenna	R&S	HFH2-Z2	860004/00 1	9kHz~30MHz	May 22, 2008	May 21, 2010	Radiation (03CH06-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	May 12, 2009	May 11, 2011	Radiation (03CH06-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		



Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				

6 Certification of TAF Accreditation



Certificate No. : L1190-090417

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : April 17, 2009

P1, total 20 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Appendix A. Photographs of EUT

Please refer to Sporton report number EP961306-05 as below.