

FCC RF Test Report

APPLICANT : HTC Corporation
EQUIPMENT : Windows Phone
MODEL NAME : PC40100
FCC ID : NM8PC40100
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Jun. 25, 2010 and completely tested on Jul. 15, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : NM8PC40100

Page Number : 1 of 55

Report Issued Date : Aug. 11, 2010

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Testing Site 6

 1.5 Applied Standards 6

 1.6 Ancillary Equipment List 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 RF Output Power 7

 2.2 Test Mode 8

 2.3 Connection Diagram of Test System 9

 2.4 RF Utility 10

3 TEST RESULT 11

 3.1 Number of Channel Measurement 11

 3.2 20dB Bandwidth Measurement 13

 3.3 Hopping Channel Separation Measurement 20

 3.4 Dwell Time Measurement 23

 3.5 Peak Output Power Measurement 25

 3.6 Band Edges Measurement 28

 3.7 Spurious Emission Measurement 33

 3.8 AC Conducted Emission Measurement 37

 3.9 Radiated Emission Measurement 41

 3.10 Antenna Requirements 52

4 LIST OF MEASURING EQUIPMENT 53

5 UNCERTAINTY OF EVALUATION 54

APPENDIX A. SETUP PHOTOGRAPHS

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1W	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 10.9 dB at 0.422 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.16 dB at 2483.5 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

HTC Corporation

1F., No. 6-3, Baoqiang Rd., Xindian City, Taipei, Taiwan

1.2 Manufacturer

HTC Corporation

1F., No. 6-3, Baoqiang Rd., Xindian City, Taipei, Taiwan

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Windows Phone
Model Name	PC40100
FCC ID	NM8PC40100
Sample A	EUT with LCM-Main
Sample B	EUT with LCM-2 nd source
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 4.49 dBm (0.003 W) Bluetooth EDR (2Mbps) : 7.01 dBm (0.005 W) Bluetooth EDR (3Mbps) : 4.71 dBm (0.003 W)
Antenna Type	Monopole Antenna with gain -1.5 dBi
Type of Antenna Connector	N/A
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Production Unit

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 7

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	π /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	3.55 dBm	6.09 dBm	3.86 dBm
Ch39	2441MHz	4.49 dBm	7.01 dBm	4.71 dBm
Ch78	2480MHz	4.39 dBm	6.97 dBm	4.48 dBm

Remark:

1. The data rate was set in 2Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	Mode 1: CH00_2402 MHz for Sample A Mode 2: CH39_2441 MHz for Sample A Mode 3: CH78_2480 MHz for Sample A Mode 4: CH78_2480 MHz for Sample B	N/A
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 1 + Earphone 1 + USB Cable 1 (Charging from Adapter 1) for Sample A Mode 2 : GSM1900 Idle + Bluetooth Link + WLAN Link + Camera + Battery 2 + Earphone 2 + USB Cable 2 (Charging from Adapter 2) for Sample A Mode 3 : GSM850 Idle + Bluetooth Link + WLAN Link + Camera + Battery 2 + Earphone 2 + USB Cable 2 (Charging from Adapter 2) for Sample B		
Remark: <ol style="list-style-type: none"> For radiated TCs, the data rate was set in 2Mbps due to the highest RF output power; only the data of these modes was reported. For conducted emission, the worst case is mode 2; only the test data of this mode was reported. Adapter 1, USB Cable 1, Earphone 1 and Battery 1 were the configuration for the radiation test. 			

2.3 Connection Diagram of Test System


<Bluetooth Tx Mode>

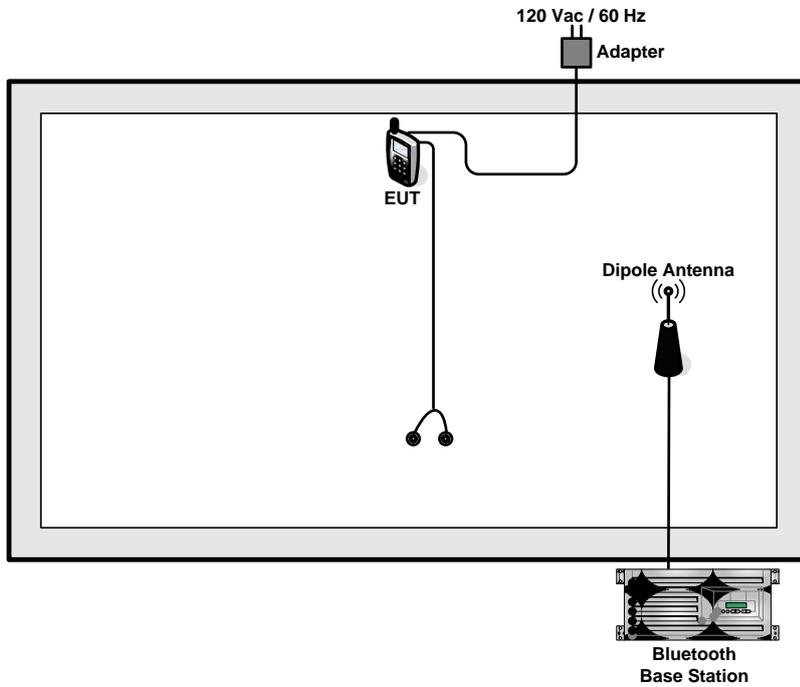

<EUT with Adapter in GPS Rx Mode>

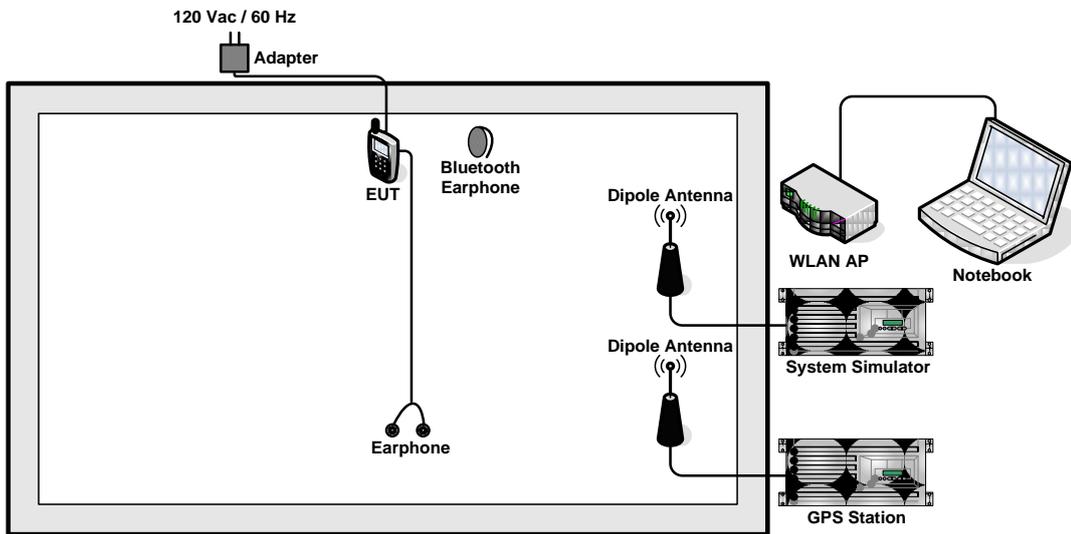

<EUT with Adapter Mode>

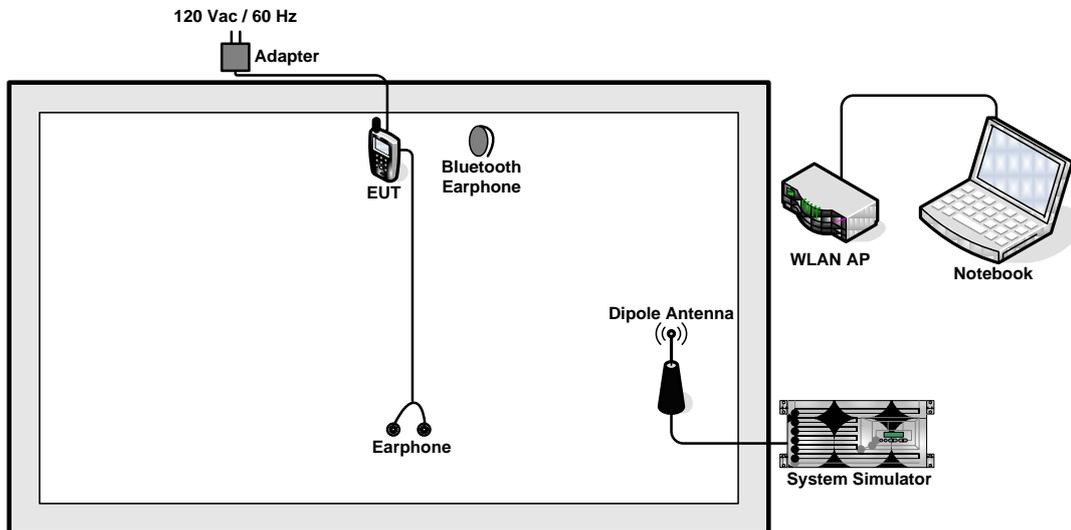

2.4 RF Utility

For Bluetooth function, the RF utility, “Remote 432X controller” was installed through the Notebook which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; $RBW \geq 1\%$ of the span; $VBW \geq RBW$; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

3.1.4 Test Setup

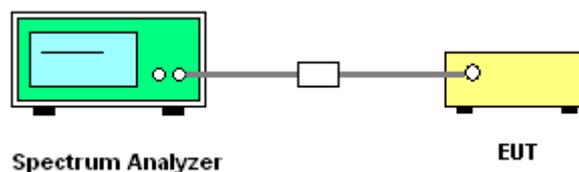





3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 4~6	Temperature :	27~29°C
Test Engineer :	Lancelot Chen	Relative Humidity :	52~55%
Number of Hopping Channels (Channel)		Limits (Channel)	
79		> 15	
		Pass/Fail	
		Pass	

Number of Hopping Channel Plot on Channel 00 - 78

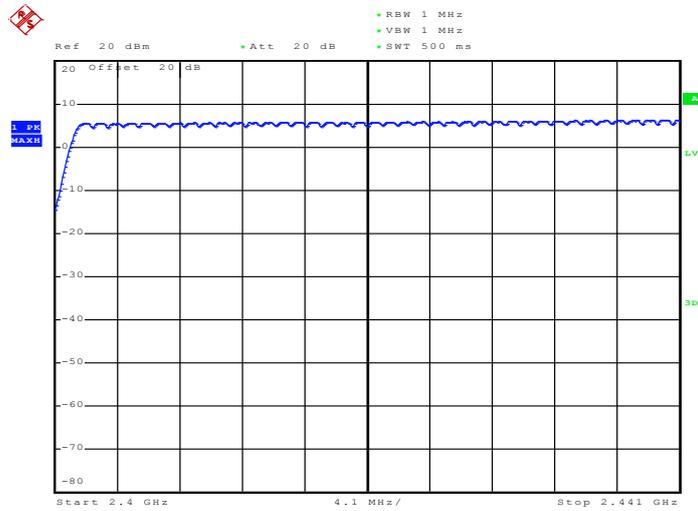

Date: 15.JUL.2010 01:47:35

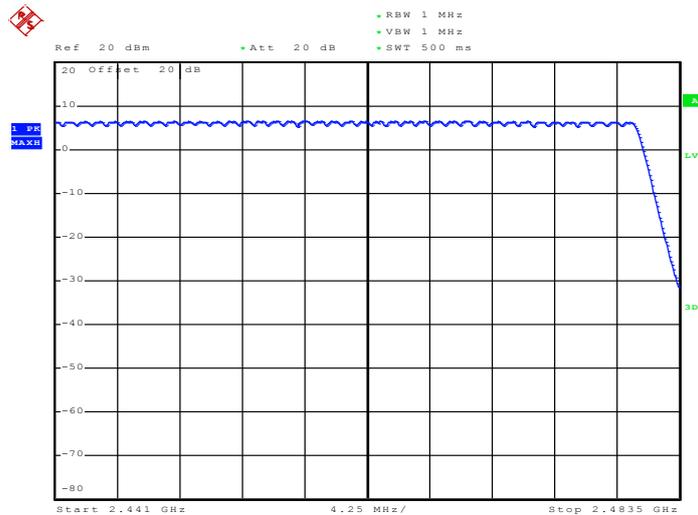

Date: 15.JUL.2010 01:41:46

3.2 20dB Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

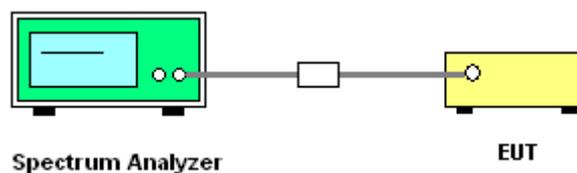




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	27~29°C
Test Engineer :	Lancelot Chen	Relative Humidity :	52~55%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.996
39	2441	1.004
78	2480	1.008


20 dB Bandwidth Plot on Channel 00

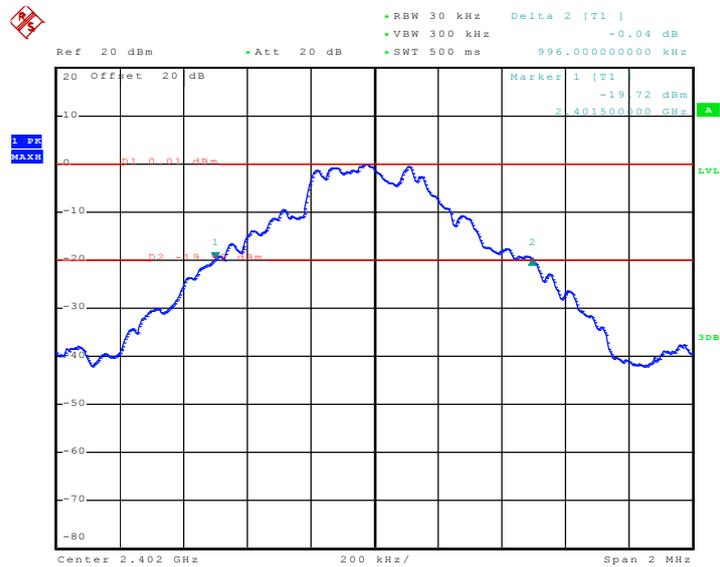

Date: 15.JUL.2010 00:24:36




20 dB Bandwidth Plot on Channel 39

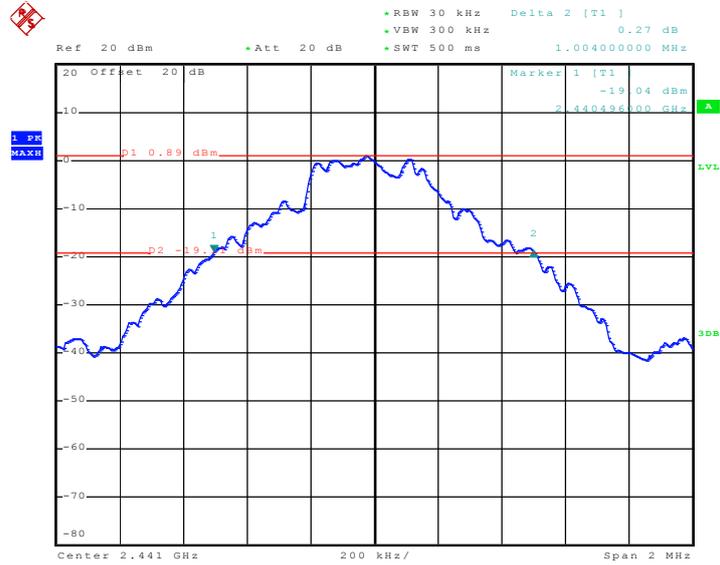

Date: 15.JUL.2010 00:26:11

20 dB Bandwidth Plot on Channel 78

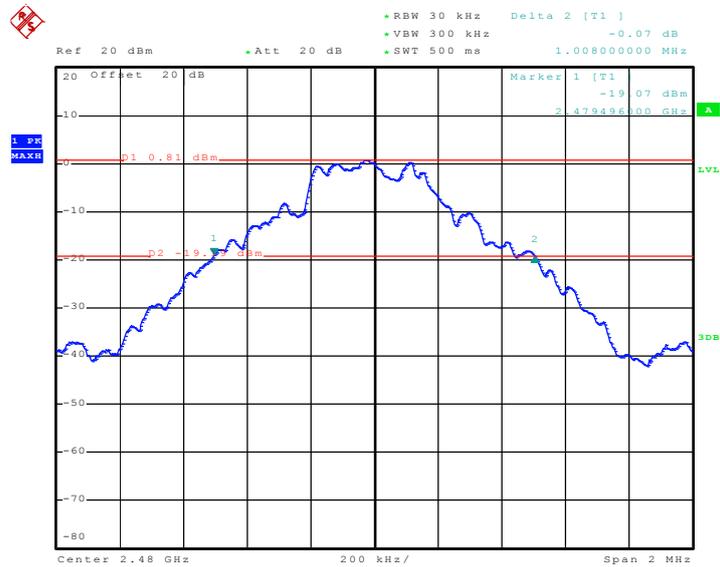


Date: 15.JUL.2010 02:02:03



Test Mode :	Mode 4, 5, 6	Temperature :	27~29°C
Test Engineer :	Lancelot Chen	Relative Humidity :	52~55%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.314
39	2441	1.302
78	2480	1.296


20 dB Bandwidth Plot on Channel 00

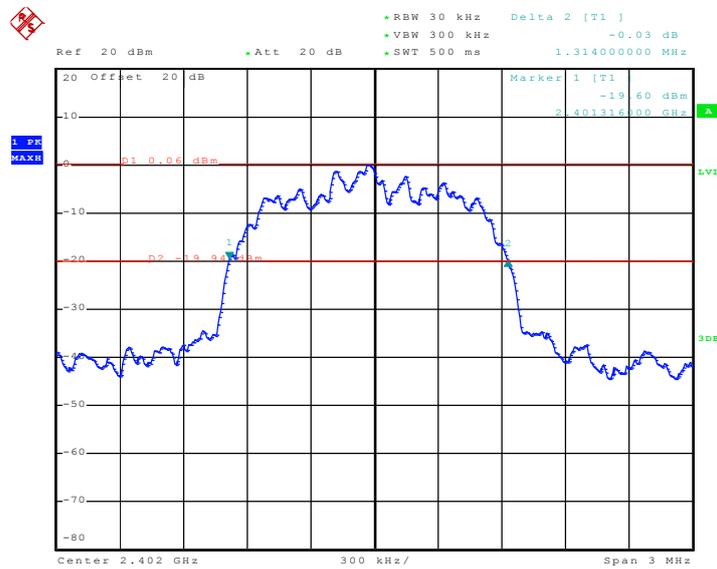

Date: 15.JUL.2010 00:31:41




20 dB Bandwidth Plot on Channel 39

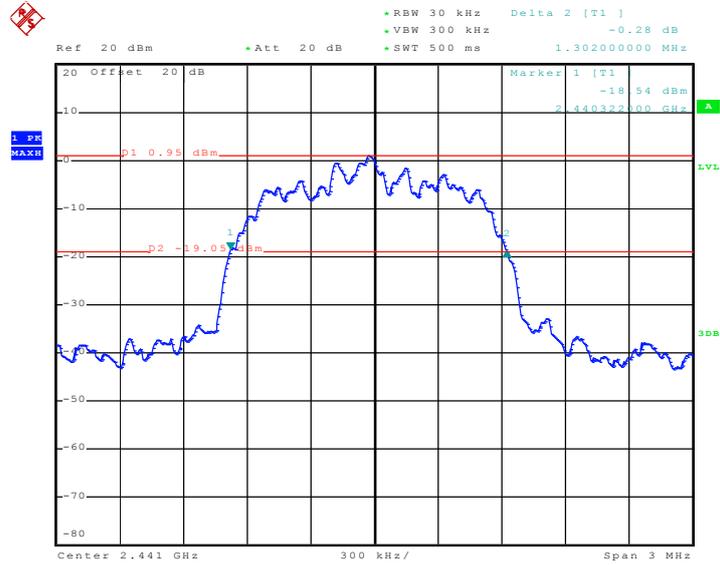

Date: 15.JUL.2010 00:30:18

20 dB Bandwidth Plot on Channel 78

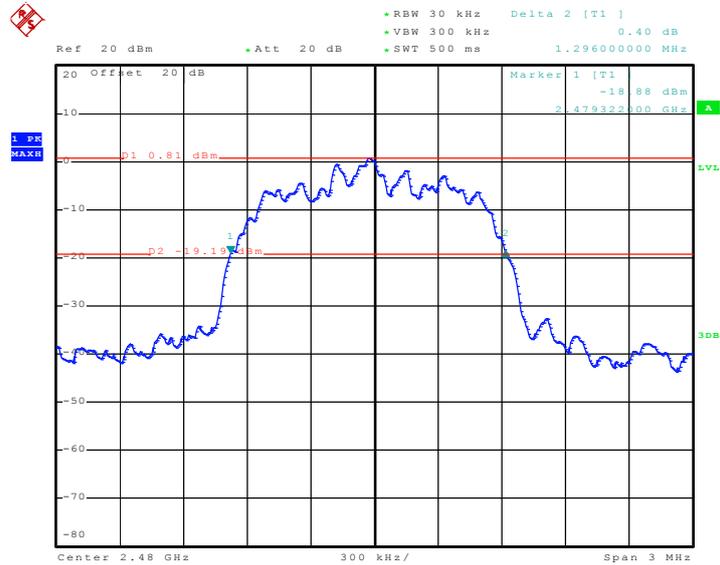


Date: 15.JUL.2010 02:03:39



Test Mode :	Mode 7, 8, 9	Temperature :	27~29°C
Test Engineer :	Lancelot Chen	Relative Humidity :	52~55%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.278
39	2441	1.278
78	2480	1.278


20 dB Bandwidth Plot on Channel 00

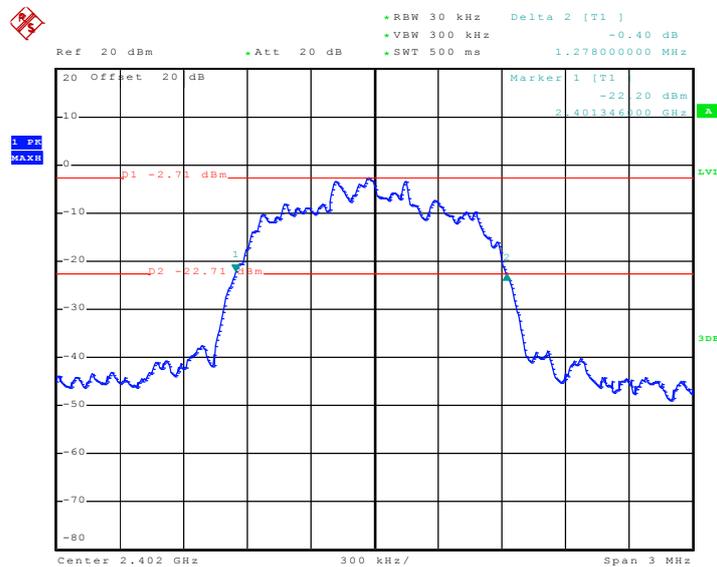

Date: 15.JUL.2010 00:32:45




20 dB Bandwidth Plot on Channel 39

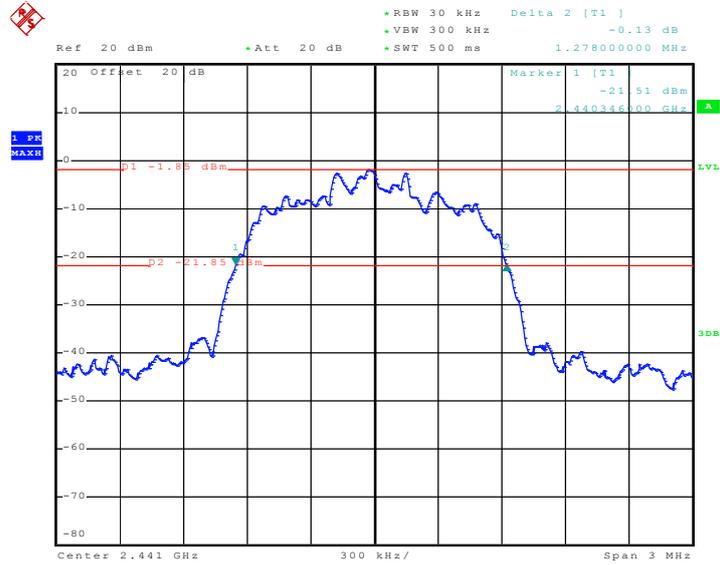

Date: 15.JUL.2010 00:34:24

20 dB Bandwidth Plot on Channel 78

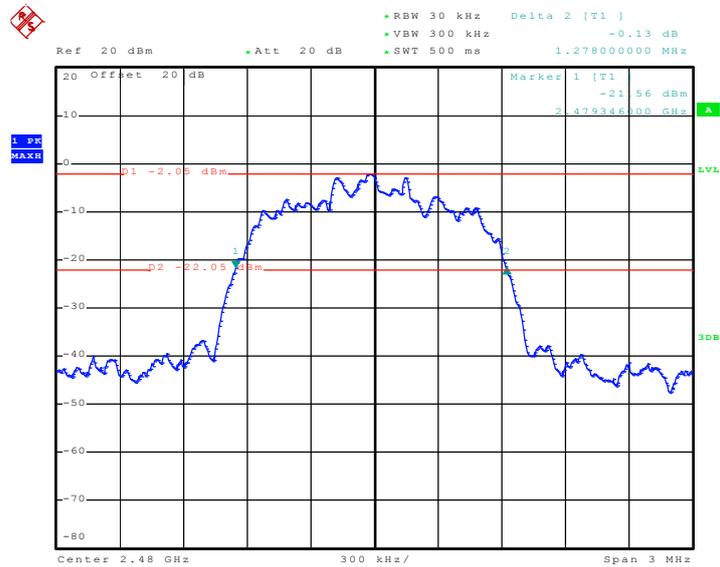

Date: 15.JUL.2010 02:05:02

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

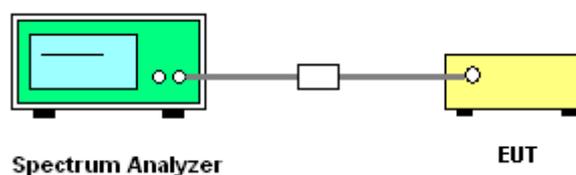




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 4, 5, 6	Temperature :	27~29°C
Test Engineer :	Lancelot Chen	Relative Humidity :	52~55%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.876	Pass
39	2441	1.002	0.868	Pass
78	2480	1.002	0.864	Pass


Channel Separation Plot on Channel 00 - 01

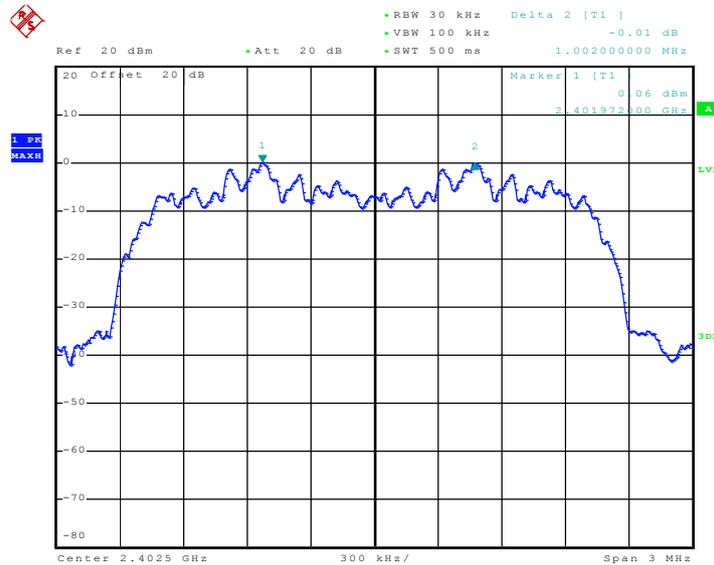

Date: 15.JUL.2010 00:47:52




Channel Separation Plot on Channel 39 - 40

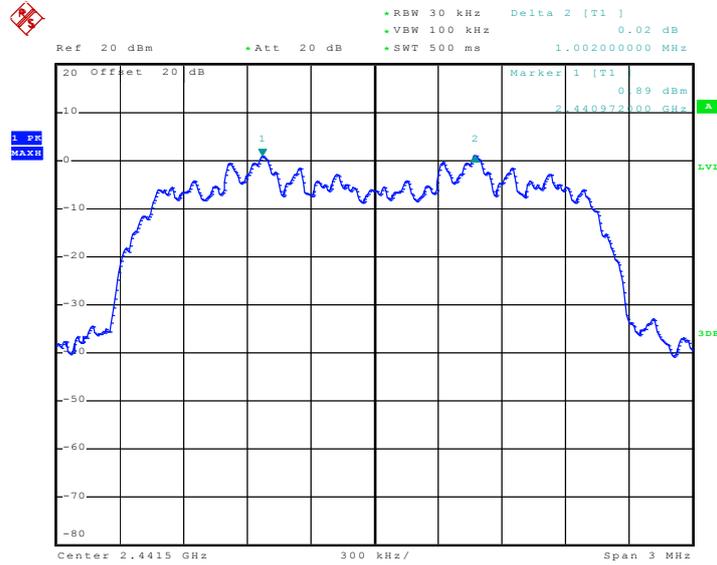

Date: 15.JUL.2010 00:47:14

Channel Separation Plot on Channel 77 - 78

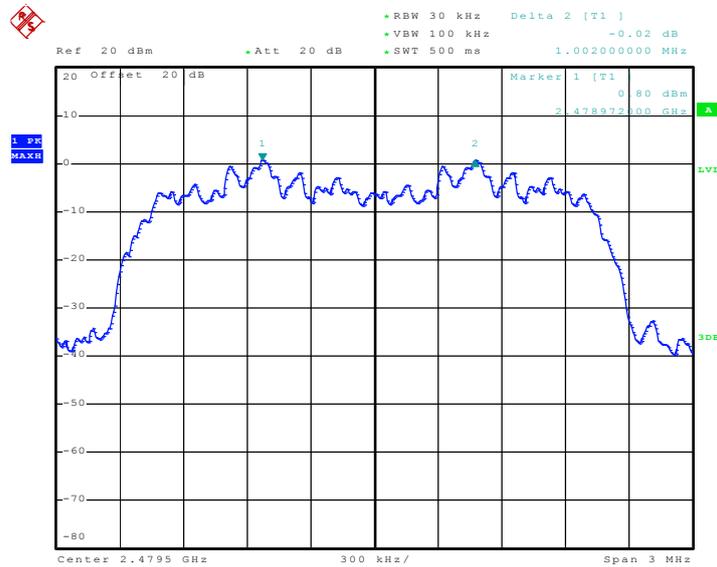

Date: 15.JUL.2010 00:46:29

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

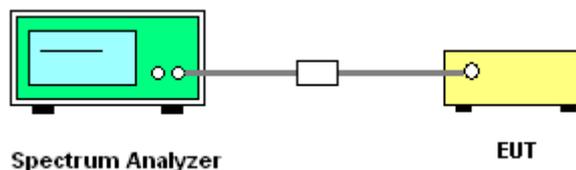

3.4.5 Test Result of Dwell Time


Test Mode :	Mode 5	Temperature :	27~29°C		
Test Engineer :	Lancelot Chen	Relative Humidity :	52~55%		
Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	3.30	2942.00	0.31	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




2DH5 Dwell Time (One Pulse) Plot on Channel 39

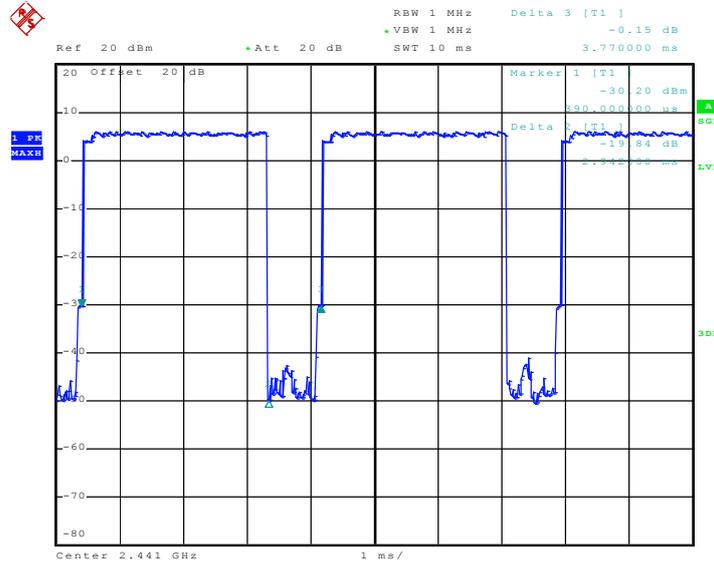

Date: 15.JUL.2010 01:18:25

2DH5 Dwell Time (Count Pulses) Plot on Channel 39

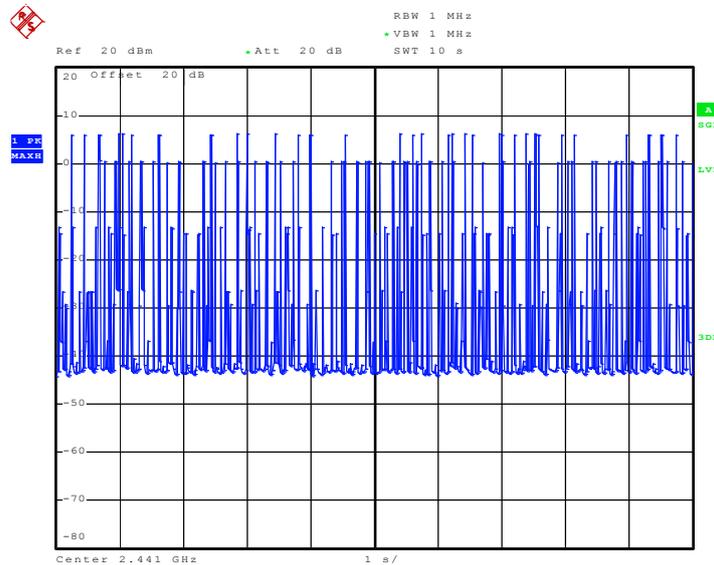

Date: 15.JUL.2010 01:22:46

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

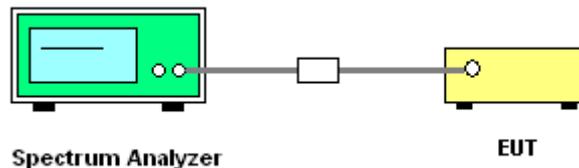


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 4, 5, 6	Temperature :	27~29°C
Test Engineer :	Lancelot Chen	Relative Humidity :	52~55%

Channel	Frequency (MHz)	RF Power (dBm)		
		π /4-DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	6.09	30	Pass
39	2441	7.01	30	Pass
78	2480	6.97	30	Pass




Peak Output Power Plot on Channel 00

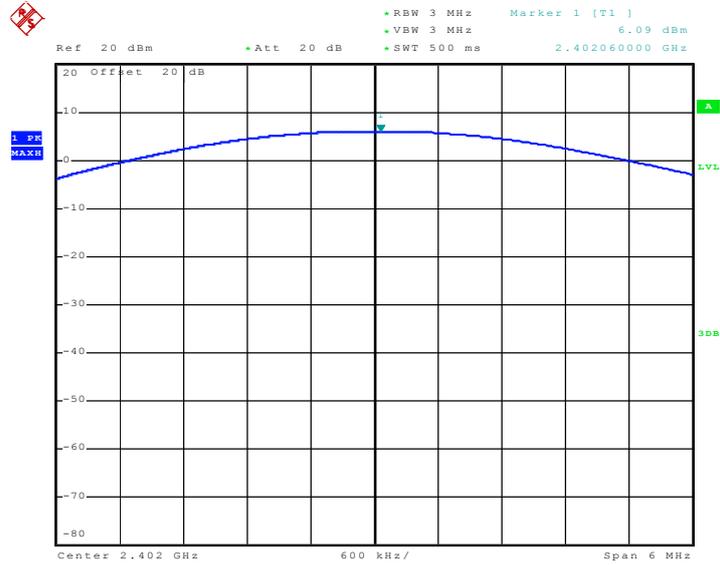

Date: 14.JUL.2010 23:59:46


Peak Output Power Plot on Channel 39

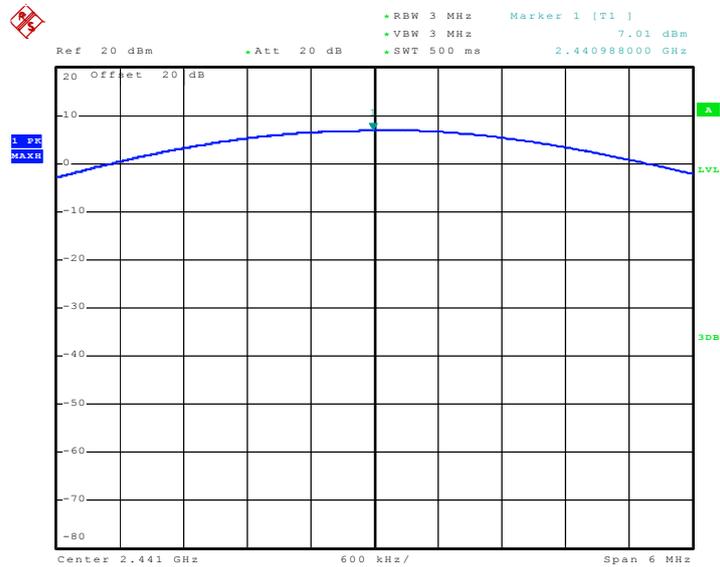

Date: 14.JUL.2010 23:59:20



Peak Output Power Plot on Channel 78

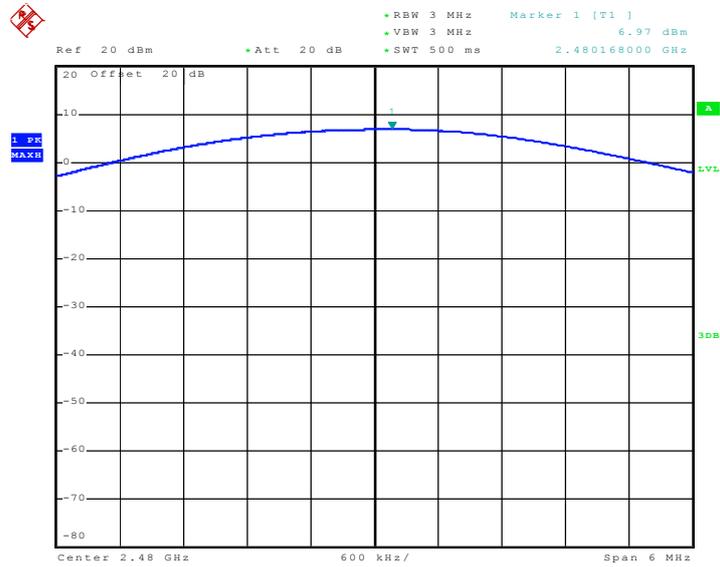

Date: 14.JUL.2010 23:58:49



3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW) \geq RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

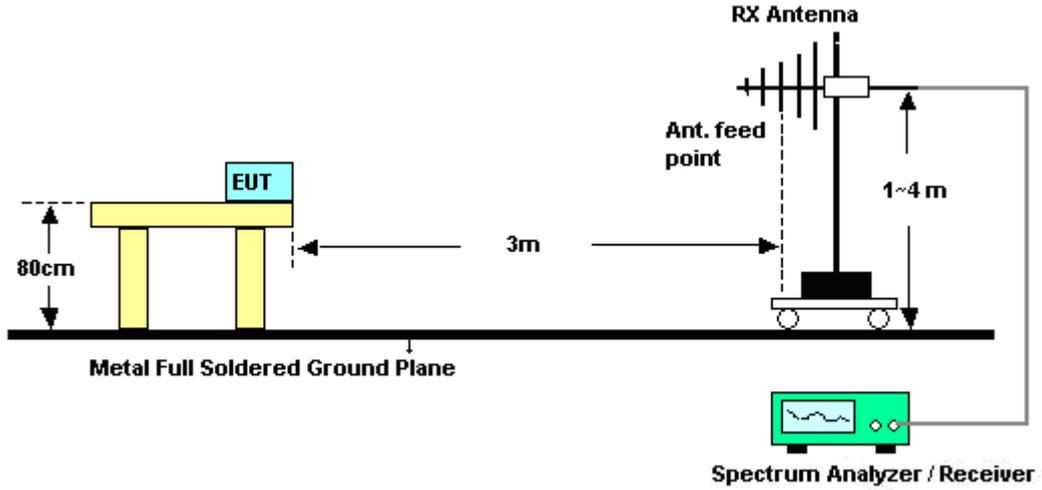

<Conducted Band Edges>

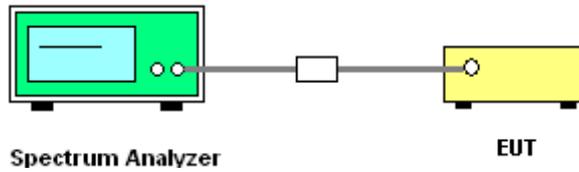



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	41~42%
		Test Engineer :	Cona Huang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.99	47.67	-26.33	74	43.33	32.13	5.46	33.25	149	32	Peak
2389.99	35.36	-18.64	54	31.02	32.13	5.46	33.25	149	32	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.85	47.29	-26.71	74	42.95	32.13	5.46	33.25	100	17	Peak
2388.85	35.04	-18.96	54	30.7	32.13	5.46	33.25	100	17	Average

Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	41~42%
		Test Engineer :	Cona Huang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	60.27	-13.73	74	55.83	32.27	5.38	33.21	188	45	Peak
2483.5	49.27	-4.73	54	44.83	32.27	5.38	33.21	188	45	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	62.1	-11.9	74	57.66	32.27	5.38	33.21	100	22	Peak
2483.5	50.84	-3.16	54	46.4	32.27	5.38	33.21	100	22	Average



Test Mode :	Mode 4	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	41~42%
		Test Engineer :	Cona Huang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	64.77	-9.23	74	60.33	32.27	5.38	33.21	100	7	Peak
2483.5	50.83	-3.17	54	46.39	32.27	5.38	33.21	100	7	Average


ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	61.57	-12.43	74	57.13	32.27	5.38	33.21	200	10	Peak
2483.5	48.95	-5.05	54	44.51	32.27	5.38	33.21	200	10	Average



3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	27~29°C
Test Channel :	00 and 78	Relative Humidity :	52~55%
		Test Engineer :	Lancelot Chen

Low Band Edge Plot on Channel 00

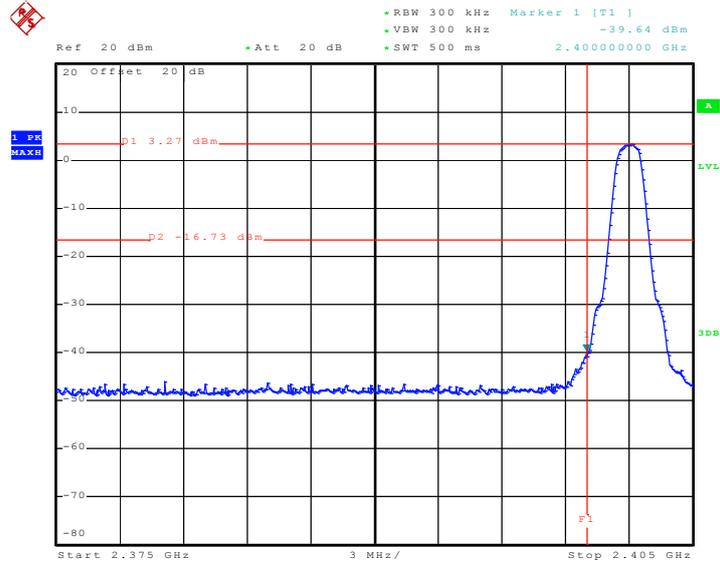

Date: 15.JUL.2010 01:00:25

High Band Edge Plot on Channel 78

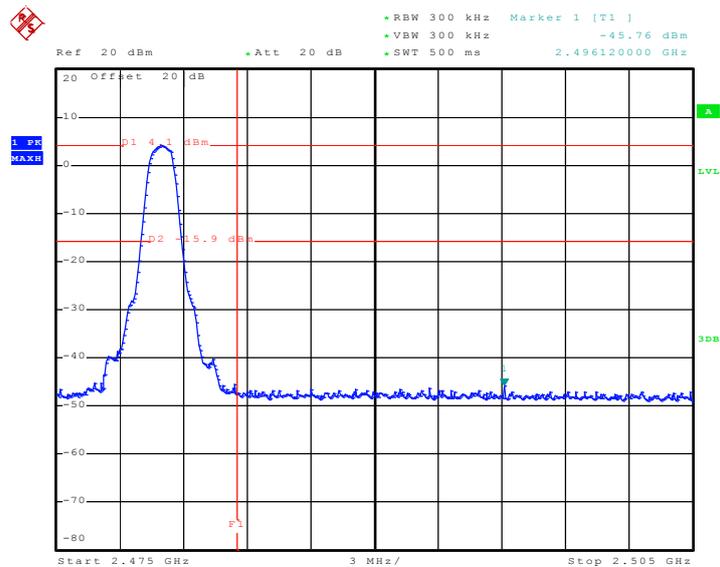

Date: 15.JUL.2010 00:56:53

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) \geq RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

3.7.4 Test Setup

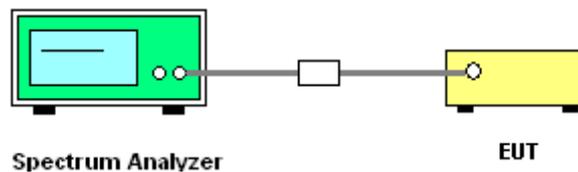




3.7.5 Test Result


Test Mode :	Mode 4	Temperature :	27~29°C
Test Channel :	00	Relative Humidity :	52~55%
		Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

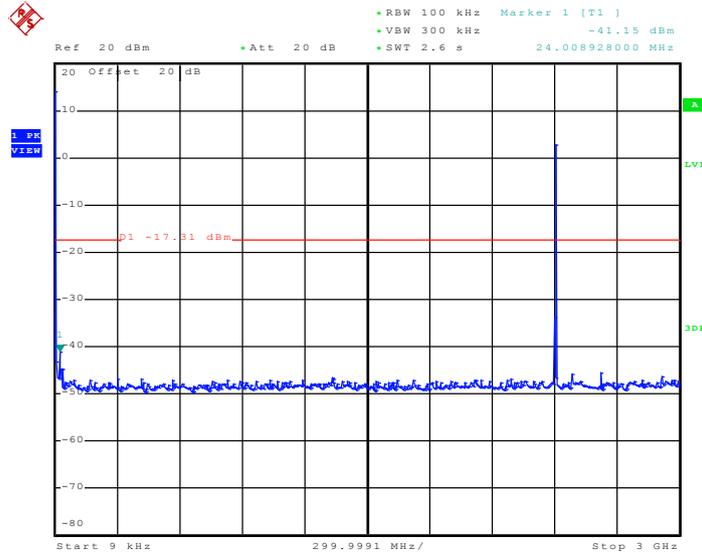

Date: 15.JUL.2010 02:11:40

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

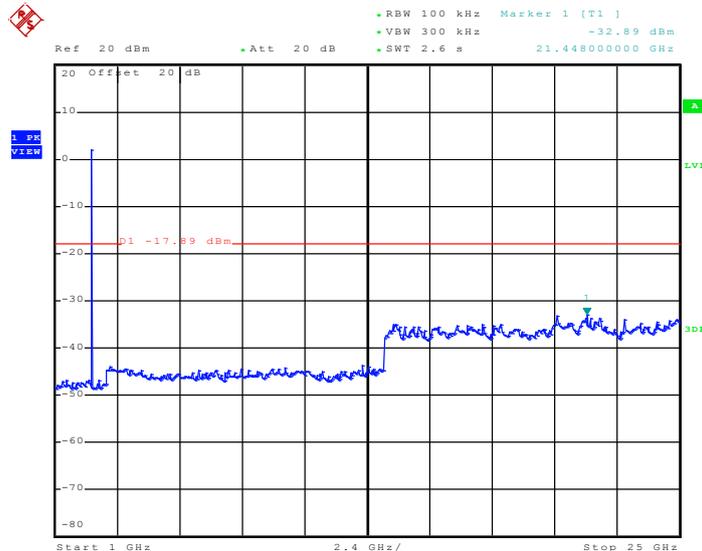


Date: 15.JUL.2010 02:12:40




Test Mode :	Mode 5	Temperature :	27~29°C
Test Channel :	39	Relative Humidity :	52~55%
		Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

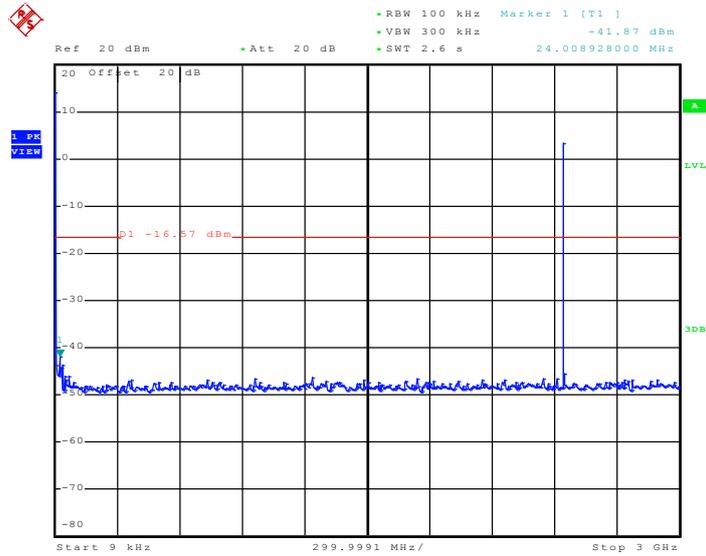

Date: 15.JUL.2010 02:13:28

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

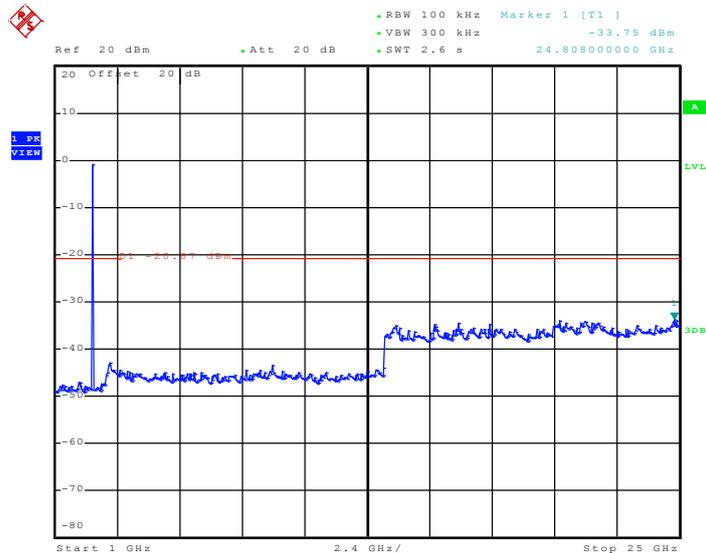


Date: 15.JUL.2010 02:14:11




Test Mode :	Mode 6	Temperature :	27~29°C
Test Channel :	78	Relative Humidity :	52~55%
		Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

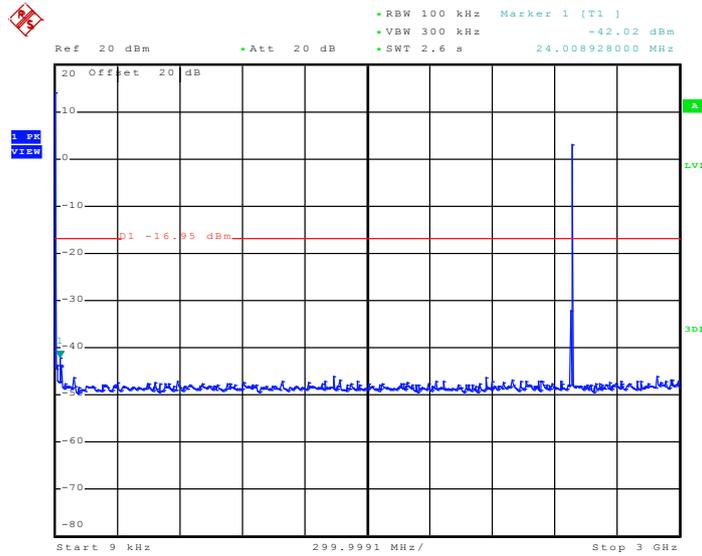

Date: 15.JUL.2010 02:16:21

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

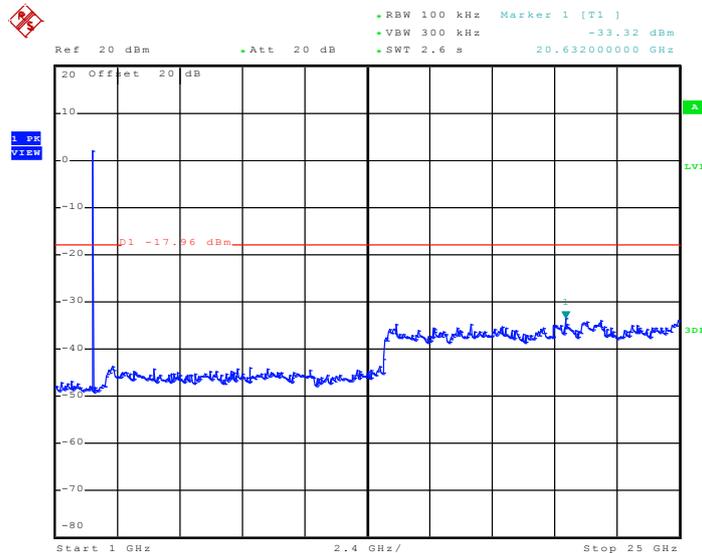

Date: 15.JUL.2010 02:16:56

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

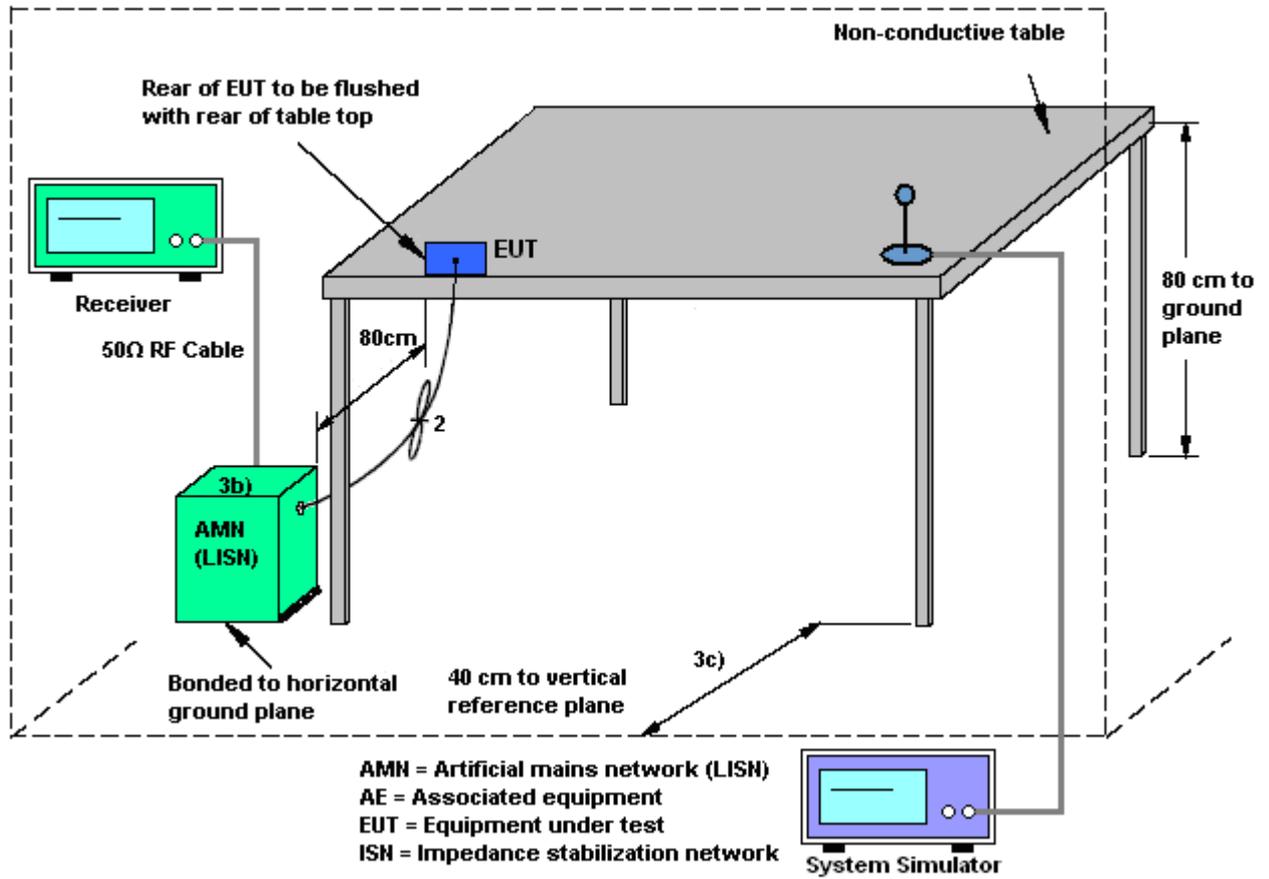

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Jiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Camera + Battery 2 + Earphone 2 + USB Cable 2 (Charging from Adapter 2) for Sample A		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

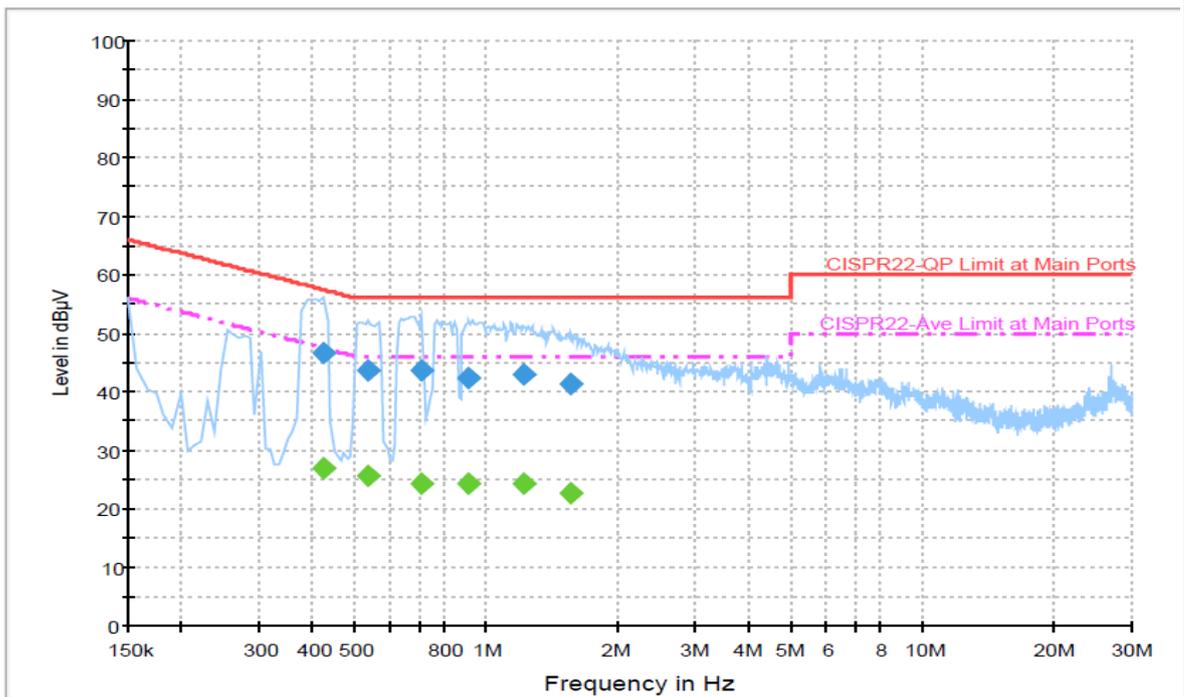

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	46.5	Off	L1	19.4	10.9	57.4
0.534000	43.5	Off	L1	19.3	12.5	56.0
0.710000	43.5	Off	L1	19.5	12.5	56.0
0.910000	42.3	Off	L1	19.4	13.7	56.0
1.214000	43.0	Off	L1	19.4	13.0	56.0
1.558000	41.2	Off	L1	19.4	14.8	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	26.7	Off	L1	19.4	20.7	47.4
0.534000	25.6	Off	L1	19.3	20.4	46.0
0.710000	24.2	Off	L1	19.5	21.8	46.0
0.910000	24.1	Off	L1	19.4	21.9	46.0
1.214000	24.4	Off	L1	19.4	21.6	46.0
1.558000	22.8	Off	L1	19.4	23.2	46.0



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Jiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Camera + Battery 2 + Earphone 2 + USB Cable 2 (Charging from Adapter 2) for Sample A		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

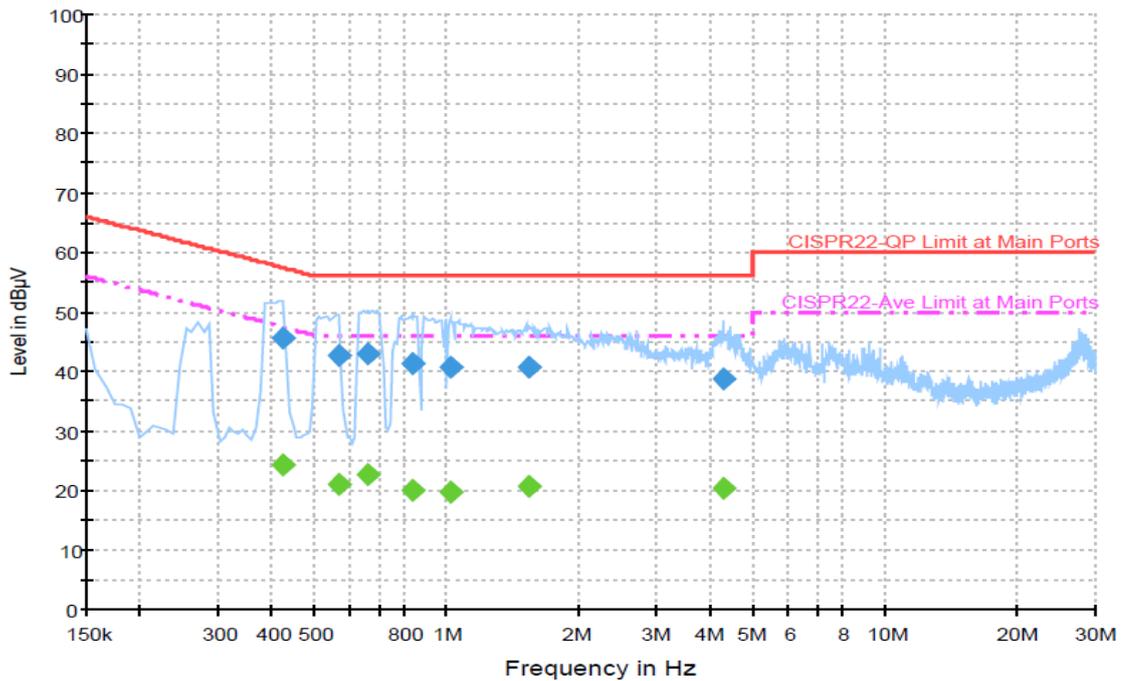

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	45.7	Off	N	19.4	11.7	57.4
0.566000	42.5	Off	N	19.3	13.5	56.0
0.662000	43.0	Off	N	19.4	13.0	56.0
0.838000	41.3	Off	N	19.5	14.7	56.0
1.014000	40.8	Off	N	19.5	15.2	56.0
1.542000	40.7	Off	N	19.4	15.3	56.0
4.278000	38.8	Off	N	19.5	17.2	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	24.3	Off	N	19.4	23.1	47.4
0.566000	20.9	Off	N	19.3	25.1	46.0
0.662000	22.8	Off	N	19.4	23.2	46.0
0.838000	20.1	Off	N	19.5	25.9	46.0
1.014000	19.5	Off	N	19.5	26.5	46.0
1.542000	20.6	Off	N	19.4	25.4	46.0
4.278000	20.4	Off	N	19.5	25.6	46.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
 Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.9.4 Test Setup

For radiated emissions below 30MHz

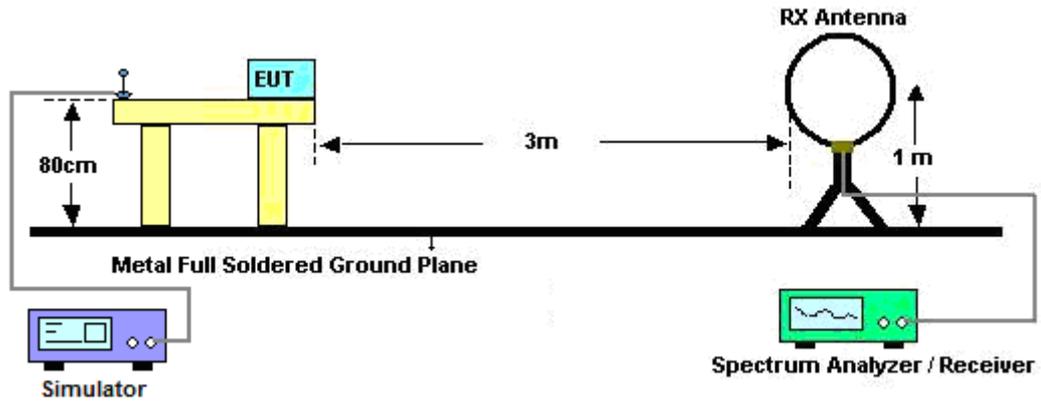

For radiated emissions above 30MHz

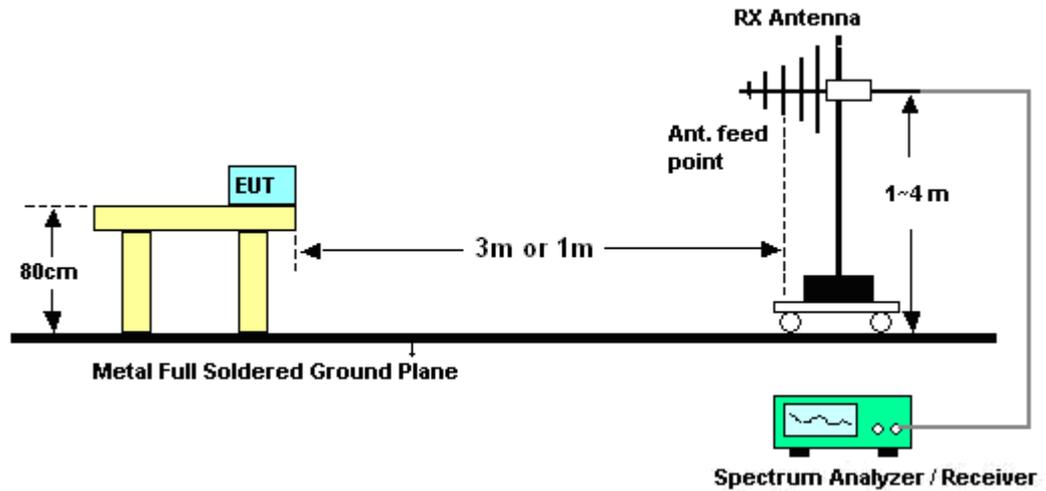



3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Cona Huang	Temperature :	25~26°C	
		Relative Humidity :	41~42%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	41~42%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	23.77	-16.23	40	35.19	19.51	0.53	31.46	-	-	Peak
132.33	27.1	-16.4	43.5	45.75	11.76	1.16	31.57	-	-	Peak
224.13	23.83	-22.17	46	44.22	9.62	1.44	31.45	-	-	Peak
309.8	30.37	-15.63	46	46.19	13.72	1.79	31.33	100	67	Peak
458.2	26.85	-19.15	46	38.31	17.3	2.32	31.08	-	-	Peak
696.9	23.42	-22.58	46	30.49	20.82	2.93	30.82	-	-	Peak
2389.99	47.67	-26.33	74	43.33	32.13	5.46	33.25	149	32	Peak
2389.99	35.36	-18.64	54	31.02	32.13	5.46	33.25	149	32	Average
2402	93.56	-	-	89.2	32.16	5.44	33.24	149	32	Peak
2402	79.88	-	-	75.54	32.13	5.46	33.25	149	32	Average
2494	45.73	-28.27	74	41.26	32.3	5.37	33.2	149	32	Peak
2494	33.5	-20.5	54	29.03	32.3	5.37	33.2	149	32	Average
8406	56.6	-17.4	74	43.93	36	10.12	33.45	100	94	Peak
8406	42.66	-11.34	54	29.99	36	10.12	33.45	100	94	Average



Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	41~42%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	33.26	-6.74	40	44.68	19.51	0.53	31.46	100	37	Peak
82.65	25.88	-14.12	40	48.69	7.83	0.89	31.53	-	-	Peak
191.73	27.12	-16.38	43.5	48.43	8.9	1.29	31.5	-	-	Peak
377.7	22.62	-23.38	46	36.25	15.52	2.09	31.24	-	-	Peak
455.4	26.32	-19.68	46	37.84	17.26	2.31	31.09	-	-	Peak
945.4	26.71	-19.29	46	29.97	23.87	3.45	30.58	-	-	Peak
2388.85	35.04	-18.96	54	30.7	32.13	5.46	33.25	100	17	Average
2388.85	47.29	-26.71	74	42.95	32.13	5.46	33.25	100	17	Peak
2402	95.55	-	-	91.19	32.16	5.44	33.24	100	17	Peak
2402	81.81	-	-	77.47	32.13	5.46	33.25	100	17	Average
2492	33.49	-20.51	54	29.02	32.3	5.37	33.2	100	17	Average
2492	45.51	-28.49	74	41.04	32.3	5.37	33.2	100	17	Peak
8394	56.66	-17.34	74	43.99	36	10.11	33.44	100	21	Peak
8394	42.88	-11.12	54	30.21	36	10.11	33.44	100	21	Average



Test Mode :	Mode 2	Temperature :	25~26°C
Test Channel :	39	Relative Humidity :	41~42%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	2441 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	22.65	-17.35	40	34.07	19.51	0.53	31.46	-	-	Peak
130.98	27	-16.5	43.5	45.65	11.77	1.15	31.57	-	-	Peak
226.02	23.53	-22.47	46	43.67	9.85	1.46	31.45	-	-	Peak
310.5	29.67	-16.33	46	45.46	13.74	1.79	31.32	100	67	Peak
458.2	27.81	-18.19	46	39.27	17.3	2.32	31.08	-	-	Peak
665.4	24.45	-21.55	46	31.86	20.57	2.87	30.85	-	-	Peak
2390	46.3	-27.7	74	41.96	32.13	5.46	33.25	123	37	Peak
2390	34.56	-19.44	54	30.22	32.13	5.46	33.25	123	37	Average
2441	94.65	-	-	90.24	32.22	5.41	33.22	123	37	Peak
2441	79.78	-	-	75.37	32.22	5.41	33.22	123	37	Average
2486	33.51	-20.49	54	29.07	32.27	5.38	33.21	123	37	Average
2486	45.15	-28.85	74	40.71	32.27	5.38	33.21	123	37	Peak
8361	56.67	-17.33	74	44	36	10.09	33.42	100	212	Peak
8361	42.55	-11.45	54	29.88	36	10.09	33.42	100	212	Average



Test Mode :	Mode 2	Temperature :	25~26°C
Test Channel :	39	Relative Humidity :	41~42%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	2441 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.54	33.55	-6.45	40	45.52	18.95	0.54	31.46	100	67	Peak
84.81	28.15	-11.85	40	50.55	8.23	0.91	31.54	-	-	Peak
223.86	26.88	-19.12	46	47.27	9.62	1.44	31.45	-	-	Peak
307	21.41	-24.59	46	37.28	13.67	1.79	31.33	-	-	Peak
458.2	26.31	-19.69	46	37.77	17.3	2.32	31.08	-	-	Peak
928.6	26.29	-19.71	46	29.9	23.61	3.41	30.63	-	-	Peak
2380	46.16	-27.84	74	41.84	32.11	5.47	33.26	101	19	Peak
2380	34.57	-19.43	54	30.25	32.11	5.47	33.26	101	19	Average
2441	96.82	-	-	92.41	32.22	5.41	33.22	101	19	Peak
2441	82.1	-	-	77.69	32.22	5.41	33.22	101	19	Average
2500	45.02	-28.98	74	40.55	32.3	5.37	33.2	101	19	Peak
2500	33.55	-20.45	54	29.08	32.3	5.37	33.2	101	19	Average
8313	56.9	-17.1	74	44.24	36	10.05	33.39	100	121	Peak
8313	42.62	-11.38	54	29.96	36	10.05	33.39	100	121	Average



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	41~42%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.62	22.8	-17.2	40	35.31	18.4	0.55	31.46	-	-	Peak
128.82	26.13	-17.37	43.5	44.78	11.78	1.14	31.57	-	-	Peak
224.13	23.57	-22.43	46	43.96	9.62	1.44	31.45	-	-	Peak
310.5	29.5	-16.5	46	45.29	13.74	1.79	31.32	100	27	Peak
380.5	26.46	-19.54	46	40	15.6	2.1	31.24	-	-	Peak
789.3	24.89	-21.11	46	30.38	22.07	3.12	30.68	-	-	Peak
2318	45.87	-28.13	74	41.62	32.02	5.51	33.28	188	45	Peak
2318	34.51	-19.49	54	30.26	32.02	5.51	33.28	188	45	Average
2480	93.34	-	-	88.9	32.27	5.38	33.21	188	45	Peak
2480	79.97	-	-	75.53	32.27	5.38	33.21	188	45	Average
2483.5	49.27	-4.73	54	44.83	32.27	5.38	33.21	188	45	Average
2483.5	60.27	-13.73	74	55.83	32.27	5.38	33.21	188	45	Peak
8385	56.62	-17.38	74	43.95	36	10.1	33.43	100	51	Peak
8385	42.61	-11.39	54	29.94	36	10.1	33.43	100	51	Average



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	41~42%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	34.33	-5.67	40	45.75	19.51	0.53	31.46	100	107	Peak
84.54	27.19	-12.81	40	49.74	8.09	0.9	31.54	-	-	Peak
188.22	26.43	-17.07	43.5	47.73	8.94	1.27	31.51	-	-	Peak
307	22.96	-23.04	46	38.83	13.67	1.79	31.33	-	-	Peak
458.9	26.11	-19.89	46	37.55	17.32	2.32	31.08	-	-	Peak
729.8	23.82	-22.18	46	30.32	21.24	3.01	30.75	-	-	Peak
2388	45.89	-28.11	74	41.55	32.13	5.46	33.25	100	22	Peak
2388	34.62	-19.38	54	30.28	32.13	5.46	33.25	100	22	Average
2480	82.55	-	-	78.11	32.27	5.38	33.21	100	22	Average
2480	96.31	-	-	91.87	32.27	5.38	33.21	100	22	Peak
2483.5	62.1	-11.9	74	57.66	32.27	5.38	33.21	100	22	Peak
2483.5	50.84	-3.16	54	46.4	32.27	5.38	33.21	100	22	Average
8310	56.41	-17.59	74	43.75	36	10.05	33.39	100	210	Peak
8310	42.45	-11.55	54	29.79	36	10.05	33.39	100	210	Average



Test Mode :	Mode 4	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	41~42%
Test Engineer :	Cona Huang	Polarization :	Horizontal
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	22.66	-17.34	40	34.63	18.95	0.54	31.46	105	67	Peak
127.74	23.22	-20.28	43.5	41.86	11.79	1.14	31.57	-	-	Peak
152.58	22.86	-20.64	43.5	42.16	11.04	1.21	31.55	-	-	Peak
321	27.13	-18.87	46	42.61	14.03	1.81	31.32	-	-	Peak
380.5	23.08	-22.92	46	36.62	15.6	2.1	31.24	-	-	Peak
461	24.51	-21.49	46	35.91	17.36	2.32	31.08	-	-	Peak
2350	45.93	-28.07	74	41.65	32.05	5.5	33.27	100	7	Peak
2350	33.78	-20.22	54	29.5	32.05	5.5	33.27	100	7	Average
2480	99.51	-	-	95.07	32.27	5.38	33.21	100	7	Peak
2480	83.28	-	-	78.84	32.27	5.38	33.21	100	7	Average
2483.5	50.83	-3.17	54	46.39	32.27	5.38	33.21	100	7	Average
2483.5	64.77	-9.23	74	60.33	32.27	5.38	33.21	100	7	Peak
8190	53.99	-20.01	74	41.35	36	9.97	33.33	100	29	Peak
8190	40.99	-13.01	54	28.35	36	9.97	33.33	100	29	Average



Test Mode :	Mode 4	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	41~42%
Test Engineer :	Cona Huang	Polarization :	Vertical
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	32.99	-7.01	40	45.5	18.4	0.55	31.46	100	192	Peak
84.54	26.08	-13.92	40	48.63	8.09	0.9	31.54	-	-	Peak
228.45	25.29	-20.71	46	45.06	10.2	1.47	31.44	-	-	Peak
383.3	21.16	-24.84	46	34.61	15.67	2.11	31.23	-	-	Peak
458.2	24.21	-21.79	46	35.67	17.3	2.32	31.08	-	-	Peak
688.5	23.79	-22.21	46	30.95	20.75	2.92	30.83	-	-	Peak
2364	46.34	-27.66	74	42.03	32.08	5.49	33.26	200	10	Peak
2364	33.72	-20.28	54	29.41	32.08	5.49	33.26	200	10	Average
2480	95.33	-	-	90.89	32.27	5.38	33.21	200	10	Peak
2480	80.54	-	-	76.1	32.27	5.38	33.21	200	10	Average
2483.5	48.95	-5.05	54	44.51	32.27	5.38	33.21	200	10	Average
2483.5	61.57	-12.43	74	57.13	32.27	5.38	33.21	200	10	Peak
8166	55.44	-18.56	74	41.24	36	11.52	33.32	104	256	Peak
8166	40.01	-13.99	54	25.81	36	11.52	33.32	104	256	Average



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is Monopole Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101329	9kHz~30GHz	Apr. 26, 2010	Apr. 25, 2011	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 17, 2009	Sep. 16, 2010	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 10, 2009	Sep. 09, 2010	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 05, 2009	Aug. 04, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz~30MHz	Nov. 30, 2009	Nov. 29, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz~30MHz	Nov. 23, 2009	Nov. 22, 2010	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	105934	N/A	Nov. 11, 2008	Nov. 10, 2010	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 04, 2009	Dec. 03, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 20, 2009	Aug. 19, 2010	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 28, 2008	Jul. 28, 2010	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec.09,2009	Dec. 08, 2010	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 27, 2010	Mar. 26, 2011	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	May 12, 2009	May 11, 2011	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		



Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				