

## FCC 47 CFR PART 15 SUBPART C

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model Number : PC49100  
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2009  
ANSI C63.4-2003  
Issue Date : May 14, 2010

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan Country 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Revised By</b>
00	May 14, 2010	Initial Issue	

## Verification

Issued Date: 2010/05/14

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model Number : PC49100  
FCC ID : NM8PC49100  
EUT Rated Voltage : DC 5.0V, 1.0A  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2009  
ANSI C63.4-2003  
Test Result : Complied  
Performed Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,  
Taoyuan Country 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190




Taiwan Accreditation Foundation accreditation number:  
1330

<http://www.atl-lab.com.tw/e-index.htm>

The above equipment has been tested by A Test Lab Techno Corp., and found compliance with the requirements set forth in the Electromagnetic Compatibility Directive 2004/108/EC and technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved By :   
(Manager) (Miller Lee)

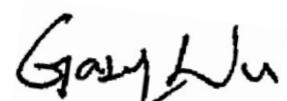Reviewed By :   
(Testing Engineer) (Gary Wu)

---

## TABLE OF CONTENTS

<b>1</b>	<b>General Information.....</b>	<b>6</b>
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology .....</b>	<b>8</b>
3.1.	Mode of Operation .....	8
3.2.	EUT Exercise Software .....	9
3.3.	Configuration of Test System Details .....	9
3.4.	Test Site Environment .....	9
<b>4</b>	<b>Conducted Emission Measurement.....</b>	<b>10</b>
4.1.	Limit.....	10
4.2.	Test Instruments.....	10
4.3.	Test Setup .....	10
4.4.	Test Procedure .....	11
4.5.	Test Result .....	12
<b>5</b>	<b>Radiated Interference Measurement.....</b>	<b>16</b>
5.1.	Limit.....	16
5.2.	Test Instruments.....	16
5.3.	Setup .....	17
5.4.	Test Procedure .....	17
5.5.	Test Result .....	19
<b>6</b>	<b>Maximum Conducted Output Power Measurement .....</b>	<b>45</b>
6.1.	Limit.....	45
6.2.	Test Setup .....	45
6.3.	Test Instruments.....	45
6.4.	Test Procedure .....	45
6.5.	Test Result .....	46
<b>7</b>	<b>Minimum 20dB RF Bandwidth Measurement.....</b>	<b>48</b>
7.1.	Limit.....	48
7.2.	Test Setup .....	48
7.3.	Test Instruments.....	48
7.4.	Test Procedure .....	48
7.5.	Test Result .....	49
7.6.	Test Graphs.....	50
<b>8</b>	<b>Carrier Frequency Separation Measurement.....</b>	<b>52</b>
8.1.	Limit.....	52
8.2.	Test Setup .....	52
8.3.	Test Instruments.....	52
8.4.	Test Procedure .....	52
8.5.	Test Result .....	53
8.6.	Test Graphs.....	53

<b>9</b>	<b>Number of Hopping Measurement .....</b>	<b>55</b>
9.1.	Limit.....	55
9.2.	Test Setup .....	55
9.3.	Test Instruments.....	55
9.4.	Test Procedure .....	55
9.5.	Test Result .....	56
9.6.	Test Graphs.....	57
<b>10</b>	<b>Time of Occupancy (Dwell Time) Measurement .....</b>	<b>59</b>
10.1.	Limit.....	59
10.2.	Test Setup .....	59
10.3.	Test Instruments.....	59
10.4.	Test Procedure .....	59
10.5.	Test Result .....	60
10.6.	Test Graphs.....	62
<b>11</b>	<b>Out of Band Conducted Emissions Measurement .....</b>	<b>64</b>
11.1.	Limit.....	64
11.2.	Test Setup .....	64
11.3.	Test Instruments.....	64
11.4.	Test Procedure .....	64
11.5.	Test Graphs.....	65
<b>12</b>	<b>Band Edges Measurement .....</b>	<b>67</b>
12.1.	Limit.....	67
12.2.	Test Setup .....	67
12.3.	Test Instruments.....	67
12.4.	Test Procedure .....	68
12.5.	Test Graphs.....	69
<b>13</b>	<b>Antenna Measurement .....</b>	<b>73</b>
13.1.	Limit.....	73
13.2.	Antenna Connector Construction.....	73

## 1 General Information

### 1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(c)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(1)	A8.4 (2)	Max. Output Power	PASS	-----
15.247(a)(1)	A8.1 (1)	20dB RF Bandwidth	PASS	-----
15.247(a)(1)(iii)	A8.1 (2)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	A8.1 (4)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	A8.1 (4)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(c)	A8.5	Band Edge Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

#### Conducted Emission

The measurement uncertainty is evaluated as  $\pm 2.24$  dB.

#### Radiated Emission

The measurement uncertainty of 30 MHz - 1GHz is evaluated as  $\pm 3.072$ dB.

## 2 EUT Description

<b>Product</b>	:	Smartphone		
<b>Trade Name</b>	:	HTC		
<b>Model Number</b>	:	PC49100		
<b>Applicant</b>	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan		
<b>Manufacturer</b>	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan		
<b>FCC ID</b>	:	NM8PC49100		
<b>Frequency Range</b>	:	2402 ~ 2480 MHz		
<b>Modulation Type</b>	:	GFSK for 1Mbps		
		$\pi/4$ -DQPSK for 2Mbps		
		8DPSK for 3Mbps		
<b>Antenna Type</b>	:	PIFA Type		
<b>Antenna Gain</b>	:	0.5 dBi		
<b>RF Output Power (Conducted)</b>	:	GFSK for 1Mbps	1.50 dBm /	0.001 W
		$\pi/4$ -DQPSK for 2Mbps	4.28 dBm /	0.003 W
		8DPSK for 3Mbps	2.20 dBm /	0.002 W

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 2: Normal Operation Mode
Mode 3: GFSK Link Mode
Mode 4: $\pi/4$ -DQPSK Link Mode
Mode 5: 8DPSK Link Mode

#### Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation shown in the table below is the worst-case. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Modulation Type	Channel	Frequency (MHz)	Packet Type	Conducted Power (dBm)	Worst Case
GFSK	Low	2402	DH1	0.95	<input type="checkbox"/>
	Middle	2402	DH3	0.90	<input type="checkbox"/>
	High	2402	DH5	0.90	<input type="checkbox"/>
	Low	2441	DH1	1.50	<input type="checkbox"/>
	Middle	2441	DH3	1.49	<input type="checkbox"/>
	High	2441	DH5	1.45	<input type="checkbox"/>
	Low	2480	DH1	1.24	<input type="checkbox"/>
	Middle	2480	DH3	1.24	<input type="checkbox"/>
	High	2480	DH5	1.23	<input type="checkbox"/>
$\pi/4$ -DQPSK	Low	2402	2DH1	3.76	<input type="checkbox"/>
	Middle	2402	2DH3	3.71	<input type="checkbox"/>
	High	2402	2DH5	3.71	<input type="checkbox"/>
	Low	2441	2DH1	4.26	<input type="checkbox"/>
	Middle	2441	2DH3	4.28	<input checked="" type="checkbox"/>
	High	2441	2DH5	4.23	<input type="checkbox"/>
	Low	2480	2DH1	3.99	<input type="checkbox"/>
	Middle	2480	2DH3	4.03	<input type="checkbox"/>
	High	2480	2DH5	4.01	<input type="checkbox"/>
8DPSK	Low	2402	3DH1	1.14	<input type="checkbox"/>
	Middle	2402	3DH3	1.26	<input type="checkbox"/>
	High	2402	3DH5	1.56	<input type="checkbox"/>
	Low	2441	3DH1	1.59	<input type="checkbox"/>
	Middle	2441	3DH3	1.85	<input type="checkbox"/>
	High	2441	3DH5	2.20	<input type="checkbox"/>
	Low	2480	3DH1	1.45	<input type="checkbox"/>
	Middle	2480	3DH3	1.57	<input type="checkbox"/>
	High	2480	3DH5	1.93	<input type="checkbox"/>

### Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA

### 3.2. EUT Exercise Software

1.	Setup the EUT and Bluetooth Tester (CBT) as shown on 3.3.
2.	Turn on the power of all equipment.
3.	EUT run test program.
4.	Open Bluetooth function link to CBT.

### 3.3. Configuration of Test System Details

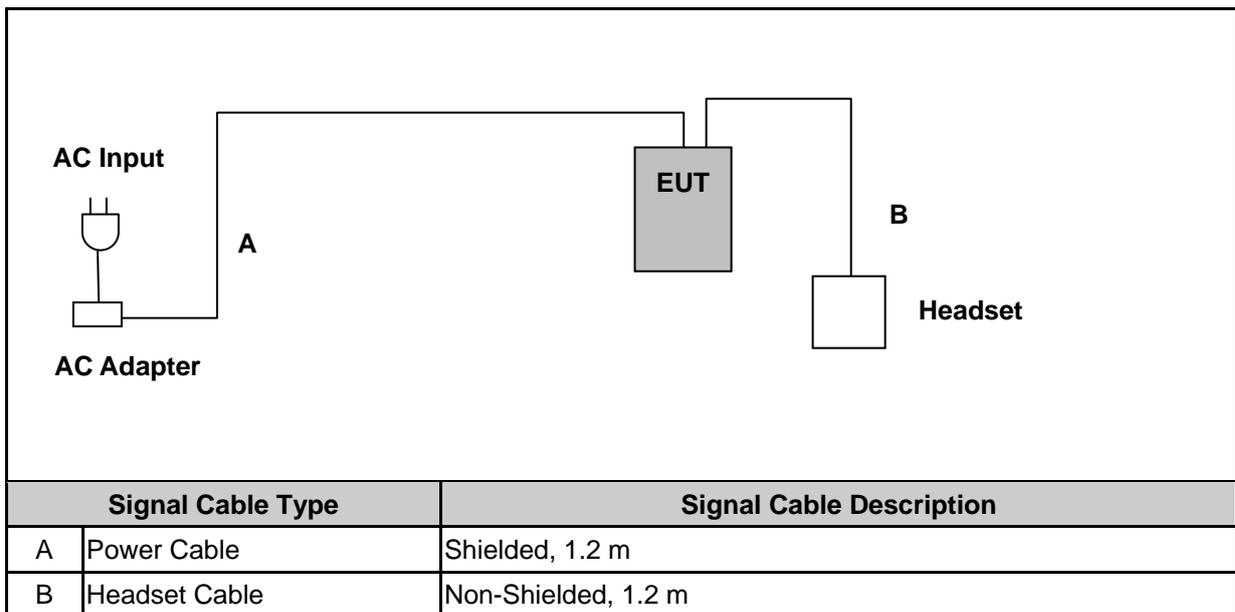

### 3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	25
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950

## 4 Conducted Emission Measurement

### 4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


### 4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	07/01/2009	(1)
LISN	R&S	ENV216	101040	03/02/2010	(1)
LISN	R&S	ENV216	101041	03/02/2010	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 4.3. Test Setup

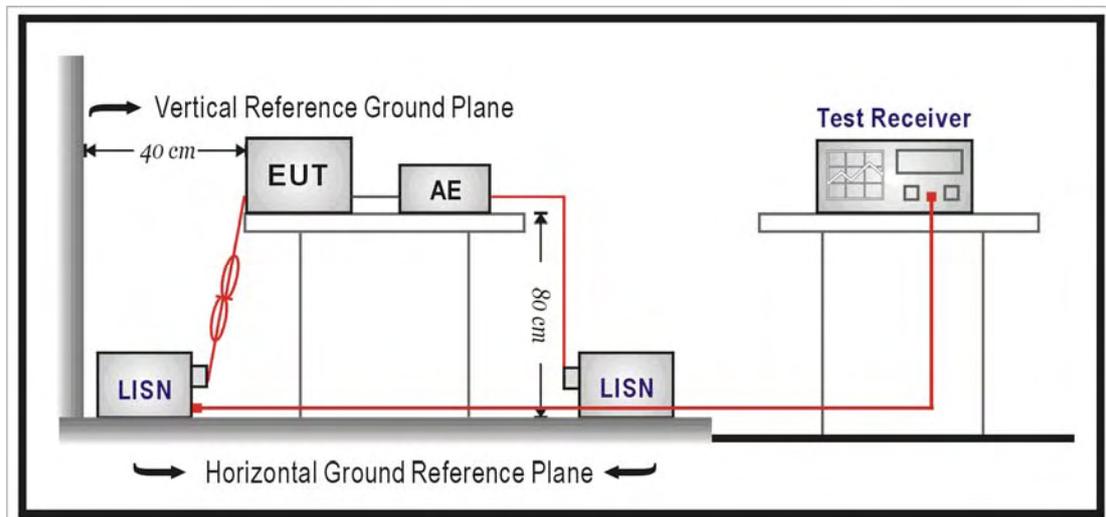

#### **4.4. Test Procedure**

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

### 4.5. Test Result




Site : Conduction      Phase: **L1**      Temperature: 26 °C  
 Limit: CISPR22 Class B Conduction(QP)      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: Smartphone  
 M/N: PC49100  
 Mode: 1  
 Note: AC Adapter #1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	39.70	10.11	49.81	65.99	-16.18	QP	
2		0.1500	17.80	10.11	27.91	55.99	-28.08	AVG	
3		0.2753	36.20	10.05	46.25	60.95	-14.70	QP	
4		0.2753	19.20	10.05	29.25	50.95	-21.70	AVG	
5		0.4342	37.60	9.99	47.59	57.17	-9.58	QP	
6		0.4342	13.90	9.99	23.89	47.17	-23.28	AVG	
7		0.5360	37.60	9.94	47.54	56.00	-8.46	QP	
8		0.5360	14.50	9.94	24.44	46.00	-21.56	AVG	
9		0.6710	39.10	9.88	48.98	56.00	-7.02	QP	
10		0.6710	18.30	9.88	28.18	46.00	-17.82	AVG	
11	*	0.8150	40.00	9.83	49.83	56.00	-6.17	QP	
12		0.8150	19.30	9.83	29.13	46.00	-16.87	AVG	

\*:Maximum data    x:Over limit    !:over margin

●:Reference Only

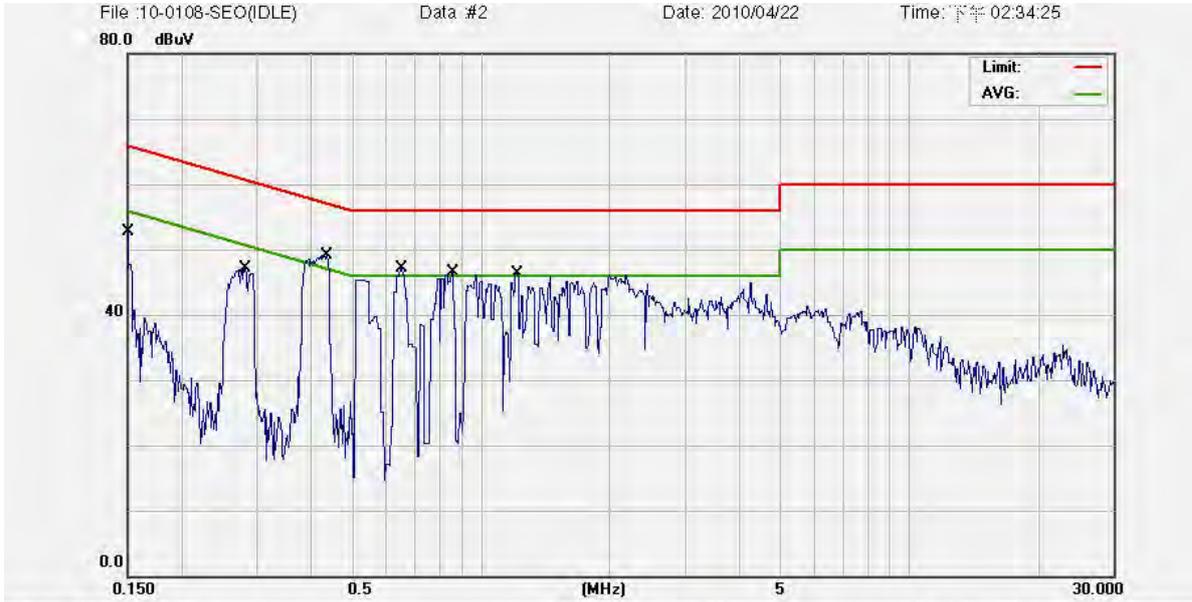

Site : Conduction      Phase: **N**      Temperature: 26 °C  
 Limit: CISPR22 Class B Conduction(QP)      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: Smartphone  
 M/N: PC49100  
 Mode: 1  
 Note: AC Adapter #1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	38.10	10.10	48.20	65.99	-17.79	QP	
2		0.1500	17.30	10.10	27.40	55.99	-28.59	AVG	
3		0.2809	32.80	10.04	42.84	60.79	-17.95	QP	
4		0.2809	18.10	10.04	28.14	50.79	-22.65	AVG	
5		0.4363	34.40	9.99	44.39	57.13	-12.74	QP	
6		0.4363	10.30	9.99	20.29	47.13	-26.84	AVG	
7	*	0.6530	33.40	9.89	43.29	56.00	-12.71	QP	
8		0.6530	13.70	9.89	23.59	46.00	-22.41	AVG	
9		0.8600	31.80	9.81	41.61	56.00	-14.39	QP	
10		0.8600	12.20	9.81	22.01	46.00	-23.99	AVG	
11		1.2109	30.90	9.66	40.56	56.00	-15.44	QP	
12		1.2109	13.20	9.66	22.86	46.00	-23.14	AVG	

\*: Maximum data    x: Over limit    !: over margin      •: Reference Only



Site : Conduction Phase: **L1** Temperature: 26 °C  
 Limit: CISPR22 Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 55 %  
 EUT: Smartphone  
 M/N: PC49100  
 Mode: 2  
 Note: AC Adapter #1

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	39.50	10.11	49.61	65.99	-16.38	QP	
2		0.1500	17.80	10.11	27.91	55.99	-28.08	AVG	
3		0.4363	37.00	9.99	46.99	57.13	-10.14	QP	
4		0.4363	12.30	9.99	22.29	47.13	-24.84	AVG	
5		0.5810	35.20	9.92	45.12	56.00	-10.88	QP	
6		0.5810	11.30	9.92	21.22	46.00	-24.78	AVG	
7	*	0.6889	36.10	9.87	45.97	56.00	-10.03	QP	
8		0.6889	13.70	9.87	23.57	46.00	-22.43	AVG	
9		0.8240	34.20	9.83	44.03	56.00	-11.97	QP	
10		0.8240	11.50	9.83	21.33	46.00	-24.67	AVG	
11		1.1119	32.20	9.71	41.91	56.00	-14.09	QP	
12		1.1119	9.70	9.71	19.41	46.00	-26.59	AVG	

\*:Maximum data x:Over limit !:over margin •Reference Only



Site : Conduction Phase: **N** Temperature: 26 °C  
 Limit: CISPR22 Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 55 %  
 EUT: Smartphone  
 M/N: PC49100  
 Mode: 2  
 Note: AC Adapter #1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	38.30	10.10	48.40	65.99	-17.59	QP	
2		0.1500	17.50	10.10	27.60	55.99	-28.39	AVG	
3		0.2872	33.20	10.04	43.24	60.60	-17.36	QP	
4		0.2872	17.50	10.04	27.54	50.60	-23.06	AVG	
5	*	0.4300	35.00	9.99	44.99	57.25	-12.26	QP	
6		0.4300	14.90	9.99	24.89	47.25	-22.36	AVG	
7		0.7970	32.70	9.83	42.53	56.00	-13.47	QP	
8		0.7970	14.40	9.83	24.23	46.00	-21.77	AVG	
9		1.6250	29.10	9.66	38.76	56.00	-17.24	QP	
10		1.6250	9.30	9.66	18.96	46.00	-27.04	AVG	
11		2.4350	28.30	9.76	38.06	56.00	-17.94	QP	
12		2.4350	11.60	9.76	21.36	46.00	-24.64	AVG	

\*:Maximum data x:Over limit !:over margin •Reference Only

## 5 Radiated Interference Measurement

### 5.1. Limit

Frequency Range (MHz)	Peak (dBuV)
30 to 88	39
88 to 216	43.5
216 to 960	46.4
Above 960	49.5


### 5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/27/2009	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/20/2009	(2)
Pre Amplifier	Agilent	8449B	3008A02237	07/01/2009	(1)
Pre Amplifier	Agilent	8447D	2944A10961	06/30/2009	(1)
Bi-log Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	06/23/2009	(2)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	07/01/2009	(2)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/30/2009	(2)
Test Site	ATL	TE01	888001	08/06/2009	(1)

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 5.3. Setup

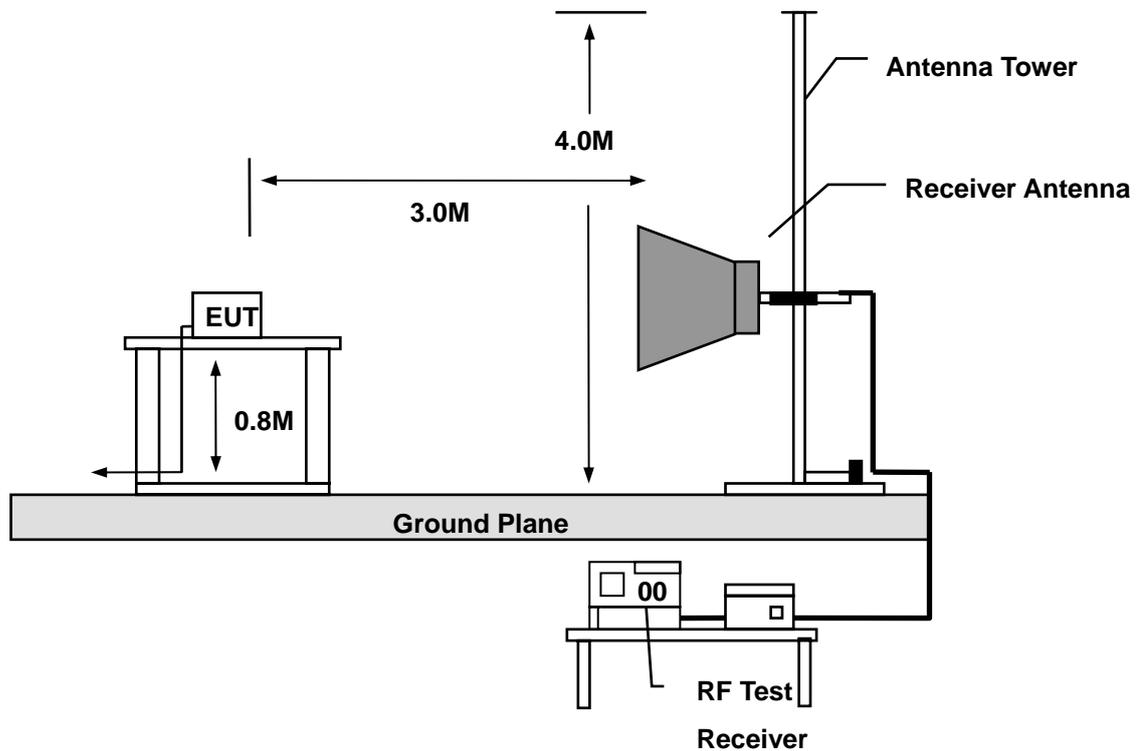

### 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:


(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

## 5.5. Test Result


### 5.5.1. Below 1GHz

Job No.:	10-0109-SEO	Ant. Polar. :	Vertical
Standard:	FCC Class B 3M Radiation	Test Distance:	3m
Test item:	Radiation Test	Power:	AC 120V/60Hz
Temp.(°C)/Hum.(%RH):	26(°C)/60%RH	Date:2010/5/13	Time:PM 09:39:42
EUT:	Smartphone	Test By:	Gary Wu
Model:	PC49100		
Description:	Mode 2: Normal Operation Mode (30-1000 MHz)		

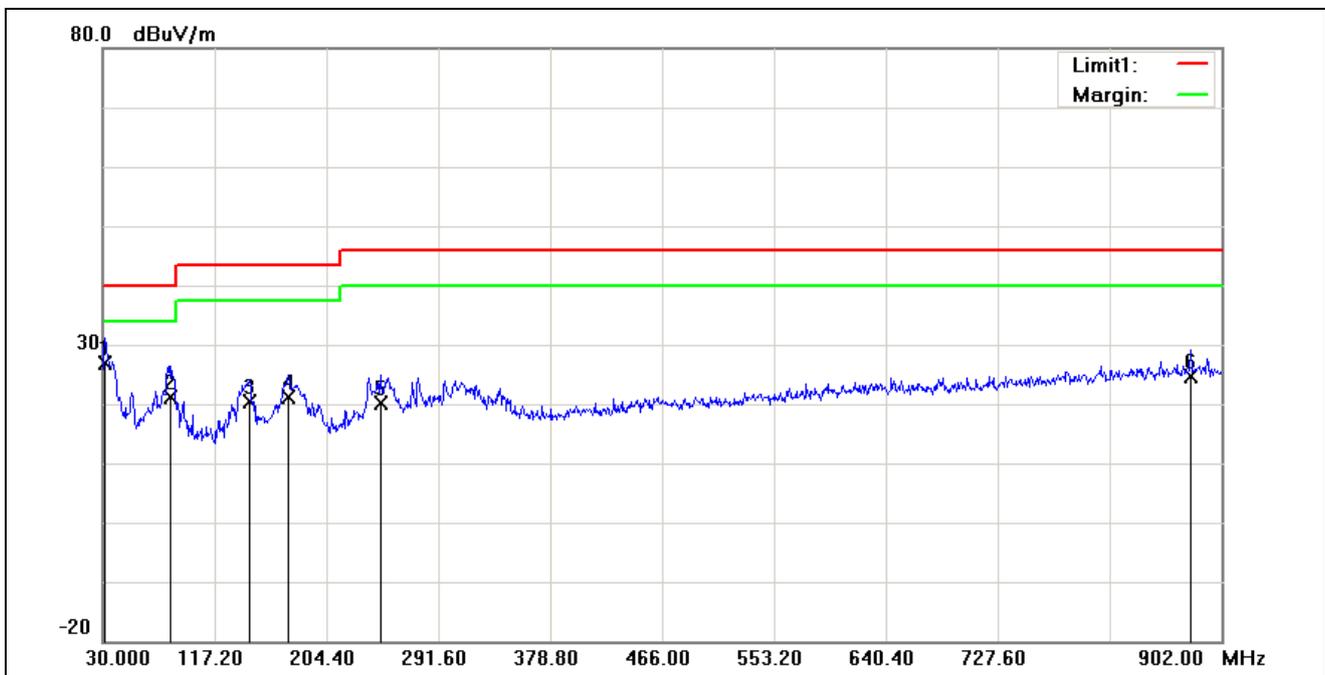

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	31.7440	40.21	-13.28	26.93	40.00	-13.07			QP
2	83.1920	36.58	-15.39	21.19	40.00	-18.81			QP
3	144.2320	36.47	-16.21	20.26	43.50	-23.24			QP
4	174.7520	35.87	-14.67	21.20	43.50	-22.30			QP
5	246.2560	31.23	-11.15	20.08	46.00	-25.92			QP
6	878.4560	25.47	-0.73	24.74	46.00	-21.26			QP


<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC Class B 3M Radiation</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>26(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Time:</b>	<b>PM 09:45:49</b>
<b>Model:</b>	<b>PC49100</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Description:</b>	<b>Mode 2: Normal Operation Mode (30-1000 MHz)</b>		

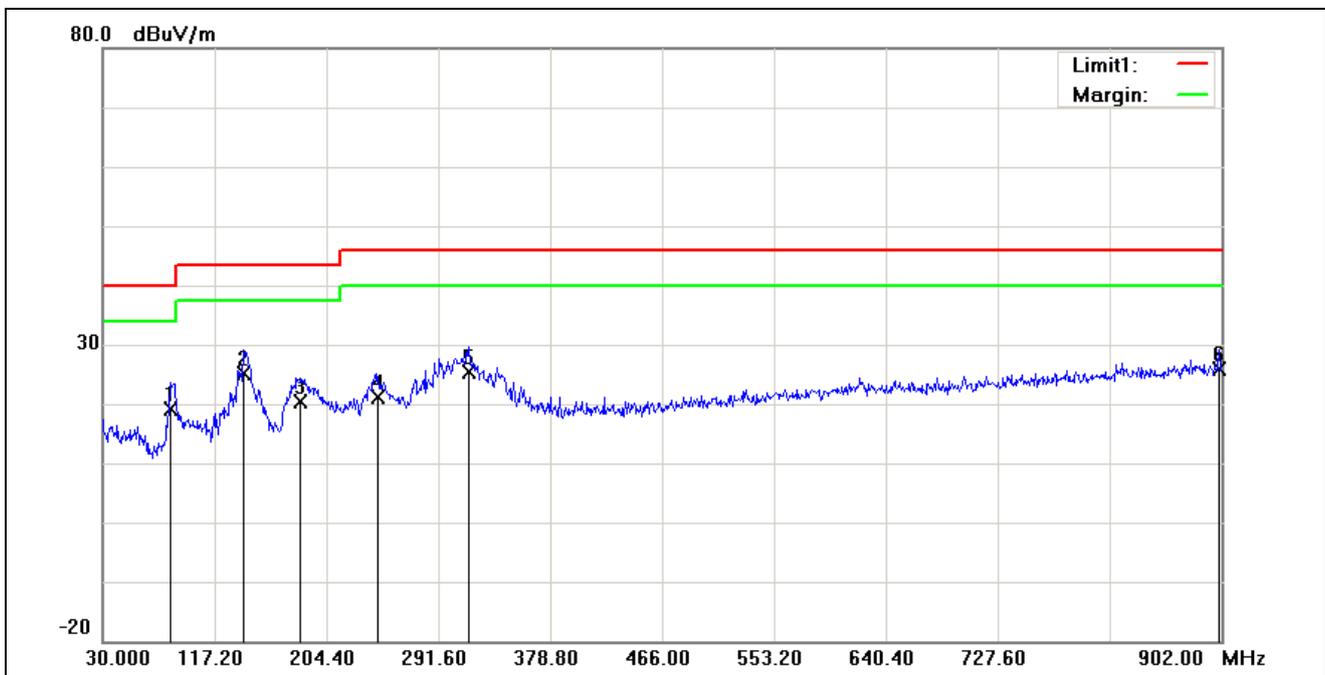

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	83.9381	34.20	-15.12	19.08	40.00	-20.92			QP
2	140.5732	41.34	-16.33	25.01	43.50	-18.49			QP
3	185.0722	34.21	-13.80	20.41	43.50	-23.09			QP
4	243.9543	32.31	-11.30	21.01	46.00	-24.99			QP
5	315.4227	35.25	-9.76	25.49	46.00	-20.51			QP
6	900.6515	26.14	-0.36	25.78	46.00	-20.22			QP


**5.5.2. Above 1GHz**

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:06:24</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		

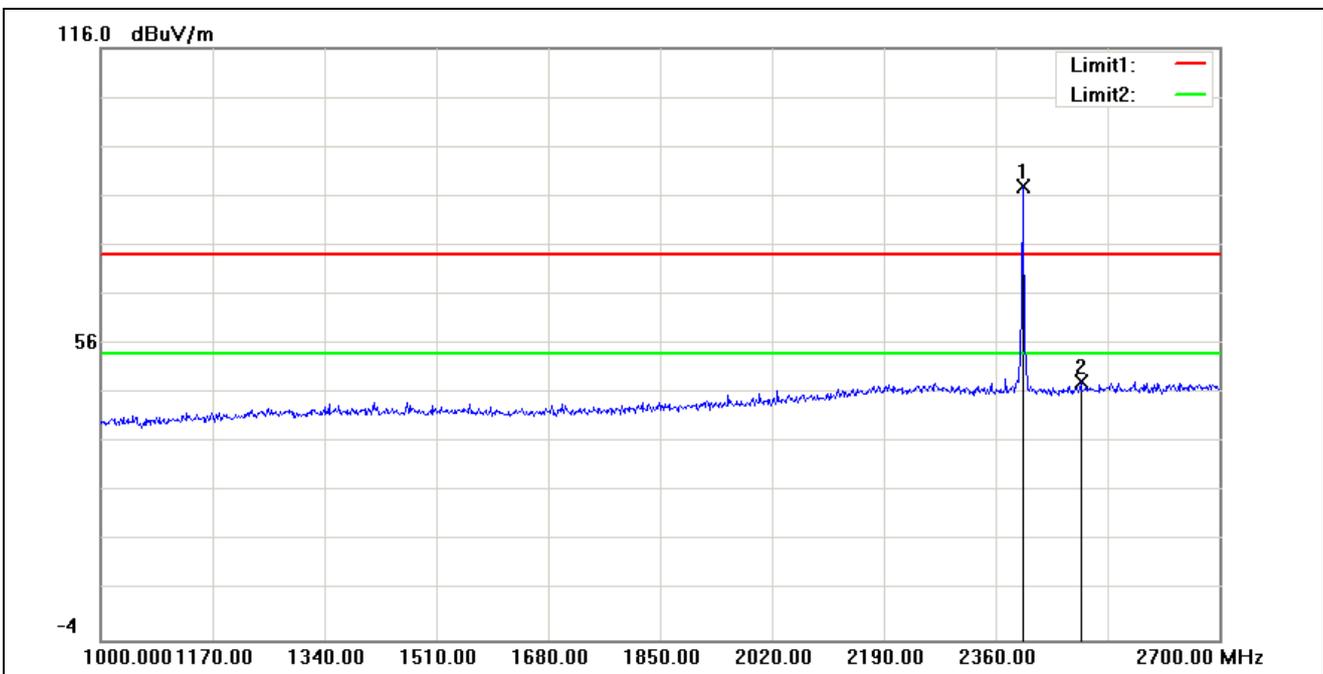


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2401.650	87.95	0.12	88.07	74.00	14.07			TX
2	2490.050	48.17	0.25	48.42	74.00	-25.58			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Time:</b>	<b>PM 10:12:24</b>
<b>Model:</b>	<b>PC49100</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		

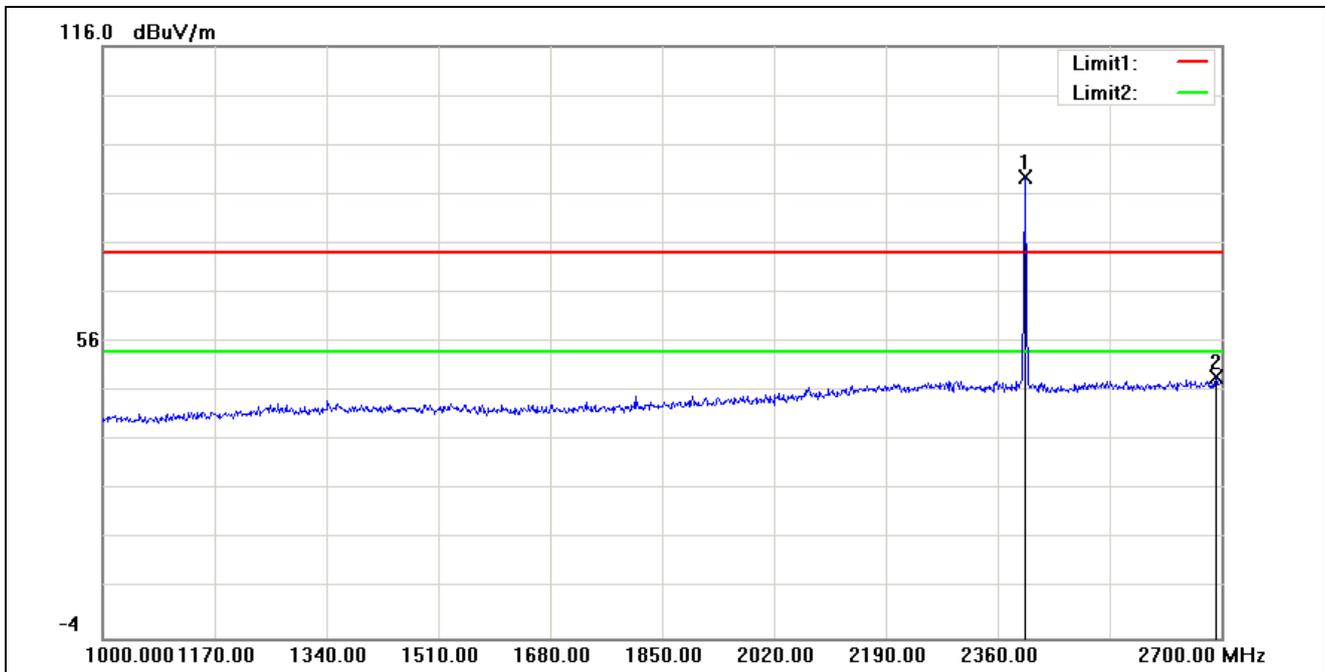


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2401.650	89.45	0.12	89.57	74.00	15.57			TX
2	2691.500	47.95	1.00	48.95	74.00	-25.05			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:21:51</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		
	<b>2.7G-10G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

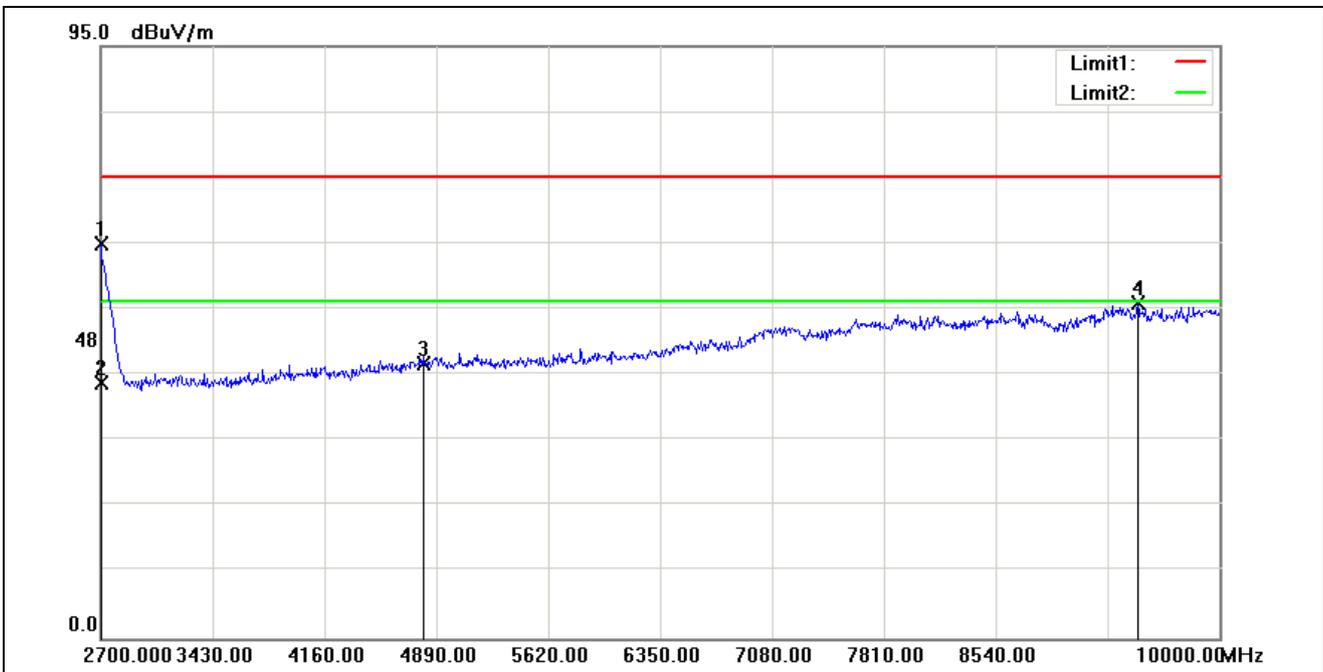


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2700.000	40.71	22.58	63.29	74.00	-10.71			peak
2	2700.000	18.30	22.58	40.88	54.00	-13.12			AVG
3	4804.000	36.75	7.32	44.07	74.00	-29.93			peak
4	9470.750	36.90	16.91	53.81	74.00	-20.19			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:25:11</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		
	<b>2.7G-10G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

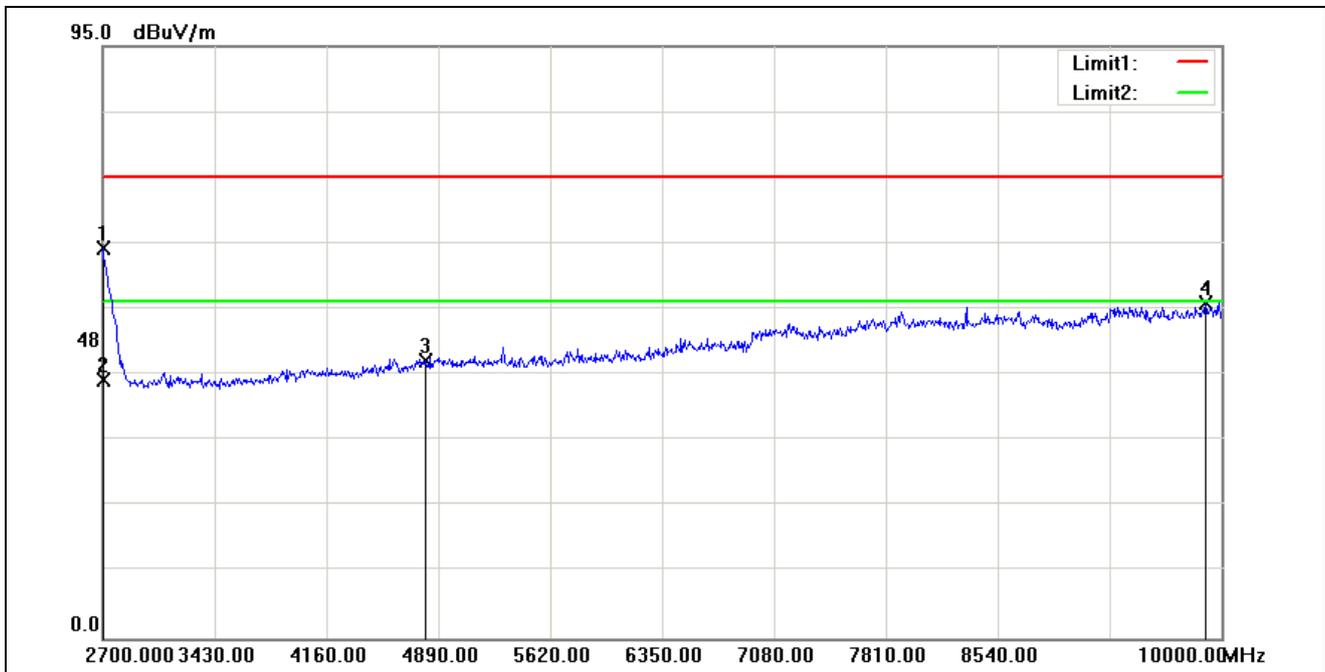


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2700.000	40.00	22.58	62.58	74.00	-11.42			peak
2	2700.000	18.89	22.58	41.47	54.00	-12.53			AVG
3	4804.000	37.12	7.32	44.44	74.00	-29.56			peak
4	9897.800	36.09	17.78	53.87	74.00	-20.13			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:59:06</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		
	<b>10G - 18G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

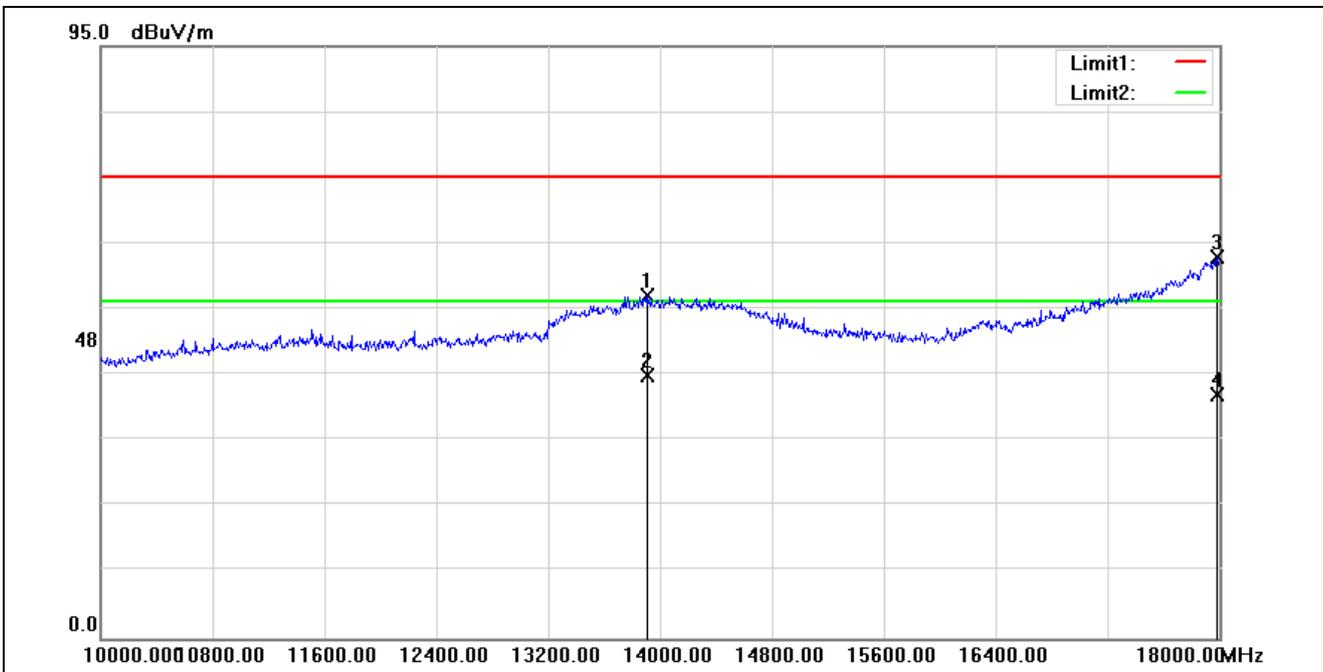


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	13904.000	36.48	18.53	55.01	74.00	-18.99			peak
2	13904.000	23.51	18.53	42.04	54.00	-11.96			AVG
3	17988.000	35.74	25.34	61.08	74.00	-12.92			peak
4	17988.000	13.62	25.34	38.96	54.00	-15.04			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 11:02:16</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		
	<b>10G - 18G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

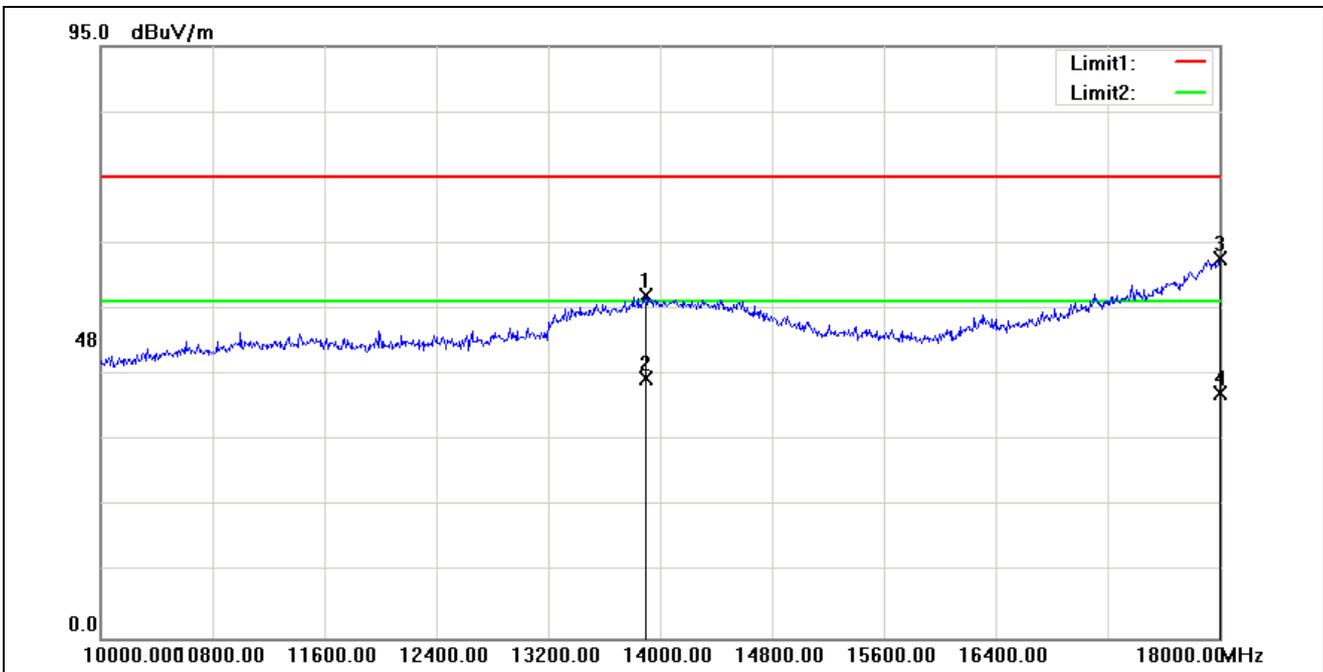


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	13896.000	36.53	18.50	55.03	74.00	-18.97			peak
2	13896.000	23.25	18.50	41.75	54.00	-12.25			AVG
3	18000.000	35.43	25.57	61.00	74.00	-13.00			peak
4	18000.000	13.62	25.57	39.19	54.00	-14.81			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Time:</b>	<b>PM 11:05:06</b>
<b>Model:</b>	<b>PC49100</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		

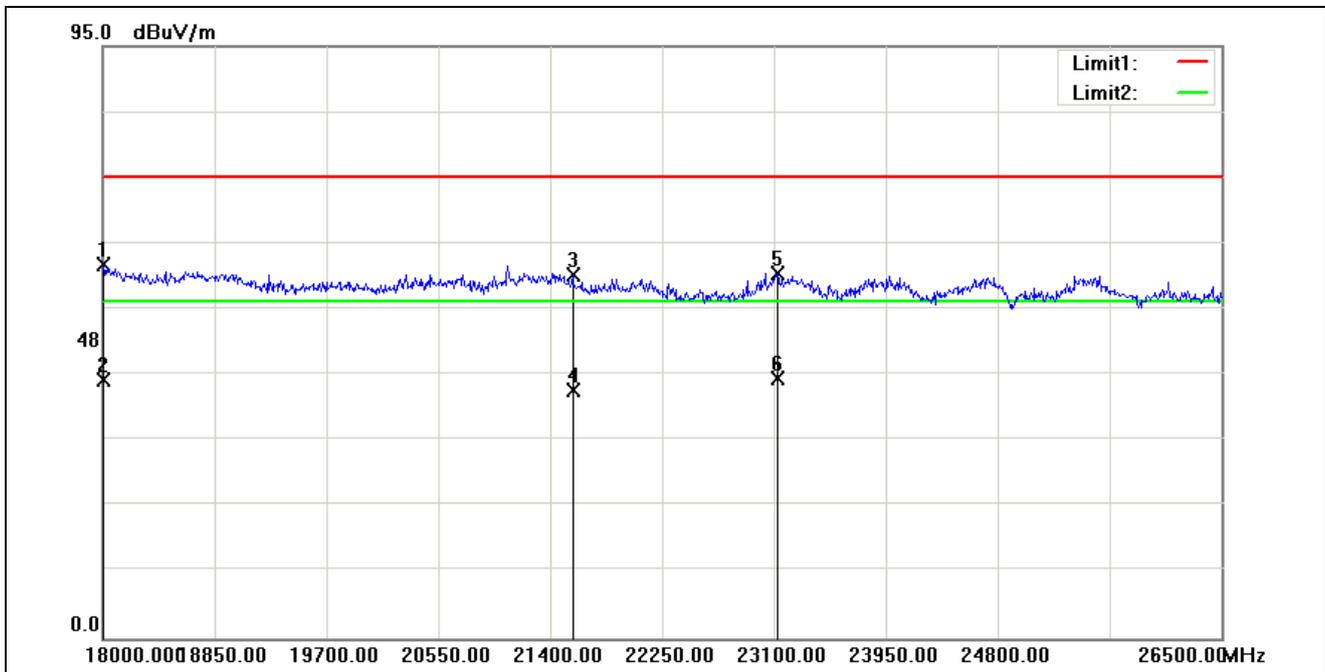


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	18012.750	36.60	23.29	59.89	74.00	-14.11			peak
2	18012.750	18.06	23.29	41.35	54.00	-12.65			AVG
3	21570.000	37.01	21.31	58.32	74.00	-15.68			peak
4	21570.000	18.39	21.31	39.70	54.00	-14.30			AVG
5	23129.750	37.67	20.83	58.50	74.00	-15.50			peak
6	23129.750	20.80	20.83	41.63	54.00	-12.37			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 11:10:23</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		

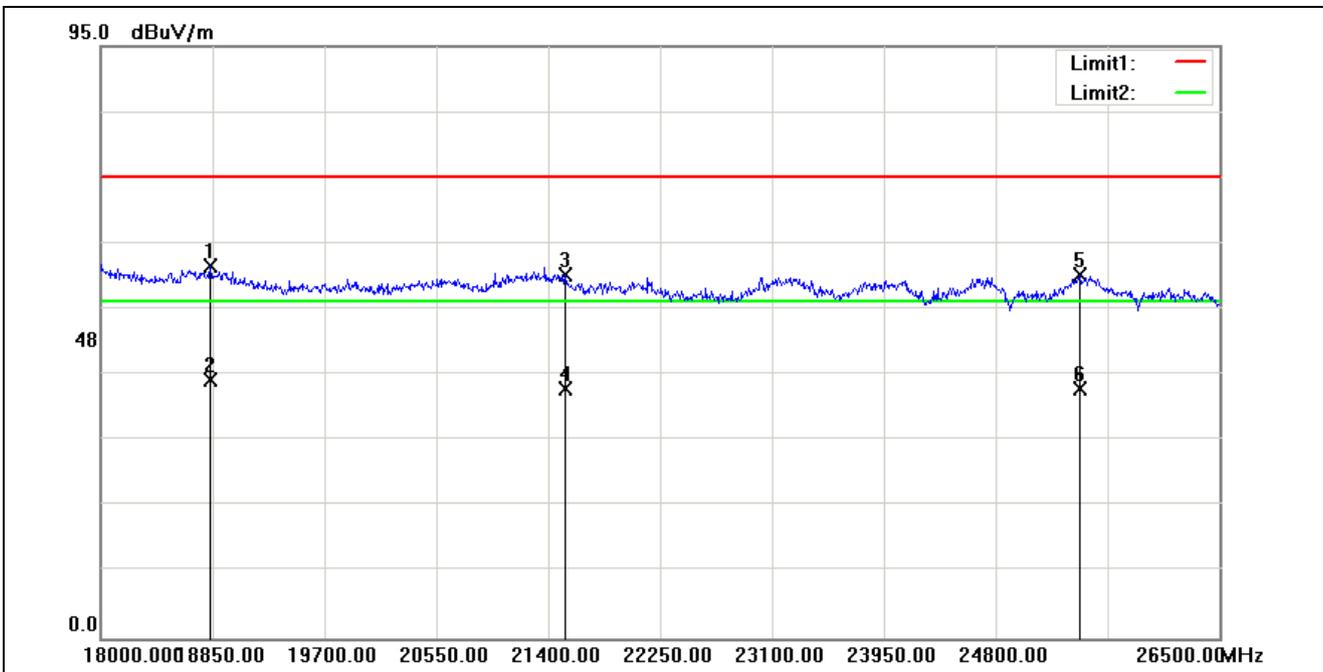


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	18837.250	36.54	23.15	59.69	74.00	-14.31			peak
2	18837.250	18.27	23.15	41.42	54.00	-12.58			AVG
3	21531.750	37.01	21.34	58.35	74.00	-15.65			peak
4	21531.750	18.60	21.34	39.94	54.00	-14.06			AVG
5	25437.500	39.22	19.02	58.24	74.00	-15.76			peak
6	25437.500	21.06	19.02	40.08	54.00	-13.92			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:15:01</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2441MHz)</b>		

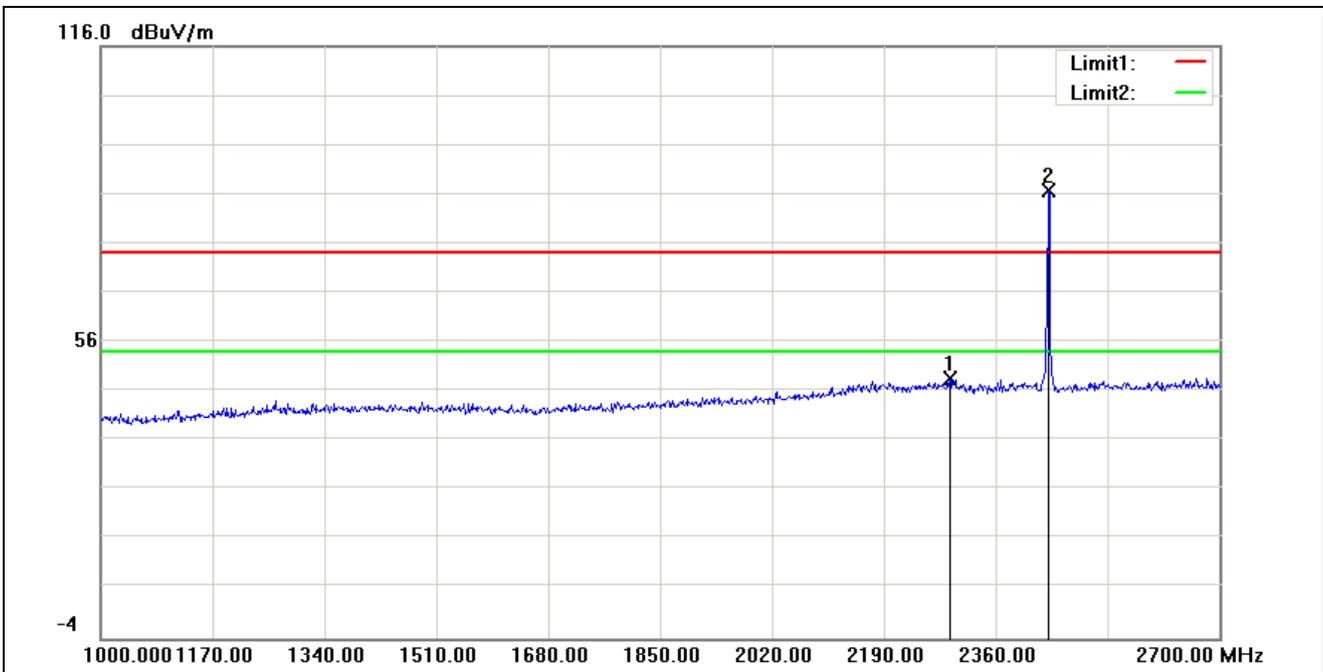


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2291.150	48.28	0.41	48.69	74.00	-25.31			peak
2	2440.750	86.88	-0.01	86.87	74.00	12.87			TX

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:2010/5/13</b>	<b>Time:PM 10:16:44</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2441MHz)</b>		

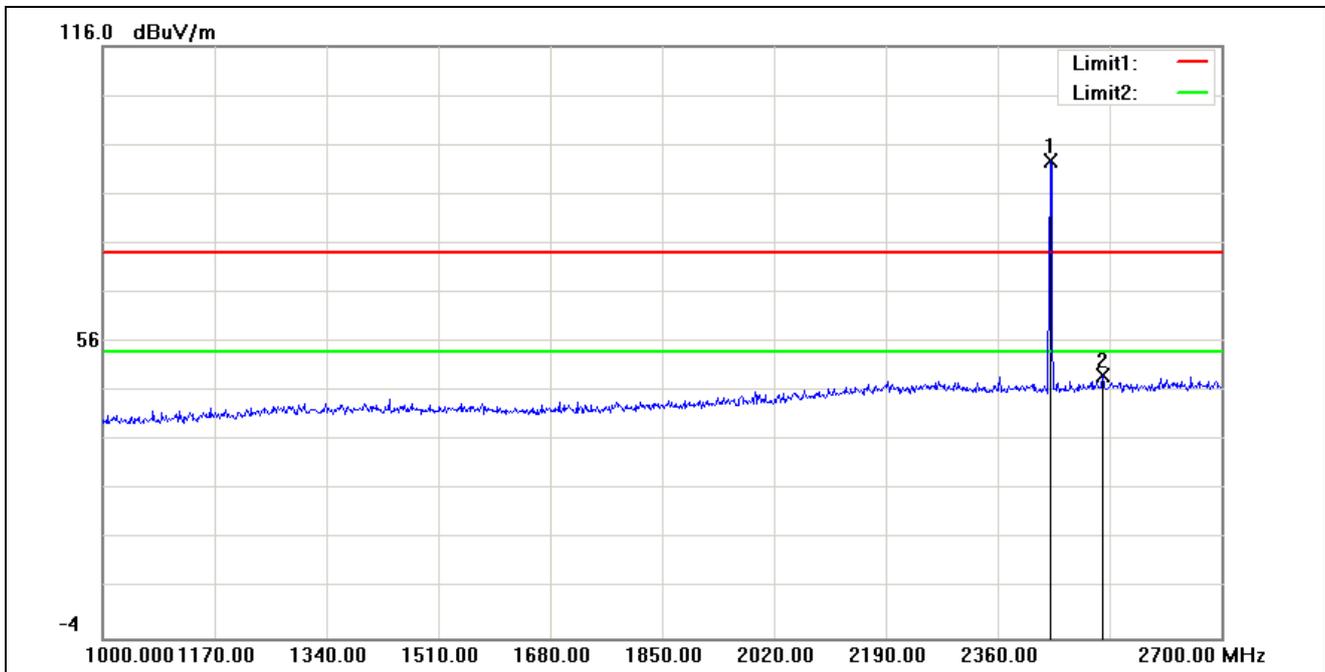


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2440.750	92.74	-0.01	92.73	74.00	18.73			TX
2	2520.650	48.88	0.41	49.29	74.00	-24.71			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:2010/5/13</b>	<b>Time:PM 10:30:32</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2441MHz)</b>		
	<b>2.7G-10G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

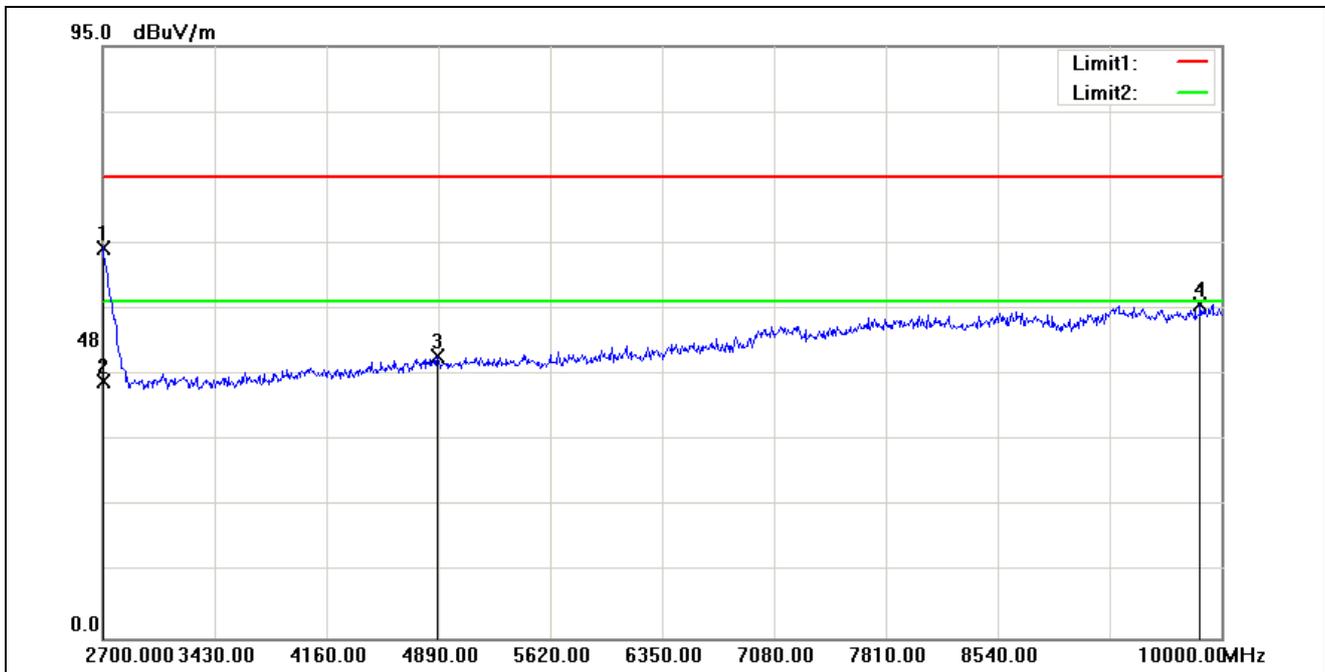


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2700.000	40.12	22.58	62.70	74.00	-11.30			peak
2	2700.000	18.61	22.58	41.19	54.00	-12.81			AVG
3	4882.000	37.40	7.74	45.14	74.00	-28.86			peak
4	9864.950	35.82	17.85	53.67	74.00	-20.33			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:32:48</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2441MHz)</b>		
	<b>2.7G-10G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

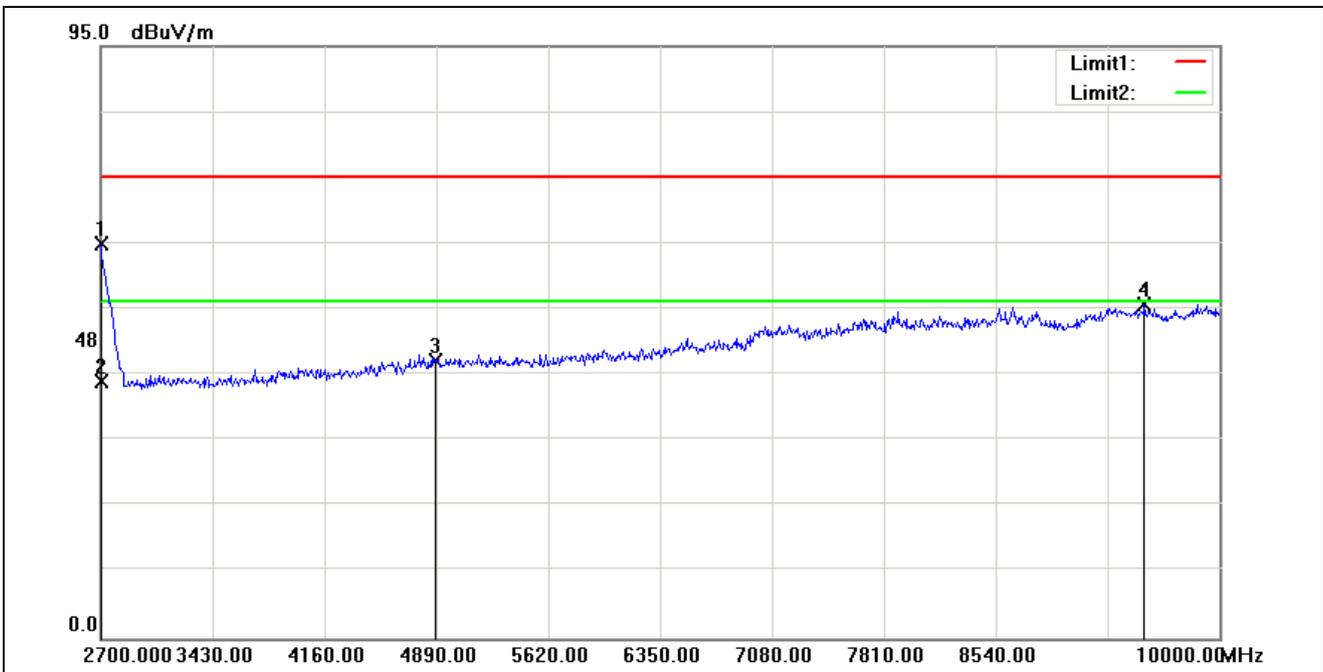


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2700.000	40.68	22.58	63.26	74.00	-10.74			peak
2	2700.000	18.52	22.58	41.10	54.00	-12.90			AVG
3	4882.000	36.86	7.74	44.60	74.00	-29.40			peak
4	9514.550	36.69	16.89	53.58	74.00	-20.42			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:53:45</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2441MHz)</b>		
	<b>10G - 18G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

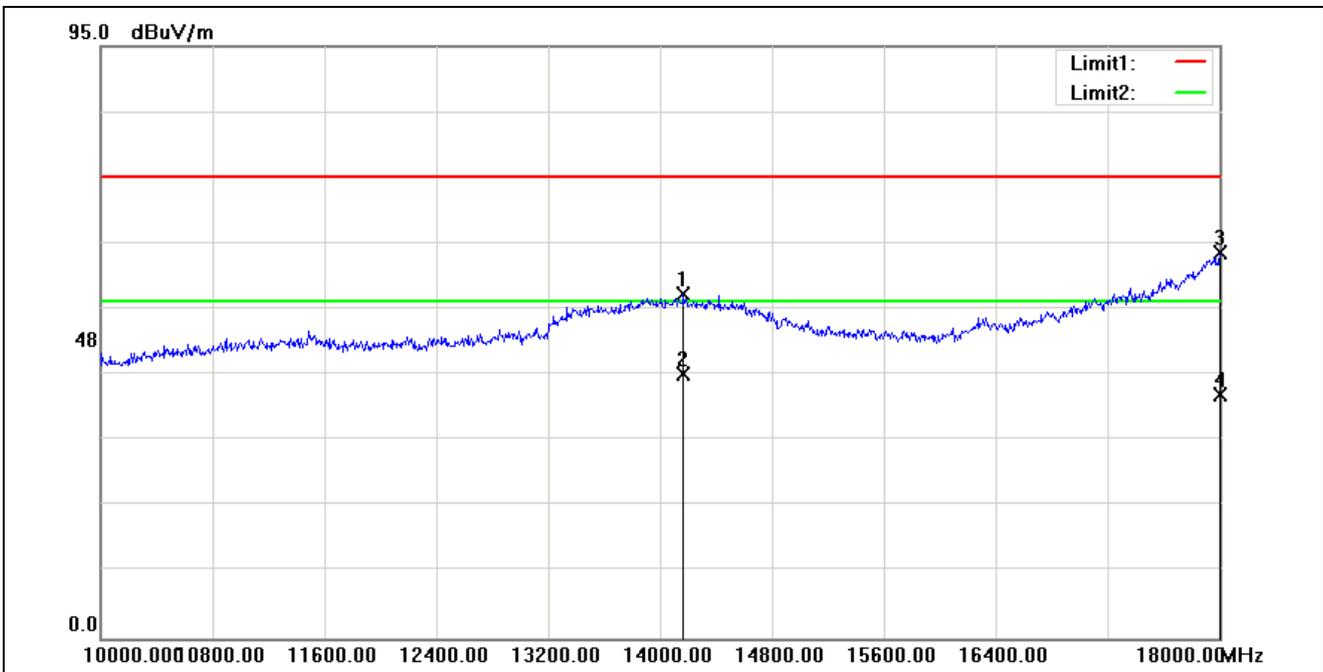


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	14168.000	36.43	18.83	55.26	74.00	-18.74			peak
2	14168.000	23.59	18.83	42.42	54.00	-11.58			AVG
3	18000.000	36.21	25.57	61.78	74.00	-12.22			peak
4	18000.000	13.47	25.57	39.04	54.00	-14.96			AVG

<b>Job No.:</b>	10-0109-SEO	<b>Ant. Polar. :</b>	Horizontal
<b>Standard:</b>	FCC part 15 (PK)	<b>Test Distance:</b>	3m
<b>Test item:</b>	Radiation Test	<b>Power:</b>	AC 120V/60Hz
<b>Temp.(°C)/Hum.(%RH):</b>	22(°C)/60%RH	<b>Date:</b> 2010/5/13	<b>Time:</b> PM 10:56:02
<b>EUT:</b>	Smartphone	<b>Test By:</b>	Gary Wu
<b>Model:</b>	PC49100		
<b>Description:</b>	Mode 4: $\pi/4$ -DQPSK Link Mode (2441MHz)		
	10G - 18G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)		

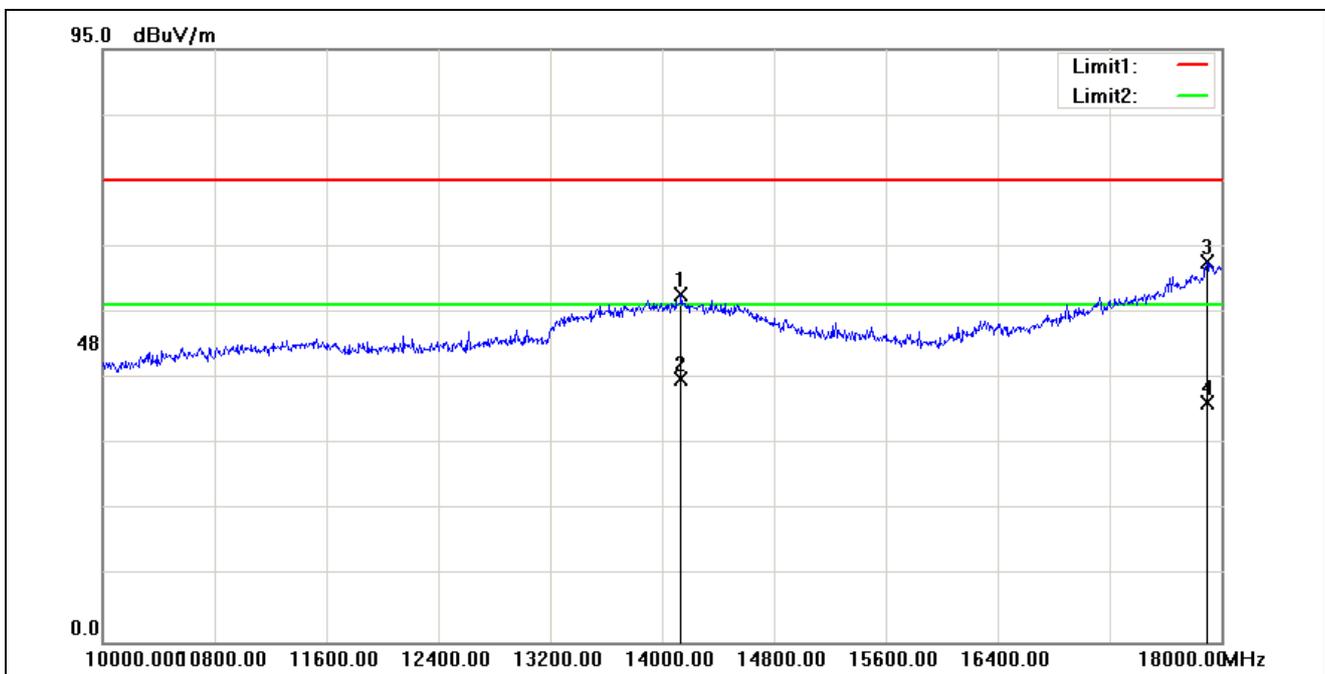


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	14140.000	36.91	18.84	55.75	74.00	-18.25			peak
2	14140.000	23.35	18.84	42.19	54.00	-11.81			AVG
3	17896.000	36.00	24.84	60.84	74.00	-13.16			peak
4	17896.000	13.57	24.84	38.41	54.00	-15.59			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Time:</b>	<b>PM 11:37:59</b>
<b>Model:</b>	<b>PC49100</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2441MHz)</b>		

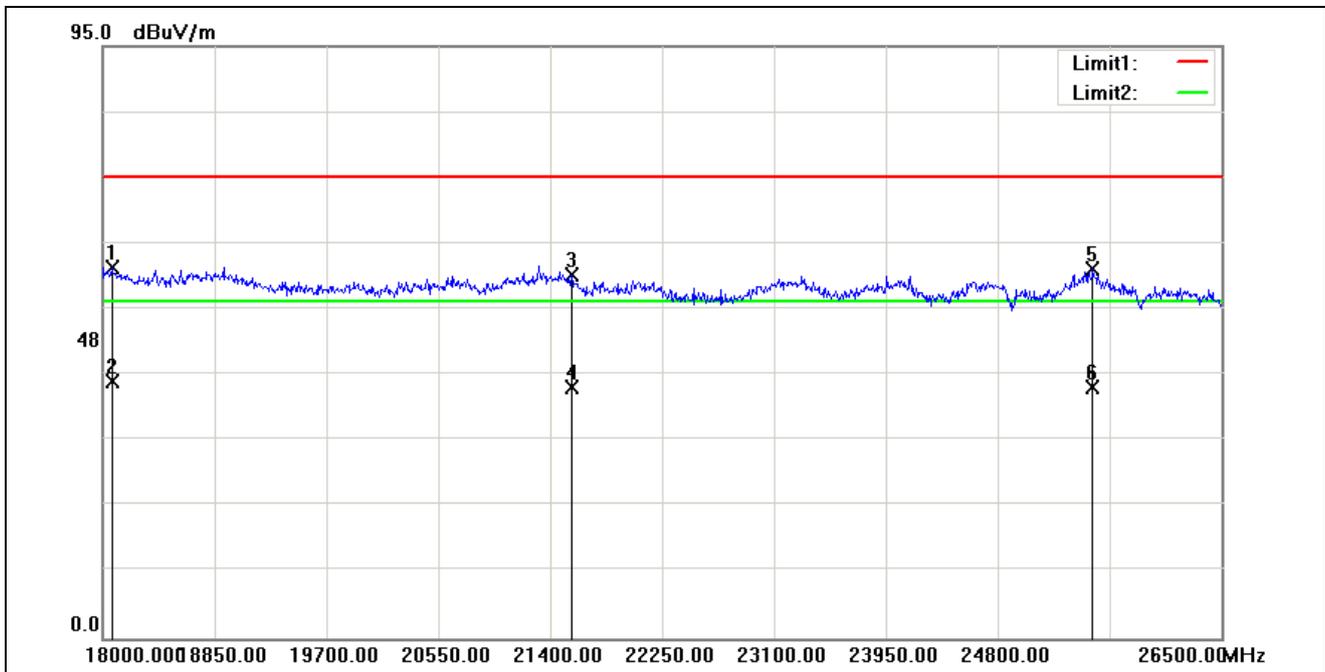


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	18068.000	36.17	23.25	59.42	74.00	-14.58			peak
2	18068.000	18.02	23.25	41.27	54.00	-12.73			AVG
3	21561.500	37.02	21.32	58.34	74.00	-15.66			peak
4	21561.500	18.95	21.32	40.27	54.00	-13.73			AVG
5	25522.500	40.18	18.97	59.15	74.00	-14.85			peak
6	25522.500	21.29	18.97	40.26	54.00	-13.74			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:2010/5/13</b>	<b>Time:PM 11:39:16</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2441MHz)</b>		

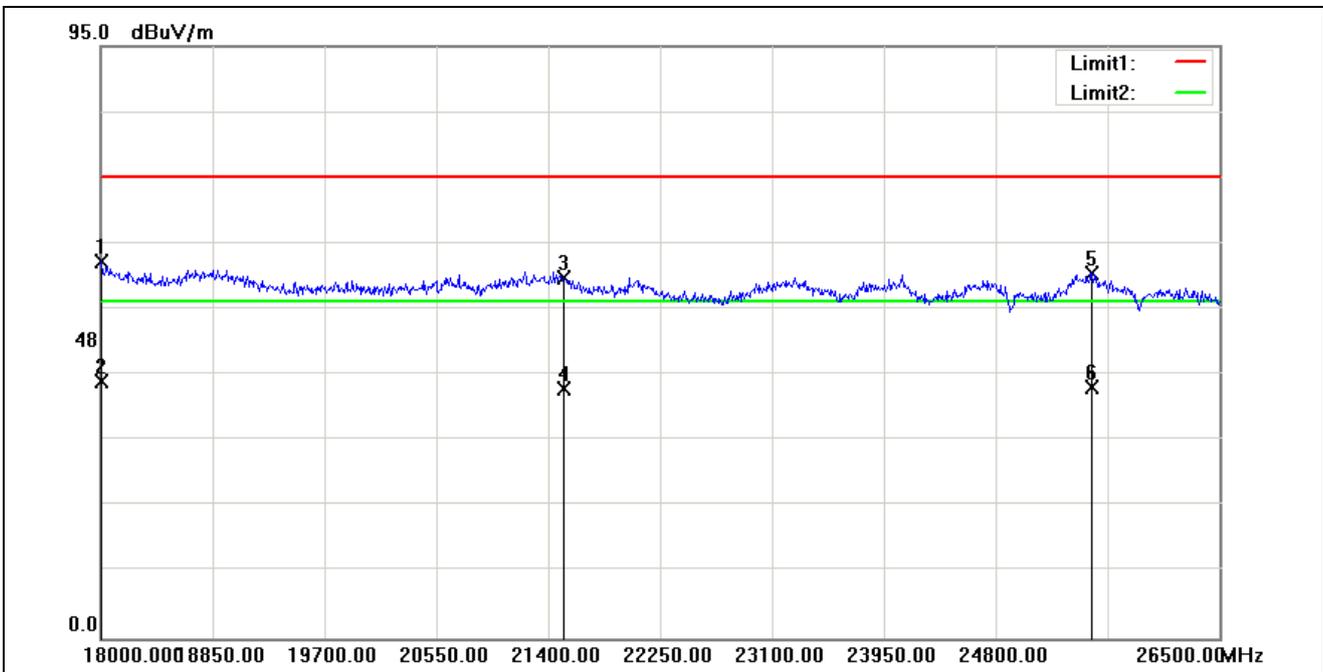


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	18012.750	37.16	23.29	60.45	74.00	-13.55			peak
2	18012.750	17.87	23.29	41.16	54.00	-12.84			AVG
3	21523.250	36.53	21.34	57.87	74.00	-16.13			peak
4	21523.250	18.61	21.34	39.95	54.00	-14.05			AVG
5	25535.250	39.59	18.96	58.55	74.00	-15.45			peak
6	25535.250	21.22	18.96	40.18	54.00	-13.82			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Time:</b>	<b>PM 09:52:33</b>
<b>Model:</b>	<b>PC49100</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		

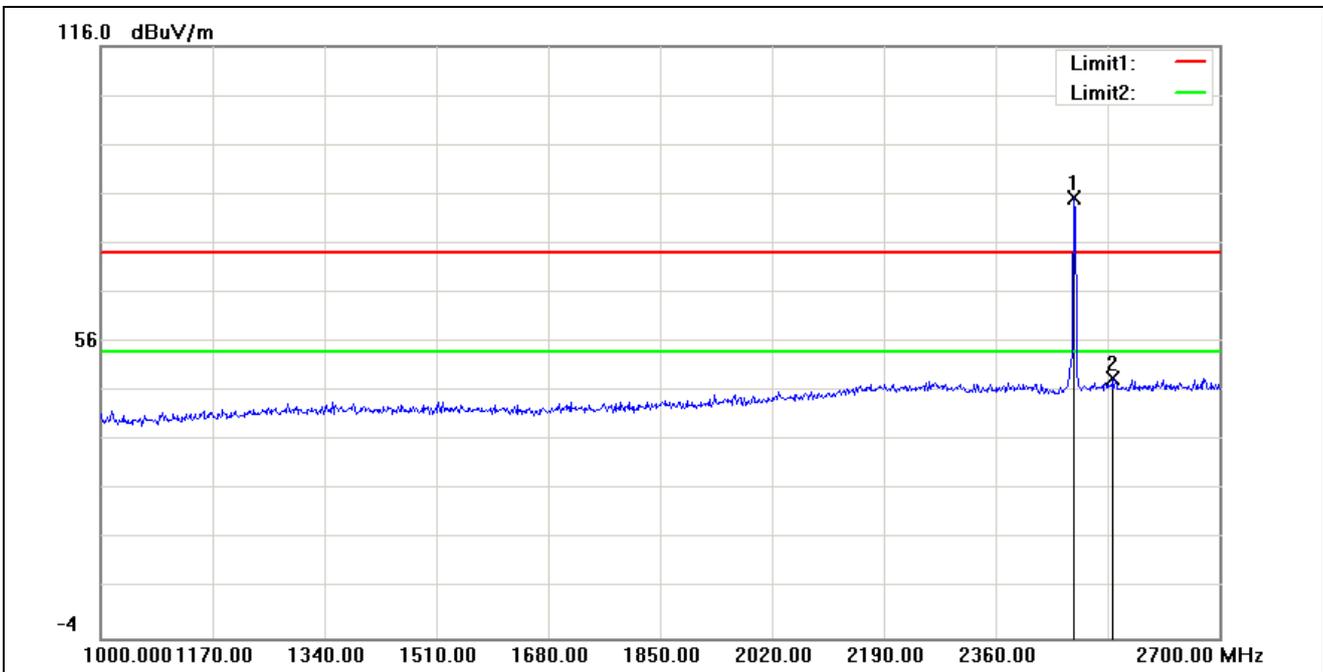


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2479.850	84.99	0.24	85.23	74.00	11.23			TX
2	2539.350	48.06	0.48	48.54	74.00	-25.46			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:2010/5/13</b>	<b>Time:PM 09:57:30</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		

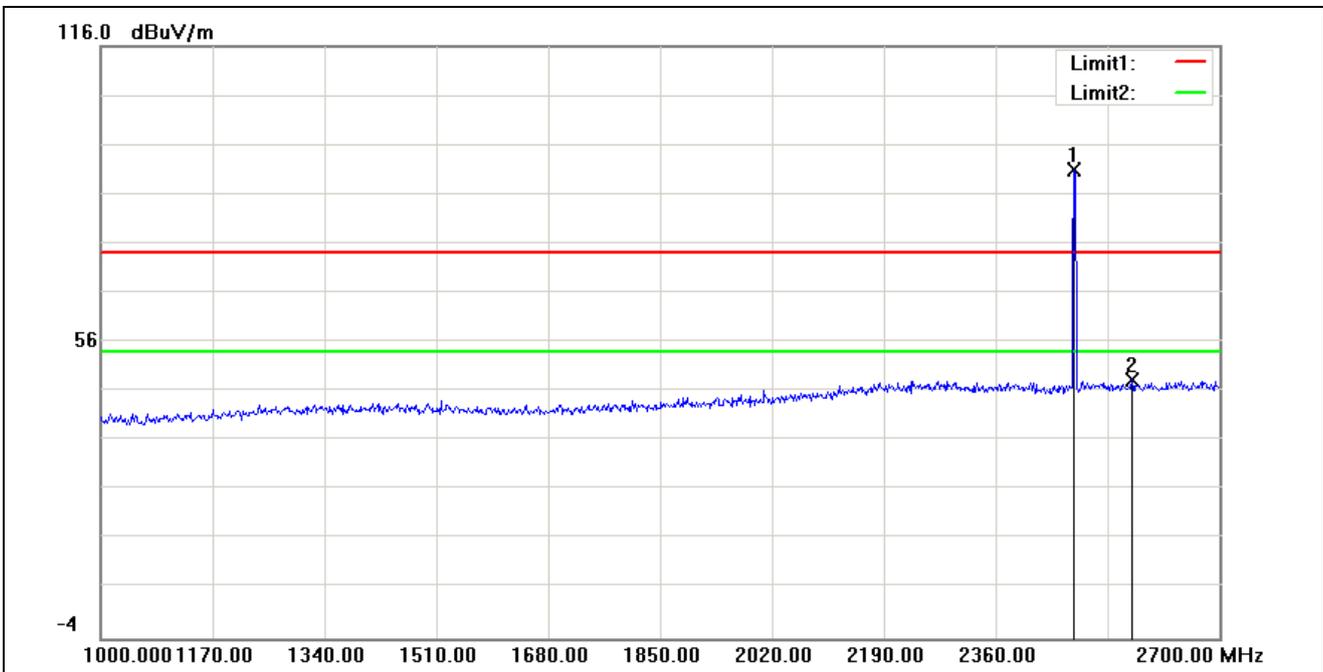


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2479.850	90.71	0.24	90.95	74.00	16.95			TX
2	2568.250	47.81	0.51	48.32	74.00	-25.68			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Time:</b>	<b>PM 10:35:56</b>
<b>Model:</b>	<b>PC49100</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		
	<b>2.7G-10G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

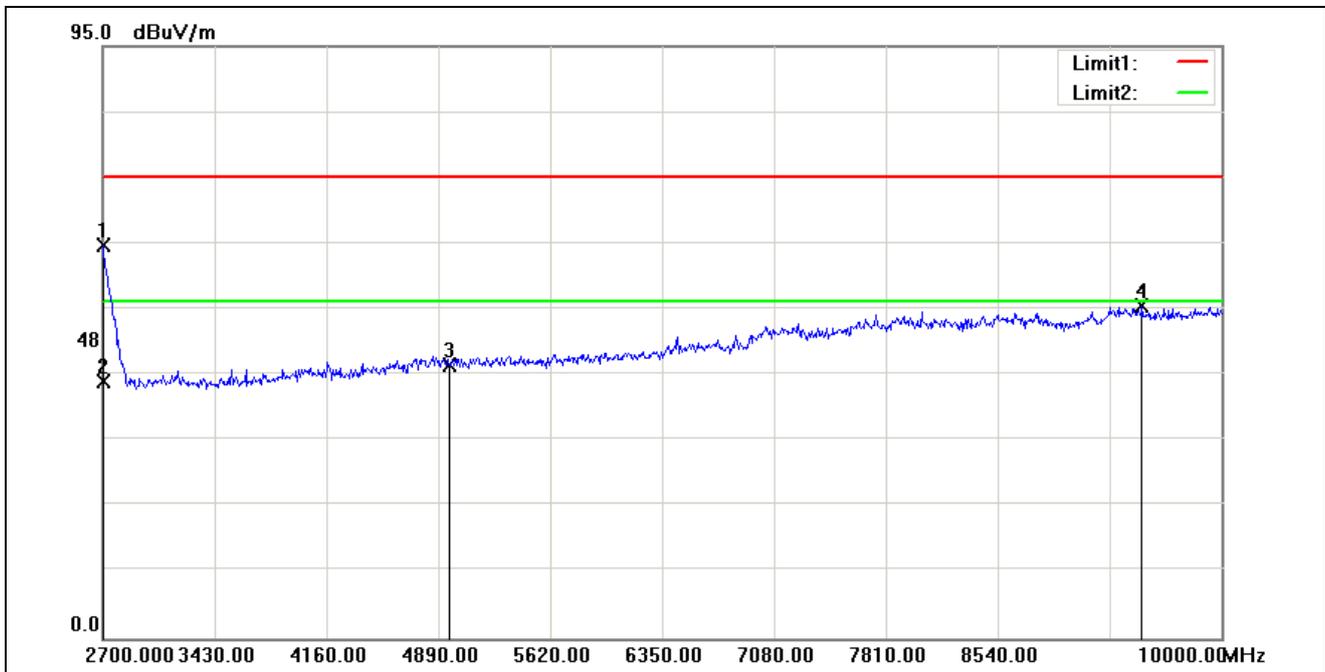


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2700.000	40.48	22.58	63.06	74.00	-10.94			peak
2	2700.000	18.57	22.58	41.15	54.00	-12.85			AVG
3	4960.000	36.11	7.80	43.91	74.00	-30.09			peak
4	9481.700	36.46	16.87	53.33	74.00	-20.67			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:2010/5/13</b>	<b>Time:PM 10:38:14</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		
	<b>2.7G-10G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

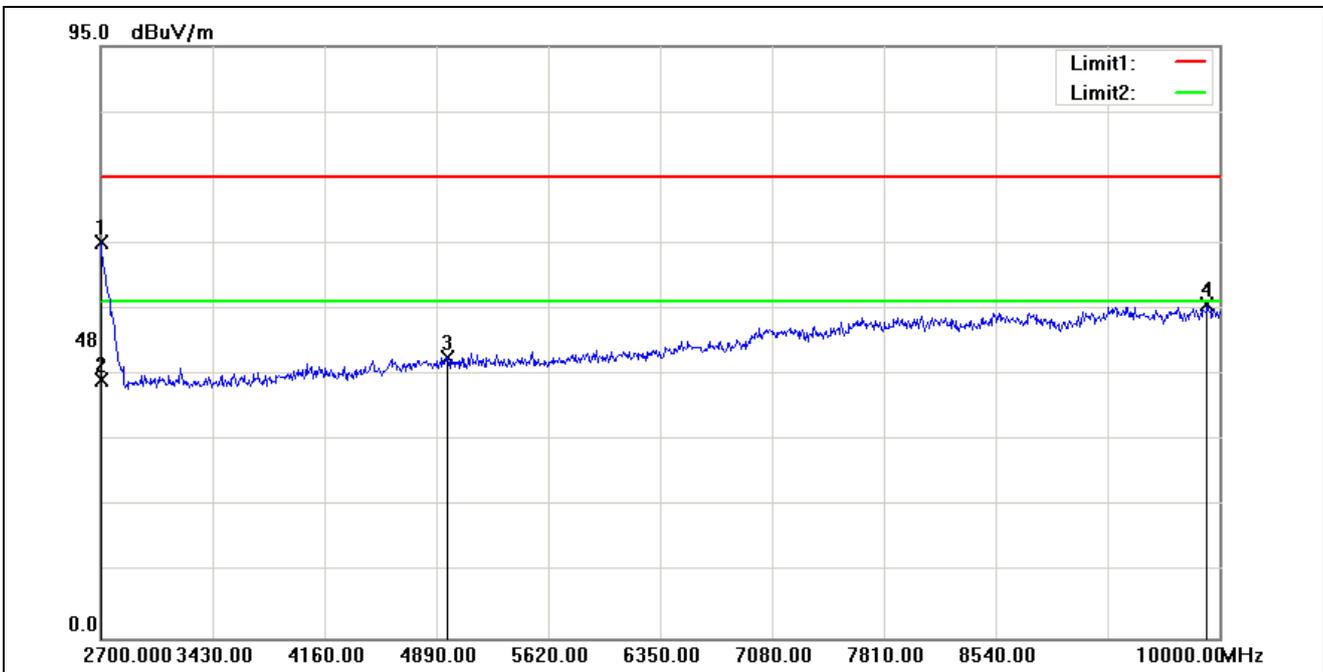


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2700.000	40.95	22.58	63.53	74.00	-10.47			peak
2	2700.000	18.75	22.58	41.33	54.00	-12.67			AVG
3	4960.000	37.27	7.80	45.07	74.00	-28.93			peak
4	9923.350	35.84	17.78	53.62	74.00	-20.38			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:41:32</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		
	<b>10G - 18G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

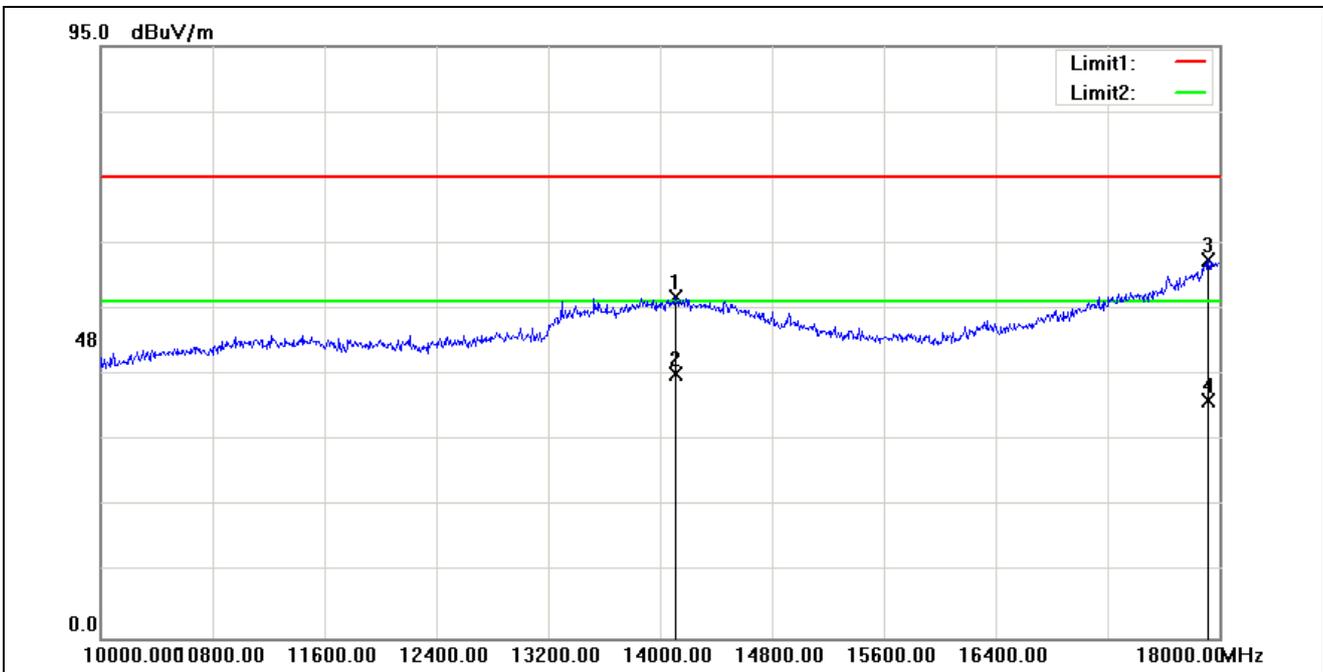


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	14116.000	35.82	18.87	54.69	74.00	-19.31			peak
2	14116.000	23.45	18.87	42.32	54.00	-11.68			AVG
3	17920.000	35.86	24.84	60.70	74.00	-13.30			peak
4	17920.000	13.25	24.84	38.09	54.00	-15.91			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:50:33</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		
	<b>10G - 18G PK Scan Att:0 ; REF:95 ; Range:95(EUT Power Lever:255)</b>		

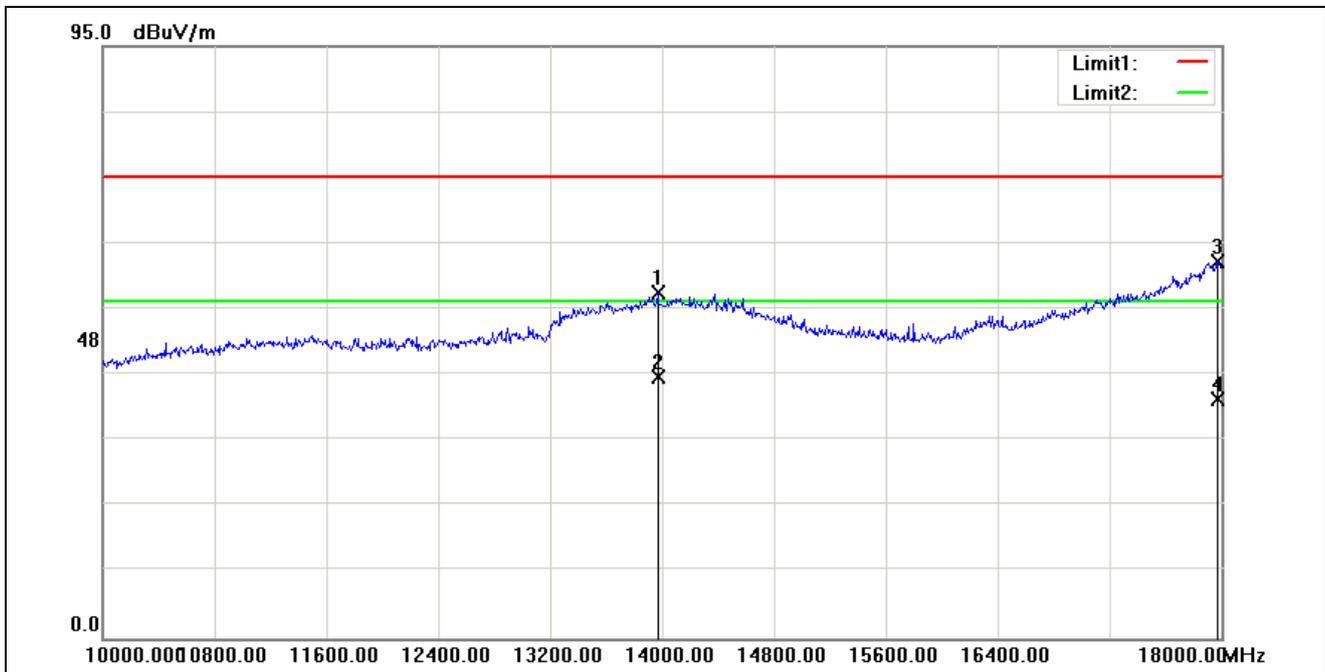


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	13972.000	36.82	18.60	55.42	74.00	-18.58			peak
2	13972.000	23.26	18.60	41.86	54.00	-12.14			AVG
3	17968.000	35.52	24.98	60.50	74.00	-13.50			peak
4	17968.000	13.45	24.98	38.43	54.00	-15.57			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 11:44:29</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		

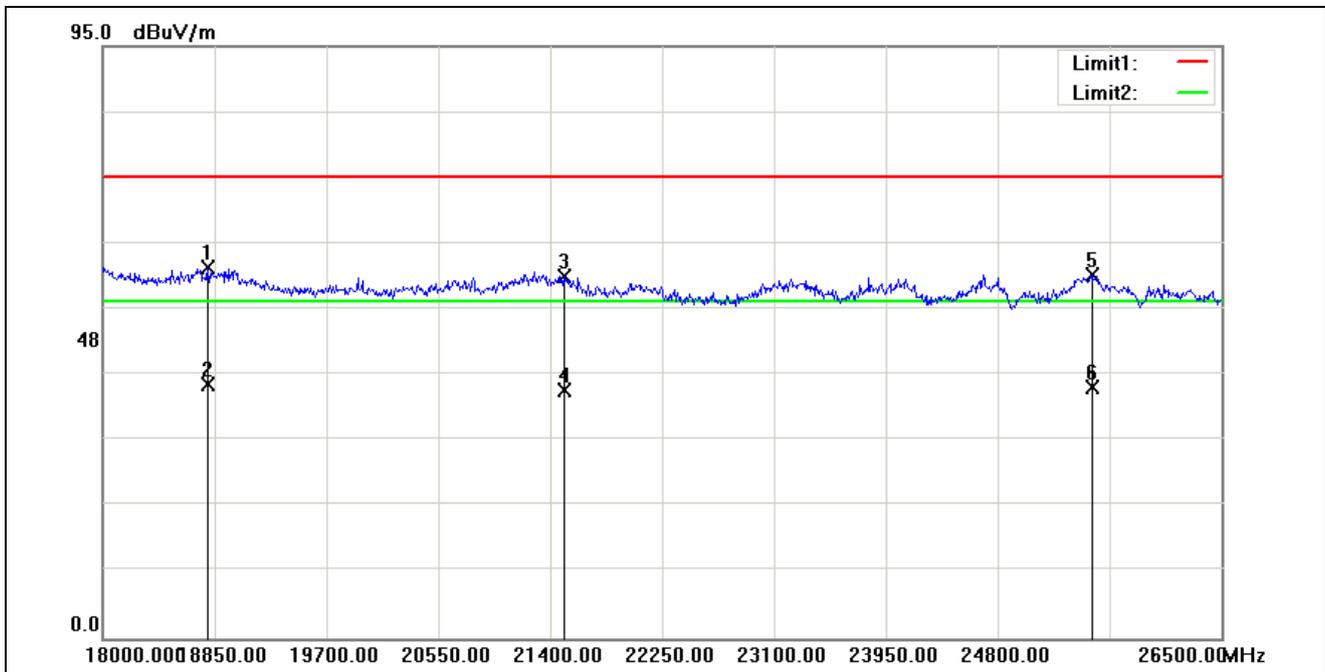

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	18803.250	36.39	23.15	59.54	74.00	-14.46			peak
2	18803.250	17.55	23.15	40.70	54.00	-13.30			AVG
3	21502.000	36.75	21.36	58.11	74.00	-15.89			peak
4	21502.000	18.35	21.36	39.71	54.00	-14.29			AVG
5	25518.250	39.41	18.97	58.38	74.00	-15.62			peak
6	25518.250	21.34	18.97	40.31	54.00	-13.69			AVG

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>22(°C)/60%RH</b>	<b>Date:2010/5/13</b>	<b>Time:PM 11:45:47</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		

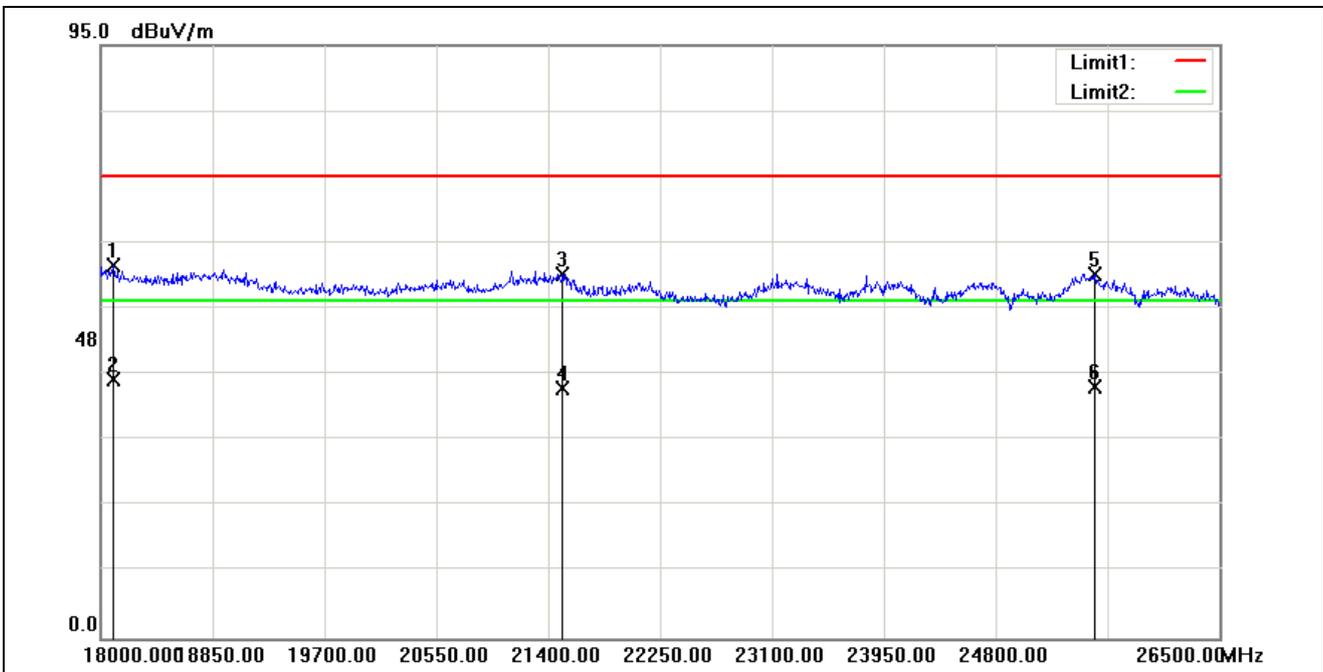


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	18093.500	36.59	23.24	59.83	74.00	-14.17			peak
2	18093.500	18.32	23.24	41.56	54.00	-12.44			AVG
3	21514.750	37.07	21.35	58.42	74.00	-15.58			peak
4	21514.750	18.63	21.35	39.98	54.00	-14.02			AVG
5	25560.750	39.45	18.94	58.39	74.00	-15.61			peak
6	25560.750	21.24	18.94	40.18	54.00	-13.82			AVG

## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 1 watt.

### 6.2. Test Setup

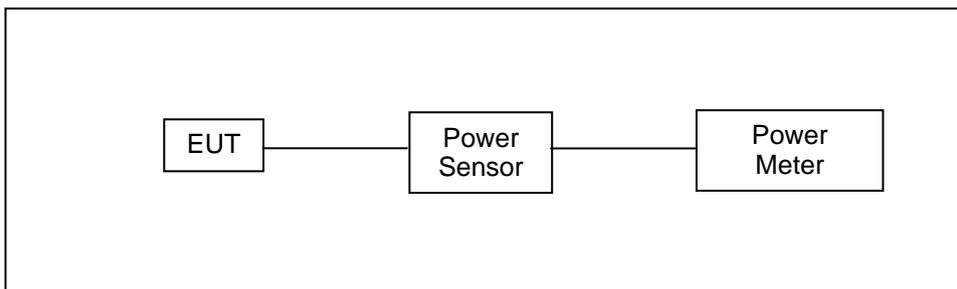

### 6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY15101619	07/14/2009	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/25/2009	(1)
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

**6.5. Test Result**

Product	Smartphone					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: GFSK Link Mode					
Date of Test	04/22/2010			Test Site	TE06	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	-4.86	0.000	0.95	0.001	< 1
	DH3	-1.54	0.001	0.90	0.001	< 1
	DH5	-2.00	0.001	0.90	0.001	< 1
2441	DH1	-4.24	0.000	<b>1.50</b>	0.001	< 1
	DH3	-0.91	0.001	1.49	0.001	< 1
	DH5	-1.40	0.001	1.45	0.001	< 1
2480	DH1	-4.46	0.000	1.24	0.001	< 1
	DH3	-1.14	0.001	1.24	0.001	< 1
	DH5	-1.60	0.001	1.23	0.001	< 1

Product	Smartphone					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: $\pi/4$ -DQPSK Mode					
Date of Test	04/22/2010			Test Site	TE06	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	-5.70	0.000	3.76	0.002	< 1
	DH3	-2.77	0.001	3.71	0.002	< 1
	DH5	-4.54	0.000	3.71	0.002	< 1
2441	DH1	-5.07	0.000	4.26	0.003	< 1
	DH3	-2.16	0.001	<b>4.28</b>	0.003	< 1
	DH5	-3.93	0.000	4.23	0.003	< 1
2480	DH1	-5.59	0.000	3.99	0.003	< 1
	DH3	-2.40	0.001	4.03	0.003	< 1
	DH5	-4.15	0.000	4.01	0.003	< 1


Product	Smartphone					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: 8DPSK Link Mode					
Date of Test	04/22/2010			Test Site	TE06	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	-7.36	0.000	1.14	0.001	< 1
	DH3	-6.94	0.000	1.26	0.001	< 1
	DH5	-8.67	0.000	1.56	0.001	< 1
2441	DH1	-6.78	0.000	1.59	0.001	< 1
	DH3	-6.36	0.000	1.85	0.002	< 1
	DH5	-8.09	0.000	<b>2.20</b>	0.002	< 1
2480	DH1	-7.00	0.000	1.45	0.001	< 1
	DH3	-6.57	0.000	1.57	0.001	< 1
	DH5	-8.29	0.000	1.93	0.002	< 1

## 7 Minimum 20dB RF Bandwidth Measurement

### 7.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hop-ping channel is < 1 MHz.

### 7.2. Test Setup

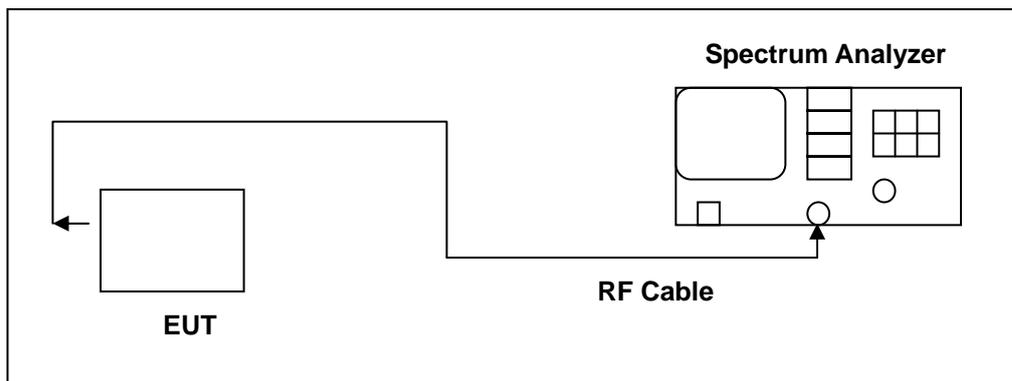

### 7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	<sup>(2)</sup>
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW  $\geq$  1% of the 20dB span
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

## 7.5. Test Result

Product	Smartphone		
Test Item	Minimum 20dB RF Bandwidth		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	04/30/2010	Test Site	TE06
Frequency (MHz)	Measurement (MHz)		Limit (MHz)
2402	0.92250		< 1
2441	0.92250		< 1
2480	0.87375		< 1

Product	Smartphone		
Test Item	Minimum 20dB RF Bandwidth		
Test Mode	Mode 4: $\pi/4$ -DQPSK Link Mode		
Date of Test	05/12/2010	Test Site	TE06
Frequency (MHz)	20dB Bandwidth (MHz)		Limit (MHz)
2402	1.31625		-----
2441	1.31250		-----
2480	1.31250		-----

7.6. Test Graphs

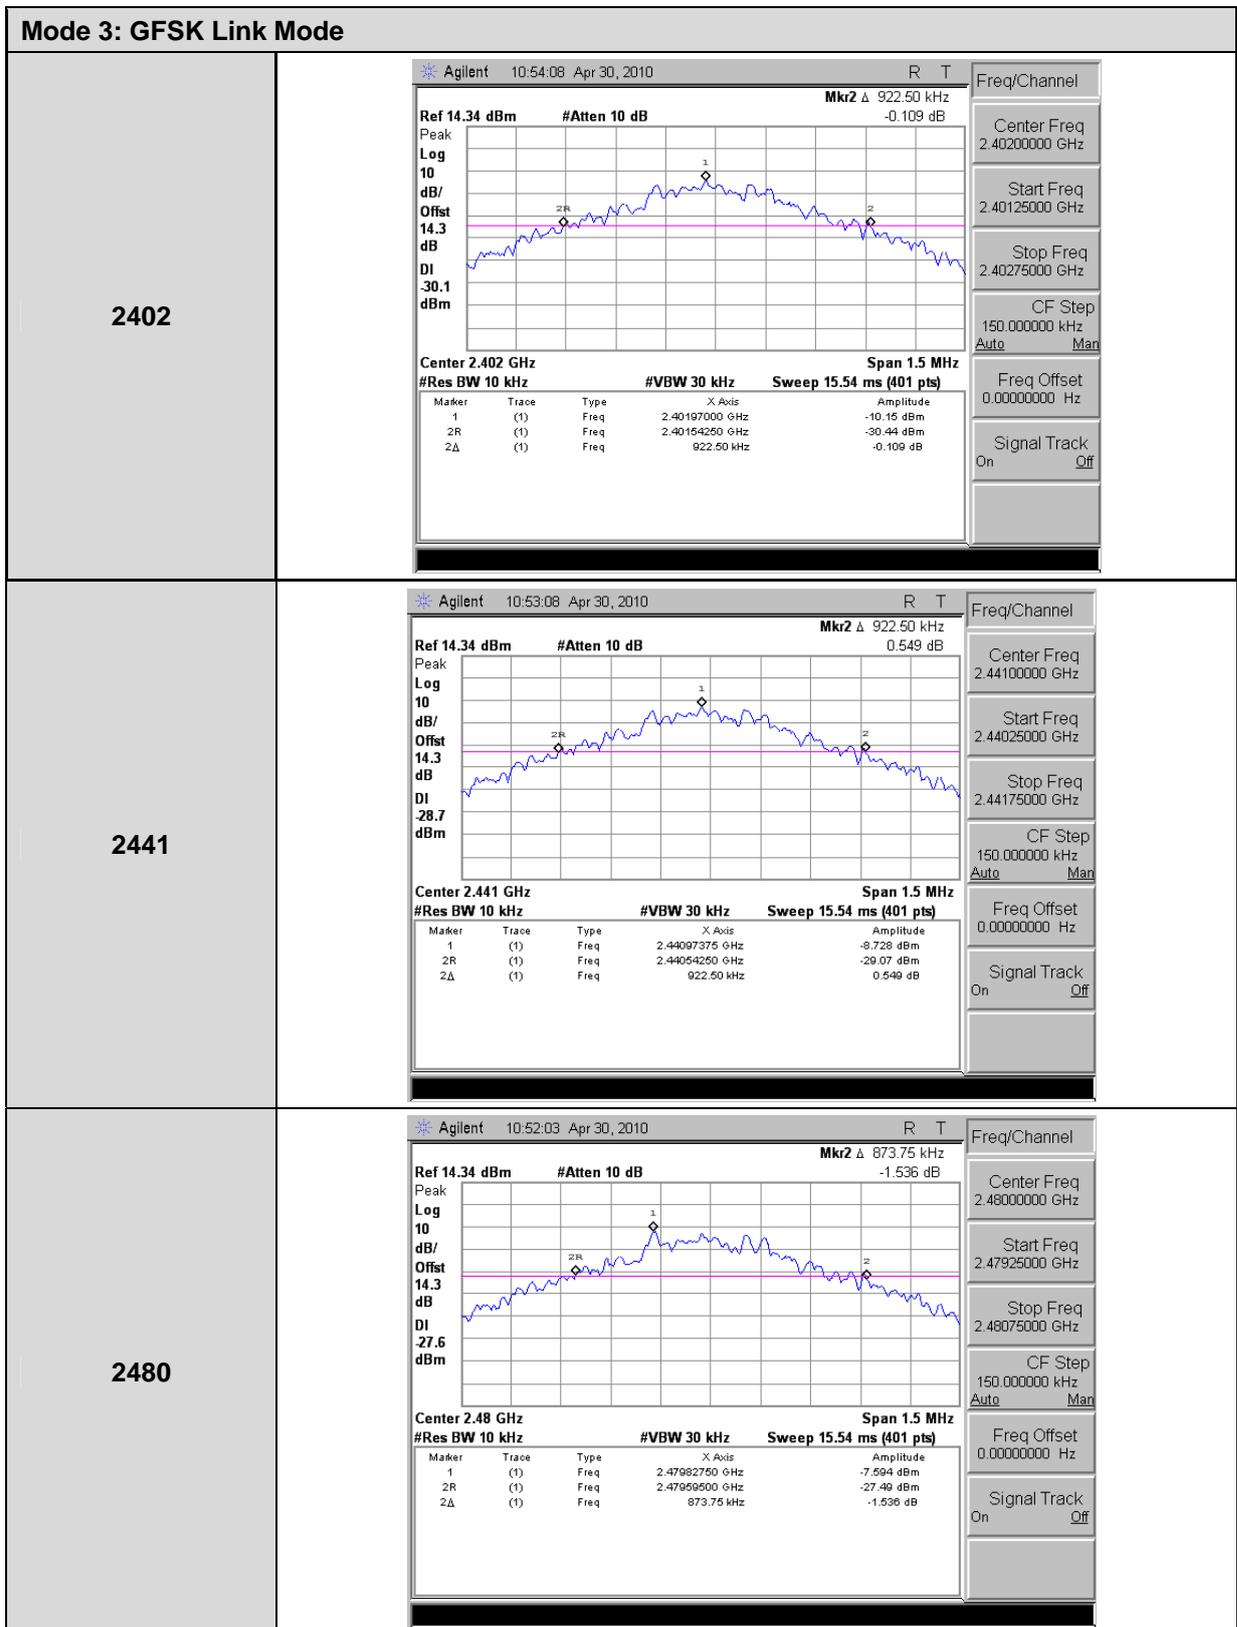

**Mode 4:  $\pi/4$ -DQPSK Link Mode**


<p><b>2402</b></p>	<p>Agilent 13:18:46 May 12, 2010</p> <p>Ref 10 dBm #Atten 20 dB Mkr2 <math>\Delta</math> 1.31625 MHz 0.747 dB</p> <p>Peak Log 10 dB/ DI -28.3 dBm</p> <p>Center 2.402 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 15.54 ms (401 pts) Span 1.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.40215000 GHz</td> <td>-8.272 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.40132500 GHz</td> <td>-28.4 dBm</td> </tr> <tr> <td>2<math>\Delta</math></td> <td>(1)</td> <td>Freq</td> <td>1.31625 MHz</td> <td>0.747 dB</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 2.40200000 GHz, Start Freq 2.40125000 GHz, Stop Freq 2.40275000 GHz, CF Step 150.000000 kHz, Freq Offset 0.00000000 Hz, Signal Track On</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.40215000 GHz	-8.272 dBm	2R	(1)	Freq	2.40132500 GHz	-28.4 dBm	2 $\Delta$	(1)	Freq	1.31625 MHz	0.747 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.40215000 GHz	-8.272 dBm																	
2R	(1)	Freq	2.40132500 GHz	-28.4 dBm																	
2 $\Delta$	(1)	Freq	1.31625 MHz	0.747 dB																	
<p><b>2441</b></p>	<p>Agilent 13:19:55 May 12, 2010</p> <p>Ref 10 dBm #Atten 20 dB Mkr2 <math>\Delta</math> 1.31250 MHz 0.279 dB</p> <p>Peak Log 10 dB/ DI -27.4 dBm</p> <p>Center 2.441 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 15.54 ms (401 pts) Span 1.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44115000 GHz</td> <td>-7.403 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.44032875 GHz</td> <td>-27.08 dBm</td> </tr> <tr> <td>2<math>\Delta</math></td> <td>(1)</td> <td>Freq</td> <td>1.31250 MHz</td> <td>0.279 dB</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 2.44100000 GHz, Start Freq 2.44025000 GHz, Stop Freq 2.44175000 GHz, CF Step 150.000000 kHz, Freq Offset 0.00000000 Hz, Signal Track On</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44115000 GHz	-7.403 dBm	2R	(1)	Freq	2.44032875 GHz	-27.08 dBm	2 $\Delta$	(1)	Freq	1.31250 MHz	0.279 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.44115000 GHz	-7.403 dBm																	
2R	(1)	Freq	2.44032875 GHz	-27.08 dBm																	
2 $\Delta$	(1)	Freq	1.31250 MHz	0.279 dB																	
<p><b>2480</b></p>	<p>Agilent 13:21:07 May 12, 2010</p> <p>Ref 10 dBm #Atten 20 dB Mkr2 <math>\Delta</math> 1.31250 MHz 0.78 dB</p> <p>Peak Log 10 dB/ DI -27.5 dBm</p> <p>Center 2.48 GHz #Res BW 10 kHz #VBW 30 kHz Sweep 15.54 ms (401 pts) Span 1.5 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.48015000 GHz</td> <td>-7.407 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.47932875 GHz</td> <td>-27.64 dBm</td> </tr> <tr> <td>2<math>\Delta</math></td> <td>(1)</td> <td>Freq</td> <td>1.31250 MHz</td> <td>0.78 dB</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 2.48000000 GHz, Start Freq 2.47925000 GHz, Stop Freq 2.48075000 GHz, CF Step 150.000000 kHz, Freq Offset 0.00000000 Hz, Signal Track On</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.48015000 GHz	-7.407 dBm	2R	(1)	Freq	2.47932875 GHz	-27.64 dBm	2 $\Delta$	(1)	Freq	1.31250 MHz	0.78 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.48015000 GHz	-7.407 dBm																	
2R	(1)	Freq	2.47932875 GHz	-27.64 dBm																	
2 $\Delta$	(1)	Freq	1.31250 MHz	0.78 dB																	

## 8 Carrier Frequency Separation Measurement

### 8.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band shall use at least 75 hopping frequencies. The Carrier Frequency Separation is 1 MHz.

### 8.2. Test Setup

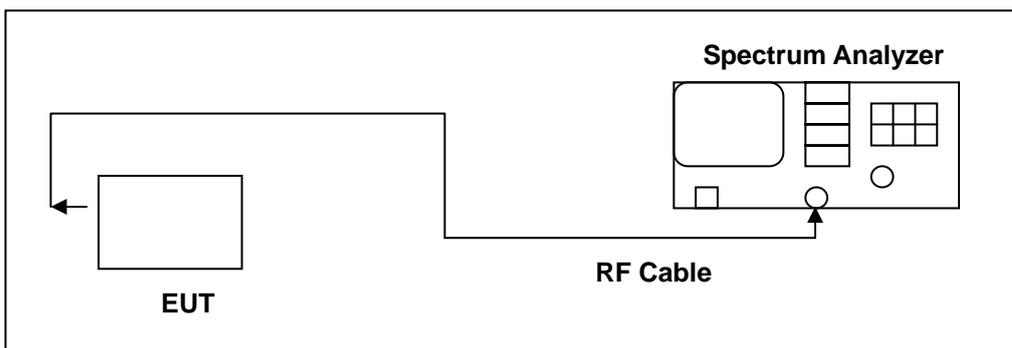

### 8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	<sup>(2)</sup>
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 8.4. Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth transmitter of the V6 had its hopping function enabled. The following spectrum analyzer settings were used:


1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span
3. Video (or Average) Bandwidth (VBW)  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.


**8.5. Test Result**

Product	Smartphone		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	04/30/2010	Test Site	TE06
Frequency (MHz)	Measurement (MHz)		Limit (MHz)
2441	1		$\geq 1$

Product	Smartphone		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 4: $\pi/4$ -DQPSK Link Mode		
Date of Test	05/12/2010	Test Site	TE06
Frequency (MHz)	Measurement (MHz)		Limit (MHz)
2441	1		$\geq 1$

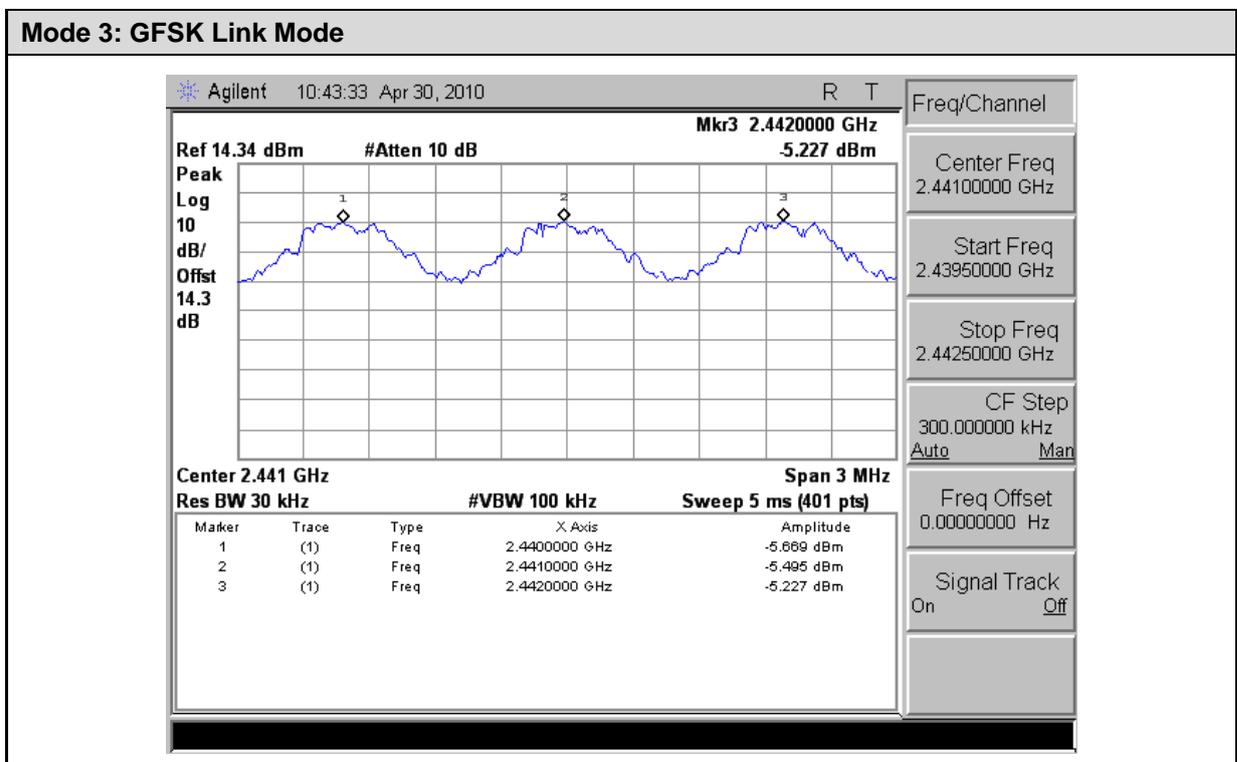**8.6. Test Graphs**


**Mode 4:  $\pi/4$ -DQPSK Link Mode**

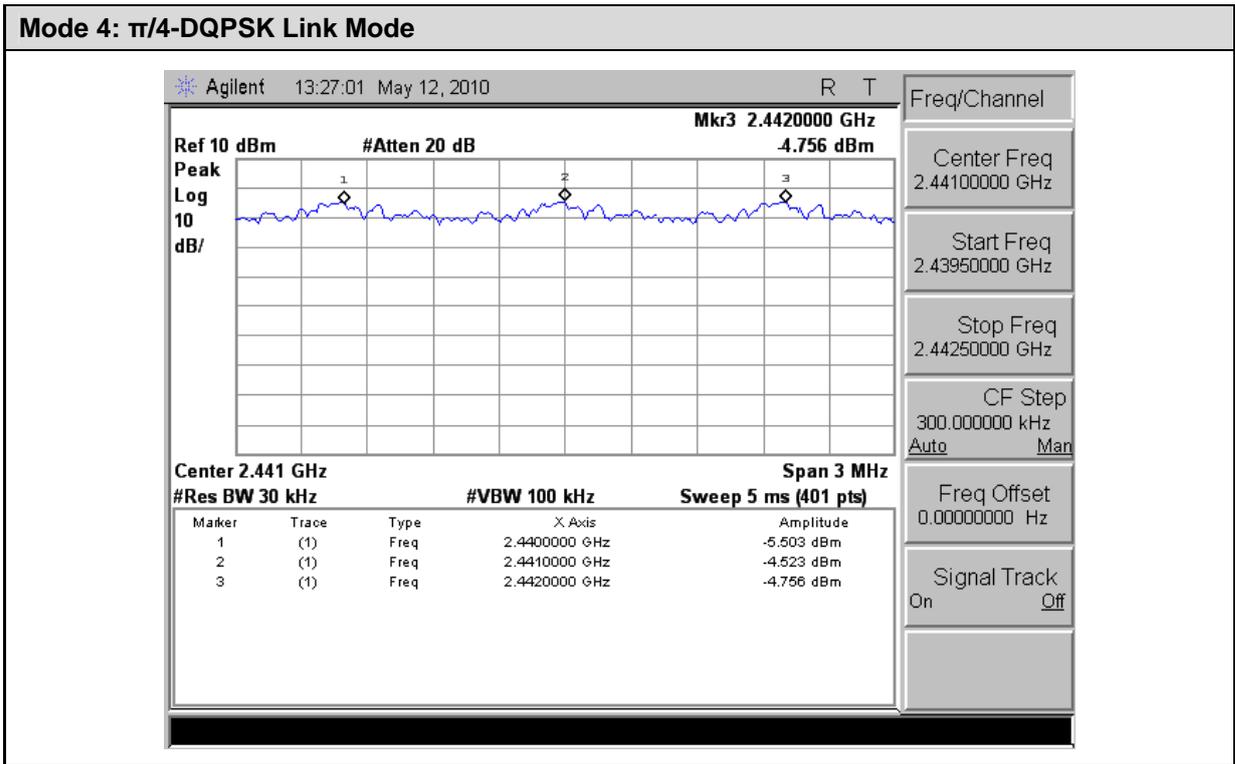


## 9 Number of Hopping Measurement

### 9.1. Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 9.2. Test Setup

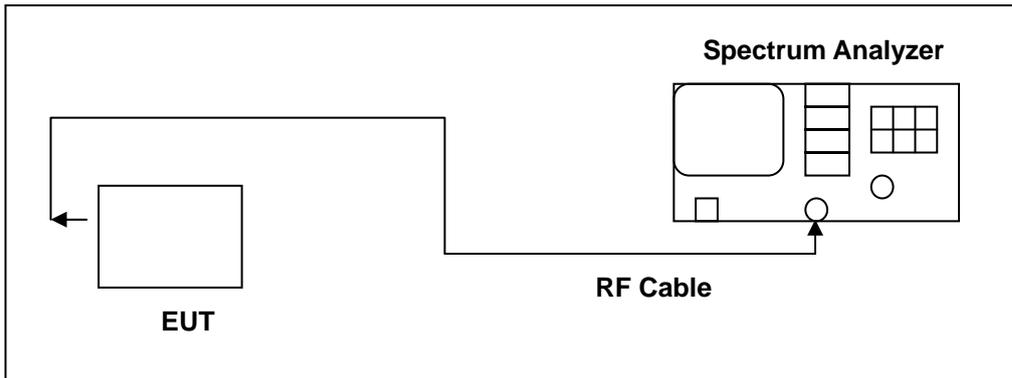

### 9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	<sup>(2)</sup>
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 9.4. Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW  $\geq$  1% of the span
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

**9.5. Test Result**



Product	Smartphone		
Test Item	Number of Hopping		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	05/12/2010	Test Site	TE06
Frequency Range (MHz)	Measurement (ch)		Limit (ch)
2402 - 2480	79		> 15

Product	Smartphone		
Test Item	Number of Hopping		
Test Mode	Mode 4: $\pi/4$ -DQPSK Link Mode		
Date of Test	05/12/2010	Test Site	TE06
Frequency Range (MHz)	Measurement (ch)		Limit (ch)
2402 - 2480	79		> 15

9.6. Test Graphs

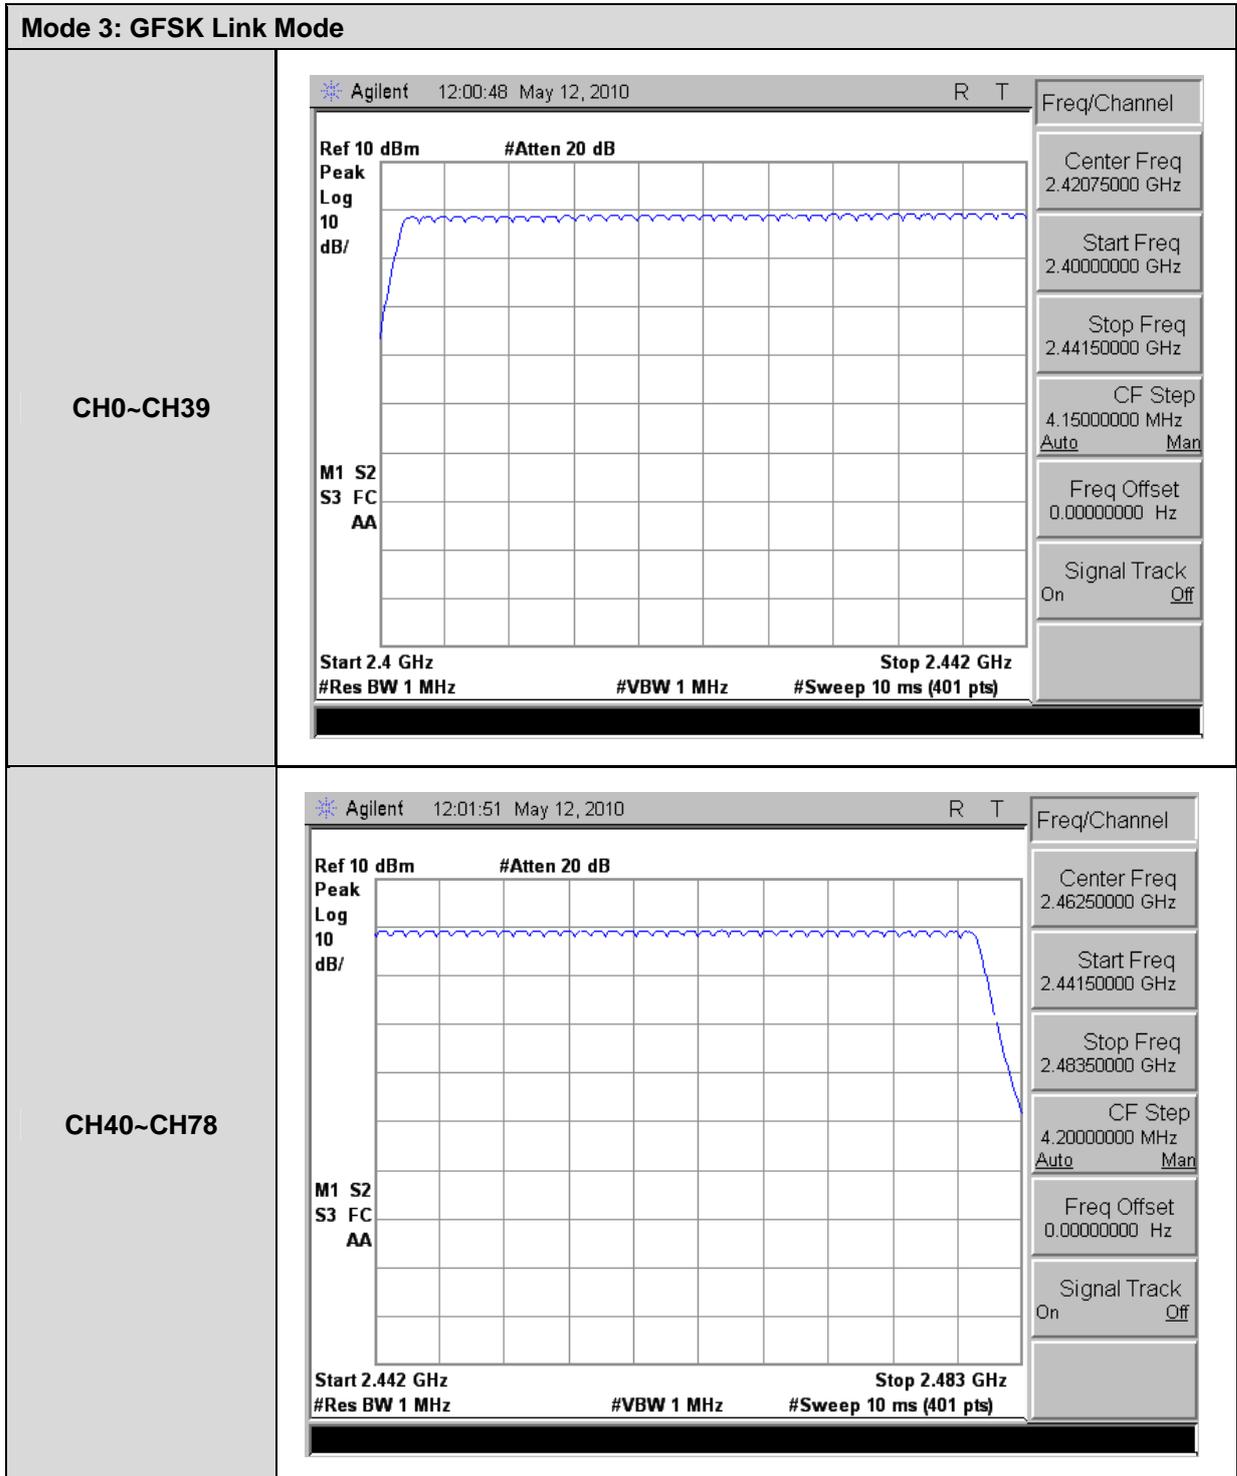

**Mode 4:  $\pi/4$ -DQPSK Link Mode**

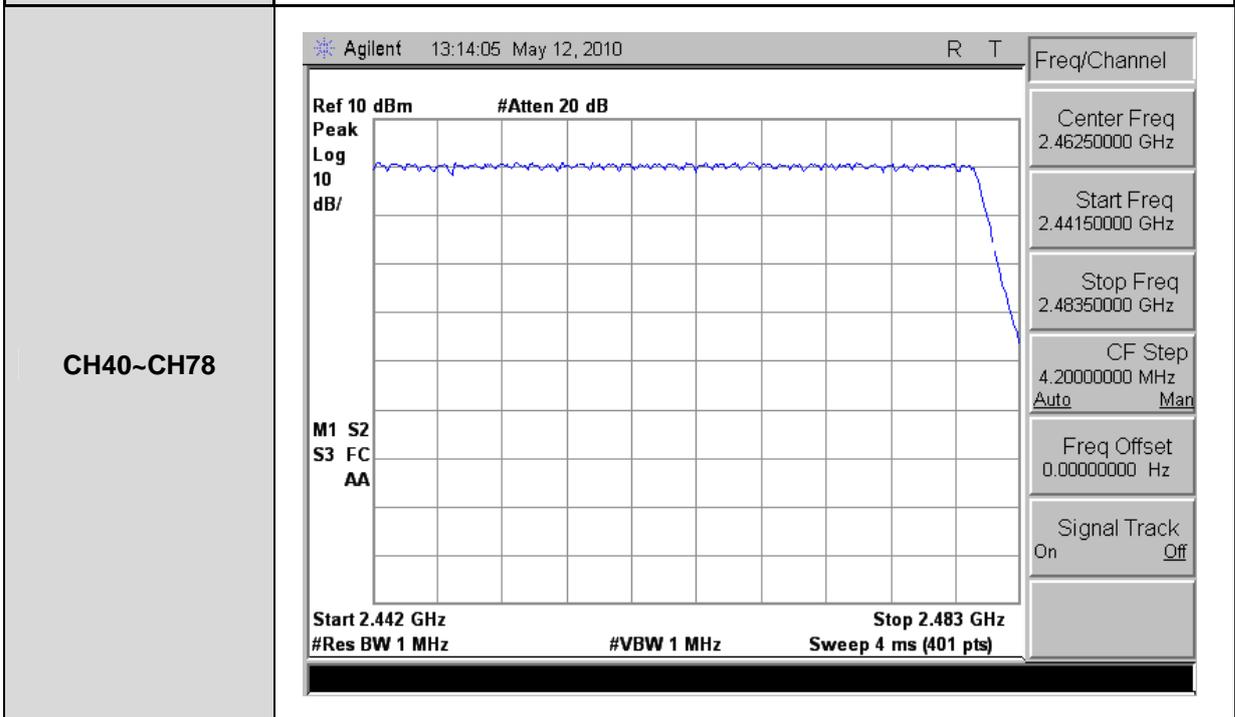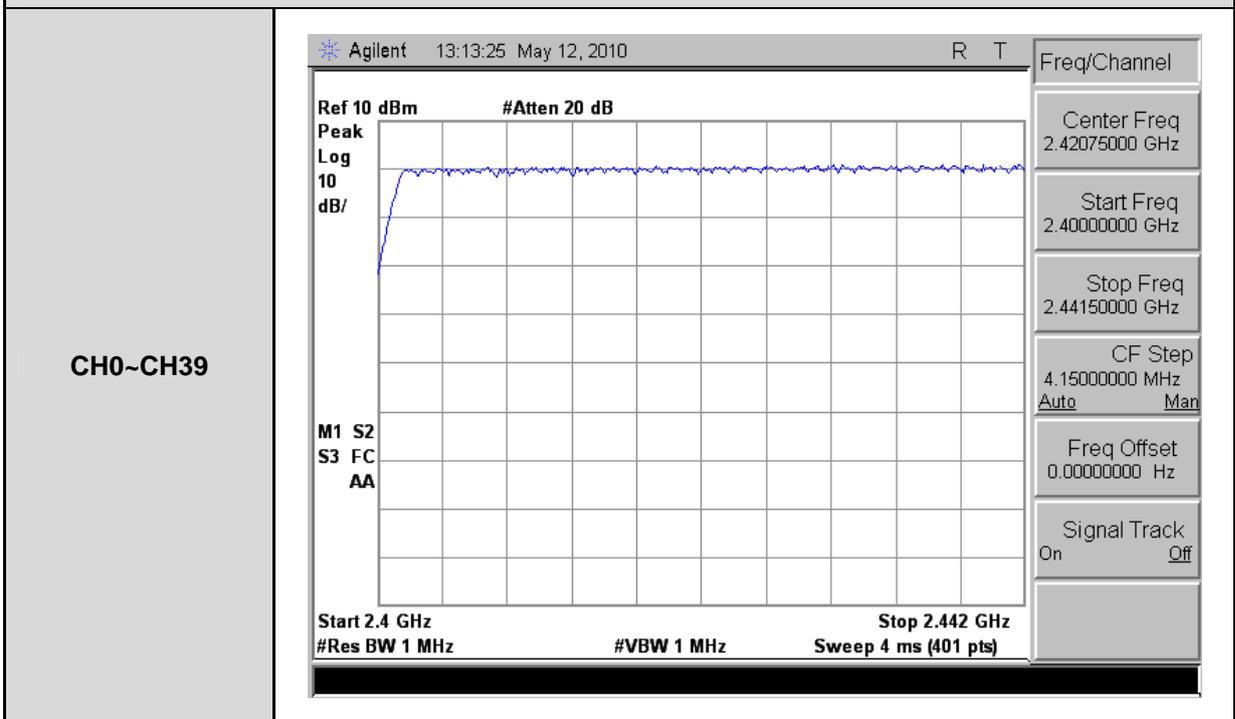


## 10 Time of Occupancy (Dwell Time) Measurement

### 10.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 10.2. Test Setup

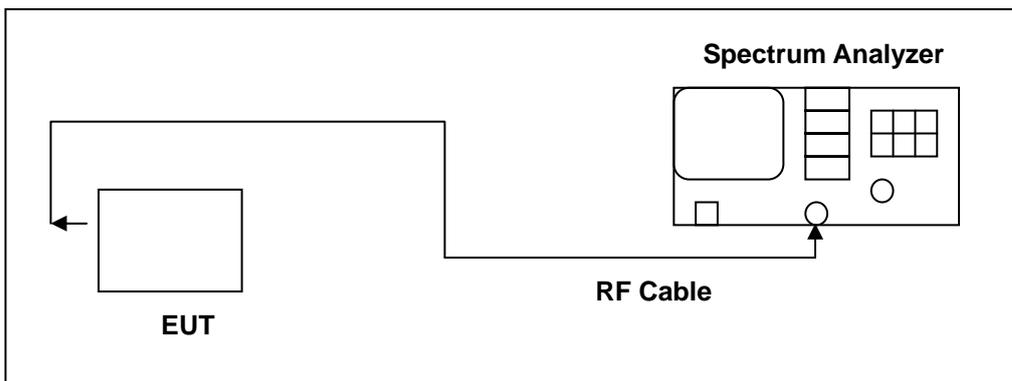

### 10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	<sup>(2)</sup>
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 10.4. Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW  $\geq$  RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold


The marker-delta function was used to determine the dwell time.


**10.5. Test Result**

Product	Smartphone		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	05/08/2010	Test Site	TE06
DH1			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)		
Each Channel Dwell Times (1)	0.525	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 10.13 = 320.108(times)		
Dwell Times on Cycle (1) * (2)	168.0567	ms (sec)	
LIMIT(msec)	< = 400		
DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)		
Each Channel Dwell Times (1)	1.800	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 5.1 = 161.16(times)		
Dwell Times on Cycle (1) * (2)	290.0880	ms (sec)	
LIMIT(msec)	< = 400		
DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)		
Each Channel Dwell Times (1)	2.400	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 3.37 = 106.492(times)		
Dwell Times on Cycle (1) * (2)	255.5808	ms (sec)	
LIMIT(msec)	< = 400		

Product	Smartphone		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 4: $\pi/4$ -DQPSK Link Mode		
Date of Test	05/12/2010	Test Site	TE06
2DH1			
Cycle Calculate	$79\text{CH} * 0.4 = 31.6 \text{ (sec)}$		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$800/79\text{CH} = 10.13(\text{times/sec})$		
Each Channel Dwell Times (1)	0.525	ms (sec)	
Each Channel Dwell Times on Cycle(2)	$31.6 * 10.13 = 320.108(\text{times})$		
Dwell Times on Cycle (1) * (2)	168.0567	ms (sec)	
LIMIT(msec)	< = 400		
2DH3			
Cycle Calculate	$79\text{CH} * 0.4 = 31.6 \text{ (sec)}$		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$400/79\text{CH} = 5.1(\text{times/sec})$		
Each Channel Dwell Times (1)	1.400	ms (sec)	
Each Channel Dwell Times on Cycle(2)	$31.6 * 5.1 = 161.16(\text{times})$		
Dwell Times on Cycle (1) * (2)	225.6240	ms (sec)	
LIMIT(msec)	< = 400		
2DH5			
Cycle Calculate	$79\text{CH} * 0.4 = 31.6 \text{ (sec)}$		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$266.7/79\text{CH} = 3.37(\text{times/sec})$		
Each Channel Dwell Times (1)	1.325	ms (sec)	
Each Channel Dwell Times on Cycle(2)	$31.6 * 3.37 = 106.492(\text{times})$		
Dwell Times on Cycle (1) * (2)	141.1019	ms (sec)	
LIMIT(msec)	< = 400		

10.6. Test Graphs

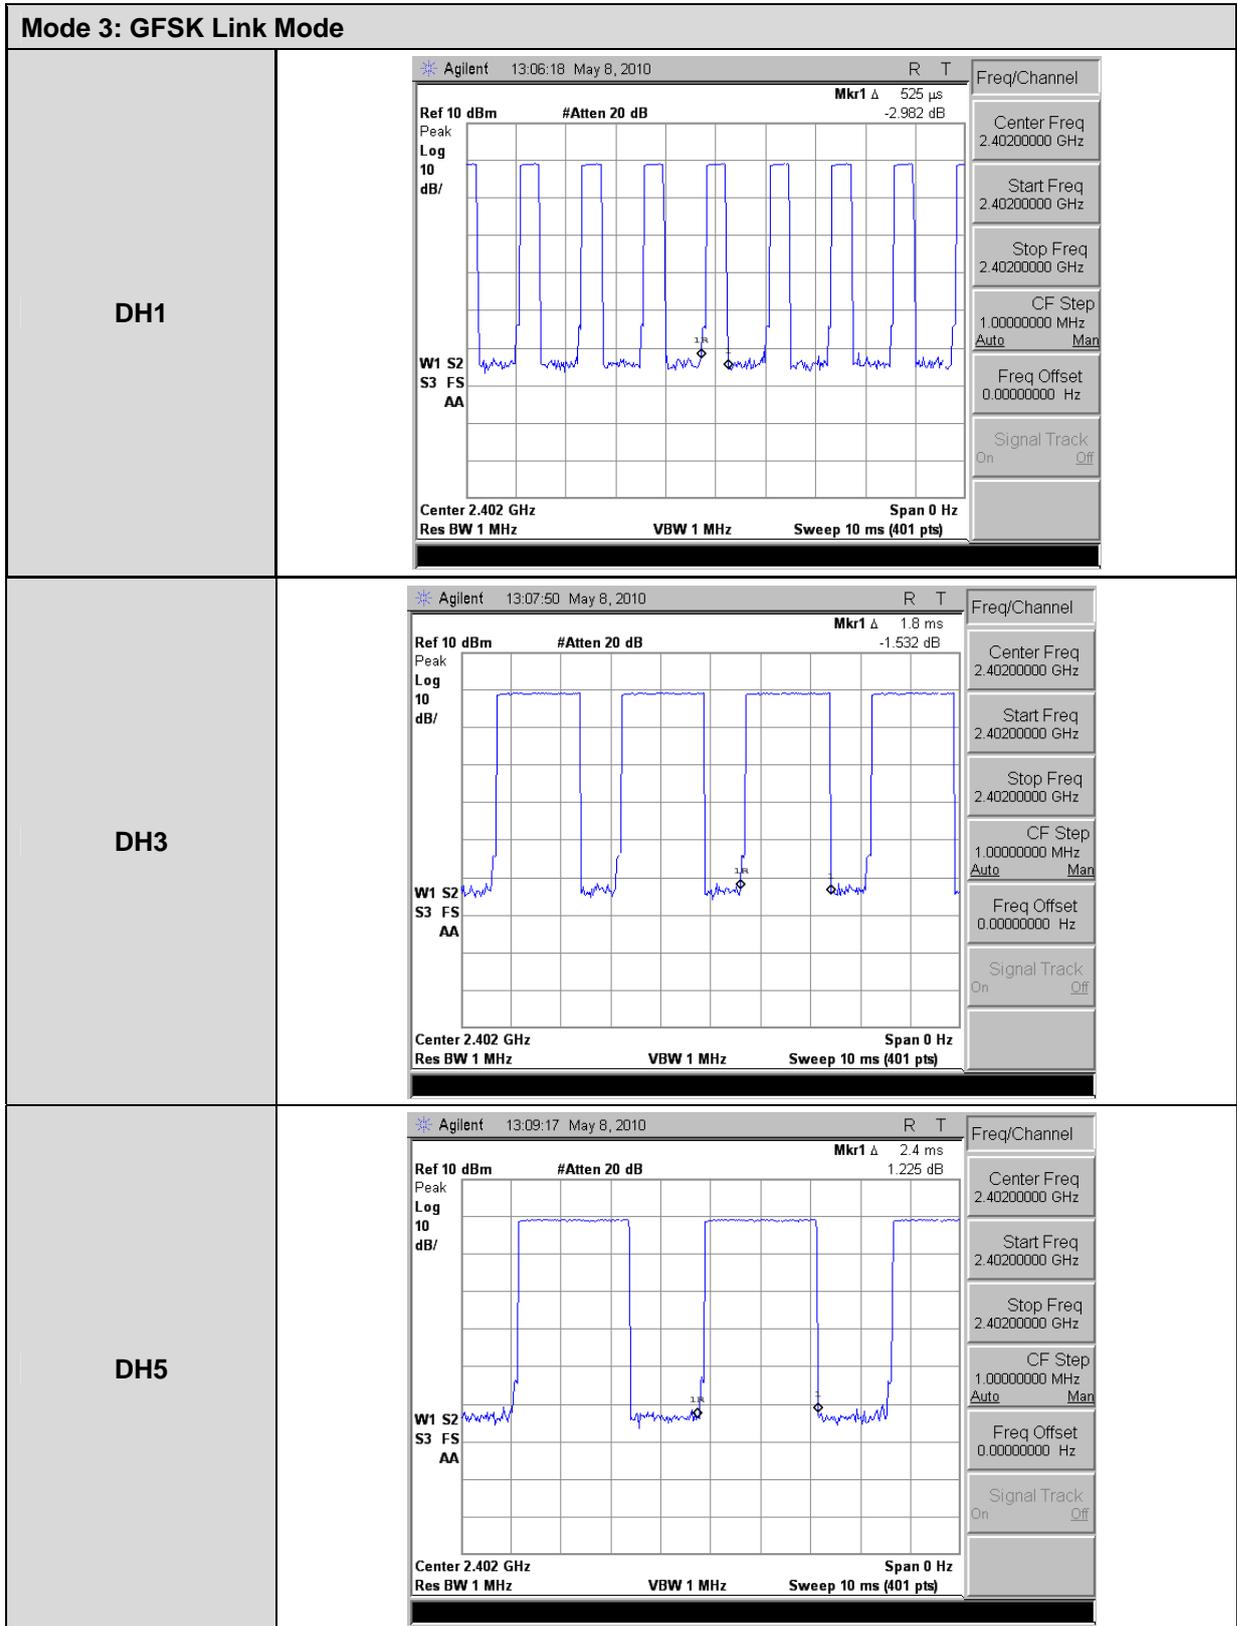

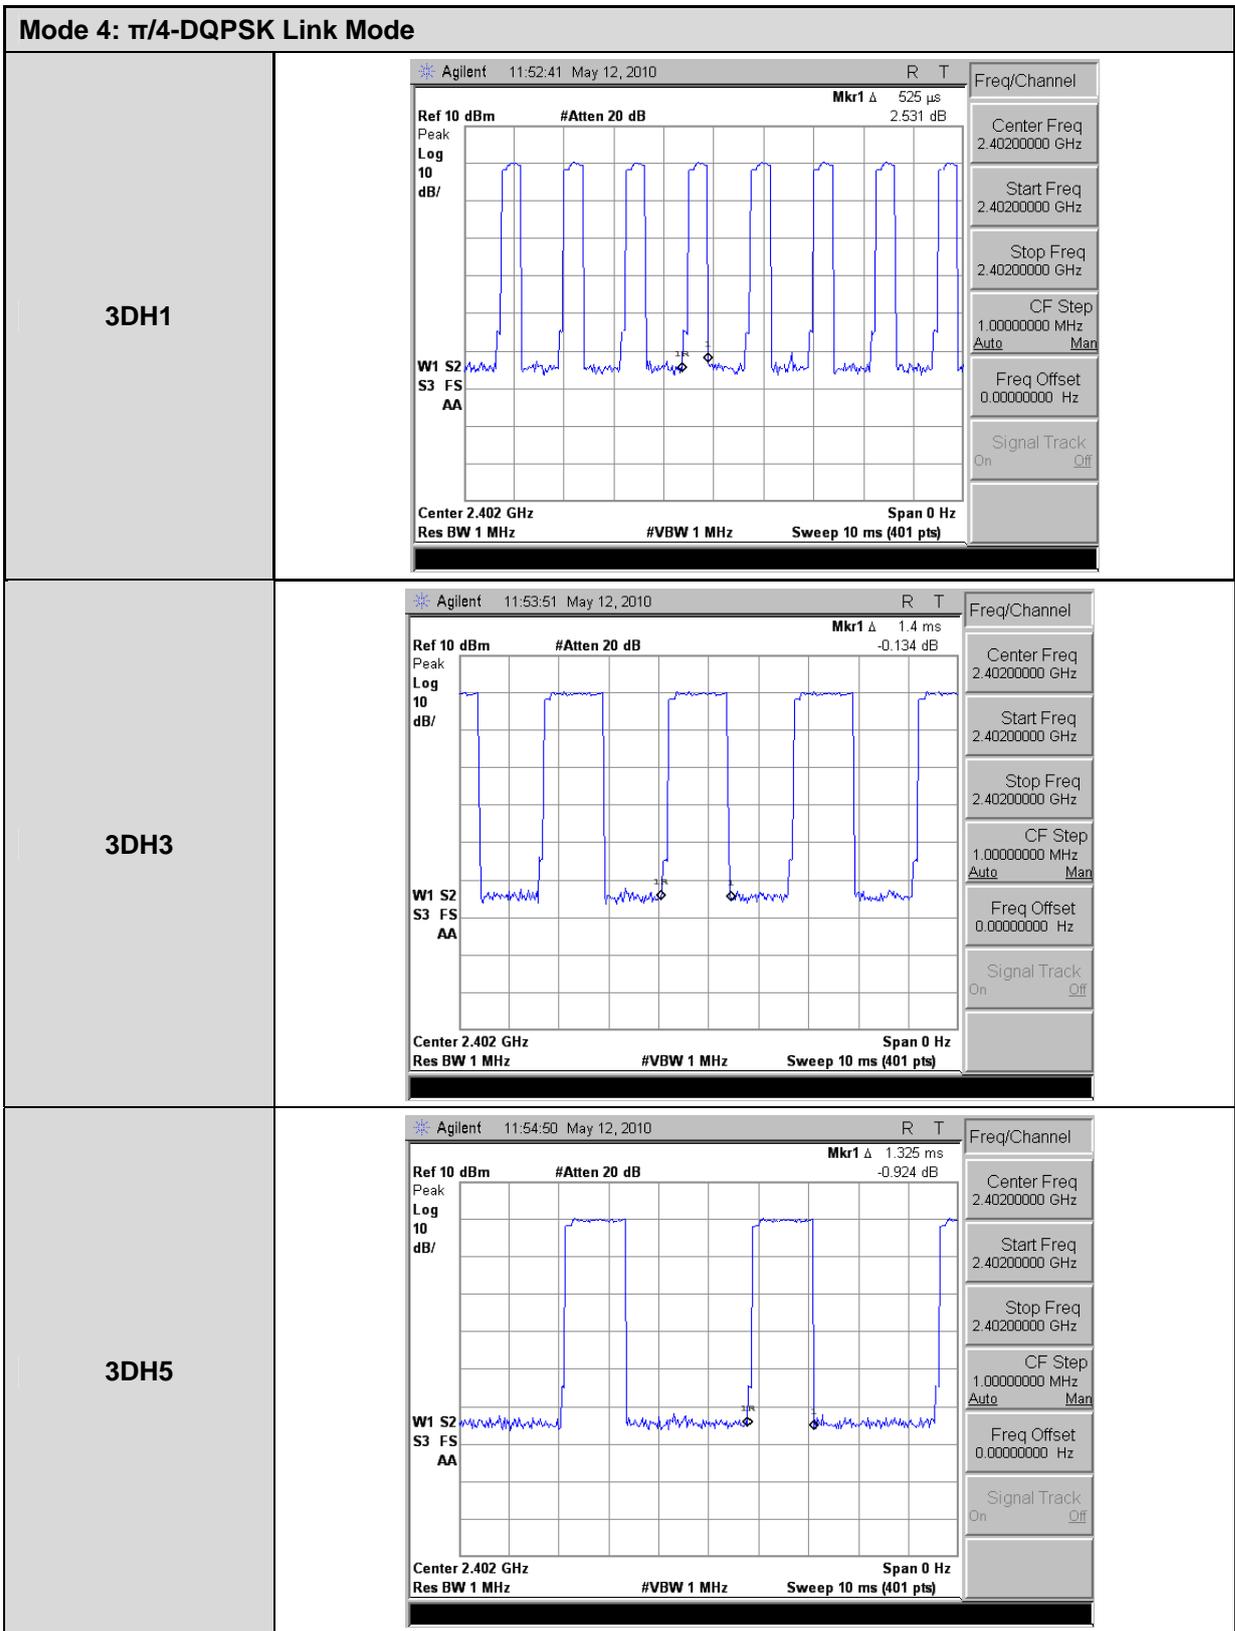


## 11 Out of Band Conducted Emissions Measurement

### 11.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 11.2. Test Setup

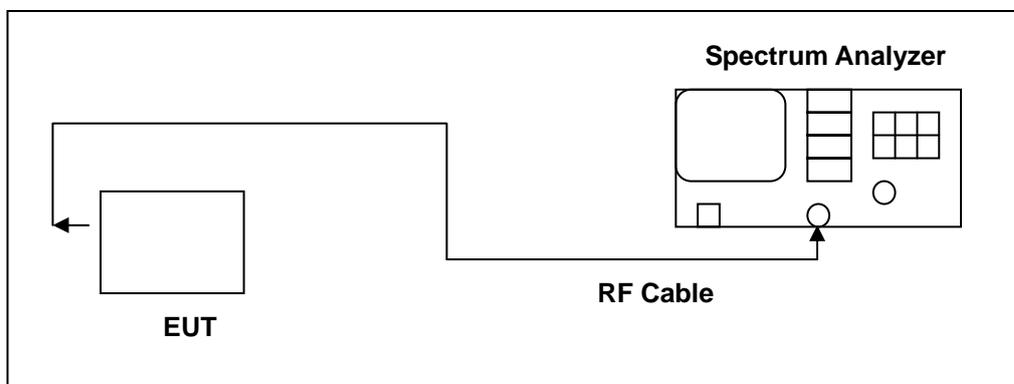

### 11.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	(2)
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

### 11.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

11.5. Test Graphs

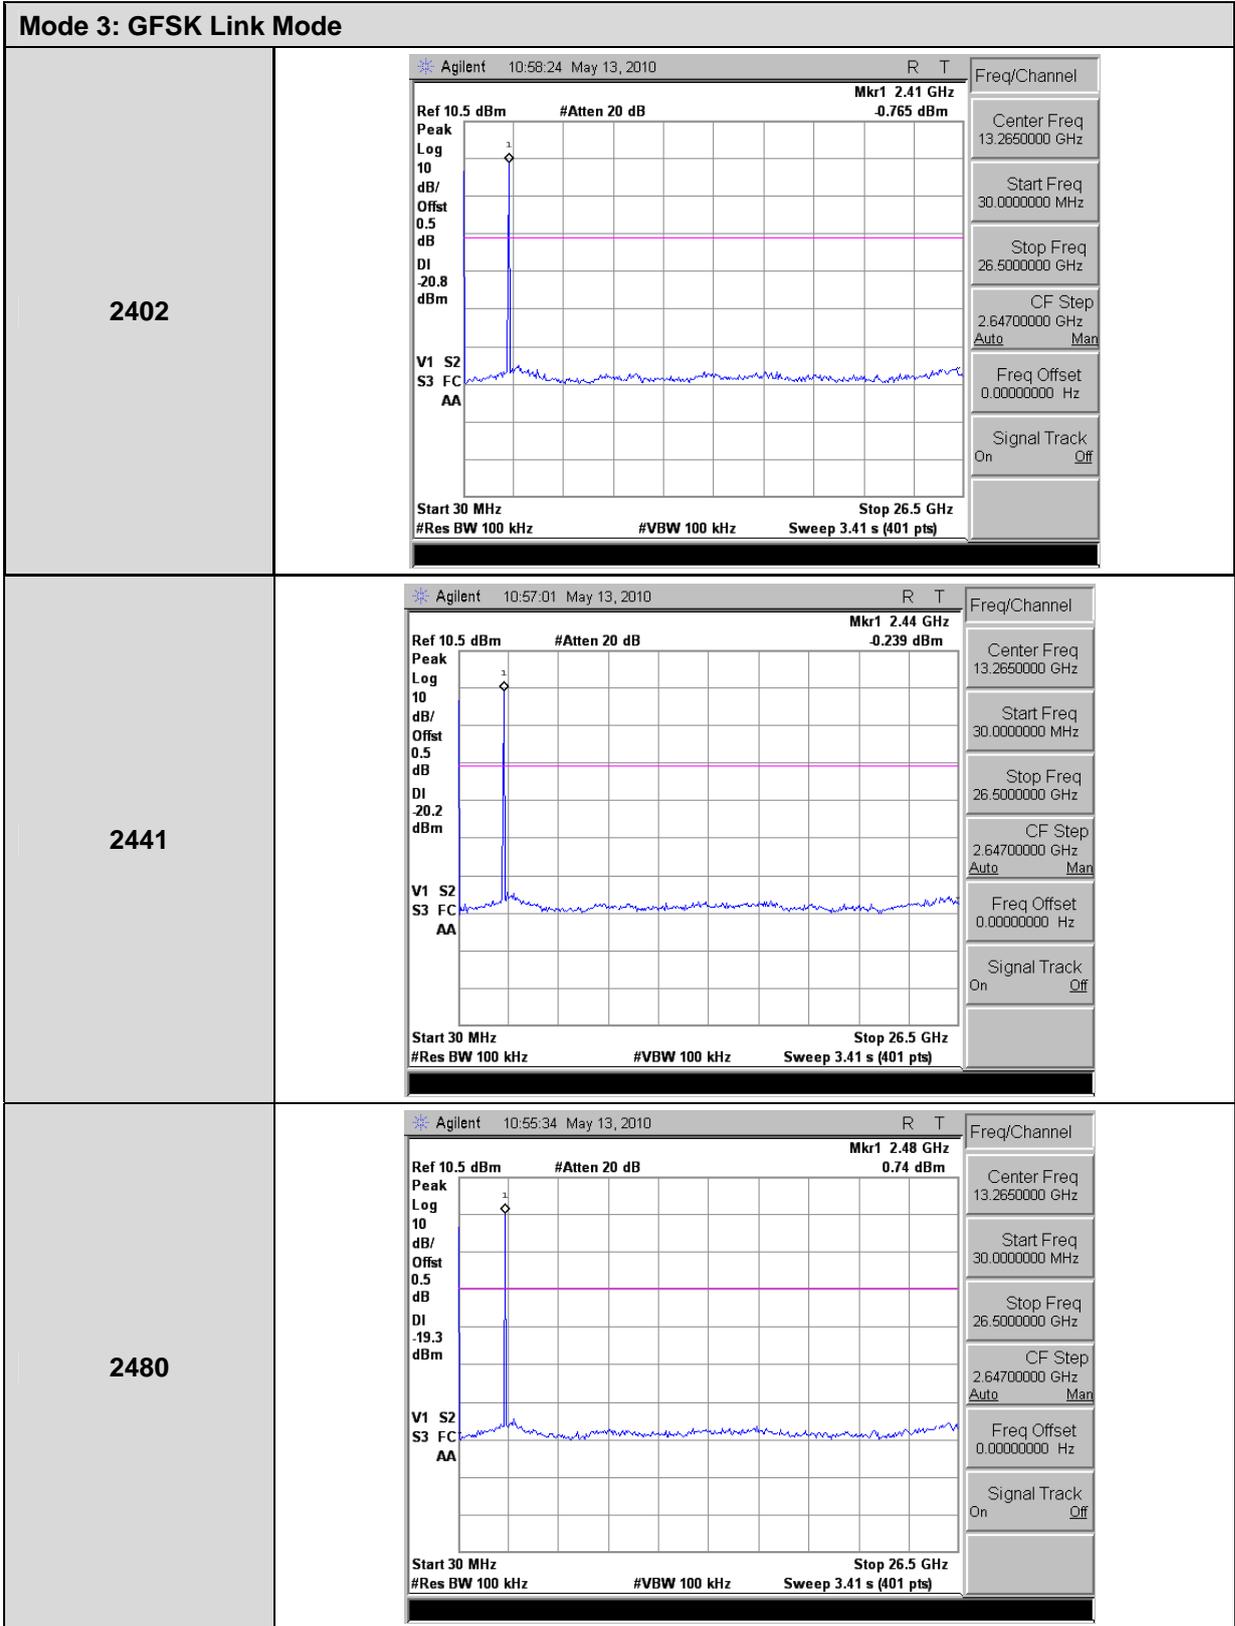

**Mode 4:  $\pi/4$ -DQPSK Link Mode**


<p style="text-align: center; font-weight: bold;">2402</p>	<p>Agilent 10:59:21 May 13, 2010 R T</p> <p>Ref 10.5 dBm #Atten 20 dB Mkr1 2.41 GHz 3.121 dBm</p> <p>Peak Log 10 dB/Offst 0.5 dB DI -23.1 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.5 GHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
<p style="text-align: center; font-weight: bold;">2441</p>	<p>Agilent 11:00:26 May 13, 2010 R T</p> <p>Ref 10.5 dBm #Atten 20 dB Mkr1 2.44 GHz 3.458 dBm</p> <p>Peak Log 10 dB/Offst 0.5 dB DI -23.5 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.5 GHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
<p style="text-align: center; font-weight: bold;">2480</p>	<p>Agilent 11:01:25 May 13, 2010 R T</p> <p>Ref 10.5 dBm #Atten 20 dB Mkr1 2.48 GHz -1.041 dBm</p> <p>Peak Log 10 dB/Offst 0.5 dB DI -21.0 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.5 GHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>

## 12 Band Edges Measurement

### 12.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 12.2. Test Setup

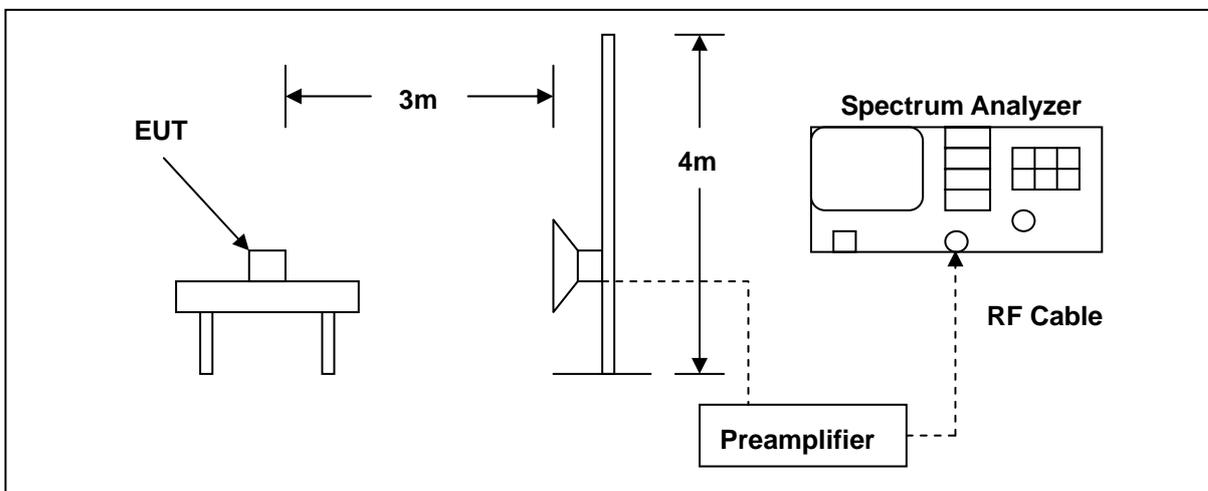

### 12.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	06/23/2009	(2)
Pre Amplifier	Agilent	8449B	3008A02237	07/01/2009	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	07/01/2009	(2)
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

## 12.4. Test Procedure


The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.


**12.5. Test Graphs**

Job No.:	10-0109-SEO	Ant. Polar. :	Vertical
Standard:	FCC part 15 (PK)	Test Distance:	3m
Test item:	Radiation Test	Power:	AC 120V/60Hz
Temp.(°C)/Hum.(%RH):	26(°C)/60%RH	Date:2010/5/13	Time:PM 10:21:21
EUT:	Smartphone	Test By:	Gary Wu
Model:	PC49100		
Description:	Mode 4: $\pi/4$ -DQPSK Link Mode (2402MHz)		

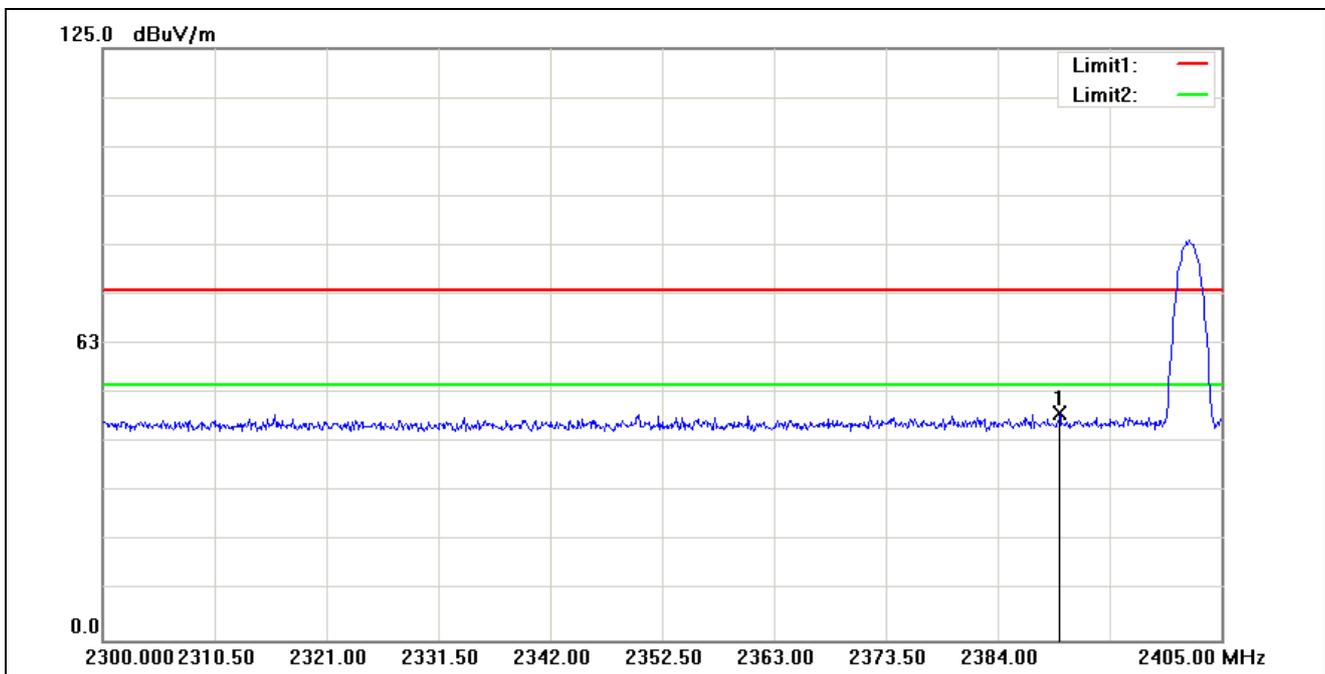


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2389.800	47.68	0.19	47.87	74.00	-26.13			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>26(°C)/60%RH</b>	<b>Date:2010/5/13</b>	<b>Time:PM 10:27:55</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2402MHz)</b>		

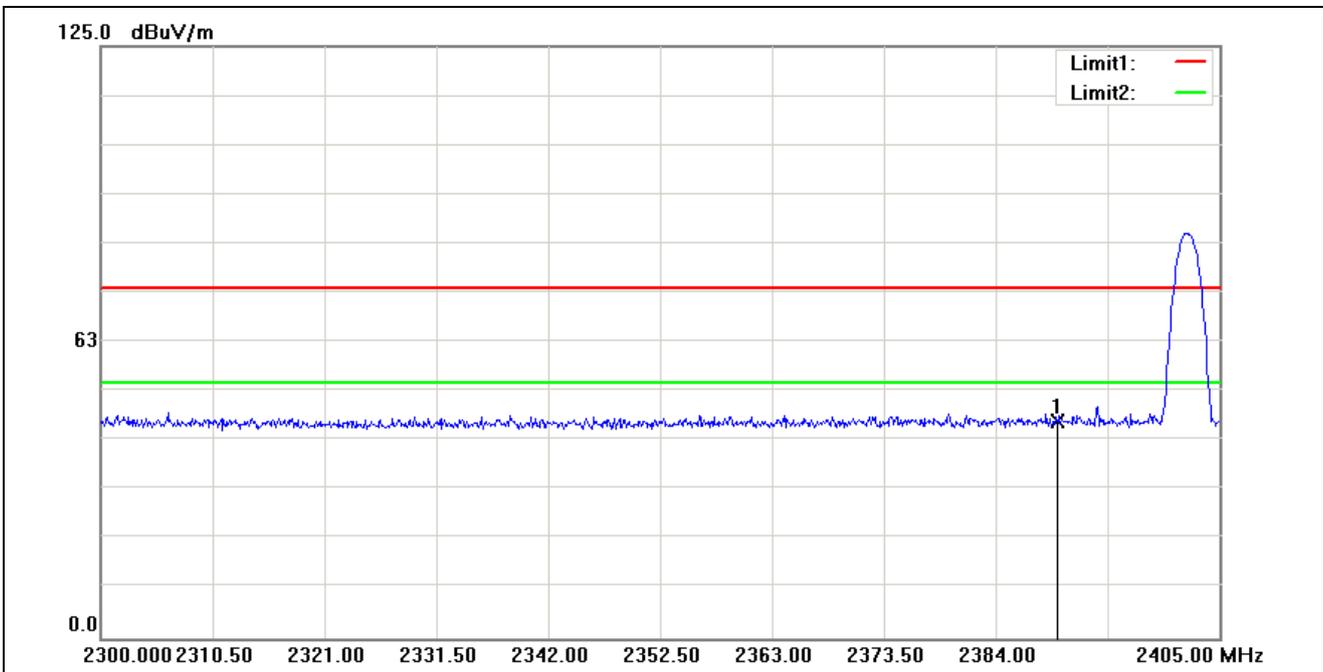


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )	Remark
1	2389.800	45.55	0.19	45.74	74.00	-28.26			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>26(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Time:</b>	<b>PM 10:31:25</b>
<b>Model:</b>	<b>PC49100</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		

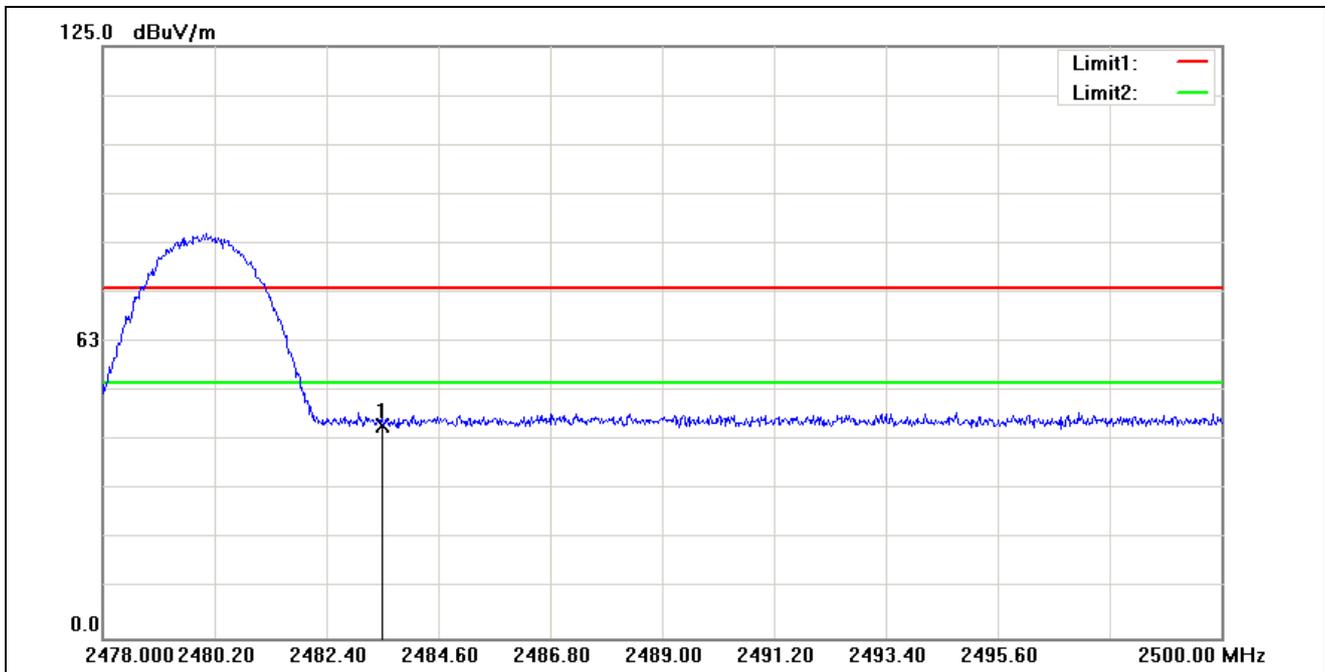

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.510	44.56	0.25	44.81	74.00	-29.19			peak

<b>Job No.:</b>	<b>10-0109-SEO</b>	<b>Ant. Polar. :</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC part 15 (PK)</b>	<b>Test Distance:</b>	<b>3m</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power:</b>	<b>AC 120V/60Hz</b>
<b>Temp.(°C)/Hum.(%RH):</b>	<b>26(°C)/60%RH</b>	<b>Date:</b>	<b>2010/5/13 Time:PM 10:33:35</b>
<b>EUT:</b>	<b>Smartphone</b>	<b>Test By:</b>	<b>Gary Wu</b>
<b>Model:</b>	<b>PC49100</b>		
<b>Description:</b>	<b>Mode 4: <math>\pi/4</math>-DQPSK Link Mode (2480MHz)</b>		

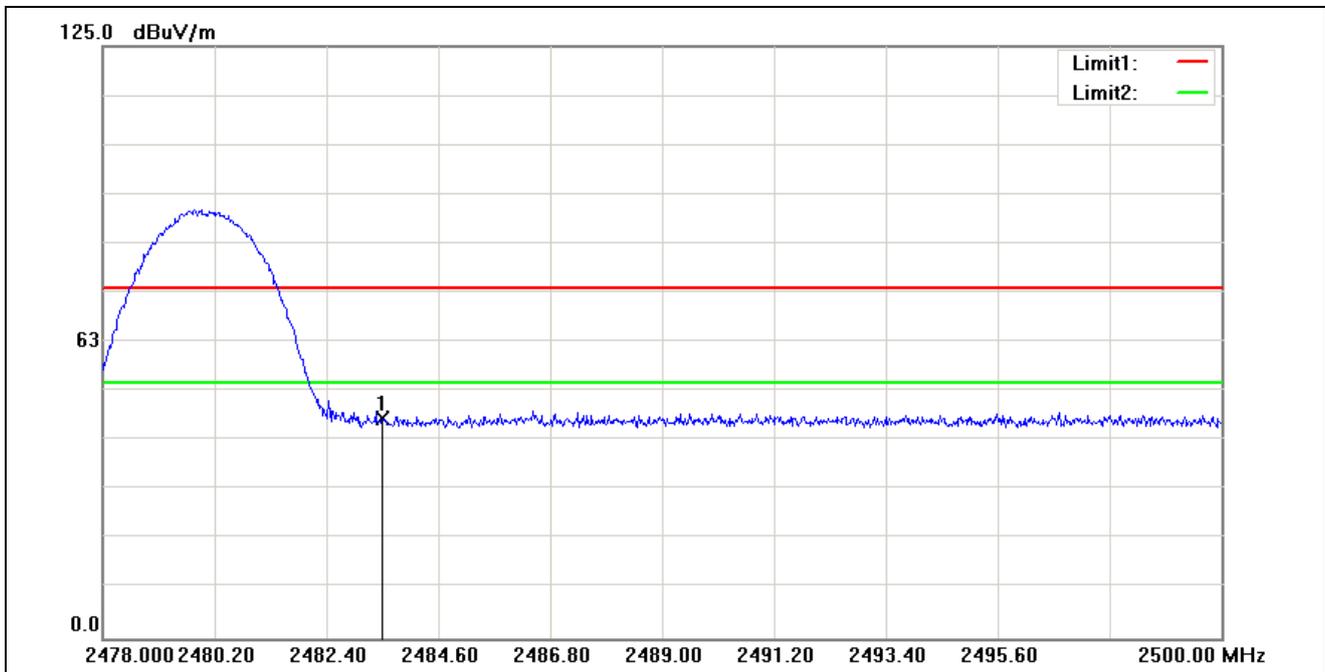

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2483.510	46.28	0.25	46.53	74.00	-27.47			peak

## 13 Antenna Measurement

### 13.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 13.2. Antenna Connector Construction

The antenna used in this product is **PIFA antenna**. And the maximum Gain of this antenna is only **0.5 dBi**.