

FCC 47 CFR PART 15 SUBPART C

Product Type : Smartphone
Applicant : HTC Corporation
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,
Taiwan
Trade Name : HTC
Model Number : PC49120
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct, 2009
ANSI C63.4-2003
Issue Date : Jun. 25, 2010

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jun. 25, 2010	Initial Issue	

Verification

Issued Date: 2010/06/25

Product Type : Smartphone
Applicant : HTC Corporation
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,
Taiwan
Trade Name : HTC
Model Number : PC49120
FCC ID : NM8PC49120
EUT Rated Voltage : DC 5.0V, 1.0A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct, 2009
ANSI C63.4-2003

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.

Tel : +86-3-2710188 / Fax : +86-3-2710190

Taiwan Accreditation Foundation accreditation number:
1330



<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .
The test results of this report relate only to the tested sample identified in this report.

Approved By : 
(Manager) (Miller Lee)


Reviewed By : 
(Testing Engineer) (Gary Wu)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology.....	8
	3.1. Mode of Operation	8
	3.2. EUT Exercise Software.....	8
	3.3. Configuration of Test System Details	9
	3.4. Test Site Environment.....	9
4	Conducted Emission Measurement	10
	4.1. Limit	10
	4.2. Test Instruments.....	10
	4.3. Test Setup	10
	4.4. Test Procedure.....	11
	4.5. Test Result	12
5	Radiated Interference Measurement	16
	5.1. Limit	16
	5.2. Test Instruments.....	16
	5.3. Setup.....	17
	5.4. Test Procedure.....	17
	5.5. Test Result	19
6	Maximum Conducted Output Power Measurement.....	24
	6.1. Limit	24
	6.2. Test Setup	24
	6.3. Test Instruments.....	24
	6.4. Test Procedure.....	24
	6.5. Test Result	25
7	6dB RF Bandwidth Measurement	26
	7.1. Limit	26
	7.2. Test Setup	26
	7.3. Test Instruments.....	26
	7.4. Test Procedure.....	26
	7.5. Test Result	27
	7.6. Test Graphs.....	28

8	Maximum Power Density Measurement.....	30
8.1.	Limit	30
8.2.	Test Setup	30
8.3.	Test Instruments.....	30
8.4.	Test Procedure.....	30
8.5.	Test Result	31
8.6.	Test Graphs.....	32
9	Out of Band Conducted Emissions Measurement	34
9.1.	Limit	34
9.2.	Test Setup	34
9.3.	Test Instruments.....	34
9.4.	Test Procedure.....	34
9.5.	Test Result	35
9.6.	Test Graphs.....	36
10	Band Edges Measurement	38
10.1.	Limit	38
10.2.	Test Setup	38
10.3.	Test Instruments.....	38
10.4.	Test Procedure.....	39
10.5.	Test Result	40
11	Antenna Measurement.....	48
11.1.	Limit	48
11.2.	Antenna Connector Construction.....	48

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.24 dB.

Radiated Emission

The measurement uncertainty of 30 MHz - 1GHz is evaluated as ± 3.072 dB.

2 EUT Description

Product	:	Smartphone
Trade Name	:	HTC
Model No.	:	PC49120
Applicant	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
Manufacturer	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
FCC ID	:	NM8PC49120
Frequency Range	:	2412 ~ 2462 MHz
Modulation Type	:	IEEE 802.11b:DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g:DSSS(CCK, DQPSK, DBPSK)+ OFDM(QPSK, BPSK, 16-QAM, 64-QAM)
Antenna Type	:	PIFA Type
Antenna Gain	:	0 dBi
RF Output Power	:	IEEE 802.11b: 0.087 W / 19.39 dBm IEEE 802.11g: 0.157 W / 21.95 dBm

3 Test Methodology

3.1. Mode of Operation


Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 2: Normal Operation Mode
Mode 3: IEEE 802.11b Link Mode
Mode 4: IEEE 802.11g Link Mode
Mode 5: Receiver Mode

3.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to AP.
4.	EUT run test program.

3.3. Configuration of Test System Details

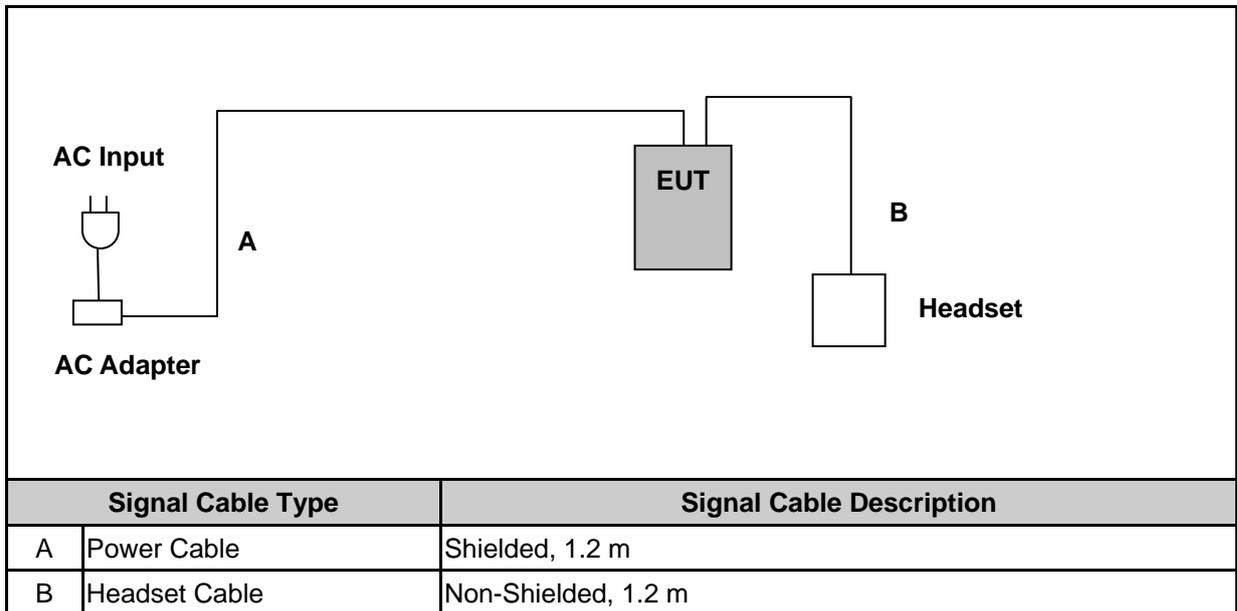

Devices Description				
Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	-----	-----	-----	-----

3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	25
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	07/01/2009	(1)
LISN	R&S	ENV216	101040	03/02/2010	(1)
LISN	R&S	ENV216	101041	03/02/2010	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.3. Test Setup

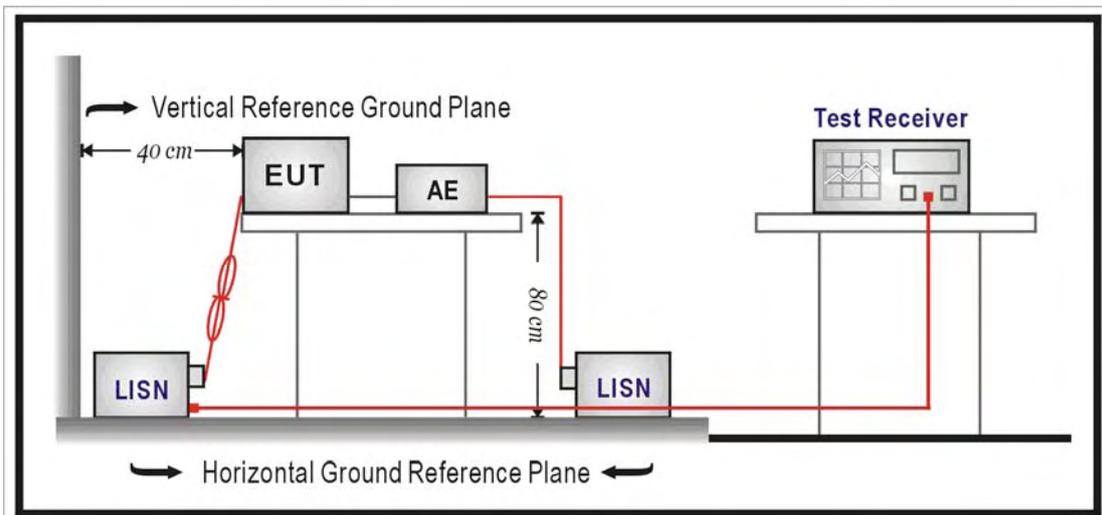

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2010/06/14
		Test By:	Gary Wu
Description:			

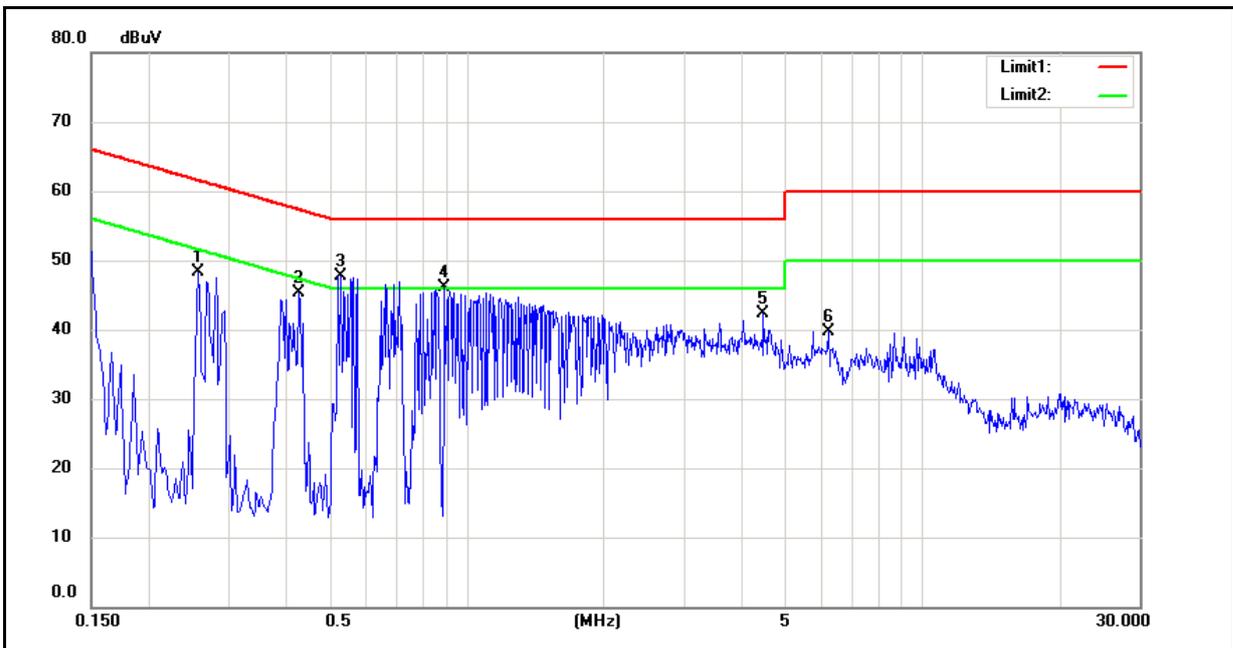


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2580	35.13	14.58	10.06	45.19	24.64	61.50	51.50	-16.31	-26.86	Pass
2	0.4300	31.95	12.54	9.99	41.94	22.53	57.25	47.25	-15.31	-24.72	Pass
3	0.5300	33.96	11.87	9.94	43.90	21.81	56.00	46.00	-12.10	-24.19	Pass
4	0.8980	31.11	7.08	9.80	40.91	16.88	56.00	46.00	-15.09	-29.12	Pass
5	4.4860	24.39	9.03	9.86	34.25	18.89	56.00	46.00	-21.75	-27.11	Pass
6	6.2220	22.25	8.11	9.84	32.09	17.95	60.00	50.00	-27.91	-32.05	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2010/06/14
		Test By:	Gary Wu
Description:			

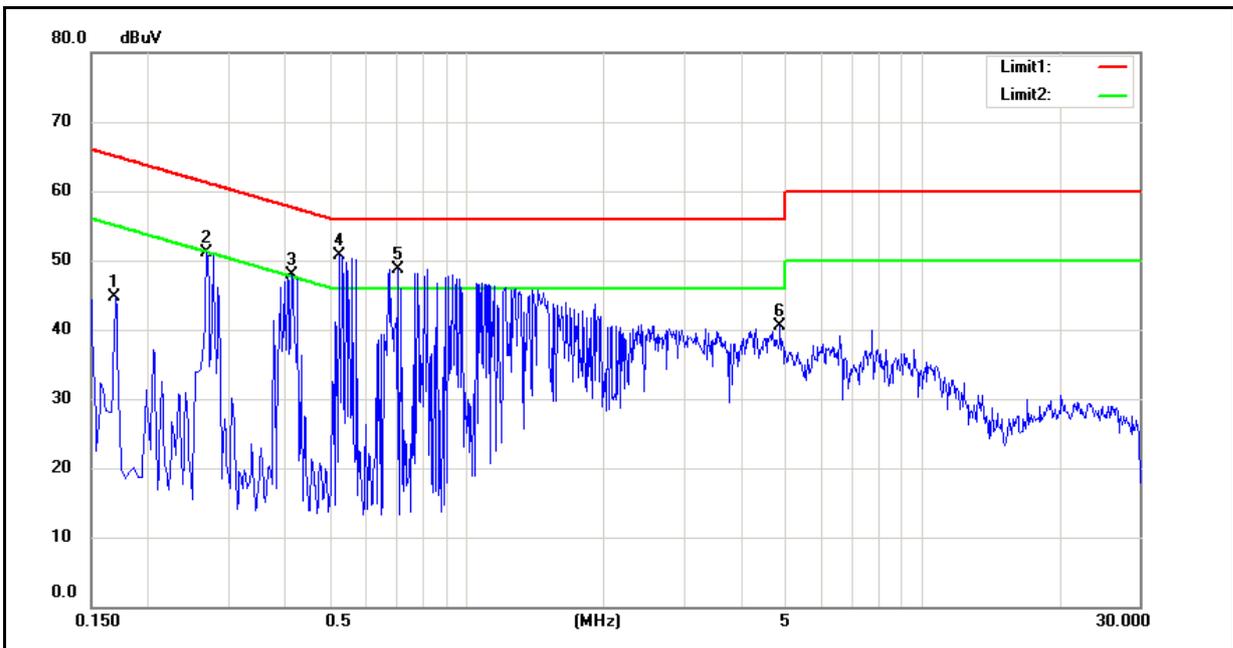


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1700	24.39	4.93	10.09	34.48	15.02	64.96	54.96	-30.48	-39.94	Pass
2	0.2700	37.06	18.59	10.04	47.10	28.63	61.12	51.12	-14.02	-22.49	Pass
3	0.4140	34.14	16.05	9.99	44.13	26.04	57.57	47.57	-13.44	-21.53	Pass
4	0.5260	36.46	13.96	9.95	46.41	23.91	56.00	46.00	-9.59	-22.09	Pass
5	0.7100	33.50	13.81	9.87	43.37	23.68	56.00	46.00	-12.63	-22.32	Pass
6	4.8860	21.99	8.18	9.84	31.83	18.02	56.00	46.00	-24.17	-27.98	Pass

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	2010/06/14
		Test By:	Gary Wu
Description:			

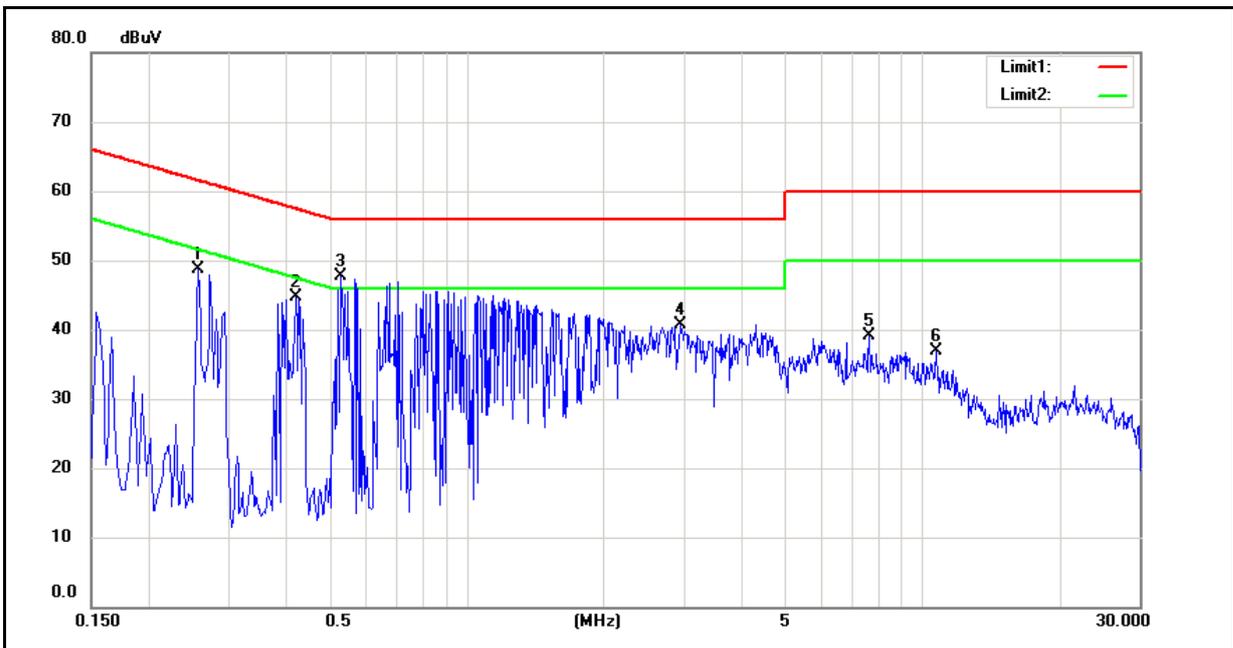

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2580	34.99	14.52	10.06	45.05	24.58	61.50	51.50	-16.45	-26.92	Pass
2	0.4220	32.04	13.60	9.99	42.03	23.59	57.41	47.41	-15.38	-23.82	Pass
3	0.5300	33.39	12.14	9.94	43.33	22.08	56.00	46.00	-12.67	-23.92	Pass
4	2.9580	24.62	9.38	9.84	34.46	19.22	56.00	46.00	-21.54	-26.78	Pass
5	7.6740	20.25	7.87	9.93	30.18	17.80	60.00	50.00	-29.82	-32.20	Pass
6	10.7340	17.31	7.52	10.30	27.61	17.82	60.00	50.00	-32.39	-32.18	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	2010/06/14
		Test By:	Gary Wu
Description:			

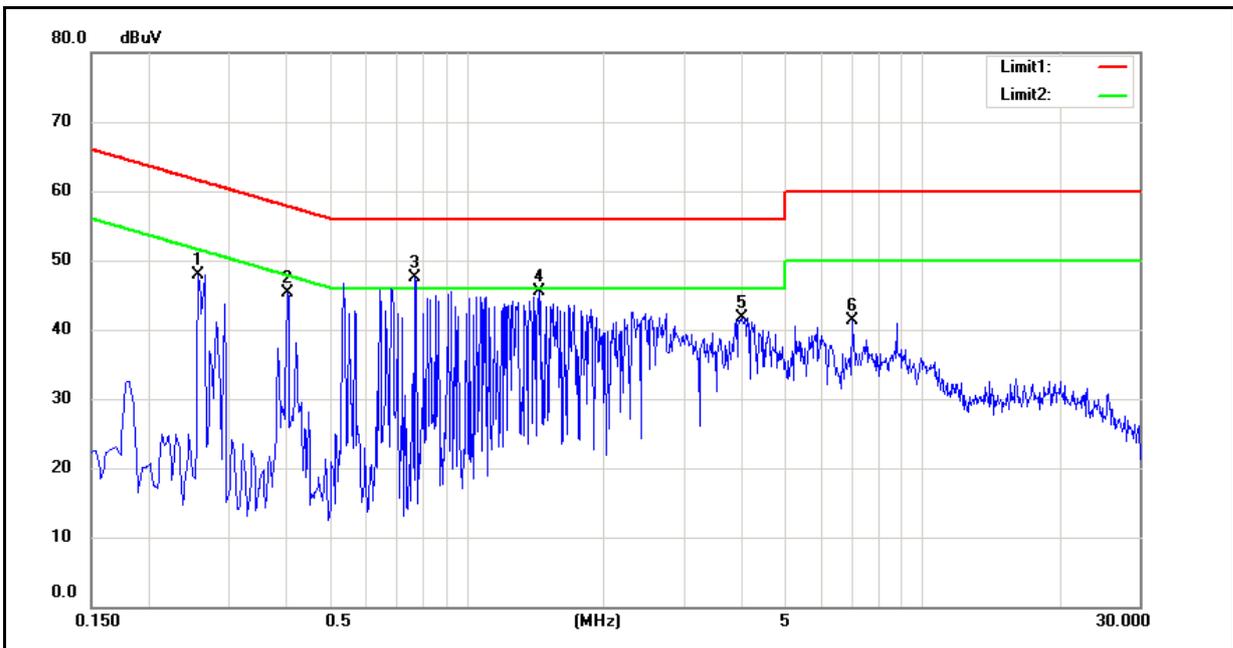

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2580	32.65	11.38	10.05	42.70	21.43	61.50	51.50	-18.80	-30.07	Pass
2	0.4060	32.20	10.87	10.00	42.20	20.87	57.73	47.73	-15.53	-26.86	Pass
3	0.7700	31.02	6.83	9.84	40.86	16.67	56.00	46.00	-15.14	-29.33	Pass
4	1.4460	30.10	10.67	9.69	39.79	20.36	56.00	46.00	-16.21	-25.64	Pass
5	4.0420	26.71	6.26	9.84	36.55	16.10	56.00	46.00	-19.45	-29.90	Pass
6	7.0540	21.02	4.75	9.87	30.89	14.62	60.00	50.00	-29.11	-35.38	Pass

5 Radiated Interference Measurement

5.1. Limit

Frequency Range (MHz)	Peak (dBuV)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54


5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/27/2009	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/20/2009	(2)
Pre Amplifier	Agilent	8449B	3008A02237	07/01/2009	(1)
Pre Amplifier	Agilent	8447D	2944A10961	06/30/2009	(1)
Bi-log Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	06/23/2009	(2)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	07/01/2009	(2)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/30/2009	(2)
Test Site	ATL	TE01	888001	08/06/2009	(1)

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.3. Setup

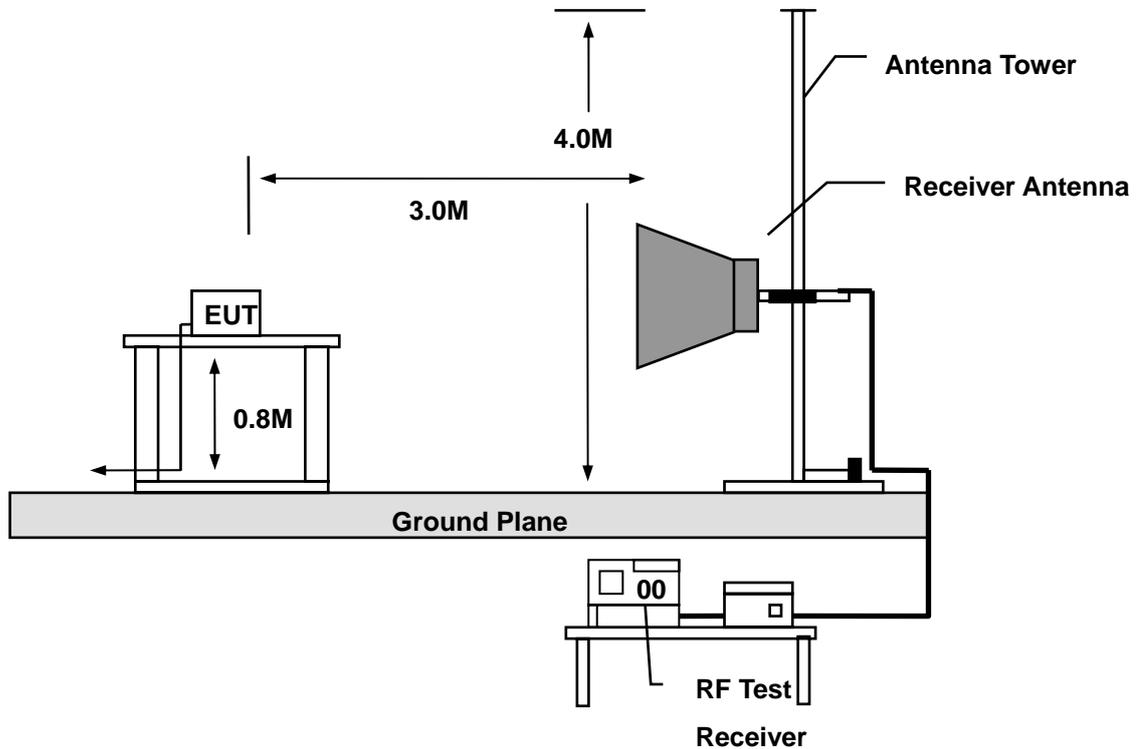

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in decibels referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:


(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

5.5. Test Result


5.5.1. Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	2010/06/21
Ant.Polar.:	Horizontal	Test By:	Gary Wu

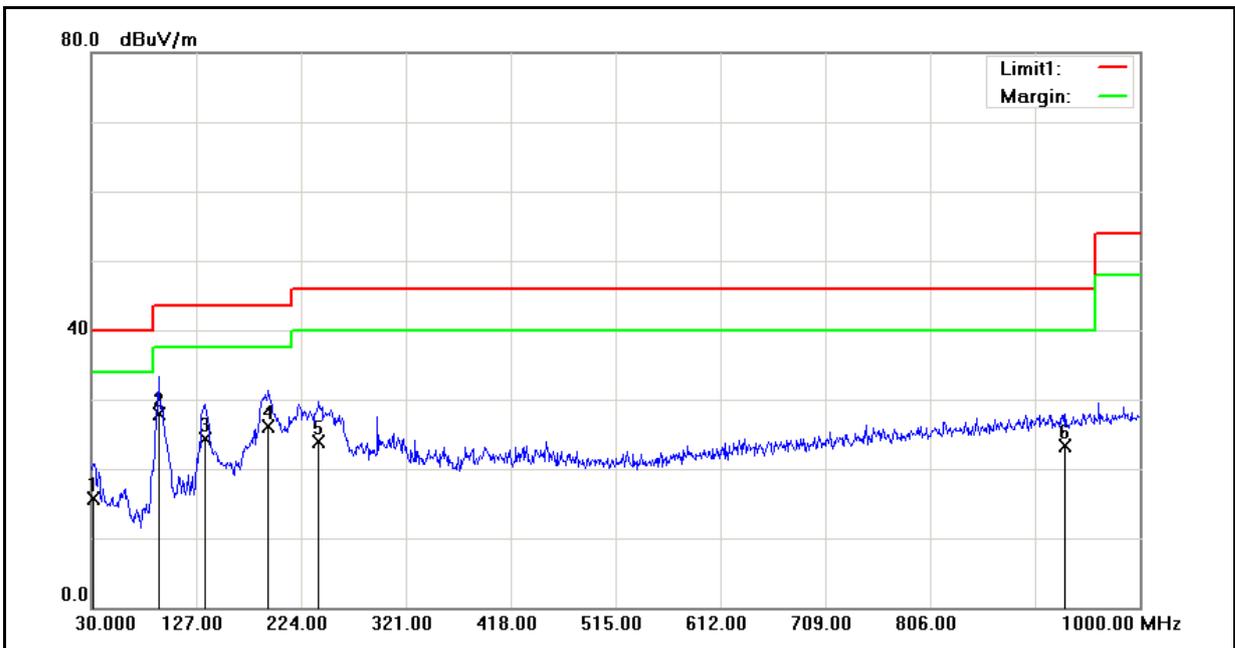

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.4250	29.15	-13.41	15.74	40.00	-24.26	QP
2	92.5650	43.25	-15.29	27.96	43.50	-15.54	QP
3	134.7600	41.27	-16.90	24.37	43.50	-19.13	QP
4	193.9300	39.63	-13.57	26.06	43.50	-17.44	QP
5	240.4900	36.15	-12.24	23.91	46.00	-22.09	QP
6	931.6150	22.54	0.67	23.21	46.00	-22.79	QP

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	2010/06/21
Ant.Polar.:	Vertical	Test By:	Gary Wu

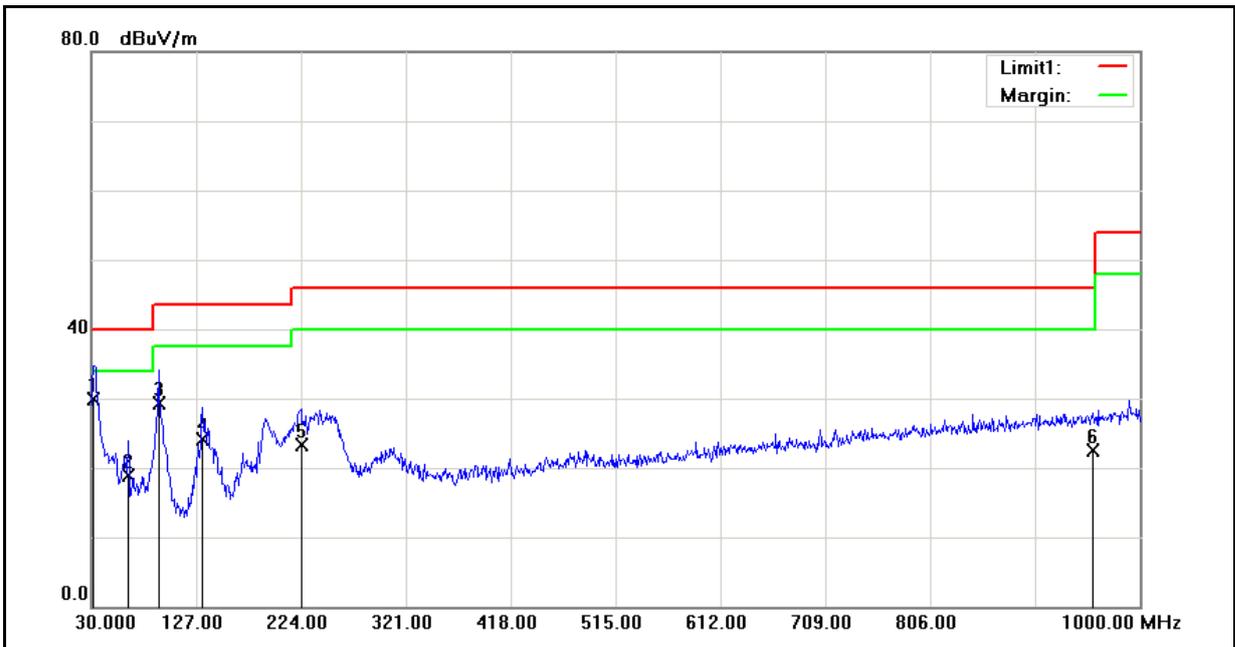

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.4250	43.25	-13.41	29.84	40.00	-10.16	QP
2	64.4350	33.21	-14.21	19.00	40.00	-21.00	QP
3	92.5650	44.51	-15.29	29.22	43.50	-14.28	QP
4	132.8200	41.02	-16.84	24.18	43.50	-19.32	QP
5	224.0000	36.51	-13.12	23.39	46.00	-22.61	QP
6	956.3500	21.57	0.90	22.47	46.00	-23.53	QP

5.5.2. Above 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model:		PC49120		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		2010/06/23	
Frequency:		2412MHz		Test By:		Gary Wu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	43.62	7.79	51.41	74.00	-22.59	peak	H
7236.000	33.76	15.38	49.14	74.00	-24.86	peak	H
4824.000	43.65	7.79	51.44	74.00	-22.56	peak	V
7236.000	34.81	15.38	50.19	74.00	-23.81	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model:		PC49120		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		2010/06/23	
Frequency:		2437MHz		Test By:		Gary Wu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	43.69	7.94	51.63	74.00	-22.37	peak	H
7311.000	33.69	15.59	49.28	74.00	-24.72	AVG	H
4874.000	40.58	7.94	48.52	74.00	-25.48	AVG	V
7311.000	33.29	15.59	48.88	74.00	-25.12	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model:		PC49120		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		2010/06/23	
Frequency:		2462MHz		Test By:		Gary Wu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4923.500	39.86	8.08	47.94	74.00	-26.06	peak	H
7386.000	33.66	15.80	49.46	74.00	-24.54	peak	H
4923.500	42.44	8.08	50.52	74.00	-23.48	peak	V
7386.000	34.42	15.80	50.22	74.00	-23.78	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model:		PC49120		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 4		Date:		2010/06/23	
Frequency:		2412MHz		Test By:		Gary Wu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	35.82	7.79	43.61	74.00	-30.39	peak	H
7236.000	33.52	15.38	48.90	74.00	-25.10	peak	H
4824.000	34.90	7.79	42.69	74.00	-31.31	peak	V
7236.000	34.70	15.38	50.08	74.00	-23.92	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model:		PC49120		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 4		Date:		2010/06/23	
Frequency:		2437MHz		Test By:		Gary Wu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	35.59	7.94	43.53	74.00	-30.47	peak	H
7311.000	32.62	15.59	48.21	74.00	-25.79	peak	H
4874.000	35.26	7.94	43.20	74.00	-30.80	peak	V
7311.000	33.60	15.59	49.19	74.00	-24.81	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model:		PC49120		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 4		Date:		2010/06/23	
Frequency:		2462MHz		Test By:		Gary Wu	
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	35.61	8.08	43.69	74.00	-30.31	peak	H
7386.000	34.30	15.80	50.10	74.00	-23.90	peak	H
4924.000	34.32	8.08	42.40	74.00	-31.60	peak	V
7386.000	32.98	15.80	48.78	74.00	-25.22	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	2010/06/23
		Test By:	Gary Wu


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2760.500	39.18	1.20	40.38	74.00	-33.62	peak	H
4965.500	38.00	8.19	46.19	74.00	-27.81	peak	H
2760.500	39.18	1.20	40.38	74.00	-33.62	peak	V
4965.500	38.00	8.19	46.19	74.00	-27.81	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

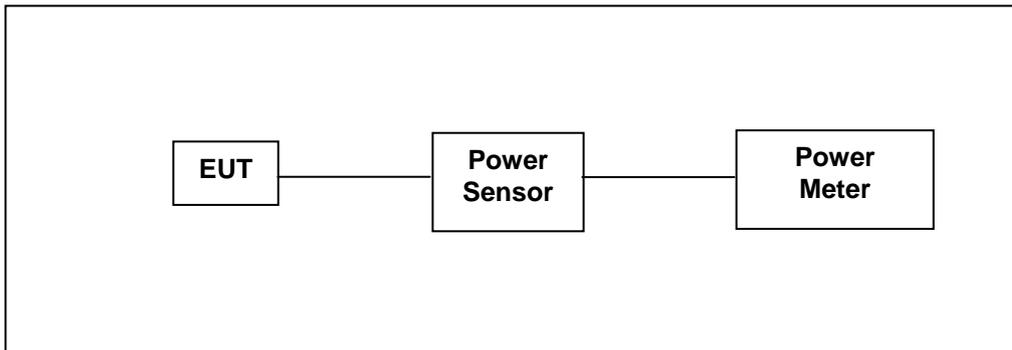

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY15101619	07/14/2009	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/25/2009	(1)
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to $(\text{GAIN} - 6)/3$ dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model	PC49120					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: IEEE 802.11b Link Mode					
Date of Test	06/22/2010			Test Site	TE06	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	1	16.96	0.050	19.39	0.087	< 30
2437		16.14	0.041	18.83	0.076	< 30
2462		15.77	0.038	18.41	0.069	< 30
2412	11	16.16	0.041	19.27	0.085	< 30
2437		15.82	0.038	19.06	0.081	< 30
2462		15.62	0.036	18.76	0.075	< 30


Model	PC49120					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: IEEE 802.11g Link Mode					
Date of Test	06/22/2010			Test Site	TE06	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6	12.13	0.016	21.76	0.150	< 30
2437		11.63	0.015	21.95	0.157	< 30
2462		11.10	0.013	21.38	0.137	< 30
2412	54	10.60	0.011	21.88	0.154	< 30
2437		10.45	0.011	21.94	0.156	< 30
2462		10.06	0.010	21.28	0.134	< 30

7 6dB RF Bandwidth Measurement

7.1. Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

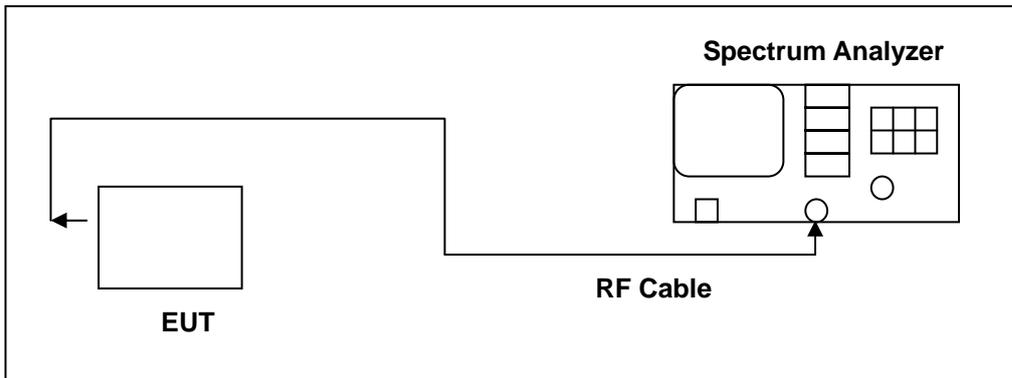

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	⁽²⁾
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)

7.5. Test Result




Model	PC49120		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	06/22/2010	Test Site	TE06
Frequency (MHz)	Measurement (kHz)		Limit (kHz)
2412	9500		> 500
2437	7920		> 500
2462	7920		> 500

Model	PC49120		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	06/22/2010	Test Site	TE06
Frequency (MHz)	Measurement (kHz)		Limit (kHz)
2412	16330		> 500
2437	16330		> 500
2462	16330		> 500

7.6. Test Graphs

Mode 3: IEEE 802.11b Link Mode																	
<p>2412</p>	<p>Agilent 19:34:44 Jun 22, 2010 R T</p> <p>Ref 20 dBm Atten 30 dB Δ Mkr1 9.50 MHz -0.22 dB</p> <p>#Peak Log 10 dB/ LgAv M1 S2 S3 FC</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 100 kHz #Sweep 100 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <tr><th colspan="2">Freq/Channel</th></tr> <tr><td>Center Freq</td><td>2.41200000 GHz</td></tr> <tr><td>Start Freq</td><td>2.38700000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.43700000 GHz</td></tr> <tr><td>CF Step</td><td>5.00000000 MHz</td></tr> <tr><td>Auto</td><td>Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On Off</td></tr> </table>	Freq/Channel		Center Freq	2.41200000 GHz	Start Freq	2.38700000 GHz	Stop Freq	2.43700000 GHz	CF Step	5.00000000 MHz	Auto	Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel																	
Center Freq	2.41200000 GHz																
Start Freq	2.38700000 GHz																
Stop Freq	2.43700000 GHz																
CF Step	5.00000000 MHz																
Auto	Man																
Freq Offset	0.00000000 Hz																
Signal Track	On Off																
<p>2437</p>	<p>Agilent 19:38:45 Jun 22, 2010 T</p> <p>Ref 20 dBm Atten 30 dB Δ Mkr1 7.92 MHz 0.26 dB</p> <p>#Peak Log 10 dB/ LgAv M1 S2 S3 FC</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 100 kHz #Sweep 100 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <tr><th colspan="2">Marker</th></tr> <tr><td>Select Marker</td><td>1 2 3 4</td></tr> <tr><td>Normal</td><td></td></tr> <tr><td>Delta</td><td></td></tr> <tr><td>Delta Pair (Tracking Ref)</td><td>Ref Δ</td></tr> <tr><td>Span Pair</td><td>Span Center</td></tr> <tr><td>Off</td><td></td></tr> <tr><td>More</td><td>1 of 2</td></tr> </table>	Marker		Select Marker	1 2 3 4	Normal		Delta		Delta Pair (Tracking Ref)	Ref Δ	Span Pair	Span Center	Off		More	1 of 2
Marker																	
Select Marker	1 2 3 4																
Normal																	
Delta																	
Delta Pair (Tracking Ref)	Ref Δ																
Span Pair	Span Center																
Off																	
More	1 of 2																
<p>2462</p>	<p>Agilent 19:40:20 Jun 22, 2010 T</p> <p>Ref 20 dBm Atten 30 dB Δ Mkr1 7.92 MHz 0.68 dB</p> <p>#Peak Log 10 dB/ LgAv M1 S2 S3 FC</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 100 kHz #Sweep 100 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <tr><th colspan="2">Freq/Channel</th></tr> <tr><td>Center Freq</td><td>2.46200000 GHz</td></tr> <tr><td>Start Freq</td><td>2.43700000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.48700000 GHz</td></tr> <tr><td>CF Step</td><td>5.00000000 MHz</td></tr> <tr><td>Auto</td><td>Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On Off</td></tr> </table>	Freq/Channel		Center Freq	2.46200000 GHz	Start Freq	2.43700000 GHz	Stop Freq	2.48700000 GHz	CF Step	5.00000000 MHz	Auto	Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel																	
Center Freq	2.46200000 GHz																
Start Freq	2.43700000 GHz																
Stop Freq	2.48700000 GHz																
CF Step	5.00000000 MHz																
Auto	Man																
Freq Offset	0.00000000 Hz																
Signal Track	On Off																

Mode 4: IEEE 802.11g Link Mode

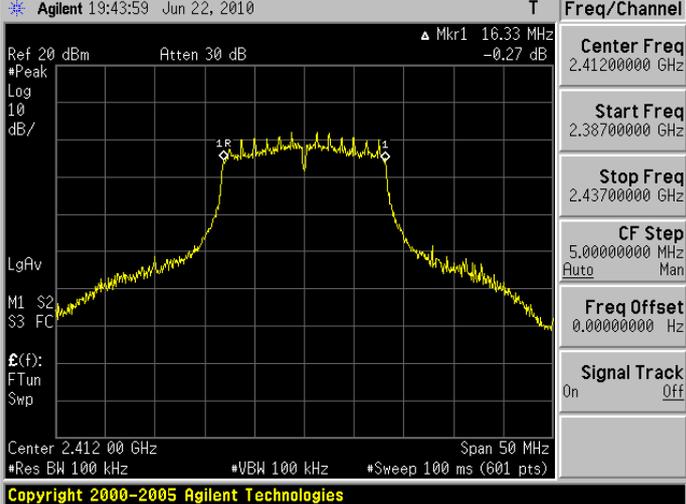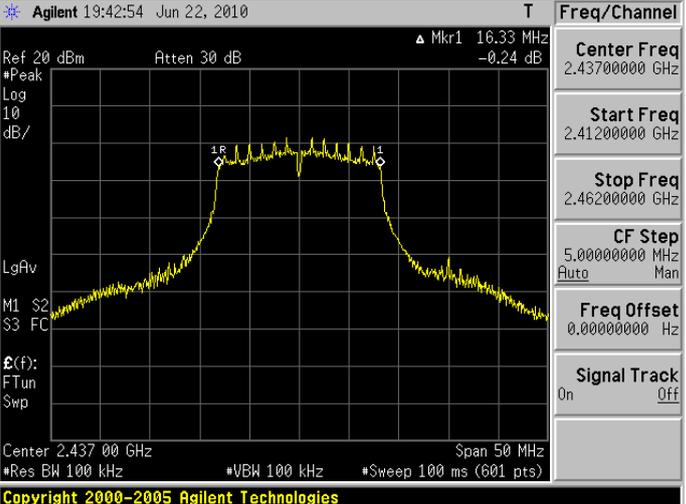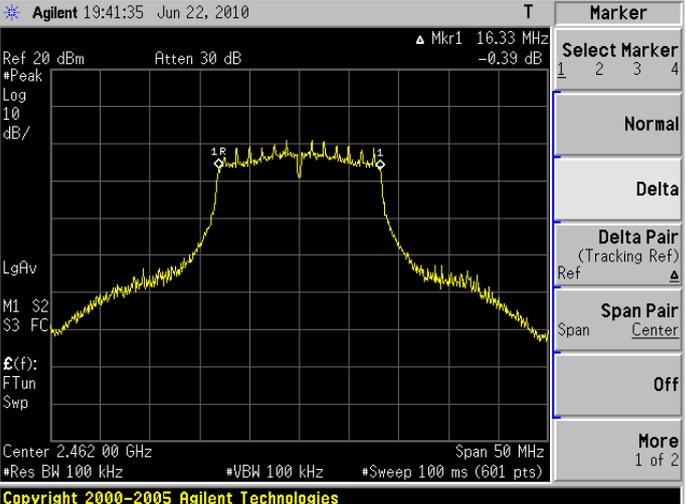
<p style="text-align: center; font-weight: bold;">2412</p>	 <p>Agilent 19:43:59 Jun 22, 2010</p> <p>Ref 20 dBm Atten 30 dB Mkr1 16.33 MHz -0.27 dB</p> <p>Center 2.412 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 100 kHz #Sweep 100 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1" style="float: right; width: 150px;"> <tr><th colspan="2">Freq/Channel</th></tr> <tr><td>Center Freq</td><td>2.41200000 GHz</td></tr> <tr><td>Start Freq</td><td>2.38700000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.43700000 GHz</td></tr> <tr><td>CF Step</td><td>5.00000000 MHz Auto Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On Off</td></tr> </table>	Freq/Channel		Center Freq	2.41200000 GHz	Start Freq	2.38700000 GHz	Stop Freq	2.43700000 GHz	CF Step	5.00000000 MHz Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off		
Freq/Channel																	
Center Freq	2.41200000 GHz																
Start Freq	2.38700000 GHz																
Stop Freq	2.43700000 GHz																
CF Step	5.00000000 MHz Auto Man																
Freq Offset	0.00000000 Hz																
Signal Track	On Off																
<p style="text-align: center; font-weight: bold;">2437</p>	 <p>Agilent 19:42:54 Jun 22, 2010</p> <p>Ref 20 dBm Atten 30 dB Mkr1 16.33 MHz -0.24 dB</p> <p>Center 2.437 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 100 kHz #Sweep 100 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1" style="float: right; width: 150px;"> <tr><th colspan="2">Freq/Channel</th></tr> <tr><td>Center Freq</td><td>2.43700000 GHz</td></tr> <tr><td>Start Freq</td><td>2.41200000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.46200000 GHz</td></tr> <tr><td>CF Step</td><td>5.00000000 MHz Auto Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On Off</td></tr> </table>	Freq/Channel		Center Freq	2.43700000 GHz	Start Freq	2.41200000 GHz	Stop Freq	2.46200000 GHz	CF Step	5.00000000 MHz Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off		
Freq/Channel																	
Center Freq	2.43700000 GHz																
Start Freq	2.41200000 GHz																
Stop Freq	2.46200000 GHz																
CF Step	5.00000000 MHz Auto Man																
Freq Offset	0.00000000 Hz																
Signal Track	On Off																
<p style="text-align: center; font-weight: bold;">2462</p>	 <p>Agilent 19:41:35 Jun 22, 2010</p> <p>Ref 20 dBm Atten 30 dB Mkr1 16.33 MHz -0.39 dB</p> <p>Center 2.462 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 100 kHz #Sweep 100 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1" style="float: right; width: 150px;"> <tr><th colspan="2">Marker</th></tr> <tr><td>Select Marker</td><td>1 2 3 4</td></tr> <tr><td>Normal</td><td></td></tr> <tr><td>Delta</td><td></td></tr> <tr><td>Delta Pair (Tracking Ref)</td><td>Ref ▲</td></tr> <tr><td>Span Pair</td><td>Span Center</td></tr> <tr><td>Off</td><td></td></tr> <tr><td>More</td><td>1 of 2</td></tr> </table>	Marker		Select Marker	1 2 3 4	Normal		Delta		Delta Pair (Tracking Ref)	Ref ▲	Span Pair	Span Center	Off		More	1 of 2
Marker																	
Select Marker	1 2 3 4																
Normal																	
Delta																	
Delta Pair (Tracking Ref)	Ref ▲																
Span Pair	Span Center																
Off																	
More	1 of 2																

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

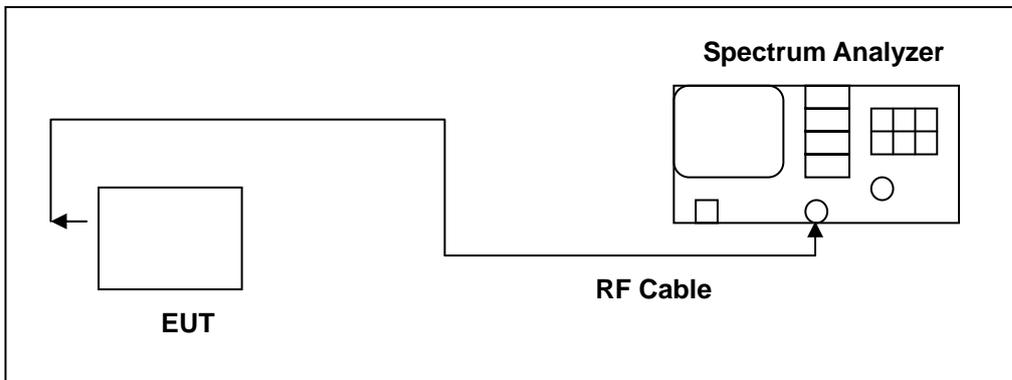

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	⁽²⁾
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output pass band. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$




Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

8.5. Test Result

Model	PC49120		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	06/22/2010	Test Site	TE06
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-8.10	< 8	
2437	-7.22	< 8	
2462	-9.26	< 8	

Model	PC49120		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	06/22/2010	Test Site	TE06
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2412	-11.42	< 8	
2437	-12.76	< 8	
2462	-13.84	< 8	

8.6. Test Graphs

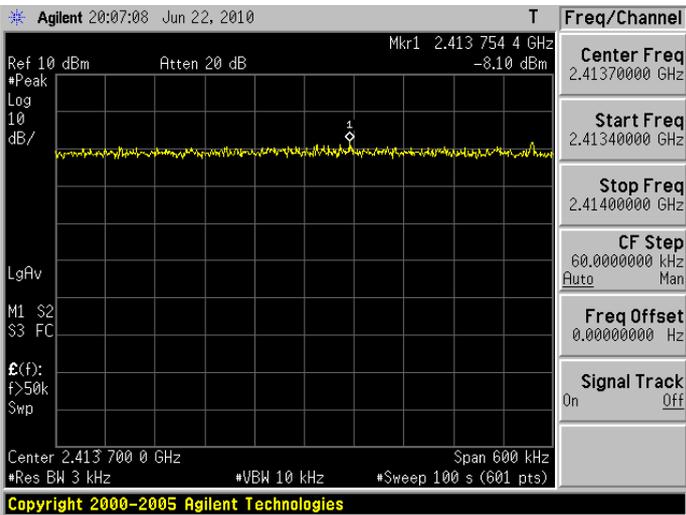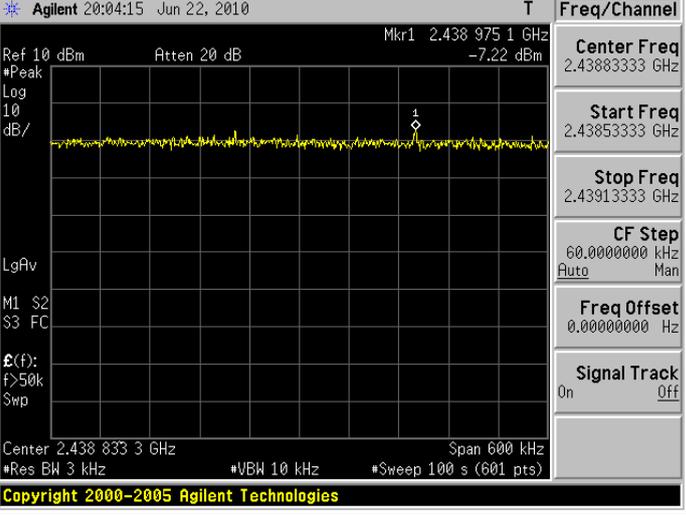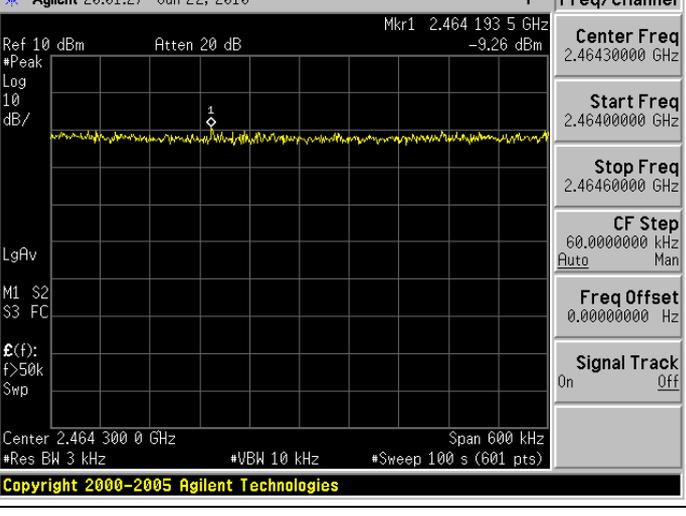Mode 3: IEEE 802.11b Link Mode	
2412	
2437	
2462	


Mode 4: IEEE 802.11g Link Mode															
2412	<p>Agilent 19:49:40 Jun 22, 2010 R T</p> <p>Mkr1 2.410 697 1 GHz -11.42 dBm</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>LgAv</p> <p>M1 S2 S3 FC</p> <p>Ⓕ(f): f>50k Swp</p> <p>Center 2.410 466 7 GHz Span 600 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <tr><th colspan="2">Freq/Channel</th></tr> <tr><td>Center Freq</td><td>2.41046667 GHz</td></tr> <tr><td>Start Freq</td><td>2.41016667 GHz</td></tr> <tr><td>Stop Freq</td><td>2.41076667 GHz</td></tr> <tr><td>CF Step</td><td>60.0000000 kHz Auto Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On Off</td></tr> </table>	Freq/Channel		Center Freq	2.41046667 GHz	Start Freq	2.41016667 GHz	Stop Freq	2.41076667 GHz	CF Step	60.0000000 kHz Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel															
Center Freq	2.41046667 GHz														
Start Freq	2.41016667 GHz														
Stop Freq	2.41076667 GHz														
CF Step	60.0000000 kHz Auto Man														
Freq Offset	0.00000000 Hz														
Signal Track	On Off														
2437	<p>Agilent 19:55:53 Jun 22, 2010 T</p> <p>Mkr1 2.437 290 9 GHz -12.76 dBm</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>LgAv</p> <p>M1 S2 S3 FC</p> <p>Ⓕ(f): f>50k Swp</p> <p>Center 2.437 266 7 GHz Span 600 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <tr><th colspan="2">Freq/Channel</th></tr> <tr><td>Center Freq</td><td>2.43726667 GHz</td></tr> <tr><td>Start Freq</td><td>2.43696667 GHz</td></tr> <tr><td>Stop Freq</td><td>2.43756667 GHz</td></tr> <tr><td>CF Step</td><td>60.0000000 kHz Auto Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On Off</td></tr> </table>	Freq/Channel		Center Freq	2.43726667 GHz	Start Freq	2.43696667 GHz	Stop Freq	2.43756667 GHz	CF Step	60.0000000 kHz Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel															
Center Freq	2.43726667 GHz														
Start Freq	2.43696667 GHz														
Stop Freq	2.43756667 GHz														
CF Step	60.0000000 kHz Auto Man														
Freq Offset	0.00000000 Hz														
Signal Track	On Off														
2462	<p>Agilent 19:58:32 Jun 22, 2010 T</p> <p>Mkr1 2.464 481 0 GHz -13.84 dBm</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/</p> <p>LgAv</p> <p>M1 S2 S3 FC</p> <p>Ⓕ(f): f>50k Swp</p> <p>Center 2.464 533 3 GHz Span 600 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <tr><th colspan="2">Freq/Channel</th></tr> <tr><td>Center Freq</td><td>2.46453333 GHz</td></tr> <tr><td>Start Freq</td><td>2.46423333 GHz</td></tr> <tr><td>Stop Freq</td><td>2.46483333 GHz</td></tr> <tr><td>CF Step</td><td>60.0000000 kHz Auto Man</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On Off</td></tr> </table>	Freq/Channel		Center Freq	2.46453333 GHz	Start Freq	2.46423333 GHz	Stop Freq	2.46483333 GHz	CF Step	60.0000000 kHz Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel															
Center Freq	2.46453333 GHz														
Start Freq	2.46423333 GHz														
Stop Freq	2.46483333 GHz														
CF Step	60.0000000 kHz Auto Man														
Freq Offset	0.00000000 Hz														
Signal Track	On Off														

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

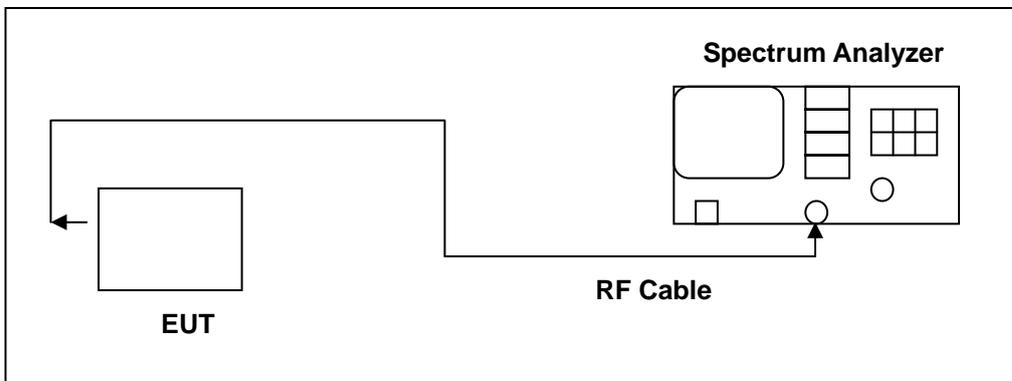

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/14/2009	⁽²⁾
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.


All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 1, 6, 11)

9.5. Test Result

Model	PC49120			
Test Item	Out of Band Conducted Emissions			
Test Mode	Mode 3: IEEE 802.11b Link Mode			
Date of Test	06/22/2010		Test Site	TE06
Frequency (MHz)	Fundamental (dB μ V)	Measurement (dB μ V)	Limit (dB μ V)	Margin
2412	10.17	-30.98	-9.83	-21.15
2437	9.86	-29.70	-10.14	-19.56
2462	9.63	-31.08	-10.37	-20.71

Model	PC49120			
Test Item	Out of Band Conducted Emissions			
Test Mode	Mode 4: IEEE 802.11g Link Mode			
Date of Test	06/22/2010		Test Site	TE06
Frequency (MHz)	Fundamental (dB μ V)	Measurement (dB μ V)	Limit (dB μ V)	Margin
2412	7.17	-30.48	-12.83	-17.65
2437	9.86	-29.70	-10.14	-19.56
2462	9.63	-31.08	-10.37	-20.71

9.6. Test Graphs

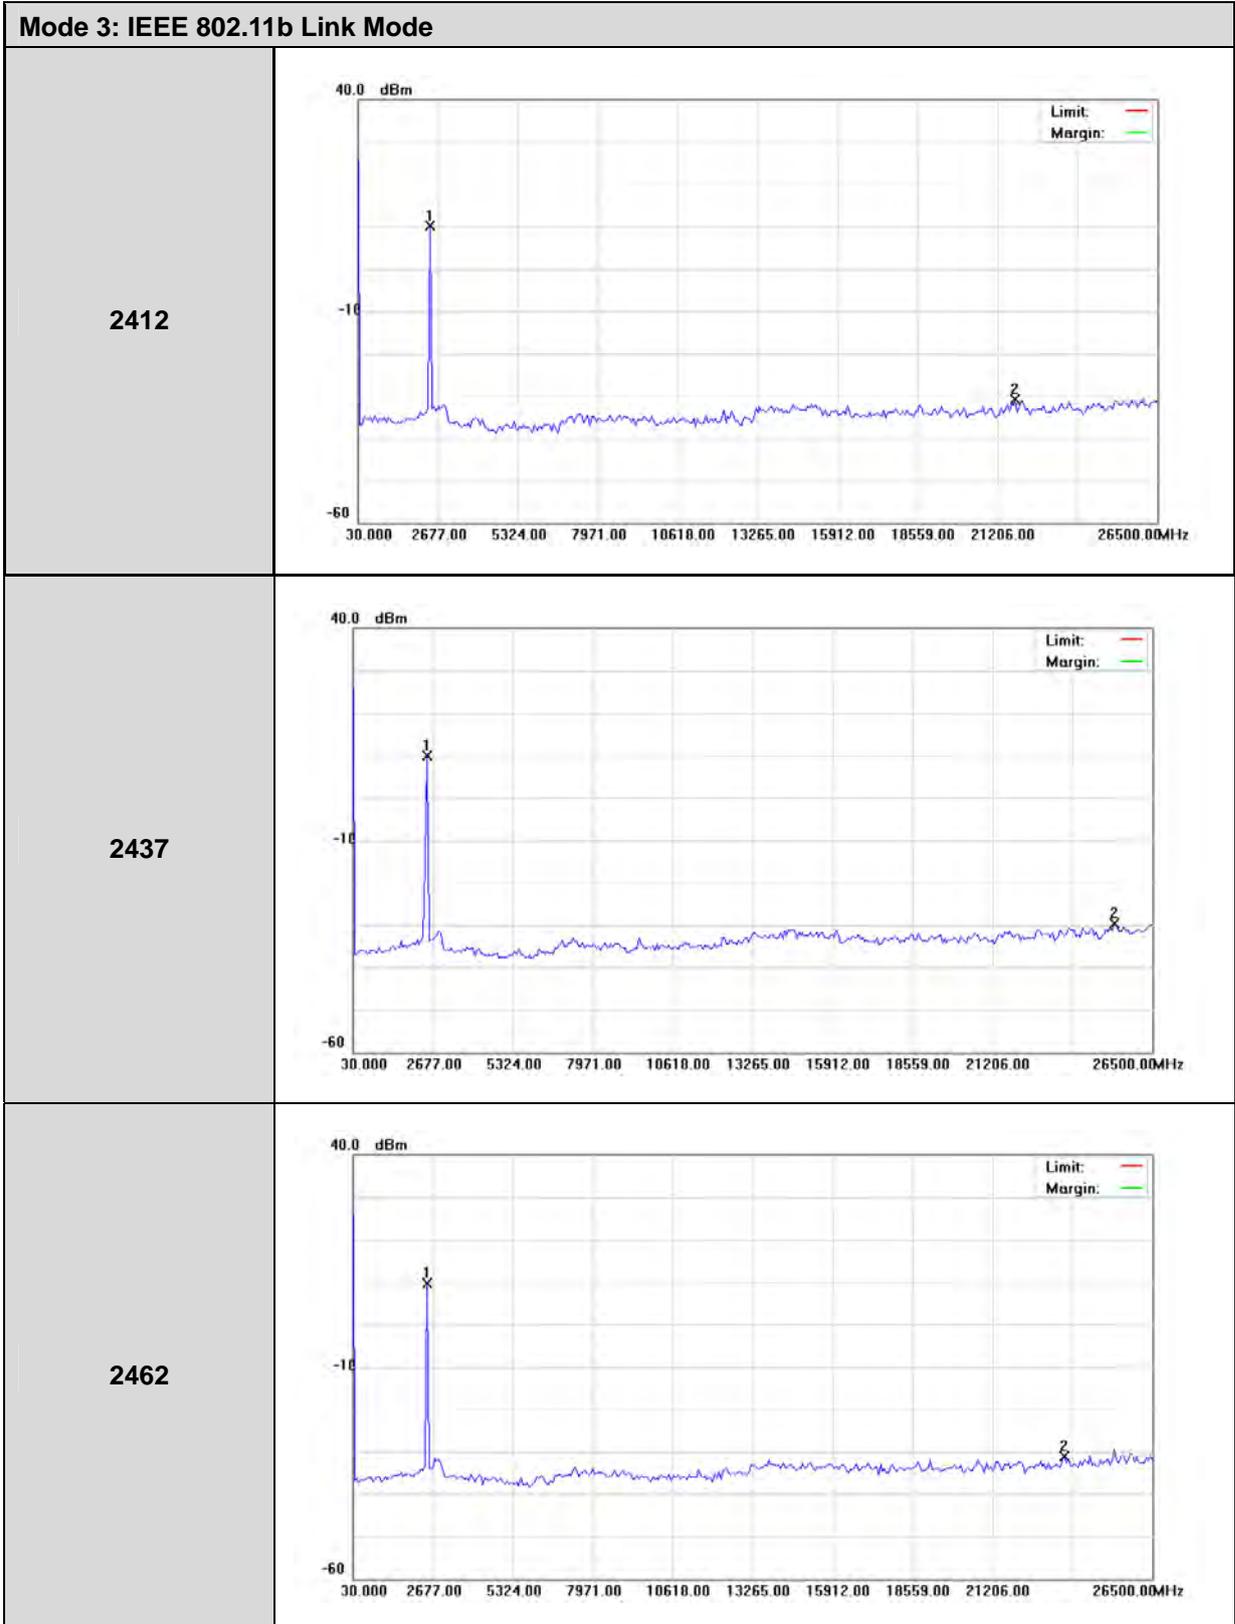


Mode 4: IEEE 802.11g Link Mode	
2412	
2437	
2462	

10 Band Edges Measurement

10.1. Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2. Test Setup

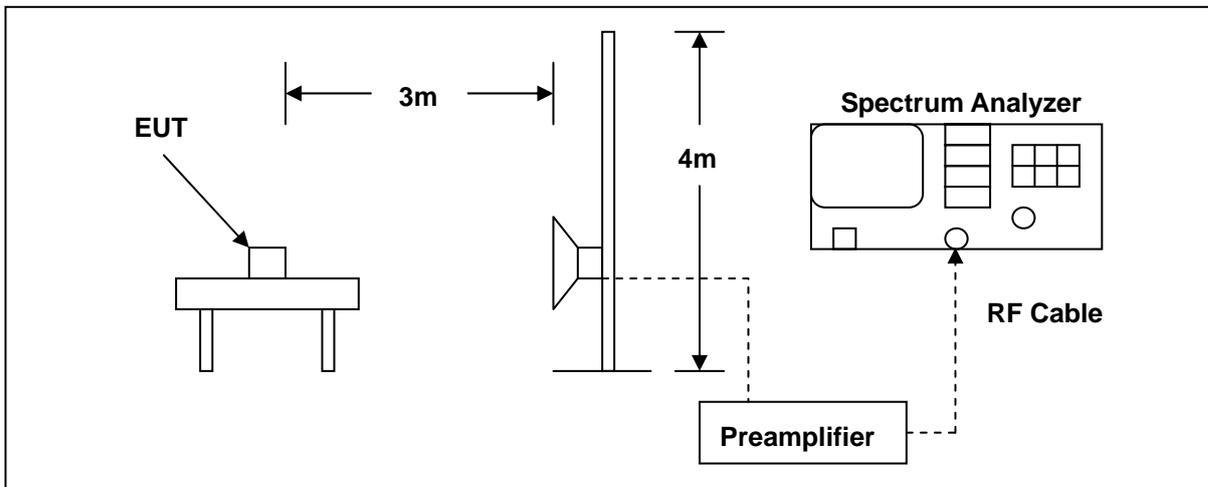

10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	06/23/2009	(2)
Pre Amplifier	Agilent	8449B	3008A02237	07/01/2009	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	07/01/2009	(2)
Test Site	ATL	TE06	TE06	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.


The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.


10.5. Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	2010/06/23
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

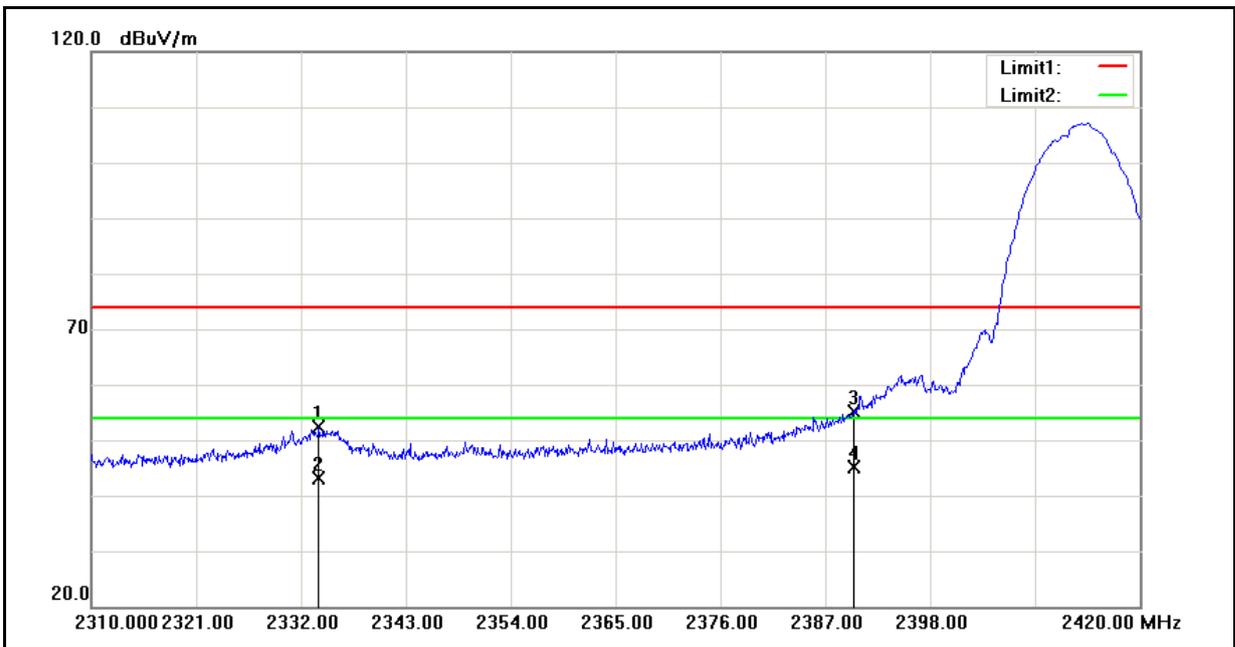


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2333.925	52.79	-0.48	52.31	74.00	-21.69	peak
2	2333.925	43.52	-0.48	43.04	54.00	-10.96	AVG
3	2390.000	55.35	-0.24	55.11	74.00	-18.89	peak
4	2390.000	45.33	-0.24	45.09	54.00	-8.91	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	2010/06/23
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

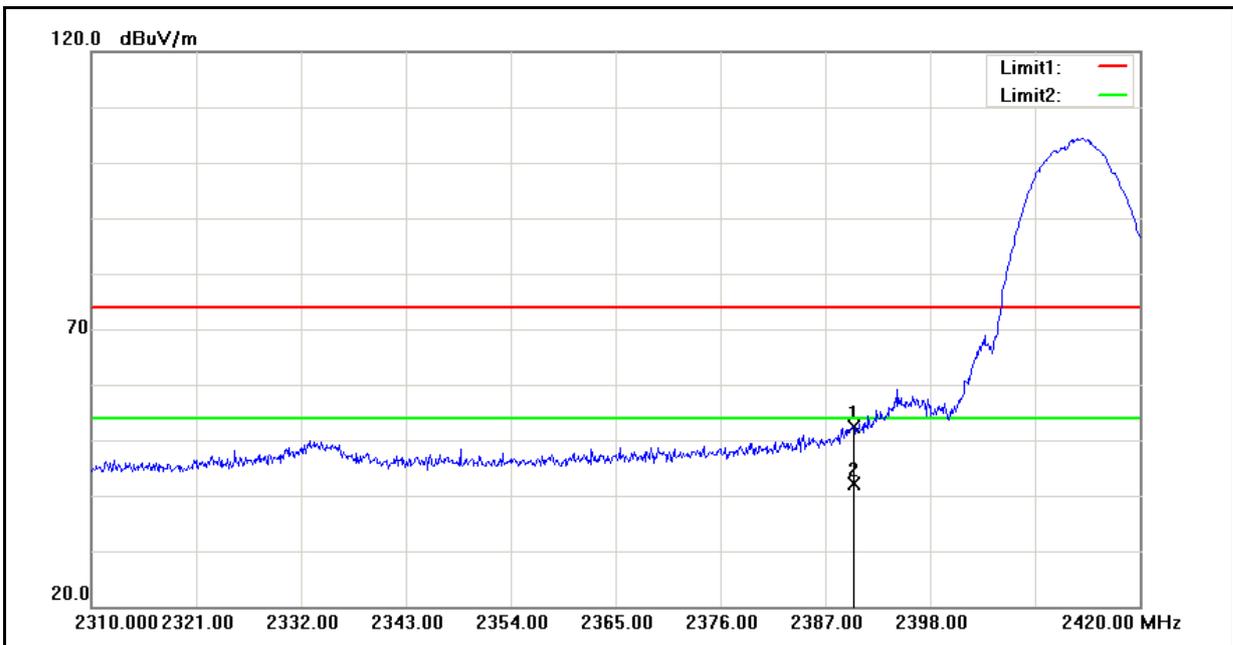


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	52.57	-0.24	52.33	74.00	-21.67	peak
2	2390.000	42.36	-0.24	42.12	54.00	-11.88	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	2010/06/23
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

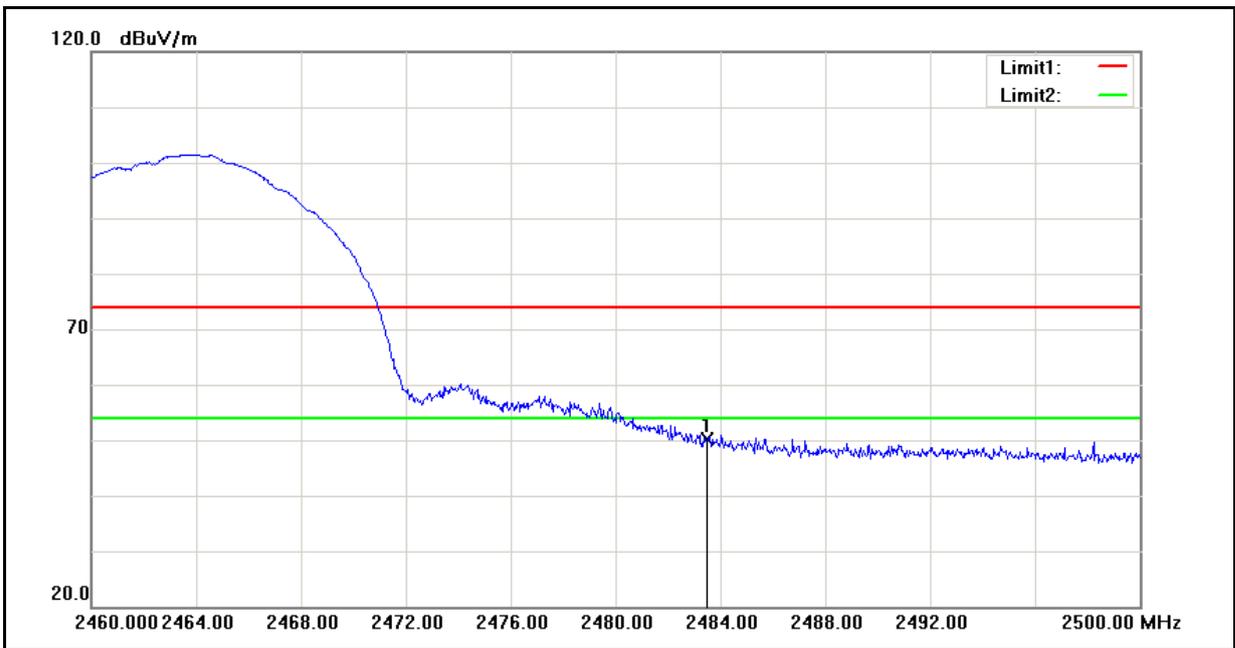


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.00	0.15	50.15	74.00	-23.85	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	2010/06/23
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

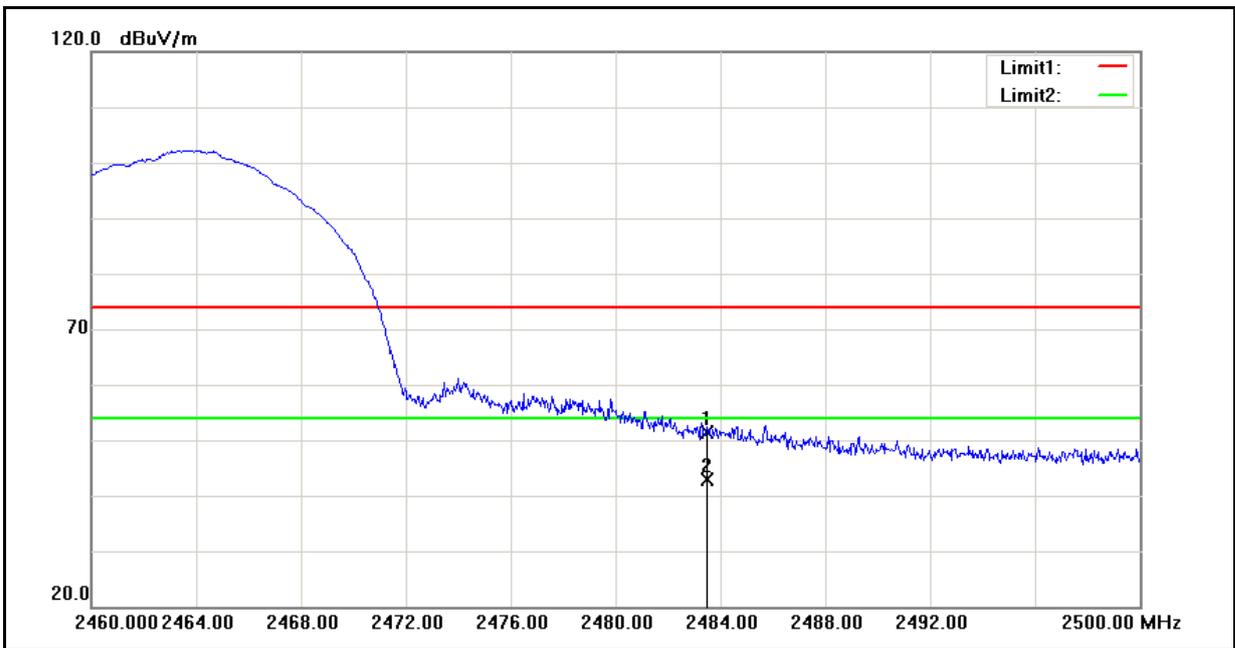


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	51.24	0.15	51.39	74.00	-22.61	peak
2	2483.500	42.62	0.15	42.77	54.00	-11.23	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	2010/06/23
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

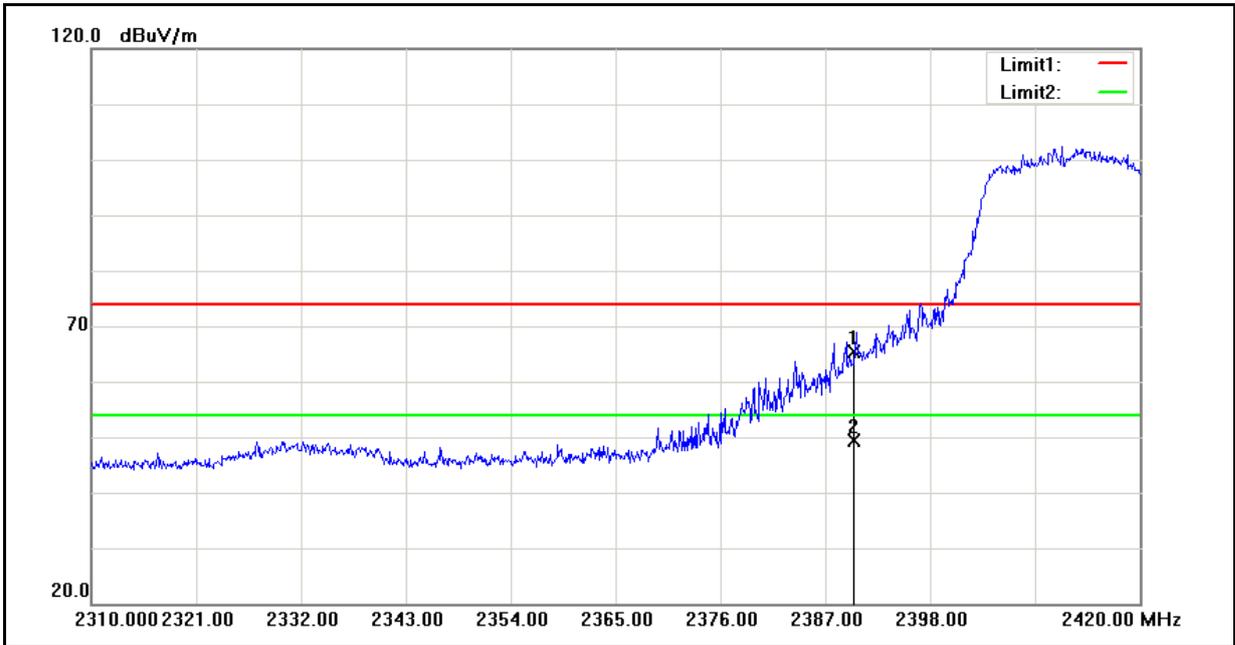


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	65.70	-0.24	65.46	74.00	-8.54	peak
2	2390.000	49.53	-0.24	49.29	54.00	-4.71	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	2010/06/23
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

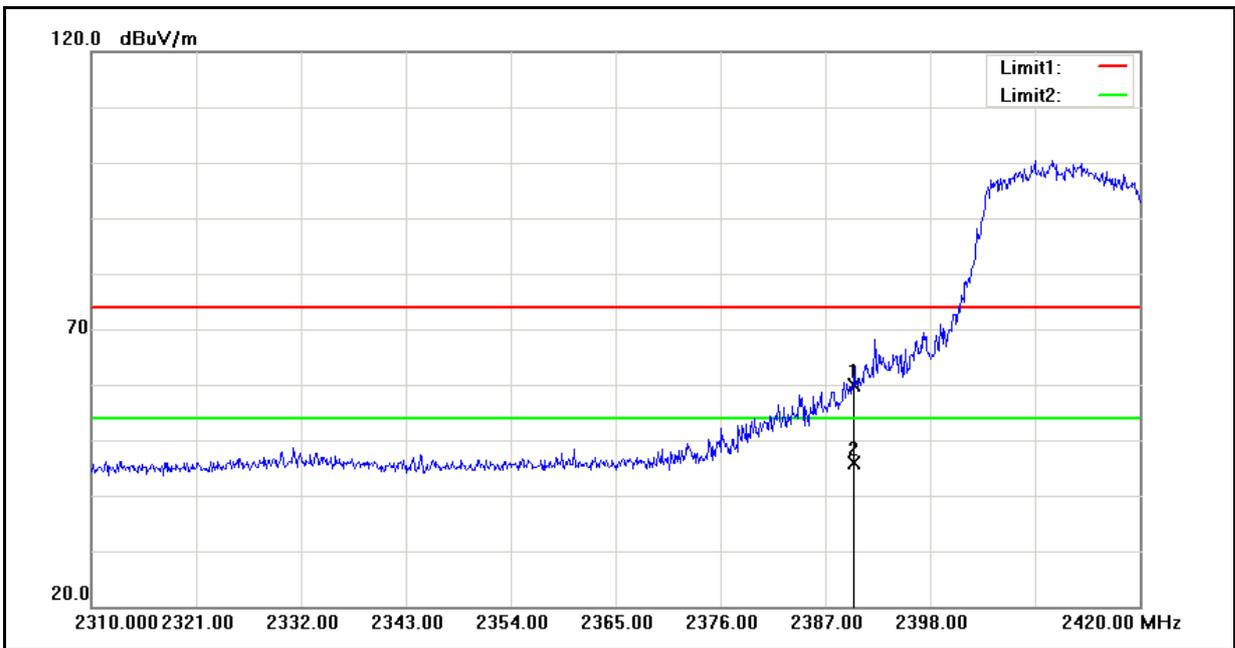


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	60.23	-0.24	59.99	74.00	-14.01	peak
2	2390.000	46.18	-0.24	45.94	54.00	-8.06	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	2010/06/23
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

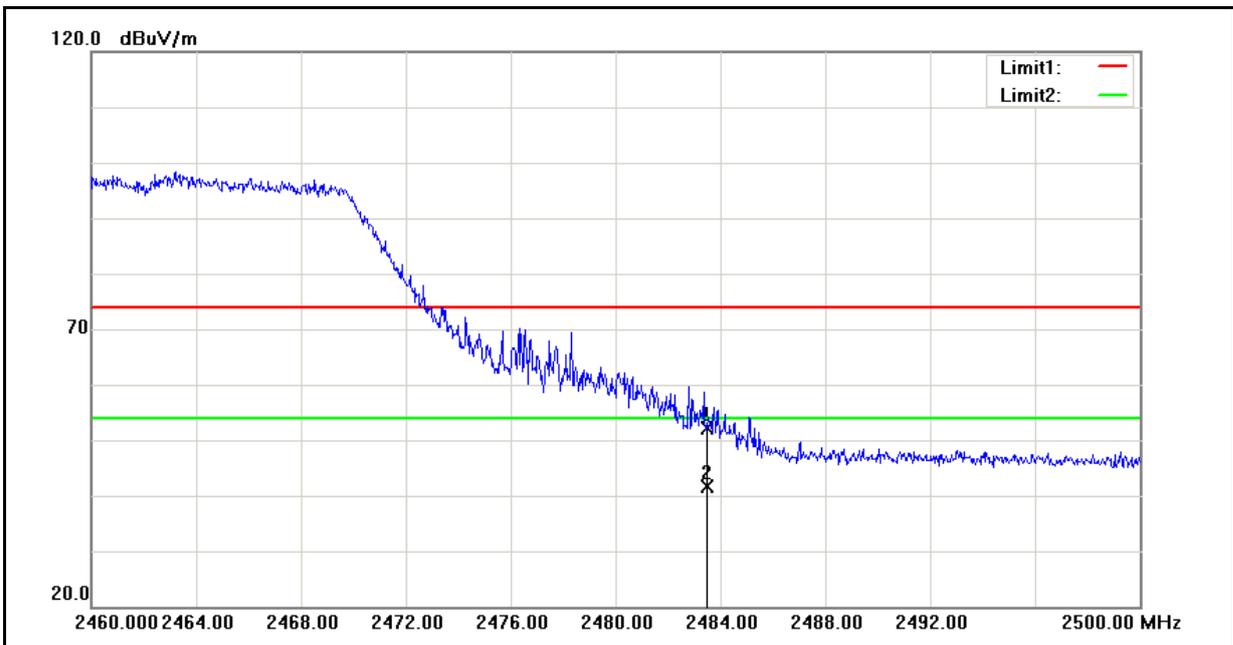

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	51.94	0.15	52.09	74.00	-21.91	peak
2	2483.500	41.42	0.15	41.57	54.00	-12.43	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model:	PC49120	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	2010/06/23
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

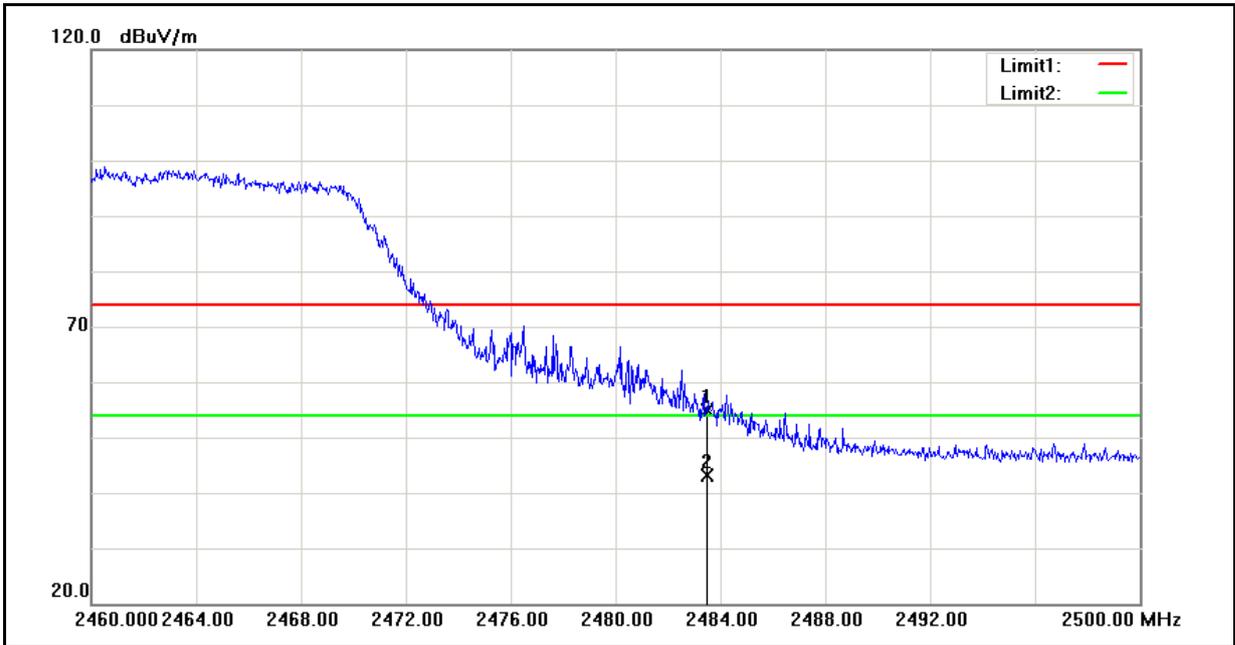

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.79	0.15	54.94	74.00	-19.06	peak
2	2483.500	42.93	0.15	43.08	54.00	-10.92	AVG

11 Antenna Measurement

11.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Antenna Connector Construction

The antenna used in this product is **PIFA antenna**. And the maximum Gain of this antenna is only **0 dBi**.