


BRC 540

User guide



Removing the back cover

1. With the phone switched off, hold your phone securely with the front facing down.
2. With your thumb or finger, lift the back cover off from the notch on the top of your phone.

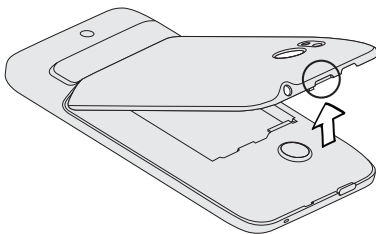

Replacing the back cover

1. Align the tabs of the back cover with the slots at the back of the phone.
2. Push the back cover towards the phone. You'll hear a click when the back cover is locked in place.



Your phone's antenna is placed underneath the back cover. We recommend that you secure the back cover to the phone's back panel to get the best radio reception for your phone.

Specification

Receive operational frequency:	100KHz - 200KHz
Supply charging voltage	5V ± 0.2V to the battery charging subsystem.
Charging current	500mA
Operating temperature range	-2°C to 60°C
Integrated charge current	2.5W output
Applications	Smart phone Wireless Power Applications for product FCC ID NM8PG05100

*The battery cover features RX charging only.