



# FCC RF Test Report

**APPLICANT** : HTC Corporation  
**EQUIPMENT** : Smartphone  
**MODEL NAME** : PG76110  
**FCC ID** : NM8PG76110  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : Digital Spread Spectrum (DSS)

The product was received on Jan. 25, 2011 and completely tested on Mar. 10, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Roy Wu / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : NM8PG76110

Page Number : 1 of 57

Report Issued Date : Apr. 25, 2011

Report Version : Rev. 01



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 RF Output Power ..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 RF Utility ..... 9

**3 TEST RESULT ..... 10**

    3.1 Number of Channel Measurement ..... 10

    3.2 20dB and 99% Bandwidth Measurement ..... 12

    3.3 Hopping Channel Separation Measurement ..... 25

    3.4 Dwell Time Measurement..... 28

    3.5 Peak Output Power Measurement ..... 30

    3.6 Band Edges Measurement ..... 33

    3.7 Spurious Emission Measurement..... 37

    3.8 AC Conducted Emission Measurement..... 41

    3.9 Radiated Emission Measurement..... 45

    3.10 Antenna Requirements ..... 54

**4 LIST OF MEASURING EQUIPMENT..... 55**

**5 UNCERTAINTY OF EVALUATION..... 56**

**APPENDIX A. SETUP PHOTOGRAPHS**



**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.2	-	Gen 4.4.1	99% Bandwidth	-	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 10.4 dB at 0.28 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.83 dB at 2483.5 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

HTC Corporation

No. 23, Xinghua Rd., Taoyuan 330, Taiwan

## 1.2 Manufacturer

HTC Corporation

No. 23, Xinghua Rd., Taoyuan 330, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smartphone
Model Name	PG76110
FCC ID	NM8PG76110
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Sample 1	EUT with LCM 1 and Camera 1
Sample 2	EUT with LCM 2 and Camera 2
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : -0.29 dBm (0.001 W) Bluetooth EDR (2Mbps) : 2.55 dBm (0.002 W) Bluetooth EDR (3Mbps) : 0.25 dBm (0.001 W)
Antenna Type	PIFA Antenna with gain 0 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi$ /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

### Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO05-HY	03CH06-HY	722060/4086B-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
6.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi$ /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	-2.19 dBm	0.38 dBm	-1.51 dBm
Ch39	2441MHz	-0.69 dBm	1.95 dBm	-0.09 dBm
Ch78	2480MHz	-0.29 dBm	<b>2.55 dBm</b>	0.25 dBm

**Remark:**

1. The data rate was set in 2Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

## 2.2 Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.


<b>Test Cases</b>	
<b>Test Item</b>	<b>Data Rate / Modulation</b>
	<b>Bluetooth 1Mbps GFSK</b>
	<b>Bluetooth EDR 2Mbps <math>\pi</math>/4-DQPSK</b>
	<b>Bluetooth EDR 3Mbps 8-DPSK</b>
<b>Conducted TCs</b>	Mode 1: Bluetooth 1Mbps_CH00_2402 MHz Mode 2: Bluetooth 1Mbps_CH39_2441 MHz Mode 3: Bluetooth 1Mbps_CH78_2480 MHz Mode 4: Bluetooth 2Mbps_CH00_2402 MHz Mode 5: Bluetooth 2Mbps_CH39_2441 MHz Mode 6: Bluetooth 2Mbps_CH78_2480 MHz Mode 7: Bluetooth 3Mbps_CH00_2402 MHz Mode 8: Bluetooth 3Mbps_CH39_2441 MHz Mode 9: Bluetooth 3Mbps_CH78_2480 MHz
<b>Radiated TCs</b>	Mode 1: Bluetooth 2Mbps_CH00_2402 MHz + TC for Sample 1 Mode 2: Bluetooth 2Mbps_CH39_2441 MHz + TC for Sample 1 Mode 3: Bluetooth 2Mbps_CH78_2480 MHz + TC for Sample 1
<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1 Mode 2 : WCDMA Band II Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 2 Mode 3 : WCDMA Band II Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 2 + USB Cable 2 (Charging from Adapter 3) for Sample 2
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. TC stands for Test Configuration, and consists of USB Cable 1, battery 1, earphone and adapter 1.</li> <li>2. For radiated TCs, the data rate was set in 2Mbps due to the highest RF output power; only the data of these modes was reported.</li> <li>3. For conducted emission, the worst case is mode 2; only the test data of this mode was reported.</li> </ol>	

## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

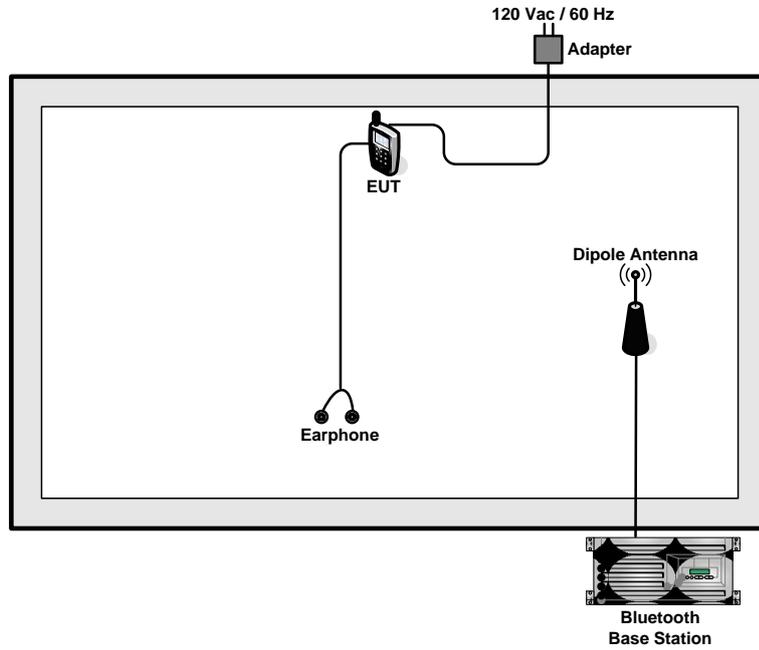

<AC Conducted Emission Mode>

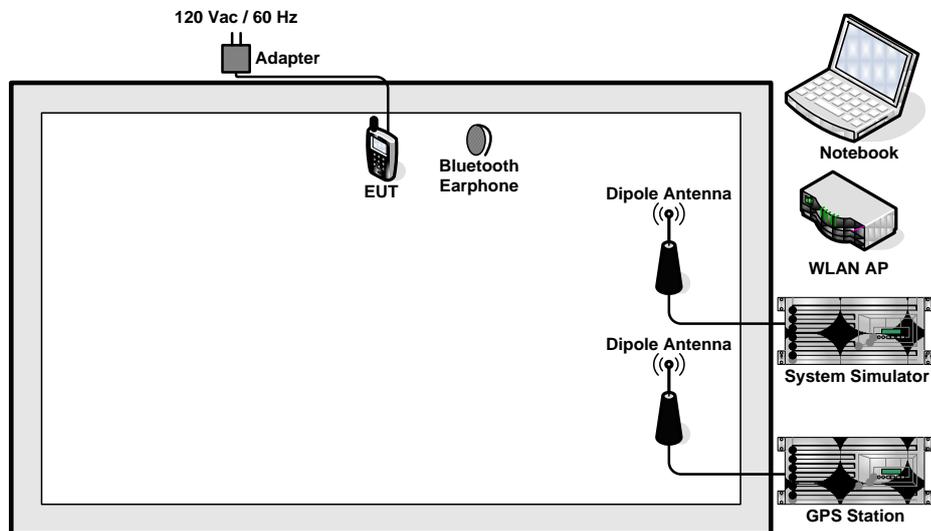

## 2.4 RF Utility

For Bluetooth function, the RF utility, "Bluetooth Test Mode" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto;  
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

##### 3.1.4 Test Setup

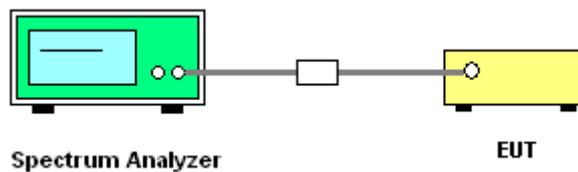


##### 3.1.5 Test Result of Number of Hopping Frequency


<b>Test Mode :</b>	Mode 4~6	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Pinkston Tu	<b>Relative Humidity :</b>	50~53%
<b>Number of Hopping Channels (Channel)</b>		<b>Limits (Channel)</b>	<b>Pass/Fail</b>
79		> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

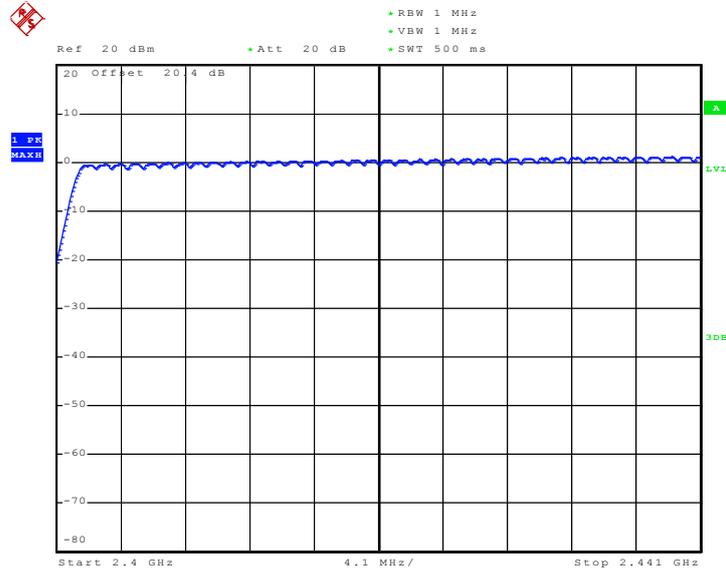

Date: 27.JAN.2011 03:59:41

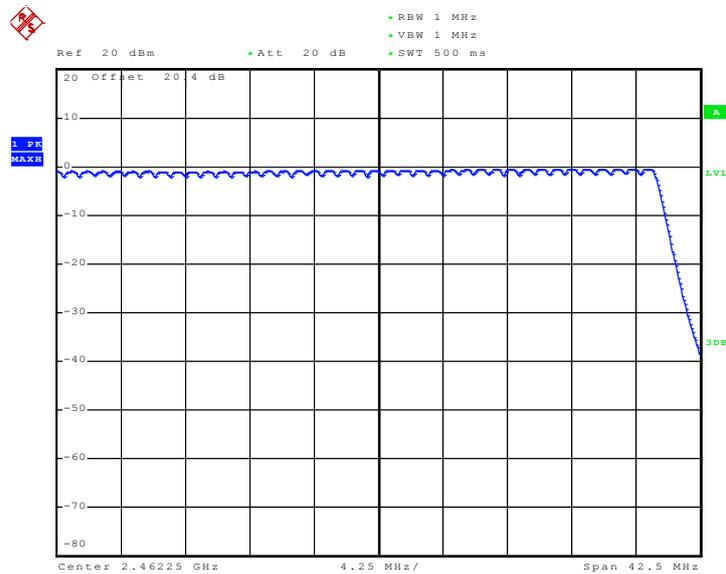

Date: 27.JAN.2011 04:05:46

## 3.2 20dB and 99% Bandwidth Measurement

### 3.2.1 Limit of 20dB Bandwidth

N/A


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

### 3.2.4 Test Setup

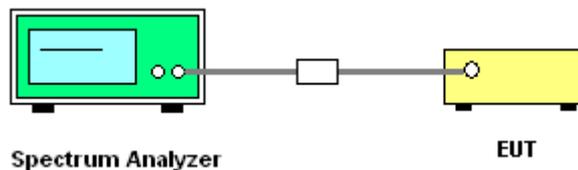




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.912
39	2441	0.936
78	2480	0.944


20 dB Bandwidth Plot on Channel 00

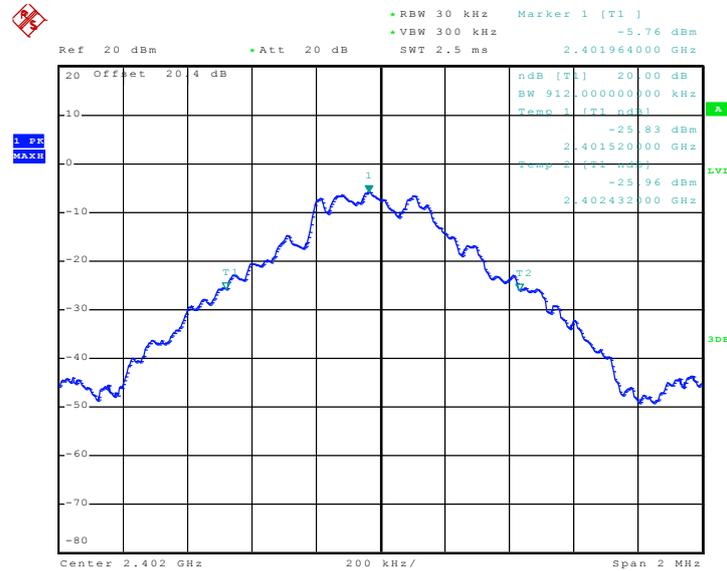

Date: 27.JAN.2011 02:40:08




20 dB Bandwidth Plot on Channel 39

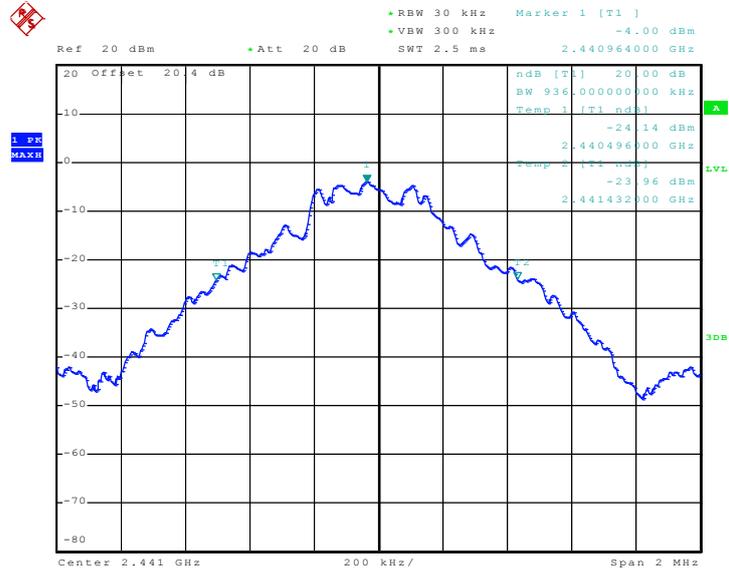

Date: 27.JAN.2011 02:40:19

20 dB Bandwidth Plot on Channel 78

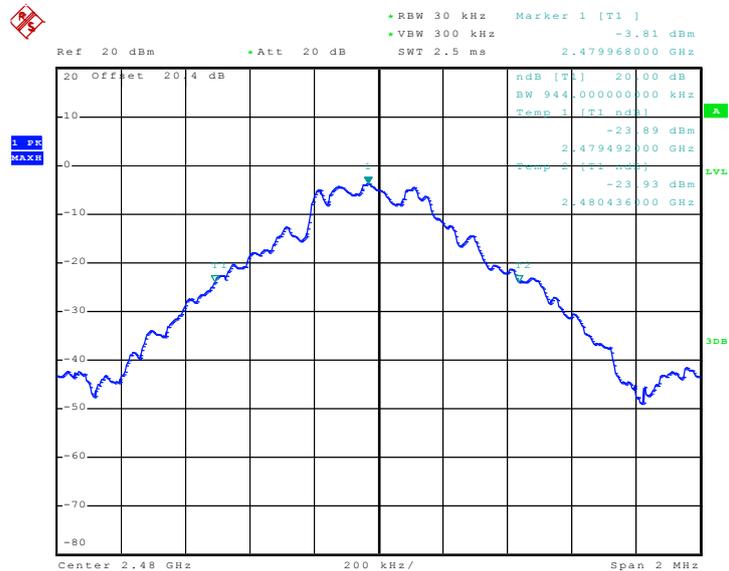


Date: 27.JAN.2011 02:40:32



Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.326
39	2441	1.332
78	2480	1.332


20 dB Bandwidth Plot on Channel 00

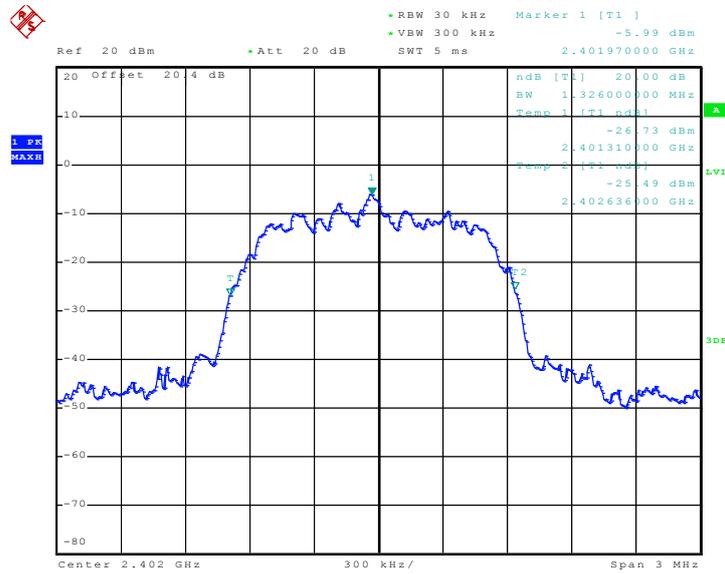

Date: 27.JAN.2011 02:40:43




### 20 dB Bandwidth Plot on Channel 39

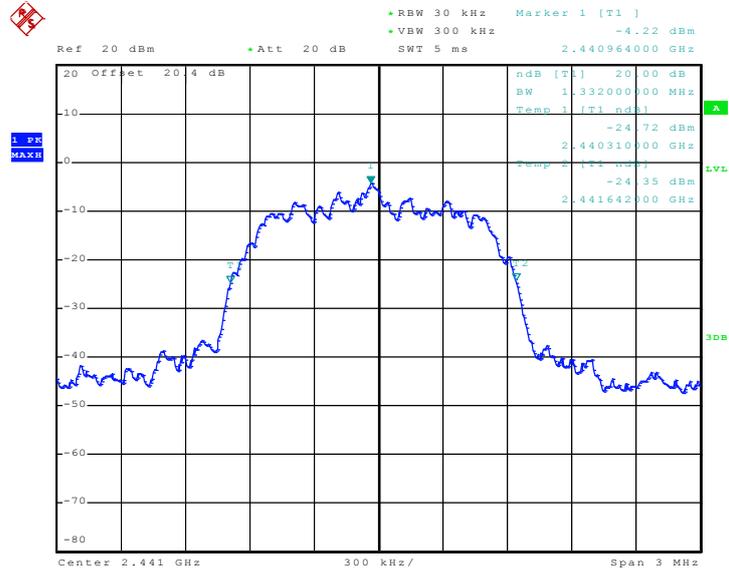

Date: 27.JAN.2011 02:40:55

### 20 dB Bandwidth Plot on Channel 78

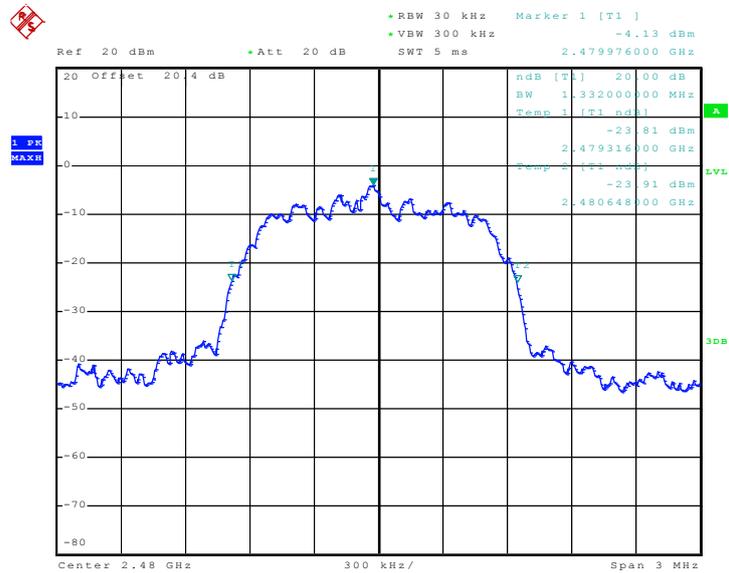


Date: 27.JAN.2011 02:41:07



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.320
39	2441	1.320
78	2480	1.314


20 dB Bandwidth Plot on Channel 00

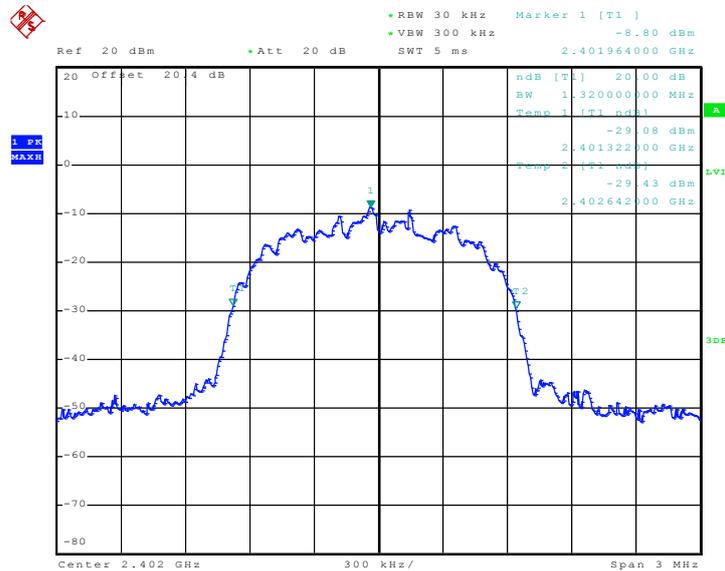

Date: 27.JAN.2011 02:41:19




20 dB Bandwidth Plot on Channel 39

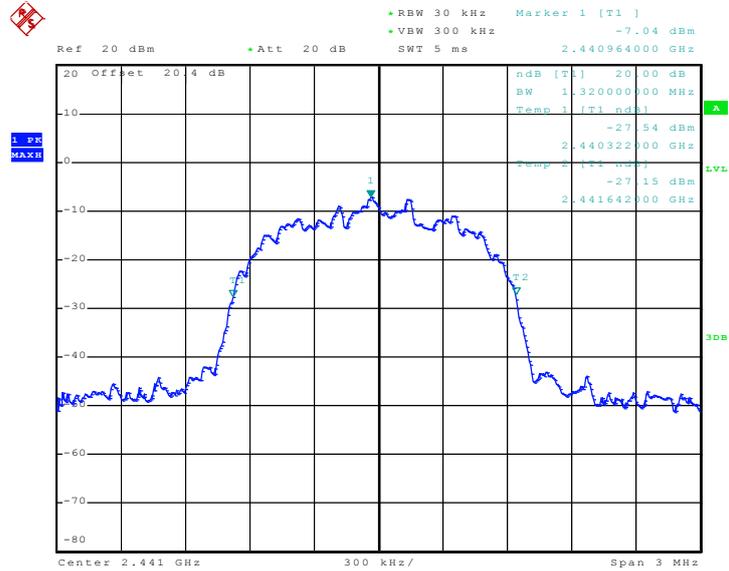

Date: 27.JAN.2011 03:02:27

20 dB Bandwidth Plot on Channel 78

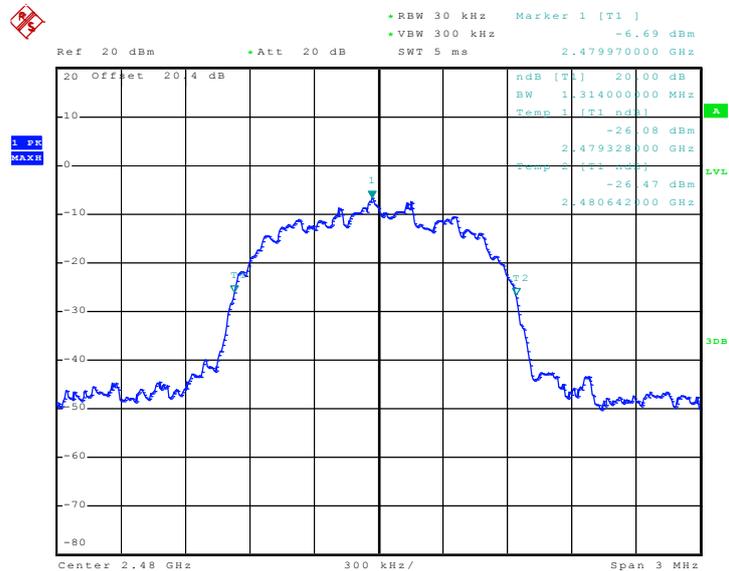

Date: 27.JAN.2011 02:41:43




3.2.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.876
39	2441	0.872
78	2480	0.880


99% Bandwidth Plot on Channel 00

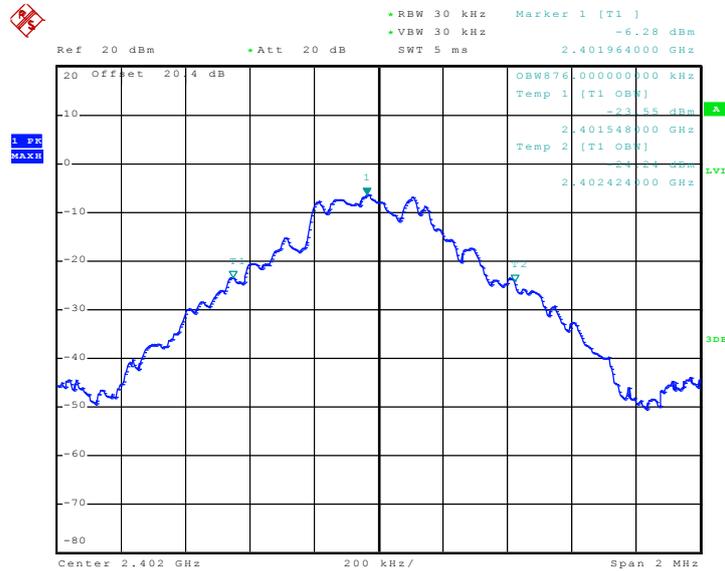

Date: 27.JAN.2011 02:51:53




99% Occupied Bandwidth Plot on Channel 39

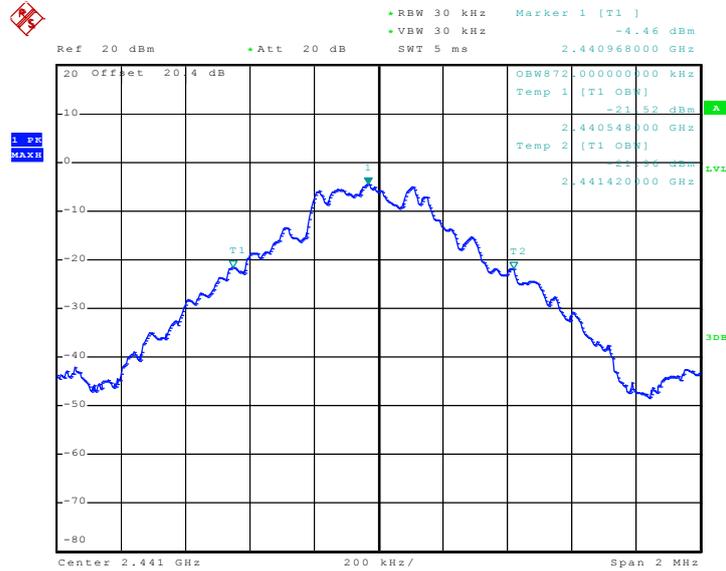

Date: 27.JAN.2011 02:44:39

99% Occupied Bandwidth Plot on Channel 78

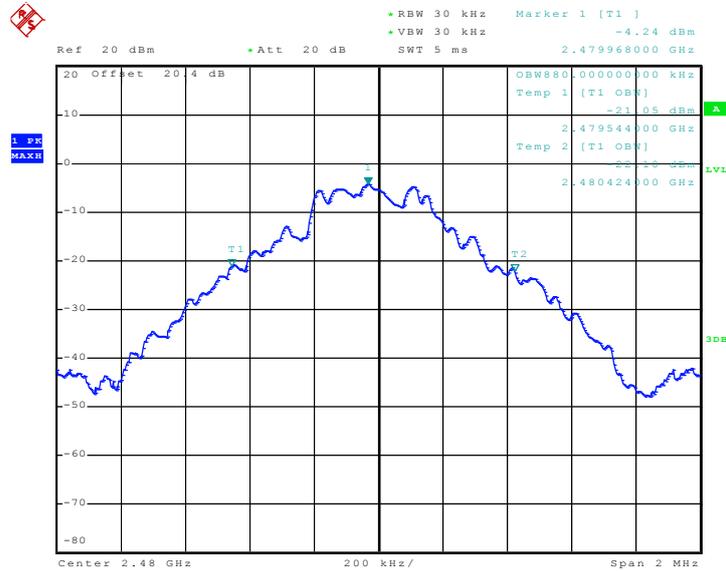


Date: 27.JAN.2011 02:44:50



Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.188
39	2441	1.192
78	2480	1.192

99% Bandwidth Plot on Channel 00

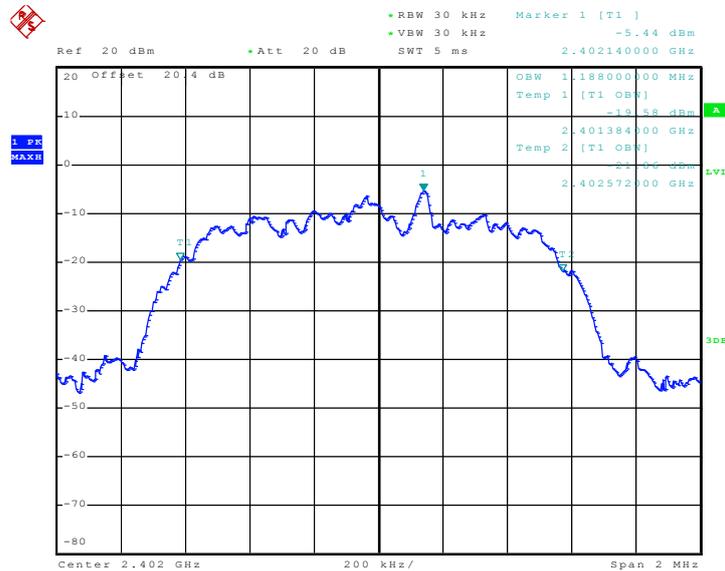

Date: 27.JAN.2011 02:56:24




99% Occupied Bandwidth Plot on Channel 39



Date: 27.JAN.2011 02:45:13

99% Occupied Bandwidth Plot on Channel 78

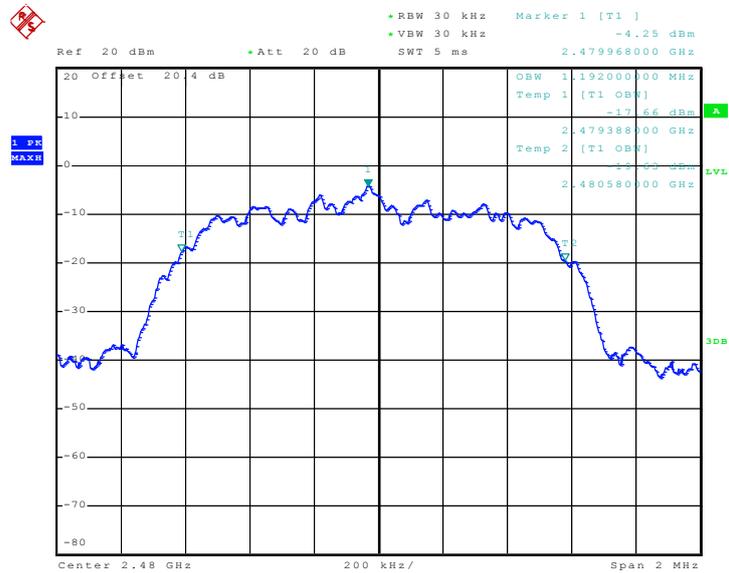


Date: 27.JAN.2011 02:45:25



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.184
39	2441	1.184
78	2480	1.188

99% Bandwidth Plot on Channel 00

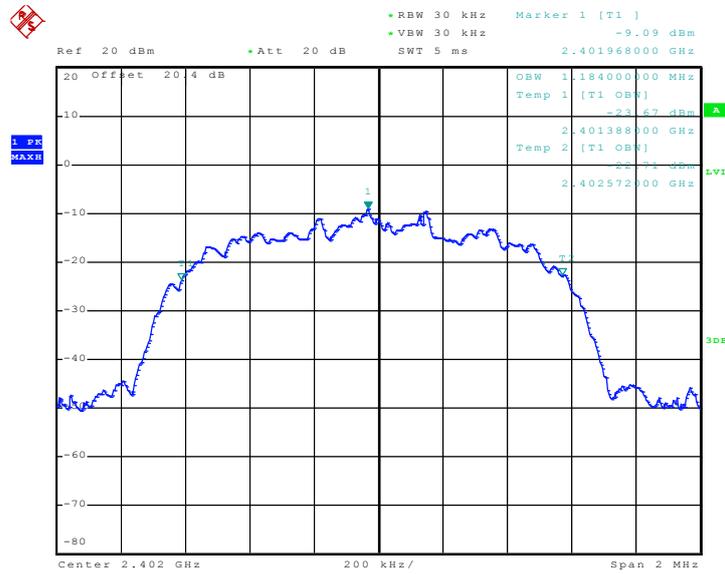

Date: 27.JAN.2011 03:00:40




99% Occupied Bandwidth Plot on Channel 39



Date: 27.JAN.2011 03:01:10

99% Occupied Bandwidth Plot on Channel 78

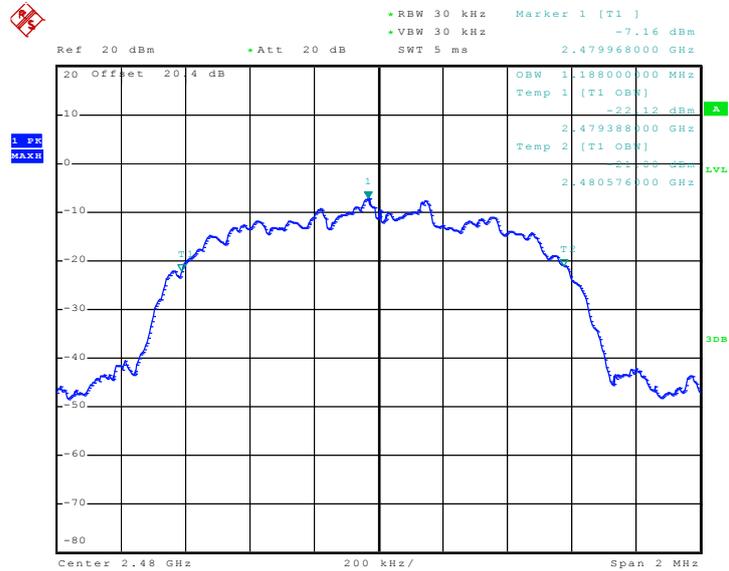

Date: 27.JAN.2011 02:45:59

### 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels; RBW  $\geq$  1% of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.3.4 Test Setup

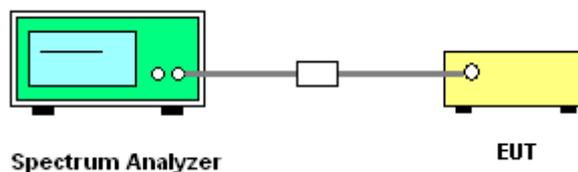




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Pinkston Tu	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.884	Pass
39	2441	1.002	0.888	Pass
78	2480	1.002	0.888	Pass


Channel Separation Plot on Channel 00 - 01

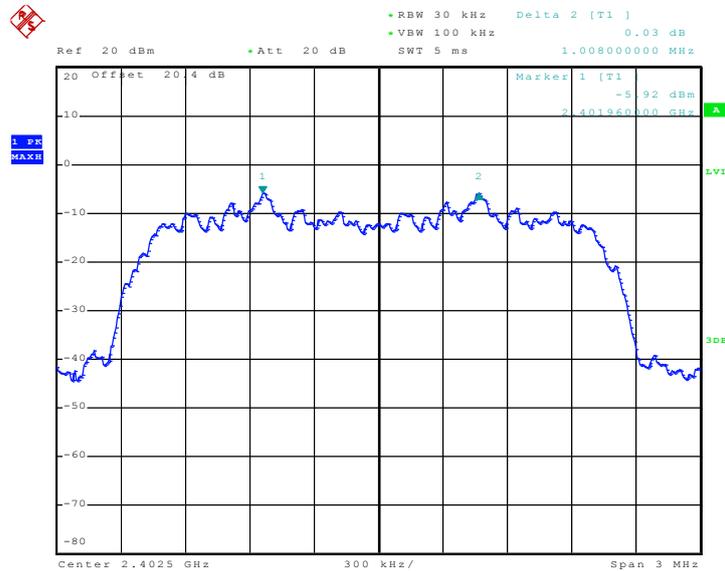

Date: 27.JAN.2011 02:27:10




Channel Separation Plot on Channel 39 - 40

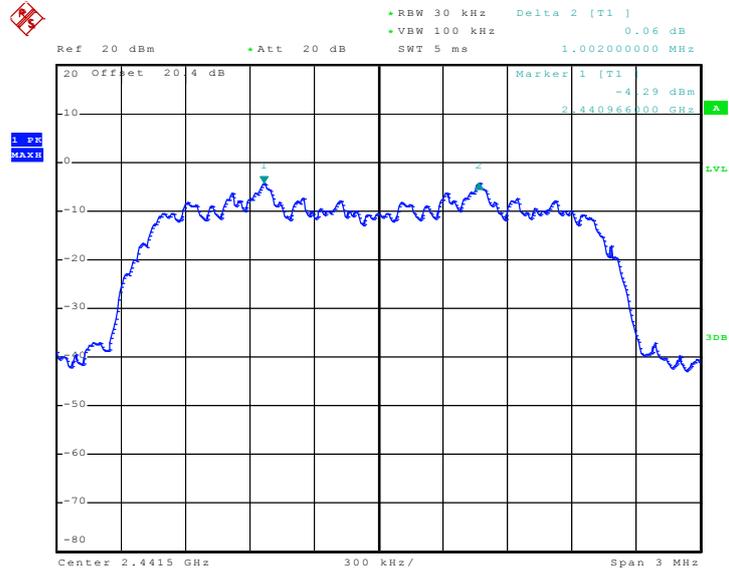

Date: 27.JAN.2011 02:27:53

Channel Separation Plot on Channel 77 - 78

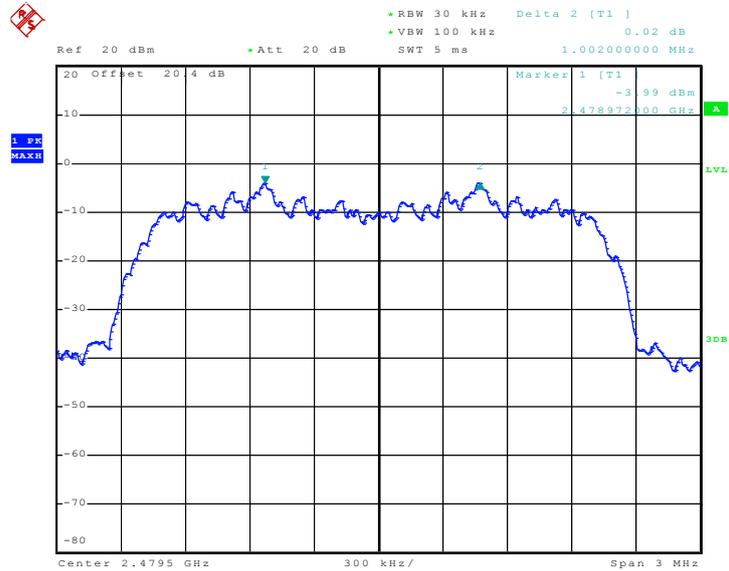

Date: 27.JAN.2011 02:28:29

### 3.4 Dwell Time Measurement

#### 3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

#### 3.4.4 Test Setup

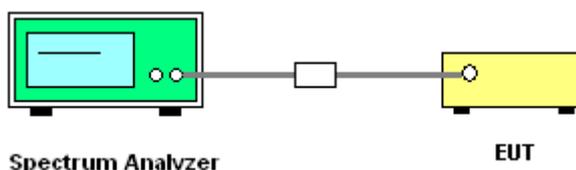

#### 3.4.5 Test Result of Dwell Time


<b>Test Mode :</b>	Mode 5	<b>Temperature :</b>	24~26°C		
<b>Test Engineer :</b>	Pinkston Tu	<b>Relative Humidity :</b>	50~53%		
Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	3.60	3054.00	0.35	0.4	Pass

**Remark:**

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




### 2DH5 Dwell Time (One Pulse) Plot on Channel 39

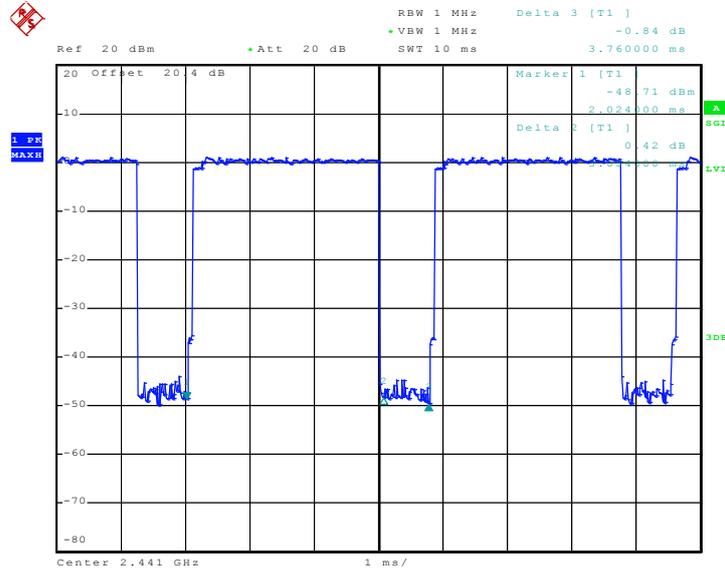

Date: 27.JAN.2011 02:19:02

### 2DH5 Dwell Time (Count Pulses) Plot on Channel 39

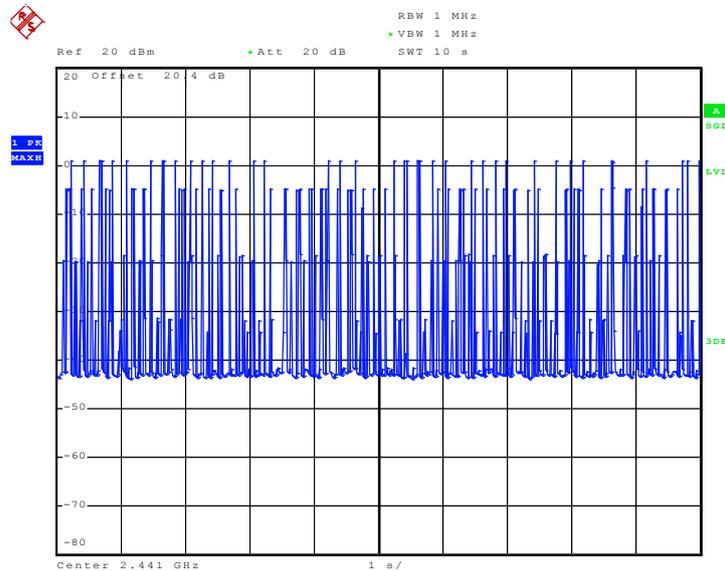

Date: 27.JAN.2011 04:47:09

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (20.97dBm).


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

#### 3.5.4 Test Setup

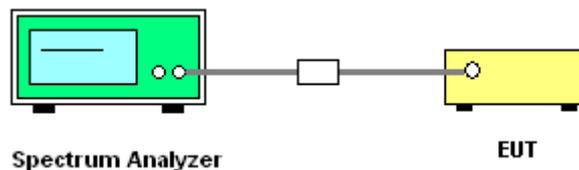


#### 3.5.5 Test Result of Peak Output Power

<b>Test Mode :</b>	Mode 4, 5, 6	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Pinkston Tu	<b>Relative Humidity :</b>	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi$ /4-DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	0.38	20.97	Pass
39	2441	1.95	20.97	Pass
78	2480	2.55	20.97	Pass




Peak Output Power Plot on Channel 00

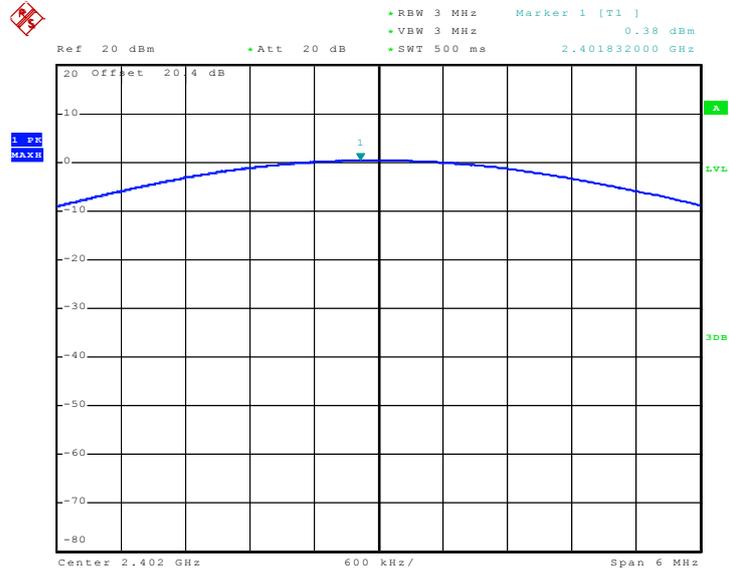

Date: 27.JAN.2011 02:08:30


Peak Output Power Plot on Channel 39

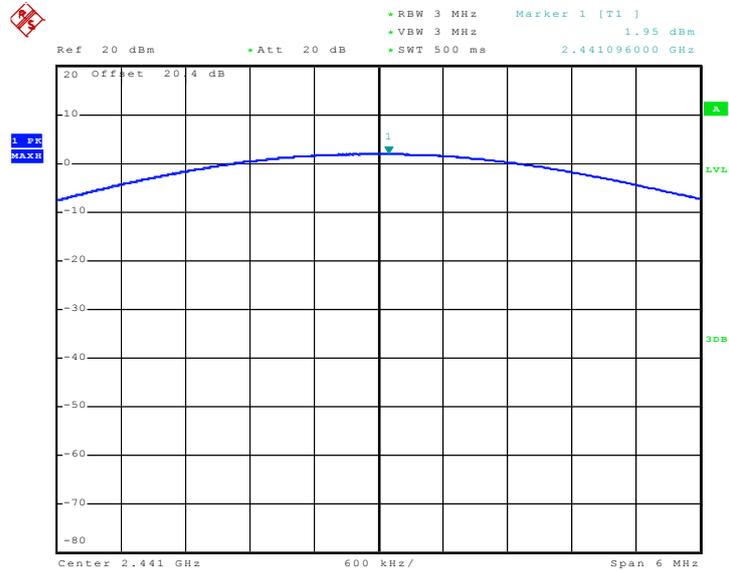

Date: 27.JAN.2011 02:09:46



Peak Output Power Plot on Channel 78

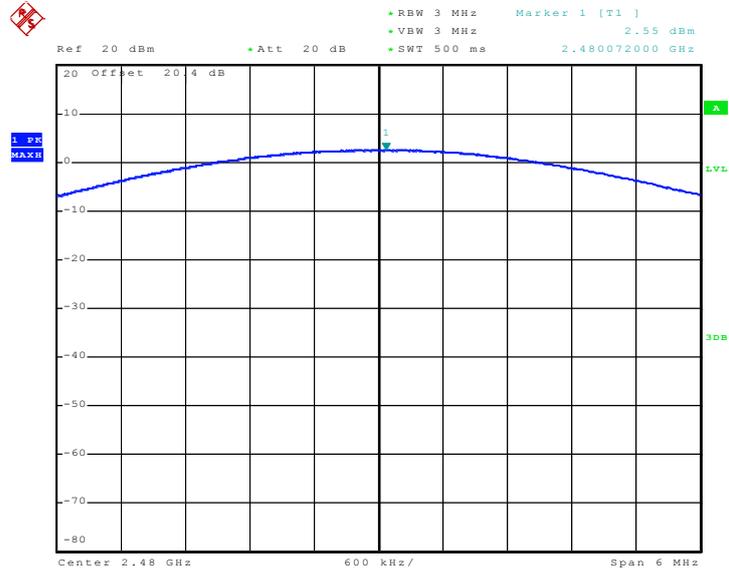

Date: 27.JAN.2011 02:11:02



## **3.6 Band Edges Measurement**

### **3.6.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### **3.6.2 Measuring Instruments**


See list of measuring instruments of this test report.

### **3.6.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

### 3.6.4 Test Setup

#### <Radiated Band Edges>

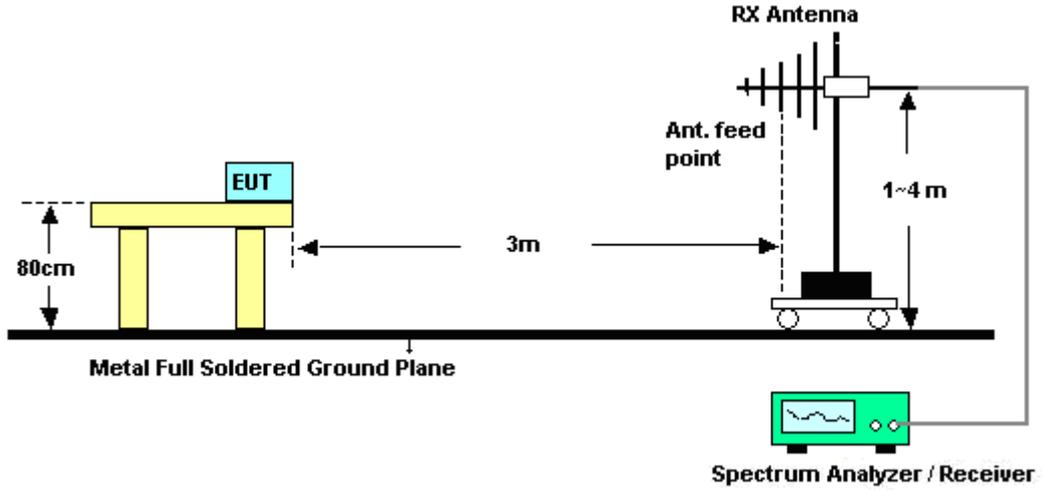

#### <Conducted Band Edges>

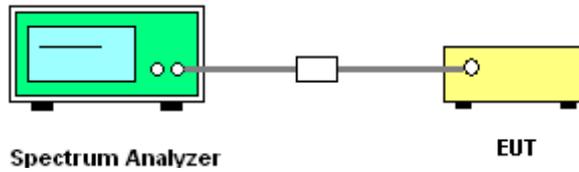



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	45~46%
		Test Engineer :	Kai Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.99	45.23	-28.77	74	43.8	31.9	3.92	34.39	100	355	Peak
2389.99	33.31	-20.69	54	31.88	31.9	3.92	34.39	100	355	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2346.86	45.42	-28.58	74	43.99	31.9	3.92	34.39	110	27	Peak
2346.86	32.3	-21.7	54	31.01	31.84	3.86	34.41	110	27	Average

Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	45~46%
		Test Engineer :	Kai Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	62.88	-11.12	74	61.22	31.98	4.05	34.37	100	359	Peak
2483.5	49.17	-4.83	54	47.51	31.98	4.05	34.37	100	359	Average


ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	58.47	-15.53	74	56.81	31.98	4.05	34.37	106	37	Peak
2483.5	45.95	-8.05	54	44.29	31.98	4.05	34.37	106	37	Average



### 3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Pinkston Tu

Low Band Edge Plot on Channel 00

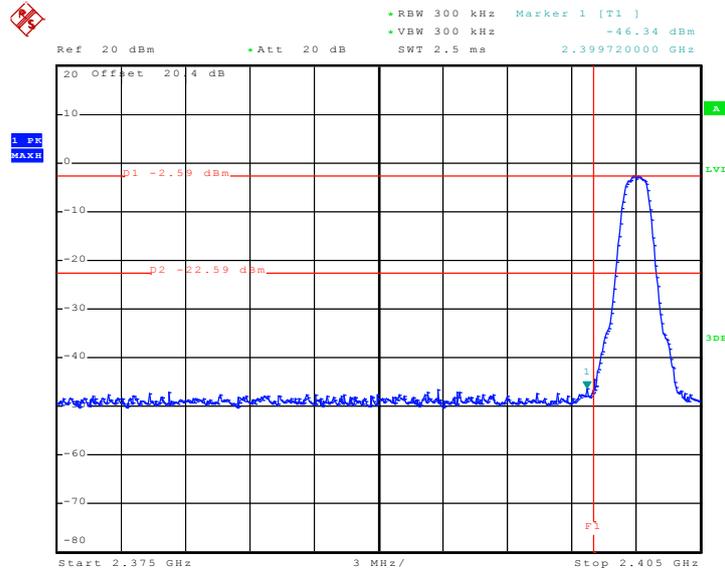

Date: 27.JAN.2011 05:03:52

High Band Edge Plot on Channel 78

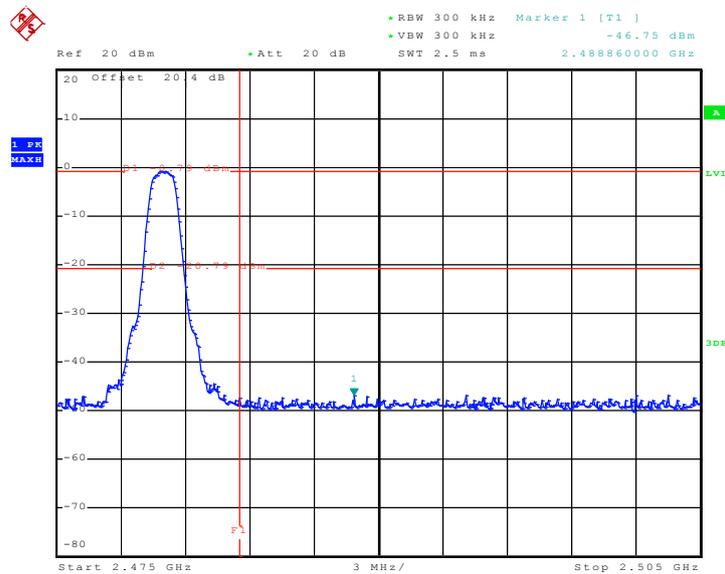

Date: 27.JAN.2011 05:04:25

## 3.7 Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


### 3.7.4 Test Setup

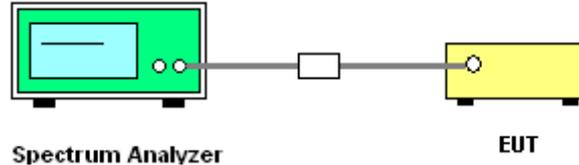

3.7.5 Test Result


Test Mode :	Mode 4	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Pinkston Tu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

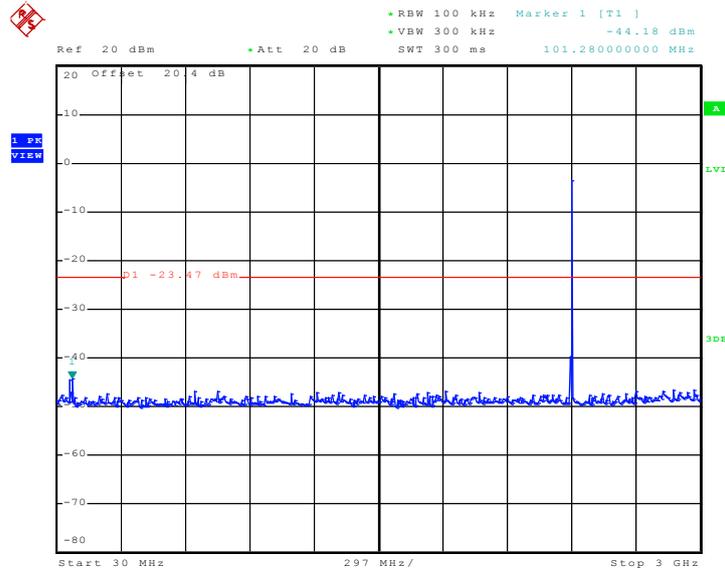

Date: 27.JAN.2011 04:48:20

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

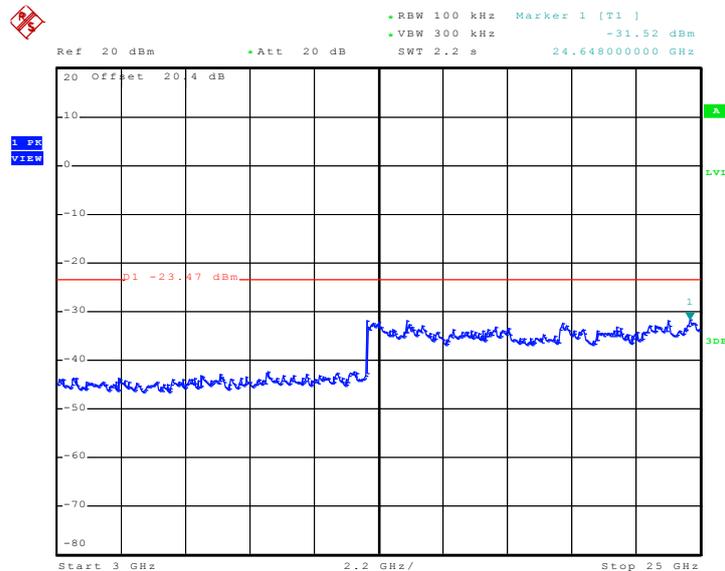


Date: 27.JAN.2011 04:48:43




Test Mode :	Mode 5	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Pinkston Tu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

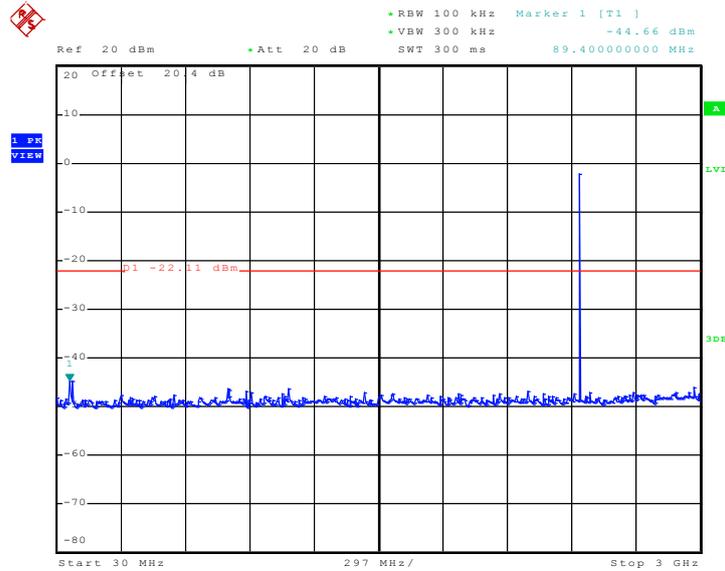

Date: 27.JAN.2011 04:49:04

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

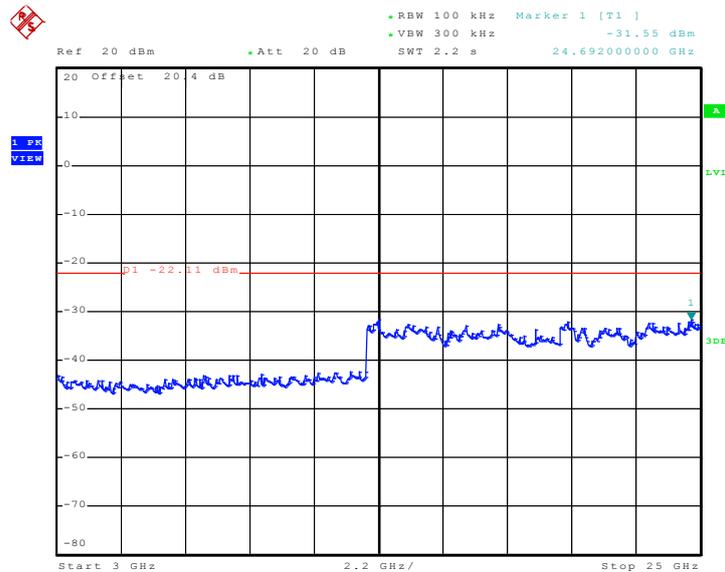


Date: 27.JAN.2011 04:49:27




Test Mode :	Mode 6	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Pinkston Tu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

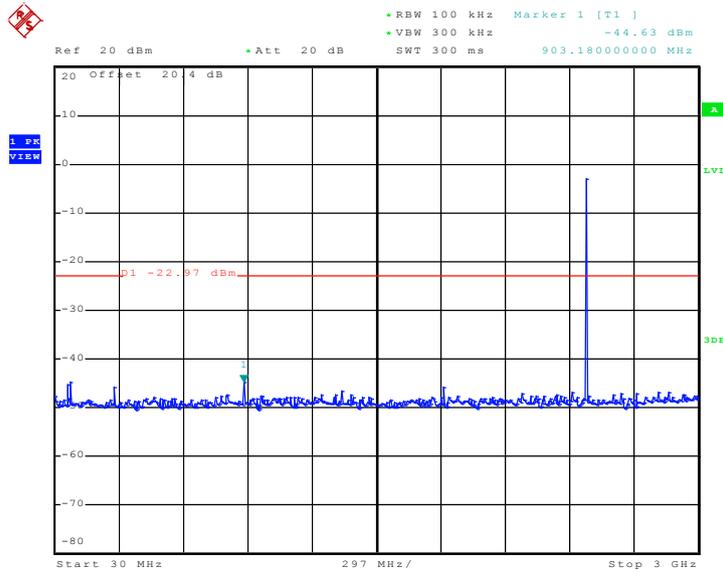

Date: 27.JAN.2011 04:49:49

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

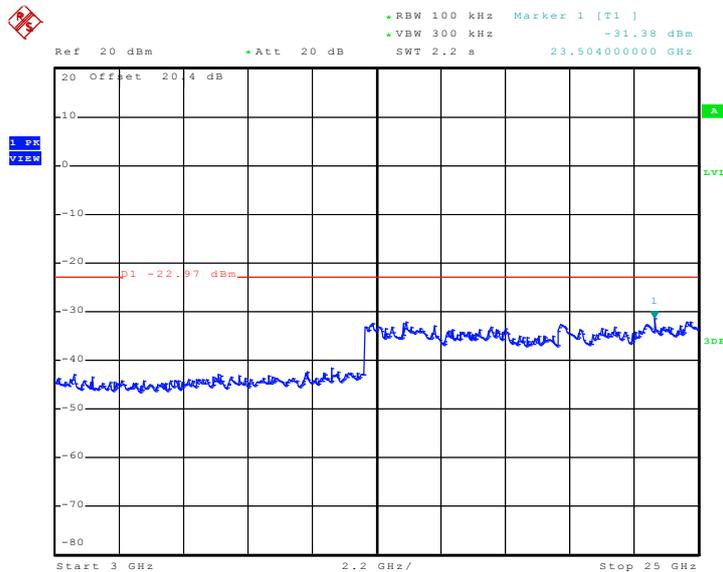

Date: 27.JAN.2011 04:50:12

### 3.8 AC Conducted Emission Measurement

#### 3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.8.4 Test Setup

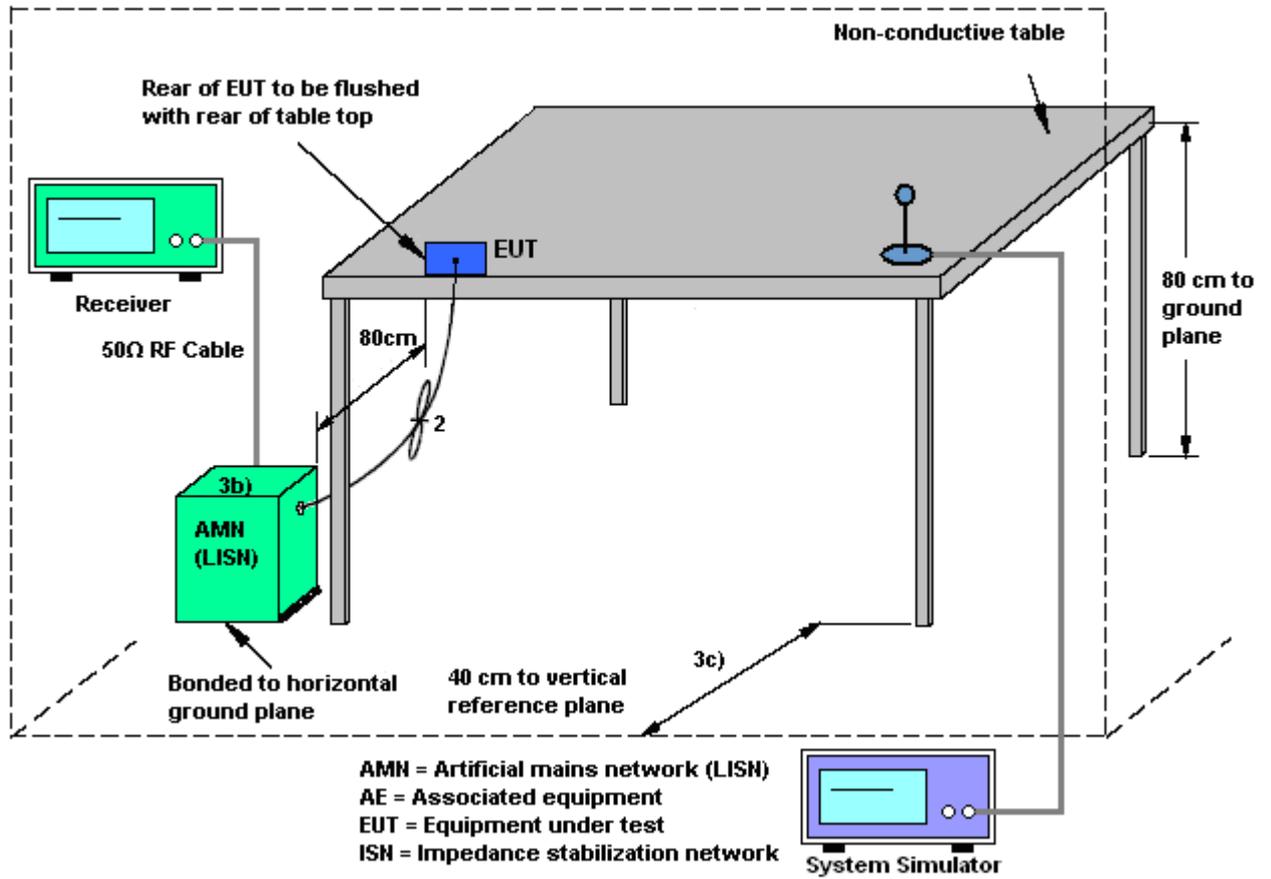

### 3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band II Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

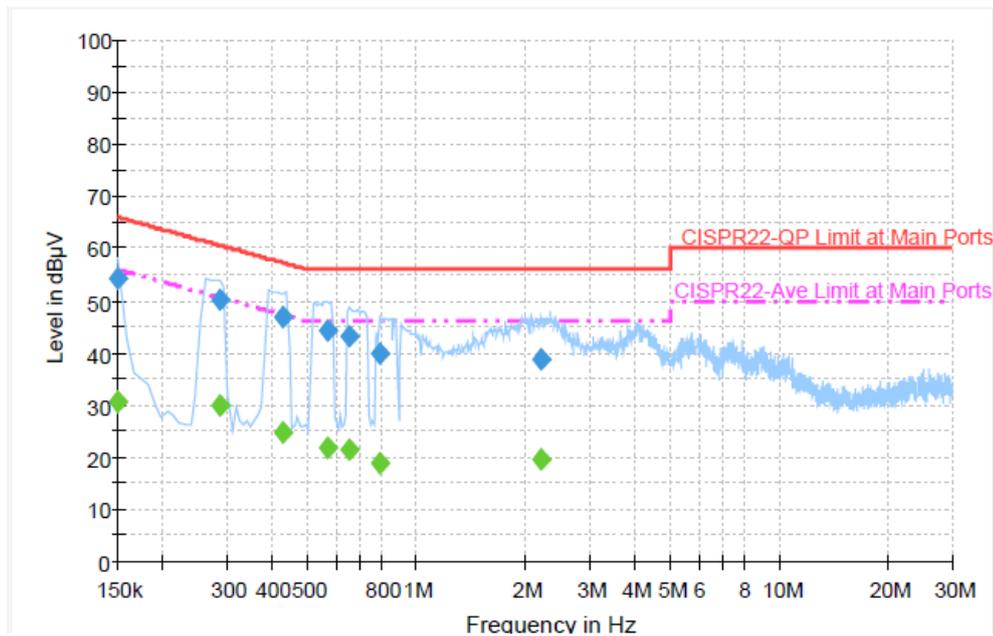

#### Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	54.3	Off	L1	19.4	11.7	66.0
0.286000	50.2	Off	L1	19.3	10.4	60.6
0.430000	46.8	Off	L1	19.4	10.5	57.3
0.566000	44.3	Off	L1	19.3	11.7	56.0
0.654000	43.1	Off	L1	19.4	12.9	56.0
0.790000	40.0	Off	L1	19.4	16.0	56.0
2.214000	38.8	Off	L1	19.5	17.2	56.0

#### Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	30.6	Off	L1	19.4	25.4	56.0
0.286000	29.8	Off	L1	19.3	20.8	50.6
0.430000	24.6	Off	L1	19.4	22.7	47.3
0.566000	21.9	Off	L1	19.3	24.1	46.0
0.654000	21.2	Off	L1	19.4	24.8	46.0
0.790000	18.7	Off	L1	19.4	27.3	46.0
2.214000	19.6	Off	L1	19.5	26.4	46.0



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band II Idle + Bluetooth Link + WLAN Link + GPS Rx + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

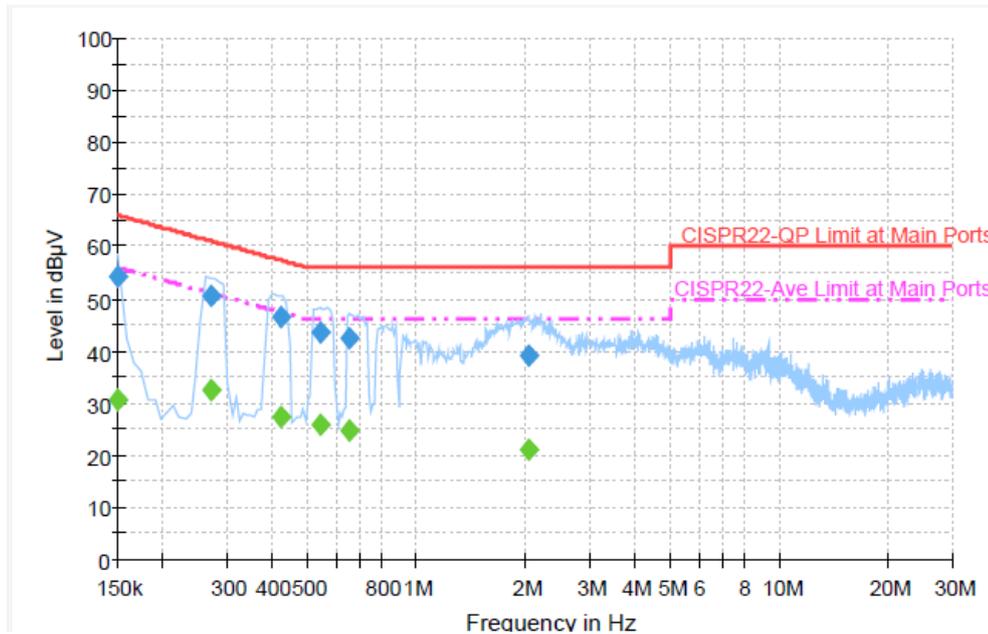

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	54.3	Off	N	19.4	11.7	66.0
0.270000	50.6	Off	N	19.3	10.5	61.1
0.422000	46.4	Off	N	19.4	11.0	57.4
0.542000	43.4	Off	N	19.3	12.6	56.0
0.654000	42.6	Off	N	19.4	13.4	56.0
2.038000	39.3	Off	N	19.5	16.7	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	30.5	Off	N	19.4	25.5	56.0
0.270000	32.6	Off	N	19.3	18.5	51.1
0.422000	27.2	Off	N	19.4	20.2	47.4
0.542000	25.7	Off	N	19.3	20.3	46.0
0.654000	24.8	Off	N	19.4	21.2	46.0
2.038000	21.1	Off	N	19.5	24.9	46.0

### 3.9 Radiated Emission Measurement

#### 3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
  - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
 Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
4. Measured average value for the peak value is greater than 54 dBuV/m

### 3.9.4 Test Setup

For radiated emissions below 30MHz

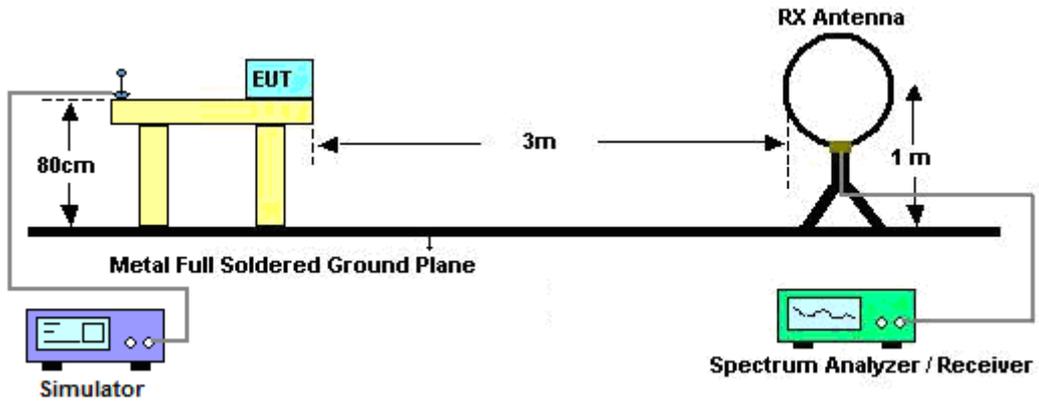

For radiated emissions above 30MHz

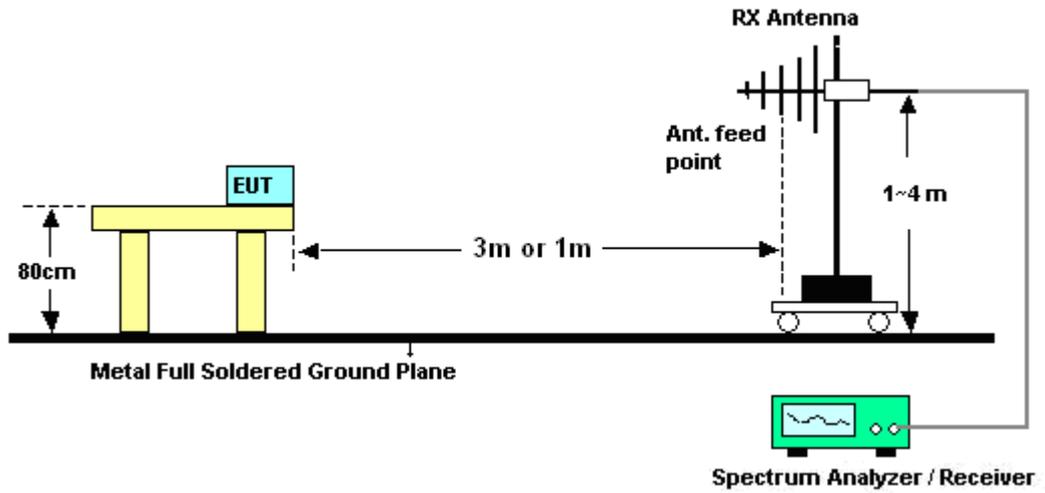



3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Kai Wang	Temperature :	23~24°C	
		Relative Humidity :	45~46%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	45~46%
Test Engineer :	Kai Wang	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
85.89	22.04	-17.96	40	44.23	8.26	1.12	31.57	100	28	Peak
153.39	25.47	-18.03	43.5	44.89	10.51	1.47	31.4	-	-	Peak
247.89	27.29	-18.71	46	44.38	12.54	1.84	31.47	-	-	Peak
322.4	21.78	-24.22	46	37.06	13.97	2.14	31.39	-	-	Peak
626.9	23.05	-22.95	46	32.49	19.23	2.99	31.66	-	-	Peak
941.9	26.25	-19.75	46	31.29	21.82	3.79	30.65	-	-	Peak
2389.99	45.23	-28.77	74	43.8	31.9	3.92	34.39	100	355	Peak
2389.99	33.31	-20.69	54	31.88	31.9	3.92	34.39	100	355	Average
2402	97.83	-	-	96.39	31.91	3.92	34.39	100	355	Peak
2402	81.92	-	-	80.49	31.9	3.92	34.39	100	355	Average
2486	44.52	-29.48	74	42.86	31.98	4.05	34.37	100	355	Peak
2486	31.84	-22.16	54	30.18	31.98	4.05	34.37	100	355	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Kai Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
38.64	24.25	-15.75	40	41.8	13.27	0.8	31.62	-	-	Peak
151.23	29.25	-14.25	43.5	48.54	10.64	1.46	31.39	100	215	Peak
253.83	27.83	-18.17	46	44.7	12.73	1.87	31.47	-	-	Peak
313.3	22.73	-23.27	46	38.27	13.77	2.11	31.42	-	-	Peak
551.3	23.89	-22.11	46	34.11	18.51	2.85	31.58	-	-	Peak
890.8	26.51	-19.49	46	32.24	21.55	3.72	31	-	-	Peak
2346.86	45.42	-28.58	74	43.99	31.9	3.92	34.39	110	27	Peak
2346.86	32.3	-21.7	54	31.01	31.84	3.86	34.41	110	27	Average
2402	93.86	-	-	92.42	31.91	3.92	34.39	110	27	Peak
2402	77.68	-	-	76.25	31.9	3.92	34.39	110	27	Average
2484	44.03	-29.97	74	42.37	31.98	4.05	34.37	110	27	Peak
2484	31.74	-22.26	54	30.08	31.98	4.05	34.37	110	27	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Kai Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
42.69	22.12	-17.88	40	41.7	11.25	0.81	31.64	-	-	Peak
143.13	26.78	-16.72	43.5	45.66	11.15	1.45	31.48	100	123	Peak
243.84	26.39	-19.61	46	43.81	12.22	1.82	31.46	-	-	Peak
337.8	22.89	-23.11	46	37.72	14.33	2.19	31.35	-	-	Peak
631.8	23.54	-22.46	46	32.95	19.24	3	31.65	-	-	Peak
904.8	26.11	-19.89	46	31.62	21.65	3.76	30.92	-	-	Peak
2316	44.44	-29.56	74	43.22	31.81	3.82	34.41	100	354	Peak
2316	32.07	-21.93	54	30.85	31.81	3.82	34.41	100	354	Average
2441	99.11	-	-	97.55	31.95	3.99	34.38	100	354	Peak
2441	83.56	-	-	82	31.95	3.99	34.38	100	354	Average
2500	44.55	-29.45	74	42.87	32	4.05	34.37	100	354	Peak
2500	31.89	-22.11	54	30.21	32	4.05	34.37	100	354	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Kai Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	26.5	-13.5	40	39.55	17.91	0.72	31.68	100	251	Peak
149.88	28.43	-15.07	43.5	47.65	10.7	1.46	31.38	-	-	Peak
250.59	27.38	-18.62	46	44.33	12.67	1.85	31.47	-	-	Peak
311.9	22.56	-23.44	46	38.13	13.75	2.1	31.42	-	-	Peak
546.4	23.16	-22.84	46	33.45	18.44	2.84	31.57	-	-	Peak
925.8	26.15	-19.85	46	31.38	21.75	3.78	30.76	-	-	Peak
2358	45.66	-28.34	74	44.31	31.86	3.89	34.4	108	35	Peak
2358	32.19	-21.81	54	30.84	31.86	3.89	34.4	108	35	Average
2441	95.17	-	-	93.61	31.95	3.99	34.38	108	35	Peak
2441	79.8	-	-	78.24	31.95	3.99	34.38	108	35	Average
2494	45.36	-28.64	74	43.68	32	4.05	34.37	108	35	Peak
2494	32.58	-21.42	54	30.9	32	4.05	34.37	108	35	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Kai Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
33.24	27.64	-12.36	40	42.42	16.12	0.73	31.63	100	28	Peak
152.58	26.41	-17.09	43.5	45.76	10.58	1.46	31.39	-	-	Peak
253.29	26.79	-19.21	46	43.68	12.72	1.86	31.47	-	-	Peak
344.8	23.08	-22.92	46	37.72	14.51	2.21	31.36	-	-	Peak
682.9	22.7	-23.3	46	31.82	19.35	3.19	31.66	-	-	Peak
910.4	26.01	-19.99	46	31.43	21.68	3.77	30.87	-	-	Peak
2310	45.3	-28.7	74	44.08	31.81	3.82	34.41	100	359	Peak
2310	32.07	-21.93	54	30.85	31.81	3.82	34.41	100	359	Average
2480	96.88	-	-	95.22	31.98	4.05	34.37	100	359	Peak
2480	81.34	-	-	79.68	31.98	4.05	34.37	100	359	Average
2483.5	62.88	-11.12	74	61.22	31.98	4.05	34.37	100	359	Peak
2483.5	49.17	-4.83	54	47.51	31.98	4.05	34.37	100	359	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Kai Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
40.53	24.2	-15.8	40	42.7	12.32	0.81	31.63	-	-	Peak
145.29	29.01	-14.49	43.5	47.99	11.02	1.45	31.45	100	286	Peak
252.48	27.52	-18.48	46	44.43	12.7	1.86	31.47	-	-	Peak
547.8	22.96	-23.04	46	33.23	18.47	2.84	31.58	-	-	Peak
757.8	24.6	-21.4	46	32.67	20.18	3.35	31.6	-	-	Peak
871.9	26.17	-19.83	46	32.22	21.39	3.64	31.08	-	-	Peak
2350	44.73	-29.27	74	43.44	31.84	3.86	34.41	106	37	Peak
2350	32.12	-21.88	54	30.83	31.84	3.86	34.41	106	37	Average
2480	92.67	-	-	91.01	31.98	4.05	34.37	106	37	Peak
2480	77.1	-	-	75.44	31.98	4.05	34.37	106	37	Average
2483.5	58.47	-15.53	74	56.81	31.98	4.05	34.37	106	37	Peak
2483.5	45.95	-8.05	54	44.29	31.98	4.05	34.37	106	37	Average



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Mar. 19, 2009	Mar. 18, 2011	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP30	101329	9kHz~30GHz	Apr. 26, 2010	Apr. 25, 2011	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 13, 2010	Sep. 12, 2011	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 14, 2010	Sep. 13, 2011	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 30, 2010	Jul. 29, 2011	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	106656	N/A	May 11, 2010	May 10, 2012	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz-40GHz	Oct. 25, 2010	Oct. 24, 2011	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz-1000MHz	Apr. 28, 2010	Apr. 27, 2011	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Oct. 31, 2010	Oct. 31, 2011	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz~18GHz	Aug. 02, 2010	Aug. 01, 2011	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Training Research	AH-0801	95119	8GHz~18GHz	Oct. 20, 2010	Oct. 19, 2011	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz- 26.5GHz	Apr. 15, 2010	Apr. 14, 2011	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz~1GHz	Apr. 15, 2010	Apr. 14, 2011	Radiation (03CH06-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH06-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	May 12, 2009	May 11, 2011	Radiation (03CH06-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		



**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty Uc(y)</b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))</b>	<b>4.72</b>				