

FCC 47 CFR PART 15 SUBPART C

Product Type : Smartphone
Applicant : HTC Corporation
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,
Taiwan
Trade Name : HTC
Model Number : PG76200
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2010
ANSI C63.4-2009
Issue Date : Jul. 06, 2011

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jul. 06, 2011	Initial Issue	

Verification of Compliance

Issued Date: 07/06/2011

Product Type : Smartphone
Applicant : HTC Corporation
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,
Taiwan
Trade Name : HTC
Model Number : PG76200
FCC ID : NM8PG76200
EUT Rated Voltage : DC 5.0V, 1.0A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2010
ANSI C63.4-2009
Test Result : Complied
Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.

Tel : +86-3-2710188 / Fax : +86-3-2710190

Taiwan Accreditation Foundation accreditation number:
1330



<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By : 
(Manager) (Miller Lee)


Reviewed By : 
(Testing Engineer) (Gary Wu)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology.....	8
	3.1. Mode of Operation	8
	3.2. EUT Exercise Software.....	8
	3.3. Configuration of Test System Details.....	9
	3.4. Test Site Environment.....	10
4	Conducted Emission Measurement	11
	4.1. Limit	11
	4.2. Test Instruments.....	11
	4.3. Test Setup	11
	4.4. Test Procedure.....	12
	4.5. Test Result	13
5	Radiated Interference Measurement	17
	5.1. Limit	17
	5.2. Test Instruments.....	17
	5.3. Setup.....	18
	5.4. Test Procedure.....	19
	5.5. Test Result	21
6	Maximum Conducted Output Power Measurement.....	29
	6.1. Limit	29
	6.2. Test Setup	29
	6.3. Test Instruments.....	29
	6.4. Test Procedure.....	29
	6.5. Test Result	30
7	6dB RF Bandwidth Measurement	31
	7.1. Limit	31
	7.2. Test Setup	31
	7.3. Test Instruments.....	31
	7.4. Test Procedure.....	31
	7.5. Test Result	32
	7.6. Test Graphs.....	33

8	Maximum Power Density Measurement.....	36
8.1.	Limit	36
8.2.	Test Setup	36
8.3.	Test Instruments.....	36
8.4.	Test Procedure.....	36
8.5.	Test Result	37
8.6.	Test Graphs.....	38
9	Out of Band Conducted Emissions Measurement	41
9.1.	Limit	41
9.2.	Test Setup	41
9.3.	Test Instruments.....	41
9.4.	Test Procedure.....	41
9.5.	Test Graphs.....	42
10	Band Edges Measurement	45
10.1.	Limit	45
10.2.	Test Setup	45
10.3.	Test Instruments.....	45
10.4.	Test Procedure.....	46
10.5.	Test Result	47
11	99 % Occupied Bandwidth Measurement.....	59
11.1.	Limit	59
11.2.	Test Setup	59
11.3.	Test Instruments.....	59
11.4.	Test Procedure.....	59
11.5.	Test Result	60
11.6.	Test Graphs.....	61
12	Antenna Measurement.....	64
12.1.	Limit	64
12.2.	Antenna Connector Construction.....	64

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.24 dB.

Radiated Emission

The measurement uncertainty of 30 MHz - 1GHz is evaluated as ± 3.072 dB.

2 EUT Description

Product	:	Smartphone
Trade Name	:	HTC
Model No.	:	PG76200
Applicant	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
Manufacturer	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
FCC ID	:	NM8PG76200
Frequency Range	:	2412 ~ 2462 MHz
Modulation Type	:	IEEE 802.11b:DSSS(DQPSK, DBPSK) IEEE 802.11g:DSSS(DQPSK, DBPSK)+ OFDM(QPSK, BPSK, 16-QAM, 64-QAM) draft 802.11n Standard-20MHz channel mode: OFDM(QPSK, BPSK, 16-QAM, 64-QAM) 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65.0, 72.2 Mbps
Antenna Type	:	PIFA Type
Antenna Gain	:	1.5 dBi
RF Output Power	:	IEEE 802.11b: 0.122 W / 20.85 dBm IEEE 802.11g: 0.165 W / 22.17 dBm draft 802.11n Standard-20MHz: 0.166 W / 22.20 dBm

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 2: Normal Operation Mode
Mode 3: IEEE 802.11b Link Mode
Mode 4: IEEE 802.11g Link Mode
Mode 5: draft 802.11n Standard-20MHz Link Mode
Mode 6: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 11Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:


Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 7.2Mbps data rate were chosen for full testing.

3.2. EUT Exercise Software


1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to AP.
4.	EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

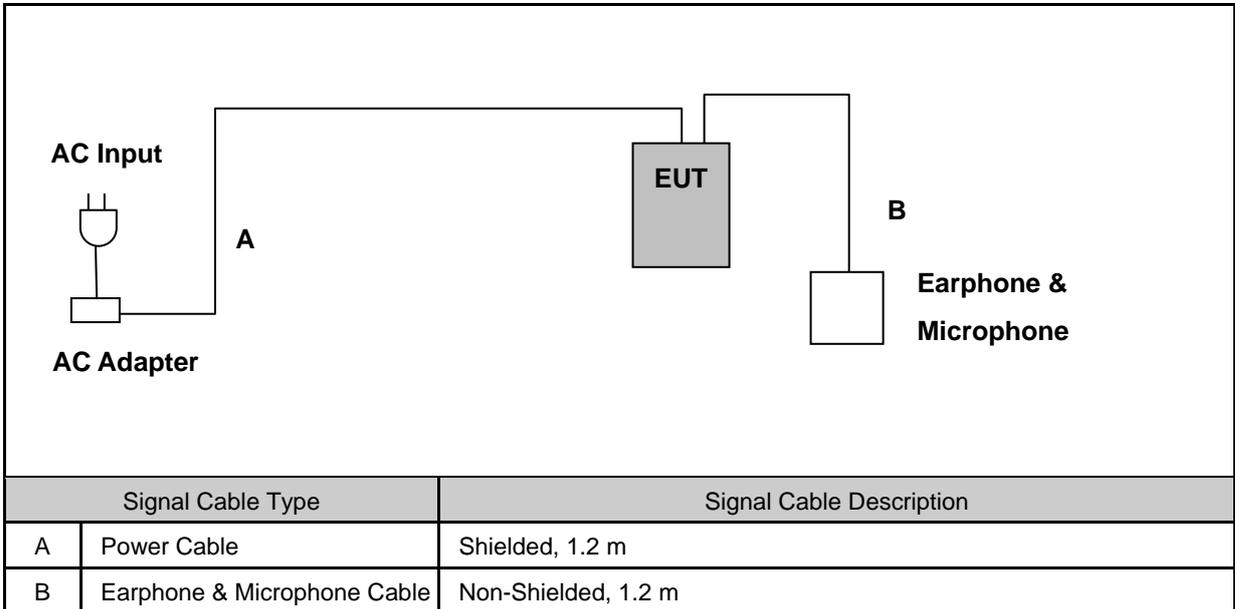

Radiated Emission

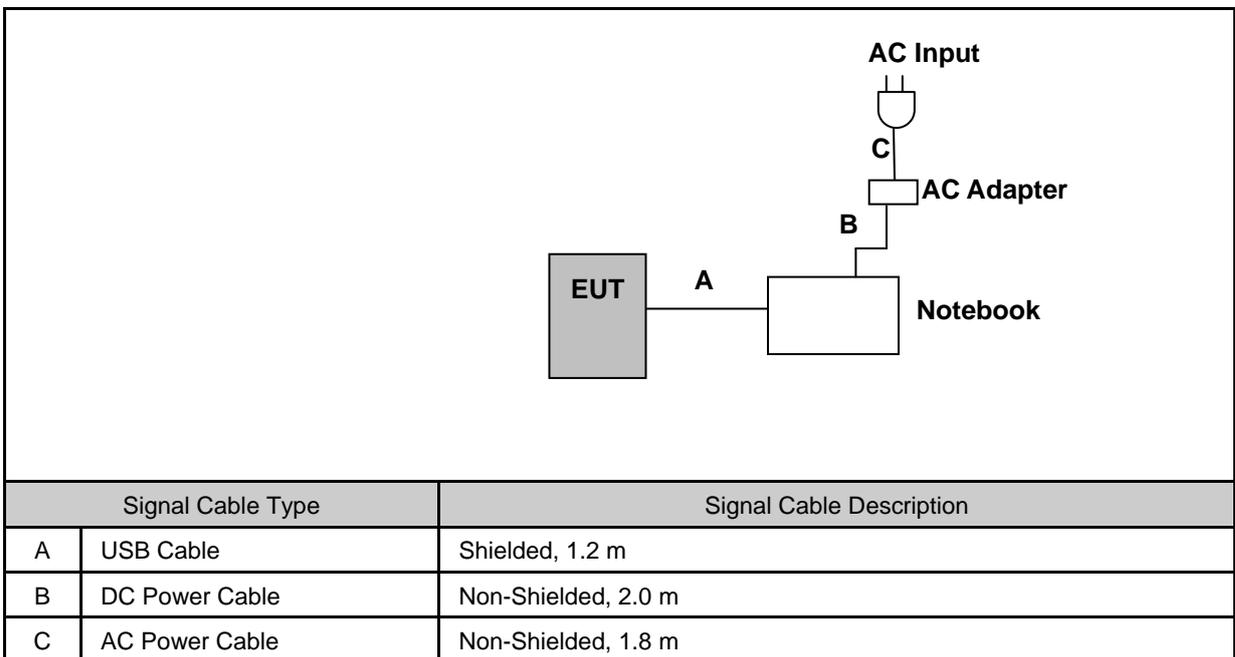

Devices Description					
Product	Manufacturer	Model Number	Serial Number	Power Cord	
1.	Notebook	DELL	D830	CN-OHN341-48643-88Q-1221	Non-Shielded, 2.0 m

3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	07/01/2010	(1)
LISN	R&S	ENV216	101040	03/04/2011	(1)
LISN	R&S	ENV216	101041	03/04/2011	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.3. Test Setup

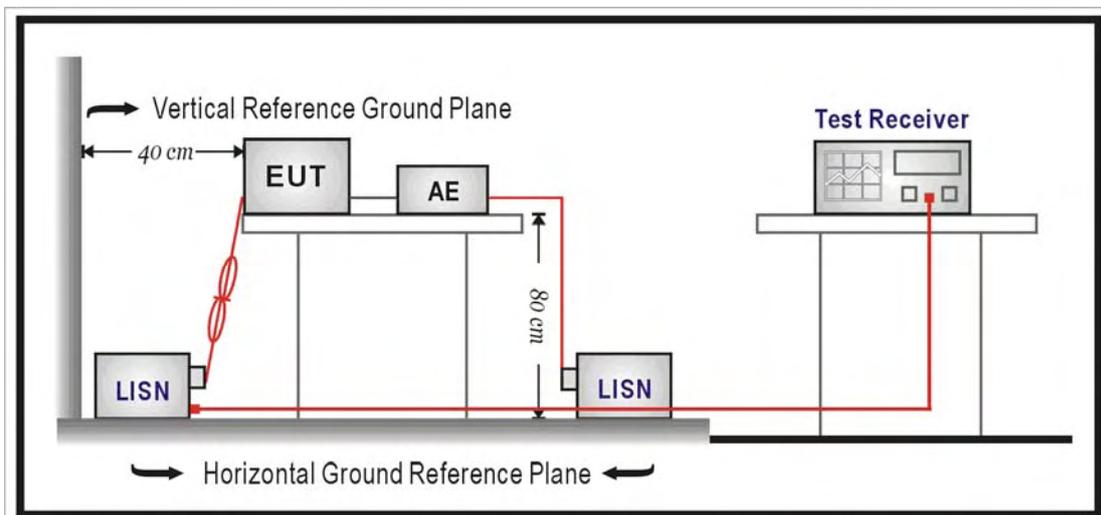

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	06/21/2011
		Test By:	Gary Wu
Description:			

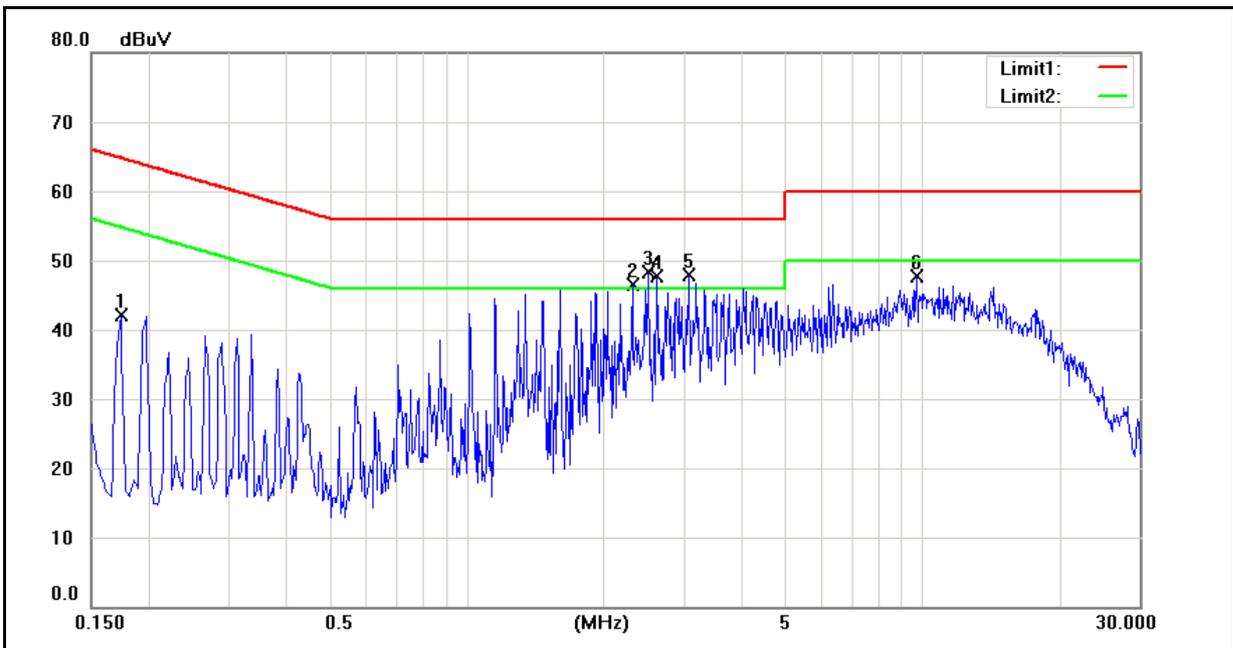


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1740	27.54	10.00	10.06	37.60	20.06	64.77	54.77	-27.17	-34.71	Pass
2	2.3100	33.04	23.54	9.72	42.76	33.26	56.00	46.00	-13.24	-12.74	Pass
3	2.5020	31.98	20.05	9.74	41.72	29.79	56.00	46.00	-14.28	-16.21	Pass
4	2.6180	31.45	21.23	9.75	41.20	30.98	56.00	46.00	-14.80	-15.02	Pass
5	3.0780	32.14	20.58	9.81	41.95	30.39	56.00	46.00	-14.05	-15.61	Pass
6	9.7220	29.00	20.76	10.15	39.15	30.91	60.00	50.00	-20.85	-19.09	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	06/21/2011
		Test By:	Gary Wu
Description:			

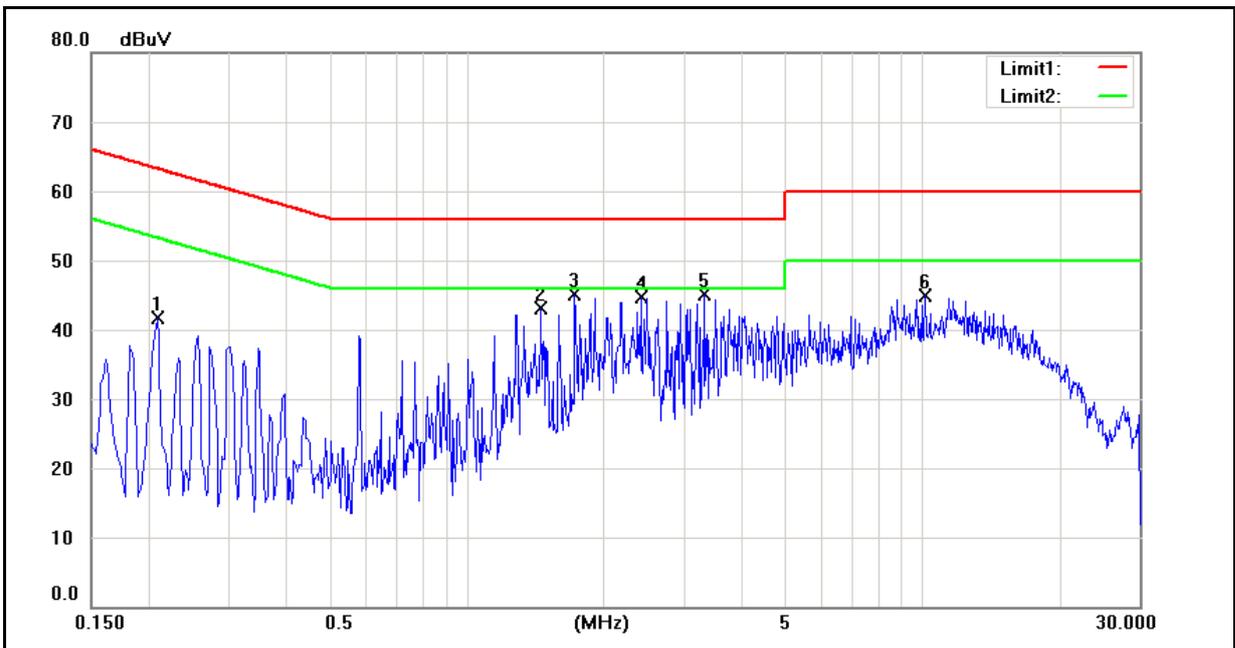


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2100	21.78	7.11	10.13	31.91	17.24	63.21	53.21	-31.30	-35.97	Pass
2	1.4580	25.33	14.26	9.75	35.08	24.01	56.00	46.00	-20.92	-21.99	Pass
3	1.7340	31.74	21.48	9.75	41.49	31.23	56.00	46.00	-14.51	-14.77	Pass
4	2.4180	24.57	17.03	9.79	34.36	26.82	56.00	46.00	-21.64	-19.18	Pass
5	3.3340	30.00	19.12	9.86	39.86	28.98	56.00	46.00	-16.14	-17.02	Pass
6	10.1740	24.25	16.94	10.26	34.51	27.20	60.00	50.00	-25.49	-22.80	Pass

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/29/2011
		Test By:	Gary Wu
Description:			

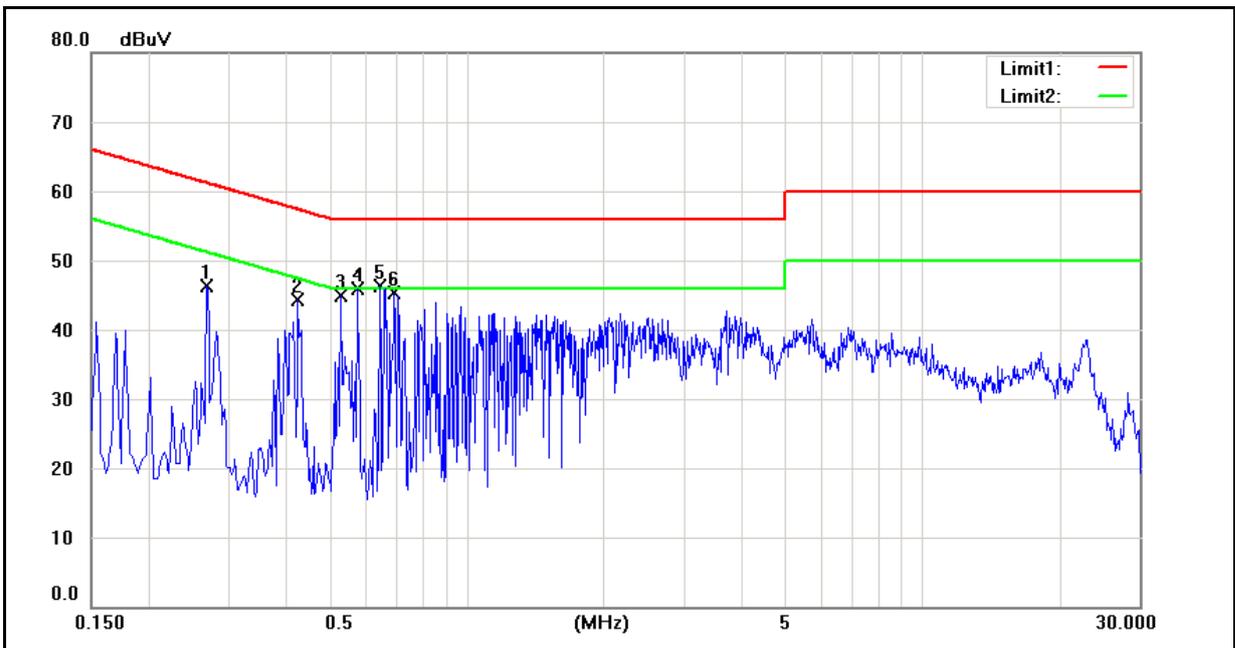

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2700	32.40	13.88	10.02	42.42	23.90	61.12	51.12	-18.70	-27.22	Pass
2	0.4260	30.38	13.96	9.96	40.34	23.92	57.33	47.33	-16.99	-23.41	Pass
3	0.5300	33.22	12.70	9.92	43.14	22.62	56.00	46.00	-12.86	-23.38	Pass
4	0.5780	32.15	11.25	9.90	42.05	21.15	56.00	46.00	-13.95	-24.85	Pass
5	0.6460	33.38	12.21	9.87	43.25	22.08	56.00	46.00	-12.75	-23.92	Pass
6	0.6940	32.97	13.28	9.85	42.82	23.13	56.00	46.00	-13.18	-22.87	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/29/2011
		Test By:	Gary Wu
Description:			

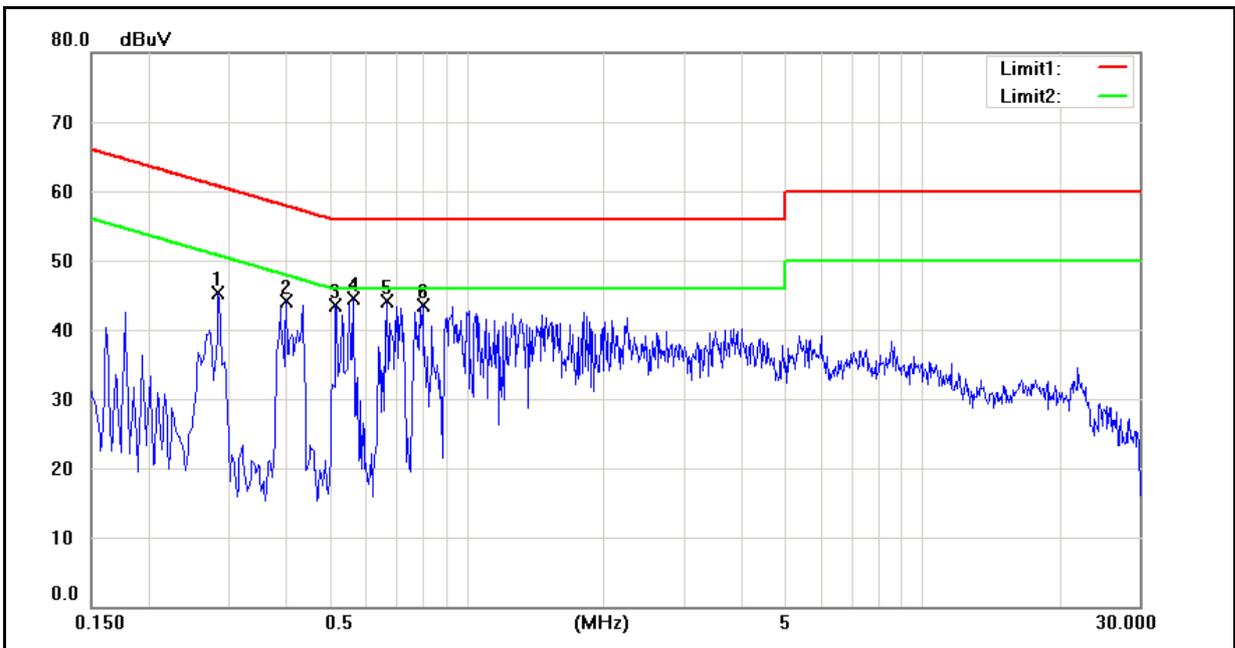

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2860	31.51	15.49	10.10	41.61	25.59	60.64	50.64	-19.03	-25.05	Pass
2	0.4020	29.93	14.75	10.05	39.98	24.80	57.81	47.81	-17.83	-23.01	Pass
3	0.5180	31.76	14.41	10.00	41.76	24.41	56.00	46.00	-14.24	-21.59	Pass
4	0.5660	31.62	14.73	9.98	41.60	24.71	56.00	46.00	-14.40	-21.29	Pass
5	0.6700	32.10	12.66	9.94	42.04	22.60	56.00	46.00	-13.96	-23.40	Pass
6	0.8020	30.99	13.17	9.88	40.87	23.05	56.00	46.00	-15.13	-22.95	Pass

5 Radiated Interference Measurement

5.1. Limit

Frequency Range (MHz)	Peak (dBuV)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	06/16/2011	(1)
Amplifier	Mini-Circuits	ZKL-1R5+	N/A	05/30/2011	(1)
Amplifier	Mini-Circuits	ZVA-213-S+	N/A	05/30/2011	(1)
RF Pre-selector	Agilent	N9039A	MY46520255	05/16/2011	(1)
Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00128055	08/24/2011	(1)
Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	SB AC VULB	9168-419	05/10/2011	(1)
Test Site	ATL	TE09	TE09	05/13/2011	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

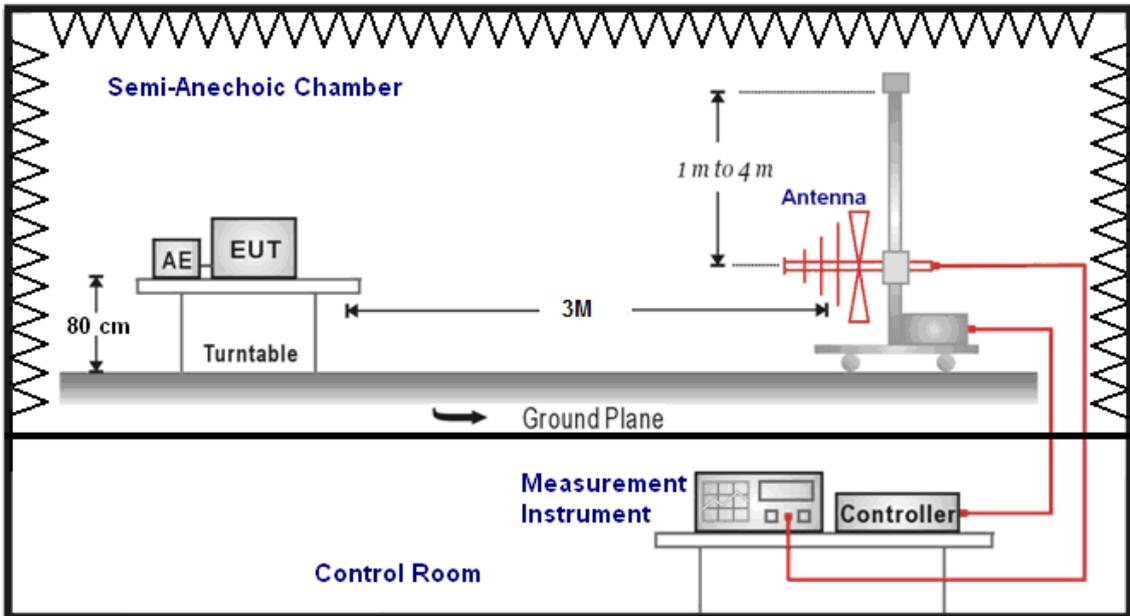

Above 1GHz

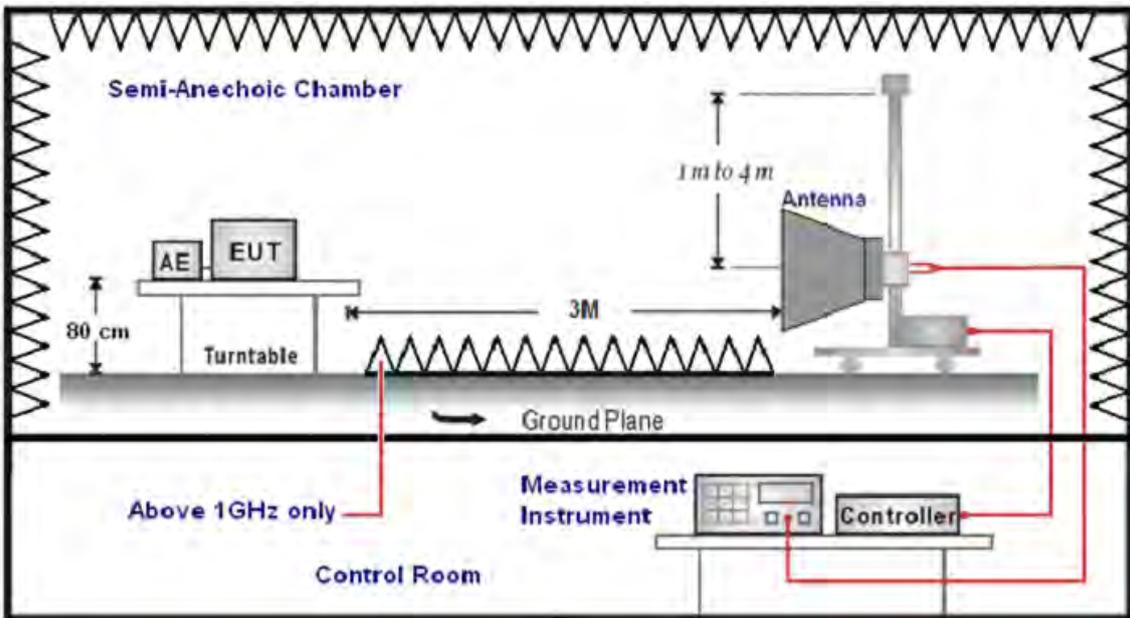

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:


(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

5.5. Test Result


Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/23/2011
Ant.Polar.:	Horizontal	Test By:	Gary Wu

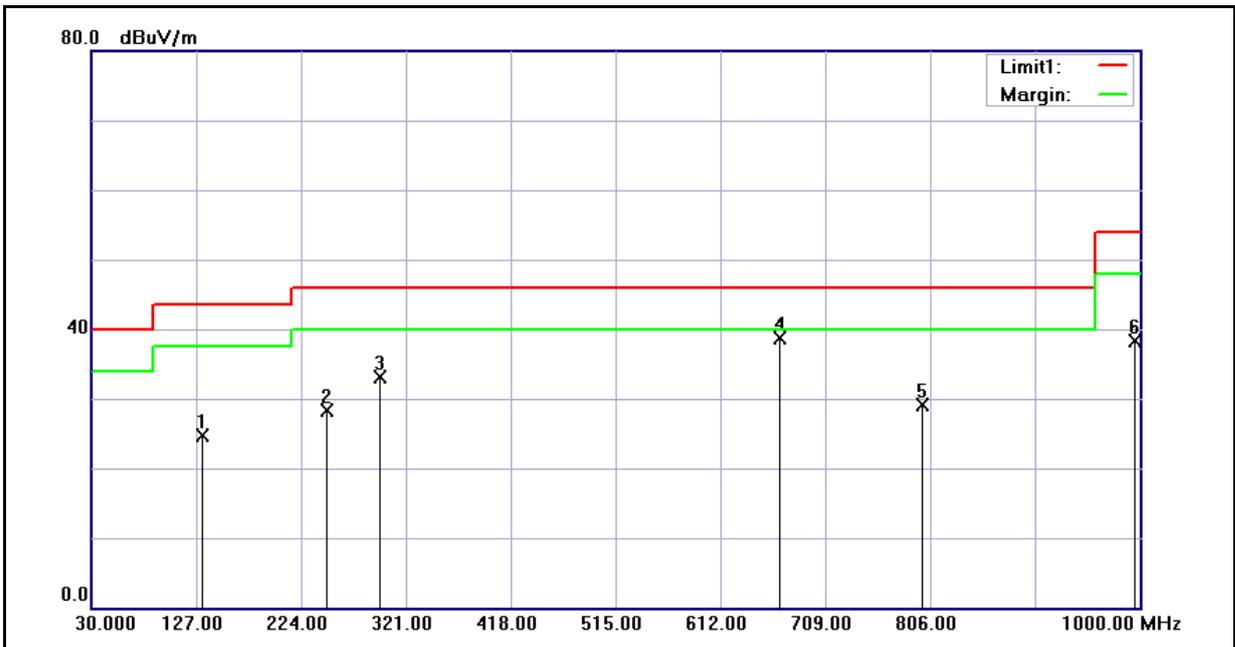

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	133.5000	46.18	-21.50	24.68	43.50	-18.82	QP
2	248.5000	49.20	-20.83	28.37	46.00	-17.63	QP
3	297.0000	51.69	-18.68	33.01	46.00	-12.99	QP
4	666.5000	48.15	-9.43	38.72	46.00	-7.28	QP
5	800.0000	2.65	26.53	29.18	46.00	-16.82	QP
6	995.5000	9.51	28.83	38.34	54.00	-15.66	QP

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	06/23/2011
Ant.Polar.:	Vertical	Test By:	Gary Wu

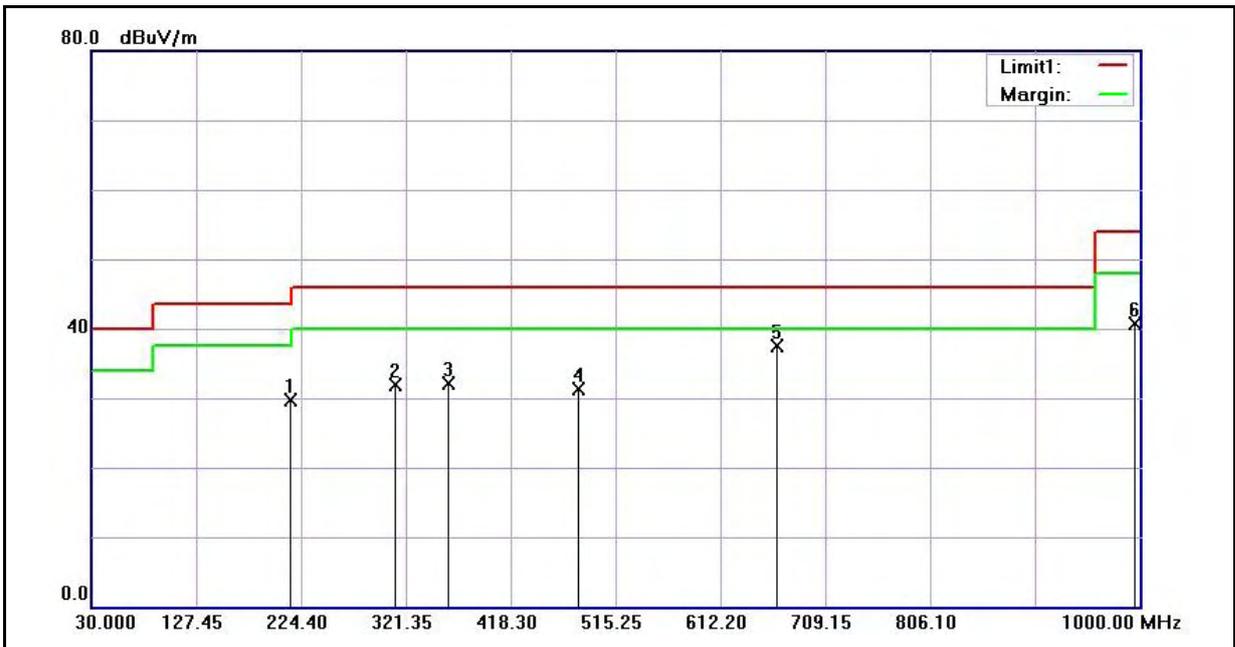

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	215.0000	51.99	-22.26	29.73	43.50	-13.77	QP
2	311.5000	50.16	-18.29	31.87	46.00	-14.13	QP
3	360.0000	49.04	-16.91	32.13	46.00	-13.87	QP
4	481.0000	44.74	-13.49	31.25	46.00	-14.75	QP
5	665.0000	46.99	-9.45	37.54	46.00	-8.46	QP
6	995.5000	11.84	28.83	40.67	54.00	-13.33	QP

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	06/23/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1602.000	69.60	-20.48	49.12	74.00	-24.88	peak	H
4836.000	62.17	-11.26	50.91	74.00	-23.09	peak	H
5984.000	61.03	-8.33	52.70	74.00	-21.30	peak	H
5984.000	47.00	-8.33	38.67	54.00	-15.33	AVG	H
1546.000	70.98	-20.79	50.19	74.00	-23.81	peak	V
3737.000	64.85	-14.51	50.34	74.00	-23.66	peak	V
6089.000	57.38	-8.12	49.26	74.00	-24.74	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	06/23/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1595.000	70.71	-20.52	50.19	74.00	-23.81	peak	H
4878.000	63.14	-11.16	51.98	74.00	-22.02	peak	H
6593.000	58.80	-7.20	51.60	74.00	-22.40	peak	H
1546.000	70.06	-20.79	49.27	74.00	-24.73	peak	V
3191.000	65.66	-15.75	49.91	74.00	-24.09	peak	V
5242.000	60.51	-10.36	50.15	74.00	-23.85	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	06/23/2011		
Frequency:	2462MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3198.000	65.42	-15.74	49.68	74.00	-24.32	peak	H
4927.000	63.51	-11.07	52.44	74.00	-21.56	peak	H
4927.000	54.80	-11.07	43.73	54.00	-10.27	AVG	H
5977.000	61.02	-8.35	52.67	74.00	-21.33	peak	H
5977.000	48.74	-8.35	40.39	54.00	-13.61	AVG	H
3191.000	64.70	-15.75	48.95	74.00	-25.05	peak	V
4927.000	60.51	-11.07	49.44	74.00	-24.56	peak	V
6705.000	57.74	-7.01	50.73	74.00	-23.27	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	06/23/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3744.000	64.86	-14.49	50.37	74.00	-23.63	peak	H
5228.000	61.73	-10.38	51.35	74.00	-22.65	peak	H
7209.000	57.40	-6.03	51.37	74.00	-22.63	peak	H
3485.000	64.32	-15.27	49.05	74.00	-24.95	peak	V
5235.000	60.10	-10.37	49.73	74.00	-24.27	peak	V
6565.000	58.35	-7.25	51.10	74.00	-22.90	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	06/23/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3107.000	63.50	-15.90	47.60	74.00	-26.40	peak	H
4878.000	62.77	-11.16	51.61	74.00	-22.39	peak	H
6733.000	58.15	-6.97	51.18	74.00	-22.82	peak	H
3198.000	66.77	-15.74	51.03	74.00	-22.97	peak	V
5235.000	60.70	-10.37	50.33	74.00	-23.67	peak	V
7237.000	57.45	-5.97	51.48	74.00	-22.52	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	06/23/2011		
Frequency:	2462MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3779.000	62.91	-14.38	48.53	74.00	-25.47	peak	H
5242.000	59.95	-10.36	49.59	74.00	-24.41	peak	H
6663.000	58.38	-7.08	51.30	74.00	-22.70	peak	H
3737.000	65.95	-14.51	51.44	74.00	-22.56	peak	V
4969.000	59.13	-10.98	48.15	74.00	-25.85	peak	V
6726.000	58.28	-6.98	51.30	74.00	-22.70	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	06/23/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3751.000	64.16	-14.46	49.70	74.00	-24.30	peak	H
5242.000	59.91	-10.36	49.55	74.00	-24.45	peak	H
6670.000	58.39	-7.07	51.32	74.00	-22.68	peak	H
3737.000	65.39	-14.51	50.88	74.00	-23.12	peak	V
5718.000	58.60	-9.11	49.49	74.00	-24.51	peak	V
6635.000	58.37	-7.14	51.23	74.00	-22.77	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	06/23/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3198.000	65.00	-15.74	49.26	74.00	-24.74	peak	H
5235.000	60.58	-10.37	50.21	74.00	-23.79	peak	H
6607.000	58.11	-7.19	50.92	74.00	-23.08	peak	H
3191.000	66.34	-15.75	50.59	74.00	-23.41	peak	V
5235.000	61.28	-10.37	50.91	74.00	-23.09	peak	V
6670.000	58.48	-7.07	51.41	74.00	-22.59	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	06/23/2011		
Frequency:	2462MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3737.000	63.47	-14.51	48.96	74.00	-25.04	peak	H
5235.000	60.96	-10.37	50.59	74.00	-23.41	peak	H
6985.000	57.52	-6.53	50.99	74.00	-23.01	peak	H
3744.000	64.59	-14.49	50.10	74.00	-23.90	peak	V
5228.000	60.93	-10.38	50.55	74.00	-23.45	peak	V
6705.000	58.18	-7.01	51.17	74.00	-22.83	peak	V


Standard:	FCC Part 15C			Test Distance:	3m			
Test item:	Radiated Emission			Power:	AC 120V/60Hz			
Model Number:	PG76200			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 6			Date:	06/23/2011			
Modulation:	draft 802.11n Standard-20MHz			Test By:	Gary Wu			
Frequency:	2437MHz							
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2246.000	62.84	-17.98	44.86	74.00	54.00	-29.14	peak	H
4514.000	59.37	-11.91	47.46	74.00	54.00	-26.54	peak	H
6649.000	57.22	-7.10	50.12	74.00	54.00	-23.88	peak	H
2148.000	61.75	-18.11	43.64	74.00	54.00	-29.14	peak	V
4598.000	59.59	-11.74	47.85	74.00	54.00	-26.54	peak	V
6845.000	57.60	-6.77	50.83	74.00	54.00	-23.88	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

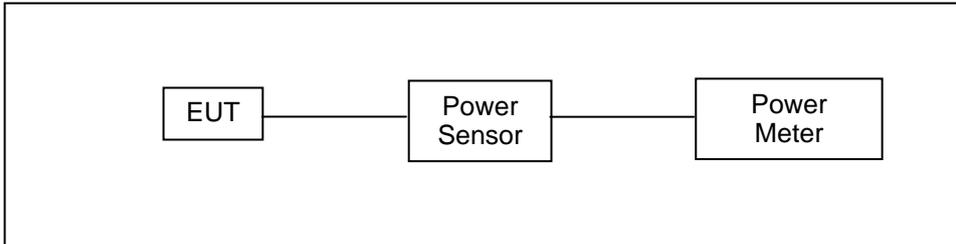

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	07/19/2010	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/19/2010	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to $(\text{GAIN} - 6)/3$ dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	PG76200					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: IEEE 802.11b Link Mode					
Date of Test	06/21/2011			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	1 M	17.38	0.055	19.66	0.092	< 30
2437		17.27	0.053	19.82	0.096	< 30
2462		17.70	0.059	20.39	0.109	< 30
2412	11 M	17.06	0.051	19.70	0.093	< 30
2437		17.29	0.054	20.11	0.103	< 30
2462		17.72	0.059	20.85	0.122	< 30

Model Number	PG76200					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: IEEE 802.11g Link Mode					
Date of Test	06/21/2011			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6 M	12.35	0.017	21.32	0.136	< 30
2437		12.34	0.017	21.63	0.146	< 30
2462		12.83	0.019	22.17	0.165	< 30
2412	54 M	10.86	0.012	21.39	0.138	< 30
2437		10.92	0.012	21.39	0.138	< 30
2462		11.19	0.013	21.99	0.158	< 30


Model Number	PG76200					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode					
Date of Test	06/21/2011			Test Site	TE02	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	7.2 M	12.07	0.016	21.22	0.132	< 30
2437		12.02	0.016	21.45	0.140	< 30
2462		12.47	0.018	22.20	0.166	< 30
2412	72.2 M	10.84	0.012	21.48	0.141	< 30
2437		10.73	0.012	21.11	0.129	< 30
2462		11.02	0.013	22.03	0.160	< 30

7 6dB RF Bandwidth Measurement

7.1. Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

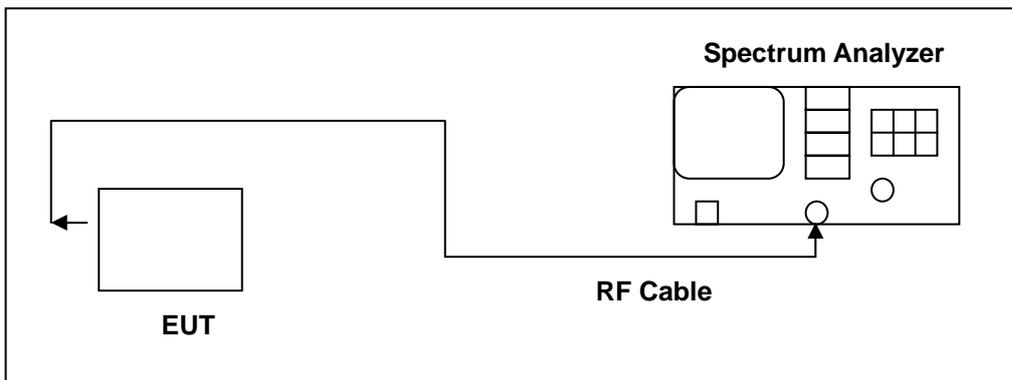

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/16/2011	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)

7.5. Test Result

Model Number	PG76200		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	06/21/2011	Test Site	TE02
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	7830	> 500
	2437	7420	> 500
	2462	7750	> 500

Model Number	PG76200		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	06/21/2011	Test Site	TE06
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	15170	> 500
	2437	15170	> 500
	2462	15250	> 500


Model Number	PG76200		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	06/21/2011	Test Site	TE02
	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
	2412	15170	> 500
	2437	15750	> 500
	2462	15330	> 500

7.6. Test Graphs


Mode 3: IEEE 802.11b Link Mode																					
2412	<p>Agilent R T Freq/Channel</p> <p>Ref 23 dBm Atten 20 dB Mkr2 7.83 MHz 0.37 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>Res BW 100 kHz VBW 100 kHz Sweep 6.04 ms (601 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.414 67 GHz</td> <td>8.64 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.409 42 GHz</td> <td>2.51 dBm</td> </tr> <tr> <td>2a</td> <td>(1)</td> <td>Freq</td> <td>7.83 MHz</td> <td>0.37 dB</td> </tr> </tbody> </table> <p>Copyright 2000-2005 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.414 67 GHz	8.64 dBm	2R	(1)	Freq	2.409 42 GHz	2.51 dBm	2a	(1)	Freq	7.83 MHz	0.37 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.414 67 GHz	8.64 dBm																	
2R	(1)	Freq	2.409 42 GHz	2.51 dBm																	
2a	(1)	Freq	7.83 MHz	0.37 dB																	
2437	<p>Agilent T Freq/Channel</p> <p>Ref 23 dBm Atten 20 dB Mkr2 7.42 MHz 0.73 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>Res BW 100 kHz VBW 100 kHz Sweep 6.04 ms (601 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.438 17 GHz</td> <td>9.89 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.434 58 GHz</td> <td>2.34 dBm</td> </tr> <tr> <td>2a</td> <td>(1)</td> <td>Freq</td> <td>7.42 MHz</td> <td>0.73 dB</td> </tr> </tbody> </table> <p>Copyright 2000-2005 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.438 17 GHz	9.89 dBm	2R	(1)	Freq	2.434 58 GHz	2.34 dBm	2a	(1)	Freq	7.42 MHz	0.73 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.438 17 GHz	9.89 dBm																	
2R	(1)	Freq	2.434 58 GHz	2.34 dBm																	
2a	(1)	Freq	7.42 MHz	0.73 dB																	
2462	<p>Agilent T Freq/Channel</p> <p>Ref 23 dBm Atten 20 dB Mkr2 7.75 MHz -0.38 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>Res BW 100 kHz VBW 100 kHz Sweep 6.04 ms (601 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.463 50 GHz</td> <td>9.89 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.459 42 GHz</td> <td>3.45 dBm</td> </tr> <tr> <td>2a</td> <td>(1)</td> <td>Freq</td> <td>7.75 MHz</td> <td>-0.38 dB</td> </tr> </tbody> </table> <p>Copyright 2000-2005 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.463 50 GHz	9.89 dBm	2R	(1)	Freq	2.459 42 GHz	3.45 dBm	2a	(1)	Freq	7.75 MHz	-0.38 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.463 50 GHz	9.89 dBm																	
2R	(1)	Freq	2.459 42 GHz	3.45 dBm																	
2a	(1)	Freq	7.75 MHz	-0.38 dB																	

Mode 4: IEEE 802.11g Link Mode


2412

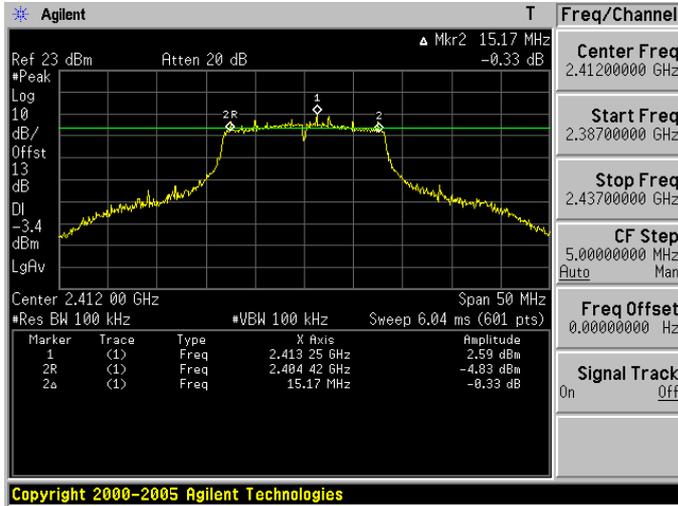

2437

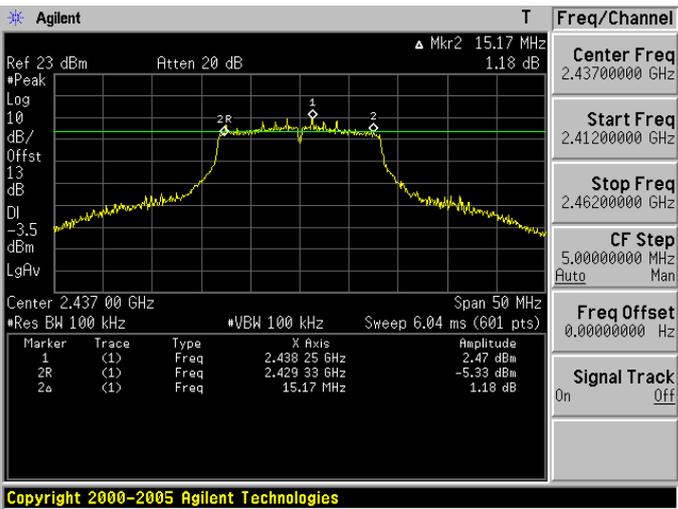


2462

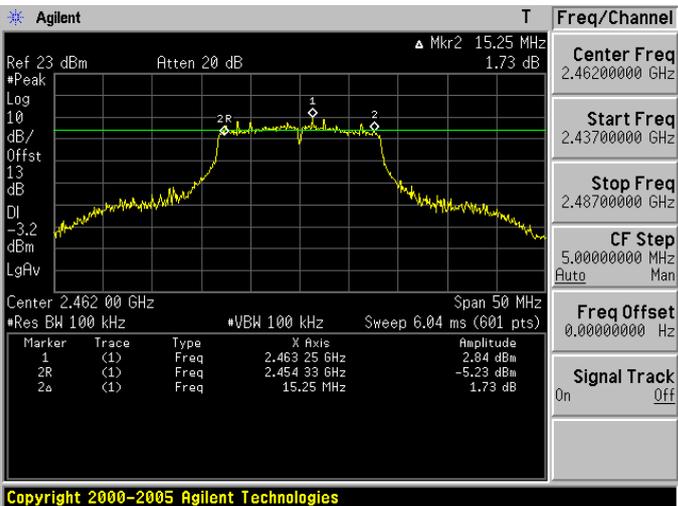


Mode 5: draft 802.11n Standard-20MHz Link Mode


2412

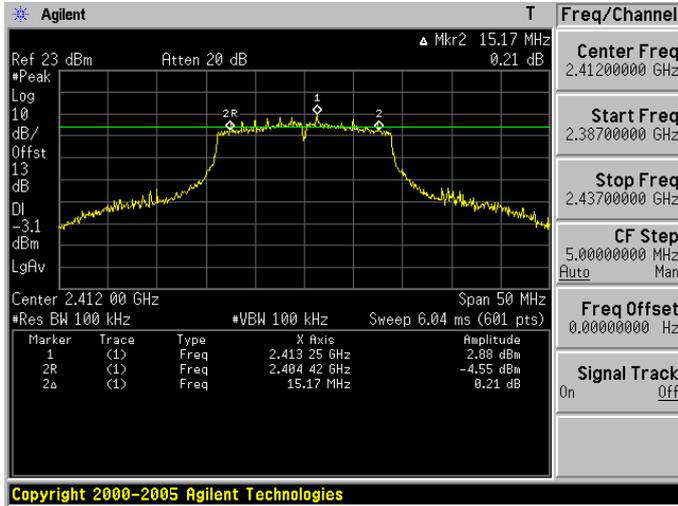

2437

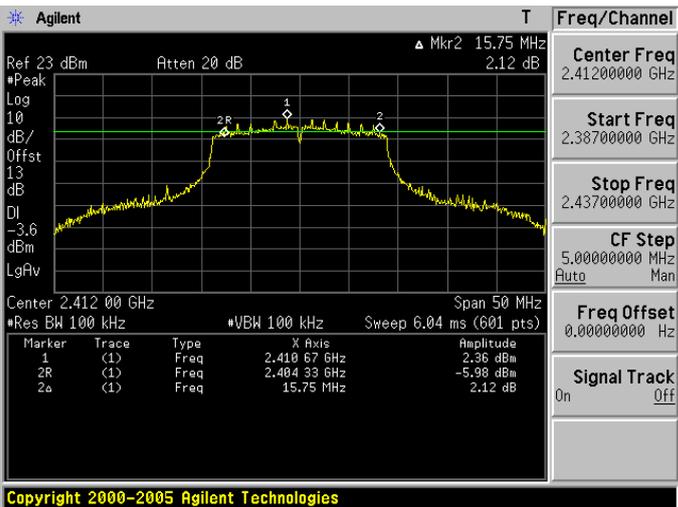

2462

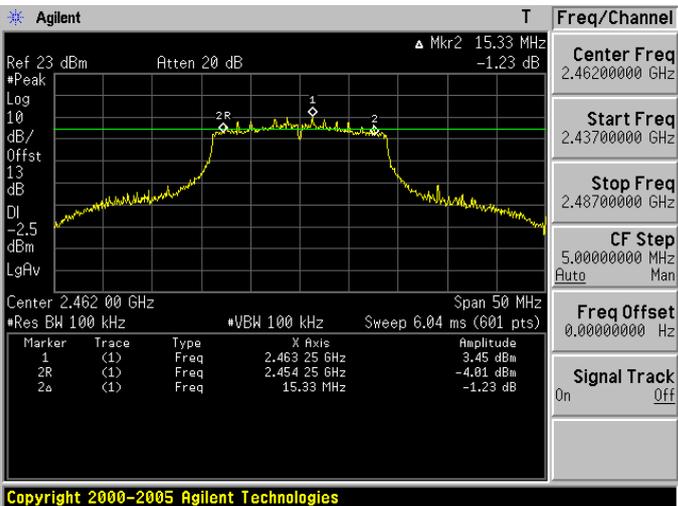


8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

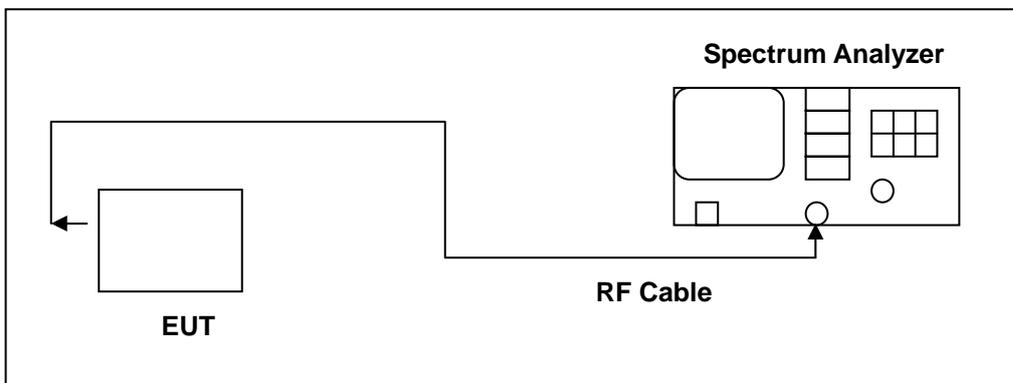

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/16/2011	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output pass band. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

8.5. Test Result

Model Number	PG76200		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	06/21/2011	Test Site	TE02
	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
	2412	-6.05	< 8
	2437	-3.73	< 8
	2462	-3.87	< 8




Model Number	PG76200		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	06/21/2011	Test Site	TE02
	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
	2412	-10.48	< 8
	2437	-11.17	< 8
	2462	-10.35	< 8

Model Number	PG76200		
Test Item	Maximum Power Density		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	06/21/2011	Test Site	TE02
	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
	2412	-11.05	< 8
	2437	-10.86	< 8
	2462	-10.31	< 8




8.6. Test Graphs

Mode 3: IEEE 802.11b Link Mode	
2412	
2437	
2462	

Mode 4: IEEE 802.11g Link Mode

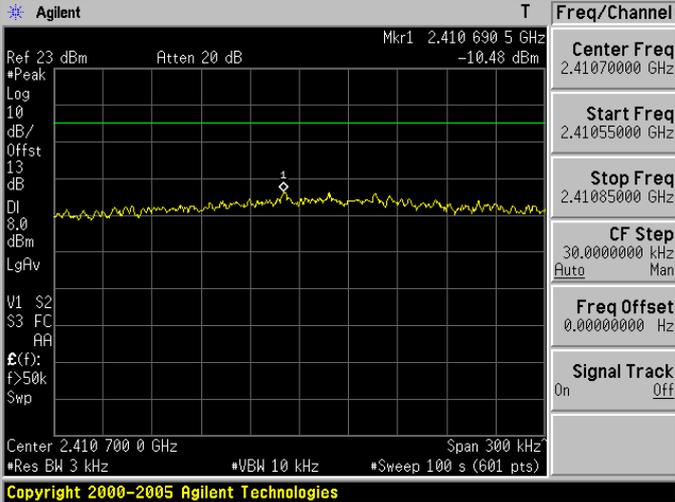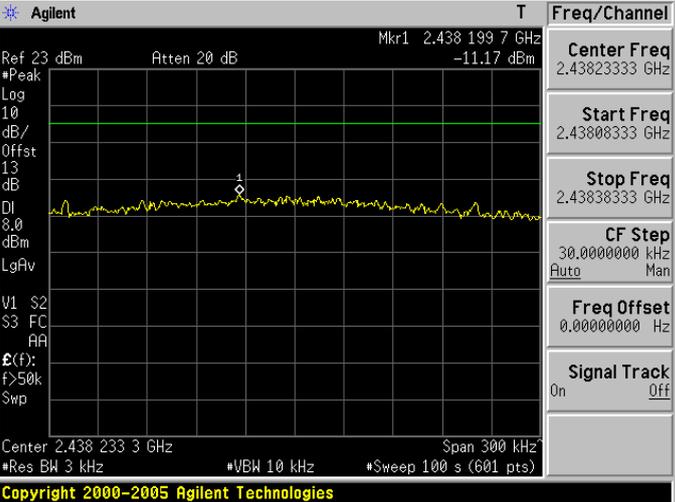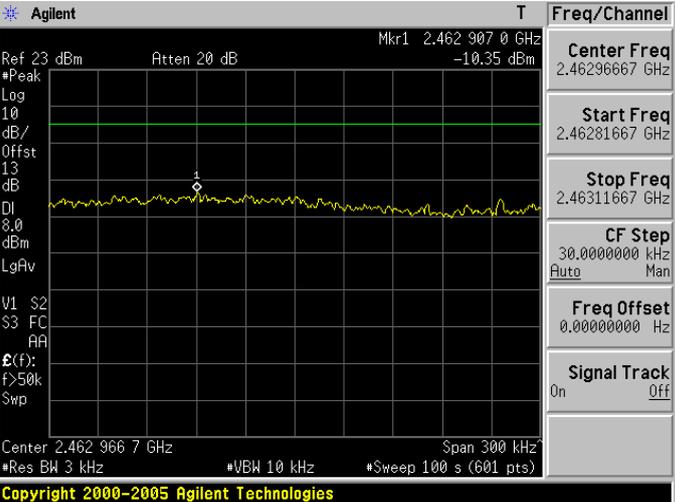2412	 <p>Agilent T Freq/Channel Ref 23 dBm Atten 20 dB Mkr1 2.410 690 5 GHz #Peak -10.48 dBm Log 10 dB/ Offst 13 dB DI 8.0 dBm LgAv V1 S2 S3 FC AA E(f): f>50k Swp Center 2.410 700 0 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts) Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T Freq/Channel Ref 23 dBm Atten 20 dB Mkr1 2.438 199 7 GHz #Peak -11.17 dBm Log 10 dB/ Offst 13 dB DI 8.0 dBm LgAv V1 S2 S3 FC AA E(f): f>50k Swp Center 2.438 233 3 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts) Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T Freq/Channel Ref 23 dBm Atten 20 dB Mkr1 2.462 907 0 GHz #Peak -10.35 dBm Log 10 dB/ Offst 13 dB DI 8.0 dBm LgAv V1 S2 S3 FC AA E(f): f>50k Swp Center 2.462 966 7 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts) Copyright 2000-2005 Agilent Technologies</p>

Mode 5: draft 802.11n Standard-20MHz Link Mode

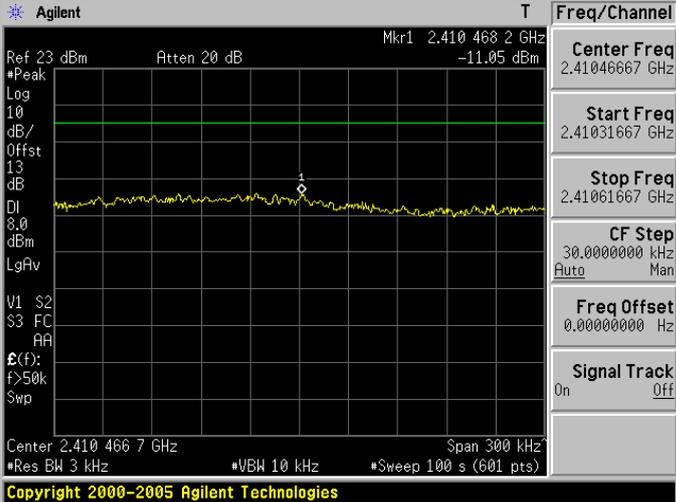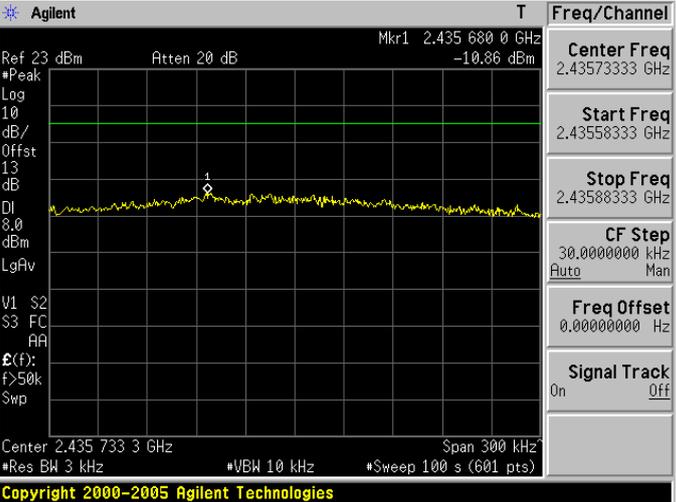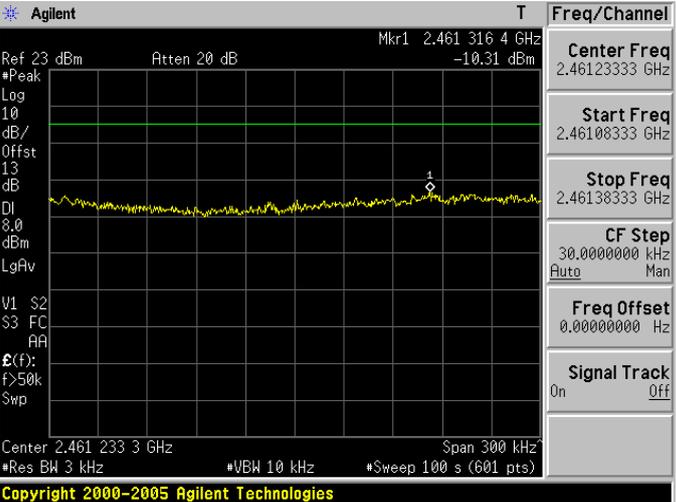
2412	 <p>Agilent T Freq/Channel</p> <p>Ref 23 dBm Atten 20 dB Mkr1 2.410 468 2 GHz -11.05 dBm</p> <p>Center Freq 2.4104667 GHz</p> <p>Start Freq 2.41031667 GHz</p> <p>Stop Freq 2.41061667 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.410 466 7 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T Freq/Channel</p> <p>Ref 23 dBm Atten 20 dB Mkr1 2.435 680 0 GHz -10.86 dBm</p> <p>Center Freq 2.4357333 GHz</p> <p>Start Freq 2.43558333 GHz</p> <p>Stop Freq 2.43588333 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.435 733 3 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T Freq/Channel</p> <p>Ref 23 dBm Atten 20 dB Mkr1 2.461 316 4 GHz -10.31 dBm</p> <p>Center Freq 2.4612333 GHz</p> <p>Start Freq 2.46108333 GHz</p> <p>Stop Freq 2.46138333 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.461 233 3 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

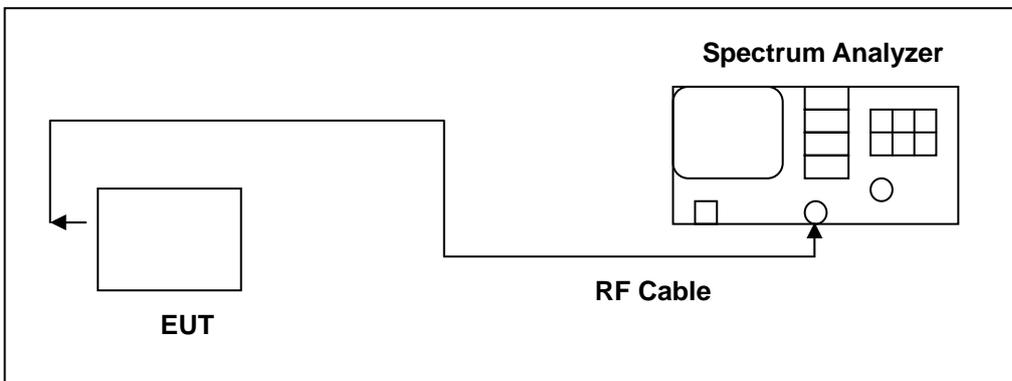

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/16/2011	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 1, 6, 11)




9.5. Test Graphs

Mode 3: IEEE 802.11b Link Mode	
2412	
2437	
2462	

Mode 4: IEEE 802.11g Link Mode

2412	<p>Agilent 10:44:05 Jun 21, 2011 R T</p> <p>Ref 21 dBm Atten 20 dB Mkr1 2.41 GHz 1.428 dBm</p> <p>Peak Log 10 dB/Offst 11 dB DI -18.6 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel: Center Freq 13.2650000 GHz, Start Freq 30.0000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64700000 GHz Auto Man, Freq Offset 0.00000000 Hz, Signal Track On Off</p>
2437	<p>Agilent 10:41:00 Jun 21, 2011 R T</p> <p>Ref 21 dBm Atten 20 dB Mkr1 2.44 GHz 2.488 dBm</p> <p>Peak Log 10 dB/Offst 11 dB DI -17.5 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel: Center Freq 13.2650000 GHz, Start Freq 30.0000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64700000 GHz Auto Man, Freq Offset 0.00000000 Hz, Signal Track On Off</p>
2462	<p>Agilent 10:46:31 Jun 21, 2011 R T</p> <p>Ref 21 dBm Atten 20 dB Mkr1 2.46 GHz 2.623 dBm</p> <p>Peak Log 10 dB/Offst 11 dB DI -17.4 dBm</p> <p>V1 S2 S3 FC AA</p> <p>Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel: Center Freq 13.2650000 GHz, Start Freq 30.0000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64700000 GHz Auto Man, Freq Offset 0.00000000 Hz, Signal Track On Off</p>

Mode 5: draft 802.11n Standard-20MHz Link Mode

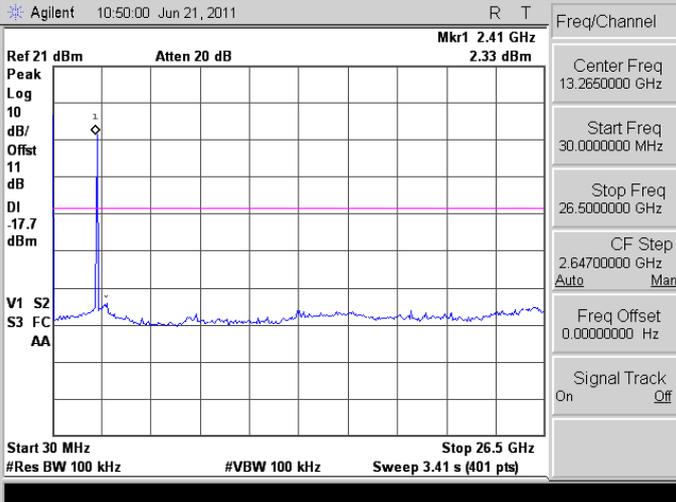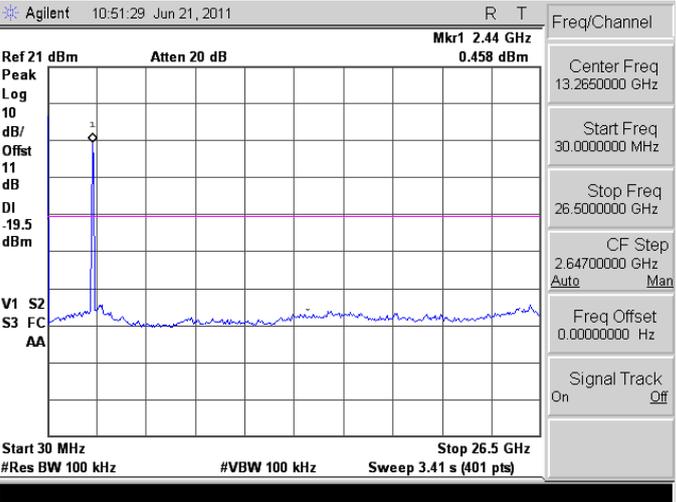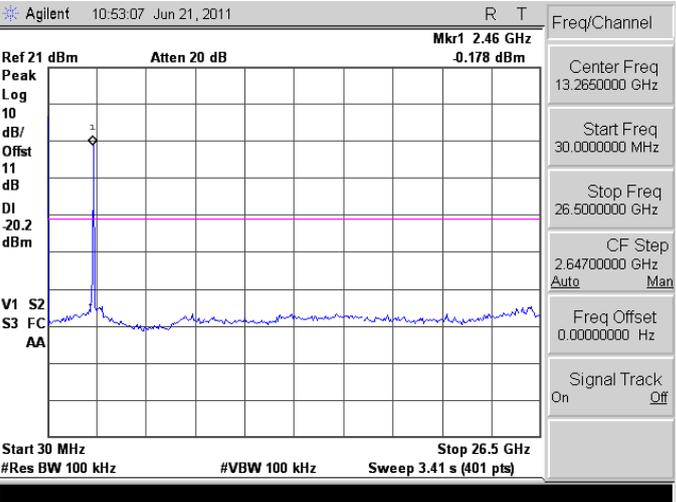
2412	
2437	
2462	

10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

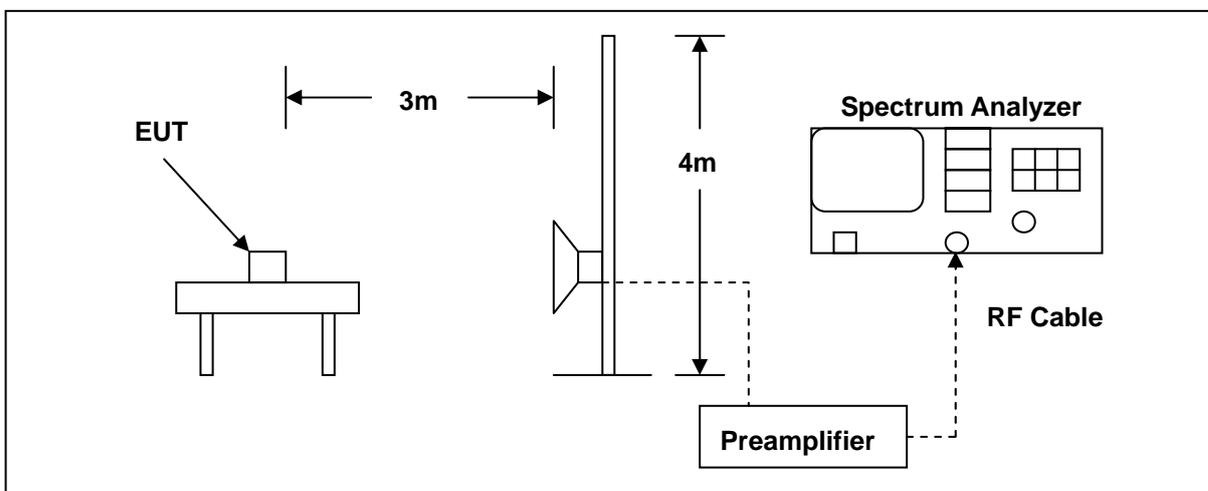

10.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	06/24/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/29/2010	(1)
Test Site	ATL	TE01	888001	07/30/2010	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


10.5.Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/27/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

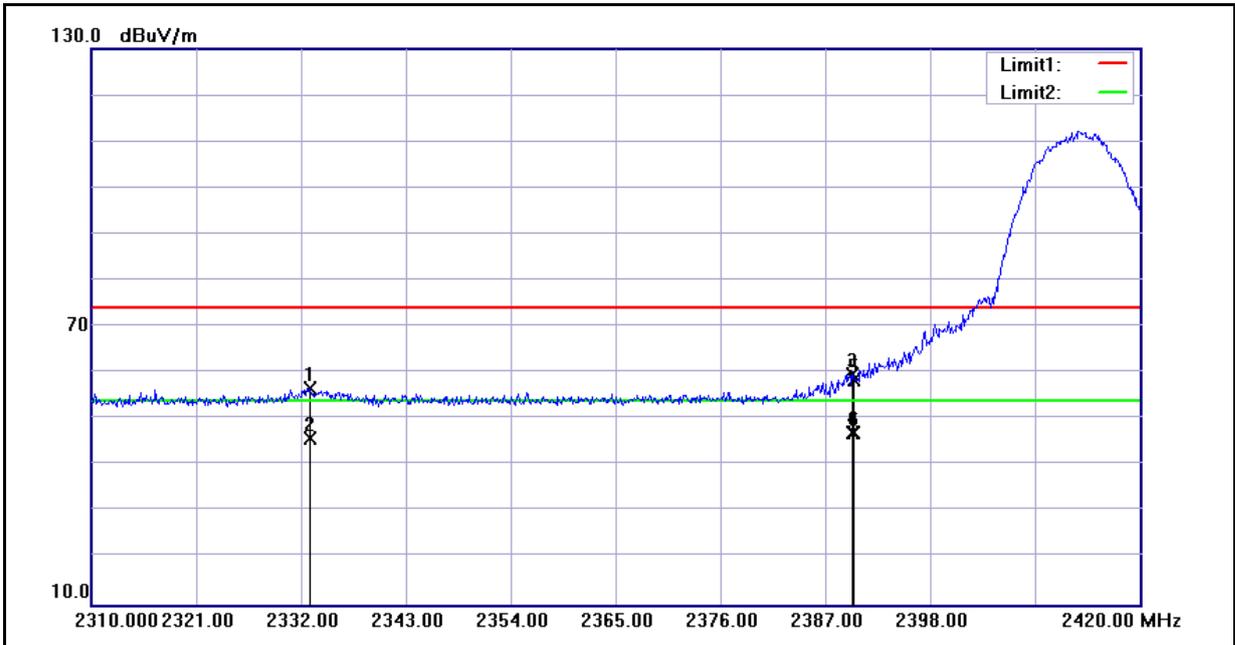


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.990	48.62	7.98	56.60	74.00	-17.40	peak
2	2332.990	37.83	7.98	45.81	54.00	-8.19	AVG
3	2389.860	51.55	8.10	59.65	74.00	-14.35	peak
4	2389.860	38.92	8.10	47.02	54.00	-6.98	AVG
5	2390.000	50.27	8.10	58.37	74.00	-15.63	peak
6	2390.000	39.00	8.10	47.10	54.00	-6.90	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/27/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

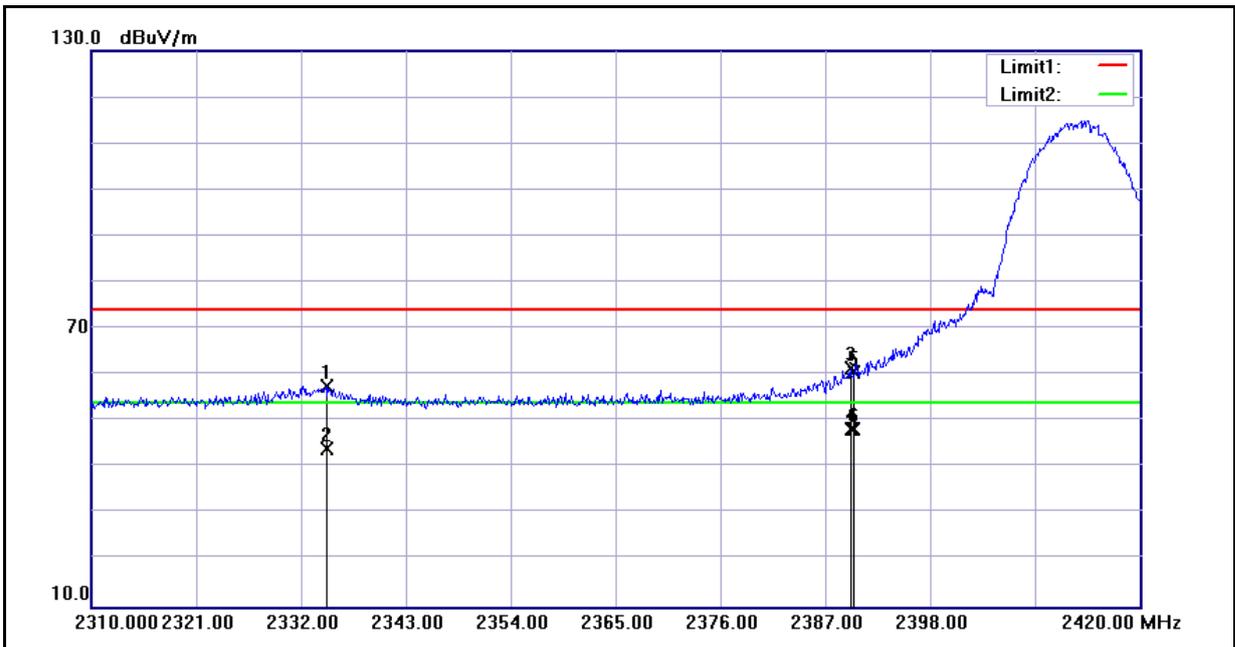


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2334.640	49.49	7.98	57.47	74.00	-16.53	peak
2	2334.640	36.07	7.98	44.05	54.00	-9.95	AVG
3	2389.640	53.22	8.10	61.32	74.00	-12.68	peak
4	2389.640	40.15	8.10	48.25	54.00	-5.75	AVG
5	2390.000	52.40	8.10	60.50	74.00	-13.50	peak
6	2390.000	40.21	8.10	48.31	54.00	-5.69	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/27/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

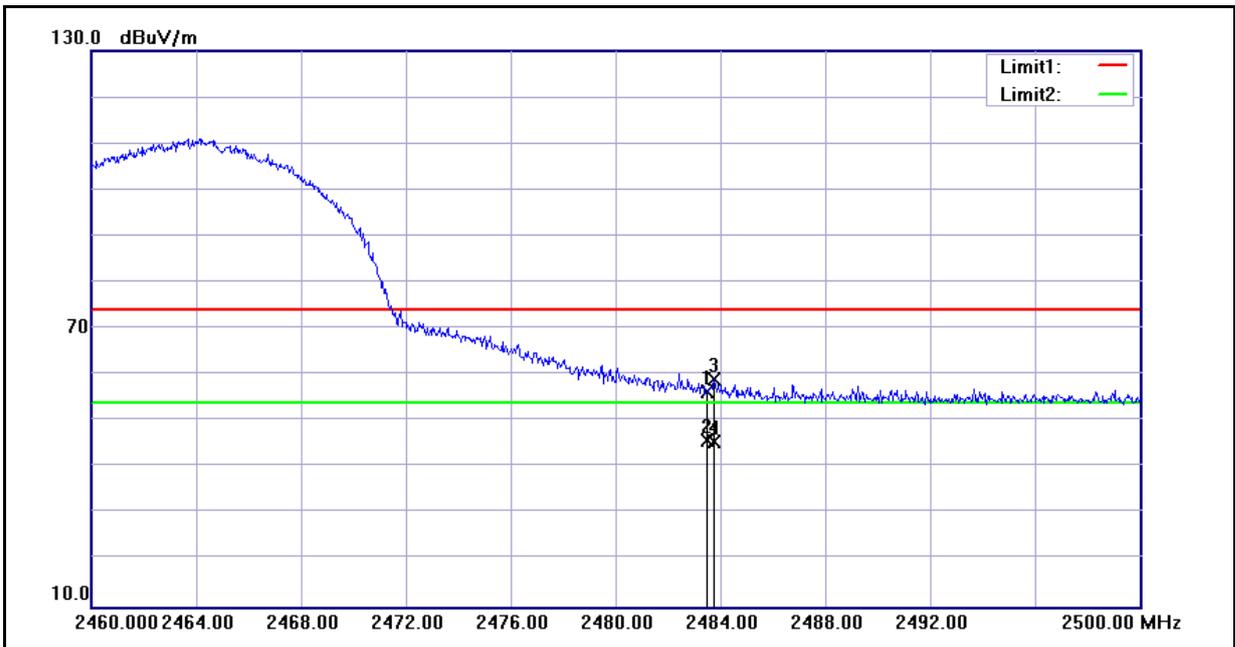


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	47.94	8.32	56.26	74.00	-17.74	peak
2	2483.500	37.39	8.32	45.71	54.00	-8.29	AVG
3	2483.760	50.69	8.32	59.01	74.00	-14.99	peak
4	2483.760	37.29	8.32	45.61	54.00	-8.39	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	06/27/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

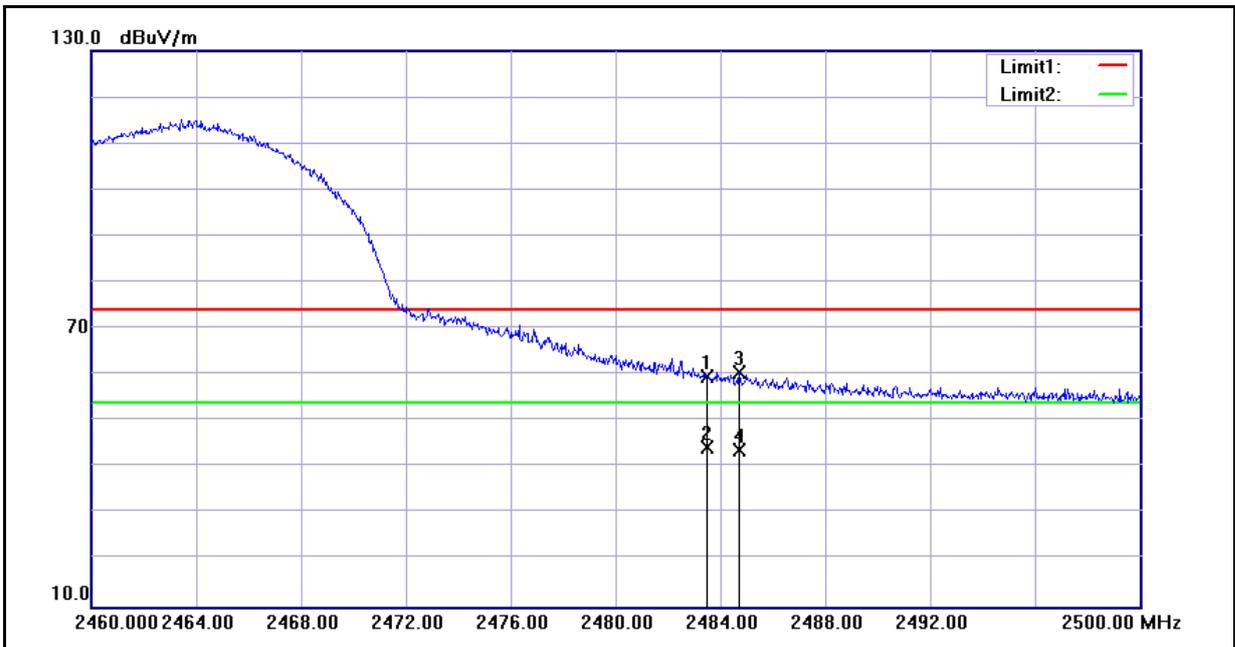


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	51.45	8.32	59.77	74.00	-14.23	peak
2	2483.500	35.93	8.32	44.25	54.00	-9.75	AVG
3	2484.720	52.26	8.32	60.58	74.00	-13.42	peak
4	2484.720	35.52	8.32	43.84	54.00	-10.16	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/27/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

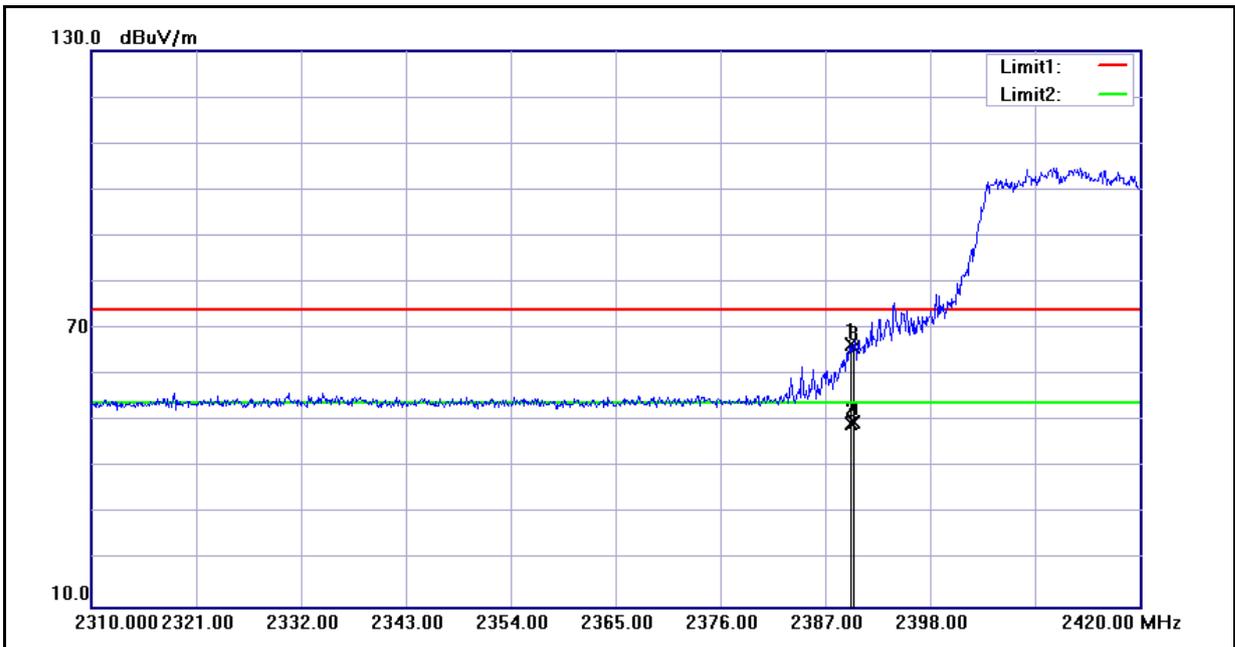


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.640	58.43	8.10	66.53	74.00	-7.47	peak
2	2389.640	41.47	8.10	49.57	54.00	-4.43	AVG
3	2390.000	57.87	8.10	65.97	74.00	-8.03	peak
4	2390.000	41.58	8.10	49.68	54.00	-4.32	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/27/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

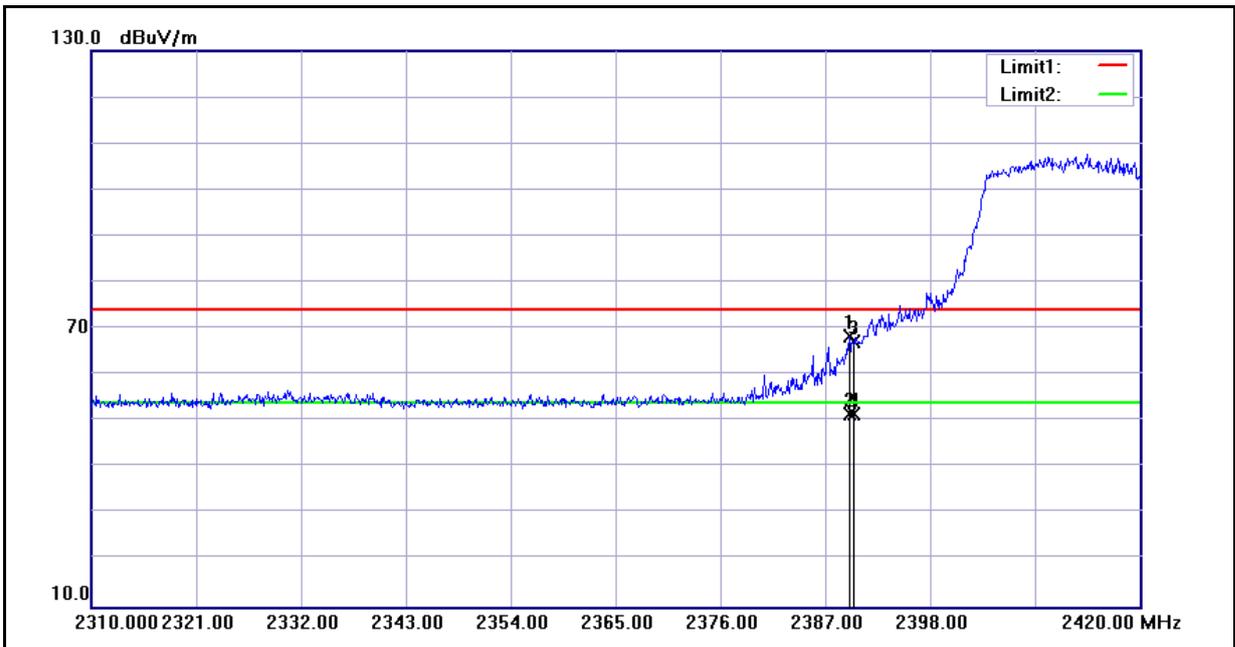


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	60.34	8.10	68.44	74.00	-5.56	peak
2	2389.530	43.42	8.10	51.52	54.00	-2.48	AVG
3	2390.000	59.13	8.10	67.23	74.00	-6.77	peak
4	2390.000	43.57	8.10	51.67	54.00	-2.33	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/27/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

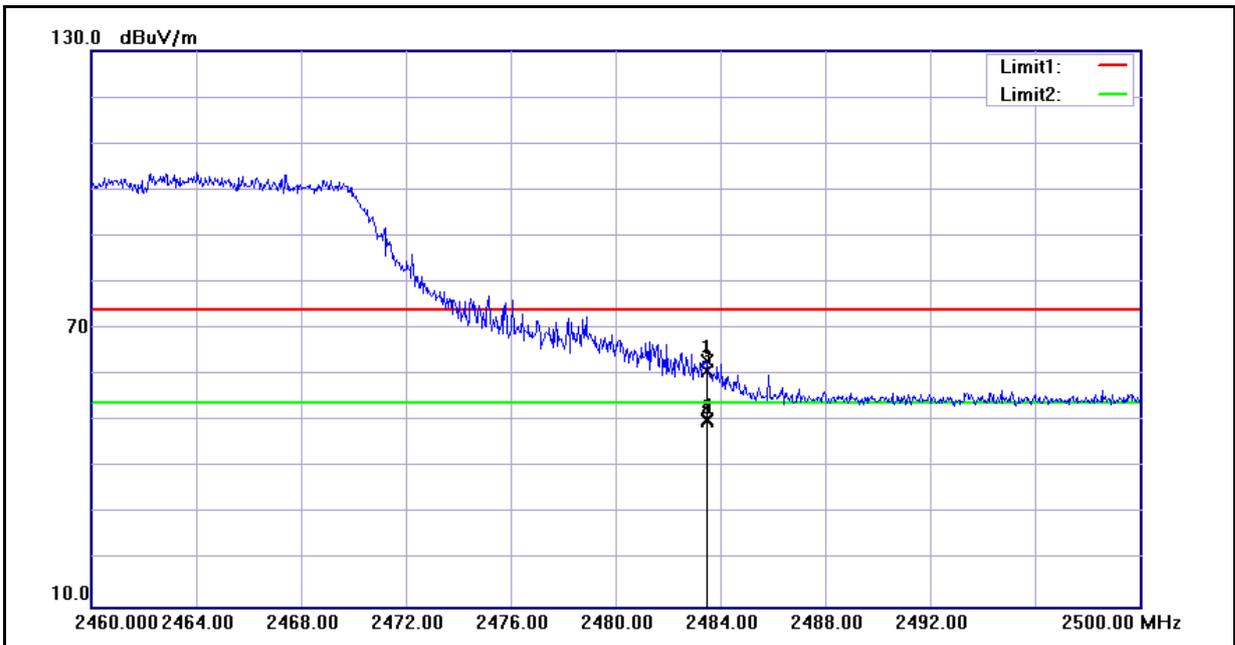


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.480	54.53	8.32	62.85	74.00	-11.15	peak
2	2483.480	41.69	8.32	50.01	54.00	-3.99	AVG
3	2483.500	52.66	8.32	60.98	74.00	-13.02	peak
4	2483.500	41.88	8.32	50.20	54.00	-3.80	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	06/27/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

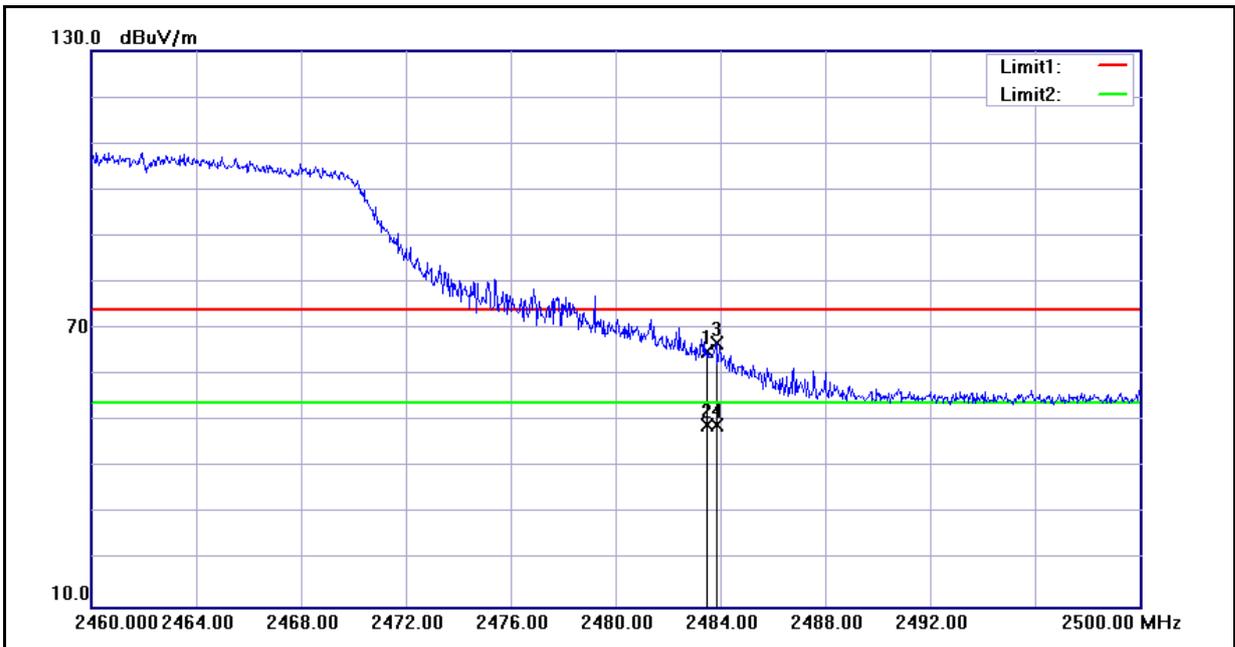


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.75	8.32	65.07	74.00	-8.93	peak
2	2483.500	40.86	8.32	49.18	54.00	-4.82	AVG
3	2483.840	58.56	8.32	66.88	74.00	-7.12	peak
4	2483.840	40.93	8.32	49.25	54.00	-4.75	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/27/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

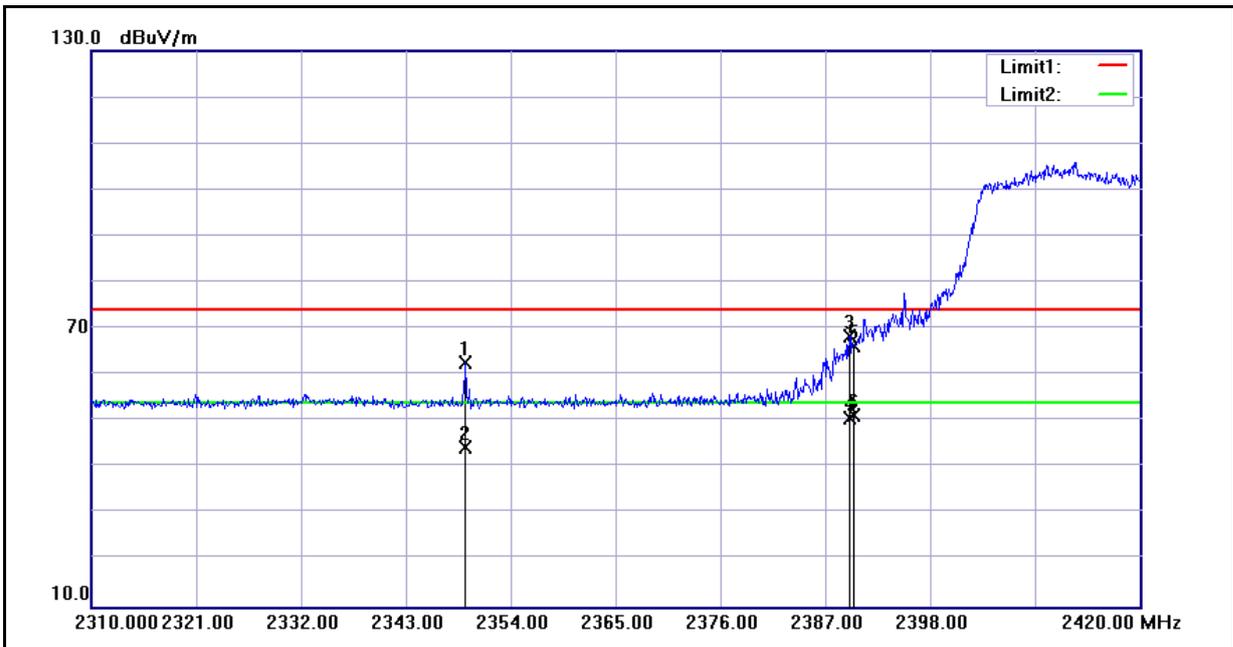


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2349.270	54.78	8.01	62.79	74.00	-11.21	peak
2	2349.270	36.32	8.01	44.33	54.00	-9.67	AVG
3	2389.530	60.38	8.10	68.48	74.00	-5.52	peak
4	2389.530	42.50	8.10	50.60	54.00	-3.40	AVG
5	2390.000	58.25	8.10	66.35	74.00	-7.65	peak
6	2390.000	43.08	8.10	51.18	54.00	-2.82	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/27/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

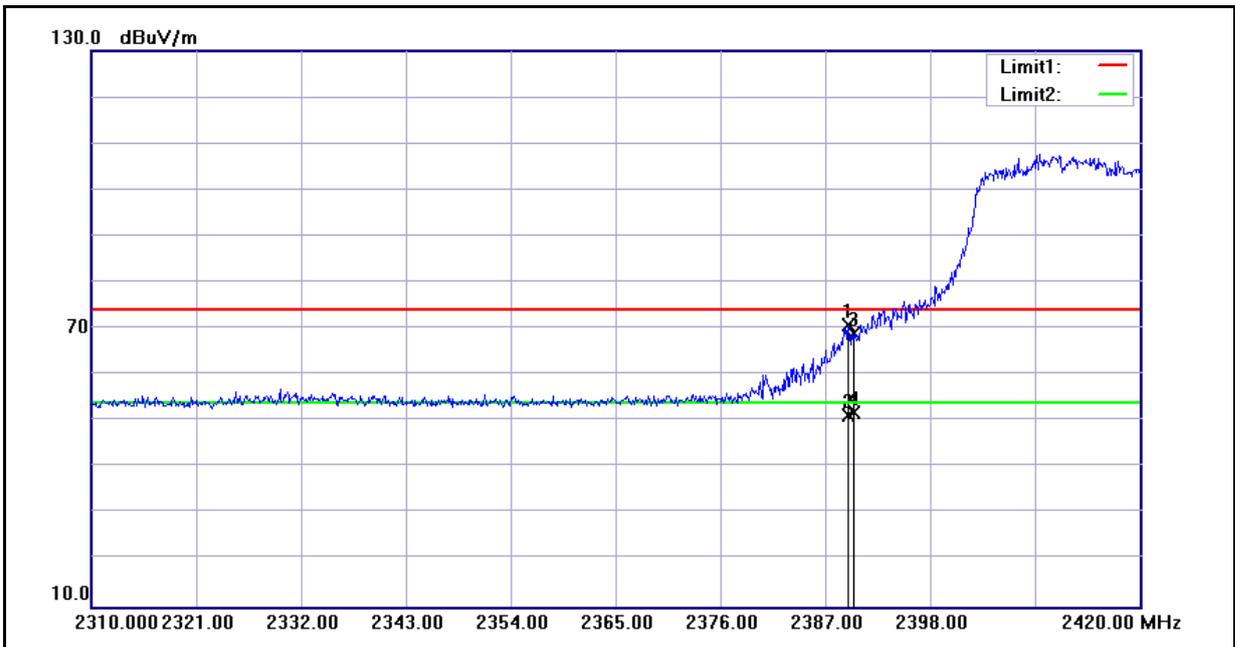


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	62.78	8.10	70.88	74.00	-3.12	peak
2	2389.420	43.15	8.10	51.25	54.00	-2.75	AVG
3	2390.000	60.97	8.10	69.07	74.00	-4.93	peak
4	2390.000	43.89	8.10	51.99	54.00	-2.01	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/27/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

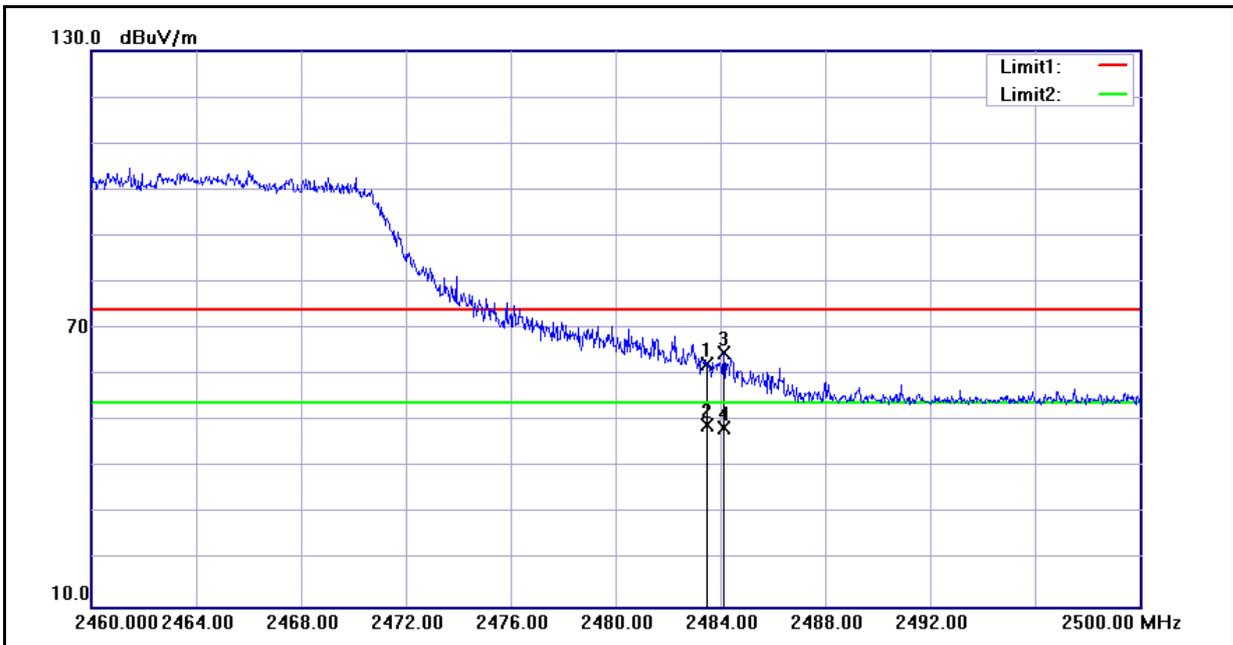

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.96	8.32	62.28	74.00	-11.72	peak
2	2483.500	40.80	8.32	49.12	54.00	-4.88	AVG
3	2484.120	56.35	8.32	64.67	74.00	-9.33	peak
4	2484.120	40.19	8.32	48.51	54.00	-5.49	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PG76200	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	06/27/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

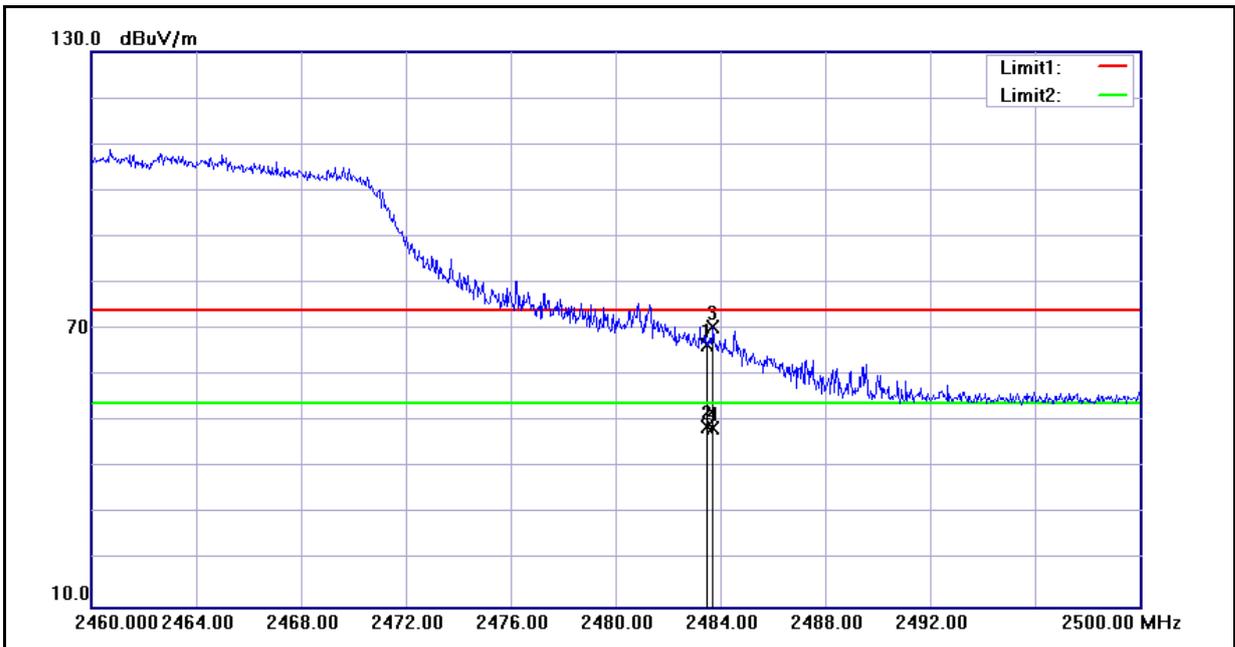


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.09	8.32	66.41	74.00	-7.59	peak
2	2483.500	40.46	8.32	48.78	54.00	-5.22	AVG
3	2483.720	62.00	8.32	70.32	74.00	-3.68	peak
4	2483.720	40.32	8.32	48.64	54.00	-5.36	AVG

11 99 % Occupied Bandwidth Measurement

11.1.Limit

N/A

11.2.Test Setup

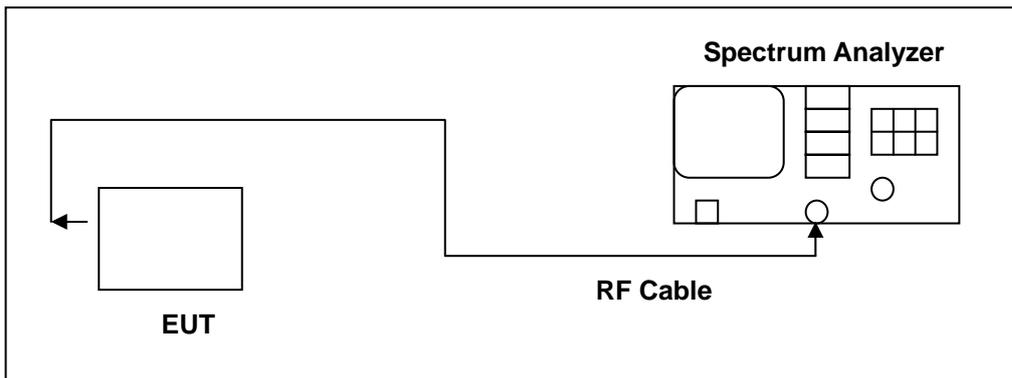

11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/16/2011	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

11.4.Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

11.5.Test Result

Model Number	PG76200		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11b Link Mode		
Date of Test	06/21/2011	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	2412	11.3270	-----
	2437	11.4922	-----
	2462	11.2370	-----

Model Number	PG76200		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 4: IEEE 802.11g Link Mode		
Date of Test	06/21/2011	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	2412	16.5613	-----
	2437	16.6458	-----
	2462	16.5800	-----

Model Number	PG76200		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 5: draft 802.11n Standard-20MHz Link Mode		
Date of Test	06/21/2011	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (kHz)
	2412	17.6548	-----
	2437	17.7369	-----
	2462	17.6805	-----


11.6. Test Graphs

Mode 3: IEEE 802.11b Link Mode	
2412	<p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 13 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 11.3270 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.417 MHz</p> <p>x dB Bandwidth 14.313 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	<p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 13 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 11.4922 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.388 MHz</p> <p>x dB Bandwidth 14.383 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	<p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 13 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 11.2370 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.406 MHz</p> <p>x dB Bandwidth 14.236 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11g Link Mode

2412	<p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 13 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 16.5613 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -19.334 kHz</p> <p>x dB Bandwidth 21.716 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	<p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 13 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 16.6458 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -46.153 kHz</p> <p>x dB Bandwidth 21.325 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	<p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 13 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 16.5800 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -84.064 kHz</p> <p>x dB Bandwidth 20.614 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 5: draft 802.11n Standard-20MHz Link Mode

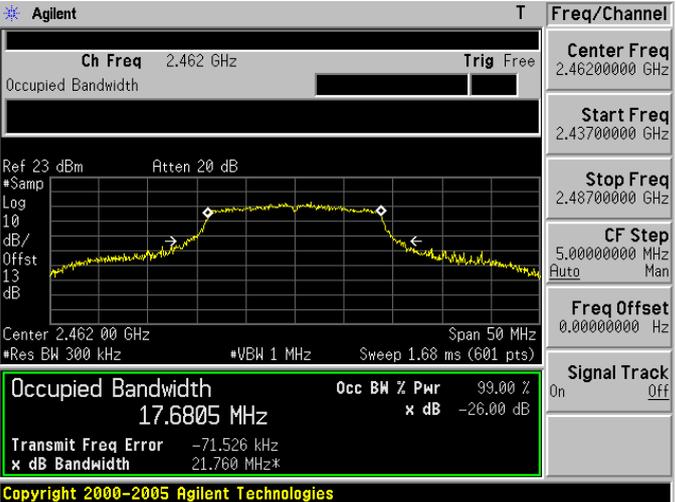2412	 <p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 13 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 17.6548 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -9.998 kHz</p> <p>x dB Bandwidth 21.915 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	 <p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 13 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 17.7369 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -48.308 kHz</p> <p>x dB Bandwidth 22.085 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	 <p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 23 dBm Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 13 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 17.6805 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -71.526 kHz</p> <p>x dB Bandwidth 21.760 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

12 Antenna Measurement

12.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2.Antenna Connector Construction

The antenna used in this product is **PIFA antenna**. And the maximum Gain of this antenna is only **1.5 dBi**.