

#133 LTE Band 17_QPSK(1-0)_Front Face_1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg³/m

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.104 mW/g



Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.132 mW/g

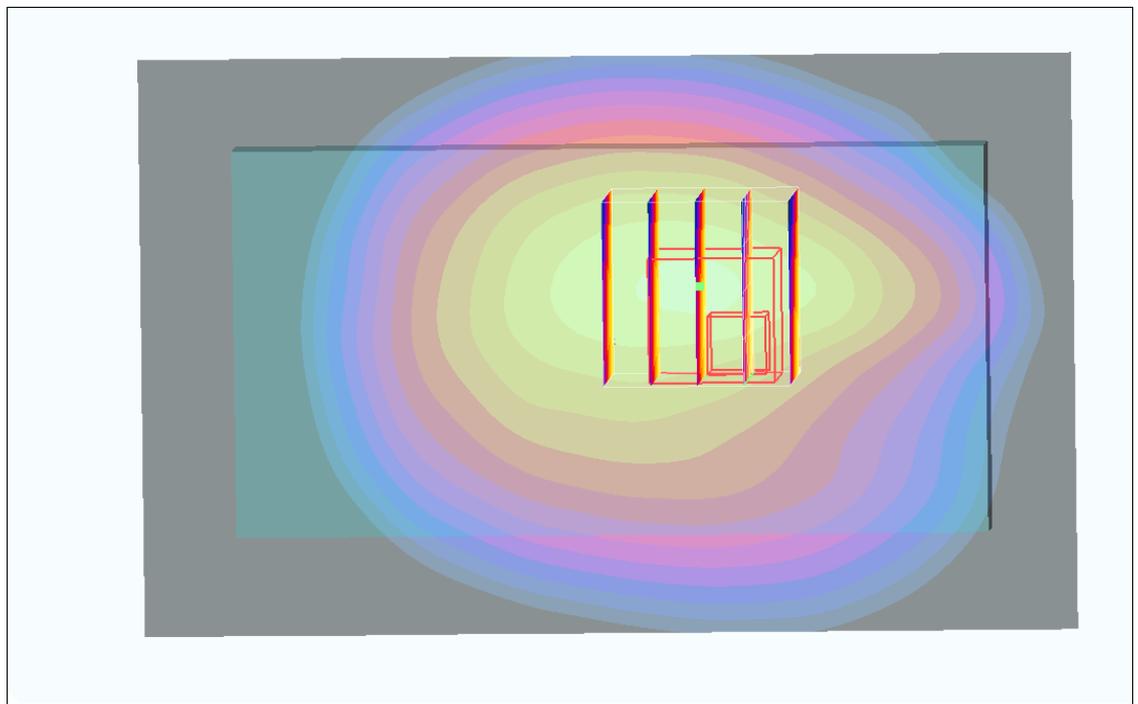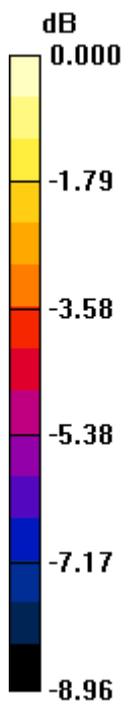

0 dB = 0.132mW/g

#134 LTE Band 17_QPSK(1-49)_Front Face_1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.135 mW/g

Ch23790/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.097 mW/g


Maximum value of SAR (measured) = 0.133 mW/g

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.089 mW/g

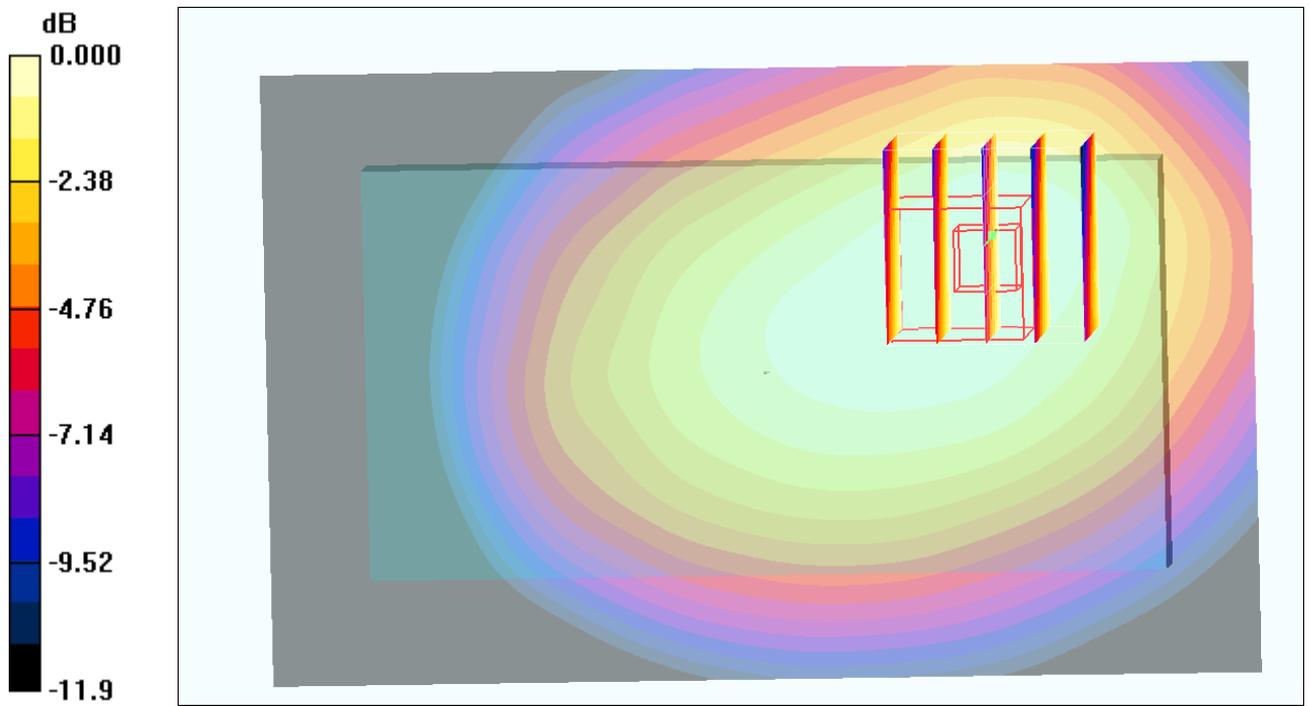

0 dB = 0.152mW/g

#135 LTE Band 17_QPSK(1-0)_Rear Face _1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 4232133145"
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.139 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.135 mW/g

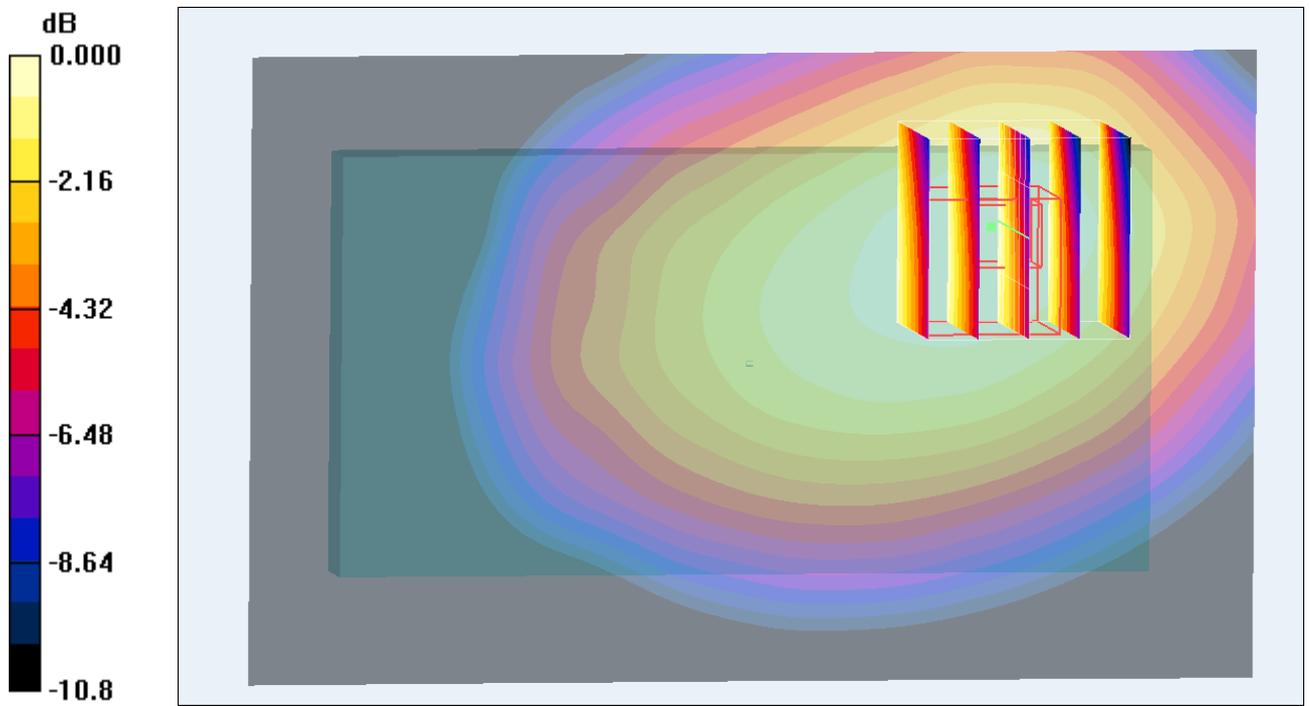

0 dB = 0.135mW/g

#136 LTE Band 17_QPSK(1-49)_Rear Face _1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 4232133145"
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.133 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 9.86 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.129 mW/g

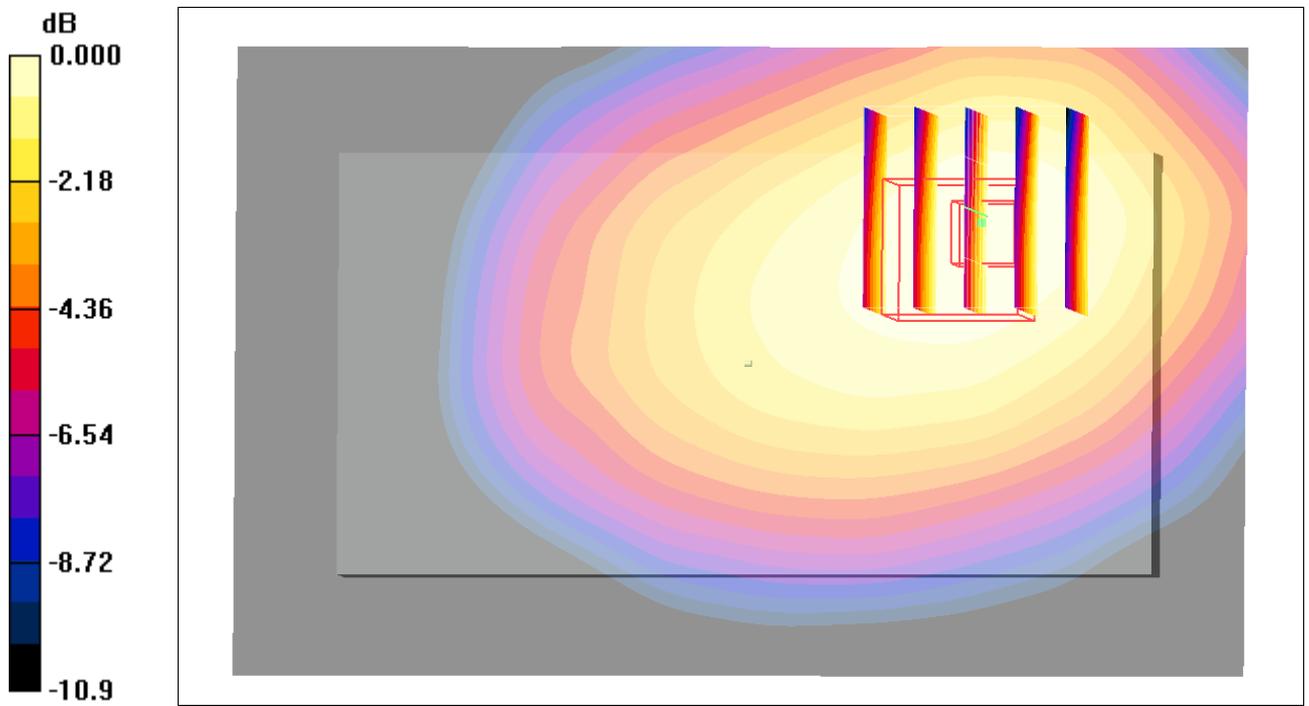

0 dB = 0.129mW/g

#77 LTE Band 17_QPSK(25-13)_Right Side_1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110602 Medium parameters used: $f = 710$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 52.86$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 4232133145"
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.157 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

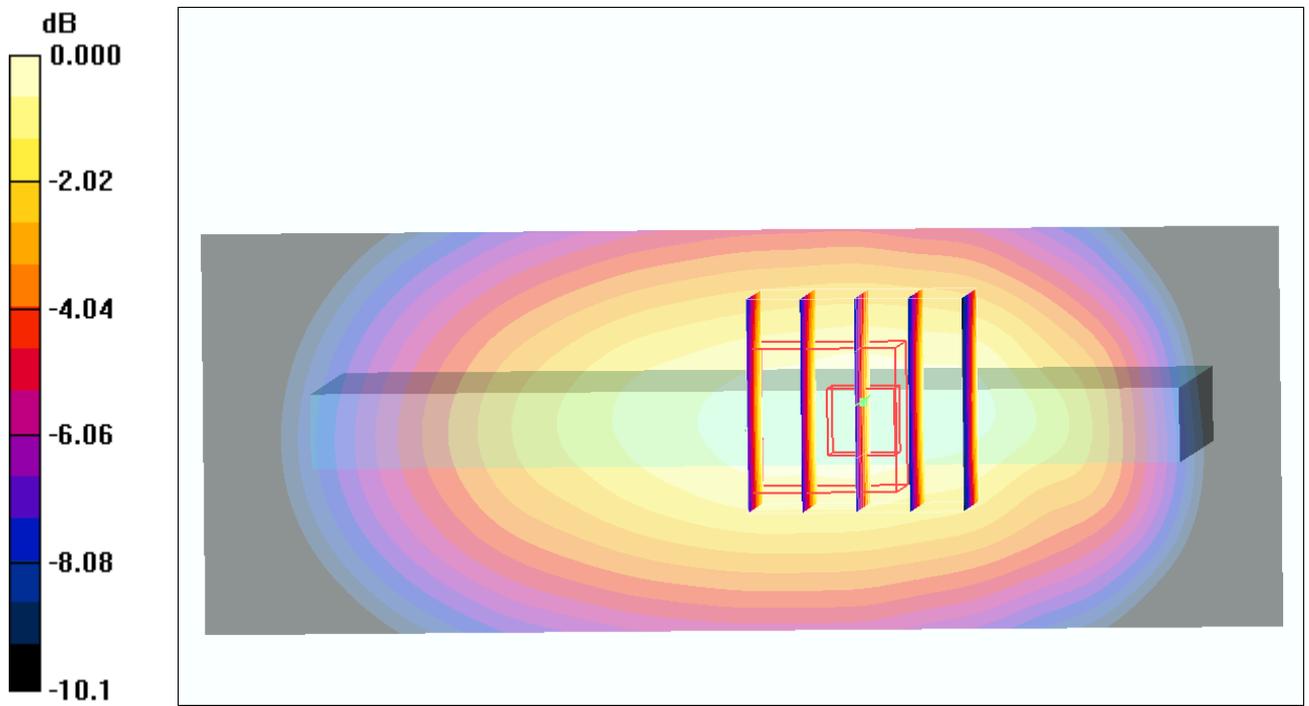

0 dB = 0.162mW/g

#77 LTE Band 17_QPSK(25-13)_Right Side_1cm_Ch23790_10M_2D

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110602 Medium parameters used: $f = 710$ MHz; $\sigma = 0.921$
mho/m; $\epsilon_r = 52.86$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 4232133145"
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.157 mW/g

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.016 dB


Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

1g/10g Averaged SAR

SAR, Zoom Scan: Value Along Z, X=2, Y=2

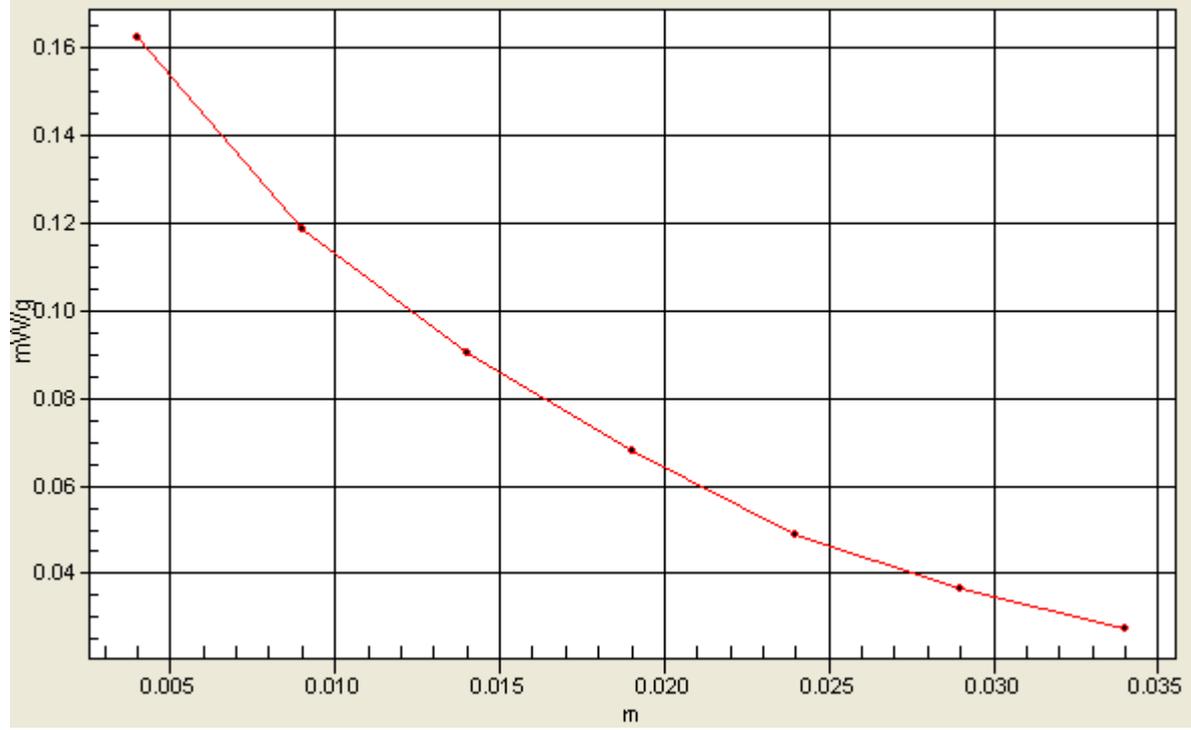

#139 LTE Band 17_QPSK(1-0)_Right Side _1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:0

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 423213145"
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.126 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

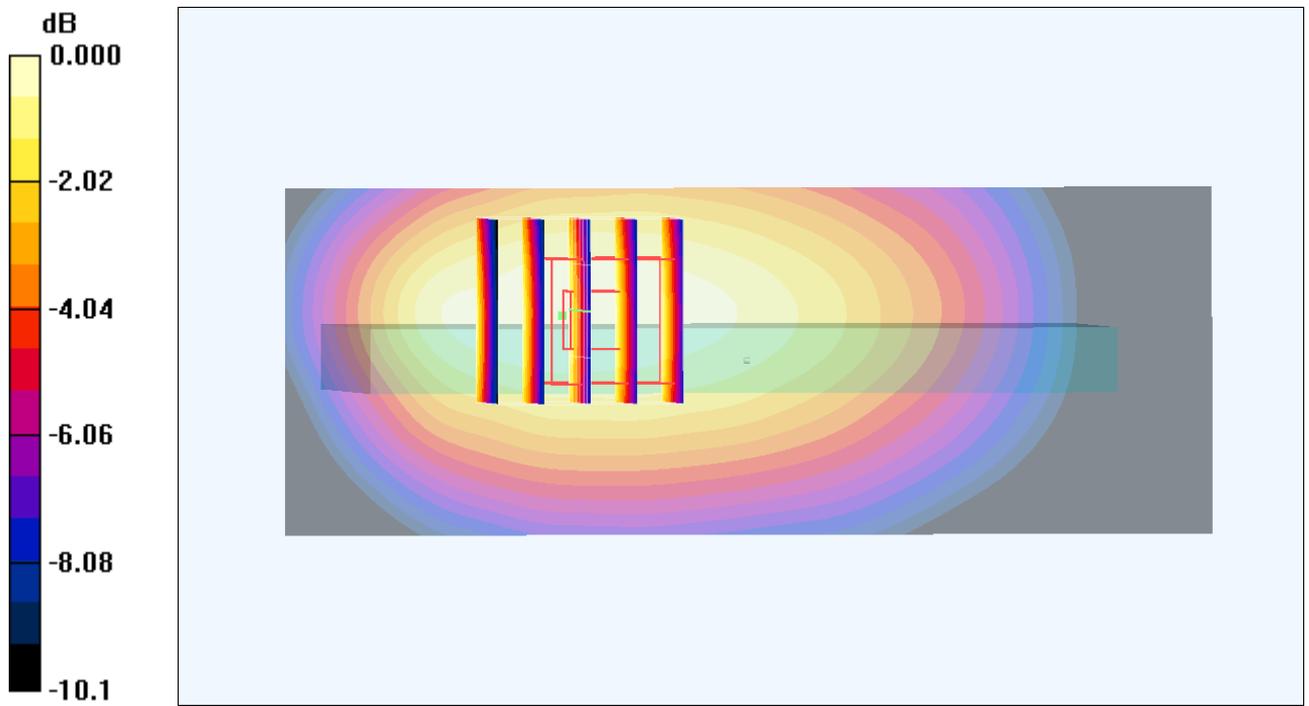

0 dB = 0.124mW/g

#140 LTE Band 17_QPSK(1-49)_Right Side _1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 4232133145"
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.120 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

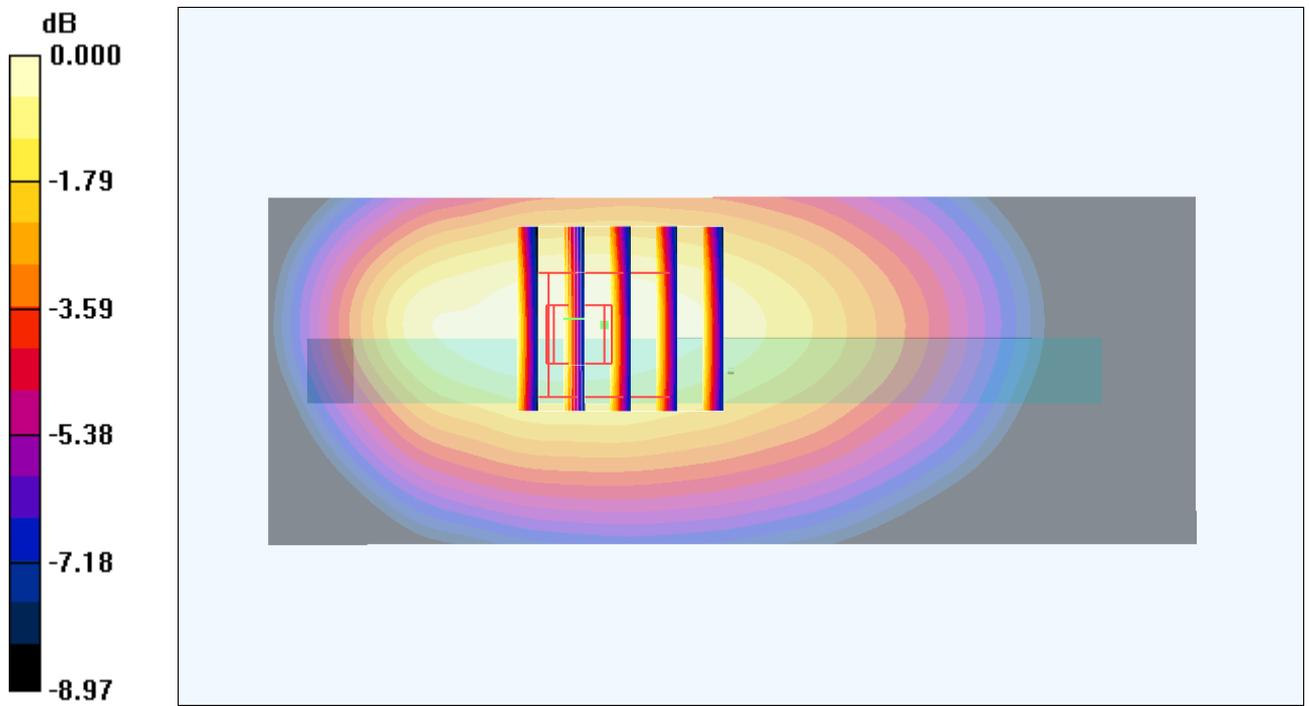

0 dB = 0.117mW/g

#78 LTE Band 17_QPSK(25-13)_Top Side_1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110602 Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.921$
 mho/m ; $\epsilon_r = 52.86$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 4232B3145"
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x41x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
Maximum value of SAR (interpolated) = 0.099 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.30 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

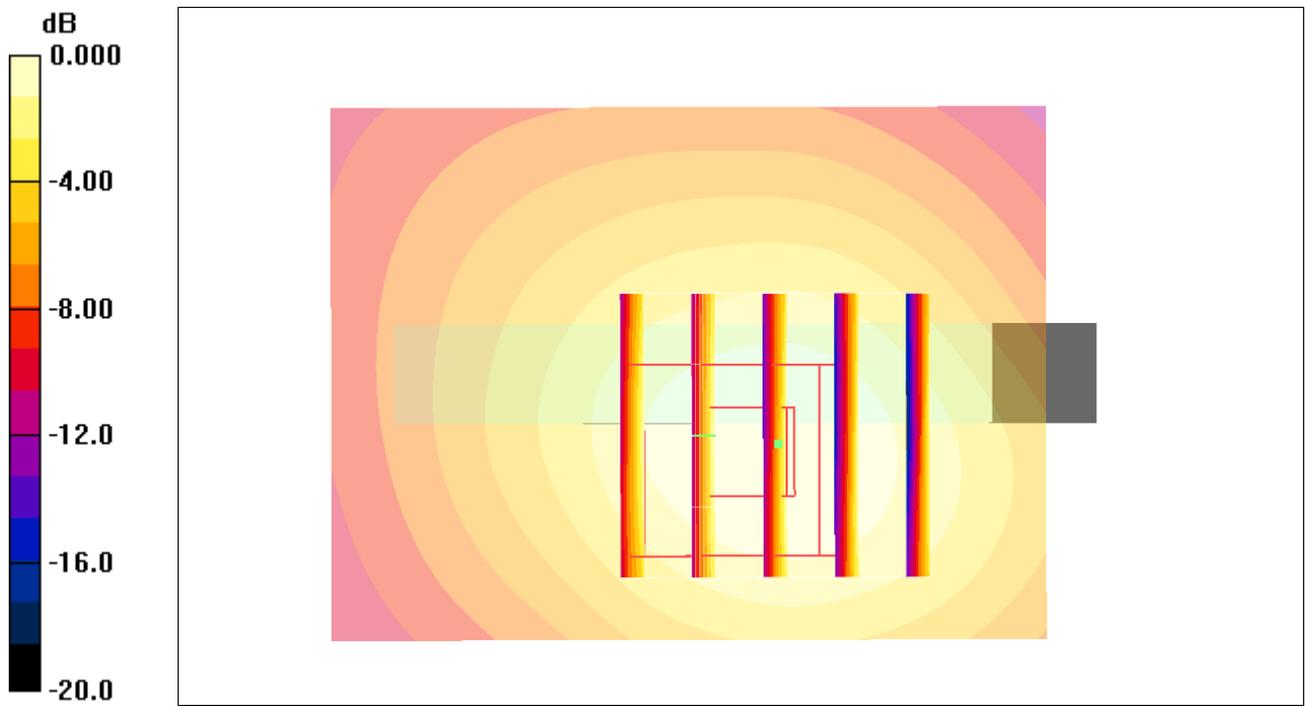

0 dB = 0.095mW/g

#141 LTE Band 17_QPSK(1-0)_Top Side _1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 4232133145"
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.065 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.48 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.068 mW/g

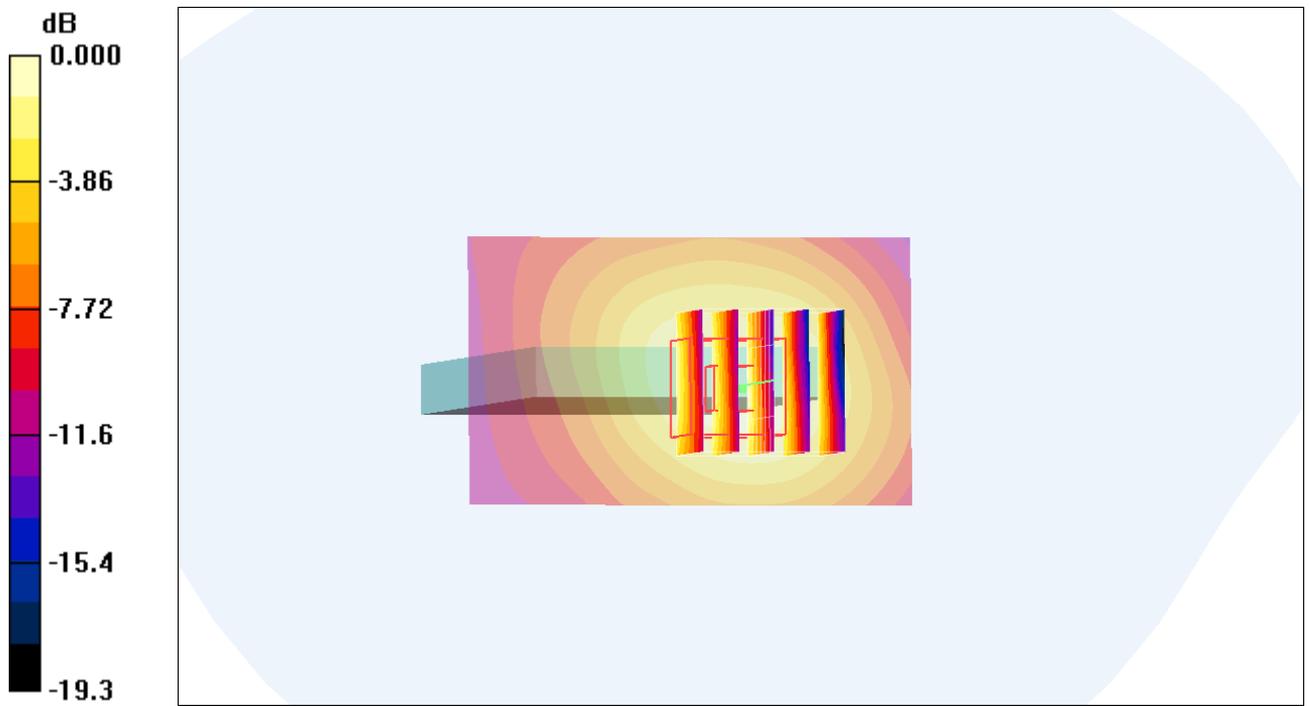

0 dB = 0.068mW/g

#142 LTE Band 17_QPSK(1-49)_Top Side _1cm_Ch23790_10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.062 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.09 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

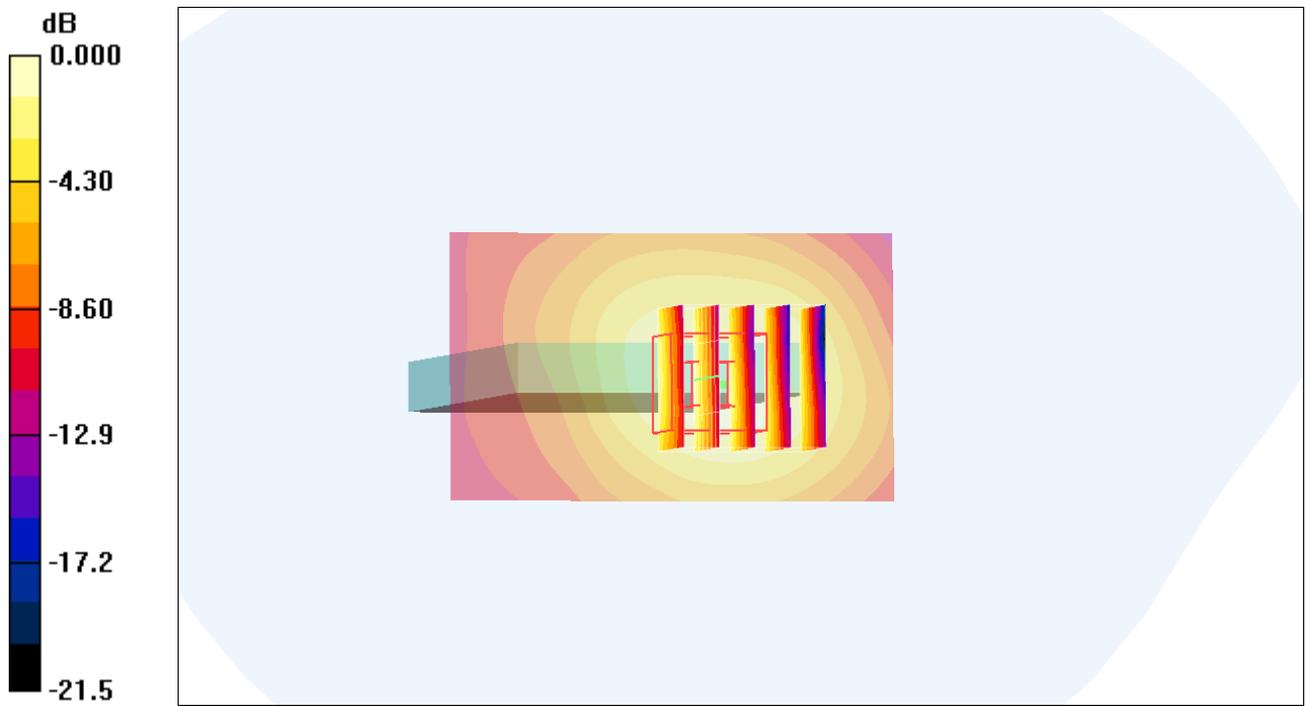

0 dB = 0.065mW/g

#143 LTE Band 17_QPSK(25-13)_Front Face_1cm_Ch23790_Earphone _10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$

mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg³/m

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn495; Calibrated: 2011/4/28

- Phantom: SAM_Right; Type: SAM; Serial: TP-1303

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.099 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 9.06 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.088 mW/g

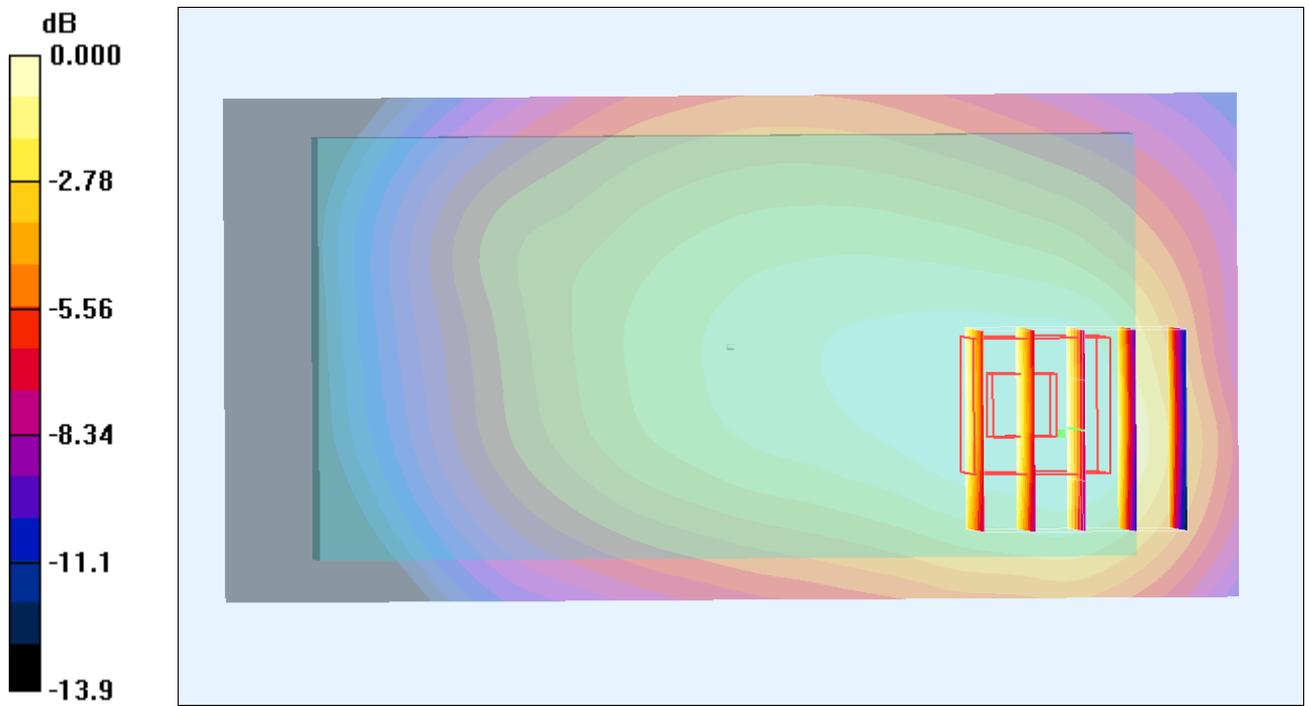

0 dB = 0.088mW/g

#144 LTE Band 17_QPSK(1-0)_Front Face_1cm_Ch23790_Earphone _10M

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$

mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.103 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.88 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.065 mW/g

Maximum value of SAR (measured) = 0.092 mW/g

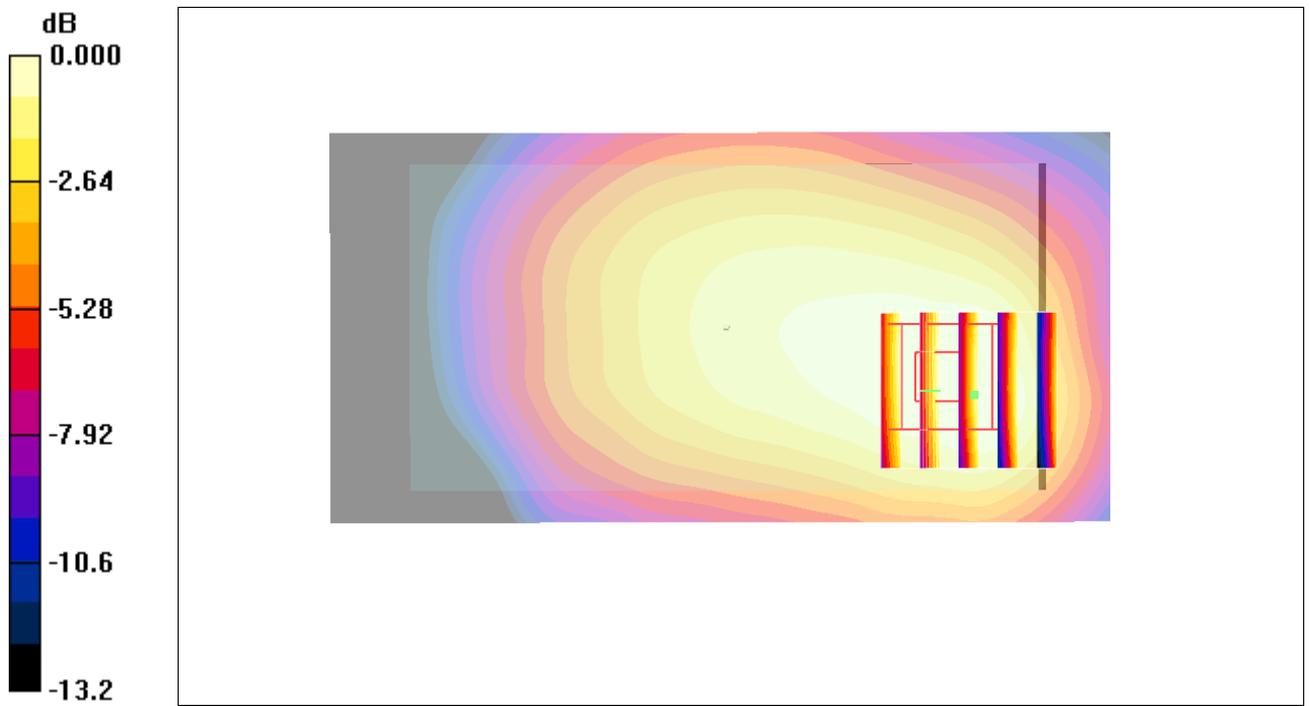

0 dB = 0.092mW/g

#145 LTE Band 17_QPSK(1-49)_Front Face_1cm_Ch23790_Earphone a320

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$

mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn495; Calibrated: 2011/4/28

- Phantom: SAM_Right; Type: SAM; Serial: TP-1303

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.097 mW/g



Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.73 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

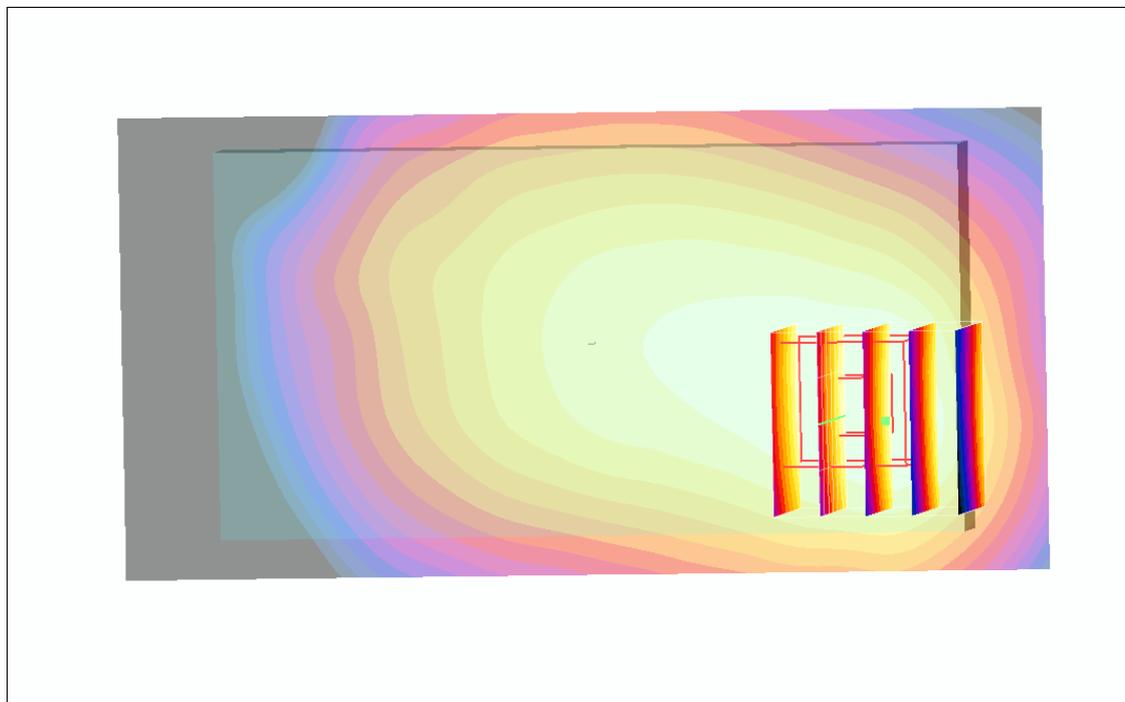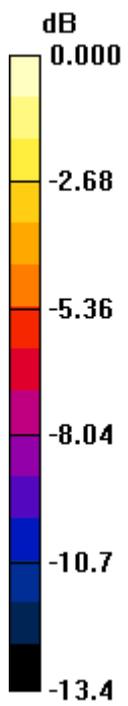

0 dB = 0.087mW/g

#161 LTE Band 17_16QAM(25-13)_Front Face_1cm_Ch23790a32O

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.123 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.118 mW/g

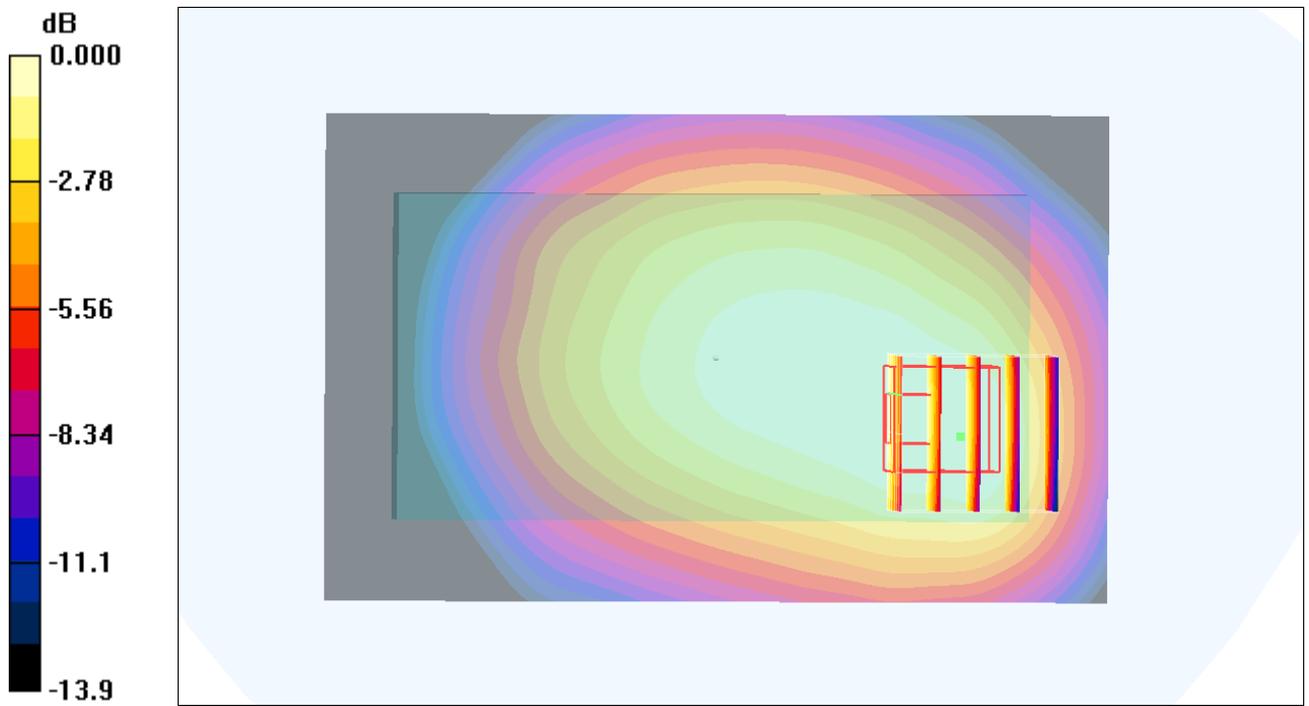

0 dB = 0.118mW/g

#162 LTE Band 17_16QAM(1-0)_Front Face_1cm_Ch23790a320

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.125 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.123 mW/g

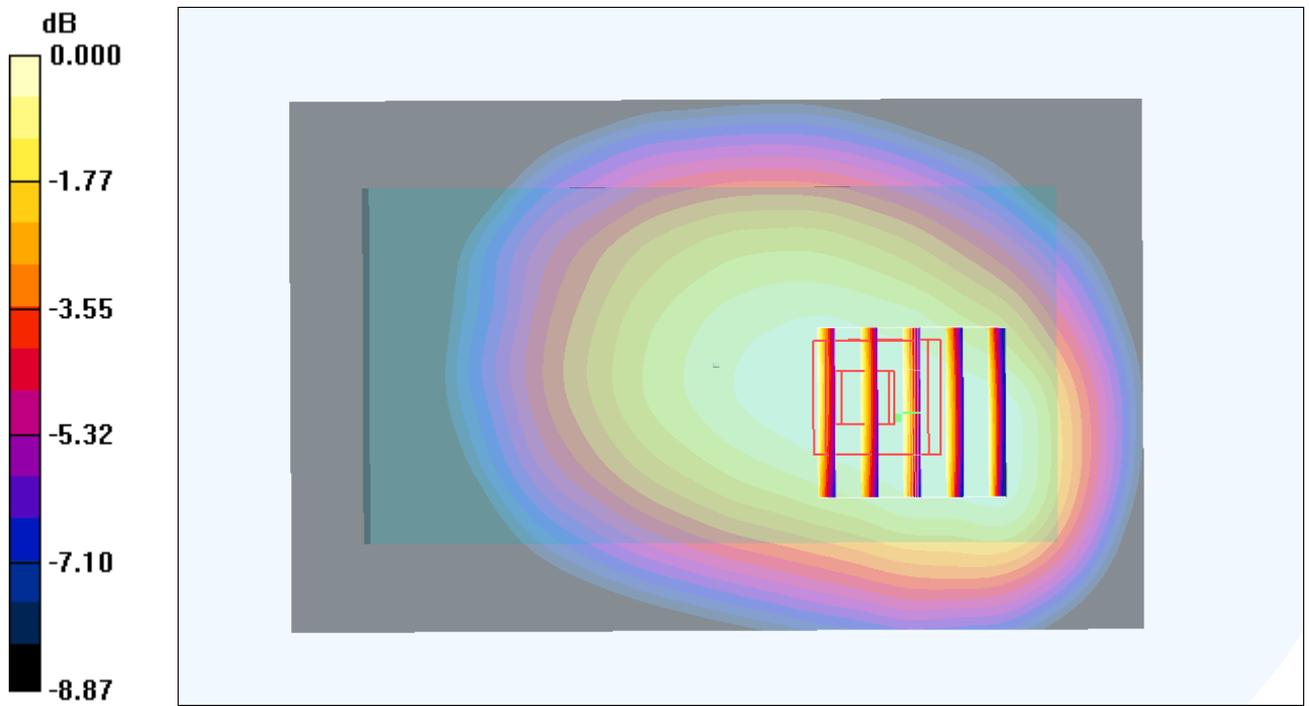

0 dB = 0.123mW/g

#163 LTE Band 17_16QAM(1-49)_Front Face_1cm_Ch23790a32O

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.127 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.126 mW/g

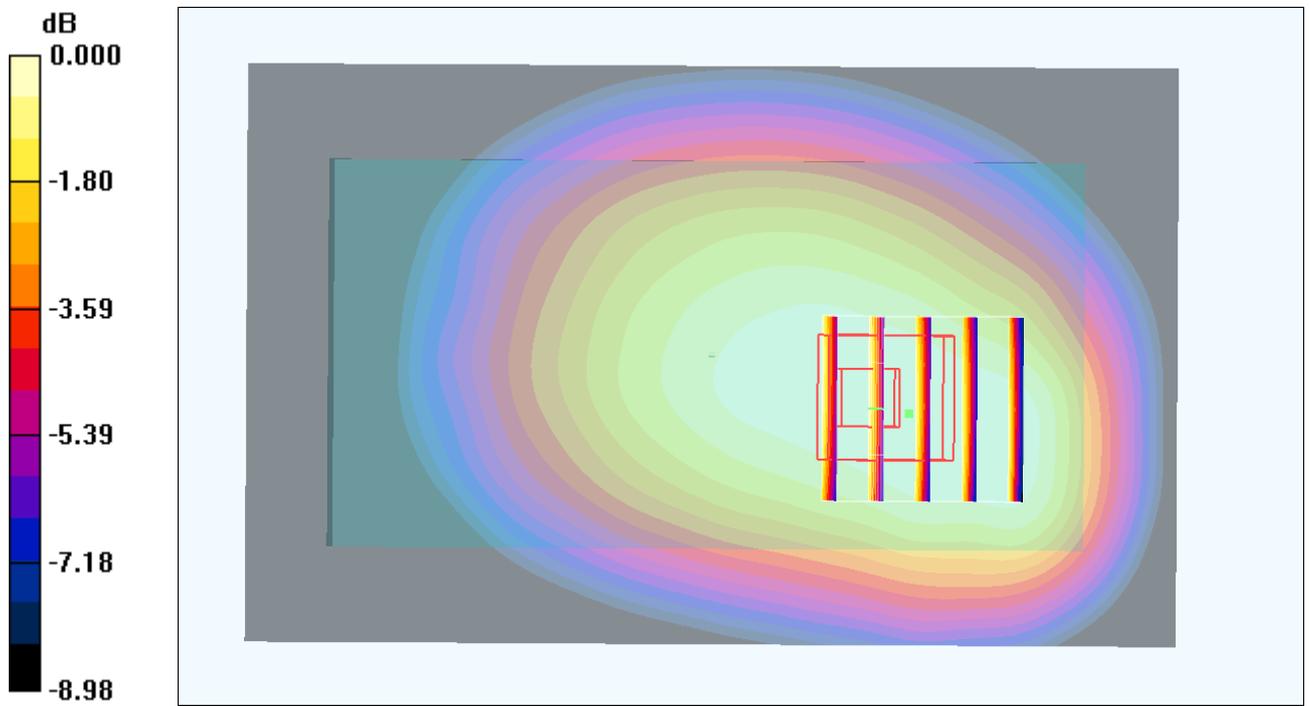

0 dB = 0.126mW/g

#164 LTE Band 17_16QAM(25-13)_Rear Face_1cm_Ch23790a320

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.137 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.126 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.132 mW/g

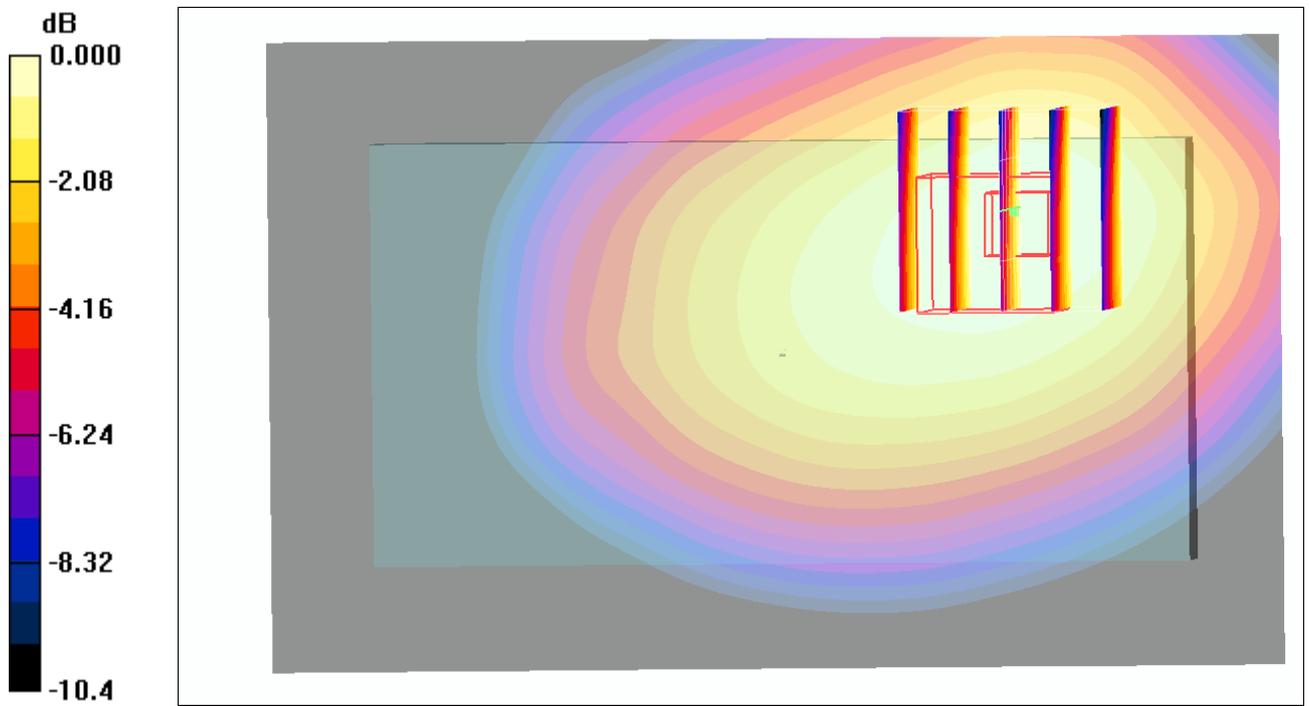

0 dB = 0.132mW/g

#165 LTE Band 17_16QAM(1-0)_Rear Face_1cm_Ch23790a32O

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.141 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.137 mW/g

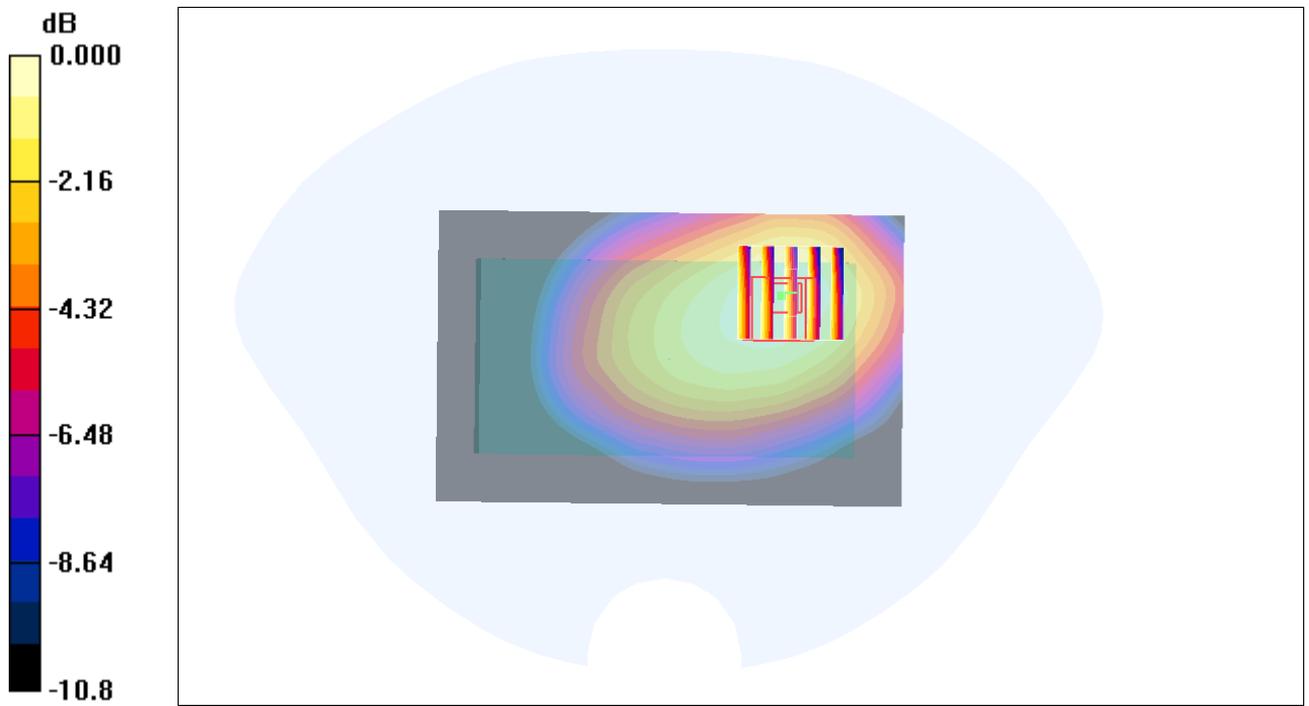

0 dB = 0.137mW/g

#165 LTE Band 17_16QAM(1-0)_Rear Face_1cm_Ch23790a32O_2D

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.141 mW/g

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = 0.042 dB


Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.137 mW/g

1g/10g Averaged SAR

SAR, Zoom Scan: Value Along Z, X=2, Y=2

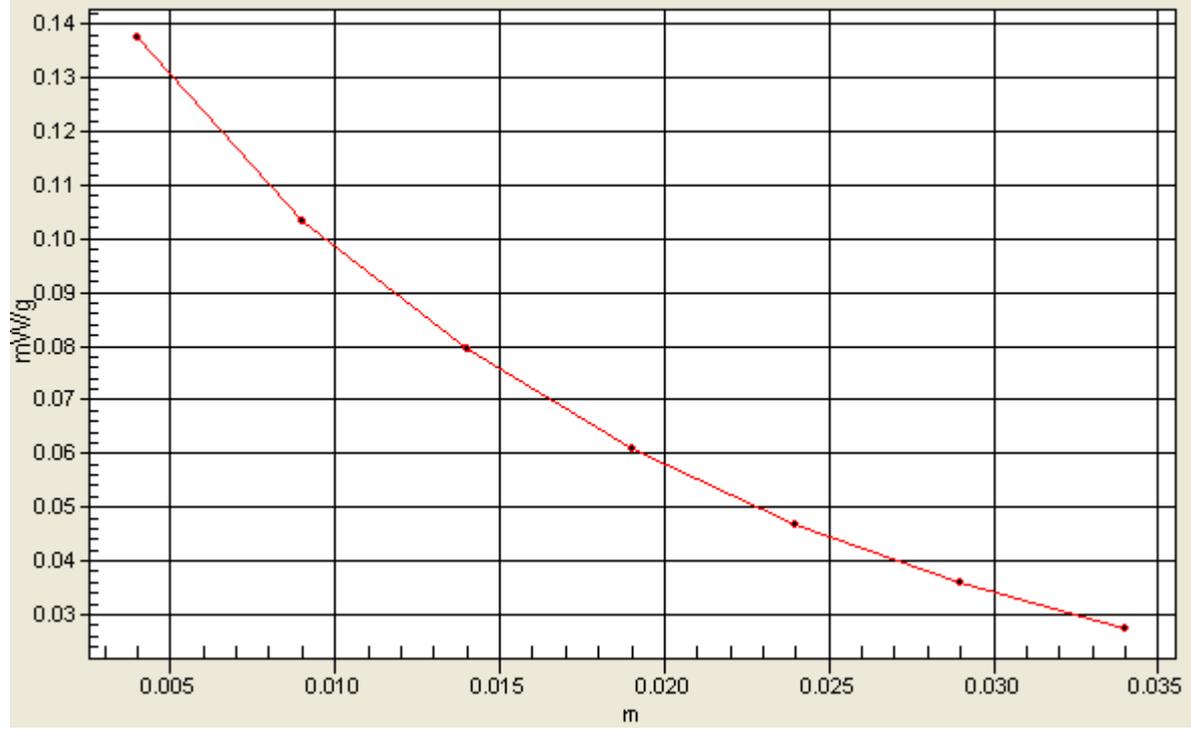

#166 LTE Band 17_16QAM(1-49)_Rear Face_1cm_Ch23790a32O

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.133 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 9.87 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.129 mW/g

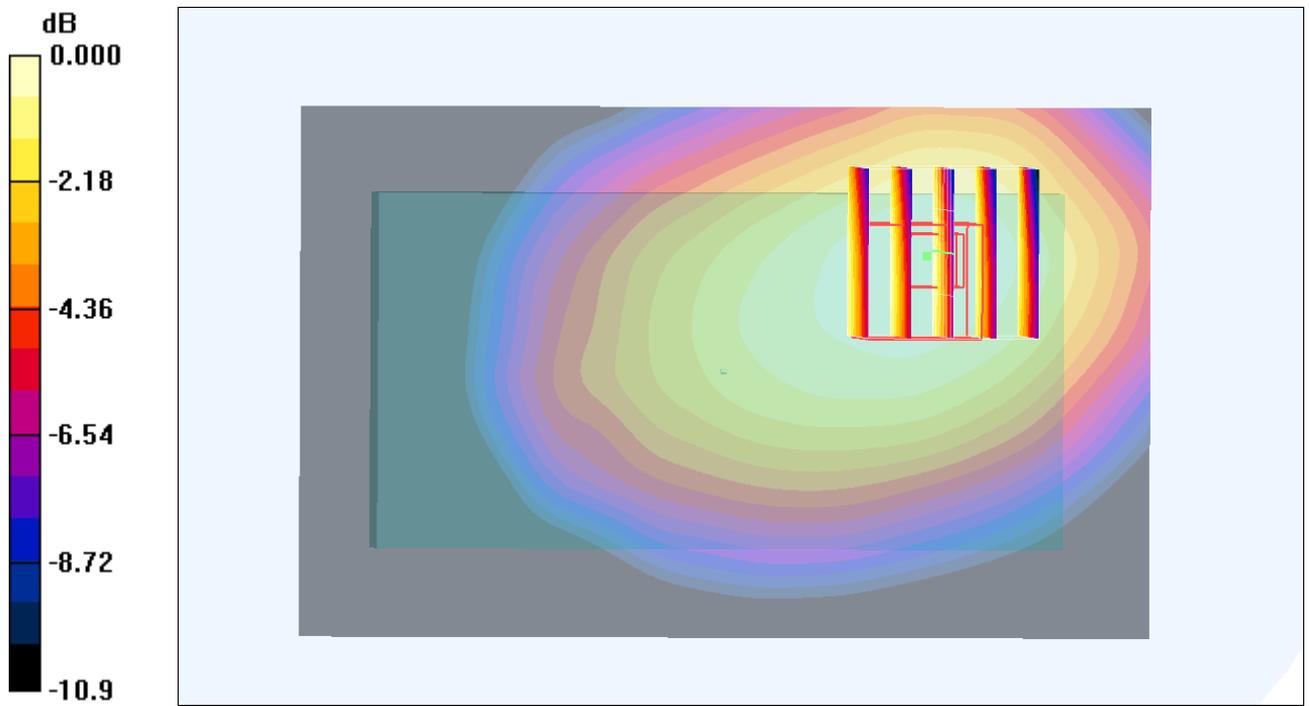

0 dB = 0.129mW/g

#170 LTE Band 17_16QAM(25-13)_Right Side_1cm_Ch23790a32O

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg³/m

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.123 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.122 mW/g

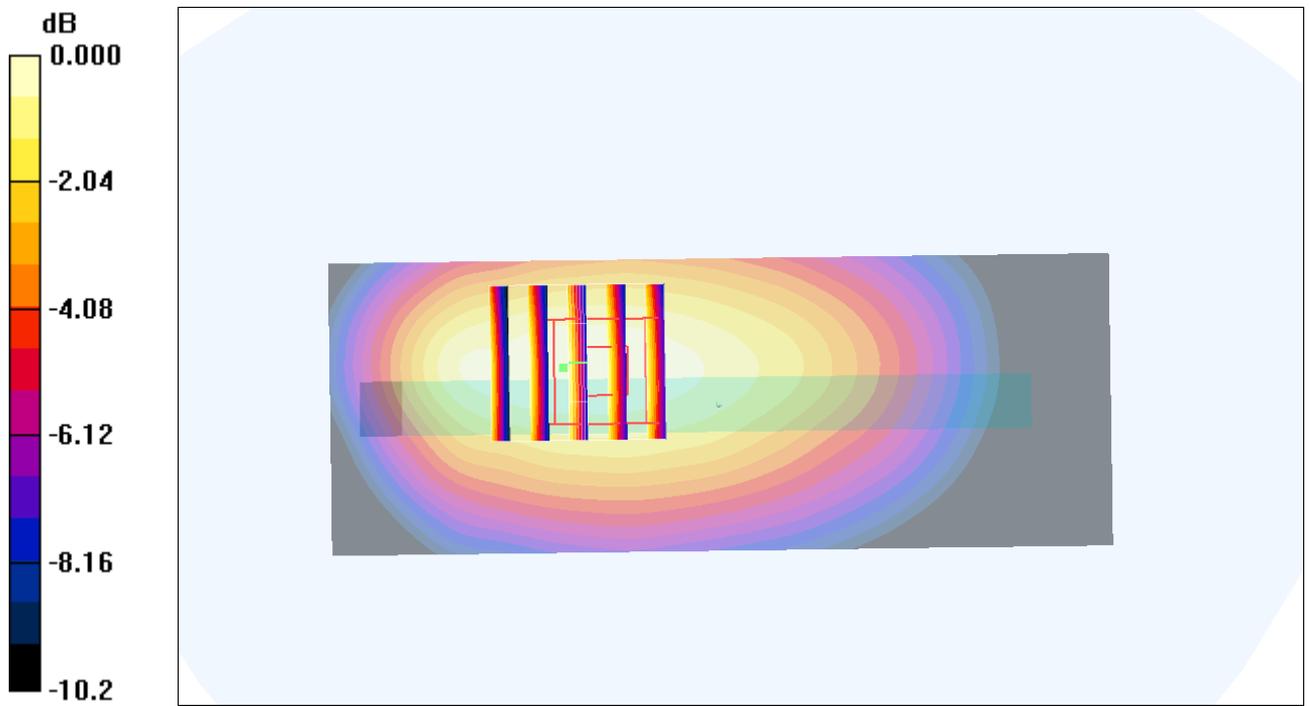

0 dB = 0.122mW/g

#171 LTE Band 17_16QAM(1-0)_Right Side_1cm_Ch23790a32O

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.124 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.126 mW/g

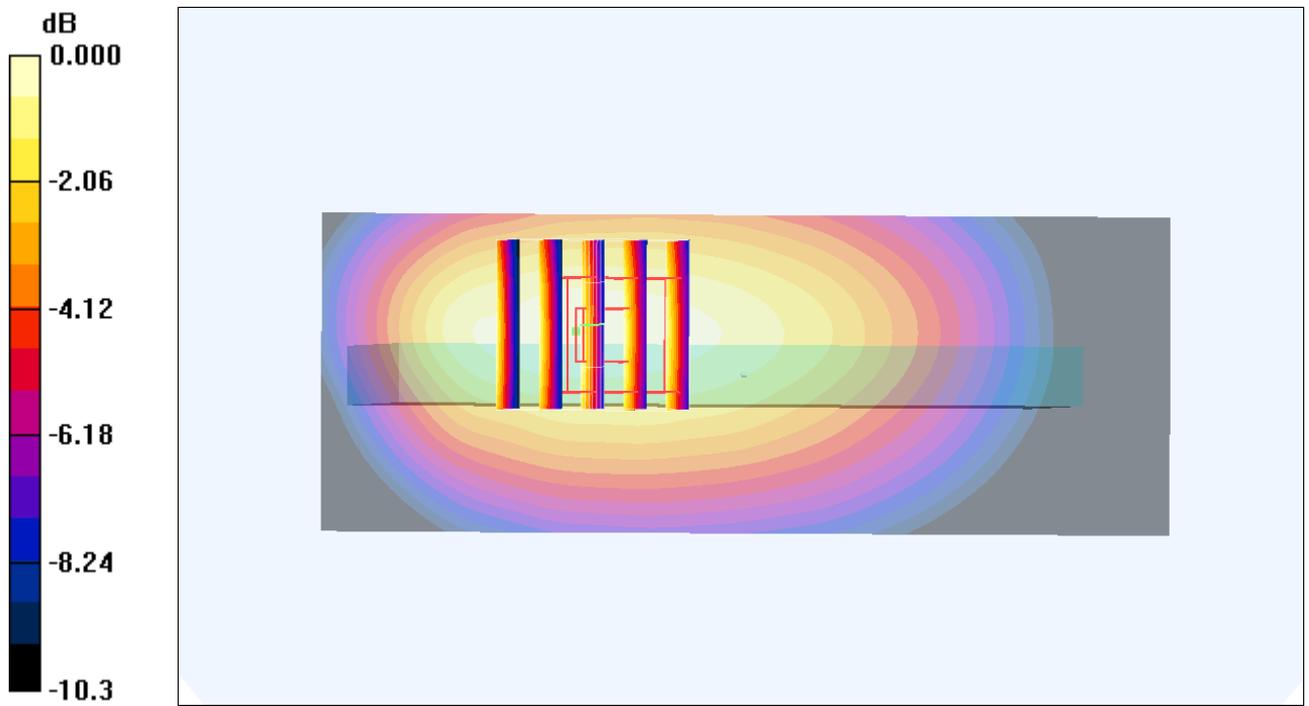

0 dB = 0.126mW/g

#172 LTE Band 17_16QAM(1-49)_Right Side_1cm_Ch23790a320

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.118 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

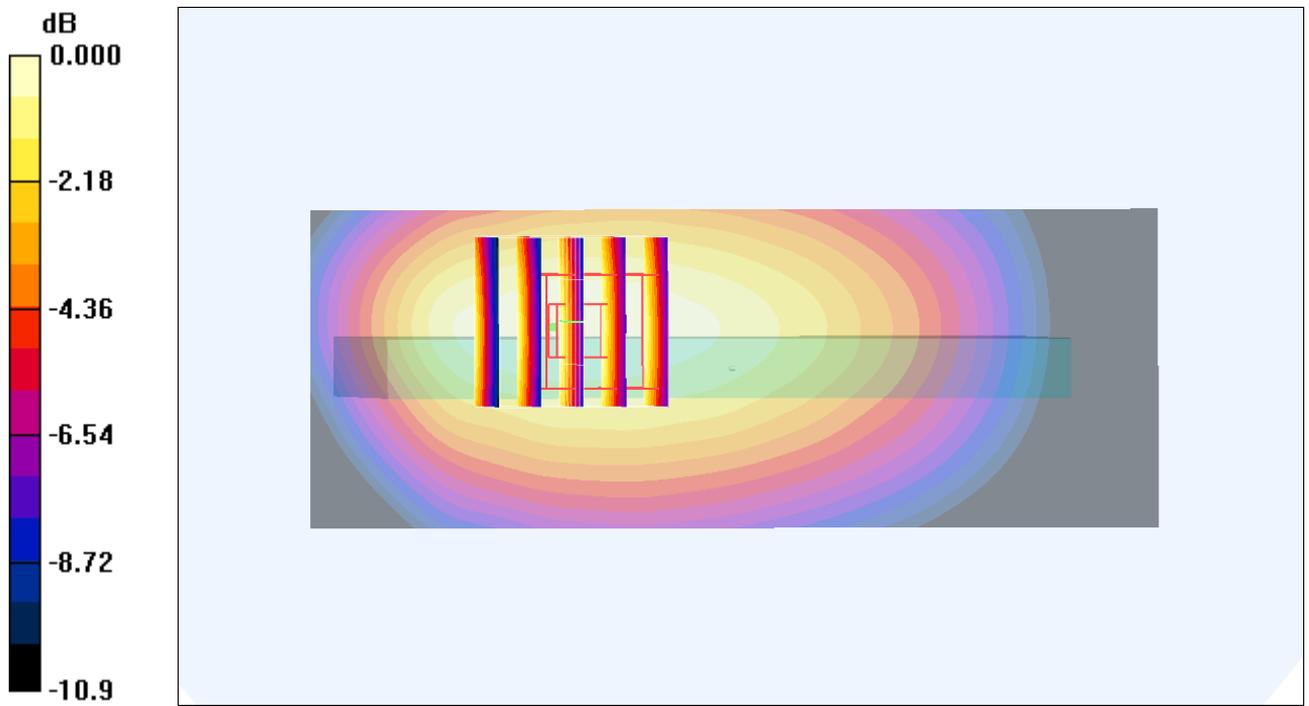

0 dB = 0.117mW/g

#173 LTE Band 17_16QAM(25-13)_Top Side_1cm_Ch23790a32O

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.067 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.62 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.069 mW/g

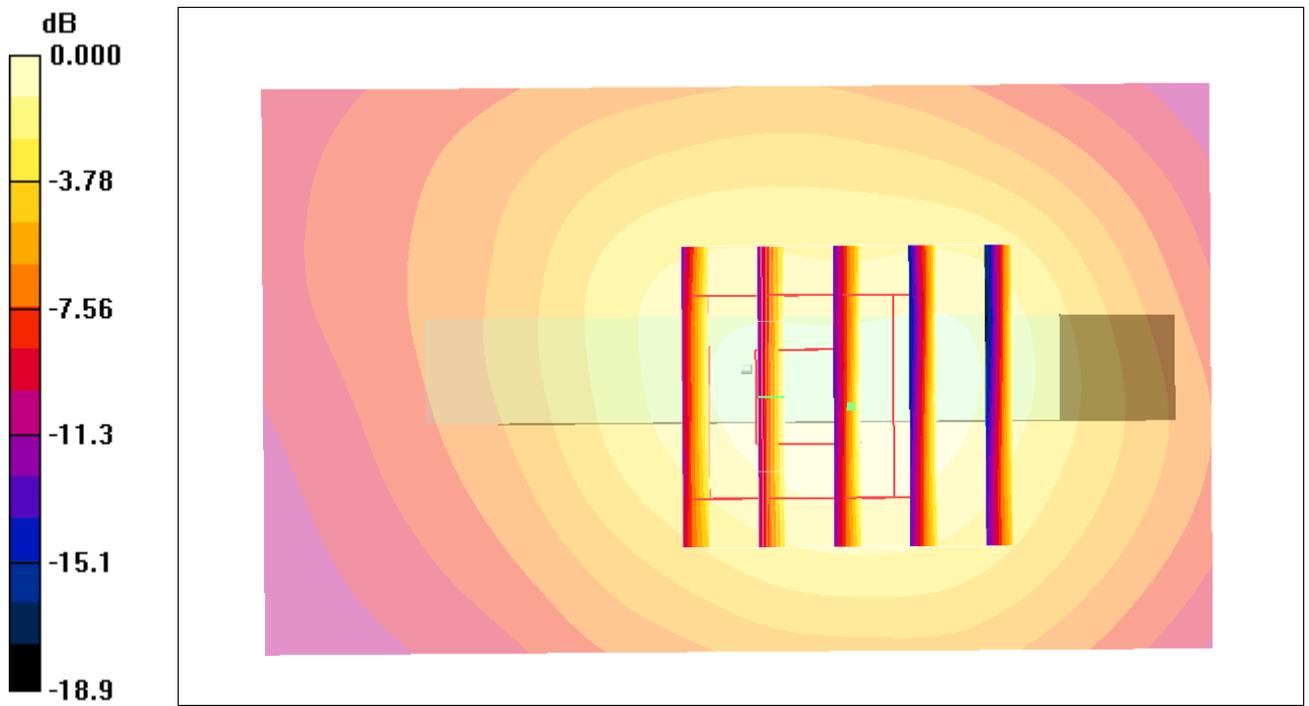

0 dB = 0.069mW/g

#174 LTE Band 17_16QAM(1-0)_Top Side_1cm_Ch23790a320

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.068 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.67 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.072 mW/g

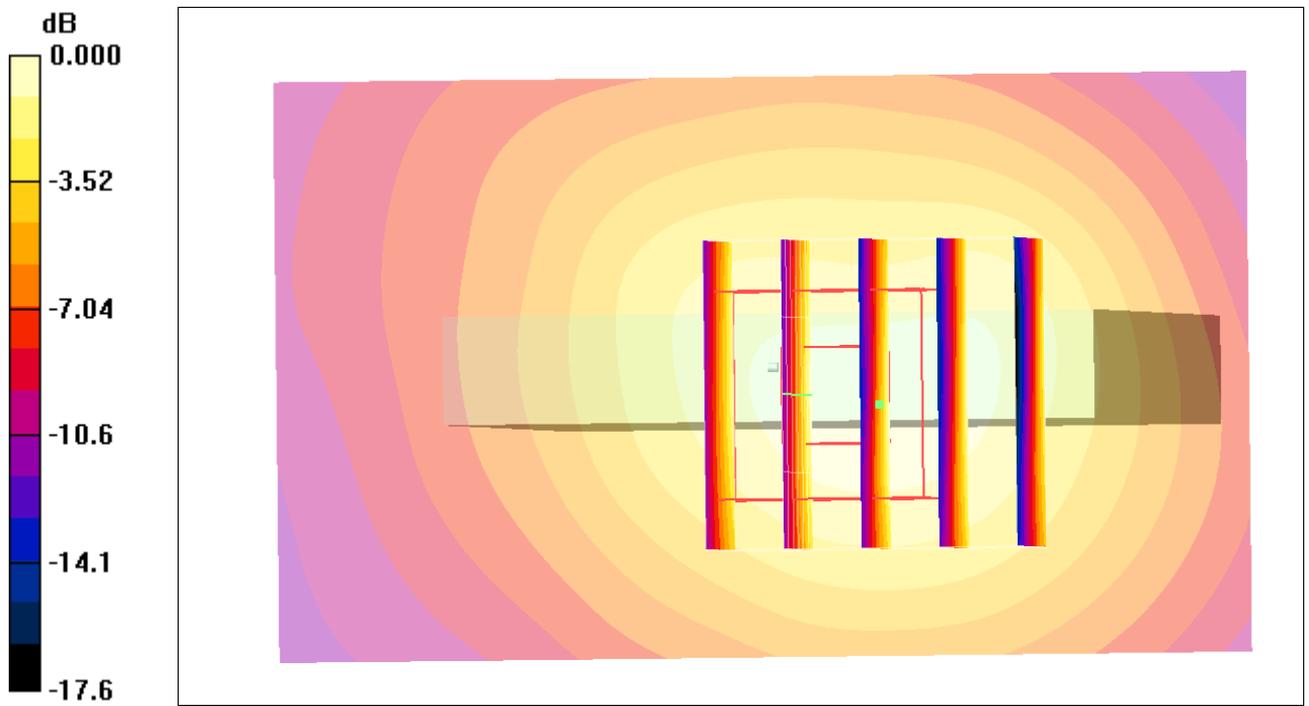

0 dB = 0.072mW/g

#175 LTE Band 17_16QAM(1-49)_Top Side_1cm_Ch23790a32O

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$
mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.064 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.50 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

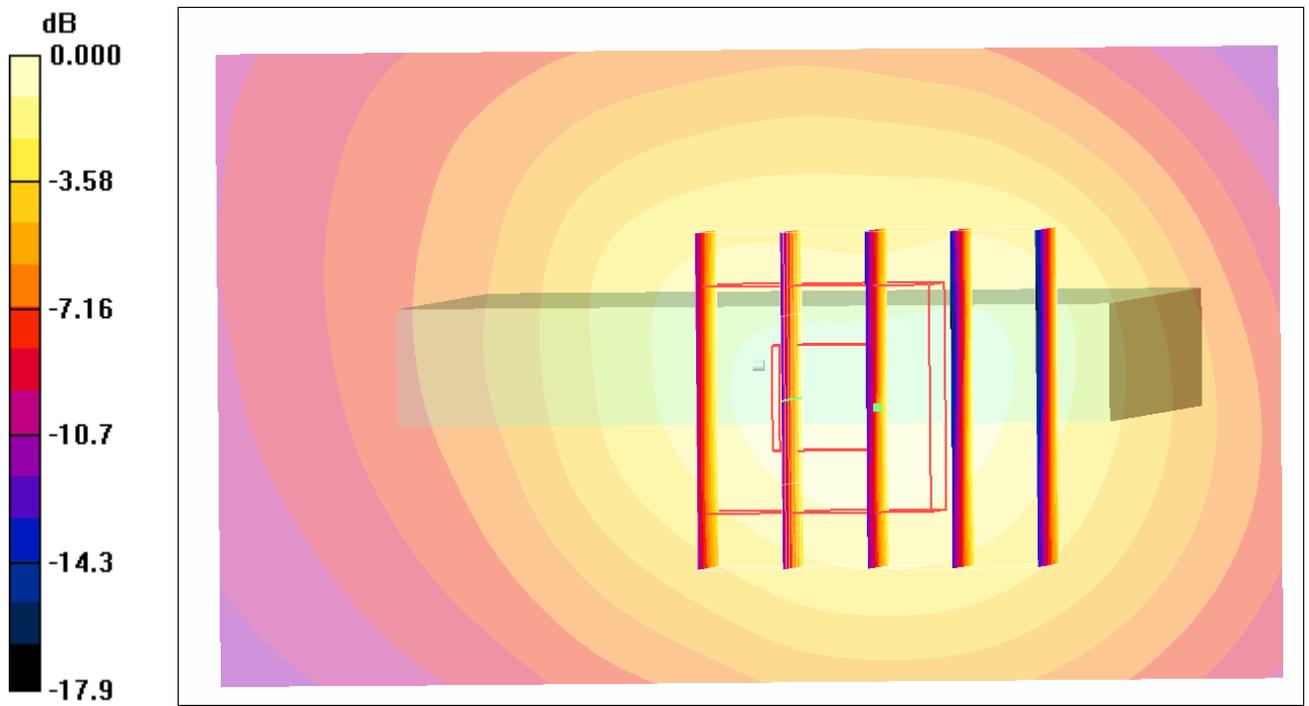

0 dB = 0.067mW/g

#176 LTE Band 17_16QAM(25-13)_Rear Face_1cm_Ch23790_Earphone a320

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$

mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn495; Calibrated: 2011/4/28

- Phantom: SAM_Right; Type: SAM; Serial: TP-1303

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.109 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.16 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.111 mW/g

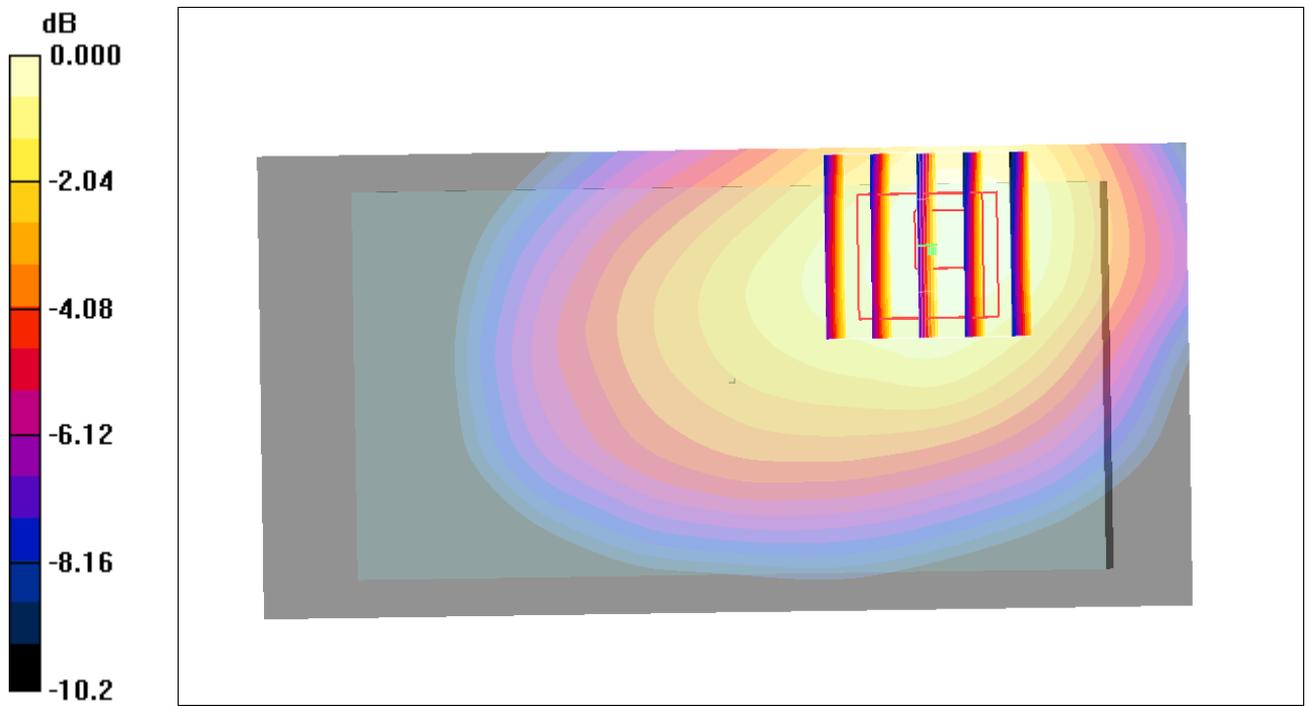

0 dB = 0.111mW/g

#177 LTE Band 17_16QAM(1-0)_Rear Face_1cm_Ch23790_Earphone a320

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$

mho/m; $\epsilon_r = 52.92$; $\rho = 1000$ kg³/m

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.112 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,
dy=8mm, dz=5mm

Reference Value = 8.28 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

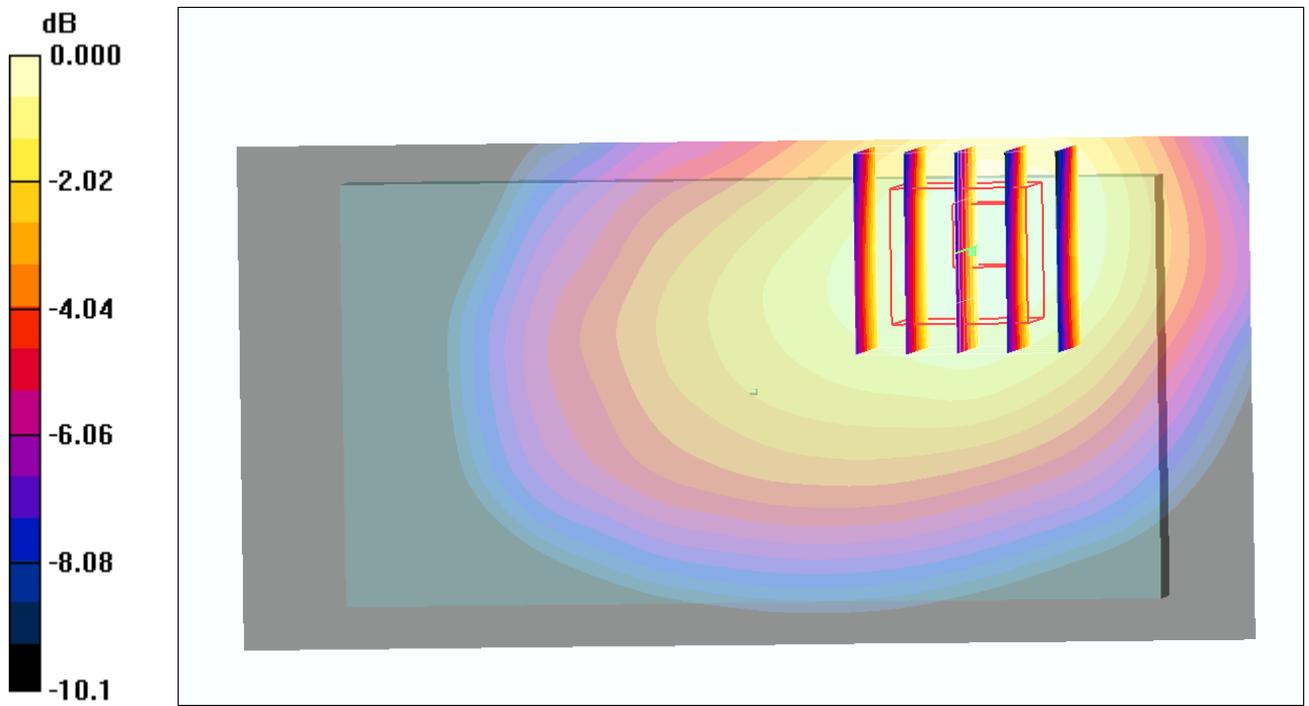

0 dB = 0.112mW/g

#178 LTE Band 17_16QAM(1-49)_Rear Face_1cm_Ch23790_Earphone a320

DUT: 142244-01

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL_750_110604 Medium parameters used: $f = 710$ MHz; $\sigma = 0.928$

$\rho = 1000$ kg/m³; $\epsilon_r = 52.92$

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.81, 8.81, 8.81); Calibrated: 2010/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn495; Calibrated: 2011/4/28

- Phantom: SAM_Right; Type: SAM; Serial: TP-1303

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch23790/Area Scan (41x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.106 mW/g


Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.07 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.108 mW/g

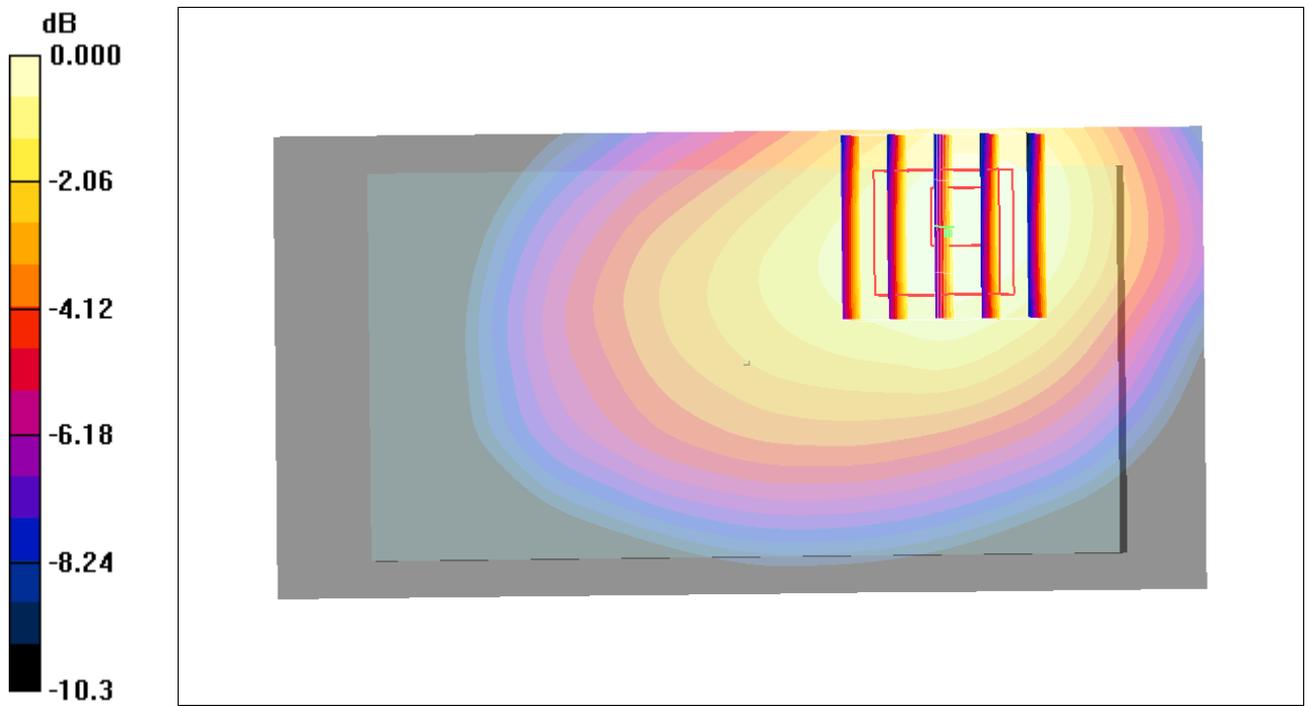

0 dB = 0.108mW/g

#83 802.11b_Right Cheek_Ch11

DUT: 14224-01

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL_2450_110602 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$
mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.457 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 15.4 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.486 mW/g

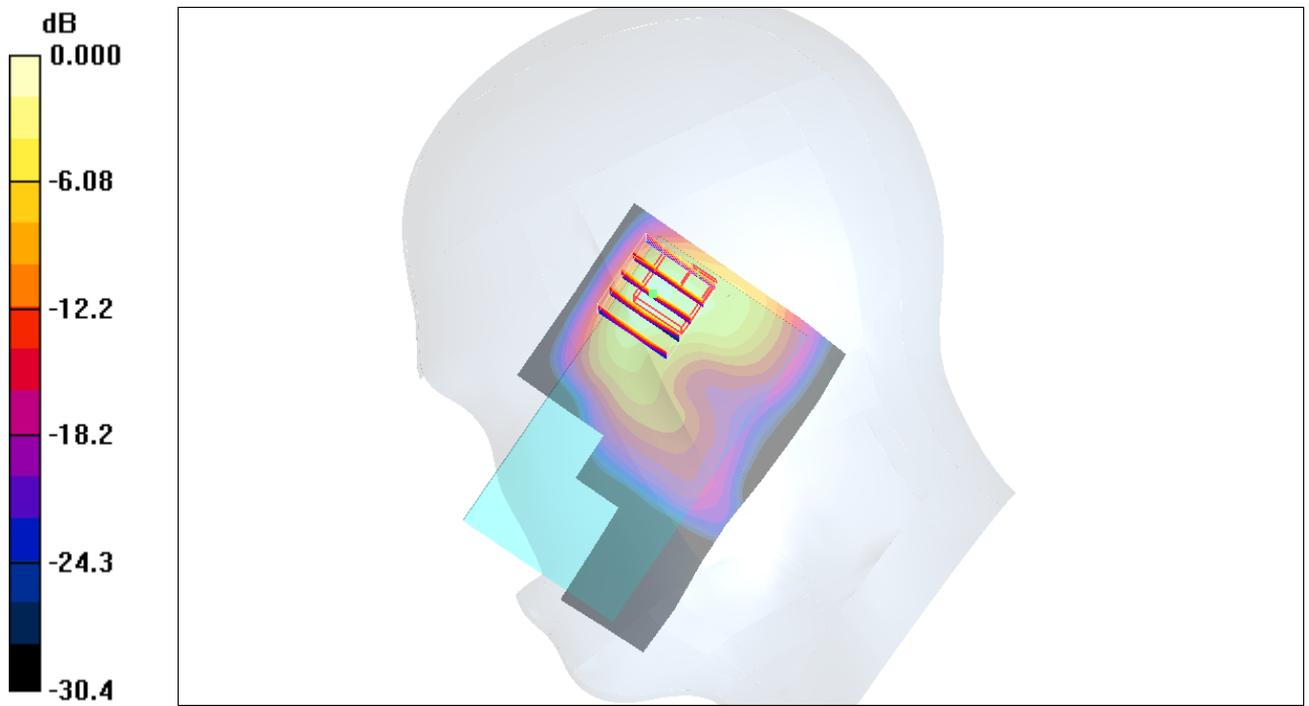

0 dB = 0.486mW/g

#85 802.11b_Left Cheek_Ch11

DUT: 14224-01

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL_2450_110602 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$
mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.535 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = 0.175 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.357 mW/g

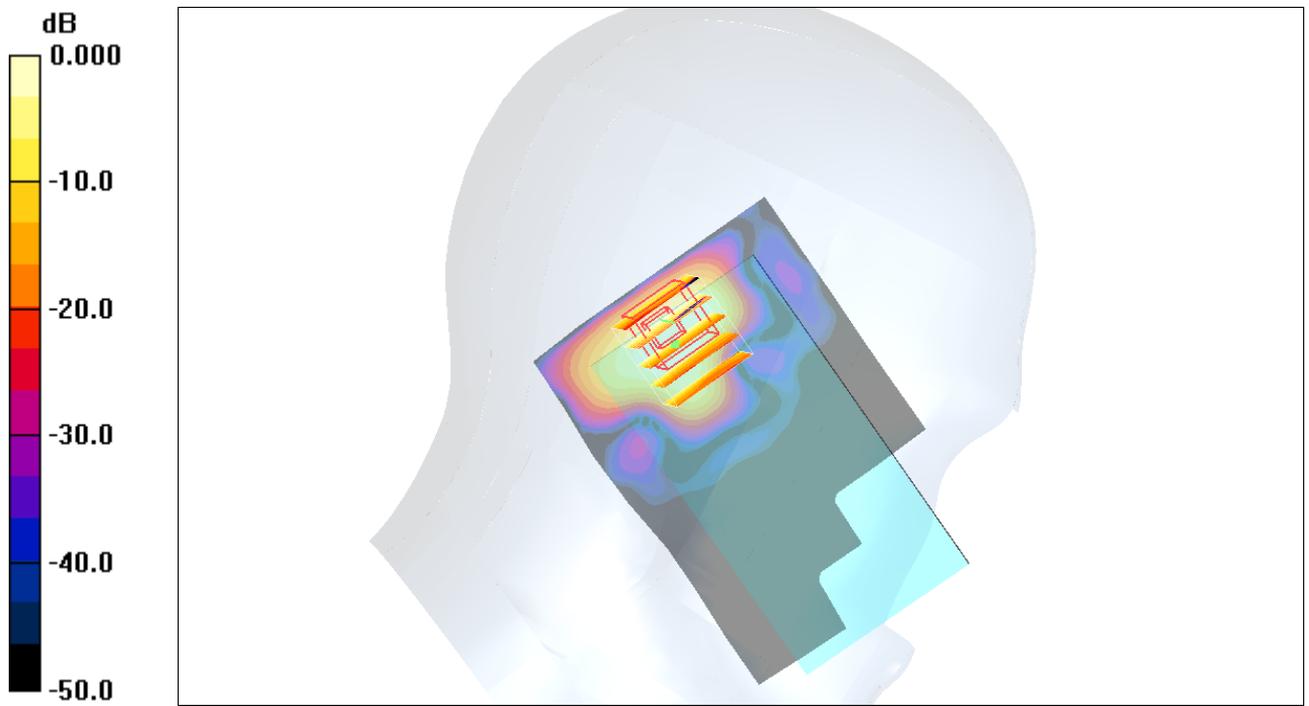

0 dB = 0.357mW/g

#86 802.11b_Left Tilted_Ch11

DUT: 14224-01

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL_2450_110602 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$
mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.77, 6.77, 6.77); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.591 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.579 mW/g

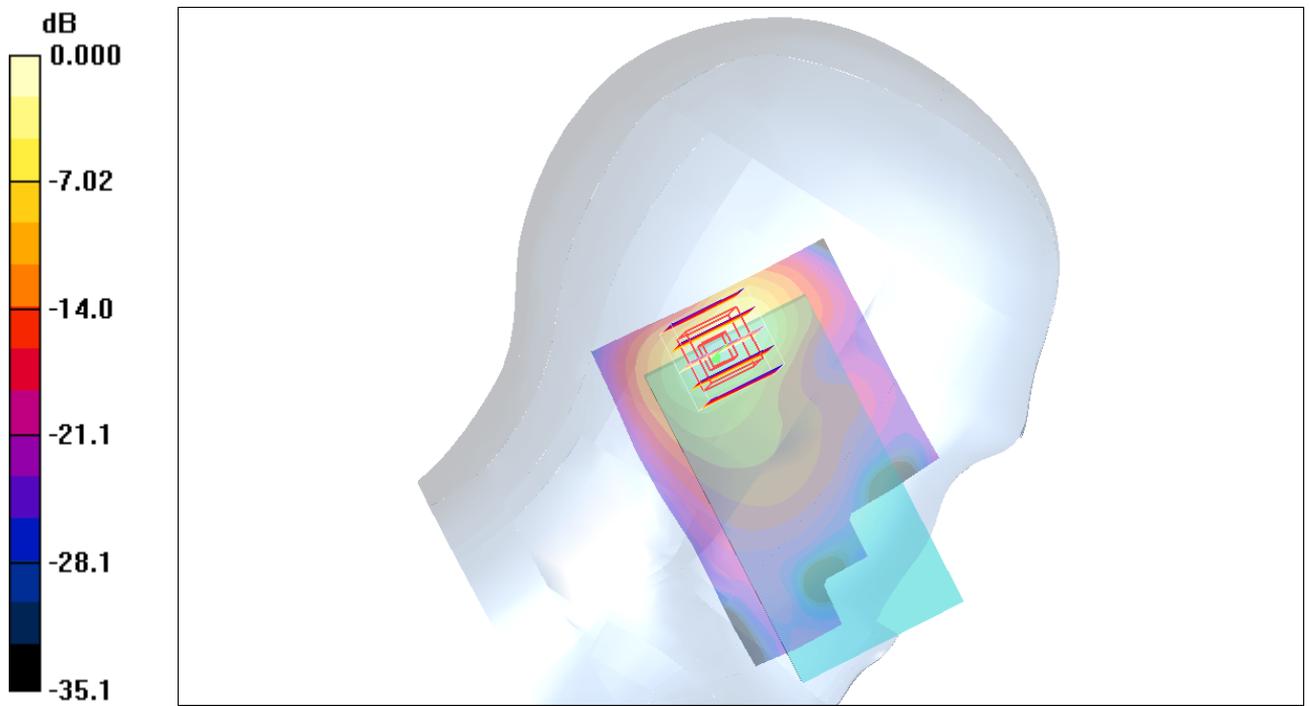

0 dB = 0.579mW/g

#87 802.11b_Front Face_1cm_Ch11

DUT: 142244-01

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450_110602 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.02, 7.02, 7.02); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.064 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.05 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.089 mW/g

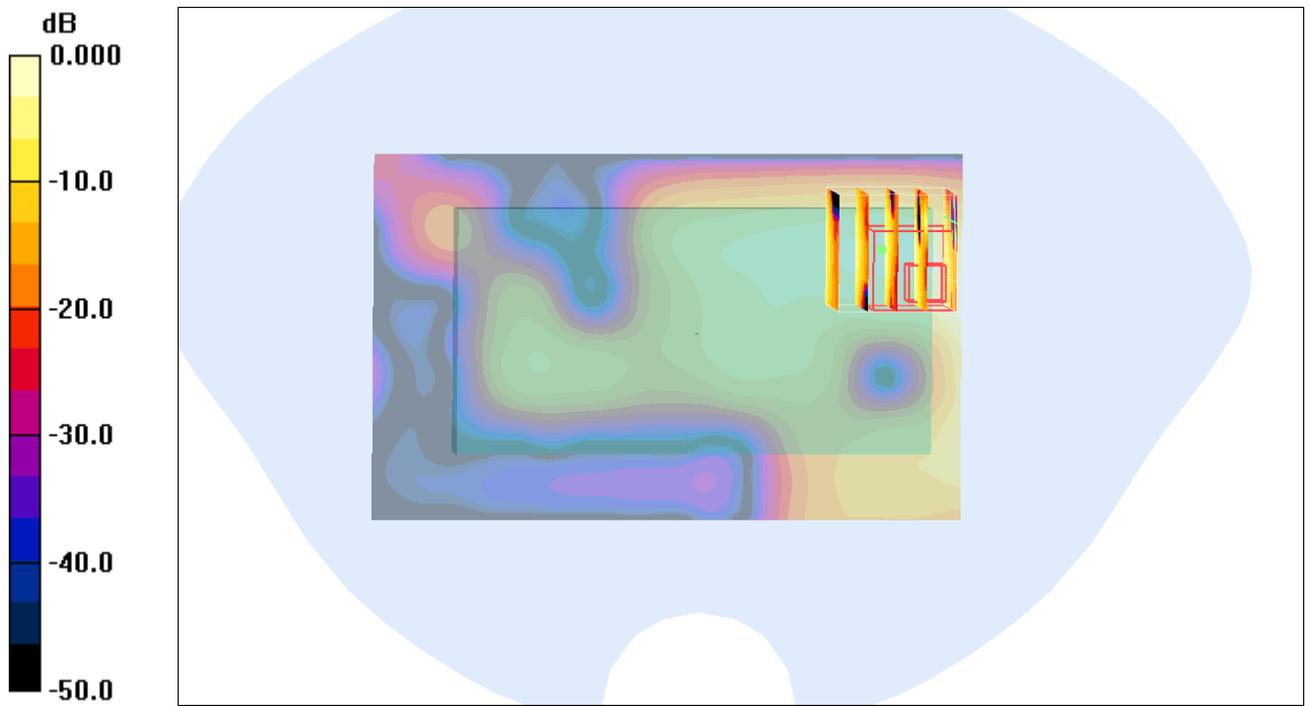

0 dB = 0.089mW/g

#89 802.11b_Left Side_1cm_Ch11

DUT: 142244-01

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450_110602 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.02, 7.02, 7.02); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.019 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.09 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00384 mW/g

Maximum value of SAR (measured) = 0.009 mW/g

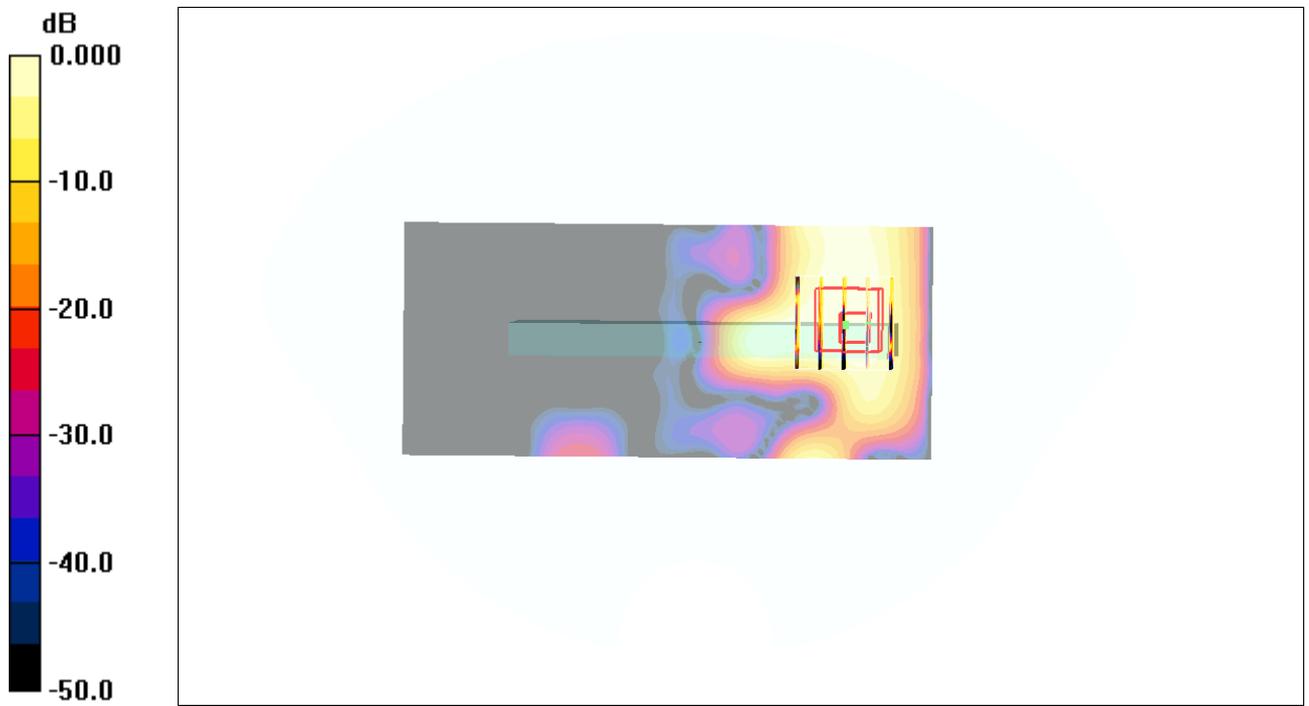

0 dB = 0.009mW/g

#90 802.11b_Right Side_1cm_Ch11

DUT: 142244-01

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450_110602 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$
mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.02, 7.02, 7.02); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x91x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.020 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm

Reference Value = 0.000 V/m; Power Drift = 0.132 dB

Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00345 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

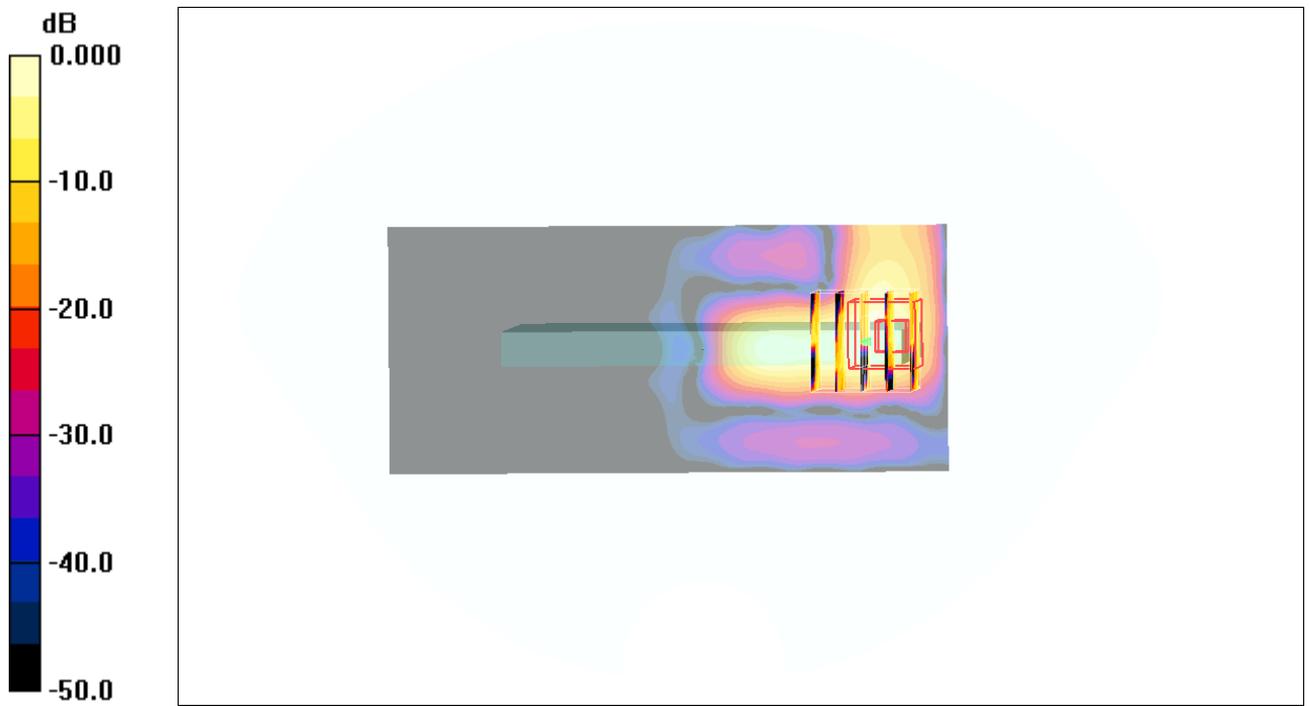

0 dB = 0.014mW/g

#91 802.11b_Top Side_1cm_Ch11

DUT: 142244-01

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450_110602 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.02, 7.02, 7.02); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.067 mW/g



Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.43 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

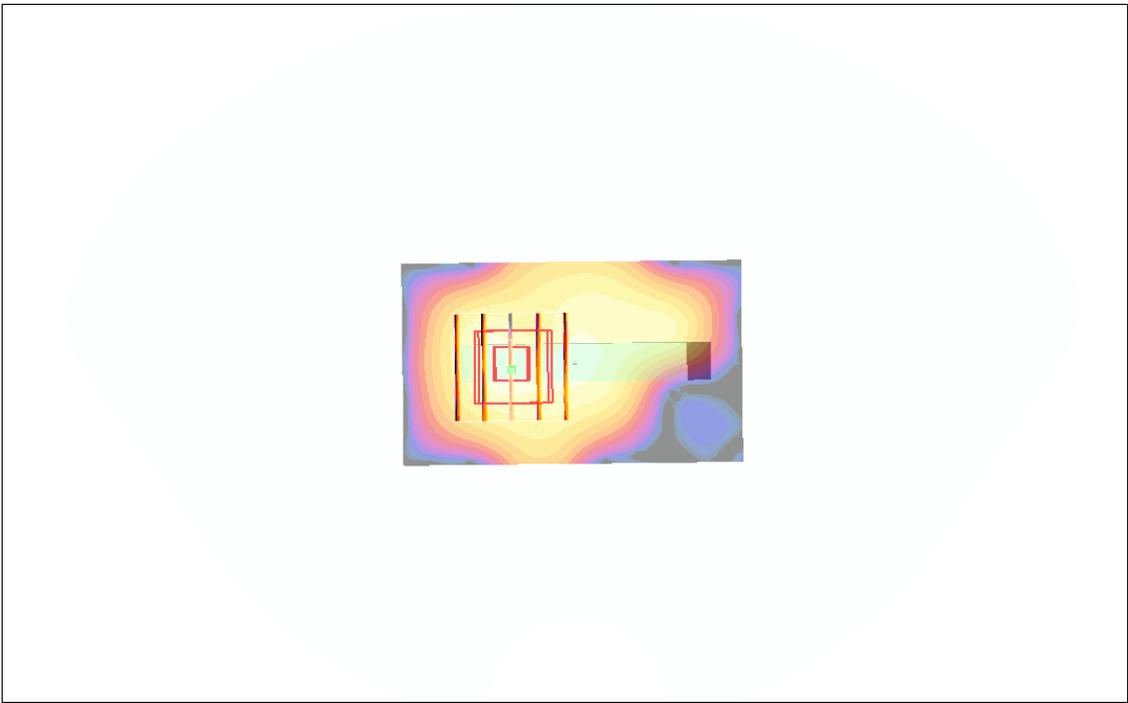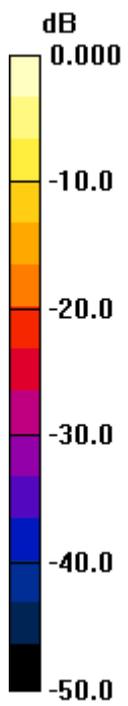

0 dB = 0.087mW/g