

**System Check\_Head\_750MHz\_110808**

**DUT: Dipole 750 MHz**

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_110808 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.895$  mho/m;  $\epsilon_r = 41.004$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.138 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.428 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.742 W/kg

**SAR(1 g) = 1.99 mW/g; SAR(10 g) = 1.35 mW/g**

Maximum value of SAR (measured) = 2.148 mW/g

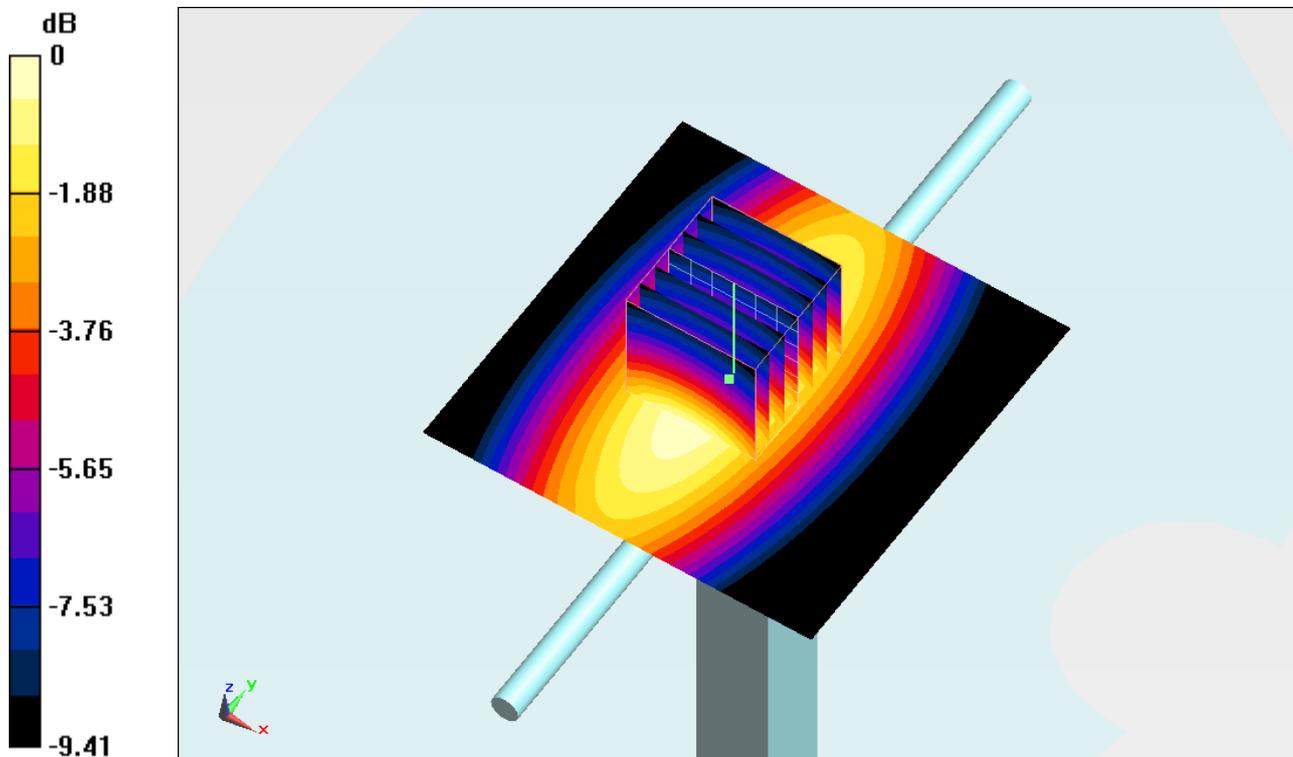

0 dB = 2.150mW/g

**System Check\_Body\_750MHz\_110808**

**DUT: Dipole 750 MHz**

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_110808 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.963 \text{ mho/m}$ ;  $\epsilon_r = 54.231$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.6 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $21.6 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.347 \text{ mW/g}$


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $51.113 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$

Peak SAR (extrapolated) =  $2.972 \text{ W/kg}$

**SAR(1 g) =  $2.18 \text{ mW/g}$ ; SAR(10 g) =  $1.48 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.358 \text{ mW/g}$

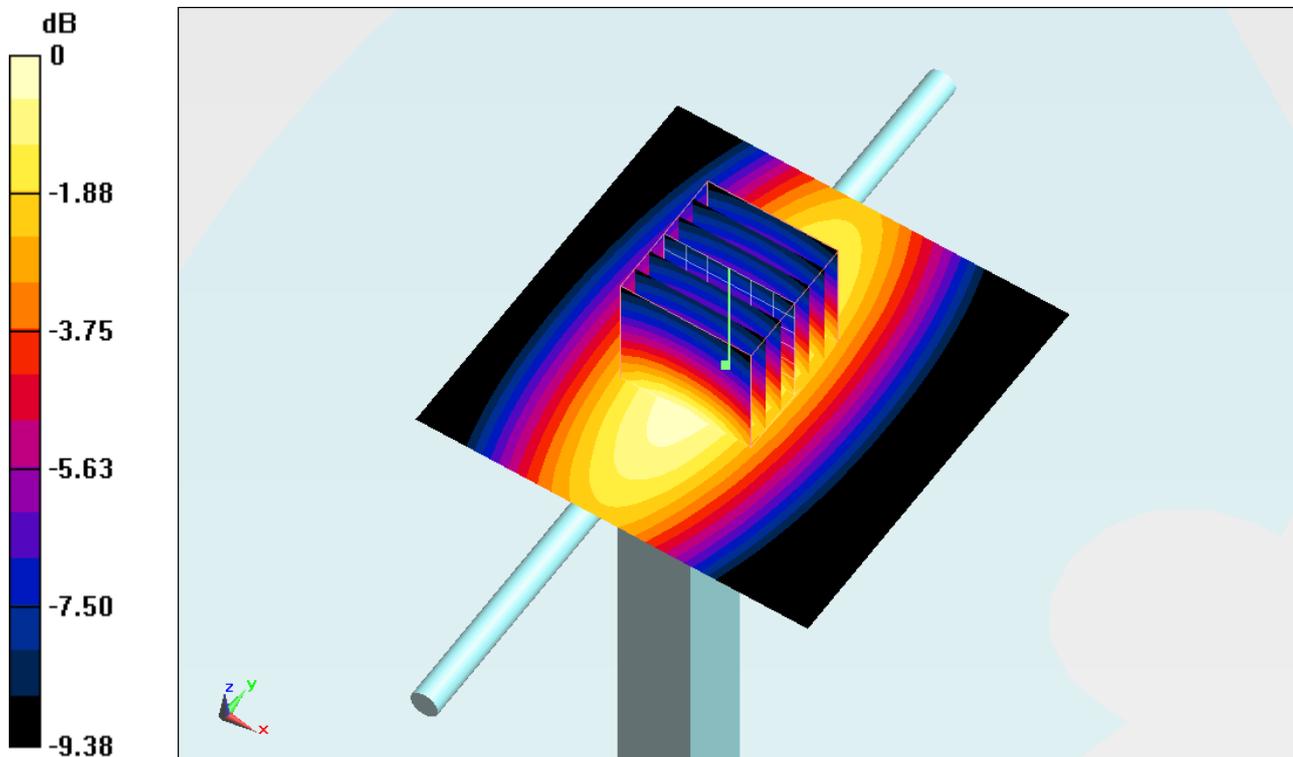

0 dB =  $2.360\text{mW/g}$

## System Check\_Head\_835MHz\_110807

### DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_110807 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.912$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

#### DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011 105 120
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.58 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.4 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 3.33 W/kg

**SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.58 mW/g**

Maximum value of SAR (measured) = 2.57 mW/g

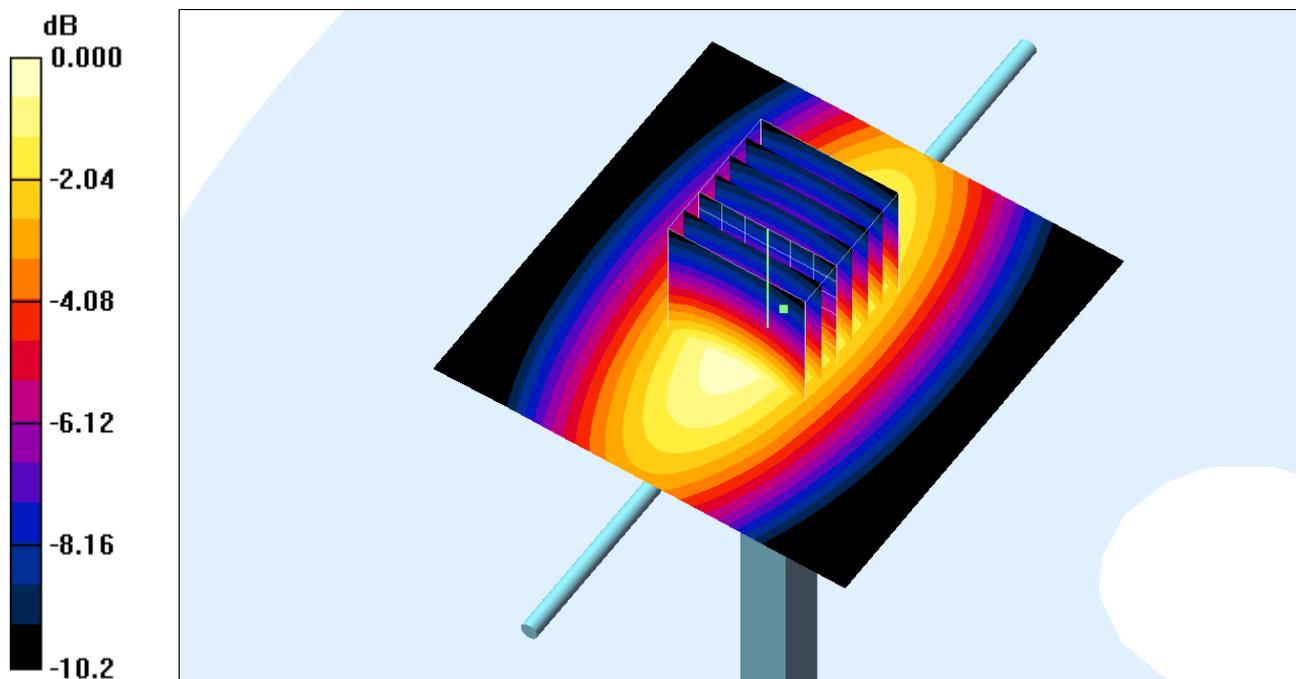

0 dB = 2.57mW/g

**System Check\_Head\_835MHz\_110809**

**DUT: Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_110809 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.886 \text{ mho/m}$ ;  $\epsilon_r = 41.325$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.6 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $21.5 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.718 \text{ mW/g}$


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $57.968 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$

Peak SAR (extrapolated) =  $3.498 \text{ W/kg}$

**SAR(1 g) =  $2.49 \text{ mW/g}$ ; SAR(10 g) =  $1.65 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.694 \text{ mW/g}$

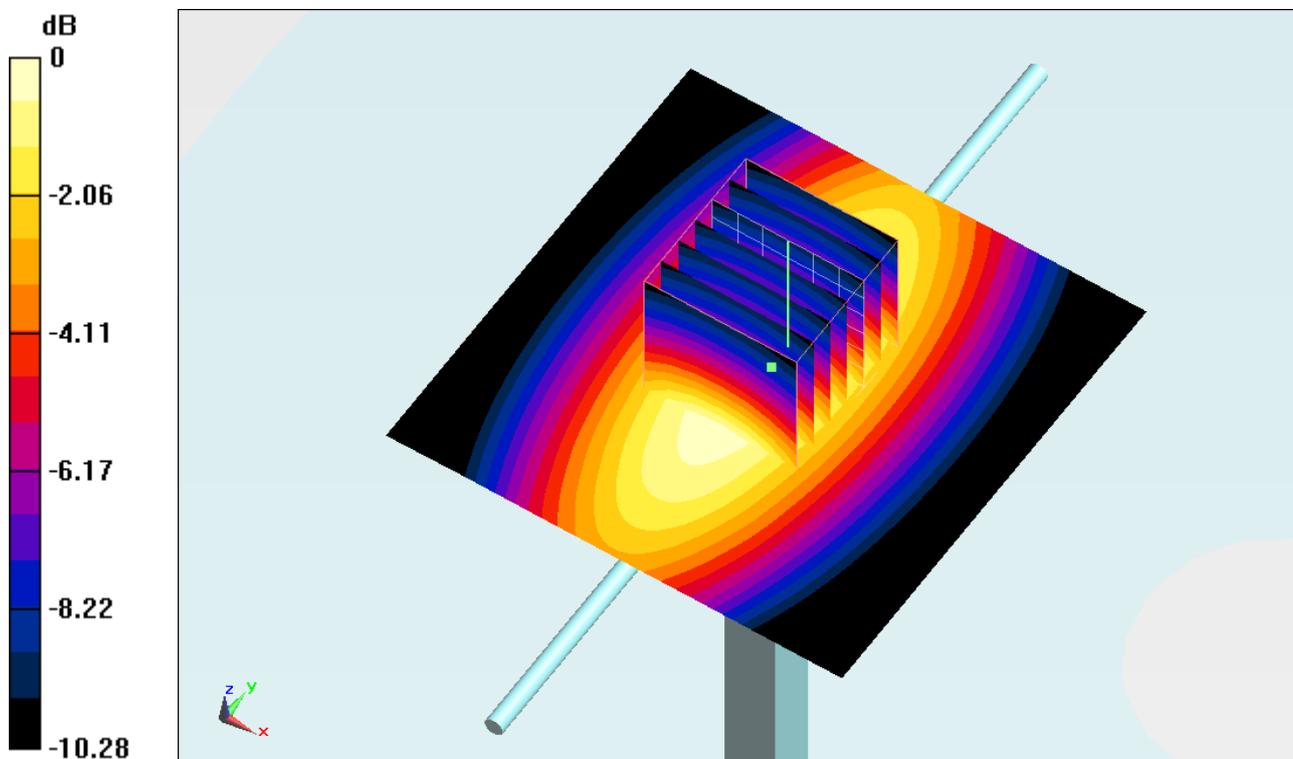

0 dB =  $2.690\text{mW/g}$

## System Check\_Body\_835MHz\_110807

### DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_110807 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.977$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011 105 120
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.66 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.5 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 3.39 W/kg

**SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.64 mW/g**

Maximum value of SAR (measured) = 2.66 mW/g

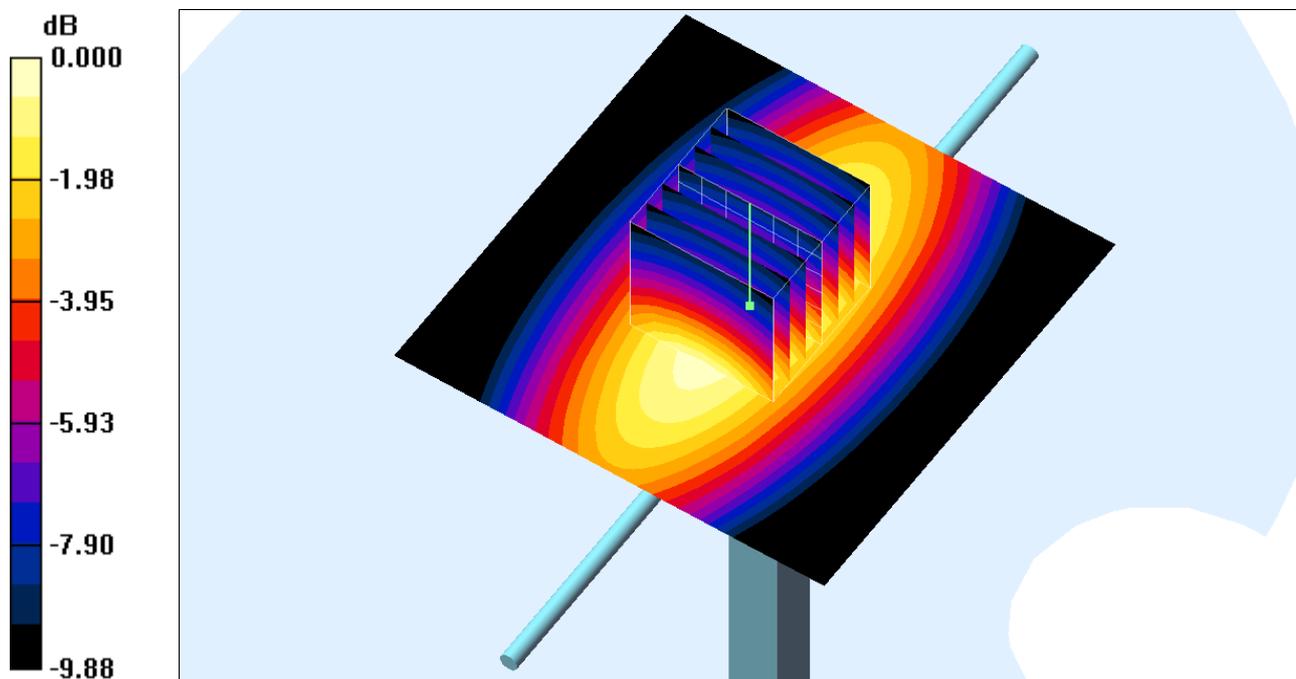

**System Check\_Body\_835MHz\_110809**

**DUT: Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_110809 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.994 \text{ mho/m}$ ;  $\epsilon_r = 56.197$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.6 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $21.7 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.648 \text{ mW/g}$


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $54.023 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$

Peak SAR (extrapolated) =  $3.380 \text{ W/kg}$

**SAR(1 g) =  $2.44 \text{ mW/g}$ ; SAR(10 g) =  $1.63 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.649 \text{ mW/g}$

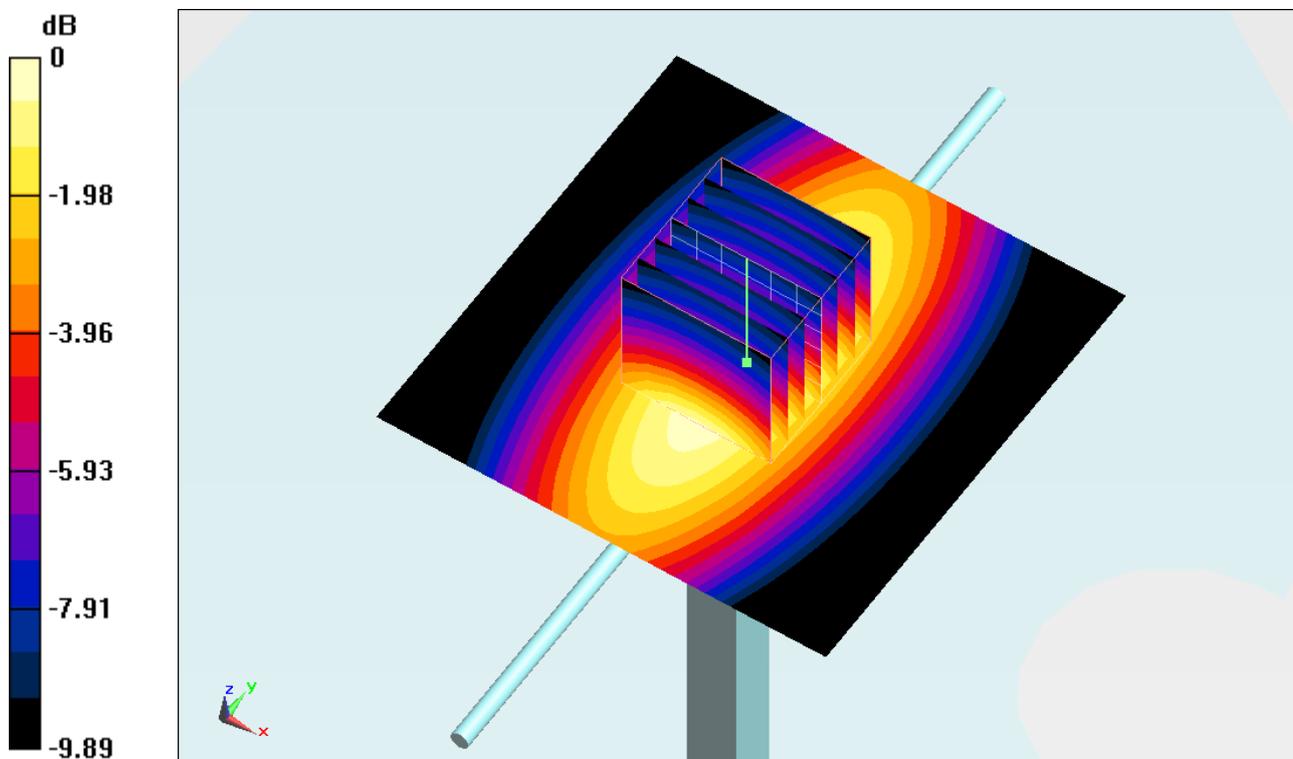

0 dB =  $2.650\text{mW/g}$

## System Check\_Head\_1800MHz\_110902

### DUT: Dipole 1800 MHz

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110902 Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=250mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 10.9 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.3 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 18.1 W/kg

**SAR(1 g) = 9.86 mW/g; SAR(10 g) = 5.46 mW/g**

Maximum value of SAR (measured) = 10.9 mW/g

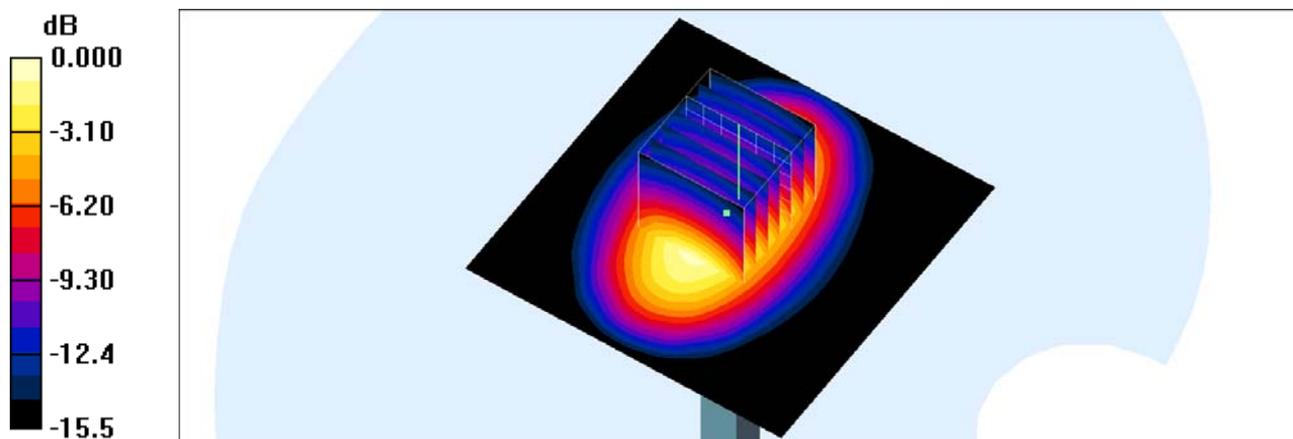

0 dB = 10.9mW/g

## System Check\_Head\_1800MHz\_110903

### DUT: Dipole 1800 MHz

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=250mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 10.8 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.5 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.72 mW/g; SAR(10 g) = 5.36 mW/g**

Maximum value of SAR (measured) = 10.7 mW/g

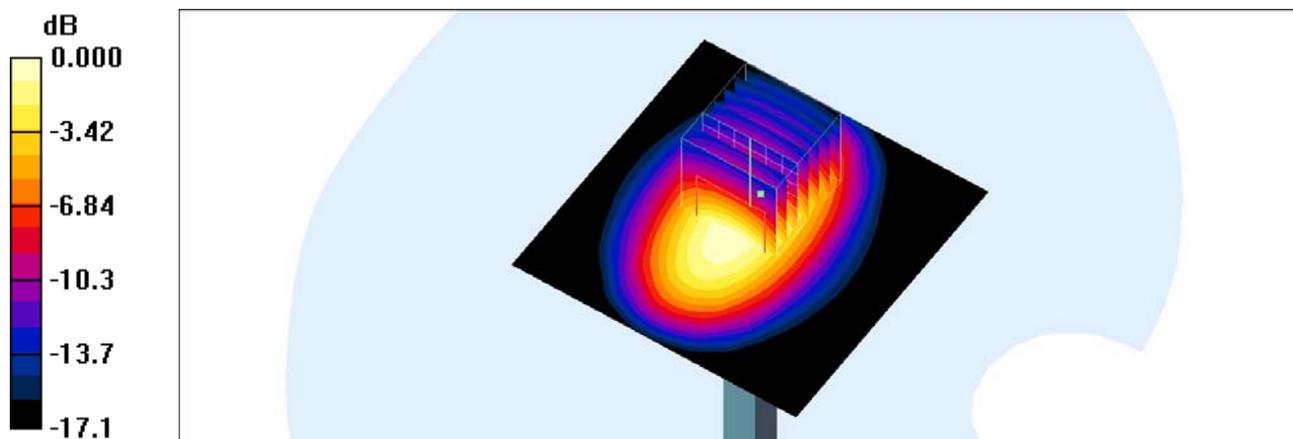

0 dB = 10.7mW/g

## System Check\_Body\_1800MHz\_110903

### DUT: Dipole 1800 MHz

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.6$  mho/m;  $\epsilon_r = 51.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=250mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.3 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.4 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 18.8 W/kg

**SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.65 mW/g**

Maximum value of SAR (measured) = 11.3 mW/g

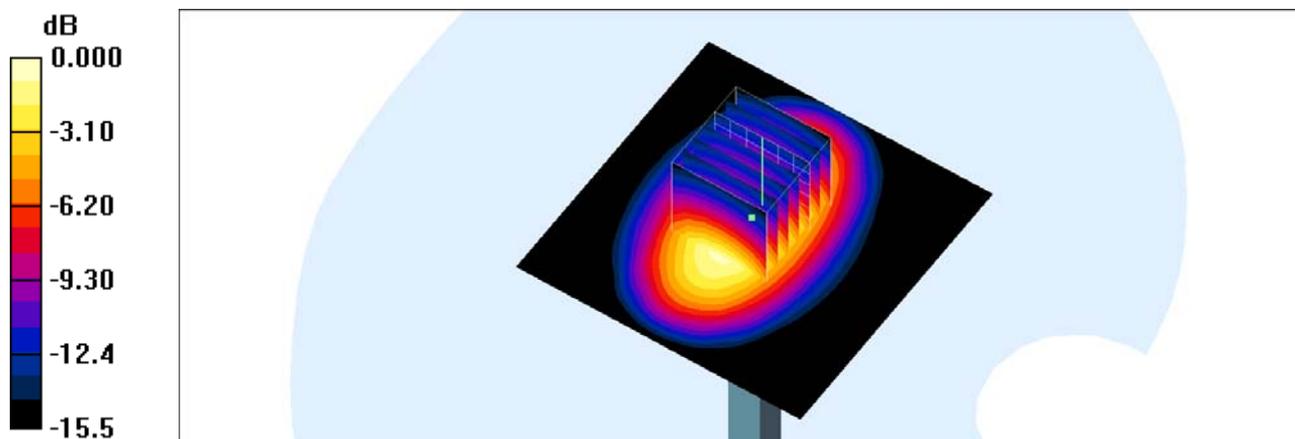

0 dB = 11.3mW/g

## System Check\_Head\_1900MHz\_110807

### DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_110807 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.0 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.4 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 16.6 W/kg

**SAR(1 g) = 9.38 mW/g; SAR(10 g) = 4.95 mW/g**

Maximum value of SAR (measured) = 10.5 mW/g

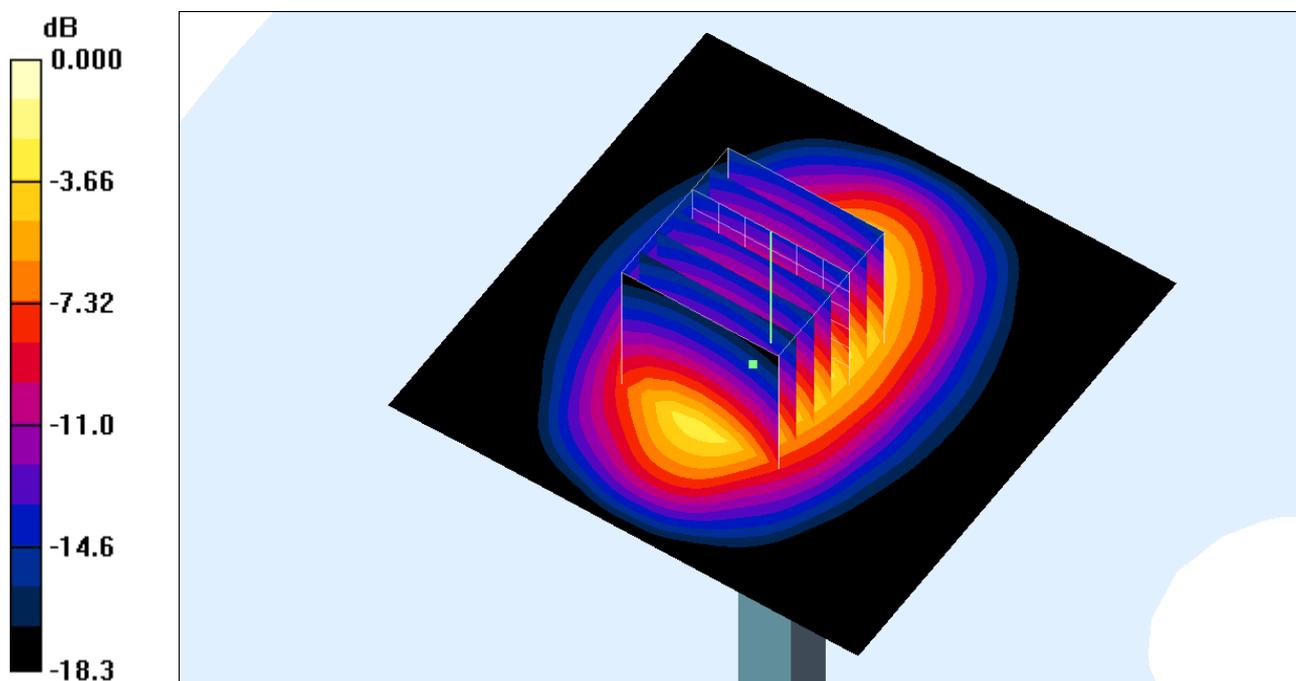

0 dB = 10.5mW/g

## **System Check\_Head\_1900MHz\_110818**

### **DUT: Dipole 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_110818 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 41.1$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 22.5 ; Liquid Temperature : 21.5

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3792; ConvF(7.76, 7.76, 7.76); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**Pin=250mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.2 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 18.6 W/kg

**SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.6 mW/g**

Maximum value of SAR (measured) = 11.1 mW/g

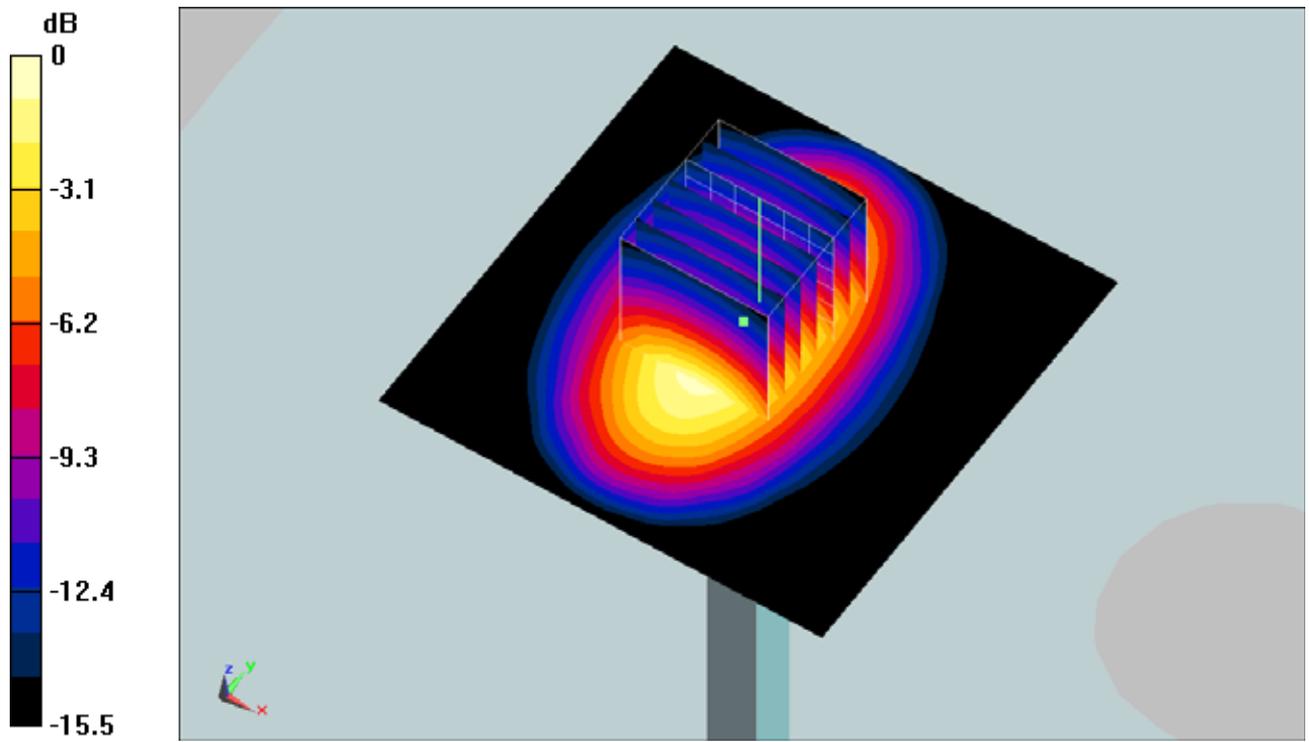

0 dB = 11.1mW/g

## System Check\_Body\_1900MHz\_110807

### DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_110807 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.4 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.3 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.48 mW/g**

Maximum value of SAR (measured) = 11.8 mW/g

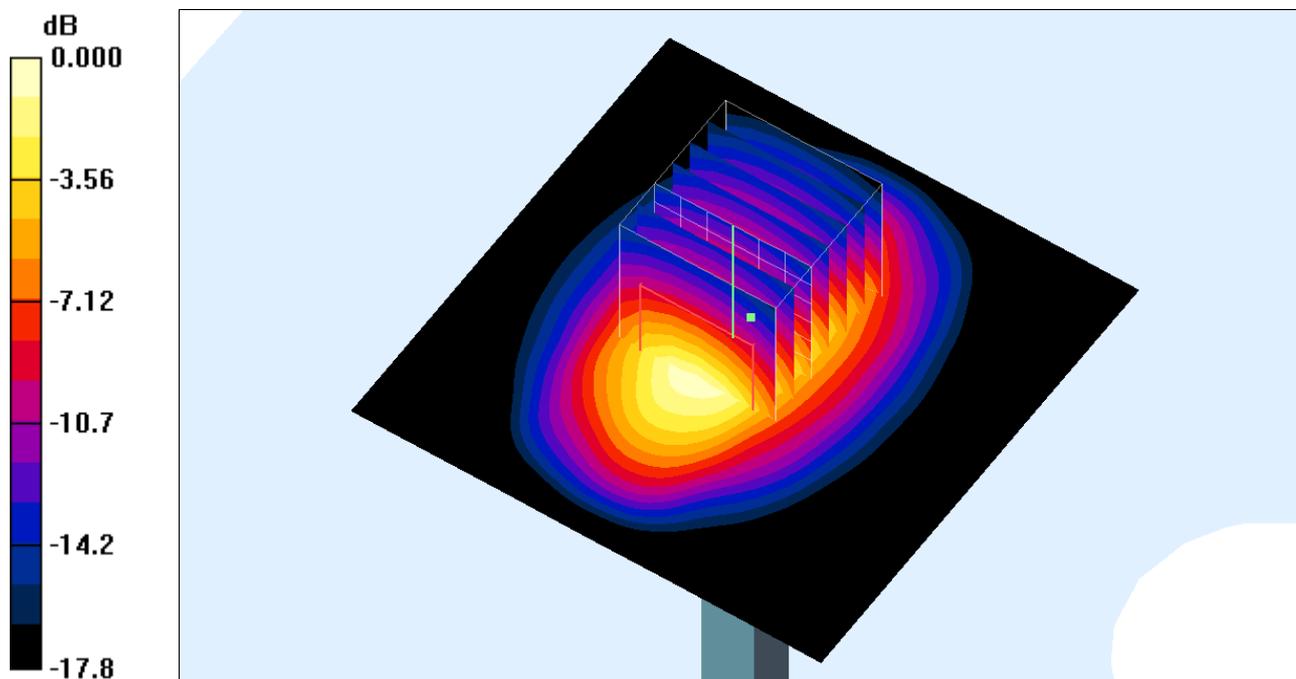

0 dB = 11.8mW/g

### System Check\_Body\_1900MHz\_110809

#### DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_110809 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.515$  mho/m;  $\epsilon_r =$

$55.045$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.2 °C

#### DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.454 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.093 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.780 W/kg

**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.48 mW/g**

Maximum value of SAR (measured) = 11.761 mW/g

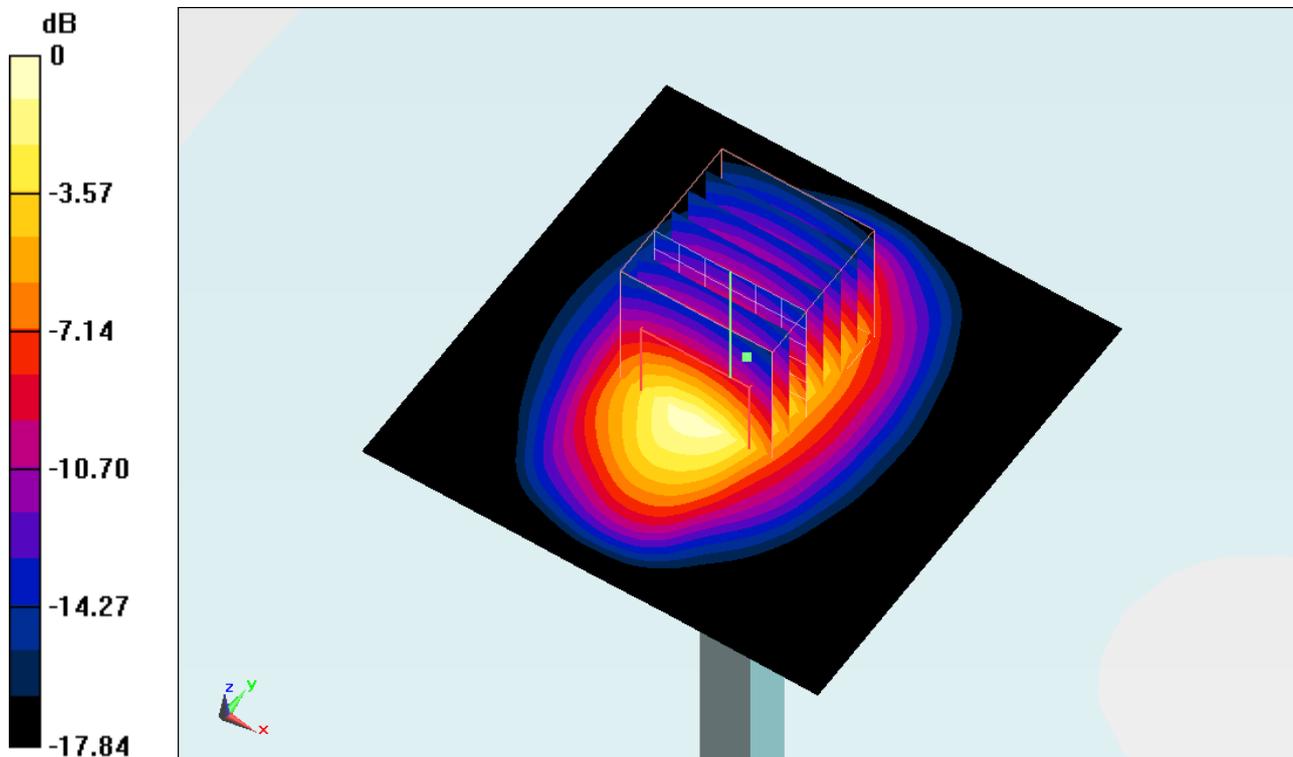

0 dB = 11.760mW/g

## System Check\_Head\_2450MHz\_110809

### DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_110809 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.84$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/05/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn778; Calibrated: 2010/10/22

- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 16.5 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.1 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 30.8 W/kg

**SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.14 mW/g**

Maximum value of SAR (measured) = 15.1 mW/g

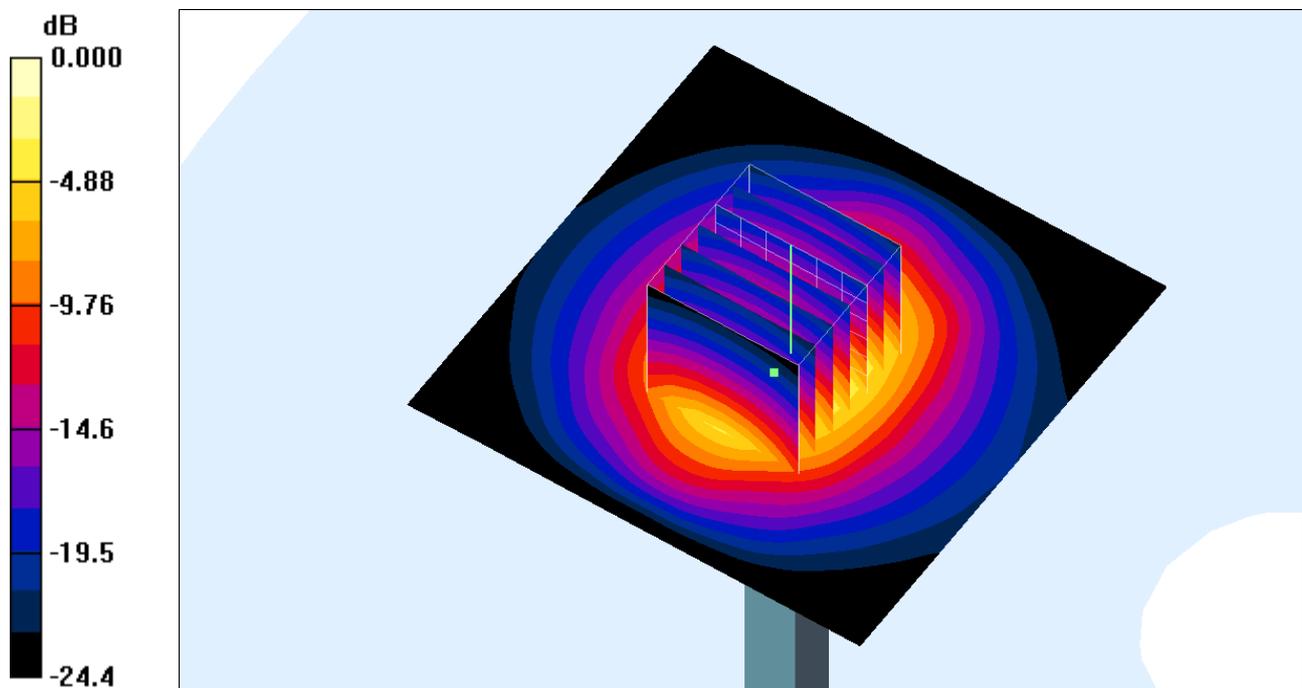

0 dB = 15.1mW/g

### System Check\_Body\_2450MHz\_110808

#### DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_110808 Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.965 \text{ mho/m}$ ;  $\epsilon_r =$

$51.537$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.6 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $21.6 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(6.67, 6.67, 6.67); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $15.227 \text{ mW/g}$


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $83.873 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$

Peak SAR (extrapolated) =  $28.772 \text{ W/kg}$

**SAR(1 g) =  $13 \text{ mW/g}$ ; SAR(10 g) =  $5.97 \text{ mW/g}$**

Maximum value of SAR (measured) =  $14.511 \text{ mW/g}$

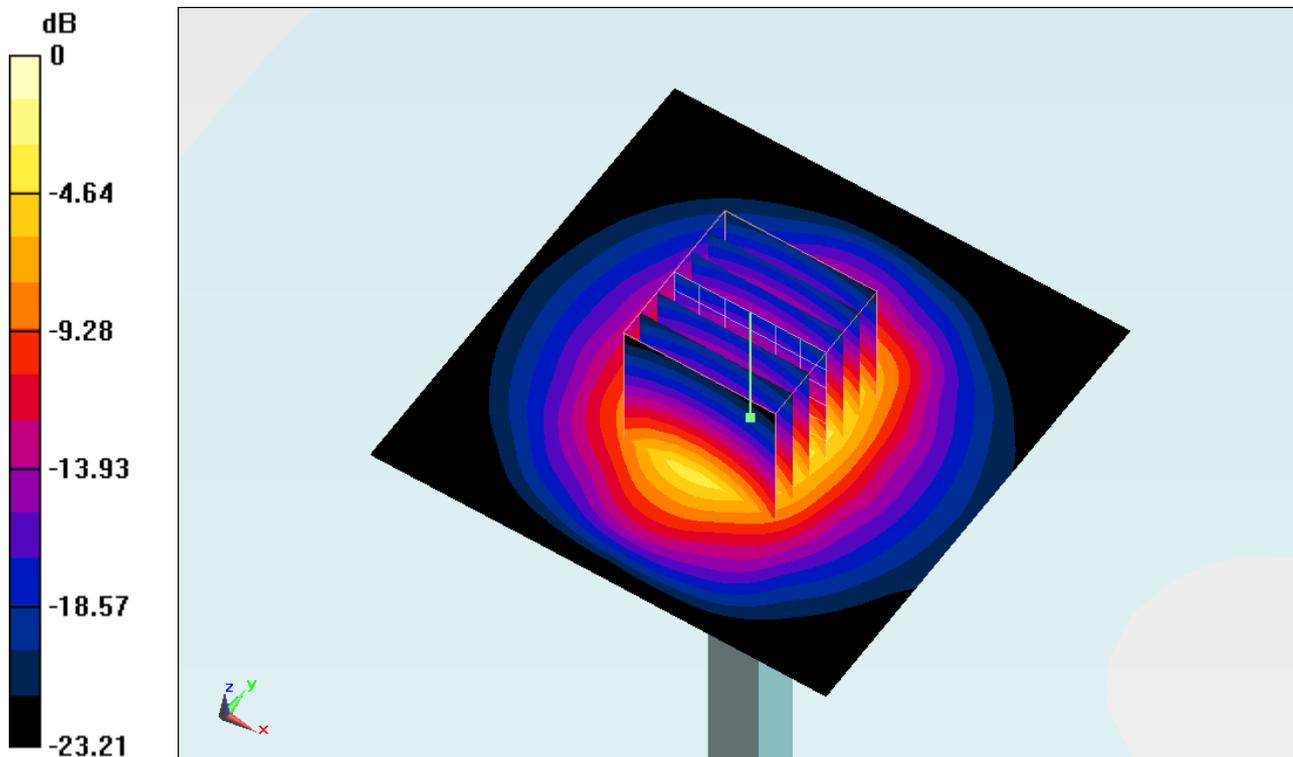

0 dB =  $14.510 \text{ mW/g}$

## #201 GSM850\_Left Cheek\_Ch189

**DUT: 172733**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL\_850\_110807 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.914$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.208 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.82 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.147 mW/g**

Maximum value of SAR (measured) = 0.204 mW/g



0 dB = 0.204mW/g

## #201 GSM850\_Left Cheek\_Ch189\_2D

**DUT: 172733**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL\_850\_110807 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.914$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.208 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.82 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.147 mW/g**

Maximum value of SAR (measured) = 0.204 mW/g

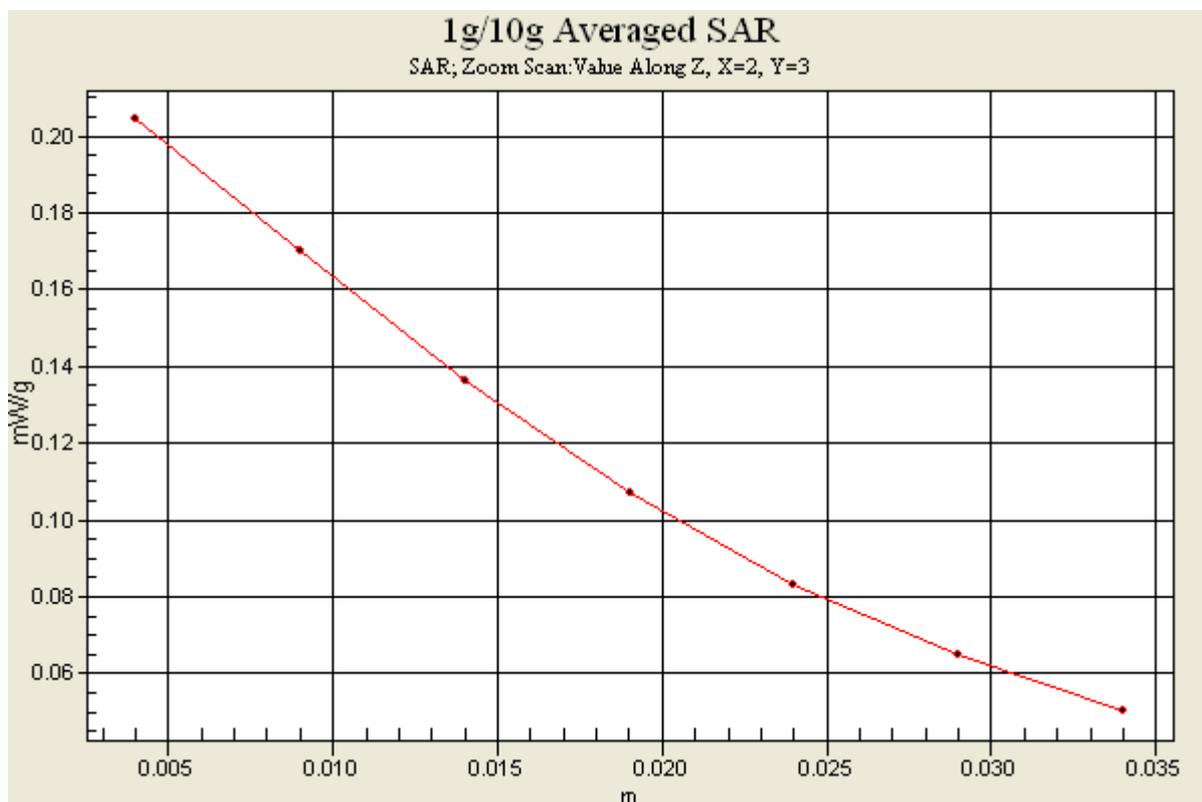

## #202 GSM1900\_Right Cheek\_Ch810

**DUT: 172733**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900\_110807 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.440 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.81 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.616 W/kg

**SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.246 mW/g**

Maximum value of SAR (measured) = 0.419 mW/g



0 dB = 0.419mW/g

## #202 GSM1900\_Right Cheek\_Ch810\_2D

**DUT: 172733**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900\_110807 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.03, 5.03, 5.03); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.440 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.81 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.616 W/kg

**SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.246 mW/g**

Maximum value of SAR (measured) = 0.419 mW/g

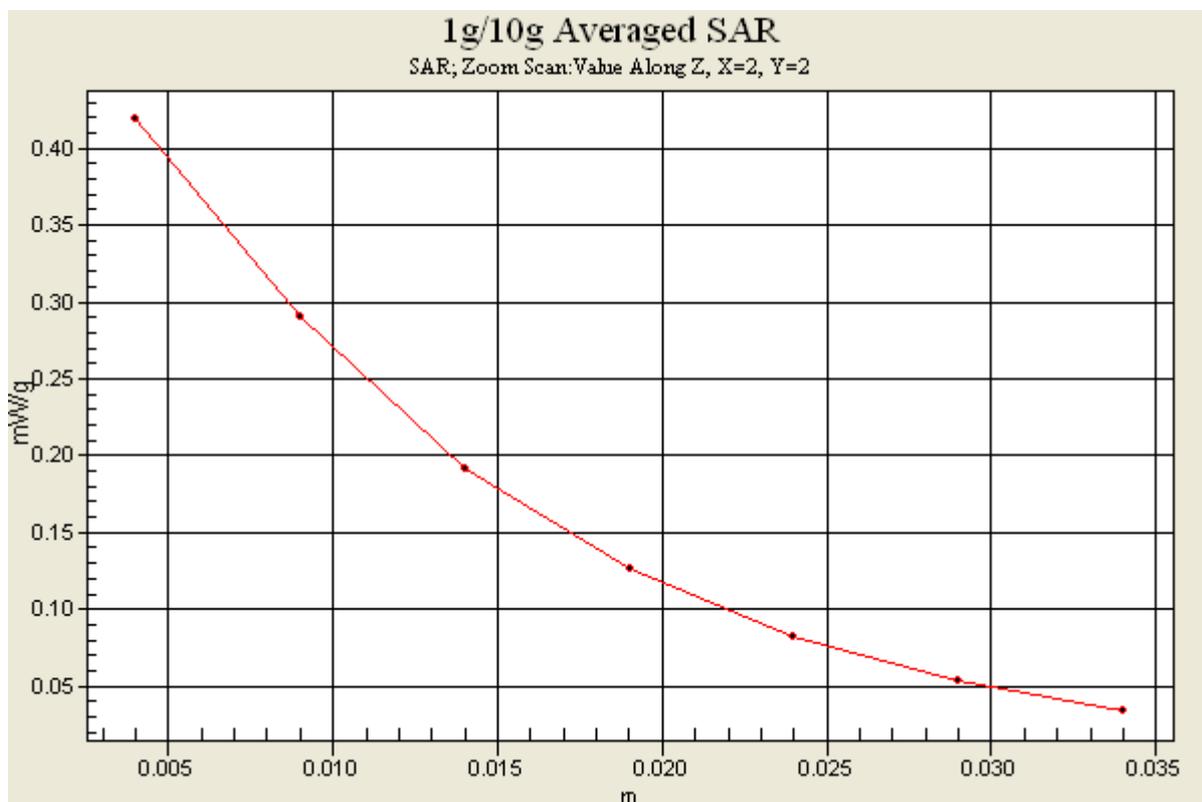

**#203 WCDMA V\_RMC12.2K\_Left Cheek\_Ch4132**

**DUT: 172733**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_110809 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.877$  mho/m;  $\epsilon_r = 41.43$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.317 mW/g


**Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.972 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.356 W/kg

**SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.228 mW/g**

Maximum value of SAR (measured) = 0.315 mW/g

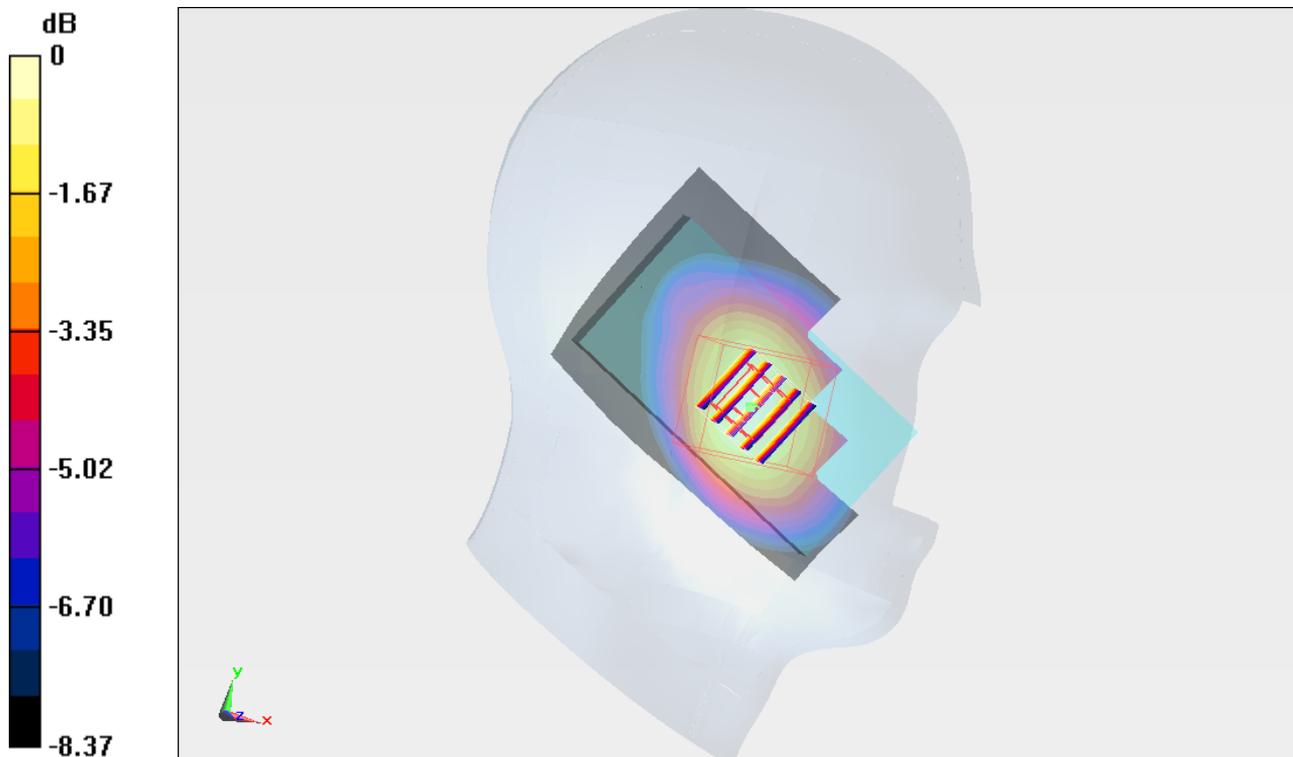

0 dB = 0.320mW/g

**#203 WCDMA V\_RMC12.2K\_Left Cheek\_Ch4132\_2D**

**DUT: 172733**


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_110809 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.877$  mho/m;  $\epsilon_r = 41.43$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.317 mW/g

**Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.972 V/m; Power Drift = -0.17 dB  
Peak SAR (extrapolated) = 0.356 W/kg  
**SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.228 mW/g**  
Maximum value of SAR (measured) = 0.315 mW/g

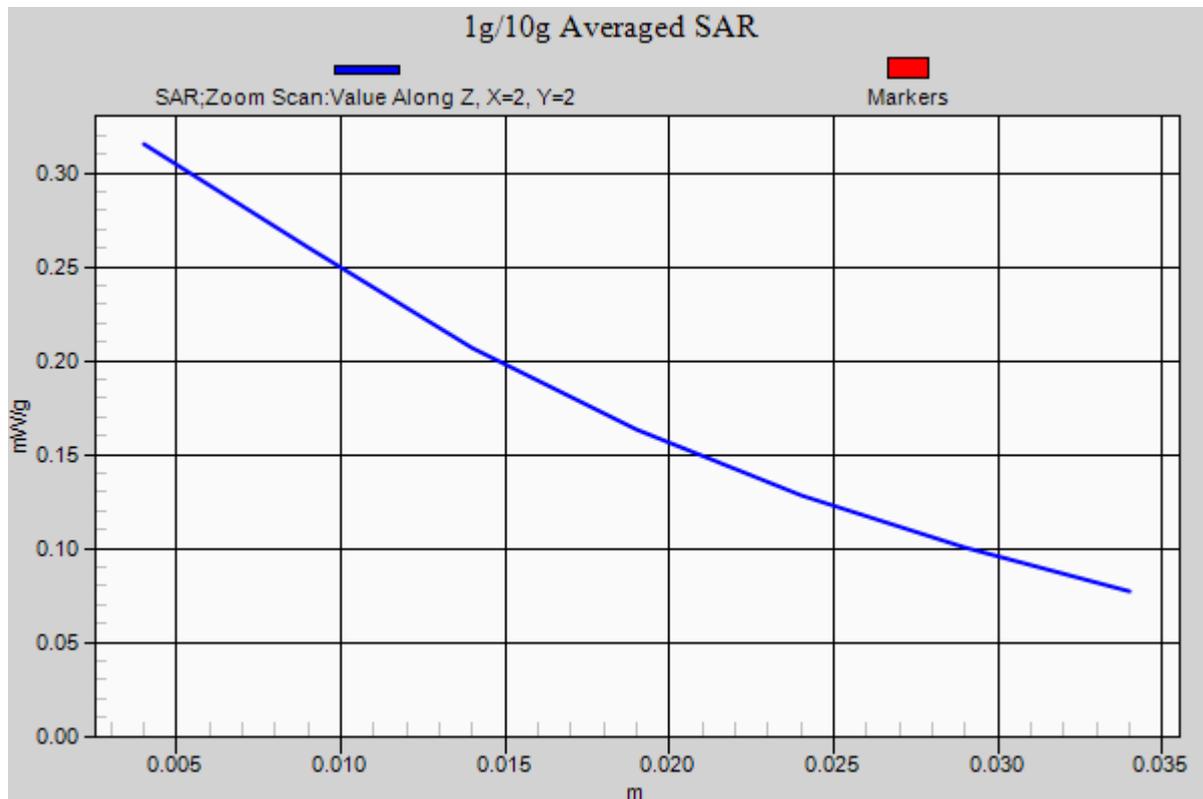

**#204 WCDMA II\_RMC12.2\_Right Cheek\_Ch9400**

**DUT: 172733**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_110818 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 41.1$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 22.5 ; Liquid Temperature : 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.76, 7.76, 7.76); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2011/1/13

- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**Ch9400/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.24 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.38 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 1.86 W/kg

**SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.683 mW/g**

Maximum value of SAR (measured) = 1.26 mW/g

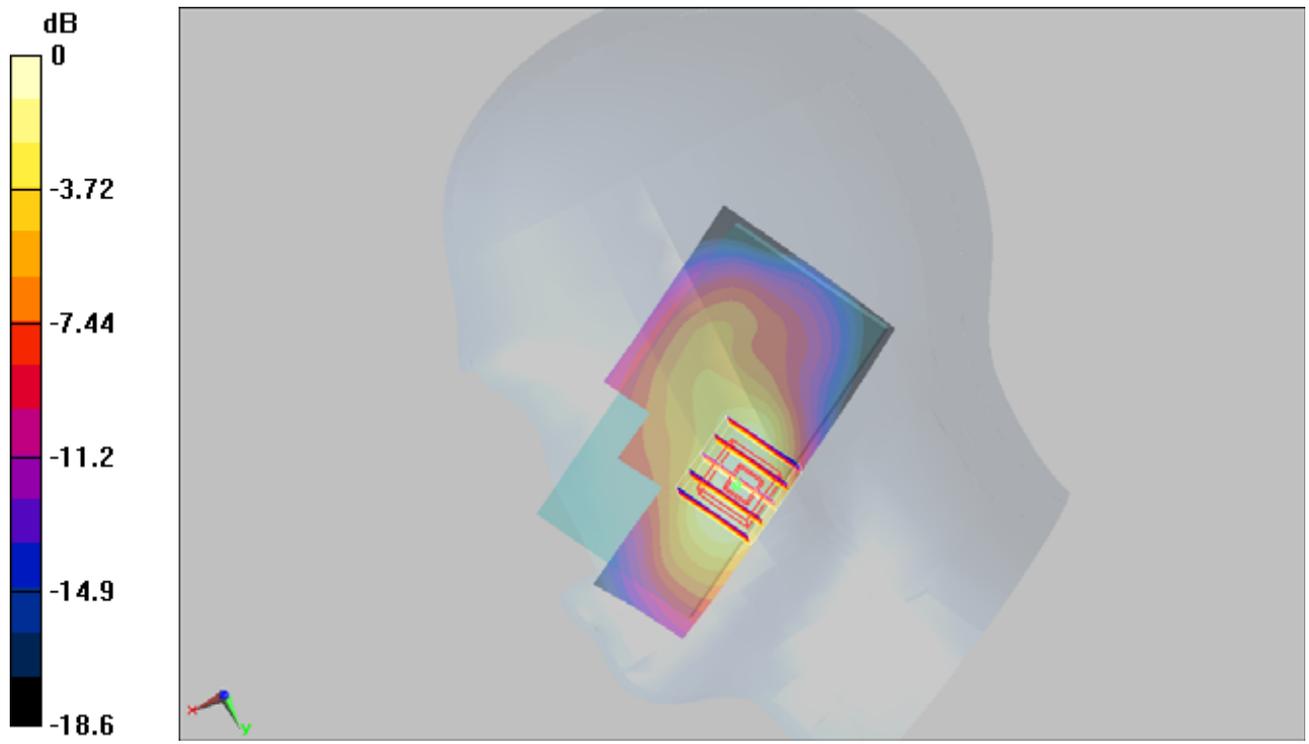

0 dB = 1.26mW/g

**#205 WCDMA II\_RMC12.2\_Right Cheek\_Ch9262**

**DUT: 172733**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_110818 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r =$

$41.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 ; Liquid Temperature : 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.76, 7.76, 7.76); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2011/1/13

- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**Ch9262/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.25 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.03 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.83 W/kg

**SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.685 mW/g**

Maximum value of SAR (measured) = 1.21 mW/g

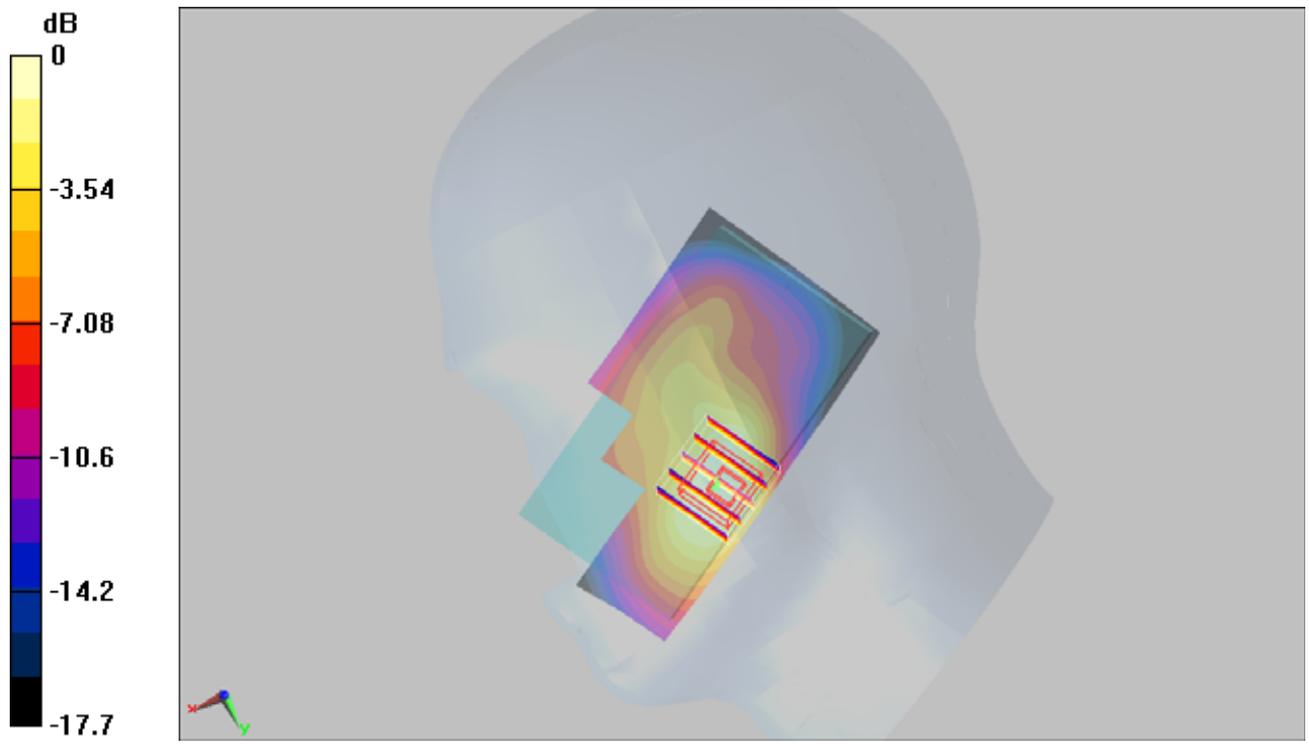

0 dB = 1.21mW/g

**#206 WCDMA II\_RMC12.2\_Right Cheek\_Ch9538**

**DUT: 172733**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_110818 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 41$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 22.5 ; Liquid Temperature : 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.76, 7.76, 7.76); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2011/1/13

- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**Ch9538/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.3 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.51 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.703 mW/g**

Maximum value of SAR (measured) = 1.29 mW/g

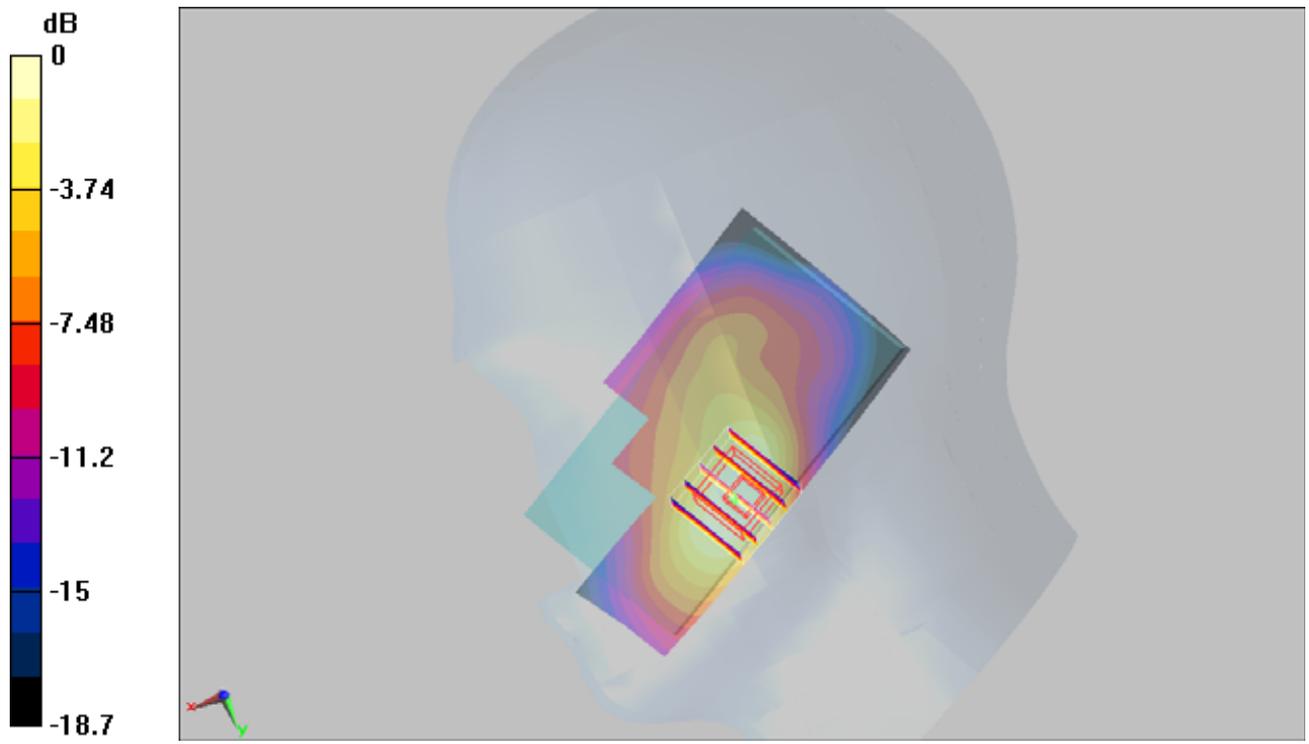

0 dB = 1.29mW/g

#206 WCDMA II\_RMC12.2\_Right Cheek\_Ch9538\_2D

DUT: 172733

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_110818 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 ; Liquid Temperature : 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.76, 7.76, 7.76); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

**Ch9538/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.3 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.51 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.703 mW/g**

Maximum value of SAR (measured) = 1.29 mW/g

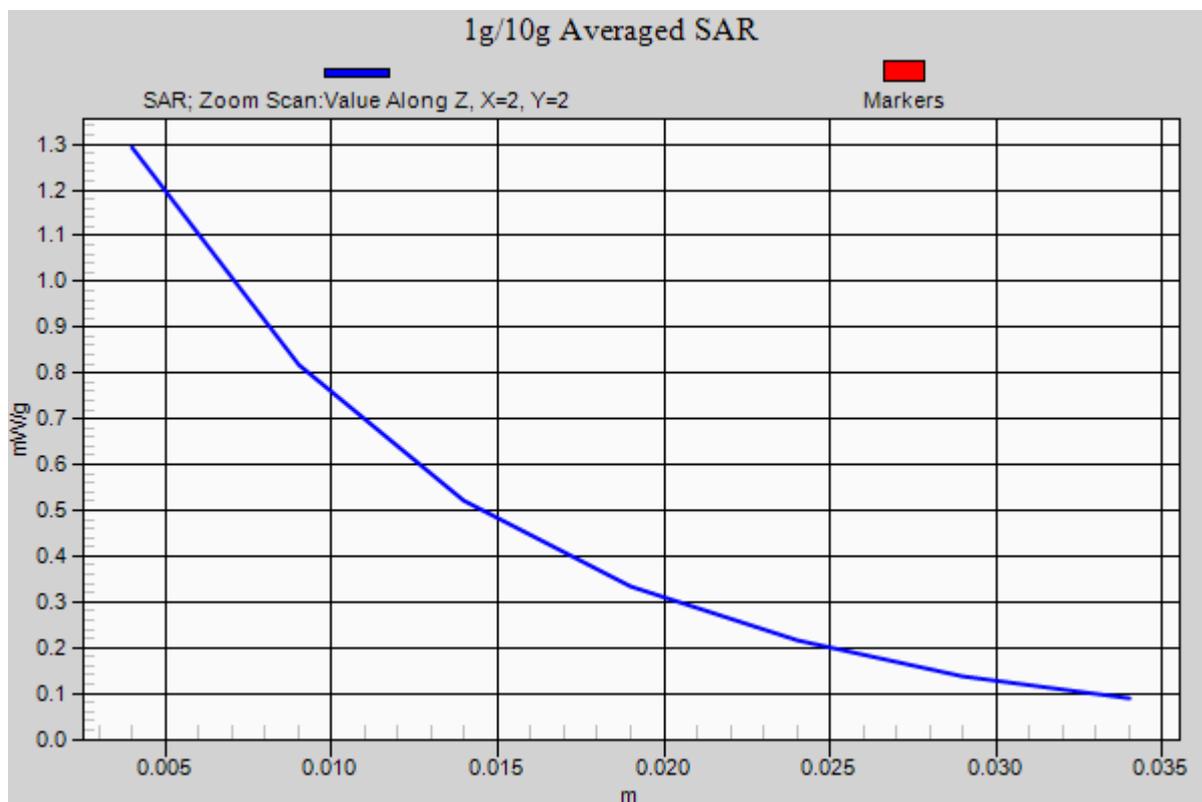

## #218 LTE Band4\_QPSK(36-18)\_Right Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110902 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.681 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.65 V/m; Power Drift = 0.194 dB

Peak SAR (extrapolated) = 0.915 W/kg

**SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.398 mW/g**

Maximum value of SAR (measured) = 0.649 mW/g

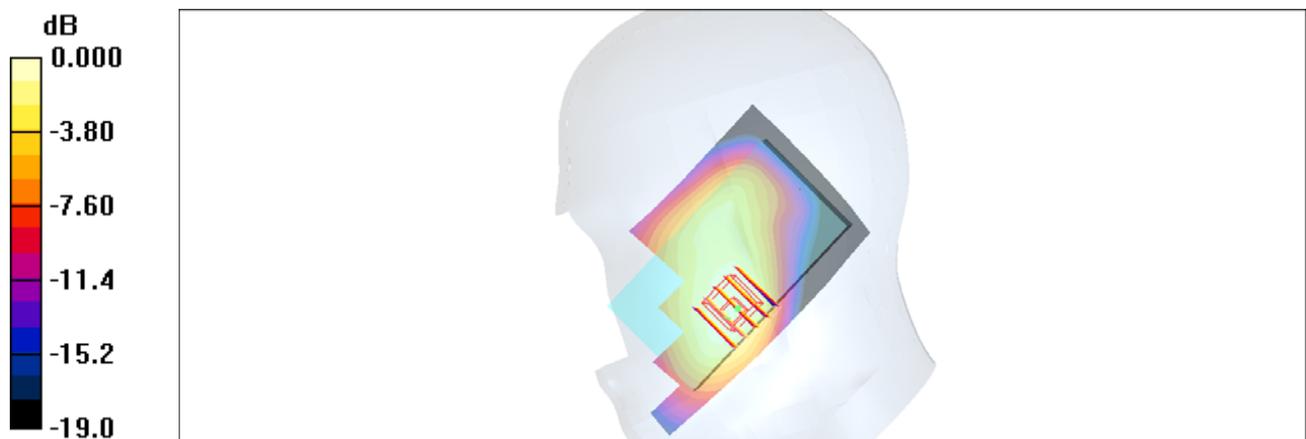

0 dB = 0.649mW/g

### #218 LTE Band4\_QPSK(36-18)\_Right Cheek\_Ch20175\_15M\_2D

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110902 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r =$

$39.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.681 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.65 V/m; Power Drift = 0.194 dB

Peak SAR (extrapolated) = 0.915 W/kg

**SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.398 mW/g**

Maximum value of SAR (measured) = 0.649 mW/g

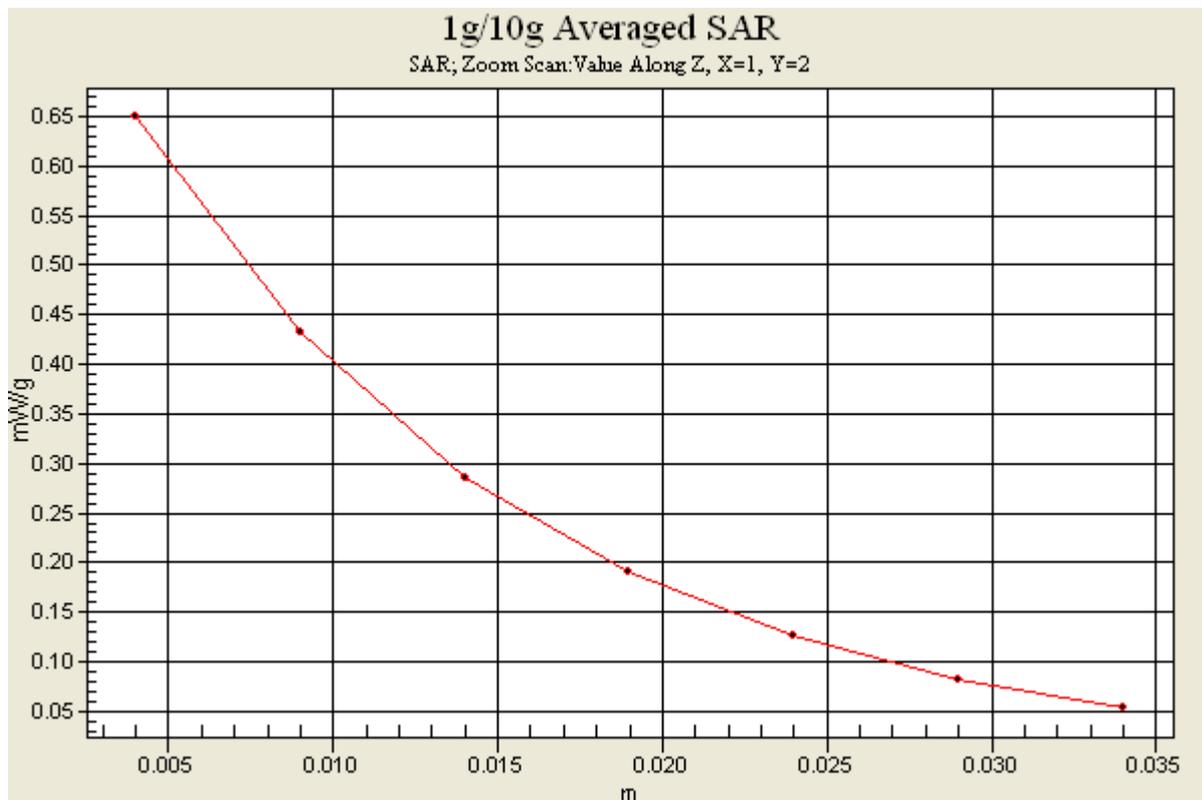

## #219 LTE Band4\_QPSK(1-0)\_Right Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110902 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.682 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.63 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.916 W/kg

**SAR(1 g) = 0.608 mW/g; SAR(10 g) = 0.397 mW/g**

Maximum value of SAR (measured) = 0.652 mW/g

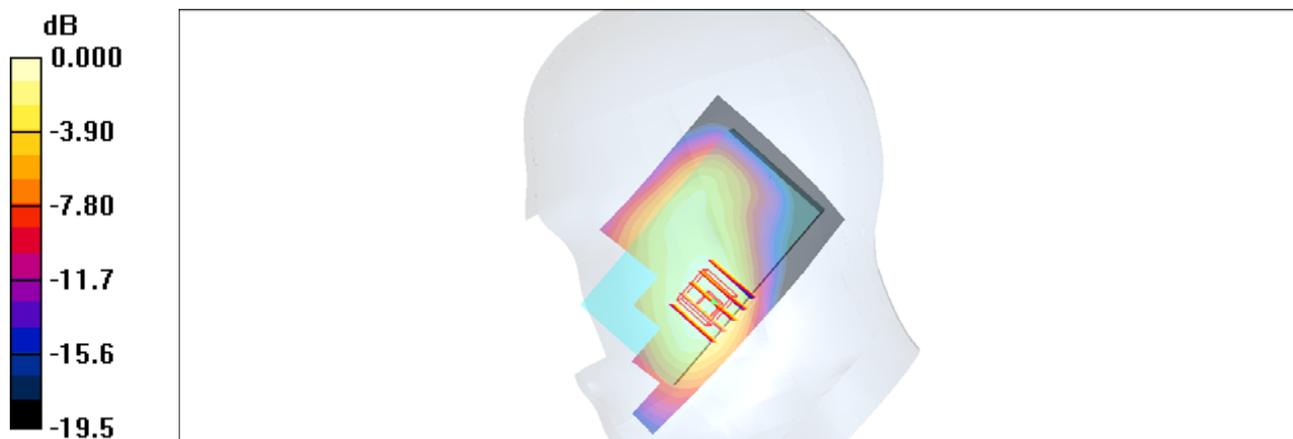

0 dB = 0.652mW/g

## #220 LTE Band4\_QPSK(1-74)\_Right Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110902 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.659 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.73 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.882 W/kg

**SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.378 mW/g**

Maximum value of SAR (measured) = 0.618 mW/g

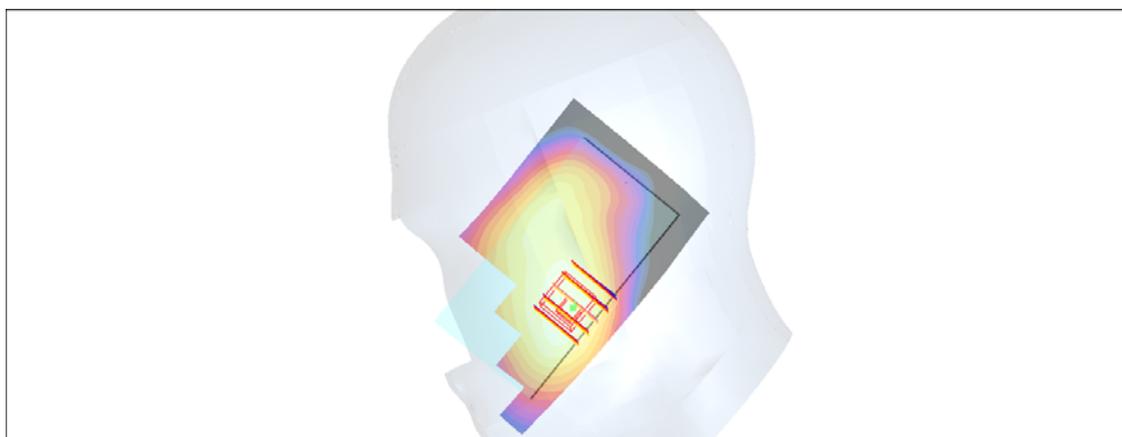

0 dB = 0.618mW/g

### #221 LTE Band4\_16QAM(36-18)\_Right Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110902 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.647 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.15 V/m; Power Drift = 0.147 dB

Peak SAR (extrapolated) = 0.873 W/kg

**SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.374 mW/g**

Maximum value of SAR (measured) = 0.615 mW/g



0 dB = 0.615mW/g

## #222 LTE Band4\_16QAM(1-0)\_Right Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110902 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.654 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.08 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.927 W/kg

**SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.378 mW/g**

Maximum value of SAR (measured) = 0.624 mW/g

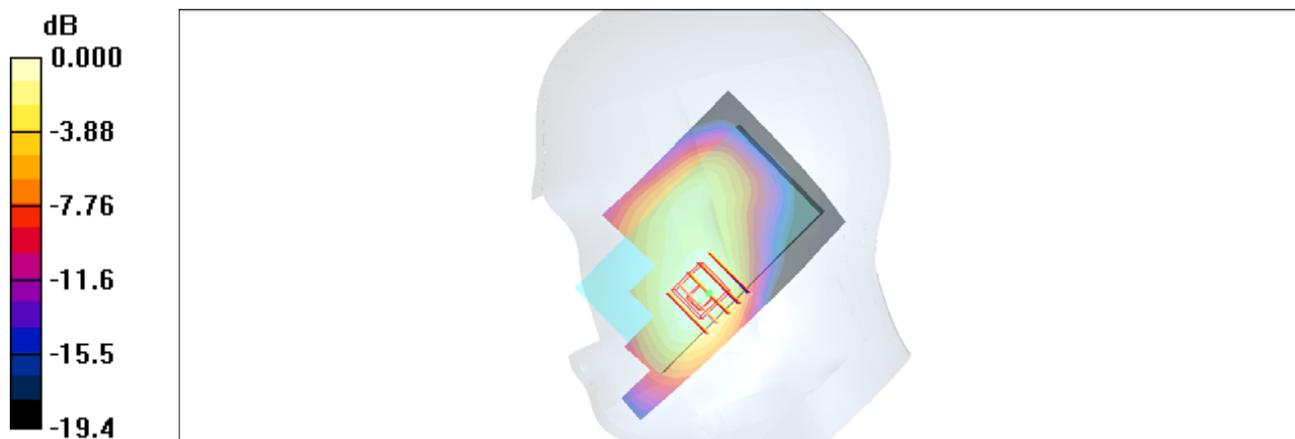

0 dB = 0.624mW/g

## #223 LTE Band4\_16QAM(1-74)\_Right Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110902 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.5$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.633 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.27 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.818 W/kg

**SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.361 mW/g**

Maximum value of SAR (measured) = 0.592 mW/g

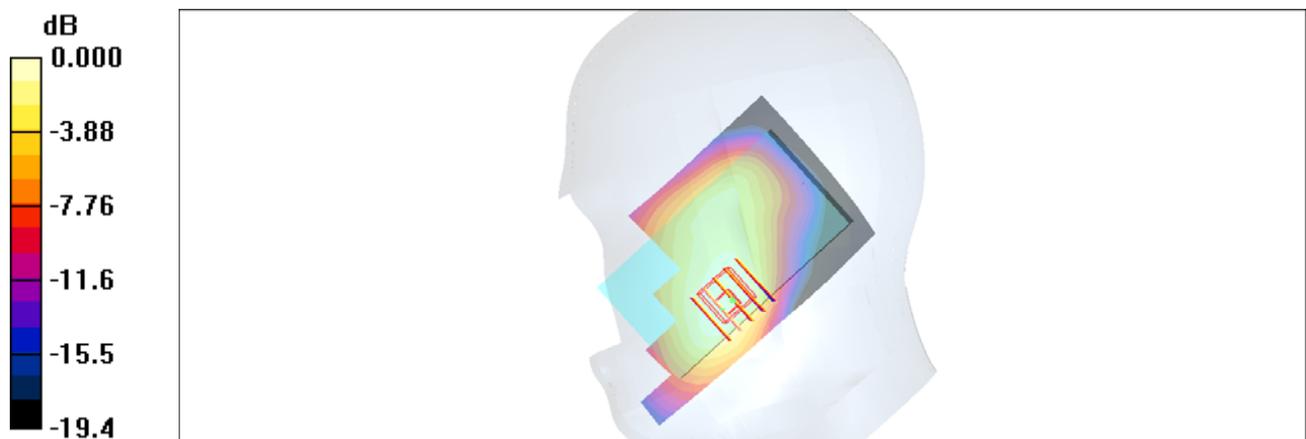

0 dB = 0.592mW/g

## #224 LTE Band4\_QPSK(36-18)\_Right Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.334 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = 0.183 dB

Peak SAR (extrapolated) = 0.408 W/kg

**SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.181 mW/g**

Maximum value of SAR (measured) = 0.302 mW/g

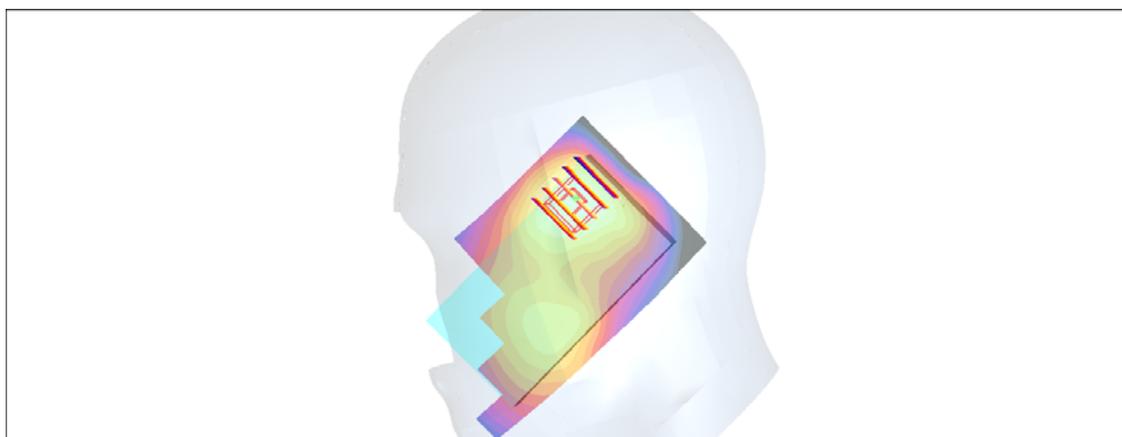

0 dB = 0.302mW/g

## #225 LTE Band4\_QPSK(1-0)\_Right Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.368 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.459 W/kg

**SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.194 mW/g**

Maximum value of SAR (measured) = 0.328 mW/g

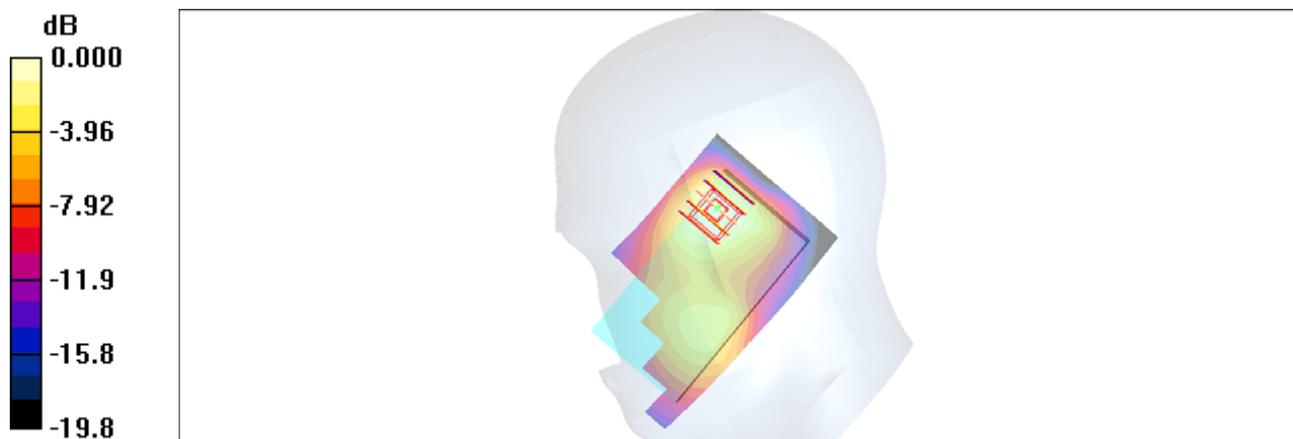

0 dB = 0.328mW/g

### #225 LTE Band4\_QPSK(1-0)\_Right Tilted\_Ch20175\_15M\_2D

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r =$

$40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.368 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.459 W/kg

**SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.194 mW/g**

Maximum value of SAR (measured) = 0.328 mW/g

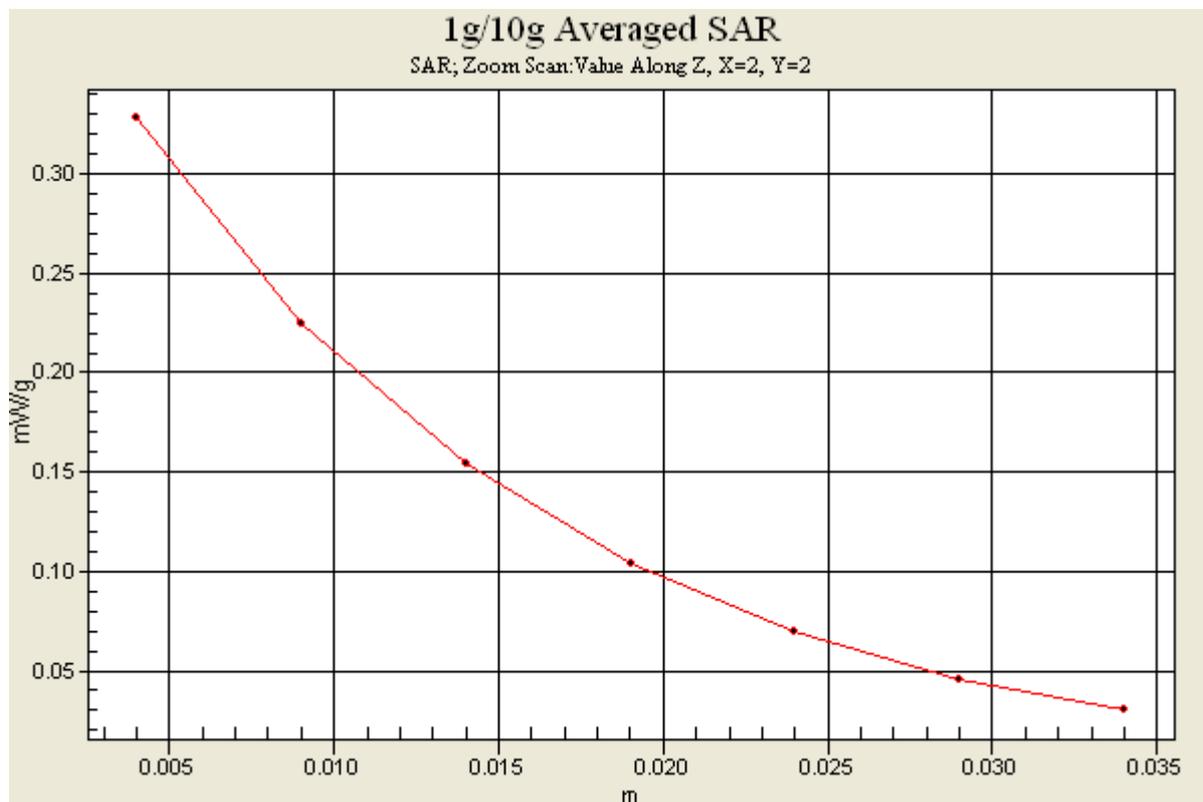

## #226 LTE Band4\_QPSK(1-74)\_Right Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.344 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.434 W/kg

**SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.186 mW/g**

Maximum value of SAR (measured) = 0.311 mW/g

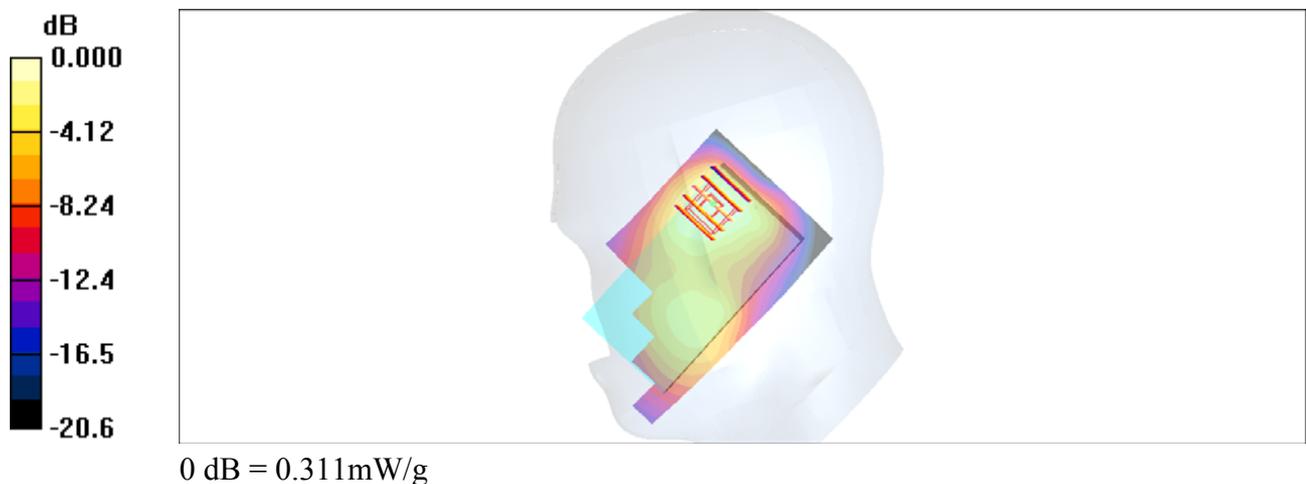

## #227 LTE Band4\_16QAM(36-18)\_Right Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.321 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.409 W/kg

**SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.176 mW/g**

Maximum value of SAR (measured) = 0.294 mW/g

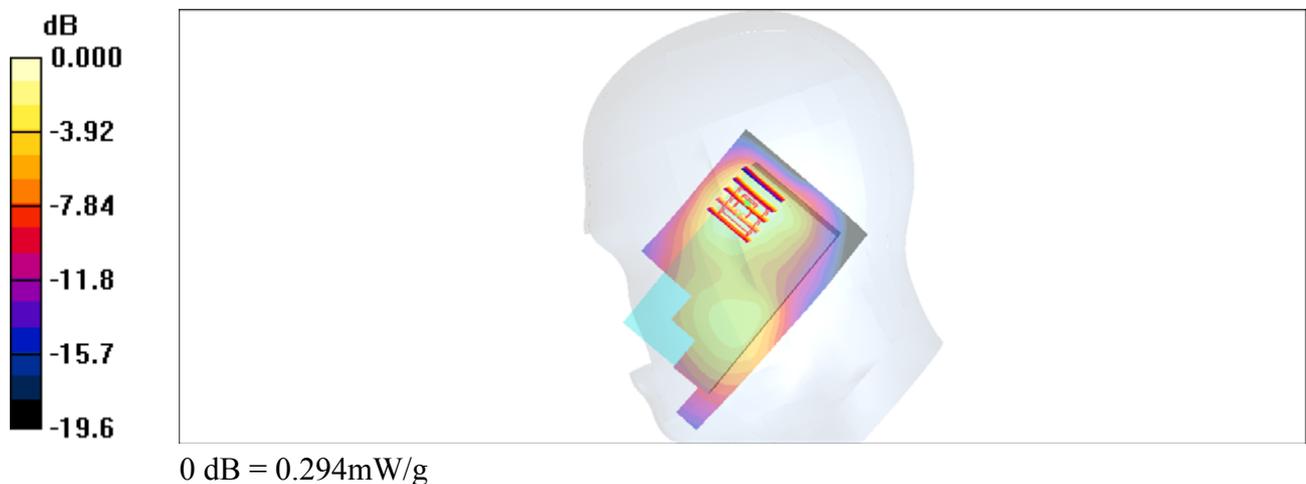

## #228 LTE Band4\_16QAM(1-0)\_Right Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.318 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.97 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.402 W/kg

**SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.179 mW/g**

Maximum value of SAR (measured) = 0.302 mW/g



0 dB = 0.302mW/g

## #229 LTE Band4\_16QAM(1-74)\_Right Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.314 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.92 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 0.406 W/kg

**SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.174 mW/g**

Maximum value of SAR (measured) = 0.293 mW/g



0 dB = 0.293mW/g

### #230 LTE Band4\_QPSK(36-18)\_Left Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.528 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.30 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.739 W/kg

**SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.316 mW/g**

Maximum value of SAR (measured) = 0.525 mW/g

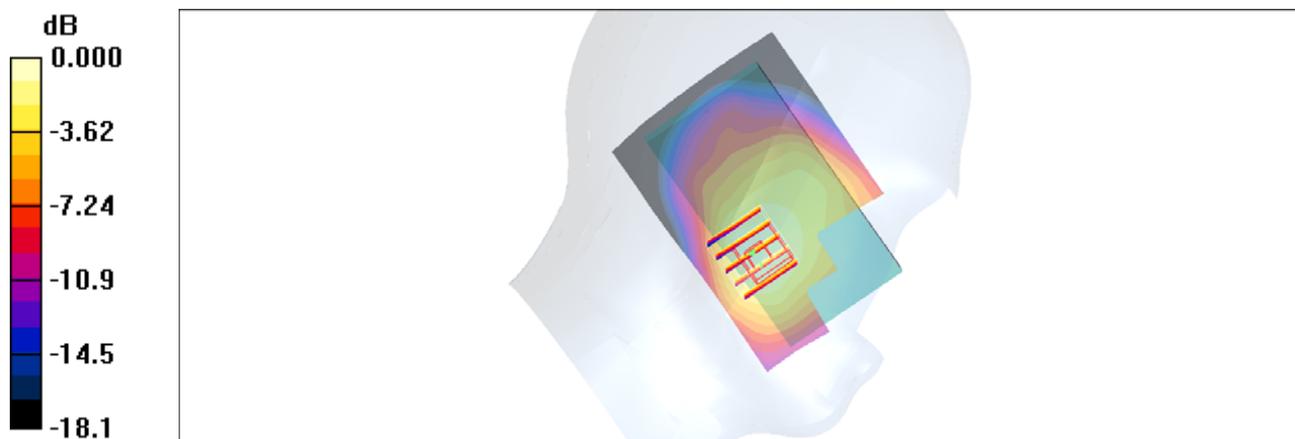

0 dB = 0.525mW/g

## #231 LTE Band4\_QPSK(1-0)\_Left Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.561 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.16 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 0.784 W/kg

**SAR(1 g) = 0.526 mW/g; SAR(10 g) = 0.339 mW/g**

Maximum value of SAR (measured) = 0.561 mW/g

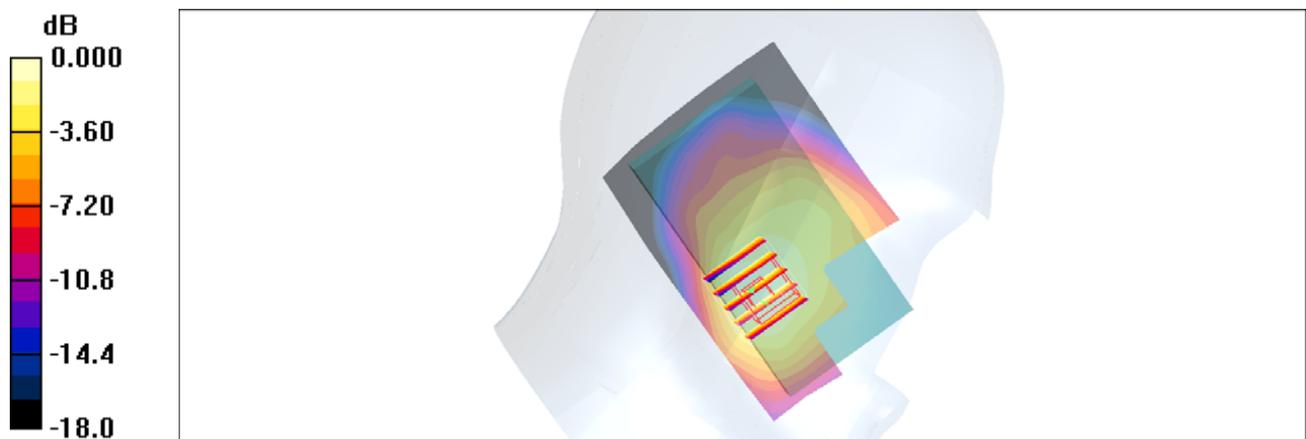

0 dB = 0.561mW/g

## #232 LTE Band4\_QPSK(1-74)\_Left Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.539 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.40 V/m; Power Drift = 0.074 dB

Peak SAR (extrapolated) = 0.763 W/kg

**SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.323 mW/g**

Maximum value of SAR (measured) = 0.543 mW/g

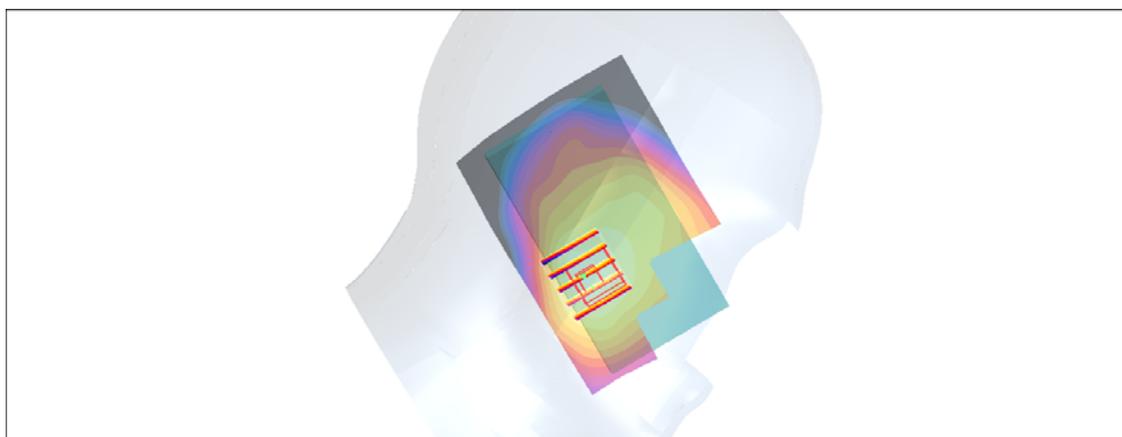

0 dB = 0.543mW/g

### #233 LTE Band4\_16QAM(36-18)\_Left Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.598 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.47 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.798 W/kg

**SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.350 mW/g**

Maximum value of SAR (measured) = 0.573 mW/g

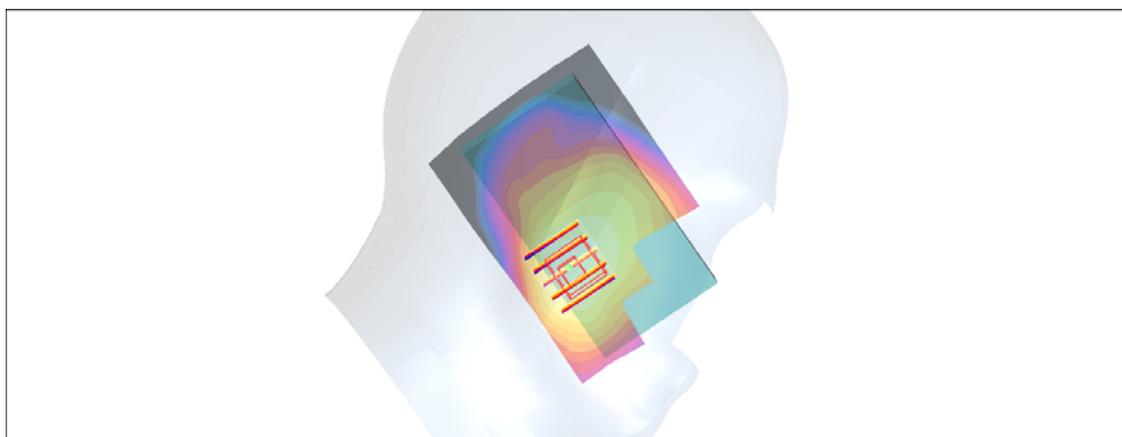

0 dB = 0.573mW/g

### #234 LTE Band4\_16QAM(1-0)\_Left Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.603 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.36 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.800 W/kg

**SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.357 mW/g**

Maximum value of SAR (measured) = 0.573 mW/g

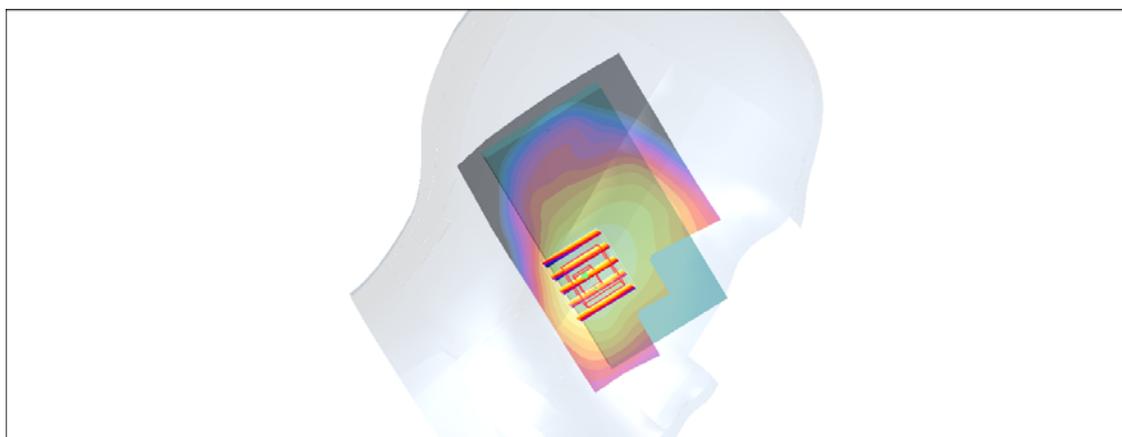

0 dB = 0.573mW/g

### #234 LTE Band4\_16QAM(1-0)\_Left Cheek\_Ch20175\_15M\_2D

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r =$

40.6;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.603 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.36 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.800 W/kg

**SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.357 mW/g.**

Maximum value of SAR (measured) = 0.573 mW/g

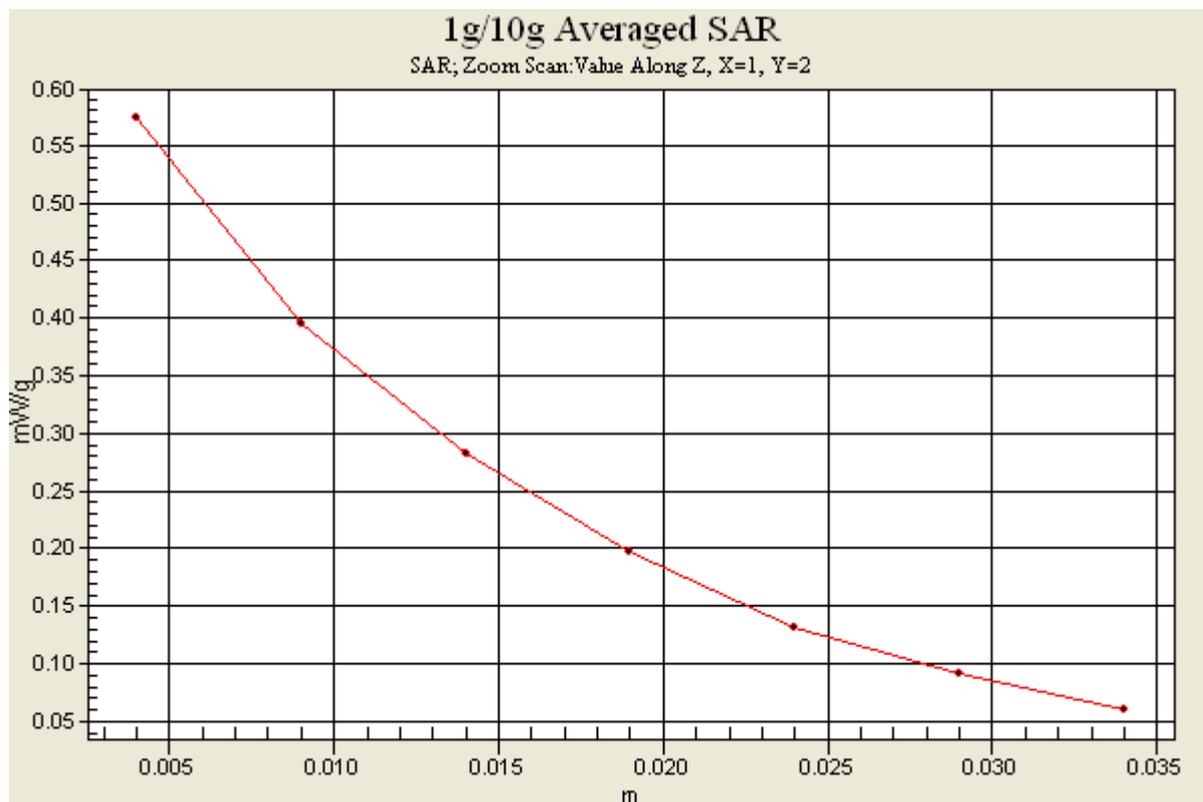

### #235 LTE Band4\_16QAM(1-74)\_Left Cheek\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.587 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.65 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.792 W/kg

**SAR(1 g) = 0.533 mW/g; SAR(10 g) = 0.344 mW/g**

Maximum value of SAR (measured) = 0.563 mW/g

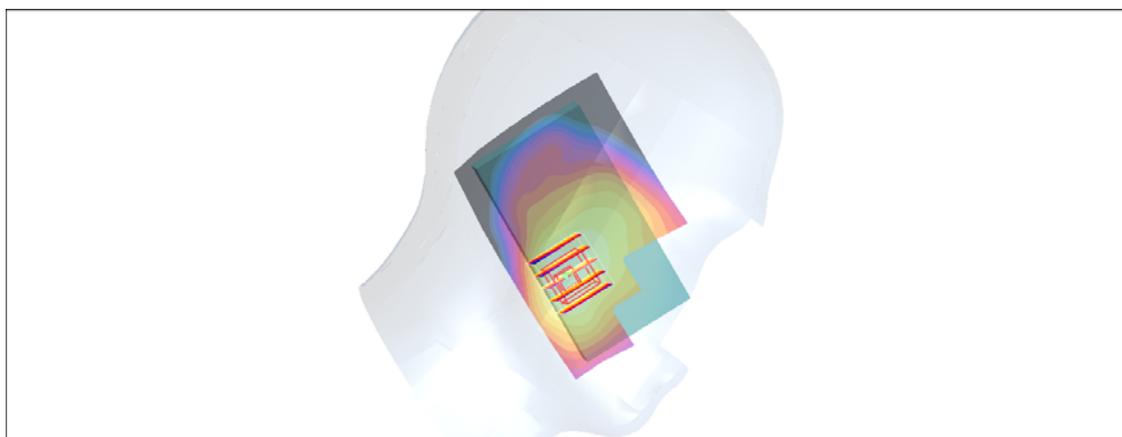

0 dB = 0.563mW/g

### #236 LTE Band4\_QPSK(36-18)\_Left Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.166 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.73 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.220 W/kg

**SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.097 mW/g**

Maximum value of SAR (measured) = 0.163 mW/g

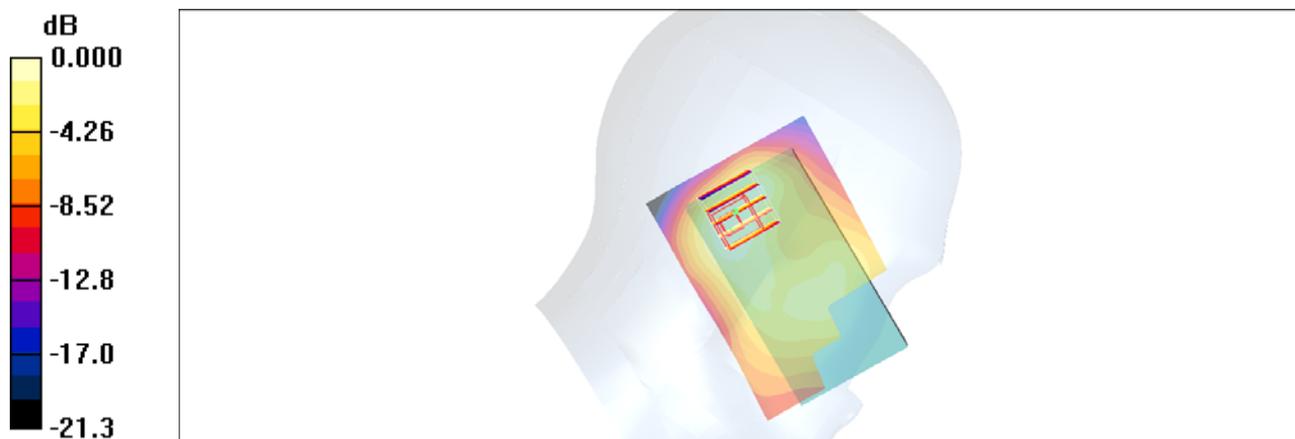

0 dB = 0.163mW/g

### #237 LTE Band4\_QPSK(1-0)\_Left Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.188 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.80 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 0.250 W/kg

**SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.104 mW/g**

Maximum value of SAR (measured) = 0.175 mW/g

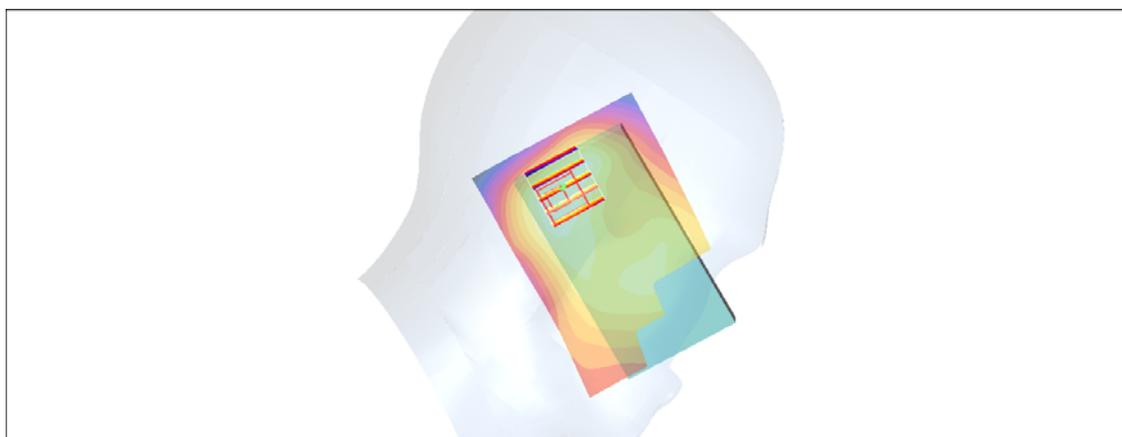

0 dB = 0.175mW/g

### #237 LTE Band4\_QPSK(1-0)\_Left Tilted\_Ch20175\_15M\_2D

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r =$

$40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.188 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.80 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 0.250 W/kg

**SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.104 mW/g**

Maximum value of SAR (measured) = 0.175 mW/g

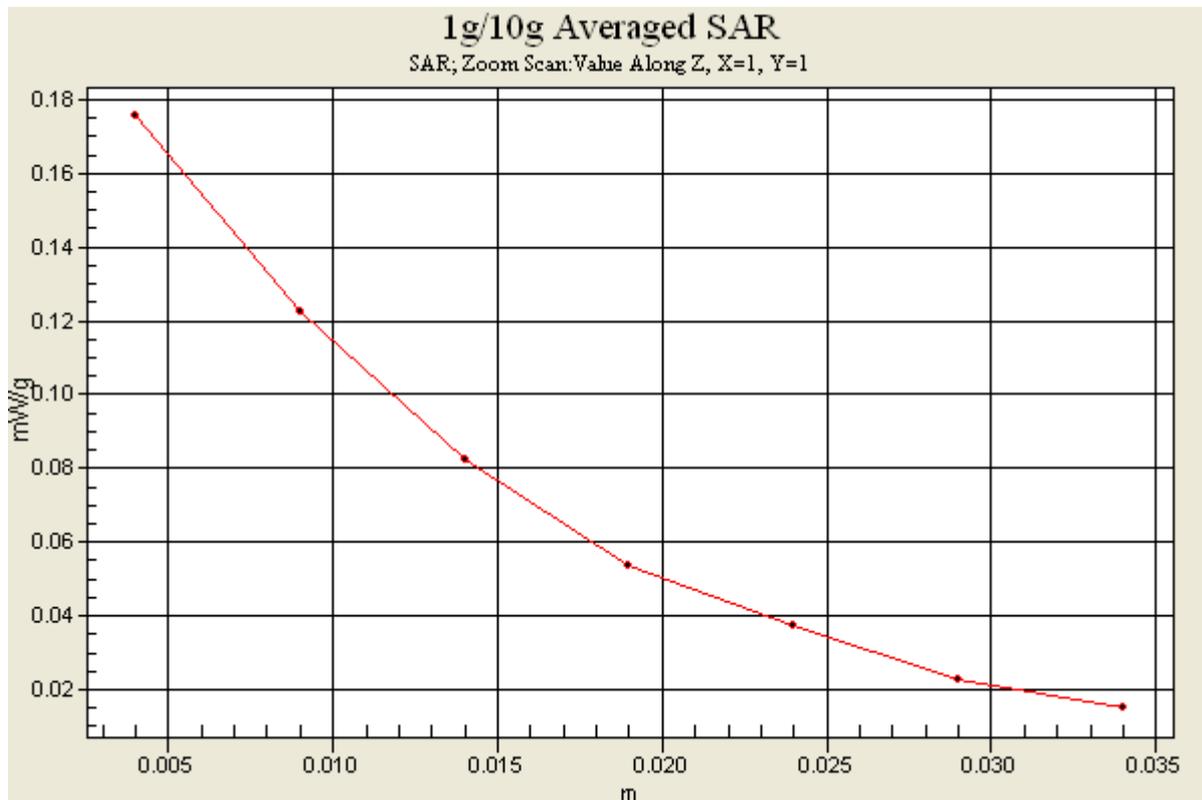

## #238 LTE Band4\_QPSK(1-74)\_Left Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.177 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.47 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 0.247 W/kg

**SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.103 mW/g**

Maximum value of SAR (measured) = 0.173 mW/g

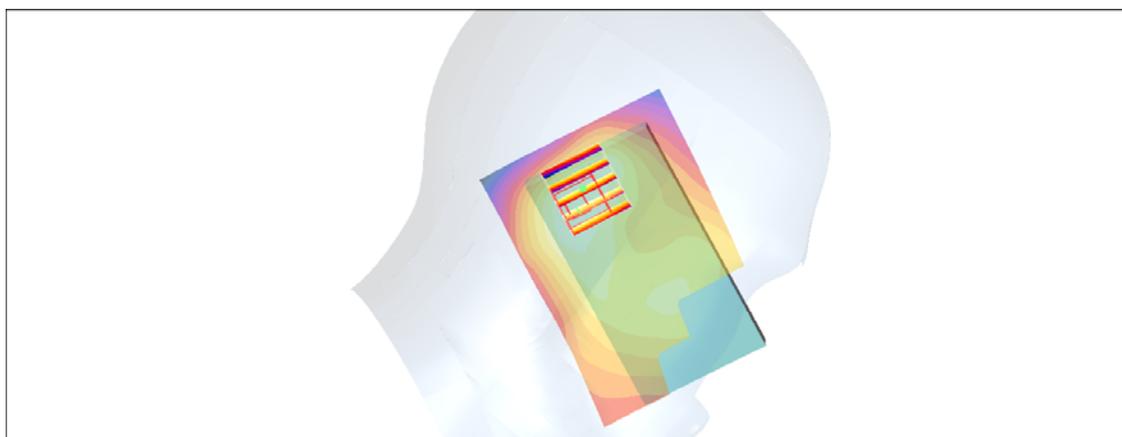

0 dB = 0.173mW/g

### #239 LTE Band4\_16QAM(36-18)\_Left Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.161 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.83 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 0.219 W/kg

**SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.094 mW/g**

Maximum value of SAR (measured) = 0.158 mW/g



0 dB = 0.158mW/g

## #240 LTE Band4\_16QAM(1-0)\_Left Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.160 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.77 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.227 W/kg

**SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.095 mW/g**

Maximum value of SAR (measured) = 0.161 mW/g



### #241 LTE Band4\_16QAM(1-74)\_Left Tilted\_Ch20175\_15M

**DUT: 172733**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.6$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(8.06, 8.06, 8.06); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.167 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.05 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.233 W/kg

**SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.096 mW/g**

Maximum value of SAR (measured) = 0.162 mW/g

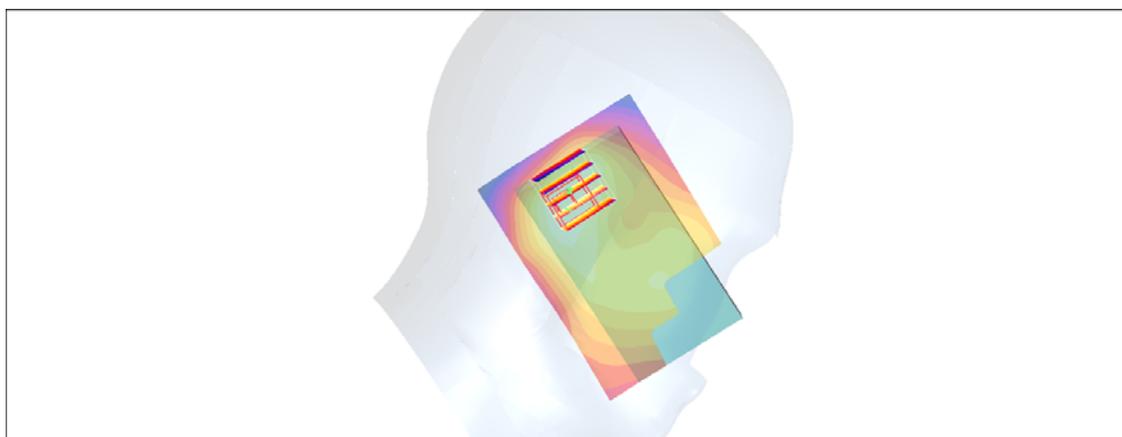

0 dB = 0.162mW/g

## #242 LTE Band17\_QPSK(1-49)\_Left Tilted\_Ch23790\_10M

**DUT: 172733**

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_110808 Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.86$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011105120
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010110122
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch23790/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.482 mW/g



**Ch23790/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 2.73 W/kg

**SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.282 mW/g**

Maximum value of SAR (measured) = 0.920 mW/g

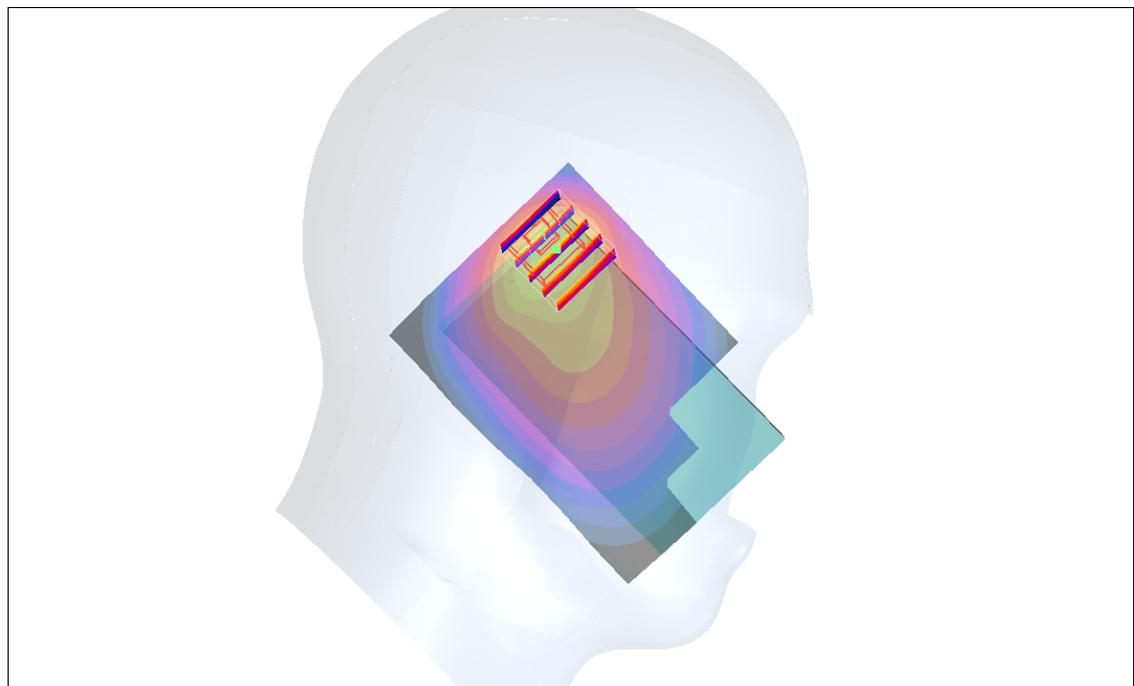

0 dB = 0.920mW/g

## #242 LTE Band17\_QPSK(1-49)\_Left Tilted\_Ch23790\_10M\_2D

**DUT: 172733**

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_110808 Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.86$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011-05-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010-10-22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch23790/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.482 mW/g


**Ch23790/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 2.73 W/kg

**SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.282 mW/g**

Maximum value of SAR (measured) = 0.920 mW/g

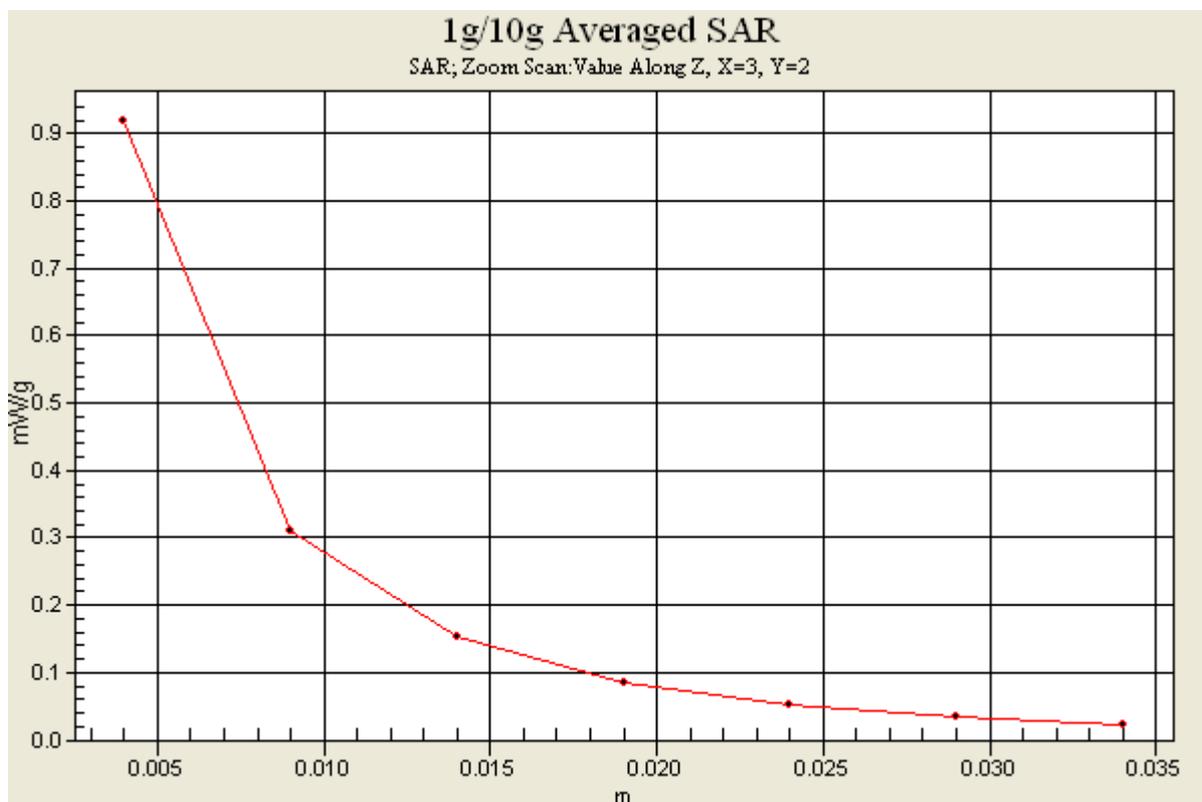

## #283 802.11b\_Right Tilted\_Ch11

**DUT: 172733**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_110809 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch2462/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.444 mW/g


**Ch2462/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 2.34 W/kg

**SAR(1 g) = 0.727 mW/g; SAR(10 g) = 0.293 mW/g**

Maximum value of SAR (measured) = 0.837 mW/g

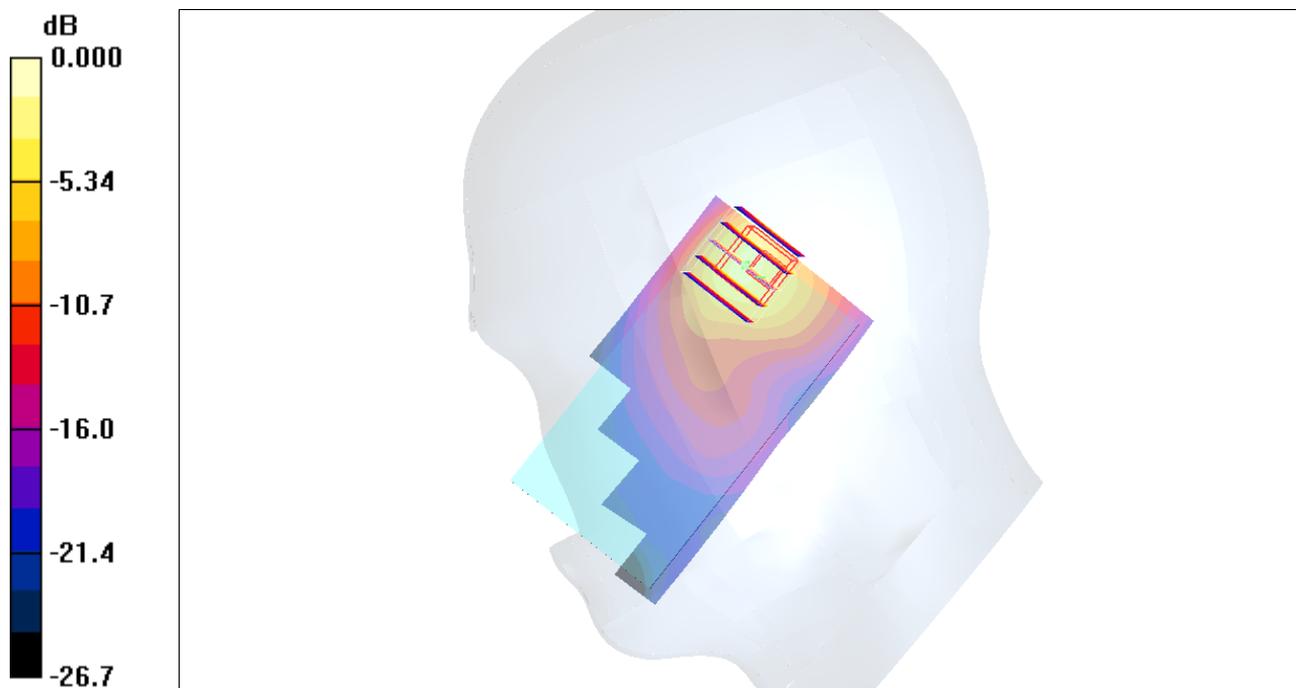

0 dB = 0.837mW/g

## #283 802.11b\_Right Tilted\_Ch11\_2D

**DUT: 172733**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_110809 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.41, 4.41, 4.41); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch2462/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.444 mW/g


**Ch2462/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 2.34 W/kg

**SAR(1 g) = 0.727 mW/g; SAR(10 g) = 0.293 mW/g**

Maximum value of SAR (measured) = 0.837 mW/g

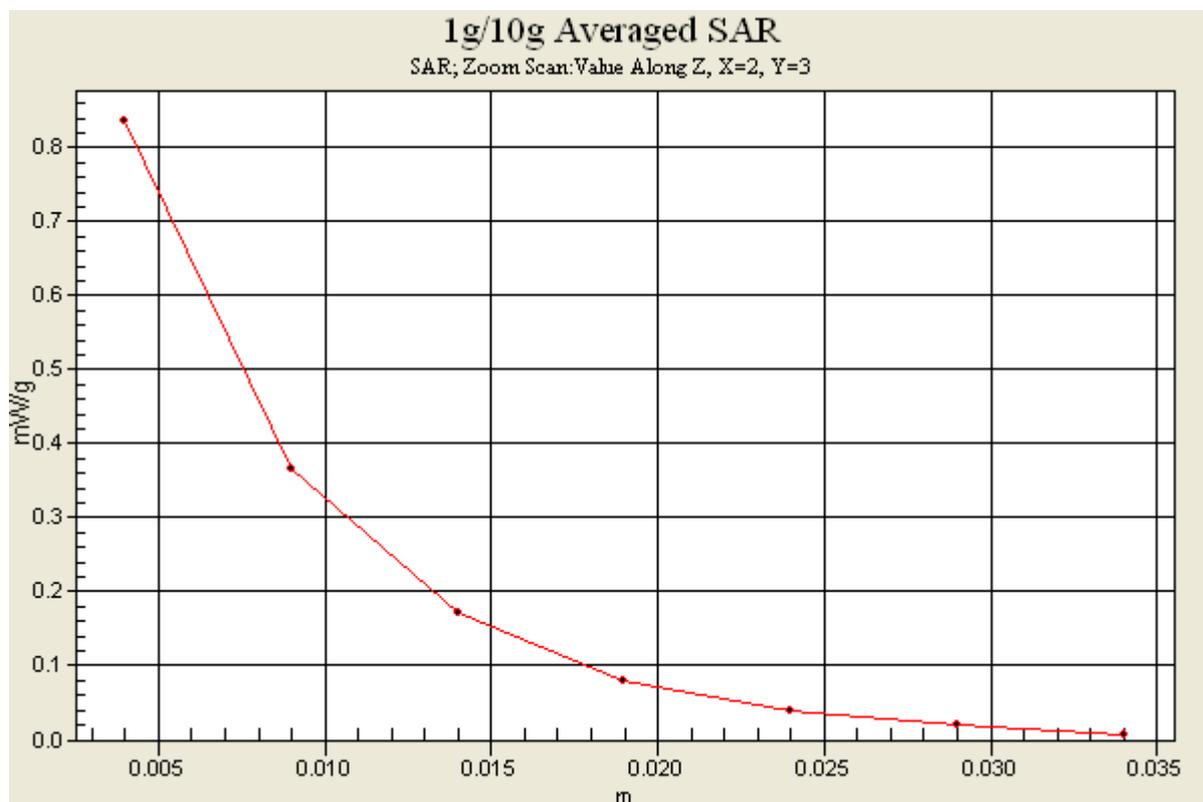

## #207 GSM850\_GPRS10\_Rear Face\_1cm\_Ch189

**DUT: 172733**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850\_110807 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011 105/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.579 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.1 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.673 W/kg

**SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.425 mW/g**

Maximum value of SAR (measured) = 0.589 mW/g

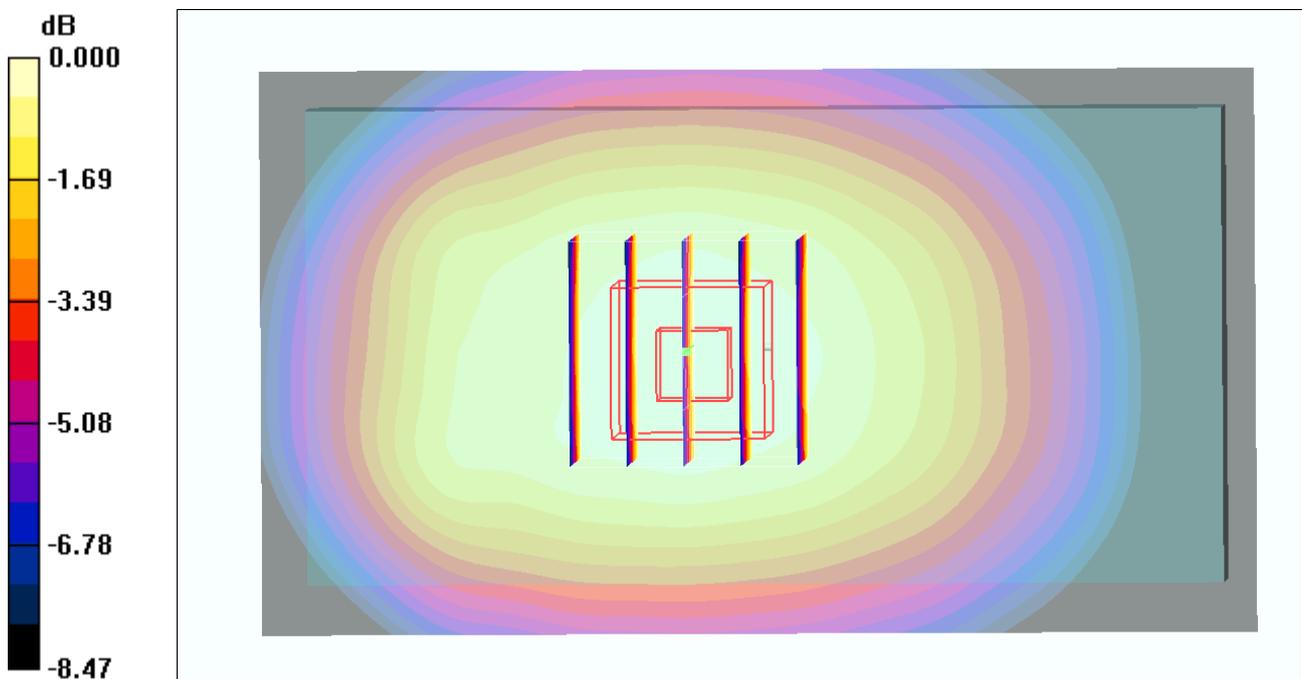

0 dB = 0.589mW/g

## #207 GSM850\_GPRS10\_Rear Face\_1cm\_Ch189\_2D

**DUT: 172733**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850\_110807 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/05/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.579 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.1 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.673 W/kg

**SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.425 mW/g**

Maximum value of SAR (measured) = 0.589 mW/g

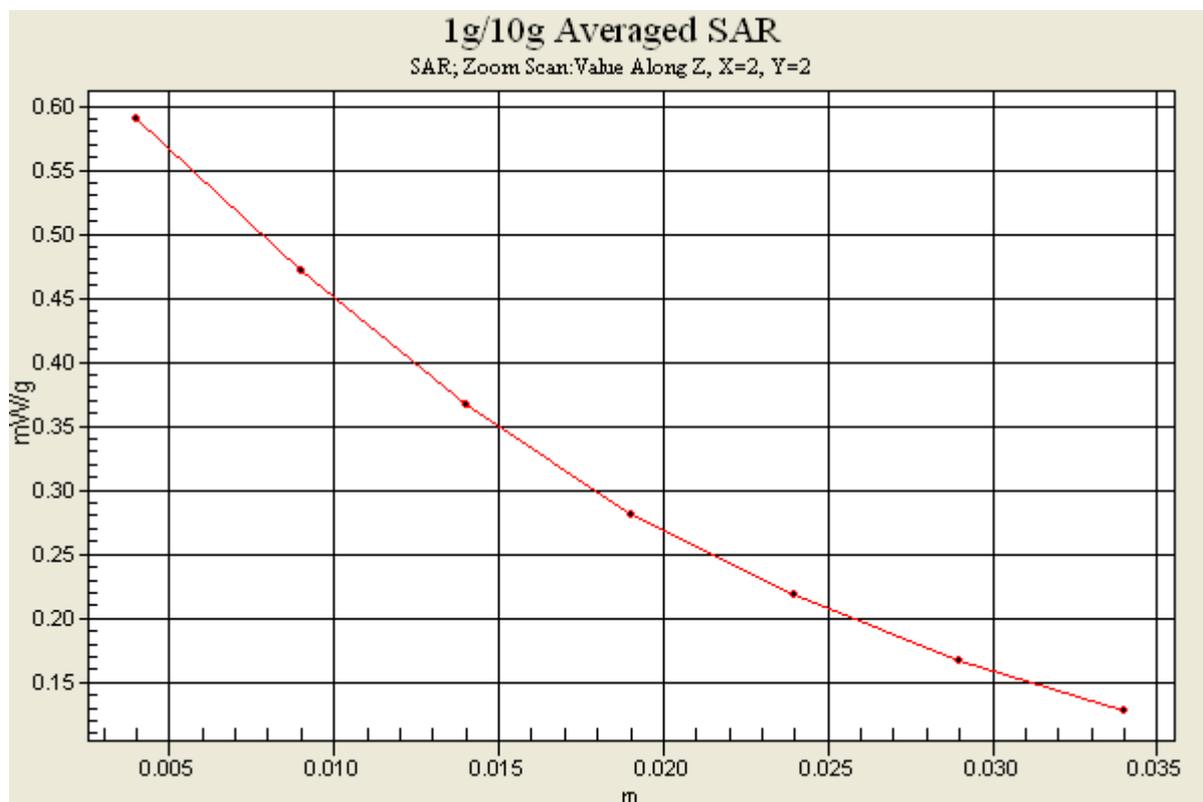

## #208 GSM850\_GPRS10\_Rear Face\_1cm\_Ch189\_Earphone

**DUT: 172733**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL\_850\_110807 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011105120
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010110/22
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.282 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.303 W/kg

**SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.188 mW/g**

Maximum value of SAR (measured) = 0.259 mW/g



**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.379 W/kg

**SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.172 mW/g**

Maximum value of SAR (measured) = 0.256 mW/g

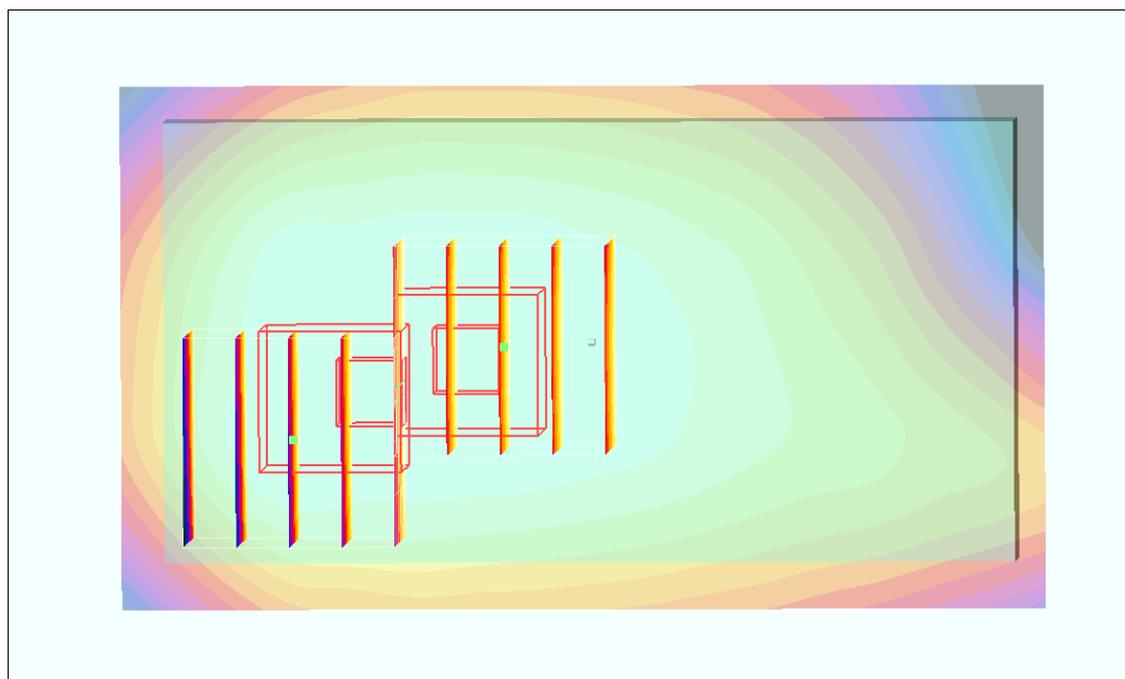

0 dB = 0.256mW/g

## #209 GSM1900\_GPRS 10\_Front\_1cm\_Ch810

**DUT: 172733**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL\_1900\_110807 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011 105 120
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010 110 122
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.732 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.939 W/kg

**SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.382 mW/g**

Maximum value of SAR (measured) = 0.627 mW/g

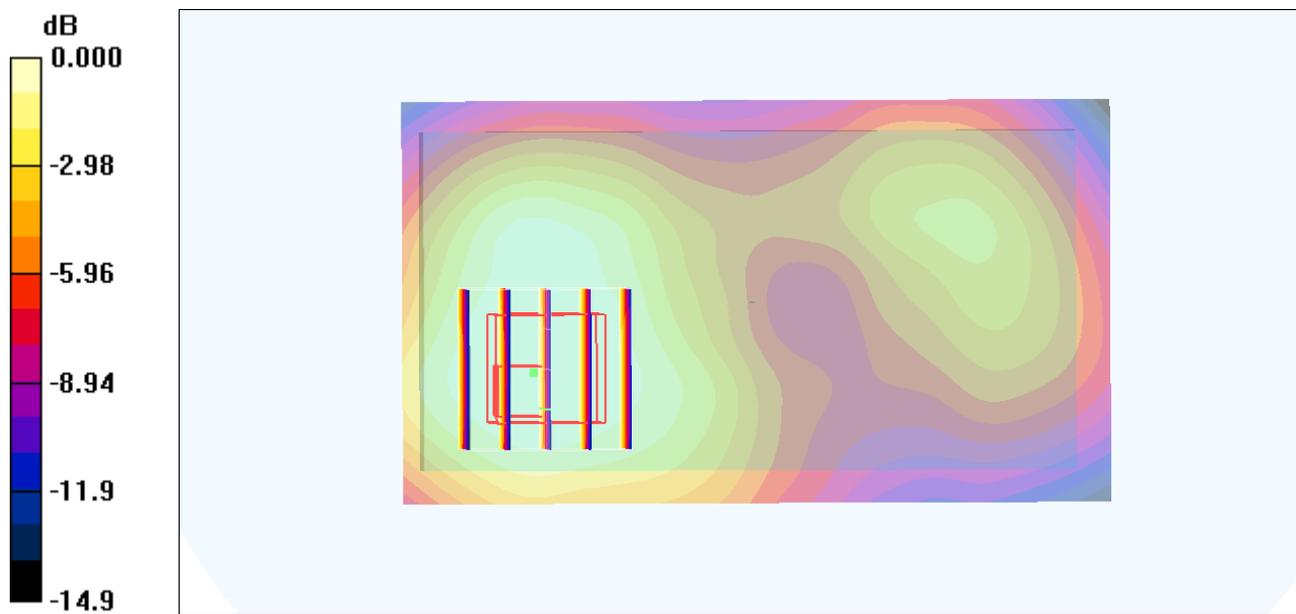

0 dB = 0.627mW/g

## #210 GSM1900\_GPRS 10\_Front\_1cm\_Ch810\_Earphone

**DUT: 172733**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL\_1900\_110807 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011 105 120
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010 110 122
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.737 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.985 W/kg

**SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.394 mW/g**

Maximum value of SAR (measured) = 0.660 mW/g

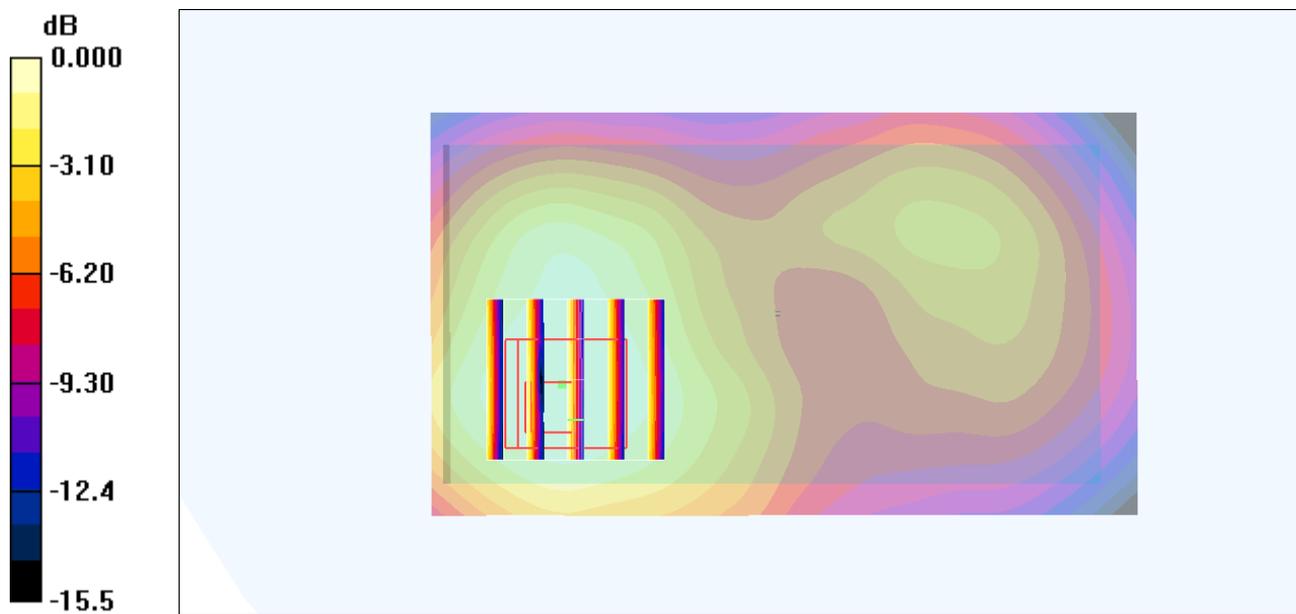

0 dB = 0.660mW/g

## #210 GSM1900\_GPRS 10\_Front\_1cm\_Ch810\_Earphone\_2D

**DUT: 172733**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL\_1900\_110807 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011 105 120
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010 110 122
- Phantom: SAM\_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.737 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.985 W/kg

**SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.394 mW/g**

Maximum value of SAR (measured) = 0.660 mW/g

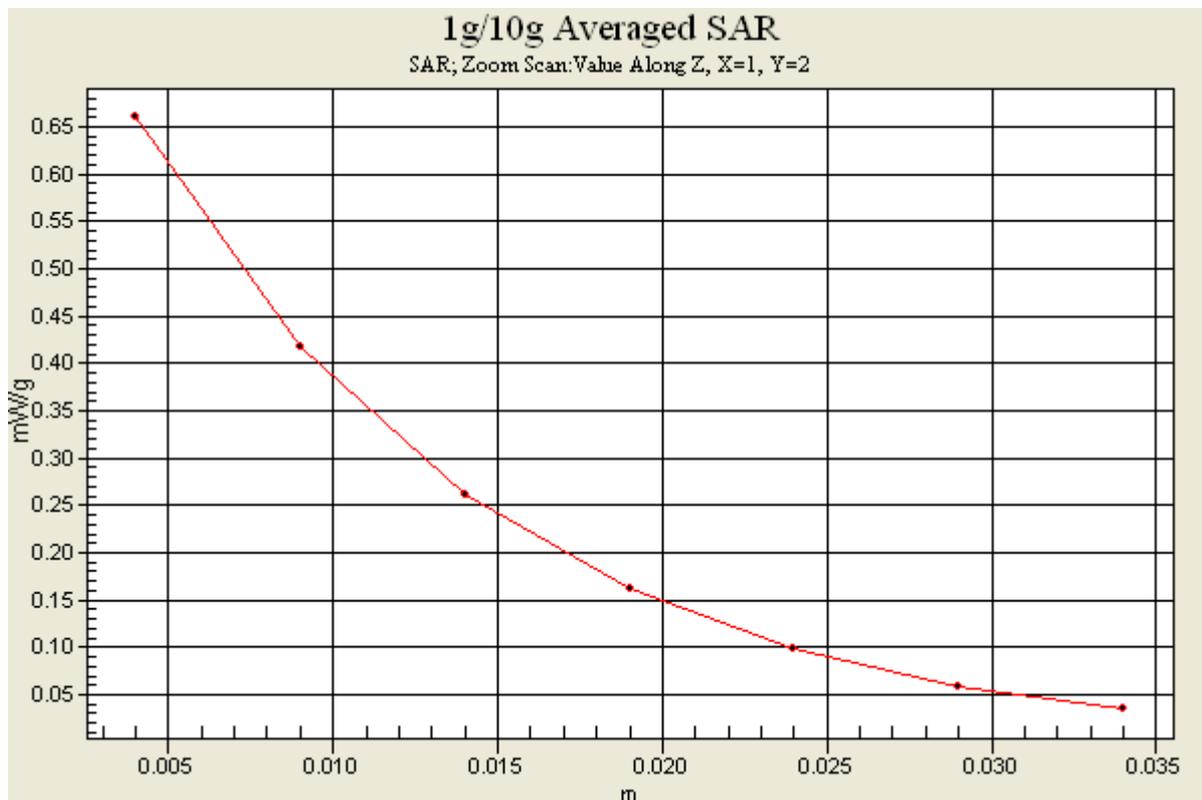

**#211 WCDMA V\_RMC12.2K\_Rear Face\_1cm\_Ch4132**

**DUT: 172733**


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_850\_110809 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.986$  mho/m;  $\epsilon_r = 56.252$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 0.561 mW/g

**Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 24.375 V/m; Power Drift = -0.120 dB  
Peak SAR (extrapolated) = 0.612 W/kg  
**SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.404 mW/g**  
Maximum value of SAR (measured) = 0.545 mW/g

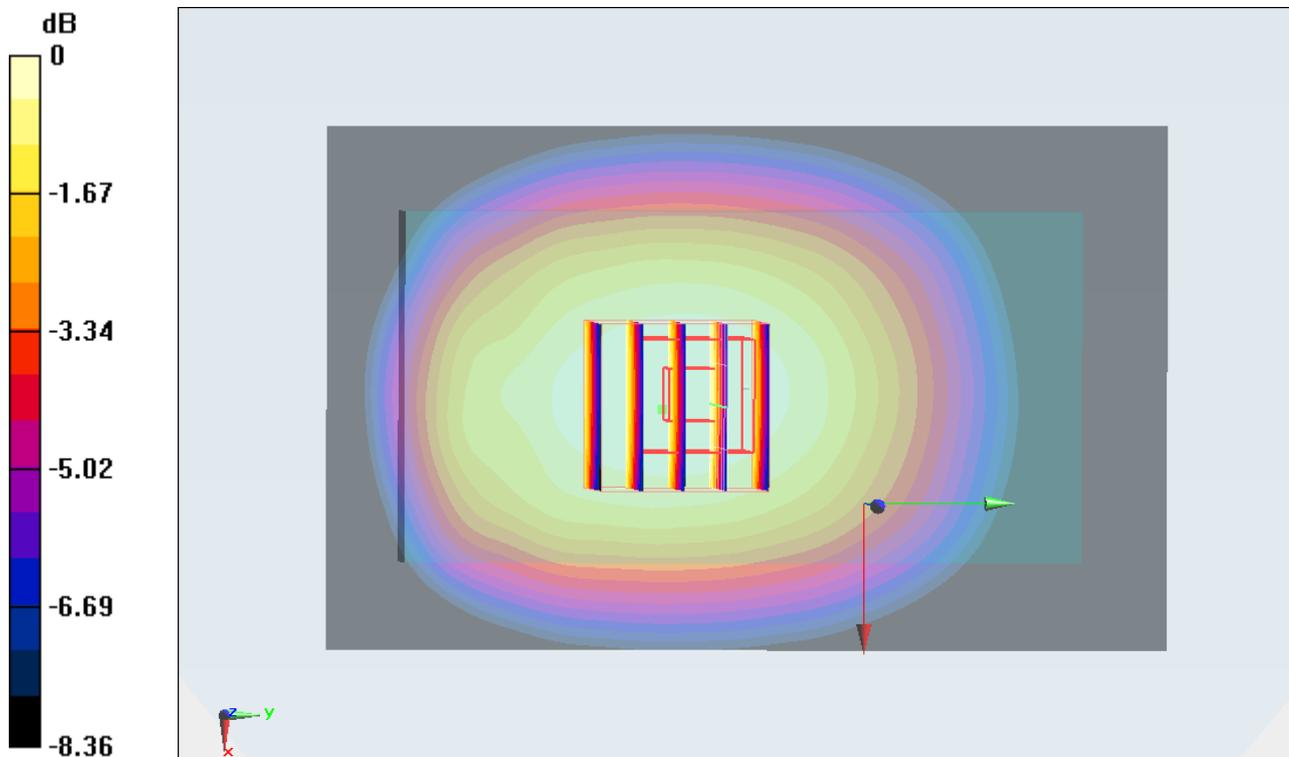

0 dB = 0.550mW/g

**#211 WCDMA V\_RMC12.2K\_Rear Face\_1cm\_Ch4132\_2D**

**DUT: 172733**


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_850\_110809 Medium parameters used:  $f = 826.4 \text{ MHz}$ ;  $\sigma = 0.986 \text{ mho/m}$ ;  $\epsilon_r = 56.252$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $22.6 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $21.7 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Area Scan (51x81x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$   
Maximum value of SAR (interpolated) =  $0.561 \text{ mW/g}$

**Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $24.375 \text{ V/m}$ ; Power Drift =  $-0.120 \text{ dB}$   
Peak SAR (extrapolated) =  $0.612 \text{ W/kg}$   
**SAR(1 g) =  $0.523 \text{ mW/g}$ ; SAR(10 g) =  $0.404 \text{ mW/g}$**   
Maximum value of SAR (measured) =  $0.545 \text{ mW/g}$

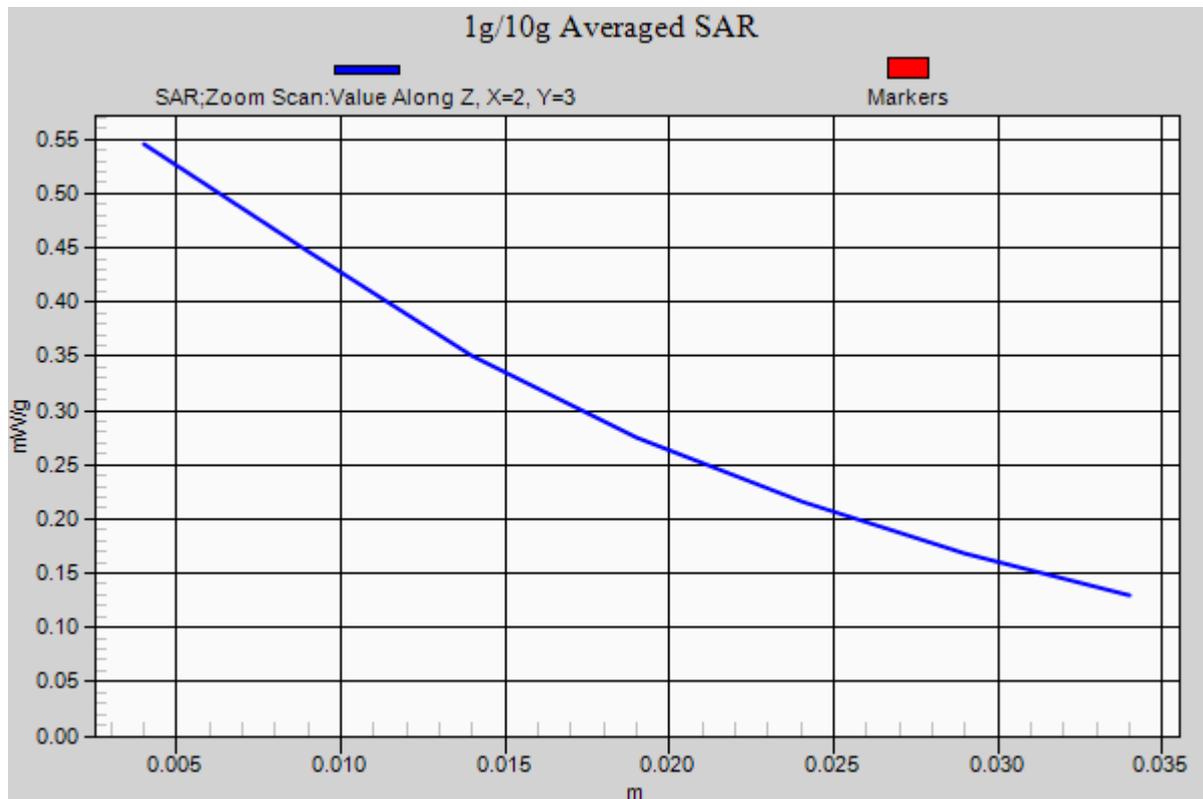

### #212 WCDMA V\_RMC12.2K\_Rear Face\_1cm\_Ch4132\_Earphone

**DUT: 172733**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_110809 Medium parameters used:  $f = 826.4 \text{ MHz}$ ;  $\sigma = 0.986 \text{ mho/m}$ ;  $\epsilon_r =$

$56.252$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.6 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $21.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Area Scan (51x81x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (interpolated) =  $0.338 \text{ mW/g}$


**Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $16.672 \text{ V/m}$ ; Power Drift =  $0.122 \text{ dB}$

Peak SAR (extrapolated) =  $0.457 \text{ W/kg}$

**SAR(1 g) =  $0.311 \text{ mW/g}$ ; SAR(10 g) =  $0.216 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.329 \text{ mW/g}$

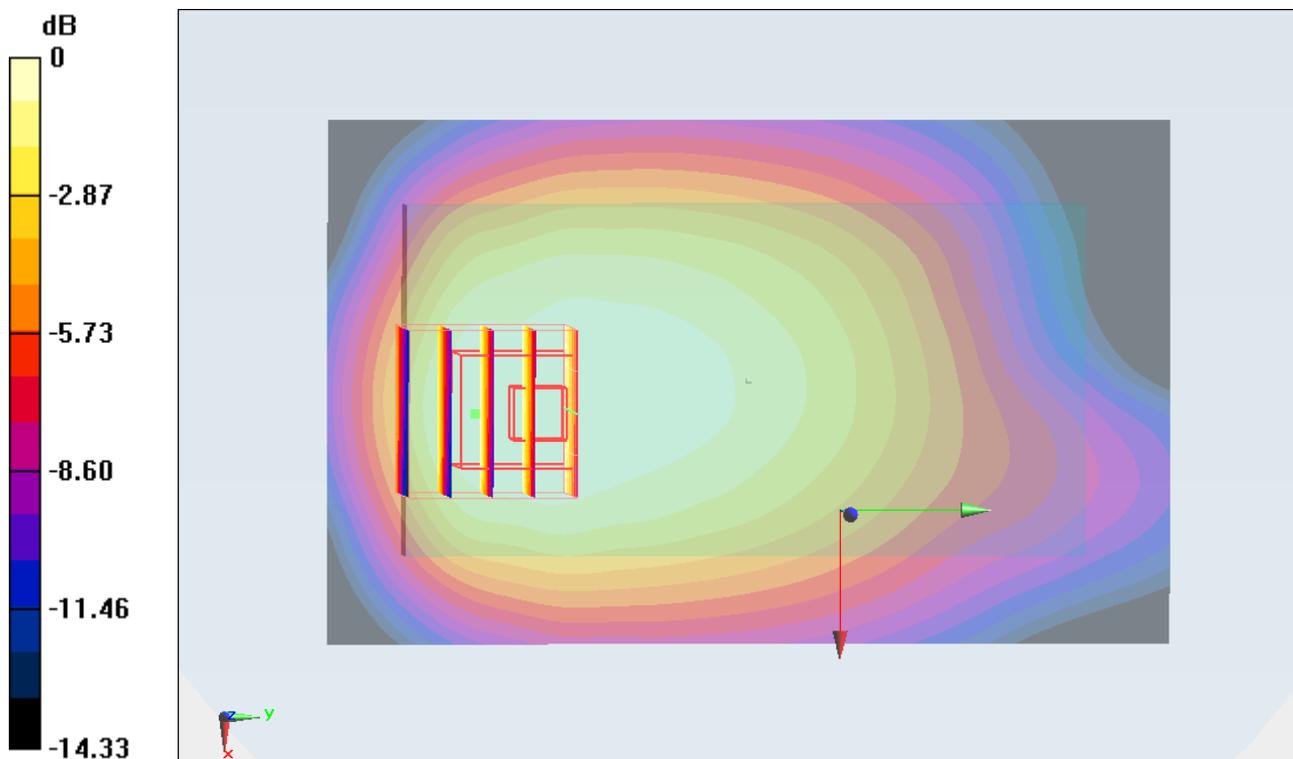

0 dB =  $0.330\text{mW/g}$

**#213 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9400**

**DUT: 172733**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_110809 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.491$  mho/m;  $\epsilon_r =$

$55.074$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9400/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.066 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.221 V/m; Power Drift = 0.0038 dB

Peak SAR (extrapolated) = 1.352 W/kg

**SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.554 mW/g**

Maximum value of SAR (measured) = 0.951 mW/g

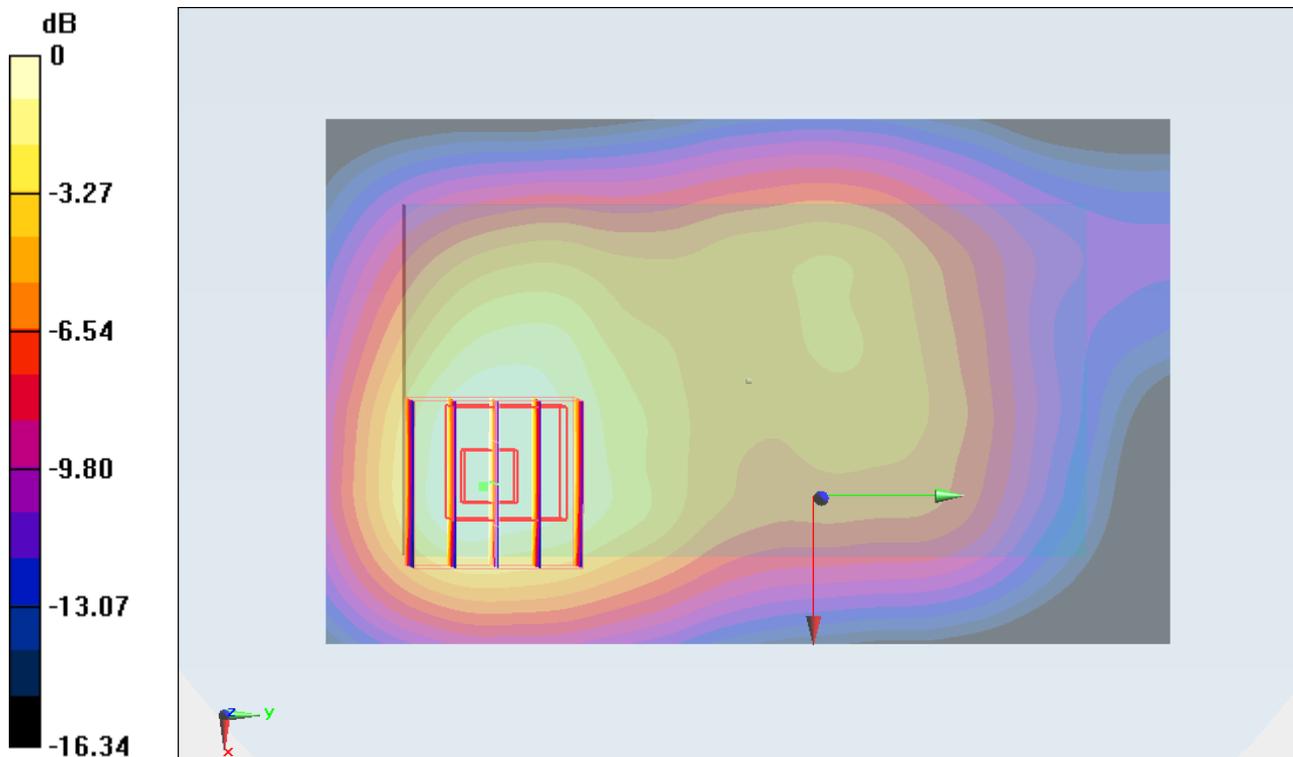

0 dB = 0.950mW/g

**#214 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9262**

**DUT: 172733**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_110809 Medium parameters used:  $f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.46 \text{ mho/m}$ ;  $\epsilon_r =$

$55.182$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.6 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $21.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Area Scan (51x81x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (interpolated) =  $1.022 \text{ mW/g}$


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $16.313 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $1.295 \text{ W/kg}$

**SAR(1 g) =  $0.843 \text{ mW/g}$ ; SAR(10 g) =  $0.527 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.911 \text{ mW/g}$

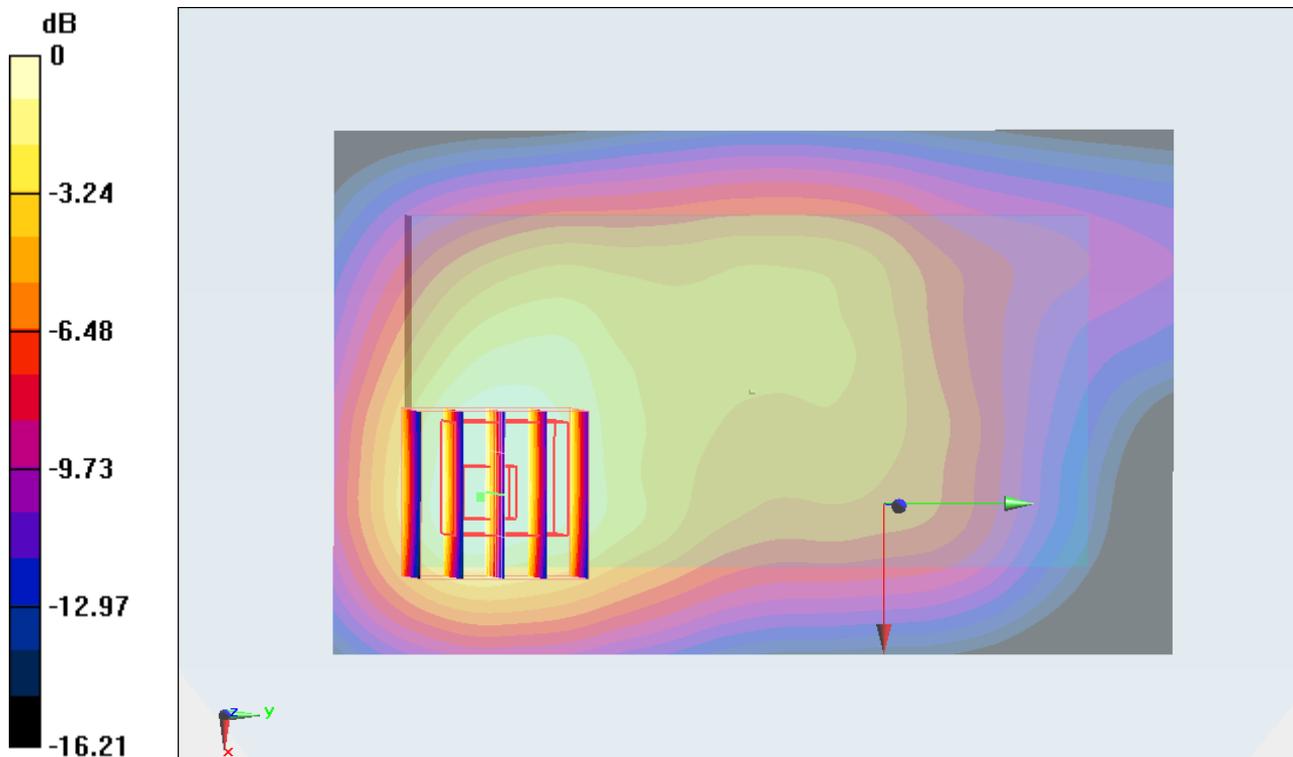

0 dB =  $0.910\text{mW/g}$

**#215 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9538**

**DUT: 172733**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_110809 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.525$  mho/m;  $\epsilon_r =$

$55.047$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9538/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.071 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.453 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.419 W/kg

**SAR(1 g) = 0.899 mW/g; SAR(10 g) = 0.566 mW/g**

Maximum value of SAR (measured) = 0.964 mW/g

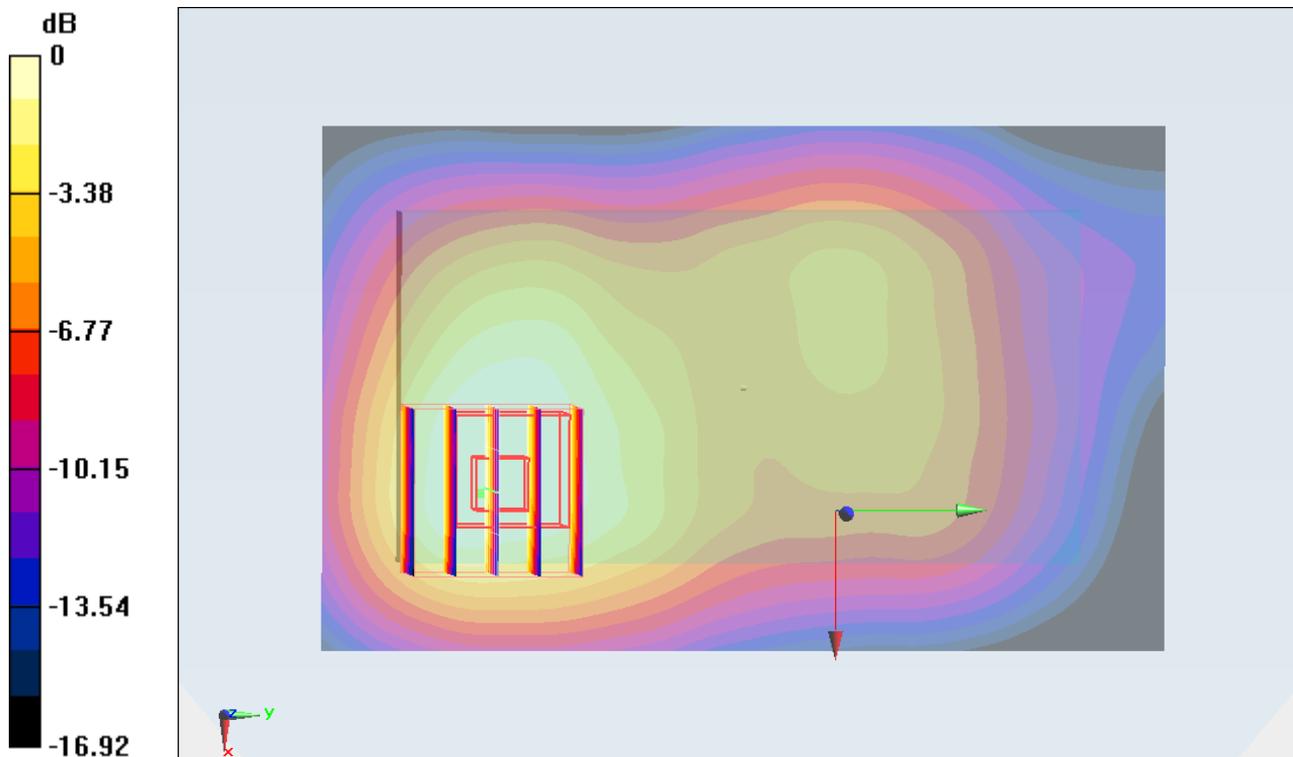

0 dB = 0.960mW/g

### #216 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9400\_Earphone

**DUT: 172733**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_110809 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.491$  mho/m;  $\epsilon_r =$

$55.074$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9400/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.841 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.101 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 1.126 W/kg

**SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.491 mW/g**

Maximum value of SAR (measured) = 0.817 mW/g

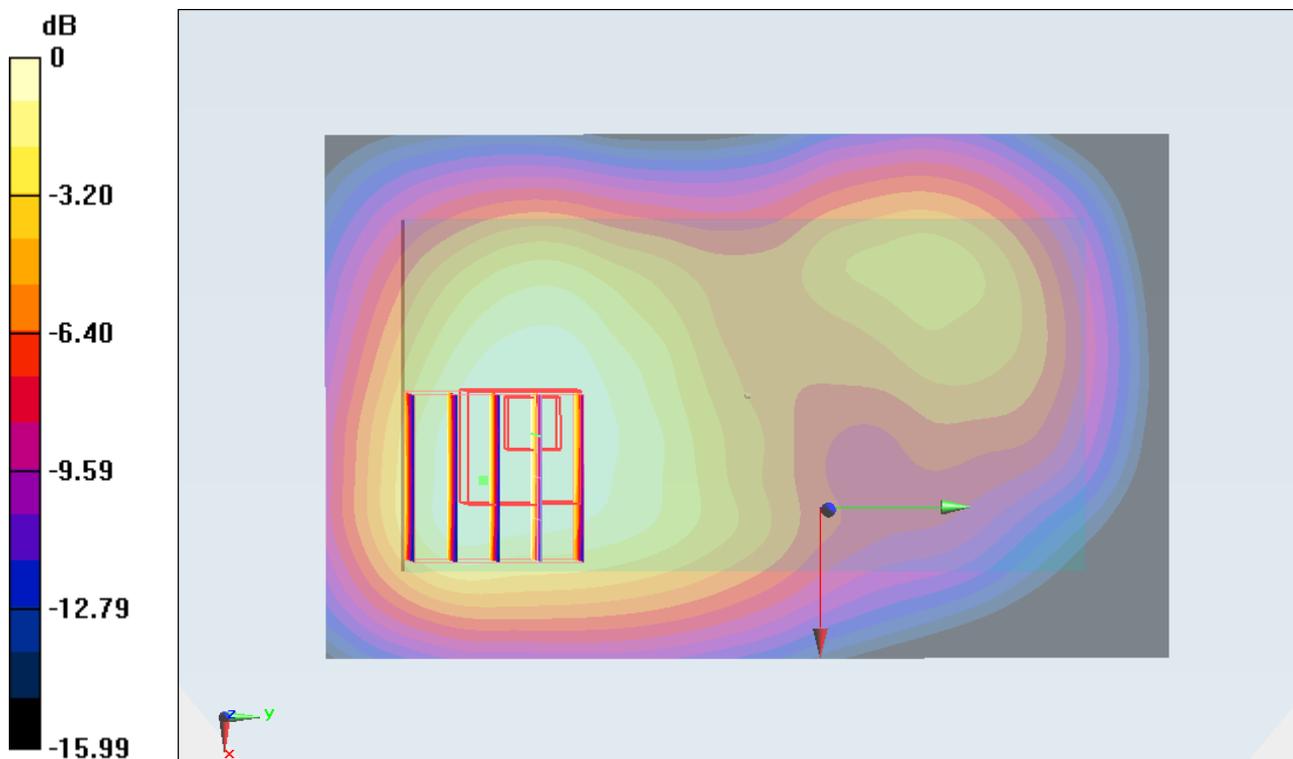

0 dB = 0.820mW/g

### #243 LTE Band 17\_QPSK(25-13)\_Front Face\_1cm\_Ch23790\_10M

**DUT: 172733**

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_110808 Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.936$  mho/m;  $\epsilon_r = 55.156$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch23790/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.158 mW/g


**Ch23790/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.187 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.177 W/kg

**SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.102 mW/g**

Maximum value of SAR (measured) = 0.146 mW/g

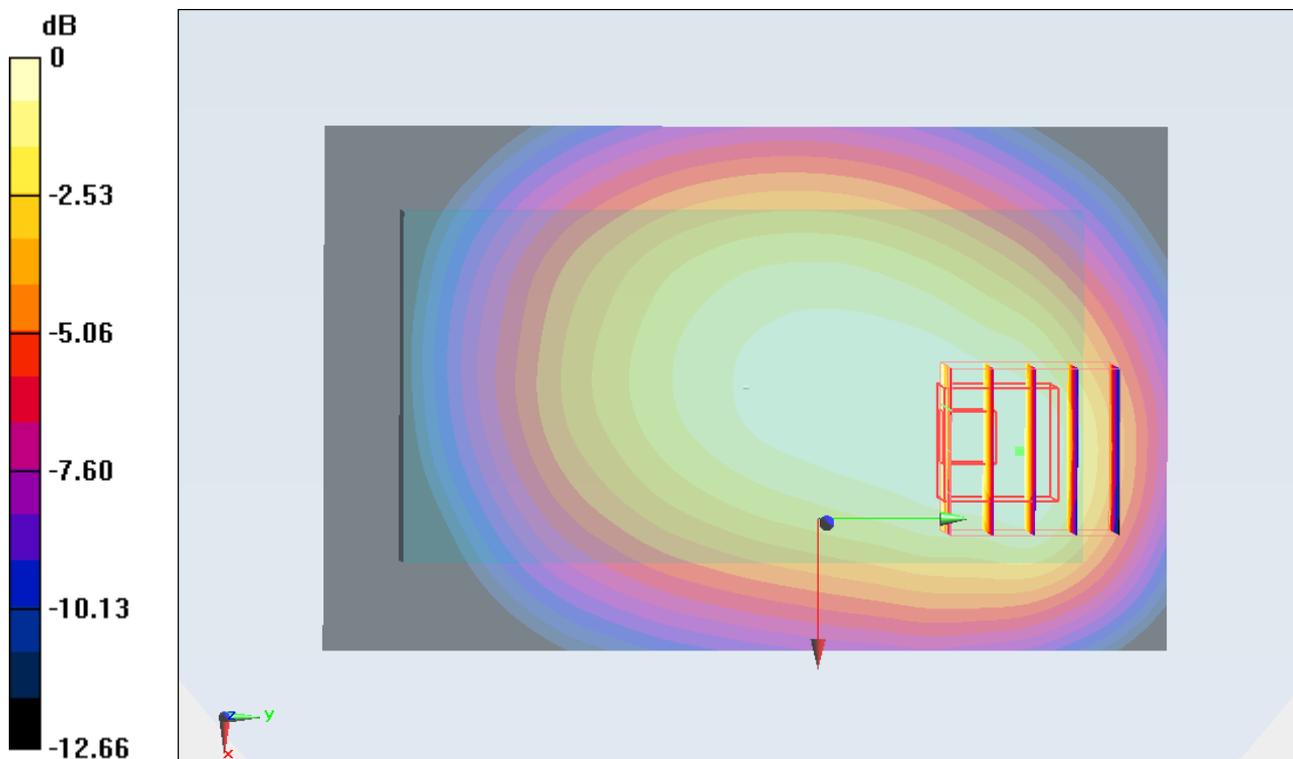

0 dB = 0.150mW/g

**#243 LTE Band 17\_QPSK(25-13)\_Front Face\_1cm\_Ch23790\_10M\_2D**

**DUT: 172733**

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_110808 Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.936$  mho/m;  $\epsilon_r = 55.156$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch23790/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.158 mW/g


**Ch23790/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.187 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.177 W/kg

**SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.102 mW/g**

Maximum value of SAR (measured) = 0.146 mW/g

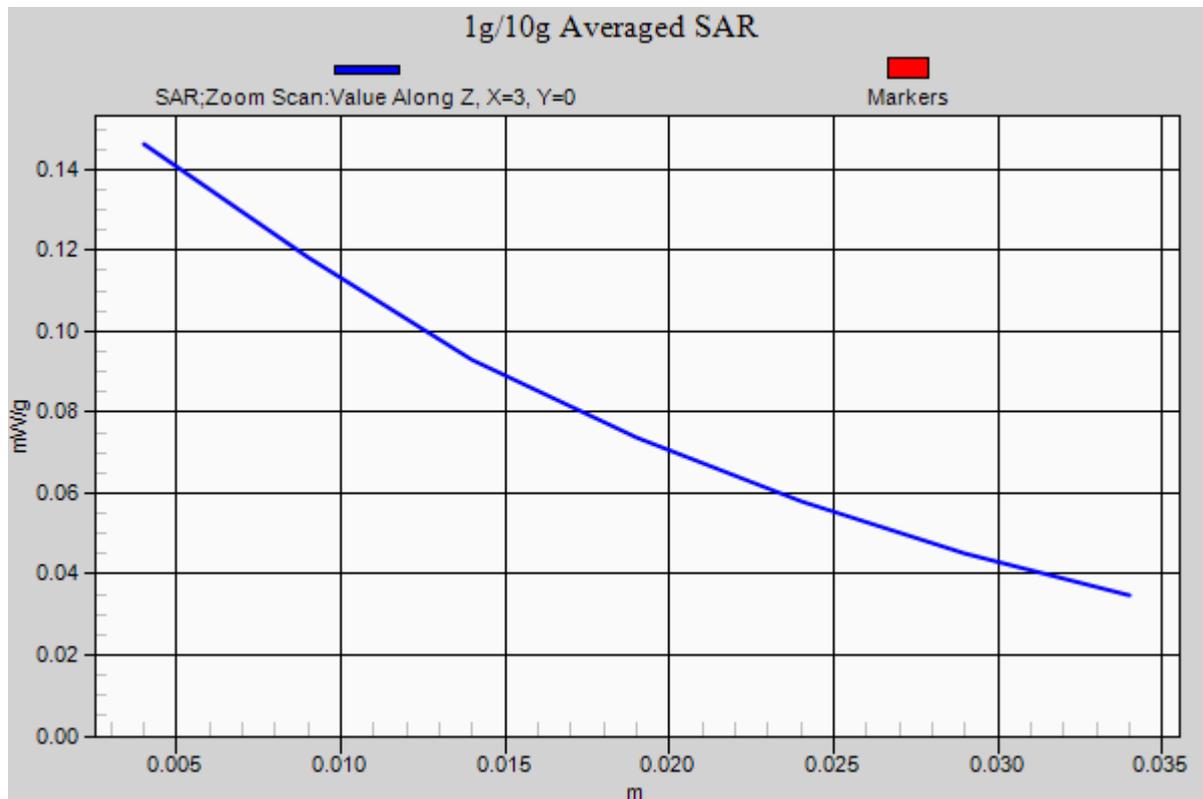

### #246 LTE Band 4\_QPSK(36-18)\_Front Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.866 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.786 mW/g; SAR(10 g) = 0.501 mW/g**

Maximum value of SAR (measured) = 0.824 mW/g

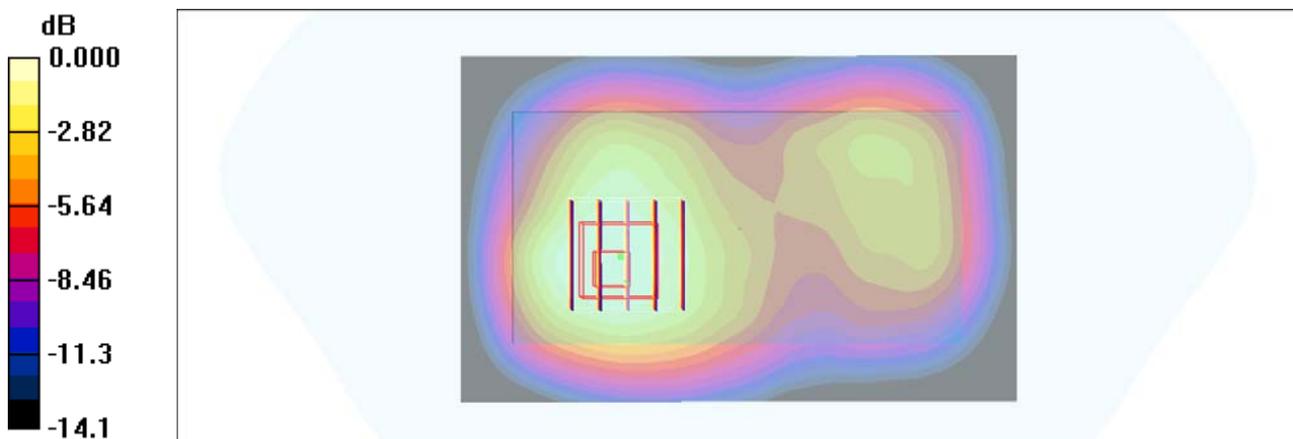

0 dB = 0.824mW/g

### #247 LTE Band 4\_QPSK(1-0)\_Front Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.980 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.517 mW/g**

Maximum value of SAR (measured) = 0.854 mW/g

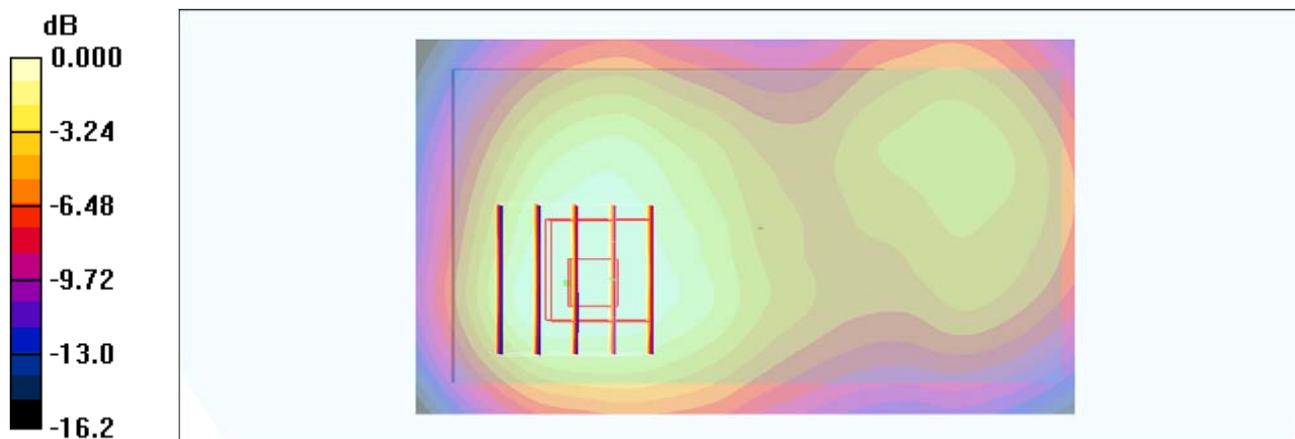

0 dB = 0.854mW/g

### #247 LTE Band 4\_QPSK(1-0)\_Front Face\_1cm\_Ch20175\_15M\_2D

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r =$

51.8;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.980 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.517 mW/g**

Maximum value of SAR (measured) = 0.854 mW/g

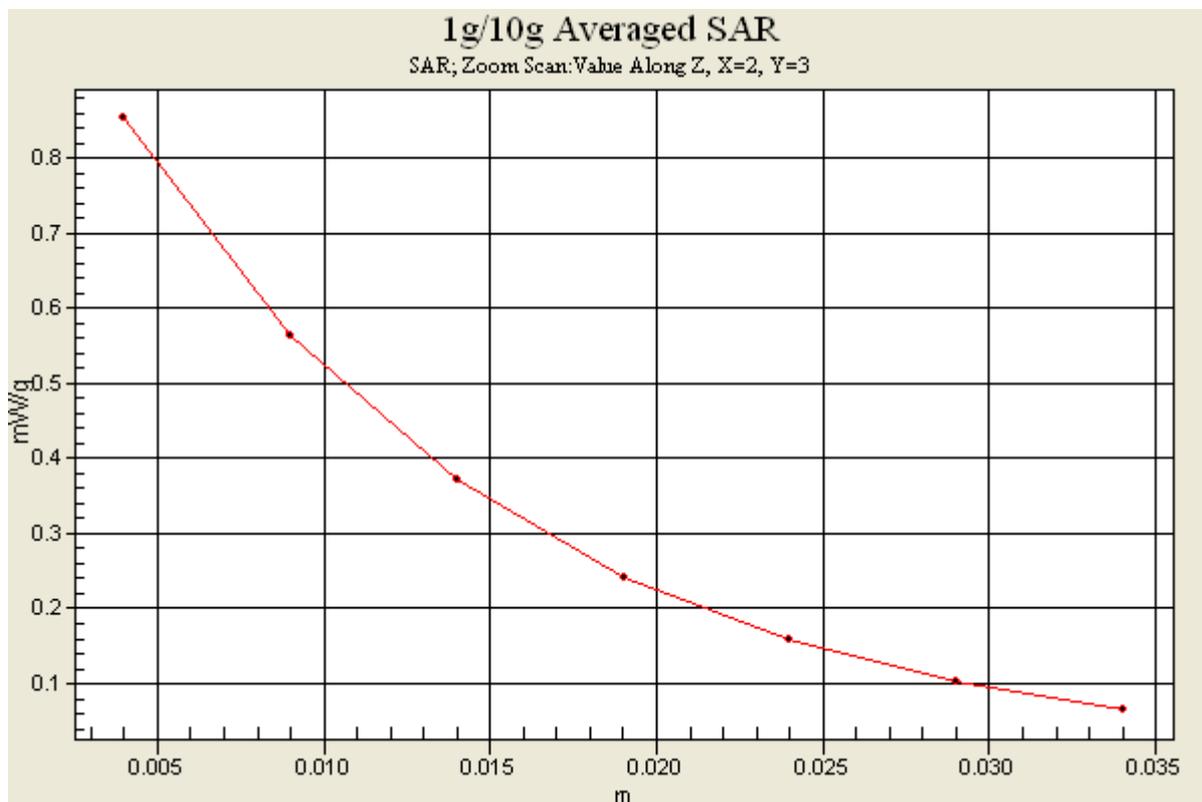

### #248 LTE Band 4\_QPSK(1-74)\_Front Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.913 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.17 W/kg

**SAR(1 g) = 0.754 mW/g; SAR(10 g) = 0.480 mW/g**

Maximum value of SAR (measured) = 0.797 mW/g

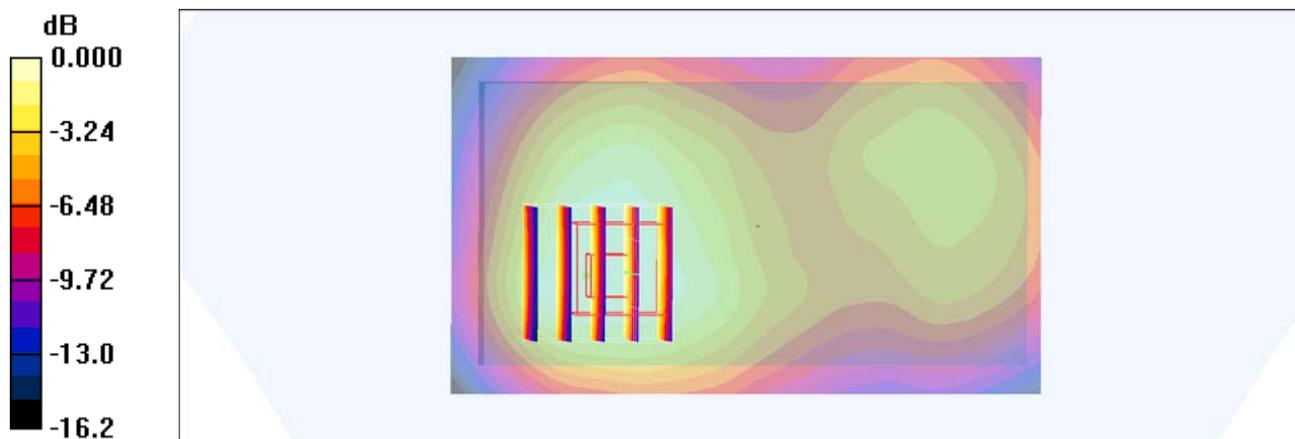

0 dB = 0.797mW/g

### #249 LTE Band 4\_16QAM(36-18)\_Front Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.827 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.675 mW/g; SAR(10 g) = 0.430 mW/g**

Maximum value of SAR (measured) = 0.719 mW/g

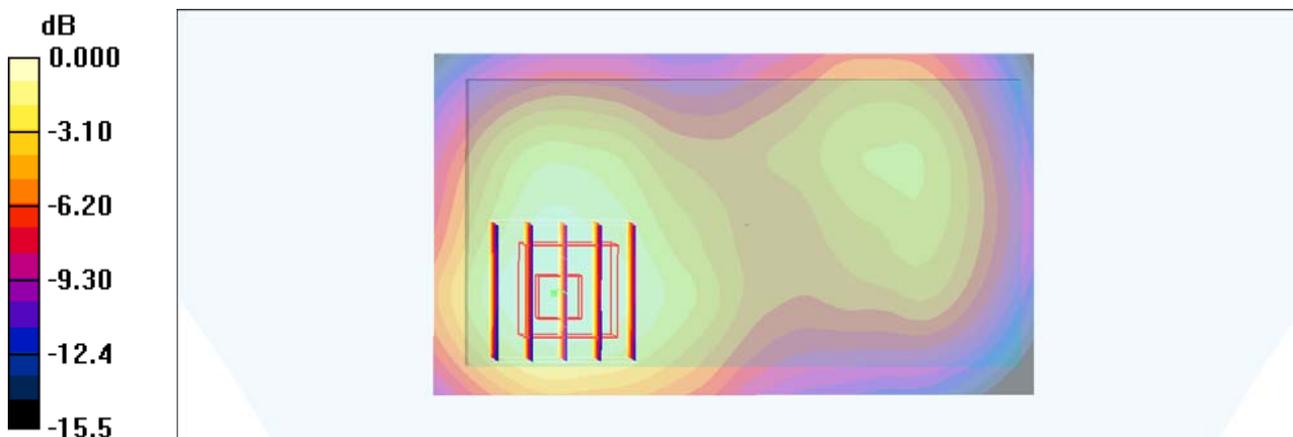

0 dB = 0.719mW/g

### #250 LTE Band 4\_16QAM(1-0)\_Front Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.832 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.446 mW/g**

Maximum value of SAR (measured) = 0.756 mW/g

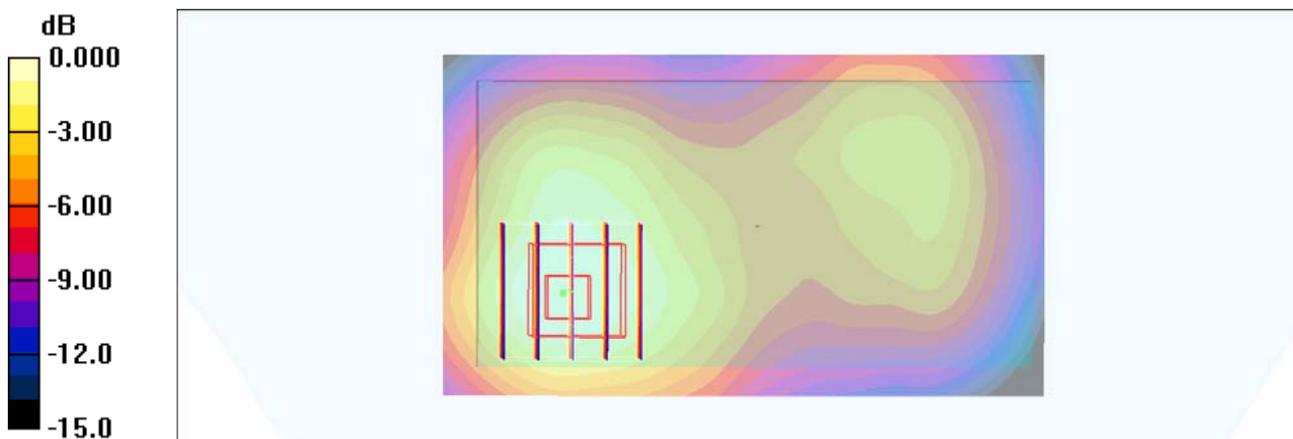

0 dB = 0.756mW/g

### #251 LTE Band 4\_16QAM(1-74)\_Front Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.791 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.657 mW/g; SAR(10 g) = 0.415 mW/g**

Maximum value of SAR (measured) = 0.704 mW/g

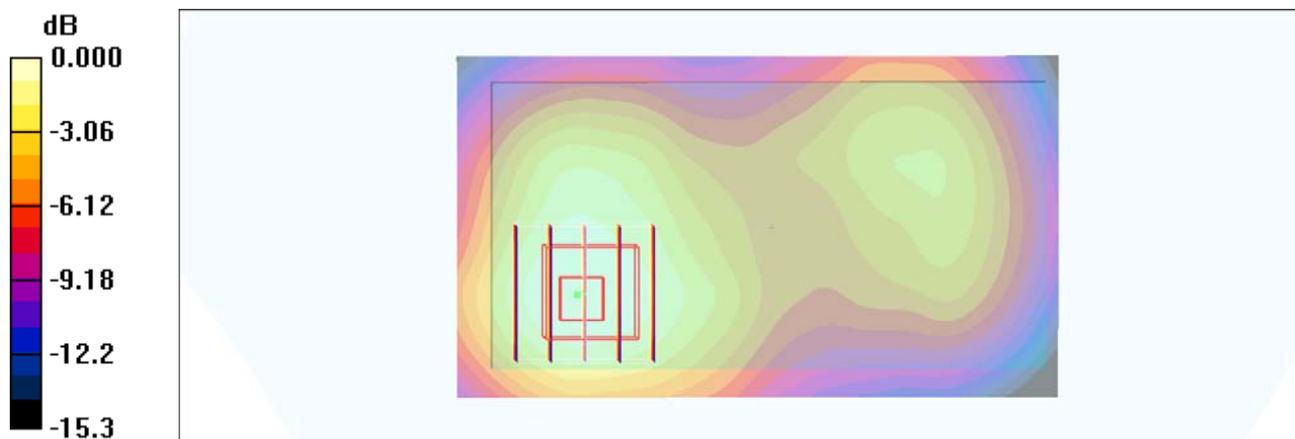

0 dB = 0.704mW/g

## #252 LTE Band 4\_QPSK(36-18)\_Front Face\_1cm\_Ch20175\_15M\_Earphone

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.774 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.665 mW/g; SAR(10 g) = 0.413 mW/g**

Maximum value of SAR (measured) = 0.701 mW/g

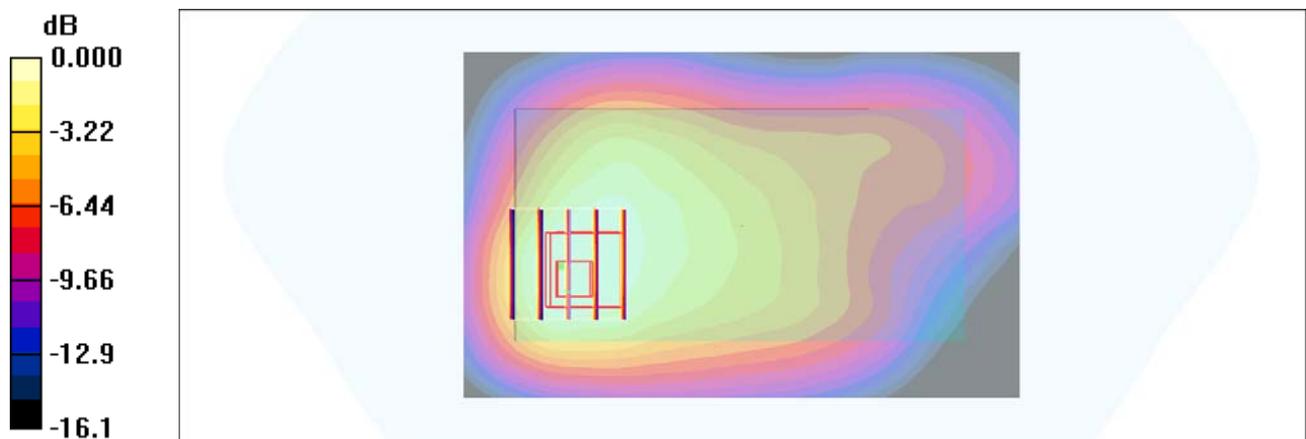

### #253 LTE Band 4\_QPSK(1-0)\_Front Face\_1cm\_Ch20175\_15M\_Earphone

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.875 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.778 mW/g; SAR(10 g) = 0.486 mW/g**

Maximum value of SAR (measured) = 0.811 mW/g

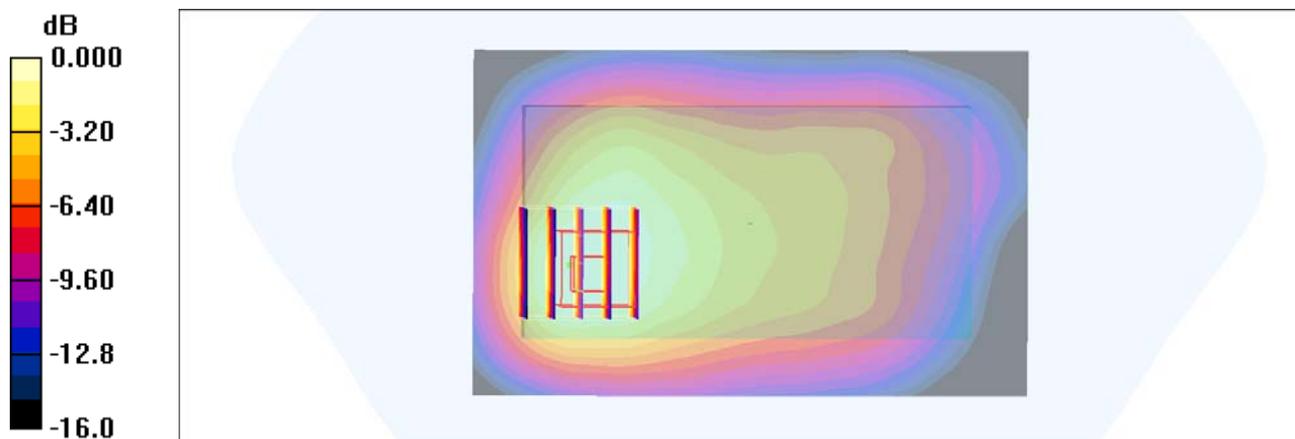

0 dB = 0.811mW/g

### #254 LTE Band 4\_QPSK(1-74)\_Front Face\_1cm\_Ch20175\_15M\_Earphone

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.774 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.672 mW/g; SAR(10 g) = 0.411 mW/g**

Maximum value of SAR (measured) = 0.717 mW/g

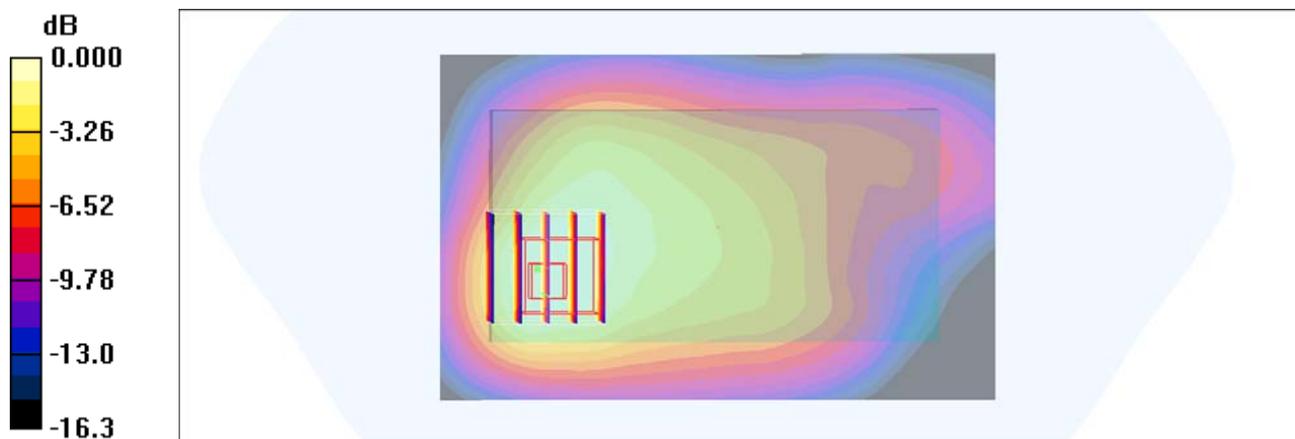

0 dB = 0.717mW/g

### #255 LTE Band 4\_16QAM(36-18)\_Front Face\_1cm\_Ch20175\_15M\_Earphone

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.730 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.396 mW/g**

Maximum value of SAR (measured) = 0.673 mW/g

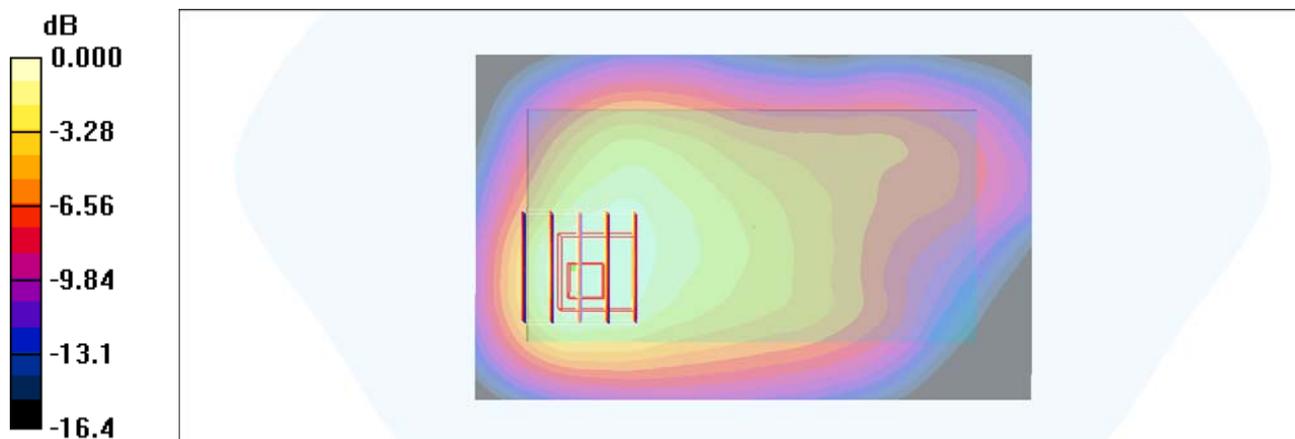

0 dB = 0.673mW/g

## #256 LTE Band 4\_16QAM(1-0)\_Front Face\_1cm\_Ch20175\_15M\_Earphone

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.775 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.422 mW/g**

Maximum value of SAR (measured) = 0.710 mW/g

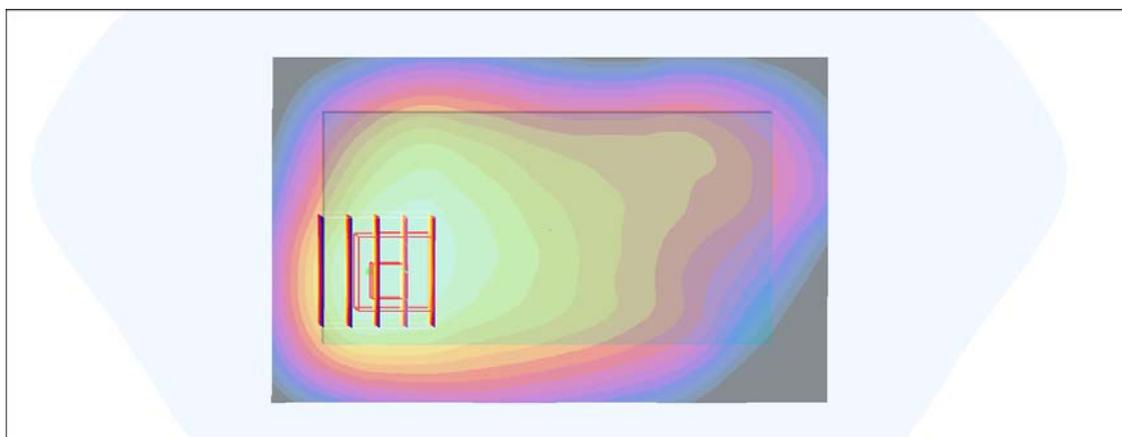

0 dB = 0.710mW/g

### #257 LTE Band 4\_16QAM(1-74)\_Front Face\_1cm\_Ch20175\_15M\_Earphone

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.713 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.378 mW/g**

Maximum value of SAR (measured) = 0.663 mW/g

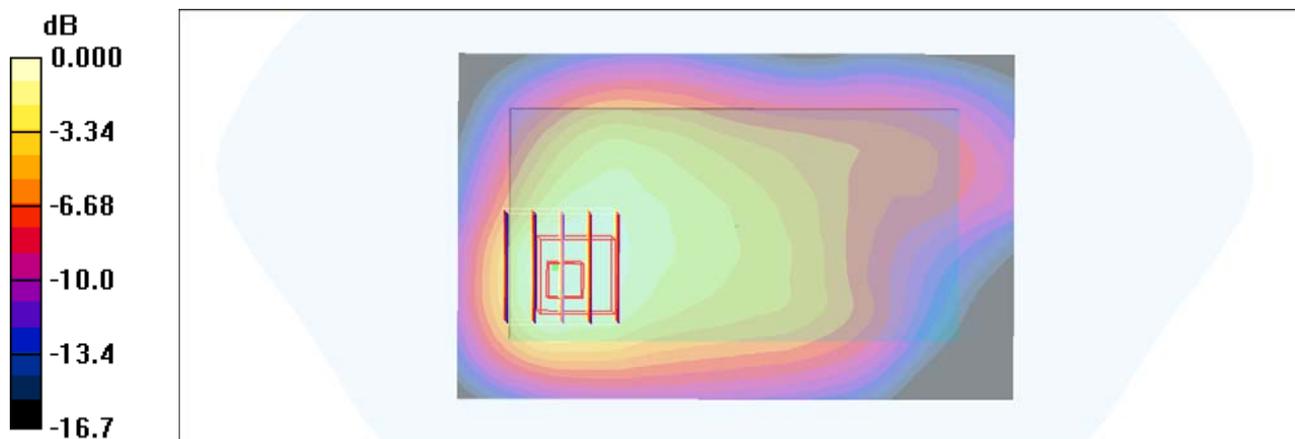

0 dB = 0.663mW/g

**#258 LTE Band 17\_QPSK(25-13)\_Rear Face\_1cm\_Ch23790\_10M**

**DUT: 172733**

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_110808 Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.936$  mho/m;  $\epsilon_r = 55.156$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch23790/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.136 mW/g


**Ch23790/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.029 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.154 W/kg

**SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.082 mW/g**

Maximum value of SAR (measured) = 0.124 mW/g

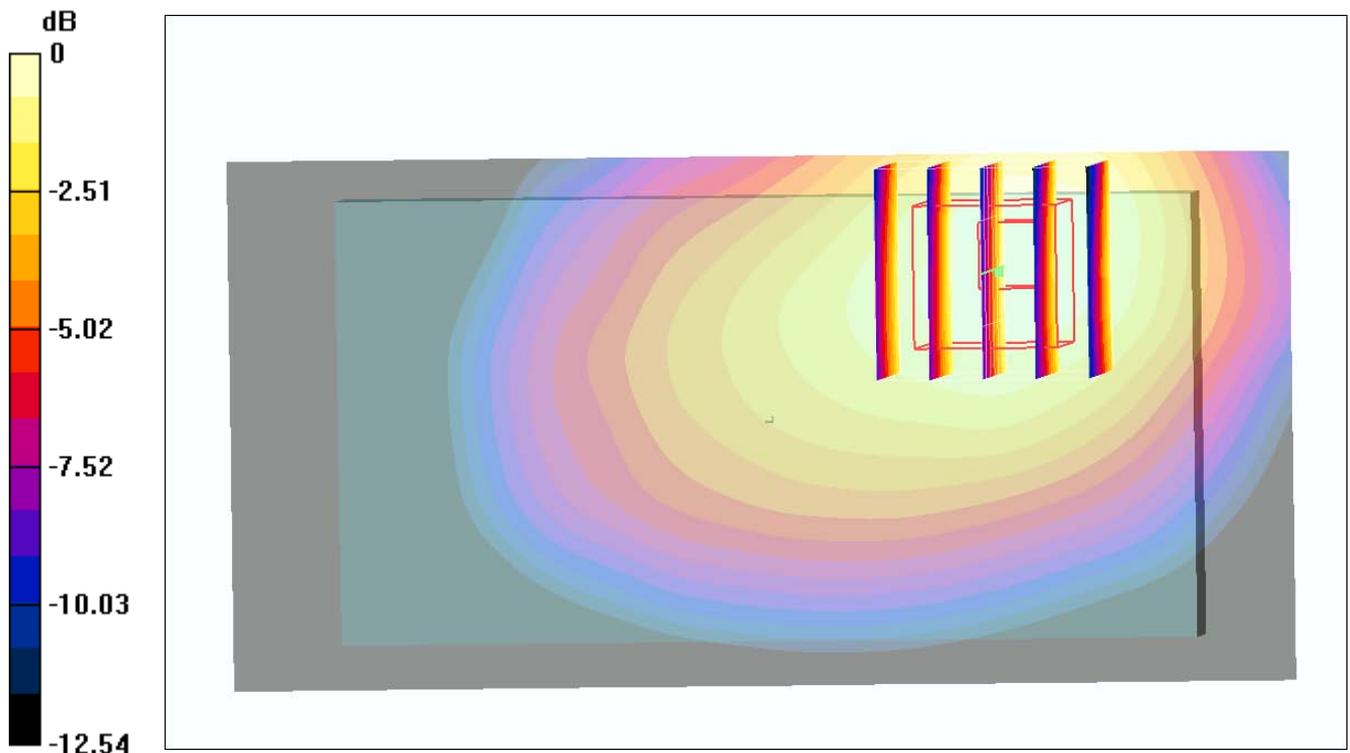

0 dB = 0.124mW/g

### #259 LTE Band 4\_QPSK(36-18)\_Rear Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.778 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.468 mW/g**

Maximum value of SAR (measured) = 0.794 mW/g

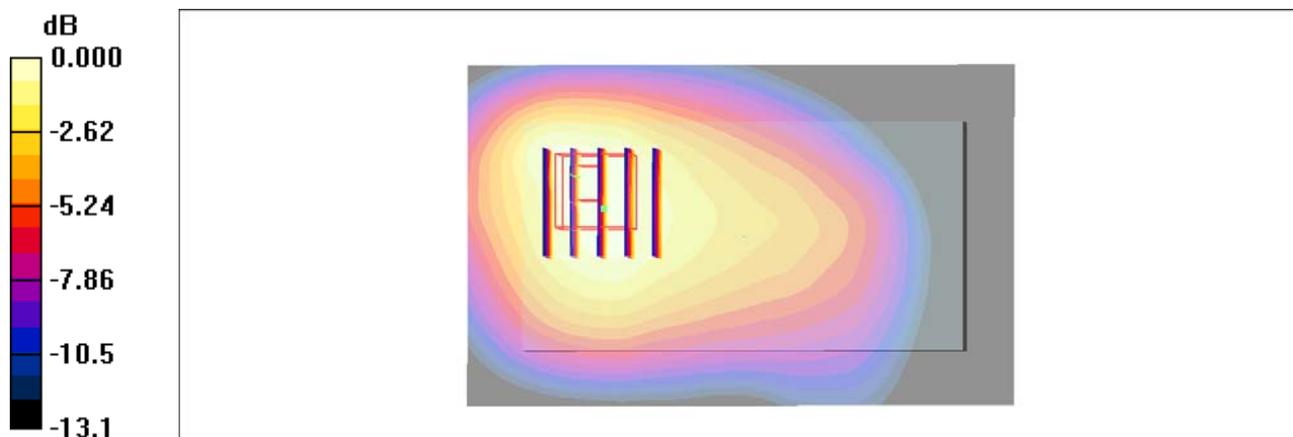

0 dB = 0.794mW/g

### #260 LTE Band 4\_QPSK(1-10)\_Rear Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.811 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.489 mW/g**

Maximum value of SAR (measured) = 0.825 mW/g

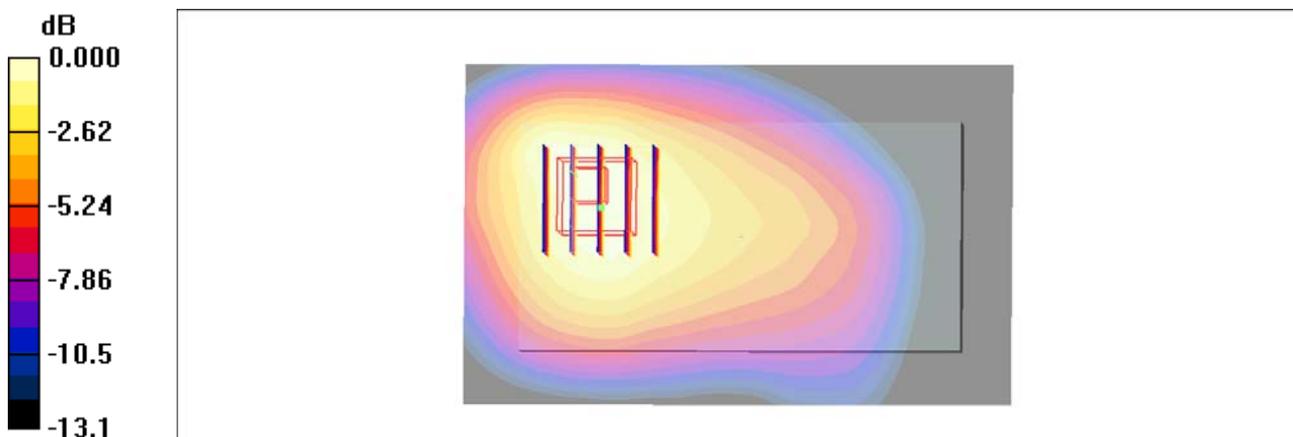

0 dB = 0.825mW/g

### #261 LTE Band 4\_QPSK(1-74)\_Rear Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.723 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.442 mW/g**

Maximum value of SAR (measured) = 0.757 mW/g

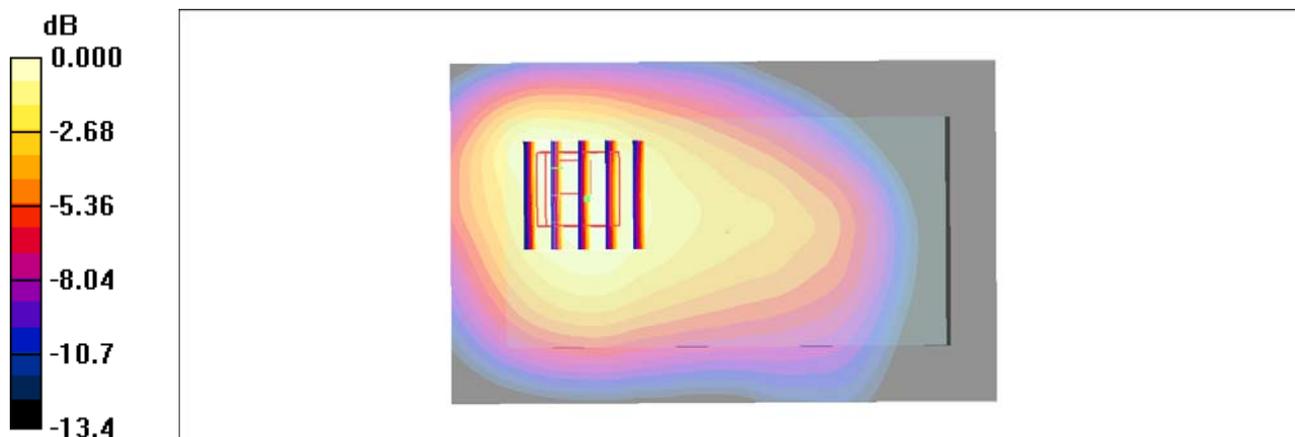

0 dB = 0.757mW/g

### #262 LTE Band 4\_16QAM(36-18)\_Rear Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.757 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.452 mW/g**

Maximum value of SAR (measured) = 0.762 mW/g

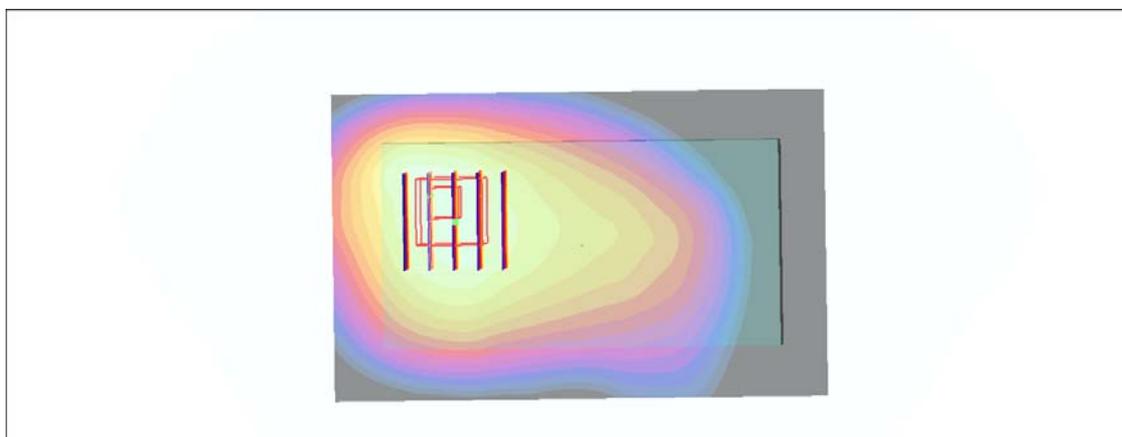

0 dB = 0.762mW/g

### #263 LTE Band 4\_16QAM(1-0)\_Rear Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.849 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.1 V/m; Power Drift = -0.067 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.490 mW/g**

Maximum value of SAR (measured) = 0.833 mW/g

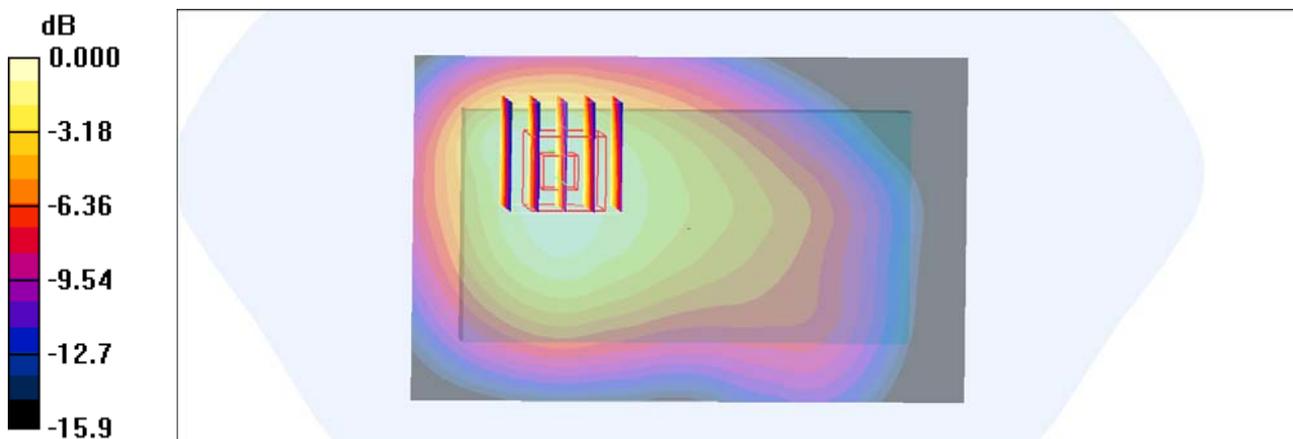

0 dB = 0.833mW/g

### #263 LTE Band 4\_16QAM(1-0)\_Rear Face\_1cm\_Ch20175\_15M\_2D

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r =$

51.8;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.849 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.1 V/m; Power Drift = -0.067 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.490 mW/g**

Maximum value of SAR (measured) = 0.833 mW/g

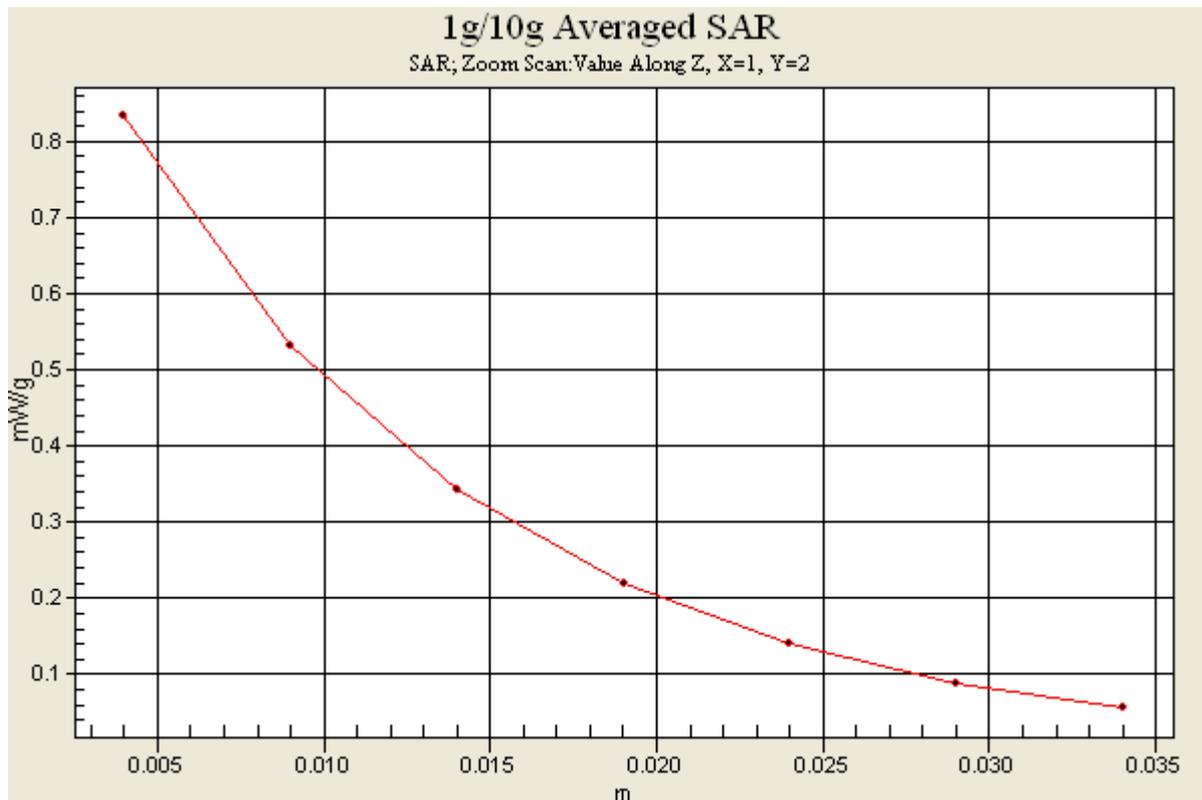

### #264 LTE Band 4\_16QAM(1-74)\_Rear Face\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.804 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.731 mW/g; SAR(10 g) = 0.462 mW/g**

Maximum value of SAR (measured) = 0.786 mW/g

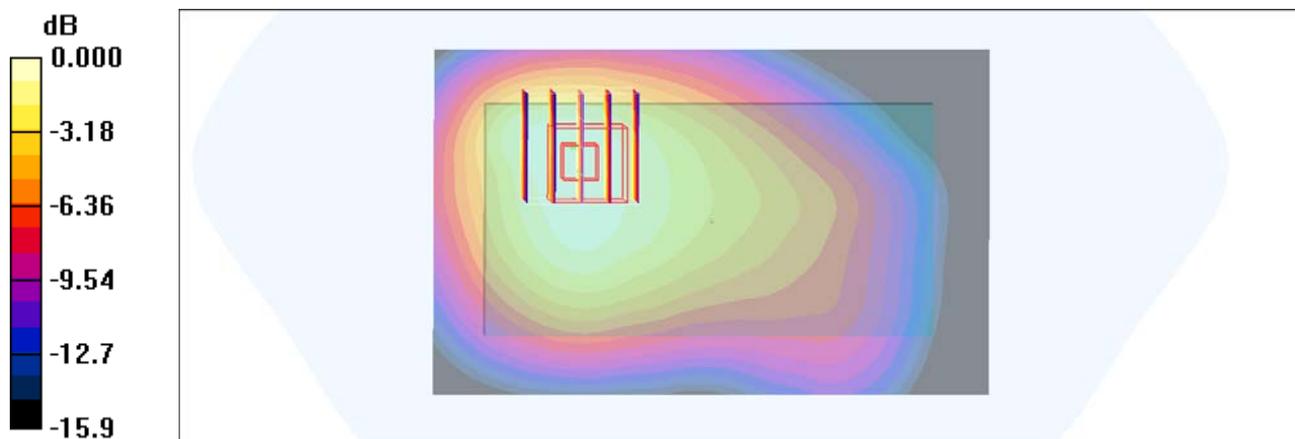

0 dB = 0.786mW/g

### #265 LTE Band 4\_QPSK(36-18)\_Left Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.201 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.85 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 0.275 W/kg

**SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.106 mW/g**

Maximum value of SAR (measured) = 0.191 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.85 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.091 mW/g**

Maximum value of SAR (measured) = 0.155 mW/g

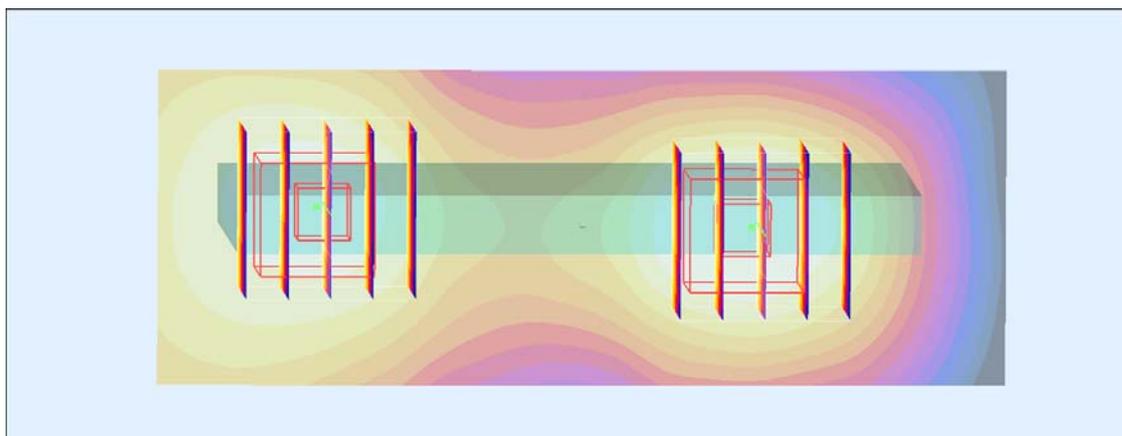

0 dB = 0.155mW/g

### #266 LTE Band 4\_QPSK(1-0)\_Left Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.210 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.97 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.117 mW/g**

Maximum value of SAR (measured) = 0.208 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.97 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.239 W/kg

**SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.098 mW/g**

Maximum value of SAR (measured) = 0.168 mW/g

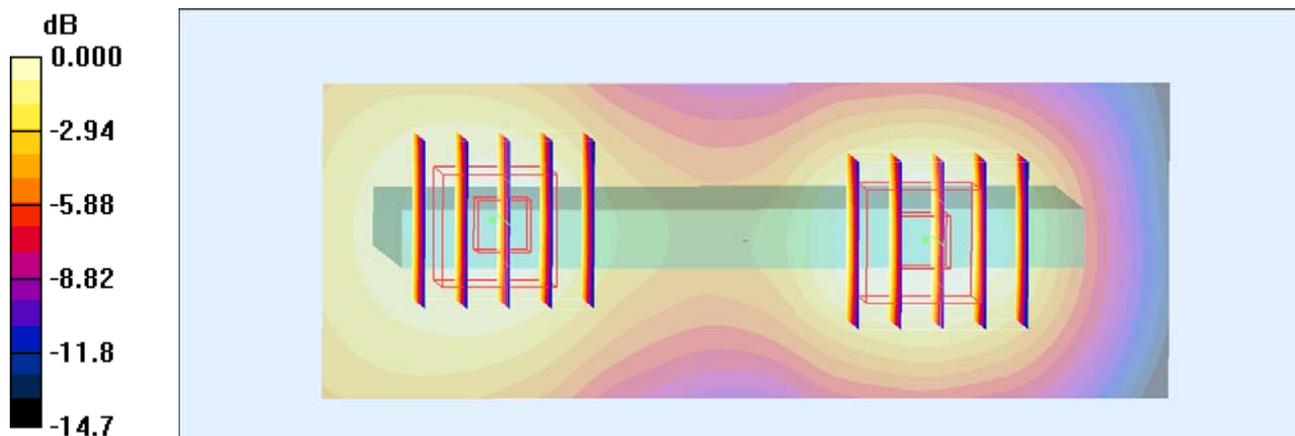

### #267 LTE Band 4\_QPSK(1-74)\_Left Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.197 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.76 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.276 W/kg

**SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.107 mW/g**

Maximum value of SAR (measured) = 0.193 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.76 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.146 mW/g; SAR(10 g) = 0.092 mW/g**

Maximum value of SAR (measured) = 0.157 mW/g

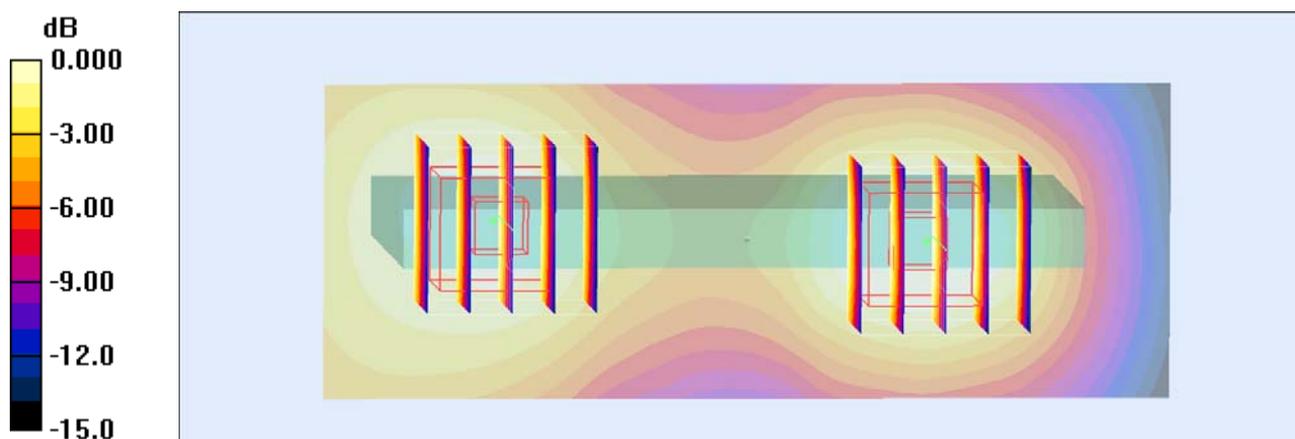

0 dB = 0.157mW/g

### #268 LTE Band 4\_16QAM(36-18)\_Left Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.179 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.67 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.277 W/kg

**SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.104 mW/g**

Maximum value of SAR (measured) = 0.190 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.67 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.223 W/kg

**SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.088 mW/g**

Maximum value of SAR (measured) = 0.148 mW/g

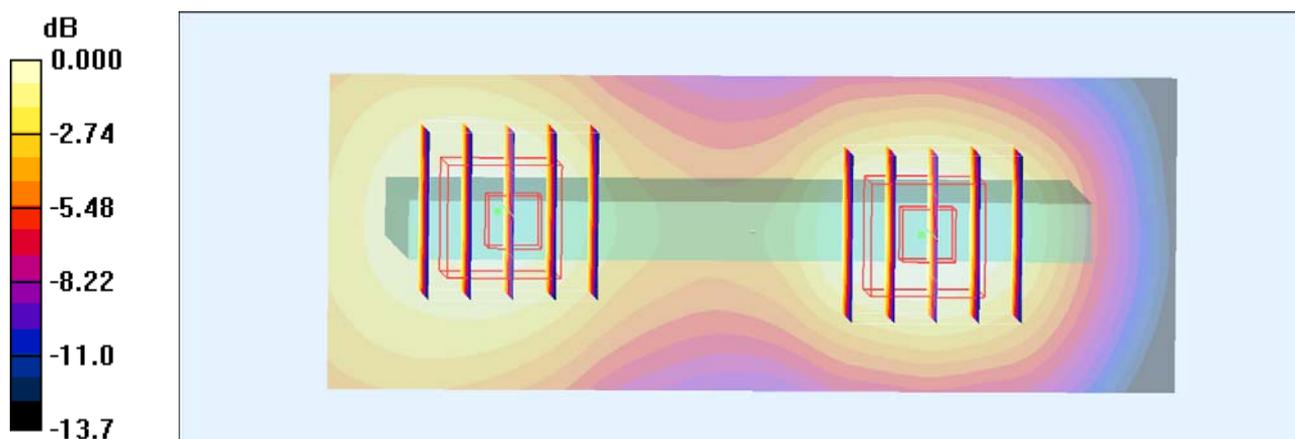

0 dB = 0.148mW/g

### #269 LTE Band 4\_16QAM(1-0)\_Left Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.212 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.17 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.303 W/kg

**SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.116 mW/g**

Maximum value of SAR (measured) = 0.214 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.17 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.094 mW/g**

Maximum value of SAR (measured) = 0.160 mW/g

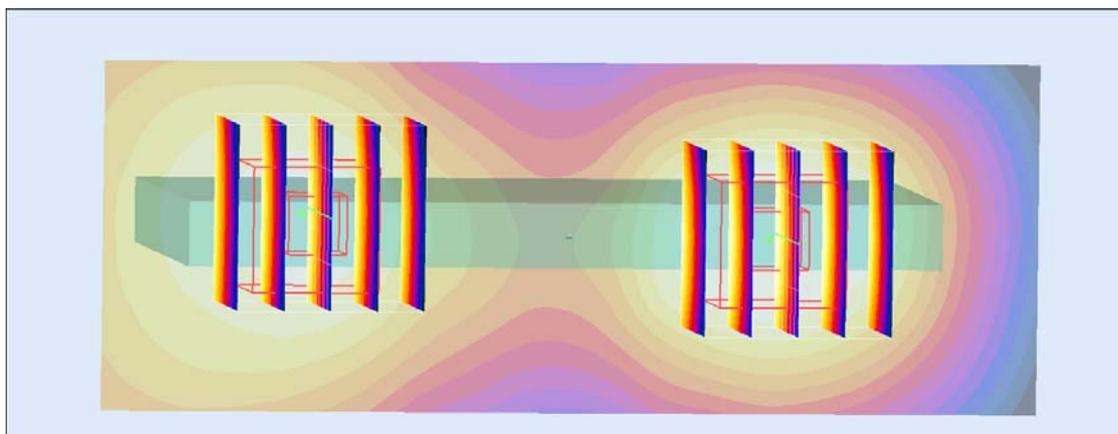

0 dB = 0.160mW/g

## #269 LTE Band 4\_16QAM(1-0)\_Left Side\_1cm\_Ch20175\_15M\_2D

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r =$

51.8;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.212 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.17 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.303 W/kg

**SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.116 mW/g**

Maximum value of SAR (measured) = 0.214 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.17 V/m; Power Drift = -0.044 dB


Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.094 mW/g**

Maximum value of SAR (measured) = 0.160 mW/g

# 1g/10g Averaged SAR

SAR; Zoom Scan: Value Along Z, X=2, Y=2

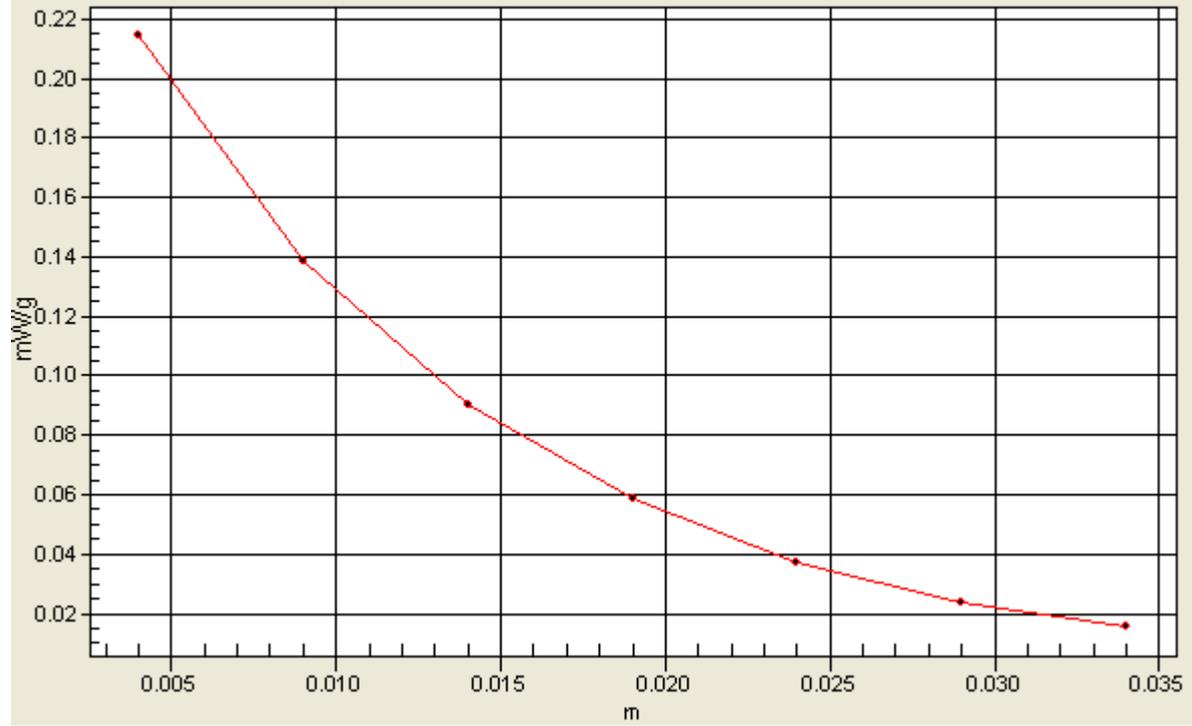

### #270 LTE Band 4\_16QAM(1-74)\_Left Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.192 mW/g

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.00 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.277 W/kg

**SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.107 mW/g**

Maximum value of SAR (measured) = 0.195 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.00 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.217 W/kg

**SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.089 mW/g**

Maximum value of SAR (measured) = 0.152 mW/g

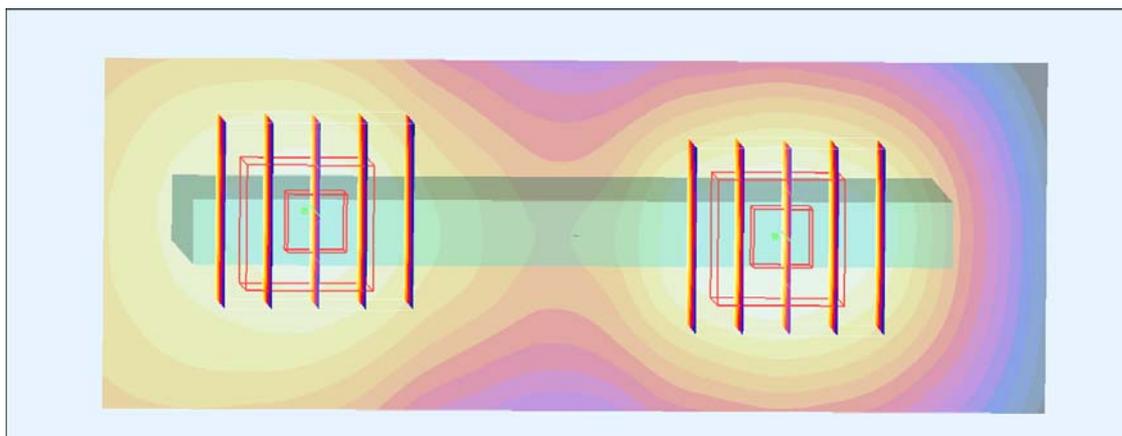

0 dB = 0.152mW/g

### #271 LTE Band 4\_QPSK(36-18)\_Right Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.415 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.579 W/kg

**SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.215 mW/g**

Maximum value of SAR (measured) = 0.393 mW/g

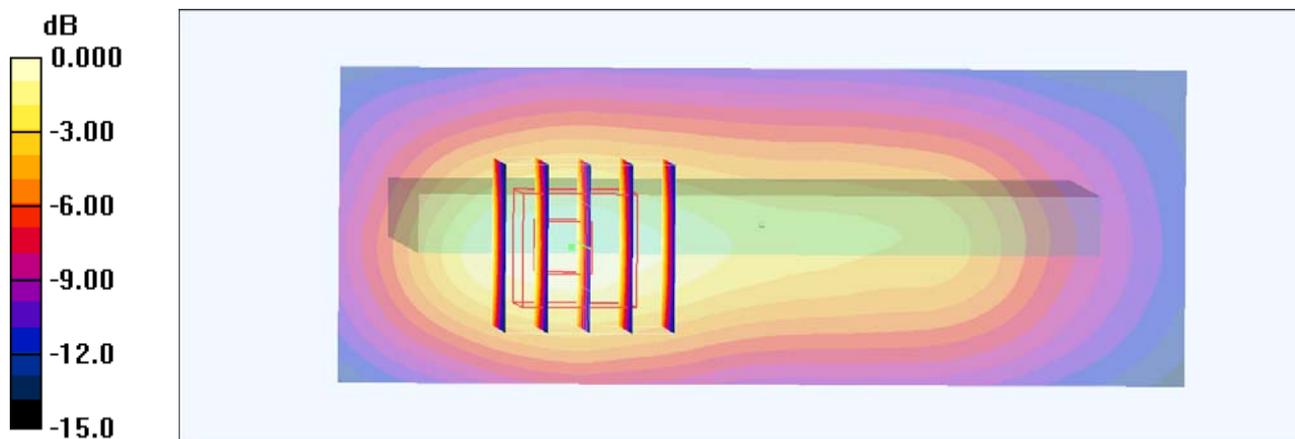

0 dB = 0.393mW/g

### #272 LTE Band 4\_QPSK(1-0)\_Right Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.439 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.625 W/kg

**SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.225 mW/g**

Maximum value of SAR (measured) = 0.418 mW/g

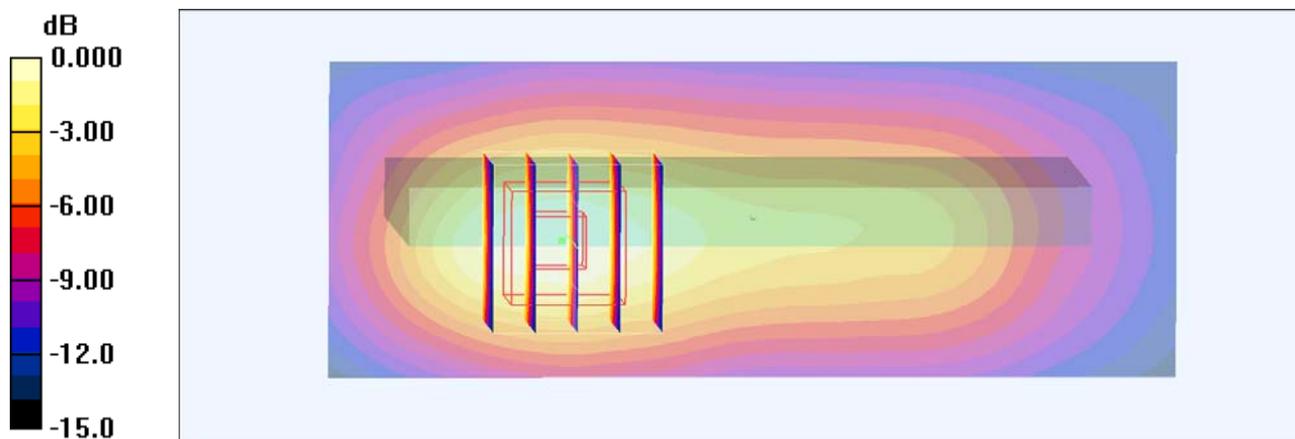

0 dB = 0.418mW/g

### #272 LTE Band 4\_QPSK(1-0)\_Right Side\_1cm\_Ch20175\_15M\_2D

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r =$

51.8;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.439 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.625 W/kg

**SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.225 mW/g**

Maximum value of SAR (measured) = 0.418 mW/g

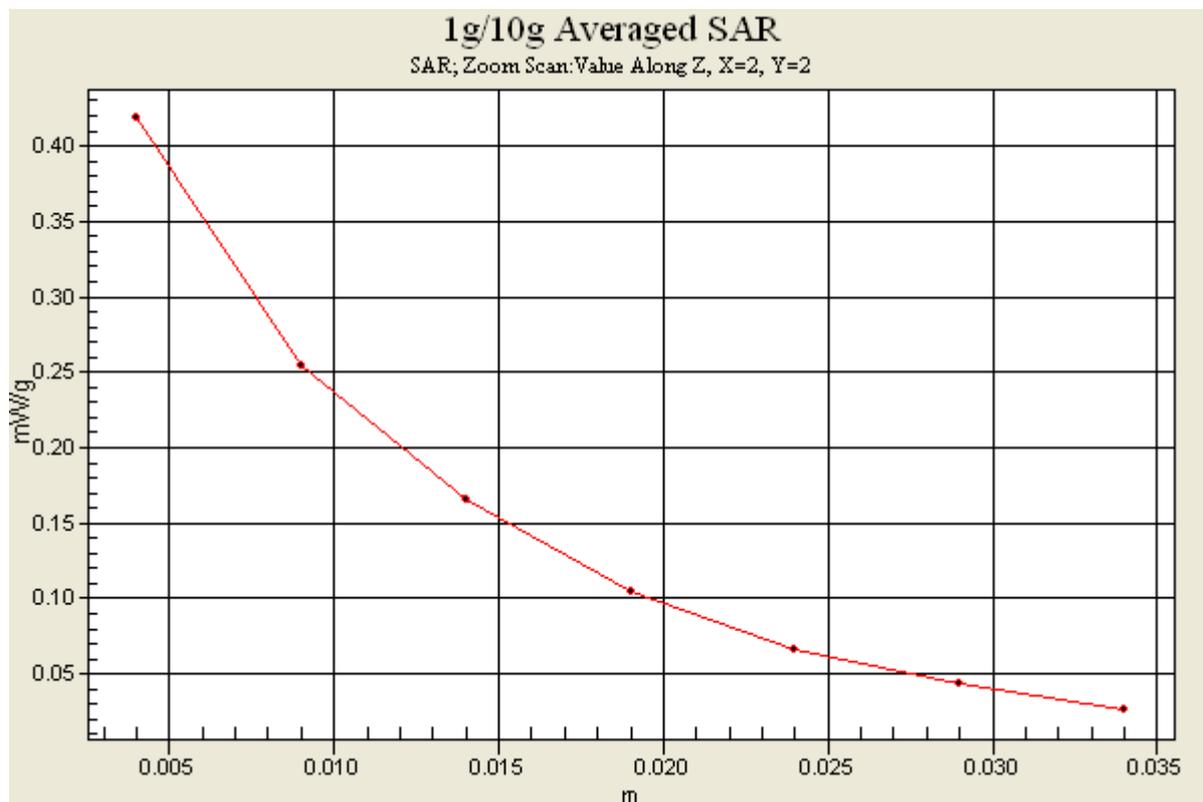

### #273 LTE Band 4\_QPSK(1-74)\_Right Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.396 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.536 W/kg

**SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.202 mW/g**

Maximum value of SAR (measured) = 0.365 mW/g

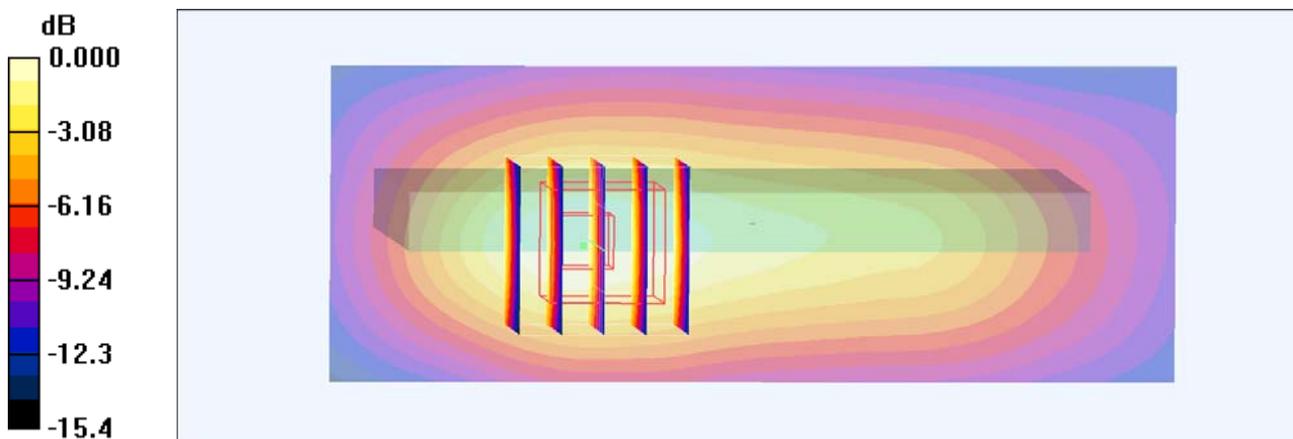

0 dB = 0.365mW/g

### #274 LTE Band 4\_16QAM(36-18)\_Right Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.394 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.568 W/kg

**SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.206 mW/g**

Maximum value of SAR (measured) = 0.380 mW/g

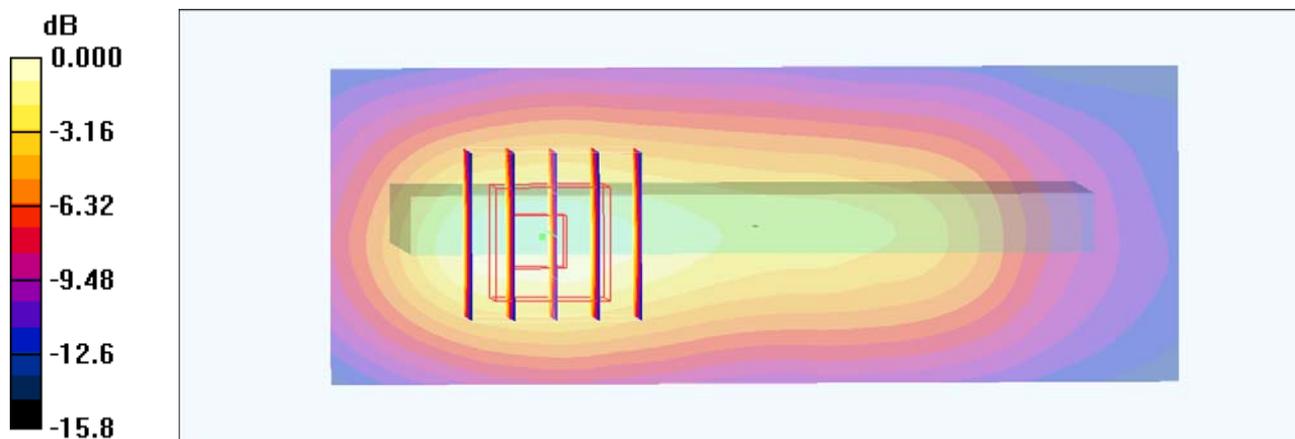

### #275 LTE Band 4\_16QAM(1-0)\_Right Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.391 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.568 W/kg

**SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.207 mW/g**

Maximum value of SAR (measured) = 0.377 mW/g

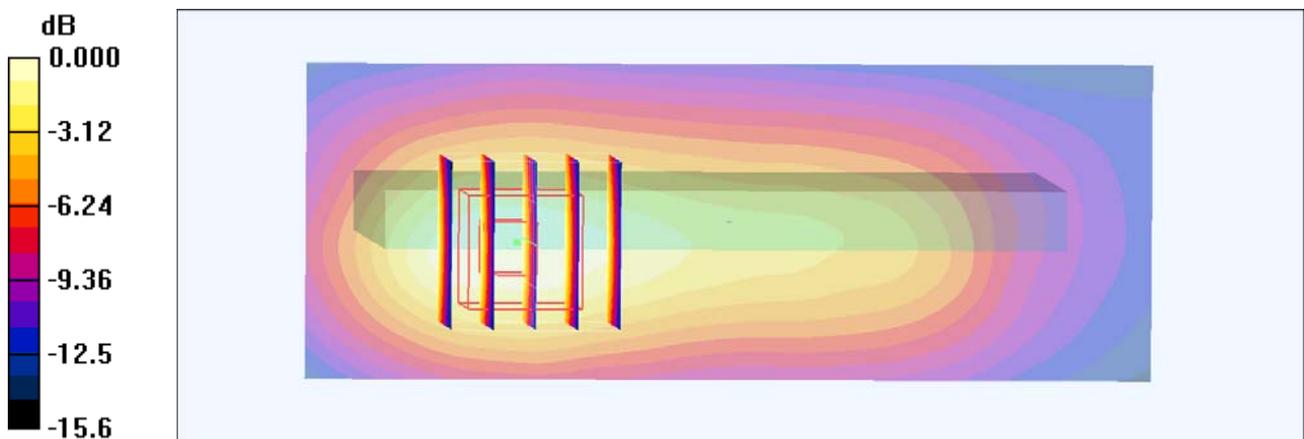

0 dB = 0.377mW/g

### #276 LTE Band 4\_16QAM(1-74)\_Right Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.387 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.612 W/kg

**SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.210 mW/g**

Maximum value of SAR (measured) = 0.390 mW/g

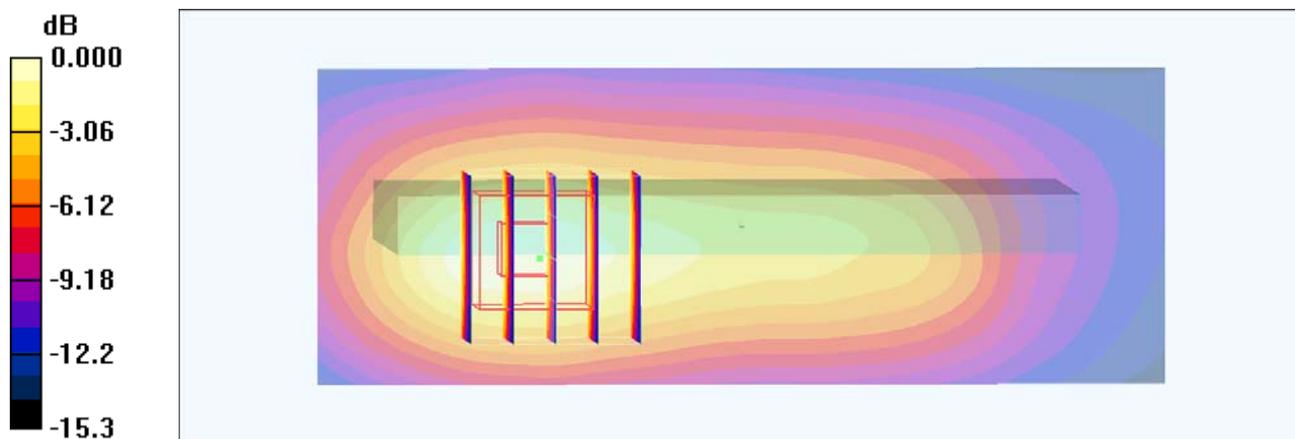

0 dB = 0.390mW/g

### #277 LTE Band 4\_QPSK(36-18)\_Down Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.534 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.0 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.817 W/kg

**SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.297 mW/g**

Maximum value of SAR (measured) = 0.546 mW/g

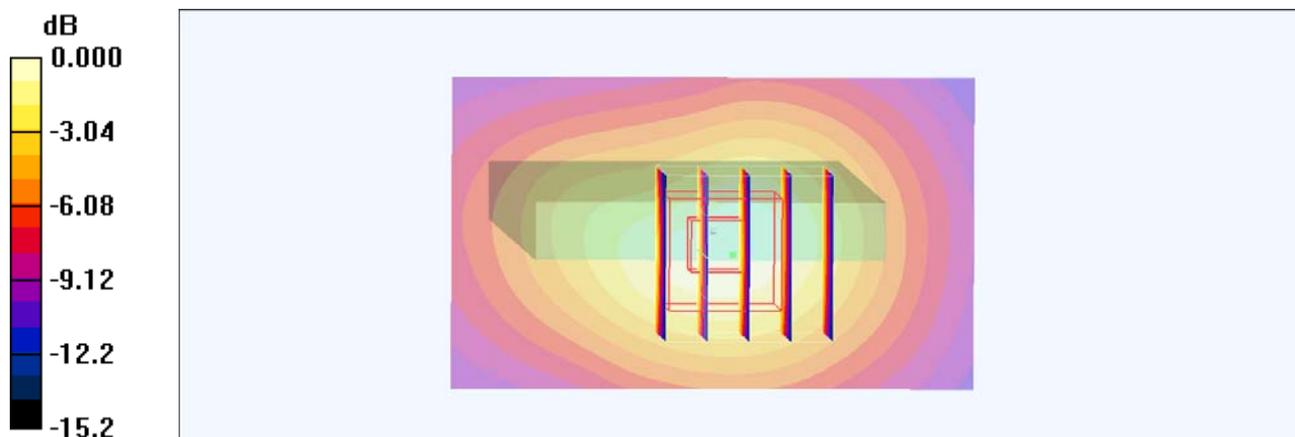

0 dB = 0.546mW/g

## #278 LTE Band 4\_QPSK(1-0)\_Down Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17

- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.543 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.841 W/kg

**SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.305 mW/g**

Maximum value of SAR (measured) = 0.561 mW/g

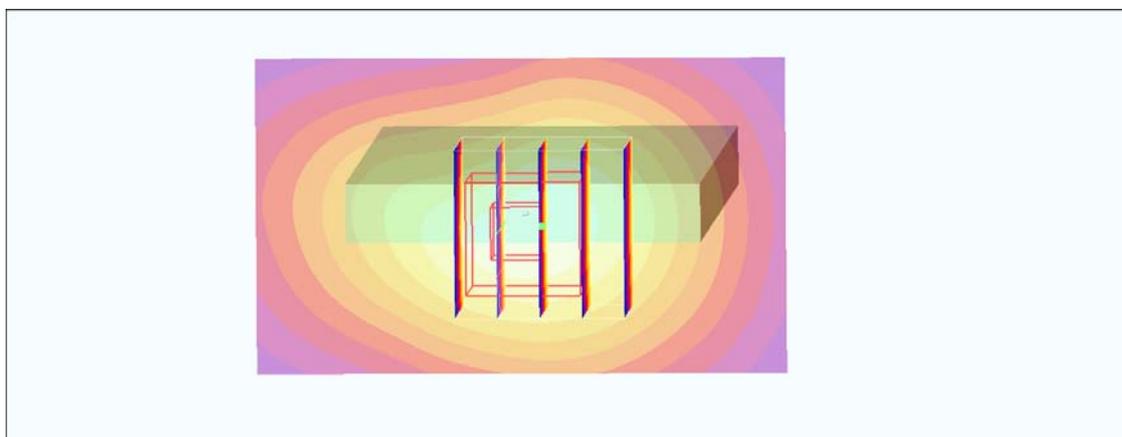

0 dB = 0.561mW/g

### #278 LTE Band 4\_QPSK(1-0)\_Down Side\_1cm\_Ch20175\_15M\_2D

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r =$

51.8;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.543 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.841 W/kg

**SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.305 mW/g**

Maximum value of SAR (measured) = 0.561 mW/g

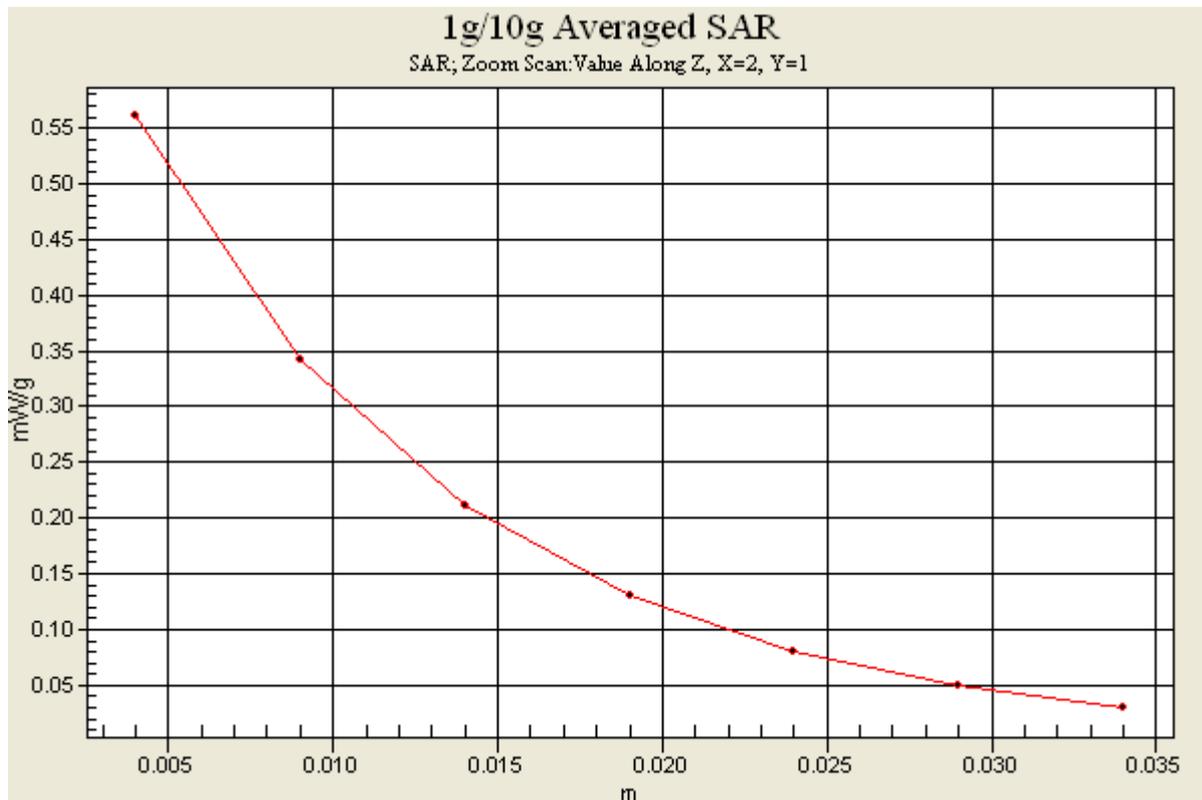

### #279 LTE Band 4\_QPSK(1-74)\_Down Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.542 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.834 W/kg

**SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.304 mW/g**

Maximum value of SAR (measured) = 0.554 mW/g

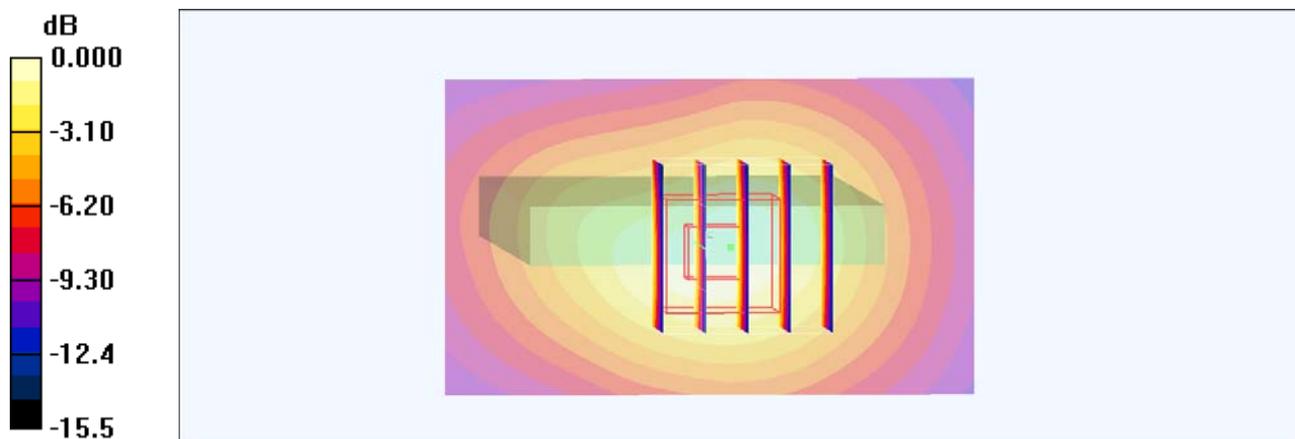

0 dB = 0.554mW/g

### #280 LTE Band 4\_16QAM(36-18)\_Down Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.525 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.7 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 0.831 W/kg

**SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.302 mW/g**

Maximum value of SAR (measured) = 0.551 mW/g

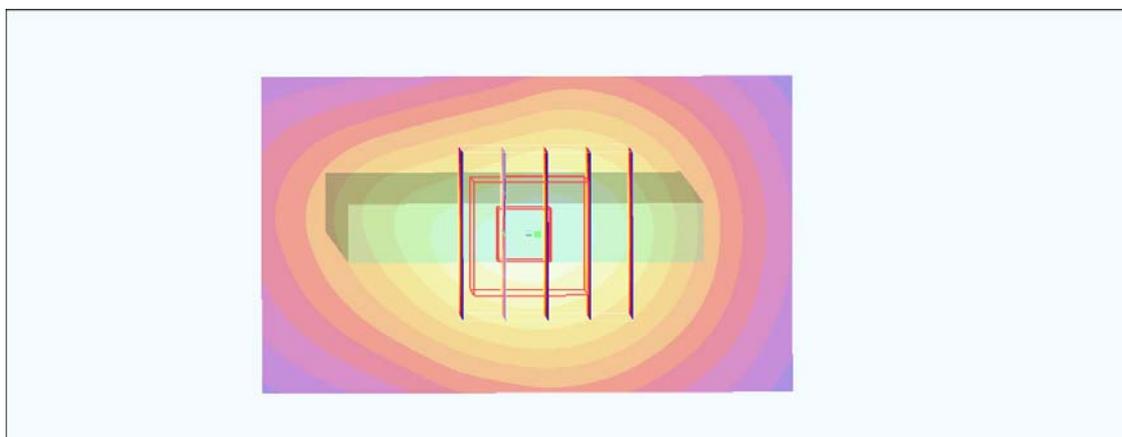

0 dB = 0.551mW/g

### #281 LTE Band 4\_16QAM(1-0)\_Down Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.538 mW/g


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.812 W/kg

**SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.298 mW/g**

Maximum value of SAR (measured) = 0.544 mW/g

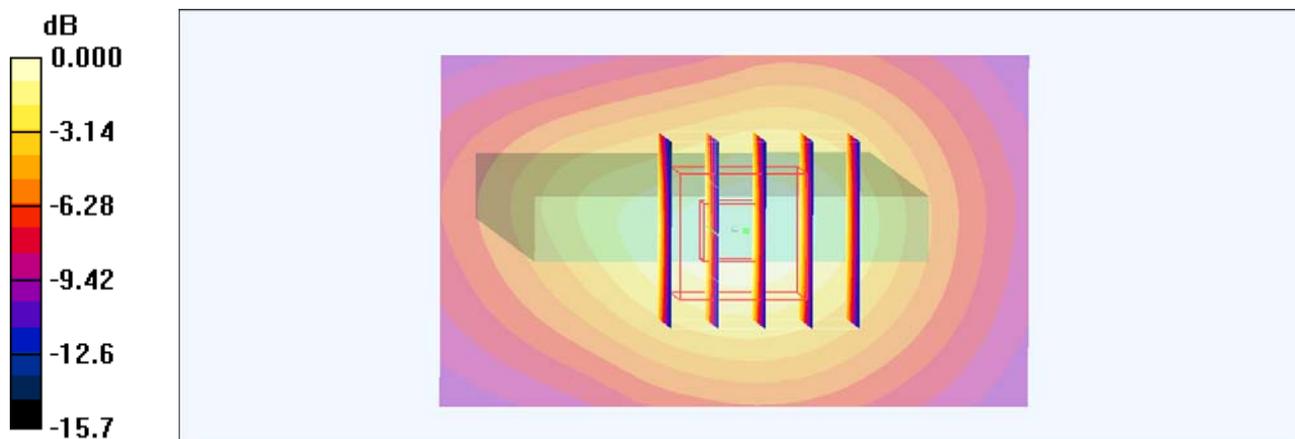

0 dB = 0.544mW/g

## #282 LTE Band 4\_16QAM(1-74)\_Down Side\_1cm\_Ch20175\_15M

**DUT: 172773**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_110903 Medium parameters used :  $f = 1732.5$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.8$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(7.62, 7.62, 7.62); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch20175/Area Scan (31x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.538 mW/g



**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.813 W/kg

**SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.296 mW/g**

Maximum value of SAR (measured) = 0.539 mW/g

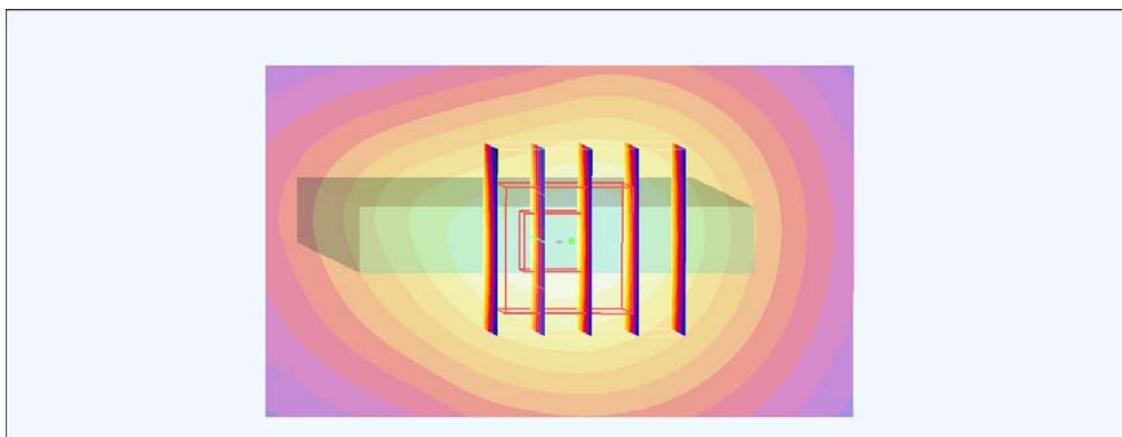

0 dB = 0.539mW/g

**#284 802.11b\_Rear Face\_1cm\_Ch11**

**DUT: 172733**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_110808 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.981$  mho/m;  $\epsilon_r =$

51.494;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3792; ConvF(6.67, 6.67, 6.67); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2011/1/13

- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (41x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.115 mW/g

**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.290 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.235 W/kg

**SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.059 mW/g**

Maximum value of SAR (measured) = 0.131 mW/g


**Configuration/Ch11/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.290 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.133 W/kg

**SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.038 mW/g**

Maximum value of SAR (measured) = 0.084 mW/g

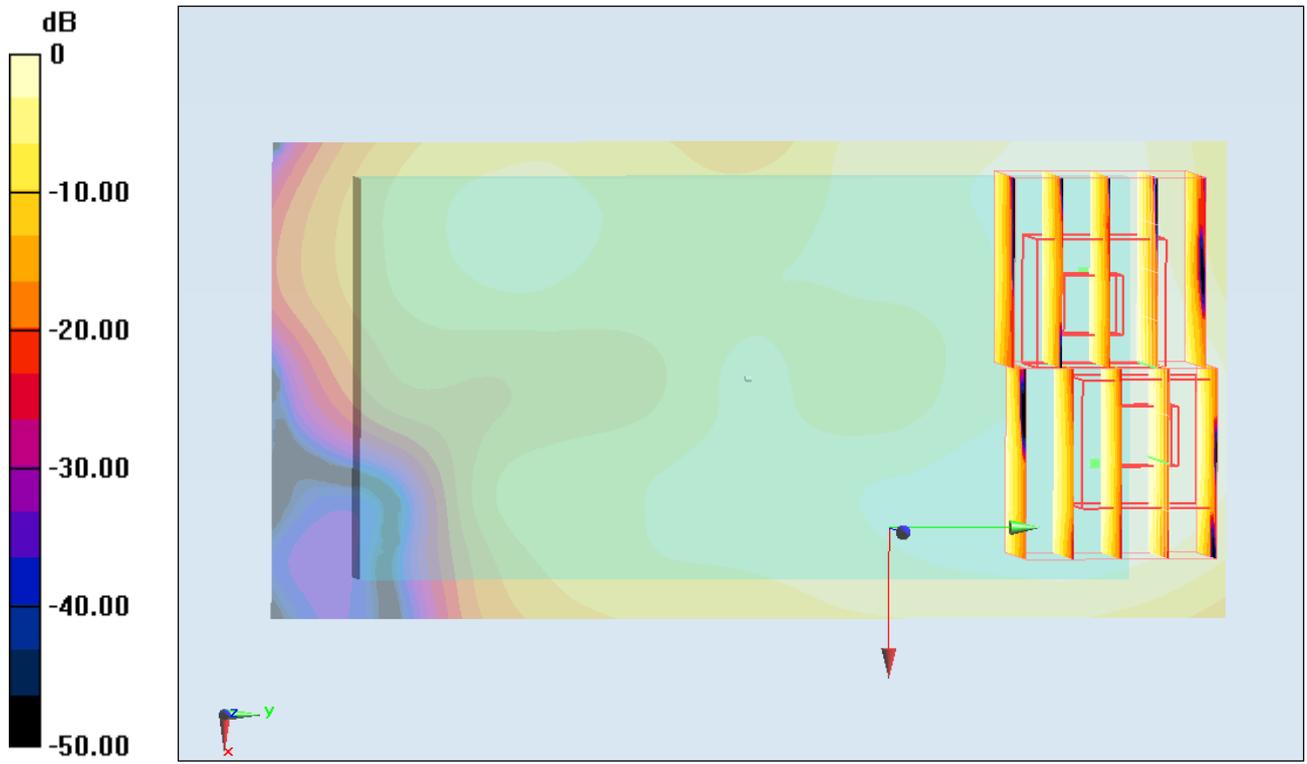

0 dB = 0.080mW/g

**#284 802.11b\_Rear Face\_1cm\_Ch11\_2D**

**DUT: 172733**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_110808 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.981$  mho/m;  $\epsilon_r =$

51.494;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3792; ConvF(6.67, 6.67, 6.67); Calibrated: 2011/6/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2011/1/13

- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (41x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.115 mW/g

**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.290 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.235 W/kg

**SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.059 mW/g**

Maximum value of SAR (measured) = 0.131 mW/g

**Ch11/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.290 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.133 W/kg

**SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.038 mW/g**

Maximum value of SAR (measured) = 0.084 mW/g

# 1g/10g Averaged SAR

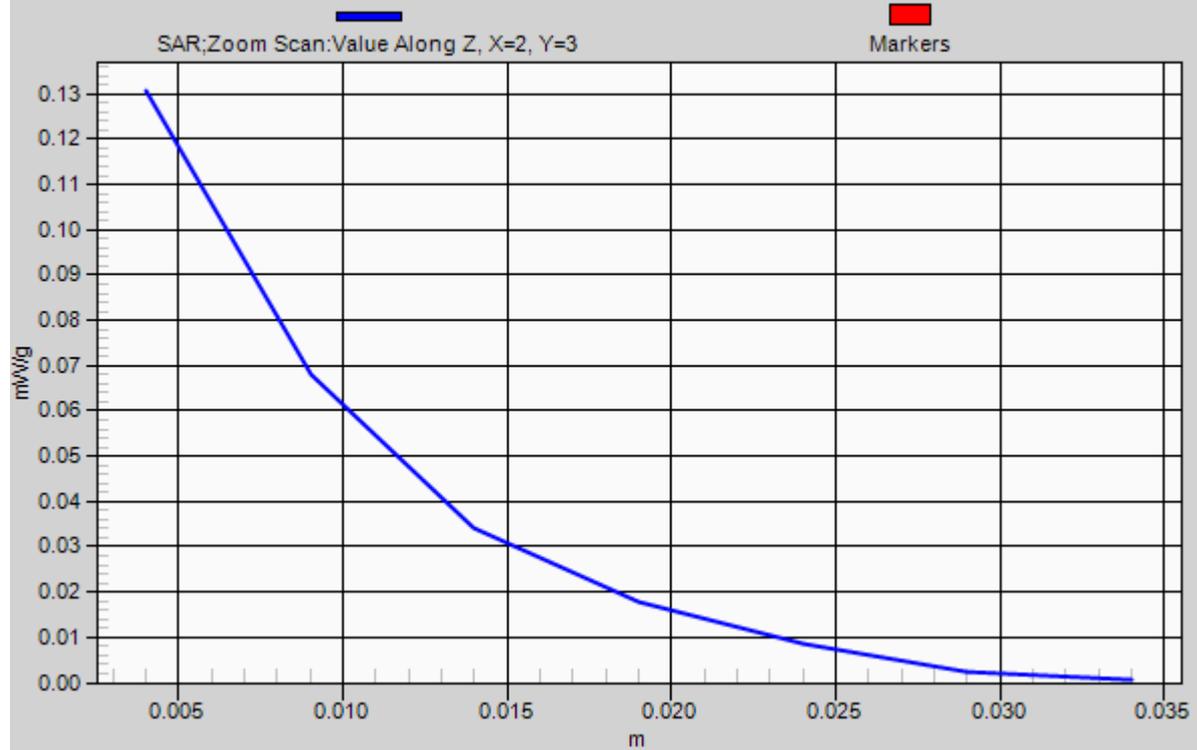

### #285 802.11b\_Rear Face\_1cm\_Ch11\_Earphone

**DUT: 172733**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_110808 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.981$  mho/m;  $\epsilon_r =$

$51.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(6.67, 6.67, 6.67); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (41x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.080 mW/g

**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.996 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 0.152 W/kg

**SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.039 mW/g**

Maximum value of SAR (measured) = 0.084 mW/g

