

### P01 GSM850\_Right Cheek\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium: H835\_0430 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.912$  mho/m;  $\epsilon_r = 41.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.361 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.271 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.389 mW/g

**SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.239 mW/g**

Maximum value of SAR (measured) = 0.360 mW/g

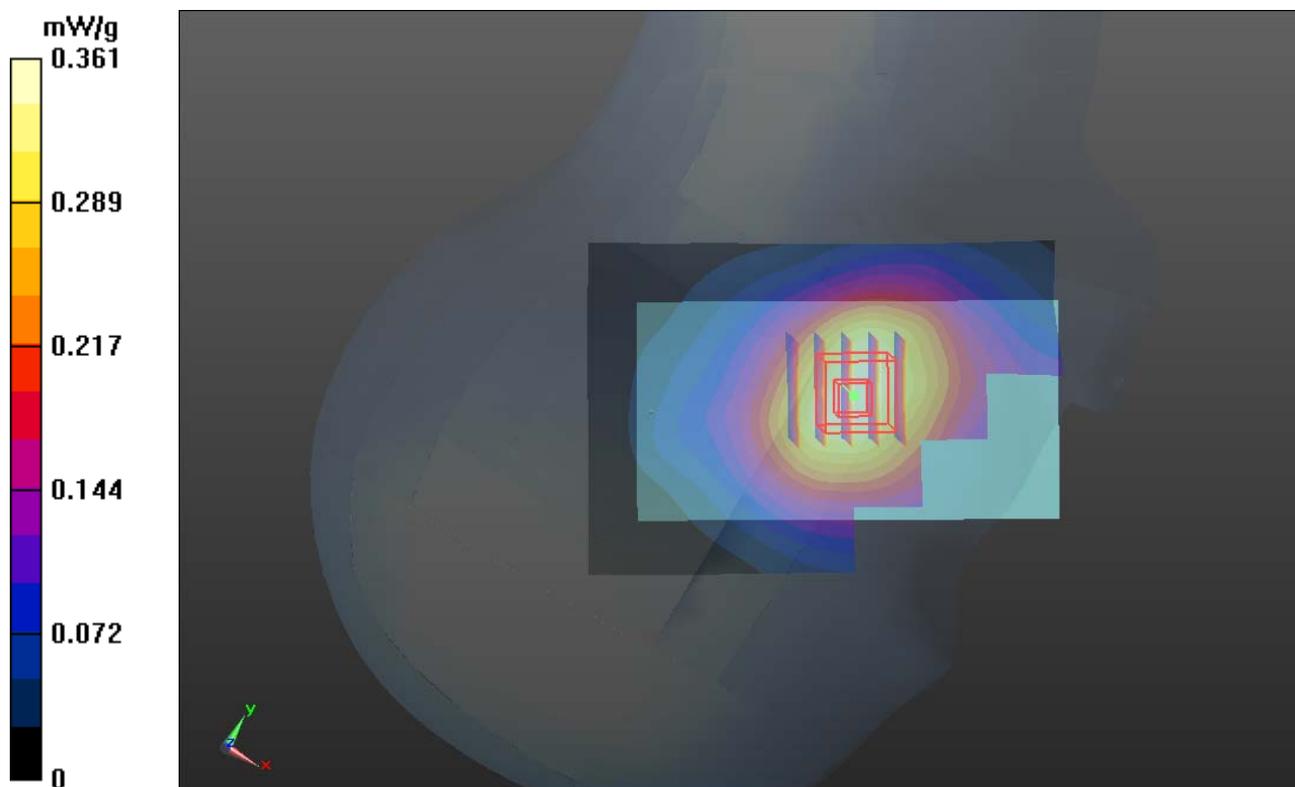

## P02 GSM850\_Right Tilted\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium: H835\_0430 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.912$  mho/m;  $\epsilon_r = 41.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.255 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.183 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.259 mW/g

**SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.159 mW/g**

Maximum value of SAR (measured) = 0.236 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.183 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.225 mW/g

**SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.112 mW/g**

Maximum value of SAR (measured) = 0.208 mW/g

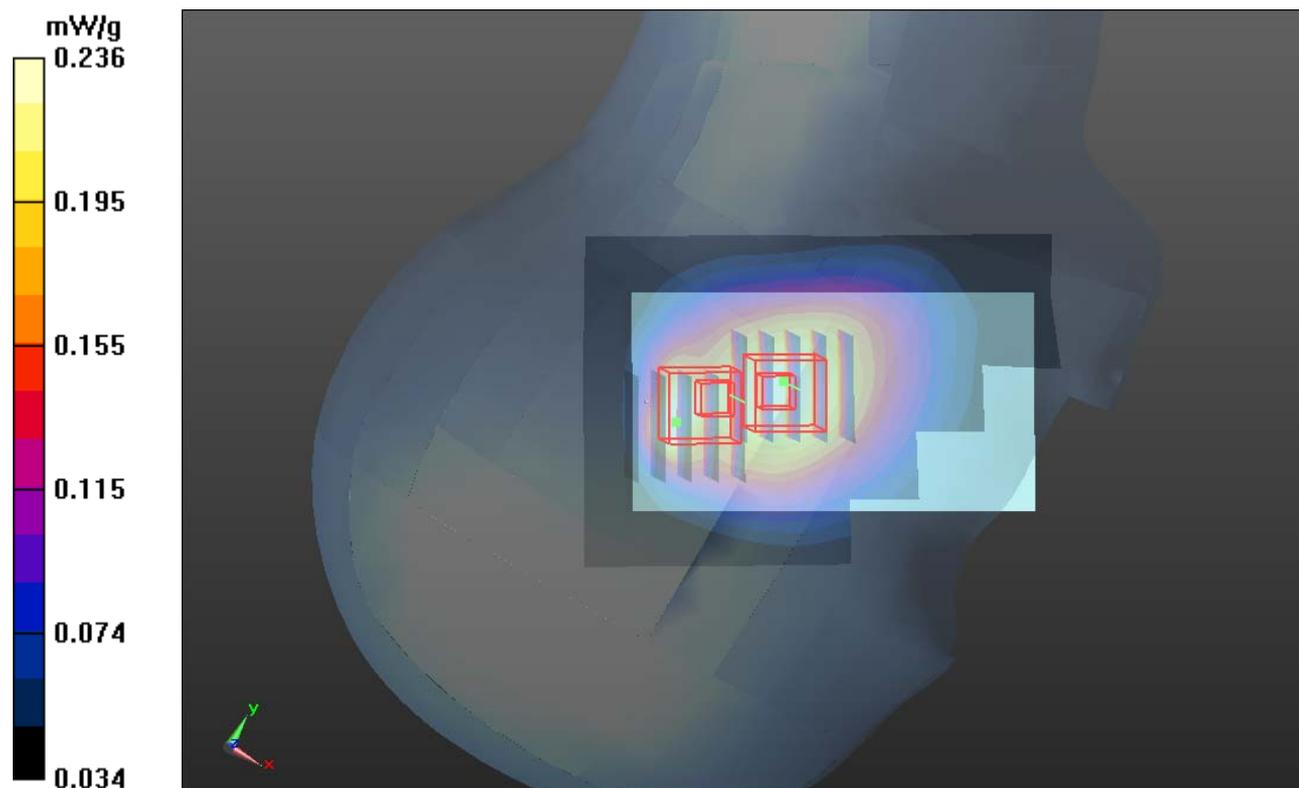

### P03 GSM850\_Left Cheek\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium: H835\_0430 Medium parameters used:  $f = 849 \text{ MHz}$ ;  $\sigma = 0.912 \text{ mho/m}$ ;  $\epsilon_r = 41.834$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (51x81x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.362 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.251 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.393 mW/g

**SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.241 mW/g**

Maximum value of SAR (measured) = 0.362 mW/g

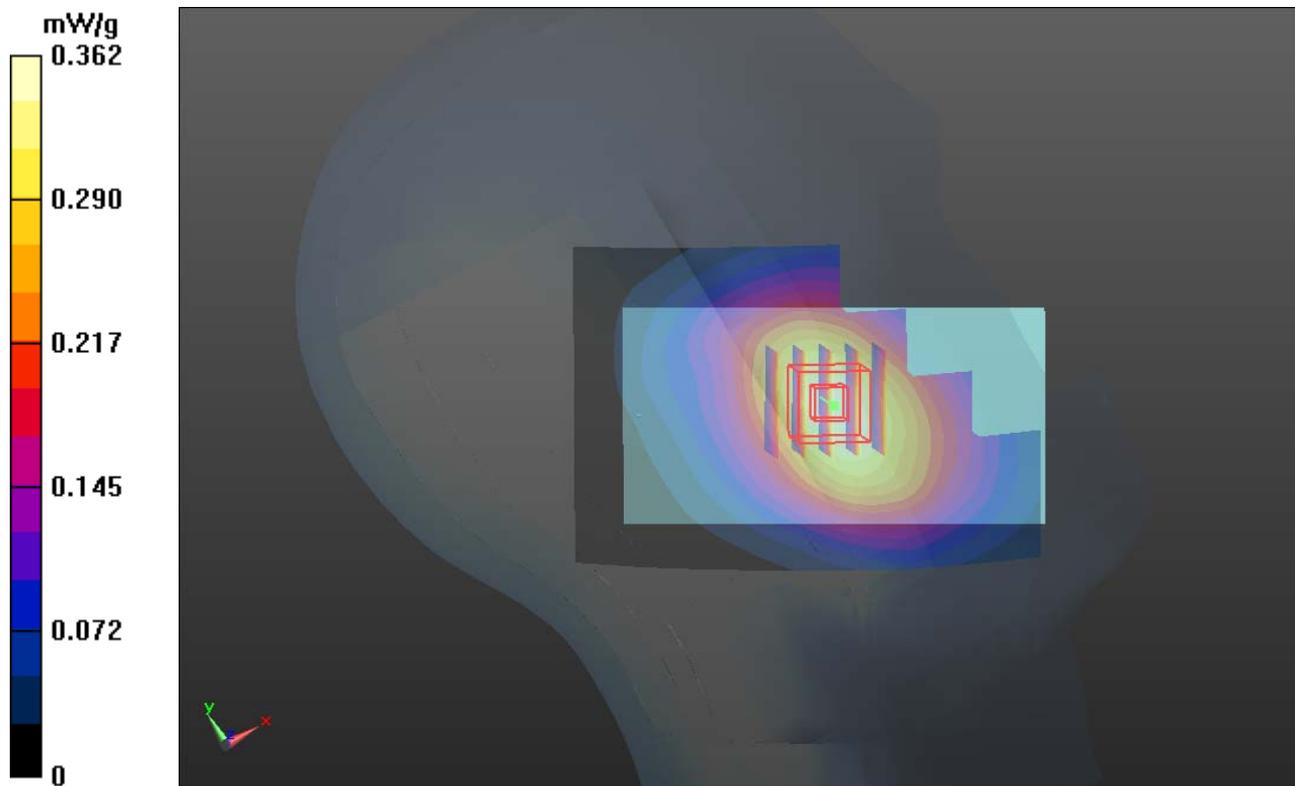

## P04 GSM850\_Left Tilted\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium: H835\_0430 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.912$  mho/m;  $\epsilon_r = 41.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.244 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.223 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.244 mW/g

**SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.151 mW/g**

Maximum value of SAR (measured) = 0.222 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.223 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.218 mW/g

**SAR(1 g) = 0.158 mW/g; SAR(10 g) = 0.108 mW/g**

Maximum value of SAR (measured) = 0.201 mW/g

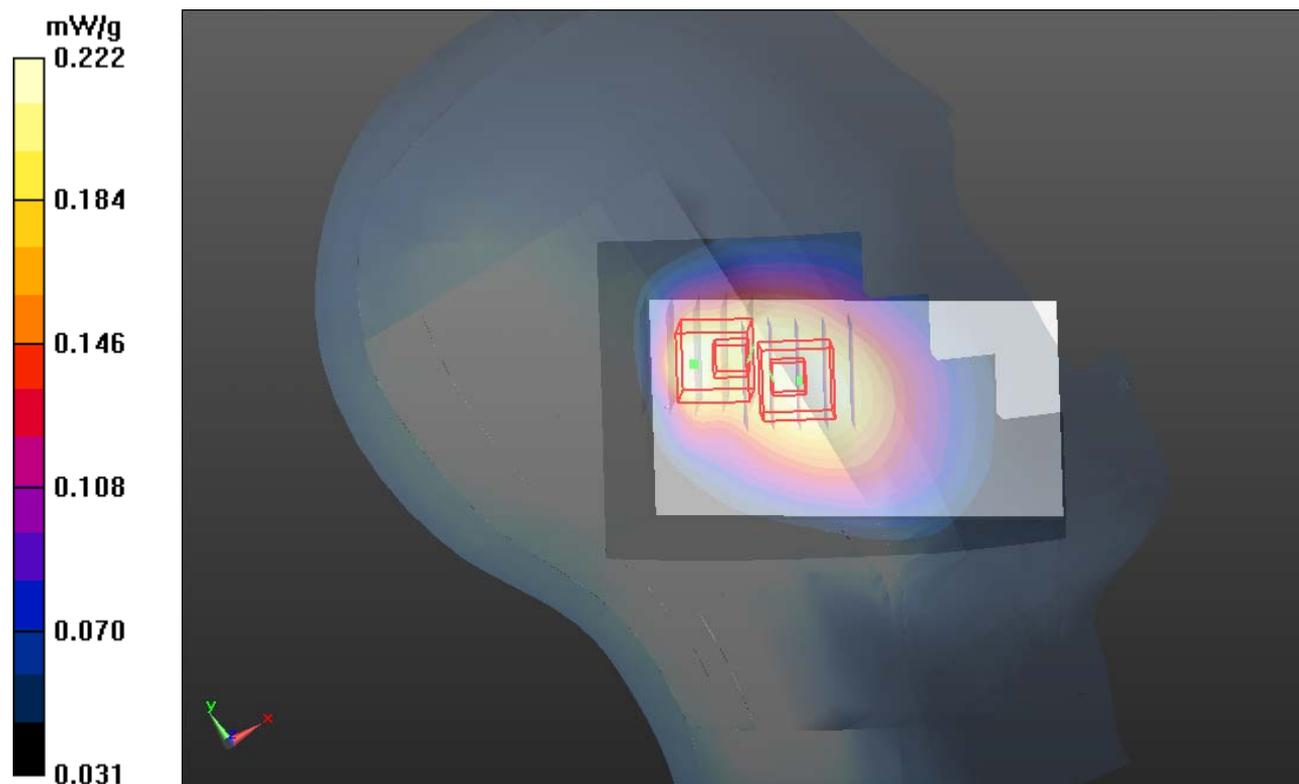

## P05 GSM850\_GPRS11\_Left Check\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: H835\_0430 Medium parameters used:  $f = 849 \text{ MHz}$ ;  $\sigma = 0.912 \text{ mho/m}$ ;  $\epsilon_r = 41.834$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (51x81x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.502 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.479 V/m; Power Drift = -0.038 dB


Peak SAR (extrapolated) = 0.540 mW/g

**SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.328 mW/g**

Maximum value of SAR (measured) = 0.496 mW/g

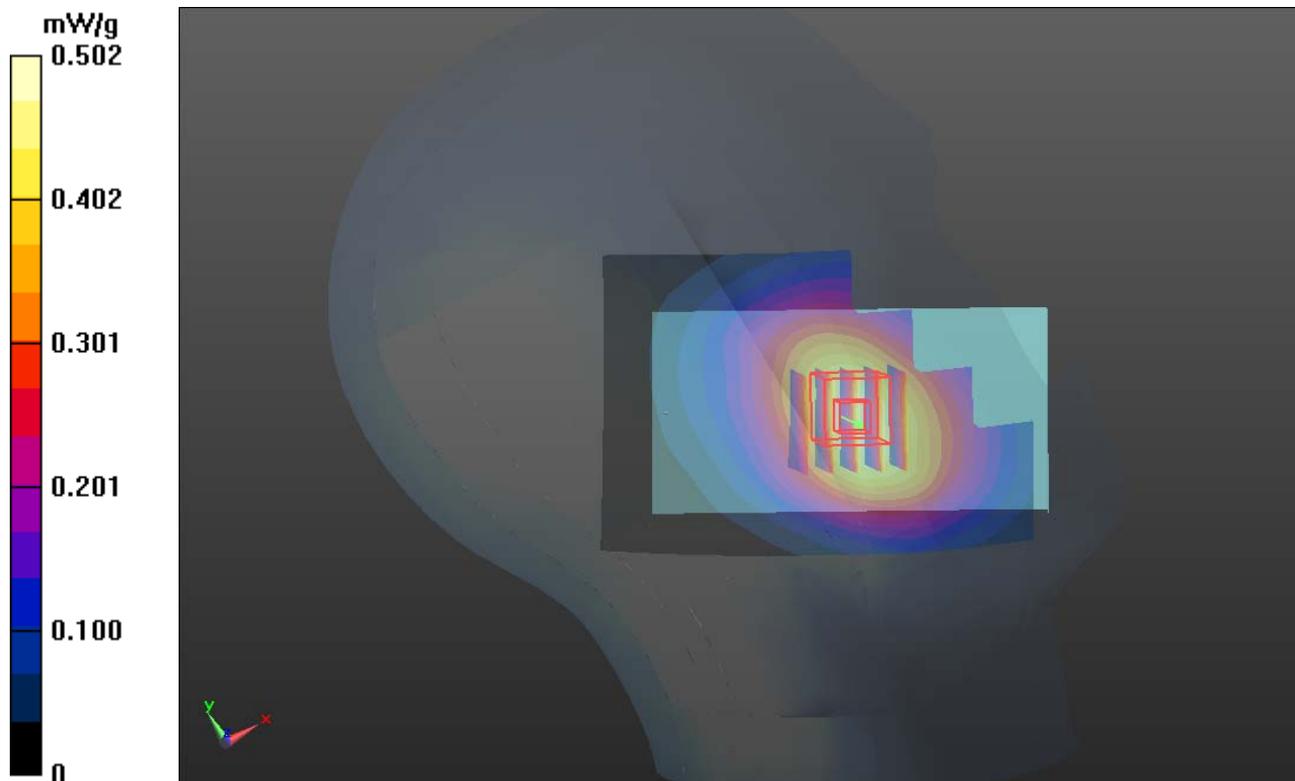

# 1g/10g Averaged SAR

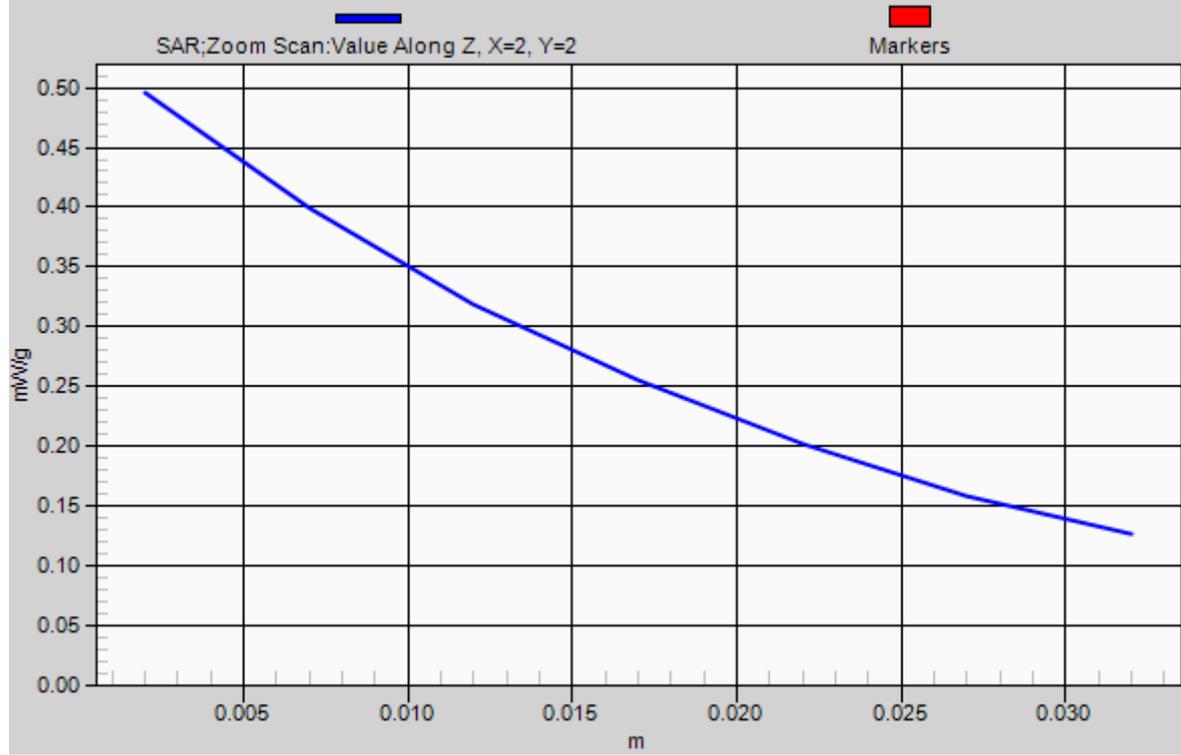

## P06 GSM850\_GPRS11\_Left Tilted\_Ch251\_Sample2

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: H835\_0430 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.912$  mho/m;  $\epsilon_r = 41.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.455 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.289 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.496 mW/g

**SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.301 mW/g**

Maximum value of SAR (measured) = 0.454 mW/g

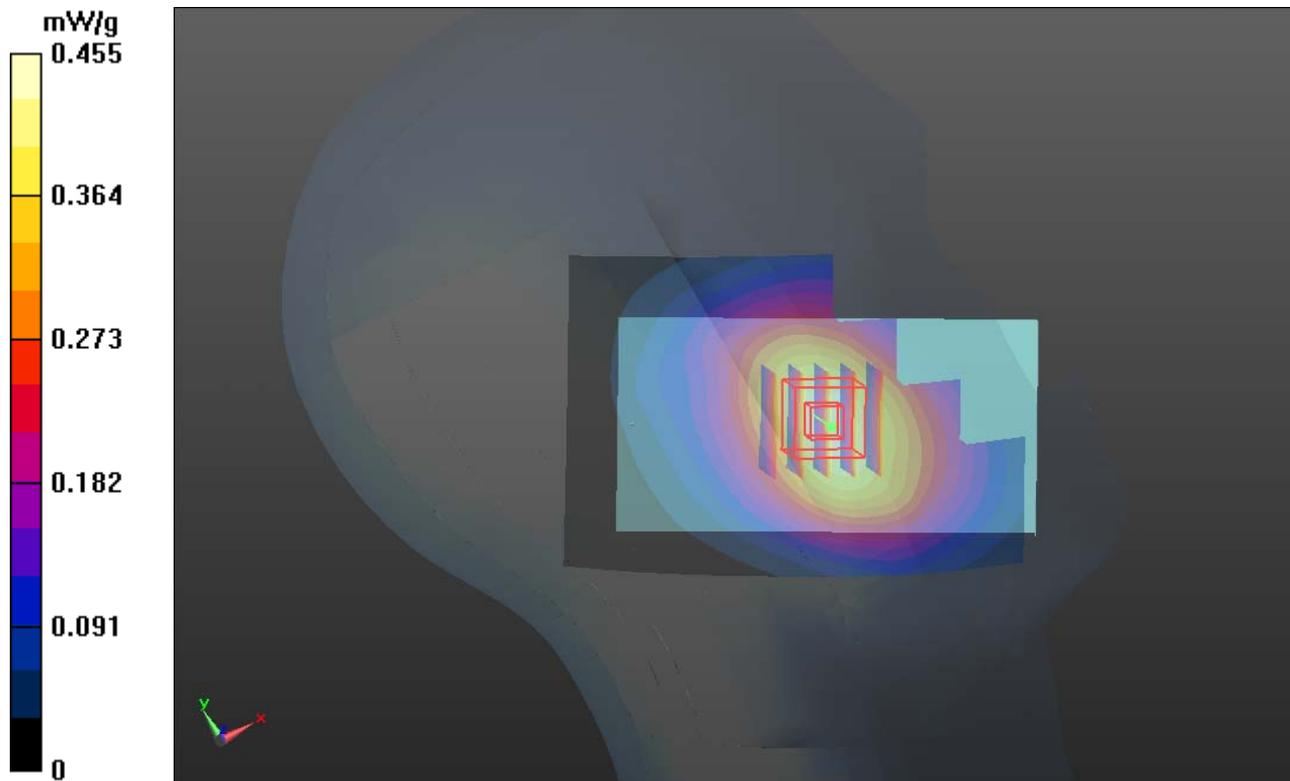

## P07 GSM1900\_Right Cheek\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: H1900\_0430 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.373$  mho/m;  $\epsilon_r = 39.533$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.626 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.815 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.655 mW/g

**SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.284 mW/g**

Maximum value of SAR (measured) = 0.560 mW/g

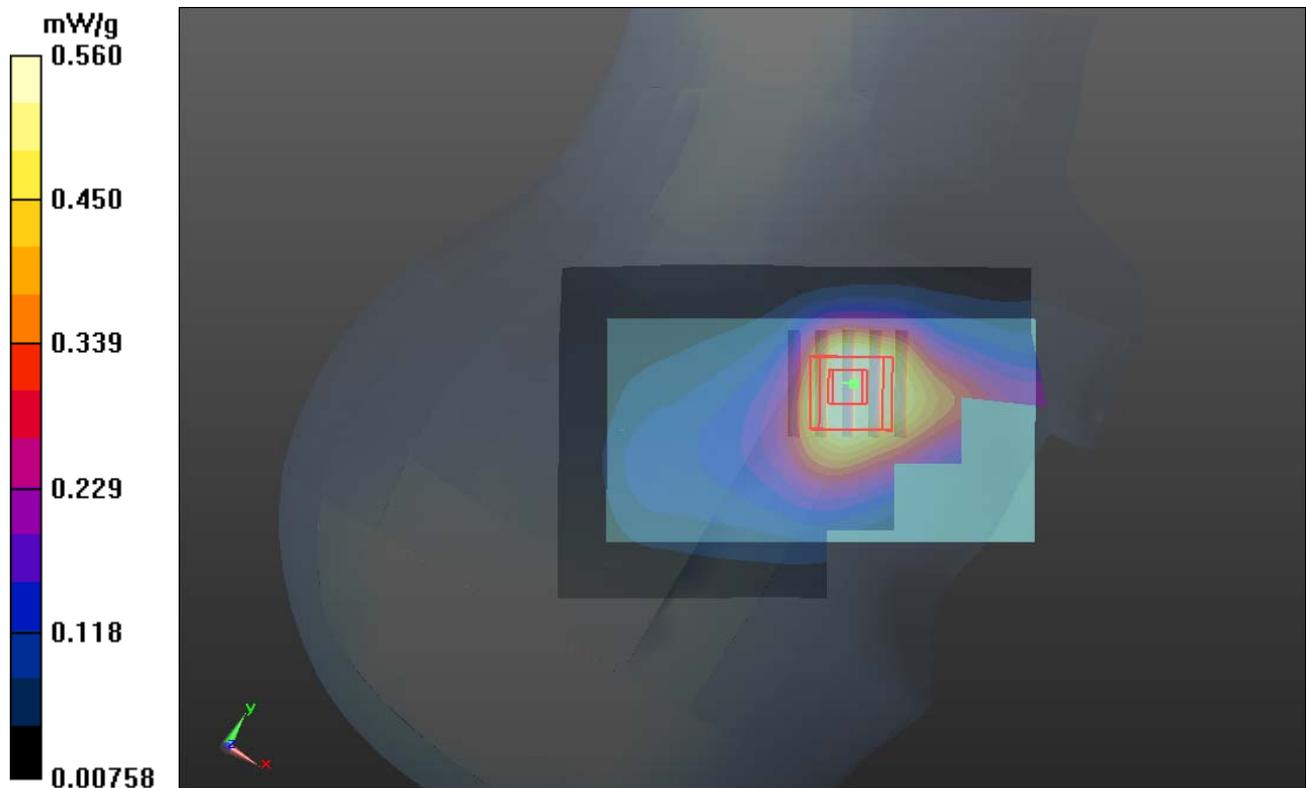

### P08 GSM1900\_Right Tilted\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: H1900\_0430 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.373$  mho/m;  $\epsilon_r = 39.533$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.296 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.533 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.332 mW/g

**SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.109 mW/g**

Maximum value of SAR (measured) = 0.253 mW/g

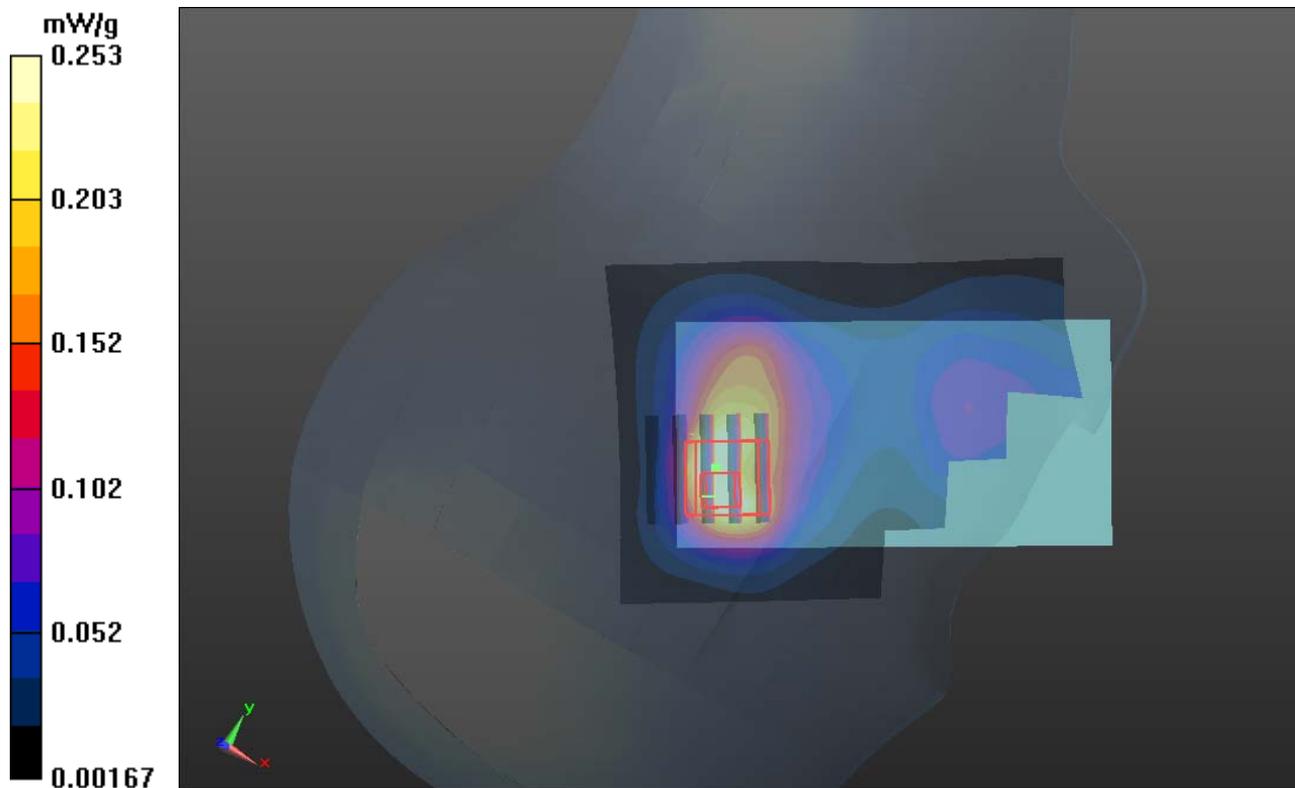

### P09 GSM1900\_Left Check\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: H1900\_0430 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.373$  mho/m;  $\epsilon_r = 39.533$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.583 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.329 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 0.623 mW/g

**SAR(1 g) = 0.417 mW/g; SAR(10 g) = 0.272 mW/g**

Maximum value of SAR (measured) = 0.528 mW/g

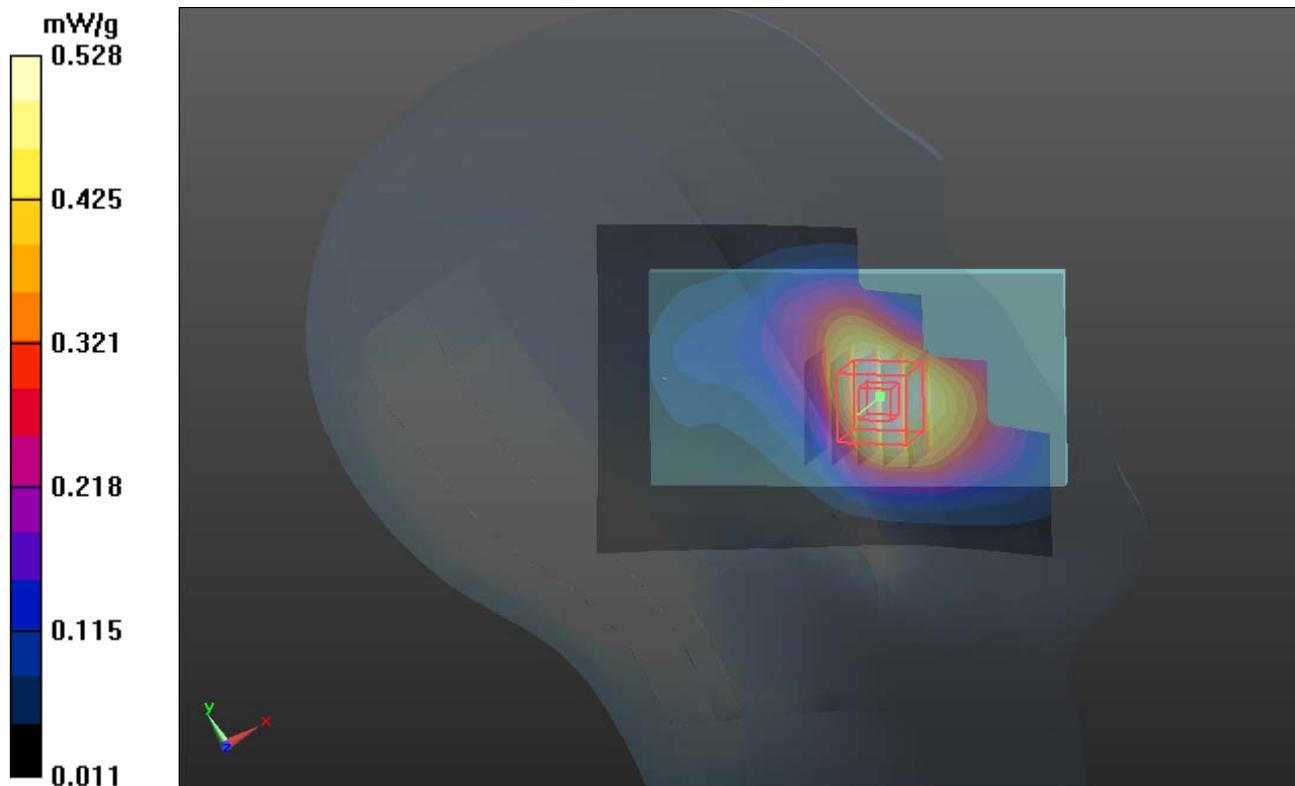

## P10 GSM1900\_Left Tilted\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: H1900\_0430 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.373$  mho/m;  $\epsilon_r = 39.533$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.353 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.822 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.382 mW/g

**SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.133 mW/g**

Maximum value of SAR (measured) = 0.299 mW/g

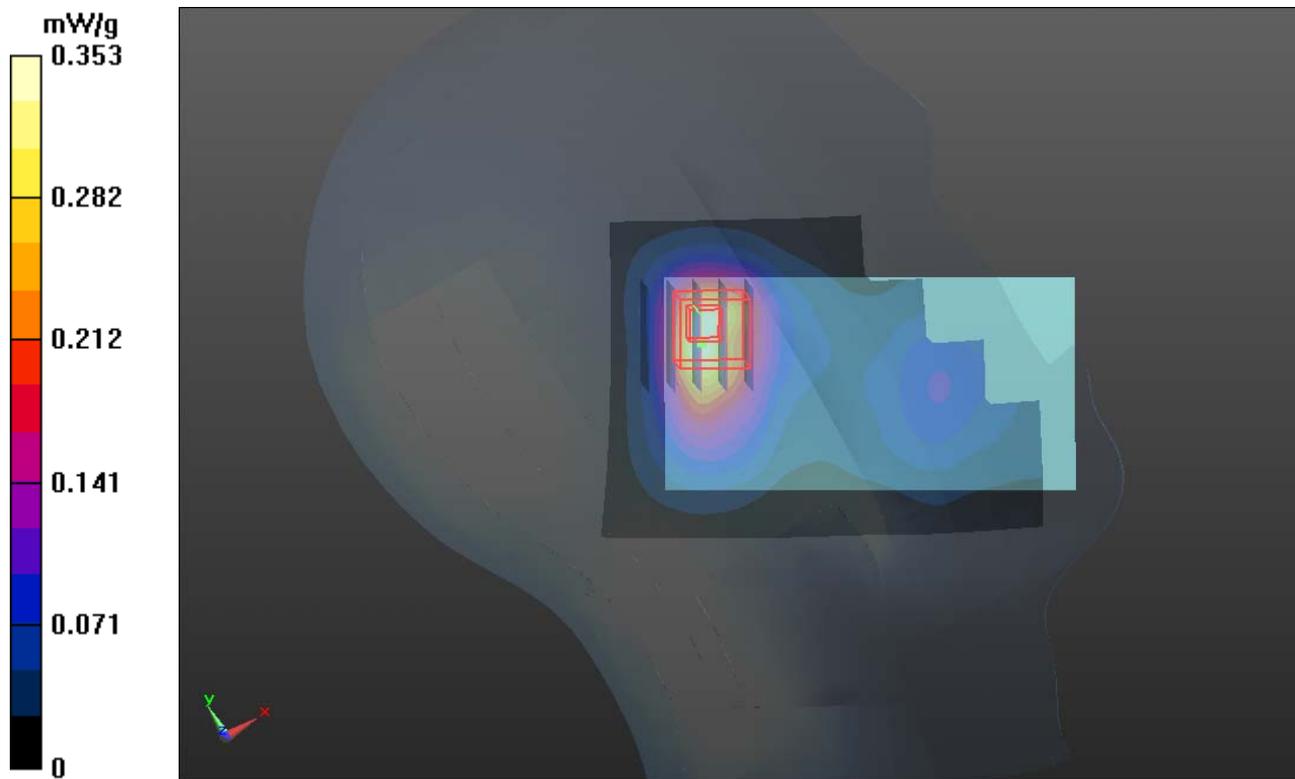

### P11 GSM1900\_GPRS10\_Right Cheek\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: H1900\_0430 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.373$  mho/m;  $\epsilon_r = 39.533$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.666 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.031 V/m; Power Drift = -0.127 dB


Peak SAR (extrapolated) = 0.716 mW/g

**SAR(1 g) = 0.486 mW/g; SAR(10 g) = 0.310 mW/g**

Maximum value of SAR (measured) = 0.608 mW/g

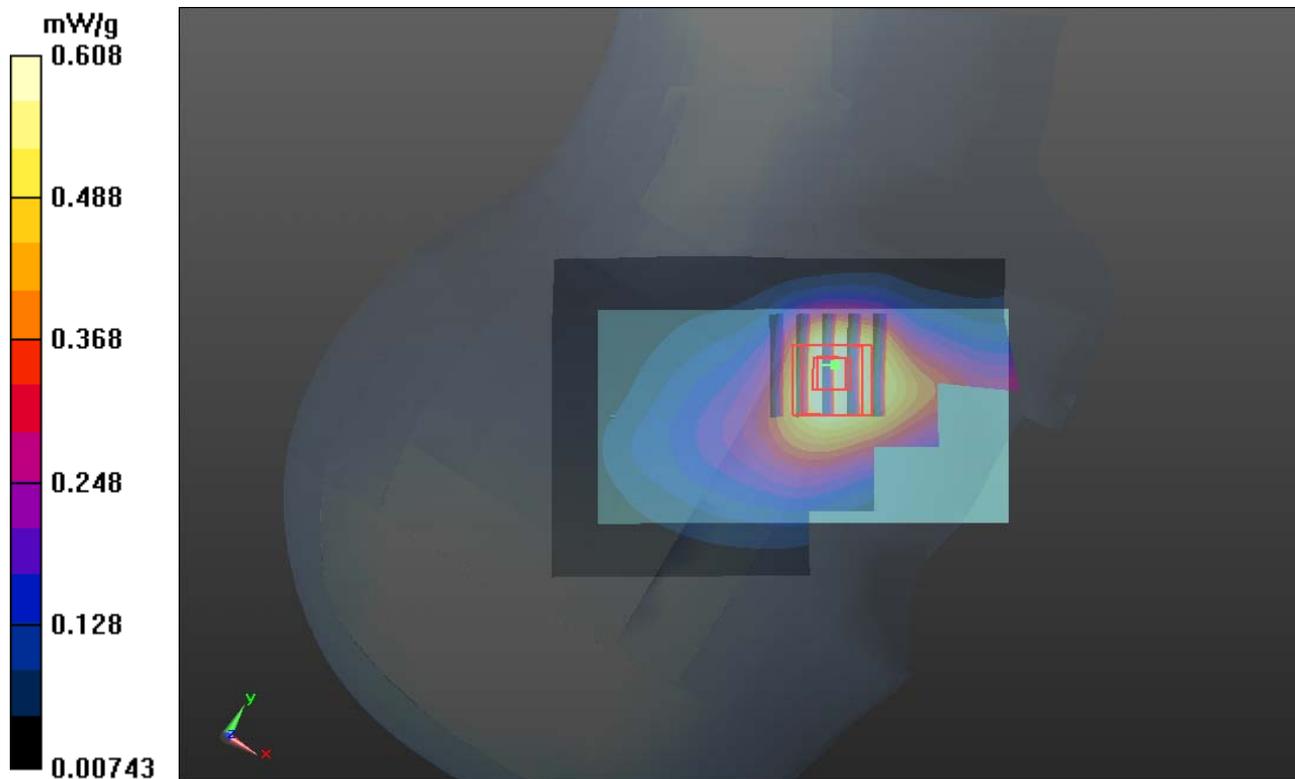

# 1g/10g Averaged SAR

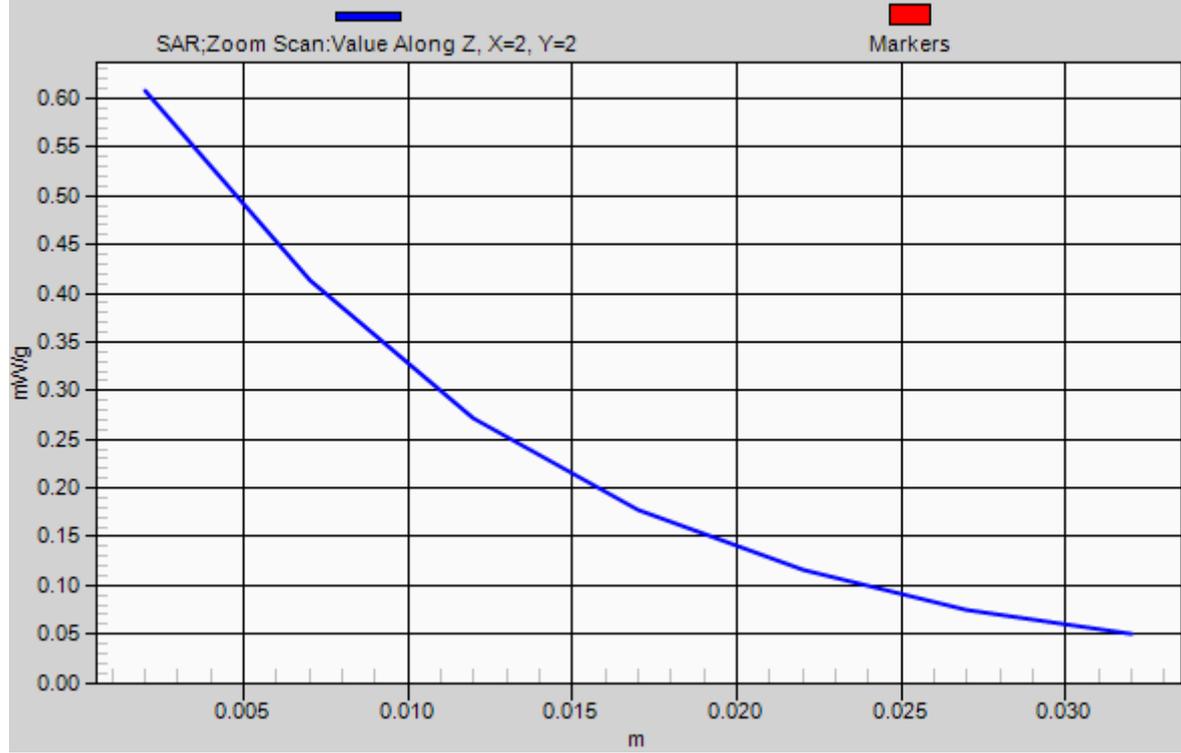

## P12 GSM1900\_GPRS10\_Right Cheek\_Ch661\_Sample2

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: H1900\_0430 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.373$  mho/m;  $\epsilon_r = 39.533$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.571 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.280 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.632 mW/g

**SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.275 mW/g**

Maximum value of SAR (measured) = 0.541 mW/g

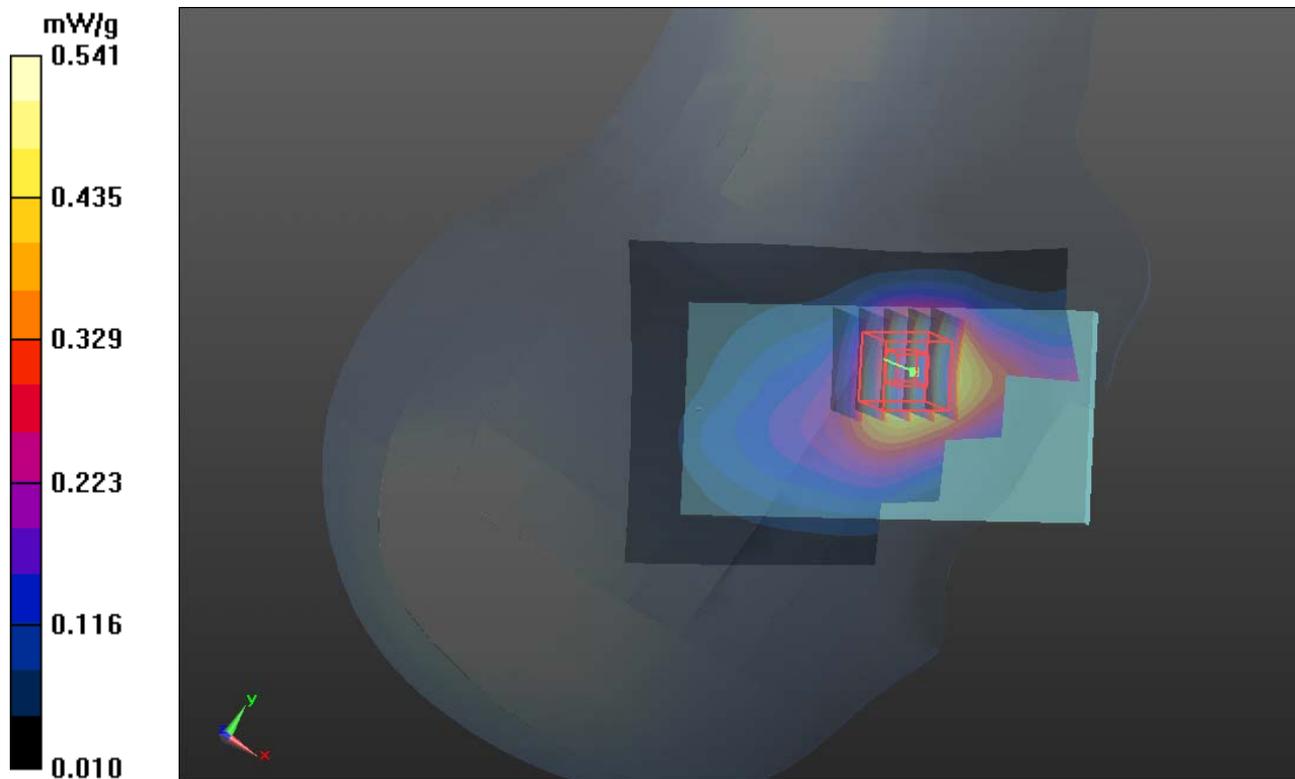

## P13 WCDMA V\_RMC12.2K\_Right Cheek\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835\_0430 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 41.858$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.353 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.759 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.383 mW/g

**SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.248 mW/g**

Maximum value of SAR (measured) = 0.355 mW/g

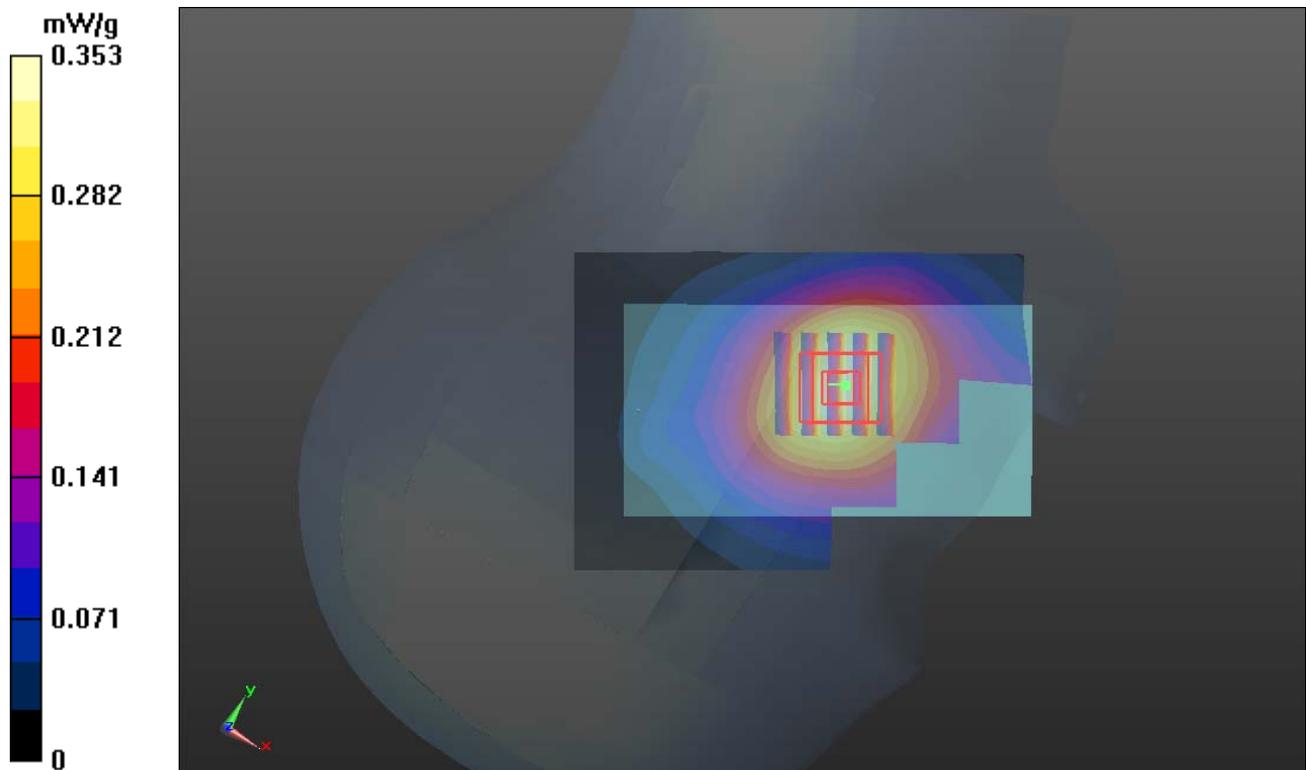

# 1g/10g Averaged SAR

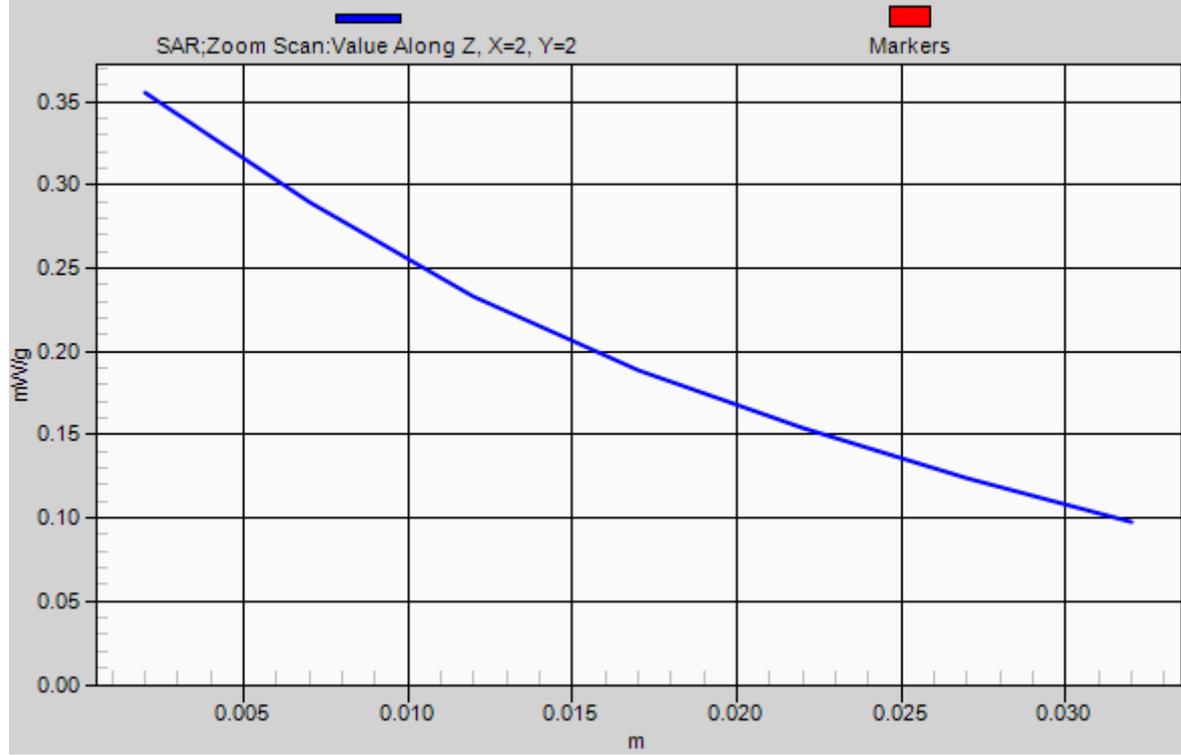

### P14 WCDMA V\_RMC12.2K\_Right Tilted\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835\_0430 Medium parameters used:  $f = 847 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 41.858$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.240 mW/g

**Ch4233/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.339 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.260 mW/g

**SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.160 mW/g**

Maximum value of SAR (measured) = 0.236 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.339 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.208 mW/g

**SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.098 mW/g**

Maximum value of SAR (measured) = 0.183 mW/g

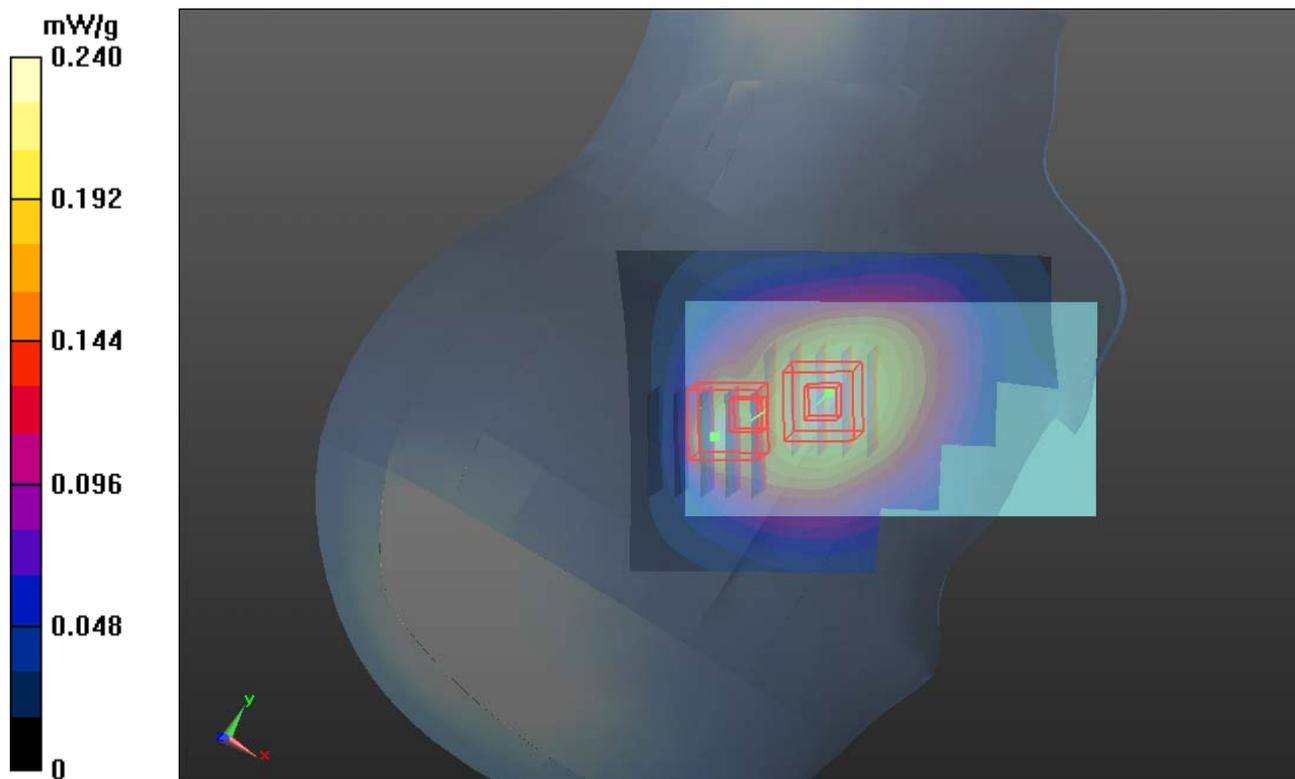

### P15 WCDMA V\_RMC12.2K\_Left Cheek\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835\_0430 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 41.858$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.341 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.574 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.365 mW/g

**SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.224 mW/g**

Maximum value of SAR (measured) = 0.335 mW/g

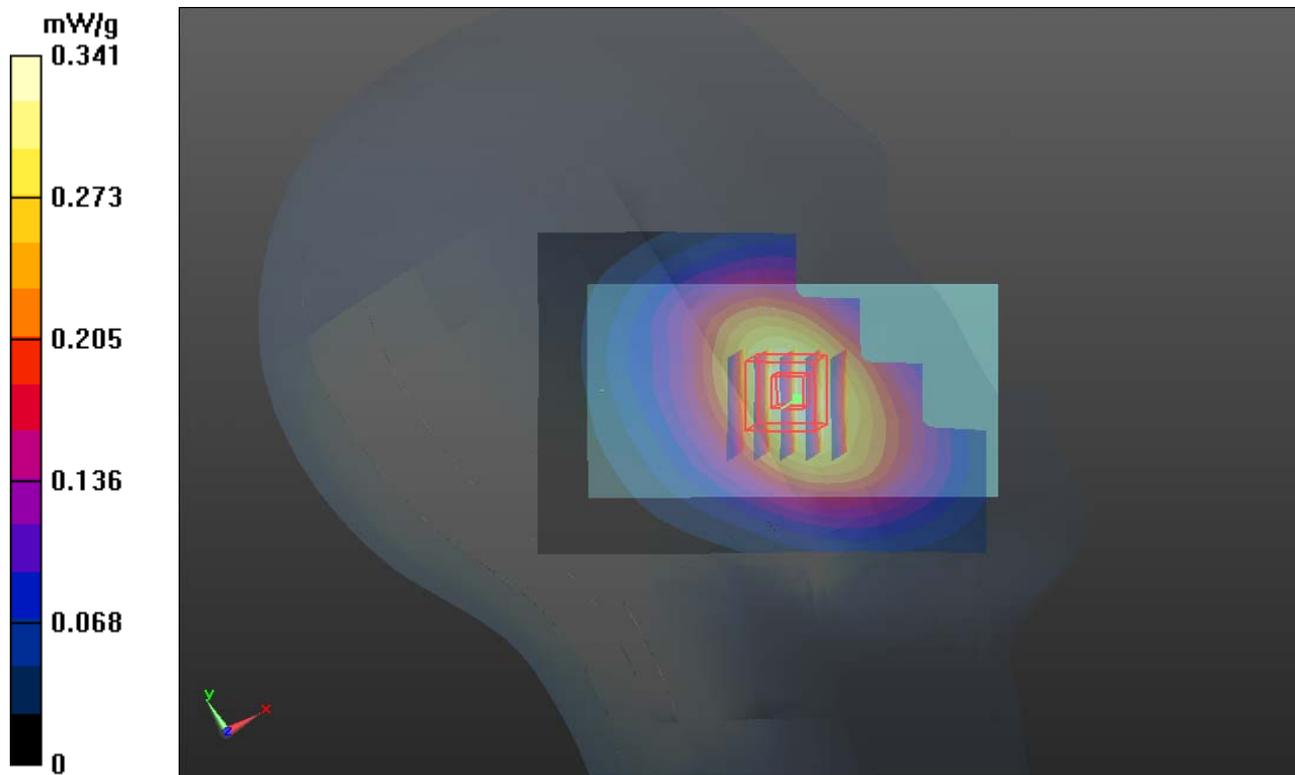

## P16 WCDMA V\_RMC12.2K\_Left Tilted\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835\_0430 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 41.858$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.363 mW/g

**Ch4233/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.864 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.281 mW/g

**SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.168 mW/g**

Maximum value of SAR (measured) = 0.256 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.864 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.268 mW/g

**SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.140 mW/g**

Maximum value of SAR (measured) = 0.245 mW/g

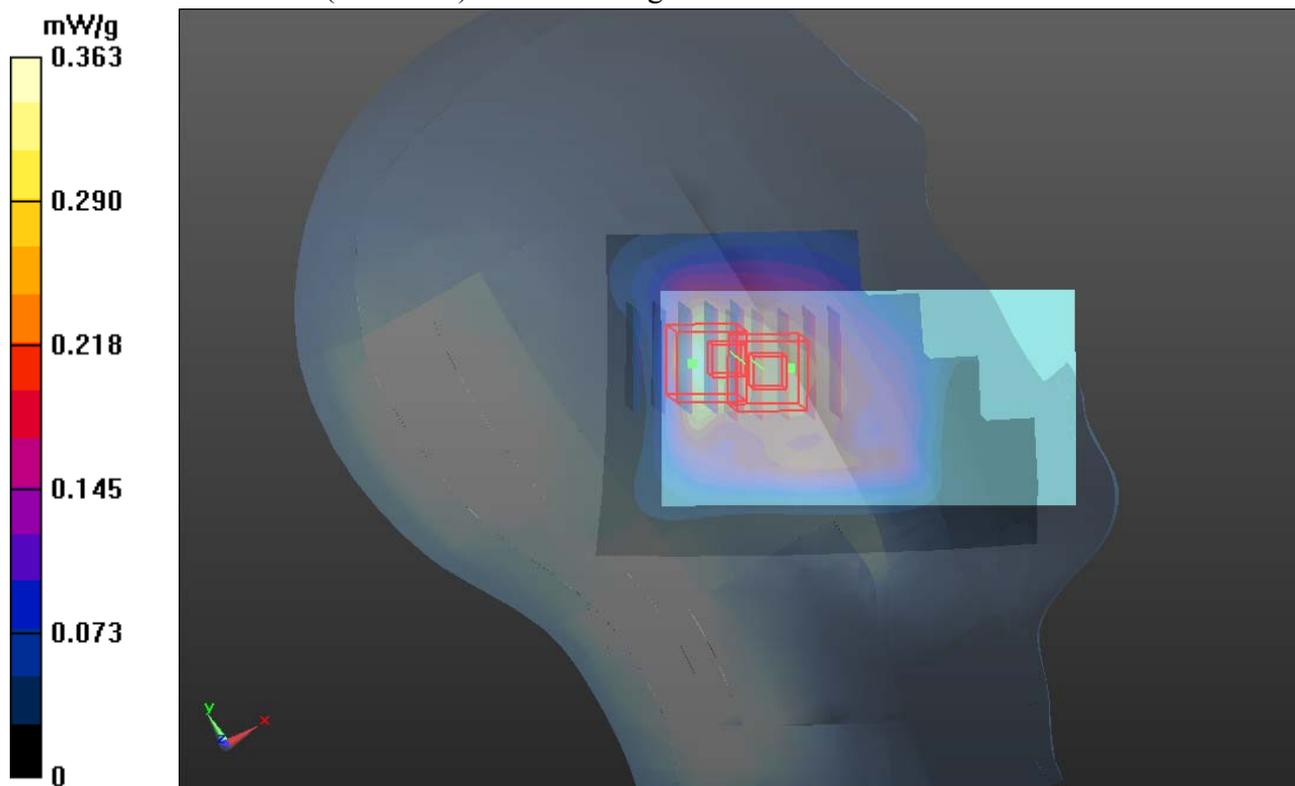

## P17 WCDMA V\_RMC12.2K\_Right Cheek\_Ch4233\_Sample2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835\_0430 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 41.858$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.14, 10.14, 10.14); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.358 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.524 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.386 mW/g

**SAR(1 g) = 0.310 mW/g; SAR(10 g) = 0.236 mW/g**

Maximum value of SAR (measured) = 0.355 mW/g

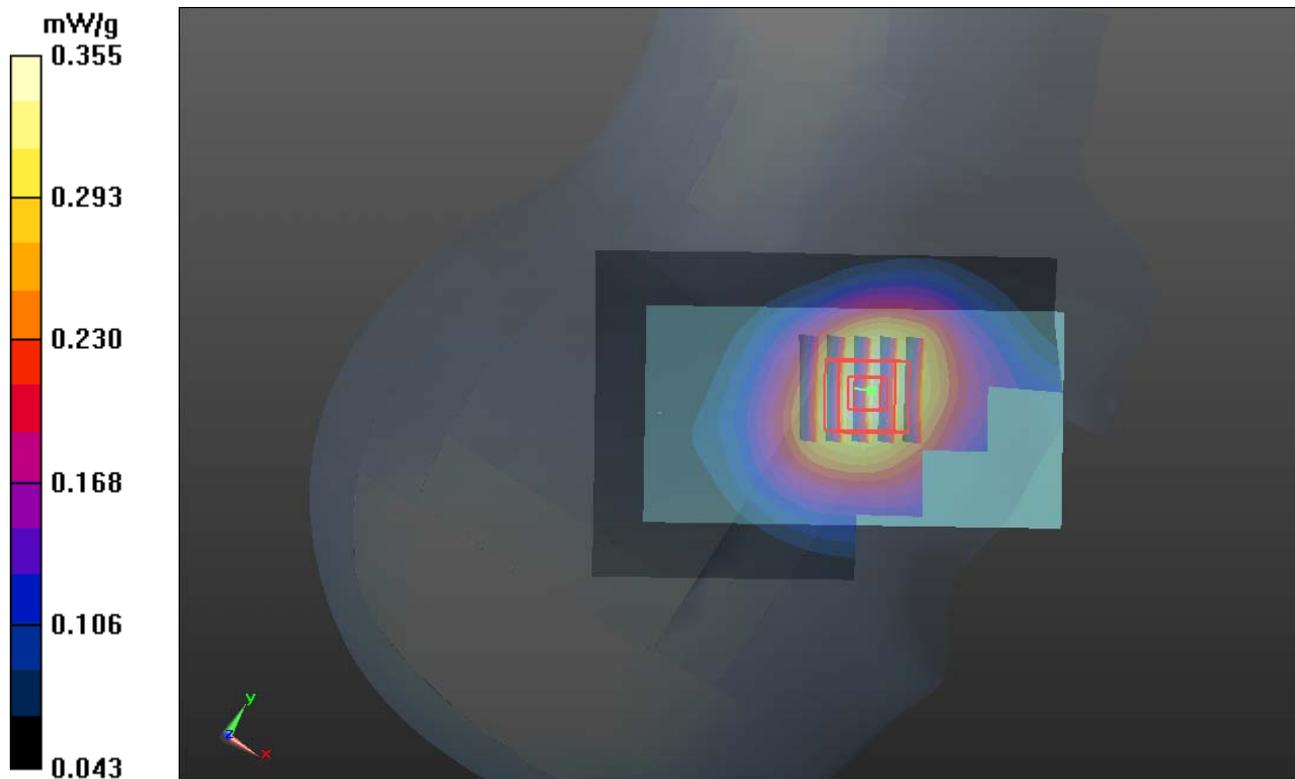

## P18 WCDMA II\_RMC12.2K\_Right Cheek\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: H1900\_0430 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.399$  mho/m;  $\epsilon_r = 39.498$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.935 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.391 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.975 mW/g

**SAR(1 g) = 0.654 mW/g; SAR(10 g) = 0.410 mW/g**

Maximum value of SAR (measured) = 0.819 mW/g

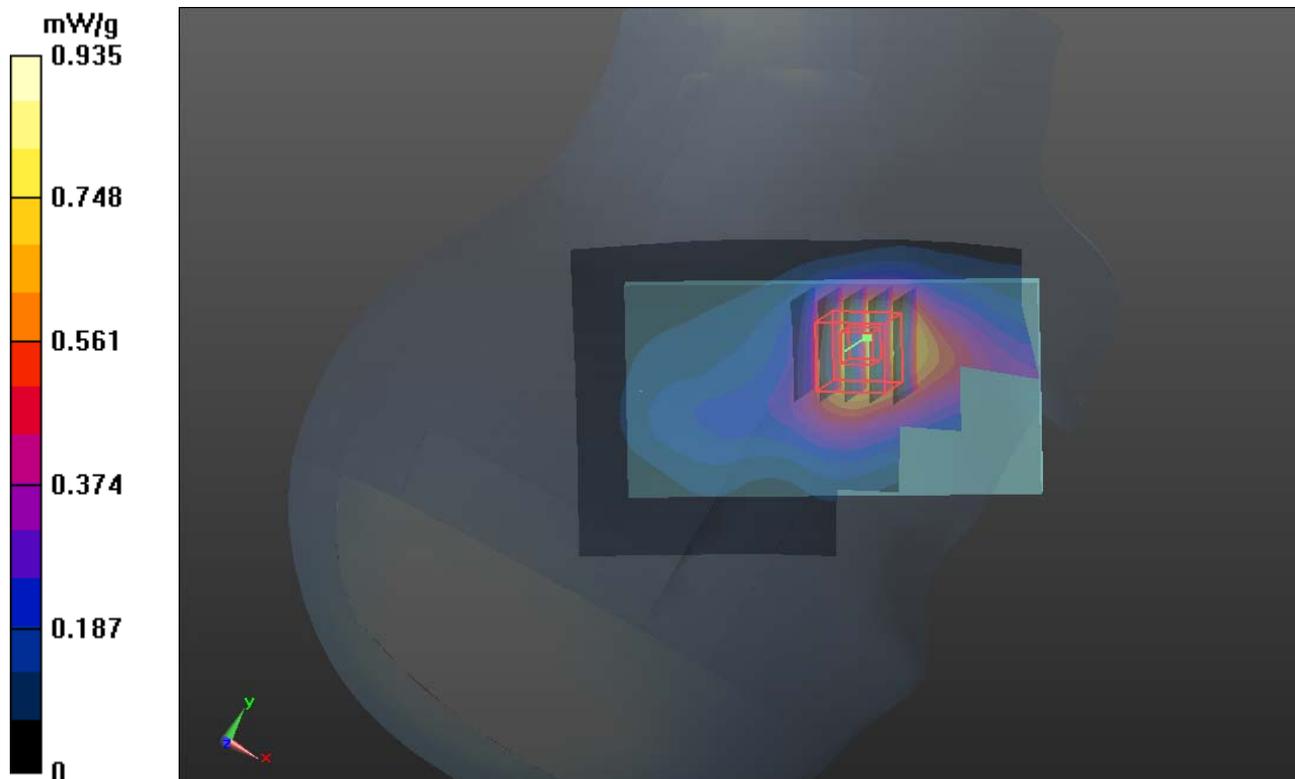

# 1g/10g Averaged SAR

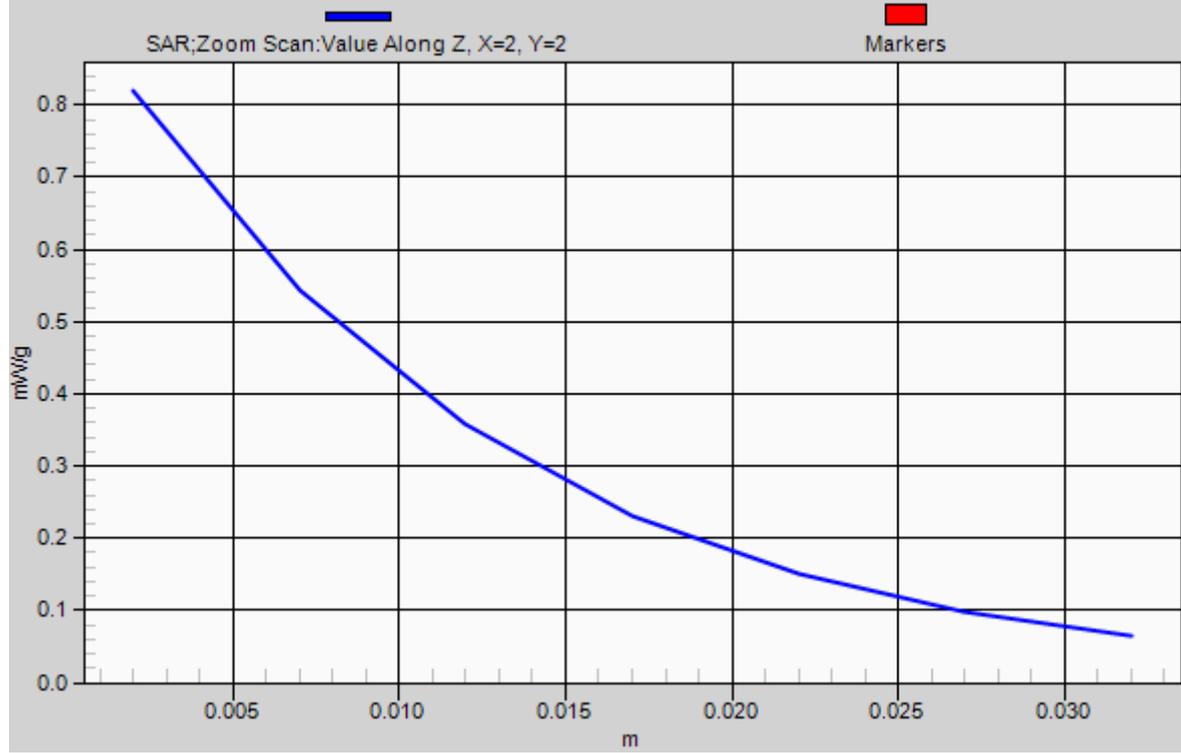

### P19 WCDMA II\_RMC12.2K\_Right Tilted\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: H1900\_0430 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.399$  mho/m;  $\epsilon_r = 39.498$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.350 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.461 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.375 mW/g

**SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.133 mW/g**

Maximum value of SAR (measured) = 0.290 mW/g

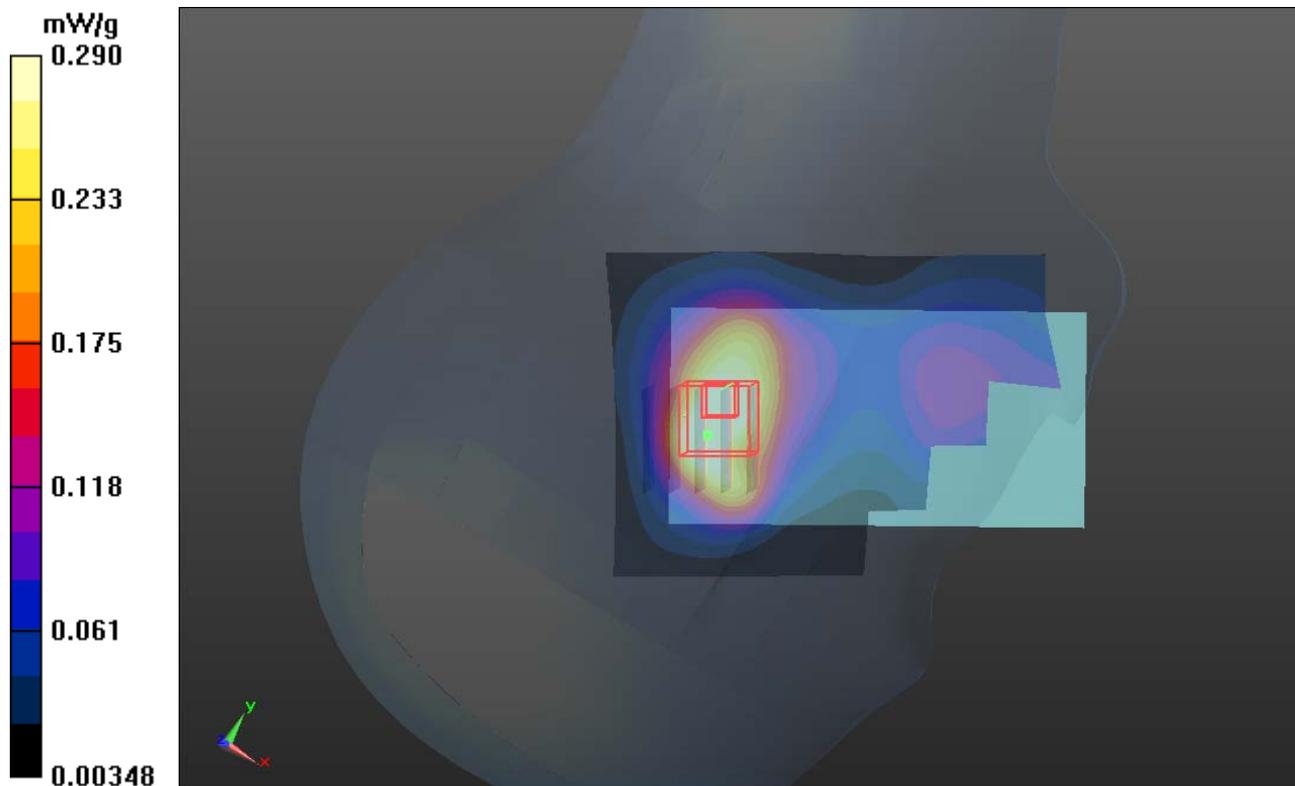

## P20 WCDMA II\_RMC12.2K\_Left Cheek\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: H1900\_0430 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.399$  mho/m;  $\epsilon_r = 39.498$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.748 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.357 V/m; Power Drift = 0.154 dB

Peak SAR (extrapolated) = 0.797 mW/g

**SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.338 mW/g**

Maximum value of SAR (measured) = 0.671 mW/g

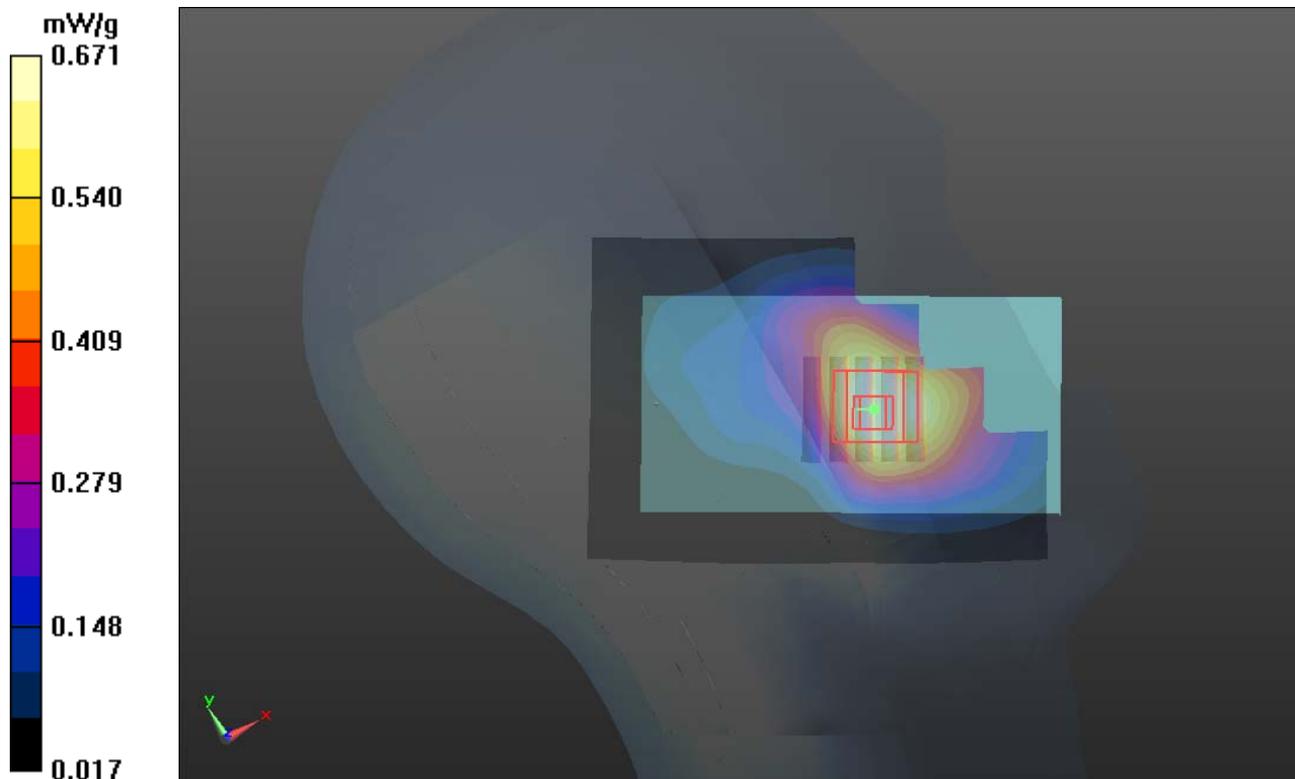

## P21 WCDMA II\_RMC12.2K\_Left Tilted\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: H1900\_0430 Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.399 \text{ mho/m}$ ;  $\epsilon_r = 39.498$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (51x81x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.512 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.060 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.646 mW/g

**SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.189 mW/g**

Maximum value of SAR (measured) = 0.460 mW/g

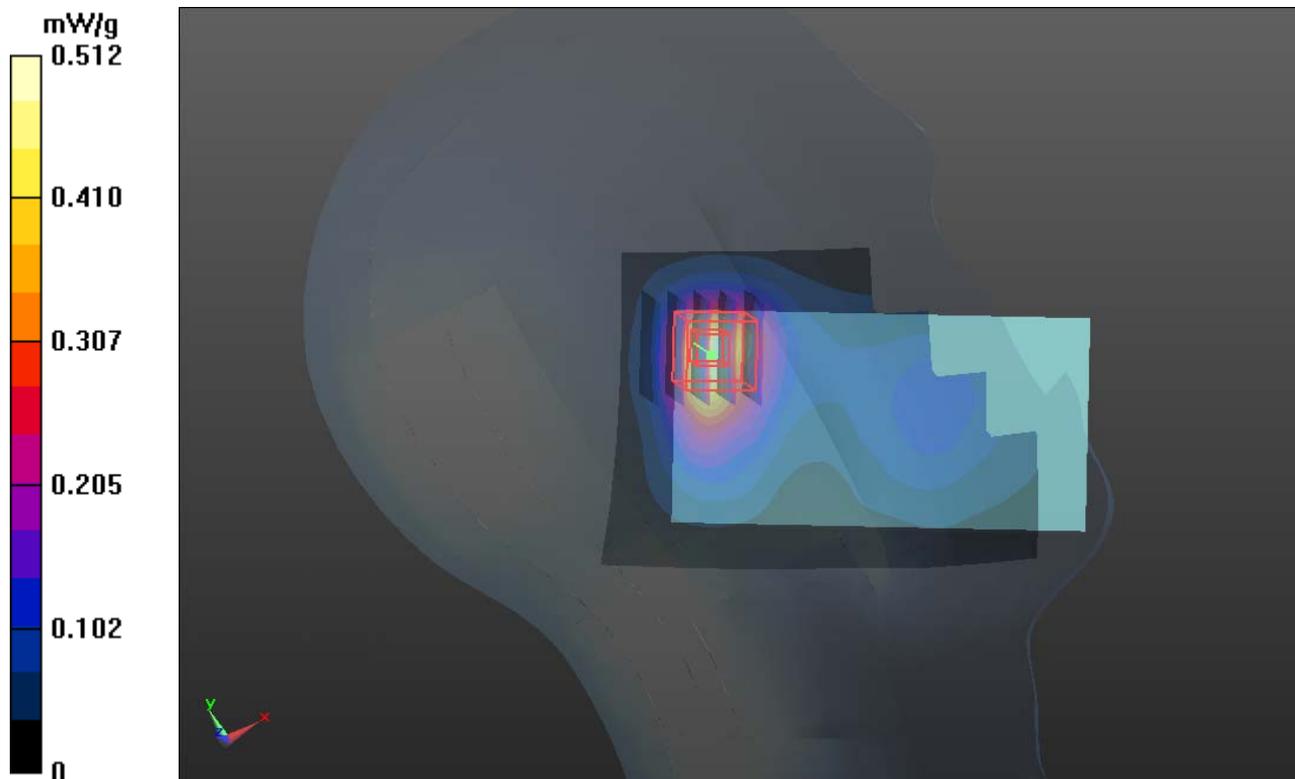

## P22 WCDMA II\_RMC12.2K\_Right Cheek\_Ch9538\_Sample2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: H1900\_0430 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.399$  mho/m;  $\epsilon_r = 39.498$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.83, 8.83, 8.83); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.815 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.326 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.896 mW/g

**SAR(1 g) = 0.595 mW/g; SAR(10 g) = 0.371 mW/g**

Maximum value of SAR (measured) = 0.741 mW/g

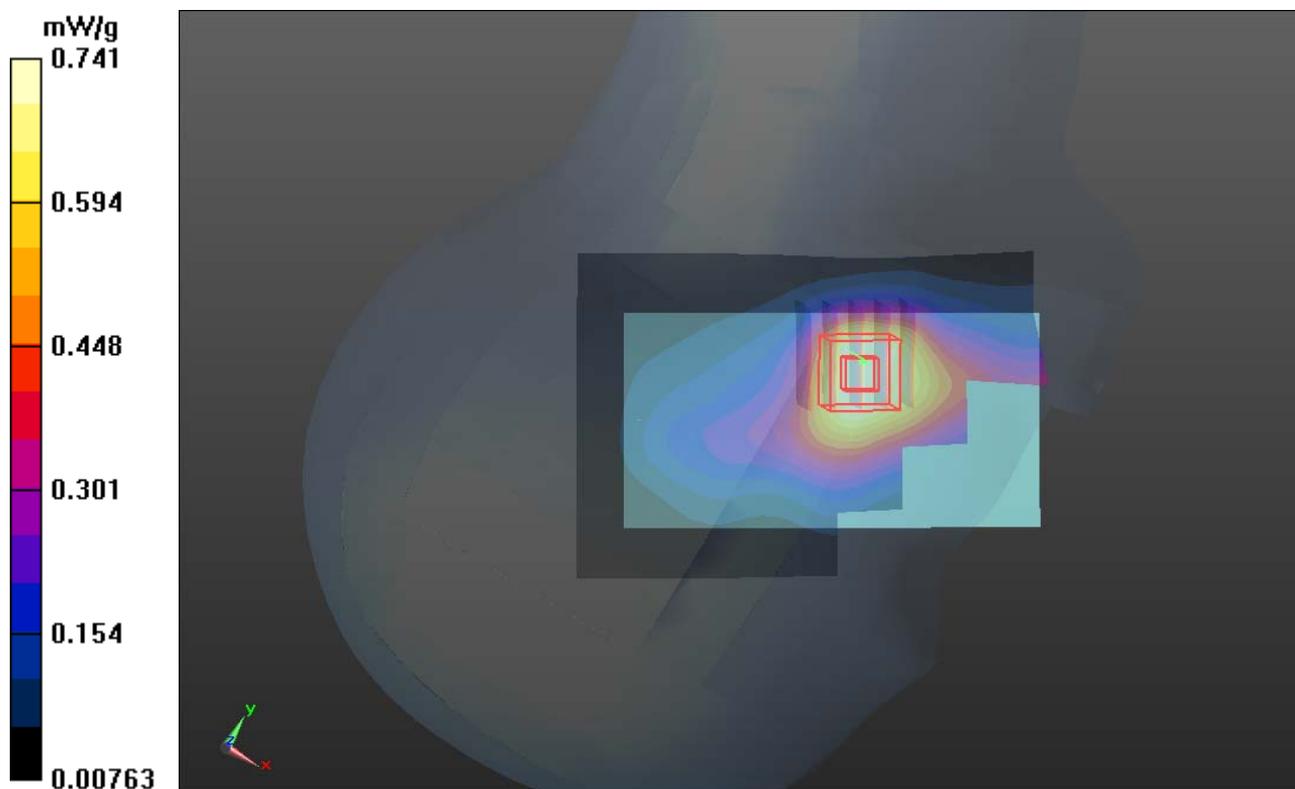

### P81 802.11b\_Right Cheek\_Ch11\_Sample1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450\_0504 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.83$  mho/m;  $\epsilon_r = 37.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.9 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.213 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.274 W/kg

**SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.074 mW/g**

Maximum value of SAR (measured) = 0.207 mW/g

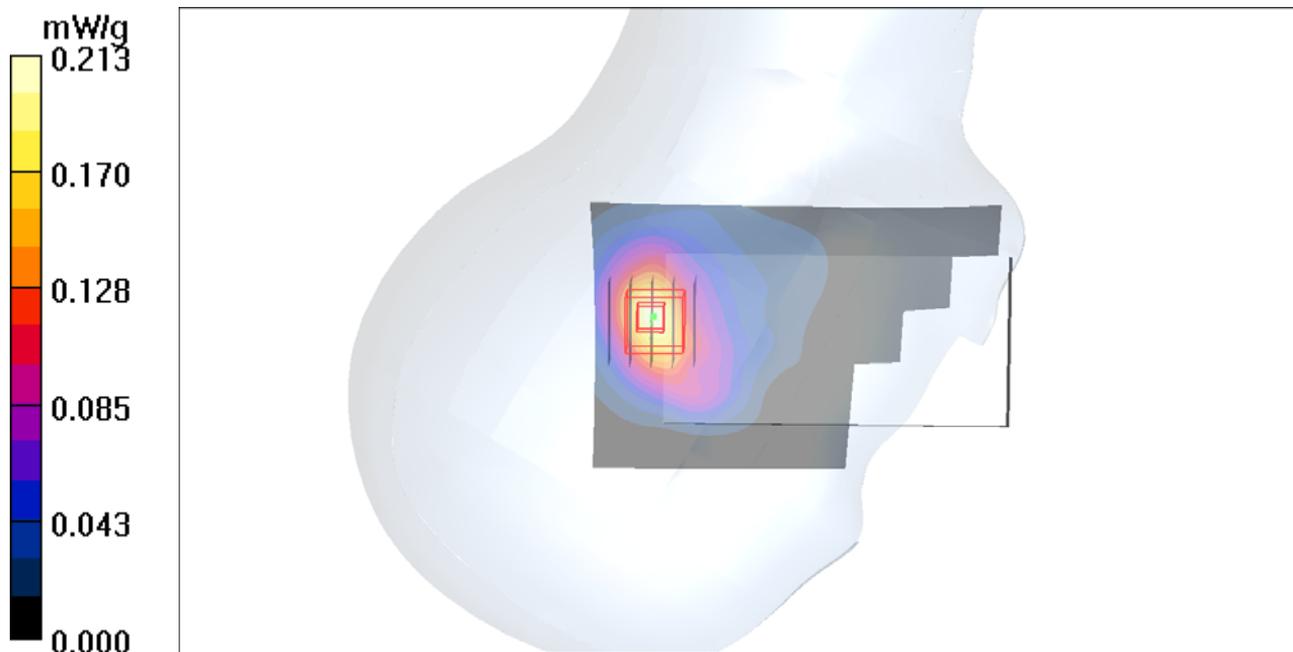

## P82 802.11b\_Right Tilted\_Ch11\_Sample1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450\_0504 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.83$  mho/m;  $\epsilon_r = 37.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.9 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.258 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.367 W/kg

**SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.090 mW/g**

Maximum value of SAR (measured) = 0.271 mW/g

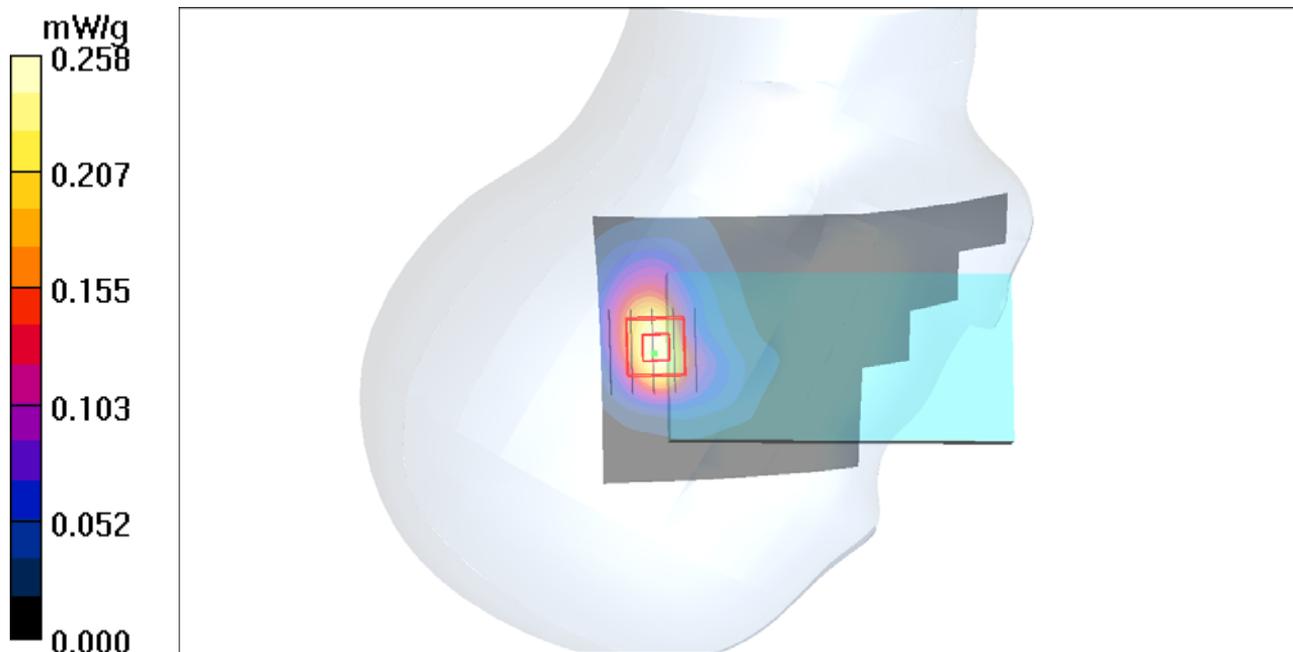

### P83 802.11b\_Left Cheek\_Ch11\_Sample1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450\_0504 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.83$  mho/m;  $\epsilon_r = 37.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.9 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.243 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.71 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.300 W/kg

**SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.084 mW/g**

Maximum value of SAR (measured) = 0.221 mW/g

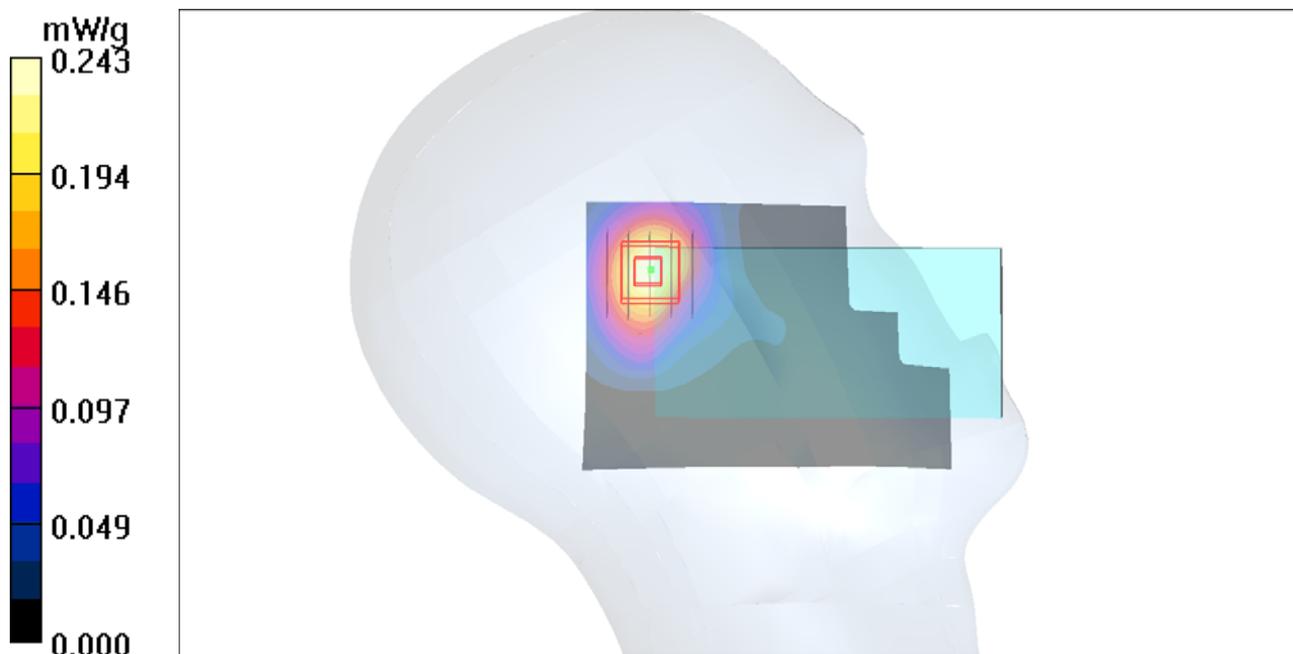

## P84 802.11b\_Left Tilted\_Ch11\_Sample1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450\_0504 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.83$  mho/m;  $\epsilon_r = 37.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.9 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.261 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 0.367 W/kg


**SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.091 mW/g**

Maximum value of SAR (measured) = 0.262 mW/g

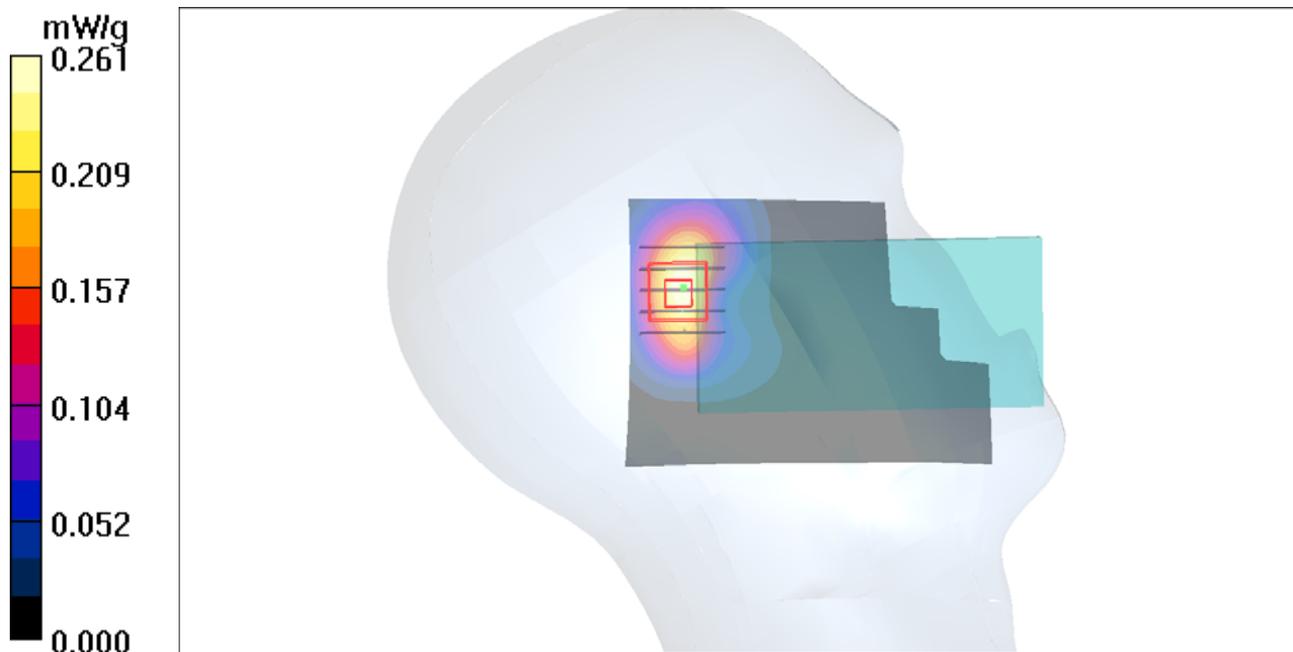

# 1g/10g Averaged SAR

SAR; Zoom Scan: Value Along Z, X=1, Y=2

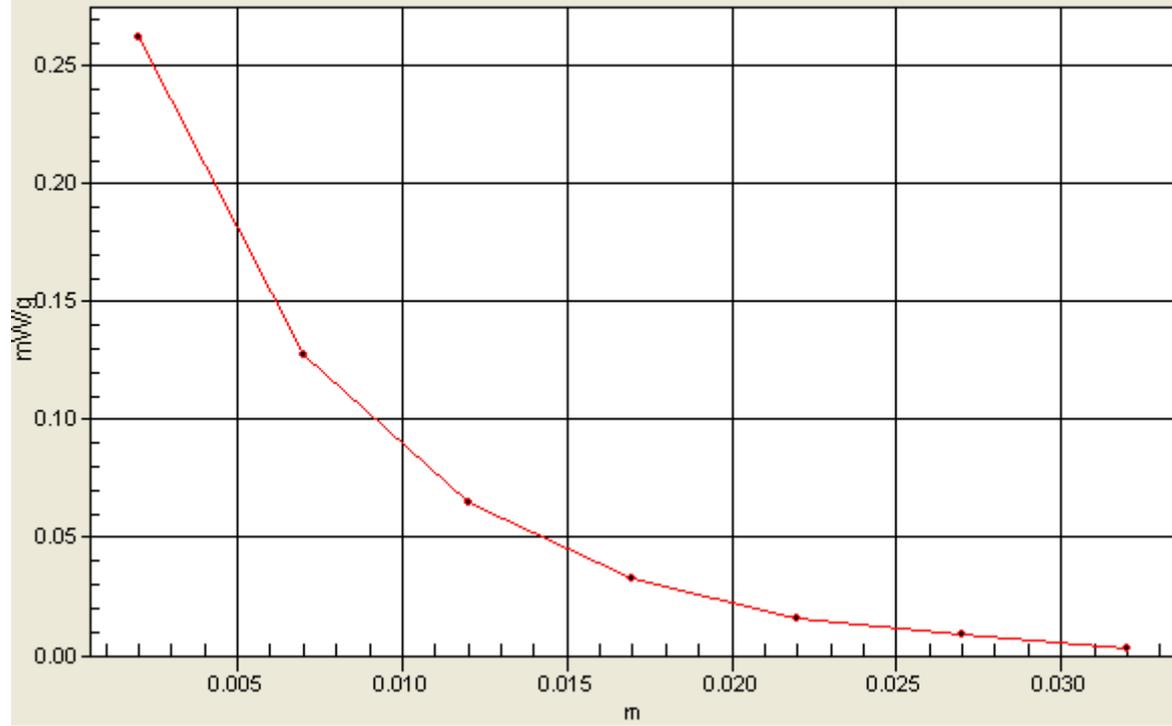

## P85 802.11b\_Left Tilted\_Ch11\_Sample2

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450\_0504 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.83$  mho/m;  $\epsilon_r = 37.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.9 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.88, 7.88, 7.88); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.243 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.160 dB

Peak SAR (extrapolated) = 0.320 W/kg

**SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.085 mW/g**

Maximum value of SAR (measured) = 0.239 mW/g

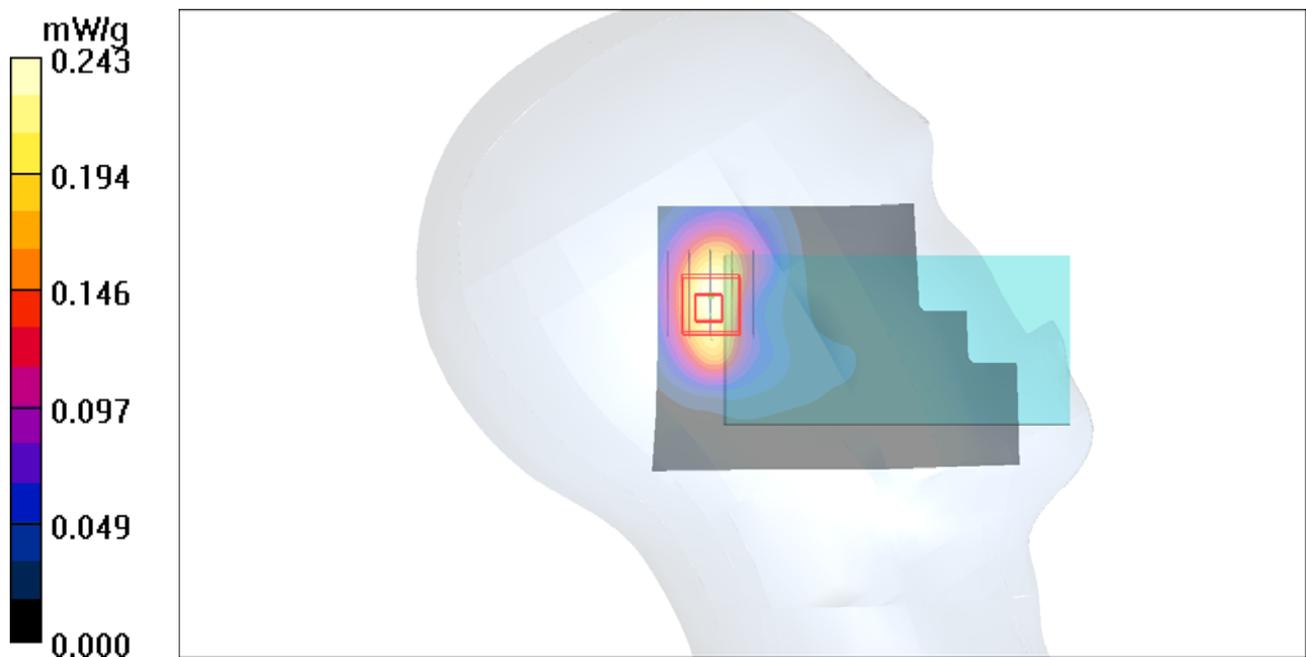

### P23 GSM850\_GPRS11\_Front Face\_1cm\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.613 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.442 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.670 mW/g

**SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.399 mW/g**

Maximum value of SAR (measured) = 0.601 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.442 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.686 mW/g

**SAR(1 g) = 0.518 mW/g; SAR(10 g) = 0.385 mW/g**

Maximum value of SAR (measured) = 0.612 mW/g

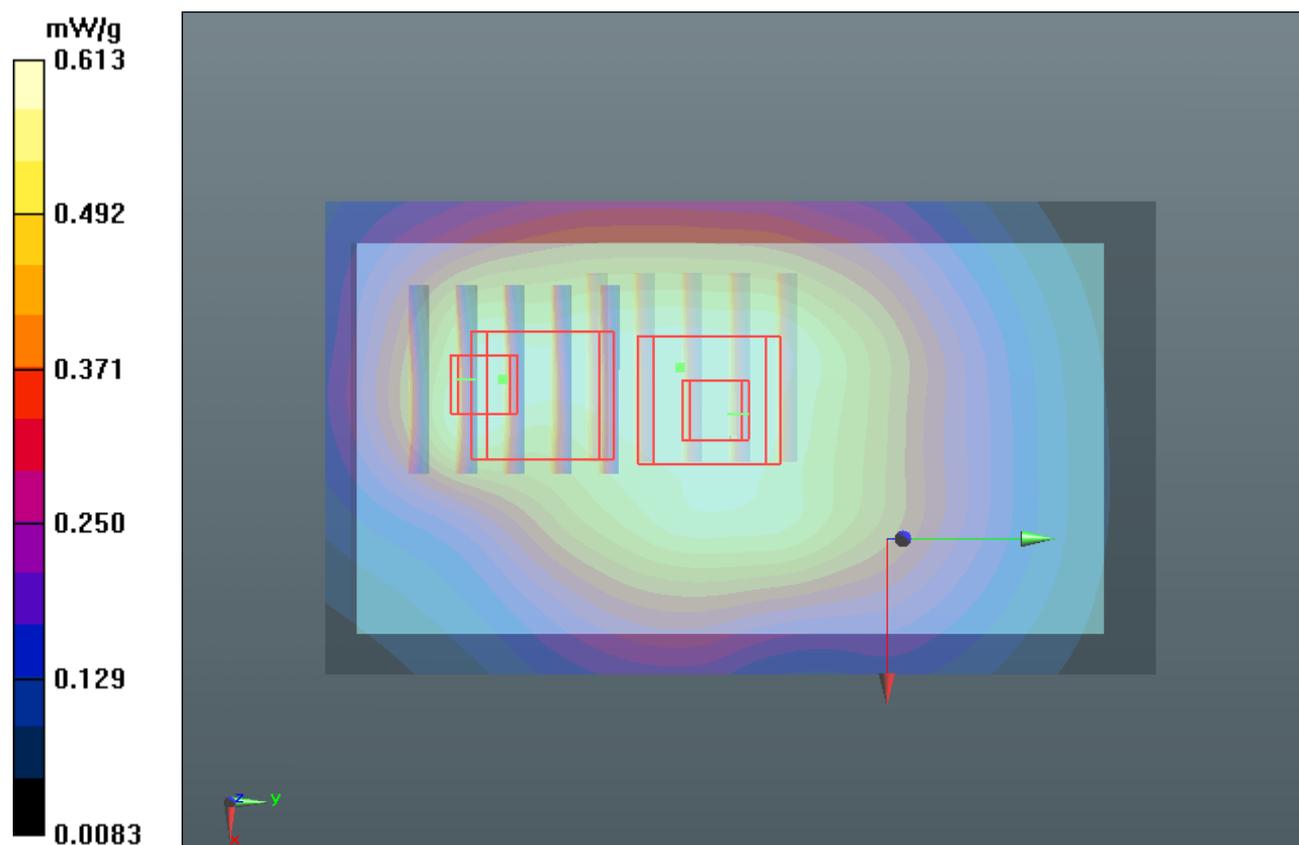

## P24 GSM850\_GPRS11\_Rear Face\_1cm\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.01 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.788 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.106 mW/g

**SAR(1 g) = 0.855 mW/g; SAR(10 g) = 0.649 mW/g**

Maximum value of SAR (measured) = 0.985 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.788 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.219 mW/g

**SAR(1 g) = 0.756 mW/g; SAR(10 g) = 0.512 mW/g**

Maximum value of SAR (measured) = 0.982 mW/g

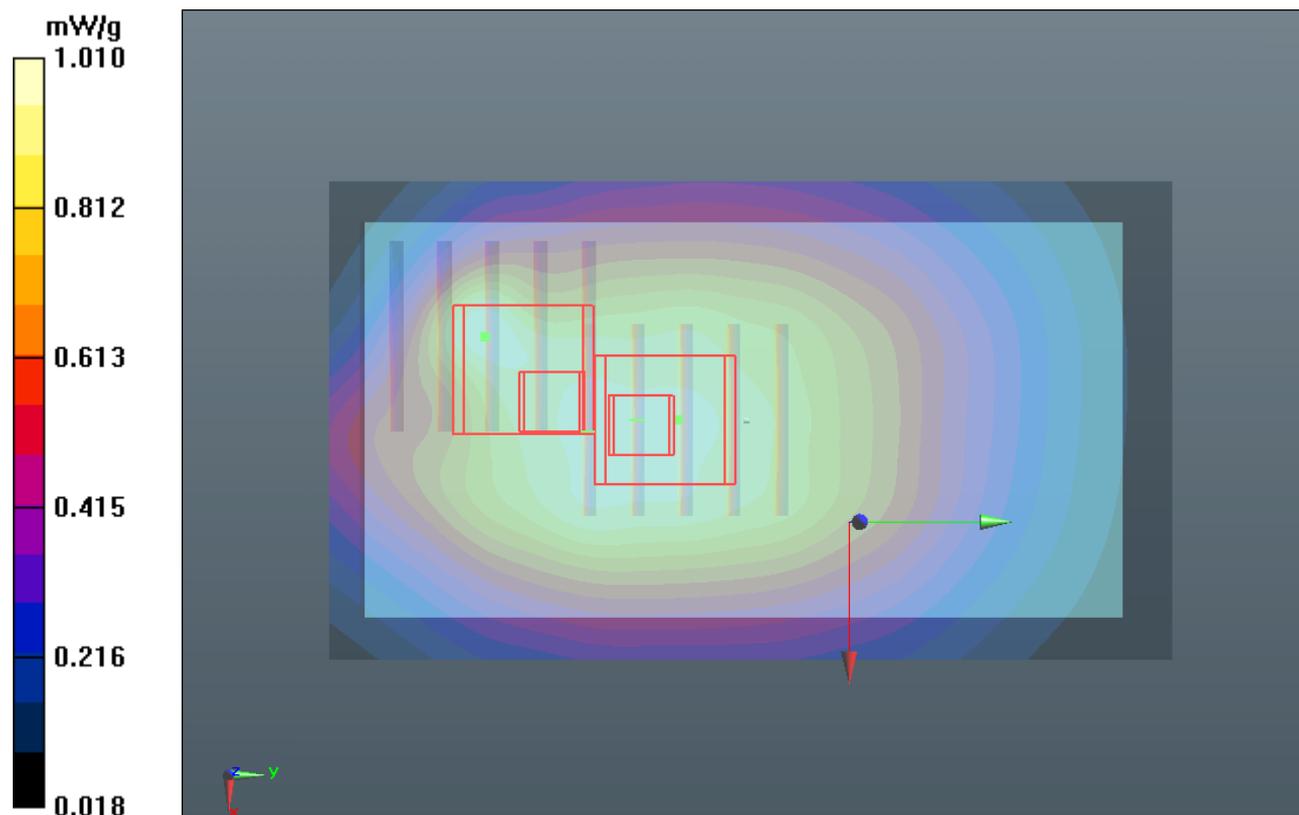

# 1g/10g Averaged SAR

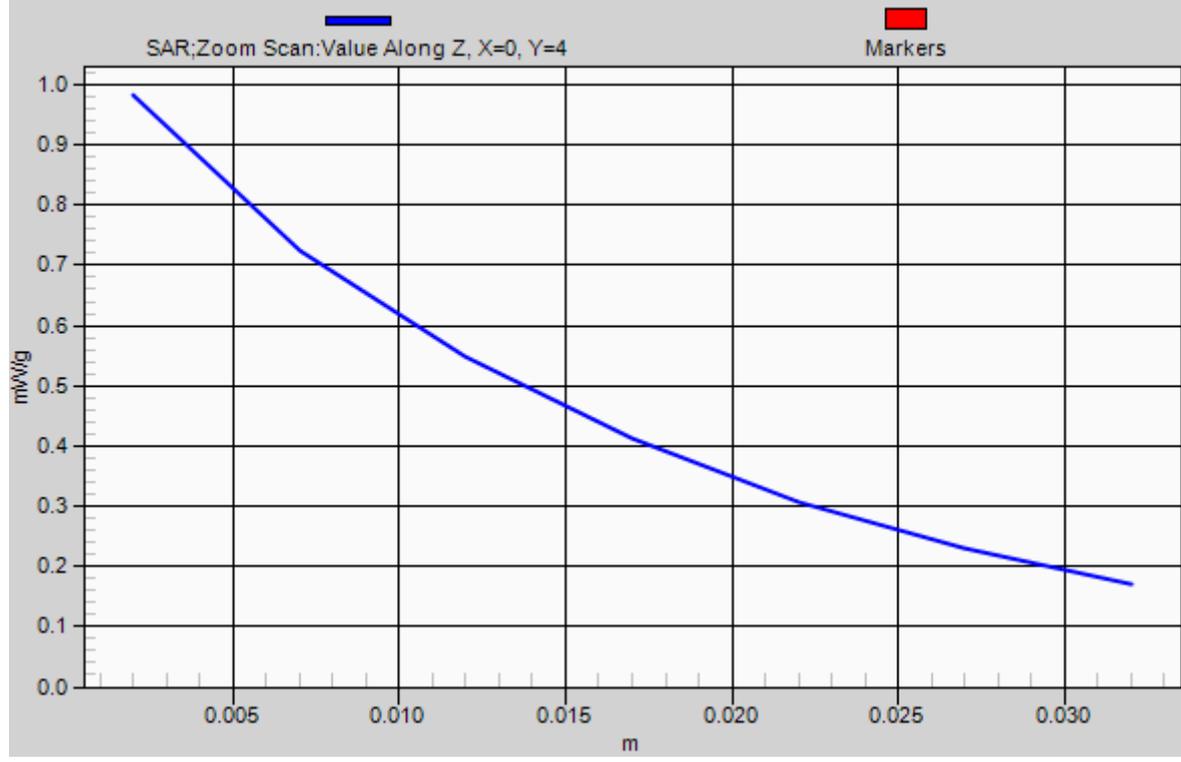

### P25 GSM850\_GPRS11\_Left Side\_1cm\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.830 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.032 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.964 mW/g

**SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.453 mW/g**

Maximum value of SAR (measured) = 0.822 mW/g

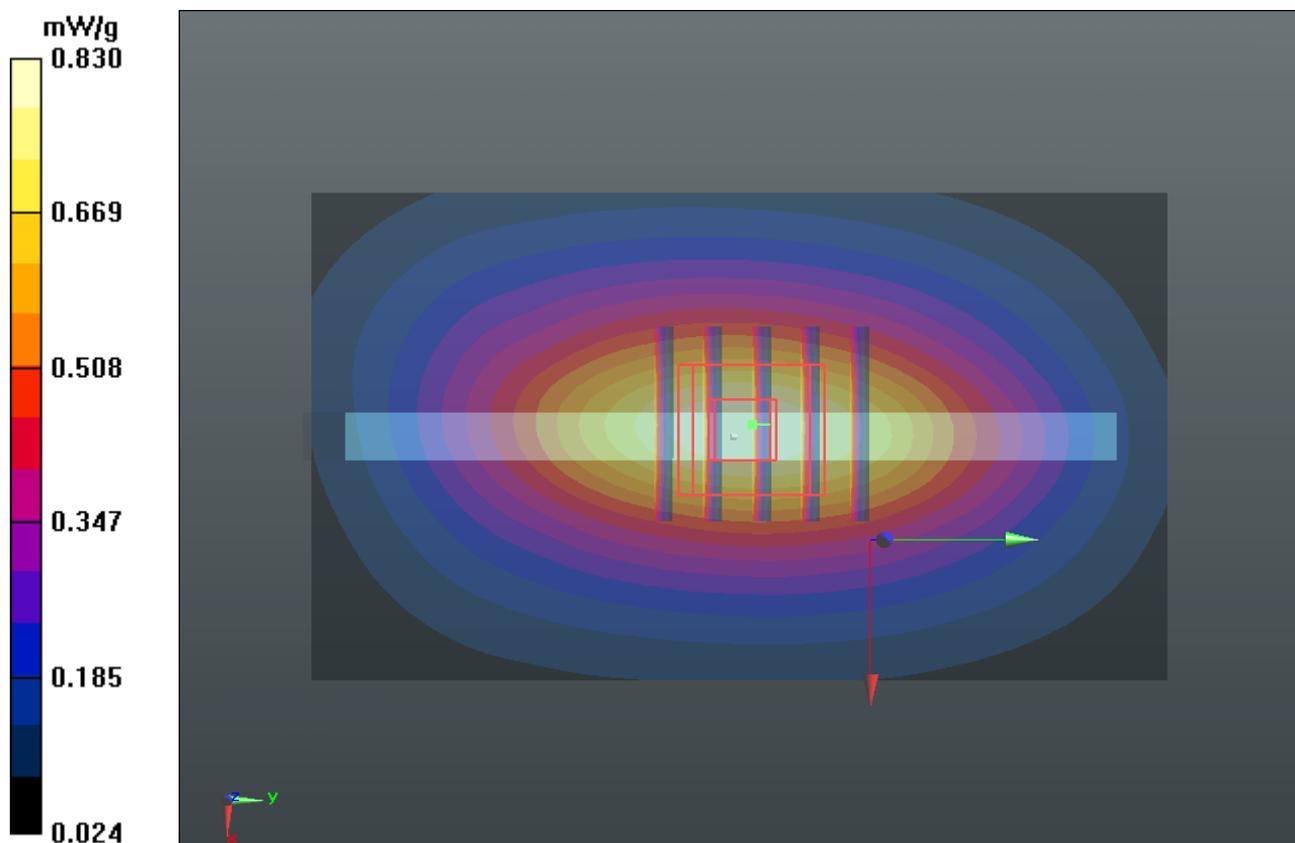

## P26 GSM850\_GPRS11\_Right Side\_1cm\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.802 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.436 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.943 mW/g

**SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.448 mW/g**

Maximum value of SAR (measured) = 0.811 mW/g

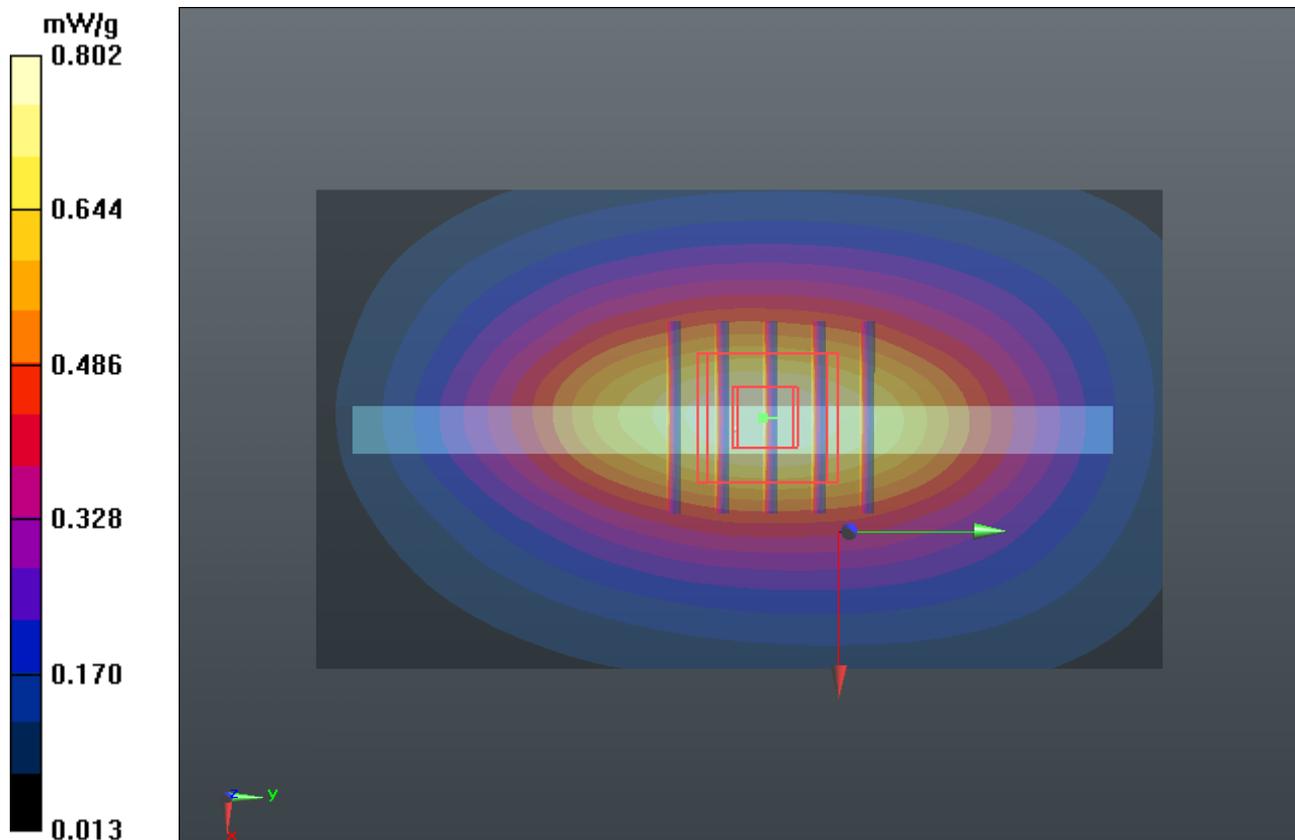

### P28 GSM850\_GPRS11\_Bottom Side\_1cm\_Ch251\_Sample1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x61x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.187 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.496 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.300 mW/g

**SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.088 mW/g**

Maximum value of SAR (measured) = 0.212 mW/g

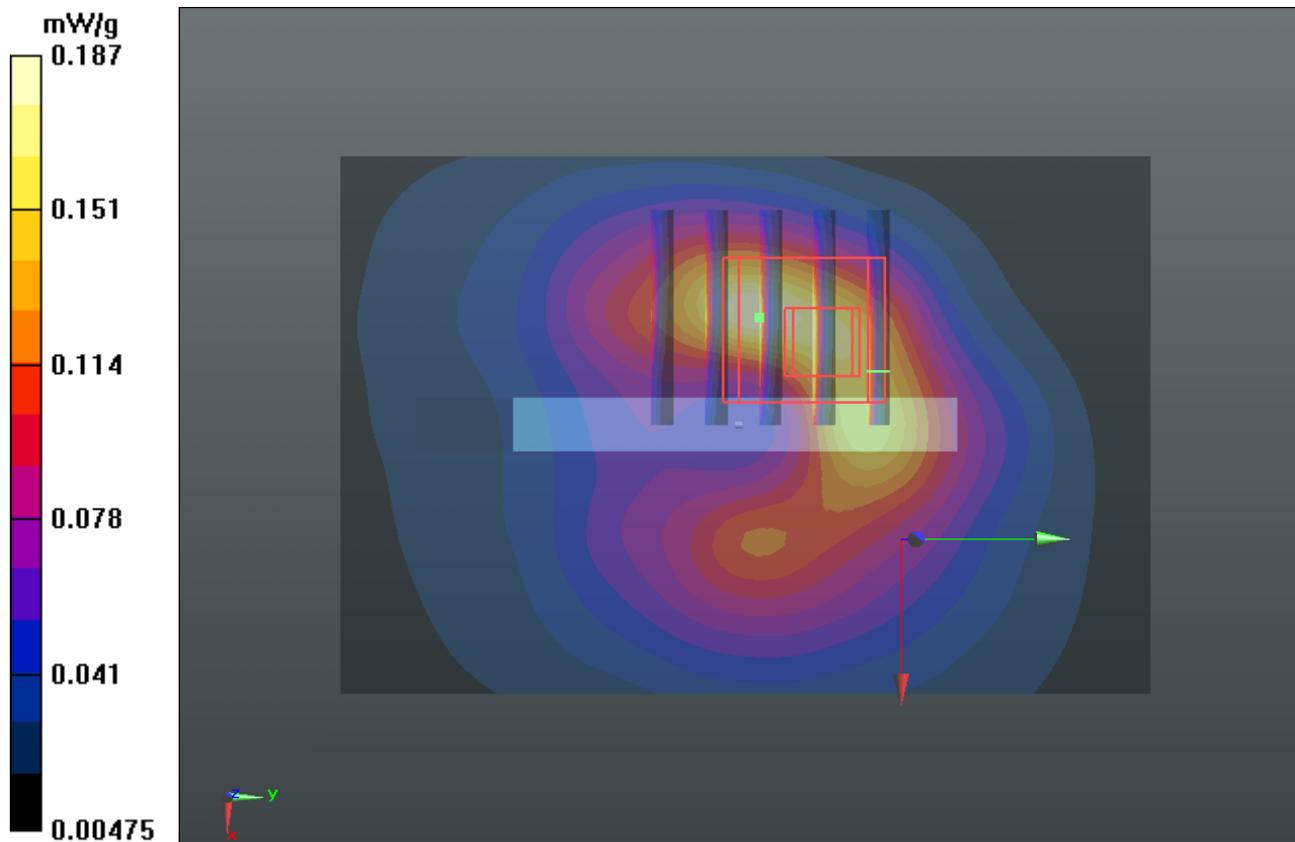

## P79 GSM850\_GPRS11\_Rear Face\_1cm\_Ch128\_Sample1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 824.2 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.982$  mho/m;  $\epsilon_r = 55.725$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch128/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.724 mW/g

**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.057 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.827 mW/g

**SAR(1 g) = 0.633 mW/g; SAR(10 g) = 0.467 mW/g**

Maximum value of SAR (measured) = 0.730 mW/g


**Ch128/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.057 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.802 mW/g

**SAR(1 g) = 0.549 mW/g; SAR(10 g) = 0.356 mW/g**

Maximum value of SAR (measured) = 0.715 mW/g

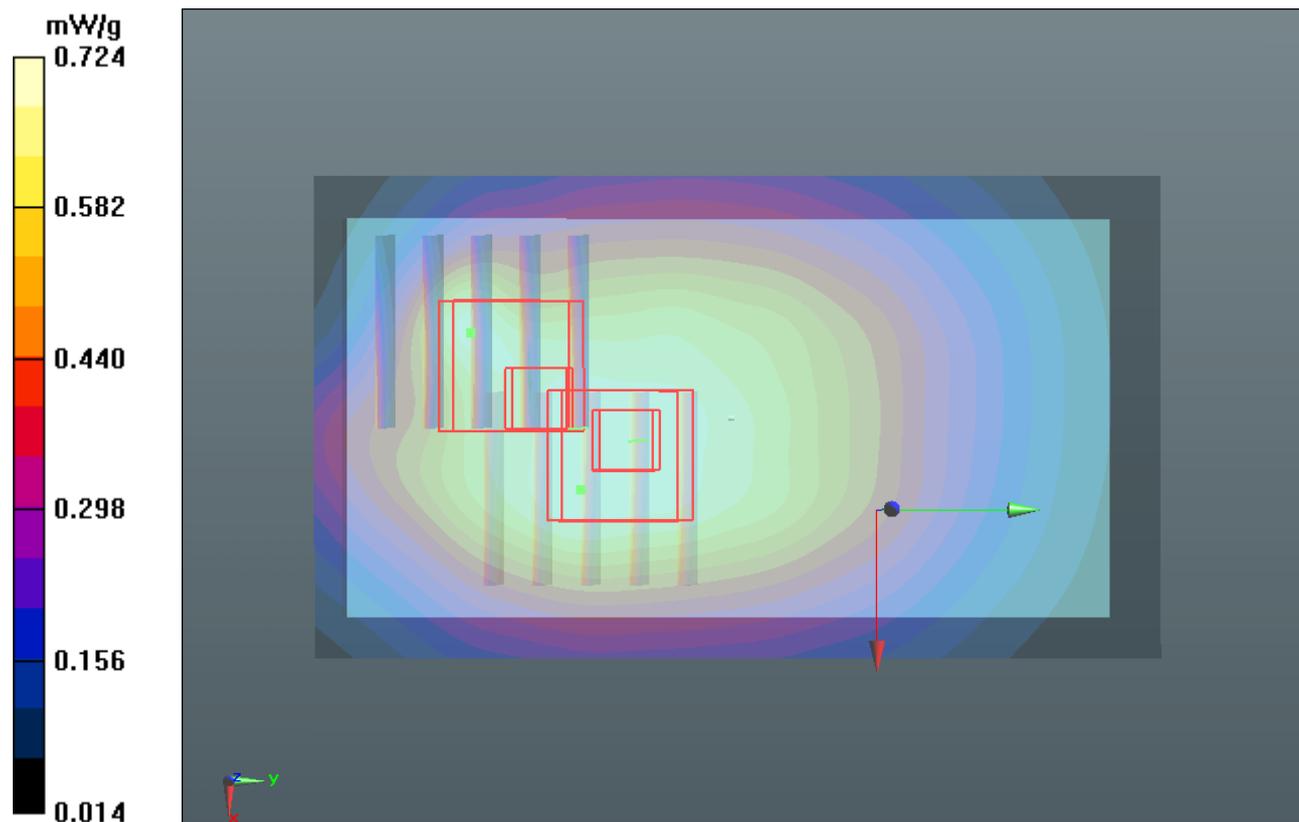

### P80 GSM850\_GPRS11\_Rear Face\_1cm\_Ch189\_Sample1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 836.4 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.993$  mho/m;  $\epsilon_r = 55.599$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch189/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.877 mW/g


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.715 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.004 mW/g

**SAR(1 g) = 0.776 mW/g; SAR(10 g) = 0.585 mW/g**

Maximum value of SAR (measured) = 0.901 mW/g

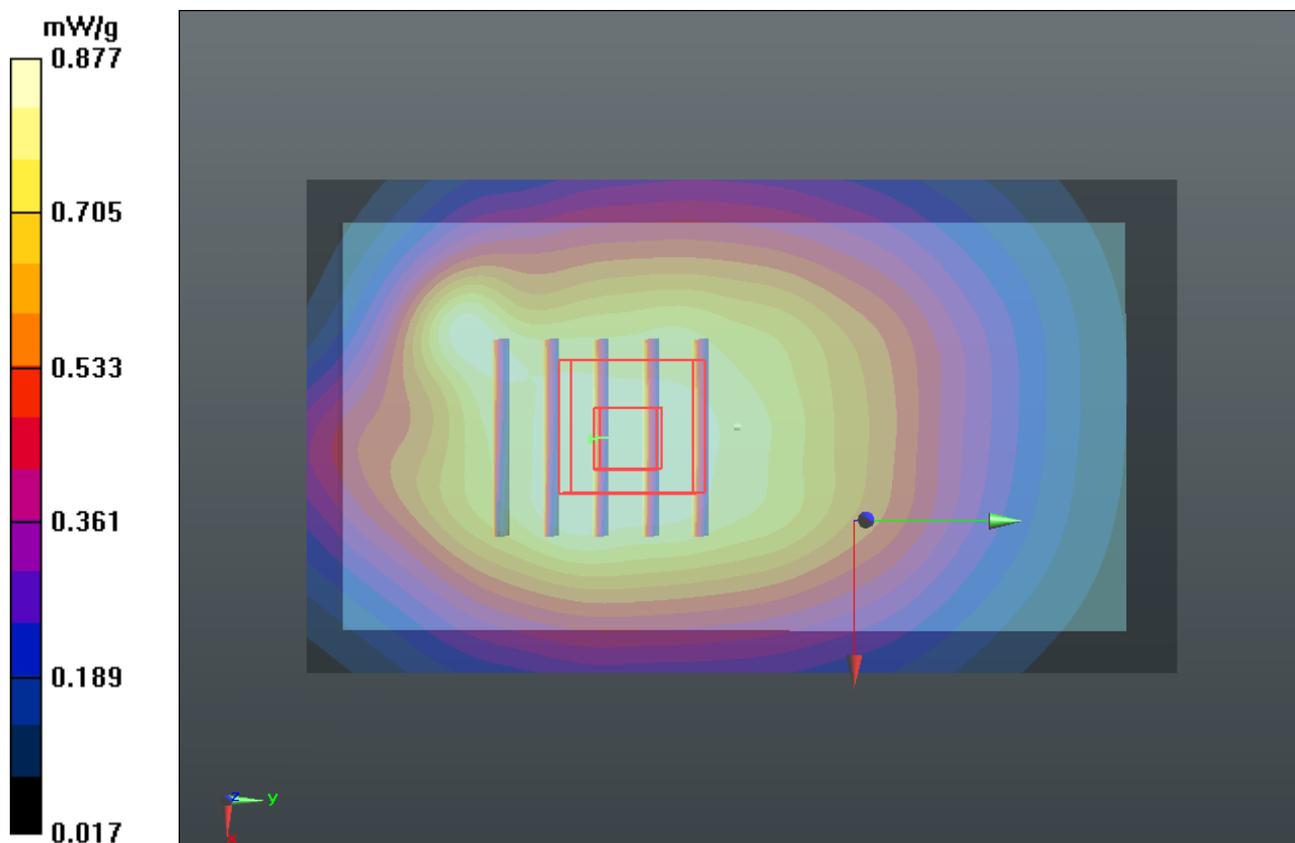

### P30 GSM850\_GPRS11\_Rear Face\_1cm\_Ch251\_Sample2

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.911 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.583 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.984 mW/g

**SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.577 mW/g**

Maximum value of SAR (measured) = 0.882 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.583 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.974 mW/g

**SAR(1 g) = 0.635 mW/g; SAR(10 g) = 0.434 mW/g**

Maximum value of SAR (measured) = 0.851 mW/g

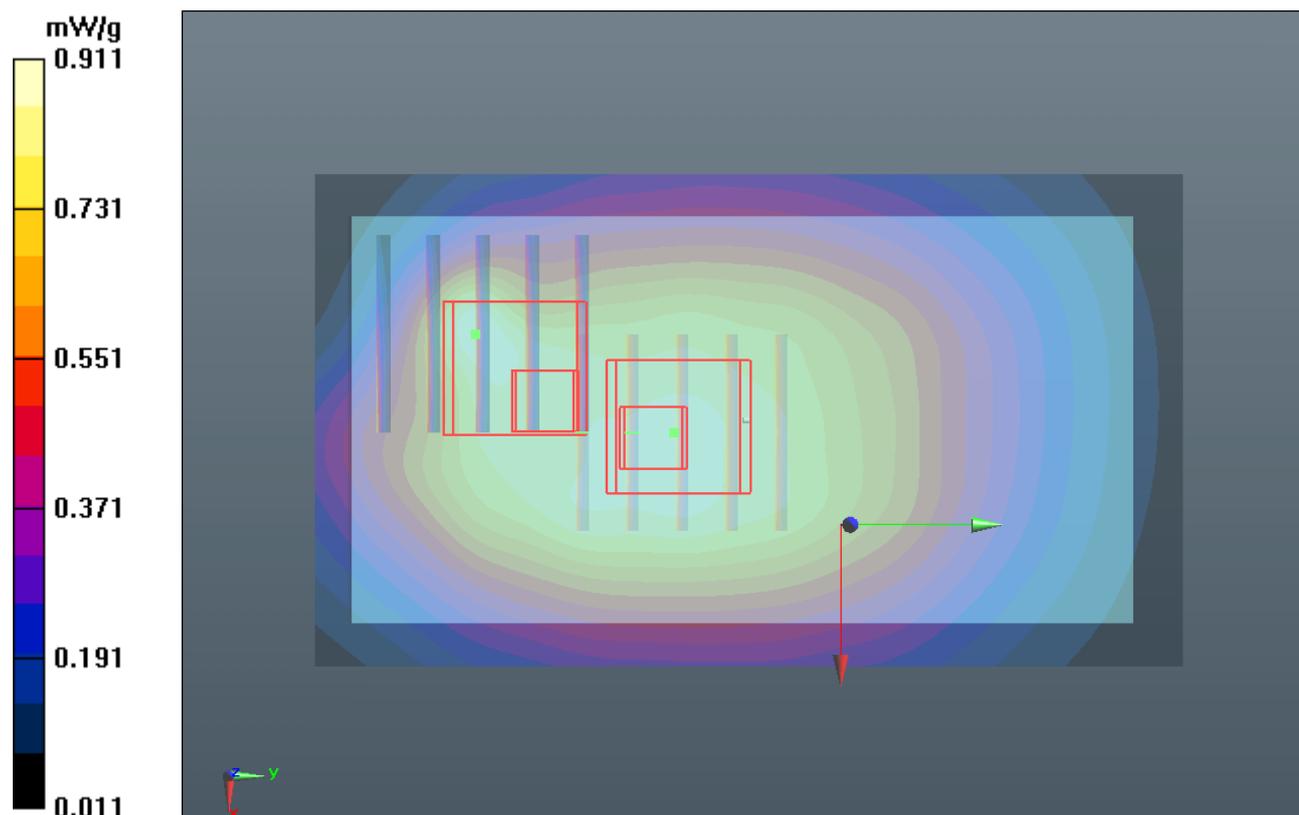

### P31 GSM850\_GPRS11\_Front Face\_1cm\_Ch251\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.492 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.678 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.597 mW/g

**SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.310 mW/g**

Maximum value of SAR (measured) = 0.526 mW/g

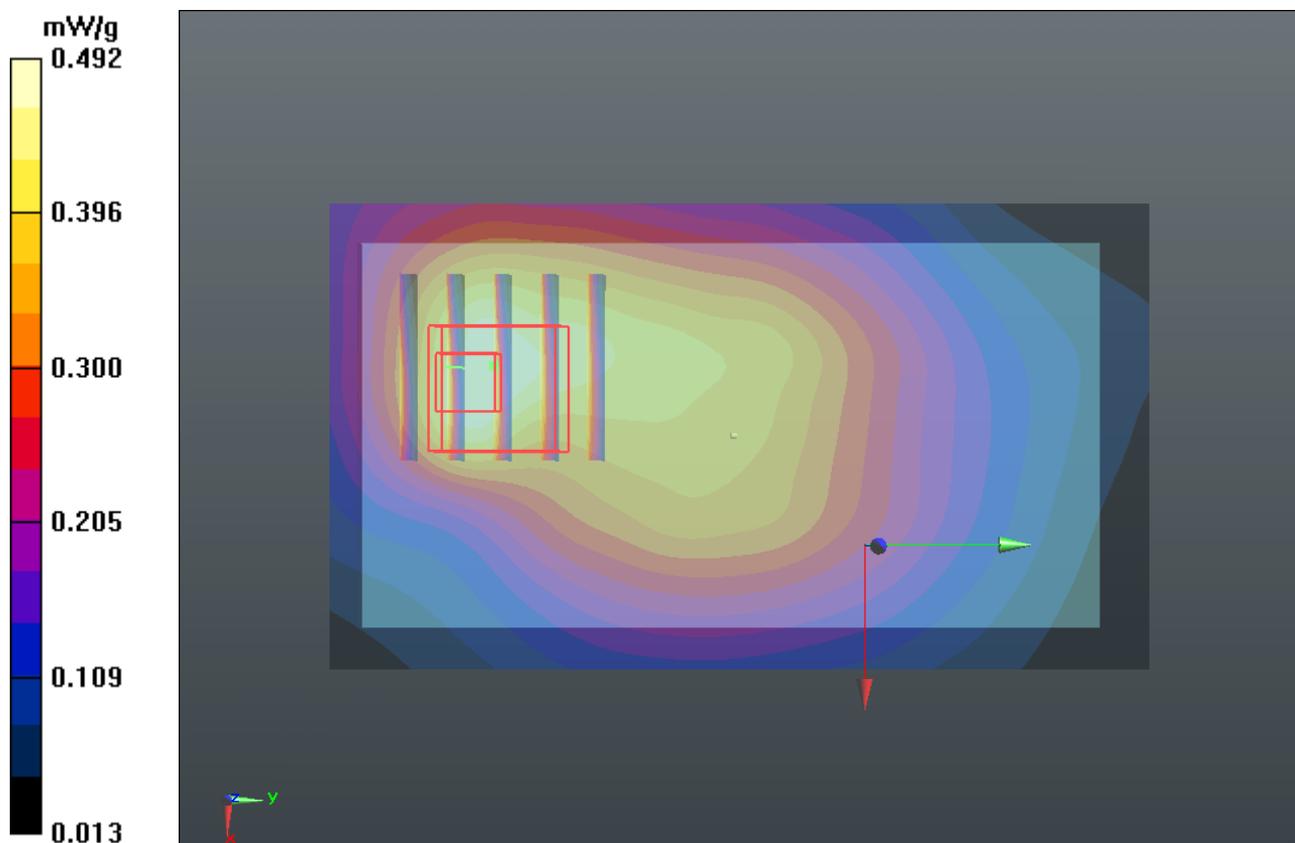

### P32 GSM850\_GPRS11\_Rear Face\_1cm\_Ch251\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.905 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.762 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.997 mW/g

**SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.529 mW/g**

Maximum value of SAR (measured) = 0.868 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.762 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.284 mW/g

**SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.444 mW/g**

Maximum value of SAR (measured) = 0.994 mW/g

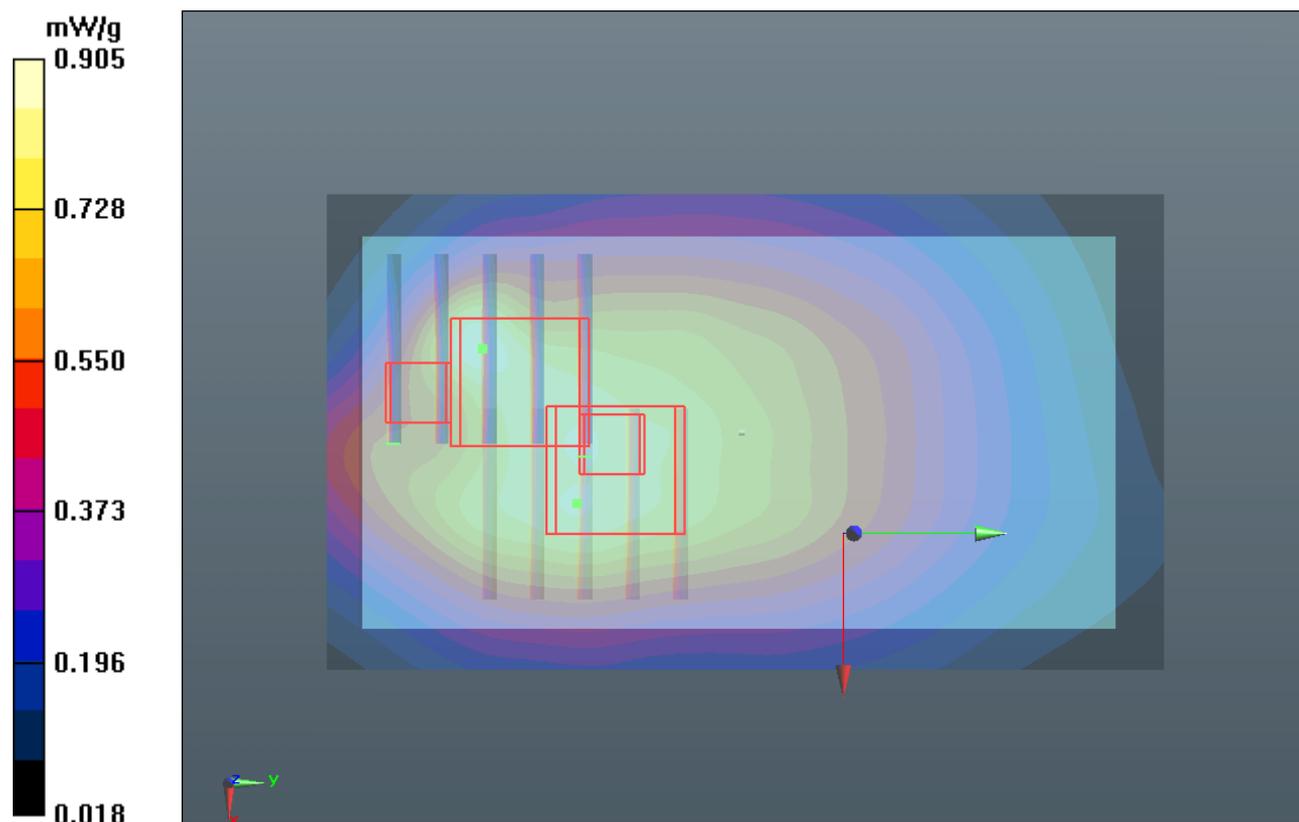

### P33 GSM850\_GPRS11\_Rear Face\_1cm\_Ch251\_Sample2\_Earphone2

**DUT: 120425C07**

Communication System: GPRS11; Frequency: 848.8 MHz; Duty Cycle: 1:2.66686

Medium: B835\_0429 Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.006$  mho/m;  $\epsilon_r = 55.471$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch251/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.824 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.608 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.837 mW/g

**SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.435 mW/g**

Maximum value of SAR (measured) = 0.734 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.608 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.007 mW/g

**SAR(1 g) = 0.571 mW/g; SAR(10 g) = 0.366 mW/g**

Maximum value of SAR (measured) = 0.785 mW/g

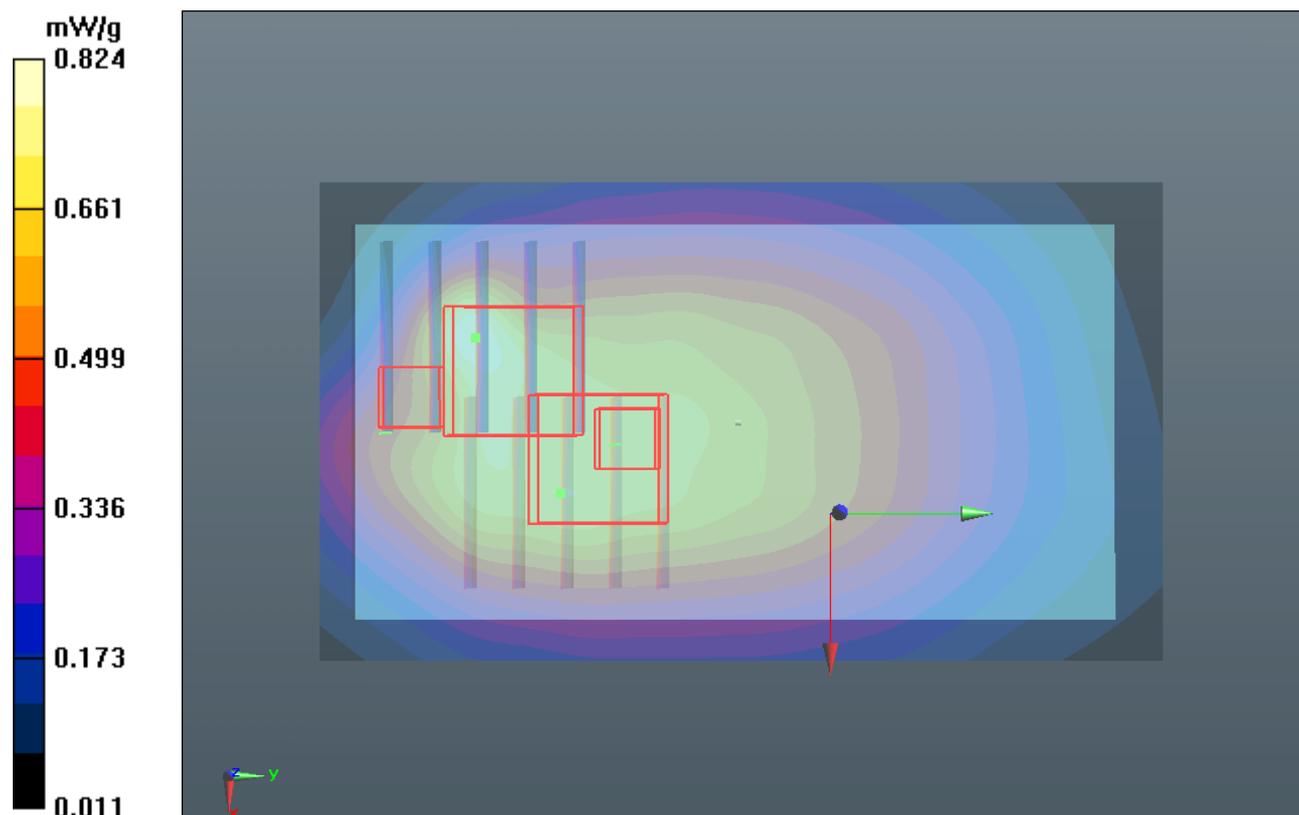

### P34 GSM1900\_GPRS10\_Front Face\_1cm\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.17 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.003 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.147 mW/g

**SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.560 mW/g**

Maximum value of SAR (measured) = 0.984 mW/g

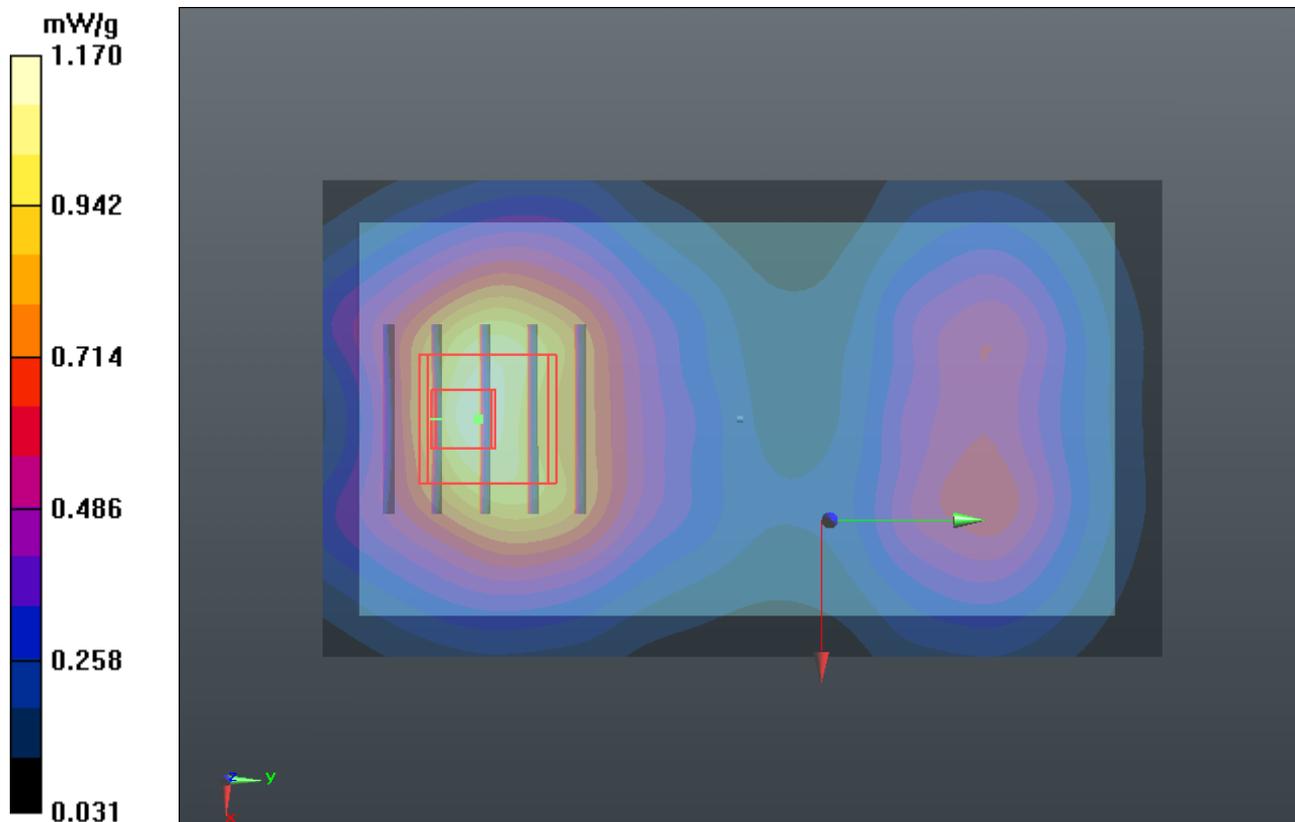

### P35 GSM1900\_GPRS10\_Rear Face\_1cm\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.918 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.363 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.975 mW/g

**SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.461 mW/g**

Maximum value of SAR (measured) = 0.841 mW/g

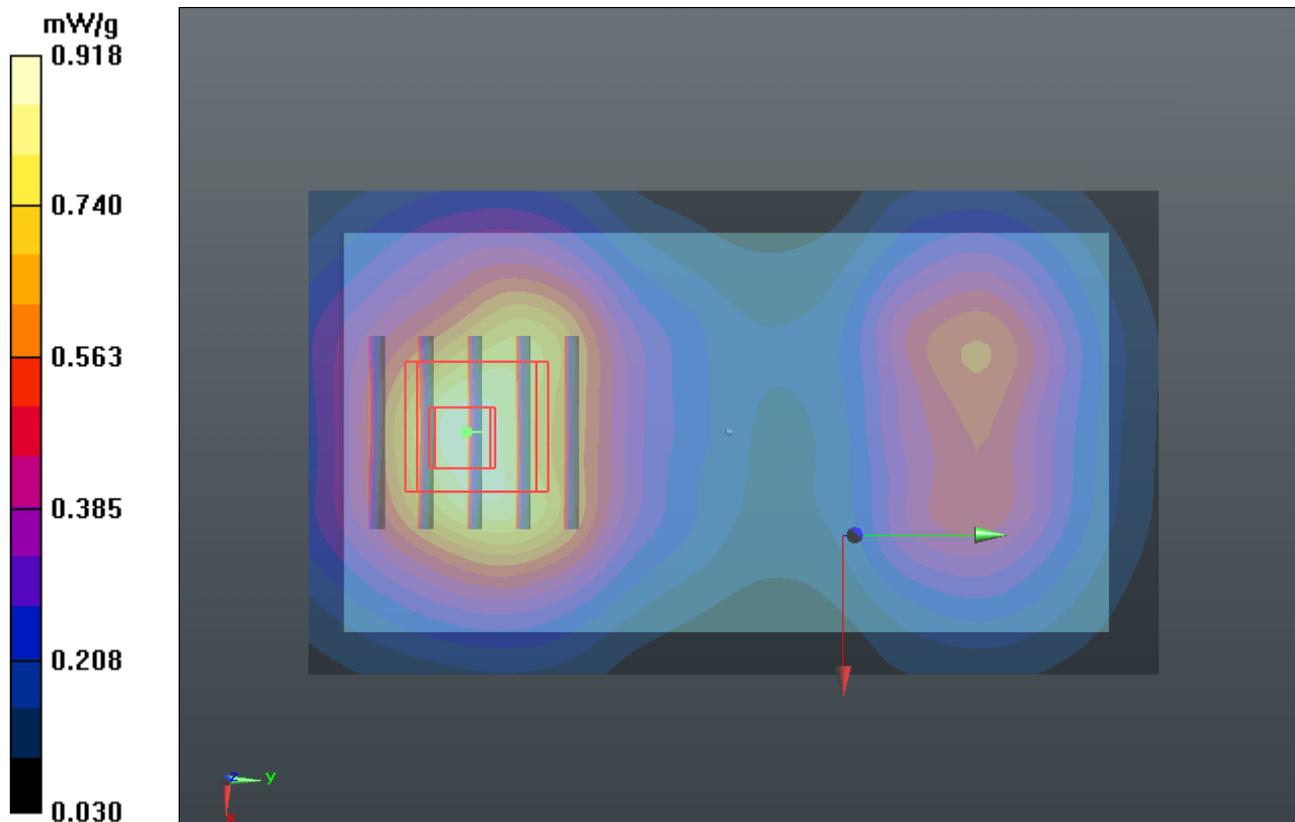

### P36 GSM1900\_GPRS10\_Left Side\_1cm\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.164 mW/g

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.829 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.200 mW/g

**SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.070 mW/g**

Maximum value of SAR (measured) = 0.162 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.829 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.179 mW/g

**SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.066 mW/g**

Maximum value of SAR (measured) = 0.146 mW/g

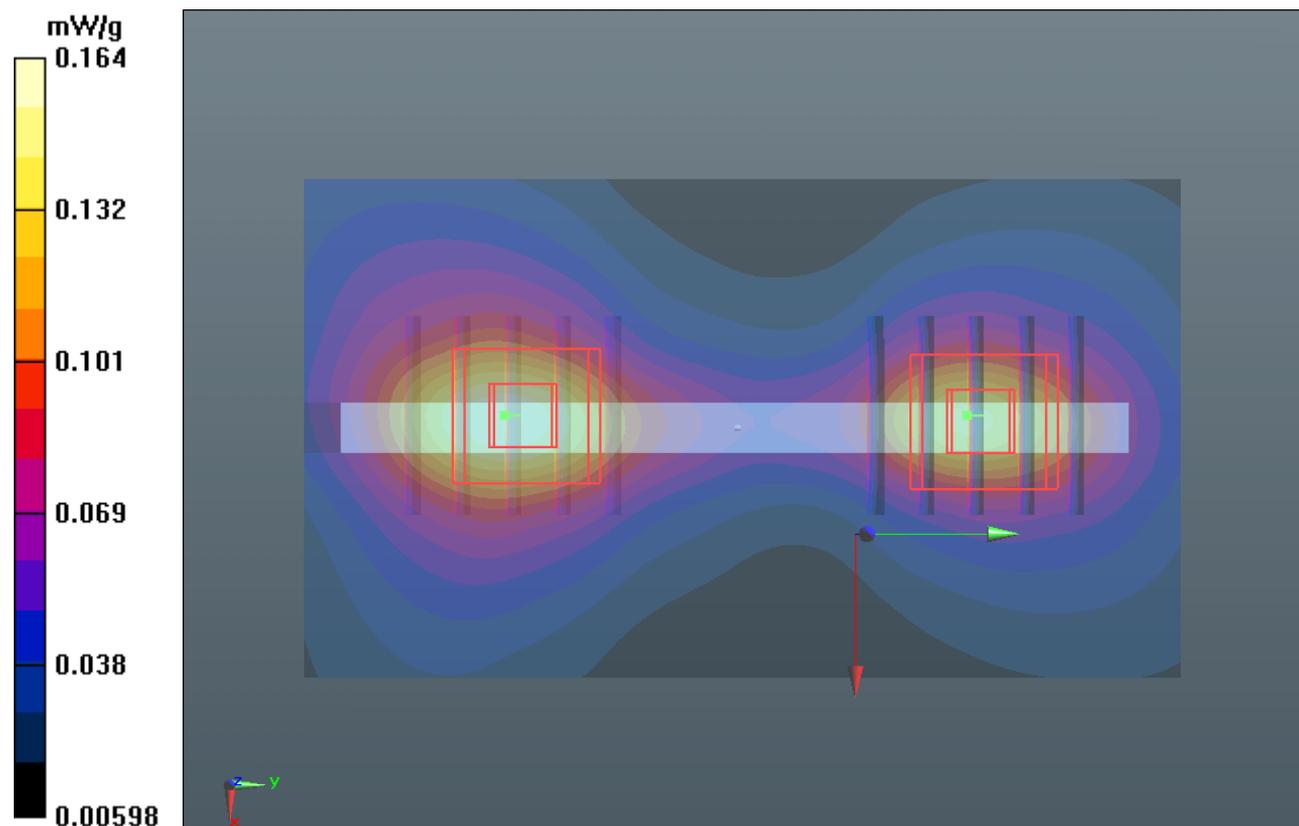

### P37 GSM1900\_GPRS10\_Right Side\_1cm\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.186 mW/g

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.644 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.213 mW/g

**SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.080 mW/g**

Maximum value of SAR (measured) = 0.180 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.644 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.206 mW/g

**SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.073 mW/g**

Maximum value of SAR (measured) = 0.164 mW/g

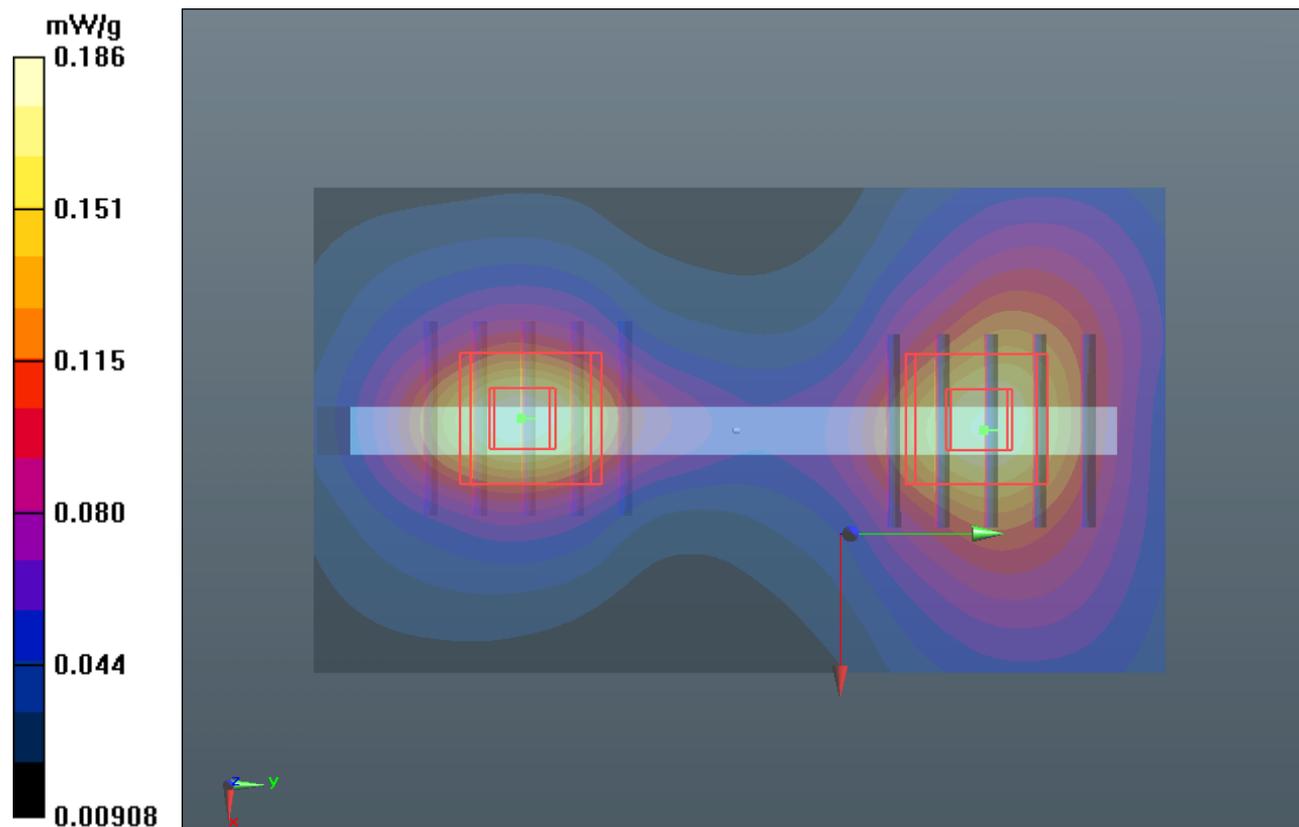

### P39 GSM1900\_GPRS10\_Bottom Side\_1cm\_Ch661\_Sample1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (41x61x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.152 mW/g

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.675 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.177 mW/g

**SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.077 mW/g**

Maximum value of SAR (measured) = 0.155 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.675 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.164 mW/g

**SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.048 mW/g**

Maximum value of SAR (measured) = 0.129 mW/g

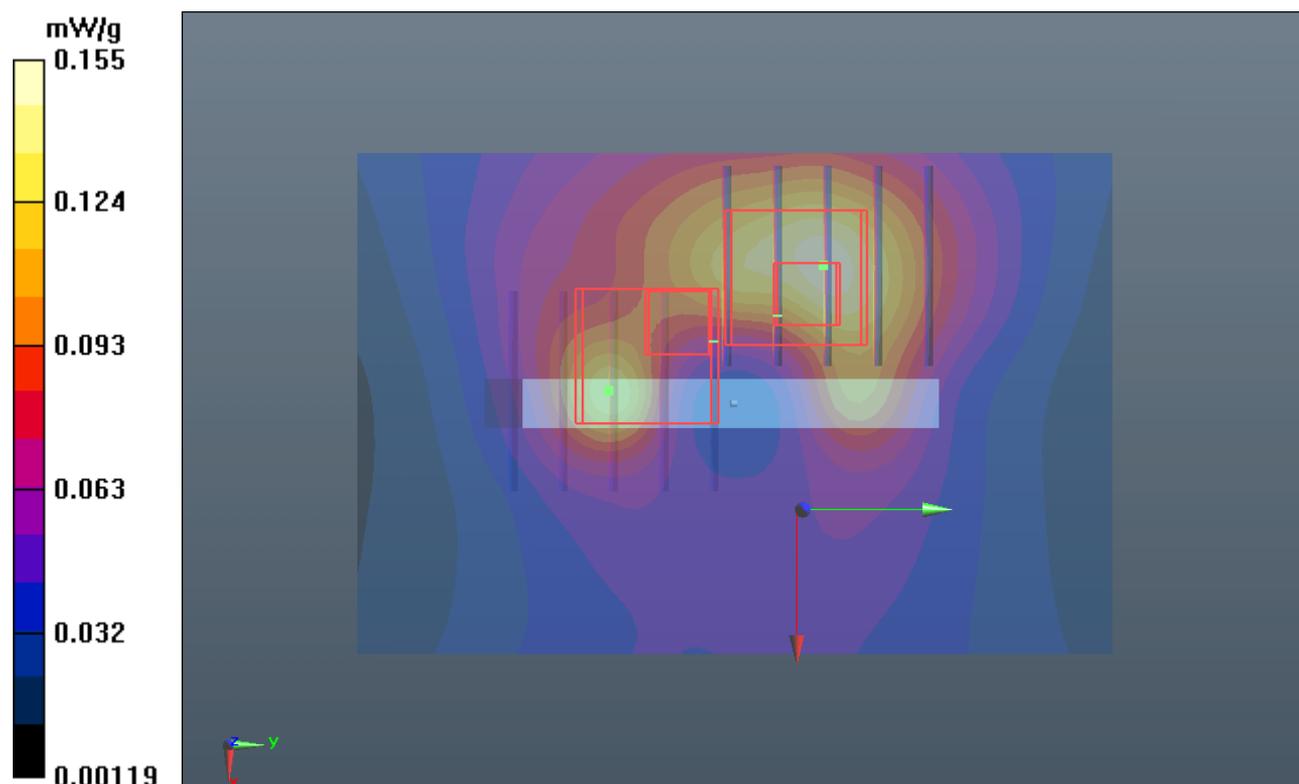

### P67 GSM1900\_GPRS10\_Front Face\_1cm\_Ch512\_Sample1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1850.2 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.495$  mho/m;  $\epsilon_r = 54.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch512/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.15 mW/g


**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.915 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.121 mW/g

**SAR(1 g) = 0.811 mW/g; SAR(10 g) = 0.552 mW/g**

Maximum value of SAR (measured) = 0.971 mW/g

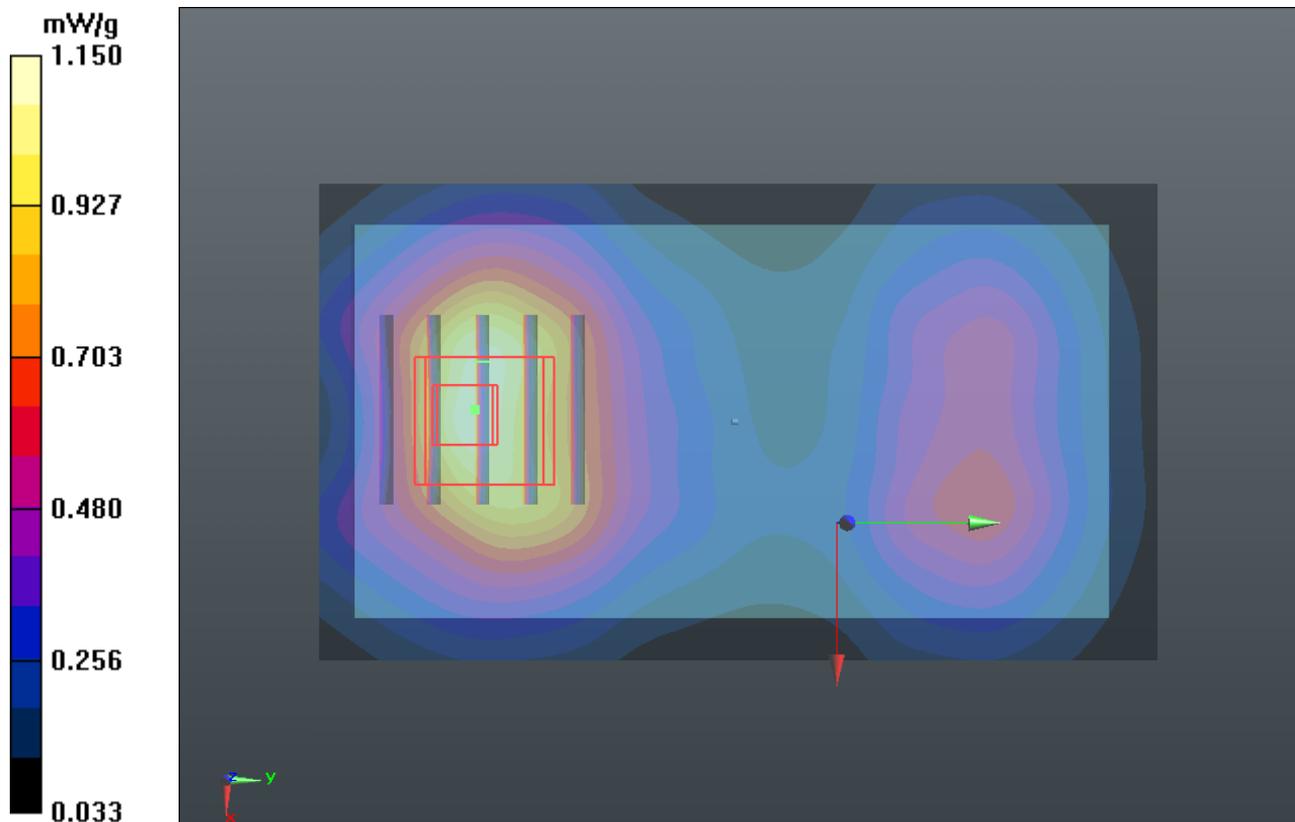

### P68 GSM1900\_GPRS10\_Front Face\_1cm\_Ch810\_Sample1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1909.8 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.564$  mho/m;  $\epsilon_r = 53.933$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch810/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.17 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.280 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.171 mW/g

**SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.555 mW/g**

Maximum value of SAR (measured) = 1.00 mW/g

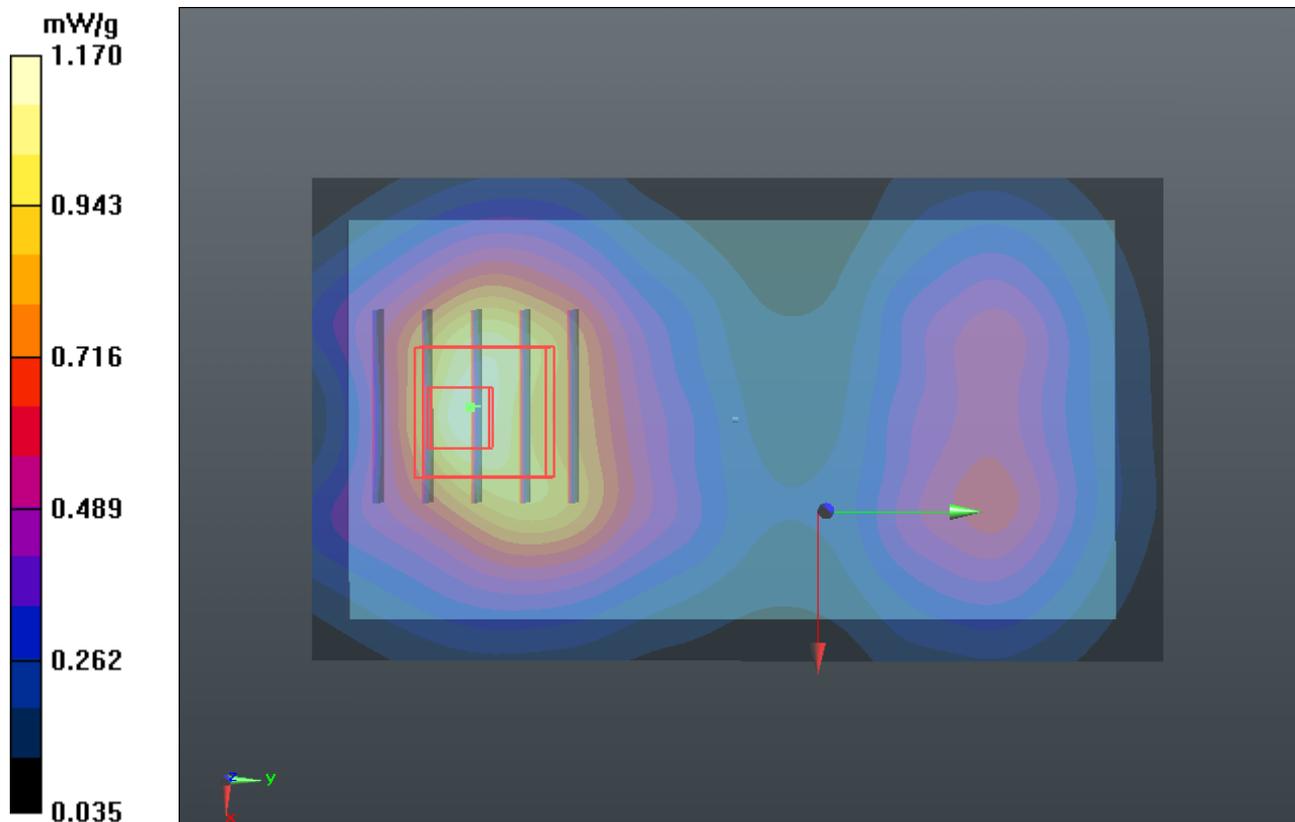

# 1g/10g Averaged SAR

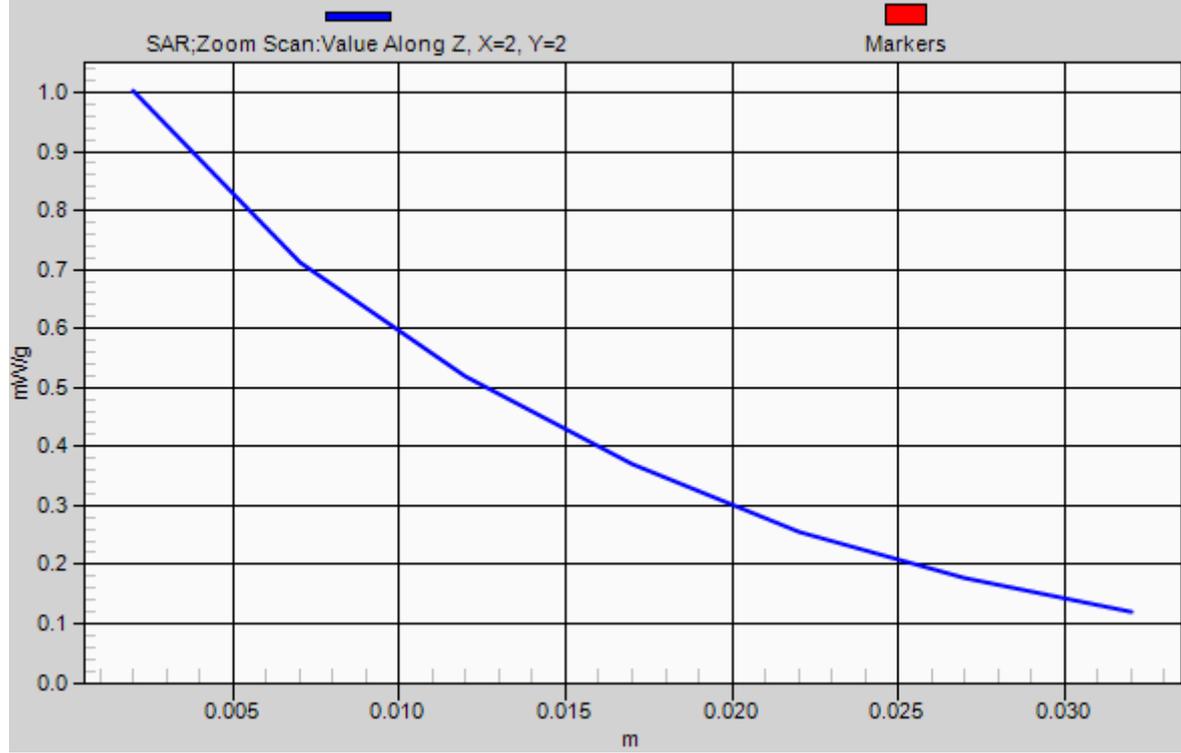

### P41 GSM1900\_GPRS10\_Front Face\_1cm\_Ch810\_Sample2

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1909.8 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.564$  mho/m;  $\epsilon_r = 53.933$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch810/Area Scan (51x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.29 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.274 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.080 mW/g

**SAR(1 g) = 0.772 mW/g; SAR(10 g) = 0.507 mW/g**

Maximum value of SAR (measured) = 0.927 mW/g

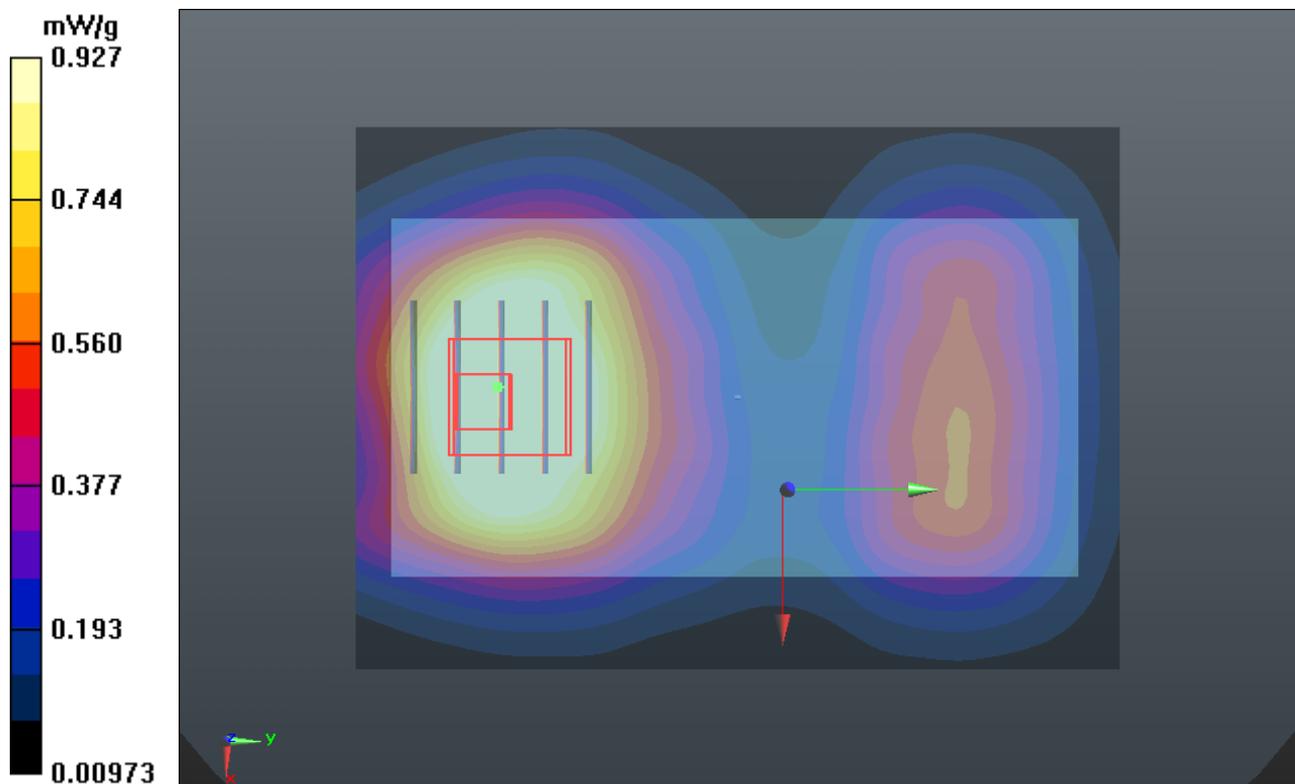

### P42 GSM1900\_GPRS10\_Front Face\_1cm\_Ch661\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.10 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.396 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.114 mW/g

**SAR(1 g) = 0.798 mW/g; SAR(10 g) = 0.536 mW/g**

Maximum value of SAR (measured) = 0.969 mW/g

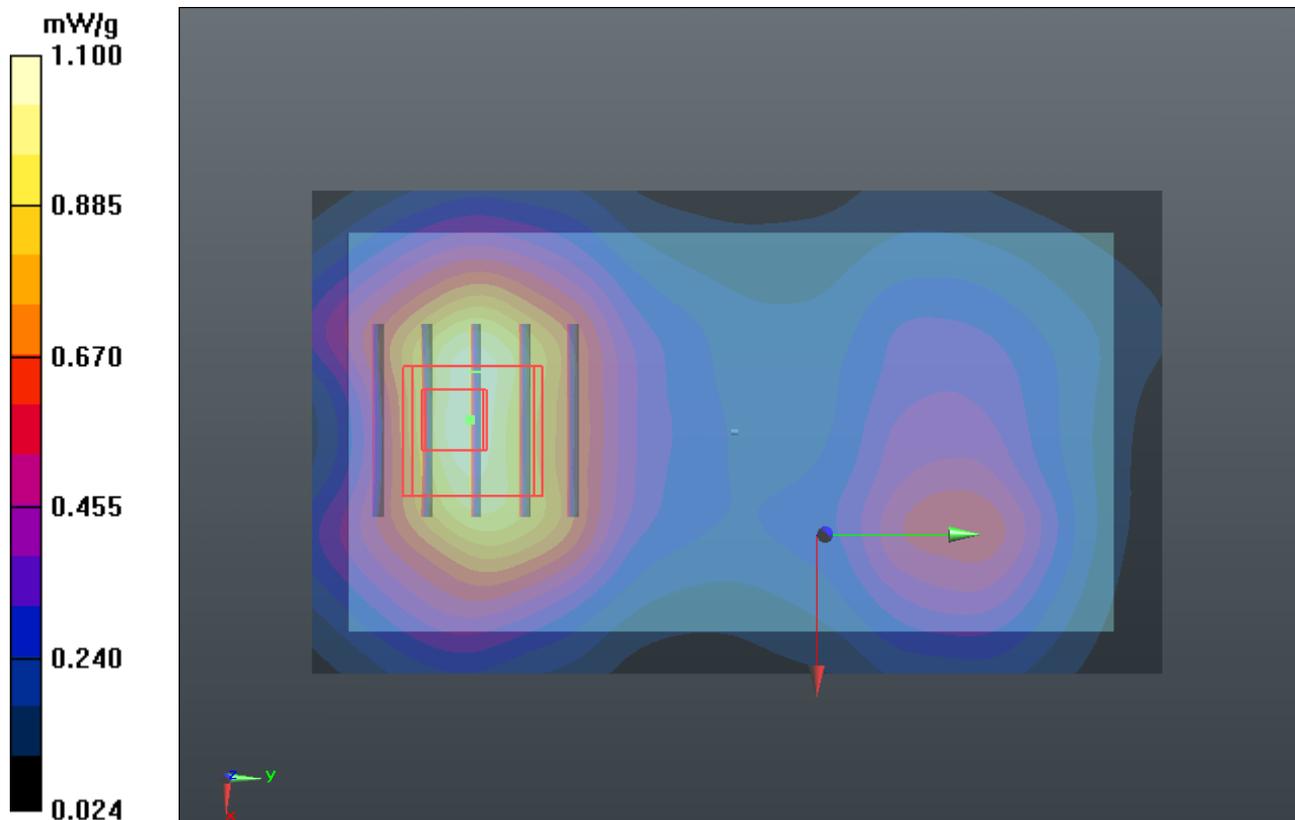

### P43 GSM1900\_GPRS10\_Rear Face\_1cm\_Ch661\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.875 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.692 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.996 mW/g

**SAR(1 g) = 0.669 mW/g; SAR(10 g) = 0.422 mW/g**

Maximum value of SAR (measured) = 0.804 mW/g

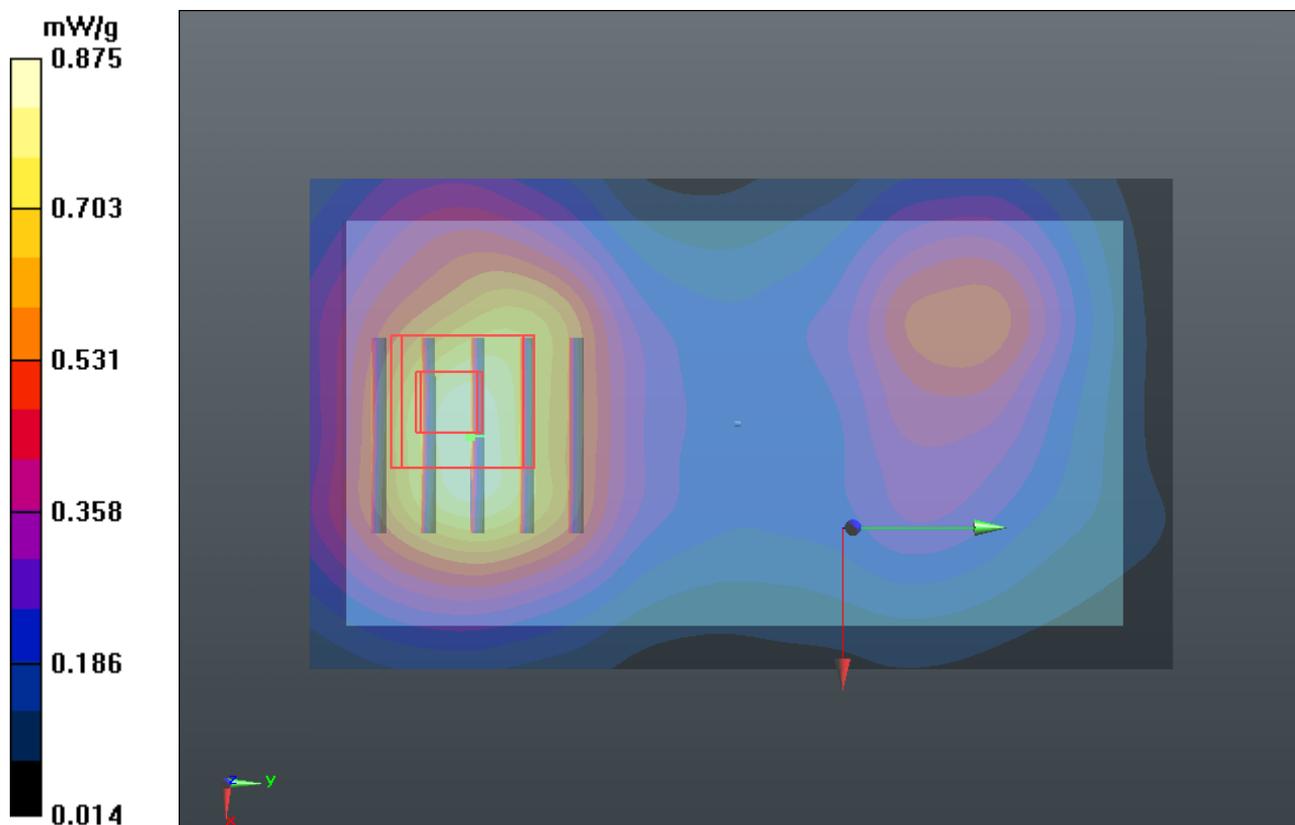

### P44 GSM1900\_GPRS10\_Front Face\_1cm\_Ch661\_Sample2\_Earphone2

**DUT: 120425C07**

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch661/Area Scan (51x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.863 mW/g


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.863 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.945 mW/g

**SAR(1 g) = 0.670 mW/g; SAR(10 g) = 0.445 mW/g**

Maximum value of SAR (measured) = 0.810 mW/g

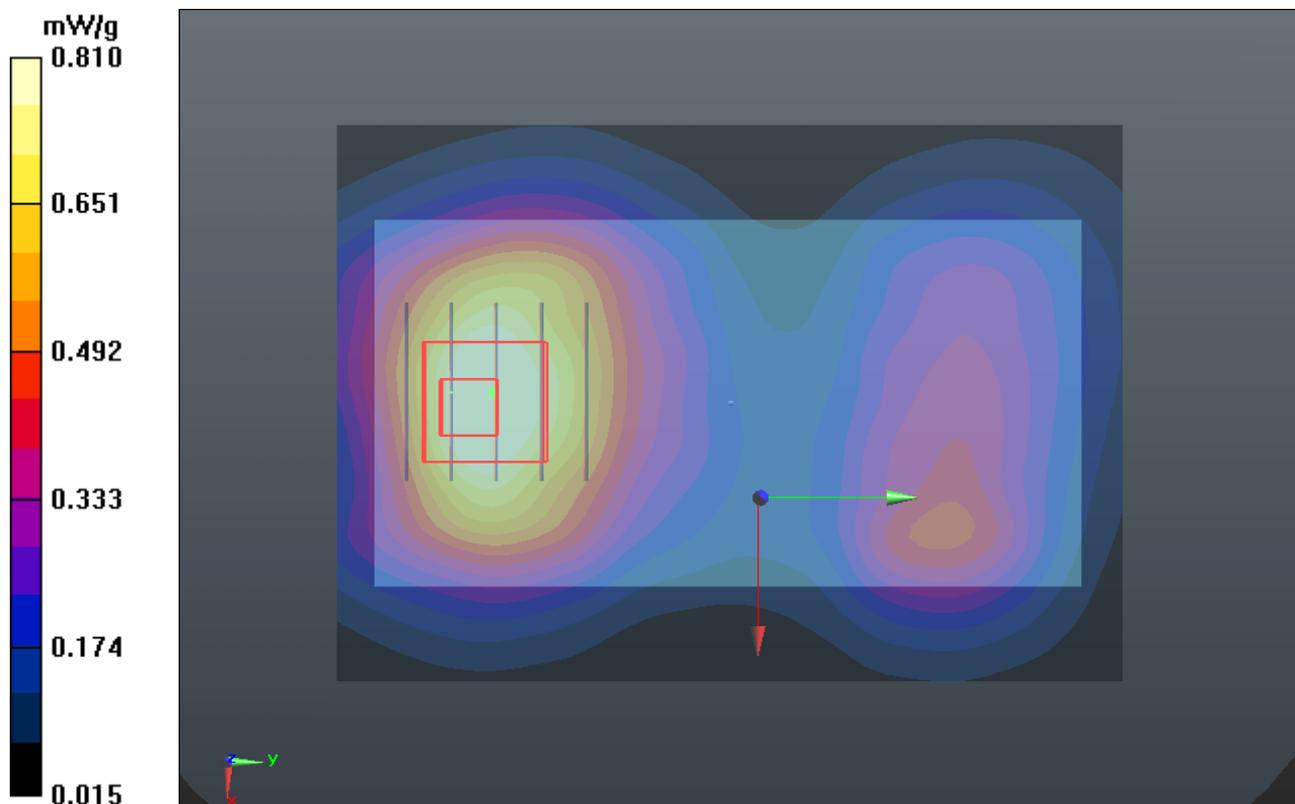

### P45 WCDMA V\_RMC12.2K\_Front Face\_1cm\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.413 mW/g

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.351 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.455 mW/g

**SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.272 mW/g**

Maximum value of SAR (measured) = 0.409 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.351 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.452 mW/g

**SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.256 mW/g**

Maximum value of SAR (measured) = 0.402 mW/g

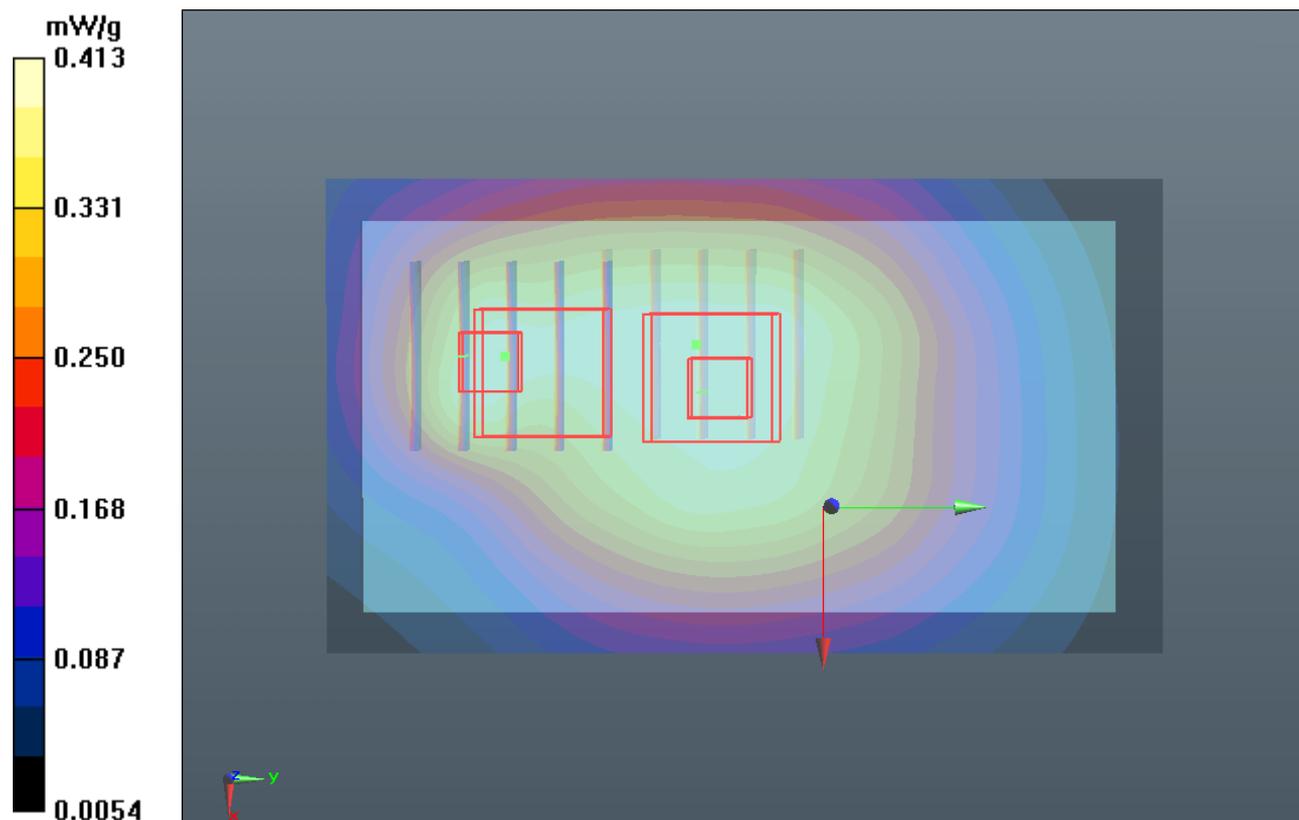

### P46 WCDMA V\_RMC12.2K\_Rear Face\_1cm\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.670 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.138 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.759 mW/g

**SAR(1 g) = 0.586 mW/g; SAR(10 g) = 0.440 mW/g**

Maximum value of SAR (measured) = 0.676 mW/g

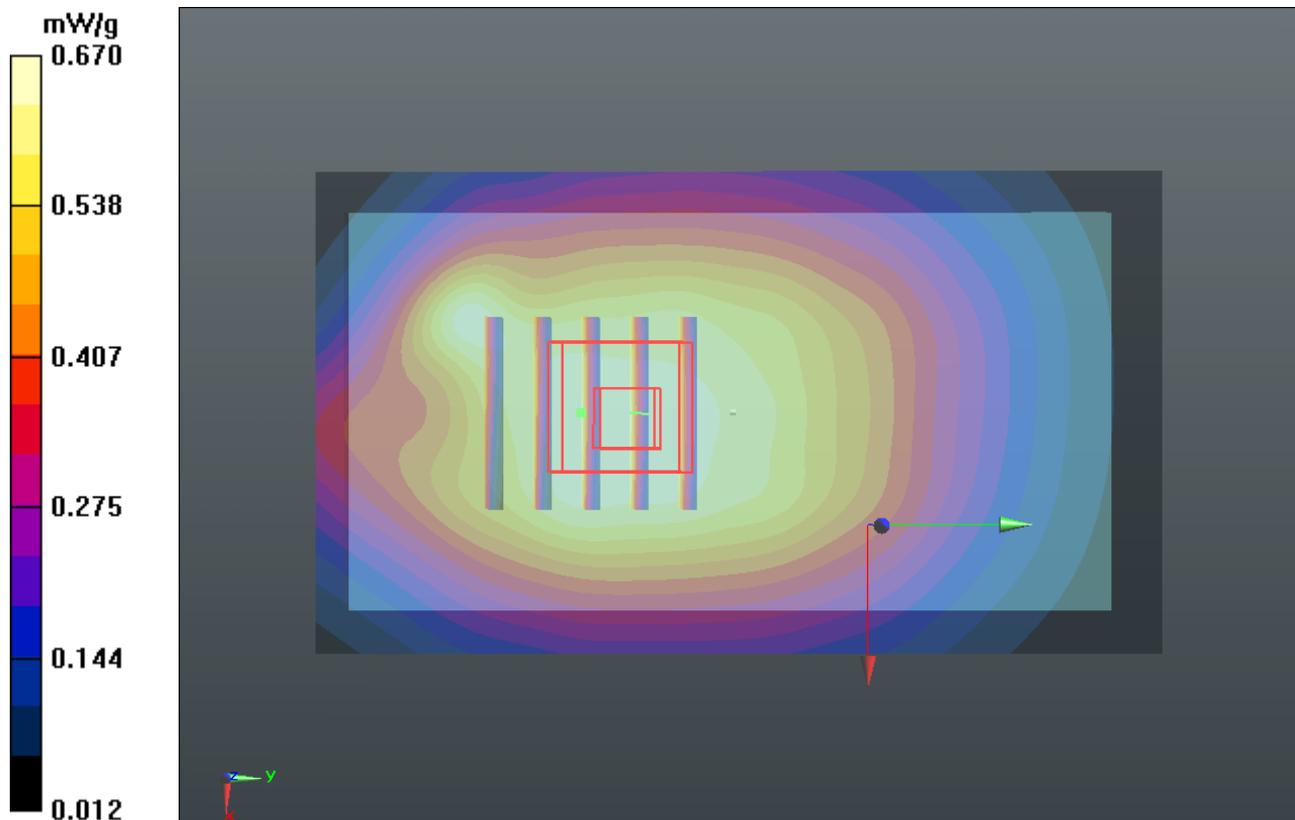

# 1g/10g Averaged SAR

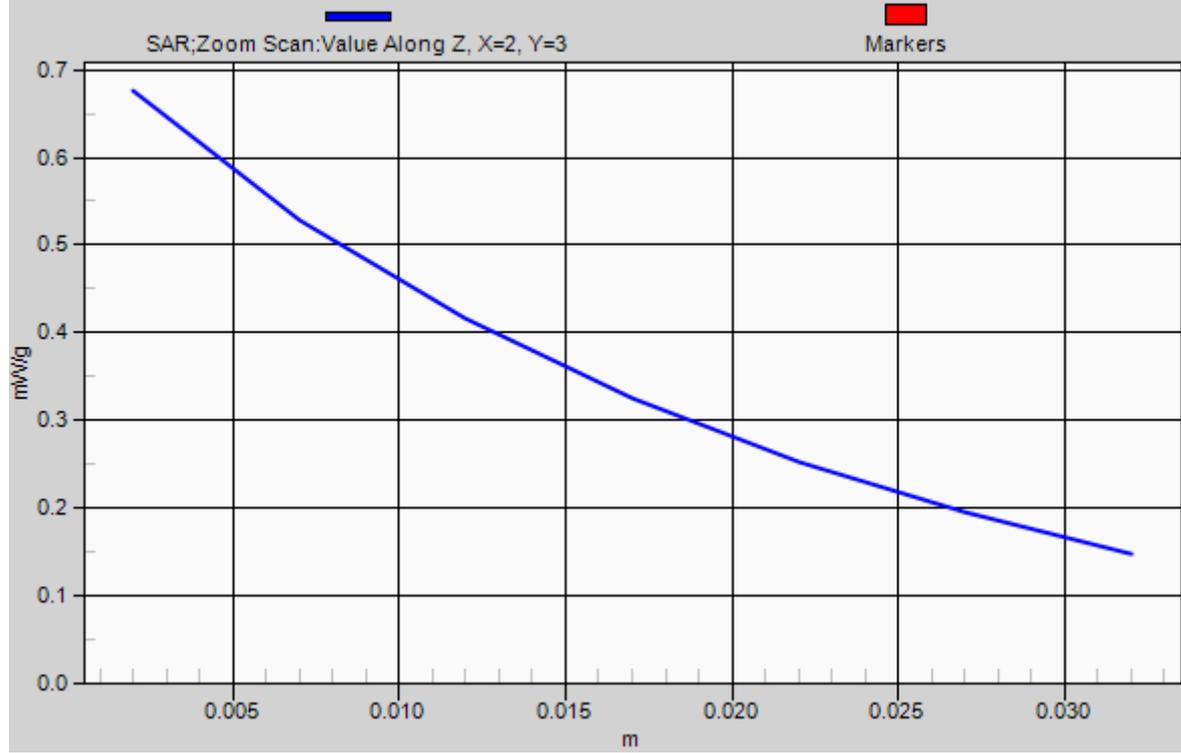

### P47 WCDMA V\_RMC12.2K\_Left Side\_1cm\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.591 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.381 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.672 mW/g

**SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.318 mW/g**

Maximum value of SAR (measured) = 0.576 mW/g

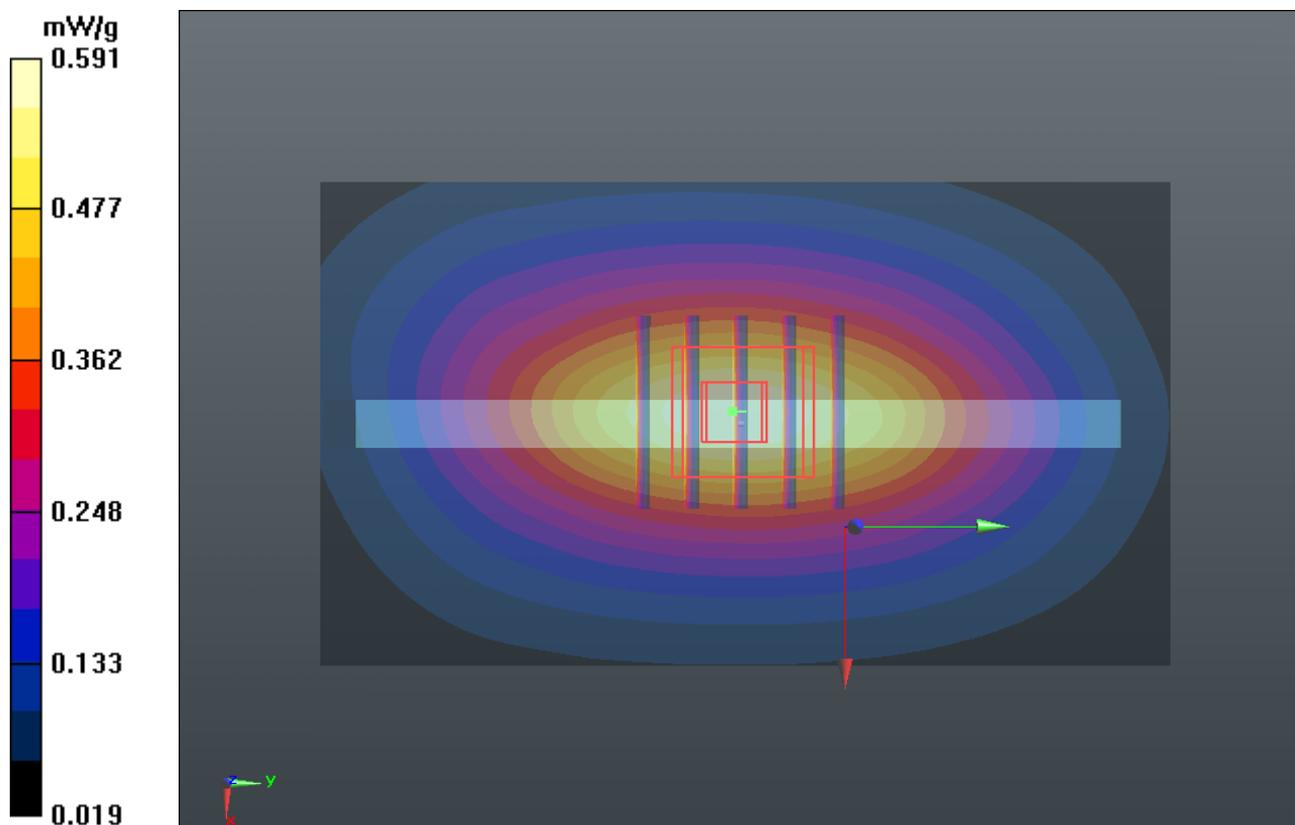

### P48 WCDMA V\_RMC12.2K\_Right Side\_1cm\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.542 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.456 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.614 mW/g

**SAR(1 g) = 0.423 mW/g; SAR(10 g) = 0.291 mW/g**

Maximum value of SAR (measured) = 0.525 mW/g

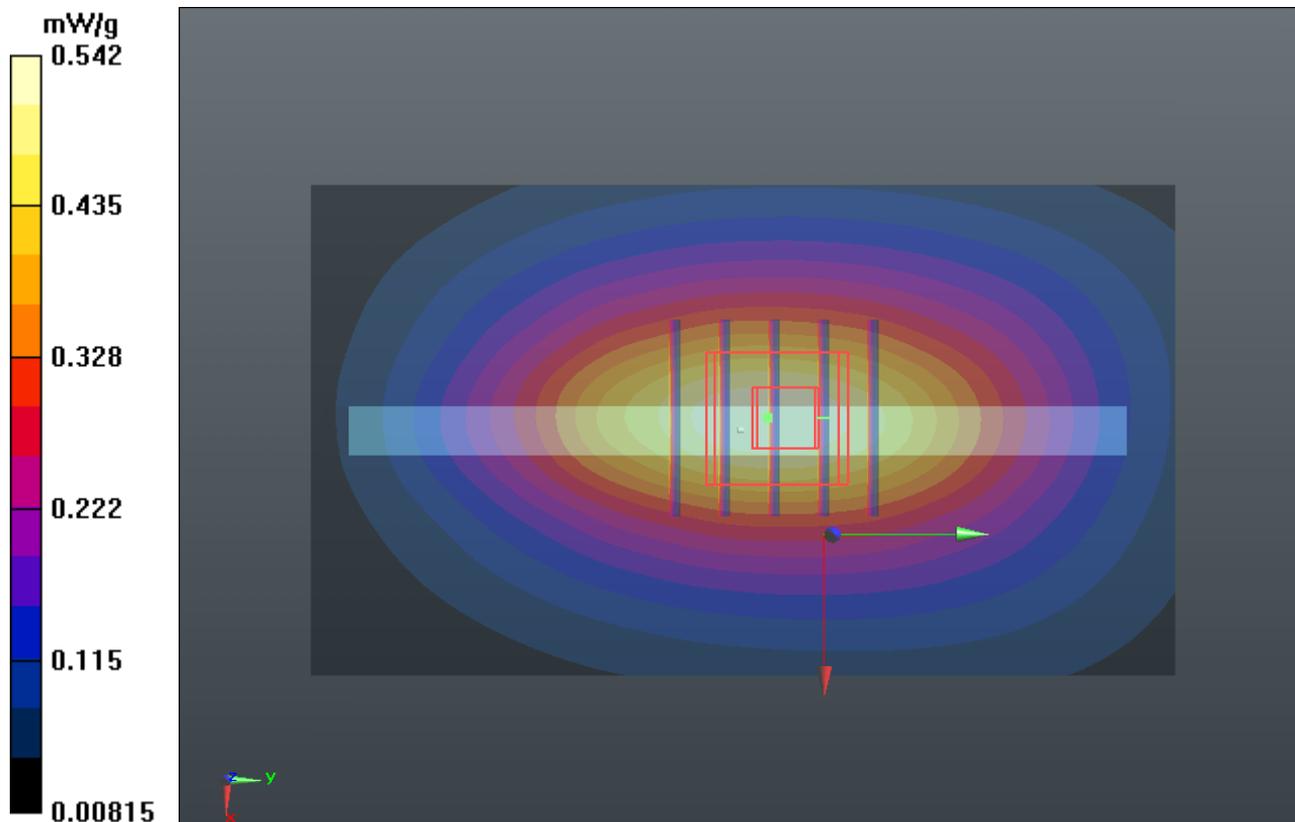

### P50 WCDMA V\_RMC12.2K\_Bottom Side\_1cm\_Ch4233\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x61x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.127 mW/g

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.434 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.215 mW/g

**SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.061 mW/g**

Maximum value of SAR (measured) = 0.153 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.434 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.129 mW/g

**SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.046 mW/g**

Maximum value of SAR (measured) = 0.104 mW/g

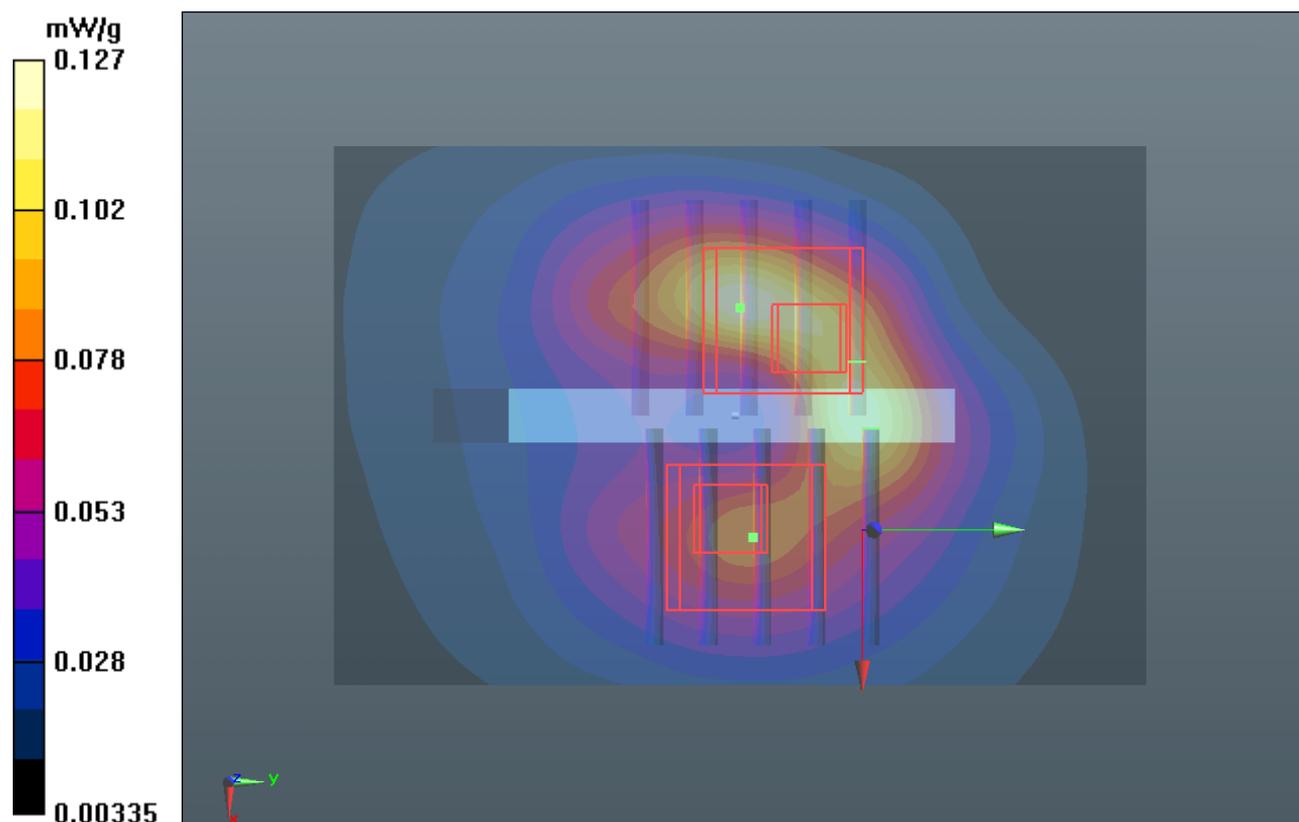

## P52 WCDMA V\_RMC12.2K\_Rear Face\_1cm\_Ch4233\_Sample2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.633 mW/g

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.625 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.728 mW/g

**SAR(1 g) = 0.561 mW/g; SAR(10 g) = 0.425 mW/g**

Maximum value of SAR (measured) = 0.651 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.625 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.712 mW/g

**SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.320 mW/g**

Maximum value of SAR (measured) = 0.625 mW/g

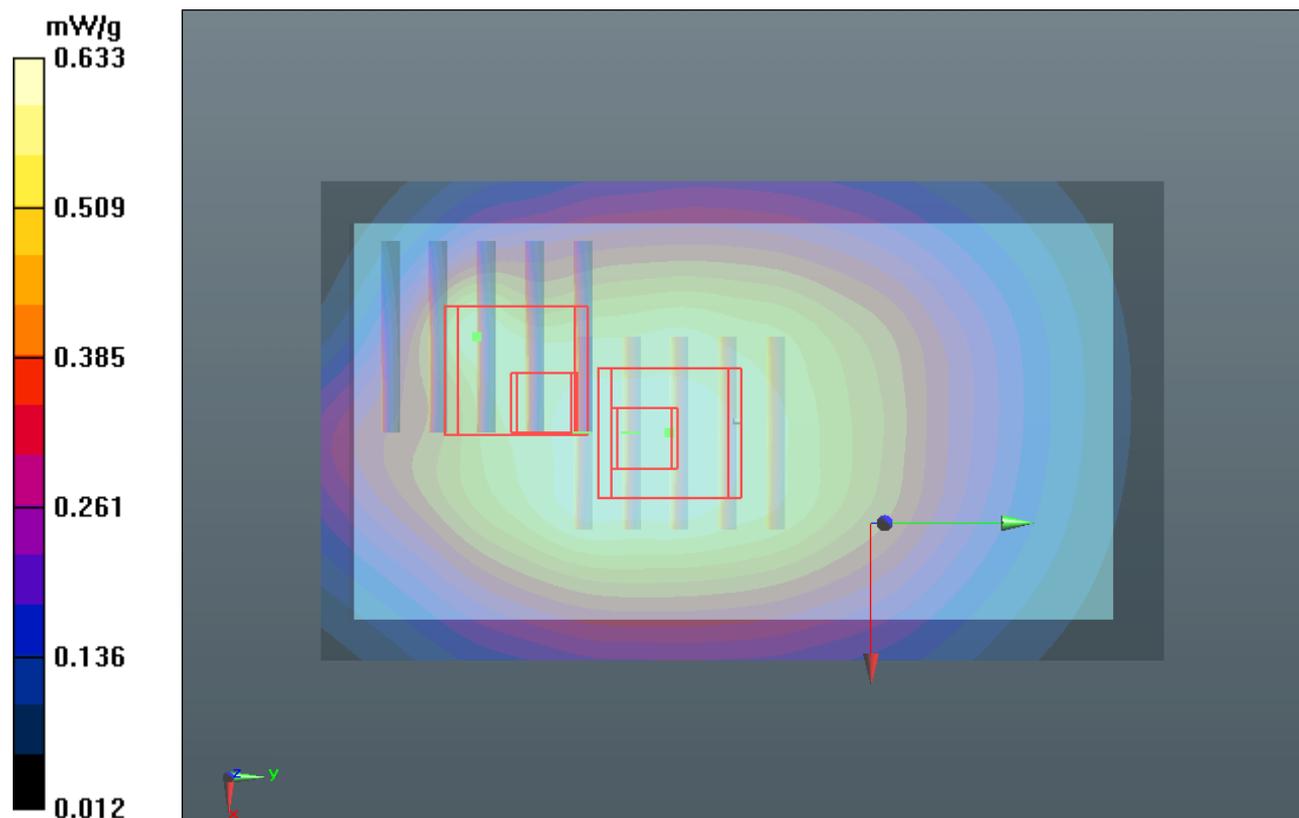

### P53 WCDMA V\_RMC12.2K\_Front Face\_1cm\_Ch4233\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.304 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.729 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.365 mW/g

**SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.189 mW/g**

Maximum value of SAR (measured) = 0.319 mW/g

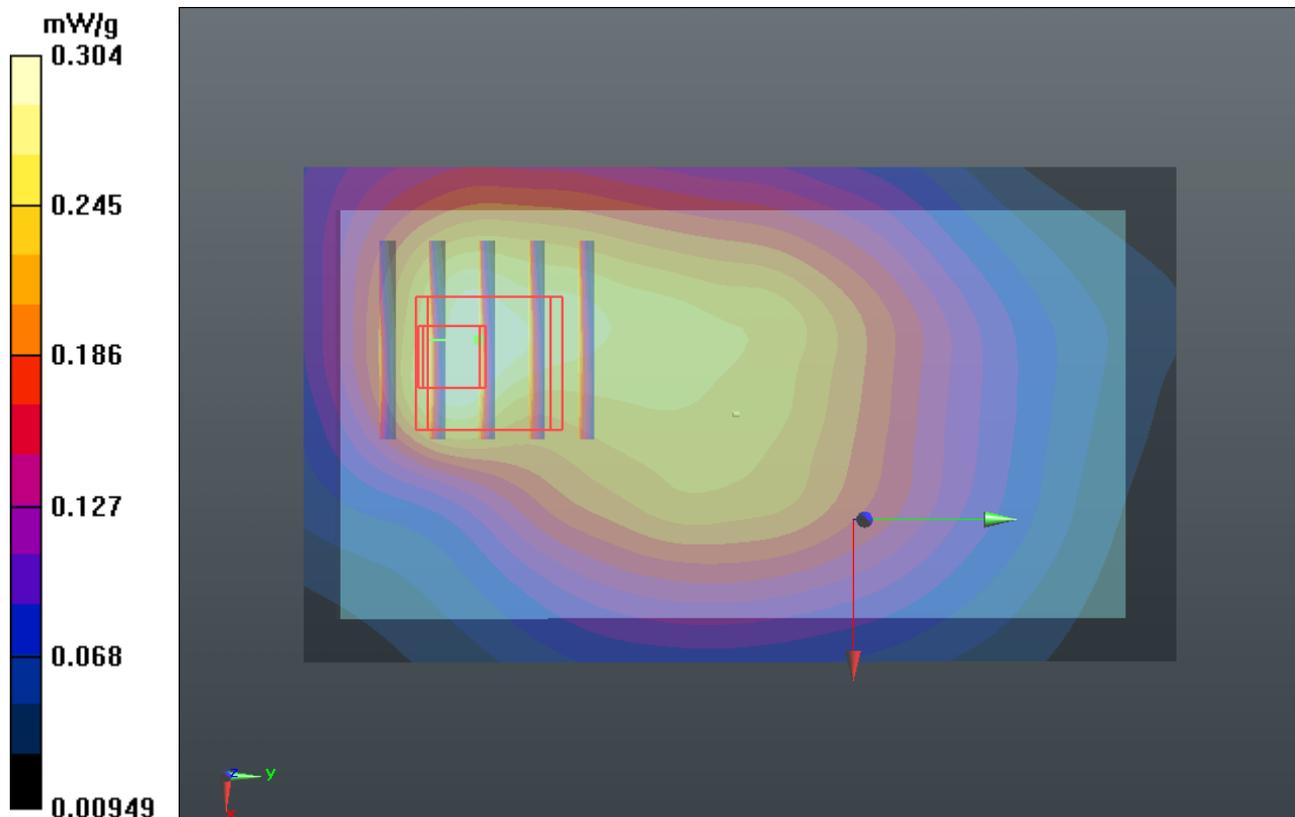

### P54 WCDMA V\_RMC12.2K\_Rear Face\_1cm\_Ch4233\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.574 mW/g

**Ch4233/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.627 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.669 mW/g

**SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.355 mW/g**

Maximum value of SAR (measured) = 0.584 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.627 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.833 mW/g

**SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.296 mW/g**

Maximum value of SAR (measured) = 0.648 mW/g

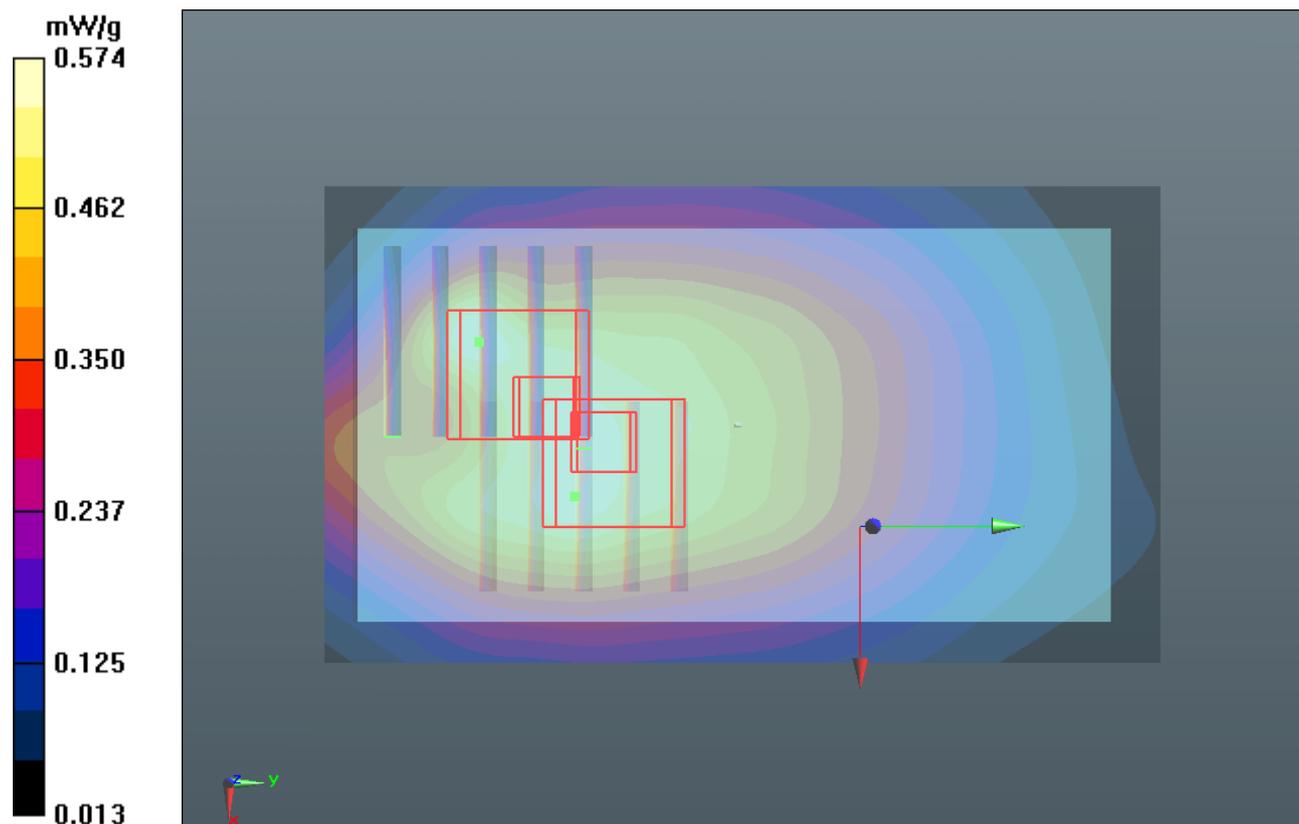

## P55 WCDMA V\_RMC12.2K\_Rear Face\_1cm\_Ch4233\_Sample2\_Earphone2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: B835\_0429 Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.004$  mho/m;  $\epsilon_r = 55.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.6 °C ; Liquid Temperature : 20.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(10.47, 10.47, 10.47); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch4233/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.545 mW/g

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.576 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.636 mW/g

**SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.339 mW/g**

Maximum value of SAR (measured) = 0.552 mW/g


**Ch4233/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.576 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.693 mW/g

**SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.273 mW/g**

Maximum value of SAR (measured) = 0.549 mW/g

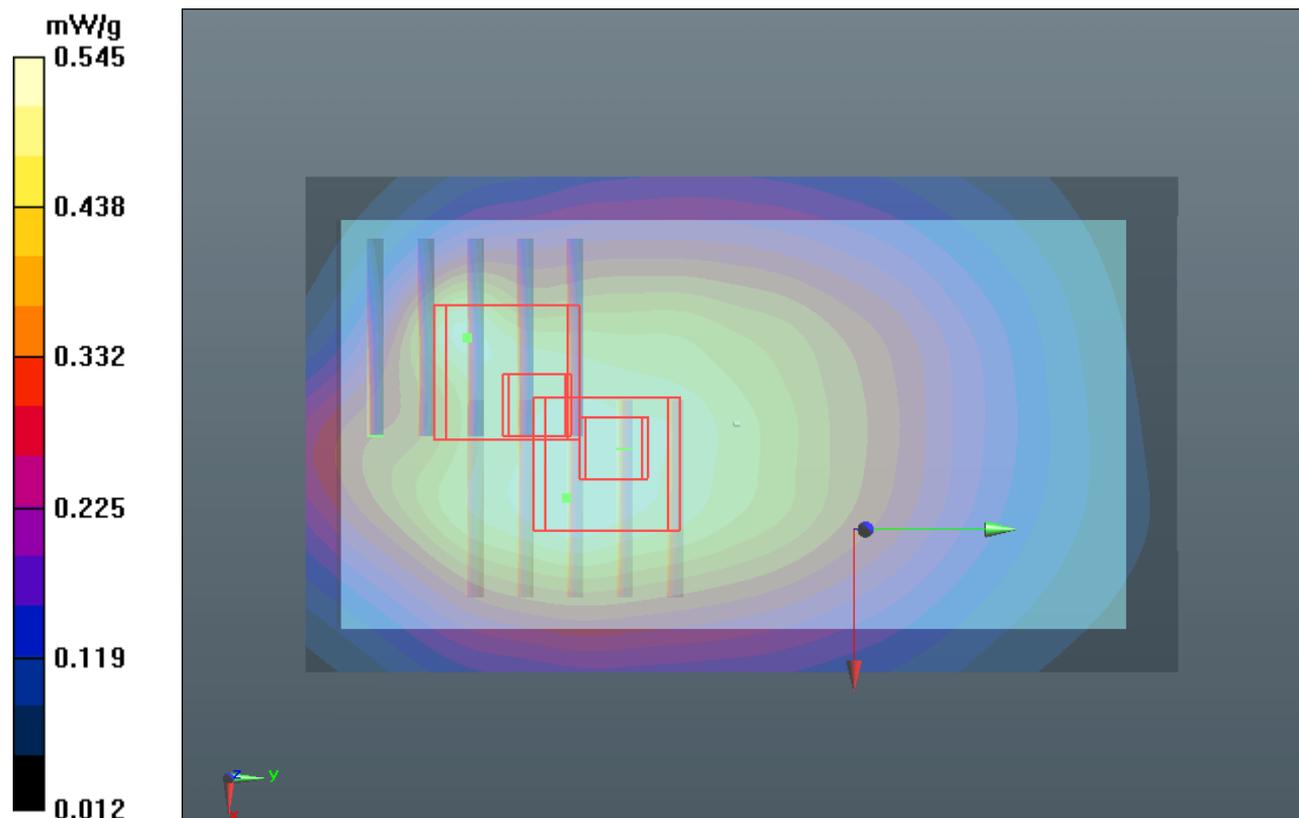

### P56 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.66 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.701 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.670 mW/g

**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.767 mW/g**

Maximum value of SAR (measured) = 1.42 mW/g

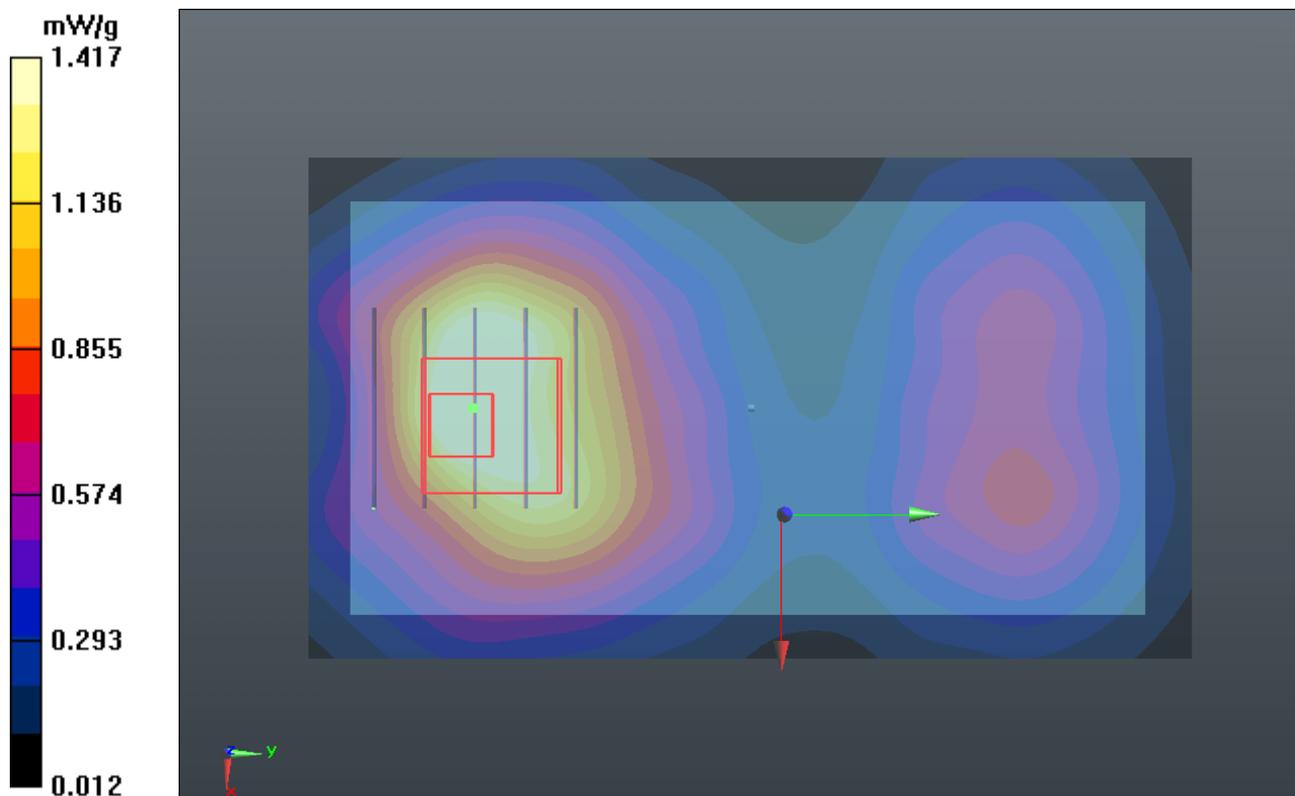

### P57 WCDMA II\_RMC12.2K\_Rear Face\_1cm\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.14 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.323 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.263 mW/g

**SAR(1 g) = 0.856 mW/g; SAR(10 g) = 0.556 mW/g**

Maximum value of SAR (measured) = 1.08 mW/g

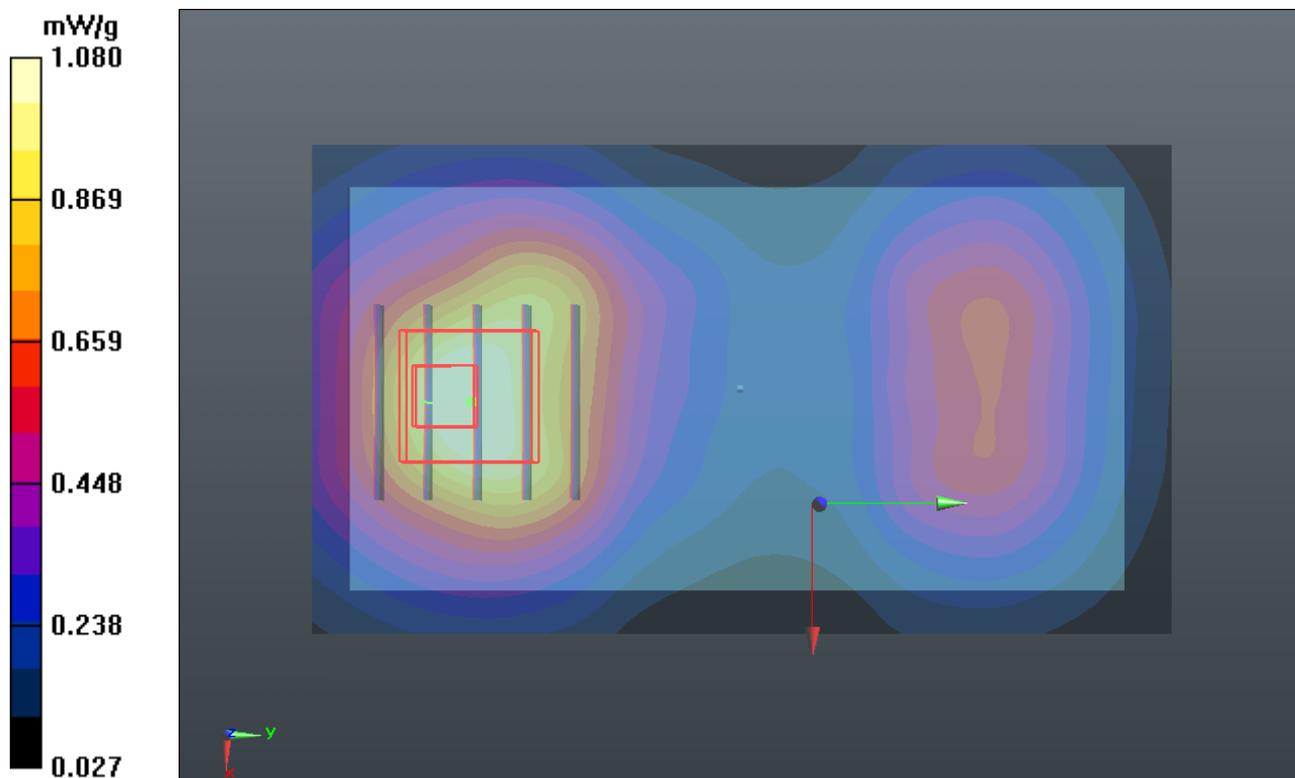

### P58 WCDMA II\_RMC12.2K\_Left Side\_1cm\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (31x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.179 mW/g

**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.042 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.226 mW/g

**SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.080 mW/g**

Maximum value of SAR (measured) = 0.182 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.042 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.206 mW/g

**SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.075 mW/g**

Maximum value of SAR (measured) = 0.168 mW/g

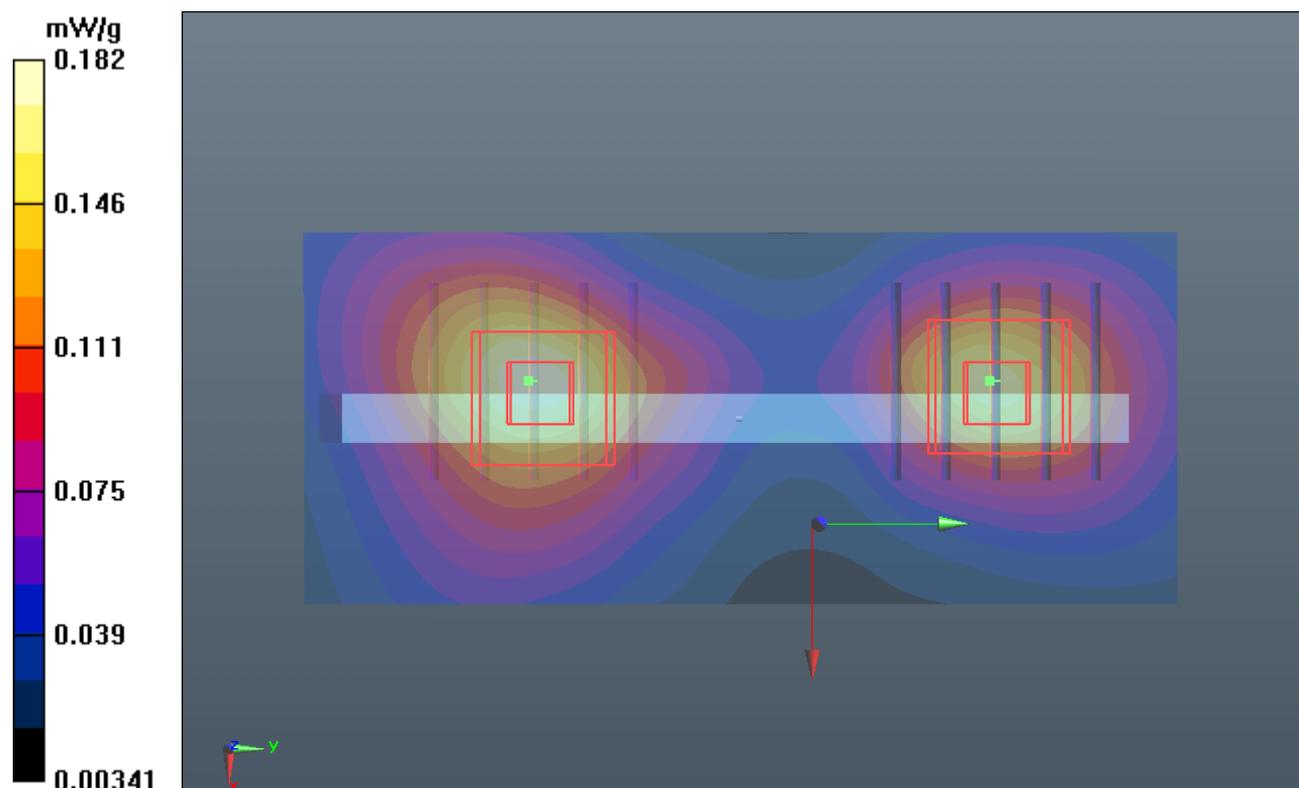

### P59 WCDMA II\_RMC12.2K\_Right Side\_1cm\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (31x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.256 mW/g

**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.148 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.300 mW/g

**SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.110 mW/g**

Maximum value of SAR (measured) = 0.244 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.148 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.297 mW/g

**SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.104 mW/g**

Maximum value of SAR (measured) = 0.235 mW/g

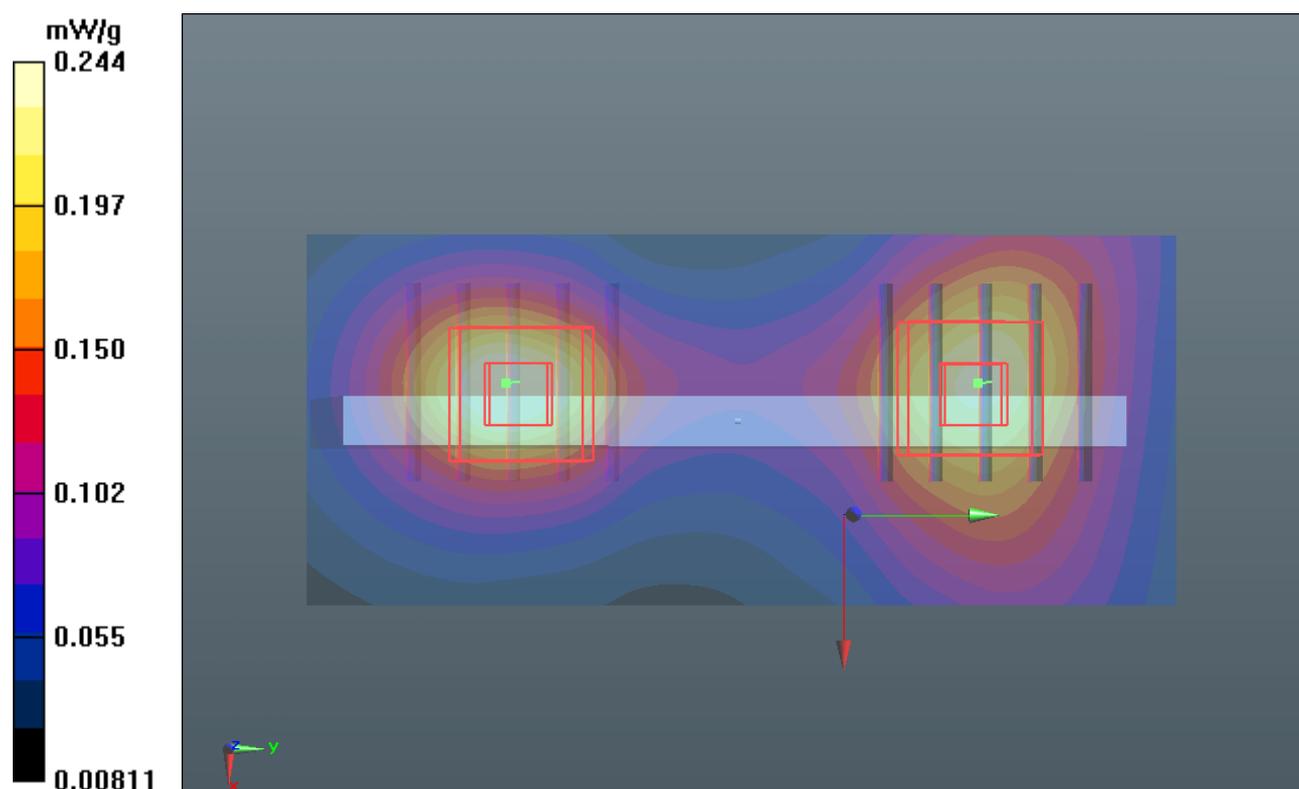

## P61 WCDMA II\_RMC12.2K\_Bottom Side\_1cm\_Ch9538\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (31x51x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.227 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.021 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.299 mW/g

**SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.108 mW/g**

Maximum value of SAR (measured) = 0.222 mW/g

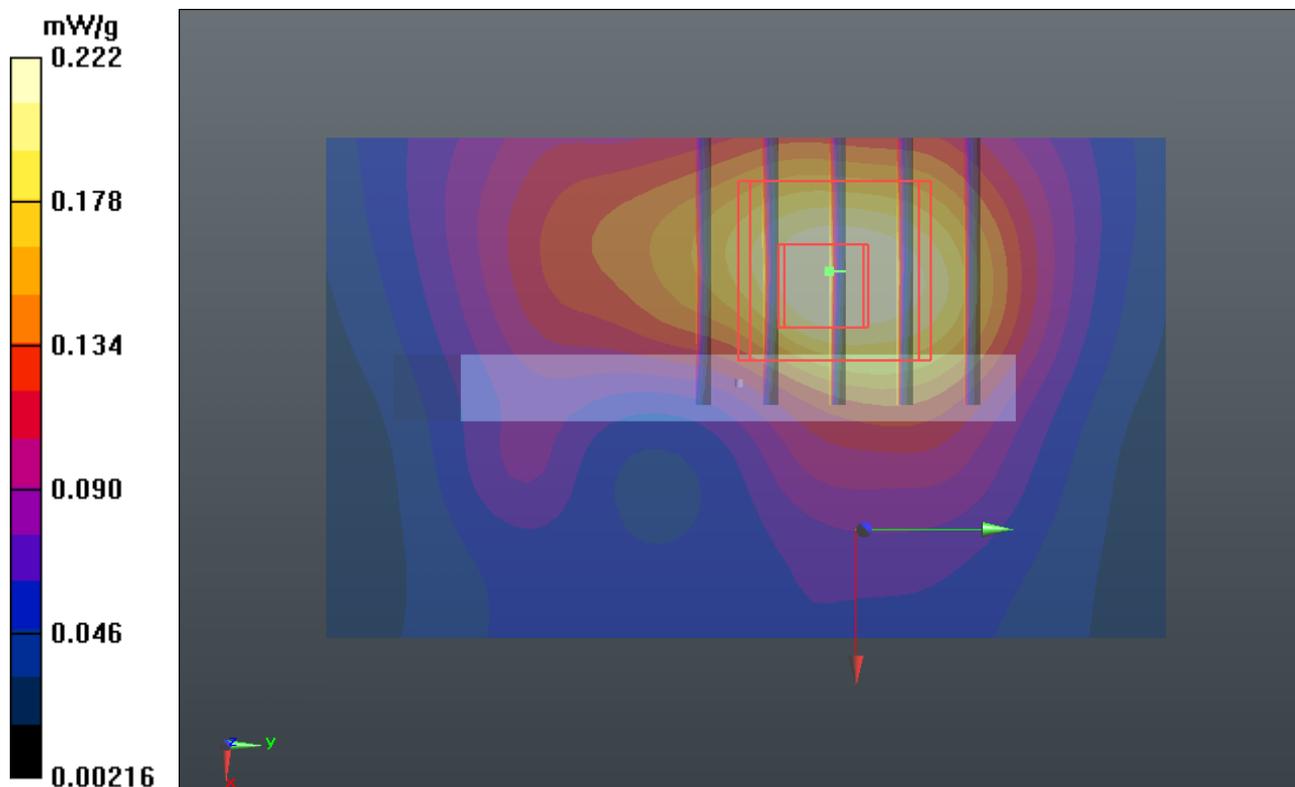

### P69 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9262\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.497$  mho/m;  $\epsilon_r = 54.115$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9262/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.71 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.720 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.660 mW/g

**SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.785 mW/g**

Maximum value of SAR (measured) = 1.42 mW/g

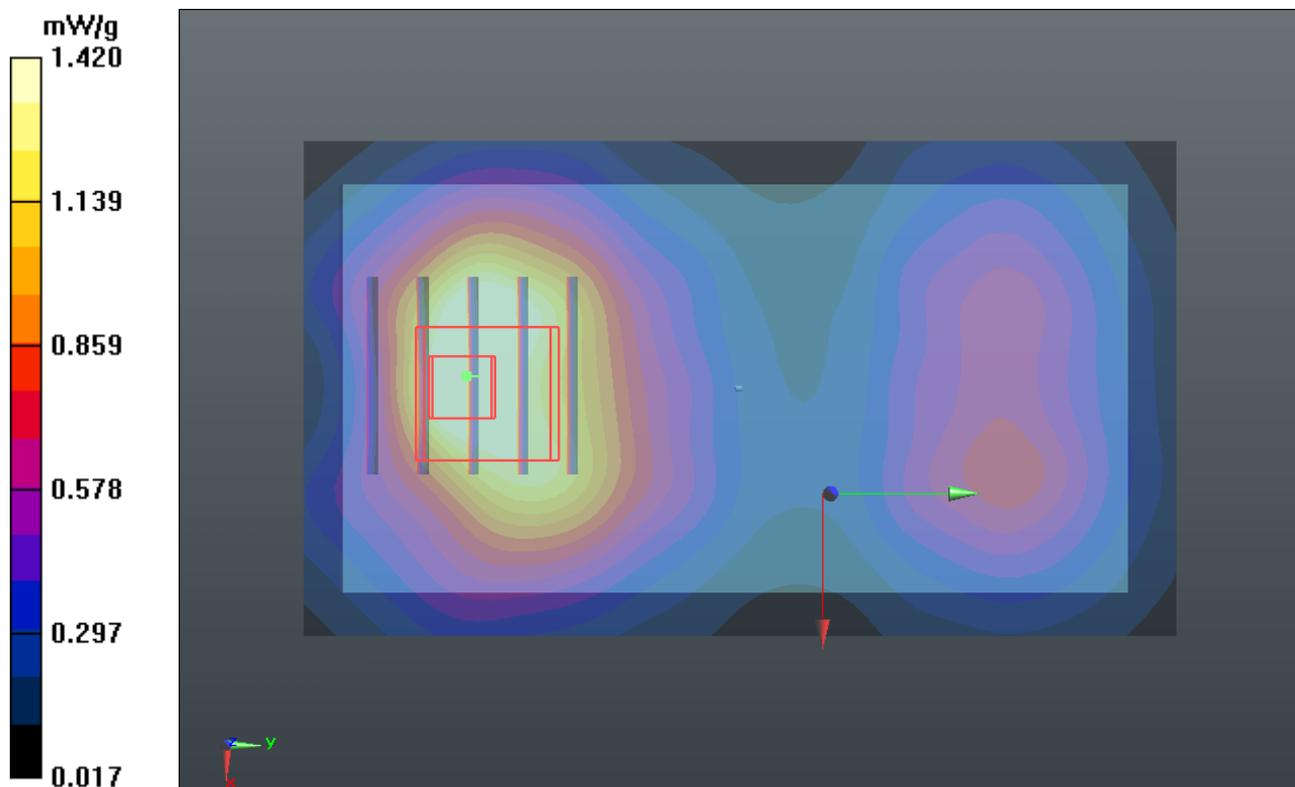

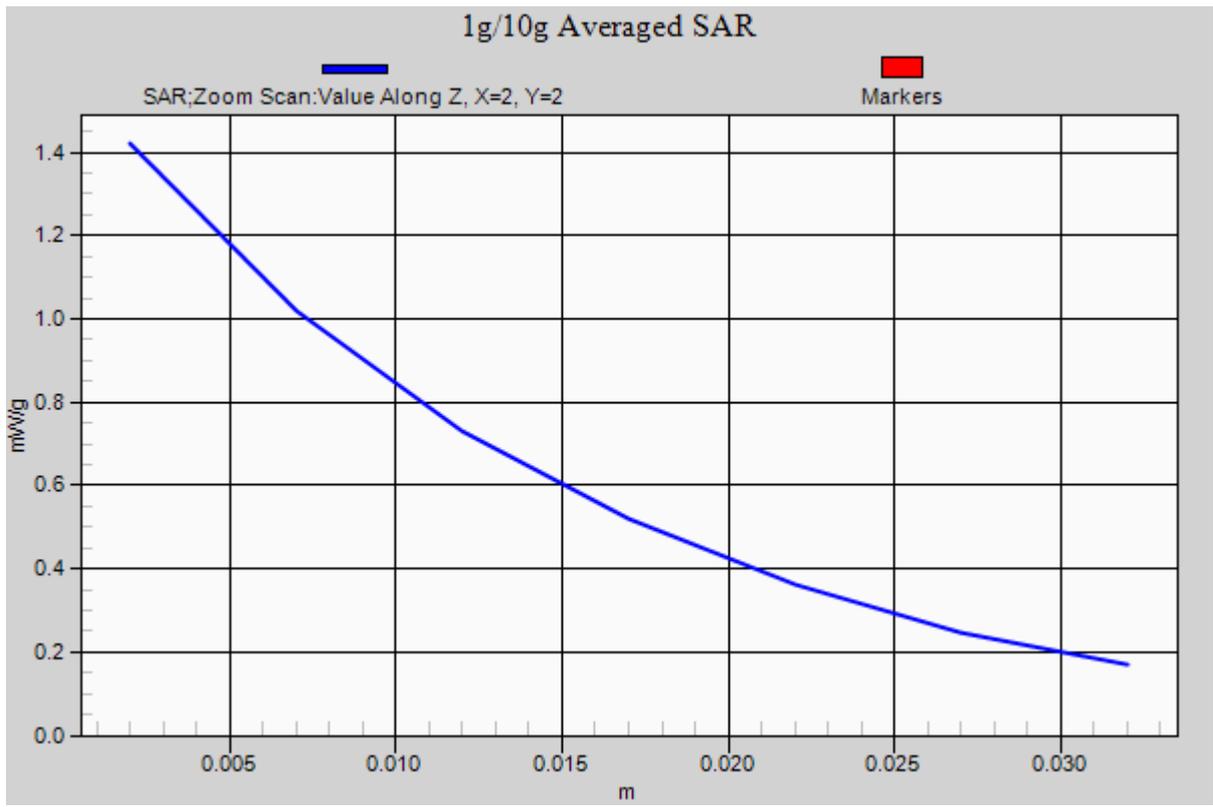

### P70 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9400\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9400/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.54 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.649 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.527 mW/g

**SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.703 mW/g**

Maximum value of SAR (measured) = 1.30 mW/g

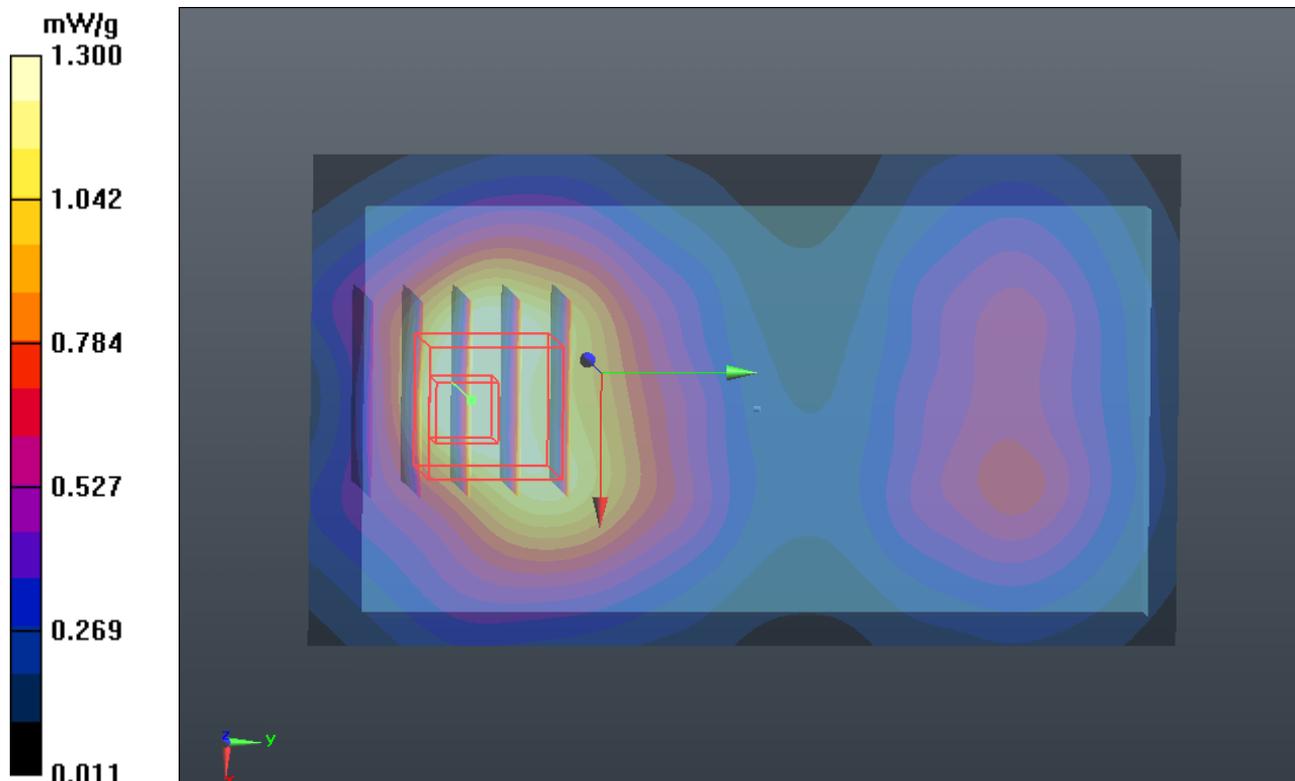

### P73 WCDMA II\_RMC12.2K\_Rear Face\_1cm\_Ch9262\_Sample1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.497$  mho/m;  $\epsilon_r = 54.115$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9262/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.26 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.124 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.325 mW/g

**SAR(1 g) = 0.922 mW/g; SAR(10 g) = 0.606 mW/g**

Maximum value of SAR (measured) = 1.12 mW/g

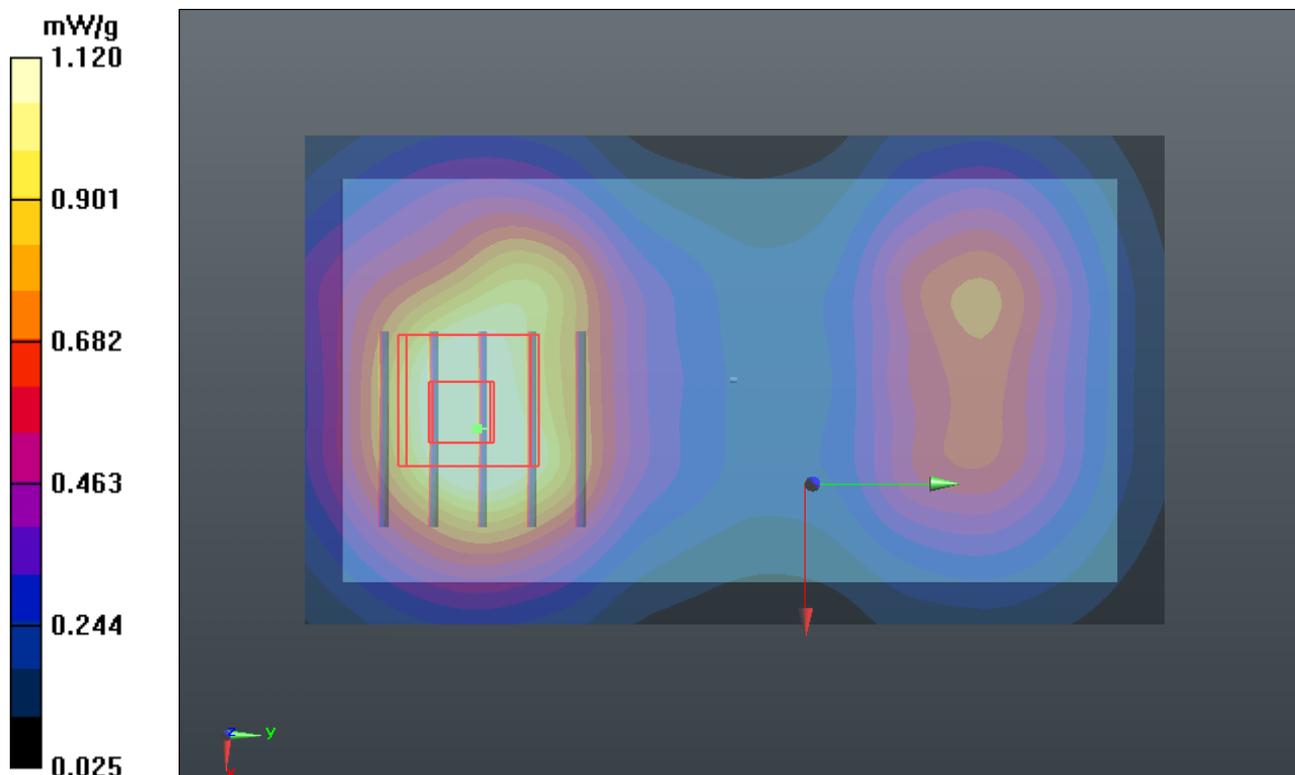

### P74 WCDMA II\_RMC12.2K\_Rear Face\_1cm\_Ch9400\_Sample1

**DUT: 120425C07**


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9400/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm  
Maximum value of SAR (interpolated) = 1.19 mW/g

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 11.123 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 1.308 mW/g  
**SAR(1 g) = 0.907 mW/g; SAR(10 g) = 0.597 mW/g**  
Maximum value of SAR (measured) = 1.11 mW/g

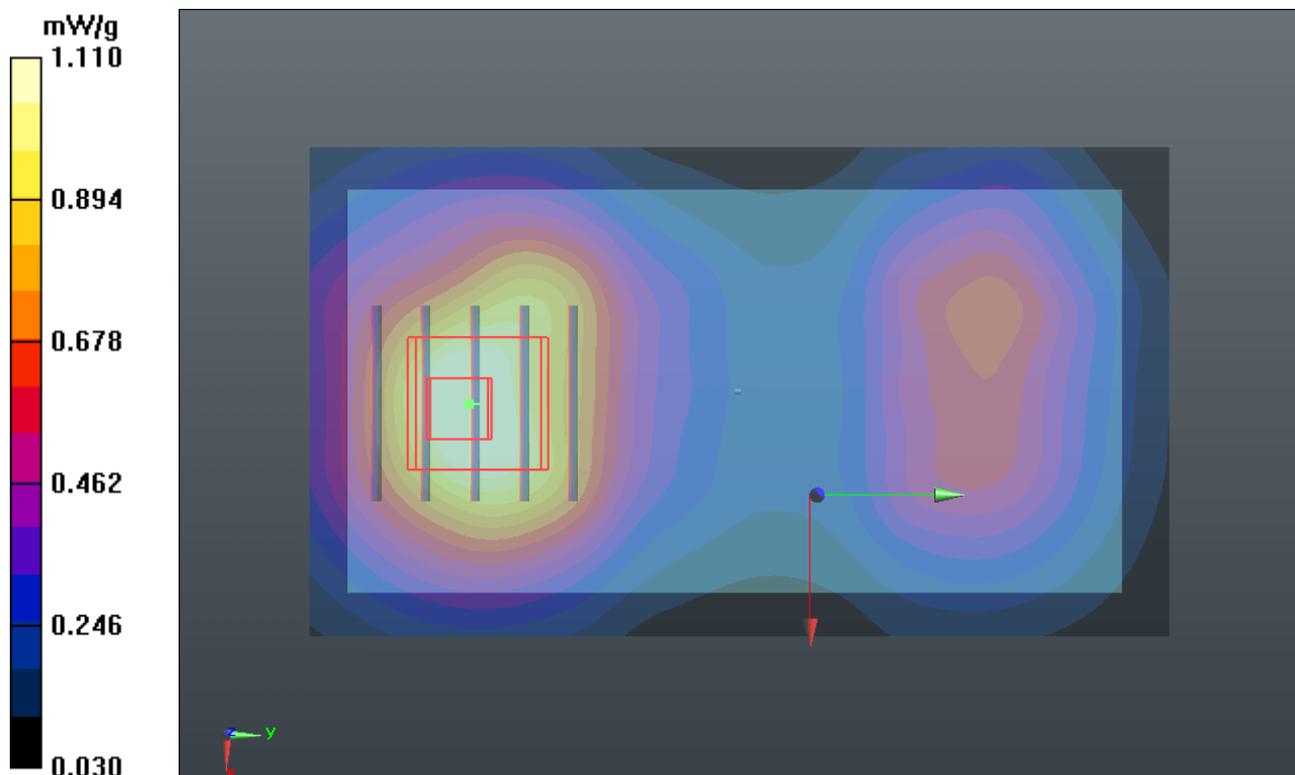

### P63 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9262\_Sample2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.497$  mho/m;  $\epsilon_r = 54.115$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9262/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.70 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.632 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.513 mW/g

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.728 mW/g**

Maximum value of SAR (measured) = 1.30 mW/g

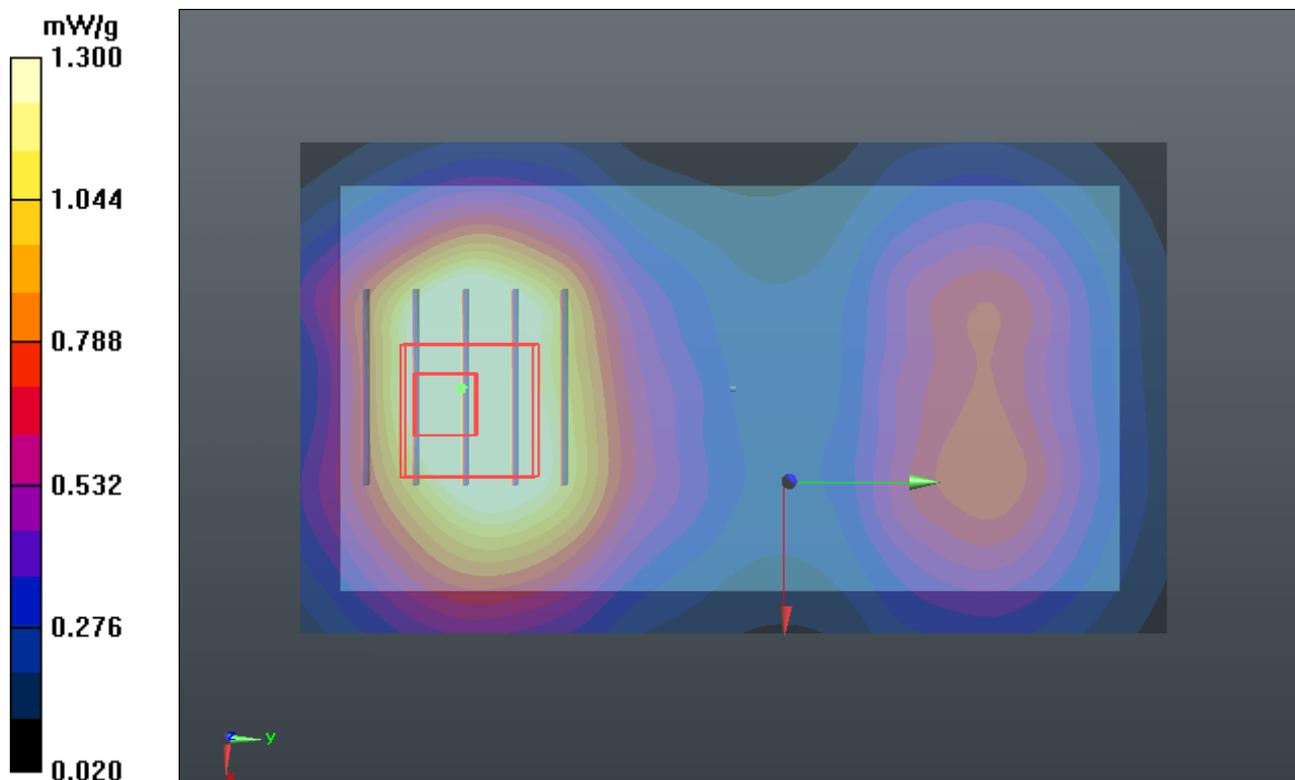

### P75 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9400\_Sample2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9400/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.44 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.933 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.471 mW/g

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.694 mW/g**

Maximum value of SAR (measured) = 1.26 mW/g

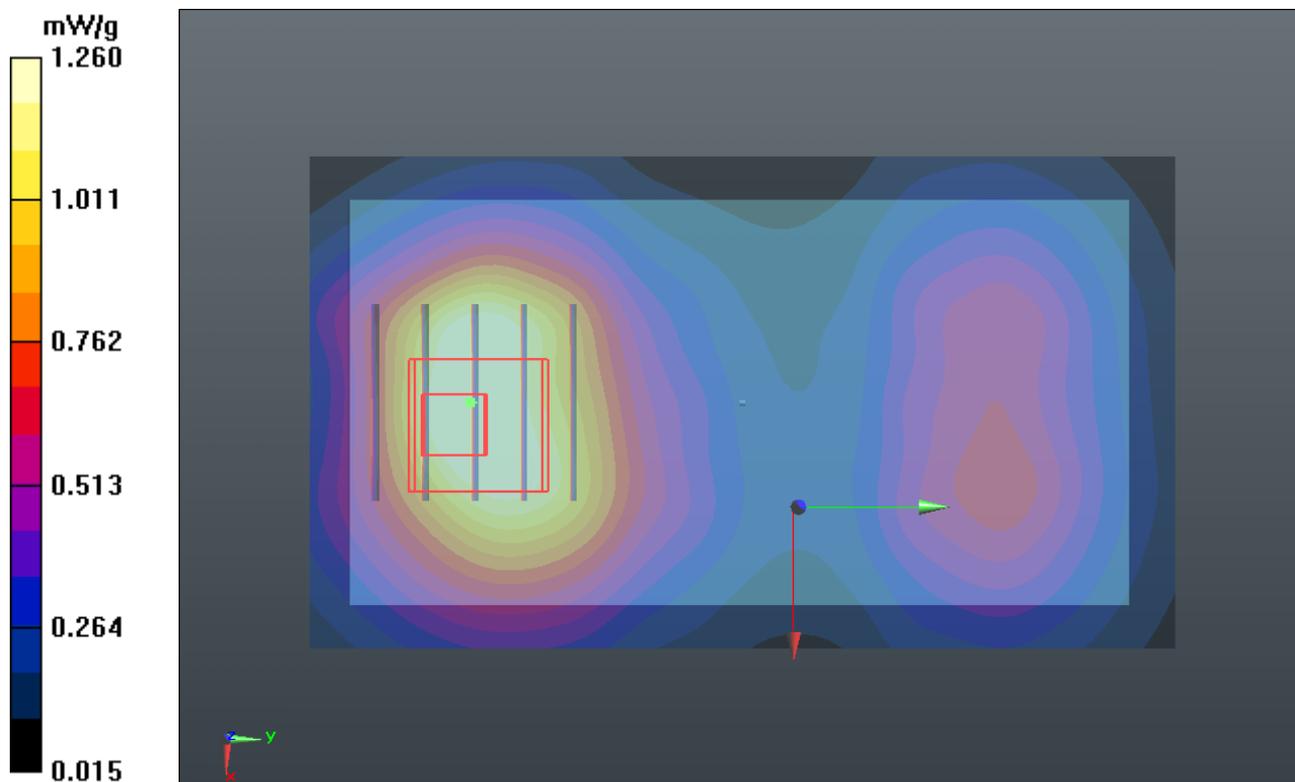

### P76 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9538\_Sample2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.36 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.546 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.419 mW/g

**SAR(1 g) = 0.995 mW/g; SAR(10 g) = 0.651 mW/g**

Maximum value of SAR (measured) = 1.21 mW/g

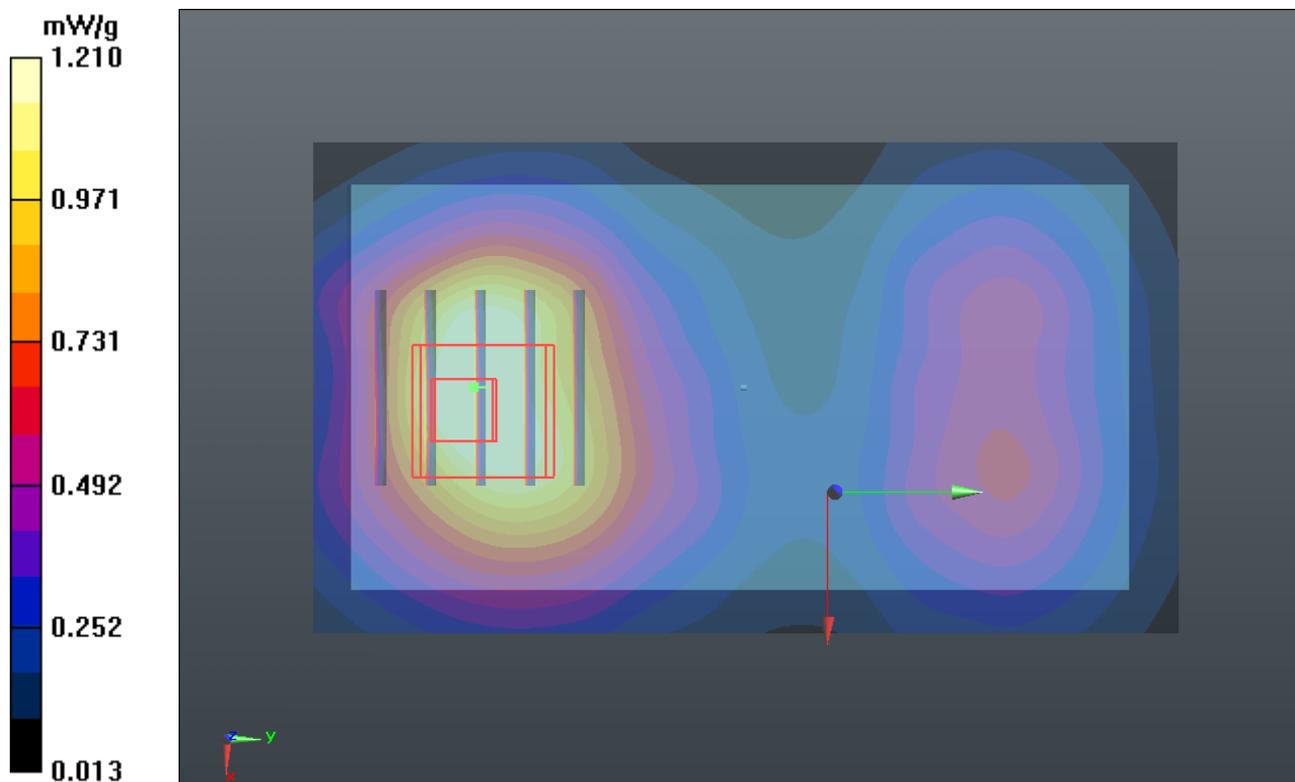

### P64 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9538\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.47 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.280 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.464 mW/g

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.678 mW/g**

Maximum value of SAR (measured) = 1.25 mW/g

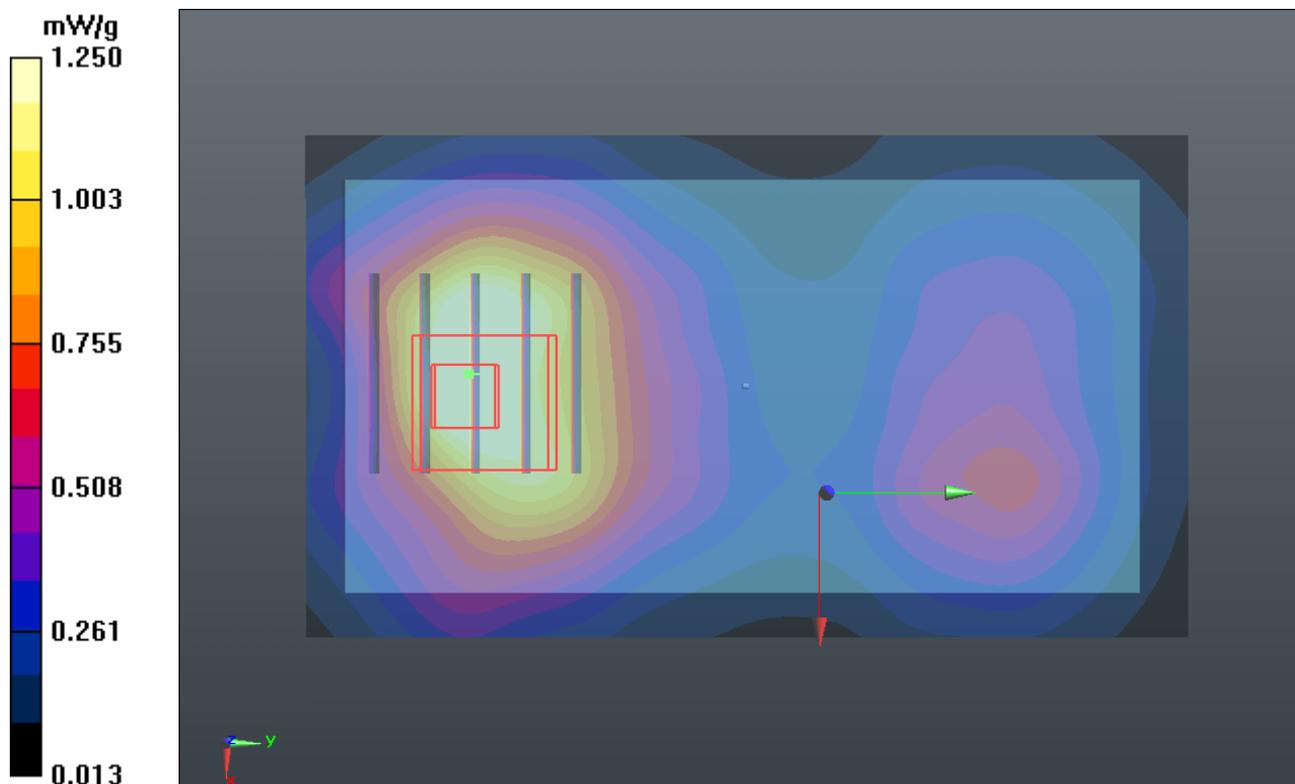

## P65 WCDMA II\_RMC12.2K\_Rear Face\_1cm\_Ch9538\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.04 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.755 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.171 mW/g

**SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.515 mW/g**

Maximum value of SAR (measured) = 0.990 mW/g

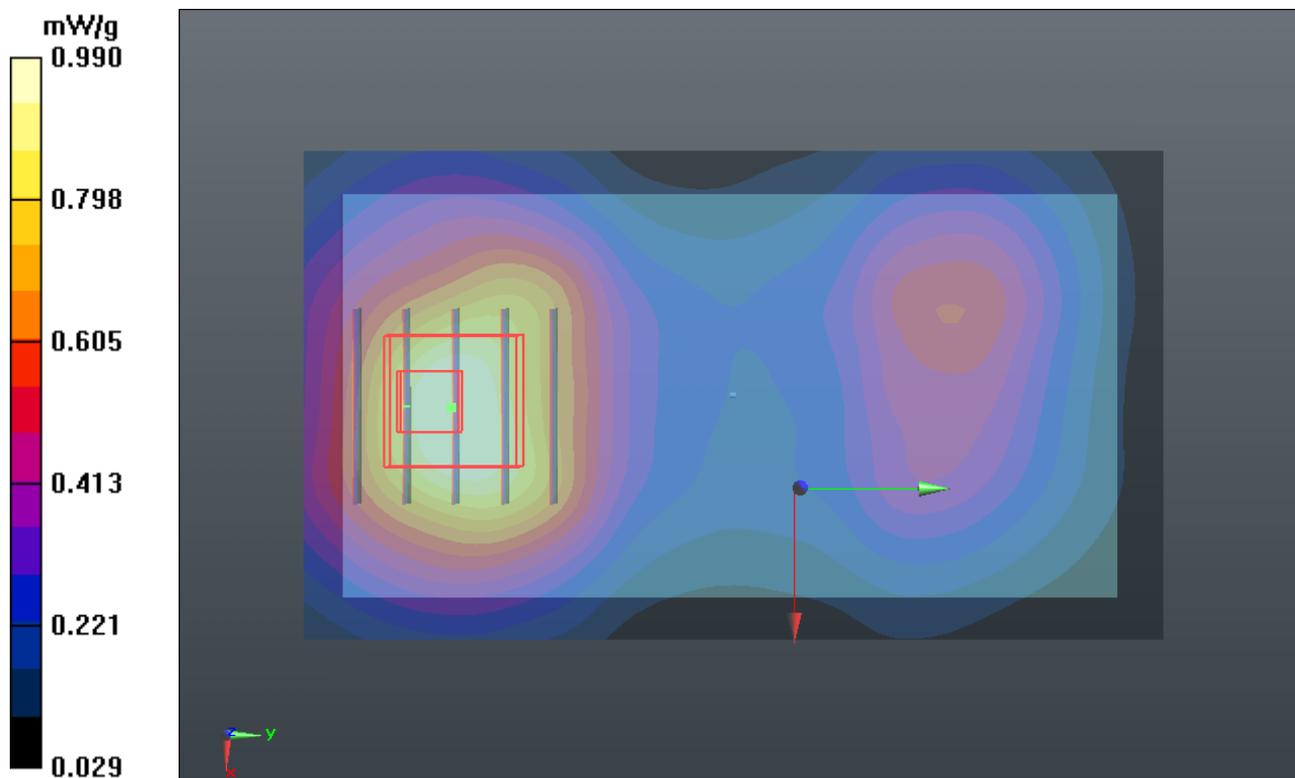

### P71 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9262\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.497$  mho/m;  $\epsilon_r = 54.115$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9262/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.57 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.735 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.517 mW/g

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.704 mW/g**

Maximum value of SAR (measured) = 1.31 mW/g

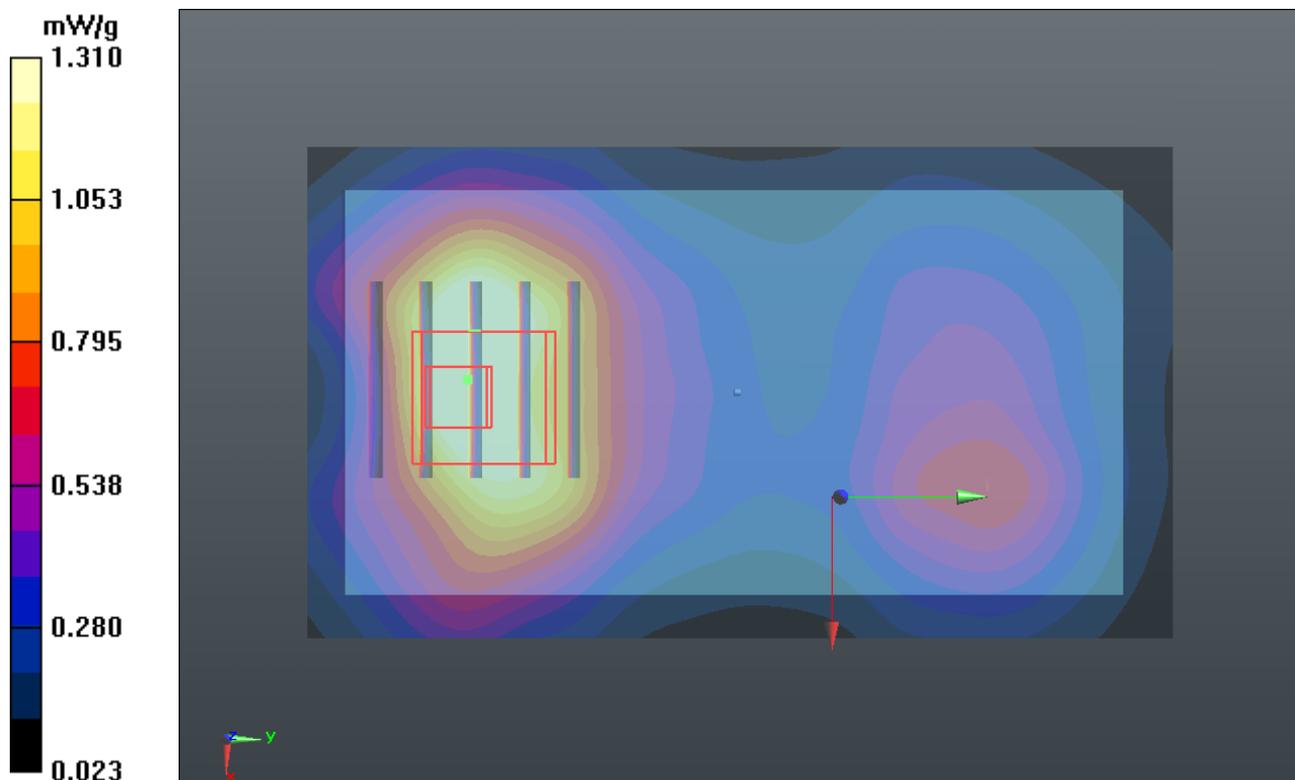

### P72 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9400\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9400/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.51 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.249 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.500 mW/g

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.704 mW/g**

Maximum value of SAR (measured) = 1.29 mW/g

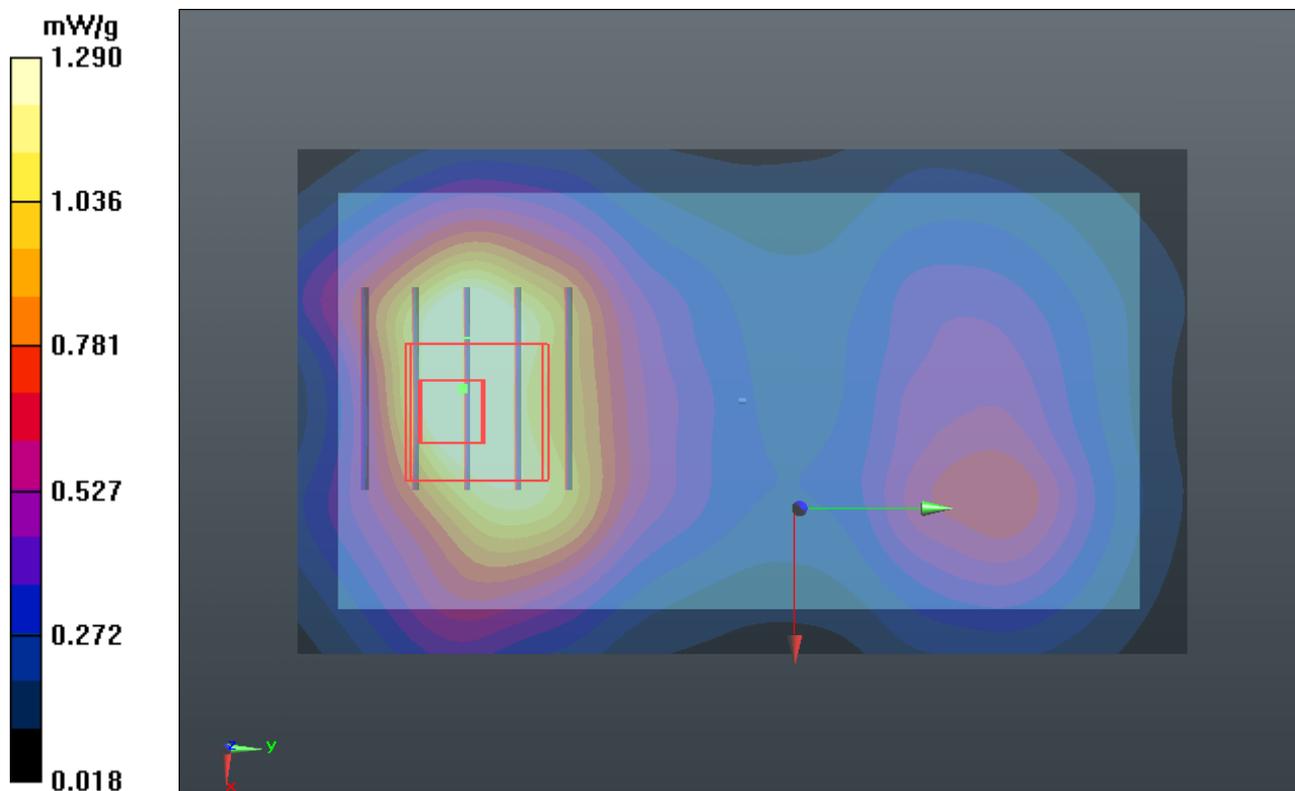

## P66 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9400\_Sample2\_Earphone2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.007$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9400/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.13 mW/g


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.932 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.228 mW/g

**SAR(1 g) = 0.866 mW/g; SAR(10 g) = 0.575 mW/g**

Maximum value of SAR (measured) = 1.06 mW/g

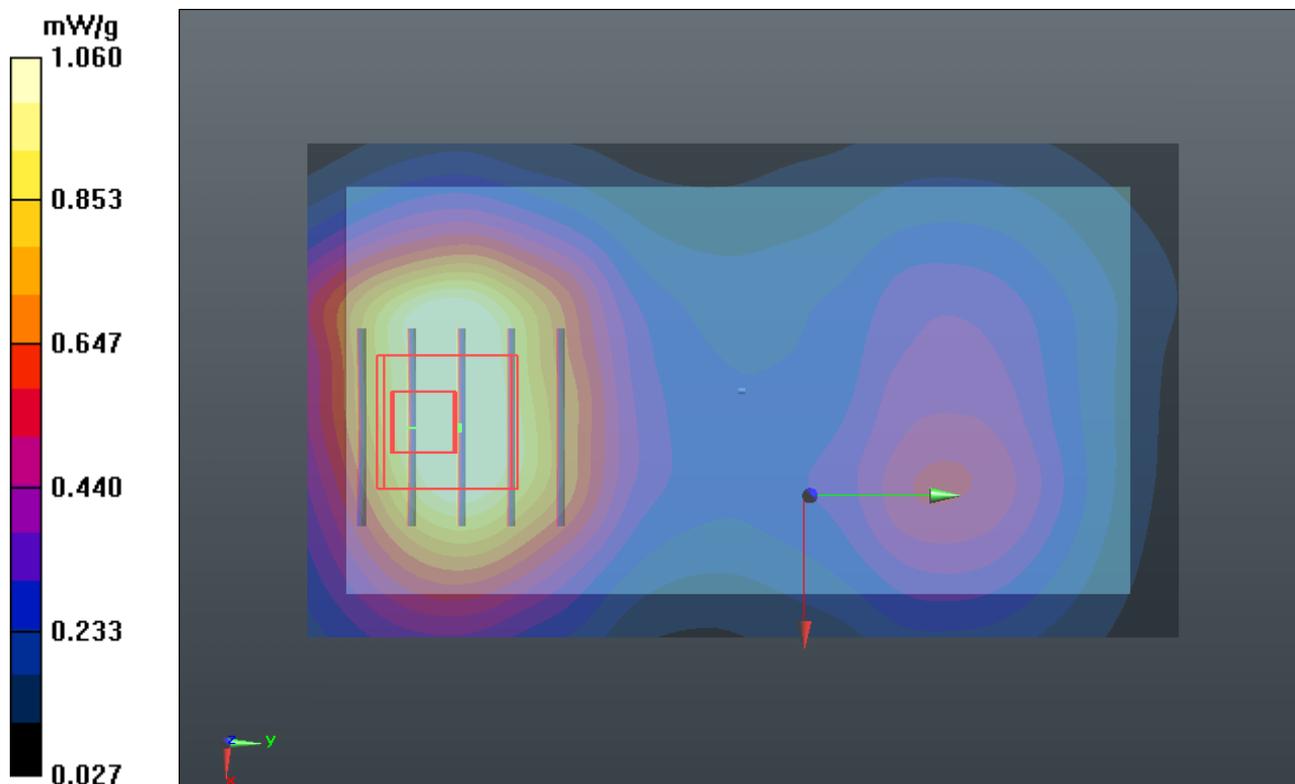

## P77 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9262\_Sample2\_Earphone2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.497$  mho/m;  $\epsilon_r = 54.115$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9262/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.16 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.888 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.243 mW/g

**SAR(1 g) = 0.885 mW/g; SAR(10 g) = 0.593 mW/g**

Maximum value of SAR (measured) = 1.06 mW/g

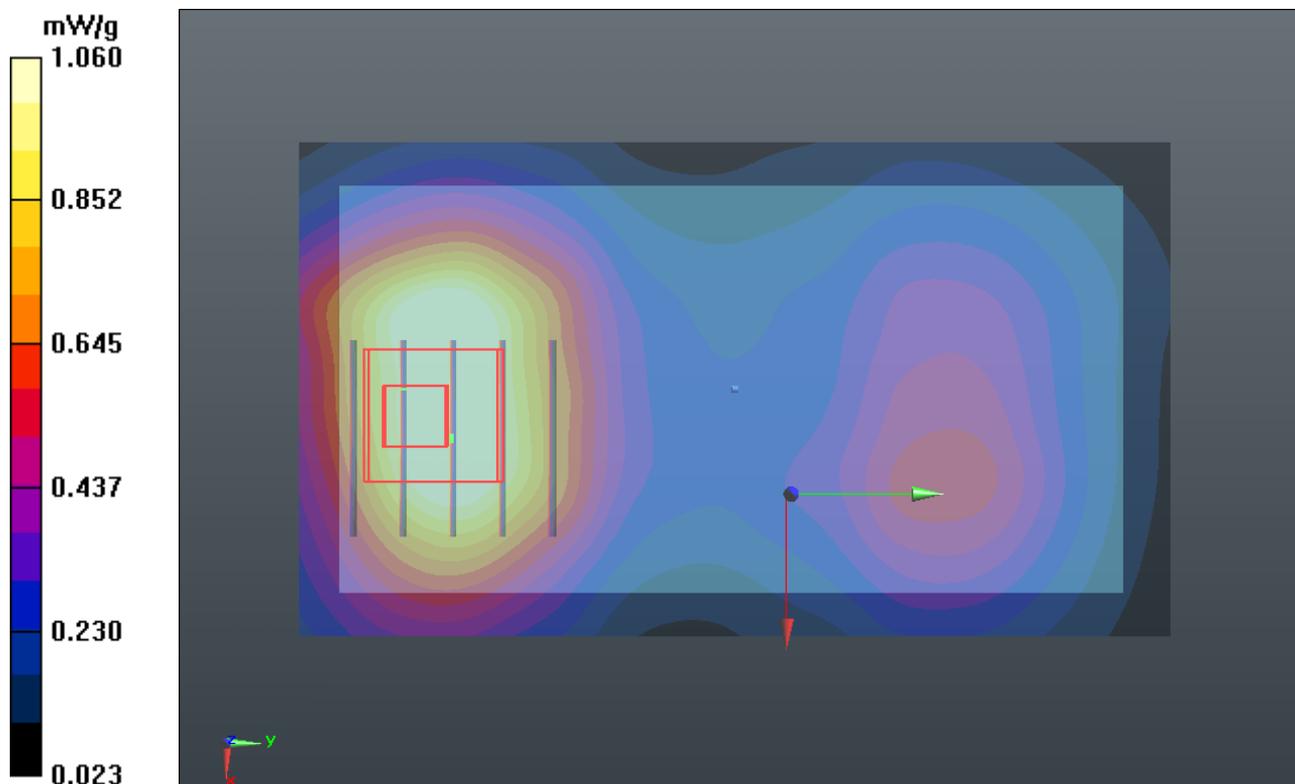

## P78 WCDMA II\_RMC12.2K\_Front Face\_1cm\_Ch9538\_Sample2\_Earphone2

**DUT: 120425C07**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: B1900\_0428 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.561$  mho/m;  $\epsilon_r = 53.935$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.4 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.07, 8.07, 8.07); Calibrated: 2012/02/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Ch9538/Area Scan (41x71x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.06 mW/g


**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.037 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.167 mW/g

**SAR(1 g) = 0.816 mW/g; SAR(10 g) = 0.534 mW/g**

Maximum value of SAR (measured) = 1.01 mW/g

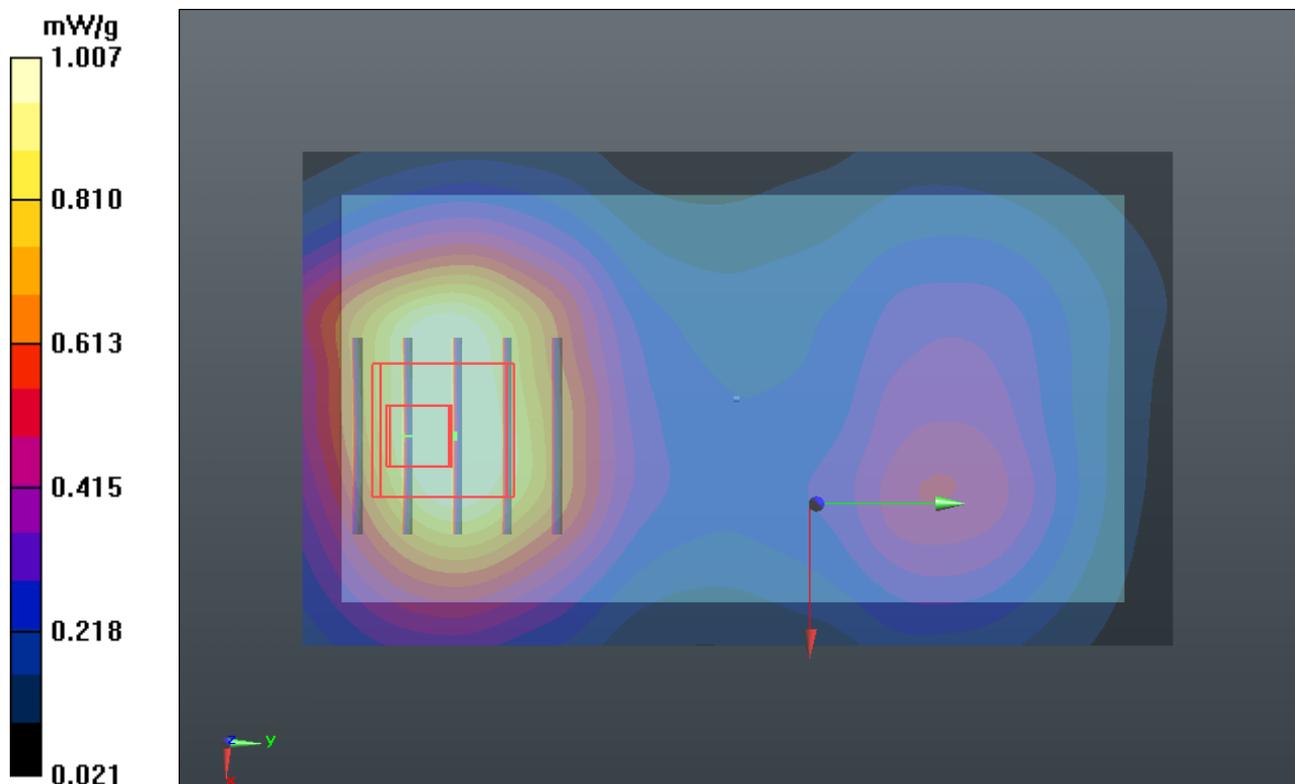

### P86 802.11b\_Front Face\_1cm\_Ch11\_Sample1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450\_0503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.8, 7.8, 7.8); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1039
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.103 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.75 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 0.165 W/kg

**SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.050 mW/g**

Maximum value of SAR (measured) = 0.121 mW/g

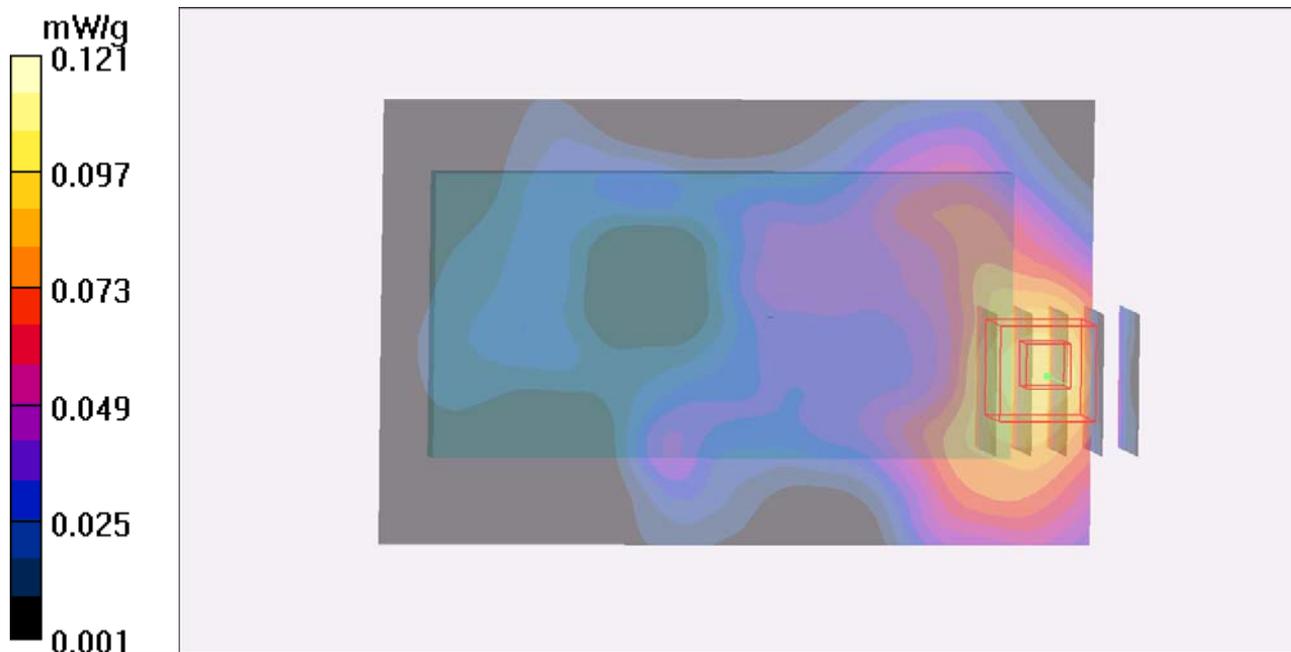

### P87 802.11b\_Rear Face\_1cm\_Ch11\_Sample1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450\_0503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.8, 7.8, 7.8); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1039
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.250 mW/g

**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.26 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.353 W/kg

**SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.078 mW/g**

Maximum value of SAR (measured) = 0.247 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.26 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.246 W/kg


**SAR(1 g) = 0.134 mW/g; SAR(10 g) = 0.076 mW/g**

Maximum value of SAR (measured) = 0.183 mW/g

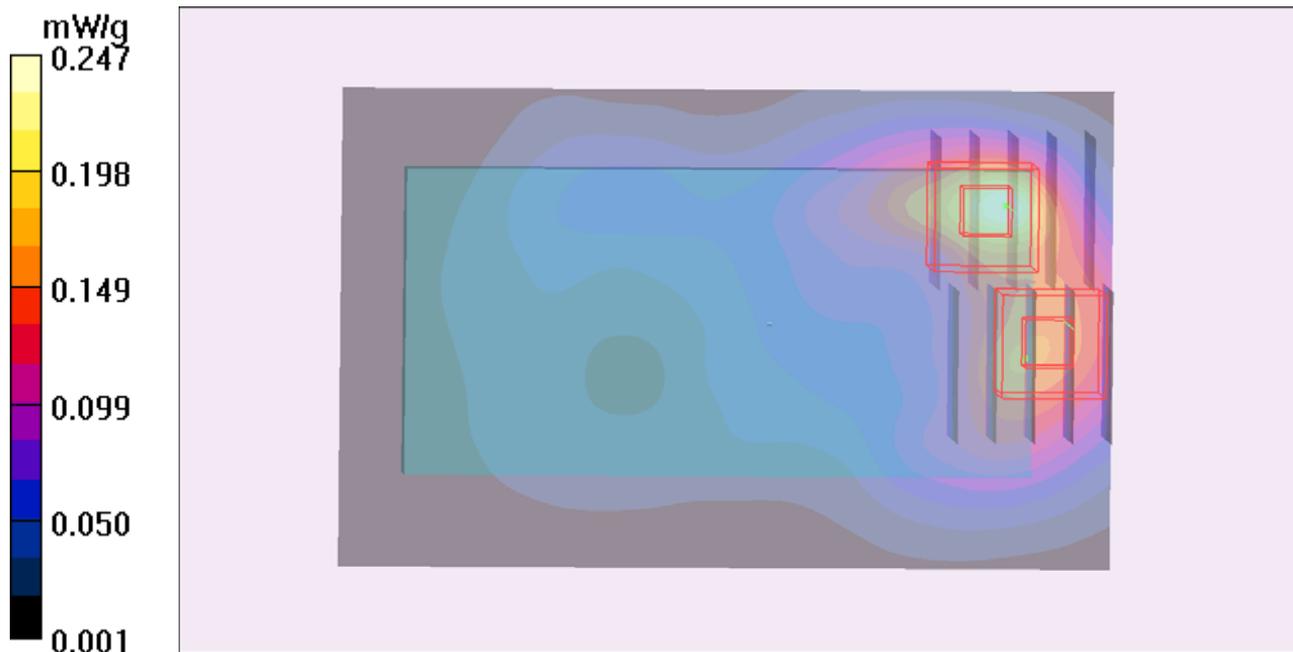

# 1g/10g Averaged SAR

SAR; Zoom Scan: Value Along Z, X=2, Y=2

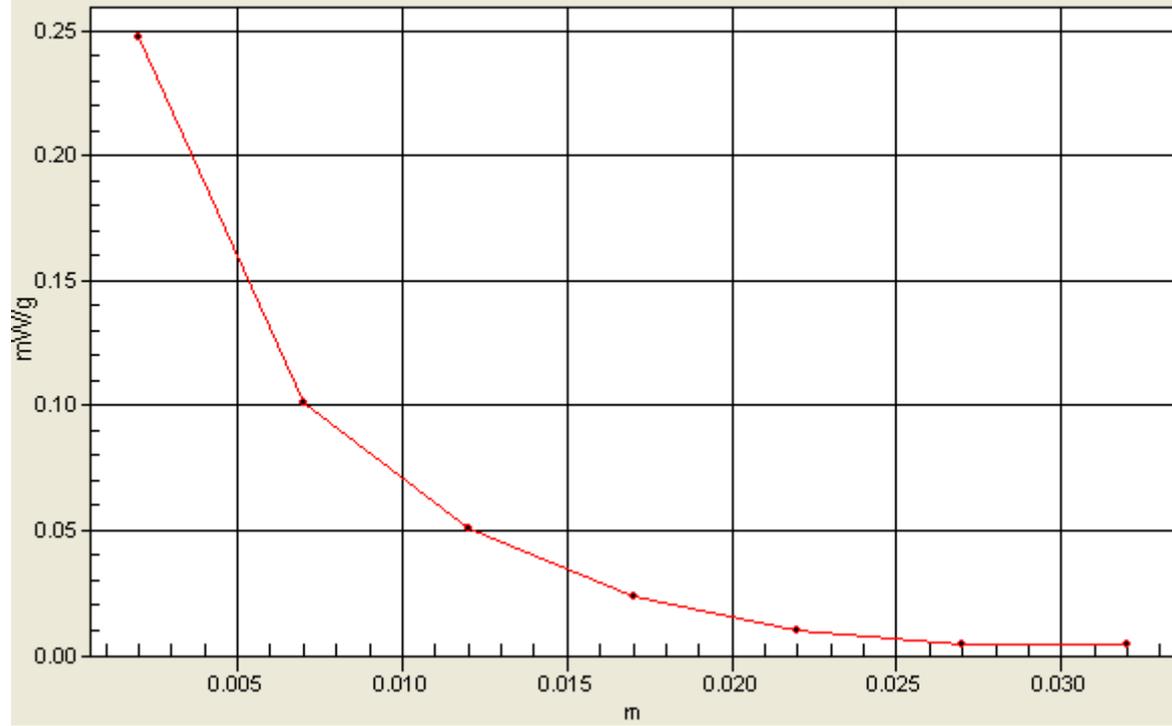

### P88 802.11b\_Right Side\_1cm\_Ch11\_Sample1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450\_0503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.8, 7.8, 7.8); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1039
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.153 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.77 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.054 mW/g**

Maximum value of SAR (measured) = 0.159 mW/g

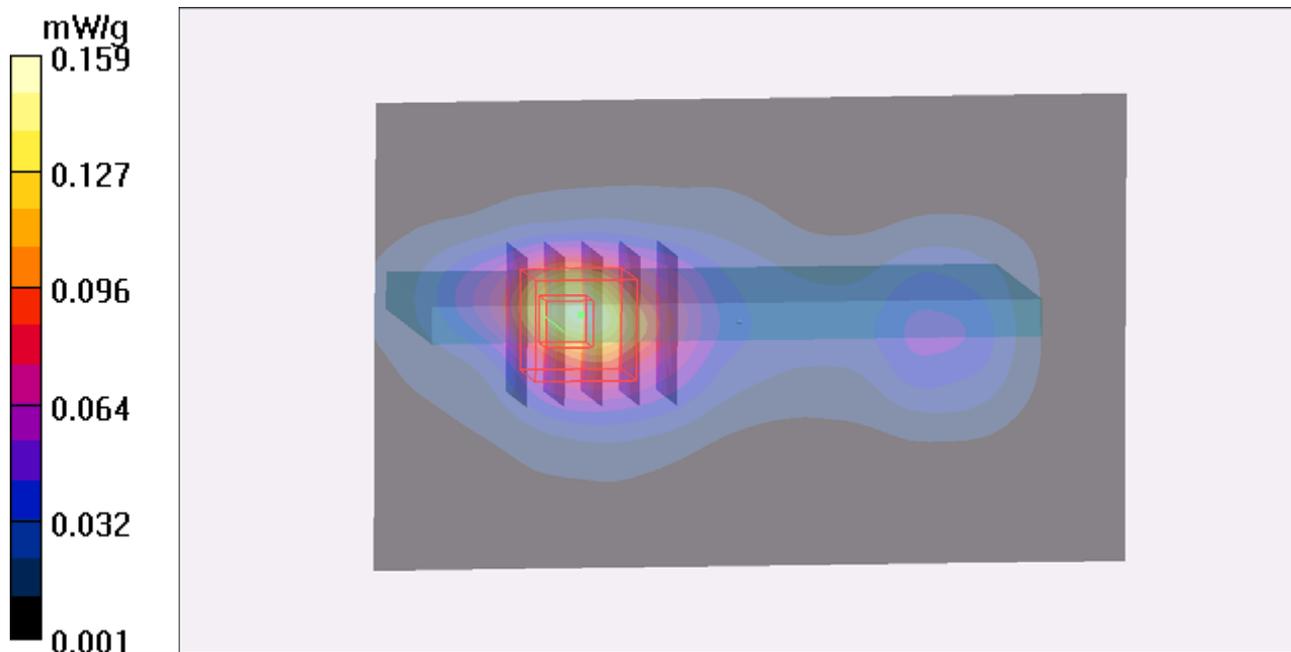

### P89 802.11b\_Top Side\_1cm\_Ch11\_Sample1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450\_0503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.8, 7.8, 7.8); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1039
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.206 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.290 W/kg

**SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.082 mW/g**

Maximum value of SAR (measured) = 0.223 mW/g

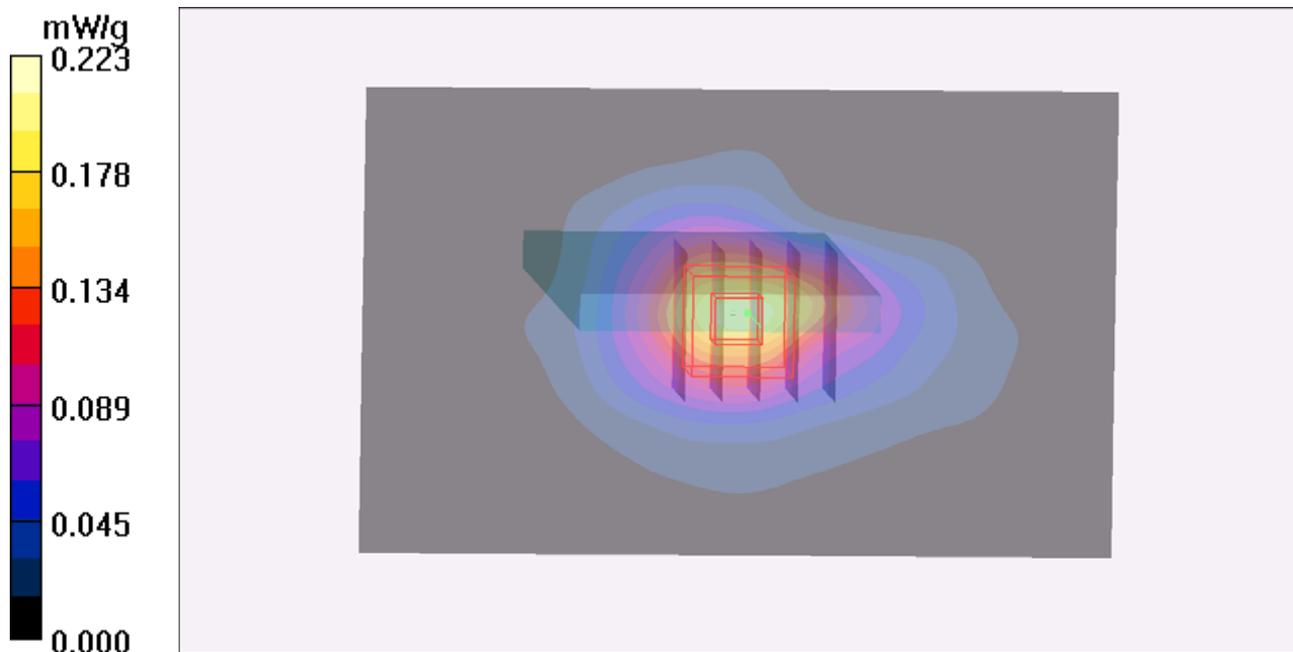

## P90 802.11b\_Rear Face\_1cm\_Ch11\_Sample2

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450\_0503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.8, 7.8, 7.8); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1039
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.244 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.17 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.346 W/kg

**SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.072 mW/g**

Maximum value of SAR (measured) = 0.213 mW/g

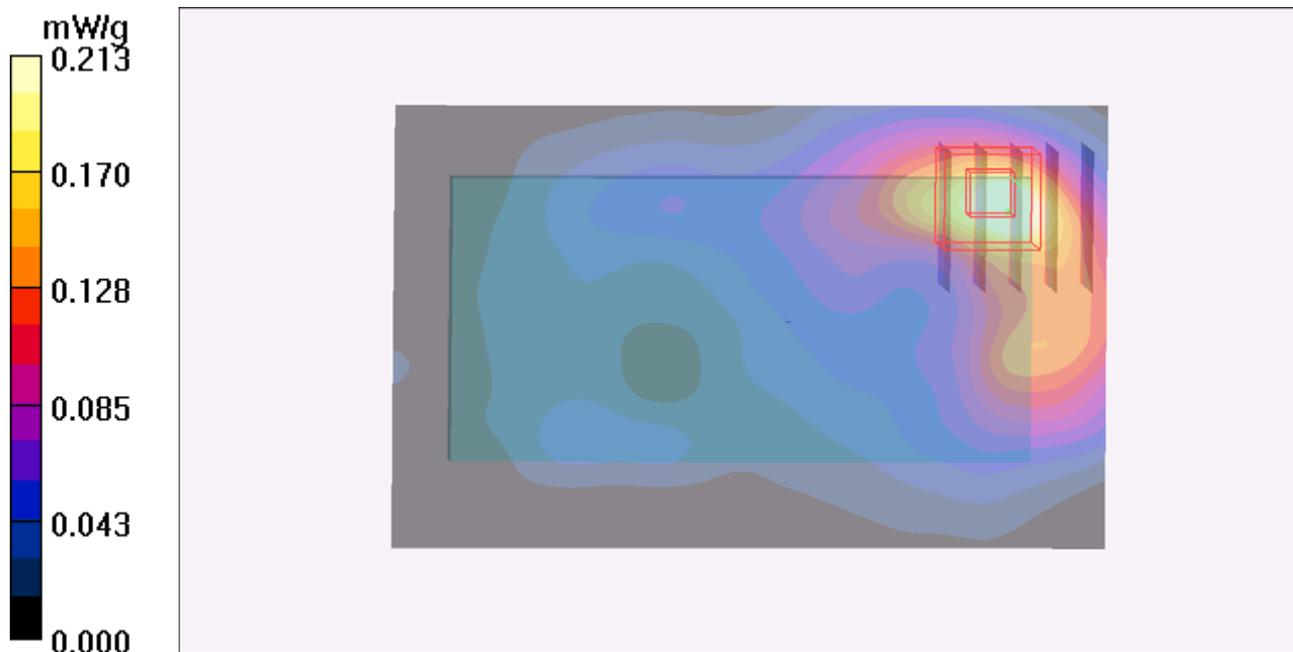

## P91 802.11b\_Front Face\_1cm\_Ch11\_Sample2\_Earphone2

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450\_0503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.8, 7.8, 7.8); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1039
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.079 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.24 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 0.116 W/kg

**SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.036 mW/g**

Maximum value of SAR (measured) = 0.088 mW/g

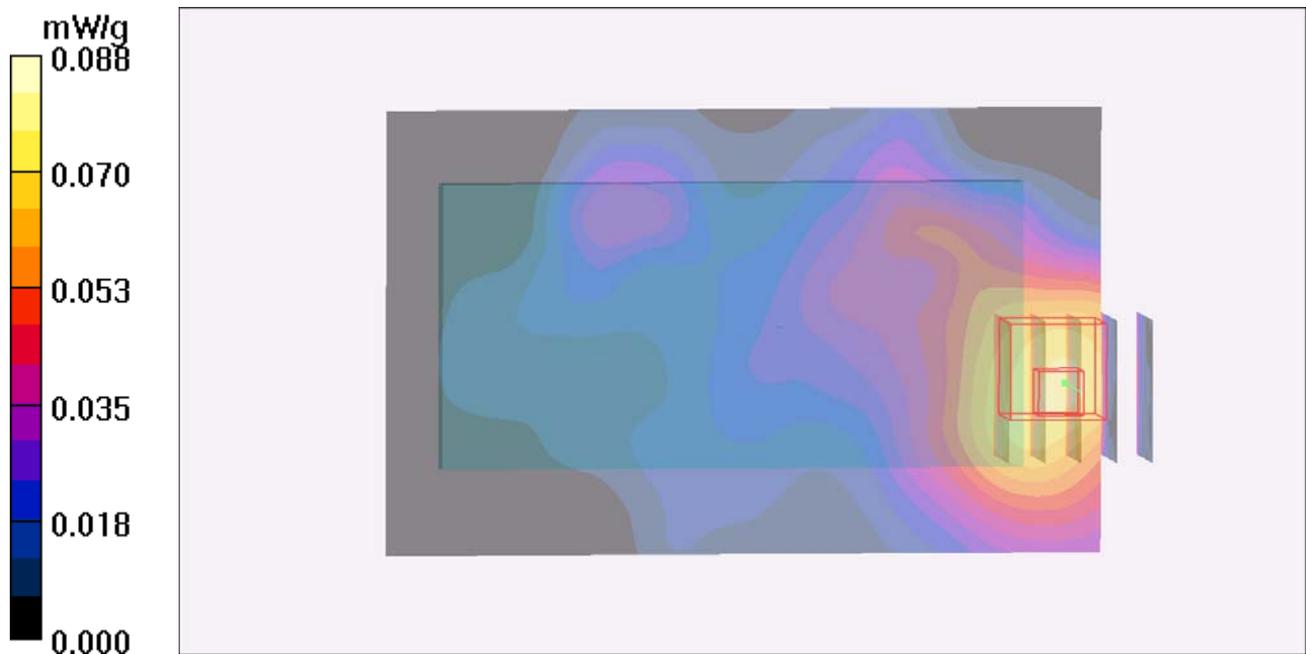

### P92 802.11b\_Rear Face\_1cm\_Ch11\_Sample1\_Earphone1

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450\_0503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.8, 7.8, 7.8); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1039
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.226 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.75 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.286 W/kg

**SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.062 mW/g**

Maximum value of SAR (measured) = 0.197 mW/g

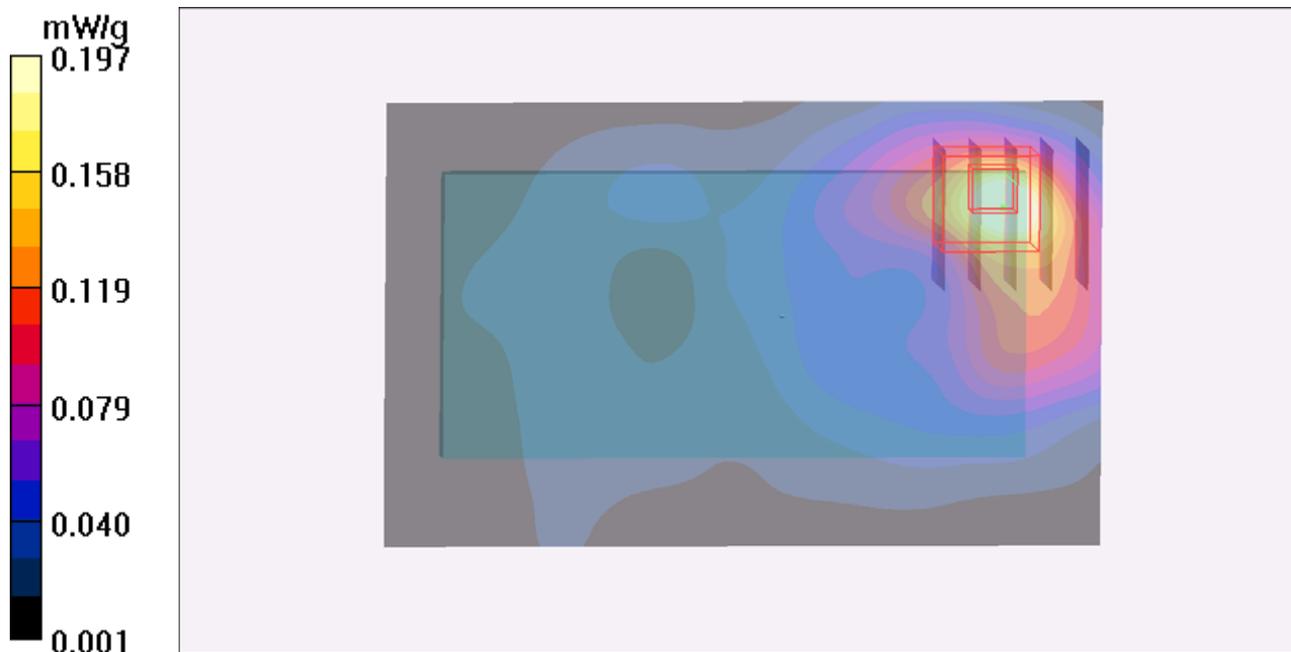

### P93 802.11b\_Rear Face\_1cm\_Ch11\_Sample2\_Earphone2

**DUT: 120425C07**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: B2450\_0503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.04$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.8, 7.8, 7.8); Calibrated: 2012/02/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2011/08/29
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1039
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (51x81x1):** Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.205 mW/g

**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.55 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.281 W/kg

**SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.058 mW/g**

Maximum value of SAR (measured) = 0.174 mW/g

