

## FCC 47 CFR PART 15 SUBPART C

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model Number : PJ46100  
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 3: Dec., 2010  
ANSI C63.4-2009  
Application Purpose: : Original  
Receive Date : Jan. 19, 2012  
Issue Date : Feb. 24, 2012

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Revised By</b>
00	Feb. 23, 2012	Initial Issue	
01	Feb. 24, 2012	Add 6dB RF Bandwidth and Maximum Power Density Measurement	Linda Su

## Verification of Compliance

Issued Date: 02/24/2012

Product Type : Smartphone  
Applicant : HTC Corporation  
Address : No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330,  
Taiwan  
Trade Name : HTC  
Model Number : PJ46100  
FCC ID : NM8PJ46100  
EUT Rated Voltage : DC 5.0V, 1.0A  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
Canada RSS-210 ISSUE 8: Dec., 2010  
Canada RSS-Gen ISSUE 3: Dec., 2010  
ANSI C63.4-2009  
Test Result : Complied  
Application Purpose : Original  
Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.

Tel : +886-3-2710188 / Fax : +886-3-2710190

Taiwan Accreditation Foundation accreditation number:  
1330

<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .  
The test results of this report relate only to the tested sample identified in this report.

Approved By :  Reviewed By :   
(Manager) (Murphy Wang) (Testing Engineer) (Fly Lu)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>7</b>
<b>2</b>	<b>EUT Description .....</b>	<b>8</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>9</b>
3.1	Mode of Operation .....	9
3.2	EUT Exercise Software.....	11
3.3	Configuration of Test System Details.....	11
3.4	Test Site Environment.....	11
<b>4</b>	<b>Conducted Emission Measurement .....</b>	<b>12</b>
4.1	Limit .....	12
4.2	Test Instruments .....	12
4.3	Test Setup.....	12
4.4	Test Procedure.....	13
4.5	Test Result .....	14
<b>5</b>	<b>Radiated Interference Measurement .....</b>	<b>18</b>
5.1	Limit .....	18
5.2	Test Instruments .....	18
5.3	Setup.....	19
5.4	Test Procedure.....	20
5.5	Test Result .....	22
<b>6</b>	<b>Maximum Conducted Output Power Measurement.....</b>	<b>29</b>
6.1	Limit .....	29
6.2	Test Setup.....	29
6.3	Test Instruments .....	29
6.4	Test Procedure.....	29
6.5	Test Result .....	30
<b>7</b>	<b>Minimum 20dB RF Bandwidth Measurement .....</b>	<b>32</b>
7.1	Limit .....	32
7.2	Test Setup.....	32
7.3	Test Instruments .....	32
7.4	Test Procedure.....	32
7.5	Test Result .....	33
7.6	Test Graphs .....	34

<b>8</b>	<b>Carrier Frequency Separation Measurement .....</b>	<b>37</b>
8.1	Limit .....	37
8.2	Test Setup .....	37
8.3	Test Instruments .....	37
8.4	Test Procedure.....	38
8.5	Test Result .....	39
8.6	Test Graphs .....	40
<b>9</b>	<b>Number of Hopping Measurement .....</b>	<b>41</b>
9.1	Limit .....	41
9.2	Test Setup .....	41
9.3	Test Instruments .....	41
9.4	Test Procedure.....	41
9.5	Test Result .....	42
9.6	Test Graphs .....	43
<b>10</b>	<b>Time of Occupancy (Dwell Time) Measurement.....</b>	<b>46</b>
10.1	Limit .....	46
10.2	Test Setup.....	46
10.3	Test Instruments .....	46
10.4	Test Procedure.....	46
10.5	Test Result .....	47
10.6	Test Graphs .....	50
<b>11</b>	<b>6dB RF Bandwidth Measurement .....</b>	<b>53</b>
11.1	Limit.....	53
11.2	Test Setup .....	53
11.3	Test Instruments.....	53
11.4	Test Procedure .....	53
11.5	Test Result .....	54
11.6	Test Graphs.....	55
<b>12</b>	<b>Maximum Power Density Measurement.....</b>	<b>56</b>
12.1	Limit .....	56
12.2	Test Setup.....	56
12.3	Test Instruments .....	56
12.4	Test Procedure.....	56
12.5	Test Result .....	57
12.6	Test Graphs .....	58

<b>13</b>	<b>Out of Band Conducted Emissions Measurement .....</b>	<b>59</b>
13.1	Limit .....	59
13.2	Test Setup.....	59
13.3	Test Instruments .....	59
13.4	Test Procedure.....	59
13.5	Test Graphs .....	60
<b>14</b>	<b>Band Edges Measurement .....</b>	<b>63</b>
14.1	Limit .....	63
14.2	Test Setup.....	63
14.3	Test Instruments .....	63
14.4	Test Procedure.....	64
14.5	Test Result .....	65
<b>15</b>	<b>99 % Occupied Bandwidth Measurement.....</b>	<b>77</b>
15.1	Limit .....	77
15.2	Test Setup.....	77
15.3	Test Instruments .....	77
15.4	Test Procedure.....	77
15.5	Test Result .....	78
15.6	Test Graphs .....	79
<b>16</b>	<b>Antenna Measurement.....</b>	<b>82</b>
16.1	Limit .....	82
16.2	Antenna Connector Construction .....	82

## 1 General Information

### 1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(c)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(1)	A8.4 (2)	Max. Output Power	PASS	-----
15.247(a)(1)	A8.1 (1)	20dB RF Bandwidth	PASS	-----
15.247(a)(1)(iii)	A8.1 (2)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	A8.1 (4)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	A8.1 (4)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	Only for Bluetooth 4.0
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	Only for Bluetooth 4.0
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(c)	A8.5	Band Edge Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

#### Conducted Emission

The measurement uncertainty is evaluated as  $\pm 2.24$  dB.

#### Radiated Emission

The measurement uncertainty is evaluated as  $\pm 3.072$ dB.

## 2 EUT Description

Product	:	Smartphone
Trade Name	:	HTC
Model Number	:	PJ46100
Applicant	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
Manufacturer	:	HTC Corporation No. 23, Xinghua Rd., Taoyuan City, Taoyuan County 330, Taiwan
IMEI Number	:	359188040039208
FCC ID	:	NM8PJ46100
Frequency Range	:	2402 ~ 2480 MHz
Modulation Type	:	GFSK for 1Mbps
		$\pi/4$ -DQPSK for 2Mbps
		8DPSK for 3Mbps
Antenna Type	:	PIFA antenna
Antenna Gain	:	0.15 dBi
RF Output Power (Conducted)	:	Bluetooth                      0.94 dBm /    0.00124 W

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 2: Normal Operation Mode
Mode 3: GFSK Link Mode
Mode 4: $\pi/4$ -DQPSK Link Mode
Mode 5: 8DPSK Link Mode
Mode 6: BT LE Link Mode
Mode 7: Receiver Mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

**Description of Test Modes**

Preliminary tests were performed in different modulation to find the worst case. The modulation shown in the table below is the worst-case. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Modulation Type	Channel	Frequency (MHz)	Packet Type	Peak Conducted Power		Worst Case
				(dBm)	(W)	
GFSK	Low	2402	DH1	-0.75	0.00084	<input type="checkbox"/>
	Low	2402	DH3	-0.77	0.00084	<input type="checkbox"/>
	Low	2402	DH5	-0.77	0.00084	<input type="checkbox"/>
	Middle	2441	DH1	-0.48	0.00090	<input type="checkbox"/>
	Middle	2441	DH3	-0.49	0.00089	<input type="checkbox"/>
	Middle	2441	DH5	-0.50	0.00089	<input type="checkbox"/>
	High	2480	DH1	-0.47	0.00090	<input type="checkbox"/>
	High	2480	DH3	-0.43	0.00091	<input type="checkbox"/>
$\pi/4$ -DQPSK	Low	2402	2DH1	-0.04	0.00099	<input type="checkbox"/>
	Low	2402	2DH3	-0.03	0.00099	<input type="checkbox"/>
	Low	2402	2DH5	-0.07	0.00098	<input type="checkbox"/>
	Middle	2441	2DH1	0.24	0.00106	<input type="checkbox"/>
	Middle	2441	2DH3	0.23	0.00105	<input type="checkbox"/>
	Middle	2441	2DH5	0.23	0.00105	<input type="checkbox"/>
	High	2480	2DH1	0.25	0.00106	<input type="checkbox"/>
	High	2480	2DH3	0.26	0.00106	<input type="checkbox"/>
	High	2480	2DH5	0.27	0.00106	<input type="checkbox"/>
8DPSK	Low	2402	3DH1	0.46	0.00111	<input type="checkbox"/>
	Low	2402	3DH3	0.44	0.00111	<input type="checkbox"/>
	Low	2402	3DH5	0.46	0.00111	<input type="checkbox"/>
	Middle	2441	3DH1	0.87	0.00122	<input type="checkbox"/>
	Middle	2441	3DH3	0.88	0.00122	<input type="checkbox"/>
	Middle	2441	3DH5	0.87	0.00122	<input type="checkbox"/>
	High	2480	3DH1	0.85	0.00122	<input type="checkbox"/>
	High	2480	3DH3	0.90	0.00123	<input type="checkbox"/>
BT LE	Low	2402	---	-0.87	0.00082	<input type="checkbox"/>
	Middle	2440	---	-0.59	0.00087	<input type="checkbox"/>
	High	2480	---	-0.51	0.00089	<input checked="" type="checkbox"/>

### Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA

### 3.2. EUT Exercise Software

1.	Setup the EUT and Bluetooth Tester (CBT) as shown on 3.3.
2.	Turn on the power of all equipment.
3.	EUT run test program.
4.	Open Bluetooth function link to CBT.

### 3.3. Configuration of Test System Details

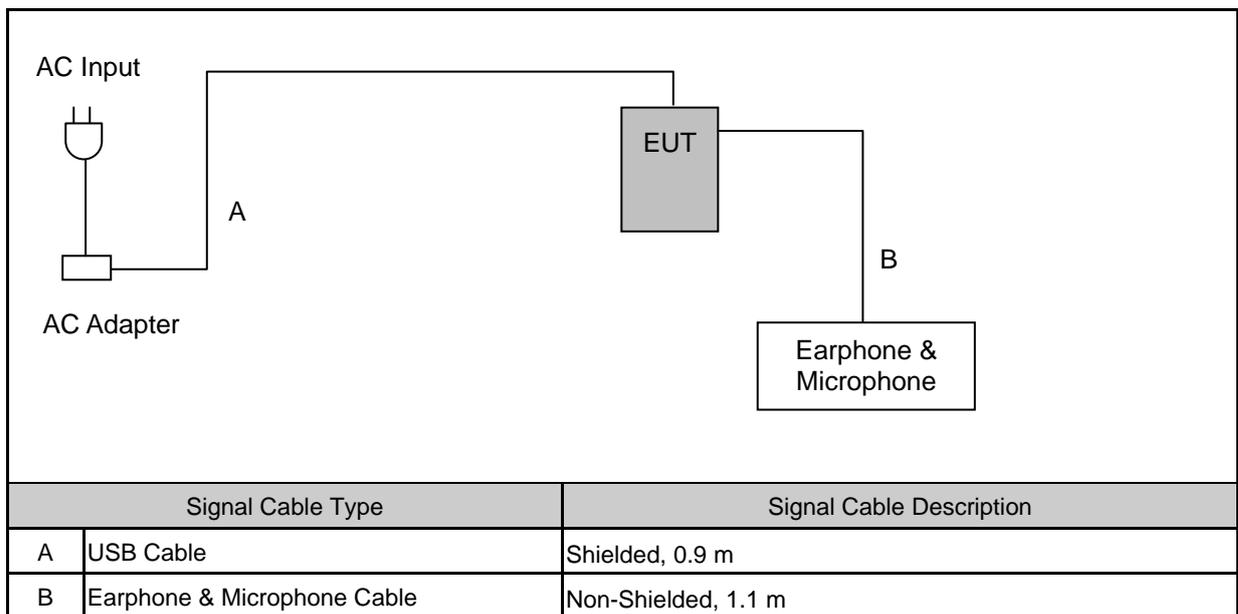

### 3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

## 4 Conducted Emission Measurement

### 4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 – 0.5	66 to 56	56 to 46
0.50 – 5.0	56	46
5.0 – 30.0	60	50


### 4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/30/2011	(1)
LISN	R&S	ENV216	101040	03/04/2011	(1)
LISN	R&S	ENV216	101041	03/04/2011	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 4.3. Test Setup

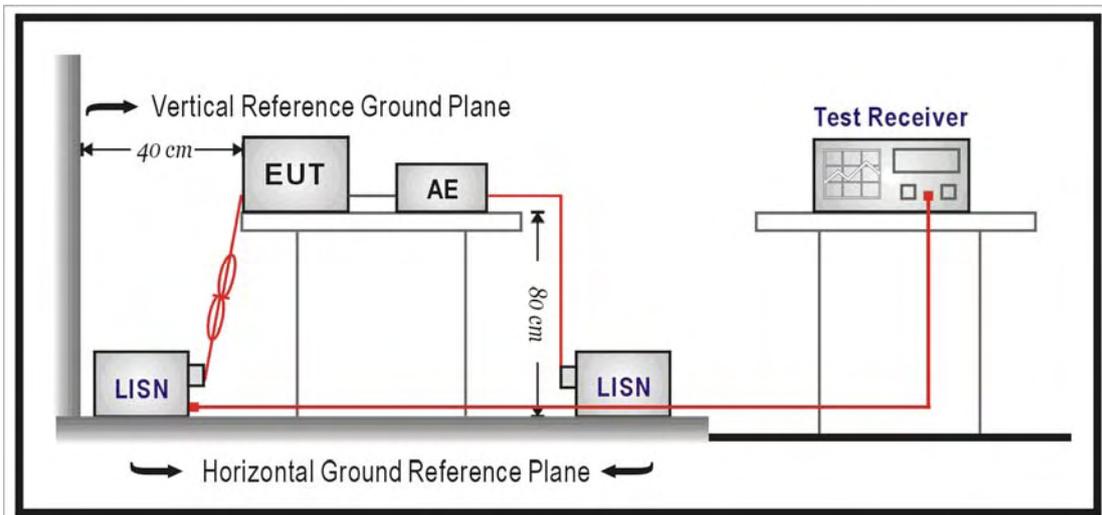

#### **4.4. Test Procedure**


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


### 4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	18(°C)/50%RH
Mode:	Mode 1	Date:	02/10/2012
		Test By:	Fly Lu
Description:			

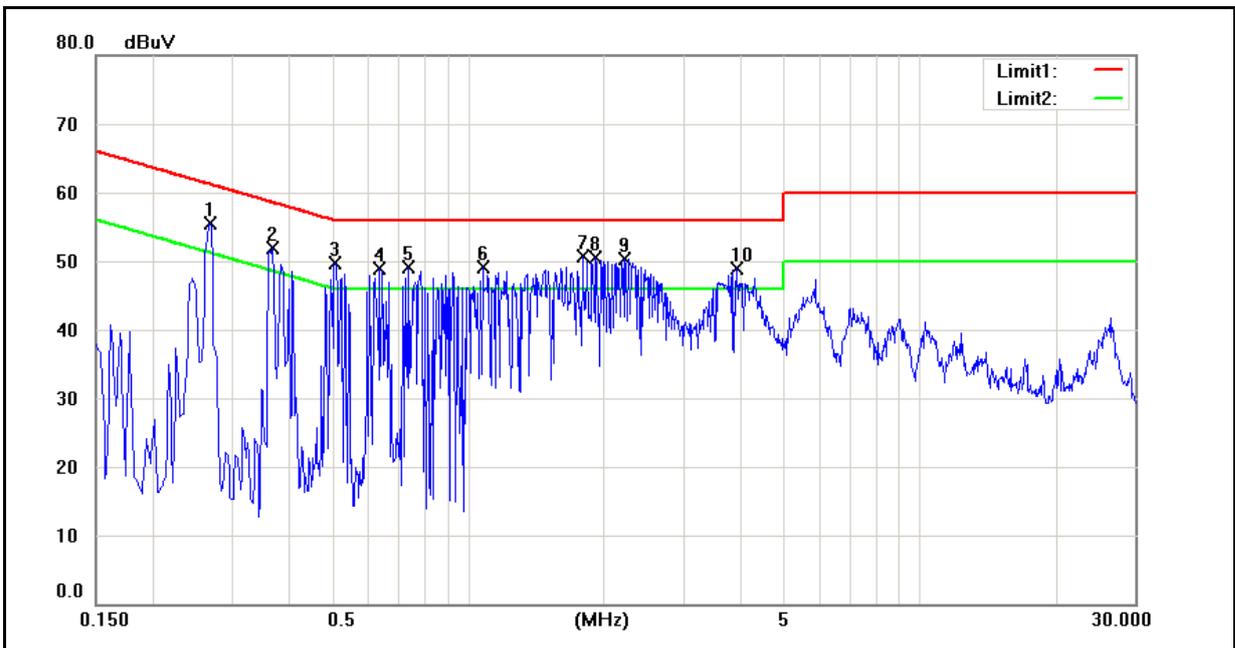


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2700	41.17	18.01	9.59	50.76	27.60	61.12	51.12	-10.36	-23.52	Pass
2	0.3700	37.35	19.23	9.59	46.94	28.82	58.50	48.50	-11.56	-19.68	Pass
3	0.5100	35.22	15.65	9.59	44.81	25.24	56.00	46.00	-11.19	-20.76	Pass
4	0.6380	34.53	13.61	9.60	44.13	23.21	56.00	46.00	-11.87	-22.79	Pass
5	0.7420	34.07	13.64	9.61	43.68	23.25	56.00	46.00	-12.32	-22.75	Pass
6	1.0780	31.38	10.54	9.63	41.01	20.17	56.00	46.00	-14.99	-25.83	Pass
7	1.7980	32.55	12.97	9.66	42.21	22.63	56.00	46.00	-13.79	-23.37	Pass
8	1.9220	34.44	15.82	9.67	44.11	25.49	56.00	46.00	-11.89	-20.51	Pass
9	2.2300	34.26	17.42	9.67	43.93	27.09	56.00	46.00	-12.07	-18.91	Pass
10	3.9540	30.79	10.17	9.66	40.45	19.83	56.00	46.00	-15.55	-26.17	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	18(°C)/50%RH
Mode:	Mode 1	Date:	02/10/2012
		Test By:	Fly Lu
Description:			

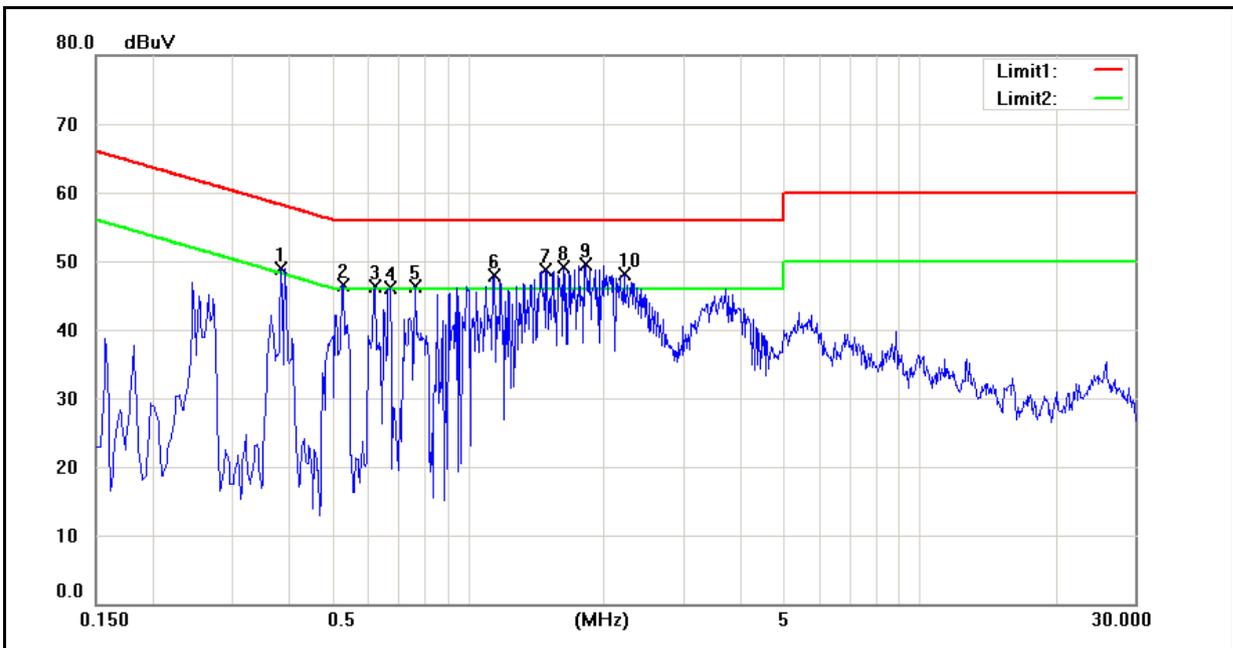


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.3860	34.88	16.71	9.67	44.55	26.38	58.15	48.15	-13.60	-21.77	Pass
2	0.5300	32.14	14.43	9.67	41.81	24.10	56.00	46.00	-14.19	-21.90	Pass
3	0.6260	31.61	13.98	9.68	41.29	23.66	56.00	46.00	-14.71	-22.34	Pass
4	0.6740	30.28	13.53	9.68	39.96	23.21	56.00	46.00	-16.04	-22.79	Pass
5	0.7660	31.10	14.66	9.69	40.79	24.35	56.00	46.00	-15.21	-21.65	Pass
6	1.1460	31.51	12.88	9.70	41.21	22.58	56.00	46.00	-14.79	-23.42	Pass
7	1.4940	34.25	21.16	9.71	43.96	30.87	56.00	46.00	-12.04	-15.13	Pass
8	1.6300	34.43	18.36	9.72	44.15	28.08	56.00	46.00	-11.85	-17.92	Pass
9	1.8220	33.96	20.16	9.72	43.68	29.88	56.00	46.00	-12.32	-16.12	Pass
10	2.2180	32.36	18.13	9.73	42.09	27.86	56.00	46.00	-13.91	-18.14	Pass

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	18(°C)/50%RH
Mode:	Mode 2	Date:	02/10/2012
		Test By:	Fly Lu
Description:			

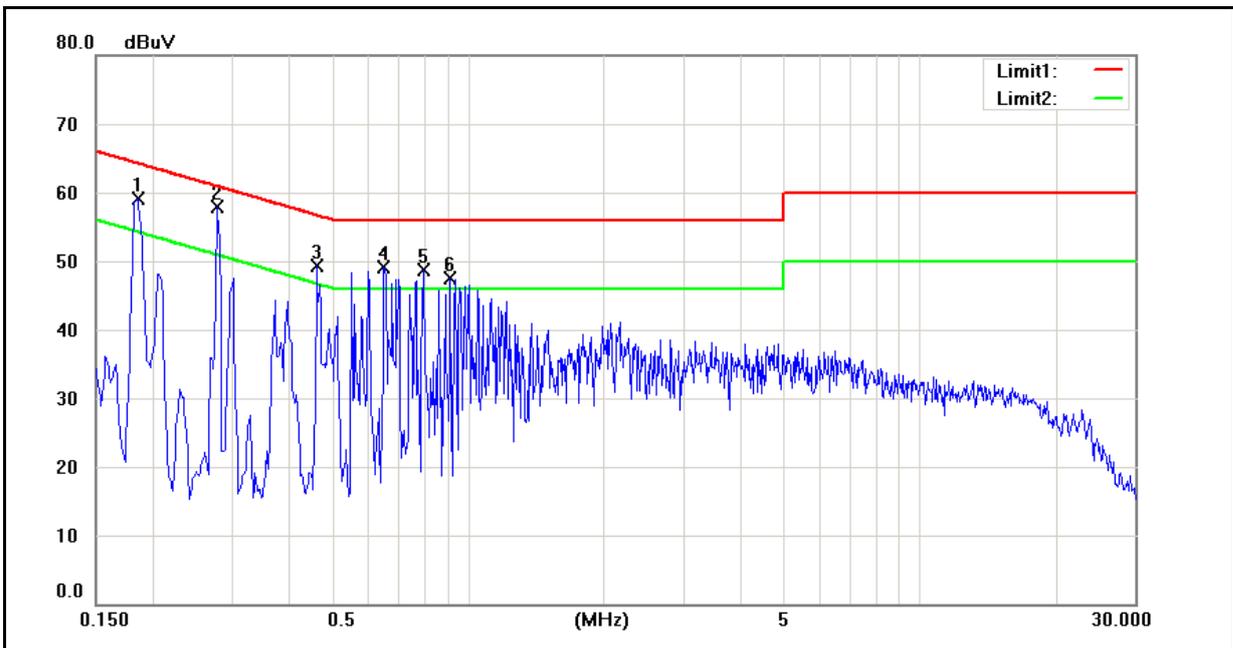

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1860	50.40	29.57	9.59	59.99	39.16	64.21	54.21	-4.22	-15.05	Pass
2	0.2780	42.33	18.13	9.59	51.92	27.72	60.88	50.88	-8.96	-23.16	Pass
3	0.4620	34.77	12.53	9.59	44.36	22.12	56.66	46.66	-12.30	-24.54	Pass
4	0.6540	35.13	16.90	9.60	44.73	26.50	56.00	46.00	-11.27	-19.50	Pass
5	0.7980	36.39	16.70	9.62	46.01	26.32	56.00	46.00	-9.99	-19.68	Pass
6	0.9140	35.05	15.02	9.62	44.67	24.64	56.00	46.00	-11.33	-21.36	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	18(°C)/50%RH
Mode:	Mode 2	Date:	02/10/2012
		Test By:	Fly Lu
Description:			

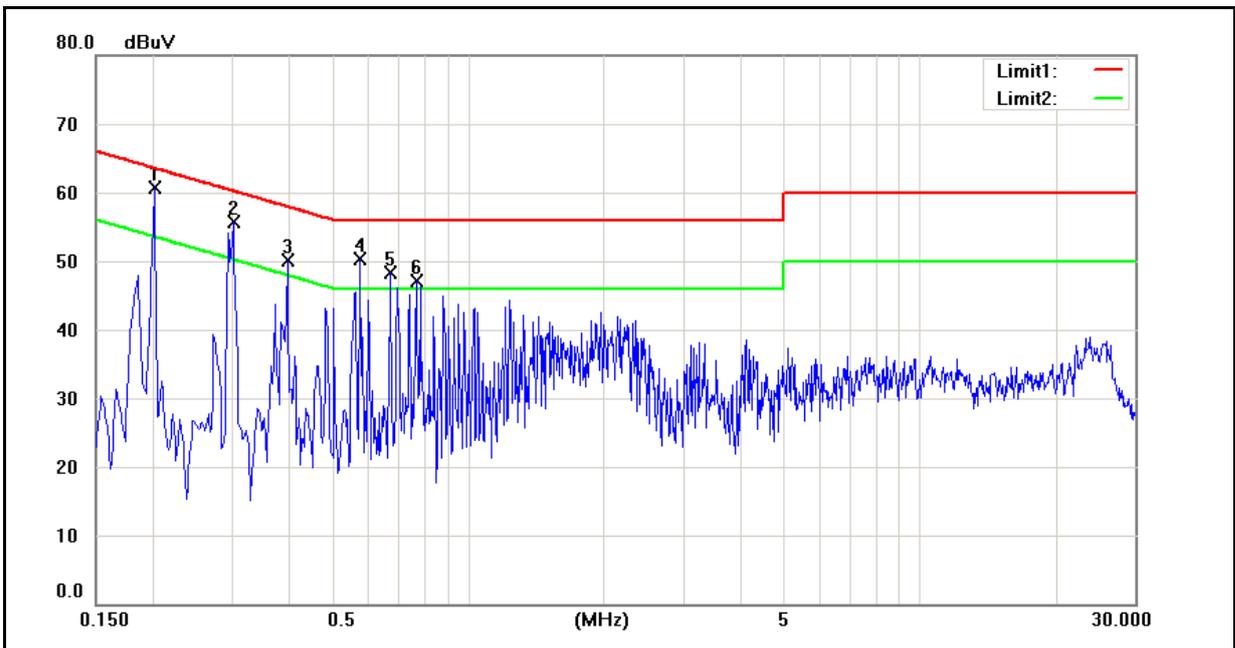

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2020	47.89	26.93	9.67	57.56	36.60	63.53	53.53	-5.97	-16.93	Pass
2	0.3020	41.38	18.32	9.67	51.05	27.99	60.19	50.19	-9.14	-22.20	Pass
3	0.3980	37.50	18.20	9.67	47.17	27.87	57.90	47.90	-10.73	-20.03	Pass
4	0.5780	36.39	14.80	9.67	46.06	24.47	56.00	46.00	-9.94	-21.53	Pass
5	0.6740	35.43	15.85	9.68	45.11	25.53	56.00	46.00	-10.89	-20.47	Pass
6	0.7700	35.48	16.22	9.69	45.17	25.91	56.00	46.00	-10.83	-20.09	Pass

## 5 Radiated Interference Measurement

### 5.1. Limit

Frequency Range (MHz)	Peak (dBuV)
30 to 88	39
88 to 216	43.5
216 to 960	46.4
Above 960	49.5

### 5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/16/2012	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/16/2012	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/23/2011	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/29/2011	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/29/2011	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/28/2011	(1)
Test Site	ATL	TE01	888001	12/20/2011	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

### 5.3. Setup

Below 1GHz

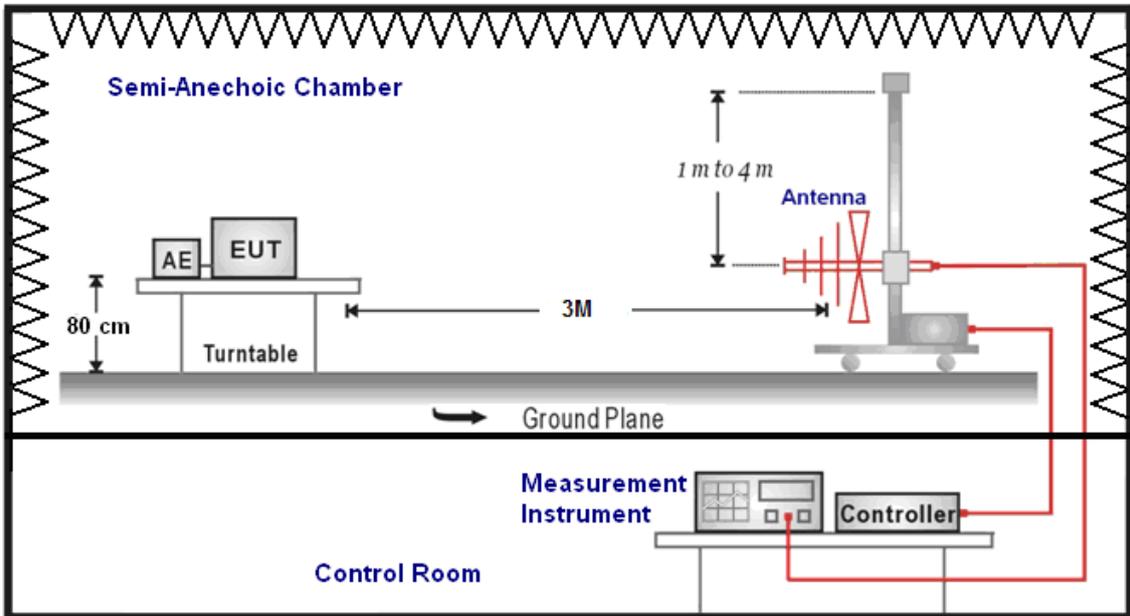

Above 1GHz

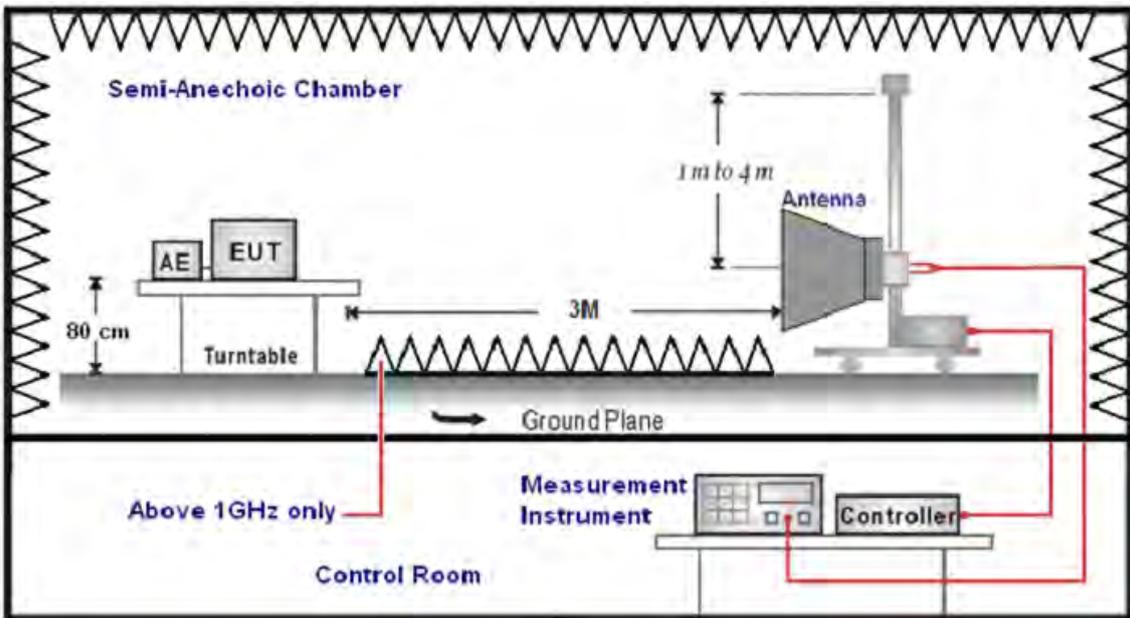

#### 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10<sup>th</sup> harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$2440 \quad \text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \quad \text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:


(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

### 5.5. Test Result


#### Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	02/15/2012
Ant.Polar.:	Horizontal	Test By:	Fly Lu

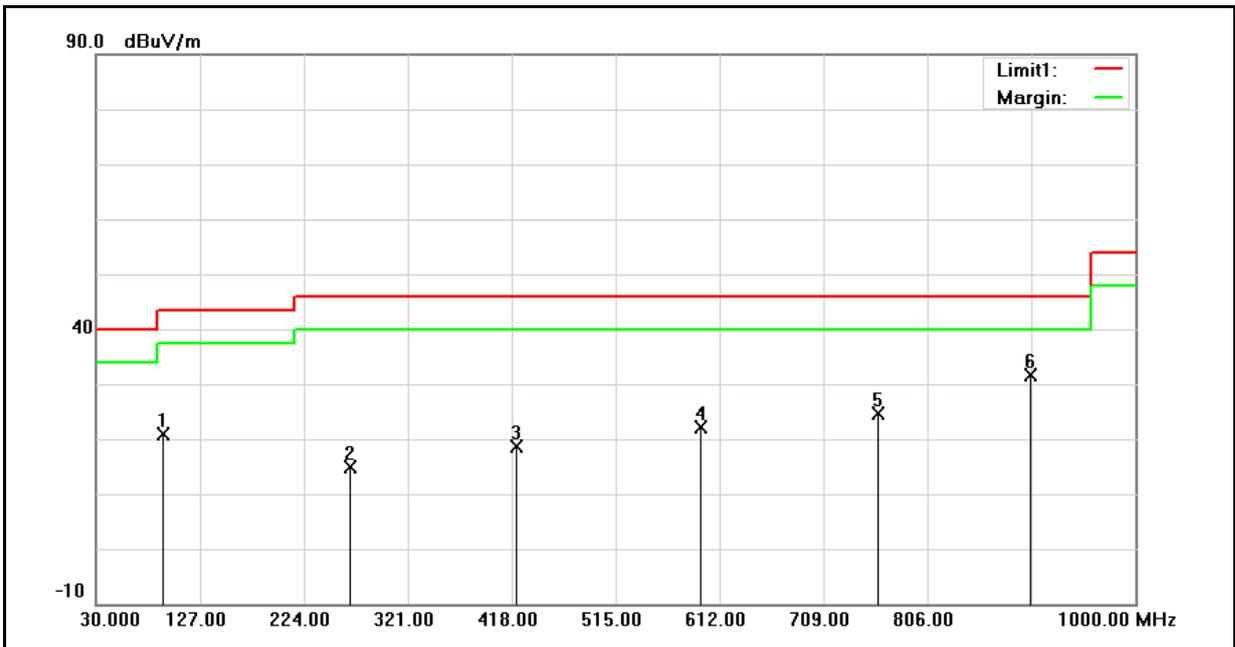

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	92.5000	36.29	-15.36	20.93	43.50	-22.57	QP
2	268.5000	26.41	-11.52	14.89	46.00	-31.11	QP
3	422.5000	27.18	-8.43	18.75	46.00	-27.25	QP
4	595.0000	27.22	-5.08	22.14	46.00	-23.86	QP
5	759.5000	26.84	-2.12	24.72	46.00	-21.28	QP
6	902.5000	31.32	0.26	31.58	46.00	-14.42	QP

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	02/15/2012
Ant.Polar.:	Vertical	Test By:	Fly Lu

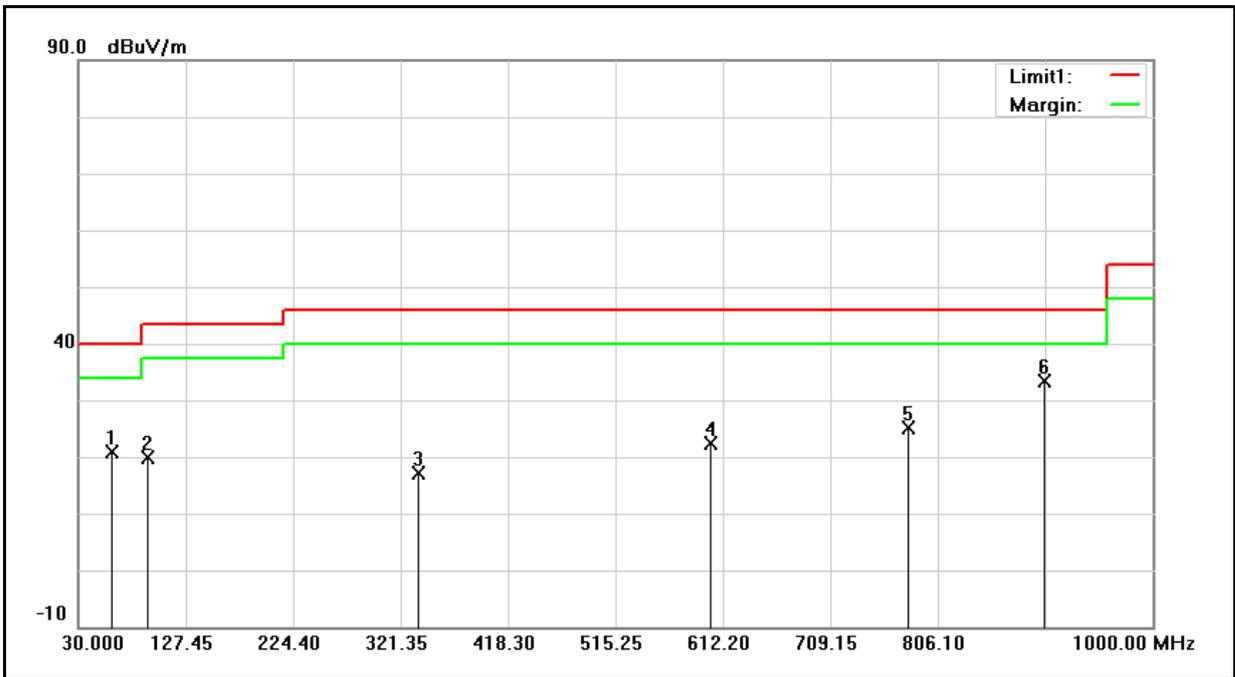

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	61.0000	33.77	-12.81	20.96	40.00	-19.04	QP
2	92.5000	35.32	-15.36	19.96	43.50	-23.54	QP
3	337.0000	26.38	-9.25	17.13	46.00	-28.87	QP
4	601.0000	27.35	-4.93	22.42	46.00	-23.58	QP
5	780.5000	26.89	-1.87	25.02	46.00	-20.98	QP
6	902.5000	33.04	0.26	33.30	46.00	-12.70	QP

**Above 1GHz**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	02/15/2012		
Frequency:	2402 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2764.000	40.29	1.37	41.66	74.00	-32.34	peak	H
4584.000	37.58	7.21	44.79	74.00	-29.21	peak	H
6054.000	35.47	11.10	46.57	74.00	-27.43	peak	H
3289.000	39.90	2.84	42.74	74.00	-31.26	peak	V
4752.000	36.90	7.73	44.63	74.00	-29.37	peak	V
6719.000	35.86	13.80	49.66	74.00	-24.34	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	02/15/2012		
Frequency:	2441 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	39.85	2.31	42.16	74.00	-31.84	peak	H
4689.000	36.68	7.54	44.22	74.00	-29.78	peak	H
5823.000	36.17	10.56	46.73	74.00	-27.27	peak	H
2813.000	40.42	1.53	41.95	74.00	-32.05	peak	V
4885.000	41.49	8.14	49.63	74.00	-24.37	peak	V
6509.000	36.14	13.12	49.26	74.00	-24.74	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	02/15/2012		
Frequency:	2480 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3149.000	39.45	2.53	41.98	74.00	-32.02	peak	H
4962.000	36.93	8.38	45.31	74.00	-28.69	peak	H
6425.000	36.39	12.76	49.15	74.00	-24.85	peak	H
2785.000	39.56	1.44	41.00	74.00	-33.00	peak	V
4374.000	37.68	6.54	44.22	74.00	-29.78	peak	V
5977.000	35.39	10.82	46.21	74.00	-27.79	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	02/15/2012		
Frequency:	2402 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2820.000	40.54	1.56	42.10	74.00	-31.90	peak	H
4493.000	37.67	6.93	44.60	74.00	-29.40	peak	H
6299.000	35.95	12.19	48.14	74.00	-25.86	peak	H
3072.000	39.92	2.36	42.28	74.00	-31.72	peak	V
4801.000	42.81	7.88	50.69	74.00	-23.31	peak	V
6320.000	35.76	12.29	48.05	74.00	-25.95	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	02/15/2012		
Frequency:	2441 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3450.000	38.40	3.20	41.60	74.00	-32.40	peak	H
4892.000	38.93	8.17	47.10	74.00	-26.90	peak	H
6558.000	35.72	13.28	49.00	74.00	-25.00	peak	H
2792.000	40.03	1.47	41.50	74.00	-32.50	peak	V
4882.000	39.97	8.14	48.11	74.00	-25.89	peak	V
6229.000	35.67	11.88	47.55	74.00	-26.45	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	02/15/2012		
Frequency:	2480 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2806.000	39.56	1.52	41.08	74.00	-32.92	peak	H
4465.000	37.04	6.84	43.88	74.00	-30.12	peak	H
6201.000	34.97	11.76	46.73	74.00	-27.27	peak	H
2771.000	40.23	1.39	41.62	74.00	-32.38	peak	V
4960.000	39.24	8.37	47.61	74.00	-26.39	peak	V
6481.000	35.63	13.00	48.63	74.00	-25.37	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 6			Date:	02/15/2012		
Frequency:	2402 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2463.000	40.85	0.27	41.12	74.00	-32.88	peak	H
3933.000	37.68	5.06	42.74	74.00	-31.26	peak	H
5641.000	35.69	10.24	45.93	74.00	-28.07	peak	H
2484.000	41.78	0.35	42.13	74.00	-31.87	peak	V
4010.000	37.65	5.36	43.01	74.00	-30.99	peak	V
5893.000	35.52	10.67	46.19	74.00	-27.81	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 6			Date:	02/15/2012		
Frequency:	2440 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2512.000	41.10	0.47	41.57	74.00	-32.43	peak	H
4605.000	37.34	7.28	44.62	74.00	-29.38	peak	H
6019.000	35.76	10.95	46.71	74.00	-27.29	peak	H
2421.000	41.54	0.07	41.61	74.00	-32.39	peak	V
4276.000	38.29	6.23	44.52	74.00	-29.48	peak	V
5564.000	36.24	10.10	46.34	74.00	-27.66	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 6			Date:	02/15/2012		
Frequency:	2480 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2435.000	40.98	0.15	41.13	74.00	-32.87	peak	H
4325.000	37.86	6.39	44.25	74.00	-29.75	peak	H
5928.000	35.55	10.73	46.28	74.00	-27.72	peak	H
2456.000	40.91	0.23	41.14	74.00	-32.86	peak	V
4479.000	38.38	6.88	45.26	74.00	-28.74	peak	V
6047.000	35.80	11.07	46.87	74.00	-27.13	peak	V


Standard:	FCC Part 15C			Test Distance:	3m			
Test item:	Radiated Emission			Power:	AC 120V/60Hz			
Model Number:	PJ46100			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 7			Date:	02/15/2012			
Modulation:	Bluetooth 4.0, GFSK			Test By:	Fly Lu			
Frequency:	2440 MHz							
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2477.000	40.78	0.33	41.11	74.00	54.00	-32.89	peak	H
4234.000	37.30	6.08	43.38	74.00	54.00	-30.62	peak	H
5900.000	35.71	10.69	46.40	74.00	54.00	-27.60	peak	H
2792.000	40.48	1.47	41.95	74.00	54.00	-32.05	peak	V
4577.000	37.10	7.19	44.29	74.00	54.00	-29.71	peak	V
5893.000	36.66	10.67	47.33	74.00	54.00	-26.67	peak	V

## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 1 watt.

### 6.2. Test Setup

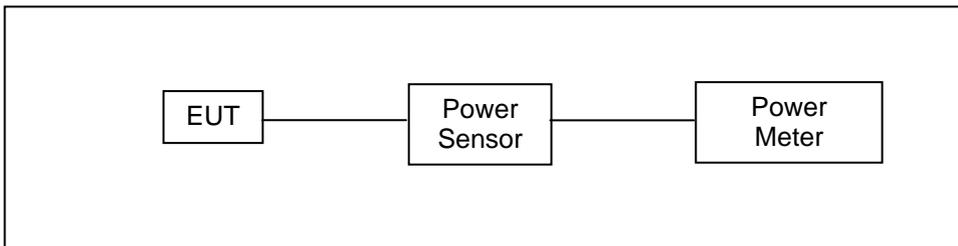

### 6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	07/19/2010	(2)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/19/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

**6.5. Test Result**

Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: GFSK Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	-5.95	0.00025	-0.75	0.00084	< 1
	DH3	-2.69	0.00054	-0.77	0.00084	< 1
	DH5	-2.00	0.00063	-0.77	0.00084	< 1
2441	DH1	-5.69	0.00027	-0.48	0.00090	< 1
	DH3	-2.35	0.00058	-0.49	0.00089	< 1
	DH5	-1.83	0.00066	-0.50	0.00089	< 1
2480	DH1	-5.65	0.00027	-0.47	0.00090	< 1
	DH3	-2.38	0.00058	-0.43	0.00091	< 1
	DH5	-1.69	0.00068	<b>-0.41</b>	<b>0.00091</b>	< 1

Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: $\pi/4$ -DQPSK Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	-7.75	0.00017	-0.04	0.00099	< 1
	DH3	-4.57	0.00035	-0.03	0.00099	< 1
	DH5	-3.89	0.00041	-0.07	0.00098	< 1
2441	DH1	-7.43	0.00018	0.24	0.00106	< 1
	DH3	-4.28	0.00037	0.23	0.00105	< 1
	DH5	-3.60	0.00044	0.23	0.00105	< 1
2480	DH1	-7.40	0.00018	0.25	0.00106	< 1
	DH3	-4.22	0.00038	0.26	0.00106	< 1
	DH5	-3.57	0.00044	<b>0.27</b>	<b>0.00106</b>	< 1

Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: 8DPSK Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	-7.73	0.00017	0.46	0.00111	< 1
	DH3	-4.58	0.00035	0.44	0.00111	< 1
	DH5	-3.88	0.00041	0.46	0.00111	< 1
2441	DH1	-7.45	0.00018	0.87	0.00122	< 1
	DH3	-4.25	0.00038	0.88	0.00122	< 1
	DH5	-3.59	0.00044	0.87	0.00122	< 1
2480	DH1	-7.38	0.00018	0.85	0.00122	< 1
	DH3	-4.23	0.00038	0.90	0.00123	< 1
	DH5	-3.55	0.00044	<b>0.94</b>	<b>0.00124</b>	< 1


Model Number	PJ46100					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 6: BT LE Link Mode					
Date of Test	02/02/2012			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	---	-2.86	0.00052	-0.87	0.00082	< 0.125
2440	---	-2.58	0.00055	-0.59	0.00087	< 0.125
2480	---	-2.49	0.00056	<b>-0.51</b>	<b>0.00089</b>	< 0.125

## 7 Minimum 20dB RF Bandwidth Measurement

### 7.1. Limit

N/A

### 7.2. Test Setup

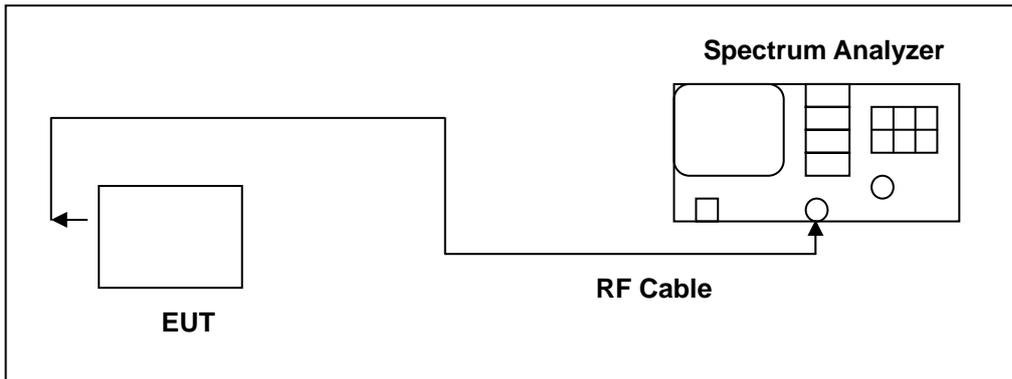

### 7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW  $\geq$  1% of the 20dB span
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

## 7.5. Test Result

Model Number	PJ46100		
Test Item	Minimum 20dB RF Bandwidth		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2402	0.889	-----	
2441	0.887	-----	
2480	0.889	-----	

Model Number	PJ46100		
Test Item	Minimum 20dB RF Bandwidth		
Test Mode	Mode 5: 8DPSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	
2402	1.321	-----	
2441	1.324	-----	
2480	1.319	-----	

Model Number	PJ46100		
Test Item	Minimum 20dB RF Bandwidth		
Test Mode	Mode 6: BT LE Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	
2402	1.075	-----	
2440	1.115	-----	
2480	1.070	-----	

**7.6. Test Graphs**

Mode 3: GFSK Link Mode	
2402	<p>Copyright 2000-2007 Agilent Technologies</p>
2441	<p>Copyright 2000-2007 Agilent Technologies</p>
2480	<p>Copyright 2000-2007 Agilent Technologies</p>

Mode 5: 8DPSK Link Mode

<p>2402</p>	<p>Copyright 2000-2007 Agilent Technologies</p>
<p>2441</p>	<p>Copyright 2000-2007 Agilent Technologies</p>
<p>2480</p>	<p>Copyright 2000-2007 Agilent Technologies</p>

Mode 6: BT LE Link Mode


2402	<p>Agilent R T</p> <p>Ref 1 dBm #Atten 10 dB Mkr2 Δ 1.075 MHz -0.135 dB</p> <p>#Peak Log 10 dB/Offst 1 dB DI -27.8 dBm</p> <p>Center 2.402 GHz Span 2 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 20.72 ms (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.402000 GHz</td> <td>-7.765 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.401475 GHz</td> <td>-28.07 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>1.075 MHz</td> <td>-0.135 dB</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 2.40200000 GHz, Start Freq 2.40100000 GHz, Stop Freq 2.40300000 GHz, CF Step 200.000000 kHz, Freq Offset 0.00000000 Hz, Signal Track On</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.402000 GHz	-7.765 dBm	2R	(1)	Freq	2.401475 GHz	-28.07 dBm	2Δ	(1)	Freq	1.075 MHz	-0.135 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.402000 GHz	-7.765 dBm																	
2R	(1)	Freq	2.401475 GHz	-28.07 dBm																	
2Δ	(1)	Freq	1.075 MHz	-0.135 dB																	
2440	<p>Agilent R T</p> <p>Ref 1 dBm #Atten 10 dB Mkr2 Δ 1.115 MHz -1.603 dB</p> <p>#Peak Log 10 dB/Offst 1 dB DI -28.5 dBm</p> <p>Center 2.44 GHz Span 2 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 20.72 ms (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.440000 GHz</td> <td>-8.47 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.439480 GHz</td> <td>-28.2 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>1.115 MHz</td> <td>-1.603 dB</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 2.44000000 GHz, Start Freq 2.43900000 GHz, Stop Freq 2.44100000 GHz, CF Step 200.000000 kHz, Freq Offset 0.00000000 Hz, Signal Track On</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.440000 GHz	-8.47 dBm	2R	(1)	Freq	2.439480 GHz	-28.2 dBm	2Δ	(1)	Freq	1.115 MHz	-1.603 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.440000 GHz	-8.47 dBm																	
2R	(1)	Freq	2.439480 GHz	-28.2 dBm																	
2Δ	(1)	Freq	1.115 MHz	-1.603 dB																	
2480	<p>Agilent R T</p> <p>Ref 1 dBm #Atten 10 dB Mkr2 Δ 1.070 MHz 0.144 dB</p> <p>#Peak Log 10 dB/Offst 1 dB DI -27.9 dBm</p> <p>Center 2.48 GHz Span 2 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 20.72 ms (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.480000 GHz</td> <td>-7.864 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.479475 GHz</td> <td>-27.49 dBm</td> </tr> <tr> <td>2Δ</td> <td>(1)</td> <td>Freq</td> <td>1.070 MHz</td> <td>0.144 dB</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 2.48000000 GHz, Start Freq 2.47900000 GHz, Stop Freq 2.48100000 GHz, CF Step 200.000000 kHz, Freq Offset 0.00000000 Hz, Signal Track On</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.480000 GHz	-7.864 dBm	2R	(1)	Freq	2.479475 GHz	-27.49 dBm	2Δ	(1)	Freq	1.070 MHz	0.144 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.480000 GHz	-7.864 dBm																	
2R	(1)	Freq	2.479475 GHz	-27.49 dBm																	
2Δ	(1)	Freq	1.070 MHz	0.144 dB																	

## 8 Carrier Frequency Separation Measurement

### 8.1. Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1)(i) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth.

### 8.2. Test Setup

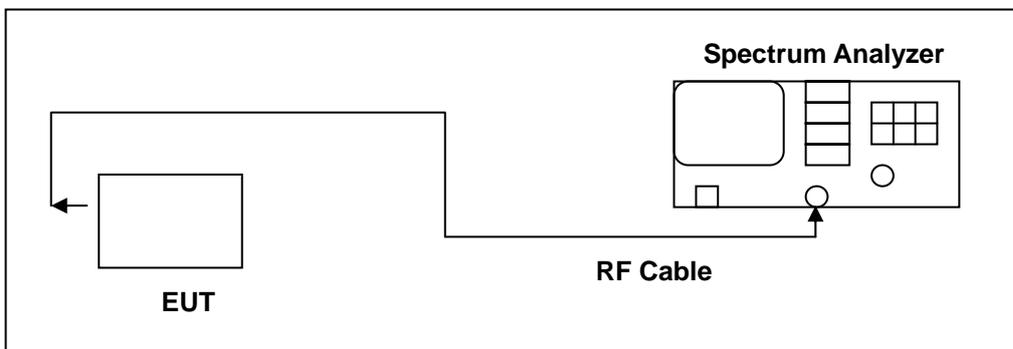

### 8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

#### 8.4. Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth transmitter of the V6 had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span
3. Video (or Average) Bandwidth (VBW)  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.


**8.5. Test Result**

Model Number	PJ46100		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2441	1	> 0.593	

Model Number	PJ46100		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 5: 8DPSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2441	1	> 0.883	

Model Number	PJ46100		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 6: BT LE Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2440	1	> 0.743	

**8.6. Test Graphs**

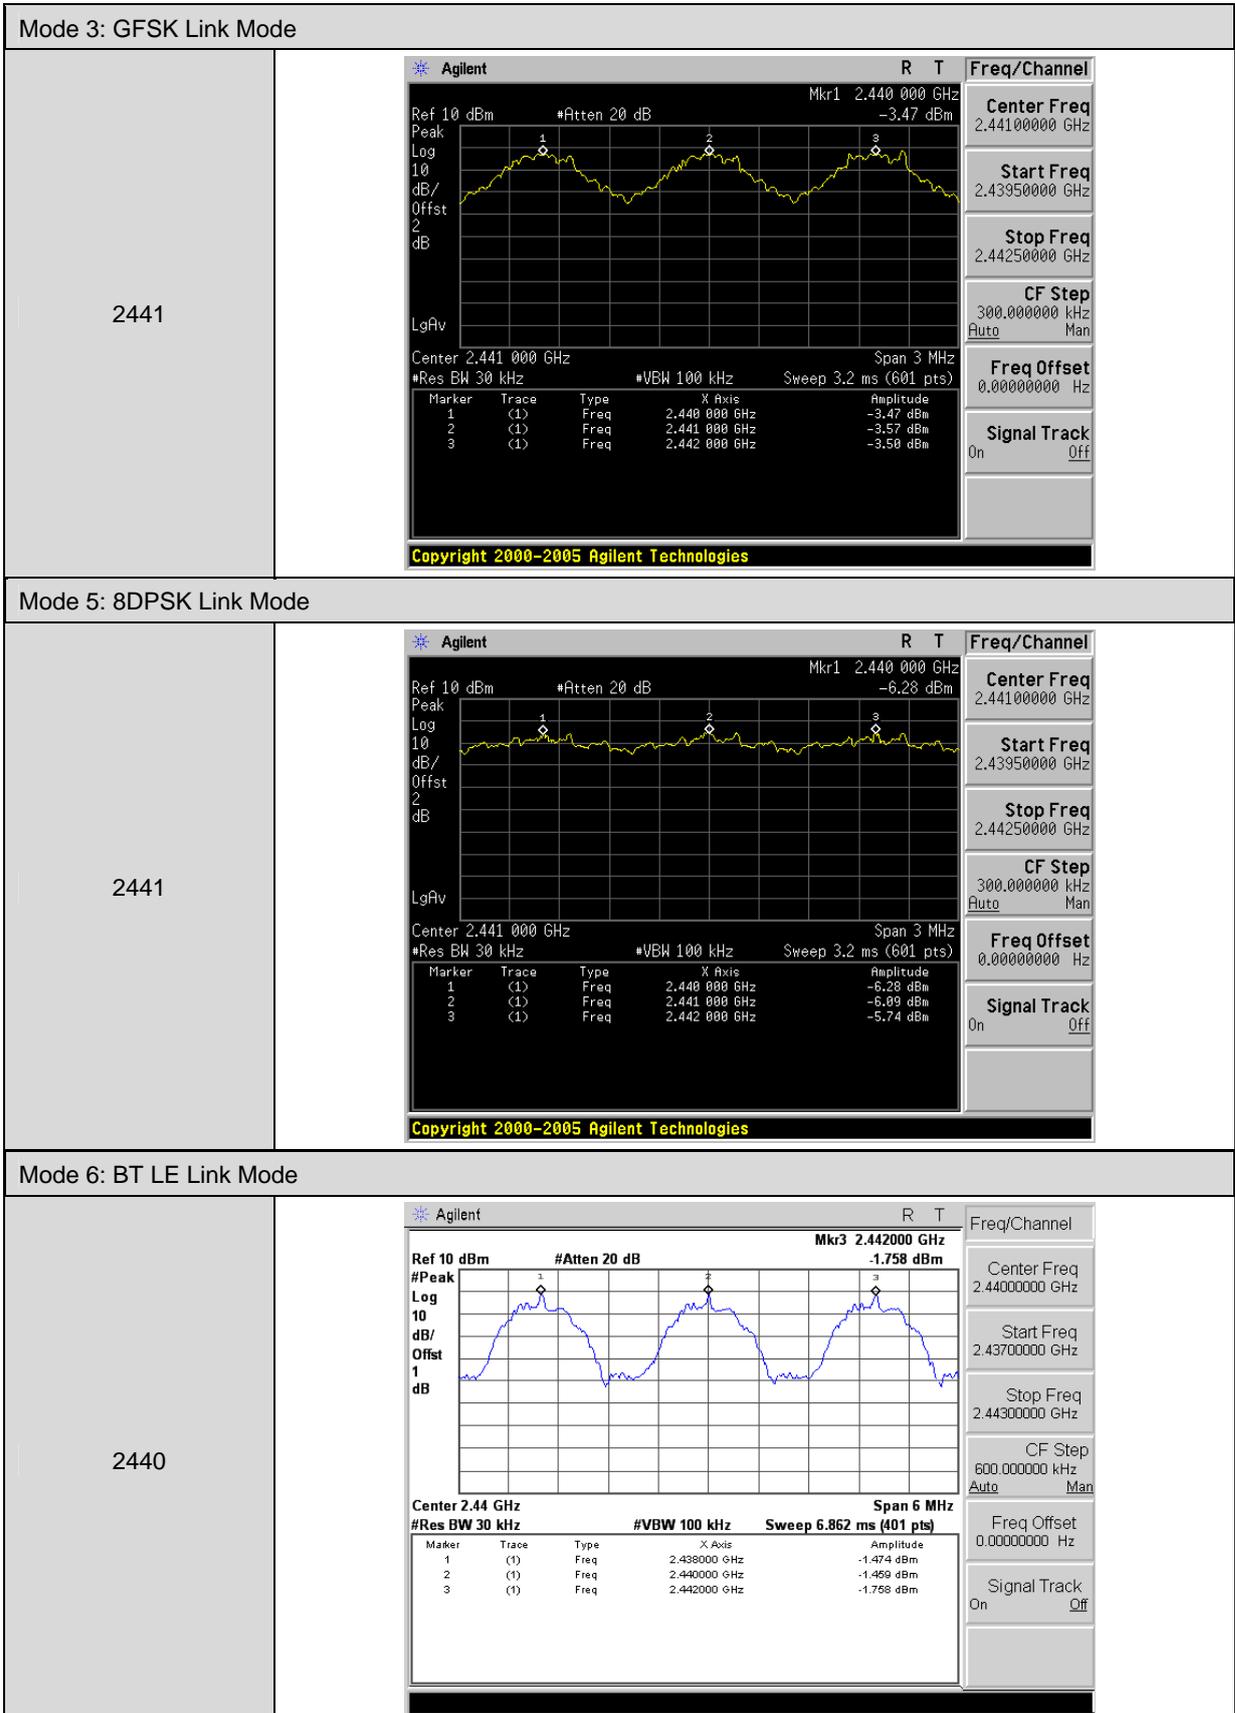


## 9 Number of Hopping Measurement

### 9.1. Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 9.2. Test Setup

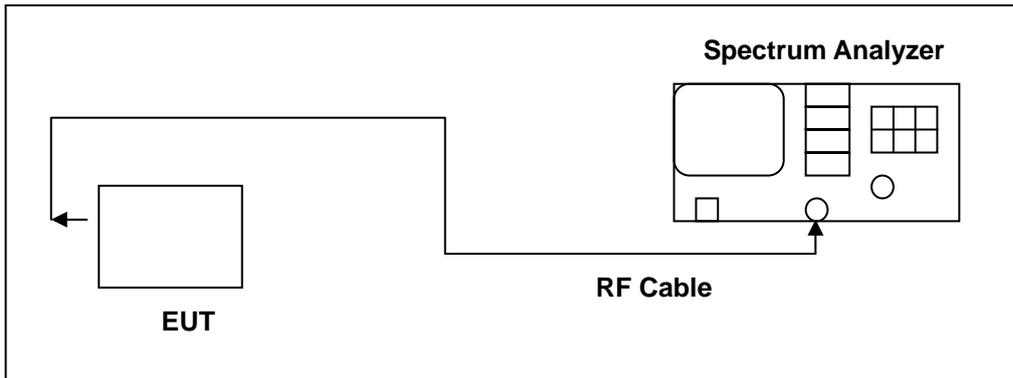

### 9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 9.4. Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW  $\geq$  1% of the span
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize.


**9.5. Test Result**

Model Number	PJ46100		
Test Item	Number of Hopping		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)		Limit (ch)
2402 - 2480	79		> 15

Model Number	PJ46100		
Test Item	Number of Hopping		
Test Mode	Mode 5: 8DPSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)		Limit (ch)
2402 - 2480	79		> 15


Model Number	PJ46100		
Test Item	Number of Hopping		
Test Mode	Mode 6: BT LE Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)		Limit (ch)
2402 - 2480	40		> 15

**9.6. Test Graphs**

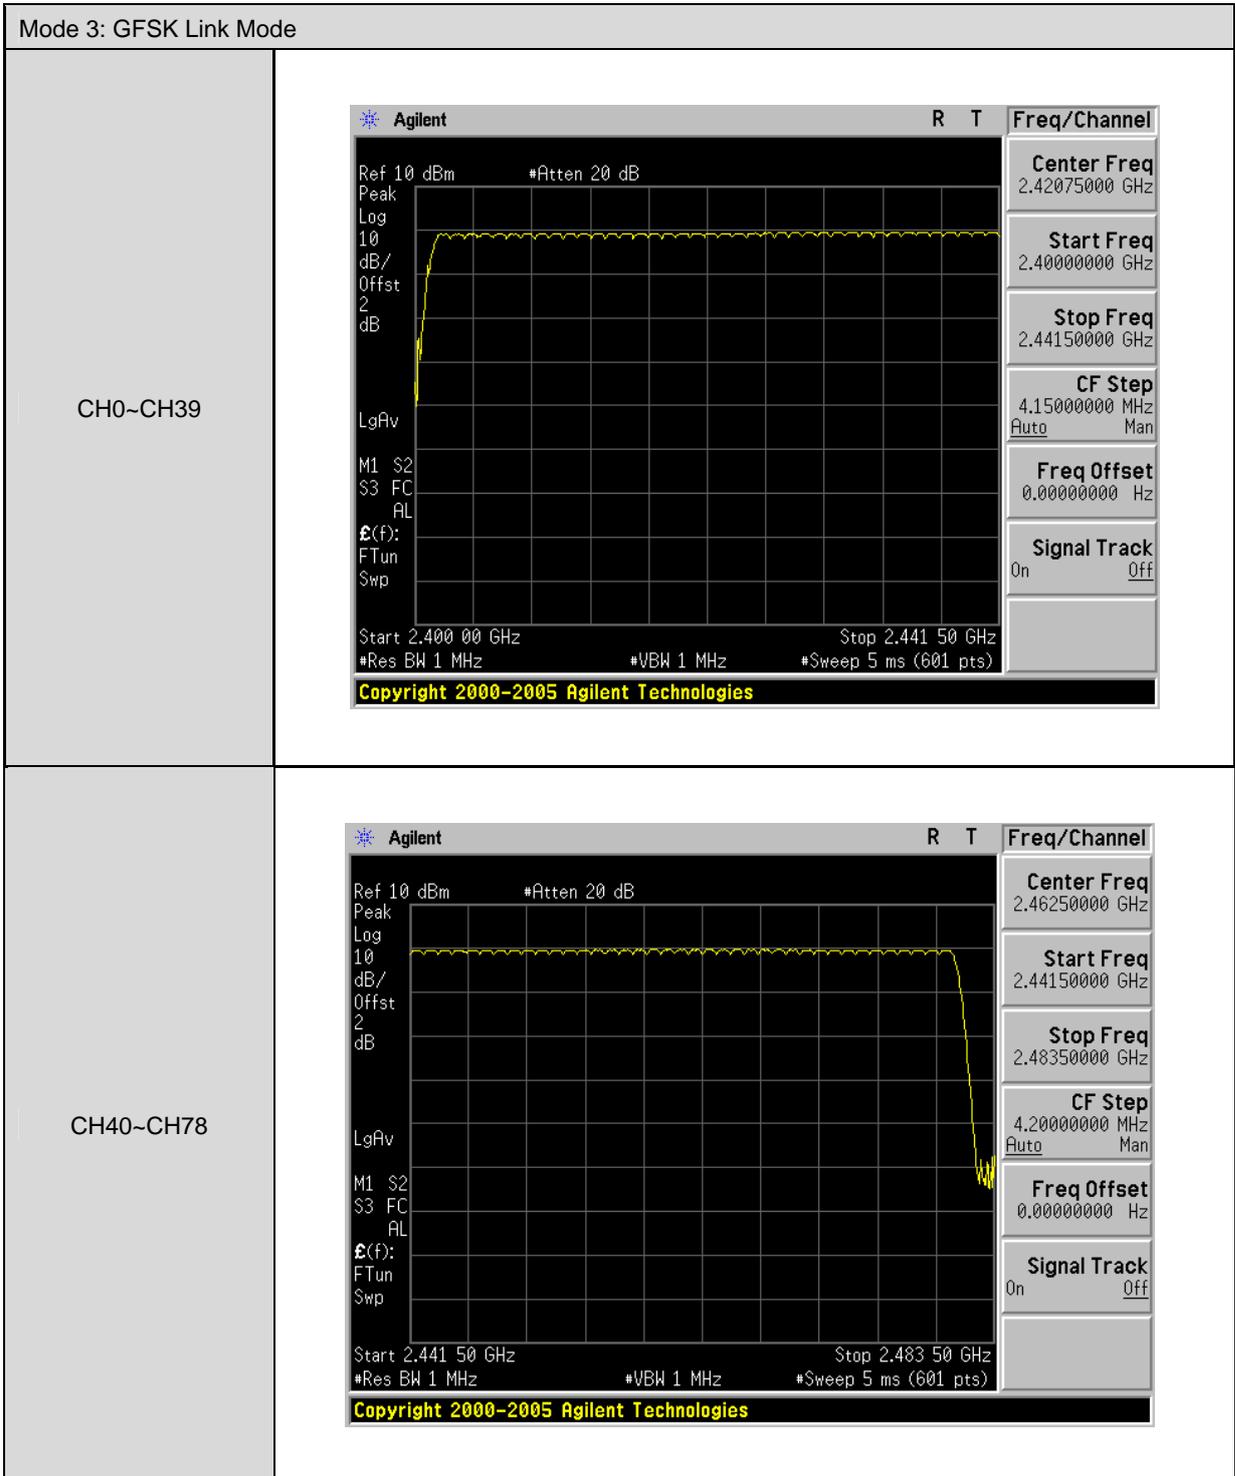


Mode 5: 8DPSK Link Mode

CH0~CH39

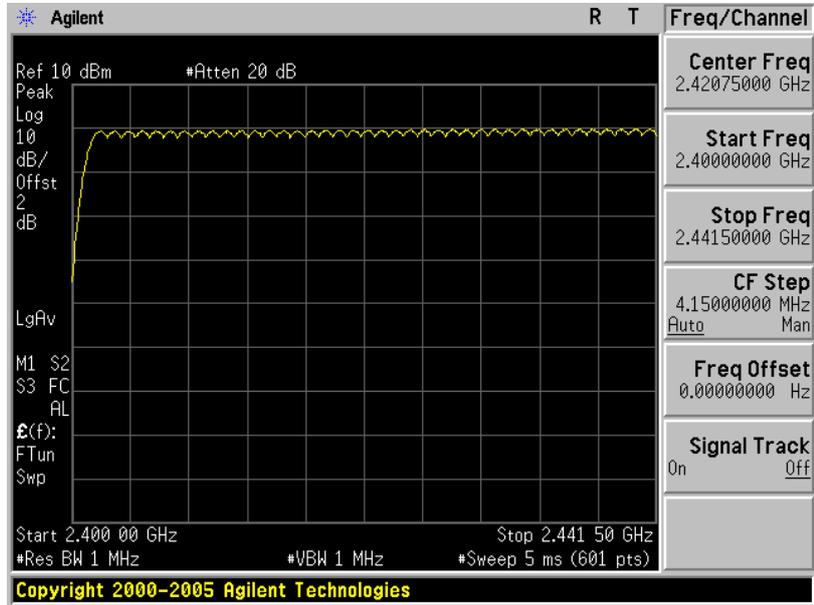


CH40~CH78

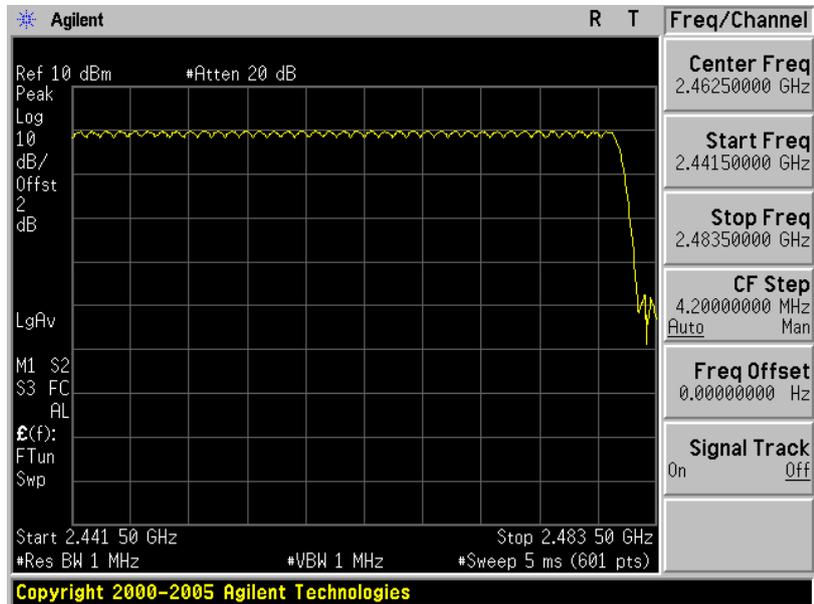


Mode 6: BT LE Link Mode

2402 ~ 2440 MHz

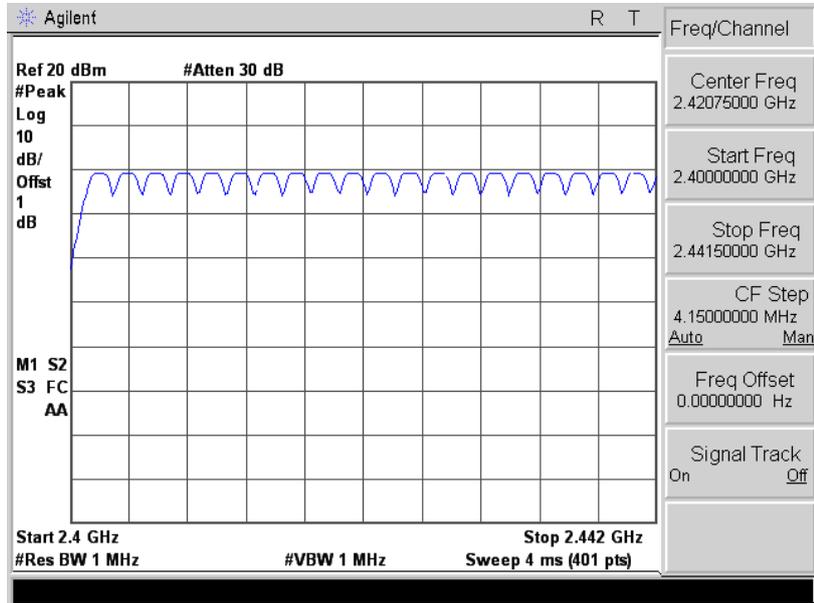

2442 ~ 2480 MHz

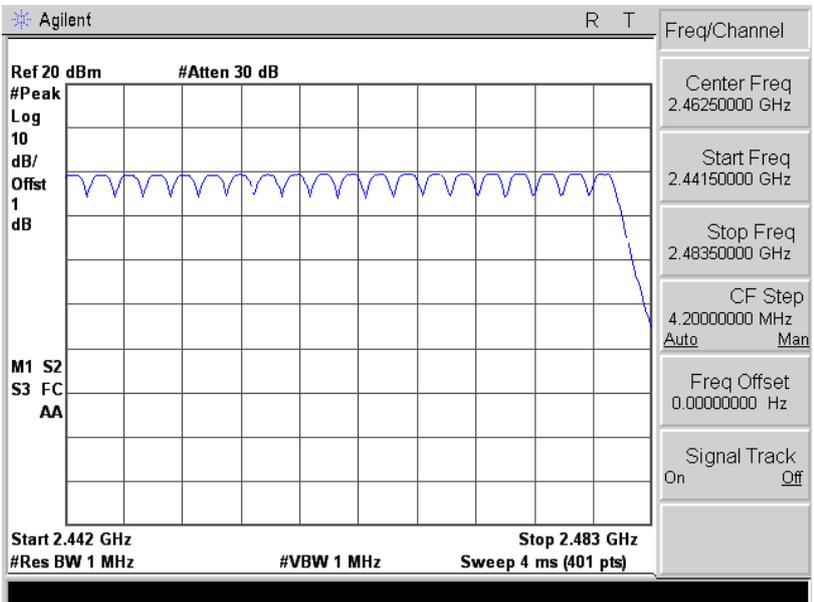


## 10 Time of Occupancy (Dwell Time) Measurement

### 10.1.Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 10.2.Test Setup

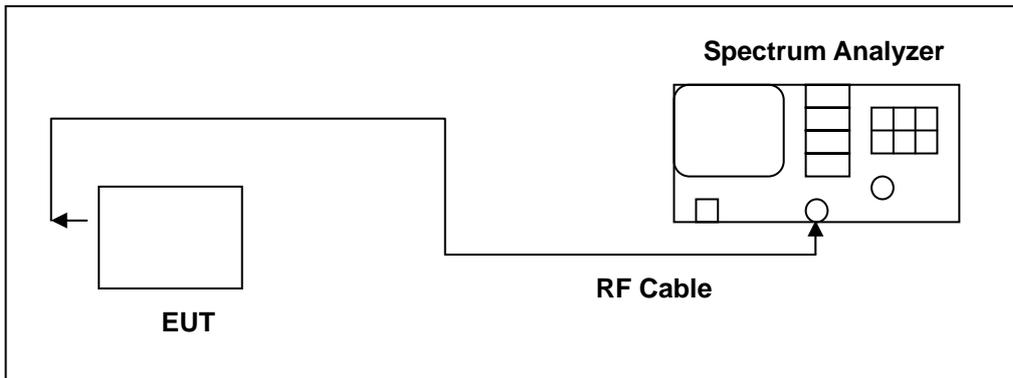

### 10.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 10.4.Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW  $\geq$  RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.




### 10.5.Test Result

Model Number	PJ46100		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
DH1			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)		
Each Channel Dwell Times (1)	0.467	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 10.13 = 320.108(times)		
Dwell Times on Cycle (1) * (2)	149.4904	ms (sec)	
LIMIT(msec)	< = 400		
DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)		
Each Channel Dwell Times (1)	1.750	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 5.1 = 161.16(times)		
Dwell Times on Cycle (1) * (2)	282.0300	ms (sec)	
LIMIT(msec)	< = 400		
DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)		
Each Channel Dwell Times (1)	2.983	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 3.37 = 106.492(times)		
Dwell Times on Cycle (1) * (2)	317.6656	ms (sec)	
LIMIT(msec)	< = 400		

Model Number	PJ46100		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 5: 8DPSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
2DH1			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)		
Each Channel Dwell Times (1)	0.467	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 10.13 = 320.108(times)		
Dwell Times on Cycle (1) * (2)	149.4904	ms (sec)	
LIMIT(msec)	< = 400		
2DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)		
Each Channel Dwell Times (1)	1.750	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 5.1 = 161.16(times)		
Dwell Times on Cycle (1) * (2)	282.0300	ms (sec)	
LIMIT(msec)	< = 400		
2DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)		
Each Channel Dwell Times (1)	2.983	ms (sec)	
Each Channel Dwell Times on Cycle(2)	31.6 * 3.37 = 106.492(times)		
Dwell Times on Cycle (1) * (2)	317.6656	ms (sec)	
LIMIT(msec)	< = 400		

Model Number	PJ46100		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 6: BT LE Link Mode		
Date of Test	02/13/2012	Test Site	TE02
Low CH			
Cycle Calculate	40CH * 0.4 = 16 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/40CH = 20(times/sec)		
Each Channel Dwell Times (1)	0.438	ms (sec)	
Each Channel Dwell Times on Cycle(2)	16 * 20 = 320 (times)		
Dwell Times on Cycle (1) * (2)	140.1600	ms (sec)	
LIMIT(msec)	< = 400		
Middle CH			
Cycle Calculate	40CH * 0.4 = 16 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/40CH = 20(times/sec)		
Each Channel Dwell Times (1)	0.438		
Each Channel Dwell Times on Cycle(2)	16 * 20 = 320 (times)		
Dwell Times on Cycle (1) * (2)	140.1600	ms (sec)	
LIMIT(msec)	< = 400		
High CH			
Cycle Calculate	40CH * 0.4 = 16 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/40CH = 20(times/sec)		
Each Channel Dwell Times (1)	0.438	ms (sec)	
Each Channel Dwell Times on Cycle(2)	16 * 20 = 320 (times)		
Dwell Times on Cycle (1) * (2)	140.1600	ms (sec)	
LIMIT(msec)	< = 400		

**10.6. Test Graphs**

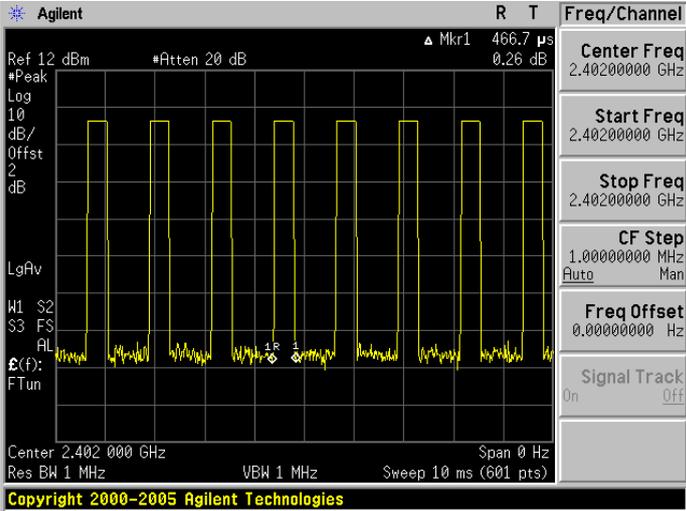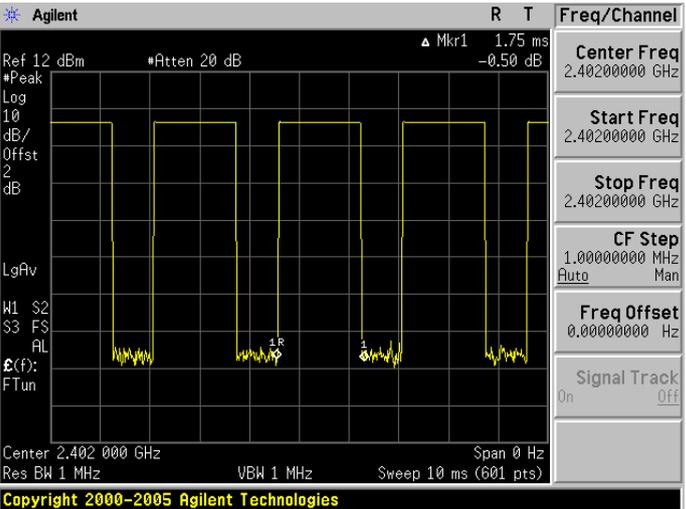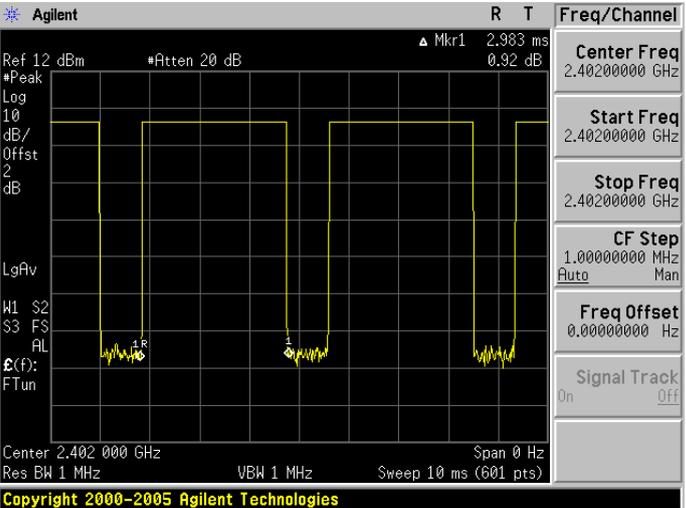Mode 3: GFSK Link Mode	
DH1	 <p>Agilent R T Freq/Channel</p> <p>Ref 12 dBm #Atten 20 dB Δ Mkr1 466.7 μs 0.26 dB</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40200000 GHz</p> <p>Stop Freq 2.40200000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.402 000 GHz Span 0 Hz</p> <p>Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
DH3	 <p>Agilent R T Freq/Channel</p> <p>Ref 12 dBm #Atten 20 dB Δ Mkr1 1.75 ms -0.50 dB</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40200000 GHz</p> <p>Stop Freq 2.40200000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.402 000 GHz Span 0 Hz</p> <p>Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
DH5	 <p>Agilent R T Freq/Channel</p> <p>Ref 12 dBm #Atten 20 dB Δ Mkr1 2.983 ms 0.92 dB</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40200000 GHz</p> <p>Stop Freq 2.40200000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.402 000 GHz Span 0 Hz</p> <p>Res BW 1 MHz VBW 1 MHz Sweep 10 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 5: 8DPSK Link Mode	
2DH1	<p>Agilent R T Freq/Channel          Ref 12 dBm #Atten 20 dB Δ Mkr1 466.7 μs          #Peak 1.86 dB          Center 2.402 000 GHz          Res BW 1 MHz Span 0 Hz          VBW 1 MHz Sweep 10 ms (601 pts)          Copyright 2000-2005 Agilent Technologies</p>
2DH3	<p>Agilent R T Freq/Channel          Ref 12 dBm #Atten 20 dB Δ Mkr1 1.75 ms          #Peak -0.74 dB          Center 2.402 000 GHz          Res BW 1 MHz Span 0 Hz          VBW 1 MHz Sweep 10 ms (601 pts)          Copyright 2000-2005 Agilent Technologies</p>
2DH5	<p>Agilent R T Freq/Channel          Ref 12 dBm #Atten 20 dB Δ Mkr1 2.983 ms          #Peak -0.58 dB          Center 2.402 000 GHz          Res BW 1 MHz Span 0 Hz          VBW 1 MHz Sweep 10 ms (601 pts)          Copyright 2000-2005 Agilent Technologies</p>

Mode 6: BT LE Link Mode


<p>Low CH</p>	
<p>Middle CH</p>	
<p>High CH</p>	

## 11 6dB RF Bandwidth Measurement

### 11.1.Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

### 11.2.Test Setup

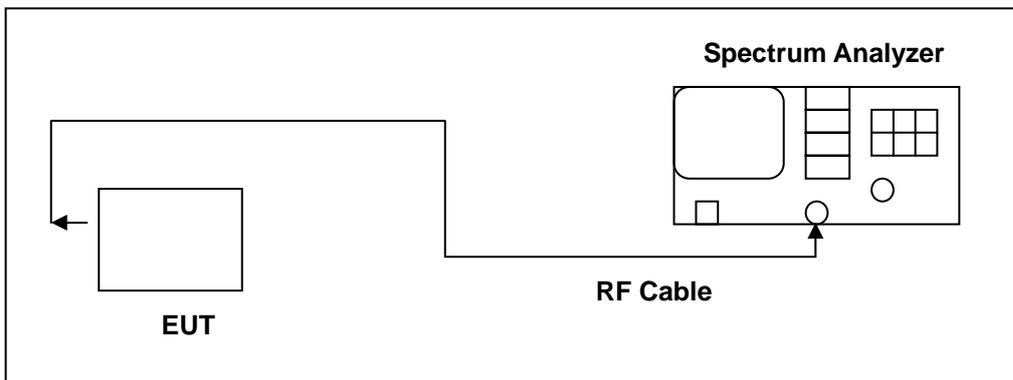

### 11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 11.4.Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

**11.5. Test Result**

Model Number	PJ46100		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 6: BT LE Link Mode		
Date of Test	02/24/2012	Test Site	TE02
Frequency (MHz)	Measurement (kHz)	Limit (kHz)	
2402	525	> 500	
2440	525	> 500	
2480	540	> 500	

**11.6. Test Graphs**

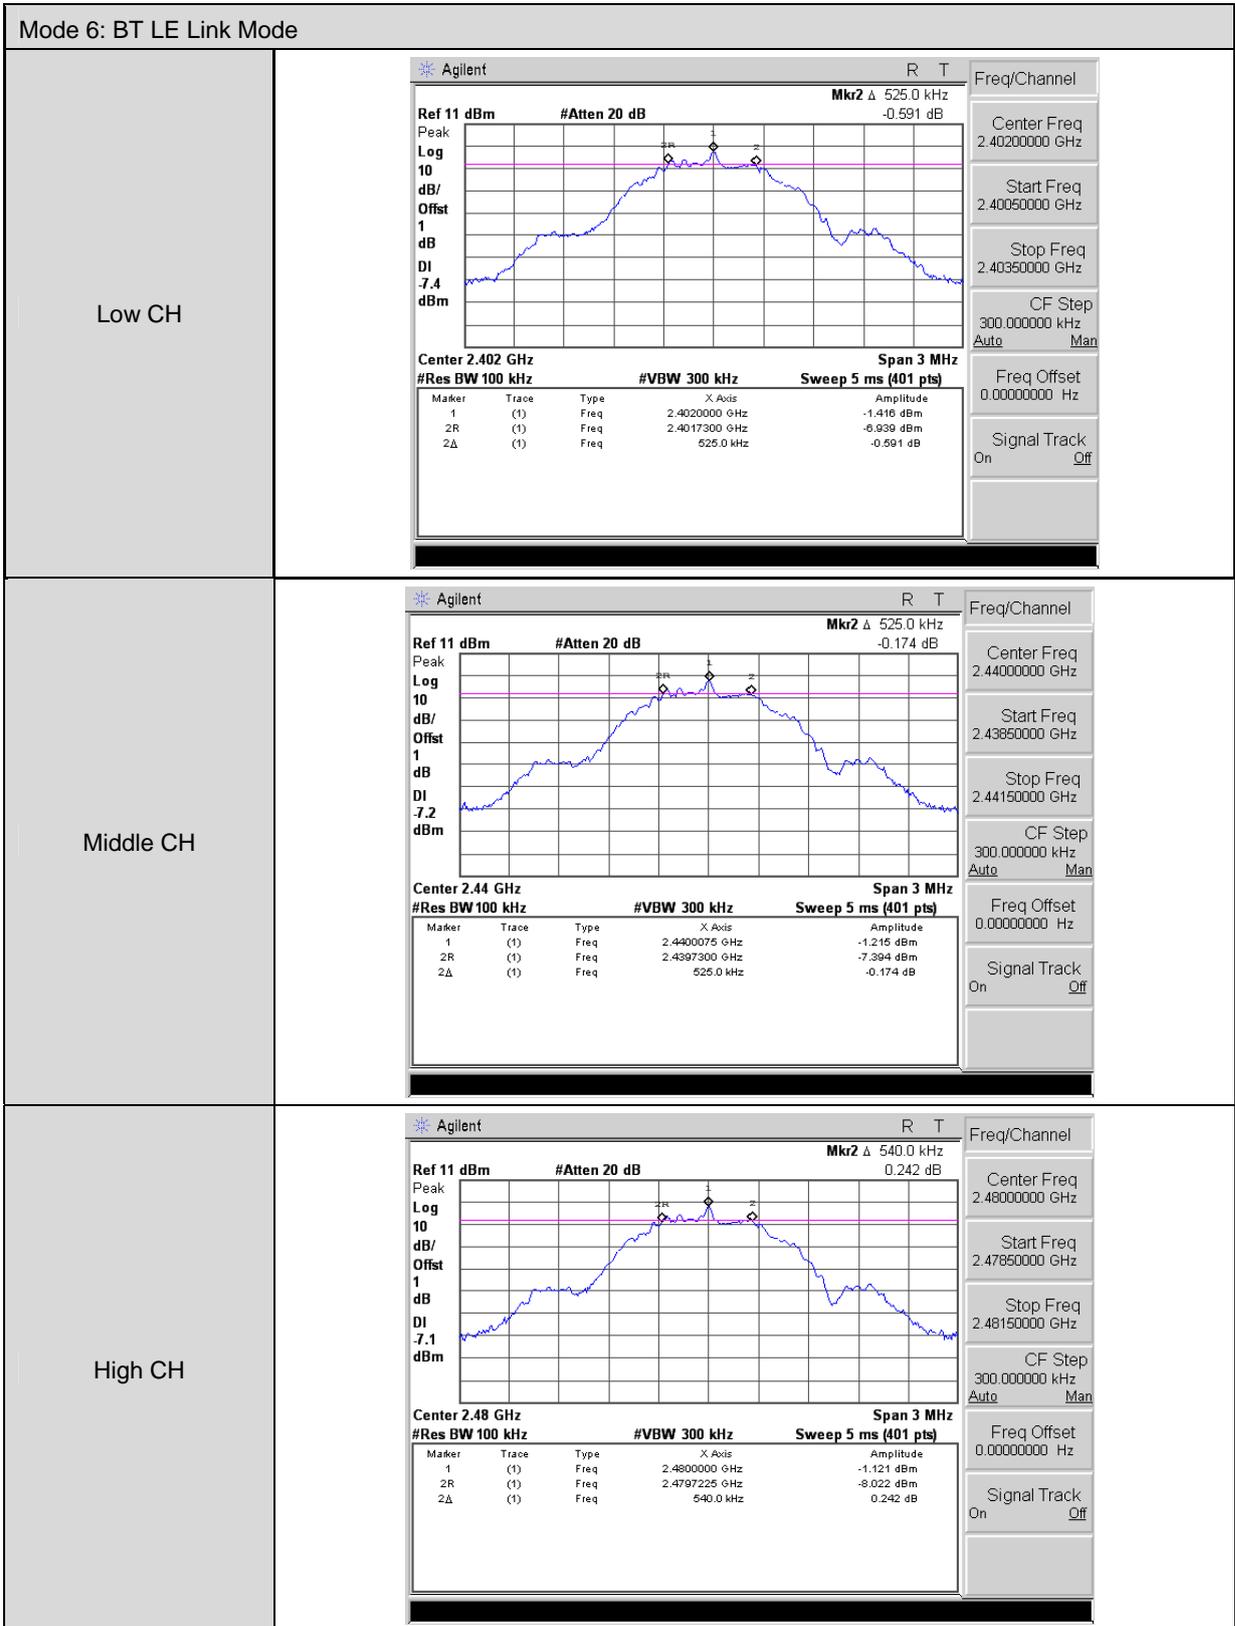


## 12 Maximum Power Density Measurement

### 12.1.Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 12.2.Test Setup

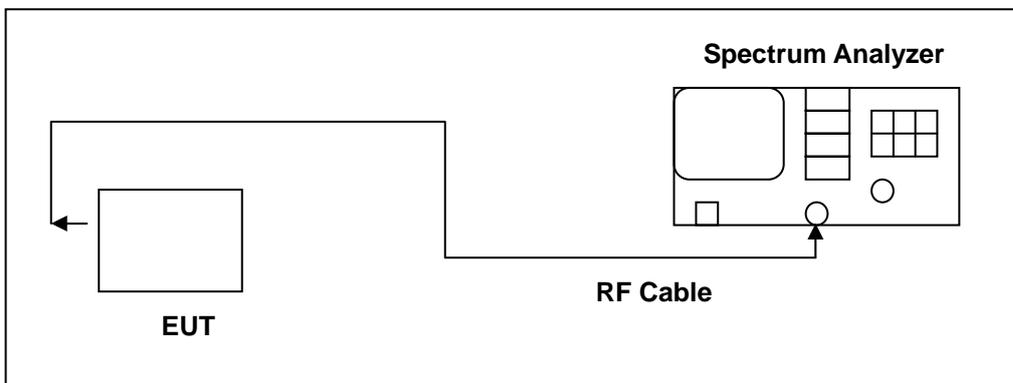

### 12.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 12.4.Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output pass band. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:


$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

**12.5.Test Result**

Model Number	PJ46100		
Test Item	Maximum Power Density		
Test Mode	Mode 6: BT LE Link Mode		
Date of Test	02/24/2012	Test Site	TE02
Frequency (MHz)	Measurement (dBm)	Limit (dBm)	
2402	-15.43	< 8	
2440	-14.97	< 8	
2480	-15.01	< 8	

**12.6. Test Graphs**

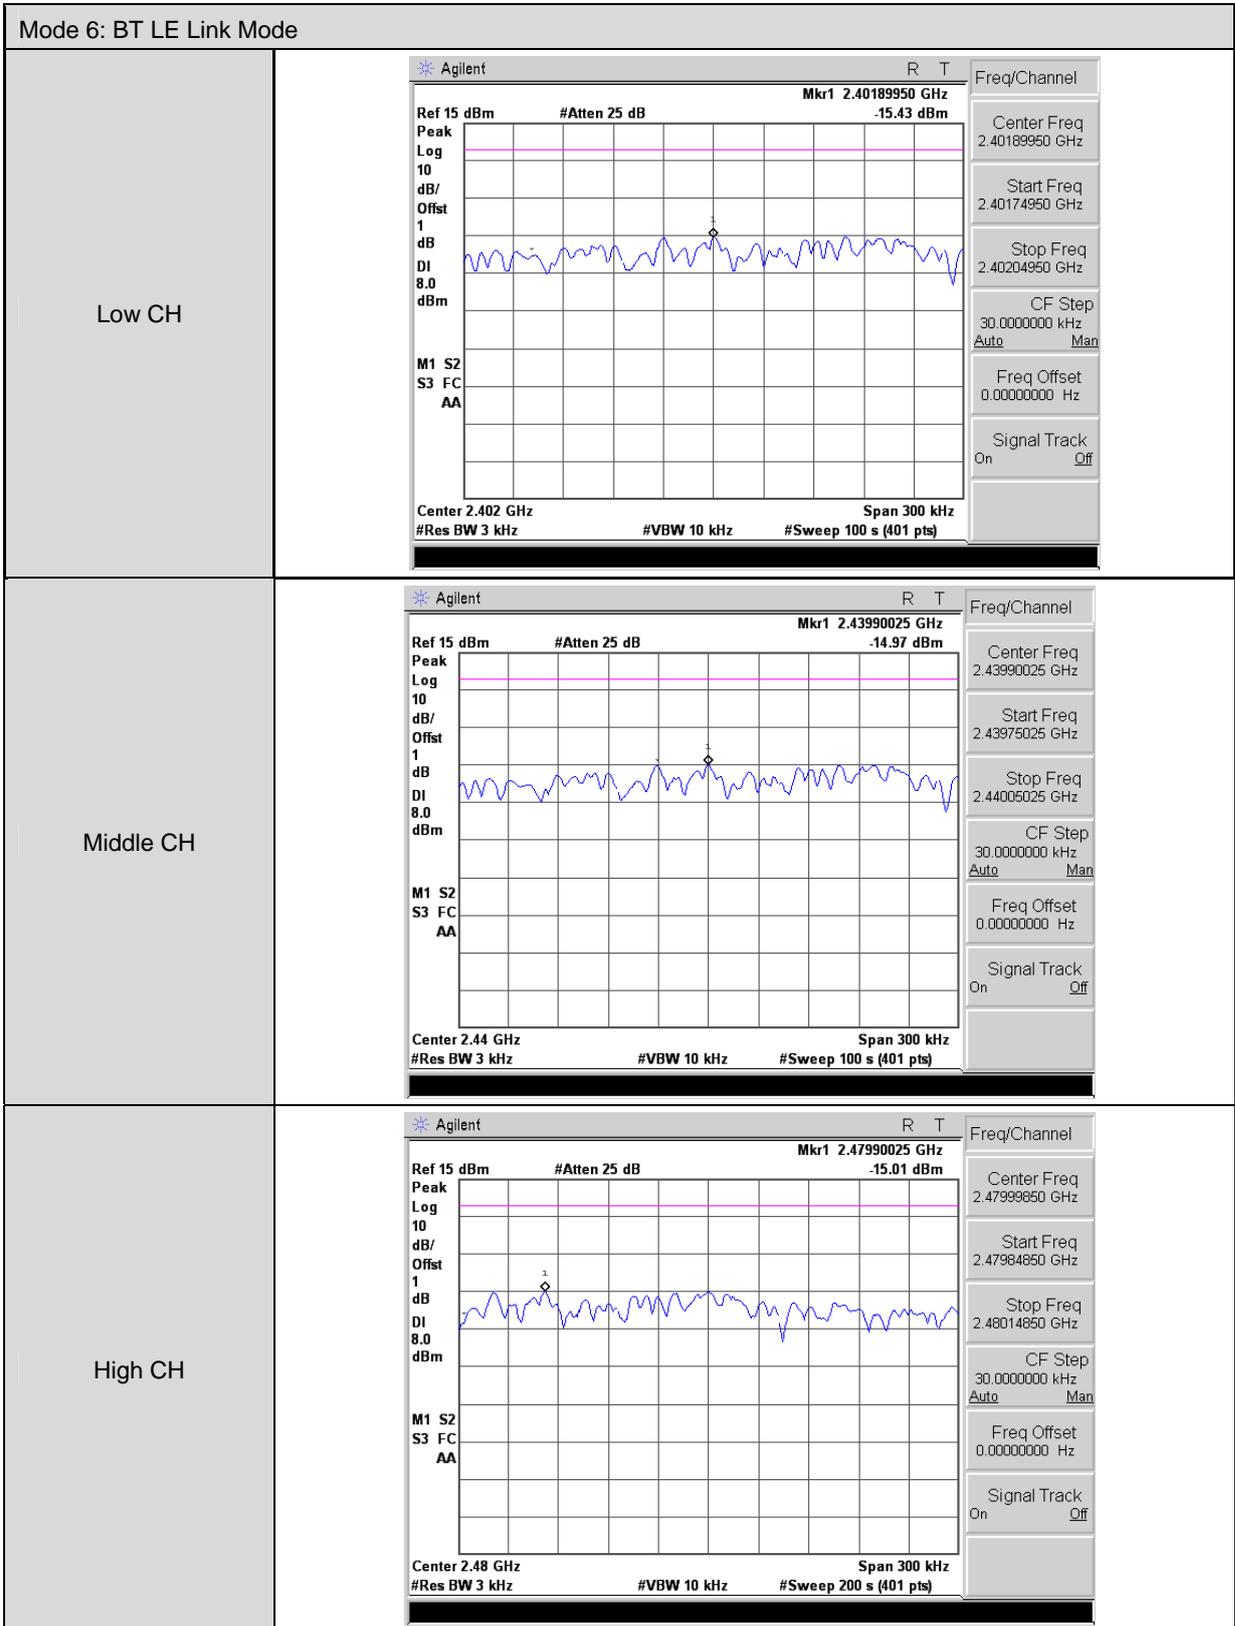


### 13 Out of Band Conducted Emissions Measurement

#### 13.1.Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

#### 13.2.Test Setup

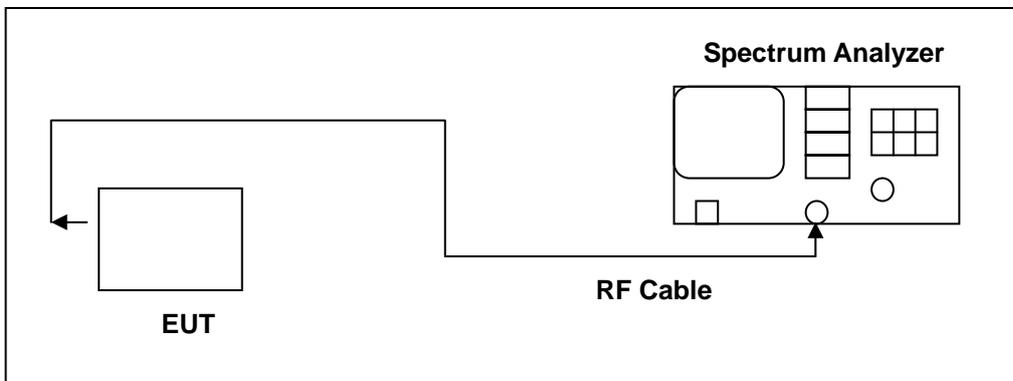

#### 13.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

#### 13.4.Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

**13.5. Test Graphs**


Mode 3: GFSK Link Mode																																	
2402	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Input: RF PNO: Fast IF Gain: Low Trig: Free Run #Atten: 20 dB Avg Type: Log-Pwr</p> <p>Ref Offset 0.8 dB Ref 10.00 dBm Mkr1 2.402 GHz -2.73 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.50 GHz Sweep 3.19 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>2.402 GHz</td> <td>-2.734 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>4.736 GHz</td> <td>-50.00 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>7.203 GHz</td> <td>-54.37 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	2.402 GHz	-2.734 dBm				2	N	f	4.736 GHz	-50.00 dBm				3	N	f	7.203 GHz	-54.37 dBm			
MKR MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	N	f	2.402 GHz	-2.734 dBm																													
2	N	f	4.736 GHz	-50.00 dBm																													
3	N	f	7.203 GHz	-54.37 dBm																													
2441	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Input: RF PNO: Fast IF Gain: Low Trig: Free Run #Atten: 20 dB Avg Type: Log-Pwr</p> <p>Ref Offset 0.8 dB Ref 10.00 dBm Mkr1 2.441 GHz -2.132 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.50 GHz Sweep 3.19 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>2.441 GHz</td> <td>-2.132 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>4.874 GHz</td> <td>-53.029 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>7.336 GHz</td> <td>-53.098 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	2.441 GHz	-2.132 dBm				2	N	f	4.874 GHz	-53.029 dBm				3	N	f	7.336 GHz	-53.098 dBm			
MKR MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	N	f	2.441 GHz	-2.132 dBm																													
2	N	f	4.874 GHz	-53.029 dBm																													
3	N	f	7.336 GHz	-53.098 dBm																													
2480	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Input: RF PNO: Fast IF Gain: Low Trig: Free Run #Atten: 20 dB Avg Type: Log-Pwr</p> <p>Ref Offset 0.8 dB Ref 10.00 dBm Mkr1 2.480 GHz -1.691 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.50 GHz Sweep 3.19 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>2.480 GHz</td> <td>-1.691 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>4.953 GHz</td> <td>-49.985 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>7.442 GHz</td> <td>-49.936 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	2.480 GHz	-1.691 dBm				2	N	f	4.953 GHz	-49.985 dBm				3	N	f	7.442 GHz	-49.936 dBm			
MKR MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	N	f	2.480 GHz	-1.691 dBm																													
2	N	f	4.953 GHz	-49.985 dBm																													
3	N	f	7.442 GHz	-49.936 dBm																													

M Mode 5: 8DPSK Link Mode


2402



2441

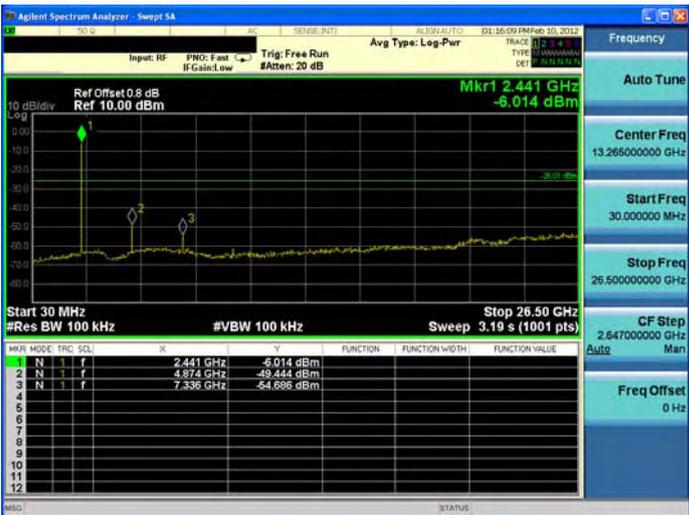


2480

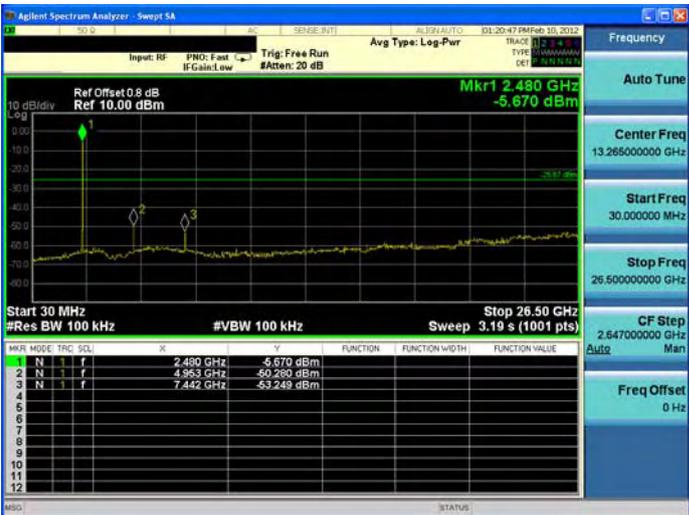

Mode 6: BT LE Link Mode

2402

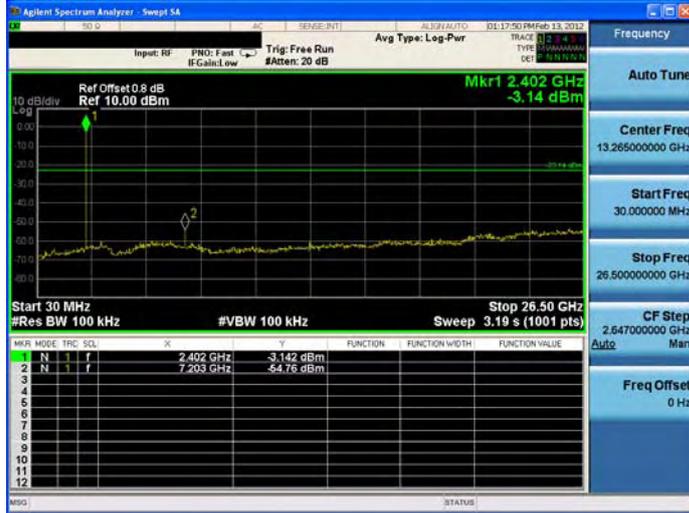

2440



2480




## 14 Band Edges Measurement

### 14.1.Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 14.2.Test Setup

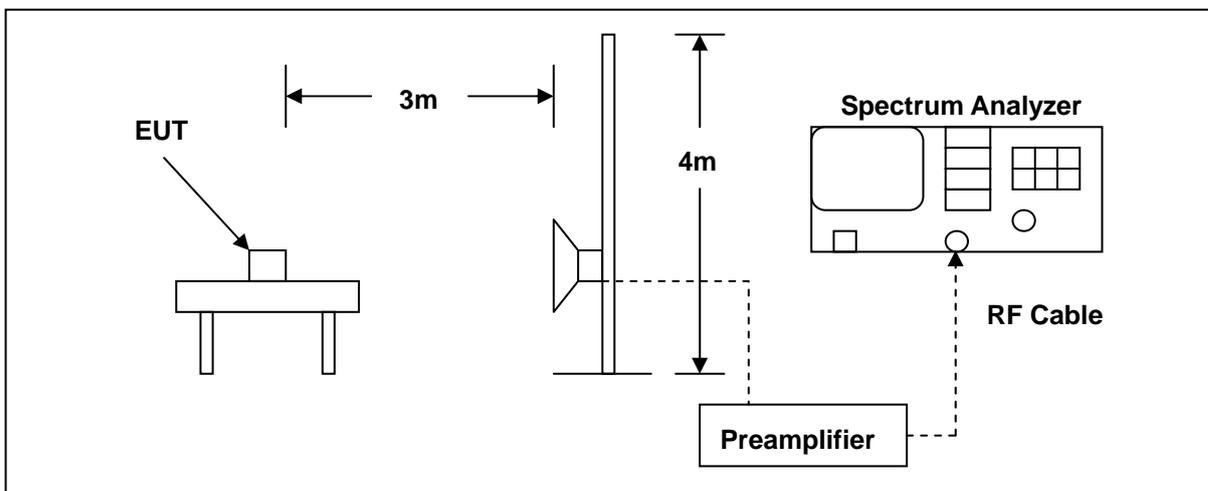

### 14.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/29/2011	(1)
Test Site	ATL	TE01	888001	12/20/2011	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

#### **14.4. Test Procedure**

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


**14.5.Test Result**

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	02/15/2012
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

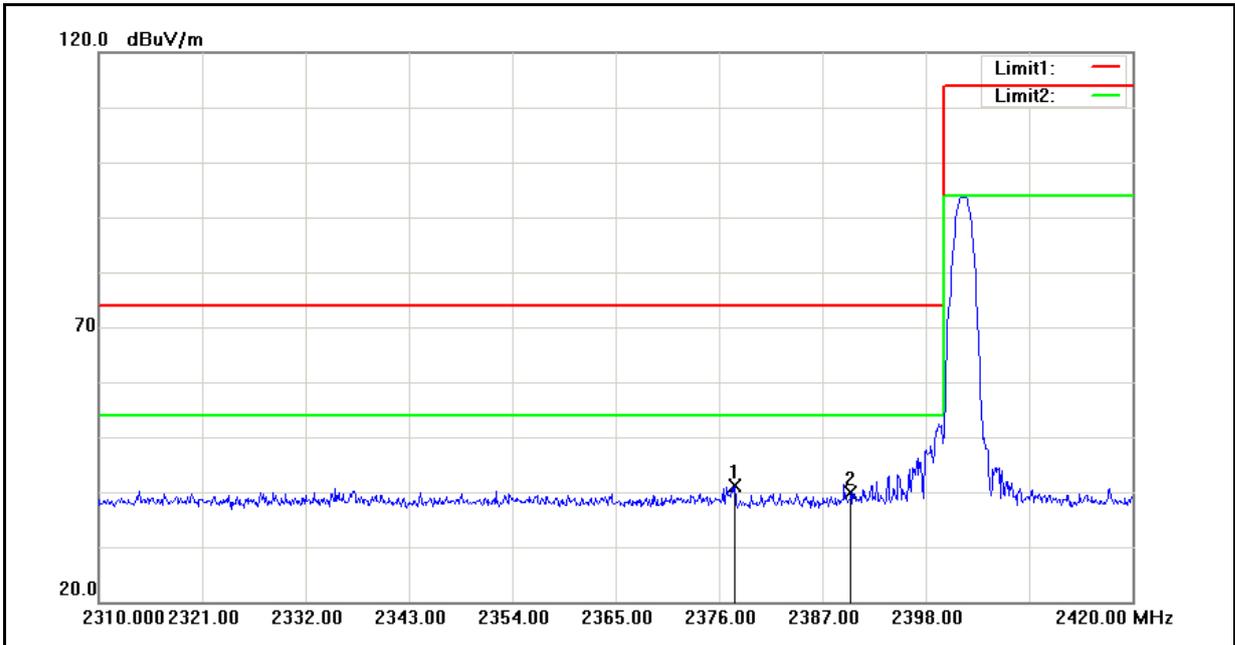


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.650	41.37	-0.12	41.25	74.00	-32.75	peak
2	2390.000	40.00	-0.06	39.94	74.00	-34.06	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	02/15/2012
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

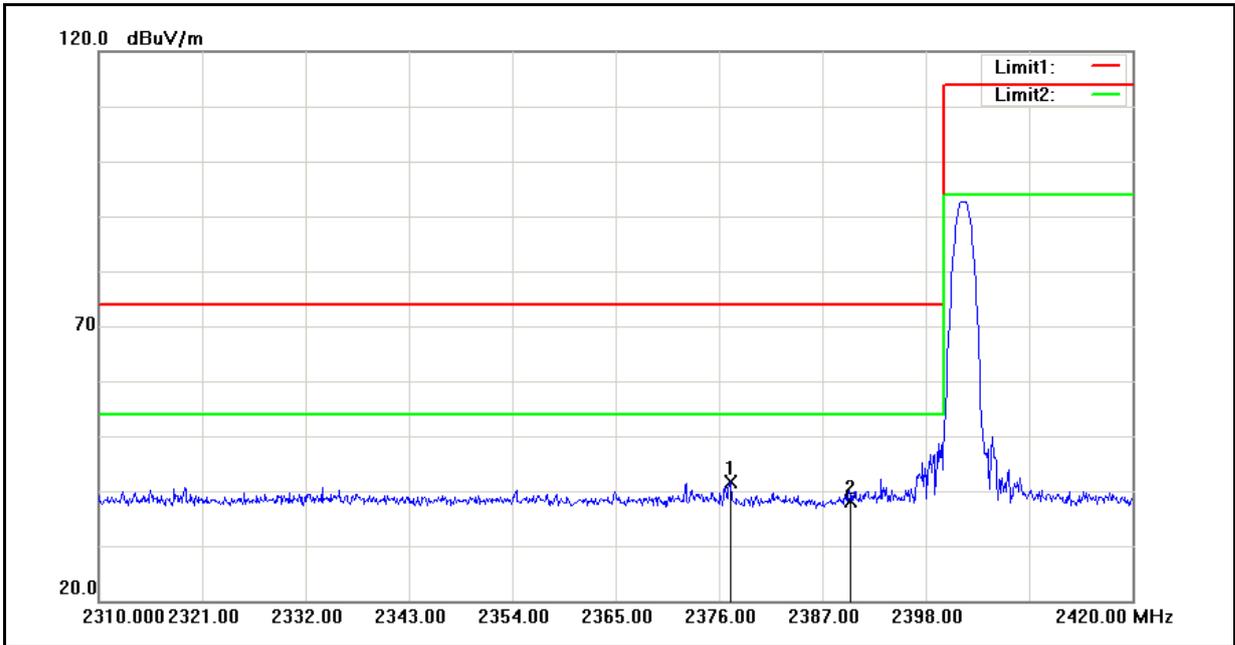


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.210	41.78	-0.12	41.66	74.00	-32.34	peak
2	2390.000	38.29	-0.06	38.23	74.00	-35.77	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	02/15/2012
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

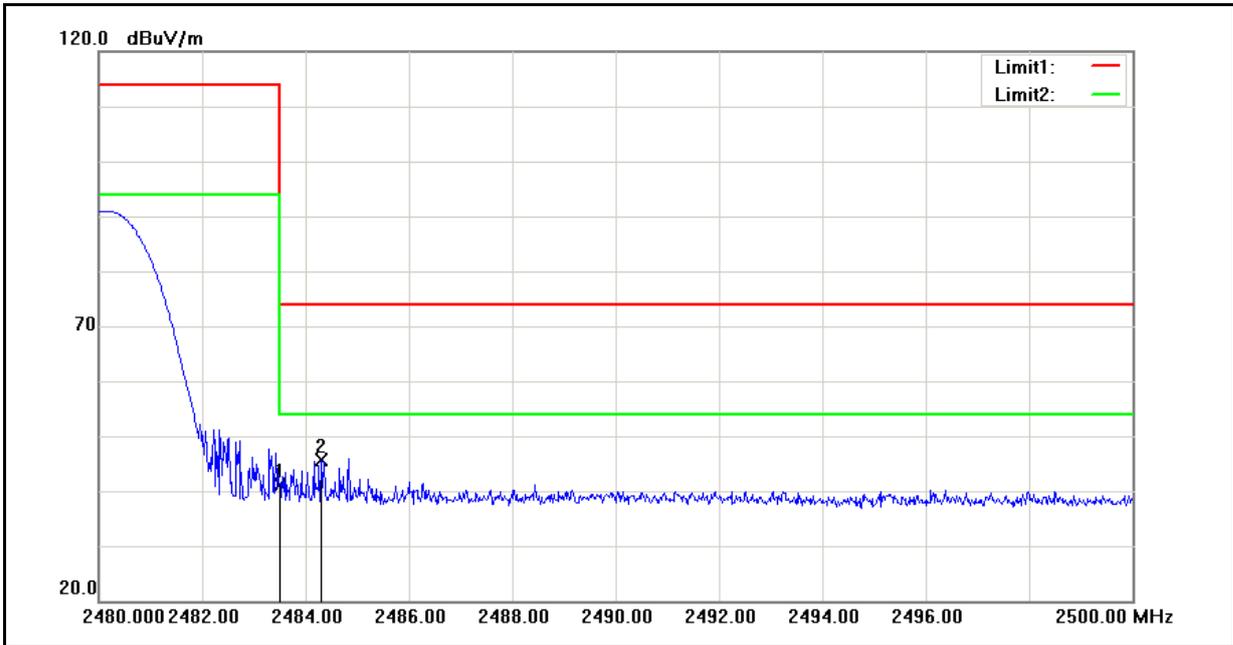


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	40.78	0.35	41.13	74.00	-32.87	peak
2	2484.300	45.33	0.35	45.68	74.00	-28.32	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	02/15/2012
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

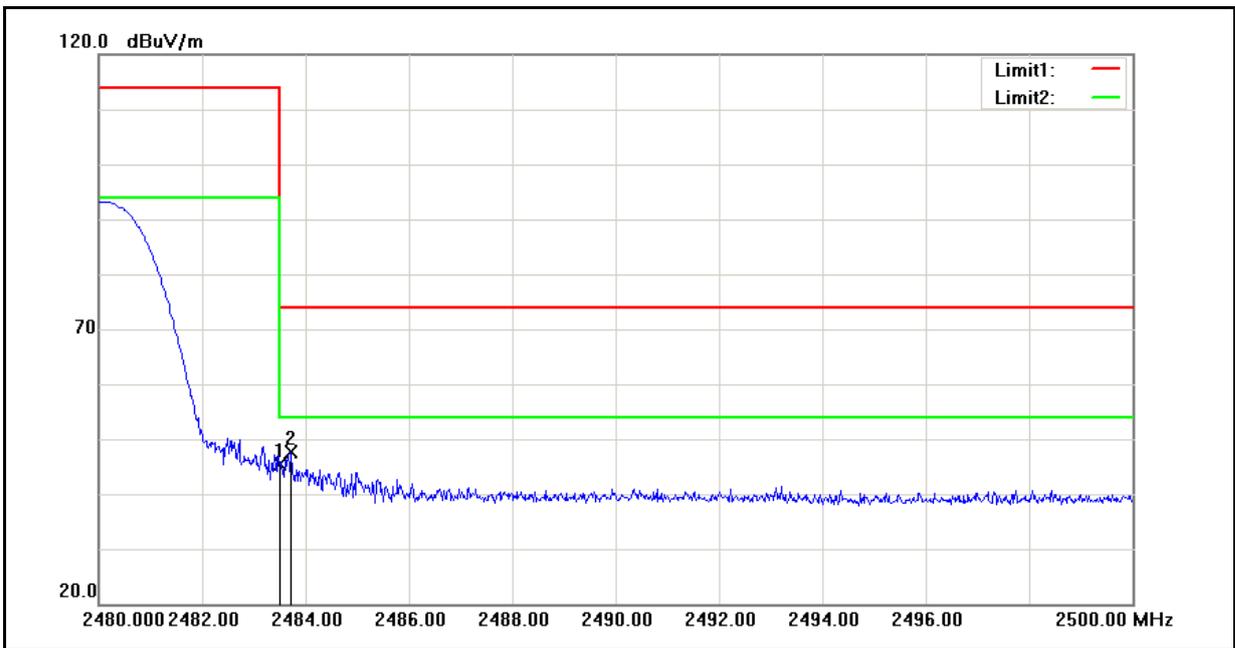


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.91	0.35	45.26	74.00	-28.74	peak
2	2483.720	47.29	0.35	47.64	74.00	-26.36	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	02/15/2012
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

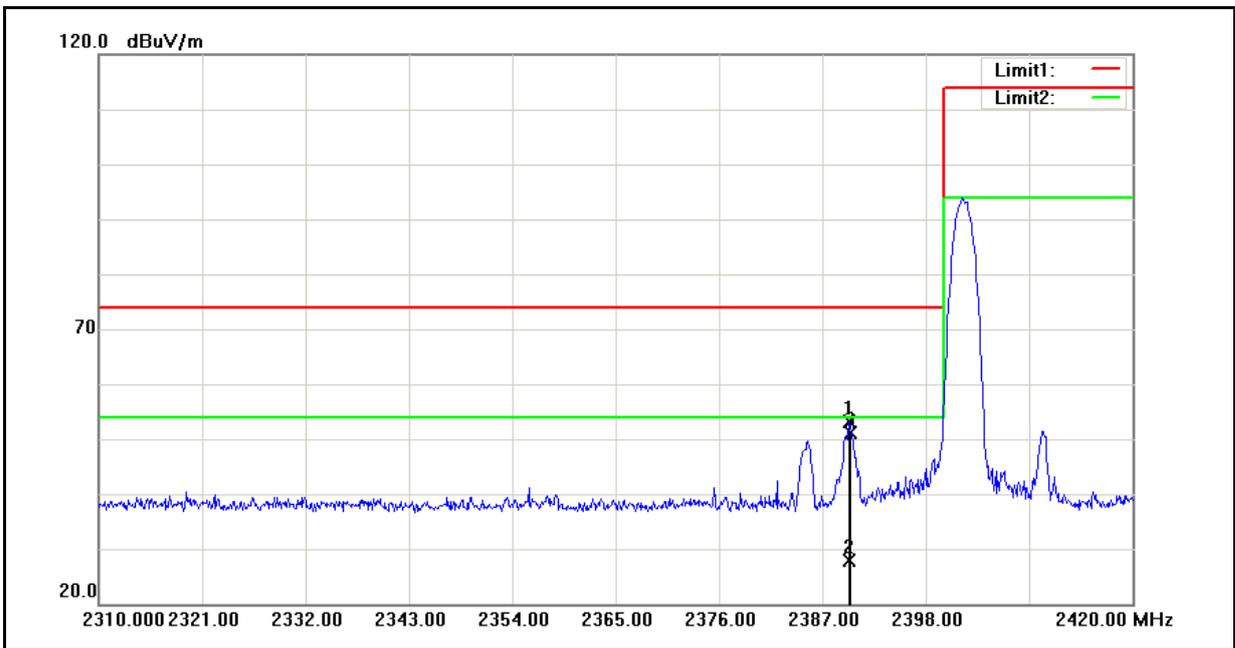


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.860	53.11	-0.06	53.05	74.00	-20.95	peak
2	2389.860	27.88	-0.06	27.82	54.00	-26.18	AVG
3	2390.000	51.29	-0.06	51.23	74.00	-22.77	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	02/15/2012
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

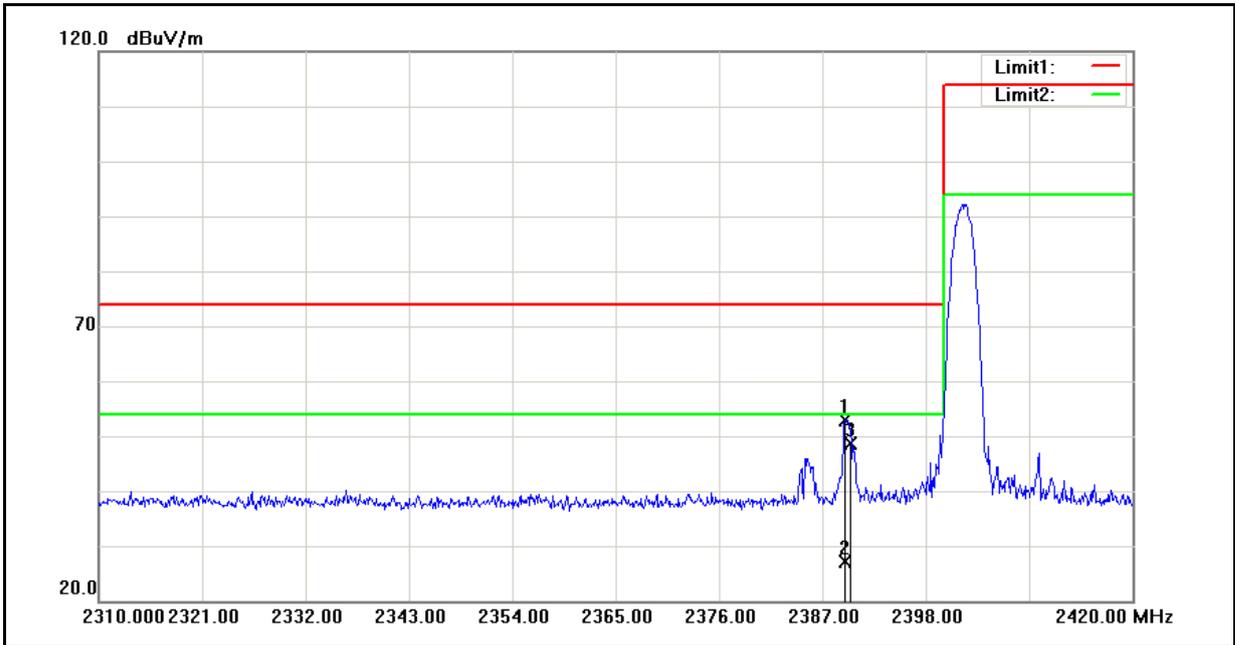


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	52.91	-0.06	52.85	74.00	-21.15	peak
2	2389.420	27.22	-0.06	27.16	54.00	-26.84	AVG
3	2390.000	48.78	-0.06	48.72	74.00	-25.28	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	02/15/2012
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

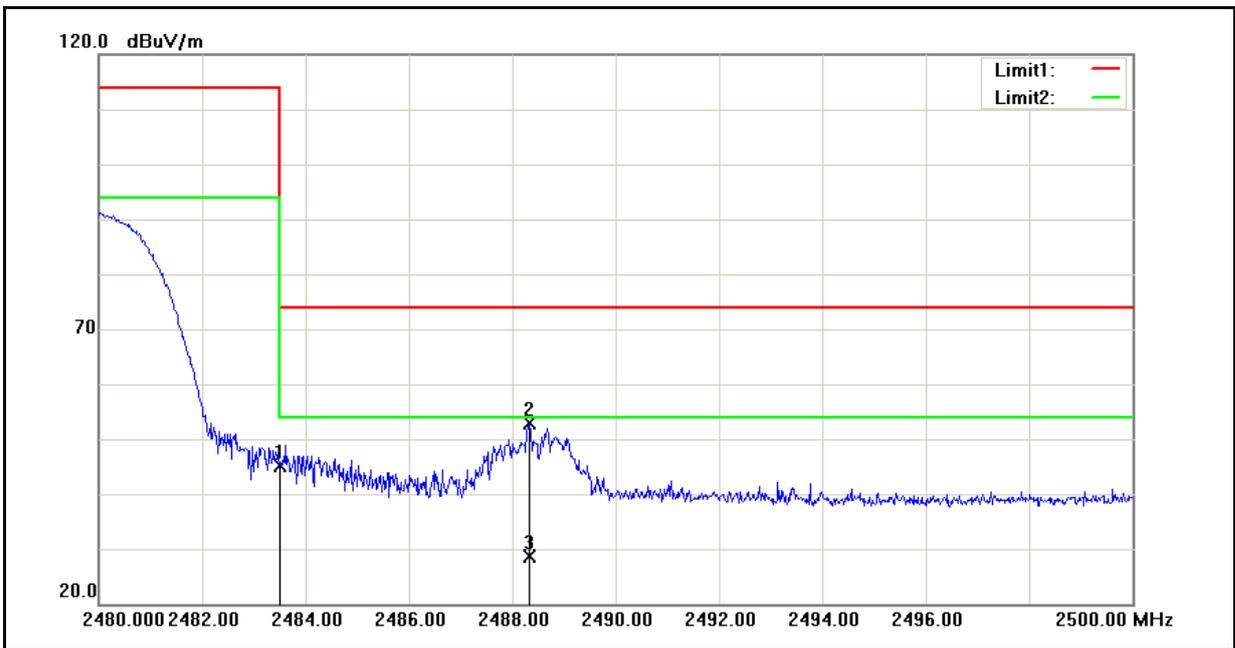


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.80	0.35	45.15	74.00	-28.85	peak
2	2488.340	52.46	0.38	52.84	74.00	-21.16	peak
3	2488.340	28.14	0.38	28.52	54.00	-25.48	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	02/15/2012
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

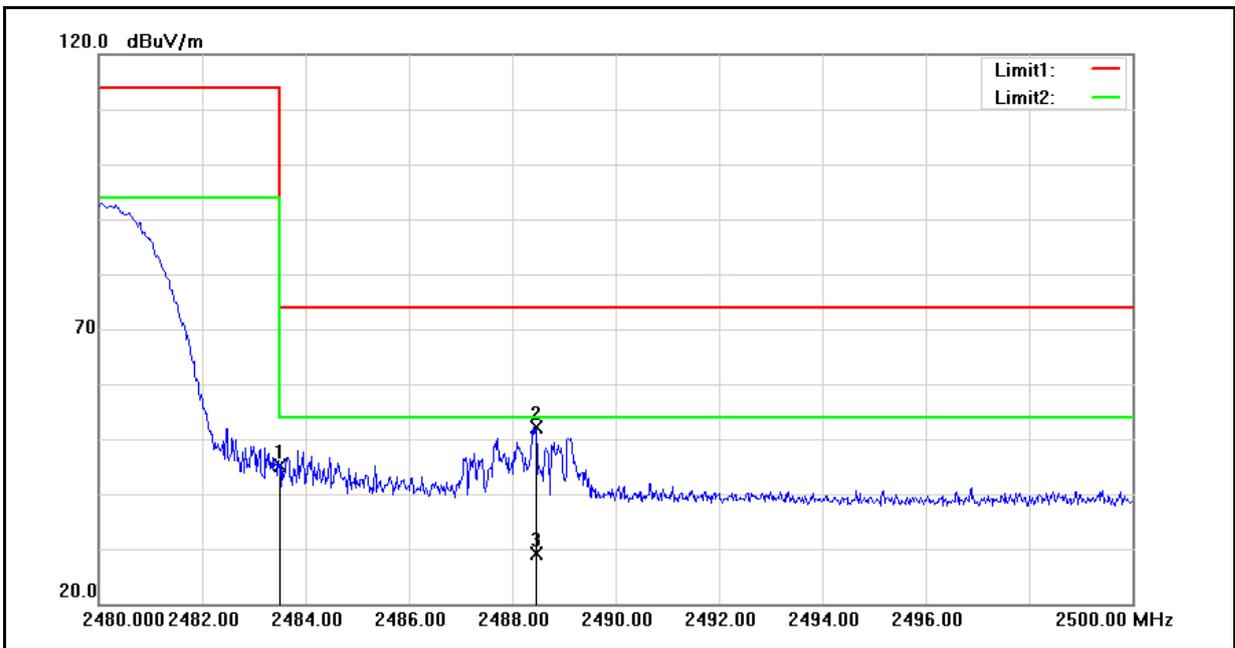


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.82	0.35	45.17	74.00	-28.83	peak
2	2488.460	51.75	0.38	52.13	74.00	-21.87	peak
3	2488.460	28.86	0.38	29.24	54.00	-24.76	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6	Date:	02/15/2012
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

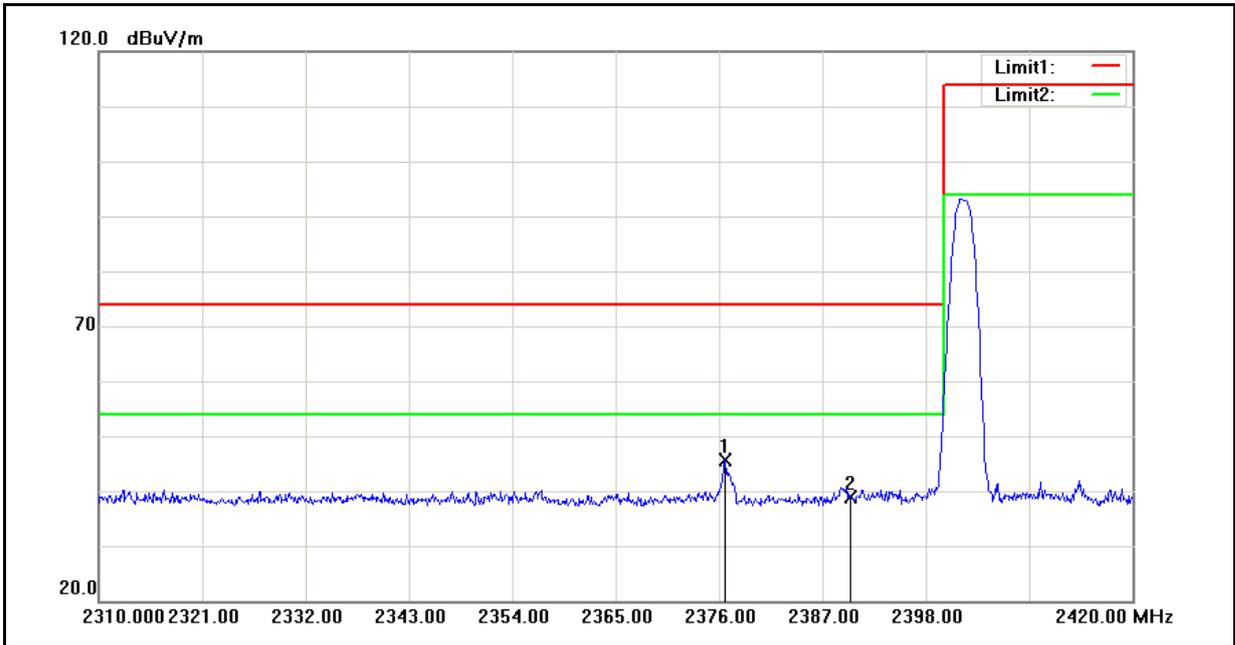


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.660	45.67	-0.12	45.55	74.00	-28.45	peak
2	2390.000	38.89	-0.06	38.83	74.00	-35.17	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6	Date:	02/15/2012
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

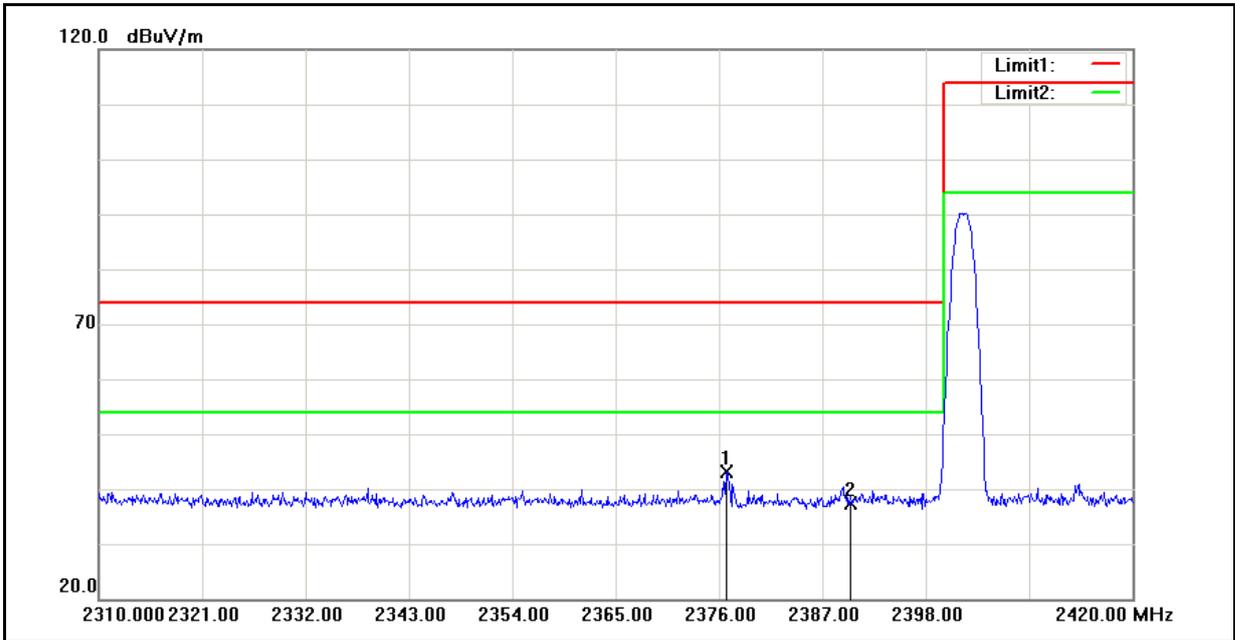


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.770	43.27	-0.12	43.15	74.00	-30.85	peak
2	2390.000	37.54	-0.06	37.48	74.00	-36.52	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6	Date:	02/15/2012
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

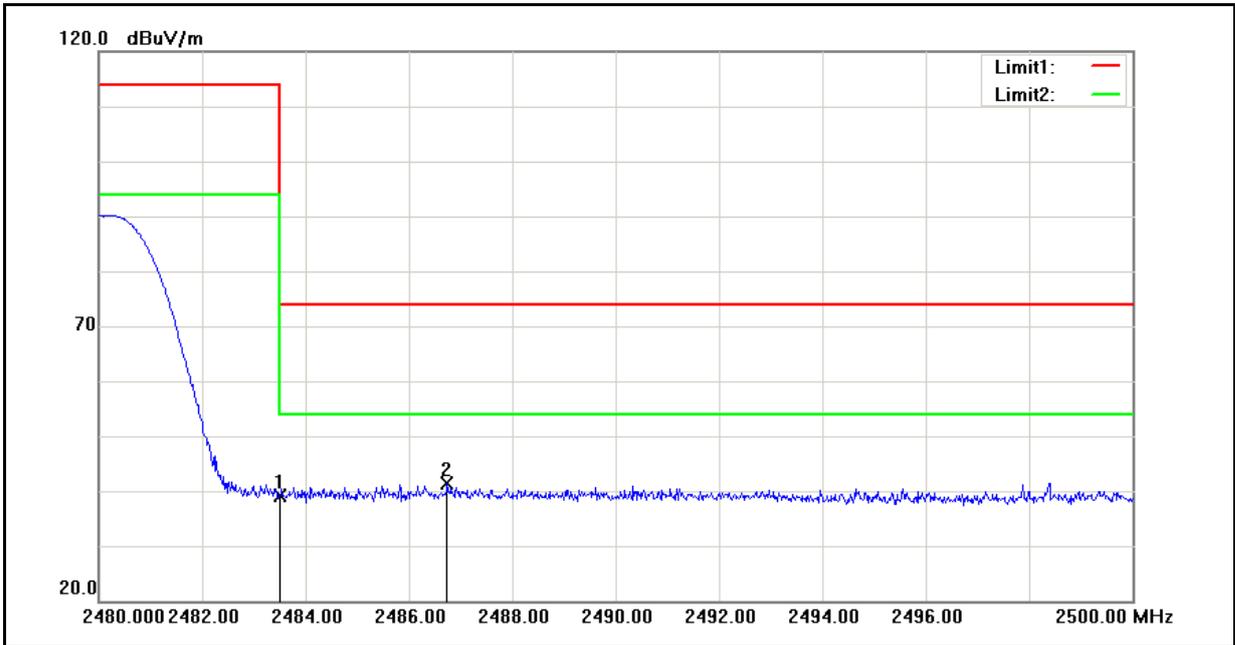

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.80	0.35	39.15	74.00	-34.85	peak
2	2486.740	40.96	0.37	41.33	74.00	-32.67	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PJ46100	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 6	Date:	02/15/2012
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

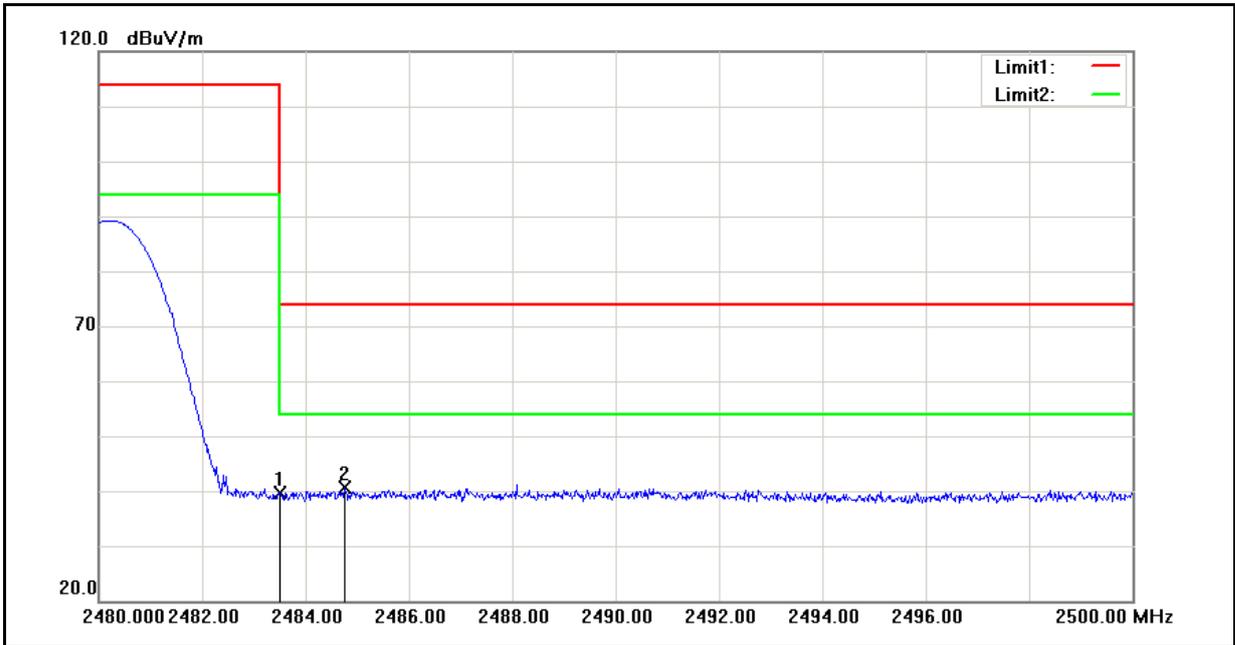


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.36	0.35	39.71	74.00	-34.29	peak
2	2484.760	40.20	0.35	40.55	74.00	-33.45	peak

## 15 99 % Occupied Bandwidth Measurement

### 15.1.Limit

N/A

### 15.2.Test Setup

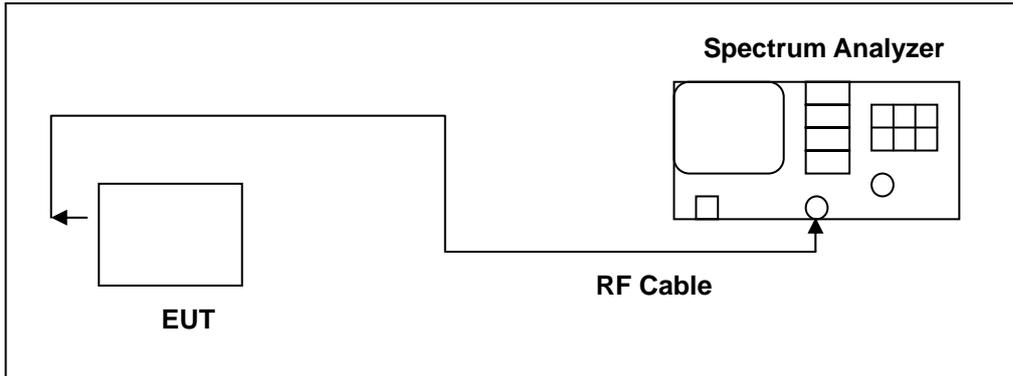

### 15.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 15.4.Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

**15.5.Test Result**

Model Number	PJ46100		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 3: GFSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (MHz)
	2402	0.8302864	-----
	2441	0.8594948	-----
	2480	0.8519562	-----

Model Number	PJ46100		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 5: 8DPSK Link Mode		
Date of Test	02/13/2012	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (MHz)
	2402	1.2010	-----
	2441	1.2045	-----
	2480	1.1990	-----

Model Number	PJ46100		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 6: BT LE Link Mode		
Date of Test	02/13/2012	Test Site	TE02
	Frequency (MHz)	Measurement (MHz)	Limit (MHz)
	2402	1.0151	-----
	2440	1.0177	-----
	2480	1.0150	-----

**15.6. Test Graphs**

Mode 3: GFSK Link Mode	
2402	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.40350000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 2 dB</p> <p>Center 2.402 000 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10.04 ms (601 pts)</p> <p><b>Occupied Bandwidth 830.2864 kHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -2.222 kHz</p> <p>x dB Bandwidth 1.129 MHz*</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2441	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.441 GHz Trig Free</p> <p>Center Freq 2.44100000 GHz</p> <p>Start Freq 2.43950000 GHz</p> <p>Stop Freq 2.44250000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 2 dB</p> <p>Center 2.441 000 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10.04 ms (601 pts)</p> <p><b>Occupied Bandwidth 859.4948 kHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -1.802 kHz</p> <p>x dB Bandwidth 1.155 MHz*</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2480	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47850000 GHz</p> <p>Stop Freq 2.48150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 2 dB</p> <p>Center 2.480 000 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10.04 ms (601 pts)</p> <p><b>Occupied Bandwidth 851.9562 kHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -1.677 kHz</p> <p>x dB Bandwidth 1.191 MHz*</p> <p>Copyright 2000-2007 Agilent Technologies</p>

Mode 5: 8DPSK Link Mode	
2402	
2441	
2480	

Mode 6: BT LE Link Mode	
2402	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.40350000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Samp Log 10 dB/Offst 2 dB</p> <p>Center 2.402 000 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10.04 ms (601 pts)</p> <p><b>Occupied Bandwidth 1.0151 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth 1.209 MHz* x dB -26.00 dB</p> <p>Transmit Freq Error 7.488 kHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2440	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43850000 GHz</p> <p>Stop Freq 2.44150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Samp Log 10 dB/Offst 2 dB</p> <p>Center 2.440 000 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10.04 ms (601 pts)</p> <p><b>Occupied Bandwidth 1.0177 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth 1.214 MHz* x dB -26.00 dB</p> <p>Transmit Freq Error 6.966 kHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>
2480	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47850000 GHz</p> <p>Stop Freq 2.48150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Samp Log 10 dB/Offst 2 dB</p> <p>Center 2.480 000 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10.04 ms (601 pts)</p> <p><b>Occupied Bandwidth 1.0150 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth 1.214 MHz* x dB -26.00 dB</p> <p>Transmit Freq Error 7.806 kHz</p> <p>Copyright 2000-2007 Agilent Technologies</p>

## 16 Antenna Measurement

### 16.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 16.2.Antenna Connector Construction

The antenna used in this product is **PIFA antenna**. And the maximum Gain of this antenna is only **0.15 dBi**.